




15.121 LABEL LOCATION

GENERAL TOLERANCE					
	G	H	J	K	L
~ 8	±0.1	±0.1	±0.2	±0.2	±0.4
8up ~ 25	±0.15	±0.15	±0.3	±0.3	±0.6
25up ~ 80	±0.2	±0.25	±0.4	±0.5	±0.8
80up ~ 250	±0.3	±0.4	±0.6	±0.8	±1.2
250over	±0.6	±0.8	±1.0	±1.5	±2.0

DO NOT SCALE DRAWING

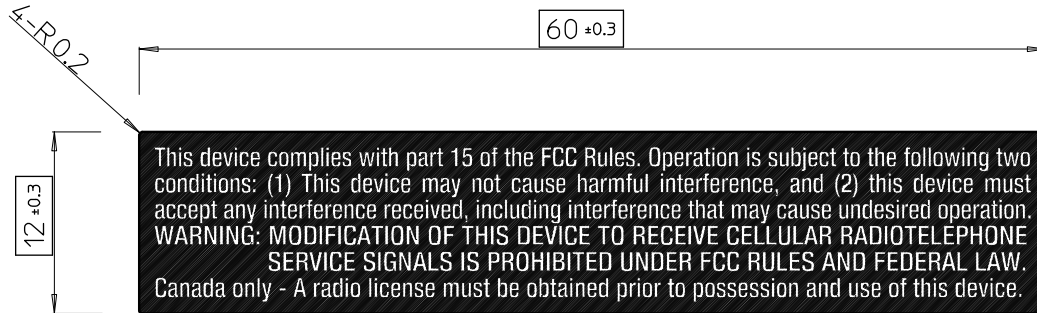

CAUTION :
 MATERIAL MUST BE MET DIRECTIVE 94/62/EC AS FOLLOWS :
 THE FOLLOWING SUBSTANCE TOTAL CONTENTS SHOULD BE LESS THAN 100ppm
 (1) Cadmium and Cadmium Compounds
 (2) Hexavalent Chromium Compounds
 (3) Lead and Lead Compounds
 (4) Mercury and Mercury Compounds
 MATERIAL MUST BE MET DIRECTIVE 2002/95/EC(RoHS) AS FOLLOWS
 THE FOLLOWING SUBSTANCE EACH CONTENT SHOULD BE LESS THAN 1000ppm
 (5) Polybrominated Biphenyls(PBBs)
 (6) Polybrominated Diphenyl ethers(PBDEs)
 At the time of parts approval request you have to prove and guarantee that the material comply with the above requirement by attaching SAMPLE and 'GREEN PROCUREMENT BASIC INFORMATION SURVEY (CHEMICAL SUBSTANCES) TABLE'.
 When material is changed after parts approval, it is necessary to do some thing again.

NOTE

- MATERIAL : POLYESTER TACK FORM(MATT) SILVER t0.05
- PRINT COLOR : SILVER (LETTERS)(OFF PRINT)
BLACK (BACKGROUND)
- ARTWORK : D36583
- LAMINATE : POLYPROPYLENE (MATT) CLEAR t=0.025
- ADHESIVE STRENGTH : MORE THAN 1000g/25mm (180° PEEL OFF TEST)

△					CAUTION: Approval sample must be submitted for Uniden(ENG) approval. Using any materials in this drawing before Uniden(ENG) approval is prohibited.			
△								
△								
REV.MARK	CONTENS	REVISED	CHECKED	APPV'D	APPROVED BY	CHECKED BY	DESIGNED BY	DRAWN BY
					EBA Feb.27'17	EBA Feb.27'17	ODAKA Feb.27'17	ODAKA Feb.27'17
	ENG'G. DIM. REQMT. FOR UNIDEN IQC INSP	YES	NO		MODEL	PARTS NAME		
	ANGLE	UNITS	TOLERANCE	SCALE	UT416Z	LABEL:INDICATION		
	MOLD CAVITIES	TOOL CODE			BASIC MODEL	BASIC PARTS CODE	PARTS CODE	
	pcs						PLN110309ZZ	