

	Test Report Serial No.:		110305AMW-F686-S80V	Report Issue Date:	Nov. 15, 2005
	Date(s) of Evaluation:		November 09, 2005	Report Rev. No.:	Revision 0
	Description of Tests:		RF Exposure SAR	FCC §2.1093	IC RSS-102

RF EXPOSURE EVALUATION
SPECIFIC ABSORPTION RATE

SAR TEST REPORT

FOR

UNIDEN AMERICA CORPORATION

PORTABLE MRN / FRS PTT RADIO TRANSCEIVER

MODEL: VHF250 (VHF75r)

FCC ID: AMWUT608

IC ID: 513C-UT608V

Test Report Serial Number

**110305AMW-F686-S80V
Revision 0**

Test Report Issue Date

November 15, 2005

Test Lab

**Celltech Compliance Testing & Engineering Lab
(Celltech Labs Inc.)
1955 Moss Court
Kelowna, BC
Canada
V1Y 9L3**

Test Report Prepared By:

Cheri Frangiadakis

**Cheri Frangiadakis
Test Report Writer
Celltech Labs Inc.**

Test Report Approved By:

Jonathan Hughes

**Jonathan Hughes
General Manager
Celltech Labs Inc.**

Applicant:	Uniden America Corporation	FCC ID:	AMWUT608	Freq.:	156.025 - 157.425 MHz	
DUT Type:	Portable VHF/UHF MRN/FRS PTT Radio Transceiver			Model:	VHF250 (VHF75r)	
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 1 of 38

	Test Report Serial No.: 110305AMW-F686-S80V		Report Issue Date:	Nov. 15, 2005
	Date(s) of Evaluation: November 09, 2005		Report Rev. No.:	Revision 0
	Description of Tests: RF Exposure SAR		FCC §2.1093	IC RSS-102

DECLARATION OF COMPLIANCE SAR RF EXPOSURE EVALUATION

Test Lab

CELLTECH LABS INC.
Testing and Engineering Services
1955 Moss Court
Kelowna, B.C.
Canada V1Y 9L3
Phone: 250-448-7047
Fax: 250-448-7046
e-mail: info@celltechlabs.com
web site: www.celltechlabs.com

Applicant Information

UNIDEN AMERICA CORPORATION
181 N. Country Club Road
P.O. Box 580
Lake City, SC 29560
United States

FCC IDENTIFIER: AMWUT608
IC IDENTIFIER: 513C-UT608V
Model(s): VHF250 (VHF75r)

Rule Part(s): FCC 47 CFR §2.1093; IC RSS-102 Issue 2
Test Procedure(s): FCC OET Bulletin 65, Supplement C (Edition 01-01)
Device Classification: Part 80 VHF Hand Held Transmitter (GMDSS) - GHH
Part 95 Family Radio Face Held Transmitter - FRF
Device Description: Portable MRN / FRS PTT Radio Transceiver
Modulation Type: FM (VHF/UHF)

Transmitter Frequency Range(s): 156.025 - 157.425 MHz (MRN VHF)
462.5625 - 467.7125 MHz (FRS UHF)
Manufacturer's Rated Output Power: 5 Watts (MRN) / 0.5 Watts (FRS)
Max. RF Output Power Measured: 37.0 dBm (5.01 Watts) 156.7 MHz (Conducted) - MRN VHF
25.29 dBm (0.338 Watts) 156.7 MHz (ERP) - MRN VHF
Antenna Type(s) Tested: Fixed Whip
Battery Type(s) Tested: Li-ion Battery Pack 7.4 V, 1400 mAh (P/N: BP250LI)

Body-Worn Accessories Tested: Plastic Swivel Belt-Clip with Metal Spring (P/N: CLIP250)
Audio Accessories Tested: Speaker-Microphone with Lapel-Clip (Model: HHVTA07)

Max. SAR Level(s) Evaluated: Face-held: 0.633 W/kg - 1g average (50% Duty Cycle)
Body-worn: 1.21 W/kg - 1g average (50% Duty Cycle)

Celltech Labs Inc. declares under its sole responsibility that this wireless portable device has demonstrated compliance with the Specific Absorption Rate (SAR) RF exposure requirements specified in FCC 47 CFR §2.1093 and Health Canada's Safety Code 6. The device was tested in accordance with the measurement standards and procedures specified in FCC OET Bulletin 65, Supplement C (Edition 01-01) and Industry Canada RSS-102 Issue 2 for the General Population / Uncontrolled Exposure environment. All measurements were performed in accordance with the SAR system manufacturer recommendations.

I attest to the accuracy of data. All measurements were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

This test report shall not be reproduced partially, or in full, without the prior written approval of Celltech Labs Inc. The results and statements contained in this report pertain only to the device(s) evaluated.

Tested By:



Sean Johnston
Compliance Technologist
Celltech Labs Inc.

Reviewed By:



Spencer Watson
Senior Compliance Technologist
Celltech Labs Inc.



Applicant:	Uniden America Corporation	FCC ID:	AMWUT608	Freq.:	156.025 - 157.425 MHz	
DUT Type:	Portable VHF/UHF MRN/FRS PTT Radio Transceiver			Model:	VHF250 (VHF75r)	
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 2 of 38

	Test Report Serial No.:		110305AMW-F686-S80V	Report Issue Date:	Nov. 15, 2005
	Date(s) of Evaluation:		November 09, 2005	Report Rev. No.:	Revision 0
	Description of Tests:		RF Exposure SAR	FCC §2.1093	IC RSS-102

TABLE OF CONTENTS	
1.0 INTRODUCTION	4
2.0 DESCRIPTION OF DEVICE UNDER TEST (DUT)	4
3.0 SAR MEASUREMENT SYSTEM	5
4.0 MEASUREMENT SUMMARY	6
5.0 DETAILS OF SAR EVALUATION	7
6.0 EVALUATION PROCEDURES	7
7.0 SYSTEM PERFORMANCE CHECK	8
8.0 SIMULATED EQUIVALENT TISSUES	9
9.0 SAR SAFETY LIMITS	9
10.0 ROBOT SYSTEM SPECIFICATIONS	10
11.0 PROBE SPECIFICATION (ET3DV6)	11
12.0 SIDE PLANAR PHANTOM	11
13.0 VALIDATION PLANAR PHANTOM	11
14.0 DEVICE HOLDER	11
15.0 TEST EQUIPMENT LIST	12
16.0 MEASUREMENT UNCERTAINTIES	13
MEASUREMENT UNCERTAINTIES (CONT.)	14
17.0 REFERENCES	15
APPENDIX A - SAR MEASUREMENT DATA	16
APPENDIX B - SYSTEM PERFORMANCE CHECK DATA	22
APPENDIX C - MEASURED FLUID DIELECTRIC PARAMETERS	25
APPENDIX D - SAR TEST SETUP & DUT PHOTOGRAPHS	29
APPENDIX E - SYSTEM VALIDATION	37
APPENDIX F - PROBE CALIBRATION	38

	Test Report Serial No.:	110305AMW-F686-S80V	Report Issue Date:	Nov. 15, 2005
	Date(s) of Evaluation:	November 09, 2005	Report Rev. No.:	Revision 0
	Description of Tests:	RF Exposure SAR	FCC §2.1093	IC RSS-102

1.0 INTRODUCTION

This measurement report demonstrates compliance of the Uniden America Corporation Model: VHF250 (VHF75r) Portable MRN/FRS PTT Radio Transceiver FCC ID: AMWUT608 with the SAR (Specific Absorption Rate) RF exposure requirements specified in FCC 47 CFR §2.1093 (see reference [1]), and Health Canada Safety Code 6 (see reference [2]) for the General Population / Uncontrolled Exposure environment. The test procedures described in FCC OET Bulletin 65, Supplement C (Edition 01-01) (see reference [3]) and IC RSS-102 Issue 2 (see reference [4]), were employed. A description of the product and operating configuration, detailed summary of the test results, methodology and procedures used in the evaluation, equipment used, and the various provisions of the rules are included within this test report.

2.0 DESCRIPTION OF DEVICE UNDER TEST (DUT)

FCC Rule Part(s)	47 CFR §2.1093				
IC Rule Part(s)	RSS-102 Issue 2				
Test Procedure(s)	FCC OET Bulletin 65, Supplement C (Edition 01-01)				
FCC Device Classification	Part 80 VHF Hand Held Transmitter (GMDSS) - GHH		VHF Marine		
	Part 95 Family Radio Face Held Transmitter - FRF		UHF FRS		
IC Device Classification	RSS-182 Issue 4 - Maritime Radio Transmitters (156-162.5 MHz)				
	RSS-210 Issue 5 (A3) - Family Radio Service (FRS) Devices				
Device Description	Portable MRN / FRS PTT Radio Transceiver				
FCC IDENTIFIER	AMWUT608				
IC IDENTIFIER	513C-UT608V				
Model(s)	VHF250 (VHF75r)				
Test Sample Serial No.	None		Identical Prototype		
Modulation Type Tested	FM (VHF)				
Tx Frequency Range Tested	156.025 - 157.425 MHz				
Max. RF Output Power Measured	Conducted		37.0 dBm	5.01 Watts	156.7 MHz
	ERP		25.29 dBm	0.338 Watts	156.7 MHz
	Note:	The UHF FRS channels were not evaluated for SAR due to the fact that the maximum transmit RF output power is limited to 0.5 Watts.			
Battery Type(s) Tested	Lithium-ion		7.4 V	1400 mAh	P/N: BP250LI
Additional Battery Type(s) Testing Not Required	Alkaline Batteries			4x AAA	P/N: BT250 (Case)
	Note:	The alkaline battery pack was not evaluated for SAR due to the fact that maximum transmit power is limited to 2.5 Watts using alkaline batteries.			
Antenna Type(s) Tested	Fixed Whip				
Body-Worn Accessories Tested	Swivel Belt-Clip (Plastic with Metal Spring)				P/N: CLIP250
Audio Accessories Tested	Speaker-Microphone with Lapel-Clip				Model: HHVTA07

Applicant:	Uniden America Corporation	FCC ID:	AMWUT608	Freq.:	156.025 - 157.425 MHz	
DUT Type:	Portable VHF/UHF MRN/FRS PTT Radio Transceiver			Model:	VHF250 (VHF75r)	
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 4 of 38


	Test Report Serial No.:		110305AMW-F686-S80V	Report Issue Date:	Nov. 15, 2005
	Date(s) of Evaluation:		November 09, 2005	Report Rev. No.:	Revision 0
	Description of Tests:		RF Exposure SAR	FCC §2.1093	IC RSS-102

3.0 SAR MEASUREMENT SYSTEM

Celltech Labs Inc. SAR measurement facility utilizes the Dosimetric Assessment System (DASY™) manufactured by Schmid & Partner Engineering AG (SPEAG™) of Zurich, Switzerland. The DASY4 measurement system is comprised of the measurement server, robot controller, computer, near-field probe, probe alignment sensor, specific anthropomorphic mannequin (SAM) phantom, and various planar phantoms for brain and/or body SAR evaluations. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF). A cell controller system contains the power supply, robot controller, teach pendant (Joystick), and remote control, is used to drive the robot motors. The Staubli robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the DASY4 measurement server. The DAE3 utilizes a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16-bit AD-converter and a command decoder and control logic unit. Transmission to the DASY4 measurement server is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe-mounting device includes two different sensor systems for frontal and sideways probe contacts. The sensor systems are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer.



DASY4 SAR Measurement System with Plexiglas validation phantom

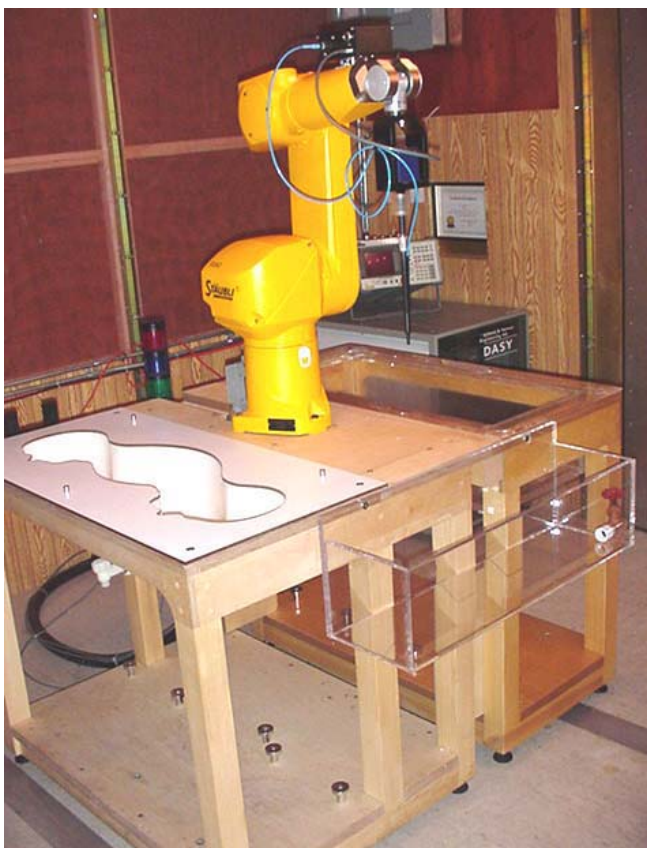

DASY4 SAR Measurement System with Plexiglas side planar phantom

Applicant:	Uniden America Corporation	FCC ID:	AMWUT608	Freq.:	156.025 - 157.425 MHz	
DUT Type:	Portable VHF/UHF MRN/FRS PTT Radio Transceiver			Model:	VHF250 (VHF75r)	
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 5 of 38

	Test Report Serial No.: 110305AMW-F686-S80V		Report Issue Date: Nov. 15, 2005	
	Date(s) of Evaluation: November 09, 2005		Report Rev. No.: Revision 0	
	Description of Tests: RF Exposure SAR		FCC §2.1093 IC RSS-102	

4.0 MEASUREMENT SUMMARY

SAR EVALUATION RESULTS															
Test Type	Freq. (MHz)	Chan.	Test Mode	Battery Type	Accessories	Separation Distance to Planar Phantom (cm)	Cond. Power Before Test (dBm)	ERP Power Before Test (Watts)	Measured SAR 1g (W/kg)		SAR Drift During Test (dB)	Scaled SAR 1g (W/kg)			
					Body-Worn				Duty Cycle			Duty Cycle			
					Audio				100%	50%		100%	50%		
Face	156.7	14	CW	Li-ion	--	2.5	37.0	0.338	1.04	0.520	-0.856	1.27	0.633		
Body	156.7	14	CW	Li-ion	Belt-Clip	2.2	37.0	0.338	P	1.93	0.965	-0.985	P	2.42	1.21
					Speaker-Mic				S	1.13	0.565	-0.690	S	1.32	0.662
ANSI / IEEE C95.1 1999 - SAFETY LIMIT					BRAIN / BODY: 1.6 W/kg (averaged over 1 gram)				Spatial Peak Uncontrolled Exposure / General Population						
Test Date		November 09, 2005				November 09, 2005			Measured Fluid Type		Brain		Body		Unit
Dielectric Constant ε _r		150 MHz Brain				150 MHz Body			Atmospheric Pressure		102.4		102.2		kPa
		IEEE Target		Meas.	Dev.	IEEE Target		Meas.	Dev.	Relative Humidity		30		30	%
		52.3	± 5%	53.4	+2.1%	61.9	± 5%	62.3	+0.6%	Ambient Temperature		22.9		22.9	°C
Conductivity σ (mho/m)		150 MHz Brain				150 MHz Body			Fluid Temperature		20.8		21.9		°C
		IEEE Target		Meas.	Dev.	IEEE Target		Meas.	Dev.	Fluid Depth		≥ 15		≥ 15	cm
		0.76	± 5%	0.73	-3.9%	0.80	± 5%	0.82	+2.5%	ρ (Kg/m³)		1000		1000	

Note(s):

1. The measurement results were obtained with the DUT tested in the conditions described in this report. Detailed measurement data and plots showing the maximum SAR location of the DUT are reported in Appendix A.
2. The transmission band of the DUT was < 10 MHz; therefore only the middle channel of the frequency band was evaluated (per FCC OET Bulletin 65, Supplement C, Edition 01-01 - see reference [3]).
3. The power droops measured by the DASY4 system for the duration of the SAR evaluations were added to the measured SAR levels to report scaled SAR results as shown in the above test data table.
4. A SAR-versus-Time power drift evaluation was performed in the test configuration that reported the maximum scaled SAR level (Body). See Appendix A (SAR Test Plots) for SAR-versus-Time power droop evaluation plot.
5. The ambient and fluid temperatures were measured prior to, and during, the fluid dielectric parameter check and the SAR evaluations. The temperatures reported were consistent for all measurement periods.
6. The dielectric parameters of the simulated tissue mixtures were measured prior to the SAR evaluations using an ALS-PR-DIEL Dielectric Probe Kit and an HP 8753ET Network Analyzer (see Appendix C).
7. The SAR evaluations were performed within 24 hours of the system performance check.
8. The area scan evaluation was performed with a fully charged battery. After the area scan was completed the radio was cooled down to room temperature and the battery was replaced with a fully charged battery prior to the zoom scan evaluation.

Applicant:	Uniden America Corporation	FCC ID:	AMWUT608	Freq.:	156.025 - 157.425 MHz	
DUT Type:	Portable VHF/UHF MRN/FRS PTT Radio Transceiver			Model:	VHF250 (VHF75r)	
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 6 of 38

	Test Report Serial No.:		110305AMW-F686-S80V	Report Issue Date:	Nov. 15, 2005
	Date(s) of Evaluation:		November 09, 2005	Report Rev. No.:	Revision 0
	Description of Tests:		RF Exposure SAR	FCC §2.1093	IC RSS-102

5.0 DETAILS OF SAR EVALUATION

The Uniden America Corporation Model: VHF250 (VHF75r) Portable MRN/FRS PTT Radio Transceiver FCC ID: AMWUT608 was compliant for localized Specific Absorption Rate (General Population / Uncontrolled Exposure) based on the test provisions and conditions described below. The detailed test setup photographs are shown in Appendix D.

1. The DUT was evaluated in a face-held configuration with the front of the radio placed parallel to the outer surface of the planar phantom. A 2.5 cm separation distance was maintained between the front side of the DUT and the outer surface of the planar phantom.
2. The DUT was tested in a body-worn configuration with the back of the radio placed parallel to the outer surface of the planar phantom. The attached swivel belt-clip accessory was touching the planar phantom and provided a 2.2 cm separation distance from the back of the DUT to the outer surface of the planar phantom. The DUT was evaluated for body-worn SAR with the speaker-microphone audio accessory connected to the audio port.
3. The conducted power levels were measured prior to the SAR evaluations using a Gigatronics 8652A Universal Power Meter according to the procedures described in FCC 47 CFR §2.1046.
4. The DUT was evaluated for SAR at the maximum ERP level measured prior to the SAR evaluations at Celltech Labs' 3-meter Open Area Test Site using the signal substitution method in accordance with ANSI/TIA-603-C-2004 (see reference [6]).
5. The area scan evaluation was performed with a fully charged battery. After the area scan was completed the radio was cooled down to room temperature and the battery was replaced with a fully charged battery prior to the zoom scan evaluation.
6. The DUT was tested in unmodulated continuous transmit operation (Continuous Wave mode at 100% duty cycle) with the transmit key constantly depressed. For a push-to-talk device the 50% duty cycle compensation reported assumes a transmit/receive cycle of equal time base.
7. The SAR evaluations were performed using a Plexiglas planar phantom.
8. The ambient and fluid temperatures were measured prior to, and during, the fluid dielectric parameter check and the SAR evaluations. The temperatures reported were consistent for all measurement periods.
9. The dielectric parameters of the simulated tissue mixtures were measured prior to the SAR evaluations using an ALS-PR-DIEL Dielectric Probe Kit and an HP 8753ET Network Analyzer (see Appendix C).
10. The SAR evaluations were performed within 24 hours of the system performance check.

6.0 EVALUATION PROCEDURES

- (i) The evaluation was performed in the applicable area of the phantom depending on the type of device being tested. For devices held to the ear during normal operation, both the left and right ear positions were evaluated using the SAM phantom.
- (ii) For body-worn and face-held devices a planar phantom was used.
- The SAR was determined by a pre-defined procedure within the DASY4 software. Upon completion of a reference and optical surface check, the exposed region of the phantom was scanned near the inner surface with a grid spacing of 15mm x 15mm.

An area scan was determined as follows:

- Based on the defined area scan grid, a more detailed grid is created to increase the points by a factor of 10. The interpolation function then evaluates all field values between corresponding measurement points.
- A linear search is applied to find all the candidate maxima. Subsequently, all maxima are removed that are >2 dB from the global maximum. The remaining maxima are then used to position the cube scans.

A 1g and 10g spatial peak SAR was determined as follows:

- Extrapolation is used to find the points between the dipole center of the probe and the surface of the phantom. This data cannot be measured, since the center of the dipoles is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.4 mm (see probe calibration document in Appendix F). The extrapolation was based on trivariate quadratics computed from the previously calculated 3D interpolated points nearest the phantom surface.
- Interpolated data is used to calculate the average SAR over 1g and 10g cubes by spatially discretizing the entire measured cube. The volume used to determine the averaged SAR is a 1mm grid (42875 interpolated points).
- A zoom scan volume of 32 mm x 32 mm x 30 mm (5 x 5 x 7 points) centered at the peak SAR location determined from the area scan is used for all zoom scans for devices with a transmit frequency < 800 MHz. Zoom scans for frequencies ≥ 800 MHz are determined with a scan volume of 30 mm x 30 mm x 30 mm (7 x 7 x 7) to ensure complete capture of the peak spatial-average SAR.

Applicant:	Uniden America Corporation	FCC ID:	AMWUT608	Freq.:	156.025 - 157.425 MHz	
DUT Type:	Portable VHF/UHF MRN/FRS PTT Radio Transceiver			Model:	VHF250 (VHF75r)	
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 7 of 38

	Test Report Serial No.: 110305AMW-F686-S80V		Report Issue Date:	Nov. 15, 2005
	Date(s) of Evaluation: November 09, 2005		Report Rev. No.:	Revision 0
	Description of Tests: RF Exposure SAR		FCC §2.1093	IC RSS-102

7.0 SYSTEM PERFORMANCE CHECK

Prior to the SAR evaluation a system check was performed using a planar phantom with a 300 MHz dipole (see Appendix E for system validation procedures). The dielectric parameters of the simulated tissue mixture were measured prior to the system performance check using an ALS-PR-DIEL Dielectric Probe Kit and an HP 8753ET Network Analyzer (see Appendix C). A forward power of 250 mW was applied to the dipole and the system was verified to a tolerance of $\pm 10\%$ (see Appendix B for system performance check test plot).

SYSTEM PERFORMANCE CHECK EVALUATION

Test Date	300MHz Equiv. Tissue	SAR 1g (W/kg)			Dielectric Constant ϵ_r			Conductivity σ (mho/m)			ρ (Kg/m ³)	Amb. Temp. (°C)	Fluid Temp. (°C)	Fluid Depth (cm)	Humid. (%)	Barom. Press. (kPa)
		IEEE Target	Meas.	Dev.	IEEE Target	Meas.	Dev.	IEEE Target	Meas.	Dev.						
11/09/05	Brain	0.750 $\pm 10\%$	0.759	+1.2%	45.3 $\pm 5\%$	44.7	-1.3%	0.87 $\pm 5\%$	0.84	-3.4%	1000	22.8	21.6	≥ 15	30	102.4

Note(s):

1. The ambient and fluid temperatures were measured prior to, and during, the fluid dielectric parameter check and the system performance check. The temperatures listed in the table above were consistent for all measurement periods.

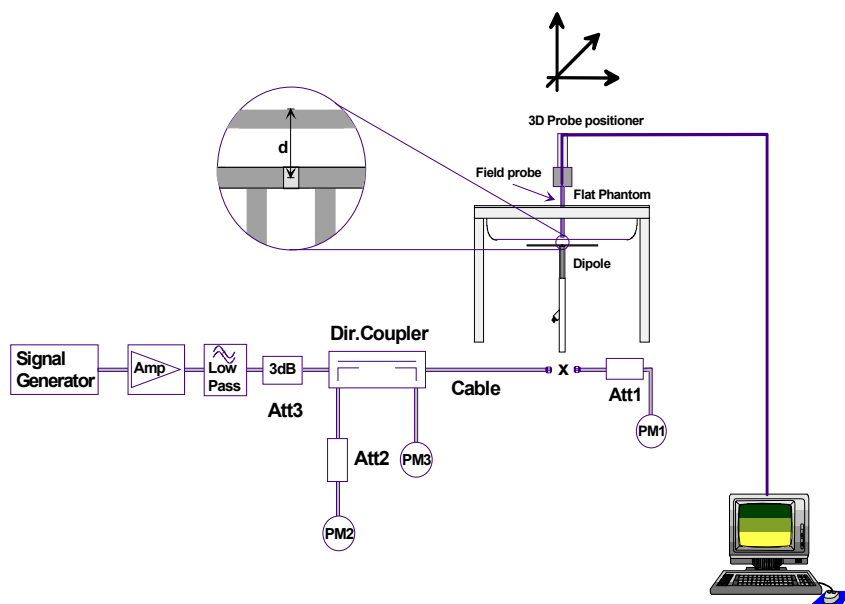


Figure 1. System Performance Check Setup Diagram



300MHz Dipole Setup

Applicant:	Uniden America Corporation	FCC ID:	AMWUT608	Freq.:	156.025 - 157.425 MHz	
DUT Type:	Portable VHF/UHF MRN/FRS PTT Radio Transceiver			Model:	VHF250 (VHF75r)	
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 8 of 38

	Test Report Serial No.:	110305AMW-F686-S80V	Report Issue Date:	Nov. 15, 2005
	Date(s) of Evaluation:	November 09, 2005	Report Rev. No.:	Revision 0
	Description of Tests:	RF Exposure SAR	FCC §2.1093	IC RSS-102

8.0 SIMULATED EQUIVALENT TISSUES

The simulated tissue mixtures consist of a viscous gel using hydroxethylcellulose (HEC) gelling agent and saline solution. Preservation with a bactericide is added and visual inspection is made to ensure air bubbles are not trapped during the mixing process. The fluid was prepared according to standardized procedures and measured for dielectric parameters (permittivity and conductivity).

SIMULATED TISSUE MIXTURES			
INGREDIENT	300 MHz Brain (%)	150 MHz Brain (%)	150 MHz Body (%)
	System Performance Check	DUT Evaluation	DUT Evaluation
Water	37.56	38.35	46.6
Sugar	55.32	55.5	49.7
Salt	5.95	5.15	2.6
HEC	0.98	0.9	1.0
Bactericide	0.19	0.1	0.1

9.0 SAR SAFETY LIMITS

EXPOSURE LIMITS	SAR (W/kg)	
	(General Population / Uncontrolled Exposure Environment)	(Occupational / Controlled Exposure Environment)
Spatial Average (averaged over the whole body)	0.08	0.4
Spatial Peak (averaged over any 1g of tissue)	1.60	8.0
Spatial Peak (hands/wrists/feet/ankles averaged over 10g)	4.0	20.0

Notes:

1. Uncontrolled environments are defined as locations where there is potential exposure of individuals who have no knowledge or control of their potential exposure.
2. Controlled environments are defined as locations where there is potential exposure of individuals who have knowledge of their potential exposure and can exercise control over their exposure.

Applicant:	Uniden America Corporation	FCC ID:	AMWUT608	Freq.:	156.025 - 157.425 MHz	
DUT Type:	Portable VHF/UHF MRN/FRS PTT Radio Transceiver			Model:	VHF250 (VHF75r)	
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 9 of 38

	Test Report Serial No.: 110305AMW-F686-S80V		Report Issue Date:	Nov. 15, 2005
	Date(s) of Evaluation: November 09, 2005		Report Rev. No.:	Revision 0
	Description of Tests:	RF Exposure SAR	FCC §2.1093	IC RSS-102

10.0 ROBOT SYSTEM SPECIFICATIONS

Specifications

POSITIONER: Stäubli Unimation Corp. Robot Model: RX60L
Repeatability: 0.02 mm
No. of axis: 6

Data Acquisition Electronic (DAE) System

Cell Controller

Processor: AMD Athlon XP 2400+
Clock Speed: 2.0 GHz
Operating System: Windows XP Professional

Data Converter

Features: Signal Amplifier, multiplexer, A/D converter, and control logic
Software: DASY4 software
Connecting Lines: Optical downlink for data and status info.
 Optical uplink for commands and clock

DASY4 Measurement Server

Function: Real-time data evaluation for field measurements and surface detection
Hardware: PC/104 166MHz Pentium CPU; 32 MB chipdisk; 64 MB RAM
Connections: COM1, COM2, DAE, Robot, Ethernet, Service Interface

E-Field Probe

Model: ET3DV6
Serial No.: 1387
Construction: Triangular core fiber optic detection system
Frequency: 10 MHz to 6 GHz
Linearity: ± 0.2 dB (30 MHz to 3 GHz)

Phantom(s)

Evaluation Phantom

Type: Planar Phantom
Shell Material: Plexiglas
Bottom Thickness: 2.0 mm $\pm$ 0.1 mm
Outer Dimensions: 75.0 cm (L) x 22.5 cm (W) x 20.5 cm (H); Back Plane: 25.7 cm (H)

Validation Phantom (≤ 450 MHz)

Type: Planar Phantom
Shell Material: Plexiglas
Bottom Thickness: 6.2 mm $\pm$ 0.1 mm
Outer Dimensions: 86.0 cm (L) x 39.5 cm (W) x 21.8 cm (H)

Applicant:	Uniden America Corporation	FCC ID:	AMWUT608	Freq.:	156.025 - 157.425 MHz	
DUT Type:	Portable VHF/UHF MRN/FRS PTT Radio Transceiver			Model:	VHF250 (VHF75r)	
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 10 of 38

	Test Report Serial No.: 110305AMW-F686-S80V		Report Issue Date:	Nov. 15, 2005
	Date(s) of Evaluation: November 09, 2005		Report Rev. No.:	Revision 0
	Description of Tests:	RF Exposure SAR	FCC §2.1093	IC RSS-102

11.0 PROBE SPECIFICATION (ET3DV6)

Construction:	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g. glycol)
Calibration:	In air from 10 MHz to 2.5 GHz In brain simulating tissue at frequencies of 900 MHz and 1.8 GHz (accuracy $\pm 8\%$)
Frequency:	10 MHz to > 6 GHz; Linearity: ± 0.2 dB (30 MHz to 3 GHz)
Directivity:	± 0.2 dB in brain tissue (rotation around probe axis) ± 0.4 dB in brain tissue (rotation normal to probe axis)
Dynamic Range:	5 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB
Surface Detection:	± 0.2 mm repeatability in air and clear liquids over diffuse reflecting surfaces
Dimensions:	Overall length: 330 mm Tip length: 16 mm Body diameter: 12 mm Tip diameter: 6.8 mm Distance from probe tip to dipole centers: 2.7 mm
Application:	General dosimetry up to 3 GHz Compliance tests of mobile phone



ET3DV6 E-Field Probe

12.0 SIDE PLANAR PHANTOM

The side planar phantom is constructed of Plexiglas material with a 2.0 mm shell thickness for face-held and body-worn SAR evaluations of handheld and body-worn radio transceivers. The planar phantom is mounted on the side of the DASY4 compact system table.



Plexiglas Side Planar Phantom

13.0 VALIDATION PLANAR PHANTOM

The validation planar phantom is constructed of Plexiglas material with a 6.0 mm shell thickness for system validations at 450MHz and below. The validation planar phantom is mounted in the table of the DASY4 compact system.



Validation Planar Phantom

14.0 DEVICE HOLDER

The DASY4 device holder has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of 65° . The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections.



Device Holder

Applicant:	Uniden America Corporation	FCC ID:	AMWUT608	Freq.:	156.025 - 157.425 MHz	
DUT Type:	Portable VHF/UHF MRN/FRS PTT Radio Transceiver			Model:	VHF250 (VHF75r)	
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 11 of 38

	Test Report Serial No.:	110305AMW-F686-S80V	Report Issue Date:	Nov. 15, 2005
	Date(s) of Evaluation:	November 09, 2005	Report Rev. No.:	Revision 0
	Description of Tests:	RF Exposure SAR	FCC §2.1093	IC RSS-102

15.0 TEST EQUIPMENT LIST

TEST EQUIPMENT		ASSET NO.	SERIAL NO.	DATE CALIBRATED		CALIBRATION DUE DATE
USED	DESCRIPTION					
x	Schmid & Partner DASY4 System	-	-	-		-
x	-DASY4 Measurement Server	00158	1078	N/A		N/A
x	-Robot	00046	599396-01	N/A		N/A
x	-DAE4	00019	353	15Jun05		15Jun06
	-DAE3	00018	370	25Jan05		25Jan06
x	-ET3DV6 E-Field Probe	00016	1387	18Mar05		18Mar06
	-ET3DV6 E-Field Probe	00017	1590	20May05		20May06
	-EX3DV4 E-Field Probe	00125	3547	21Jan05		21Jan06
x	-300MHz Validation Dipole	00023	135	25Oct05		25Oct06
	-450MHz Validation Dipole	00024	136	25Oct05		25Oct06
	-835MHz Validation Dipole	00022	411	Brain	30Mar05	30Mar06
				Body	12Apr05	12Apr06
	-900MHz Validation Dipole	00020	054	Brain	10Jun05	10Jun06
				Body	10Jun05	10Jun06
	-1800MHz Validation Dipole	00021	247	Brain	14Jun05	14Jun06
				Body	14Jun05	14Jun06
	-1900MHz Validation Dipole	00032	151	Brain	17Jun05	17Jun06
				Body	22Apr05	22Apr06
	-2450MHz Validation Dipole	00025	150	Brain	20Sep05	20Sep06
				Body	22Apr05	22Apr06
	-5000MHz Validation Dipole	00126	1031	Brain	11Jan05	11Jan06
				Body	11Jan05	11Jan06
	-SAM Phantom V4.0C	00154	1033	N/A		N/A
	-Barski Planar Phantom	00155	03-01	N/A		N/A
x	-Plexiglas Side Planar Phantom	00156	161	N/A		N/A
x	- Plexiglas Validation Planar Phantom	00157	137	N/A		N/A
	HP 85070C Dielectric Probe Kit	00033	N/A	N/A		N/A
x	ALS-PR-DIEL Dielectric Probe Kit	00160	260-00953	N/A		N/A
x	Gigatronics 8652A Power Meter	00110	1835801	16Apr05		16Apr06
	Gigatronics 8652A Power Meter	00008	1835267	29Apr05		29Apr06
x	Gigatronics 80701A Power Sensor	00012	1834350	12Sep05		12Sep06
x	Gigatronics 80701A Power Sensor	00014	1833699	07Sep05		07Sep06
	Gigatronics 80701A Power Sensor	00109	1834366	16Apr05		16Apr06
x	HP 8753ET Network Analyzer	00134	US39170292	04May05		04May06
x	HP 8648D Signal Generator	00005	3847A00611	29Apr05		29Apr06
	Rohde & Schwarz SMR40 Signal Generator	00006	100104	12Apr05		12Apr06
x	Amplifier Research 5S1G4 Power Amplifier	00106	26235	N/A		N/A

Applicant:	Uniden America Corporation	FCC ID:	AMWUT608	Freq.:	156.025 - 157.425 MHz	
DUT Type:	Portable VHF/UHF MRN/FRS PTT Radio Transceiver			Model:	VHF250 (VHF75r)	
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 12 of 38

	Test Report Serial No.: 110305AMW-F686-S80V		Report Issue Date: Nov. 15, 2005	
	Date(s) of Evaluation: November 09, 2005		Report Rev. No.: Revision 0	
	Description of Tests: RF Exposure SAR		FCC §2.1093 IC RSS-102	

16.0 MEASUREMENT UNCERTAINTIES

UNCERTAINTY BUDGET FOR DEVICE EVALUATION						
Error Description	Uncertainty Value ±%	Probability Distribution	Divisor	ci 1g	Uncertainty Value ±% (1g)	V _i or V _{eff}
Measurement System						
Probe calibration	5.0	Normal	1	1	5.0	∞
Axial isotropy of the probe	4.7	Rectangular	1.732050808	0.7	1.9	∞
Spherical isotropy of the probe	9.6	Rectangular	1.732050808	0.7	3.9	∞
Spatial resolution	0	Rectangular	1.732050808	1	0.0	∞
Boundary effects	1	Rectangular	1.732050808	1	0.6	∞
Probe linearity	4.7	Rectangular	1.732050808	1	2.7	∞
Detection limit	1	Rectangular	1.732050808	1	0.6	∞
Readout electronics	0.3	Normal	1	1	0.3	∞
Response time	0.8	Rectangular	1.732050808	1	0.5	∞
Integration time	2.6	Rectangular	1.732050808	1	1.5	∞
RF ambient conditions	3	Rectangular	1.732050808	1	1.7	∞
Mech. constraints of robot	0.4	Rectangular	1.732050808	1	0.2	∞
Probe positioning	2.9	Rectangular	1.732050808	1	1.7	∞
Extrapolation & integration	1	Rectangular	1.732050808	1	0.6	∞
Test Sample Related						
Device positioning	2.9	Normal	1	1	2.9	12
Device holder uncertainty	3.6	Normal	1	1	3.6	8
Power drift	5	Rectangular	1.732050808	1	2.9	∞
Phantom and Setup						
Phantom uncertainty	4	Rectangular	1.732050808	1	2.3	∞
Liquid conductivity (target)	5	Rectangular	1.732050808	0.64	1.8	∞
Liquid conductivity (measured)	2.5	Normal	1	0.64	1.6	∞
Liquid permittivity (target)	5	Rectangular	1.732050808	0.6	1.7	∞
Liquid permittivity (measured)	2.5	Normal	1	0.6	1.5	∞
Combined Standard Uncertainty					10.33	
Expanded Uncertainty (k=2)					20.66	

Measurement Uncertainty Table in accordance with IEEE Standard 1528-2003 (see reference [5])

Applicant:	Uniden America Corporation	FCC ID:	AMWUT608	Freq.:	156.025 - 157.425 MHz	
DUT Type:	Portable VHF/UHF MRN/FRS PTT Radio Transceiver			Model:	VHF250 (VHF75r)	
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 13 of 38

	Test Report Serial No.:	110305AMW-F686-S80V	Report Issue Date:	Nov. 15, 2005
	Date(s) of Evaluation:	November 09, 2005	Report Rev. No.:	Revision 0
	Description of Tests:	RF Exposure SAR	FCC §2.1093	IC RSS-102

MEASUREMENT UNCERTAINTIES (CONT.)

UNCERTAINTY BUDGET FOR SYSTEM VALIDATION						
Error Description	Uncertainty Value ±%	Probability Distribution	Divisor	ci 1g	Uncertainty Value ±% (1g)	V _i or V _{eff}
Measurement System						
Probe calibration	4.5	Normal	1	1	4.5	∞
Axial isotropy of the probe	4.7	Rectangular	1.732050808	1	2.7	∞
Spherical isotropy of the probe	0	Rectangular	1.732050808	1	0.0	∞
Spatial resolution	0	Rectangular	1.732050808	1	0.0	∞
Boundary effects	1	Rectangular	1.732050808	1	0.6	∞
Probe linearity	4.7	Rectangular	1.732050808	1	2.7	∞
Detection limit	1	Rectangular	1.732050808	1	0.6	∞
Readout electronics	0.3	Normal	1	1	0.3	∞
Response time	0	Rectangular	1.732050808	1	0.0	∞
Integration time	0	Rectangular	1.732050808	1	0.0	∞
RF ambient conditions	3	Rectangular	1.732050808	1	1.7	∞
Mech. constraints of robot	0.4	Rectangular	1.732050808	1	0.2	∞
Probe positioning	2.9	Rectangular	1.732050808	1	1.7	∞
Extrapolation & integration	1	Rectangular	1.732050808	1	0.6	∞
Test Sample Related						
Dipole Positioning	2	Normal	1.732050808	1	1.2	∞
Power & Power Drift	4.7	Normal	1.732050808	1	2.7	∞
Phantom and Setup						
Phantom uncertainty	4	Rectangular	1.732050808	1	2.3	∞
Liquid conductivity (target)	5	Rectangular	1.732050808	0.64	1.8	∞
Liquid conductivity (measured)	2.5	Normal	1	0.64	1.6	∞
Liquid permittivity (target)	5	Rectangular	1.732050808	0.6	1.7	∞
Liquid permittivity (measured)	2.5	Normal	1	0.6	1.5	∞
Combined Standard Uncertainty					8.20	
Expanded Uncertainty (k=2)					16.39	

Measurement Uncertainty Table in accordance with IEEE Standard 1528-2003 (see reference [5])

Applicant:	Uniden America Corporation	FCC ID:	AMWUT608	Freq.:	156.025 - 157.425 MHz	
DUT Type:	Portable VHF/UHF MRN/FRS PTT Radio Transceiver			Model:	VHF250 (VHF75r)	
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 14 of 38

	Test Report Serial No.:		110305AMW-F686-S80V	Report Issue Date:	Nov. 15, 2005
	Date(s) of Evaluation:		November 09, 2005	Report Rev. No.:	Revision 0
	Description of Tests:		RF Exposure SAR	FCC §2.1093	IC RSS-102

17.0 REFERENCES

- [1] Federal Communications Commission, "Radiofrequency radiation exposure evaluation: portable devices", Rule Part 47 CFR §2.1093: 1999.
- [2] Health Canada, "Limits of Human Exposure to Radiofrequency Electromagnetic Fields in the Frequency Range from 3 kHz to 300 GHz", Safety Code 6: 1999.
- [3] Federal Communications Commission, "Evaluating Compliance with FCC Guidelines for Human Exposure to Radio frequency Electromagnetic Fields", OET Bulletin 65, Supplement C (Edition 01-01), FCC, Washington, D.C.: June 2001.
- [4] Industry Canada, "Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)", Radio Standards Specification RSS-102 Issue 2: November 2005.
- [5] IEEE Standard 1528-2003, "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques": December 2003.
- [6] ANSI/TIA-603-C, "Land Mobile FM or PM Communications Equipment - Measurement and Performance Standards": December 2004.

Applicant:	Uniden America Corporation	FCC ID:	AMWUT608	Freq.:	156.025 - 157.425 MHz	
DUT Type:	Portable VHF/UHF MRN/FRS PTT Radio Transceiver			Model:	VHF250 (VHF75r)	
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 15 of 38

	Test Report Serial No.:	110305AMW-F686-S80V	Report Issue Date:	Nov. 15, 2005
	Date(s) of Evaluation:	November 09, 2005	Report Rev. No.:	Revision 0
	Description of Tests:	RF Exposure SAR	FCC §2.1093	IC RSS-102

APPENDIX A - SAR MEASUREMENT DATA

Applicant:	Uniden America Corporation	FCC ID:	AMWUT608	Freq.:	156.025 - 157.425 MHz	
DUT Type:	Portable VHF/UHF MRN/FRS PTT Radio Transceiver			Model:	VHF250 (VHF75r)	
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 16 of 38

	Test Report Serial No.: 110305AMW-F686-S80V		Report Issue Date:	Nov. 15, 2005
	Date(s) of Evaluation: November 09, 2005		Report Rev. No.:	Revision 0
	Description of Tests:	RF Exposure SAR	FCC §2.1093	IC RSS-102

Date Tested: 11/09/2005

Face-Held SAR - VHF Marine Band

DUT: Uniden Model: VHF250; Type: Portable MRN/FRS PTT Radio Transceiver; Serial: None (Identical Prototype)

Ambient Temp: 22.9 °C; Fluid Temp: 20.8 °C; Barometric Pressure: 102.4 kPa; Humidity: 30%

Communication System: FM VHF

RF Output Power 1: 0.338 Watts (ERP)

RF Output Power 2: 37.0 dBm (Conducted)

7.4V, 1400mAh Li-ion Battery Pack (P/N: BP250LI)

Frequency: 156.7 MHz; Channel 14; Duty Cycle: 1:1

Medium: HSL150 ($\sigma = 0.73$ mho/m; $\epsilon_r = 53.4$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(8.8, 8.8, 8.8); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 15/06/2005
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Face-Held SAR - 2.5 cm Separation Distance to Planar Phantom - Mid Channel/Area Scan (8x20x1):

Measurement grid: dx=15mm, dy=15mm


Face-Held SAR - 2.5 cm Separation Distance to Planar Phantom - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 38.8 V/m; Power Drift = -0.856 dB

Peak SAR (extrapolated) = 1.66 W/kg


SAR(1 g) = 1.04 mW/g; SAR(10 g) = 0.767 mW/g

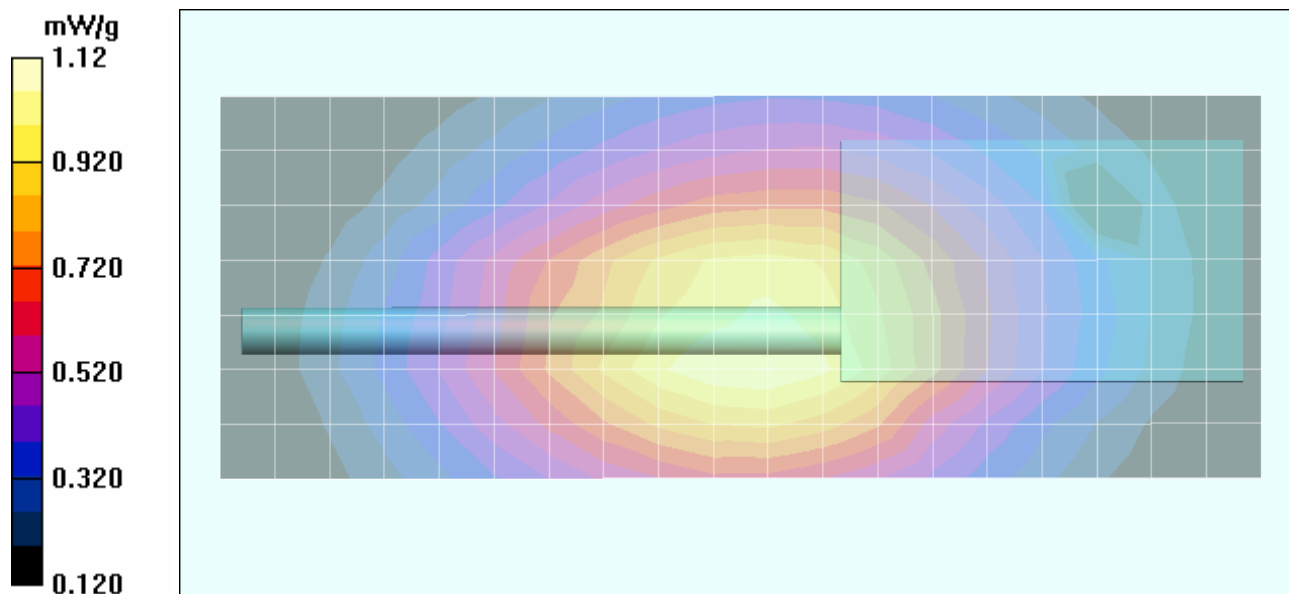

Applicant:	Uniden America Corporation	FCC ID:	AMWUT608	Freq.:	156.025 - 157.425 MHz	
DUT Type:	Portable VHF/UHF MRN/FRS PTT Radio Transceiver			Model:	VHF250 (VHF75r)	
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 17 of 38

	Test Report Serial No.: 110305AMW-F686-S80V		Report Issue Date: Nov. 15, 2005	
	Date(s) of Evaluation: November 09, 2005		Report Rev. No.: Revision 0	
	Description of Tests: RF Exposure SAR		FCC §2.1093 IC RSS-102	

Z-Axis Scan

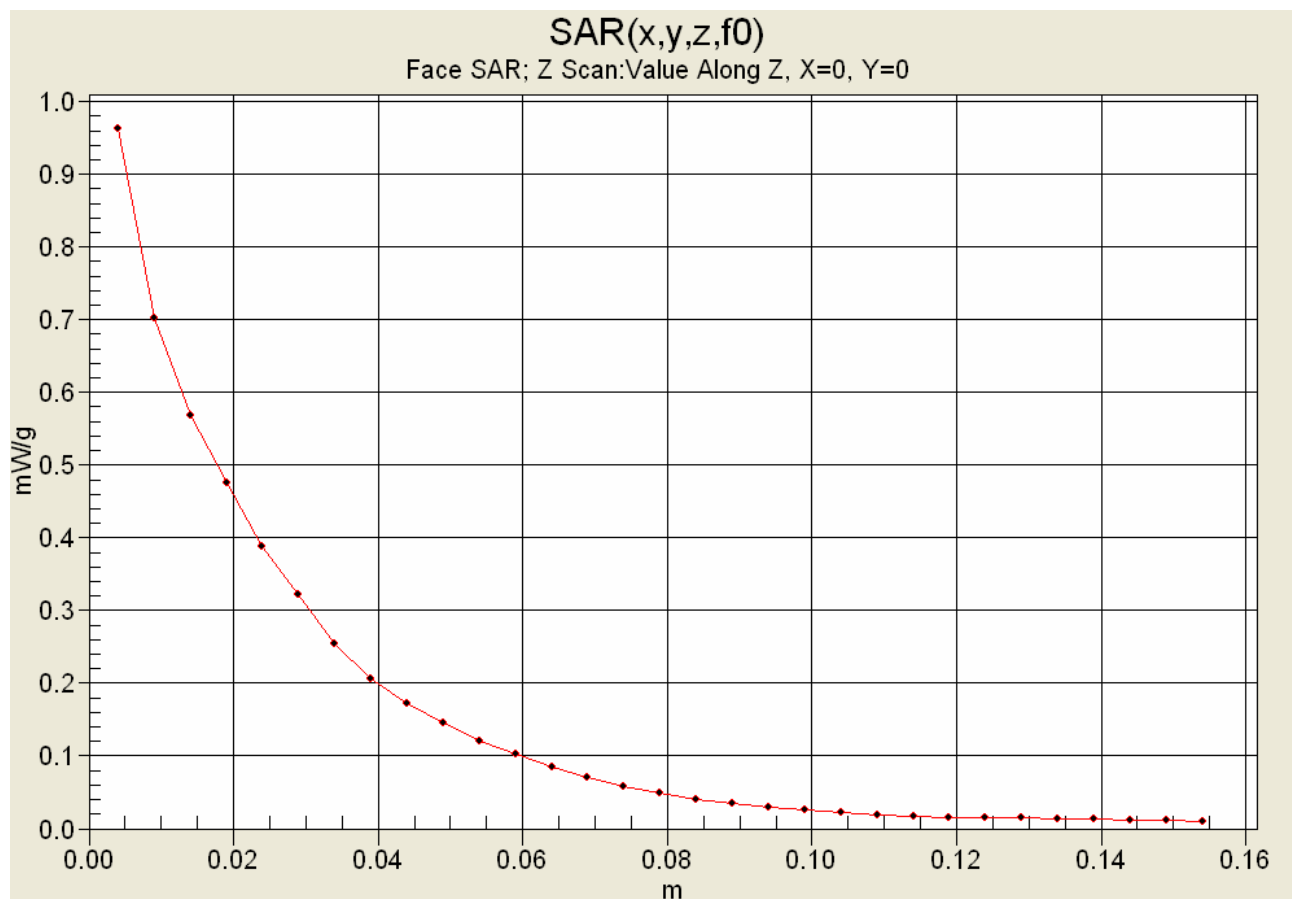

Applicant:	Uniden America Corporation	FCC ID:	AMWUT608	Freq.:	156.025 - 157.425 MHz	
DUT Type:	Portable VHF/UHF MRN/FRS PTT Radio Transceiver			Model:	VHF250 (VHF75r)	
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 18 of 38

	Test Report Serial No.: 110305AMW-F686-S80V		Report Issue Date:	Nov. 15, 2005
	Date(s) of Evaluation: November 09, 2005		Report Rev. No.:	Revision 0
	Description of Tests:	RF Exposure SAR	FCC §2.1093	IC RSS-102

Date Tested: 11/09/2005

Body-Worn SAR - VHF Marine Band

DUT: Uniden Model: VHF250; Type: Portable MRN/FRS PTT Radio Transceiver; Serial: None (Identical Prototype)

Body-Worn Accessory: Swivel Belt-Clip (P/N: CLIP250); Audio Accessory: Speaker-Microphone (Model: HHVTA07)

Ambient Temp: 22.9 °C; Fluid Temp: 21.9 °C; Barometric Pressure: 102.2 kPa; Humidity: 30%

Communication System: FM VHF

RF Output Power 1: 0.338 Watts (ERP)

RF Output Power 2: 37.0 dBm (Conducted)

7.4V, 1400mAh Li-ion Battery Pack (P/N: BP250LI)

Frequency: 156.7 MHz; Channel 14; Duty Cycle: 1:1

Medium: M150 ($\sigma = 0.82 \text{ mho/m}$; $\epsilon_r = 62.3$; $\rho = 1000 \text{ kg/m}^3$)

- Probe: ET3DV6 - SN1387; ConvF(8.4, 8.4, 8.4); Calibrated: 18/03/2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 15/06/2005
- Phantom: Side Planar; Type: Plexiglas; Serial: 161
- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

Body-Worn SAR - 2.2 cm Belt-Clip Separation Distance to Planar Phantom - Mid Channel/Area Scan (8x20x1):

Measurement grid: dx=15mm, dy=15mm

Body-Worn SAR - 2.2 cm Belt-Clip Separation Distance to Planar Phantom - Mid Channel/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 47.3 V/m; Power Drift = -0.985 dB

Peak SAR (extrapolated) = 3.10 W/kg

SAR(1 g) = 1.93 mW/g; SAR(10 g) = 1.35 mW/g


Body-Worn SAR - 2.2 cm Belt-Clip Separation Distance to Planar Phantom - Mid Channel/Zoom Scan 2 (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 45.7 V/m; Power Drift = -0.690 dB

Peak SAR (extrapolated) = 1.83 W/kg


SAR(1 g) = 1.13 mW/g; SAR(10 g) = 0.782 mW/g

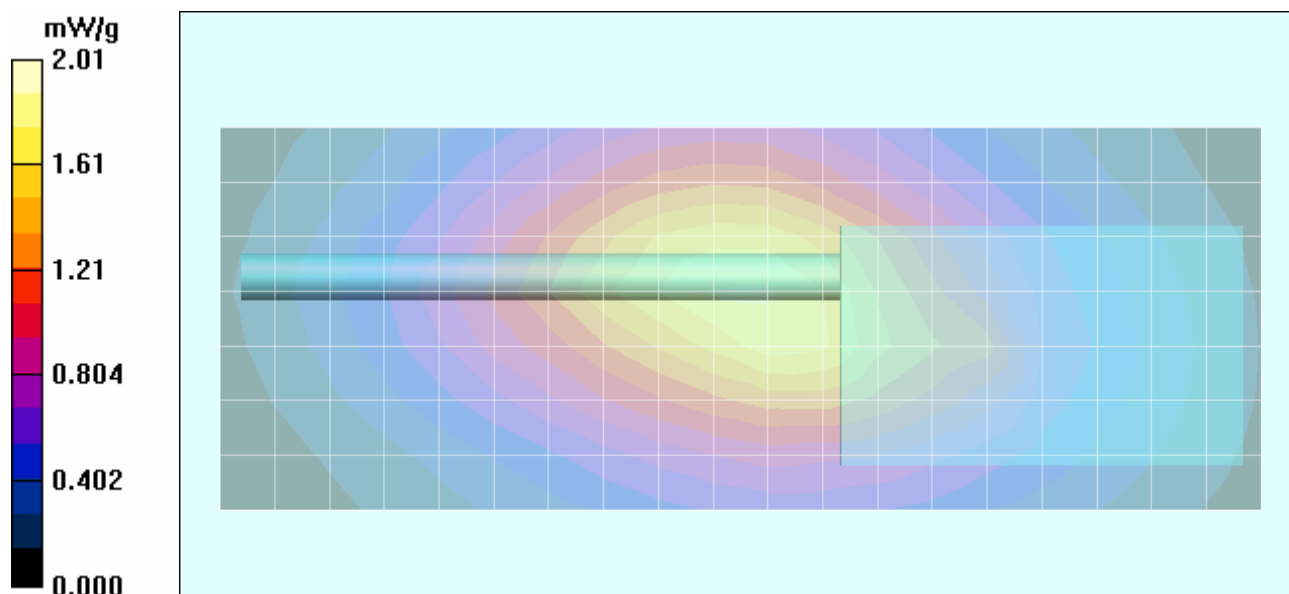

Applicant:	Uniden America Corporation	FCC ID:	AMWUT608	Freq.:	156.025 - 157.425 MHz	
DUT Type:	Portable VHF/UHF MRN/FRS PTT Radio Transceiver			Model:	VHF250 (VHF75r)	
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 19 of 38

	Test Report Serial No.: 110305AMW-F686-S80V		Report Issue Date: Nov. 15, 2005	
	Date(s) of Evaluation: November 09, 2005		Report Rev. No.: Revision 0	
	Description of Tests: RF Exposure SAR		FCC §2.1093 IC RSS-102	

Z-Axis Scan

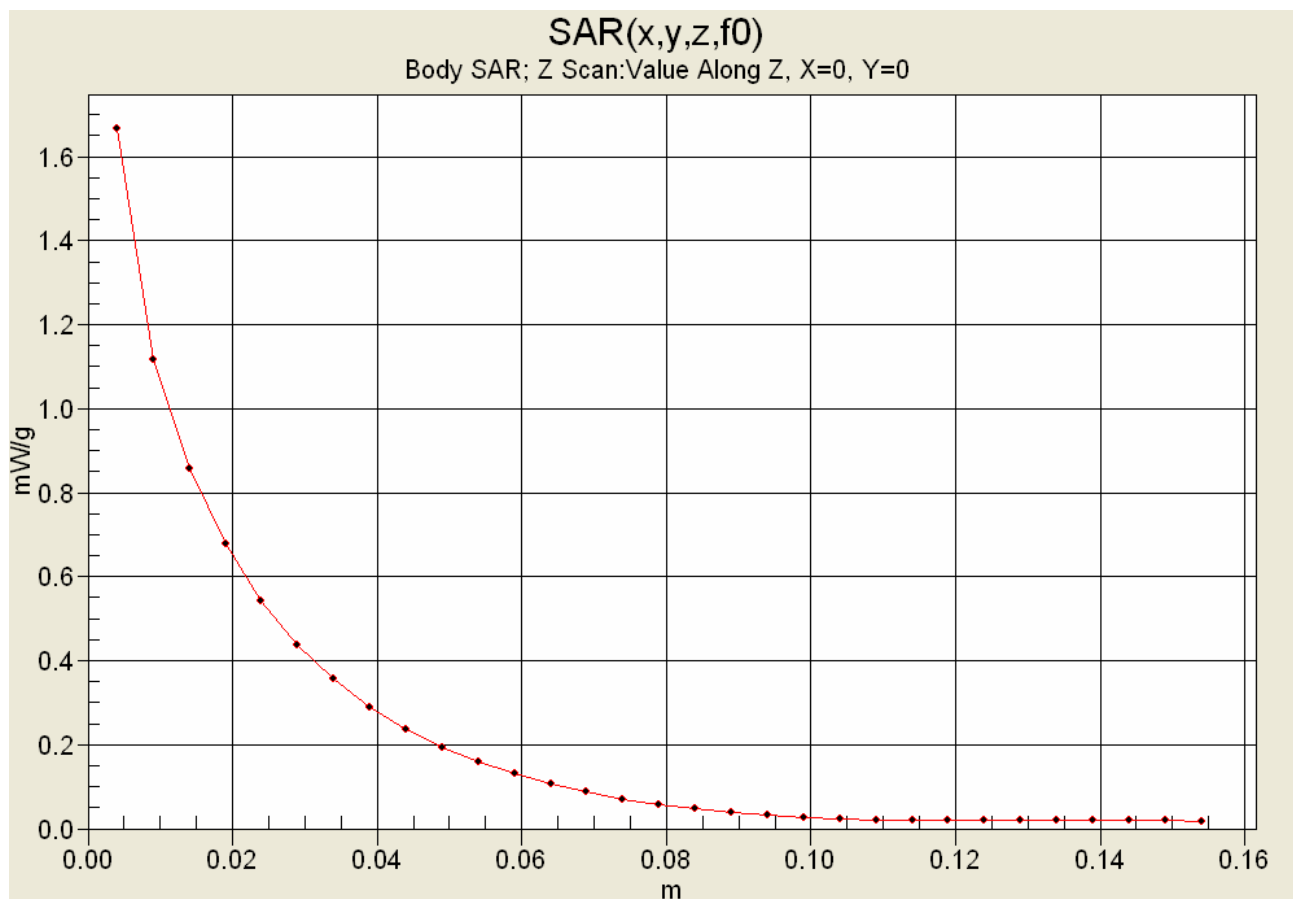

Applicant:	Uniden America Corporation	FCC ID:	AMWUT608	Freq.:	156.025 - 157.425 MHz	
DUT Type:	Portable VHF/UHF MRN/FRS PTT Radio Transceiver			Model:	VHF250 (VHF75r)	
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 20 of 38


	Test Report Serial No.: 110305AMW-F686-S80V		Report Issue Date: Nov. 15, 2005	
	Date(s) of Evaluation: November 09, 2005		Report Rev. No.: Revision 0	
	Description of Tests: RF Exposure SAR		FCC §2.1093 IC RSS-102	

SAR-versus-Time Power Drift Evaluation

Body-Worn Configuration

Li-ion Battery (P/N: BP250LI)

Mid Channel (14) - 156.700 MHz

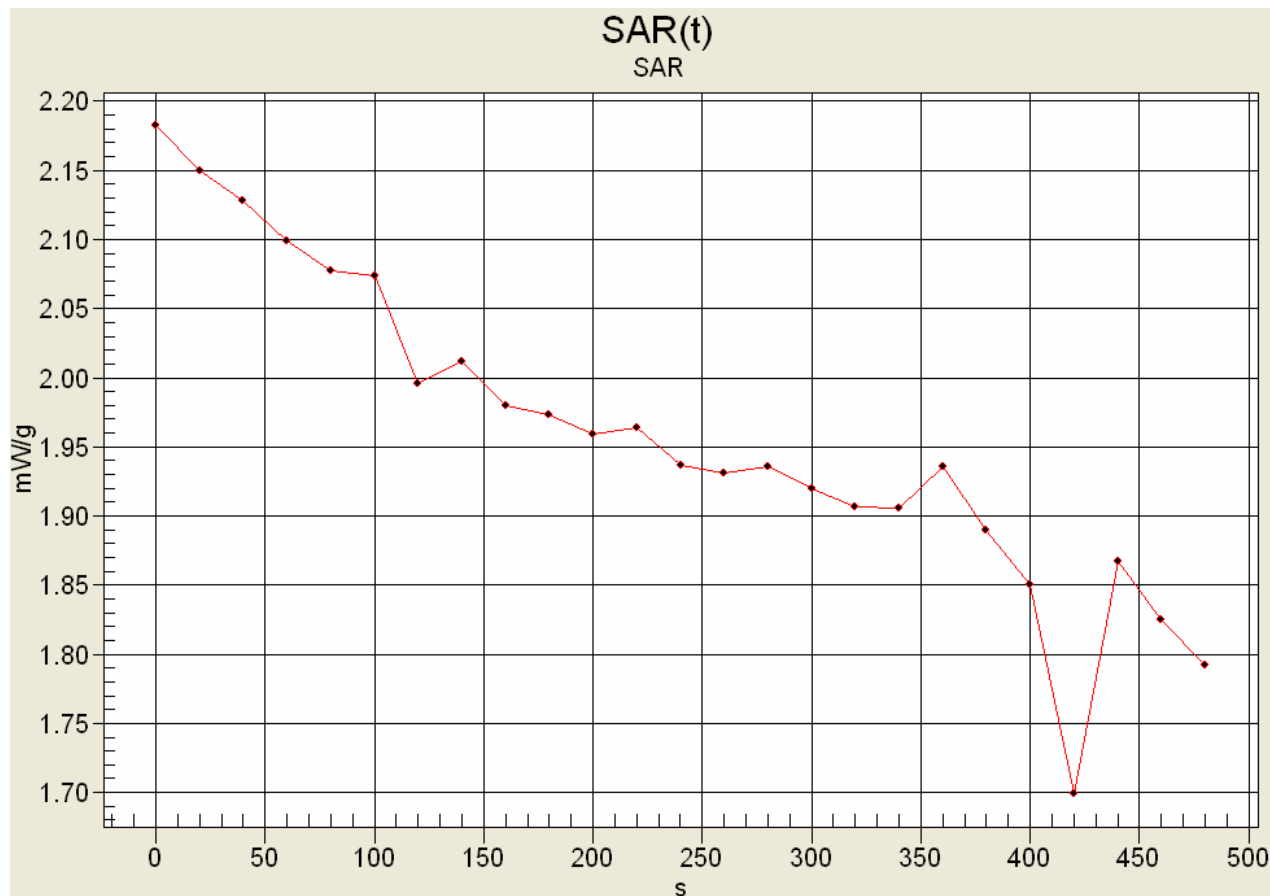

Max. SAR: 2.18235 mW/g

Low SAR: 1.69941 mW/g (-1.086 dB)

SAR after 340s: 1.90614 mW/g (-0.588 dB)

(340s = Zoom Scan Duration)

(480s = Area Scan Duration)

Applicant:	Uniden America Corporation	FCC ID:	AMWUT608	Freq.:	156.025 - 157.425 MHz	
DUT Type:	Portable VHF/UHF MRN/FRS PTT Radio Transceiver			Model:	VHF250 (VHF75r)	
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 21 of 38

	Test Report Serial No.:		110305AMW-F686-S80V	Report Issue Date:	Nov. 15, 2005
	Date(s) of Evaluation:		November 09, 2005	Report Rev. No.:	Revision 0
	Description of Tests:		RF Exposure SAR	FCC §2.1093	IC RSS-102

APPENDIX B - SYSTEM PERFORMANCE CHECK DATA

Applicant:	Uniden America Corporation	FCC ID:	AMWUT608	Freq.:	156.025 - 157.425 MHz	
DUT Type:	Portable VHF/UHF MRN/FRS PTT Radio Transceiver			Model:	VHF250 (VHF75r)	
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 22 of 38

	Test Report Serial No.: 110305AMW-F686-S80V		Report Issue Date:	Nov. 15, 2005
	Date(s) of Evaluation: November 09, 2005		Report Rev. No.:	Revision 0
	Description of Tests:	RF Exposure SAR	FCC §2.1093	IC RSS-102

Date Tested: 11/09/2005

System Performance Check (Brain) - 300 MHz Dipole

DUT: Dipole 300 MHz; Model: D300V2; Type: System Performance Check; Serial: 135; Calibrated: 10/25/2005

Ambient Temp: 22.8 °C; Fluid Temp: 21.6 °C; Barometric Pressure: 102.4 kPa; Humidity: 30%

Communication System: CW

Forward Conducted Power: 250 mW

Frequency: 300 MHz; Duty Cycle: 1:1

Medium: 300 HSL ($\sigma = 0.84$ mho/m; $\epsilon_r = 44.7$; $\rho = 1000$ kg/m³)

- Probe: ET3DV6 - SN1387; ConvF(7.9, 7.9, 7.9); Calibrated: 18/03/2005

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn353; Calibrated: 15/06/2005

- Phantom: Validation Planar; Type: Plexiglas; Serial: 137

- Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

300 MHz Dipole - System Performance Check/Area Scan (6x11x1):

Measurement grid: dx=15mm, dy=15mm


300 MHz Dipole - System Performance Check/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 31.2 V/m; Power Drift = -0.111 dB

Peak SAR (extrapolated) = 1.32 W/kg


SAR(1 g) = 0.759 mW/g; SAR(10 g) = 0.498 mW/g

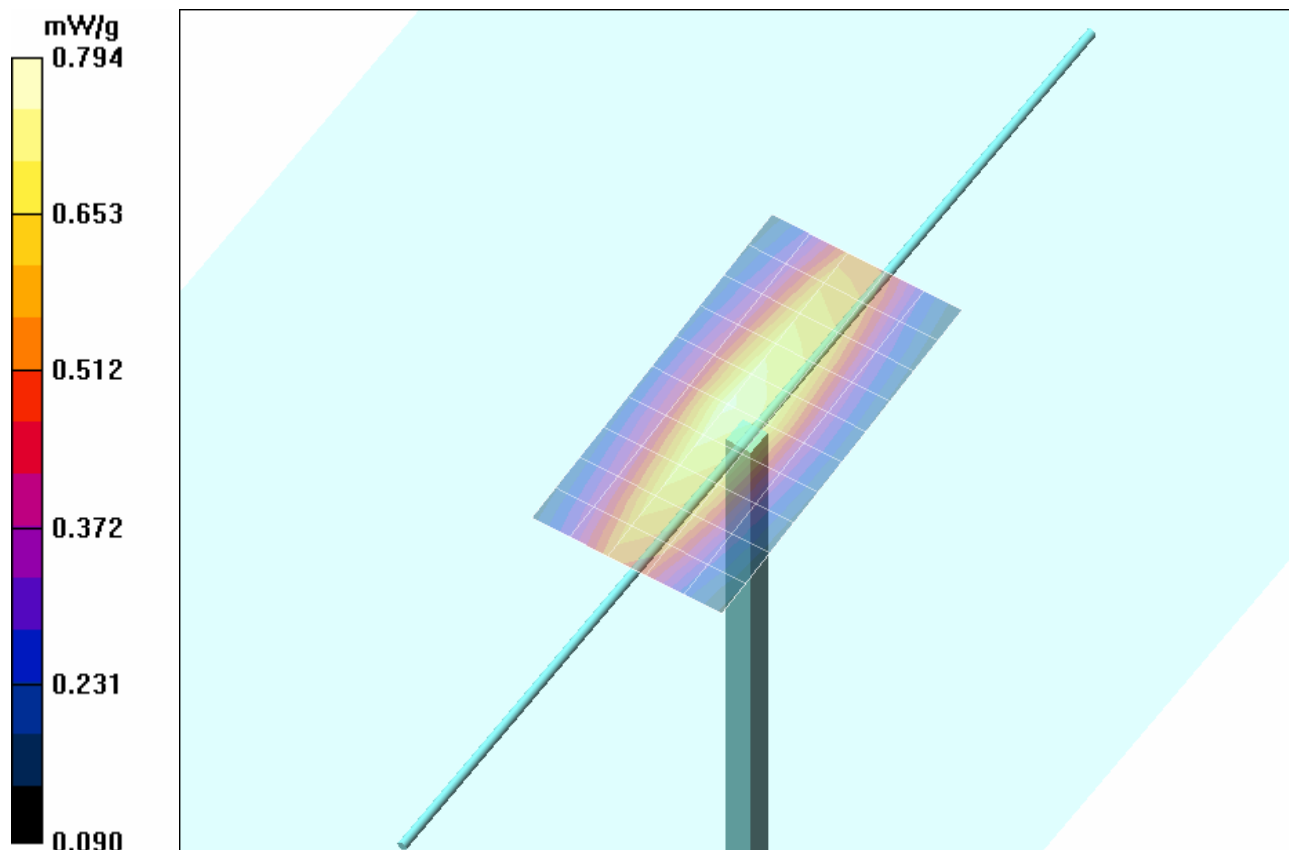

Applicant:	Uniden America Corporation	FCC ID:	AMWUT608	Freq.:	156.025 - 157.425 MHz	
DUT Type:	Portable VHF/UHF MRN/FRS PTT Radio Transceiver			Model:	VHF250 (VHF75r)	
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 23 of 38

	Test Report Serial No.: 110305AMW-F686-S80V		Report Issue Date: Nov. 15, 2005	
	Date(s) of Evaluation: November 09, 2005		Report Rev. No.: Revision 0	
	Description of Tests: RF Exposure SAR		FCC §2.1093 IC RSS-102	

Z-Axis Scan

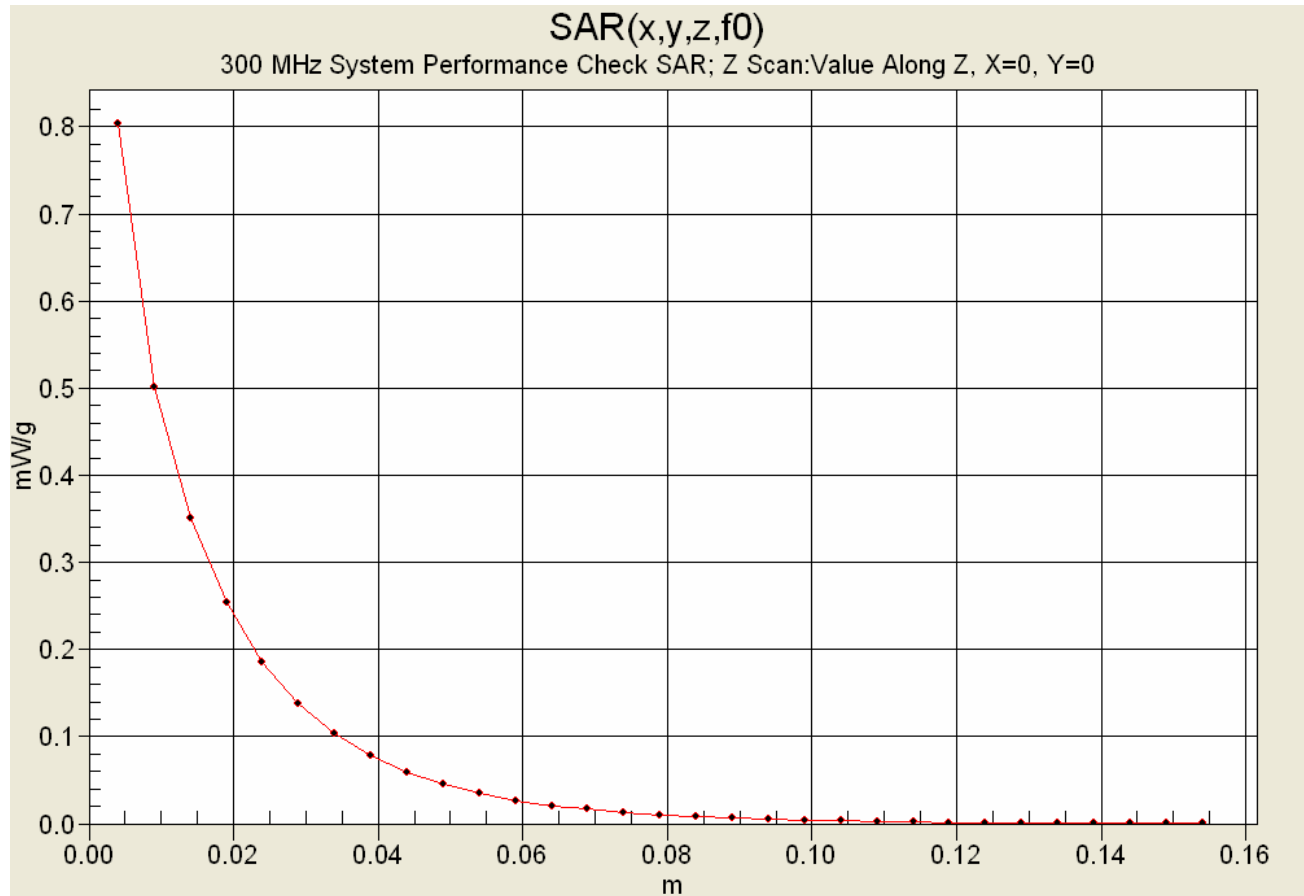

Applicant:	Uniden America Corporation	FCC ID:	AMWUT608	Freq.:	156.025 - 157.425 MHz	
DUT Type:	Portable VHF/UHF MRN/FRS PTT Radio Transceiver			Model:	VHF250 (VHF75r)	
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 24 of 38

	Test Report Serial No.:		110305AMW-F686-S80V	Report Issue Date:		Nov. 15, 2005
	Date(s) of Evaluation:		November 09, 2005	Report Rev. No.:		Revision 0
	Description of Tests:		RF Exposure	SAR	FCC §2.1093	IC RSS-102

APPENDIX C - MEASURED FLUID DIELECTRIC PARAMETERS

Applicant:	Uniden America Corporation	FCC ID:	AMWUT608	Freq.:	156.025 - 157.425 MHz	
DUT Type:	Portable VHF/UHF MRN/FRS PTT Radio Transceiver			Model:	VHF250 (VHF75r)	
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 25 of 38

	Test Report Serial No.:	110305AMW-F686-S80V	Report Issue Date:	Nov. 15, 2005
	Date(s) of Evaluation:	November 09, 2005	Report Rev. No.:	Revision 0
	Description of Tests:	RF Exposure SAR	FCC §2.1093	IC RSS-102

150 MHz DUT Evaluation (Face)

Celltech Labs Inc.
Test Result for UIM Dielectric Parameter
Wed 09/Nov/2005
Frequency(GHz)
FCC_eHFCC OET 65 Supplement C (June 2001) Limits for Head Epsilon
FCC_sHFCC OET 65 Supplement C (June 2001) Limits for Head Sigma
Test_e Epsilon of UIM
Test_s Sigma of UIM

Freq	FCC_eH	FCC_sH	Test_e	Test_s
0.0500	56.97	0.69	64.88	0.66
0.0600	56.50	0.69	57.70	0.64
0.0700	56.03	0.70	58.59	0.67
0.0800	55.57	0.71	57.25	0.67
0.0900	55.10	0.72	58.12	0.67
0.1000	54.63	0.72	56.83	0.68
0.1100	54.17	0.73	56.85	0.69
0.1200	53.70	0.74	56.10	0.70
0.1300	53.23	0.75	54.93	0.70
0.1400	52.77	0.75	54.12	0.71
0.1500	52.30	0.76	53.39	0.73
0.1600	51.83	0.77	53.07	0.74
0.1700	51.37	0.77	52.37	0.74
0.1800	50.90	0.78	51.78	0.75
0.1900	50.43	0.79	51.51	0.76
0.2000	49.97	0.80	51.22	0.77
0.2100	49.50	0.80	49.43	0.78
0.2200	49.03	0.81	49.61	0.79
0.2300	48.57	0.82	49.35	0.80
0.2400	48.10	0.83	48.87	0.80
0.2500	47.63	0.83	48.90	0.81

Applicant:	Uniden America Corporation	FCC ID:	AMWUT608	Freq.:	156.025 - 157.425 MHz	
DUT Type:	Portable VHF/UHF MRN/FRS PTT Radio Transceiver			Model:	VHF250 (VHF75r)	
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 26 of 38

	Test Report Serial No.:		110305AMW-F686-S80V	Report Issue Date:	Nov. 15, 2005
	Date(s) of Evaluation:		November 09, 2005	Report Rev. No.:	Revision 0
	Description of Tests:		RF Exposure SAR	FCC §2.1093	IC RSS-102

150 MHz DUT Evaluation (Body)

Celltech Labs. Inc.
Test Result for UIM Dielectric Parameter
Wed 09/Nov/2005
Frequency(GHz)
FCC_eHFCC Bulletin 65 Supplement C (June 2001) Limits for Head Epsilon
FCC_sHFCC Bulletin 65 Supplement C (June 2001) Limits for Head Sigma
FCC_eB FCC Limits for Body Epsilon
FCC_sB FCC Limits for Body Sigma
Test_e Epsilon of UIM
Test_s Sigma of UIM

Freq	FCC_eB	FCC_sB	Test_e	Test_s
0.0500	64.37	0.72	70.80	0.80
0.0600	64.12	0.73	63.07	0.77
0.0700	63.87	0.74	64.35	0.80
0.0800	63.63	0.74	62.59	0.80
0.0900	63.38	0.75	64.12	0.80
0.1000	63.13	0.76	63.25	0.80
0.1100	62.89	0.77	63.81	0.80
0.1200	62.64	0.78	63.88	0.81
0.1300	62.39	0.78	63.47	0.80
0.1400	62.15	0.79	62.64	0.81
0.1500	61.90	0.80	62.27	0.82
0.1600	61.65	0.81	61.41	0.83
0.1700	61.41	0.82	61.34	0.83
0.1800	61.16	0.82	61.09	0.84
0.1900	60.91	0.83	61.04	0.84
0.2000	60.67	0.84	60.36	0.85
0.2100	60.42	0.85	59.59	0.86
0.2200	60.17	0.86	59.71	0.87
0.2300	59.93	0.86	59.31	0.87
0.2400	59.68	0.87	58.89	0.87

Applicant:	Uniden America Corporation	FCC ID:	AMWUT608	Freq.:	156.025 - 157.425 MHz	
DUT Type:	Portable VHF/UHF MRN/FRS PTT Radio Transceiver			Model:	VHF250 (VHF75r)	
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 27 of 38

	Test Report Serial No.:	110305AMW-F686-S80V	Report Issue Date:	Nov. 15, 2005
	Date(s) of Evaluation:	November 09, 2005	Report Rev. No.:	Revision 0
	Description of Tests:	RF Exposure SAR	FCC §2.1093	IC RSS-102

300 MHz System Performance Check

Celltech Labs Inc.
Test Result for UIM Dielectric Parameter
Wed 09/Nov/2005
Frequency(GHz)
FCC_eHFCC OET 65 Supplement C (June 2001) Limits for Head Epsilon
FCC_sHFCC OET 65 Supplement C (June 2001) Limits for Head Sigma
Test_e Epsilon of UIM
Test_s Sigma of UIM

Freq	FCC_eH	FCC_sH	Test_e	Test_s
0.2000	49.97	0.80	47.14	0.73
0.2100	49.50	0.80	48.11	0.76
0.2200	49.03	0.81	46.73	0.73
0.2300	48.57	0.82	47.26	0.75
0.2400	48.10	0.83	46.56	0.76
0.2500	47.63	0.83	45.29	0.78
0.2600	47.17	0.84	45.99	0.80
0.2700	46.70	0.85	45.32	0.82
0.2800	46.23	0.86	43.05	0.81
0.2900	45.77	0.86	43.98	0.81
0.3000	45.30	0.87	44.66	0.84
0.3100	45.18	0.87	43.80	0.83
0.3200	45.06	0.87	43.03	0.84
0.3300	44.94	0.87	43.42	0.84
0.3400	44.82	0.87	43.10	0.87
0.3500	44.70	0.87	41.83	0.85
0.3600	44.58	0.87	42.24	0.86
0.3700	44.46	0.87	41.75	0.87
0.3800	44.34	0.87	42.36	0.89
0.3900	44.22	0.87	41.13	0.89
0.4000	44.10	0.87	41.20	0.91

Applicant:	Uniden America Corporation	FCC ID:	AMWUT608	Freq.:	156.025 - 157.425 MHz	
DUT Type:	Portable VHF/UHF MRN/FRS PTT Radio Transceiver			Model:	VHF250 (VHF75r)	
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 28 of 38

	Test Report Serial No.:		110305AMW-F686-S80V	Report Issue Date:	Nov. 15, 2005
	Date(s) of Evaluation:		November 09, 2005	Report Rev. No.:	Revision 0
	Description of Tests:		RF Exposure SAR	FCC §2.1093	IC RSS-102


APPENDIX D - SAR TEST SETUP & DUT PHOTOGRAPHS

Applicant:	Uniden America Corporation	FCC ID:	AMWUT608	Freq.:	156.025 - 157.425 MHz	
DUT Type:	Portable VHF/UHF MRN/FRS PTT Radio Transceiver			Model:	VHF250 (VHF75r)	
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 29 of 38

	Test Report Serial No.:		110305AMW-F686-S80V	Report Issue Date:	Nov. 15, 2005
	Date(s) of Evaluation:		November 09, 2005	Report Rev. No.:	Revision 0
	Description of Tests:		RF Exposure SAR	FCC §2.1093	IC RSS-102

FACE-HELD SAR TEST SETUP PHOTOGRAPHS


2.5 cm Separation Distance from Front of Radio to Planar Phantom

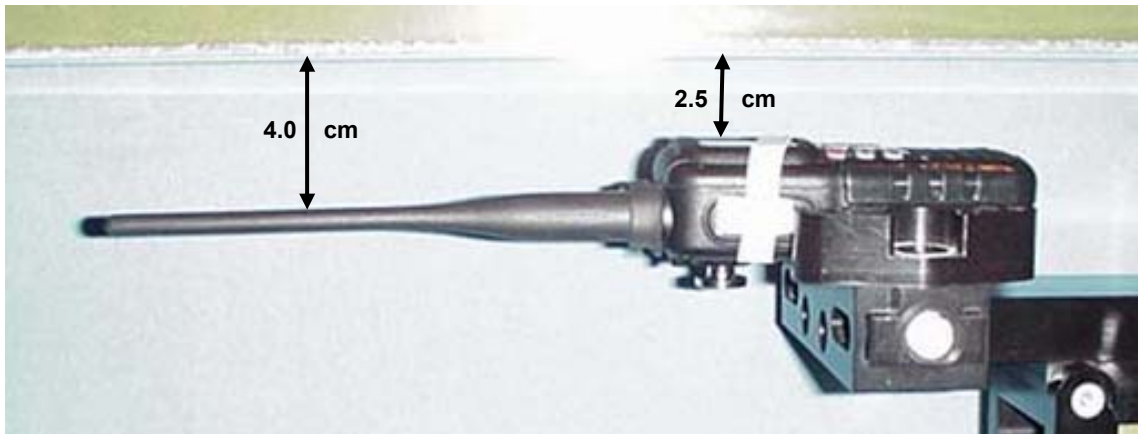

Applicant:	Uniden America Corporation	FCC ID:	AMWUT608	Freq.:	156.025 - 157.425 MHz	
DUT Type:	Portable VHF/UHF MRN/FRS PTT Radio Transceiver			Model:	VHF250 (VHF75r)	
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 30 of 38

	Test Report Serial No.: 110305AMW-F686-S80V		Report Issue Date:	Nov. 15, 2005
	Date(s) of Evaluation: November 09, 2005		Report Rev. No.:	Revision 0
	Description of Tests:	RF Exposure SAR	FCC §2.1093	IC RSS-102

BODY-WORN SAR TEST SETUP PHOTOGRAPHS
2.2 cm Swivel Belt-Clip Separation Distance to Planar Phantom
With Speaker-Microphone Audio Accessory

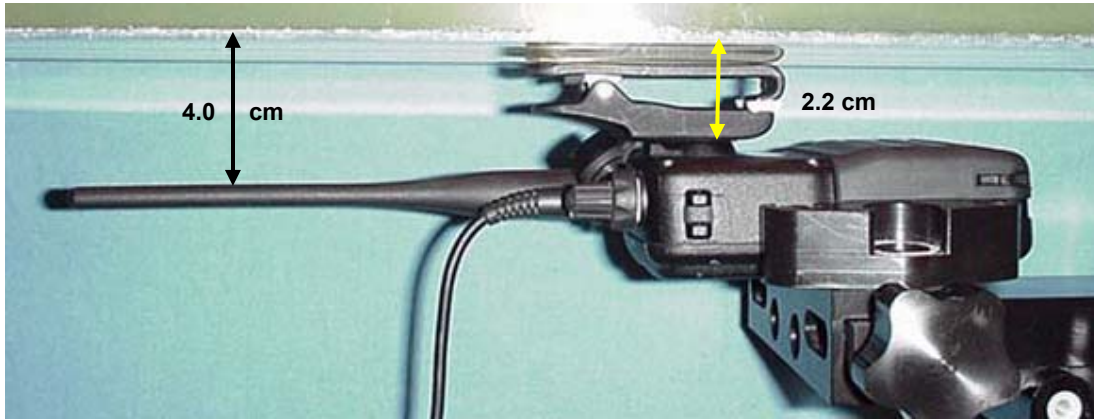

Applicant:	Uniden America Corporation	FCC ID:	AMWUT608	Freq.:	156.025 - 157.425 MHz	
DUT Type:	Portable VHF/UHF MRN/FRS PTT Radio Transceiver			Model:	VHF250 (VHF75r)	
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 31 of 38

	Test Report Serial No.:	110305AMW-F686-S80V	Report Issue Date:	Nov. 15, 2005
	Date(s) of Evaluation:	November 09, 2005	Report Rev. No.:	Revision 0
	Description of Tests:	RF Exposure SAR	FCC §2.1093	IC RSS-102

DUT PHOTOGRAPHS



Front of DUT



Back of DUT



Back of DUT with Swivel Belt-Clip

Applicant:	Uniden America Corporation	FCC ID:	AMWUT608	Freq.:	156.025 - 157.425 MHz	
DUT Type:	Portable VHF/UHF MRN/FRS PTT Radio Transceiver			Model:	VHF250 (VHF75r)	
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 32 of 38

	Test Report Serial No.:		110305AMW-F686-S80V	Report Issue Date:	Nov. 15, 2005
	Date(s) of Evaluation:		November 09, 2005	Report Rev. No.:	Revision 0
	Description of Tests:		RF Exposure SAR	FCC §2.1093	IC RSS-102

DUT PHOTOGRAPHS



Top view of DUT



Bottom view of DUT

Applicant:	Uniden America Corporation	FCC ID:	AMWUT608	Freq.:	156.025 - 157.425 MHz	
DUT Type:	Portable VHF/UHF MRN/FRS PTT Radio Transceiver			Model:	VHF250 (VHF75r)	
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 33 of 38

	Test Report Serial No.:	110305AMW-F686-S80V	Report Issue Date:	Nov. 15, 2005
	Date(s) of Evaluation:	November 09, 2005	Report Rev. No.:	Revision 0
	Description of Tests:	RF Exposure SAR	FCC §2.1093	IC RSS-102

DUT PHOTOGRAPHS



Left Side of DUT with Swivel Belt-Clip



Right Side of DUT with Swivel Belt-Clip



Swivel Belt-Clip accessory (Plastic with metal spring)
(P/N: CLIP250)

Applicant:	Uniden America Corporation	FCC ID:	AMWUT608	Freq.:	156.025 - 157.425 MHz	
DUT Type:	Portable VHF/UHF MRN/FRS PTT Radio Transceiver			Model:	VHF250 (VHF75r)	
2005 Celltech Labs Inc.	This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.					Page 34 of 38

	Test Report Serial No.:		110305AMW-F686-S80V	Report Issue Date:	Nov. 15, 2005
	Date(s) of Evaluation:		November 09, 2005	Report Rev. No.:	Revision 0
	Description of Tests:		RF Exposure SAR	FCC §2.1093	IC RSS-102

DUT PHOTOGRAPHS



DUT Battery Compartment



Li-ion Battery Pack

Applicant:	Uniden America Corporation	FCC ID:	AMWUT608	Freq.:	156.025 - 157.425 MHz	
DUT Type:	Portable VHF/UHF MRN/FRS PTT Radio Transceiver			Model:	VHF250 (VHF75r)	
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 35 of 38

	Test Report Serial No.: 110305AMW-F686-S80V		Report Issue Date:	Nov. 15, 2005
	Date(s) of Evaluation: November 09, 2005		Report Rev. No.:	Revision 0
	Description of Tests:	RF Exposure SAR	FCC §2.1093	IC RSS-102

DUT PHOTOGRAPHS



DUT with Speaker-Microphone Audio Accessory (Model: HHVTA07)

Applicant:	Uniden America Corporation	FCC ID:	AMWUT608	Freq.:	156.025 - 157.425 MHz	
DUT Type:	Portable VHF/UHF MRN/FRS PTT Radio Transceiver			Model:	VHF250 (VHF75r)	
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 36 of 38

	Test Report Serial No.:		110305AMW-F686-S80V	Report Issue Date:	Nov. 15, 2005
	Date(s) of Evaluation:		November 09, 2005	Report Rev. No.:	Revision 0
	Description of Tests:		RF Exposure SAR	FCC §2.1093	IC RSS-102

APPENDIX E - SYSTEM VALIDATION

Applicant:	Uniden America Corporation	FCC ID:	AMWUT608	Freq.:	156.025 - 157.425 MHz	
DUT Type:	Portable VHF/UHF MRN/FRS PTT Radio Transceiver			Model:	VHF250 (VHF75r)	
2005 Celltech Labs Inc.		This document is not to be reproduced in whole or in part without the prior written permission of Celltech Labs Inc.				Page 37 of 38

300 MHz SYSTEM VALIDATION DIPOLE

Type:

300 MHz Validation Dipole

Asset Number:

00023

Serial Number:

135

Place of Calibration:

Celltech Labs Inc.

Date of Calibration:

October 25, 2005

Celltech Labs Inc. hereby certifies that this device has been calibrated on the date indicated above.

Calibrated by:



Approved by:



1. Validation Dipole Construction & Electrical Characteristics

The validation dipole was constructed in accordance with the IEEE Std. "Recommended Practice for Determining the Spatial-Peak Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques". The electrical properties were measured using an HP 8753E Network Analyzer. The network analyzer was calibrated to the validation dipole N-type connector feed point using an HP85032E Type N calibration kit. The dipole was placed parallel to a planar phantom at a separation distance of 15.0mm from the simulating fluid using a loss-less dielectric spacer. The measured input impedance is:


Feed point impedance at 300MHz

$$\text{Re}\{Z\} = 44.389\Omega$$



$$\text{Im}\{Z\} = -1.2598\Omega$$

Return Loss at 300MHz

$$-24.307\text{dB}$$

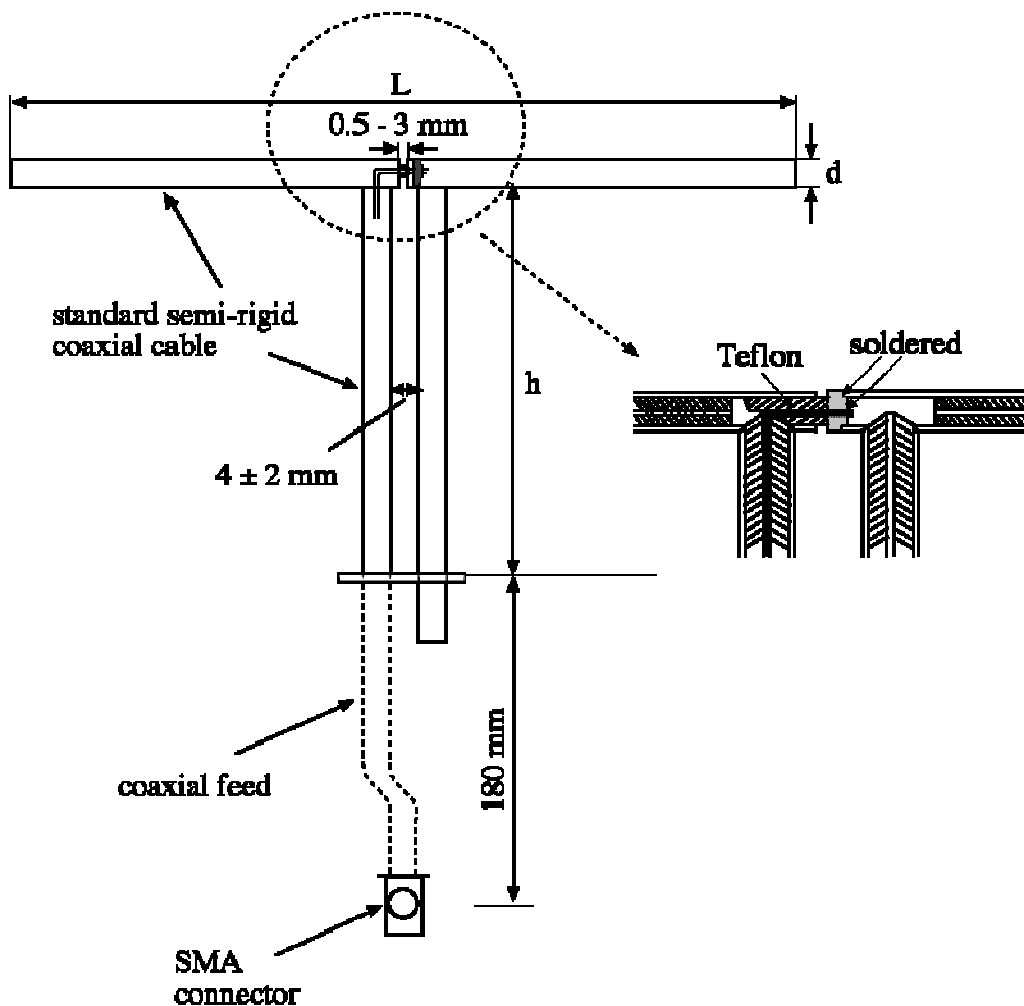

2. Validation Dipole VSWR Data

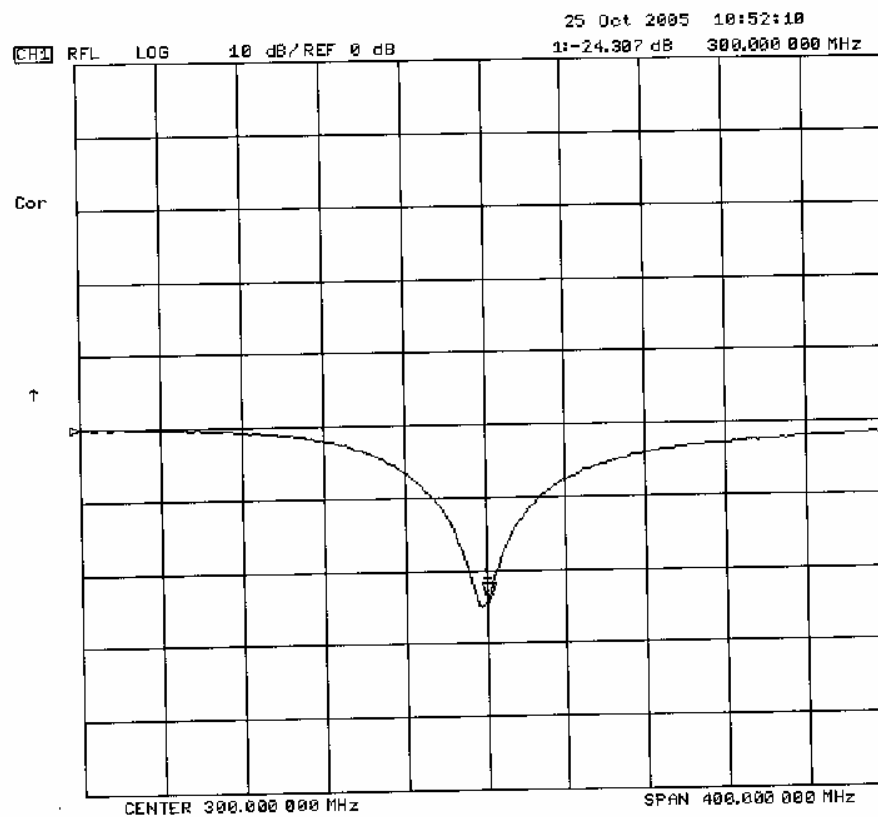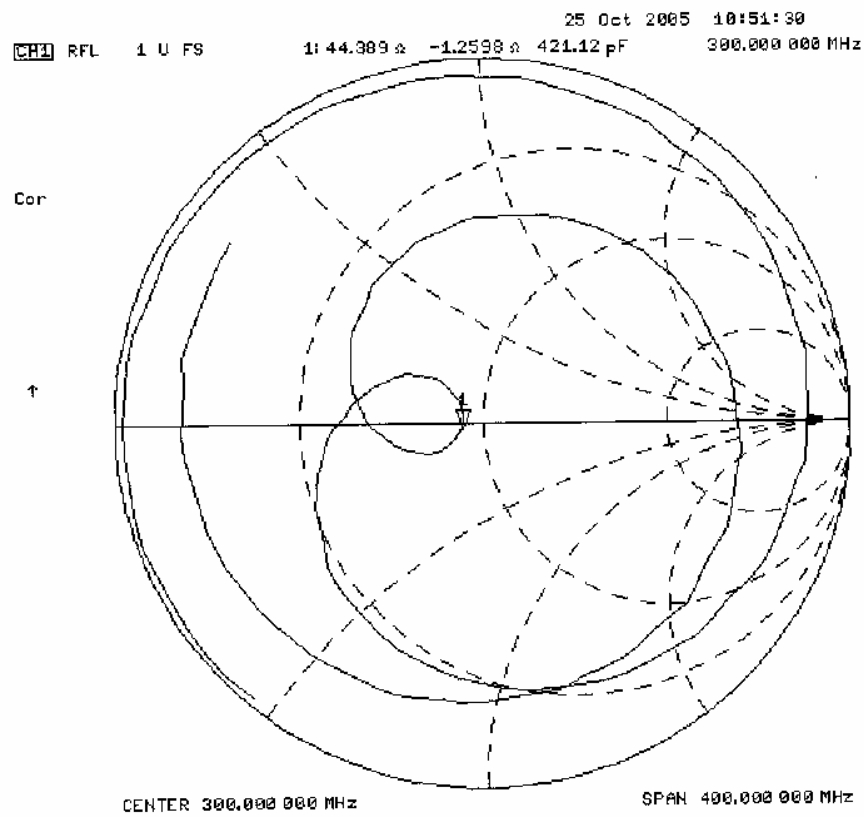

3. Validation Dipole Dimensions

Frequency (MHz)	L (mm)	H (mm)	D (mm)
300	420.0	250.0	6.2
450	288.0	167.0	6.2
835	161.0	89.8	3.6
900	149.0	83.3	3.6
1450	89.1	51.7	3.6
1800	72.0	41.7	3.6
1900	68.0	39.5	3.6
2000	64.5	37.5	3.6
2450	51.8	30.6	3.6
3000	41.5	25.0	3.6

4 Validation Phantom

The validation phantom was constructed using relatively low-loss tangent Plexiglas material. The inner dimensions of the phantom are as follows:


Length: 83.5 cm

Width: 36.9 cm

Height: 21.8 cm

The bottom section of the validation phantom is constructed of 6.2 ± 0.1 mm Plexiglas.

5. Dimensions of Plexiglas Planar Phantom

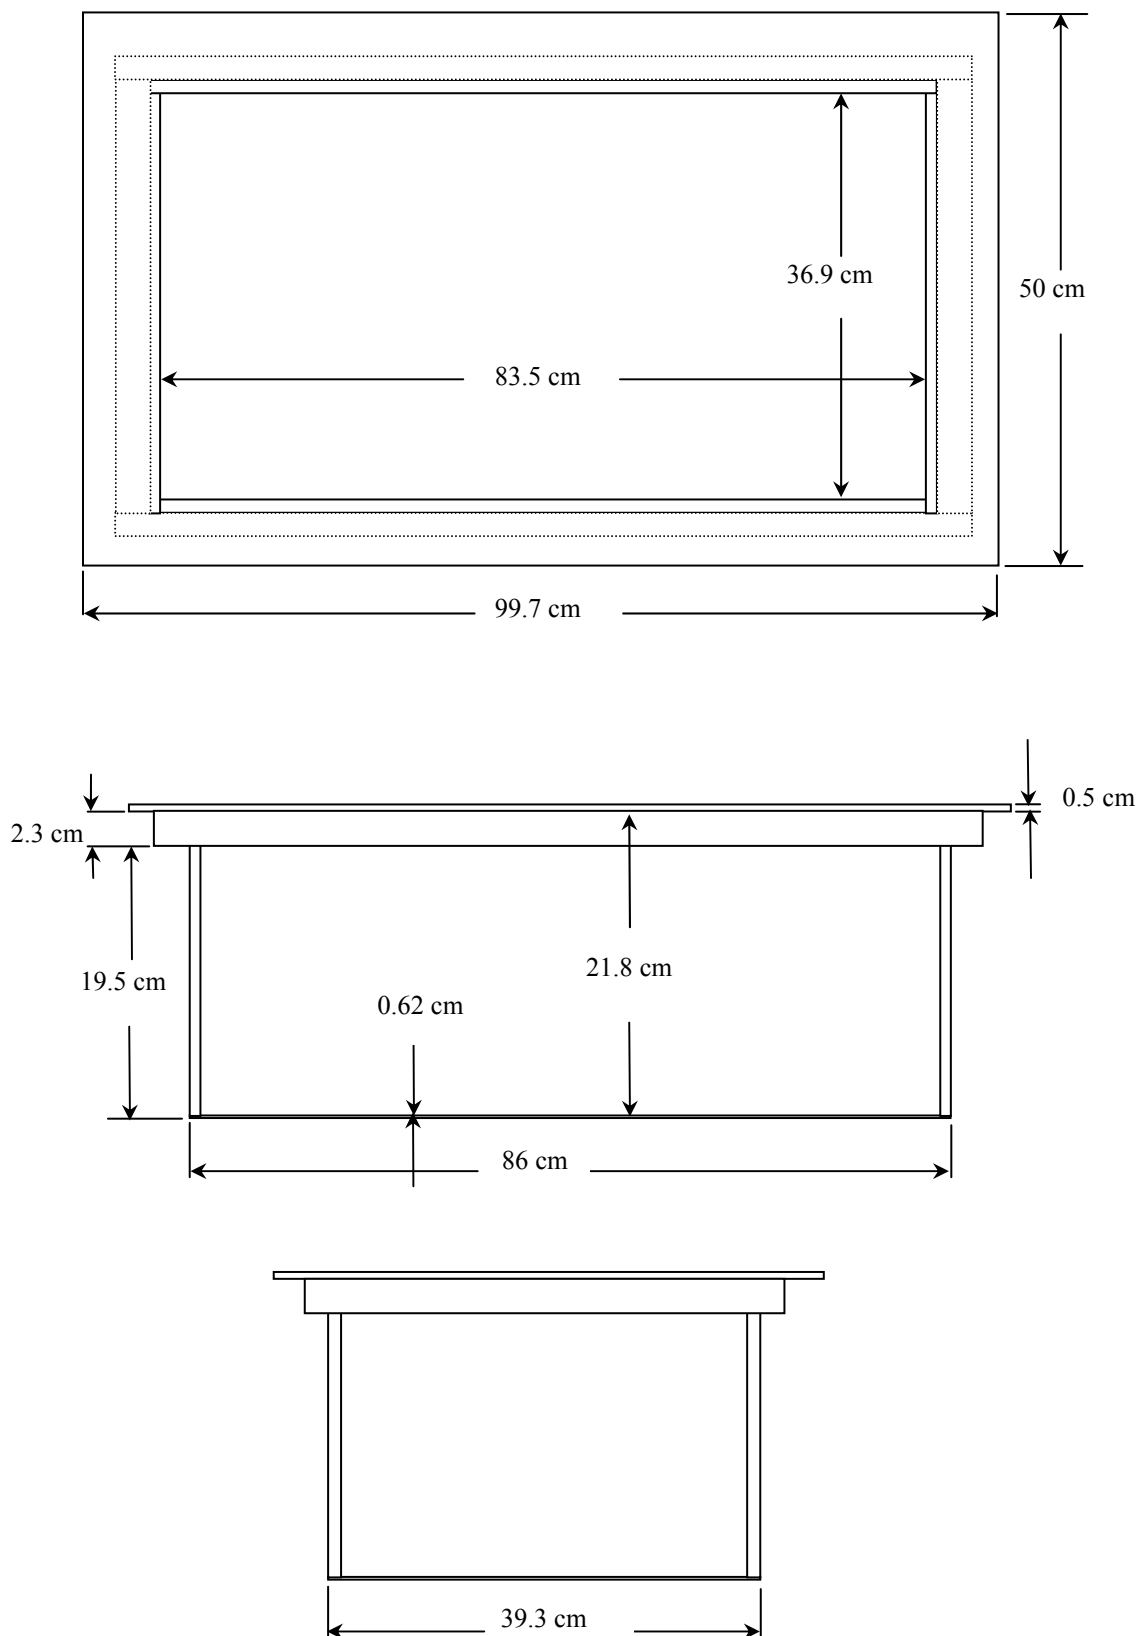

6. 300 MHz System Validation Setup



7. 300 MHz Validation Dipole Setup



8. Measurement Conditions

The planar phantom was filled with brain tissue simulant having the following parameters at 300 MHz:

Relative Permittivity:	44.3
Conductivity:	0.84 mho/m
Fluid Temperature:	21.8 °C
Fluid Depth:	≥ 15 cm

Environmental Conditions:


Ambient Temperature:	23.1°C
Humidity:	33 %
Barometric Pressure:	101.7 kPa

The 300 MHz brain tissue simulant consists of the following ingredients:

Ingredient	Percentage by weight
Water	37.56%
Sugar	55.32%
Salt	5.95%
HEC	0.98%
Dowicil 75	0.19%
300 MHz Target Dielectric Parameters at 22°C	$\epsilon_r = 45.3$ $\sigma = 0.87 \text{ S/m}$

9. SAR Measurement

The SAR measurement was performed with the E-field probe in mechanical detection mode only. The setup and determination of the forward power into the dipole was performed using the following procedures.

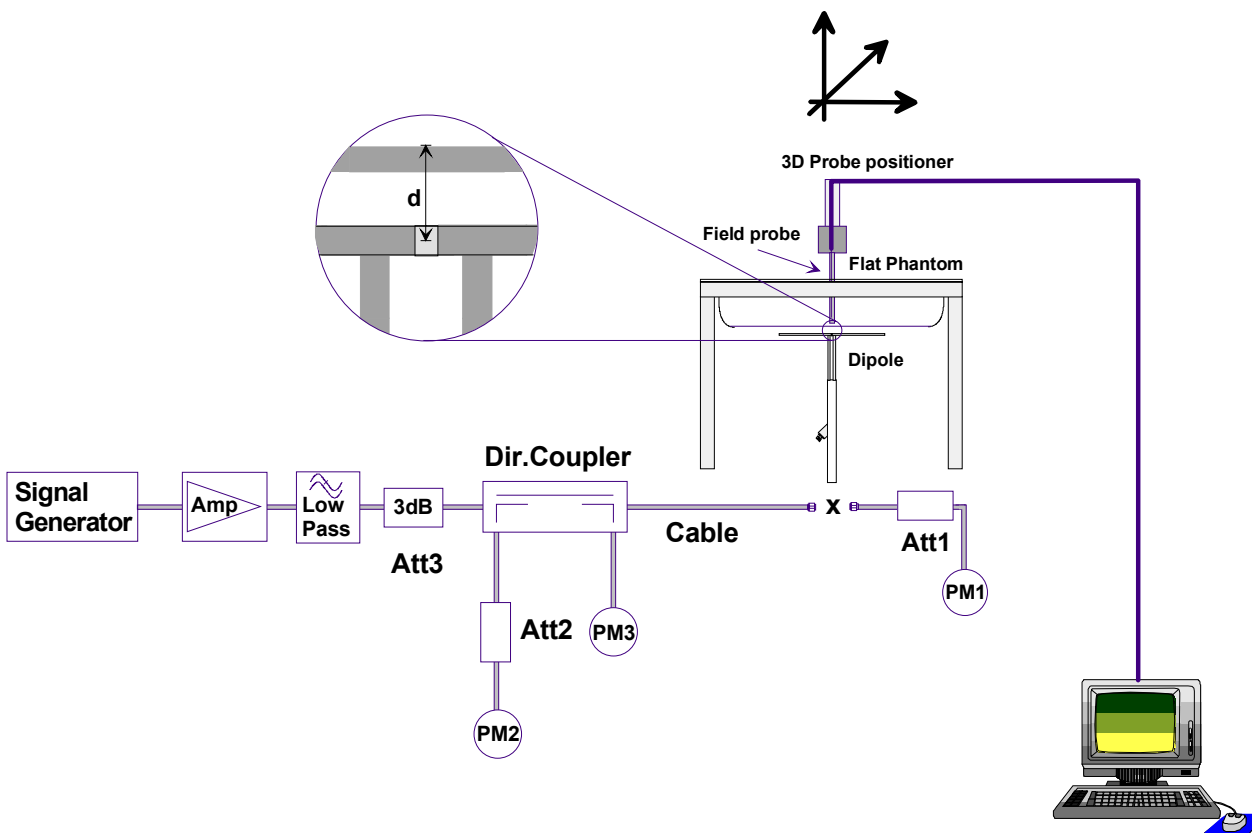

First the power meter PM1 (including attenuator Att1) is connected to the cable to measure the forward power at the location of the dipole connector (X). The signal generator is adjusted for the desired forward power at the dipole connector (taking into account the attenuation of Att1) as read by power meter PM2. After connecting the cable to the dipole, the signal generator is readjusted for the same reading at power meter PM2. If the signal generator does not allow adjustment in 0.01dB steps, the remaining difference at PM2 must be taken into consideration. PM3 records the reflected power from the dipole to ensure that the value is not changed from the previous value. The reflected power should be 20dB below the forward power.

10. Validation Dipole SAR Test Results

Ten SAR measurements were performed in order to achieve repeatability and to establish an average target value.

Validation Measurement	SAR @ 0.25W Input averaged over 1g	SAR @ 1W Input averaged over 1g	SAR @ 0.25W Input averaged over 10g	SAR @ 1W Input averaged over 10g	Peak SAR @ 0.25W Input
Test 1	0.747	2.988	0.487	1.948	0.786
Test 2	0.744	2.976	0.485	1.94	0.782
Test 3	0.748	2.992	0.488	1.952	0.783
Test 4	0.753	3.012	0.489	1.956	0.794
Test 5	0.751	3.004	0.488	1.952	0.792
Test 6	0.755	3.02	0.490	1.96	0.794
Test 7	0.751	3.004	0.489	1.956	0.791
Test 8	0.749	2.996	0.487	1.948	0.789
Test 9	0.749	2.996	0.487	1.948	0.788
Test 10	0.749	2.996	0.488	1.952	0.788
Average Value	0.750	2.998	0.488	1.951	0.789

The results have been normalized to 1W (forward power) into the dipole.

Target SAR @ 1 Watt Input averaged over 1 gram (W/kg)		Measured SAR @ 1 Watt Input averaged over 1 gram (W/kg)	Deviation from Target (%)	Target SAR @ 1 Watt Input averaged over 10 grams (W/kg)		Measured SAR @ 1 Watt Input averaged over 10 grams (W/kg)	Deviation from Target (%)
3.00	+/- 10%	2.998	-0.07%	2.00	+/- 10%	1.951	-2.5%

450 MHz System Validation - October 25, 2005

DUT: Dipole 300 MHz; Model: D300V2; Serial: 135; Calibrated: 10/25/2005
 Ambient Temp: 23.1 °C; Fluid Temp: 21.8 °C; Barometric Pressure: 101.7 kPa; Humidity: 33%
 Communication System: CW
 Frequency: 300 MHz; Duty Cycle: 1:1
 Medium: 300 HSL ($\sigma = 0.84$ mho/m; $\epsilon_r = 44.3$; $\rho = 1000$ kg/m³)
 - Probe: ET3DV6 - SN1387; ConvF(7.9, 7.9, 7.9); Calibrated: 18/03/2005
 - Sensor-Surface: 4mm (Mechanical Surface Detection)
 - Electronics: DAE4 Sn353; Calibrated: 15/06/2005
 - Phantom: Validation Planar; Type: Plexiglas; Serial: 137
 - Measurement SW: DASY4, V4.6 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 159

300 MHz System Validation/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm
 Maximum value of SAR (measured) = 0.753 mW/g

300 MHz System Validation/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 30.7 V/m; Power Drift = -0.056 dB
SAR(1 g) = 0.747 mW/g; SAR(10 g) = 0.487 mW/g
 Maximum value of SAR (measured) = 0.786 mW/g

300 MHz System Validation/Zoom Scan 2 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 30.4 V/m; Power Drift = -0.016 dB
SAR(1 g) = 0.744 mW/g; SAR(10 g) = 0.485 mW/g
 Maximum value of SAR (measured) = 0.782 mW/g

300 MHz System Validation/Zoom Scan 3 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 30.5 V/m; Power Drift = 0.001 dB
SAR(1 g) = 0.748 mW/g; SAR(10 g) = 0.488 mW/g
 Maximum value of SAR (measured) = 0.783 mW/g

300 MHz System Validation/Zoom Scan 4 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 30.4 V/m; Power Drift = 0.013 dB
SAR(1 g) = 0.753 mW/g; SAR(10 g) = 0.489 mW/g
 Maximum value of SAR (measured) = 0.794 mW/g

300 MHz System Validation/Zoom Scan 5 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 30.6 V/m; Power Drift = 0.003 dB
SAR(1 g) = 0.751 mW/g; SAR(10 g) = 0.488 mW/g
 Maximum value of SAR (measured) = 0.792 mW/g


300 MHz System Validation/Zoom Scan 6 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 30.7 V/m; Power Drift = 0.017 dB
SAR(1 g) = 0.755 mW/g; SAR(10 g) = 0.490 mW/g
 Maximum value of SAR (measured) = 0.794 mW/g

300 MHz System Validation/Zoom Scan 7 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 30.6 V/m; Power Drift = 0.005 dB
SAR(1 g) = 0.751 mW/g; SAR(10 g) = 0.489 mW/g
 Maximum value of SAR (measured) = 0.791 mW/g


300 MHz System Validation/Zoom Scan 8 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 30.5 V/m; Power Drift = -0.001 dB
SAR(1 g) = 0.749 mW/g; SAR(10 g) = 0.487 mW/g
 Maximum value of SAR (measured) = 0.789 mW/g

300 MHz System Validation/Zoom Scan 9 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 30.5 V/m; Power Drift = 0.008 dB
SAR(1 g) = 0.749 mW/g; SAR(10 g) = 0.487 mW/g
 Maximum value of SAR (measured) = 0.788 mW/g

300 MHz System Validation/Zoom Scan 10 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 30.5 V/m; Power Drift = 0.001 dB
SAR(1 g) = 0.749 mW/g; SAR(10 g) = 0.488 mW/g
 Maximum value of SAR (measured) = 0.788 mW/g

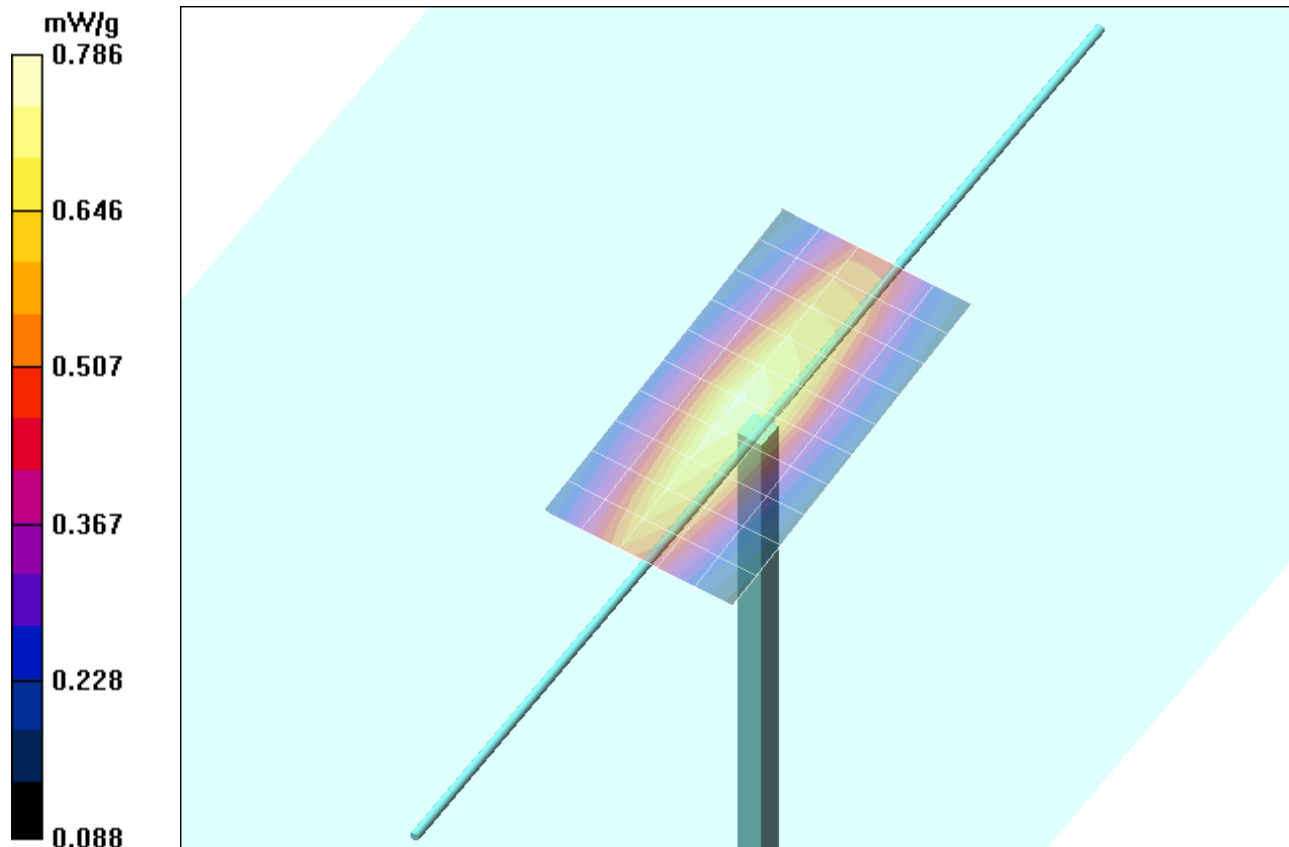

1 g average of 10 measurements: 0.750 mW/g
10 g average of 10 measurements: 0.488 mW/g

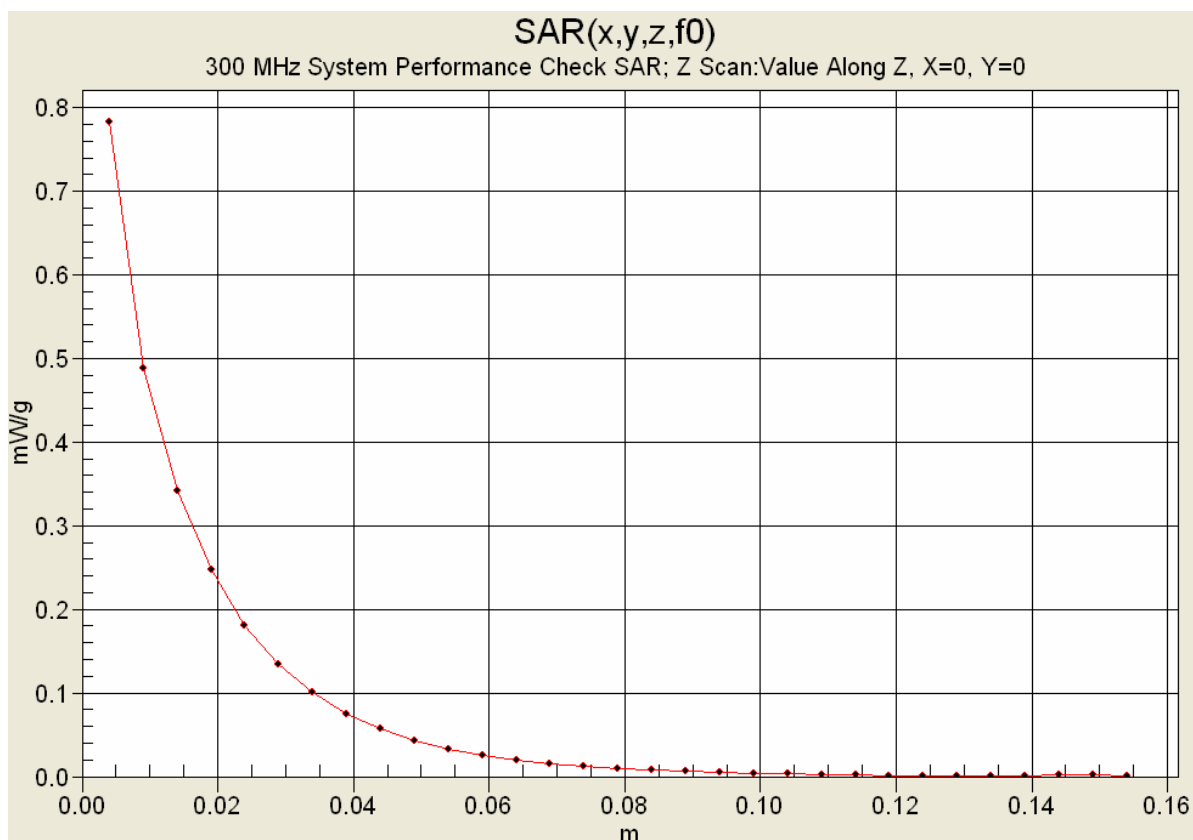

11. Measured Fluid Dielectric Parameters

System Validation (Brain) - 450 MHz Dipole

Celltech Labs Inc.

Test Result for UIM Dielectric Parameter

Tue 25/Oct/2005

Freq Frequency(GHz)

FCC_eHFCC OET 65 Supplement C (June 2001) Limits for Head Epsilon

FCC_sHFCC OET 65 Supplement C (June 2001) Limits for Head Sigma

Test_e Epsilon of UIM

Test_s Sigma of UIM

Freq		FCC_eH	FCC_sH	Test_e	Test_s
0.2000	49.97	0.80	50.42	0.74	
0.2100	49.50	0.80	47.25	0.76	
0.2200	49.03	0.81	48.21	0.76	
0.2300	48.57	0.82	45.83	0.78	
0.2400	48.10	0.83	46.47	0.78	
0.2500	47.63	0.83	46.33	0.79	
0.2600	47.17	0.84	44.51	0.80	
0.2700	46.70	0.85	45.05	0.80	
0.2800	46.23	0.86	44.67	0.82	
0.2900	45.77	0.86	44.68	0.83	
0.3000	45.30	0.87	44.28	0.84	
0.3100	45.18	0.87	42.39	0.84	
0.3200	45.06	0.87	43.12	0.85	
0.3300	44.94	0.87	42.20	0.85	
0.3400	44.82	0.87	42.13	0.89	
0.3500	44.70	0.87	42.29	0.89	
0.3600	44.58	0.87	41.56	0.90	
0.3700	44.46	0.87	41.43	0.89	
0.3800	44.34	0.87	41.87	0.90	
0.3900	44.22	0.87	41.01	0.92	
0.4000	44.10	0.87	40.97	0.92	