


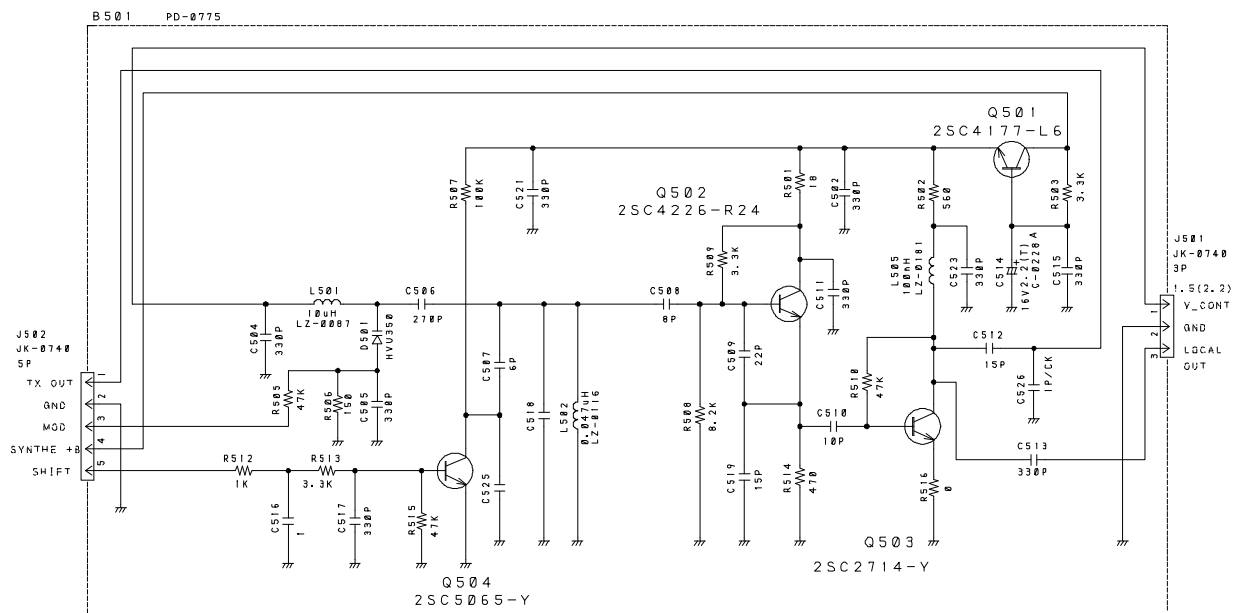

# NOTES:

1. RESISTANCE VALUES ARE SHOWN IN OHMS UNLESS OTHERWISE NOTED. (K=KILO OHM, M=MEG OHM)
2. RESISTOR WATTAGES ARE [1/16W] UNLESS OTHERWISE NOTED.
3. CAPACITANCE VALUES ARE INDICATED IN MICRO FARADS UNLESS OTHERWISE NOTED. (P=MICRO-MICRO FARAD)
4. ALL CAPACITORS TEMPERATURE CHARACTERISTICS ARE [CH] (LESS THAN 1000PF) OR [B] (MORE THAN 1000PF) UNLESS OTHERWISE NOTED.
5. CHIP PARTS ARE NOT SPECIFIED IN THIS DRAWING. PLEASE REFER TO THE PARTS LIST FOR THE CHIP PARTS.

| DESIGN    | DRAWN BY  | UNIDEN No.        | MODEL No. |
|-----------|-----------|-------------------|-----------|
| 8/30/1999 | 8/30/1999 | UT-B71Z           | HH985     |
| T. YUASA  | T. YUASA  | TITLE VCO ASSY    |           |
| CHECK BY  | APPRO BY  | SCHEMATIC DIAGRAM |           |
|           |           | DRAWING No.       |           |
| REV. No   |           | UNIDEN CORP.      |           |