

UTAM, Inc.

Affidavit of Participation


FCC Section 15.307(b) Affidavit

I, Michael Stima, Managing Director of UTAM, Inc., hereby swear and affirm that:

Uniden

is a participating member of UTAM, Inc. in good standing for purposes of Section 15.307(b) of the FCC rules.

Subscribed to and sworn this 29th day of March, 2006

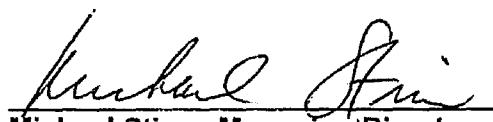
Michael Stima
Michael Stima, Managing Director
UTAM, Inc.
1170 U.S. Hwy 22
P.O. Box 8126
Bridgewater, New Jersey 08807
Tel: (508) 526-3636

Affidavit #: UNDN032906

Appendix J

Monitoring threshold

Test case Rev. Draft ANSI_7.3.2_upper_threshold.xml
 Date 19.04.2006 10:43:51
 Reference to the EUT G0M20604-0398 / DCX100 / AMWUU499
 Comment: initial setup
 DECT 6.0, Handset
 RTX Telecom A/S

The LOG table shows the level changes on each Channel of the transmission system

Time stamp	1921.536 MHz	1923.264 MHz	1924.992 MHz	1926.720 MHz	1928.448 MHz	Comment
	Peak in dBm					
	RMS in dBm					
00:00:24.4687500	-52 -52,5	-51,9 -52,4	-52,2 -52,7	-52,1 -52,5	-52 -52,5	-52.4 dBm
00:00:36.5781250	-48,3 -53,4	-52,9 -53,4	-53,2 -53,7	-53,1 -53,5	-53 -53,5	-53.4 dBm
00:00:46.4531250	-49,3 -54,5	-54,3 -54,5	-54,6 -54,8	-54,4 -54,6	-54,3 -54,5	-52.4 dBm
00:01:05.0312500	-55,2 -55,4	-55,3 -55,5	-55,6 -55,8	-49,8 -55,5	-55,4 -55,5	-55.4 dBm
00:01:20.1875000	-56,2 -56,4	-56,2 -56,4	-56,3 -56,5	-50,2 -56,5	-56,2 -56,4	-56.4 dBm
00:01:36.8906250	-50,8 -57,3	-56,7 -57,3	-56,8 -57,4	-56,9 -57,5	-56,8 -57,3	-57.4 dBm
00:01:50.9687500	-57,7 -58,3	-57,7 -58,3	-51,2 -58,3	-57,8 -58,4	-57,8 -58,3	-58.4 dBm
00:02:02.8125000	-59,1 -59,4	-59 -59,4	-51,4 -59,4	-59,1 -59,4	-59,1 -59,4	-52.4 dBm
00:02:12.6718750	-60,1 -60,5	-60,1 -60,5	-52 -60,4	-60,1 -60,5	-60,1 -60,4	-60.4 dBm
00:02:28.4062500	-60,2 -61,4	-60,3 -61,4	-52,1 -62,3	-22,3 -41,4	-56,5 -62,4	Upper threshold level: -61.4dBm

Log file

Test case Rev. Draft ANSI_7.3.3_least_interfered_channel.xml

Date 19.04.2006 10:59:56

Reference to the EUT G0M20604-0398 / DCX100 / AMWUU499

Comment: 7.3.3_b

DECT 6.0, Handset
RTX Telecom A/S

The LOG table shows the level changes on each Channel of the transmission system

Time stamp	1921.536 MHz	1923.264 MHz	1924.992 MHz	1926.720 MHz	1928.448 MHz	Comment
	Peak in dBm					
	RMS in dBm					
00:19:23.7343750	-87,6 -96,1	-86 -96,2	-85,5 -96,1	-87,6 -96,2	-86,3 -96,3	Interferer off
00:19:32.4062500	-60,1 -60,8	-60 -60,8	-60,1 -60,8	-72 -73,9	-77,8 -80,7	Interferer on
00:19:58.8437500	-59,5 -60,8	-59,7 -60,8	-59,4 -60,8	-54,2 -72,1	-21,1 -41,7	OK 1
00:20:06.5781250	-60,3 -60,9	-60,3 -60,9	-60,2 -60,9	-72,3 -73,9	-55,1 -75,6	
00:20:15.0781250	-59,5 -60,8	-59,4 -60,8	-58,9 -60,8	-54,6 -71,8	-22,6 -41,8	OK 2
00:20:19.8906250	-60,5 -60,9	-60,5 -60,9	-60,5 -60,9	-72,5 -73,9	-55 -75,7	
00:20:24.7656250	-59,7 -60,8	-59,6 -60,8	-59,1 -60,8	-54,1 -71,8	-22,5 -41,8	OK 3
00:20:29.2031250	-60,3 -60,9	-60,2 -60,9	-60,3 -60,9	-72,5 -73,9	-55,1 -75,7	
00:20:38.0156250	-59,6 -60,8	-59,4 -60,8	-58,6 -60,8	-54,3 -72,3	-22,2 -42,2	OK 4
00:20:45.9531250	-60,2 -60,9	-60,1 -60,9	-60,2 -60,9	-72,4 -73,9	-55 -75,5	
00:20:51.6406250	-59,6 -60,8	-59,6 -60,8	-59,3 -60,8	-54,8 -72	-21,8 -42,3	OK 5

Log file

Test case Rev. Draft ANSI_7.3.3_least_interfered_channel.xml

Date 19.04.2006 11:04:02

Reference to the EUT G0M20604-0398 / DCX100 / AMWUU499

Comment: 7.3.3_c

DECT 6.0, Handset
RTX Telecom A/S

The LOG table shows the level changes on each Channel of the transmission system

Time stamp	1921.536	1923.264	1924.992	1926.720	1928.448	Comment
	MHZ	MHz	MHz	MHz	MHz	
	Peak in dBm					
00:23:52.3437500	-86,9 -96,2	-87 -96	-87,4 -96,3	-84,4 -96,2	-86,6 -96,3	Interferer off
00:23:58.7031250	-60,2 -60,9	-60,2 -60,9	-60 -60,9	-77,7 -80,7	-72,4 -73,9	Interferer on
00:24:20.2656250	-59,5 -60,8	-59,4 -60,8	-51,8 -60,7	-22,7 -42,6	-59,8 -73,3	OK 1
00:24:26.4375000	-60,5 -60,9	-60,5 -60,9	-60,5 -60,9	-55,3 -75,8	-72,5 -73,9	
00:24:37.1875000	-59,6 -60,8	-59,1 -60,8	-51,9 -60,7	-22,8 -42,4	-59,7 -73,4	OK 2
00:24:41.0312500	-60,2 -60,9	-60,3 -60,9	-60,1 -60,9	-55,4 -75,6	-72,4 -73,9	
00:24:44.3750000	-59,6 -60,8	-58,5 -60,8	-50 -60,7	-22,6 -42,4	-61,7 -73,5	OK 3
00:24:47.5312500	-60,2 -60,9	-60,3 -60,9	-60,2 -60,9	-55,3 -75,6	-72,1 -73,9	
00:24:51.0781250	-59,5 -60,8	-58,7 -60,8	-52,3 -60,7	-22,2 -42,1	-60,2 -73,5	OK 4
00:24:54.6250000	-60,2 -60,9	-60,2 -60,9	-60,2 -60,9	-55,2 -75,6	-72 -73,9	
00:24:58.0781250	-59,6 -60,8	-59,3 -60,8	-51,4 -60,7	-22,7 -42,1	-55,3 -73,3	OK 5

Log file

Test case Rev. Draft ANSI_7.3.3_least_interfered_channel.xml

Date 19.04.2006 11:08:27

Reference to the EUT G0M20604-0398 / DCX100 / AMWUU499

Comment: 7.3.3_d

DECT 6.0, Handset
RTX Telecom A/S

The LOG table shows the level changes on each Channel of the transmission system

Time stamp	1921.536 MHz	1923.264 MHz	1924.992 MHz	1926.720 MHz	1928.448 MHz	Comment
	Peak in dBm					
	RMS in dBm					
00:28:17.1250000	-86,3 -96,1	-87,6 -96,3	-87 -96,3	-86,9 -96,1	-86,6 -96,3	Interferer off
00:28:38.6250000	-60,5 -60,9	-52,2 -60,8	-60,5 -60,9	-77,2 -79,7	-81,5 -86,5	Interferer on
00:28:49.4843750	-59,6 -60,8	-59,6 -60,8	-59,5 -60,8	-53,8 -75	-22,2 -42,6	OK 1
00:28:53.0156250	-60,2 -60,9	-60,2 -60,9	-60,2 -60,9	-76,7 -79,6	-55,2 -76,7	
00:28:57.7187500	-59,5 -60,8	-59,6 -60,8	-59,2 -60,8	-55,3 -75	-22,4 -42,4	OK 2
00:29:02.4375000	-60,2 -60,9	-60,2 -60,9	-60,3 -60,9	-76,9 -79,7	-55,4 -76,7	
00:29:05.9531250	-59,7 -60,8	-59,5 -60,8	-59,4 -60,8	-55 -75,4	-22,4 -42,2	OK 3
00:29:10.1875000	-60,5 -60,9	-60,5 -60,9	-60,5 -60,9	-76,5 -79,6	-55,6 -76,9	
00:29:14.1875000	-59,5 -60,8	-59,6 -60,8	-59,8 -60,8	-55,4 -75,6	-22,4 -41,6	OK 4
00:29:19.9687500	-60,5 -60,9	-60,6 -60,9	-52,1 -60,8	-77 -79,7	-55,7 -77,3	
00:29:24.8593750	-59,7 -60,8	-59,4 -60,8	-59,4 -60,8	-54,8 -75,1	-21,9 -42,1	OK 5

Log file

Test case Rev. Draft ANSI_7.3.3_least_interfered_channel.xml

Date 19.04.2006 11:12:23

Reference to the EUT G0M20604-0398 / DCX100 / AMWUU499

Comment: 7.3.3_e

DECT 6.0, Handset
RTX Telecom A/S

The LOG table shows the level changes on each Channel of the transmission system

Time stamp	1921.536 MHz	1923.264 MHz	1924.992 MHz	1926.720 MHz	1928.448 MHz	Comment
	Peak in dBm					
	RMS in dBm					
00:32:29.7343750	-86 -96,2	-86,5 -96	-87 -96,1	-86,6 -96,4	-86,2 -96,3	Interferer on
00:32:35.6250000	-60,1 -60,9	-60,1 -60,9	-59,8 -60,9	-81,4 -86,4	-77 -79,9	Interferer off
00:32:56.3125000	-59,7 -60,8	-59,4 -60,8	-51,6 -60,7	-22,4 -41,8	-62,9 -78,4	OK 1
00:32:59.6562500	-60,2 -60,9	-60,3 -60,9	-60,2 -60,9	-55,5 -77,1	-76,8 -79,8	
00:33:02.9062500	-59,4 -60,8	-59,3 -60,8	-52,4 -60,7	-22,6 -42	-62,6 -78,6	OK 2
00:33:06.2656250	-60,2 -60,9	-60,2 -60,9	-60,2 -60,9	-55,6 -76,8	-76,7 -79,8	
00:33:09.1250000	-59,5 -60,8	-59,5 -60,8	-51,6 -60,7	-22,4 -42,8	-60,8 -78,2	OK 3
00:33:12.5625000	-60,3 -60,9	-60,2 -60,9	-60,1 -60,9	-55,6 -76,8	-76,9 -79,8	
00:33:15.2343750	-59,6 -60,8	-59,2 -60,8	-51,5 -60,7	-22,7 -43	-59,4 -78	OK 4
00:33:19.8437500	-60,2 -60,9	-60,2 -60,9	-60,1 -60,9	-55,6 -76,9	-77,1 -79,9	
00:33:22.4375000	-59,5 -60,8	-59,6 -60,8	-51,1 -60,7	-22,3 -41,8	-61 -78,4	OK 5

Log file

Appendix K

Monitoring of intended transmit window and maximum reaction time

Test case Rev. Draft ANSI_7.5_reaction_time_low_ch.xml

Date 19.04.2006 12:58:07

Reference to the EUT G0M20604-0398 / DCX100 / AMWUU499

Comment: 7.5_low_ch_50 / 35 us

DECT 6.0, Handset
RTX Telecom A/S

The LOG table shows the level changes on each Channel of the transmission system

Time stamp	1921.536 MHz	1923.264 MHz	1924.992 MHz	1926.720 MHz	1928.448 MHz	Comment
	Peak in dBm					
	RMS in dBm					
00:00:11.6250000	-86,8 -96	-85,6 -96,5	-87,1 -96,2	-55,9 -77,6	-86,1 -96,2	Interferer off
00:00:20.6250000	-81,2 -95,4	-71,6 -94,2	-55 -77,4	-22,4 -42,6	-58,5 -83,3	Test connection
00:00:32.4843750	-55,5 -70,6	-59,1 -59,8	-59,2 -59,9	-51,4 -59,8	-59,2 -59,8	50µs interferer on, no connection
00:00:44.2656250	-73,8 -94,1	-55,7 -78,3	-22,9 -42,6	-57,7 -82,7	-78,6 -94,4	Test connection
00:01:23.8593750	-48,6 -66,7	-52 -59,7	-59,1 -59,9	-59,3 -59,9	-59,2 -59,7	35µs interferer on, no connection

Log file

Test case Rev. Draft ANSI_7.5_reaction_time_high_ch.xml

Date 19.04.2006 11:49:18

Reference to the EUT G0M20604-0398 / DCX100 / AMWUU499

Comment: 7.5_high_ch_50 / 35 us

DECT 6.0, Handset
RTX Telecom A/S

The LOG table shows the level changes on each Channel of the transmission system

Time stamp	1921.536 MHz	1923.264 MHz	1924.992 MHz	1926.720 MHz	1928.448 MHz	Comment
	Peak in dBm					
	RMS in dBm					
01:08:30.7500000	-86,3 -96,3	-55,9 -77,6	-87,3 -96,2	-86 -96,1	-86 -96,1	Interferer off
01:08:50.5937500	-22,4 -42,2	-58,2 -82,8	-73,6 -93,8	-80,8 -95,5	-80,3 -95,4	Test connection
01:09:08.4062500	-59,1 -59,8	-51,6 -59,9	-59,2 -59,9	-59,3 -59,9	-55 -70,6	50µs interference on, no connection
01:09:26.6093750	-79,3 -95,3	-72,7 -94,3	-55 -77,1	-22,7 -42,6	-58,2 -83	Test connection
01:09:59.7968750	-59,1 -59,8	-59,2 -59,9	-51,3 -59,8	-59,2 -59,9	-49,8 -67,2	35µs interference on, no connection

Log file

ELECTRONIC TECHNOLOGY SYSTEMS DR. GENZ GMBH
Storkower Str. 38C, D-15526 REICHENWALDE B. BERLIN

Appendix L

Monitoring bandwidth

Test case Rev. Draft ANSI_7.4.1_monitoring_bandwidth.xml

Date 19.04.2006 11:39:09

Reference to the EUT GOM20604-0398 / DCX100 / AMWUU499

Comment: 7.4.1 simple compliance test_low_+30%

DECT 6.0, Handset
RTX Telecom A/S

The LOG table shows the level changes on each Channel of the transmission system

Time stamp	1921.536 MHz	1923.264 MHz	1924.992 MHz	1926.720 MHz	1928.448 MHz	Comment
	Peak in dBm					
	RMS in dBm					
00:59:35.6718750	-86,4 -96,4	-85,8 -96,1	-56,1 -77,5	-85,6 -96,2	-87,6 -96,3	Interferer off
00:59:47.3750000	-80,6 -95,1	-74,5 -94,4	-55 -77,1	-22,4 -42,2	-59 -83	Test connection
01:00:09.4375000	-86,6 -96,1	-59 -59,7	-51,4 -59,8	-51,5 -59,8	-59,3 -59,8	Interferer on, no connection

Log file

ELECTRONIC TECHNOLOGY SYSTEMS DR. GENZ GMBH
Storkower Str. 38C, D-15526 REICHENWALDE B. BERLIN

Test case Rev. Draft ANSI_7.4.1_monitoring_bandwidth.xml

Date 19.04.2006 11:35:40

Reference to the EUT G0M20604-0398 / DCX100 / AMWUU499

Comment: 7.4.1 simple compliance test_low_-30%

DECT 6.0, Handset
RTX Telecom A/S

The LOG table shows the level changes on each Channel of the transmission system

Time stamp	1921.536 MHz	1923.264 MHz	1924.992 MHz	1926.720 MHz	1928.448 MHz	Comment
	Peak in dBm					
	RMS in dBm					
00:54:16.0156250	-87,1 -96	-87,1 -96,2	-87,1 -96	-55,9 -77,5	-86,7 -96,1	Interferer off
00:55:08.3125000	-81,9 -95,4	-73,4 -94,4	-55,7 -77,1	-22,4 -42,3	-54,6 -81,5	Test connection
00:55:27.5937500	-87,1 -95,9	-59 -59,7	-59,1 -59,8	-51,4 -59,8	-59,2 -59,8	Interferer on, no connection

Log file

Test case Rev. Draft ANSI_7.4.1_monitoring_bandwidth.xml

Date 19.04.2006 11:44:14

Reference to the EUT G0M20604-0398 / DCX100 / AMWUU499

Comment: 7.4.1 simple compliance test_high_+30%

DECT 6.0, Handset
RTX Telecom A/S

The LOG table shows the level changes on each Channel of the transmission system

Time stamp	1921.536 MHz	1923.264 MHz	1924.992 MHz	1926.720 MHz	1928.448 MHz	Comment
	Peak in dBm					
	RMS in dBm					
01:04:50.5000000	-87,2 -96	-86,7 -96,2	-55,8 -77,5	-87,7 -96,4	-87,6 -96,3	Interferer off
01:05:00.3125000	-81,2 -95,4	-80,7 -95,2	-72,6 -94,3	-55,5 -78	-22,7 -42,8	Test connection
01:05:13.3437500	-59,1 -59,7	-59,1 -59,8	-59,1 -59,8	-51,5 -59,8	-85,7 -96,2	Interferer on, no connection

Log file

Test case Rev. Draft ANSI_7.4.1_monitoring_bandwidth.xml

Date 19.04.2006 11:41:35

Reference to the EUT G0M20604-0398 / DCX100 / AMWUU499

Comment: 7.4.1 simple compliance test_high_-30%

DECT 6.0, Handset
RTX Telecom A/S

The LOG table shows the level changes on each Channel of the transmission system

Time stamp	1921.536 MHz	1923.264 MHz	1924.992 MHz	1926.720 MHz	1928.448 MHz	Comment
	Peak in dBm					
	RMS in dBm					
01:02:08.4218750	-86,9 -96,3	-84,7 -96,1	-87,5 -96	-55,9 -77,5	-86,2 -96,1	Interferer off
01:02:14.7187500	-81,2 -95,4	-77,9 -95,3	-73,2 -93,9	-55,1 -77	-22,9 -42,6	Test connection
01:02:29.3281250	-59,2 -59,7	-59,2 -59,8	-59,1 -59,8	-59,1 -59,8	-55,6 -77,4	Interferer on, no connection

Log file

Appendix M


Random waiting interval

Appendix N

Duration of Transmission

ANSI C63.17-1998 Rev. Draft ANSI 8.2.2 Transmission duration
UPCS1900

EUT	DECT 6.0, Handset
Model	DCX100 / AMWUU499
Applicant	Uniden America Corporation
Temperature	23°C
Test Site / Operator	ETS
Test Specification	ANSI C63.17-1998 Rev. Draft ANSI 8.2.2 Transmission duration
Comment 1	Monitoring the channels and time slots
Comment 2	Connection at channel 3, in time slot 22 (9.180 ms)
Comment 3	

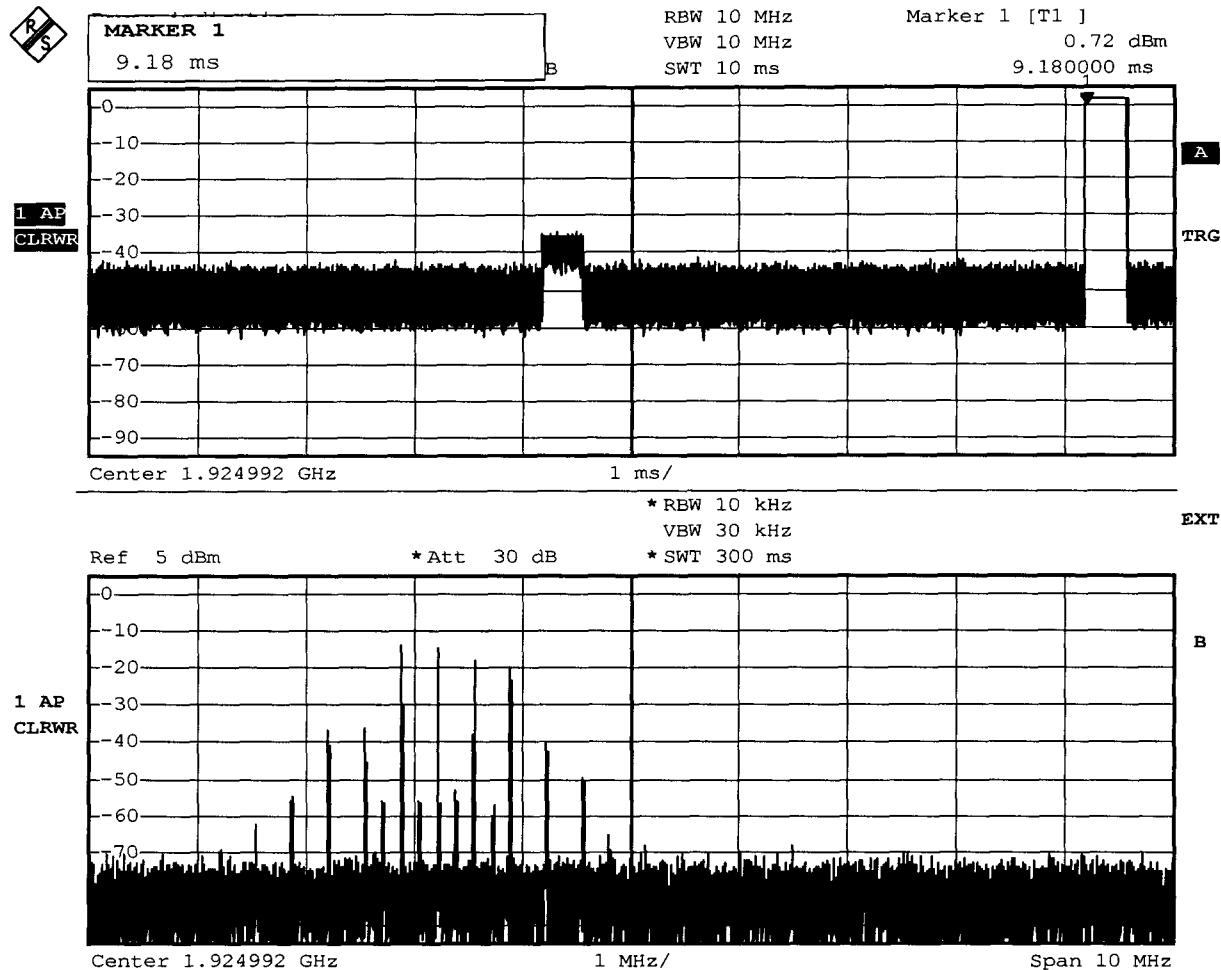


Comment: Ansi C63.17-1998
Date: 20.APR.2006 08:19:33

Measurement diagramm

ANSI C63.17-1998 Rev. Draft ANSI 8.2.2 Transmission duration
UPCS1900

EUT	DECT 6.0, Handset
Model	DCX100 / AMWUU499
Applicant	Uniden America Corporation
Temperature	23°C
Test Site / Operator	ETS
Test Specification	ANSI C63.17-1998 Rev. Draft ANSI 8.2.2 Transmission duration
Comment 1	Monitoring the channels and time slots
Comment 2	Connection at channel 3, in time slot 20 (8.36 ms)
Comment 3	the time slot is changing all 10 minutes

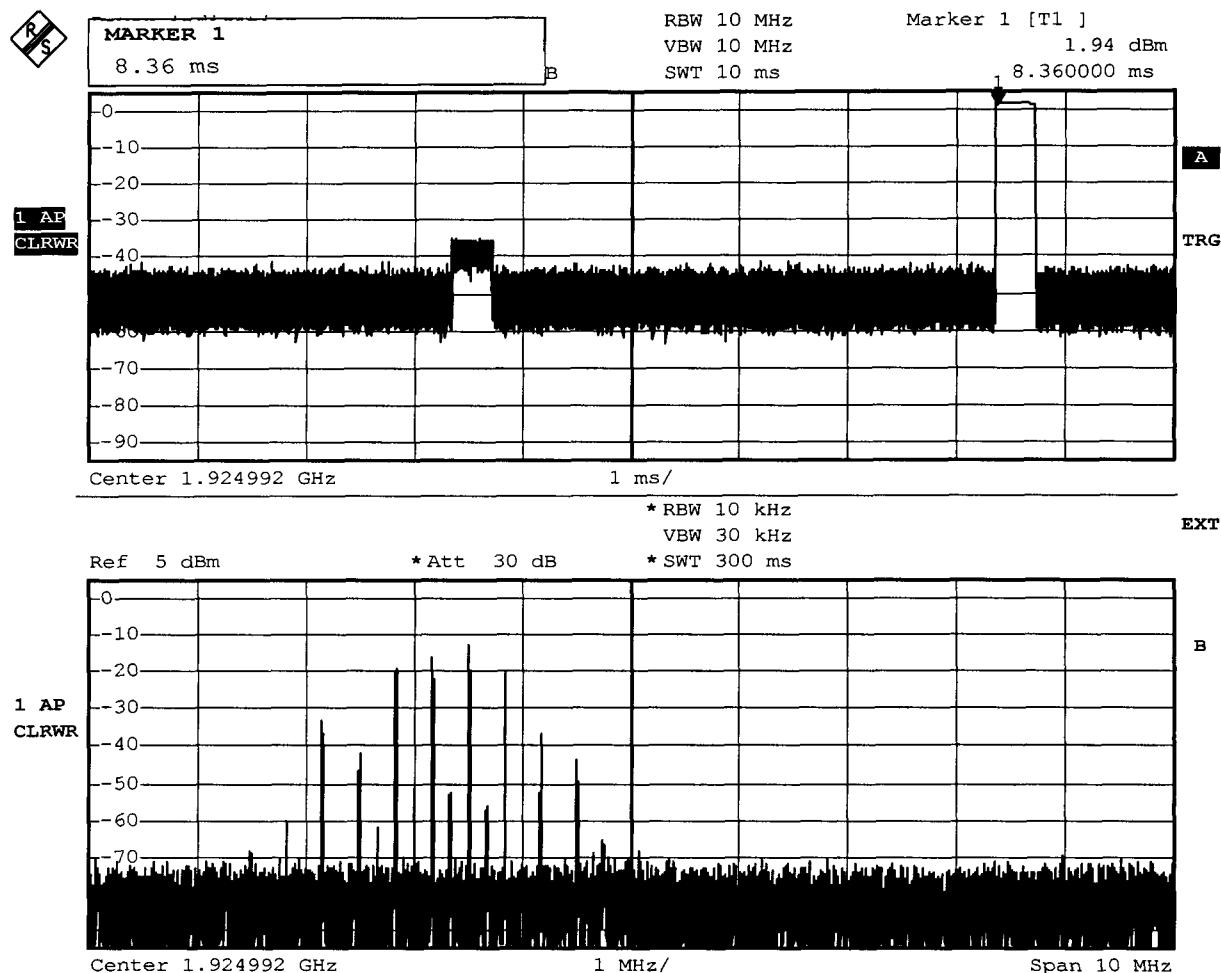


Comment: Ansi C63.17-1998
Date: 20.APR.2006 08:28:26

Measurement diagramm

ANSI C63.17-1998 Rev. Draft ANSI 8.2.2 Transmission duration
UPCS1900

EUT DECT 6.0, Handset
 Model DCX100 / AMWUU499
 Applicant Uniden America Corporation
 Temperature 23°C
 Test Site / Operator ETS
 Test Specification ANSI C63.17-1998 Rev. Draft ANSI 8.2.2 Transmission duration
 Comment 1 Monitoring of channels and time slots
 Comment 2 Connection at channel 1, in time slot 18 (7.52ms)
 Comment 3 channel and time slot changing after 10 minutes

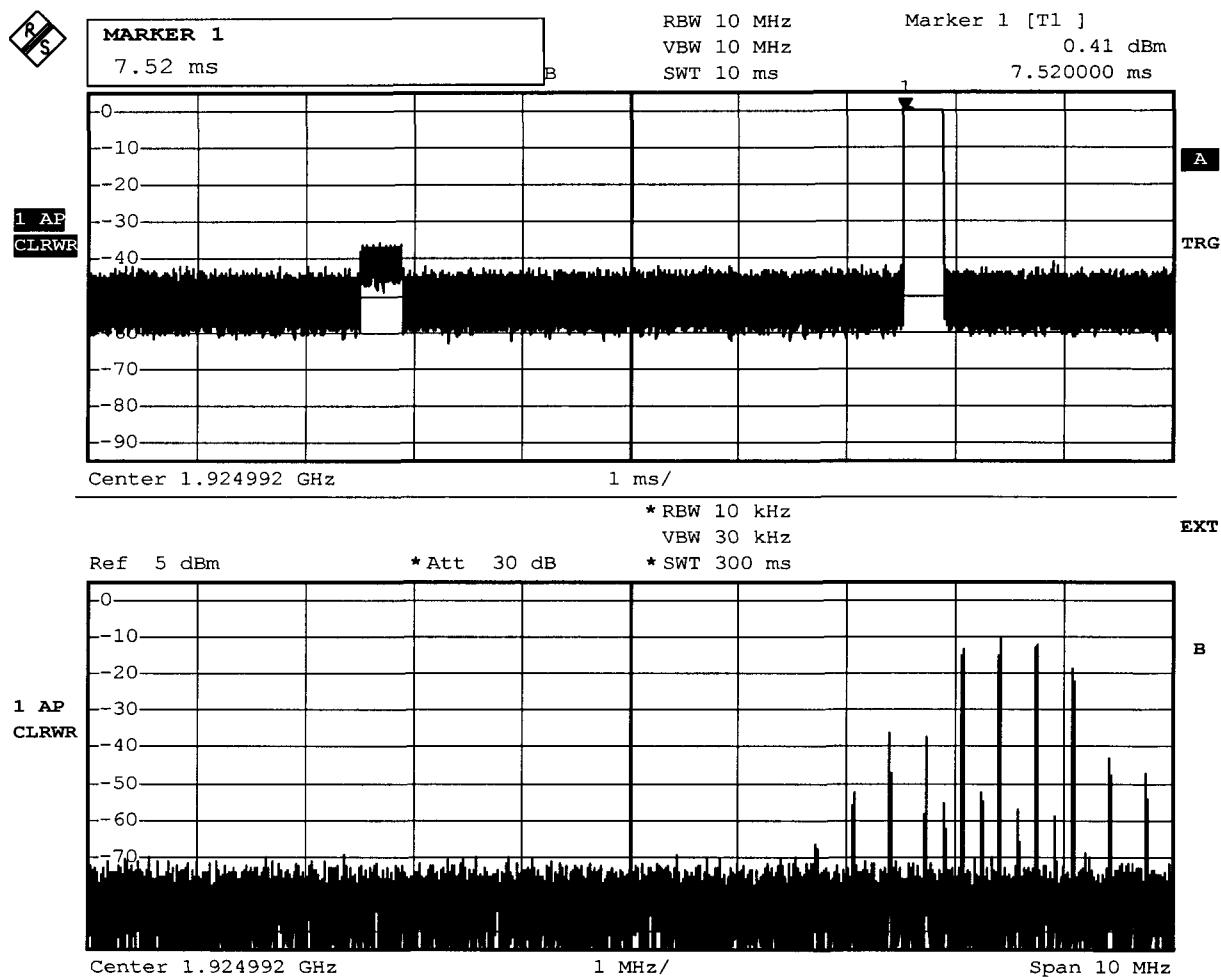

Comment: Ansi C63.17-1998
 Date: 20.APR.2006 08:39:03


Measurement diagramm

Appendix O

Connection acknowledgement

ANSI C63.17-1998 Rev. Draft ANSI 8.2.1 a) Acknowledgements
UPCS1900

EUT	DECT 6.0, Handset
Model	DCX100 / AMWUU499
Applicant	Uniden America Corporation
Temperature	23°C
Test Site / Operator	ETS
Test Specification	ANSI C63.17-1998 Rev. Draft ANSI 8.2.1 acknowledgements
Comment 1	Test connection with unblocked acknowledgements
Comment 2	TDMA, two time slot are interference free
Comment 3	connection is establish

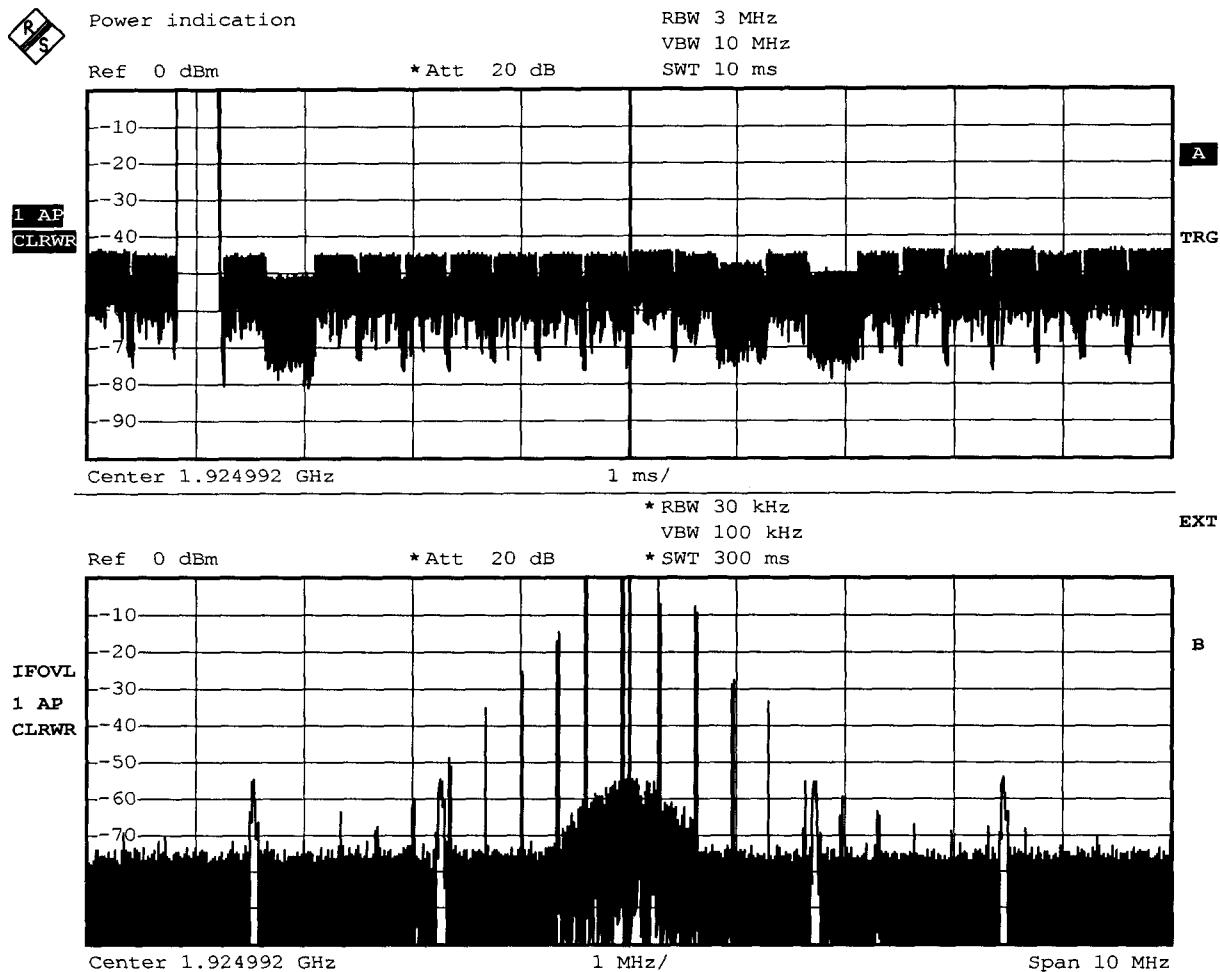


Comment: Ansi C63.17-1998
 Date: 19.APR.2006 13:13:44

Measurement diagramm

ANSI C63.17-1998 Rev. Draft ANSI 8.2.1 b) acknowledgements
UPCS1900

EUT	DECT 6.0, Handset
Model	DCX100 / AMWUU499
Applicant	Uniden America Corporation
Temperature	23°C
Test Site / Operator	ETS
Test Specification	ANSI C63.17-1998 Rev. Draft ANSI 8.2.1 acknowledgements
Comment 1	paragraph a) blocked acknowledgements from the companion device
Comment 2	by blocking the Rx time slots from the companion device
Comment 3	EUT cease the transmission after 558 ms Limit: < 1second

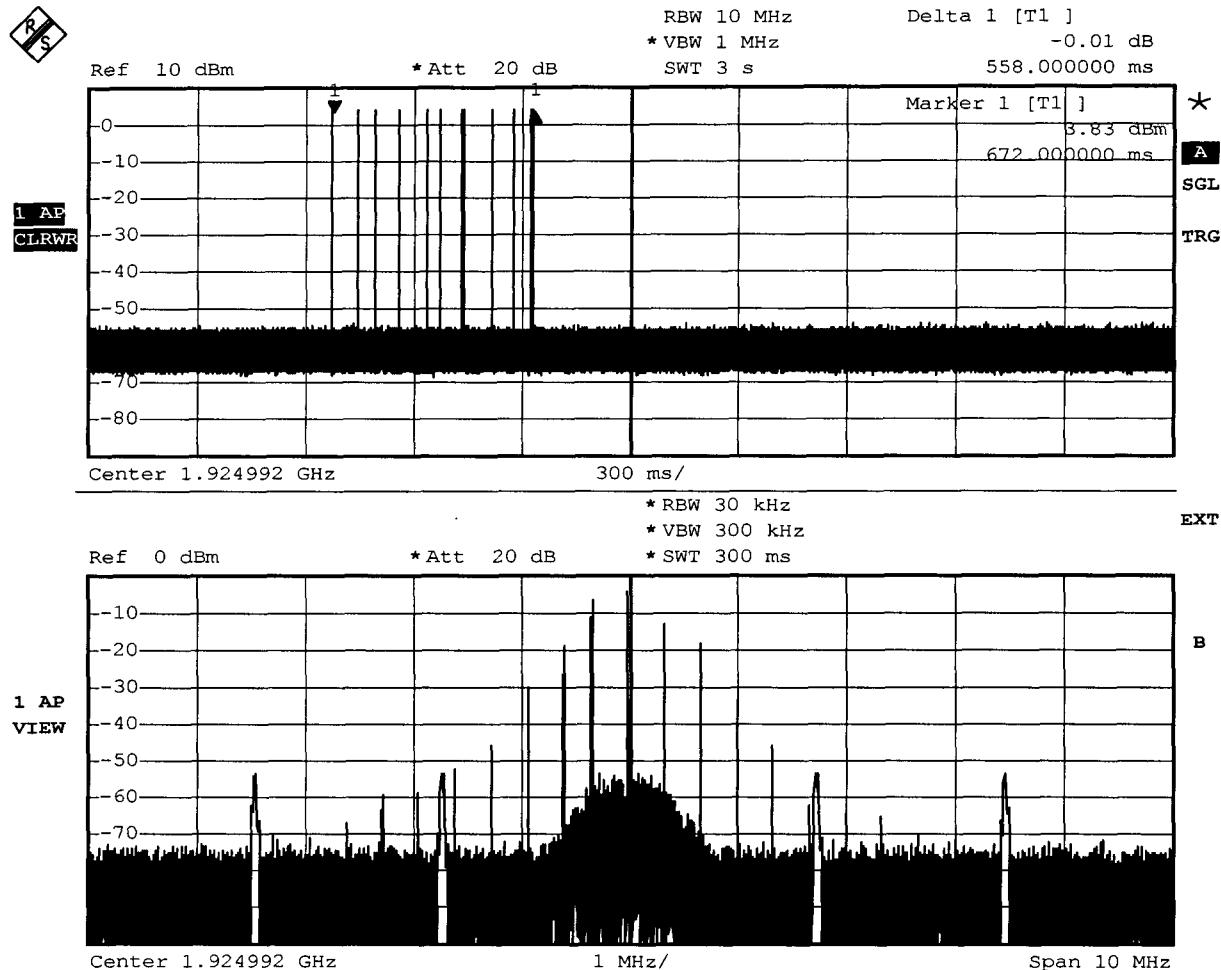

Comment: Ansi C63.17-1998
 Date: 24.APR.2006 11:47:25

Measurment diagramm

Test case Rev. Draft ANSI_8.2.1_Acknowledgments_30s.xml

Date 19.04.2006 15:15:23

Reference to the EUT G0M20604-0398 / DCX100 / AMWUU499

Comment: 8.2.1 Acknowledgments for c)

DECT 6.0, Handset
RTX Telecom A/S

The LOG table shows the level changes on each Channel of the transmission system

Time stamp	1921.536 MHz	1923.264 MHz	1924.992 MHz	1926.720 MHz	1928.448 MHz	Comment
	Peak in dBm					
	RMS in dBm					
00:03:59.0625000	-57,5 -57,9	-46,1 -57,7	-22 -39,5	-50,6 -58,6	-57,2 -59,1	connection
00:04:07.7500000	-57,4 -58,1	-45,6 -57,9	-22,3 -41,3	-49,8 -58,7	-55,9 -59,3	Block the acknowledgements from the companion device
00:04:12.2343750	-57,5 -57,9	-57,7 -58,1	-86,8 -96,1	-58,4 -58,8	-58,8 -59,2	DUT cease the transmission

The DUT terminates the transmission after 4.5 seconds.

Log file

ELECTRONIC TECHNOLOGY SYSTEMS DR. GENZ GMBH
Storkower Str. 38C, D-15526 REICHENWALDE B. BERLIN

Appendix P

Selected channel, power accuracy, segment occupancy

Test case
confirmation.xml

Rev. Draft ANSI_7.3.4_selected channel

Reference to the EUT

Date 19.04.2006 11:20:25

G0M20604-0398 / DCX100 / AMWUU499

Comment:

initial setup

DECT 6.0, Handset
RTX Telecom A/S

The LOG table shows the level changes on each Channel of the transmission system

Time stamp	1921.536 MHz	1923.264 MHz	1924.992 MHz	1926.720 MHz (f1)	1928.448 MHz (f2)	Comment
	Peak in dBm	Peak in dBm	Peak in dBm	Peak in dBm	Peak in dBm	
	RMS in dBm	RMS in dBm	RMS in dBm	RMS in dBm	RMS in dBm	
00:40:37.2343750	-60 -60,8	-60,1 -60,8	-60 -60,8	-76,5 -80,6	-86,8 -96,4	Interferer on
00:41:07.7968750	-59,7 -60,8	-59,7 -60,8	-58,8 -60,8	-54,1 -75,7	-22,8 -42,5	OK 1
00:41:17.5312500	-59,7 -60,8	-59,3 -60,8	-52,5 -60,8	-22,6 -41,7	-63,2 -79,2	OK 2

Log file


Appendix Q

Duplex connections

ANSI 8.3.2 Duplex connections

Subclause 8.3.2 c),d)

EUT	DECT 6.0, Handset
Model	DCX100 / AMWUU499
Applicant	Uniden America Corporation
Temperature	23°C
Test Site / Operator	ETS
Test Specification	ANSI C63.17-1998 Revision Draft
Comment 1	Rx time slot 2 is interference free
Comment 2	Connection in Rx time slot 2
Comment 3	Verdict : PASS

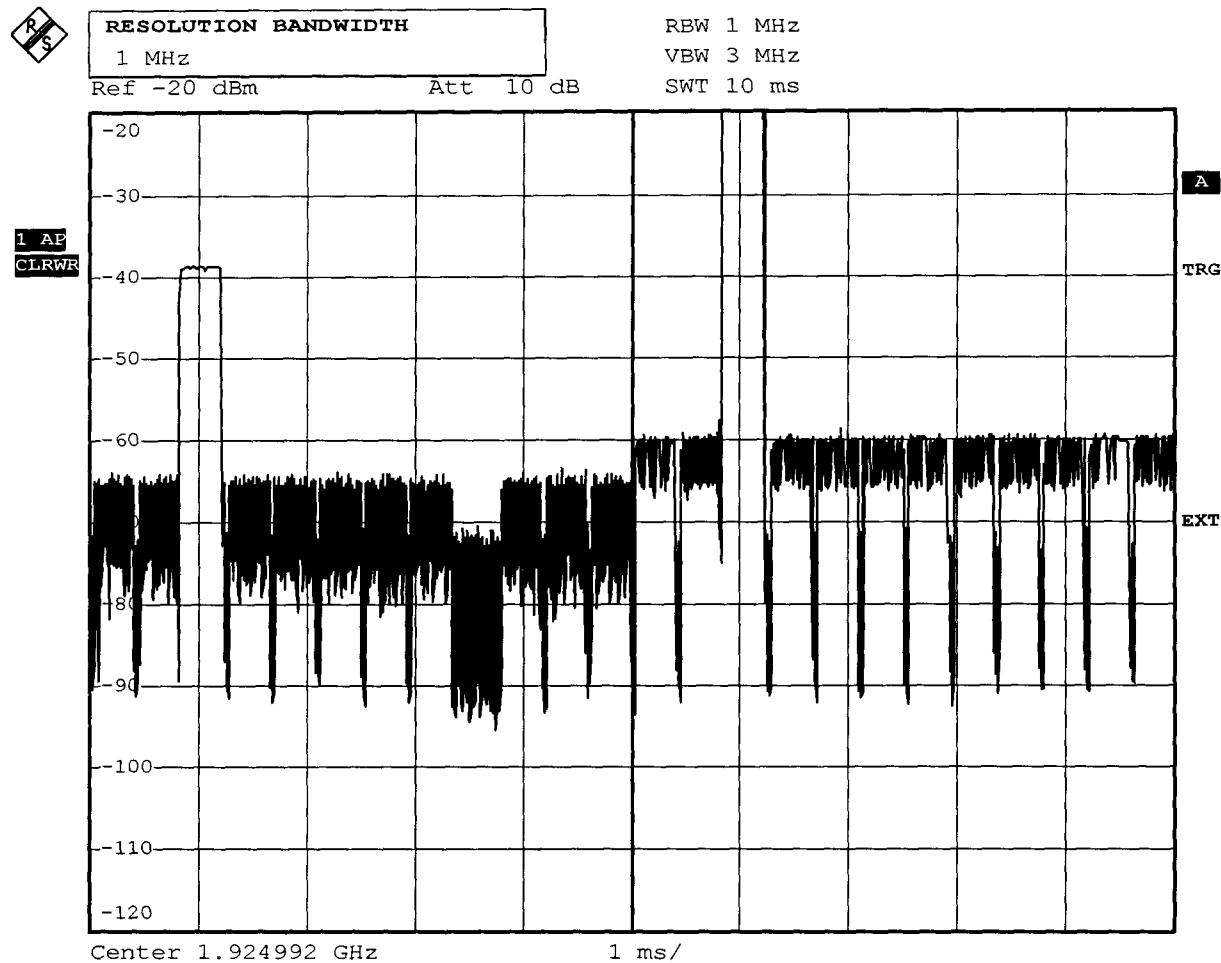

Comment: ANSI C63.17-1998
 Date: 19.APR.2006 15:18:43

Measurment diagramm


Appendix S

Frame period

FCC Part 15.323(e.1) Frame repetition**Testprocedure ANSI 63.17-1998 6.2.2****UCPS**

EUT	DECT 6.0, Handset
Model	DCX100 / AMWUU499
Applicant	RTX Telecom A/S
Temperature	23°C
Test Site / Operator	ETS Reichenwalde
Test Specification	6.2.2 Frame repetition


Width of the frequency class	0,000000 Hz
Mean	100,000071 Hz
Deviation	0,000002
Stability in ppm	0,047027 ppm
Test result	Verdict = PASS

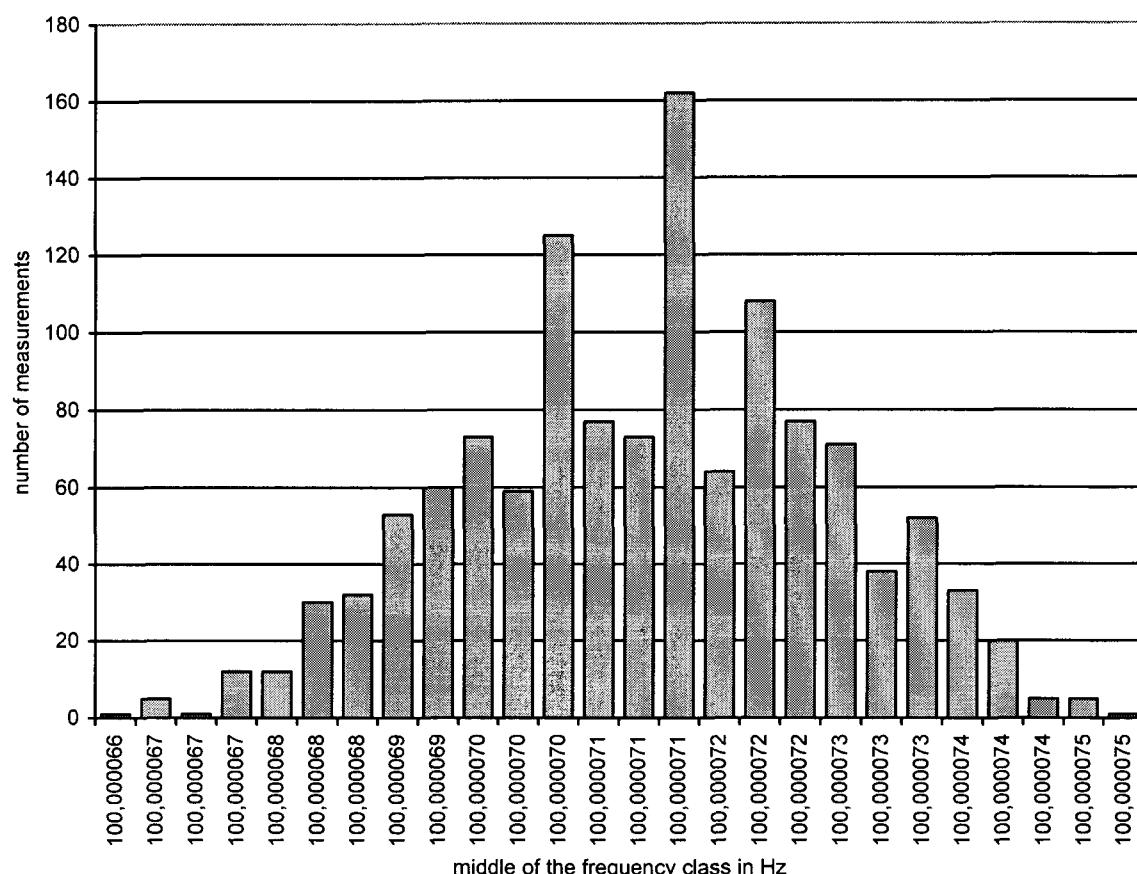Histogram**Measurement diagram**

FCC Part 15.323(e.4) Frame Period and jitter**Testprocedure ANSI 63.17-1998 6.2.3****UCPS**

EUT	DECT 6.0, Handset
Model	DCX100 / AMWUU499
Applicant	RTX Telecom A/S
Temperature	23°C
Test Site / Operator	ETS Reichenwalde
Test Specification	6.2.3 Frame Period and jitter

Width of the time class	0,048354 µs
Mean	9,998764 ms
Deviation	0,000383
Max-Min	1,208857 µs
Test result	Verdict = PASS

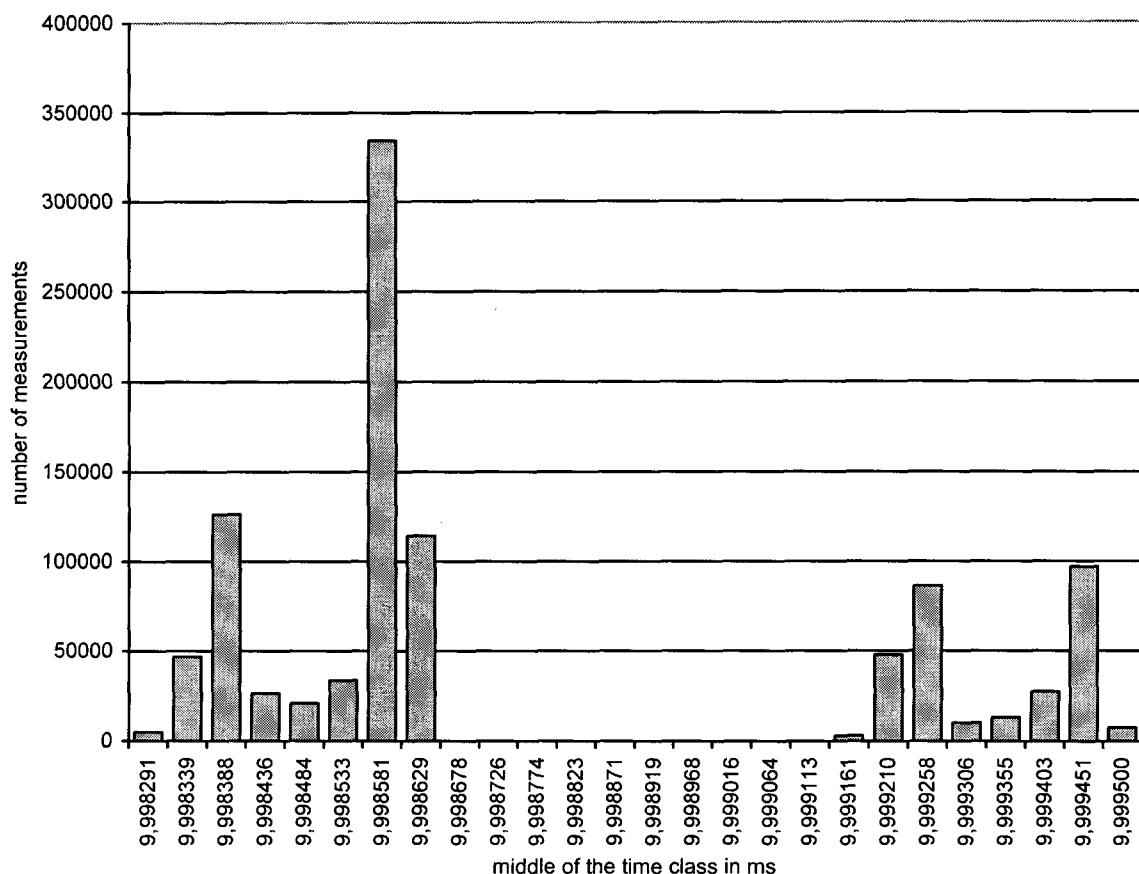Histogram

Measurement diagram

UPCS (DECT based) – Implementation Conformance Statement

DUT	Description	: Basestation		
	Model	: CLIP Basestation		
	Use	:		
		FP	PP	Repeater
	System	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	Type			
	HW version	WORKING STAGE		
	SW version	Ver. 0.02		
	RFPI / PIN			
Product information	Decl. emission BW	1.4MHz		
	Decl. lower threshold			
	Decl.upper threshold ¹⁾	-62.4 dBm		
	Standard:	<input checked="" type="checkbox"/> FCC part 15D	<input type="checkbox"/> other:	
	Frequency band:	<input checked="" type="checkbox"/> 1920 – 1930 MHz	<input type="checkbox"/> other:	
	Number of RF channels:	5		
	Number of logical channels:	60	(time and spectrum windows)	
	Used slot type:	<input checked="" type="checkbox"/> single	<input type="checkbox"/> double	
	Used slot(s):	<input checked="" type="checkbox"/> even	<input type="checkbox"/> odd	
	For doubleslot connection even and odd slots are used			
	Operating mode:	<input type="checkbox"/> simplex	<input checked="" type="checkbox"/> duplex	<input type="checkbox"/> other:

¹⁾ if applicable

Product information	Antennas:					
	FP:	Antenna	Type	Gain [dBi]	internal	external
		1	PCB	< 3	<input checked="" type="checkbox"/>	<input type="checkbox"/>
		2	Metal	< 3	<input checked="" type="checkbox"/>	<input type="checkbox"/>
		3			<input type="checkbox"/>	<input type="checkbox"/>
	Do Tx and Rx use the same antenna(s)?: <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No					
	PP:	Antenna	Type	Gain [dBi]	internal	external
		1			<input type="checkbox"/>	<input type="checkbox"/>
		2			<input type="checkbox"/>	<input type="checkbox"/>
		3			<input type="checkbox"/>	<input type="checkbox"/>
Do Tx and Rx use the same antenna(s)?: <input type="checkbox"/> Yes <input type="checkbox"/> No						
Antenna diversity: ¹⁾						
	Antenna	Diversity supported				
		Tx		Rx		
	FP	1	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		
		2	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>		
		3	<input type="checkbox"/>	<input type="checkbox"/>		
	PP	1	<input type="checkbox"/>	<input type="checkbox"/>		
		2	<input type="checkbox"/>	<input type="checkbox"/>		
		3	<input type="checkbox"/>	<input type="checkbox"/>		

¹⁾ if applicable

Product information	Supply and supported temperature ranges (Manufacturer declaration):			
		FP	PP	Repeater
	U _{normal} [V]	6.0V		
	U _{min} [V]	5.0V		
	U _{max} [V]	9.0V		
	T _{min} [°C]	+10		
	T _{max} [°C]	+40		
	Power Source	Type		Manufacturer
	FP or WRS	AC/DC Wall Adaptor		??
PP (charger)				
Data connection: <input checked="" type="checkbox"/> PSTN <input type="checkbox"/> other				
Used radio module¹⁾:				
Type :	Manufacturer:			
Ancillary equipment¹⁾:				
Description :				
Type :				
Manufacturer :				
Host device¹⁾:				
Description :				
Type :				
Manufacturer :				

¹⁾ if applicable

Product information	<p>Control software¹⁾:</p> <p>Name : Version : Manufacturer :</p> <hr/> <p>Additional remarks:</p>
---------------------	---

¹⁾ if applicable

Manufacturer declarations	FCC 15.323 (c) (5): This device or group of co-operating devices located within 1 meter of each other shall not during any frame period occupy more than 6 MHz of aggregate bandwidth, or alternatively more than one third of the time and spectrum windows defined by the system.																																							
	Manufacturer agrees: <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No																																							
	FCC 15.323 (c) (12): This device shall not use the provisions of (c) (10) or (c) (11) to extend the range of spectrum occupied over space or time for the purpose of denying fair access to spectrum to other devices.																																							
	Manufacturer agrees: <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No																																							
	FCC 15.307 (b): The applicant is a participating member of UTAM, Inc. and will provide a related affidavit from UTAM, Inc. in course of certification.																																							
	Confirmation by applicant: <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No																																							
	FCC 15.319 (f) Automatic discontinuation of transmission: This device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. Automatic break off the transmissions means break off of connection and break of transmissions which are not control and signalling information or repetitive codes of complete frame or burst intervals. In case of devices using basics of DECT technology at least fixed parts and repeaters are using control and signalling information without direct connection to their remote station.																																							
<p><i>Please fill in the table below with the reaction of the EUT (FP and/or PP) using A, B or C.</i></p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th rowspan="2"></th> <th rowspan="2" style="text-align: center;">Situation</th> <th colspan="2" style="text-align: center;">Reaction of EUT</th> <th rowspan="2" style="text-align: center;">Verdict</th> </tr> <tr> <th style="text-align: center;">FP</th> <th style="text-align: center;">PP</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">1</td> <td>Switch-off counter part</td> <td style="text-align: center;">B</td> <td></td> <td></td> </tr> <tr> <td style="text-align: center;">2</td> <td>Hook-on by counter part</td> <td style="text-align: center;">B</td> <td></td> <td></td> </tr> <tr> <td style="text-align: center;">3</td> <td>Switch-off by EUT</td> <td style="text-align: center;">A</td> <td></td> <td></td> </tr> <tr> <td style="text-align: center;">4</td> <td>Hook-on at EUT side</td> <td style="text-align: center;">Not possible</td> <td></td> <td></td> </tr> <tr> <td style="text-align: center;">5</td> <td>Remove power from EUT</td> <td style="text-align: center;">A</td> <td></td> <td></td> </tr> <tr> <td style="text-align: center;">6</td> <td>Remove power from counterpart</td> <td style="text-align: center;">B</td> <td></td> <td></td> </tr> </tbody> </table> <p style="margin-left: 20px;">A – Connection break down, cease of transmit B – Connection break down, EUT transmits signalling information C – Connection break down, counter part transmits signalling information</p>					Situation	Reaction of EUT		Verdict	FP	PP	1	Switch-off counter part	B			2	Hook-on by counter part	B			3	Switch-off by EUT	A			4	Hook-on at EUT side	Not possible			5	Remove power from EUT	A			6	Remove power from counterpart	B		
	Situation	Reaction of EUT				Verdict																																		
		FP	PP																																					
1	Switch-off counter part	B																																						
2	Hook-on by counter part	B																																						
3	Switch-off by EUT	A																																						
4	Hook-on at EUT side	Not possible																																						
5	Remove power from EUT	A																																						
6	Remove power from counterpart	B																																						

¹⁾ if applicable

Supplement	Additional remarks:	
	Declared by: Date: 4-11-2006 Name (print): Yoshinobu Fujiwara	Signature: 

¹⁾ if applicable

Test Summary

Requirement	FCC Paragraph #	IC RSS-213 Paragraph #	Required	Customer Declaration	Test Pass
Monitoring time	15.323(c)(1)	4.3.4(b)(1)	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Monitoring threshold	15.323(c)(2)	4.3.4(b)(2)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Maximum transmit period	15.323(c)(3)	4.3.4(b)(3)	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
System acknowledgement	15.323(c)(4)	4.3.4(b)(4)	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Least Interfered Channel, LIC	15.323(c)(5)	4.3.4(b)(5)	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Random waiting	15.323(c)(6)	4.3.4(b)(6)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Monitoring bandwidth and reaction time	15.323(c)(7)	4.3.4(b)(7)	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Monitoring antenna	15.323(c)(8)	4.3.4(b)(8)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Monitoring threshold relaxation	15.323(c)(9)	4.3.4(b)(9)	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Duplex system LBT	15.323(c)(10)	4.3.4(b)(10)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Co-located device LBT	15.323(c)(11)	4.3.4(b)(11)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Fair access	15.323(c)(12)	4.3.4(b)(12)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

Requirement	FCC Paragraph #	Required	Customer Declaration	Test Pass
Coordination with fixed microwave	15.307(b)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Cross reference	15.309(b)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Labeling requirements	15.311, 15.19(a)(3)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Power line conducted emissions	15.315, 15.207	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Antenna requirement	15.315, 15.203	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Digital modulation techniques	15.319(b)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Peak transmit power	15.319(c)	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Power spectral density	15.319(d)	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Antenna Gain	15.319(e)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Automatic discontinuation of transmission	15.319(f)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Safety exposure levels	15.319(i)	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Emission bandwidth	15.323(a)	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Emissions inside and outside the subband	15.323(d)	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Frame period and jitter	15.323(e)	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Carrier frequency stability	15.323(f)	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>