

Emission Test Report

Standard: FCC Part 15 Subpart C / IC RSS-210

Document Number : FCC 19-0254-0

Model Number: T60H786-U


measured with IBM ThinkPad X30 Series

FCC ID: ANO20030500CMR
IC: 349E-T60H786U

November 28, 2003

Prepared :
EMC R&D Staff Engineer


Takeshi Asano

Signature: 
IBM Japan, Ltd.
EMC Engineering
LAB-S59

1623-14, Shimotsuruma,
Yamato-shi Kanagawa-ken 242, Japan
Phone: +81-46-215-4779
Fax: +81-46-273-7420
E-Mail: asano@jp.ibm.com


Reviewed and Checked :
EMC R&D Staff Engineer

Toshiya Murota

Signature: 
IBM Japan, Ltd.
EMC Engineering
LAB-S59

1623-14, Shimotsuruma,
Yamato-shi Kanagawa-ken 242, Japan
Phone: +81-46-215-6574
Fax: +81-46-273-7420
E-Mail: murota@jp.ibm.com

Approved :
Manager, EMC Engineering
/ NVLAP signatory

Akihisa Sakurai
Signature: 
IBM Japan, Ltd.
EMC Engineering
LAB-S59

1623-14, Shimotsuruma,
Yamato-shi Kanagawa-ken 242, Japan
Phone: +81-46-215-2613
Fax: +81-46-273-7420
E-Mail: akihisa@jp.ibm.com

MEASUREMENT / TECHNICAL REPORT – Part 15 Subpart C (Intentional Radiator)

Model: T60H786-U (802.11b/g Wireless LAN Adapter)
with
IBM ThinkPad X30 Series
(Machine type : 2672, 2673, 2890, 2891)

FCC ID : ANO20030500CMR

November 28, 2003

This report concerns: (check one) Original Grant ☒ _____ Class I change ☐ _____ Class II change ☐ _____
Equipment type: <u>Wireless LAN device</u>
This report shall not be reproduced except in full, without the written permission of this test lab.
The measurement results contained in this report relate only to the item which was tested.
Measurement procedure used is ANSI C63.4-2000 unless otherwise specified.
Other test procedure: _____
The FCC has issued provisional acceptance of this test laboratory for Declaration of Conformity testing per letter dated 1997.
APPLICANT ANTI-DRUG ABUSE CERTIFICATION: By checking yes, the applicant certifies that, in the case of an individual applicant, he or she is not subject to a denial of federal benefits, that includes FCC benefits, pursuant to Section 5301 of the Anti-Drug Abuse of 1988, 21 U.S.C. 853(a), or, in the case of a non-individual applicant (e.g. corporation, partnership or other unincorporated association), no party to the application is subject to a denial of federal benefits, that includes FCC benefits, pursuant to that section. For the definition of a “party” for these purposes, see 47 CFR 1.2002(b). ☒ Yes or ☐ No
“Report shall not be reproduced except in full, without the written approval of the laboratory” “the report must not be used by the client to claim product endorsement by NVLAP or any agency of the US government”
Prepared by: Takeshi Asano IBM Japan Corporation, Yamato EMC Engineering LAB-S59, 1623-14, Shimotsuruma, Yamato-shi Kanagawa-ken 242-8502, Japan Tel: +81-46-215-4779 Fax: +81-46-273-7420

- Index -

A. General Information	5
A.1 Test Methodology	5
A.2 Test Facility / NVLAP Accreditation	5
A.3 EUT details	5
B. Summary of Test Results	6
C. Operation Mode of EUT	7
D. Justification	7
E. Test Instruments	8
F. Measurement Uncertainty	9
G. Temperature and Humidity	9
H. Related Submittal(s)/Grant(s)/Notes	9
1. Bandwidth at 6 dB below	10
1.1 Test Procedure	10
1.2 Test Instruments and Measurement Setup	10
1.3 Measurement Results	10
1.4 Trace Data of 6dB bandwidth	12
2. Occupied Bandwidth (20 dB Bandwidth)	16
2.1 Test Procedure	16
2.2 Test Instruments and Measurement Setup	16
2.3 Measurement Results	16
2.4 Trace Data of Occupied Bandwidth	17
3. Conducted Peak Output Power	19
3.1 Test Procedure	19
3.2 Measurement Results	20
3.3 Trace Data of Conducted Peak Output Power	21
4. Out of Band Emissions (Conducted Spurious)	27
4.1 Test Procedure	27
4.2 Test Instruments and Measurement Setup	27
4.3 Measurement Results	27
4.4 Trace Data of Out of Band Emissions	28
5. Peak Power Spectral Density	34
5.1 Test Procedure	34
5.2 Test Instruments and Measurement Setup	34
5.3 Measurement Results	34
5.4 Trace Data of Peak Power Spectral Density	35
6. AC Wireline Conducted Emissions (150KHz – 30MHz)	41
6.1 Test Procedure	41
6.2 Test Instruments and Measurement Setup	41
6.3 Powerline Voltage Calculation	42
6.4 Measurement Results	43

7. Restricted Bands Radiation (30MHz – 1GHz)	46
7.1 Test Procedure	46
7.2 Test Instruments and Measurement Setup	46
7.3 Field Strength Calculation	48
7.4 Measurement Results	49
8. Restricted Bands Radiation (1GHz – 25GHz)	52
8.1 Test Procedure	52
8.2 Test Instruments and Measurement Setup	52
8.3 Field Strength Calculation	54
8.4 Measurement Results	55
8.5 Measurement plots of adjacent restricted band	58

A. General Information

APPLICANT : IBM Japan, Ltd.
 TEST SITE : IBM Japan, Ltd., Yamato Semi-anechoic chamber #1
 TEST SITE ADDRESS : 1623 – 14 Shimotsuruma, Yamato-shi, Kanagawa 242-8502 Japan
 Tel: +81-46-215-4779, Fax: +81-46-273-7420
 REGULATION : FCC Part 15 Subpart C
 Industry Canada RSS-210 (Issue No.5)
 MODEL NUMBER : T60H786-U
 FCC ID : ANO20030500CMR
 IC Certification Number : 349E-T60H786U
 SERIAL NUMBER : DX39105T
 PHYSICAL CONDITION : Preproduction
 KIND OF EQUIPMENT : DTS: IEEE802.11g Wireless LAN Mini-PCI card
 TESTED DATE : October 10, 22, 23, 29, November 10 and 11, 2003

A.1 Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4-2000. Radiated testing was performed at an antenna to EUT distance of 3 meters.

A.2 Test Facility / NVLAP Accreditation

The semi-anechoic chamber #1 used to correct the data are located in Yamato Laboratory, IBM Japan.

- This facility has been fully described in a report dated September 1998, submitted to the FCC office, and accepted in a letter, dated Nov. 2, 1998(31040/SIT).
- IBM Yamato EMC Engineering is recognized under the National Voluntary Laboratory Accreditation Program for satisfactory compliance with Criteria established in Title 15, Part 285 Code of Federal Regulations.(NVLAP Lab code: 200198-0)
- This facility is accepted by **Industry Canada** in a letter dated March 19, 2001 as number **IC 349E** for chamber #2, and January 25, 2002 as number **IC 4221** for chamber #1.

A.3 EUT details

Table A EUT details

Model and S/N	FCC ID IC Certification Number	Description
T60H786-U (s/n DX39105T)	FCC ID: ANO20030500CMR IC: 349E-T60H786U	Applying modular transmitter Built_in type IEEE802.11g Wireless LAN Mini-PCI card without antenna
ThinkPad X30 Series M/T 2672-UPx (s/n zz-04049)	N/A	Host equipment IBM Notebook PC with built_in antenna CPU: Intel® Pentium® M Processor, 1.7GHz
P/N 02K6808	N/A	Universal AC adapter 56W, Unshielded power cord

B. Summary of Test Results

Table-B presents the list of the measurement items for DTS (Digital Transmissions System) devices under FCC Part 15 Subpart C and Industry Canada RSS-210.

The section numbers of upper portion are showing FCC number, and the other (lower) ones are for IC.

Table-B List of the measurements

Section(s)	Test Items : Transmit mode (TX):		Condition	Result
15.247(a)(2) 6.2.2(o)(b)	Bandwidth at 6 dB below	FCC requirement	Conducted	Pass
– 5.9.1	Occupied BW (Bandwidth at 20 dB below)	IC requirement		Pass
15.247(c) 6.2.2(o)(e1)	Out of Band Emissions	The radiated emission in any 100kHz of outband shall be at least 20dB below the highest inband spectral density.		Pass
15.247(b)(3) 6.2.2(o)(b)	Transmitter peak output power	Shall not exceed 1.0 W.		Pass
15.247(d) 6.2.2(o)(b)	Transmitter power spectral Density	Shall not be greater than 8 dBm in any 3kHz band.		Pass
15.207 6.2.2(o)(e3) / 6.6	AC Wireline Conducted Emissions 150kHz – 30MHz	Class B: Freq.(MHz) QP(dBμV) Ave.(dBμV) 0.15 - 0.5 66 - 56 56 - 46 0.5 - 5 56 46 5 - 30 60 50		Pass
15.205 / 209 6.2.1 /6.2.2(o)(e3) /6.3	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Shall not exceed the limits specified in FCC 15.209 or RSS-210 Table3.	Radiated (30MHz-1GHz)	Pass
			Radiated (1– 25GHz)	Pass

	Test Items : Receive mode (RX):			
15.207 6.2.2(o)(e3) / 7.4	AC Wireline Conducted Emissions 150kHz – 30MHz	Class B: Freq.(MHz) QP(dBμV) Ave.(dBμV) 0.15 - 0.5 66 - 56 56 - 46 0.5 - 5 56 46 5 - 30 60 50	Conducted	Pass
15.205 / 209 6.2.1 /6.2.2(o)(e3) /7.3	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Shall not exceed the limits specified in FCC 15.209 or RSS-210 Table3.	Radiated (30MHz -1GHz)	Pass
			Radiated (1– 25GHz)	Pass

	Other requirements		Result
15.247(b)(4)(i) –	Antenna gain	Peak gain of the device : 1.28 dBi	N/A
15.203 6.2.2(o)(e2)	Unique antenna connector	The device employs an unique electronic connector so called BIOS Lock . Refer to “Confidential_BIOS-Lock” exhibit.	complies

C. Operation Mode of EUT

1. All tests were performed using the “Atheros Radio Test” program. This tool supports the continuous transmission mode for the testing purpose.
2. The following frequencies were chosen for the measurements.
- 2412MHz (lowest), 2437MHz(middle), and 2462MHz (highest)
3. 11Mbps and 18Mb/s transmission modes were selected for full testing as the worse case samplings. See “Chapter 3. Conducted Peak Output Power” as to the determination of measurement plots.
4. As for the RF receiving test, the middle channels (2437MHz) were selected representatively.

Table-C Transmission mode of EUT (The measurement plots are shown in shading.)

Operation Frequency [GHz]	Rated output power (conducted) [dBm]										
	IEEE802.11b (DSSS)			IEEE802.11g (OFDM)							
	1/2M bps	5.5M bps	11M bps	6M bps	9M bps	12M bps	18M bps	24M bps	36M bps	48M bps	54M bps
2.412 (Ch. 1)	+17	+17	+17	+14	+14	+14	+14	+14	+14	+14	+13
2.417 (Ch. 2)	+17	+17	+17	+17	+17	+17	+17	+17	+17	+15	+13
2.422 (Ch. 3)	+17	+17	+17	+17	+17	+17	+17	+17	+17	+15	+13
2.427 (Ch. 4)	+17	+17	+17	+17	+17	+17	+17	+17	+17	+15	+13
2.432 (Ch. 5)	+17	+17	+17	+17	+17	+17	+17	+17	+17	+15	+13
2.437 (Ch. 6)	+17	+17	+17	+17	+17	+17	+17	+17	+17	+15	+13
2.442 (Ch. 7)	+17	+17	+17	+17	+17	+17	+17	+17	+17	+15	+13
2.447 (Ch. 8)	+17	+17	+17	+17	+17	+17	+17	+17	+17	+15	+13
2.452 (Ch. 9)	+17	+17	+17	+17	+17	+17	+17	+17	+17	+15	+13
2.457 (Ch. 10)	+17	+17	+17	+17	+17	+17	+17	+17	+17	+15	+13
2.462 (Ch. 11)	+17	+17	+17	+14	+14	+14	+14	+14	+14	+14	+13

D. Justification

The EUT was investigated for both main (left) and auxiliary (right) antennas. The worse case data taken in this report represents the measurement result of the right antenna that has comparatively higher gain in 2.4GHz band as shown in the following table.

Table-D Peak Antenna Gains of EUT

2.4GHz band	Left Antenna gain	0.62 dBi (peak)
	Right Antenna gain	1.28 dBi (peak)

E. Test Instruments

Table-E List of Measuring Instruments

Description	Model	Serial Number	Calibration Date	Calibration Interval
Computer	IBM 6868-30J	97-901X3	N/A	N/A
Computer	IBM 6589-13J	97-15613	N/A	N/A
Spectrum Analyzer (100Hz-1.5GHz)	HP 85680B	2601A02634	09/09/03	1 year
Spectrum Analyzer (100Hz-1.5GHz)	HP 85680B	3019A05156	08/14/03	1 year
Spectrum Analyzer (100Hz-1.5GHz)	HP 85680B	2841A04254	08/25/03	1 year
Spectrum Analyzer Display	HP 85662A	2542A12308	09/09/03	1 year
Spectrum Analyzer Display	HP 85662A	3026A19366	08/14/03	1 year
Spectrum Analyzer Display	HP 85662A	2816A16831	08/25/03	1 year
Quasi-Peak Adapter	HP 85650A	2043A00062	09/09/03	1 year
Quasi-Peak Adapter	HP 85650A	2811A01433	08/14/03	1 year
Quasi-Peak Adapter	HP 85650A	2811A01156	08/25/03	1 year
Amplifier (100KHz - 1.3GHz)				
- for 30-200MHz	HP 8447D	2805A02919	04/14/03	1 year
- for 200-1000MHz	HP 8447D	2727A05190	04/14/03	1 year
Amplifier (1GHz - 18GHz)	HP 8449B	3008A00582	06/11/03	1 year
Amplifier (18 – 25GHz)	Agilent 83051A	3950M00193	01/06/03	1 year
Spectrum Analyzer EMI Test Receiver	R&S ESI26	836119/003	05/01/03	1 year
Receiver (9kHz-30MHz)	R&S ESH3	891806/012	10/17/03	1 year
Receiver (20MHz-1.3GHz)	R&S ESVP	892111/030	03/17/03	1 year
Biconical Antenna (30-200MHz)	EMCO 3108	2536	04/23/03	1 year
Log-Periodic Antenna (200-1000MHz)	EMCO 3146	2849	04/23/03	1 year
Horn Antenna (1- 18GHz)	EMCO 3115	9903-5774	07/17/03	1 year
Horn Antenna (3.95- 5.85GHz)	EMCO 3160-5	1099	07/17/03	1 year
Horn Antenna (5.85- 8.20GHz)	EMCO 3160-6	9712-1044	07/17/03	1 year
Horn Antenna (18- 26.5GHz)	EMCO 3160-9	0004-1202	07/17/03	1 year
LISN	EMCO 3810/2NM	00022007	05/20/03	1 year
Power Meter	HP 437B	3043U03437	11/08/02	1 year
Power Sensor	HP 8481A	US41030582	11/08/02	1 year
Switch/control unit	HP 3488A	2719A17226	N/A	N/A
		2719A17228	N/A	N/A
Plotter	HP 7550A	2631A33619	N/A	N/A
Coaxial cables (1 – 18GHz):	Length:			
- Horn Ant <=> RF Amp.	6 m	- EM206SCO	03/27/03	1 year
- RF Amp.<=>Spectrum Analyzer	16m	- GEM0101	03/27/03	1 year
Coaxial cables (18 – 25GHz):				
- Horn Ant <=> RF Amp.	3m	- SF102-20167	03/27/03	1 year
- RF Amp.<=>Spectrum Analyzer	1m	- SF102-21105	03/27/03	1 year
N-Coax cables:				
- Bi-coni Ant <=> 10m Cable	9 m	- EM103L01	04/14/03	1 year
- 10m Cable <=> Shield Panel	10 m	- EM103L02	04/14/03	1 year
- Shield Panel <=> RF Amp	7 m	- EM103L03	04/14/03	1 year

- RF Amp <=> Power Splitter	0.5m	- EM103L04	04/14/03	1 year
- Log-peri Ant <=> 10m Cable	9 m	- EM103H01	04/14/03	1 year
- 10m Cable <=> Shield Panel	10 m	- EM103H02	04/14/03	1 year
- Shield Panel <=> RF Amp	7 m	- EM103H03	04/14/03	1 year
- RF Amp <=> Power Splitter	0.5m	- EM103H04	04/14/03	1 year
Coax cables:				
- Lisc-L <=> SW/Con.unit (SW100)	4 m	- EMIC-L	04/14/03	1 year
- Lisc-N <=> SW/Con.unit (SW101)	4 m	- EMIC-N	04/14/03	1 year
- SW/Con.unit <=> RCVR (Input)	1 m	- EMIC-R	04/14/03	1 year
- SW/Con.unit <=> Spe Ana.(Signal In)	1 m	- EMIC-S	04/14/03	1 year
- Power Splitter <=> SW/Con.unit (SW110)	1 m	- EM103L05	04/14/03	1 year
- Power Splitter <=> SW/Con.unit (SW300)	1 m	- EM103L06	04/14/03	1 year
- Power Splitter <=> SW/Con.unit (SW100)	1 m	- EM103H05	04/14/03	1 year
- Power Splitter <=> SW/Con.unit (SW301)	1 m	- EM103H06	04/14/03	1 year
- SW/Con.unit <=> Receiver (Input)	2 m	- EM1RCV	04/14/03	1 year
- SW/Con.unit <=> Spe Ana.(Signal In) for 30- 200MHz	2 m	- EM1SPL	04/14/03	1 year
- SW/Con.unit <=> Spe Ana.(Signal In) for 200-1000MHz	2 m	- EM1SPH	04/14/03	1 year

Notes.

- The above equipment calibration is traceable to National standards.
- HP: Hewlett Packard, R&S: Rohde & Schwarz

F. Measurement Uncertainty

Uncertainties of the both, the Yamato EMI radiated test facilities (EMI chambers, #1 and #2) and the Yamato EMI conducted test facility are derived with the NIS 81 " Treatment of uncertainty in EMC measurements" 1994.

Estimated site uncertainty values are as follows.

EMI chamber #1 : 4.39dB

EMI chamber #2 : 4.40dB

EMI conducted measurement system : 2.4dB

Detail should be referred to "Treatment of Uncertainty, Calculations and Policy" report, document number TCR 10-0015.

G. Temperature and Humidity

The temperature is controlled within range of 17° to 28°.

The relative humidity is controlled within range of 40% to 70%.

H. Related Submittal(s)/Grant(s)/Notes

The host unit with full peripheral devices including the applying modular as an unintentional radiator is classified as a Digital Device under the FCC Part 15 Subpart B or the Industry Canada Class B Emission Compliance (ICES-003), and subject to DoC.

1. Bandwidth at 6 dB below

[FCC 15.247(a)(2), RSS-210 6.2.2(o)(b)]

1.1 Test Procedure

The bandwidth at 6 dB down from the highest inband spectral density was measured with a spectrum analyzer connected to the antenna terminal, while EUT was operating in transmission mode at the appropriate center frequency.

The spectrum analyzer was set to :

RBW=100kHz, VBW=100kHz^{*1}, Span=30MHz, Sweep = suitable duration based on the EUT specification

*1: To be adjusted accordingly based on the spectrum stability

1.2 Test Instruments and Measurement Setup

Table 1-1 : 6 dB Bandwidth Test Instruments

Description	Model	Serial Number
Spectrum Analyzer EMI Test Receiver	R&S ESI26	836119/003
Coax cables: - Spectrum Analyzer <=> EUT	Length : 110 cm Loss : 1.3 dB	

Notes: - R&S: Rohde & Schwarz




Figure 1: Measurement setup for 6dB bandwidth test

1.3 Measurement Results

Test Date: October 10, 2003

1.3.1 2.4GHz band DSSS mode

Table 1-2-1. 6dB bandwidth, 2.4GHz band DSSS mode, TX mode 1Mbps

Center Frequency (MHz)	Trace number	Lower frequency (MHz)	Upper frequency (MHz)	Bandwidth at 6 dB below (MHz)	Limit (MHz)
2412 (ch. 1)	Plot 1-1	2405.90	2418.10	12.20	> 0.5
2437 (ch. 6)	omitted	2430.48	2443.10	12.62	
2462 (ch. 11)	omitted	2455.90	2468.10	12.20	

Table 1-2-2. 6dB bandwidth, 2.4GHz band DSSS mode, TX mode 11Mbps

Center Frequency (MHz)	Trace number	Lower frequency (MHz)	Upper frequency (MHz)	Bandwidth at 6 dB below (MHz)	Limit (MHz)
2412 (ch. 1)	Plot 1-2	2406.08	2417.50	11.42	> 0.5
2437 (ch. 6)	omitted	2430.84	2442.56	11.72	
2462 (ch. 11)	omitted	2455.84	2467.50	11.66	

1.3.2 2.4GHz band OFDM mode

Table 1-2-3. 6dB bandwidth, 2.4GHz band OFDM mode, TX mode 6Mbps


Center Frequency (MHz)	Trace number	Lower frequency (MHz)	Upper frequency (MHz)	Bandwidth at 6 dB below (MHz)	Limit (MHz)
2412 (ch. 1)	omitted	2403.73	2420.27	16.54	> 0.5
2437 (ch. 6)	Plot 1-3	2428.73	2445.27	16.54	
2462 (ch. 11)	omitted	2453.73	2470.27	16.54	

Table 1-2-4. 6dB bandwidth, 2.4GHz band OFDM mode, TX mode 18Mbps

Center Frequency (MHz)	Trace number	Lower frequency (MHz)	Upper frequency (MHz)	Bandwidth at 6 dB below (MHz)	Limit (MHz)
2412 (ch. 1)	omitted	2403.73	2420.27	16.54	> 0.5
2437 (ch. 6)	Plot 1-4	2428.73	2445.21	16.48	
2462 (ch. 11)	omitted	2453.73	2470.27	16.54	

1.4 Trace Data of 6dB bandwidth


The plots are comparatively worse measurement cases in the previous [Table 1-2-1](#) through [Table 1-2-4](#).

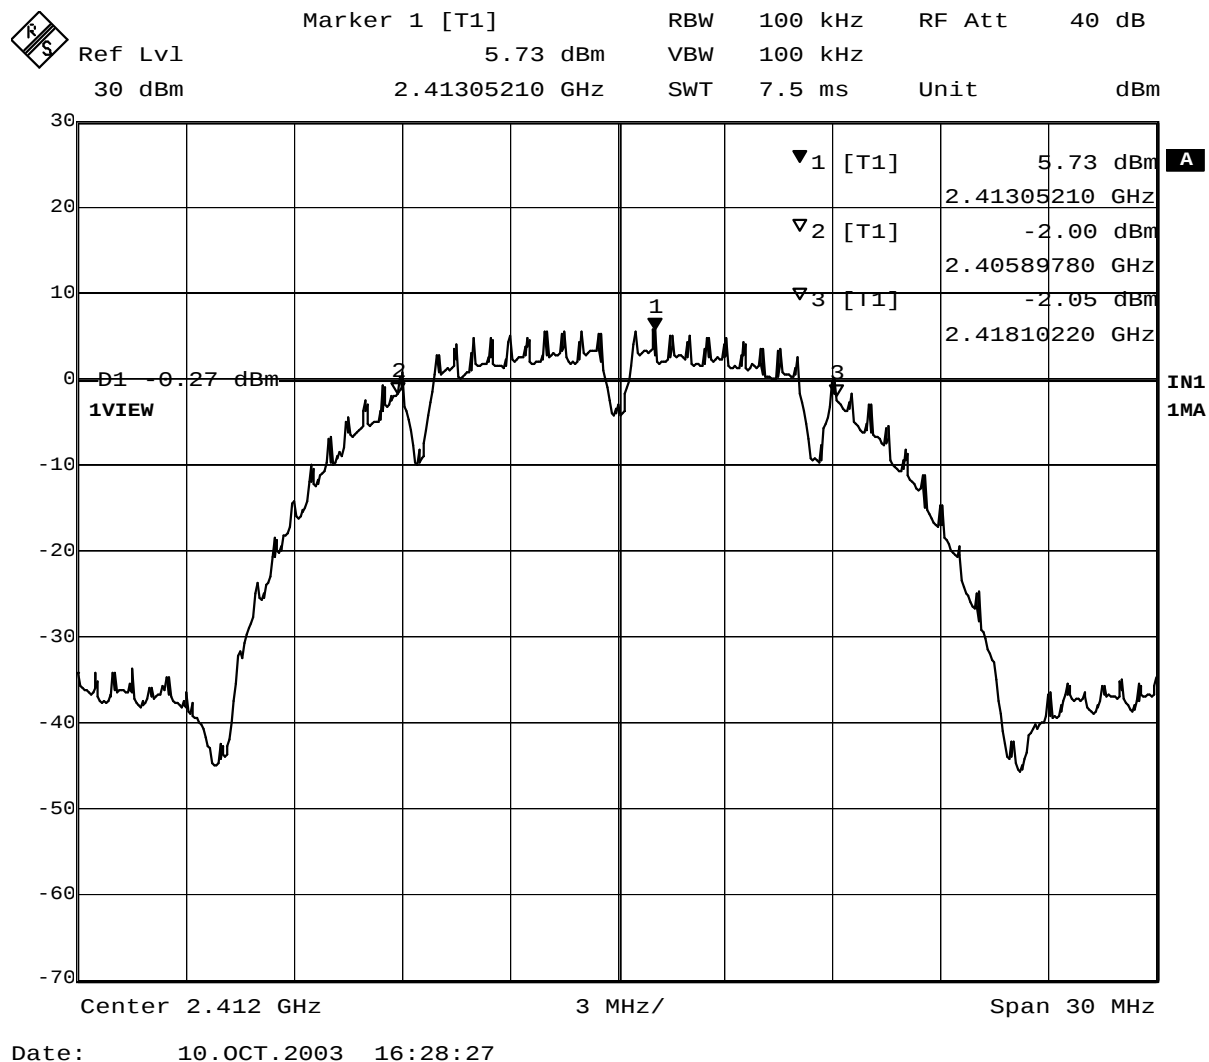

Plot 1-1. 6dB BW at 2412MHz, (DSSS, 1Mbps)



Marker 1 [T1] RBW 100 kHz RF Att 40 dB
Ref Lvl 6.51 dBm VBW 100 kHz
30 dBm 2.41263126 GHz SWT 7.5 ms Unit dBm

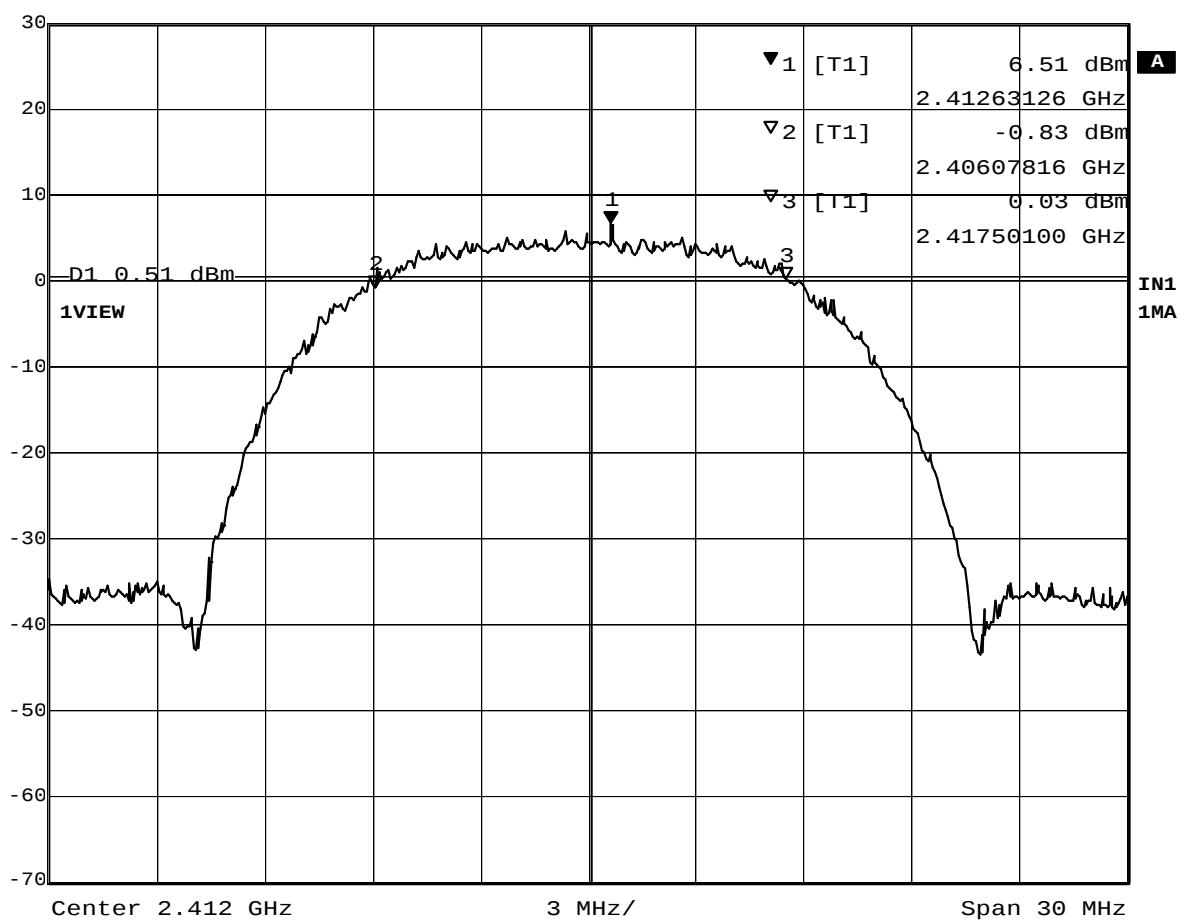


Date: 10.OCT.2003 16:24:09

Plot 1-2. 6dB BW at 2412MHz (DSSS, 11Mbps)



Marker 1 [T1] RBW 100 kHz RF Att 40 dB
Ref Lvl 4.08 dBm VBW 100 kHz
30 dBm 2.43071743 GHz SWT 7.5 ms Unit dBm

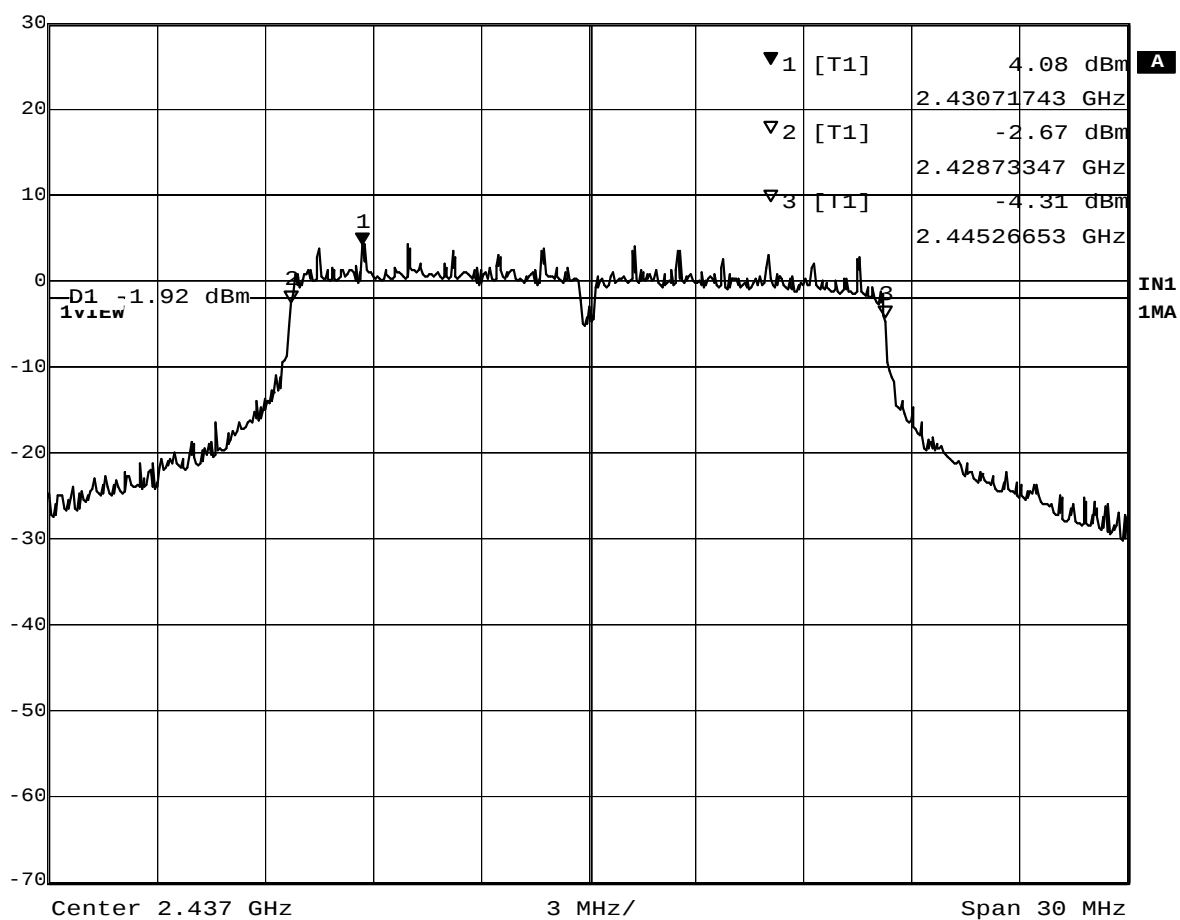


Date: 10.OCT.2003 18:28:59

Plot 1-3. 6dB BW at 2437MHz (OFDM, 6Mbps)



Marker 1 [T1] RBW 100 kHz RF Att 40 dB
Ref Lvl 4.48 dBm VBW 100 kHz
30 dBm 2.43071743 GHz SWT 7.5 ms Unit dBm

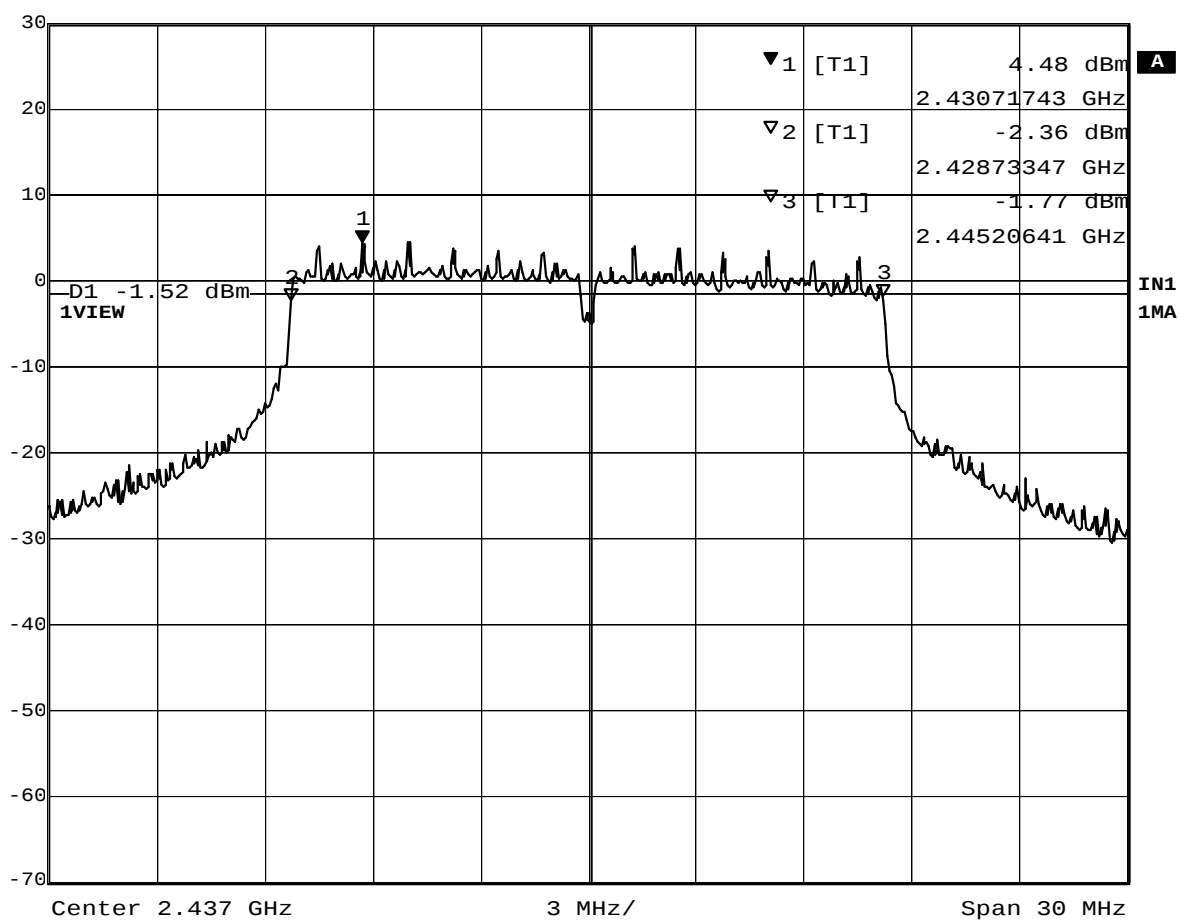

Date: 10.OCT.2003 18:27:29

Plot 1-4. 6dB BW at 2437MHz (OFDM, 18Mbps)

2. Occupied Bandwidth (20 dB Bandwidth)

[RSS-210 5.9.1]

2.1 Test Procedure

The bandwidth at 20 dB down from the highest inband spectral density was measured with a spectrum analyzer connected to the antenna terminal, while EUT was operating in transmission mode at the appropriate center frequency.

The spectrum analyzer was set to:

RBW=100kHz, VBW=100kHz*¹, Span=50MHz, Sweep = suitable duration based on the EUT specification

*1: To be adjusted accordingly based on the spectrum stability

2.2 Test Instruments and Measurement Setup

Same as the Chapter 1 (Table 1-1 & Figure 1).

2.3 Measurement Results

note) The transmission speed rate for the measurement was determined based on the results of previous 6 dB bandwidth measurement. The worse cases were selected representatively.

Test Date: October 10, 2003

2.3.1 2.4GHz band DSSS mode

Table 2-2-1. Occupied bandwidth, 2.4GHz band DSSS mode, TX 11Mbps

Center Frequency (MHz)	Trace number	Lower frequency (MHz)	Upper frequency (MHz)	Bandwidth at 20 dB below (MHz)
2412 (ch. 1)	omitted	2403.13	2420.87	17.74
2437 (ch. 6)	Plot 2-1	2428.03	2445.62	17.59
2462 (ch. 11)	omitted	2453.03	2470.87	17.84


2.3.2 2.4GHz band OFDM mode

Table 2-2-2. Occupied bandwidth, 2.4GHz band OFDM mode, TX 18Mbps

Center Frequency (MHz)	Trace number	Lower frequency (MHz)	Upper frequency (MHz)	Bandwidth at 20 dB below (MHz)
2412 (ch. 1)	omitted	2402.83	2420.97	18.14
2437 (ch. 6)	Plot 2-2	2427.93	2446.02	18.09
2462 (ch. 11)	omitted	2452.83	2471.07	18.24

2.4 Trace Data of Occupied Bandwidth

The plots are comparatively worse measurement cases in the previous [Table 2-2-1](#) and [Table 2-2-2](#).

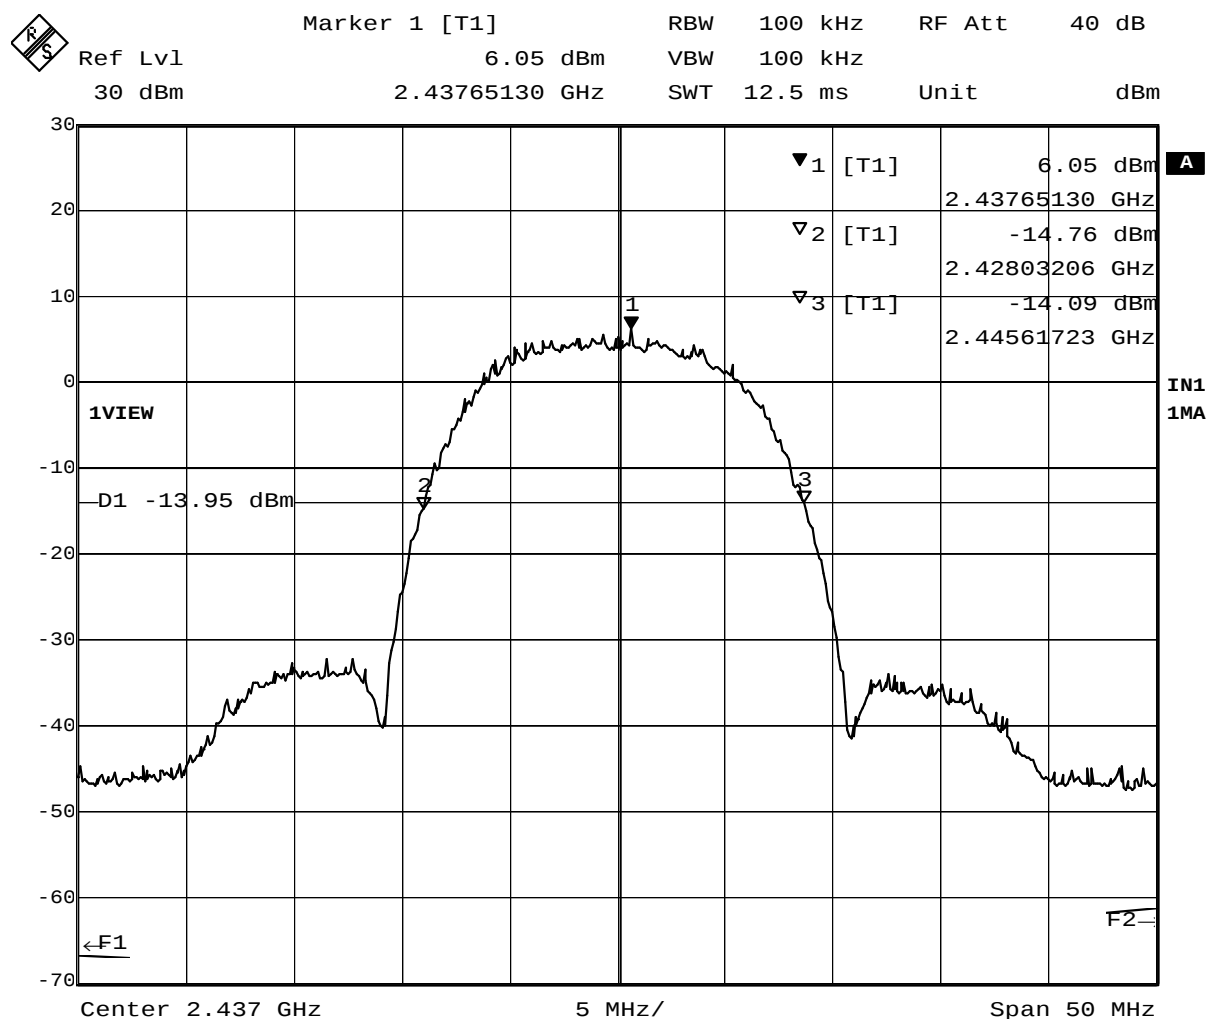


Date: 10.OCT.2003 19:27:05

Plot 2-1. 20dB BW at 2437MHz (DSSS, 11Mbps)



Marker 1 [T1] RBW 100 kHz RF Att 40 dB
Ref Lvl 4.50 dBm VBW 100 kHz
30 dBm 2.43073747 GHz SWT 12.5 ms Unit dBm

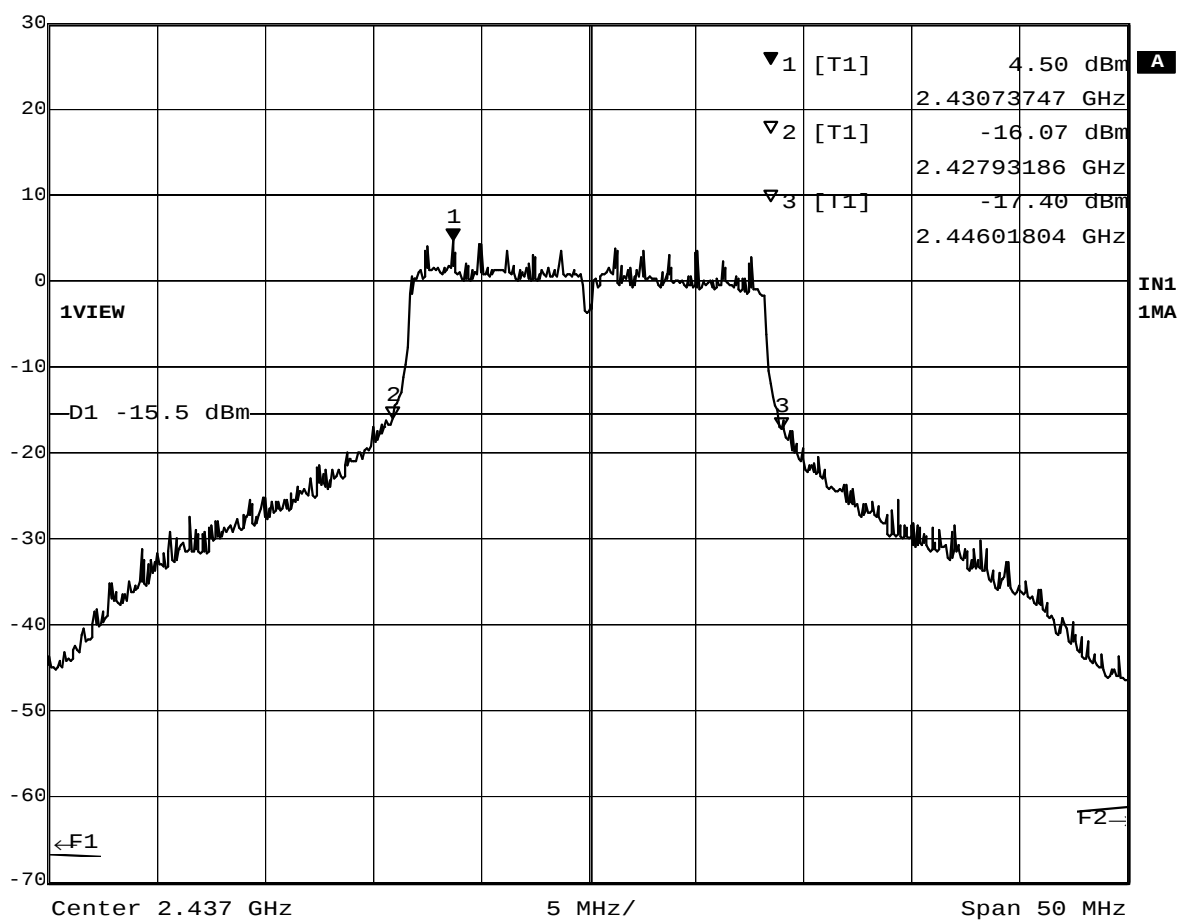

Date: 10.OCT.2003 19:41:40

Plot 2-2. 20dB BW at 2437MHz (OFDM, 18Mbps)

3. Conducted Peak Output Power

[FCC 15.247(b)(3), RSS-210 6.2.2(o)(b)]

The test was performed with two kinds of measurement methods using power meter or spectrum analyzer.

3.1 Test Procedure

3.1.1 Power Meter measurement method

The test was performed for search of the highest power levels of each Tx mode.

- A transmitter antenna terminal of EUT was connected to the input of a RF power sensor.
- The measurement was performed while EUT was operating in continuous transmission mode at the appropriate center frequencies. i.e. the lowest, middle, and highest frequencies of each DSSS or OFDM mode.

Table 3-1 : Test Instruments of power meter method

Description	Model	Serial Number
Power Meter	HP 437B	3043U03437
Power Sensor	HP 8481A	US41030582
Coax cables: - Power Sensor <=> EUT	Length: 20 cm Loss: 0.7dB	

Notes: - HP: Hewlett Packard




Figure 3-1: Measurement setup of power meter method

3.1.2 Spectrum Analyzer measurement method

The spectrum analyzer was connected to the antenna terminal, while EUT was operating in continuous transmission mode (shown in the Chapter C) at the appropriate center frequencies.

The spectrum analyzer was set to :

VBW= 30kHz, RBW=1MHz,

Span=30-40MHz encompassing the entire 6 dB emission bandwidth of the transmission signal,

Mode= sample detector, Trigger= free run

The band power measurement function was used to measure the peak power of each transmission mode selected by the step 3.1.1. The analyzer computed the peak power by integrating the spectrum across the 6 dB emission bandwidth given by the previous chapter.

The test instruments and setup configuration are the same as the Table 1-1 and Figure 1.

3.2 Measurement Results

Test Date: October 10, 2003

Table 3-2-1. Power meter measurement results

Operation Frequency [GHz]	Rated output power (conducted) [dBm]									
	DSSS		OFDM							
	1 / 2M bps	5.5/11M bps	6M bps	9M bps	12M bps	18M bps	24M bps	36M bps	48M bps	54M bps
2.412 (Aux)	16.29	16.38	13.41	13.41	13.42	13.44	13.38	13.33	13.31	–
Specification	17		14							
2.437 (Aux)	16.32	16.39	16.12	16.15	16.16	16.18	16.14	16.07	–	–
Specification	17		17							
2.462 (Aux)	16.12	16.20	13.25	13.28	13.29	13.31	13.26	13.24	13.22	–
Specification	17		14							


[Calculation table]

Measured Frequency (MHz)	Power Meter Reading (dBm)	Cable Loss (dB)	Results (dBm)	Limit		Margin to limit (dBm)
				FCC (dBm)	IC (dBm)	
2412 (DSSS)	16.38	0.7	17.08 (51.1mW)	30	30	12.92
2437 (DSSS)	16.39	0.7	17.09 (51.2mW)			12.91
2462 (DSSS)	16.20	0.7	16.90 (49.0mW)			13.10
2412 (OFDM)	13.44	0.7	14.14 (25.9mW)			15.86
2437 (OFDM)	16.18	0.7	16.88 (48.8mW)			13.12
2462 (OFDM)	13.31	0.7	14.01 (25.2mW)			15.99

Table 3-2-2. Spectrum analyzer measurement results

Measured Frequency (MHz)	Analyzer reading (dBm)	Trace number	Cable Loss (dB)	Results (dBm)	Limit		Margin to limit (dBm)
					FCC (dBm)	IC (dBm)	
2412 (DSSS)	15.86	Plot 3-1	1.3	17.16 (52.0mW)	30	30	12.84
2437 (DSSS)	15.91	Plot 3-2	1.3	17.21 (52.6mW)			12.79
2462 (DSSS)	15.69	Plot 3-3	1.3	16.99 (50.0mW)			13.01
2412 (OFDM)	12.86	Plot 3-4	1.3	14.16 (26.1mW)			15.84
2437 (OFDM)	15.64	Plot 3-5	1.3	16.94 (49.4mW)			13.06
2462 (OFDM)	12.66	Plot 3-6	1.3	13.96 (24.9mW)			16.04

3.3 Trace Data of Conducted Peak Output Power

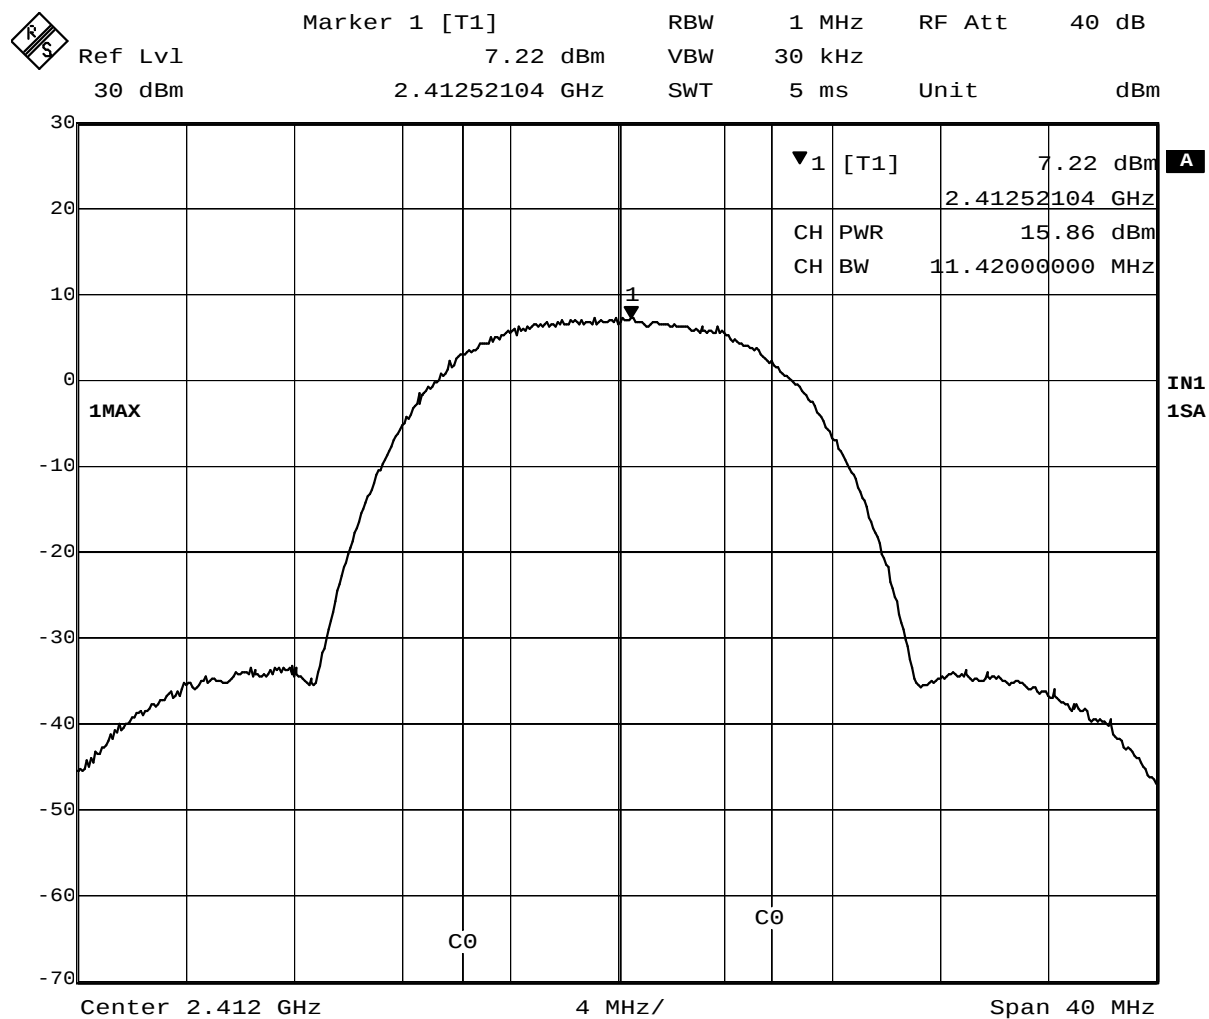


Date: 10.OCT.2003 19:55:22

Plot 3-1. Conducted Peak Output Power of 2412MHz (DSSS, 11Mbps)



Ref Lvl 30 dBm Marker 1 [T1] 7.18 dBm RBW 1 MHz RF Att 40 dB
2.43583768 GHz VBW 30 kHz Unit dBm
SWT 5 ms

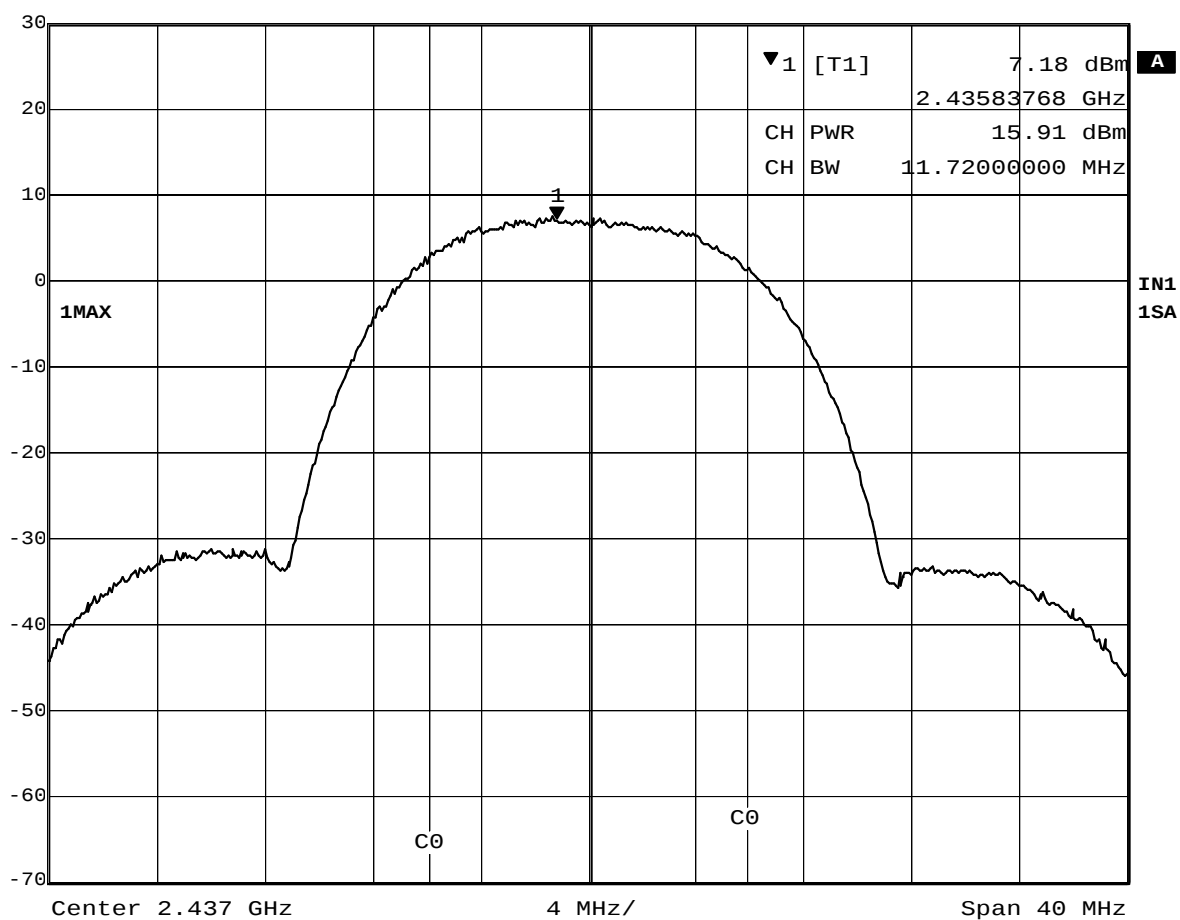


Date: 10.OCT.2003 20:27:32

Plot 3-2. Conducted Peak Output Power of 2437MHz (DSSS, 11Mbps)



Marker 1 [T1] RBW 1 MHz RF Att 40 dB
Ref Lvl 6.84 dBm VBW 30 kHz
30 dBm 2.46059719 GHz SWT 5 ms Unit dBm

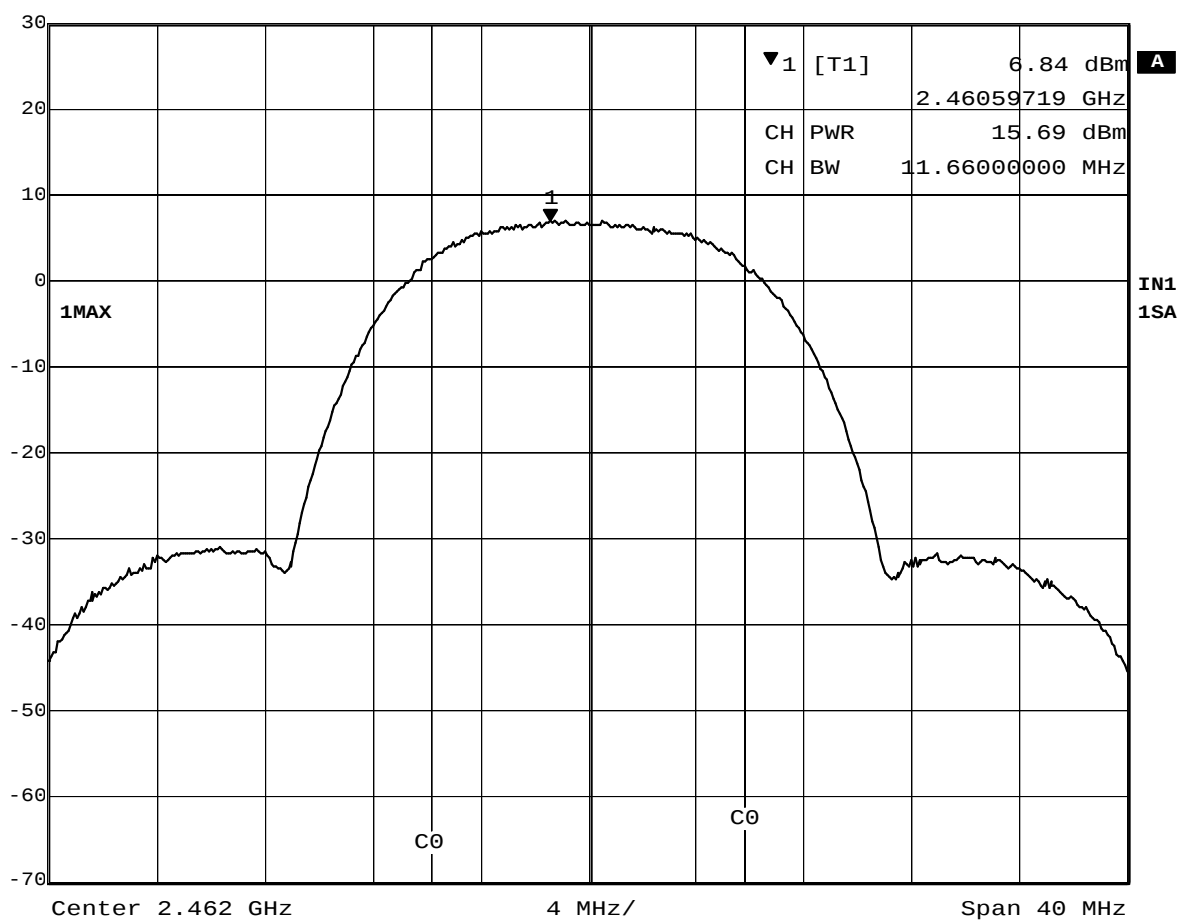


Date: 10.OCT.2003 20:34:54

Plot 3-3. Conducted Peak Output Power of 2462MHz (DSSS, 11Mbps)



Marker 1 [T1] RBW 1 MHz RF Att 40 dB
Ref Lvl 1.87 dBm VBW 30 kHz
30 dBm 2.40979559 GHz SWT 5 ms Unit dBm

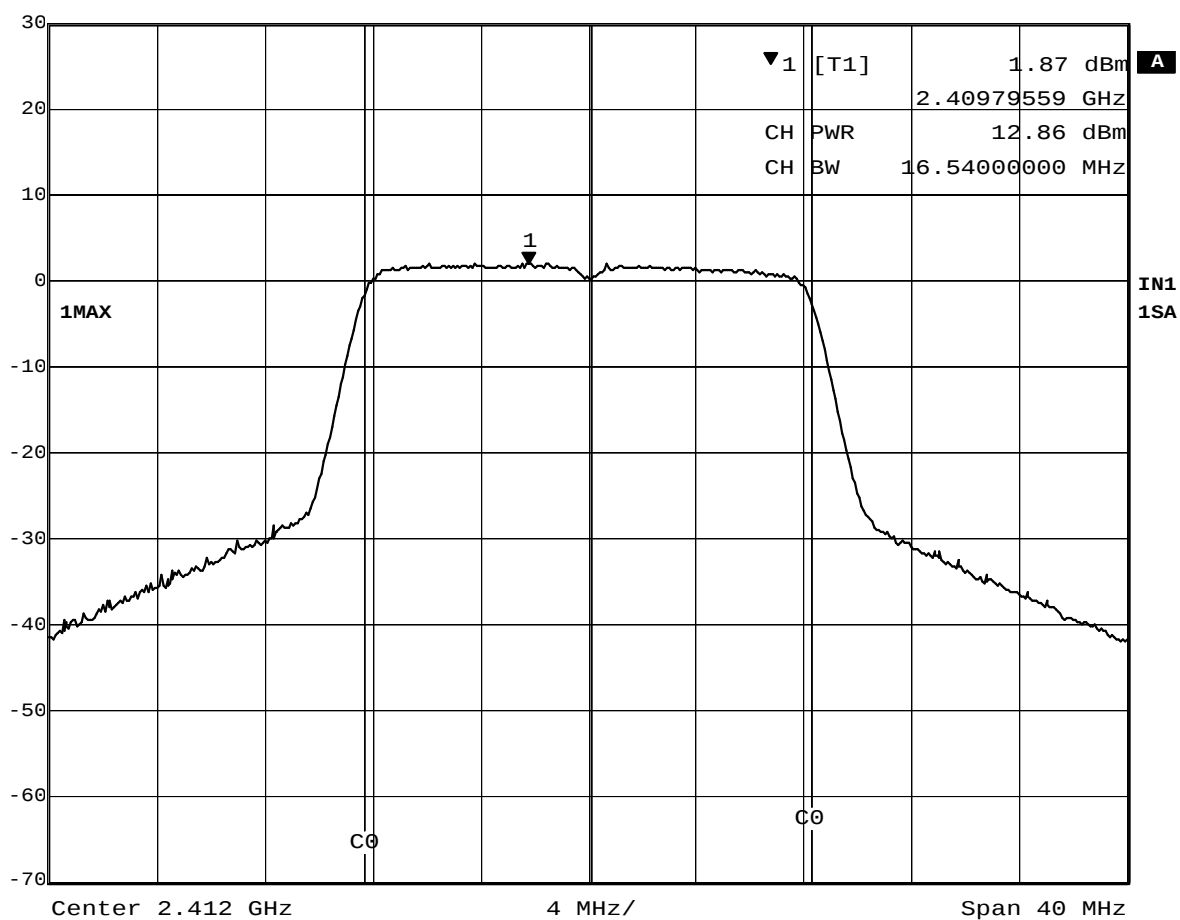


Date: 10.OCT.2003 20:44:16

Plot 3-4. Conducted Peak Output Power of 2412MHz (OFDM, 18Mbps)



Marker 1 [T1] RBW 1 MHz RF Att 40 dB
Ref Lvl 4.89 dBm VBW 30 kHz
30 dBm 2.43359319 GHz SWT 5 ms Unit dBm

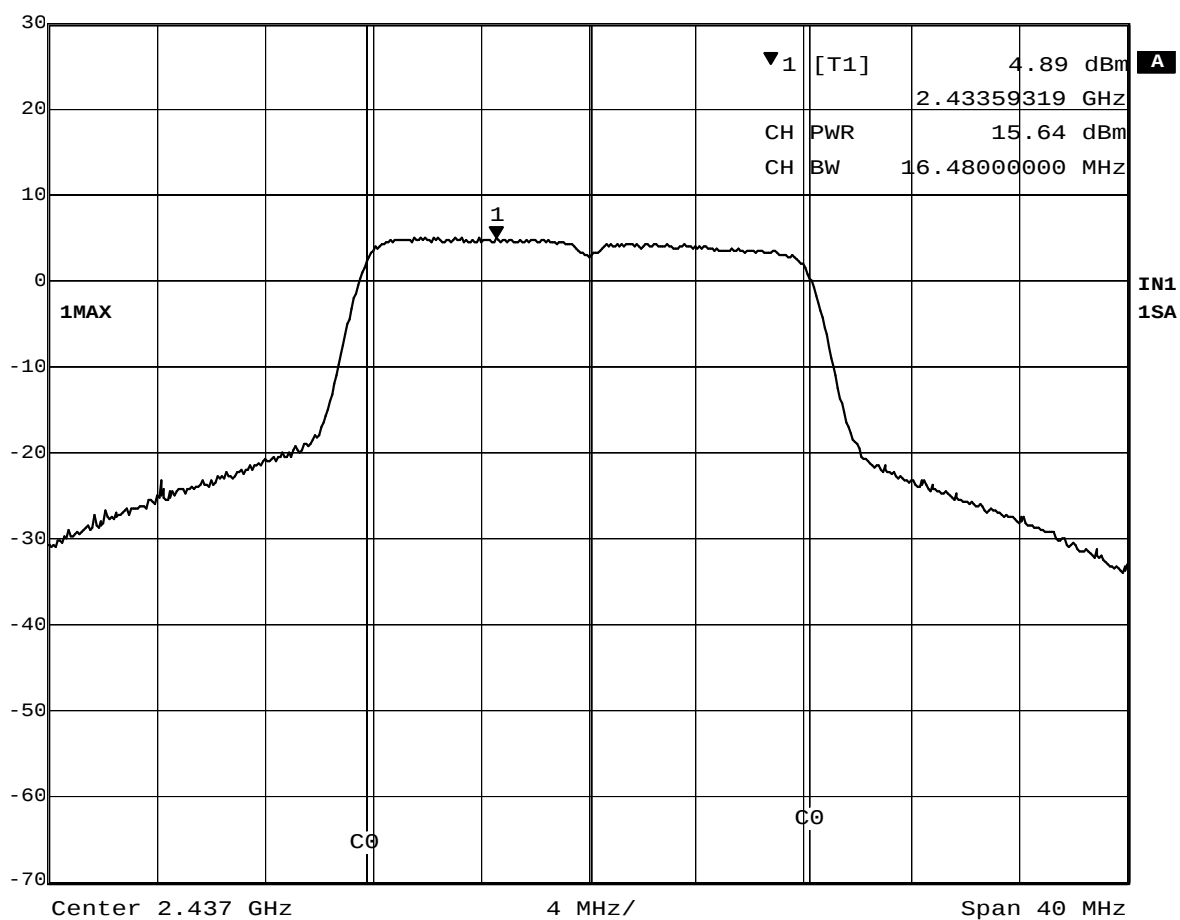


Date: 10.OCT.2003 21:07:00

Plot 3-5. Conducted Peak Output Power of 2437MHz (OFDM, 18Mbps)



Marker 1 [T1] RBW 1 MHz RF Att 40 dB
Ref Lvl 1.83 dBm VBW 30 kHz
30 dBm 2.45955511 GHz SWT 5 ms Unit dBm

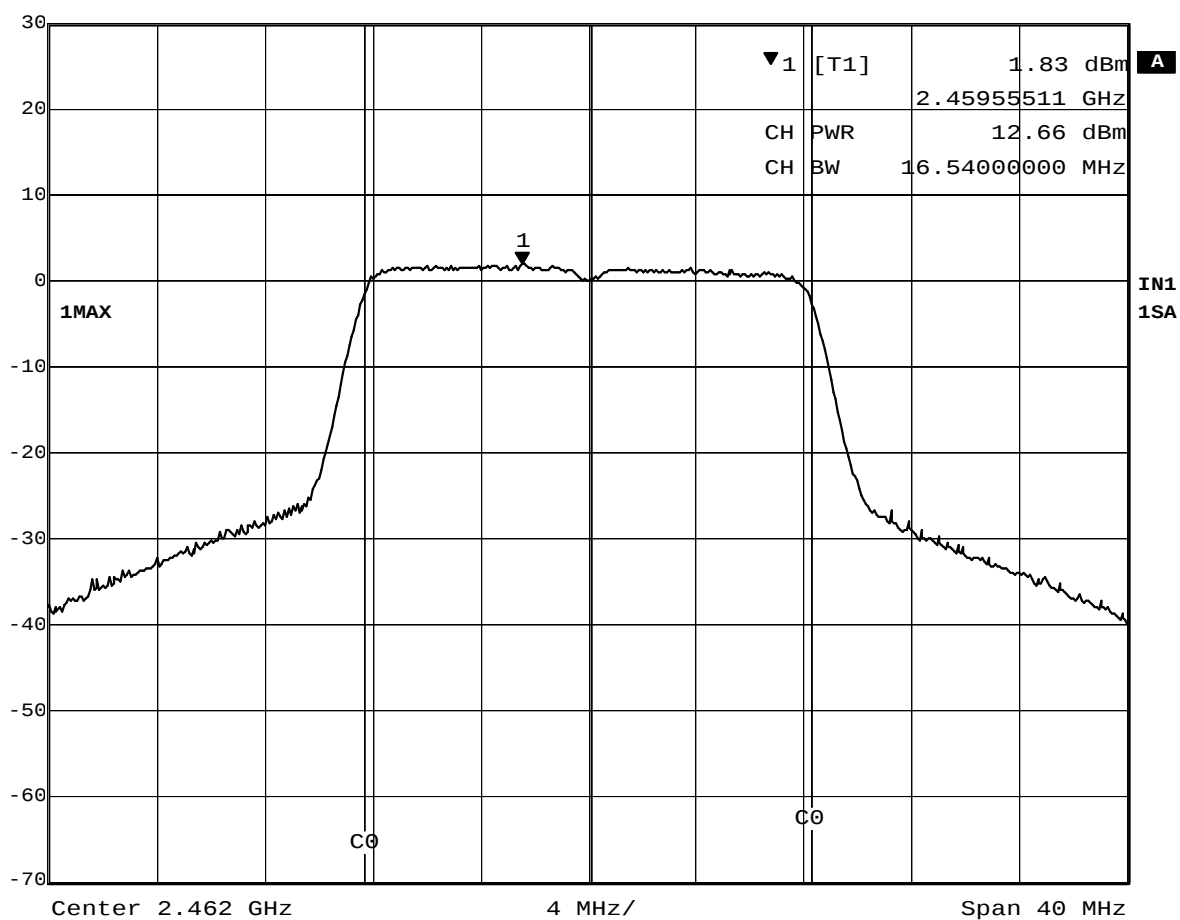

Date: 10.OCT.2003 21:21:02

Plot 3-6. Conducted Peak Output Power of 2462MHz (OFDM, 18Mbps)

4. Out of Band Emissions (Conducted Spurious)

[FCC 15.247(c), RSS-210 6.2.2(o)(e1)]

4.1 Test Procedure

The outband emissions in any 100kHz bandwidth was measured with a spectrum analyzer connected to the antenna terminal, while EUT was operating in transmission mode at the appropriate center frequency. The spectrum analyzer was set to:

RBW = 100kHz, VBW = 100kHz*1, Scanning frequency range = 30MHz~2GHz, 2GHz~3GHz, and 3GHz~25GHz, Sweep = suitable duration based on the EUT specification

*1: To be adjusted accordingly based on the spectrum stability

4.2 Test Instruments and Measurement Setup

Same as the Chapter 1 (Table 1-1 & Figure 1).

4.3 Measurement Results

All conducted emission in any 100kHz bandwidth outside of the spread spectrum band was at least 20dB lower than the highest inband spectral density.


The measurement was performed with the worse cases of each transmission mode, that tend to have higher conducted peak power, based on the results of previous Chapter 3, “Conducted Peak Output Power” measurement.

Test Date: October 10, 2003 : See the following plots.


Center Frequency (MHz)			Trace number *1
2412 (ch. 1)	DSSS	11Mbps	Plot 4-1
2437 (ch. 6)			Plot 4-2
2462 (ch. 11)			Plot 4-3
2412 (ch. 1)	OFDM	18Mbps	Plot 4-4
2437 (ch. 6)			Plot 4-5
2462 (ch. 11)			Plot 4-6

*1 : Each submittal plot includes the highest conducted spurious in the 10th harmonics frequency range of each measured Tx mode.


4.4 Trace Data of Out of Band Emissions

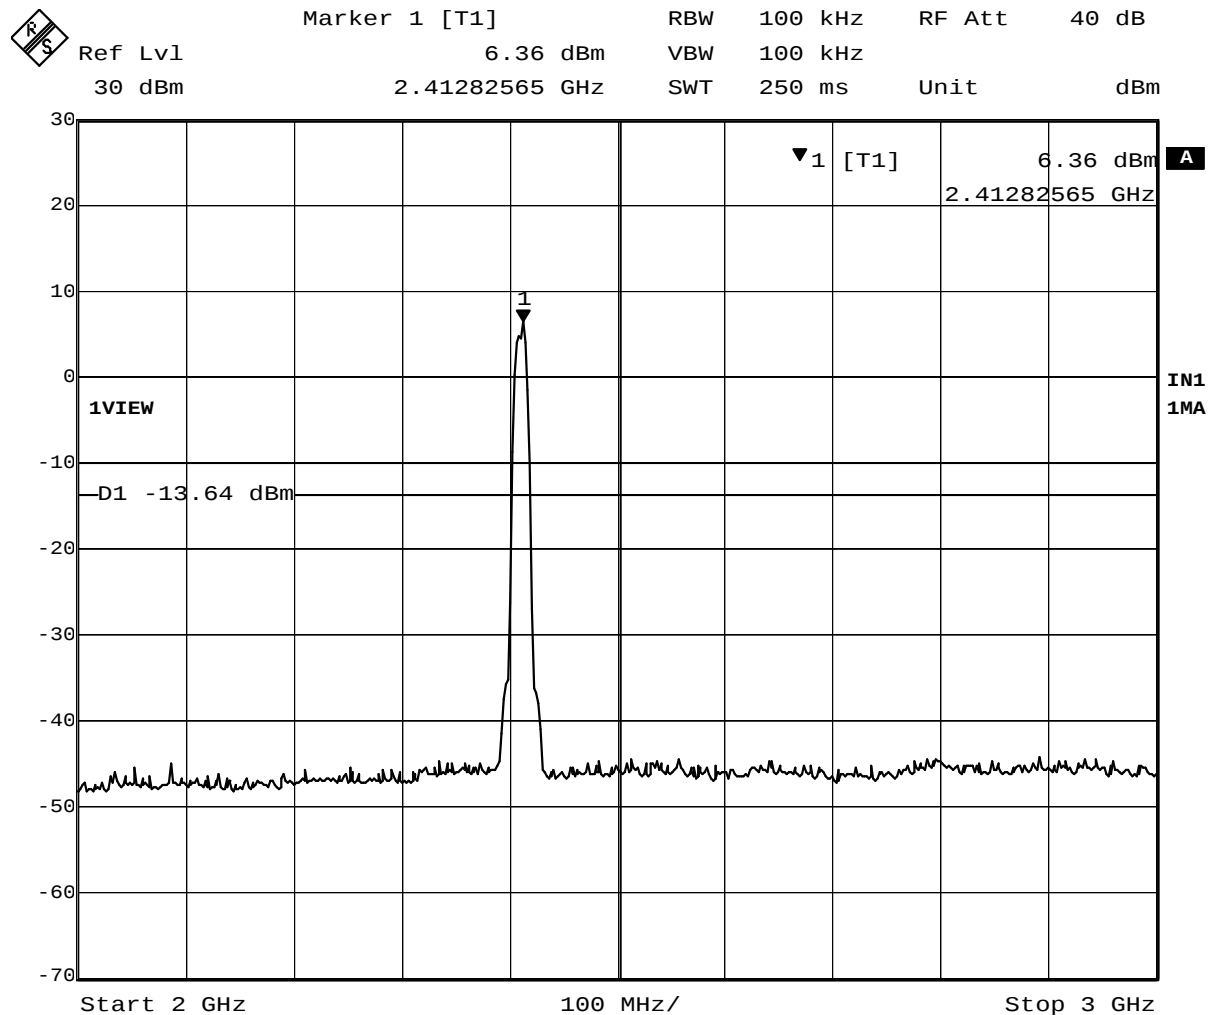

Date: 10.OCT.2003 21:26:32

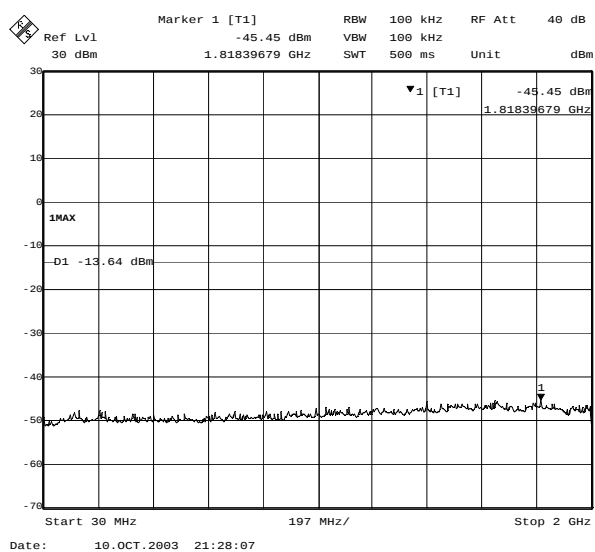


Date: 10.OCT.2003 21:28:07

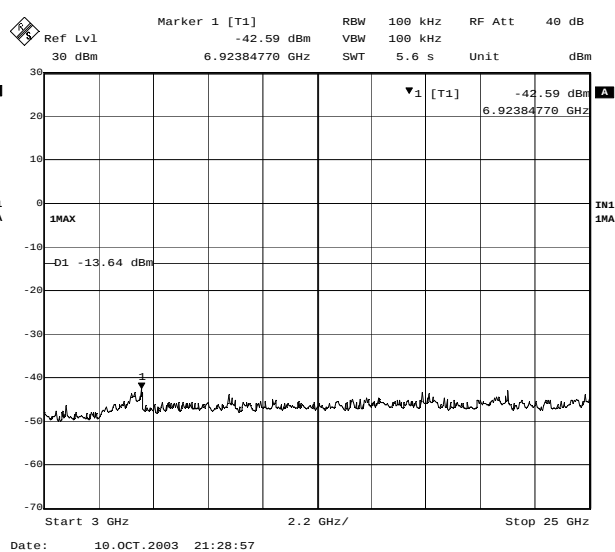


Date: 10.OCT.2003 21:28:57


Plot 4-1. Out of band emissions around 2412MHz (DSSS, 11Mbps)

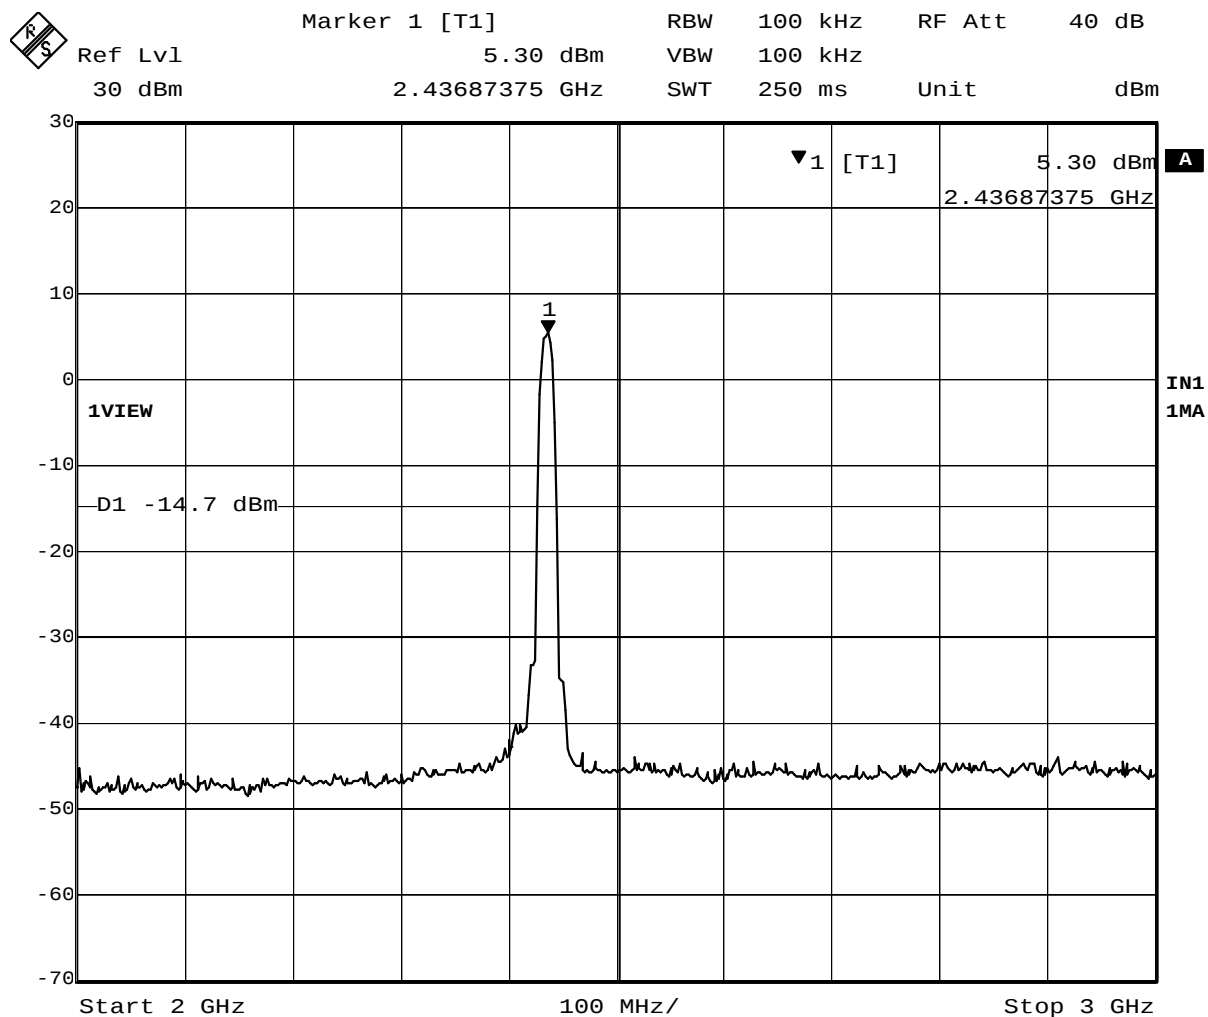


Date: 10.OCT.2003 21:30:47

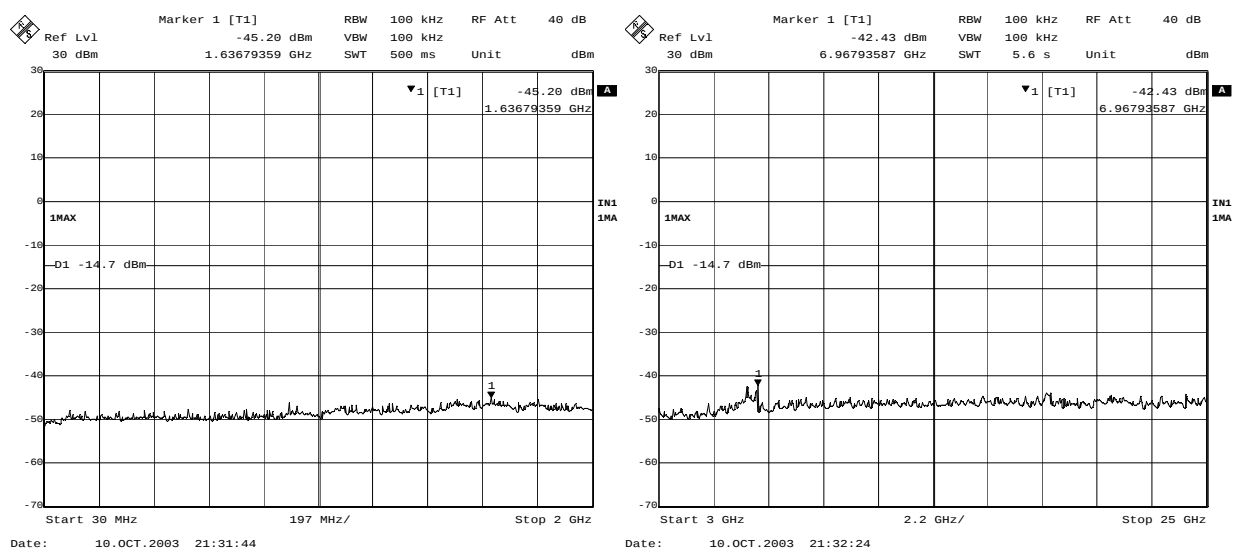


Plot 4-2. Out of band emissions around 2437MHz (DSSS, 11Mbps)

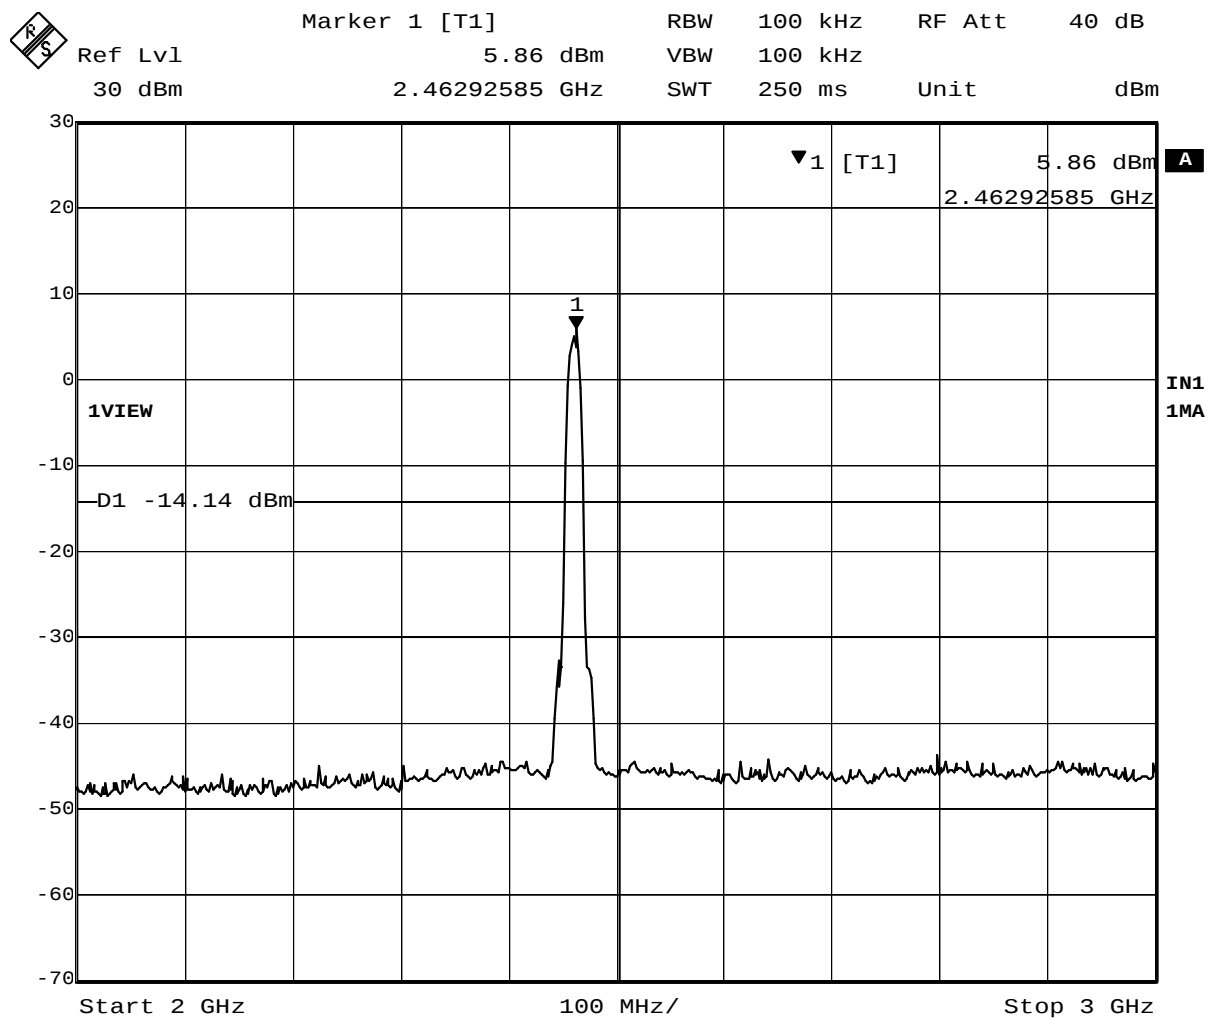


Date: 10.OCT.2003 21:33:41

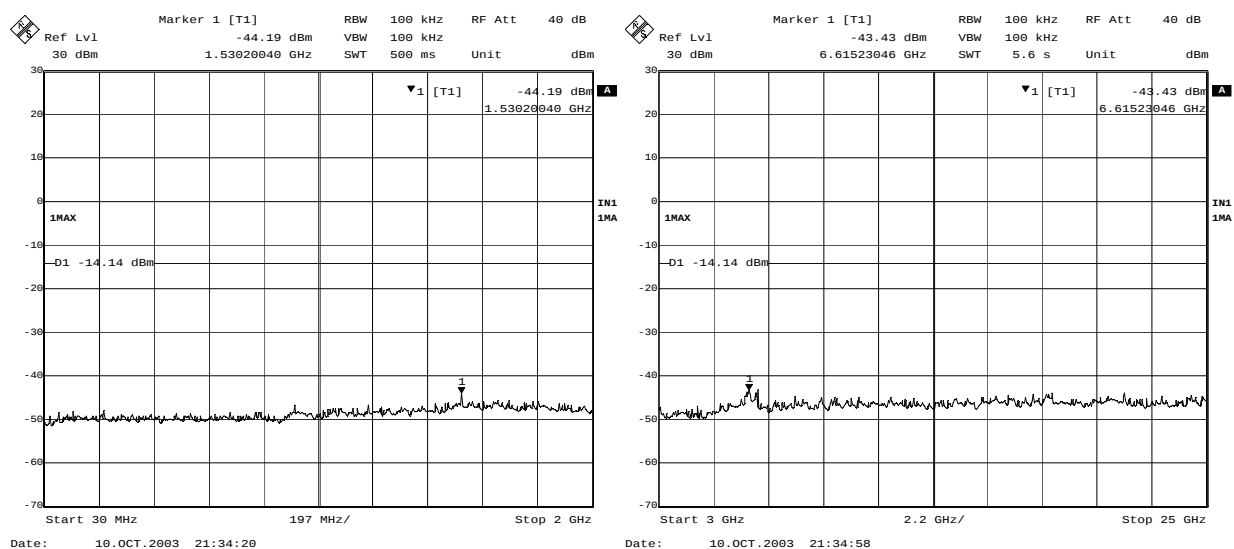


Plot 4-3. Out of band emissions around 2462MHz (DSSS, 11Mbps)

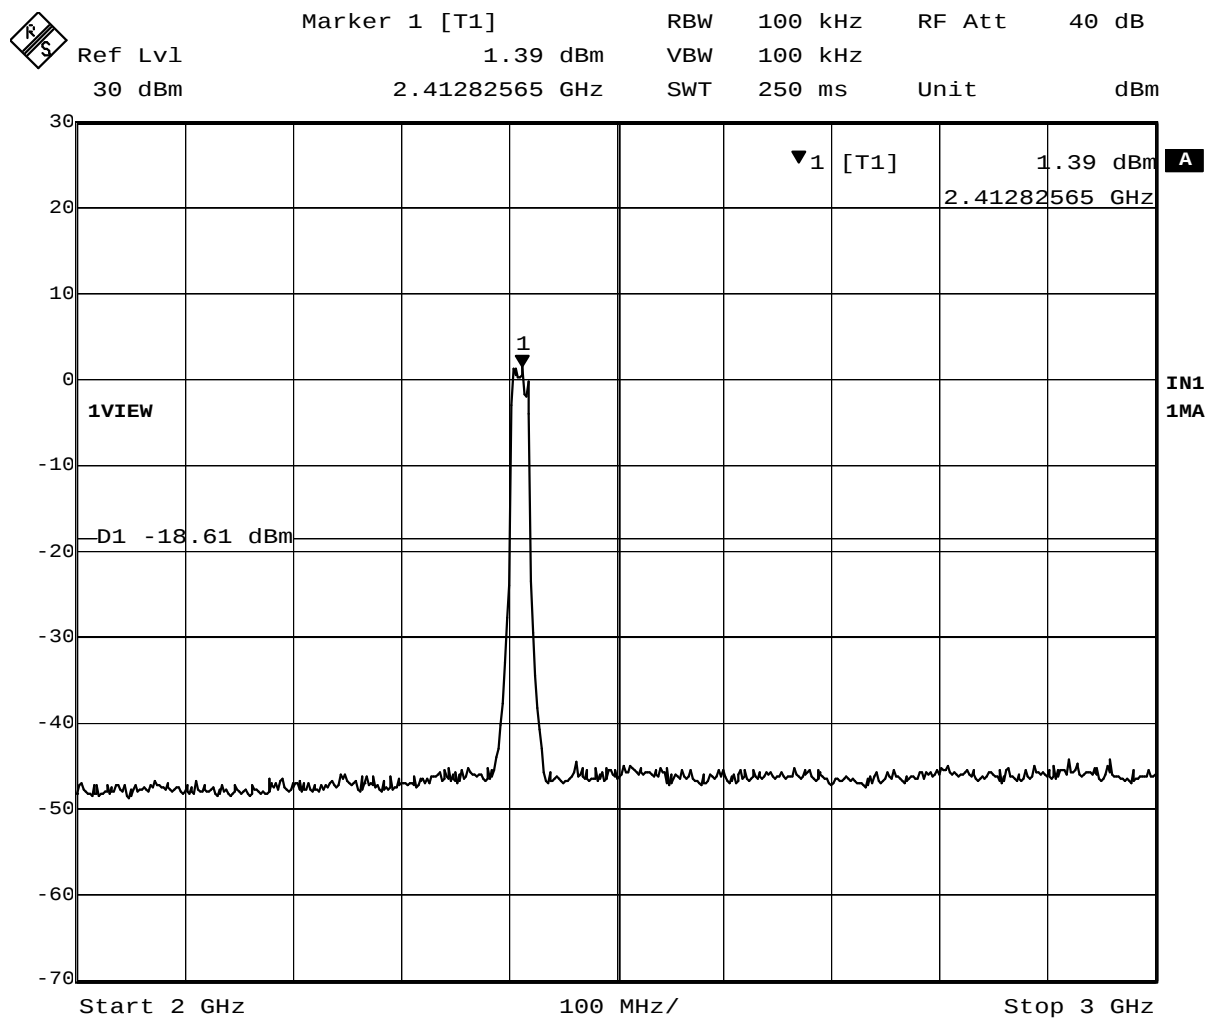

Date: 10.OCT.2003 21:37:49

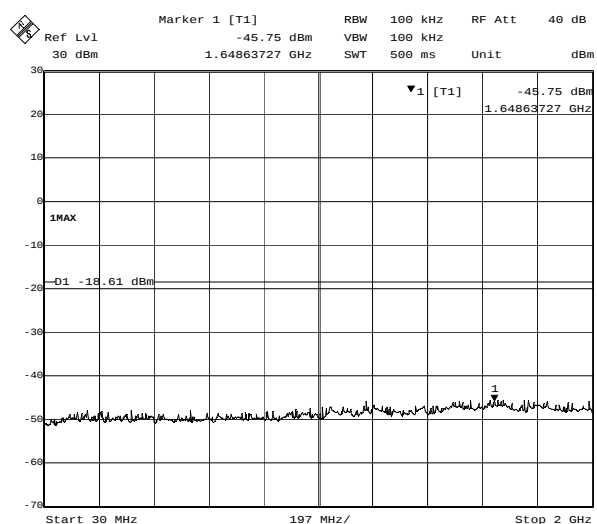


Date: 10.OCT.2003 21:38:35

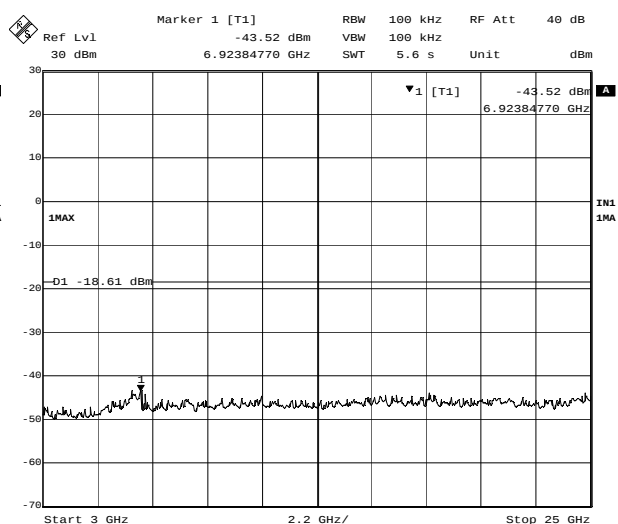


Date: 10.OCT.2003 21:39:10


Plot 4-4. Out of band emissions around 2412MHz (OFDM, 18Mbps)

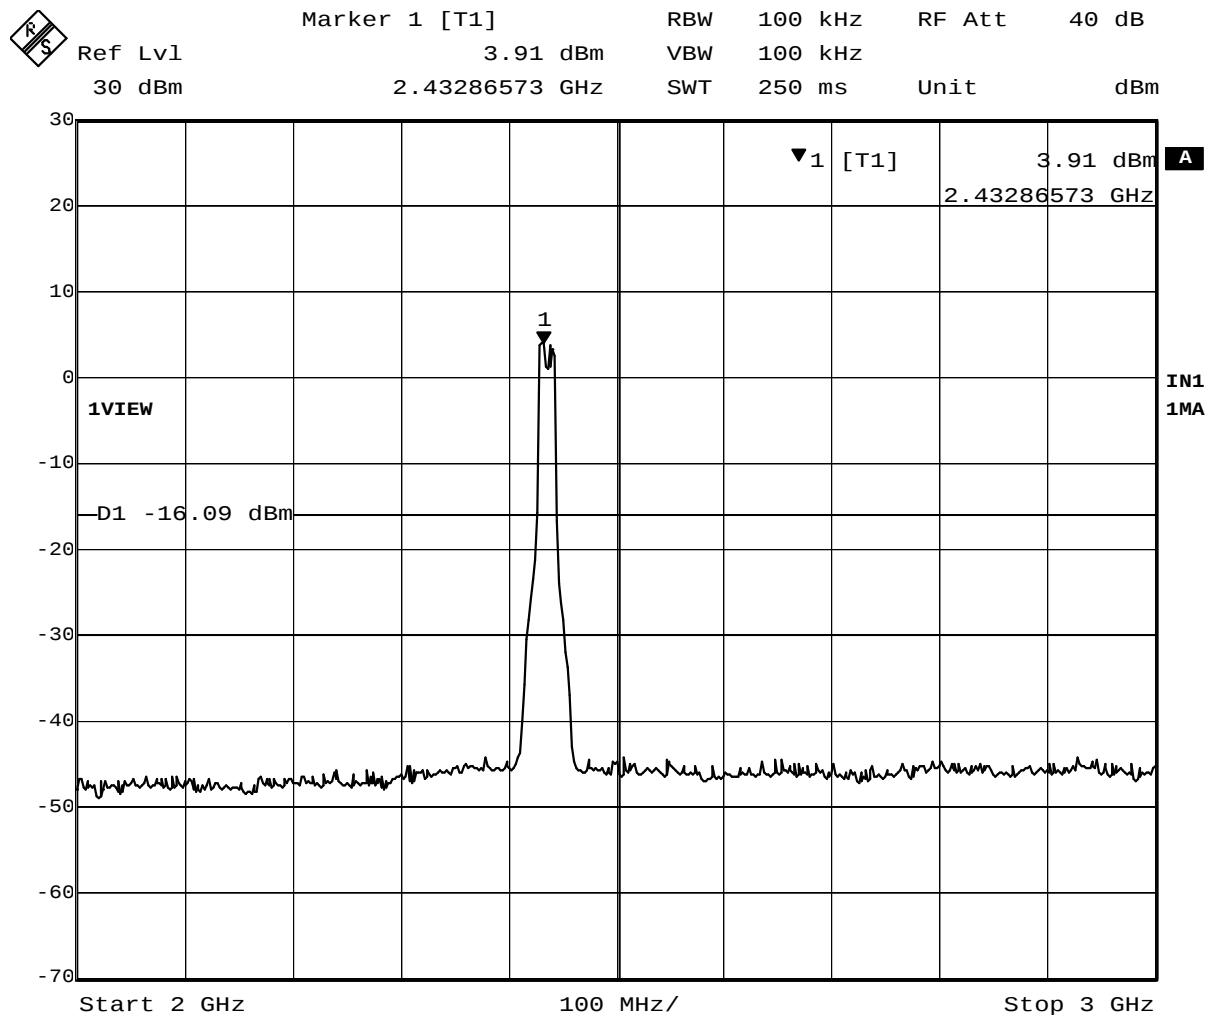

Date: 10.OCT.2003 21:40:27

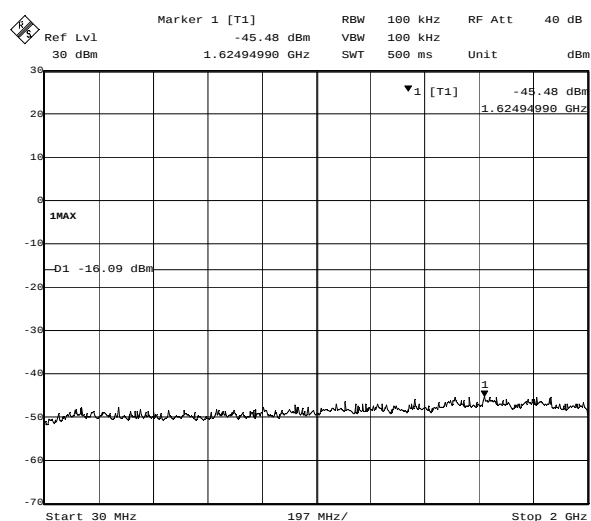


Date: 10.OCT.2003 21:41:07

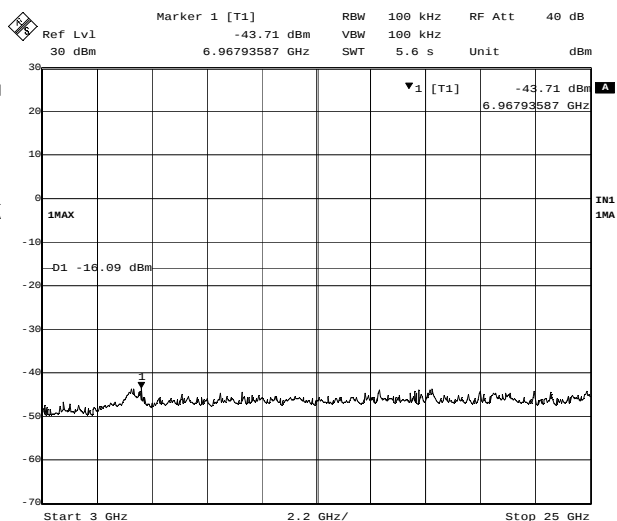


Date: 10.OCT.2003 21:41:44


Plot 4-5. Out of band emissions around 2437MHz (OFDM, 18Mbps)

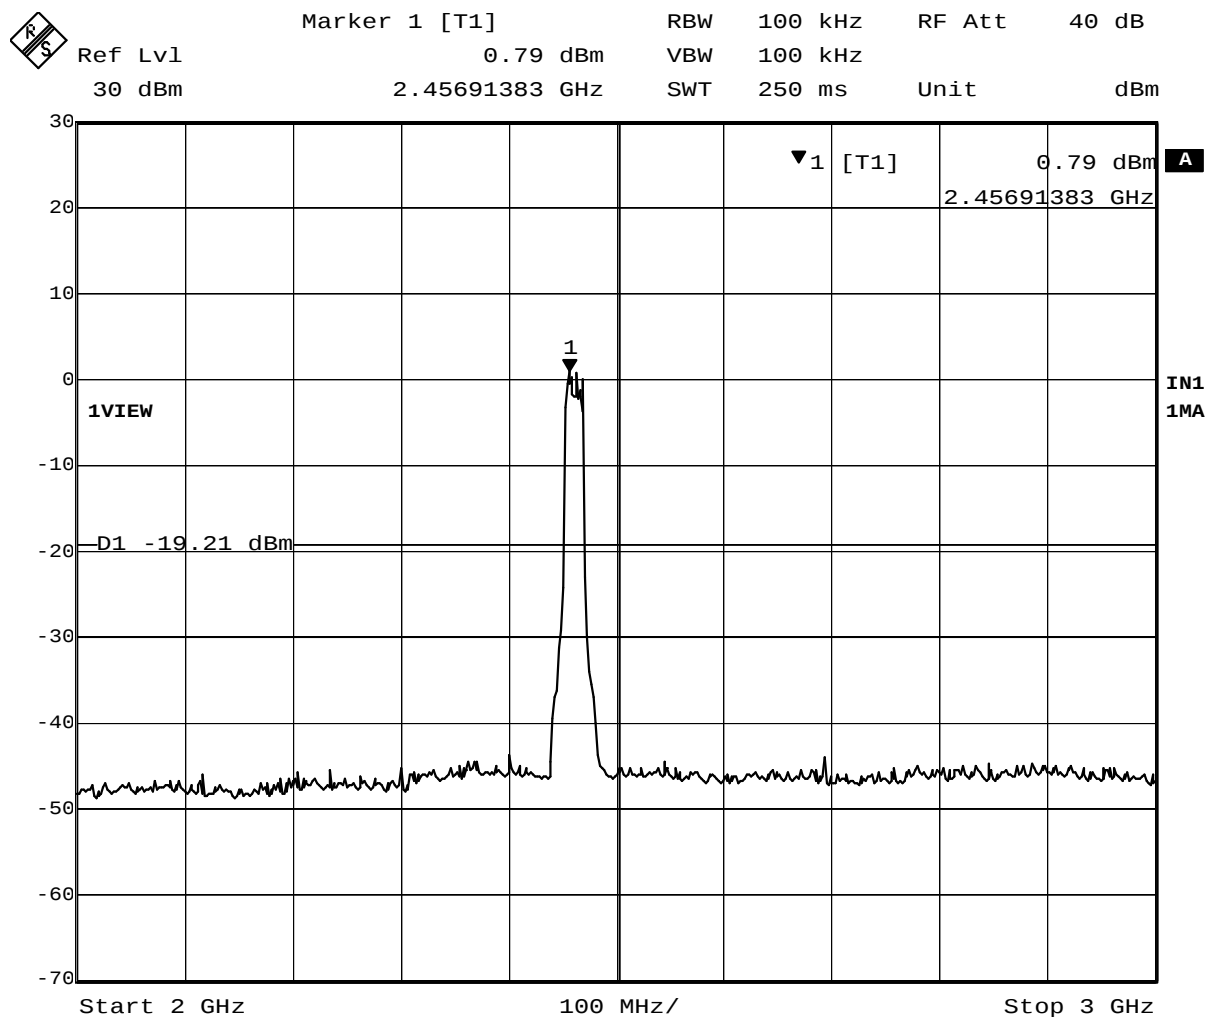

Date: 10.OCT.2003 21:42:53

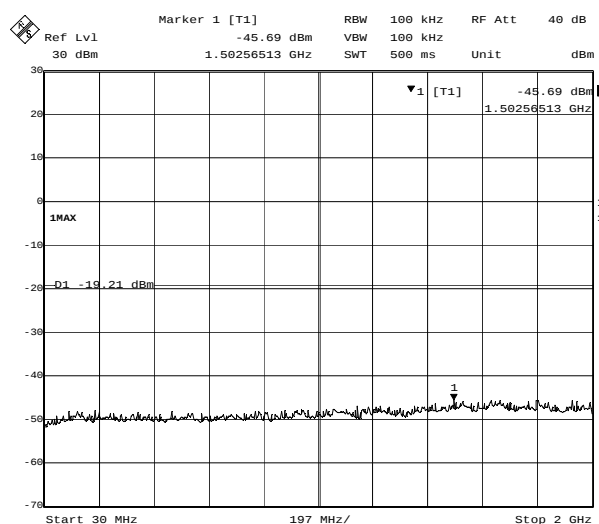

Date: 10.OCT.2003 21:43:32

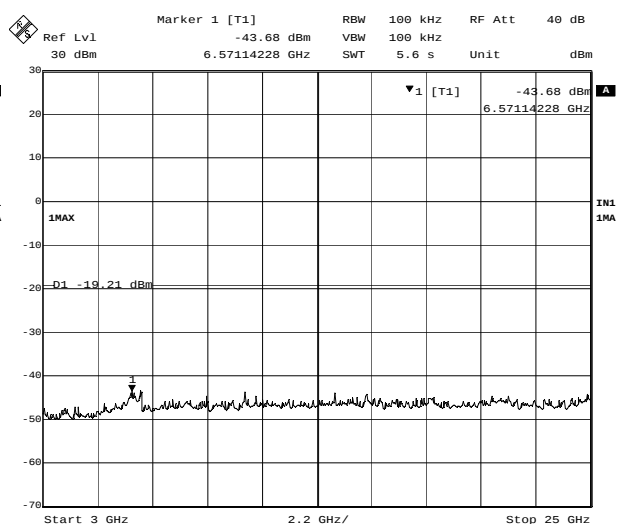

Date: 10.OCT.2003 21:44:05

Plot 4-6. Out of band emissions around 2462MHz (OFDM, 18Mbps)

5. Peak Power Spectral Density

[FCC 15.247(d), RSS-210 6.2.2(o)(b)]

5.1 Test Procedure

The power spectral density was measured with a spectrum analyzer connected to the antenna terminal, while EUT was operating in transmission mode at the appropriate center frequency.

The pre-scanning was performed with the spectrum analyzer to search and locate the center frequency at the peak emission of each transmission mode.

Then, the spectral analyzer was set to the emission peak found in the pre-scan and the peak power spectral density was measured with:

RBW = 3 kHz, VBW = 3 kHz, Span = 300 kHz, Sweep = 100 seconds

5.2 Test Instruments and Measurement Setup

Same as the Chapter 1 (Table 1-1 & Figure 1).

5.3 Measurement Results


The measurement was performed with the worse cases of each transmission mode, that tend to have higher conducted peak power, based on the results of previous Chapter 3, “Conducted Peak Output Power” measurement.

Test Date: October 10, 2003

Table 5-1. Peak Power Spectrum Density, TX mode

Ch No.			Frequency (MHz)	Analyzer Reading (dBm)	Trace number	Cable loss (dB)	Result (dBm)	Limit (dBm)	Margin (dB)
DSSS	2.4GHz 11Mbps	1	2411.98	-4.81	Plot 5-1	1.3	- 3.5	8.0	11.5
		6	2436.98	-3.98	Plot 5-2	1.3	- 2.7	8.0	10.7
		11	2461.99	-4.60	Plot 5-3	1.3	- 3.3	8.0	11.3
OFDM	2.4GHz 18Mbps	1	2412.28	-11.33	Plot 5-4	1.3	-10.0	8.0	18.0
		6	2437.28	-9.22	Plot 5-5	1.3	- 7.9	8.0	15.9
		11	2463.18	-12.18	Plot 5-6	1.3	-10.9	8.0	18.9

5.4 Trace Data of Peak Power Spectral Density

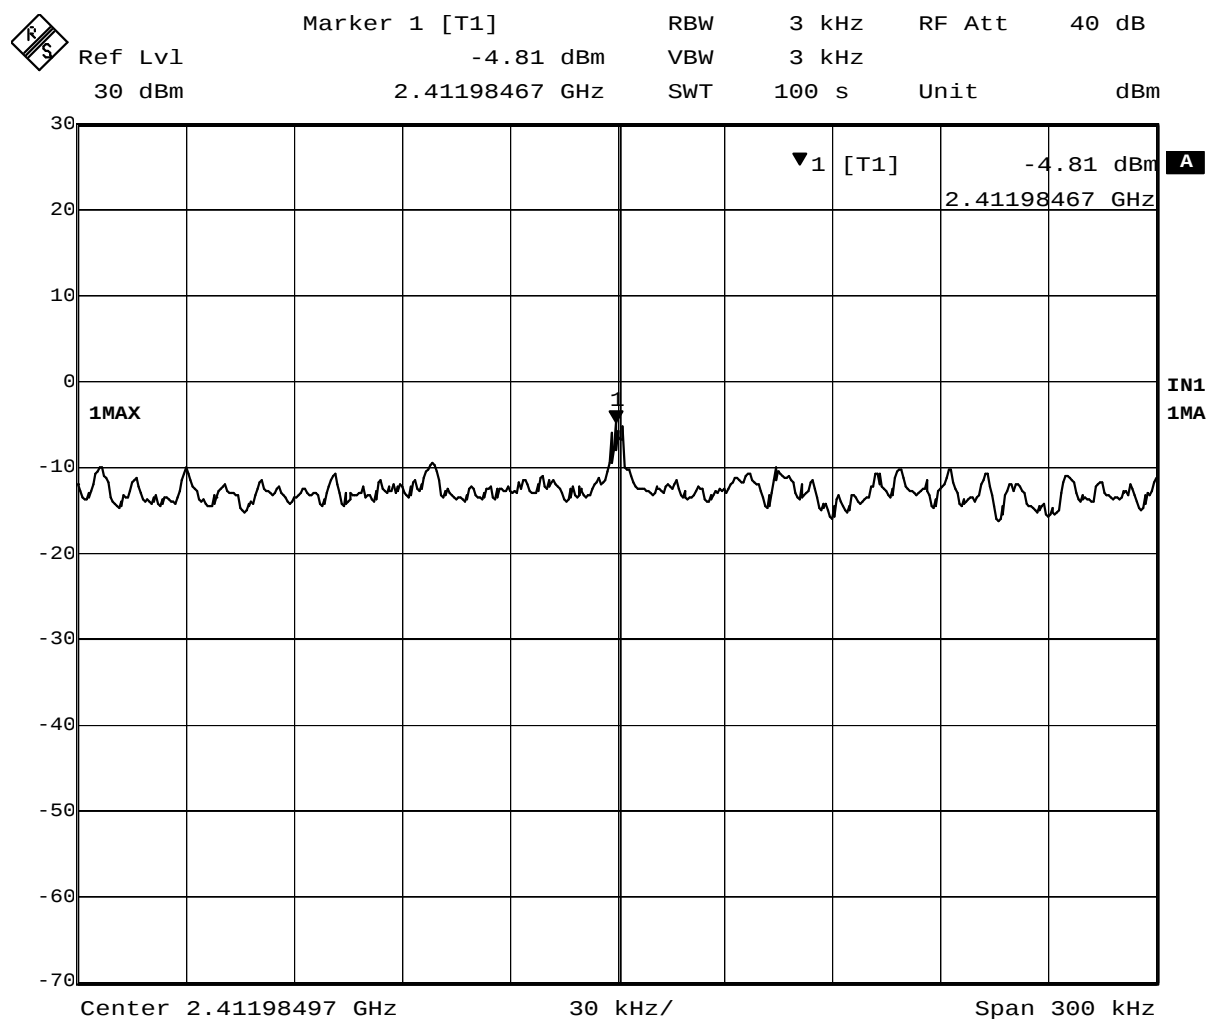

Date: 10.OCT.2003 21:49:45


Plot 5-1. Peak Power Spectral Density of 2412MHz (DSSS, 11Mbps)



Ref Lvl
30 dBm


Marker 1 [T1]
-3.98 dBm
2.43698407 GHz

RBW 3 kHz RF Att 40 dB
VBW 3 kHz
SWT 100 s Unit dBm

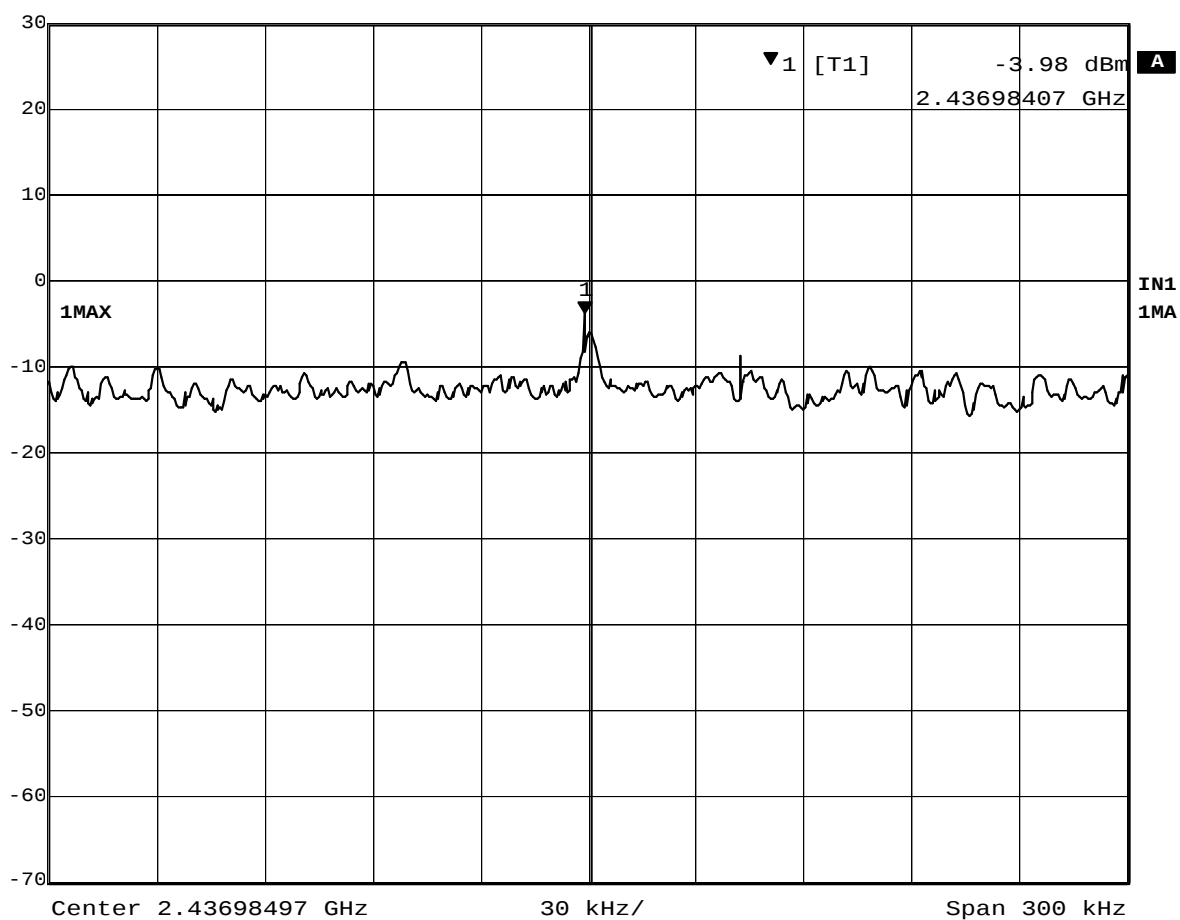

Date: 10.OCT.2003 21:53:42

Plot 5-2. Peak Power Spectral Density of 2437MHz (DSSS, 11Mbps)

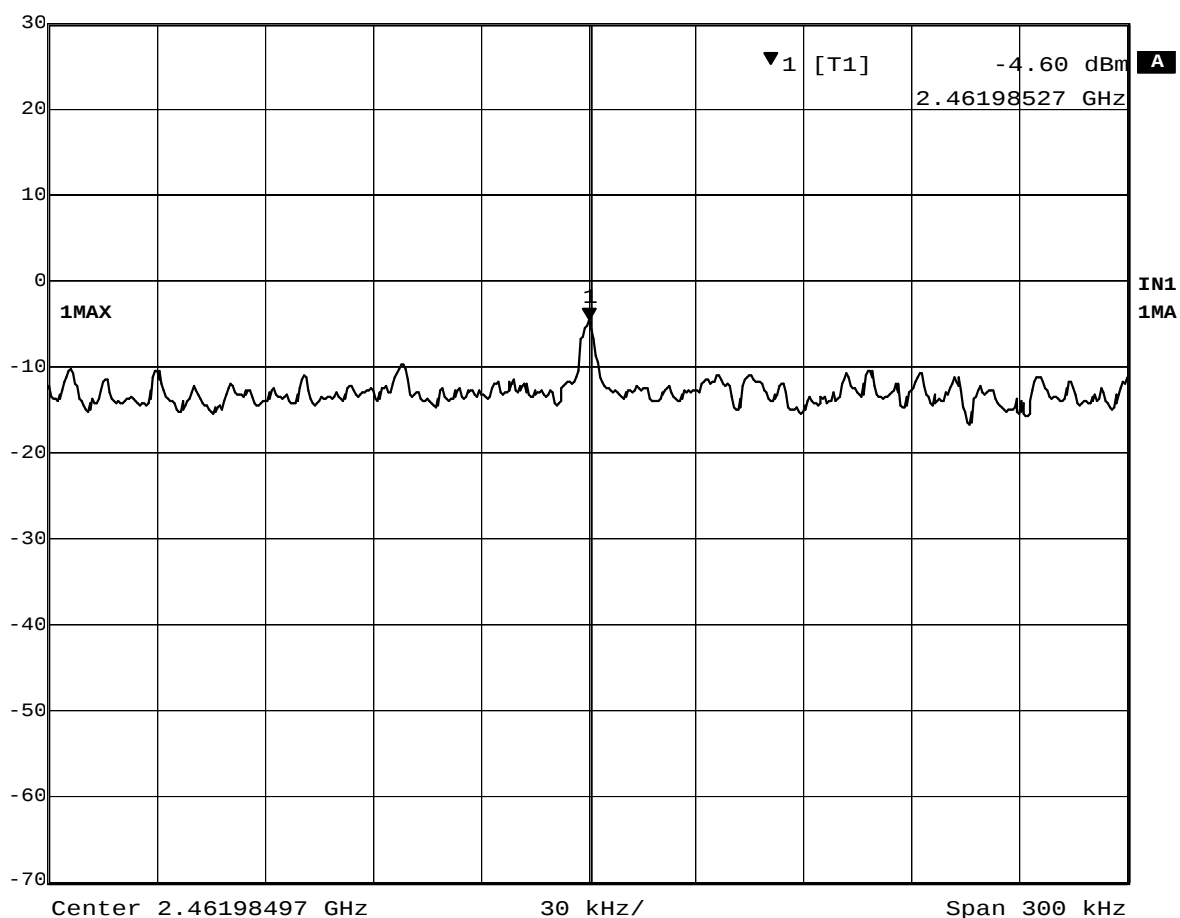
Ref Lvl
30 dBmMarker 1 [T1]
-4.60 dBm
2.46198527 GHzRBW 3 kHz RF Att 40 dB
VBW 3 kHz
SWT 100 s Unit dBm

Date: 10.OCT.2003 21:58:54

Plot 5-3. Peak Power Spectral Density of 2462MHz (DSSS, 11Mbps)



Marker 1 [T1] RBW 3 kHz RF Att 40 dB
Ref Lvl -11.33 dBm VBW 3 kHz
30 dBm 2.41227685 GHz SWT 100 s Unit dBm

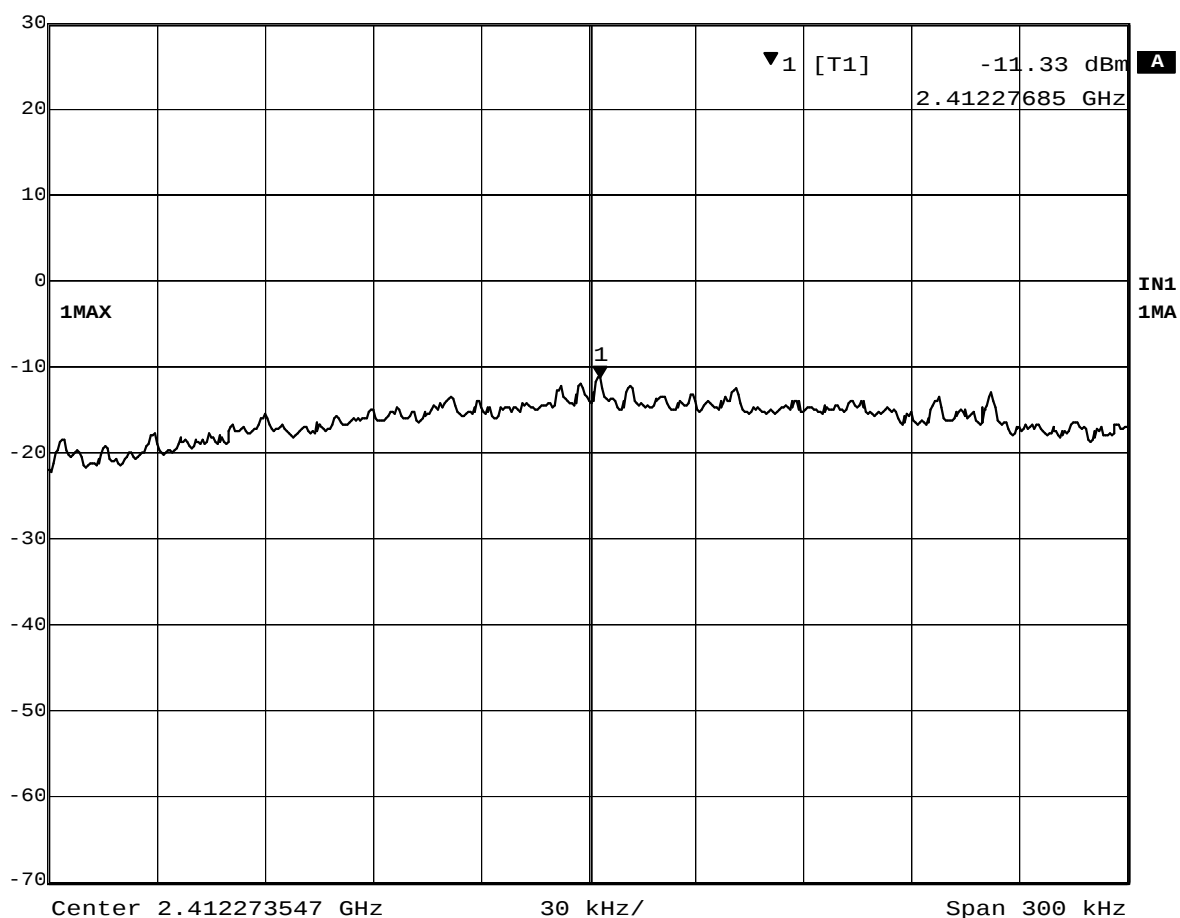


Date: 10.OCT.2003 22:03:59

Plot 5-4. Peak Power Spectral Density of 2412MHz (OFDM, 18Mbps)



Marker 1 [T1] RBW 3 kHz RF Att 40 dB
Ref Lvl -9.22 dBm VBW 3 kHz
30 dBm 2.43727625 GHz SWT 100 s Unit dBm

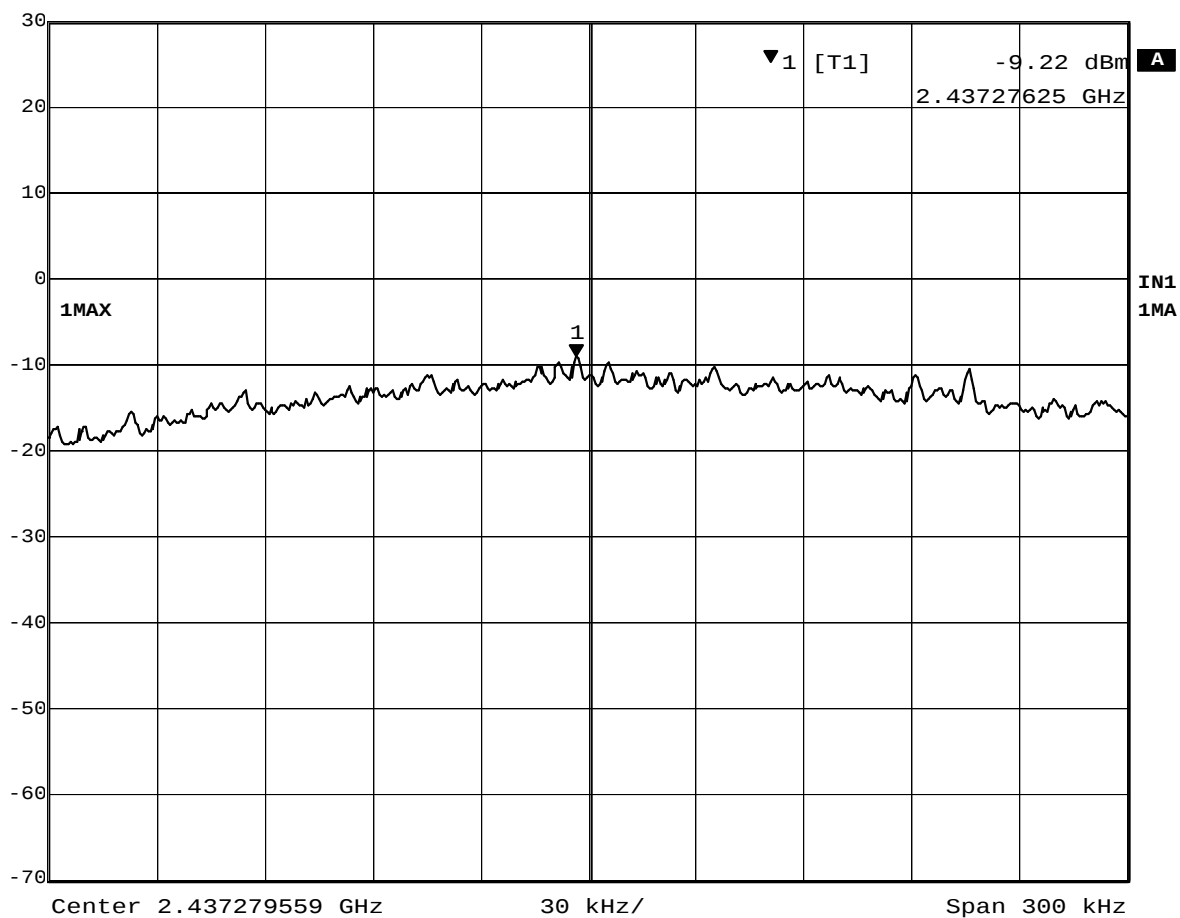


Date: 10.OCT.2003 22:08:28

Plot 5-5. Peak Power Spectral Density of 2437MHz (OFDM, 18Mbps)



Marker 1 [T1] RBW 3 kHz RF Att 40 dB
Ref Lvl -12.18 dBm VBW 3 kHz
30 dBm 2.46317926 GHz SWT 100 s Unit dBm

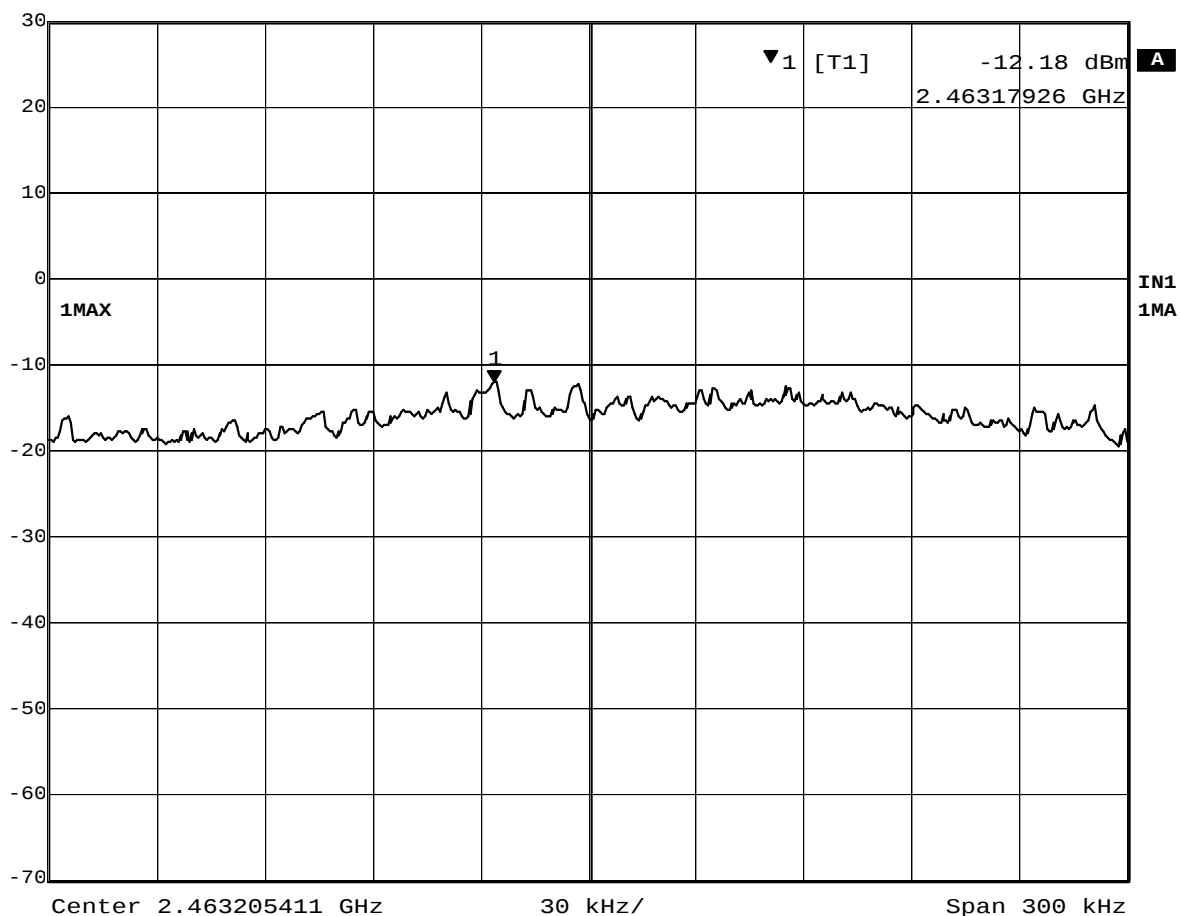

Date: 10.OCT.2003 22:12:55

Plot 5-6. Peak Power Spectral Density of 2462MHz (OFDM, 18Mbps)

6. AC Wireline Conducted Emissions (150KHz – 30MHz)

[FCC 15.207, RSS-210 6.6 / 7.4]

6.1 Test Procedure

The conducted emissions are measured in the IBM shielded room with a spectrum analyzer in peak hold. Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9kHz. The emissions are maximized further by cable manipulation. The highest emissions relative to the limit are listed.

6.2 Test Instruments and Measurement Setup

Table 6-1. Conducted Emission Test Instrumentation

Description	Model	Serial Number
Computer	IBM 6589-13J	97-15613
Spectrum Analyzer (100Hz-1.5GHz)	HP 85680B	2841A04254
Spectrum Analyzer Display	HP 85662A	2816A16831
Quasi-Peak Adapter	HP 85650A	2811A01156
Receiver (9kHz-30MHz)	R&S ESH3	891806/012
LISN	EMCO 3810/2NM	00022007
Switch/control unit	HP 3488A	2719A17228
Plotter	HP 7550A	2631A33619
Coax cables: - Lisen-L <=> SW/Con.unit (SW100) - Lisen-N <=> SW/Con.unit (SW101) - SW/Con.unit <=> RCVR (Input) - SW/Con.unit<=> Spe Ana.(Signal In)	Length: 4 m 4 m 1 m 1 m	- EMIC-L - EMIC-N - EMIC-R - EMIC-S

Notes: - HP: Hewlett Packard, R&S: Rohde & Schwarz

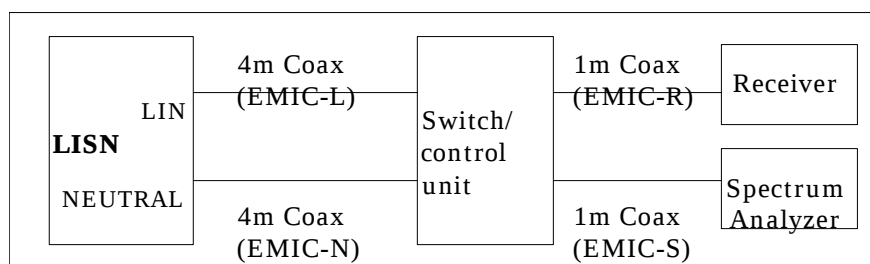


Figure 6. Cables for Conducted Emission Test

6.3 Powerline Voltage Calculation

The powerline voltage is calculated by adding insertion losses of LISN, Cable, Switch control unit and Pulse limiter to the measured reading. All factors are included in the reported data.

$$PV = R + CORR$$

where:

PV = Powerline Voltage (dBμV)

R = Measured Receiver Input Amplitude (dBμV)

CORR = Correction Factor (dB) = LL+CL+SWL+PLL

LL = Insertion loss of LISN (dB)

CL = Insertion loss of Cable (dB)

SWL = Insertion loss of Switch control unit (dB)

PLL = Insertion loss of Pulse Limiter (dB)

Given a Receiver input reading of 50.0 dBμV, LISN loss of 0.6 dB, Cable loss of 0.1dB, Switch control unit loss of 0.1dB and Pulse limiter loss of 0.2dB. The Powerline Voltage of the measured emission is:

$$CORR = 0.6 + 0.1 + 0.1 + 0.2 = 1.0 \text{ (dB)}$$

$$PV = 50.0 + 1.0 = 51.0 \text{ (dBμV)}$$

6.4 Measurement Results

The EUT was found to comply to the limits of FCC Part 15 Subpart C and RSS-210 with a margin of 10.7dB. The 6 highest emissions relative to the limits are reported.

Test Date: October 29, 2003

6.3.1 EUT in 2.4GHz DSSS transmission mode

Table 6-2-1. Ch.1 (2412MHz) TX mode 11Mbps

Frequency (MHz)	QP			AV			CISPR22 QP Limit (dBμV)	CISPR22 AV Limit (dBμV)	Phase
	Measured Reading (dBμV)	Corr. Factor (dB)	Powerline Voltage (dBμV)	Measured Reading (dBμV)	Corr. Factor (dB)	Powerline Voltage (dBμV)			
0.1604	49.0	0.5	49.5	32.2	0.5	32.7	65.4	55.4	Neutral
0.1947	45.4	0.5	45.9	31.3	0.5	31.8	63.8	53.8	Neutral
0.2670	39.2	0.6	39.8	25.5	0.6	26.1	61.2	51.2	Neutral
0.5904	28.9	0.6	29.5	26.5	0.6	27.1	56.0	46.0	Neutral
1.2394	30.6	0.6	31.2	27.1	0.6	27.7	56.0	46.0	Neutral
1.7734	26.3	0.6	26.9	15.9	0.6	16.5	56.0	46.0	Line

Table 6-2-2. Ch.6 (2437MHz) TX mode 11Mbps

Frequency (MHz)	QP			AV			CISPR22 QP Limit (dBμV)	CISPR22 AV Limit (dBμV)	Phase
	Measured Reading (dBμV)	Corr. Factor (dB)	Powerline Voltage (dBμV)	Measured Reading (dBμV)	Corr. Factor (dB)	Powerline Voltage (dBμV)			
0.1598	48.1	0.5	48.6	31.1	0.5	31.6	65.5	55.5	Neutral
0.1988	44.9	0.5	45.4	31.5	0.5	32.0	63.7	53.7	Neutral
0.2119	42.5	0.5	43.0	30.7	0.5	31.2	63.1	53.1	Neutral
0.2688	38.6	0.6	39.2	27.8	0.6	28.4	61.2	51.2	Line
0.4834	31.6	0.6	32.2	28.5	0.6	29.1	56.3	46.3	Neutral
1.6177	29.7	0.6	30.3	25.7	0.6	26.3	56.0	46.0	Line

Table 6-2-3. Ch.11 (2462MHz) TX mode 11Mbps

Frequency (MHz)	QP			AV			CISPR22 QP Limit (dBμV)	CISPR22 AV Limit (dBμV)	Phase
	Measured Reading (dBμV)	Corr. Factor (dB)	Powerline Voltage (dBμV)	Measured Reading (dBμV)	Corr. Factor (dB)	Powerline Voltage (dBμV)			
0.1526	46.5	0.5	47.0	26.0	0.5	26.5	65.9	55.9	Neutral
0.2564	38.9	0.6	39.5	27.6	0.6	28.2	61.5	51.5	Neutral
0.4788	30.9	0.6	31.5	27.9	0.6	28.5	56.4	46.4	Neutral
1.2192	30.0	0.6	30.6	25.5	0.6	26.1	56.0	46.0	Neutral
1.7124	27.3	0.6	27.9	19.0	0.6	19.6	56.0	46.0	Line
3.7897	26.2	0.7	26.9	19.1	0.7	19.8	56.0	46.0	Line

Table 6-2-4. Ch. 6 (2437MHz) **RX** mode

Frequency (MHz)	QP			AV			CISPR22 QP Limit (dB μ V)	CISPR22 AV Limit (dB μ V)	Phase
	Measured Reading (dB μ V)	Corr. Factor (dB)	Powerline Voltage (dB μ V)	Measured Reading (dB μ V)	Corr. Factor (dB)	Powerline Voltage (dB μ V)			
0.1505	54.6	0.5	55.1	41.2	0.5	41.7	66.0	56.0	Neutral
0.2138	40.7	0.5	41.2	22.8	0.5	23.3	63.1	53.1	Neutral
0.3620	31.1	0.6	31.7	17.9	0.6	18.5	58.7	48.7	Neutral
0.4306	28.6	0.6	29.2	17.9	0.6	18.5	57.2	47.2	Neutral
0.6118	27.0	0.6	27.6	16.8	0.6	17.4	56.0	46.0	Neutral
0.7639	27.1	0.6	27.7	16.2	0.6	16.8	56.0	46.0	Neutral

6.3.2 EUT in 2.4GHz OFDM transmission modeTable 6-2-5. Ch.1 (2412MHz) **TX** mode 18Mbps

Frequency (MHz)	QP			AV			CISPR22 QP Limit (dB μ V)	CISPR22 AV Limit (dB μ V)	Phase
	Measured Reading (dB μ V)	Corr. Factor (dB)	Powerline Voltage (dB μ V)	Measured Reading (dB μ V)	Corr. Factor (dB)	Powerline Voltage (dB μ V)			
0.1517	42.6	0.5	43.1	26.0	0.5	26.5	65.9	55.9	Neutral
0.2579	37.3	0.6	37.9	26.9	0.6	27.5	61.5	51.5	Neutral
0.3698	33.6	0.6	34.2	30.3	0.6	30.9	58.5	48.5	Neutral
0.7365	27.5	0.6	28.1	24.6	0.6	25.2	56.0	46.0	Neutral
1.3347	29.4	0.6	30.0	26.0	0.6	26.6	56.0	46.0	Line
3.4067	26.4	0.7	27.1	19.8	0.7	20.5	56.0	46.0	Line

Table 6-2-6. Ch.6 (2437MHz) **TX** mode 18Mbps

Frequency (MHz)	QP			AV			CISPR22 QP Limit (dB μ V)	CISPR22 AV Limit (dB μ V)	Phase
	Measured Reading (dB μ V)	Corr. Factor (dB)	Powerline Voltage (dB μ V)	Measured Reading (dB μ V)	Corr. Factor (dB)	Powerline Voltage (dB μ V)			
0.1519	41.9	0.5	42.4	25.5	0.5	26.0	65.9	55.9	Neutral
0.3702	32.9	0.6	33.5	29.8	0.6	30.4	58.5	48.5	Neutral
0.4796	31.0	0.6	31.6	29.0	0.6	29.6	56.3	46.3	Neutral
1.3360	28.6	0.6	29.2	24.7	0.6	25.3	56.0	46.0	Neutral
1.7063	28.7	0.6	29.3	22.5	0.6	23.1	56.0	46.0	Line
3.4118	24.9	0.7	25.6	18.5	0.7	19.2	56.0	46.0	Line

Table 6-2-7. Ch.11 (2462MHz) **TX** mode 18Mbps

Frequency (MHz)	QP			AV			CISPR22 QP Limit (dB μ V)	CISPR22 AV Limit (dB μ V)	Phase
	Measured Reading (dB μ V)	Corr. Factor (dB)	Powerline Voltage (dB μ V)	Measured Reading (dB μ V)	Corr. Factor (dB)	Powerline Voltage (dB μ V)			
0.1611	47.7	0.5	48.2	32.6	0.5	33.1	65.4	55.4	Neutral
0.4837	31.5	0.6	32.1	29.0	0.6	29.6	56.3	46.3	Neutral
0.5905	29.2	0.6	29.8	26.9	0.6	27.5	56.0	46.0	Neutral
0.8626	29.5	0.6	30.1	26.7	0.6	27.3	56.0	46.0	Neutral
0.9669	29.3	0.6	29.9	27.7	0.6	28.3	56.0	46.0	Neutral
1.2397	30.7	0.6	31.3	27.5	0.6	28.1	56.0	46.0	Neutral

Table 6-2-8. Ch.6 (2437MHz) **RX** mode

Frequency (MHz)	QP			AV			CISPR22 QP Limit (dB μ V)	CISPR22 AV Limit (dB μ V)	Phase
	Measured Reading (dB μ V)	Corr. Factor (dB)	Powerline Voltage (dB μ V)	Measured Reading (dB μ V)	Corr. Factor (dB)	Powerline Voltage (dB μ V)			
0.1519	54.7	0.5	55.2	34.4	0.5	34.9	65.9	55.9	Neutral
0.2154	41.7	0.5	42.2	26.0	0.5	26.5	63.0	53.0	Neutral
0.2867	36.9	0.6	37.5	22.1	0.6	22.7	60.6	50.6	Neutral
0.3562	30.5	0.6	31.1	14.6	0.6	15.2	58.8	48.8	Neutral
0.4325	29.1	0.6	29.7	19.3	0.6	19.9	57.2	47.2	Neutral
1.1426	27.6	0.6	28.2	15.2	0.6	15.8	56.0	46.0	Neutral

7. Restricted Bands Radiation (30MHz – 1GHz)

[FCC 15.205 / 209, RSS-210 6.3 / 7.3]

7.1 Test Procedure

Preliminary radiated emissions are measured in the semi-anechoic chamber at a 3 meter distance on every azimuth in both horizontal and vertical polarity. The antennas are also scanned in height. The emissions are recorded with a spectrum analyzer in peak hold mode. The identified emissions are further maximized by a cable manipulation. Emissions closest to the limits are measured in the quasi-peak mode with the tuned receiver using a bandwidth of 120kHz. The highest emissions relative to the limit are listed.

7.2 Test Instruments and Measurement Setup

Table 7-1 Radiated Emission Test Instrumentation

Description	Model	Serial Number
Computer	IBM 6868-30J	97-901X3
Spectrum Analyzer (100Hz-1.5GHz) for 30-200MHz	HP 85680B	2601A02634
Spectrum Analyzer Display for 30-200MHz	HP 85662A	2542A12308
Quasi-Peak Adapter for 30-200MHz	HP 85650A	2043A00062
Spectrum Analyzer (100Hz-1.5GHz) for 200-1000MHz	HP 85680B	3019A05156
Spectrum Analyzer Display for 200-1000MHz	HP 85662A	3026A19366
Quasi-Peak Adapter for 200-1000MHz	HP 85650A	2811A01433
Amplifier (100kHz-1.3GHz)		
- for 30-200MHz	HP 8447D	2805A02919
- for 200-1000MHz	HP 8447D	2727A05190
Biconical Antenna (30-200MHz)	EMCO 3108	2536
Log-Periodic Antenna (200-1000MHz)	EMCO 3146	2849
Receiver (20MHz-1.3GHz)	R&S ESVP	892111/030
Switch/control unit	HP 3488A	2719A17226
N-Coax cables:	Length:	
- Bi-coni Ant <=> 10m Cable	9 m	- EM103L01
- 10m Cable <=> Shield Panel	10 m	- EM103L02
- Shield Panel <=> RF Amp	7 m	- EM103L03
- RF Amp <=> Power Splitter	0.5m	- EM103L04
- Log-peri Ant <=> 10m Cable	9 m	- EM103H01
- 10m Cable <=> Shield Panel	10 m	- EM103H02
- Shield Panel <=> RF Amp	7 m	- EM103H03
- RF Amp <=> Power Splitter	0.5m	- EM103H04
Coax cables:		
- Power Splitter <=> SW/Con.unit (SW110)	1 m	- EM103L05
- Power Splitter <=> SW/Con.unit (SW300)	1 m	- EM103L06
- Power Splitter <=> SW/Con.unit (SW100)	1 m	- EM103H05
- Power Splitter <=> SW/Con.unit (SW301)	1 m	- EM103H06
- SW/Con.unit <=> Receiver (Input)	2 m	- EM1RCV
- SW/Con.unit <=> Spe Ana.(Signal In) for 30- 200MHz	2 m	- EM1SPL
- SW/Con.unit <=> Spe Ana.(Signal In) for 200-1000MHz	2 m	- EM1SPH

Notes:

- HP: Hewlett Packard, R&S: Rohde & Schwarz

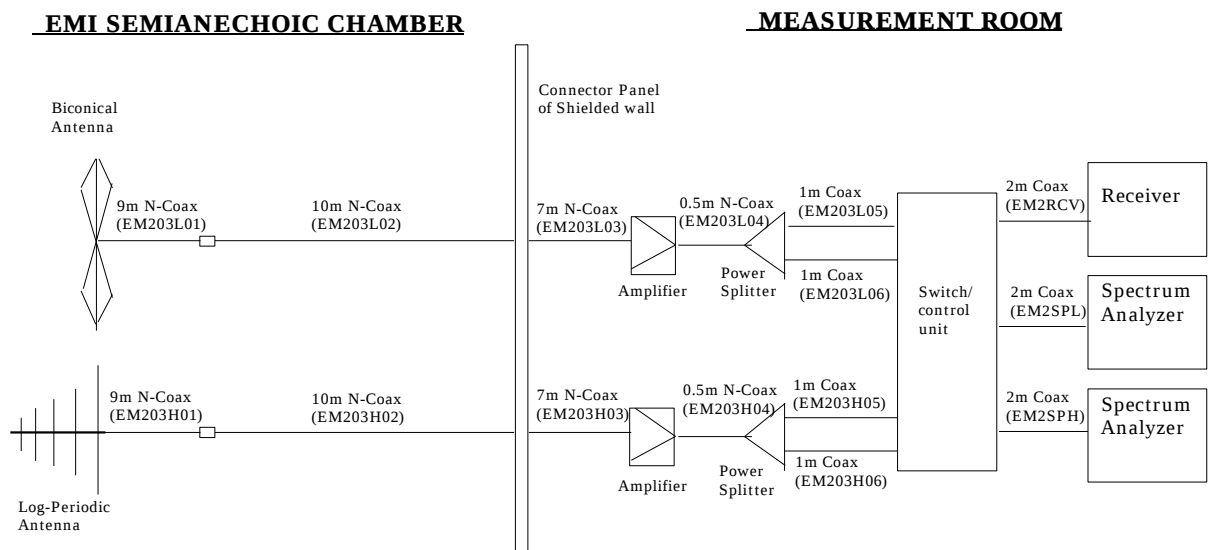


Figure 7 Cables for Radiated Emission Test

7.3 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. In this test facility, the Antenna Factor, Cable Loss, and Amplifier Gains are loaded into the Rohde & Schwarz Receiver and the corrected field strength can be read directly on the receiver. All factors are included in the reported data.

$$FS = R + AF + CORR$$

where:

FS	=	Field Strength
R	=	Measured Receiver Input Amplitude
AF	=	Antenna Factor
CORR	=	Correction Factor = CL - AG
CL	=	Cable Loss
AG	=	Amplifier Gain

For example:

Given a Receiver input reading of 51.5dB μ V; Antenna Factor of 8.5dB/m; Cable Loss of 1.3dB; and an Amplifier Gain of 26dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 = 35.3\text{dB}\mu\text{V/m}$$

Conversion between dB μ V/m (or dB μ V) and μ V/m (or μ V) are done as:

$$\text{Level}(\text{dB}\mu\text{V/m}) = 20 \times \text{Log}(\text{Level}(\mu\text{V/m}))$$

$$40\text{dB}\mu\text{V/m} = 100\mu\text{V/m}$$

$$48\text{dB}\mu\text{V/m} = 250\mu\text{V/m}$$

7.4 Measurement Results

The EUT was found to comply to the limits of FCC Part 15 Subpart C and RSS-210 with a margin of 4.3 dB at 30MHz - 1000MHz band.

The 6 highest emissions relative to the limits are reported.

Test Date: October 23, 2003

7.4.1 EUT in 2.4GHz DSSS transmission mode

Table 7-2-1. Ch.1 (2412MHz) **TX** mode 11Mbps

Frequency (MHz)	Polarity (H/V)	Measured (dB μ V)	Antenna Factor (dB/m)	Corr. Factor (dB)	Field Strength (dB μ V/m)	Limit (dB μ V/m)	Field Strength (μ V/m)	Limit (μ V/m)
200.268	V	27.3	11.4	-12.6	26.1	43.5	20.2	150
287.999	H	40.1	13.4	-14.2	39.3	46.0	92.3	200
300.406	V	26.8	14.2	-14.1	26.9	46.0	22.1	200
454.778	V	37.5	16.5	-13.8	40.2	46.0	102.3	200
650.016	V	20.9	19.6	-12.3	28.2	46.0	25.7	200
799.717	H	24.8	21.1	-10.4	35.5	46.0	59.6	200

Table 7-2-2. Ch.6 (2437MHz) **TX** mode 11Mbps

Frequency (MHz)	Polarity (H/V)	Measured (dB μ V)	Antenna Factor (dB/m)	Corr. Factor (dB)	Field Strength (dB μ V/m)	Limit (dB μ V/m)	Field Strength (μ V/m)	Limit (μ V/m)
87.748	V	30.5	7.6	-17.7	20.4	40.0	10.5	100
287.997	V	32.5	13.4	-14.2	31.7	46.0	38.5	200
287.998	H	40.4	13.4	-14.2	39.6	46.0	95.5	200
454.778	V	37.4	16.5	-13.8	40.1	46.0	101.2	200
665.396	V	29.3	20.5	-12.2	37.6	46.0	75.9	200
800.391	H	24.2	21.2	-10.4	35.0	46.0	56.2	200

Table 7-2-3. Ch.11 (2462MHz) **TX** mode 11Mbps

Frequency (MHz)	Polarity (H/V)	Measured (dB μ V)	Antenna Factor (dB/m)	Corr. Factor (dB)	Field Strength (dB μ V/m)	Limit (dB μ V/m)	Field Strength (μ V/m)	Limit (μ V/m)
200.281	V	34.2	11.4	-12.6	33.0	43.5	44.7	150
287.998	H	39.8	13.4	-14.2	39.0	46.0	89.1	200
454.778	V	38.7	16.5	-13.8	41.4	46.0	117.5	200
623.979	V	24.0	19.0	-12.2	30.8	46.0	34.7	200
669.959	V	21.1	20.7	-12.2	29.6	46.0	30.2	200
800.391	V	17.9	21.2	-10.4	28.7	46.0	27.2	200

Table 7-2-4. Ch.6 (2437MHz) **RX** mode

Frequency (MHz)	Polarity (H/V)	Measured (dB μ V)	Antenna Factor (dB/m)	Corr. Factor (dB)	Field Strength (dB μ V/m)	Limit (dB μ V/m)	Field Strength (μ V/m)	Limit (μ V/m)
200.282	H	39.9	11.4	-12.6	38.7	43.5	86.1	150
227.390	H	31.0	10.5	-14.9	26.6	46.0	21.4	200
267.045	H	31.2	12.3	-14.4	29.1	46.0	28.5	200
427.938	V	21.2	15.7	-13.7	23.2	46.0	14.5	200
454.780	V	38.6	16.5	-13.8	41.3	46.0	116.1	200
798.799	H	24.4	21.1	-10.4	35.1	46.0	56.9	200

7.4.2 EUT in 2.4GHz OFDM transmission mode

Table 7-2-5. Ch.1 (2412MHz) **TX** mode 18Mbps

Frequency (MHz)	Polarity (H/V)	Measured (dB μ V)	Antenna Factor (dB/m)	Corr. Factor (dB)	Field Strength (dB μ V/m)	Limit (dB μ V/m)	Field Strength (μ V/m)	Limit (μ V/m)
200.278	H	27.0	11.4	-12.6	25.8	43.5	19.5	150
275.385	H	35.1	12.8	-14.1	33.8	46.0	49.0	200
287.164	H	26.0	13.4	-14.1	25.3	46.0	18.4	200
454.778	V	38.3	16.5	-13.8	41.0	46.0	112.2	200
666.102	V	29.6	20.5	-12.1	38.0	46.0	79.4	200
796.170	V	17.0	21.1	-10.5	27.6	46.0	24.0	200

Table 7-2-6. Ch.6 (2437MHz) **TX** mode 18Mbps

Frequency (MHz)	Polarity (H/V)	Measured (dB μ V)	Antenna Factor (dB/m)	Corr. Factor (dB)	Field Strength (dB μ V/m)	Limit (dB μ V/m)	Field Strength (μ V/m)	Limit (μ V/m)
259.873	H	35.4	12.0	-14.8	32.6	46.0	42.7	200
275.387	H	36.7	12.8	-14.1	35.4	46.0	58.9	200
287.998	H	40.4	13.4	-14.2	39.6	46.0	95.5	200
454.778	V	38.5	16.5	-13.8	41.2	46.0	114.8	200
666.826	V	28.1	20.5	-12.3	36.3	46.0	65.3	200
798.951	H	25.1	21.1	-10.4	35.8	46.0	61.7	200

Table 7-2-7. Ch.11 (2462MHz) **TX** mode 18Mbps

Frequency (MHz)	Polarity (H/V)	Measured (dB μ V)	Antenna Factor (dB/m)	Corr. Factor (dB)	Field Strength (dB μ V/m)	Limit (dB μ V/m)	Field Strength (μ V/m)	Limit (μ V/m)
200.283	V	27.1	11.4	-12.6	25.9	43.5	19.7	150
287.998	H	40.3	13.4	-14.2	39.5	46.0	94.4	200
454.777	V	38.9	16.5	-13.8	41.6	46.0	120.2	200
623.978	V	24.2	19.0	-12.2	31.0	46.0	35.5	200
665.531	V	29.4	20.5	-12.2	37.7	46.0	76.7	200
799.562	H	24.7	21.1	-10.4	35.4	46.0	58.9	200

Table 7-2-8. Ch.6 (2437MHz) **RX** mode

Frequency (MHz)	Polarity (H/V)	Measured (dB μ V)	Antenna Factor (dB/m)	Corr. Factor (dB)	Field Strength (dB μ V/m)	Limit (dB μ V/m)	Field Strength (μ V/m)	Limit (μ V/m)
200.287	H	33.9	11.4	-12.6	32.7	43.5	43.2	150
227.389	H	30.4	10.5	-14.9	26.0	46.0	20.0	200
287.998	H	38.8	13.4	-14.2	38.0	46.0	79.4	200
294.420	H	23.9	13.7	-14.1	23.5	46.0	15.0	200
454.780	V	39.0	16.5	-13.8	41.7	46.0	121.6	200
799.134	V	18.5	21.1	-10.4	29.2	46.0	28.8	200

8. Restricted Bands Radiation (1GHz – 25GHz)

[FCC 15.205 / 209, RSS-210 6.3 / 7.3]

8.1 Test Procedure

Radiated emissions were measured in the frequency range with 1 GHz to 25GHz in transmitting mode and 1 GHz to 12.5GHz in receiving mode. All tests were performed in the semi-anechoic chamber at a 3-meter distance (except for the frequency range with 18 GHz to 25 GHz where test distance was reduced to 1 meter) on both horizontal and vertical polarities. The antenna was also scanned in height. The emissions are recorded with a spectrum analyzer in peak hold mode. The identified emissions are further maximized as a function of cable manipulation, azimuth, and antenna height. The emissions closest to the limits are measured in the peak mode with the tuned spectrum analyzer using resolution bandwidth of 1MHz / video bandwidth of 1MHz, and the average setting mode with the tuned spectrum analyzer using resolution bandwidth of 1MHz / video bandwidth of 100Hz or 10Hz. The highest emissions relative to the limit are listed.

8.2 Test Instruments and Measurement Setup

Table 8 Radiated Emission Test Instrumentation (1GHz – 25GHz)

Description	Model	Serial Number
Spectrum Analyzer EMI Test Receiver	R&S ESI26	836119/003
Amplifier (1 – 18GHz)	HP 8449B	3008A00582
Amplifier (18 – 25GHz)	Agilent 83051A	3950M00193
Horn Antenna (1 - 18GHz)	EMCO 3115	9903-5774
Horn Antenna (3.95 – 5.85GHz)	EMCO 3160-5	1099
Horn Antenna (5.85 – 8.2GHz)	EMCO 3160-6	9712-1044
Horn Antenna (18 - 25GHz)	EMCO 3160-9	0004-1202
Coaxial cables:	Length:	
- Horn Ant <=> RF Amp. (1-18GHz)	6 m	- EM206SCO
- RF Amp.<=>Spectrum Analyzer (1-18GHz)	16 m	- GEM0101
- Horn Ant <=> RF Amp. (18-25GHz)	3m	- SF102-20167
- RF Amp.<=>Spectrum Analyzer (18-25GHz)	1m	- SF102-21105

Notes: - HP: Hewlett Packard, R&S: Rohde & Schwarz

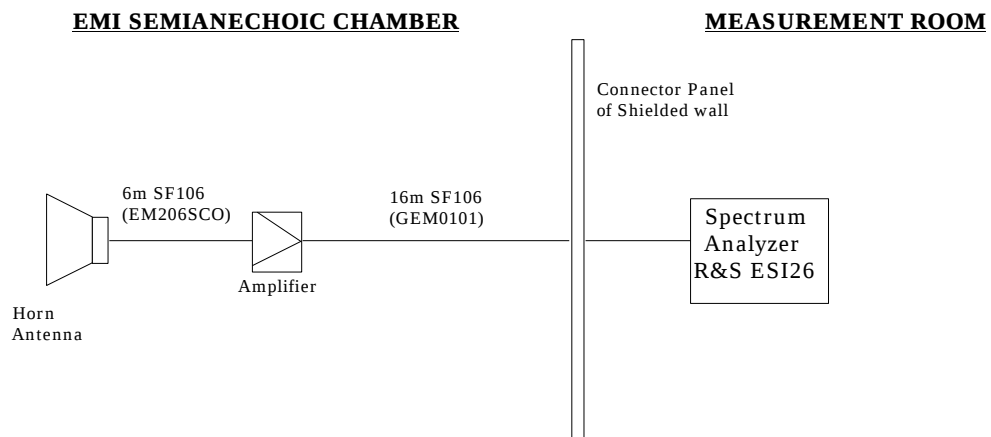


Figure 8-1. Cables for Radiated Emission Test (1 – 18 GHz)

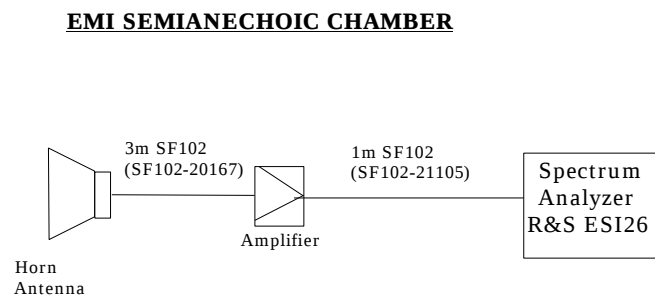


Figure 8-2. Cables for Radiated Emission Test (18 - 25GHz)

8.3 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. All factors are included in the reported data.

$$FS = R + AF + CORR - FO$$

where:

FS = Field Strength

R = Measured Spectrum analyzer Input Amplitude

AF = Antenna Factor

CORR = Correction Factor = CL-AG

CL = Cable Loss

AG = Amplifier Gain

FO = Distance Falloff Factor

For example:

Given a Spectrum Analyzer input reading of 51.5 dB μ V; Antenna Factor of 8.5 dB/m; Cable Loss of 1.3 dB; Falloff Factor of 0 dB; and an Amplifier Gain of 26 dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26 - 0.0 = 35.6 \text{ dB}\mu\text{V/m}$$

Conversions between dB μ V/m (or dB μ V) and μ V/m (or μ V) are done as :

$$\text{Level(dB}\mu\text{V/m)} = 20 \times \text{Log (Level}(\mu\text{V/m))}$$

$$40 \text{ dB}\mu\text{V/m} = 100 \mu\text{V/m}$$

$$48 \text{ dB}\mu\text{V/m} = 250 \mu\text{V/m}$$

8.4 Measurement Results

The EUT was found to comply to the limits of FCC Part 15 Subpart C and RSS-210 with a margin of 5.2 dB. The measurement was done for the frequency range of 1 GHz to 25 GHz in TX mode and 1 GHz to 12.5GHz in RX mode.

Test Date: October 22, 29, November 10 and 11, 2003

8.4.1 EUT in 2.4GHz DSSS transmission mode

*Note: OB means “operation band” (2400-2483.5MHz); in this case limit is 1W (measured conducted with power meter)

Table 8-2-1. Ch.1 (2412MHz) **TX** mode 11Mbps

Frequency (GHz)	Polarity (H/V)	Measured (dB μ V) (<i>peak</i>)	Measured (dB μ V) (<i>average</i>)	Antenna Factor (dB/m)	Corr. Factor (dB)	Falloff Factor (dB)	Field Strength (dB μ V/m) (<i>peak</i>)	FCC Limit (dB μ V/m) (<i>peak</i>)	Field Strength (dB μ V/m) (<i>average</i>)	FCC Limit (dB μ V/m) (<i>average</i>)
Inband 2.412	H	109.8	101.5	28.3	-29.6	0.0	108.5	OB*	100.2	OB*
Adjacent RB 2.377	H	55.2	-	28.2	-29.6	0.0	53.8	74.0	-	54.0
2.390	H	53.5	-	28.2	-29.6	0.0	52.1	74.0	-	54.0
1.067	V	60.9	-	24.6	-32.0	0.0	53.5	74.0	-	54.0
1.143	V	55.4	-	24.6	-31.8	0.0	48.2	74.0	-	54.0
1.201	V	55.0	-	25.2	-31.6	0.0	48.6	74.0	-	54.0
1.331	V	53.9	-	25.2	-31.3	0.0	47.8	74.0	-	54.0
2.244	H	51.8	-	27.7	-29.8	0.0	49.7	74.0	-	54.0
2.364	H	52.1	-	28.1	-29.6	0.0	50.6	74.0	-	54.0
2.373	H	51.6	-	28.2	-29.6	0.0	50.2	74.0	-	54.0
4.826	V	50.7	-	27.1	-27.2	0.0	50.6	74.0	-	54.0

Table 8-2-2. Ch.6 (2437MHz) **TX** mode 11Mbps

Frequency (GHz)	Polarity (H/V)	Measured (dB μ V) (<i>peak</i>)	Measured (dB μ V) (<i>average</i>)	Antenna Factor (dB/m)	Corr. Factor (dB)	Falloff Factor (dB)	Field Strength (dB μ V/m) (<i>peak</i>)	FCC Limit (dB μ V/m) (<i>peak</i>)	Field Strength (dB μ V/m) (<i>average</i>)	FCC Limit (dB μ V/m) (<i>average</i>)
Inband 2.437	H	110.3	101.9	28.4	-29.6	0.0	109.1	OB*	100.7	OB*
Adjacent RB 2.376	H	50.3	-	28.2	-29.6	0.0	48.9	74.0	-	54.0
2.390	H	50.7	-	28.2	-29.6	0.0	49.3	74.0	-	54.0
2.489	H	54.8	-	28.4	-29.6	0.0	53.6	74.0	-	54.0
1.065	V	55.5	-	24.6	-32.0	0.0	48.1	74.0	-	54.0
1.171	V	54.5	-	24.9	-31.6	0.0	47.8	74.0	-	54.0
1.201	V	50.7	-	25.2	-31.6	0.0	44.3	74.0	-	54.0
1.332	V	51.6	-	25.2	-31.3	0.0	45.5	74.0	-	54.0
2.239	H	51.4	-	27.7	-29.8	0.0	49.3	74.0	-	54.0
2.361	H	51.5	-	28.1	-29.6	0.0	50.0	74.0	-	54.0
4.876	V	49.0	-	27.0	-27.0	0.0	49.0	74.0	-	54.0
7.315	V	38.5	-	29.9	-24.8	0.0	43.6	74.0	-	54.0

Table 8-2-3. Ch.11 (2462MHz) **TX** mode 11Mbps

Frequency (GHz)	Polarity (H/V)	Measured (dB μ V) (peak)	Measured (dB μ V) (average)	Antenna Factor (dB/m)	Corr. Factor (dB)	Falloff Factor (dB)	Field Strength (dB μ V/m) (peak)	FCC Limit (dB μ V/m) (peak)	Field Strength (dB μ V/m) (average)	FCC Limit (dB μ V/m) (average)
Inband 2.462	H	110.5	101.8	28.4	-29.6	0.0	109.3	OB*	100.6	OB*
Adjacent RB 2.484	H	53.7	-	28.4	-29.6	0.0	52.5	74.0	-	54.0
2.491	H	53.7	-	28.4	-29.6	0.0	52.5	74.0	-	54.0
1.067	V	50.8	-	24.6	-32.0	0.0	43.4	74.0	-	54.0
1.147	V	57.8	-	24.6	-31.8	0.0	50.6	74.0	-	54.0
1.198	V	54.2	-	25.2	-31.6	0.0	47.8	74.0	-	54.0
1.332	V	51.5	-	25.2	-31.3	0.0	45.4	74.0	-	54.0
2.279	H	52.0	-	27.8	-29.8	0.0	50.0	74.0	-	54.0
2.339	H	51.6	-	28.1	-29.6	0.0	50.1	74.0	-	54.0
2.360	H	52.4	-	28.1	-29.6	0.0	50.9	74.0	-	54.0
2.387	H	50.8	-	28.2	-29.6	0.0	49.4	74.0	-	54.0
4.926	V	50.2	-	27.0	-27.0	0.0	50.2	74.0	-	54.0
7.390	V	38.9	-	29.8	-24.9	0.0	43.8	74.0	-	54.0

Table 8-2-4. Ch.6 (2437MHz) **RX** mode

Frequency (GHz)	Polarity (H/V)	Measured (dB μ V) (peak)	Measured (dB μ V) (average)	Antenna Factor (dB/m)	Corr. Factor (dB)	Falloff Factor (dB)	Field Strength (dB μ V/m) (peak)	FCC Limit (dB μ V/m) (peak)	Field Strength (dB μ V/m) (average)	FCC Limit (dB μ V/m) (average)
1.066	V	52.2	-	24.6	-32.0	0.0	44.8	74.0	-	54.0
1.144	V	50.6	-	24.6	-31.8	0.0	43.4	74.0	-	54.0
1.202	V	50.3	-	25.2	-31.6	0.0	43.9	74.0	-	54.0
1.331	V	49.1	-	25.2	-31.3	0.0	43.0	74.0	-	54.0

8.4.2 EUT in 2.4GHz OFDM transmission mode

*Note: OB means “operation band” (2400-2483.5MHz); in this case limit is 1W (measured conducted with power meter)

Table 8-2-5. Ch.1 (2412MHz) **TX** mode 18Mbps

Frequency (GHz)	Polarity (H/V)	Measured (dB μ V) (peak)	Measured (dB μ V) (average)	Antenna Factor (dB/m)	Corr. Factor (dB)	Falloff Factor (dB)	Field Strength (dB μ V/m) (peak)	FCC Limit (dB μ V/m) (peak)	Field Strength (dB μ V/m) (average)	FCC Limit (dB μ V/m) (average)
Inband 2.417	H	109.7	97.5	28.3	-29.6	0.0	108.4	OB*	96.2	OB*
Adjacent RB 2.375	H	52.9	-	28.2	-29.6	0.0	51.5	74.0	-	54.0
2.390	H	63.8	47.0	28.2	-29.6	0.0	62.4	74.0	45.6	54.0
1.007	V	48.9	-	24.1	-32.3	0.0	40.7	74.0	-	54.0
1.067	V	54.1	-	24.6	-32.0	0.0	46.7	74.0	-	54.0
1.199	V	53.7	-	25.2	-31.6	0.0	47.3	74.0	-	54.0
1.330	V	52.9	-	25.2	-31.3	0.0	46.8	74.0	-	54.0
2.344	H	50.6	-	28.1	-29.6	0.0	49.1	74.0	-	54.0
4.820	V	45.4	-	27.1	-27.2	0.0	45.3	74.0	-	54.0

Table 8-2-6. Ch.6 (2437MHz) **TX** mode 18Mbps

Frequency (GHz)	Polarity (H/V)	Measured (dB μ V) (<i>peak</i>)	Measured (dB μ V) (<i>average</i>)	Antenna Factor (dB/m)	Corr. Factor (dB)	Falloff Factor (dB)	Field Strength (dB μ V/m) (<i>peak</i>)	FCC Limit (dB μ V/m) (<i>peak</i>)	Field Strength (dB μ V/m) (<i>average</i>)	FCC Limit (dB μ V/m) (<i>average</i>)
Inband 2.435	H	111.0	99.9	28.4	-29.6	0.0	109.8	OB*	98.7	OB*
Adjacent RB 2.380	H	54.7	-	28.2	-29.6	0.0	53.3	74.0	-	54.0
2.390	H	55.1	-	28.2	-29.6	0.0	53.7	74.0	-	54.0
2.490	H	55.1	-	28.4	-29.6	0.0	53.9	74.0	-	54.0
1.007	V	49.6	-	24.1	-32.3	0.0	41.4	74.0	-	54.0
1.065	V	60.9	-	24.6	-32.0	0.0	53.5	74.0	-	54.0
1.202	V	51.4	-	25.2	-31.6	0.0	45.0	74.0	-	54.0
1.330	V	54.3	-	25.2	-31.3	0.0	48.2	74.0	-	54.0
2.347	H	51.0	-	28.1	-29.6	0.0	49.5	74.0	-	54.0
2.361	H	50.9	-	28.1	-29.6	0.0	49.4	74.0	-	54.0
2.368	H	50.5	-	28.2	-29.6	0.0	49.1	74.0	-	54.0
4.878	V	44.2	-	27.0	-27.0	0.0	44.2	74.0	-	54.0
7.315	V	41.4	-	29.9	-24.8	0.0	46.5	74.0	-	54.0


Table 8-2-7. Ch.11 (2462MHz) **TX** mode 18Mbps

Frequency (GHz)	Polarity (H/V)	Measured (dB μ V) (<i>peak</i>)	Measured (dB μ V) (<i>average</i>)	Antenna Factor (dB/m)	Corr. Factor (dB)	Falloff Factor (dB)	Field Strength (dB μ V/m) (<i>peak</i>)	FCC Limit (dB μ V/m) (<i>peak</i>)	Field Strength (dB μ V/m) (<i>average</i>)	FCC Limit (dB μ V/m) (<i>average</i>)
Inband 2.459	H	108.0	96.7	28.4	-29.6	0.0	106.8	OB*	95.5	OB*
Adjacent RB 2.484	H	70.0	49.8	28.4	-29.6	0.0	68.8	74.0	48.6	54.0
2.491	H	59.7	40.7	28.4	-29.6	0.0	58.5	74.0	39.5	54.0
1.007	V	49.2	-	24.1	-32.3	0.0	41.0	74.0	-	54.0
1.066	V	59.3	-	24.6	-32.0	0.0	51.9	74.0	-	54.0
1.203	V	52.2	-	25.2	-31.6	0.0	45.8	74.0	-	54.0
1.331	V	52.2	-	25.2	-31.3	0.0	46.1	74.0	-	54.0
2.347	H	51.0	-	28.1	-29.6	0.0	49.5	74.0	-	54.0
2.360	H	49.1	-	28.1	-29.6	0.0	47.6	74.0	-	54.0
2.364	H	49.4	-	28.1	-29.6	0.0	47.9	74.0	-	54.0
2.387	H	49.8	-	28.2	-29.6	0.0	48.4	74.0	-	54.0
4.924	V	45.8	-	27.0	-27.0	0.0	45.8	74.0	-	54.0
7.386	V	38.8	-	29.8	-24.9	0.0	43.7	74.0	-	54.0

Table 8-2-8. Ch.6 (2437MHz) **RX** mode

Frequency (GHz)	Polarity (H/V)	Measured (dB μ V) (<i>peak</i>)	Measured (dB μ V) (<i>average</i>)	Antenna Factor (dB/m)	Corr. Factor (dB)	Falloff Factor (dB)	Field Strength (dB μ V/m) (<i>peak</i>)	FCC Limit (dB μ V/m) (<i>peak</i>)	Field Strength (dB μ V/m) (<i>average</i>)	FCC Limit (dB μ V/m) (<i>average</i>)
1.007	V	49.2	-	24.1	-32.3	0.0	41.0	74.0	-	54.0
1.066	V	52.5	-	24.6	-32.0	0.0	45.1	74.0	-	54.0
1.198	V	52.5	-	25.2	-31.6	0.0	46.1	74.0	-	54.0
1.331	V	48.7	-	25.2	-31.3	0.0	42.6	74.0	-	54.0

8.5 Measurement plots of adjacent restricted band

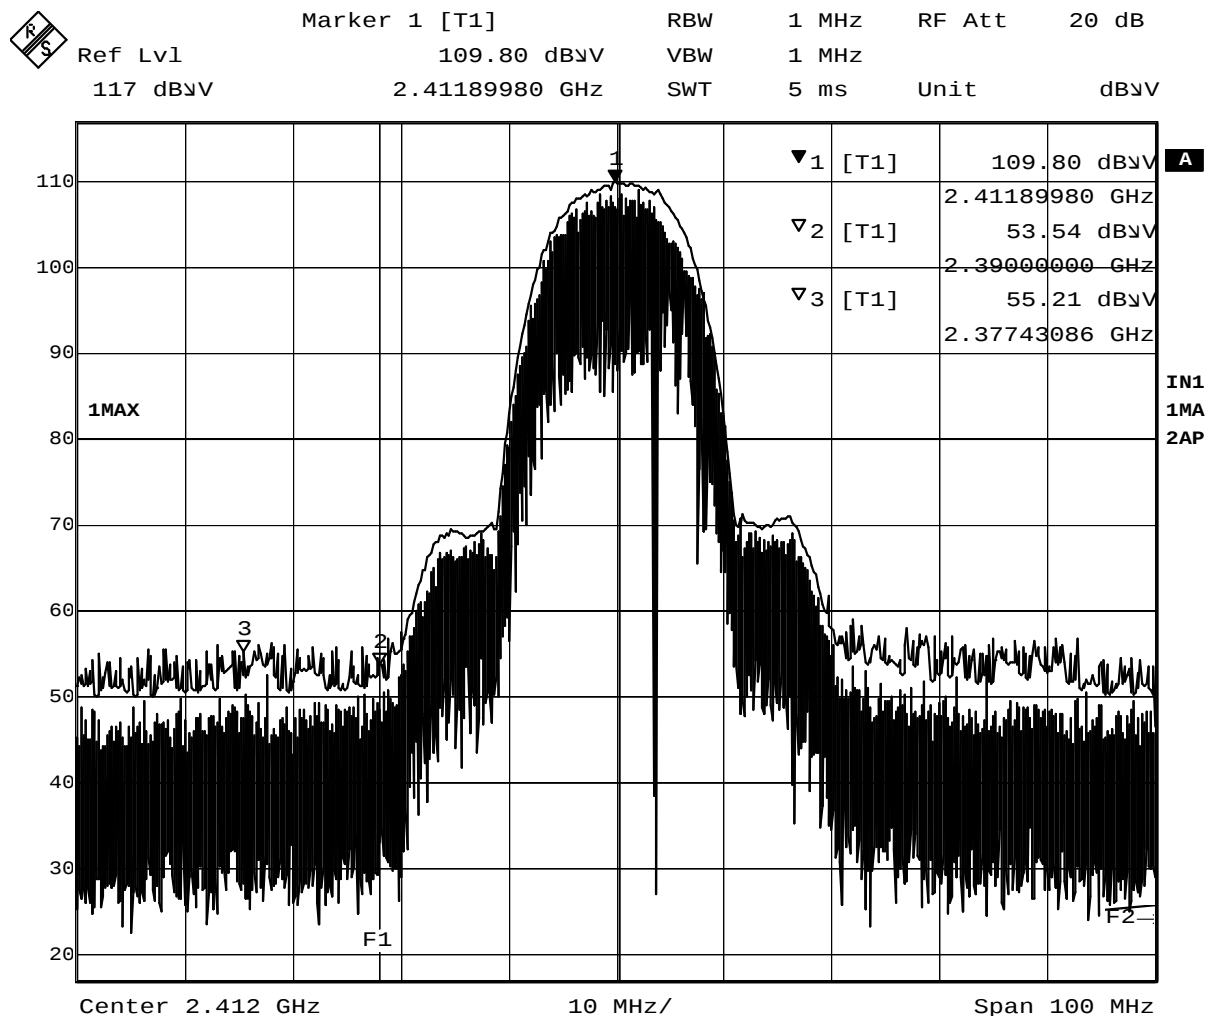


Date: 22.OCT.2003 21:33:13

Plot 8-1 Ch.1 2412MHz TX, DSSS 11Mbps (Peak)



Marker 1 [T1] RBW 1 MHz RF Att 20 dB
Ref Lvl 101.45 dBμV VBW 10 Hz
117 dBμV 2.41330261 GHz SWT 25 s Unit dBμV

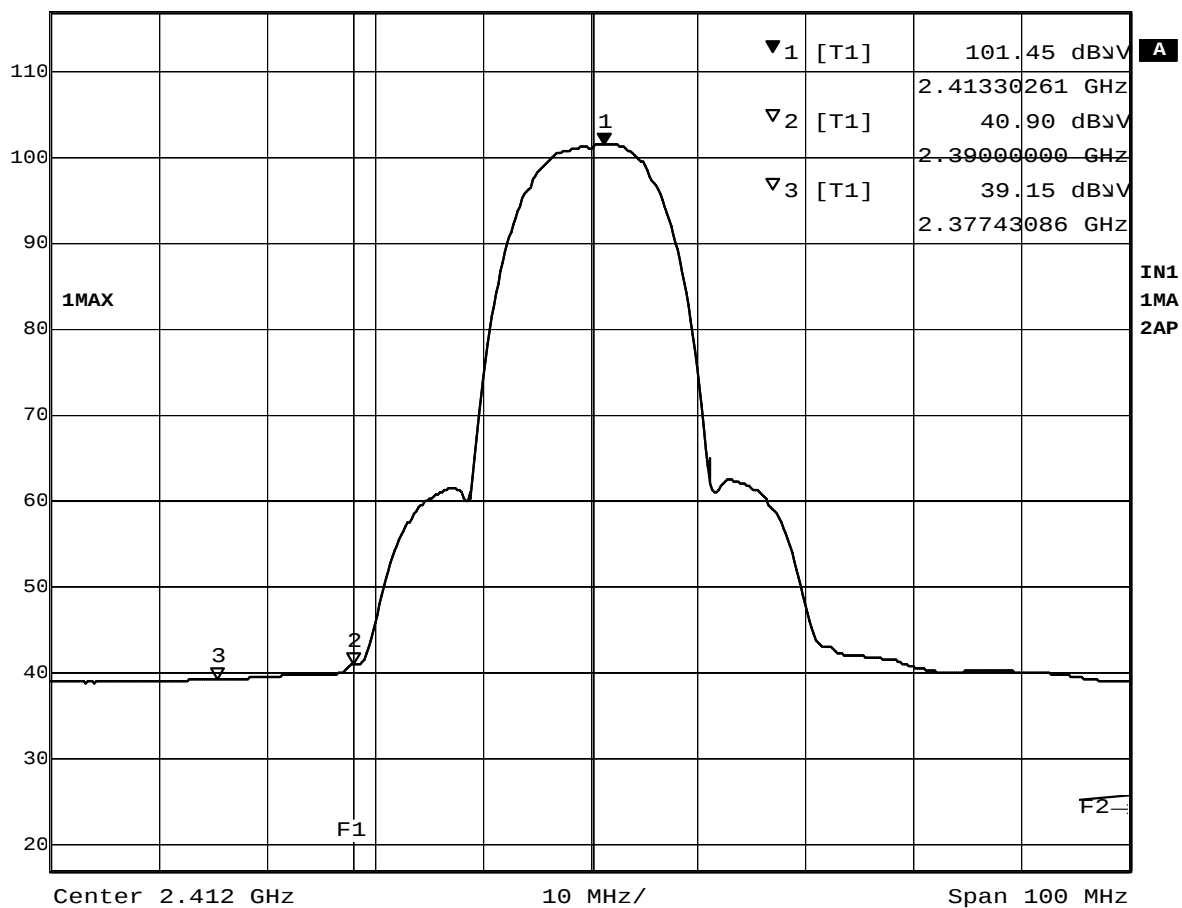


Date: 22.OCT.2003 21:34:03

Plot 8-2 Ch.1 2412MHz TX, DSSS 11Mbps (Average)



Marker 1 [T1] RBW 1 MHz RF Att 20 dB
Ref Lvl 110.45 dBμV VBW 1 MHz
117 dBμV 2.46210020 GHz SWT 5 ms Unit dBμV

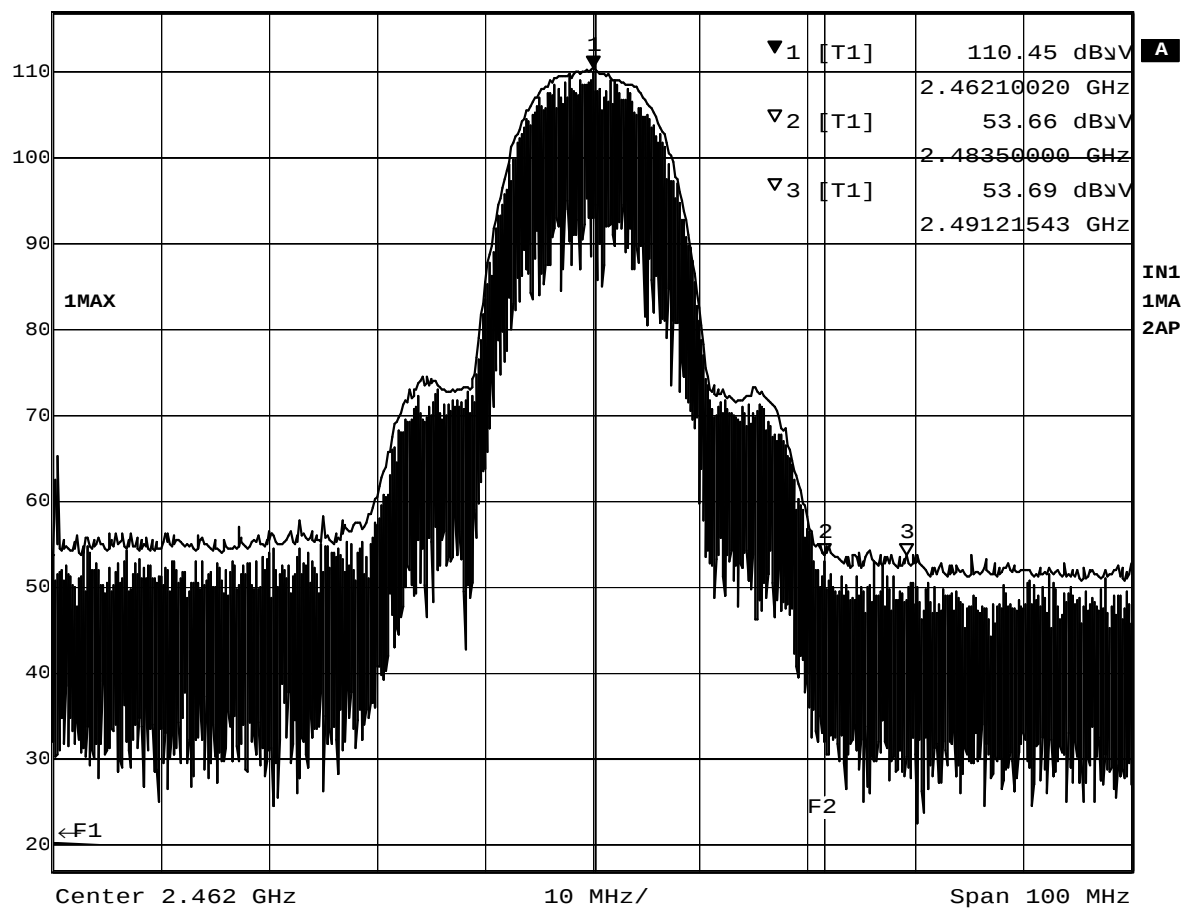


Date: 22.OCT.2003 21:11:38

Plot 8-3 Ch.11 2462MHz TX, DSSS 11Mbps (Peak)



Ref Lvl 117 dB μ V
Marker 1 [T1] 101.75 dB μ V
2.46149900 GHz
RBW 1 MHz
VBW 10 Hz
SWT 25 s
RF Att 20 dB
Unit dB μ V

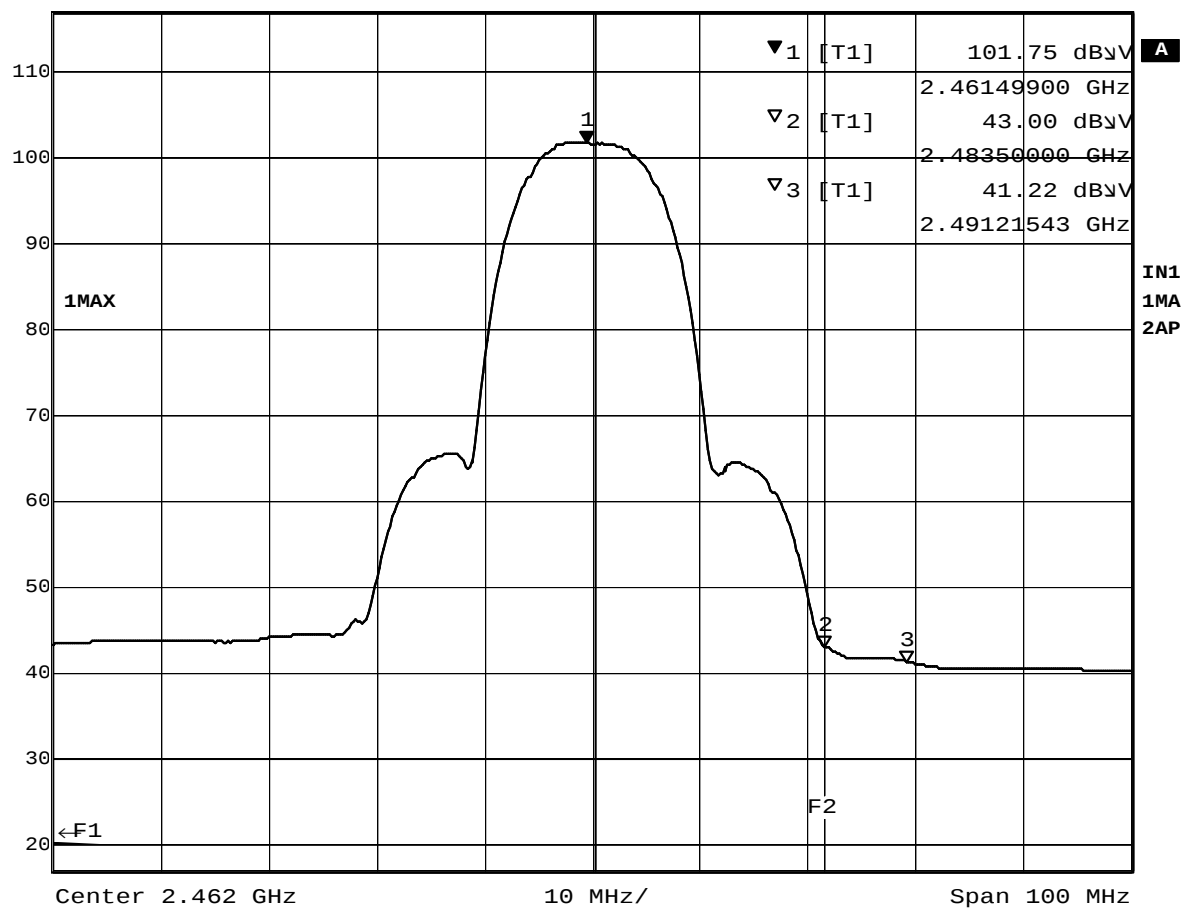


Date: 22.OCT.2003 21:12:28

Plot 8-4 Ch.11 2462MHz TX, DSSS 11Mbps (Average)



Ref Lvl 117 dBμV
Marker 1 [T1] 109.73 dBμV
2.41690982 GHz
RBW 1 MHz
VBW 1 MHz
SWT 5 ms
RF Att 20 dB
Unit dBμV

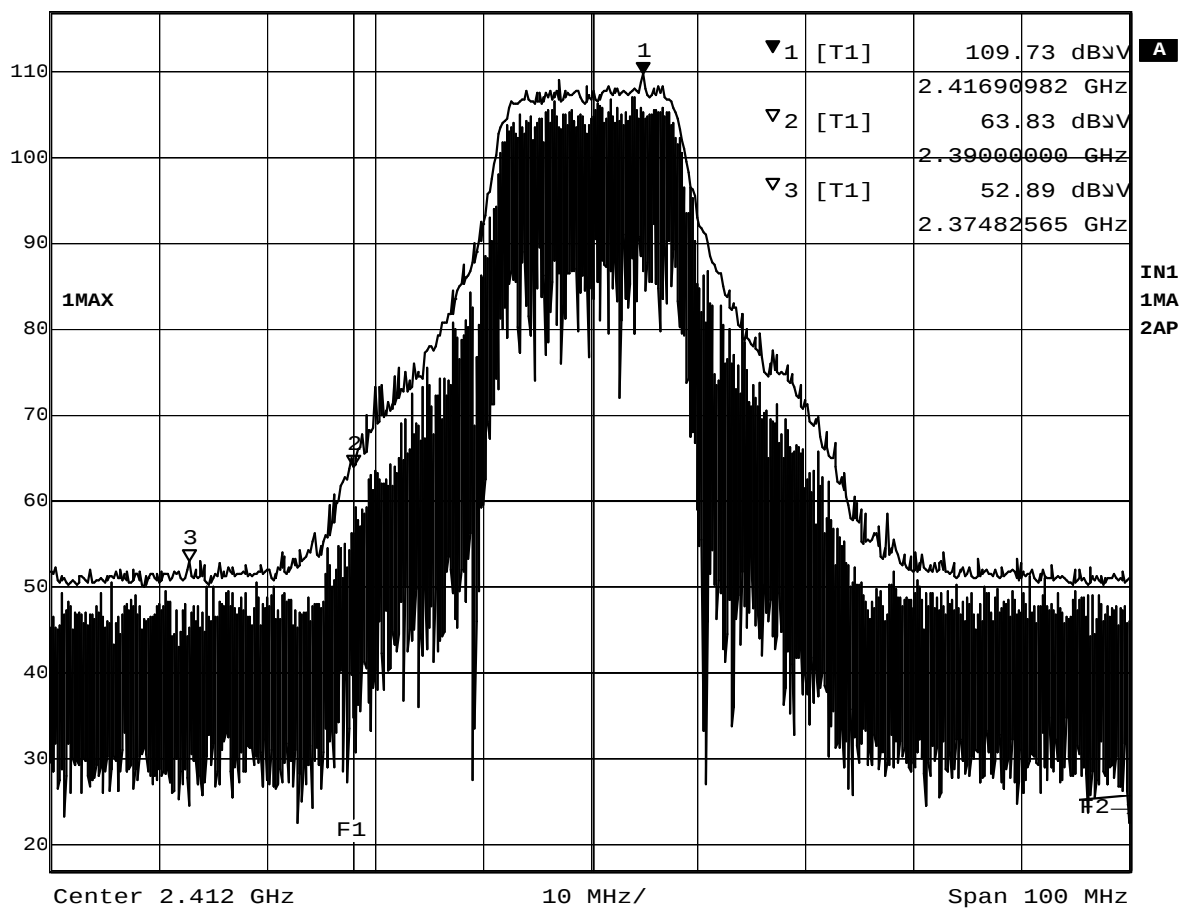


Date: 22.OCT.2003 20:40:17

Plot 8-5 Ch.1 2412MHz TX, OFDM 18Mbps (Peak)



Ref Lvl 117 dBμV
Marker 1 [T1] 97.48 dBμV
2.41350301 GHz
RBW 1 MHz
VBW 10 Hz
SWT 25 s
RF Att 20 dB
Unit dBμV

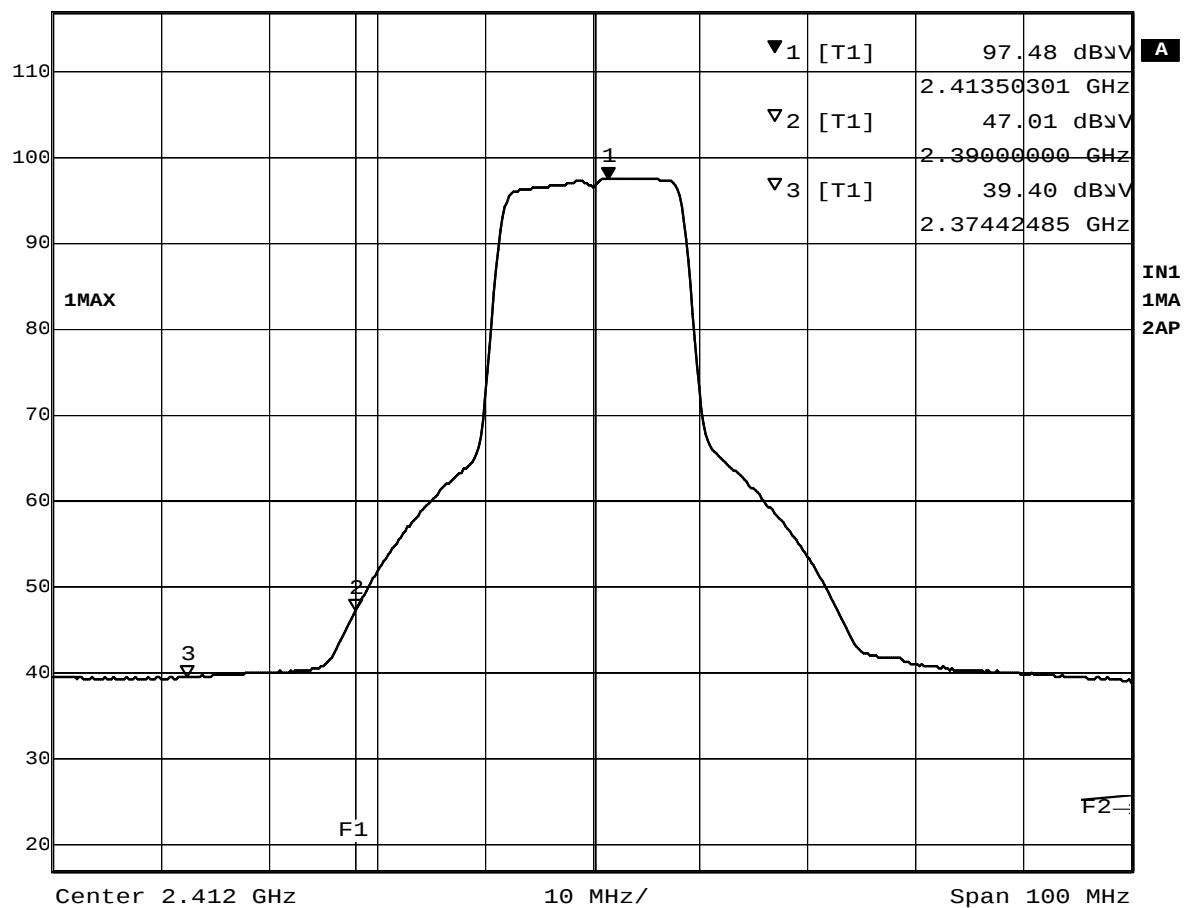


Date: 22.OCT.2003 20:39:36

Plot 8-6 Ch.1 2412MHz TX, OFDM 18Mbps (Average)



Marker 1 [T1] RBW 1 MHz RF Att 20 dB
Ref Lvl 108.04 dBμV VBW 1 MHz
117 dBμV 2.45909419 GHz SWT 5 ms Unit dBμV

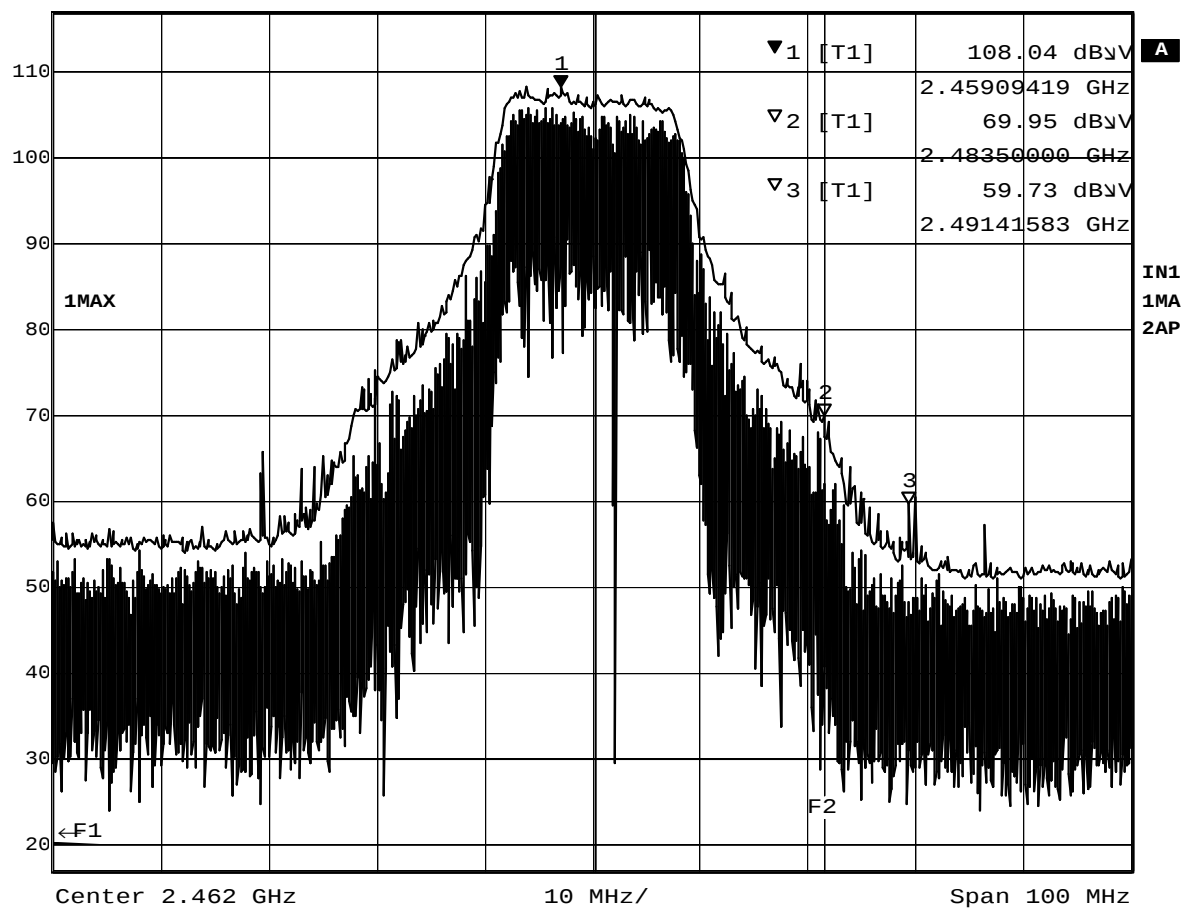


Date: 22.OCT.2003 20:58:55

Plot 8-7 Ch.11 2462MHz TX, OFDM 18Mbps (Peak)



Marker 1 [T1] RBW 1 MHz RF Att 20 dB
Ref Lvl 96.65 dBμV VBW 10 Hz
117 dBμV 2.45548697 GHz SWT 25 s Unit dBμV

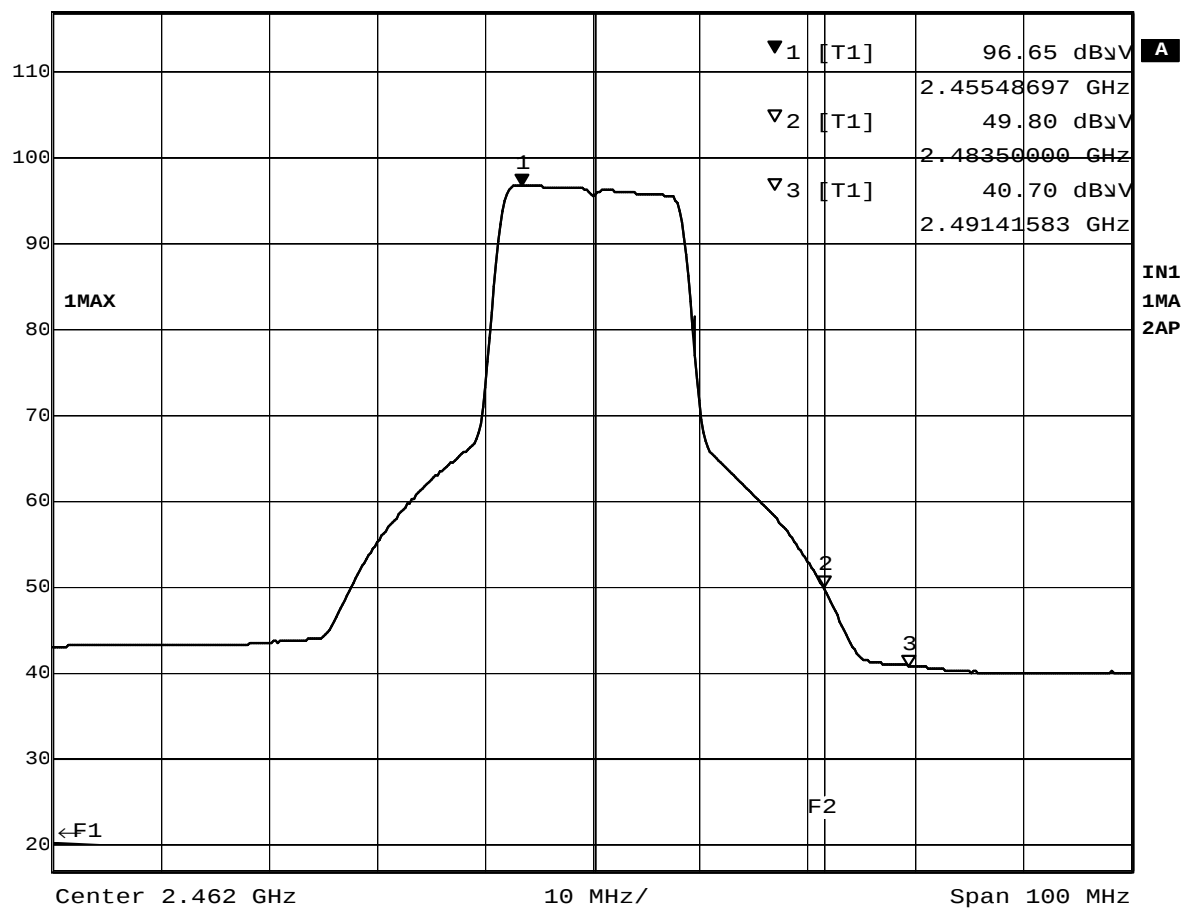

Date: 22.OCT.2003 21:00:08

Plot 8-8 Ch.11 2462MHz TX, OFDM 18Mbps (Average)