

FCC Part 15, Subpart C (Intentional Radiator)


Product Name: ThinkPad R30
(2656-3Ax/6Ax/6Bx/BAx/EAx/EBx)

FCC ID: ANOCH126P8056

June 22, 2001

EMC Staff Engineer

Toshiya Murota

Signature: 

IBM Japan, Ltd.
EMC Engineering
LAB-S59

1623-14, Shimotsuruma,
Yamato-shi Kanagawa-ken 242-8502, Japan
Phone: +81-46-215-6574
Fax: +81-46-273-7420
E-Mail: murota@jp.ibm.com

EMC Engineering Manager / NVLAP signatory

Akihisa Sakurai


Signature: 

IBM Japan, Ltd.
EMC Engineering
LAB-S59

1623-14, Shimotsuruma,
Yamato-shi Kanagawa-ken 242-8502, Japan
Phone: +81-46-215-2613
Fax: +81-46-273-7420
E-Mail: akihisa@jp.ibm.com

OEM System Development Manager

Ishikawa Tatsuroh

Signature: 

IBM Japan, Ltd.
Portable Products
LAB-R15

1623-14, Shimotsuruma,
Yamato-shi Kanagawa-ken 242-8502, Japan
Phone: +81-46-215-2750

Portable Systems Director

Arimasa Naitoh

Signature: 

IBM Japan, Ltd.
Portable Systems
LAB-R11

1623-14, Shimotsuruma,
Yamato-shi Kanagawa-ken 242-8502, Japan
Phone: +81-46-215-6110

FCC Part 15, Subpart C (Intentional Radiator)

Product Name: ThinkPad R30
(2656-3Ax/6Ax/6Bx/BAx/EAx/EBx)

FCC ID: ANOCH126P8056

June 22, 2001

EMC Staff Engineer

Toshiya Murota

Signature: _____

IBM Japan, Ltd.
EMC Engineering
LAB-S59
1623-14, Shimotsuruma,
Yamato-shi Kanagawa-ken 242-8502, Japan
Phone: +81-46-215-6574
Fax: +81-46-273-7420
E-Mail: murota@jp.ibm.com

EMC Engineering Manager / NVLAP signatory

Akihisa Sakurai

Signature: _____

IBM Japan, Ltd.
EMC Engineering
LAB-S59
1623-14, Shimotsuruma,
Yamato-shi Kanagawa-ken 242-8502, Japan
Phone: +81-46-215-2613
Fax: +81-46-273-7420
E-Mail: akihisa@jp.ibm.com

OEM System Development Manager

Ishikawa Tatsuroh

Signature: _____

IBM Japan, Ltd.
Portable Products
LAB-R15
1623-14, Shimotsuruma,
Yamato-shi Kanagawa-ken 242-8502, Japan
Phone: +81-46-215-2750

Portable Systems Director

Arimasa Naitoh

Signature: _____

IBM Japan, Ltd.
Portable Systems
LAB-R11
1623-14, Shimotsuruma,
Yamato-shi Kanagawa-ken 242-8502, Japan
Phone: +81-46-215-6110

**MEASUREMENT/TECHNICAL REPORT – Part 15 Subpart C
(Intentional Radiator)**

**ThinkPad R30
(2656-3Ax/6Ax/6Bx/BAx/EAx/EBx)**

FCC ID : ANOCH126P8056

June 22, 2001

This report concerns: (check one)

Original Grant

Class I change

Class II change

Equipment type: Wireless LAN device in Computer (computer, printer, modem, etc.)

This report shall not be reproduced except in full, without the written permission of this test lab.

The measurement results contained in this report relate only to the item which was tested.

Measurement procedure used is ANSI C63.4-1992 unless otherwise specified.

Other test procedure: _____

The FCC has issued provisional acceptance of this test laboratory for Declaration of Conformity testing per letter dated 1997.

APPLICANT ANTI-DRUG ABUSE CERTIFICATION:

By checking yes, the applicant certifies that, in the case of an individual applicant, he or she is not subject to a denial of federal benefits, that includes FCC benefits, pursuant to Section 5301 of the Anti-Drug Abuse of 1988, 21 U.S.C. 853(a), or, in the case of a non-individual applicant (e.g. corporation, partnership or other unincorporated association), no party to the application is subject to a denial of federal benefits, that includes FCC benefits, pursuant to that section. For the definition of a "party" for these purposes, see 47 CFR 1.2002(b).

or No

"Report shall not be reproduced except in full, without the written approval of the laboratory" "the report must not be used by the client to claim product endorsement by NVLAP or any agency of the US government"

Prepared by: Toshiya Murota

IBM Japan Corporation, Yamato EMC Engineering

LAB-S59, 1623-14, Shimotsuruma, Yamato-shi Kanagawa-ken 242-8502, Japan

Tel: +81-46-215-6574 Fax: +81-46-273-7420

Operational Description

1. Objective

This is a Certification Compliance Report for FCC Part 15, Subpart C (Intentional Radiator).

- The applying equipment : ThinkPad R30
- FCC ID : ANOCH126P8056

2. Product Description

The applying equipment is a portable type notebook personal computer integrating IEEE 802.11b Wireless LAN function inside. The wireless module consists of an OEM card(Actiontec Electronics Inc., IEEE802.11b Wireless LAN Mini-PCI card) and IBM original integrated 2 antennas (Dipole or Inverted F-figure type antennas).

The sepecification of the applying equipment is as follows :

Table 1 : Specification of PC main body (LCD 14 inch model)

Model Identification		ThinkPad R30			
Product number (Order code)		2656-6Ax	2656-EAx	2656-6Bx	2656-EBx
PC Functions	Max. size	313 mm(12.3")(W) : 254 mm(10.0")(D) : 36 mm(1.42")(H)			
	Max.Weight	6.36 lbs		6.61 lbst	
	Hard disk	2.5" 30 GB		2.5" 15GB	
	Memory	128MB			
	Bay Device	CD-RW/DVD-ROM	CD-RW	CD-ROM	
	Power	AC adapter, Battery (Li-Ion)		AC adapter, Battery (NiMH)	
	Ports & Slots	Parallel, CRT, Headphone, Microphone, USBx2, 4M IR, S-Video Out, Port Replicator, RJ11, RJ45, PCMCIA slot (type-2 x 1or type-3 x 1)			
	CPU	Intel® Mobile Geyserville® 900MHz			
	LCD	14.1" TFT XGA			
	Keyboard	US English, French, Spanish, UK English, Japanese, Chinese, Korean, Thailand			
	Pre installed Software	Whistler Per	Whistler Pro	Whistler Per	Whistler Pro

Table 2 : Specification of PC main body (LCD 13 inch mode)


Model Identification		ThinkPad R30	
Product number (Order code)		2656-3Ax	2656-BAx
PC Functions	Max. size	313 mm(12.3")(W) : 254 mm(10.0")(D) : 36 mm(1.42")(H)	
	Max.Weight	6.15 lbs	
	Hard disk	2.5" 15 GB	
	Memory	128MB	
	Bay Device	CD-ROM	
	Power	AC adapter, Battery (Li-Ion)	
	Ports & Slots	Parallel, CRT, Headphone, Microphone, USBx2, 4M IR, S-Video Out, Port Replicator, RJ11, RJ45, PCMCIA slot (type-2 x 1 or type-3 x 1)	
	CPU	Intel® Mobile Geyserville® 900MHz	
	LCD	13.3" TFT XGA	
	Keyboard	US English, French, Spanish, UK English, Japanese, Chinese, Korean, Thailand	
	Pre installed Software	Whistler Per	Whistler Pro

Table 3 : Specification of Wireless-LAN feature

Carrier Frequencies	2412MHz - 2462MHz				
Occupied BW at 20dB below (Band-edge)	2403.73MHz – 2470.57MHz				
Channels	Total 11 channels (default setting ch. # : 1, 6, 11)				
Channel BW at 20dB below	Max. 16.96MHz / ch				
Channal spacing	5 MHz				
Conducted emission Power	14.3 dBm				
Antenna gain	Dipole (13 inch LCD) : -0.11 dBi Inverted-F (14 inch LCD) : -1.58 dBi				
Antenna type	Rx	13/14 inch common	Inverted-F	Acer NeWeb	P/N: 5.900020.0001
	Tx/Rx switch	13 inch	Dipole		P/N: 5.900022.0001
		14 inch	Inverted-F		P/N: 5.900017.0001
Antenna cable type and length	Tx/Rx switching antenna : coax 550mm Rx antenna : coax 370mm				
Bit rate	1 Mbit/sec	2 Mbit/sec	5.5 Mbit/sec	11 Mbit/sec	
Chip/symbol rate	11	11	8	8	
Bit/symbol rate	1 (DBPSK)	2 (DQPSK)	4 (CCK)	8 (CCK)	
Chip/bit rate	11	5.5	2	1	

3. Mounting structure of Wireless LAN PC card and Antenna

note) The main antenna in left side of LCD is used for both RF transmission and receiving with half duplex switching mode. The auxiliary antenna is used for RF receiver only. When the Wireless PC card is in RF receiving state, one of the antennas is selected automatically to have a good quality of radiocommunication.

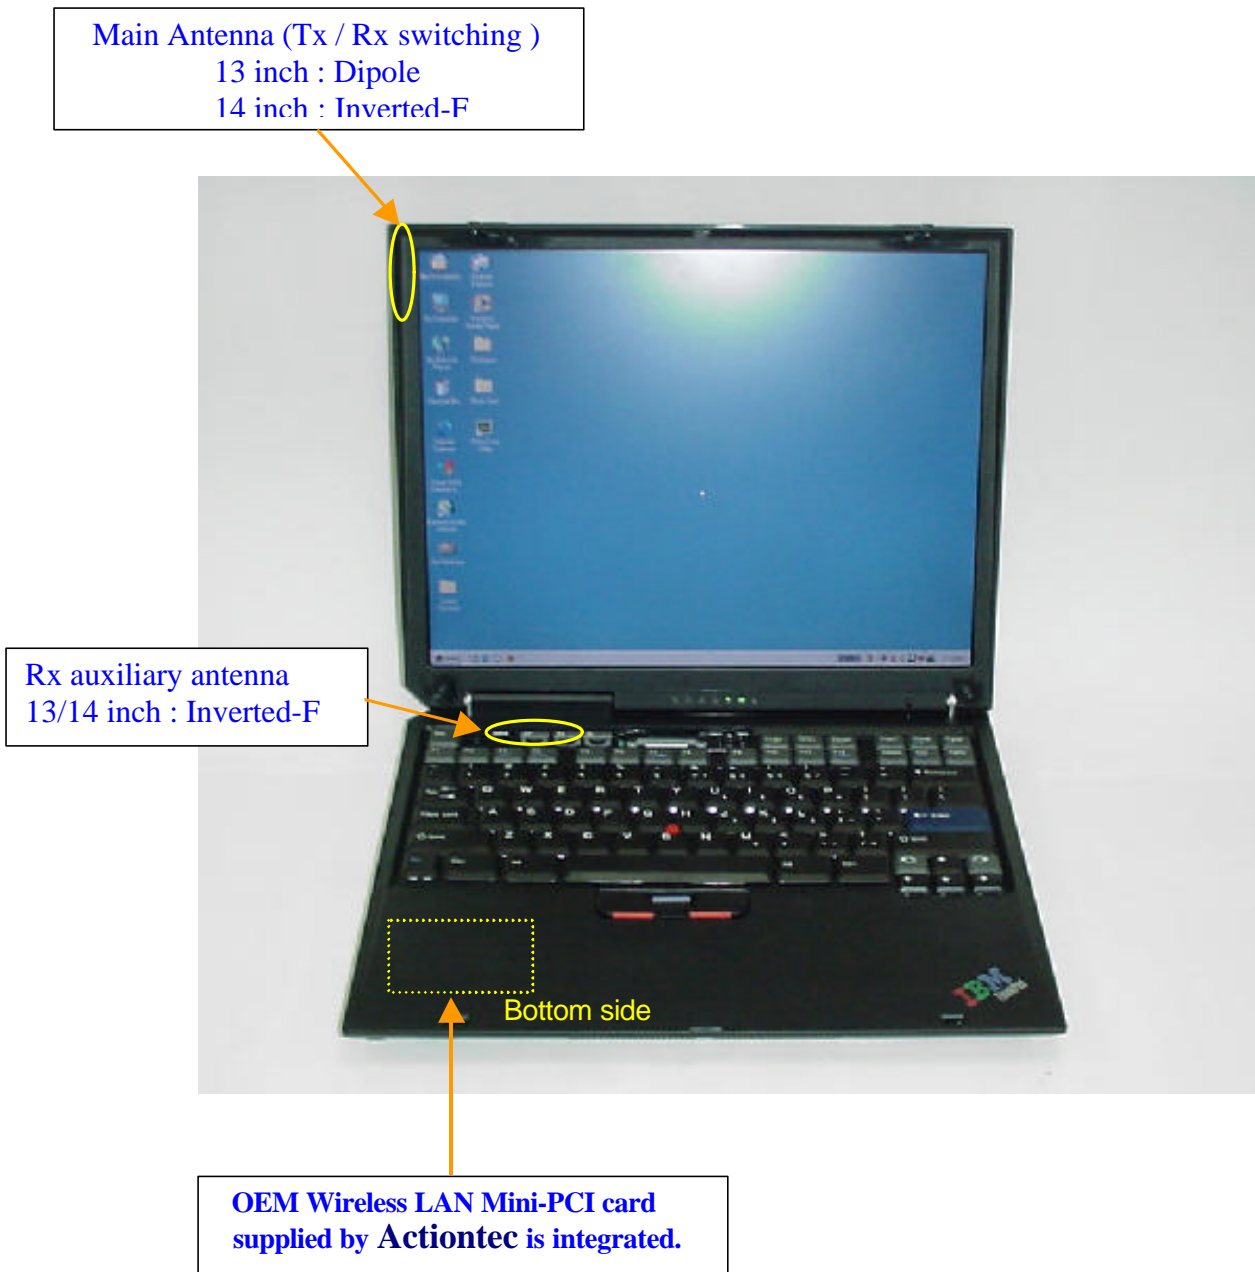

4. Related Submittal(s)/Grant(s)/Notes

- The device without Wireless LAN features is classified as a digital device under Part 15 Subpart B and subject to DoC.

5. Circuitry description of the Wireless LAN PC card

Reference: Basic Operation Principle of 802MIP

by Actiontec Electronics, Inc. 4/2001

The Wireless LAN portion of 802MIP combo card is a 2.4GHz ISM Band DSSS Radio. It is designed to operate using IEEE 802.11b WLAN Standard for use in wireless networking systems. The Radio consists of 4 major ICs, which are ISL3685, HFA3783, ISL3984, ISL3874, and few support ICs. It operates at maximum transmit rate 11Mb/s, back off rates 5.5, 2 and 1 Mb/s. The modulation schemes include CCK (Complementary Code Keying), DQPSK and DBPSK depending on what transmit bit rate it operates at. The radio card interfaces to PC through a MiniPCI bus.

Transmitter path

The Ethernet data comes through the MiniPCI interface, the Host I/O interface to the MAC section of ISL3874. The signal then flows into the data router where it is converted from Ethernet to 802.11b protocol. After the signal is converted, a radio preamble and header is added to it and passed to the I/O of BBP (Base Band Processor) section of ISL3874 via PHY I/O, RADIO I/O. There is also support circuitry, such as outboard SRAM and flash ROM, which contains the firmware controlling the radio.

In TX modulator of BBP section, differential phase shift keying modulation schemes DBPSK, DQPSK and CCK, with data scrambling capability, are fulfilled to provide a variety of data rates-- DBPSK for 1 Mb/s, DQPSK for 2 Mb/s and CCK for 5.5 and 11Mb/s. The signal, which now is two separate quadrature components I and Q, then flows to the quad IF chip HFA3783 through D/A converters.

At TX side of BBP, there is also TX ALC (Automatic Level Control) circuitry, which is part of the TX ALC loop. The loop keeps TX output power to be consistent so that prevent the power spectrum from regrowth.

HFA3783 is now the dual up conversion mixers (dual down conversion mixers for RX). The signal upconverts to an IF frequency of 374 MHz and passes into a variable gain amplifier, which is also a part of the ALC loop. Next, it passes through the switched TX/RX shared SAW filter into ISL3685 and then upconverts again to a RF frequency from 2.412~2.462 GHz, depending on the channel selection. The signal flows through a pre-amplifier, two band pass filters, which block all the unwanted emissions such as image components, harmonics and spurious stuff, into ISL3984 power amplifier. The output of the power amplifier is then fed through another band pass filter that is about 85 MHz bandwidth to one of the antennas.

Receiver path

The receive signal traveling through the air is received by the dual diversity antennas. The circuits will switch to the antenna which provides better RSSI (Received Signal Strength Indication). The RF signal then feeds into an 85 MHz band pass filter, which blocks all the unwanted components such as image frequency. The signal again is amplified using the LNA within ISL3685 and mixed down to the IF frequency of 374 MHz. The PLL and synthesizer select the channel frequency using Low Side Injection. The mixer outputs are then fed through the IF SAW filter that provides image

rejection into HFA3783, which is now a quad down converter. HFA3783 also provides RSSI to BBP of ISL3874. There is a two stage analog AGC (Automatic Gain Control) circuit which adjusts the gain to compensate the signal strength differences. The output of the twin AGC's provides a constant level signal to the I and Q down converters, which convert the IF to both I and Q signals to BBP. A second frequency synthesizer, which uses ISL3183 as its VCO, feeds the I and Q mixers with a same frequency signal that is phase shifted by 90°.

The I and Q signals that are fed into BBP of ISL3874 are converted into digital signals via a dual A/D converters then flow through the digital AGC control circuit followed by the digital demodulator. The correlation codes that BBP generates properly detect the transmitted complimentary codes. In here the automatic antenna selection is also done by taking RSSI as the reference. The output of the digital demodulator is sent into an I/O interface of MAC section. The digital codes then flow into the PHY I/O interface and into the MAC protocol engine. The MAC of ISL3874 converts the signal protocol from 802.11b to Ethernet and finally passes that data through the HOST I/O interface to the PC.