

# Emission Test Report

## Standard: FCC Part 15 Subpart C / IC RSS-210

Document Number : FCC 19-0190-0

### Product Model: IBM High Rate Wireless LAN Mini-PCI Adapter with Modem II (with IBM ThinkPad R32 Series)

### FCC ID: ANOM3AWEB56GA IC: 349E-11980

May 24, 2002

Prepared by:  
EMC Engineer

Takeshi Asano


Signature: 

IBM Japan, Ltd.  
EMC Engineering  
LAB-S59

1623-14, Shimotsuruma,  
Yamato-shi Kanagawa-ken 242, Japan  
Phone: +81-46-215-4779  
Fax: +81-46-273-7420  
E-Mail: asano@jp.ibm.com

Reviewed and Checked by:  
EMC Staff Engineer

Toshiya Murota

Signature: 

IBM Japan, Ltd.  
EMC Engineering  
LAB-S59

1623-14, Shimotsuruma,  
Yamato-shi Kanagawa-ken 242, Japan  
Phone: +81-46-215-6574  
Fax: +81-46-273-7420  
E-Mail: murota@jp.ibm.com

Approved by:  
Manager, EMC Engineering

Akihisa Sakurai

Signature: 

IBM Japan, Ltd.  
EMC Engineering  
LAB-S59

1623-14, Shimotsuruma,  
Yamato-shi Kanagawa-ken 242, Japan  
Phone: +81-46-215-2613  
Fax: +81-46-273-7420  
E-Mail: akihisa@jp.ibm.com

## MEASUREMENT / TECHNICAL REPORT – Part 15 Subpart C (Intentional Radiator)

### IBM High Rate Wireless LAN Mini-PCI Adapter with Modem II (with ThinkPad R32 Series)

**FCC ID : ANOM3AWEB56GA**

**May 24, 2002**

This report concerns: (check one) Original Grant <input checked="" type="checkbox"/> _____ Class I change <input type="checkbox"/> _____ Class II change <input type="checkbox"/> _____
Equipment type: <u>Wireless LAN device</u>
This report shall not be reproduced except in full, without the written permission of this test lab.
The measurement results contained in this report relate only to the item which was tested.
Measurement procedure used is ANSI C63.4-2000 unless otherwise specified.
Other test procedure: _____
The FCC has issued provisional acceptance of this test laboratory for Declaration of Conformity testing per letter dated 1997.
<p><i>APPLICANT ANTI-DRUG ABUSE CERTIFICATION:</i></p> By checking yes, the applicant certifies that, in the case of an individual applicant, he or she is not subject to a denial of federal benefits, that includes FCC benefits, pursuant to Section 5301 of the Anti-Drug Abuse of 1988, 21 U.S.C. 853(a), or, in the case of a non-individual applicant (e.g. corporation, partnership or other unincorporated association), no party to the application is subject to a denial of federal benefits, that includes FCC benefits, pursuant to that section. For the definition of a “party” for these purposes, see 47 CFR 1.2002(b). <p style="text-align: center;"><input checked="" type="radio"/> Yes or No</p>
“Report shall not be reproduced except in full, without the written approval of the laboratory” “the report must not be used by the client to claim product endorsement by NVLAP or any agency of the US government”
Prepared by: Takeshi Asano <div style="text-align: right; padding-right: 50px;">                     IBM Japan Corporation, Yamato EMC Engineering                      LAB-S59, 1623-14, Shimotsuruma, Yamato-shi Kanagawa-ken 242-8502, Japan                      Tel: +81-46-215-4779    Fax: +81-46-273-7420                 </div>

**- Index -**

**A. GENERAL INFORMATION.....3**

**A.1 TEST METHODOLOGY.....3**

**A.2 TEST FACILITY / NVLAP ACCREDITATION.....3**

**A.3 EUT DETAILS.....3**

**B. SUMMARY OF TEST RESULTS .....4**

**C. OPERATION MODE OF EUT.....5**

**D. TEST INSTRUMENTS.....6**

**E. MEASUREMENT UNCERTAINTY.....7**

**F. RELATED SUBMITTAL(S)/GRANT(S)/NOTES .....7**

**1. BANDWIDTH AT 6 DB BELOW.....8**

**1.1 TEST PROCEDURE.....8**

**1.2 TEST INSTRUMENTS AND MEASUREMENT SETUP.....8**

**1.3 MEASUREMENT RESULTS.....8**

**1.4 TRACE DATA.....9**

**2. OCCUPIED BANDWIDTH / BAND-EDGE (AT 20 DB BELOW), AND OUT OF BAND EMISSIONS.....12**

**2.1 TEST PROCEDURE.....12**

**2.2 TEST INSTRUMENTS AND MEASUREMENT SETUP.....12**

**2.3 MEASUREMENT RESULTS OF OCCUPIED BANDWIDTH / BAND-EDGE.....12**

**2.4 MEASUREMENT RESULTS OF OUT OF BAND EMISSIONS .....12**

**2.5 TRACE DATA OF BAND-EDGE.....13**

**2.6 TRACE DATA OF OUT OF BAND EMISSIONS.....16**

**3. TRANSMITTER OUTPUT POWER.....19**

**3.1 TEST PROCEDURE.....19**

**3.2 MEASUREMENT RESULTS.....19**

**4. TRANSMITTER POWER SPECTRAL DENSITY .....20**

**4.1 TEST PROCEDURE.....20**

**4.2 TEST INSTRUMENTS AND MEASUREMENT SETUP.....20**

**4.3 MEASUREMENT RESULTS.....20**

**4.4 TRACE DATA.....21**

**5. AC WIRELINE CONDUCTED EMISSIONS (450KHZ – 30MHZ) .....24**

**5.1 TEST PROCEDURE.....24**

**5.2 TEST INSTRUMENTS AND MEASUREMENT SETUP.....24**

**5.3 MEASUREMENT RESULTS.....25**

**6. RESTRICTED BANDS RADIATIONS (30MHZ – 1GHZ) .....27**

**6.1 TEST PROCEDURE.....27**

**6.2 TEST INSTRUMENTS AND MEASUREMENT SETUP.....27**

**6.3 FIELD STRENGTH CALCULATION.....29**

**6.4 MEASUREMENT RESULTS.....30**

**7. RESTRICTED BANDS RADIATIONS (1GHZ – 25GHZ) .....32**

**7.1 TEST PROCEDURE.....32**

**7.2 TEST INSTRUMENTS AND MEASUREMENT SETUP.....32**

**7.3 FIELD STRENGTH CALCULATION.....33**  
**7.4 MEASUREMENT RESULTS.....34**

## A. GENERAL INFORMATION

APPLICANT : IBM Japan, Ltd.  
 TEST SITE : IBM Japan, Ltd., Yamato Semi-anechoic chamber #1  
 TEST SITE ADDRESS : 1623 – 14 Shimotsuruma, Yamato-shi, Kanagawa 242-8502 Japan  
 Tel: +81-46-215-4779, Fax: +81-46-273-7420  
 REGULATION : FCC Part 15 Subpart C  
 Industry Canada RSS-210 (Issue No.5)  
 MODEL NAME : IBM High Rate Wireless LAN Mini-PCI Adapter with Modem II  
 FCC ID : ANOM3AWEB56GA  
 IC Certification Number : 349E-11980  
 SERIAL NUMBER : 900AG200D876  
 PHYSICAL CONDITION : Preproduction  
 KIND OF EQUIPMENT : IEEE802.11b Wireless LAN Mini-PCI card (DSSS)  
 TESTED DATE : May 14, 15, 16 and 24, 2002

### A.1 Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4-2000. Radiated testing was performed at an antenna to EUT distance of 3 meters.

### A.2 Test Facility / NVLAP Accreditation

The semi-anechoic chamber #1 used to correct the data are located in Yamato Laboratory, IBM Japan.

- This facility has been fully described in a report dated September 1998, submitted to the FCC office, and accepted in a letter, dated Nov. 2, 1998(31040/SIT).
- This facility is accepted by **Industry Canada** in a letter dated March 19, 2001 as number **IC 349E** for chamber #2, and January 25, 2002 as number **IC 4221** for chamber #1.
- IBM Yamato EMC Engineering is recognized under the National Voluntary Laboratory Accreditation Program for satisfactory compliance with Criteria established in Title 15, Part 285 Code of Federal Regulations.(NVLAP Lab code: 200198-0)

### A.3 EUT details

Table A EUT details

Model and S/N	FCC ID IC Certification Number	Description
IBM High Rate Wireless LAN Mini-PCI Adapter with Modem II (s/n: 900AG200D876)	ANOM3AWEB56GA 349E-11980	<b>Applying equipment</b> Wireless LAN Mini-PCI card without antenna
ThinkPad R32 M/T 2658-CGU (s/n AA-GFYR5)	N/A	IBM Notebook PC with built_in antenna CPU: Intel® Mobile Pentium® 4, clock 1.7GHz
P/N 02K6746	N/A	Universal AC adapter 72W, Unshielded power cord

## B. SUMMARY OF TEST RESULTS

Table-B presents the list of the measurement items for Spread Spectrum, Direct Sequence devices under FCC Part 15 Subpart C and Industry Canada RSS-210.

The section numbers of upper portion are showing FCC number, and the other (lower) ones are for IC.

Table-B List of the measurements

Section(s)	Test Items		Condition	Result
	Transmit mode (TX):			
15.247(a)(2) 5.9.1	Bandwidth at 6 dB below		Conducted	Pass
15.247(c) 5.9.1 6.2.2 (o) (e1)	Occupied BW (or Band-edge) Out of Band Emissions (Bandwidth at 20 dB below)	The radiated emission in any 100kHz of outband shall be at least 20dB below the highest inband spectral density.	Conducted	Pass
15.247(b) 6.2.2 (o) (b)	Transmitter output power	Shall not exceed 1.0 W.	Conducted	Pass
15.247(d) 6.2.2 (o) (b)	Transmitter power spectral Density	Shall not be greater than 8 dBm in any 3kHz band.	Conducted	Pass
15.247(e) 6.2.2 (o) (b)	Processing gain	N/A*1	N/A	N/A*1
15.207 6.6	AC Wireline Conducted Emissions 450kHz – 30MHz	Class B: 250µV	Conducted	Pass
15.205 / 209 6.2.1 / 6.3	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Shall not exceed the limits specified in FCC 15.209 or RSS-210 Table3.	Radiated (30MHz - 1GHz)	Pass
			Radiated (1– 25GHz)	Pass

Receive mode (RX):				
15.207 7.4	AC Wireline Conducted Emissions 450kHz – 30MHz	Class B: 250µV	Conducted	Pass
15.209 7.3	General Field Strength Limits (Radiated Emission Limits)	Shall not exceed the limits specified in RSS-210.	Radiated (30MHz - 1GHz)	Pass
			Radiated (1– 25GHz)	Pass

\*1: The Processing Gain data is excluded from this application according to the FCC rule change on May/16/2002.

## C. OPERATION MODE OF EUT

All tests were performed using the “PRISM Test Utility Program”, Version 3.0.24. Three kinds of modulation are used for transmission with appropriate bit rates:

Table C-1 Transmit mode (TX)

Operation Frequency [GHz]	Rated output power (conducted) [dBm]			Test performed*
	Bit rate 2Mbps	Bit rate 5.5Mbps	Bit rate 11Mbps	
2.412 (Ch. 1)	+15	+15	+15	X
2.417 (Ch. 2)	+15	+15	+15	
2.422 (Ch. 3)	+15	+15	+15	
2.427 (Ch. 4)	+15	+15	+15	
2.432 (Ch. 5)	+15	+15	+15	
2.437 (Ch. 6)	+15	+15	+15	X
2.442 (Ch. 7)	+15	+15	+15	
2.447 (Ch. 8)	+15	+15	+15	
2.452 (Ch. 9)	+15	+15	+15	
2.457 (Ch. 10)	+15	+15	+15	
2.462 (Ch. 11)	+15	+15	+15	X

\* Full testing with bit rate 11Mbps only

Table C-2 Receive mode (RX)

Operation Frequency [GHz]	Test performed
2.412 (Ch. 1)	
2.417 (Ch. 2)	
2.422 (Ch. 3)	
2.427 (Ch. 4)	
2.432 (Ch. 5)	
2.437 (Ch. 6)	X
2.442 (Ch. 7)	
2.447 (Ch. 8)	
2.452 (Ch. 9)	
2.457 (Ch. 10)	
2.462 (Ch. 11)	

## D. TEST INSTRUMENTS

Table-D List of Measuring Instruments

Description	Model	Serial Number	Calibration Date	Calibration Interval
Computer	IBM 5551-L	#4	N/A	N/A
Computer	IBM 6589-13J	97-15613	N/A	N/A
Spectrum Analyzer (100Hz-1.5GHz)	HP 85680B	3019A05155	02/15/02	1 year
Spectrum Analyzer (100Hz-1.5GHz)	HP 85680B	2601A02634	02/15/02	1 year
Spectrum Analyzer (100Hz-1.5GHz)	HP 85680B	2841A04242	10/18/01	1 year
Spectrum Analyzer Display	HP 85662A	3026A19353	02/15/02	1 year
Spectrum Analyzer Display	HP 85662A	2542A12308	02/15/02	1 year
Spectrum Analyzer Display	HP 85662A	2816A16827	10/18/01	1 year
Quasi-Peak Adapter	HP 85650A	3033A01449	02/15/02	1 year
Quasi-Peak Adapter	HP 85650A	2043A00062	02/15/02	1 year
Quasi-Peak Adapter	HP 85650A	2811A01126	10/18/01	1 year
Amplifier (100KHz - 1.3GHz) - for 30-200MHz - for 200-1000MHz	HP 8447D HP 8447D	2805A02919 2944A03506	04/15/02 04/15/02	1 year 1 year
Amplifier (1GHz - 26.5GHz)	HP 8449B	3008A00582	05/23/01	1 year
Spectrum Analyzer EMI Test Receiver	R&S ESI26	836119/003	07/04/01	1 year
Receiver (9kHz-30MHz)	R&S ESH3	891806/012	09/28/01	1 year
Receiver (20MHz-1.3GHz)	R&S ESVP	893202/018	02/09/02	1 year
Biconical Antenna (30-200MHz)	EMCO 3108	2531	05/24/01	1 year
Log-Periodic Antenna (200-1000MHz)	EMCO 3146	2849	05/06/02	1 year
Horn Antenna (1- 18GHz)	EMCO 3115	9903-5774	04/23/02	1 year
Horn Antenna (3.95- 5.85GHz)	EMCO 3160-5	1099	04/26/02	1 year
Horn Antenna (5.85- 8.20GHz)	EMCO 3160-6	9712-1044	04/26/02	1 year
Horn Antenna (18- 26.5GHz)	EMCO 3160-9	0004-1202	05/01/02	1 year
LISN	EMCO 3825/2	1426	09/01/01	1 year
Power Meter	HP 436A	3043U03437	09/06/01	1 year
Power Sensor	HP 8482A	US41030582	09/07/01	1 year
Switch/control unit	HP 3488A	2719A17229 2719A17228	N/A N/A	N/A N/A
Plotter	HP 7550A	2631A33619	N/A	N/A
SF106 cables: - Horn Ant <=> RF Amp. - RF Amp.<=>Spectrum Analyzer	Length: 6 m 15m	- EM206SCO - EM215SCO	08/07/01 08/07/01	1 year 1 year
N-Coax cables: - Bi-coni Ant <=> 10m Cable - 10m Cable <=> Shield Panel - Shield Panel <=> RF Amp - RF Amp <=> Power Splitter - Log-peri Ant <=> 10m Cable	9 m 10 m 7 m 0.5m 9 m	- EM103L01 - EM103L02 - EM103L03 - EM103L04 - EM103H01	04/15/02 04/15/02 04/15/02 04/15/02 04/15/02	1 year 1 year 1 year 1 year 1 year



- 10m Cable <=> Shield Panel	10 m	- EM103H02	04/15/02	1 year
- Shield Panel <=> RF Amp	7 m	- EM103H03	04/15/02	1 year
- RF Amp <=> Power Splitter	0.5m	- EM103H04	04/15/02	1 year
Coax cables:				
- Lisn-L <=> SW/Con.unit (SW100)	4 m	- EMIC-L	04/15/02	1 year
- Lisn-N <=> SW/Con.unit (SW101)	4 m	- EMIC-N	04/15/02	1 year
- SW/Con.unit <=> RCVR (Input)	1 m	- EMIC-R	04/15/02	1 year
- SW/Con.unit<=> Spe Ana.(Signal In)	1 m	- EMIC-S	04/15/02	1 year
- Power Splitter <=> SW/Con.unit (SW110)	1 m	- EM103L05	04/15/02	1 year
- Power Splitter <=> SW/Con.unit (SW300)	1 m	- EM103L06	04/15/02	1 year
- Power Splitter <=> SW/Con.unit (SW100)	1 m	- EM103H05	04/15/02	1 year
- Power Splitter <=> SW/Con.unit (SW301)	1 m	- EM103H06	04/15/02	1 year
- SW/Con.unit <=> Receiver (Input)	2 m	- EM2RCV	04/15/02	1 year
- SW/Con.unit <=> Spe Ana.(Signal In) for 30- 200MHz	2 m	- EM1SPL	04/15/02	1 year
- SW/Con.unit <=> Spe Ana.(Signal In) for 200-1000MHz	2 m	- EM1SPH	04/15/02	1 year

Notes.

- The above equipment calibration is traceable to National standards.
- HP: Hewlett Packard, R&S: Rohde & Schwarz

## E. MEASUREMENT UNCERTAINTY

Uncertainties of the both, the Yamato EMI radiated test facilities (EMI chambers, #1 and #2) and the Yamato EMI conducted test facility are derived with the NIS 81 " Treatment of uncertainty in EMC measurements" 1994.

Estimated site uncertainty values are as follows.

- EMI chamber #1 : 4.17dB
- EMI chamber #2 : 4.18dB
- EMI conducted measurement system : 2.4dB

Detail should be referred to "Treatment of Uncertainty, Calculations and Policy" report, document number TCR 10-0015.

## F. Related Submittal(s)/Grant(s)/Notes

The host unit with full peripheral devices including the applying modular(s) as an unintentional radiator is classified as a Digital Device under the FCC Part 15 Subpart B or the Industry Canada Class B Emission Compliance (ICES-003), and subject to SDoC.

# 1. Bandwidth at 6 dB below

## 1.1 Test Procedure

The bandwidth at 6 dB down from the highest inband spectral density is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

The spectrum analyzer is set to:

RBW=100kHz, VBW=100kHz\*1, Span=30MHz, Sweep=suitable duration based on the EUT specification

\*1: To be adjusted accordingly based on the spectrum stability

## 1.2 Test Instruments and Measurement Setup

Table 1-1 : 6 dB Bandwidth Test Instruments

Description	Model	Serial Number
Spectrum Analyzer EMI Test Receiver	R&S ESI26	836119/003
Coax cables: - Spectrum Analyzer <=> EUT	Length: 120 cm Loss: 1.7 dB	

Notes: - R&S: Rohde & Schwarz




Figure 1: Measurement setup for 6dB bandwidth test

## 1.3 Measurement Results

Test Date: May 24, 2002


Table 1-2. EUT: M/T 2658-CGU, s/n AA-GFYR5 , TX mode 11Mbps

Center Frequency (MHz)	Lower frequency (MHz)	Upper frequency (MHz)	Bandwidth at 6 dB below (MHz)
2412 (ch. 1)	2407.58	2417.44	9.86
2437 (ch. 6)	2431.26	2442.98	11.72
2462 (ch. 11)	2456.26	2467.50	11.24

## 1.4 Trace Data




	Marker 1 [T1]	RBW	100 kHz	RF Att	40 dB
Ref Lvl	4.89 dBm	VBW	100 kHz		
25 dBm	2.41269138 GHz	SWT	7.5 ms	Unit	dBm

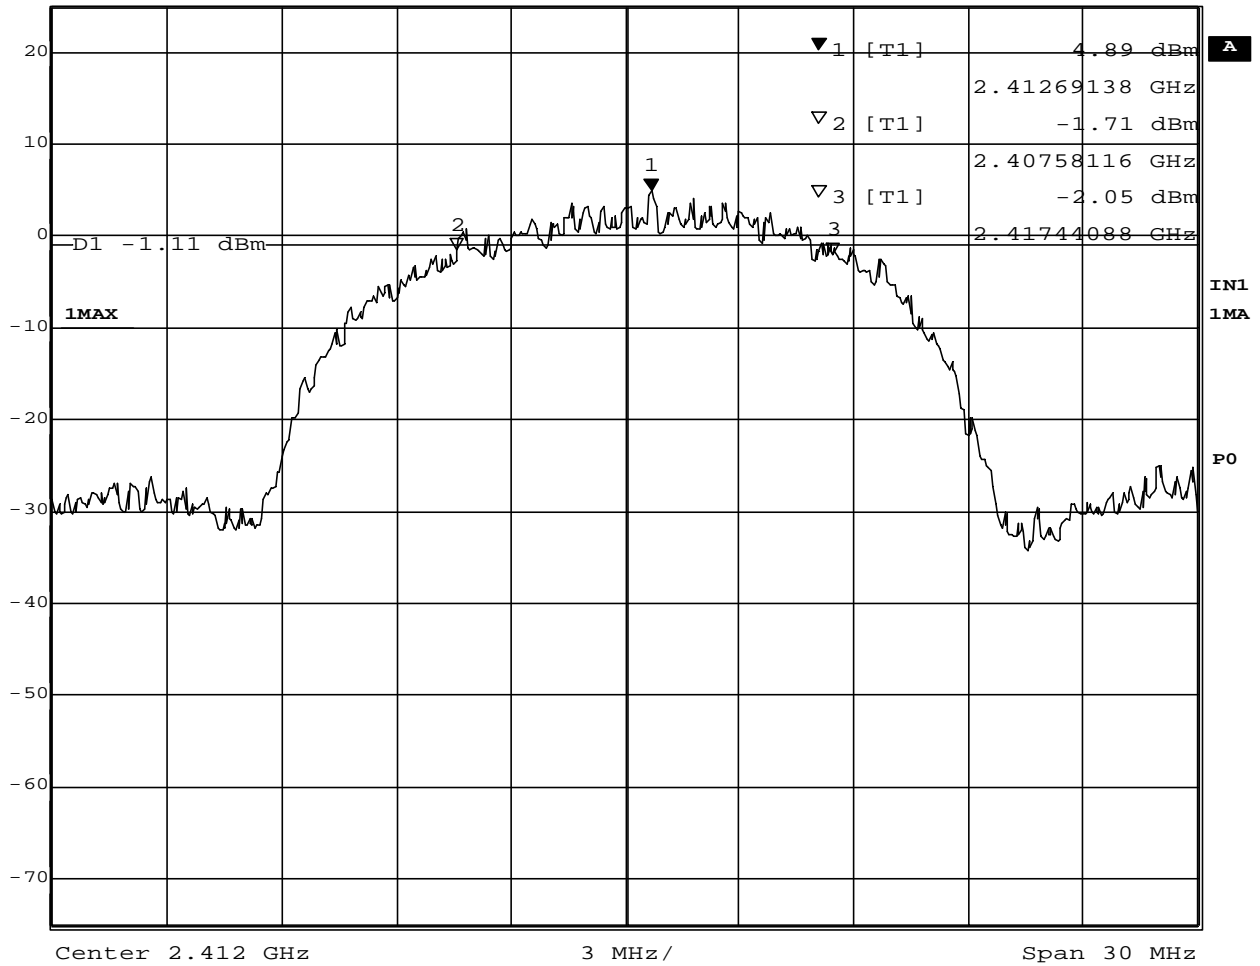

Date: 24.MAY.2002 13:42:32



Ref Lvl	25 dBm	Marker 1 [T1]	3.92 dBm	RBW	100 kHz	RF Att	40 dB
				VBW	100 kHz		
				SWT	7.5 ms	Unit	dBm

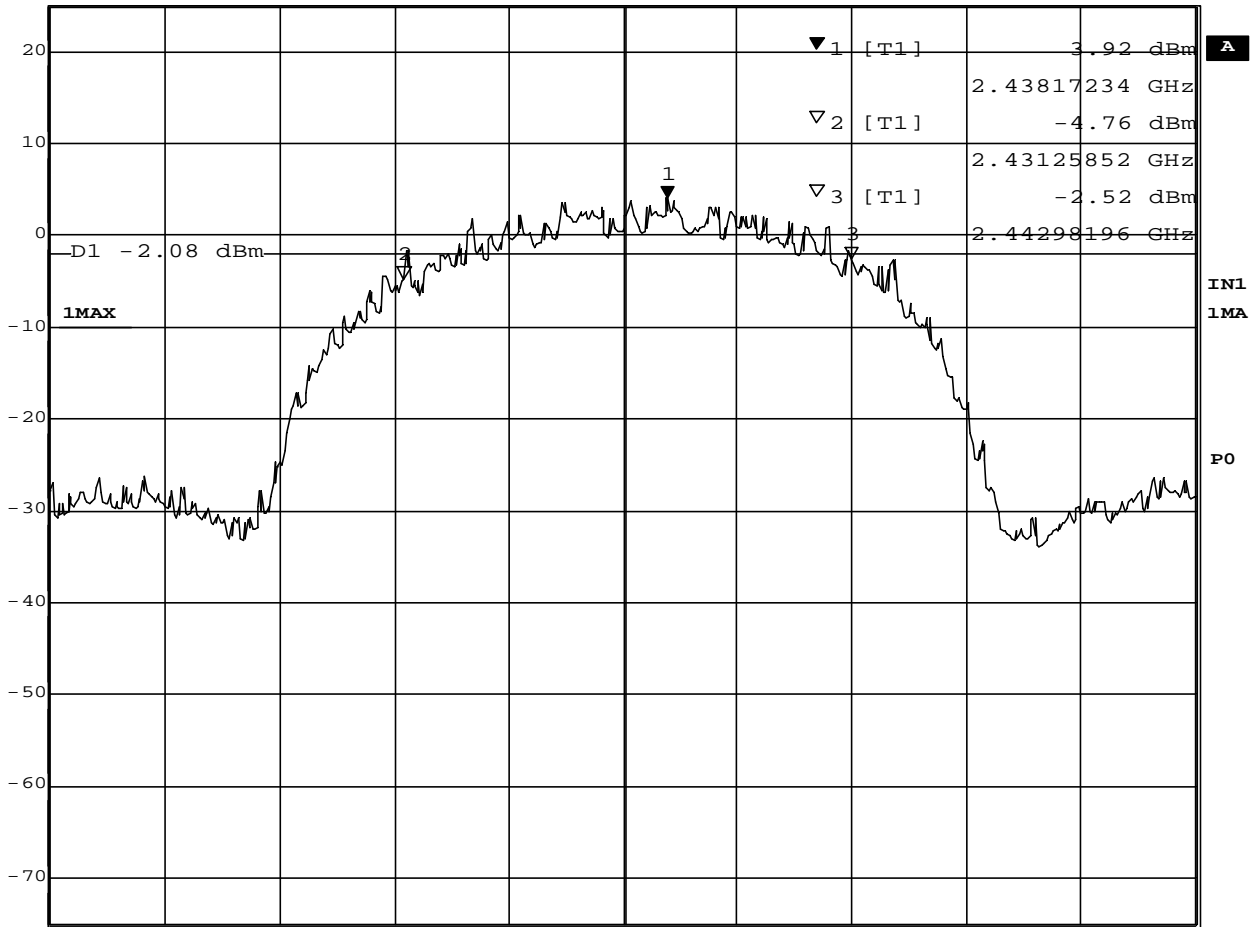


Center 2.437 GHz      3 MHz/      Span 30 MHz

Date: 24.MAY.2002 13:45:17



Ref Lvl	25 dBm	Marker 1 [T1]	3.76 dBm	RBW	100 kHz	RF Att	40 dB
			2.46317234 GHz	VBW	100 kHz		
				SWT	7.5 ms	Unit	dBm

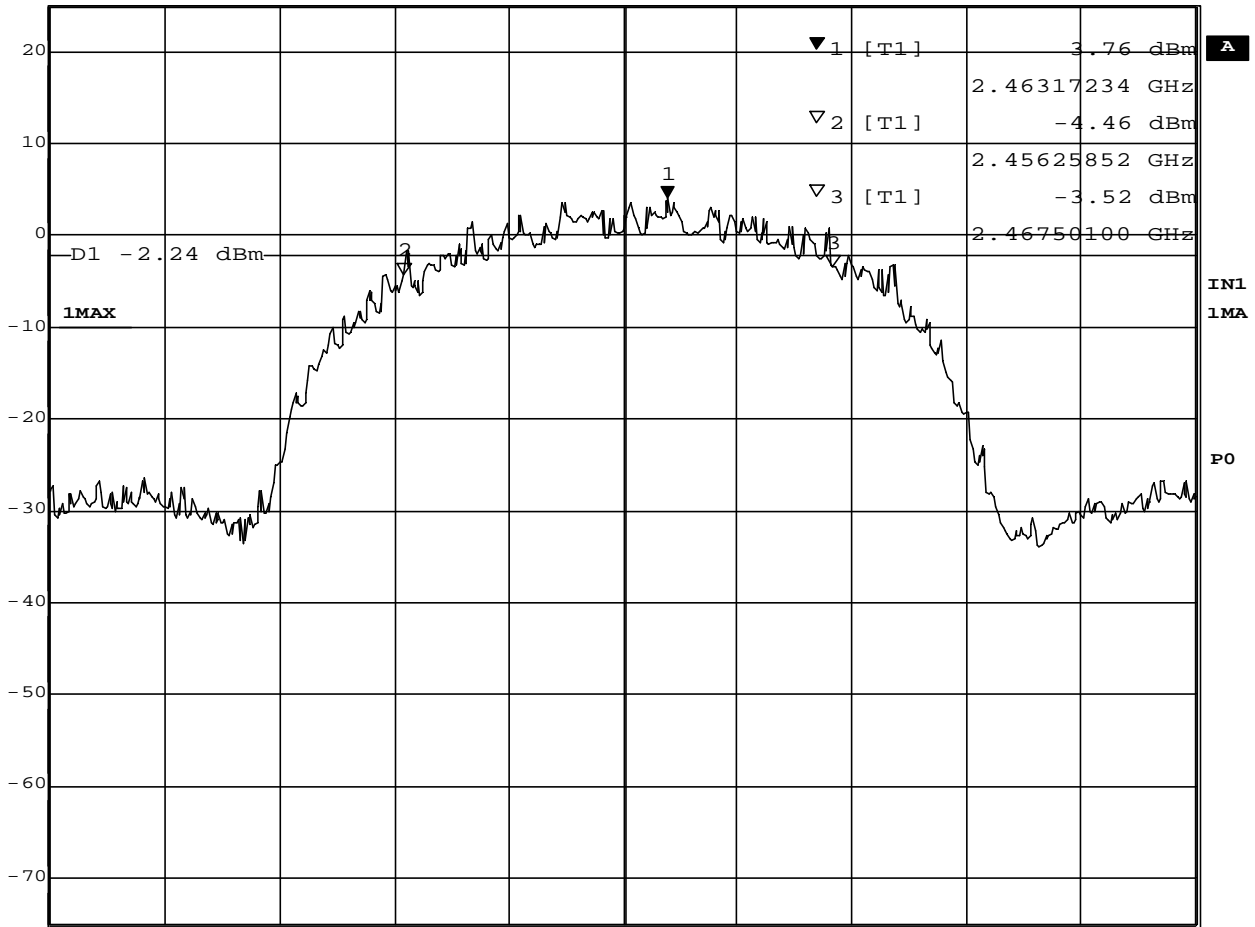

Center 2.462 GHz      3 MHz/      Span 30 MHz

Date: 24.MAY.2002 13:52:45

## 2. Occupied Bandwidth / Band-edge (at 20 dB below), and Out of Band Emissions

### 2.1 Test Procedure

The bandwidth at 20 dB down from the highest inband spectral density is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

The spectrum analyzer is set to:

RBW=100kHz, VBW=100kHz\*1, Span=50MHz, Sweep=suitable duration based on the EUT specification

\*1: To be adjusted accordingly based on the spectrum stability

### 2.2 Test Instruments and Measurement Setup

Same as the Chapter 1(Table 1-1 & Figure 1).

### 2.3 Measurement Results of Occupied Bandwidth / Band-edge

Test Date: May 24, 2002

Table 2-1. EUT: M/T 2658-CGU, s/n AA-GFYR5 , TX mode 11Mbps


Center Frequency (MHz)	Lower Frequency (MHz)	Upper Frequency (MHz)	Bandwidth at 20 dB below (MHz)	Margin to Lower limit (MHz)	Margin to Upper limit (MHz)
2412 (ch. 1)	2403.85	2420.69	16.84	3.85	
2437 (ch. 6)	2428.63	2445.74	17.11		
2462 (ch. 11)	2453.63	2470.79	17.16		12.71

### 2.4 Measurement Results of Out of Band Emissions

All conducted emission in any 100kHz bandwidth outside of the spread spectrum band was at least 20dB lower than the highest inband spectral density.

Test Date: May 24, 2002


## 2.5 Trace Data of Band-edge

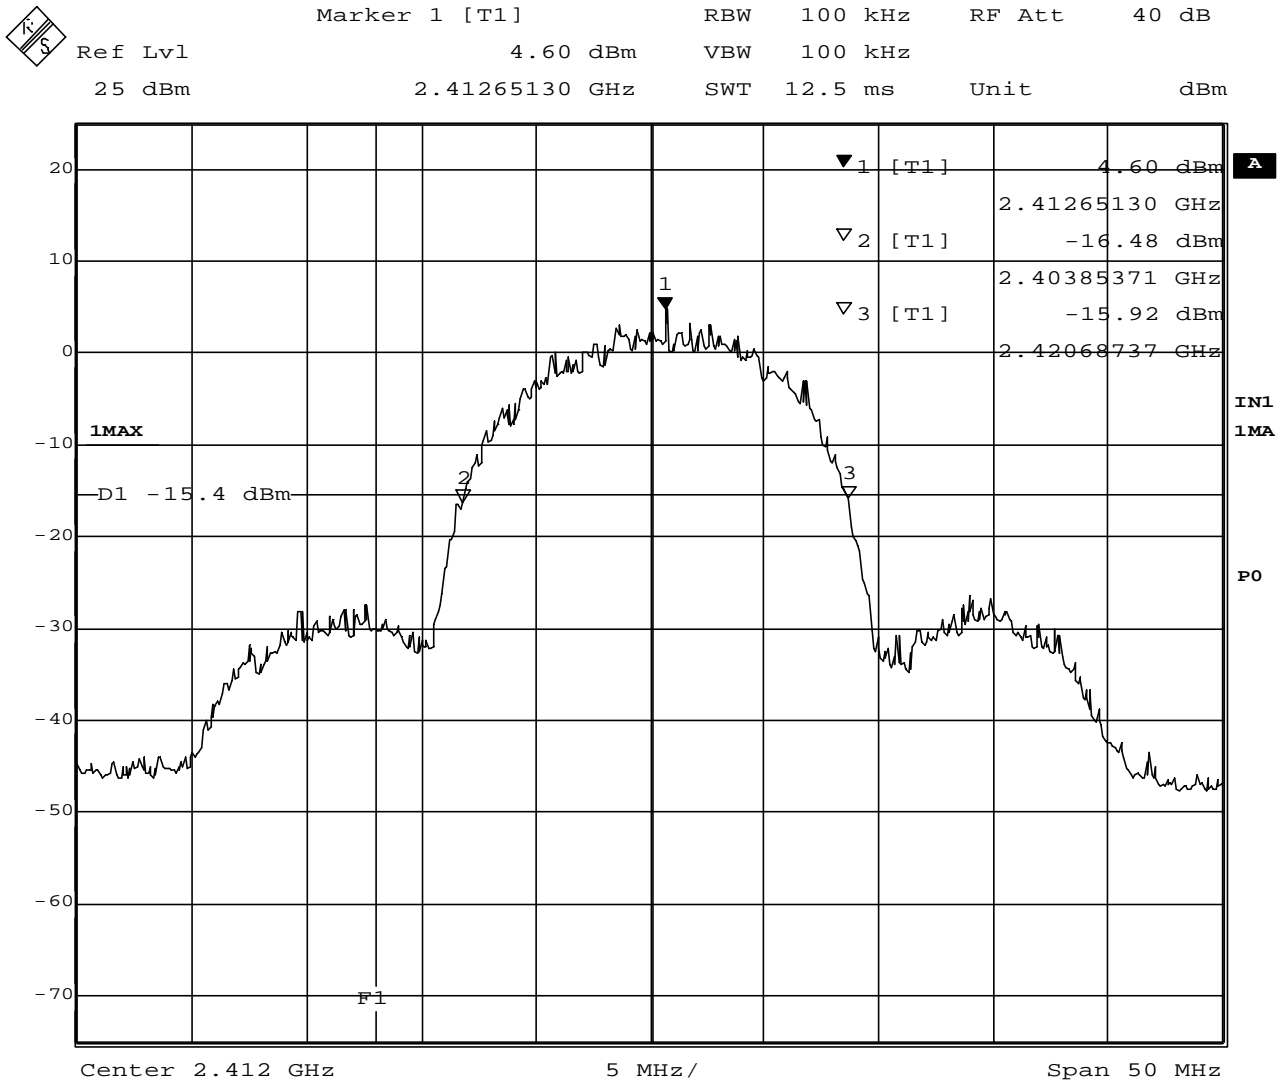

Date: 24.MAY.2002 13:55:24



Ref Lvl	25 dBm	Marker 1 [T1]	3.40 dBm	RBW	100 kHz	RF Att	40 dB
			2.43815230 GHz	VBW	100 kHz		
				SWT	12.5 ms	Unit	dBm

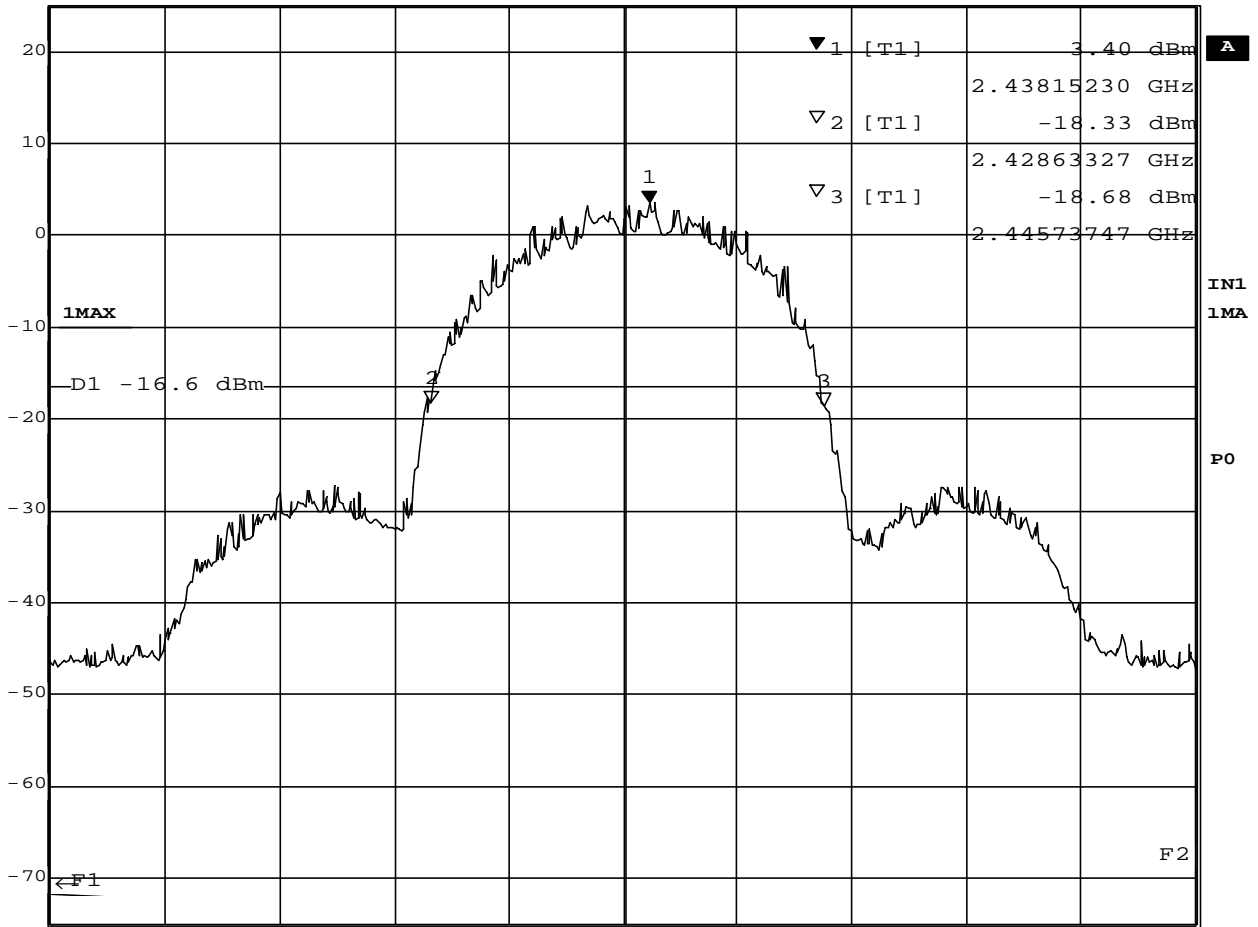


Center 2.437 GHz      5 MHz/      Span 50 MHz

Date: 24.MAY.2002 13:57:38






Marker 1 [T1] RBW 100 kHz RF Att 40 dB  
 Ref Lvl 3.15 dBm VBW 100 kHz  
 25 dBm 2.46044689 GHz SWT 12.5 ms Unit dBm

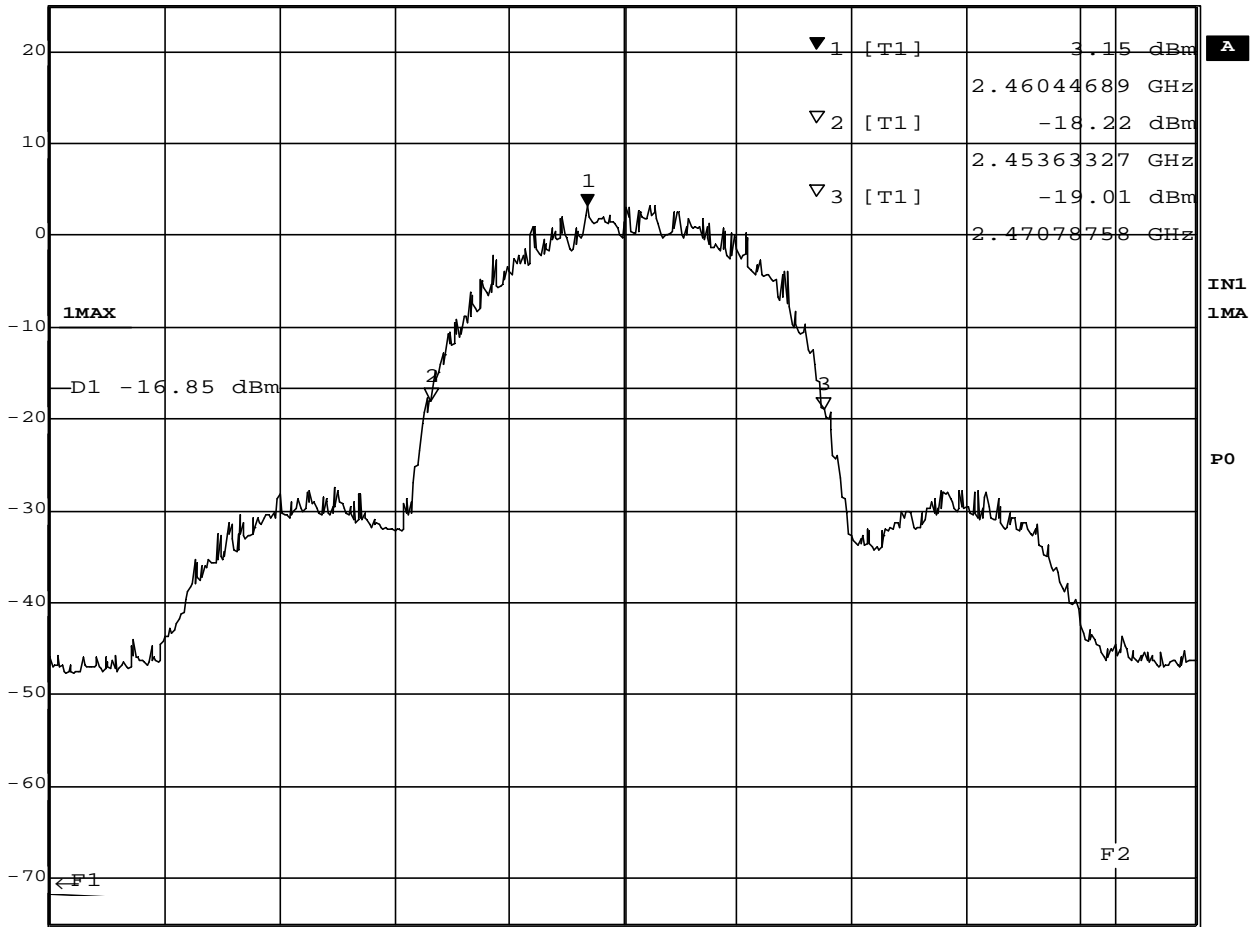

Center 2.462 GHz 5 MHz/ Span 50 MHz

Date: 24.MAY.2002 14:00:29


## 2.6 Trace Data of Out of Band Emissions

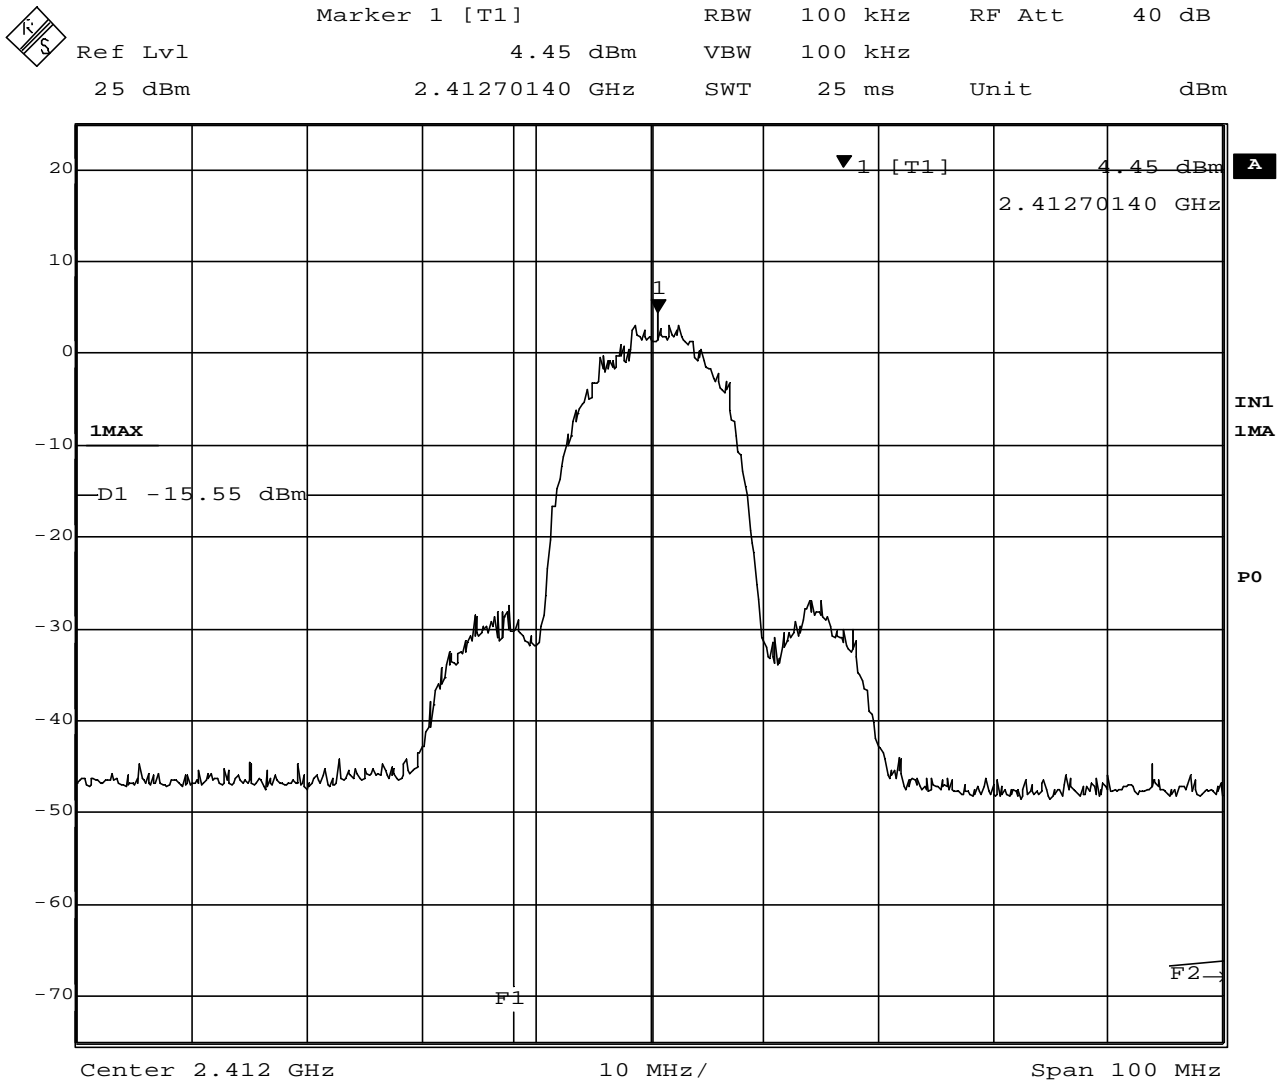

Date: 24.MAY.2002 14:04:15



Marker 1 [T1]	RBW	100 kHz	RF Att	40 dB
Ref Lvl	3.26 dBm	VBW	100 kHz	
25 dBm	2.43830261 GHz	SWT	25 ms	Unit dBm

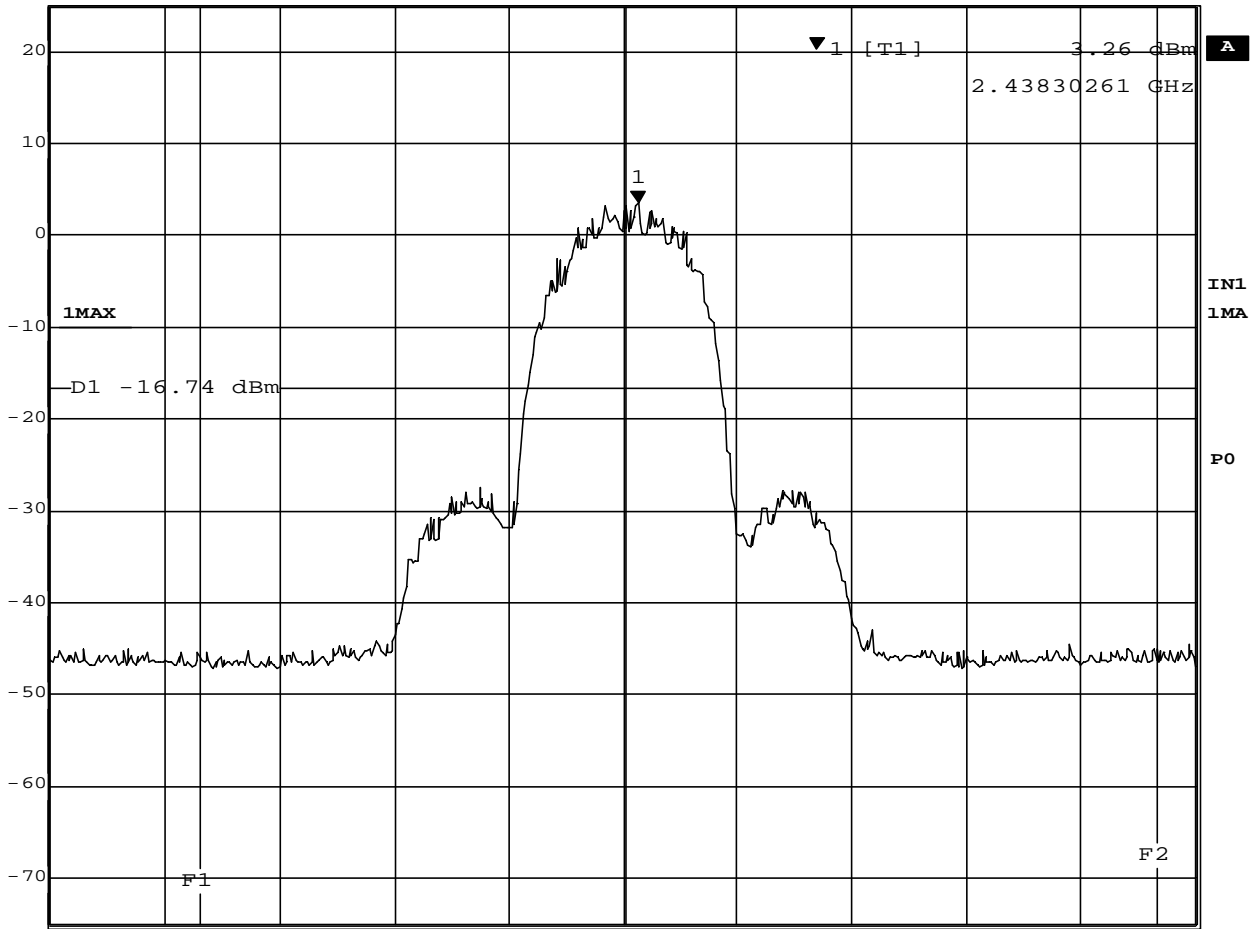


Center 2.437 GHz 10 MHz/ Span 100 MHz

Date: 24.MAY.2002 14:08:59



Marker 1 [T1]	RBW	100 kHz	RF Att	40 dB
Ref Lvl	3.14 dBm	VBW	100 kHz	
25 dBm	2.46049699 GHz	SWT	25 ms	Unit dBm

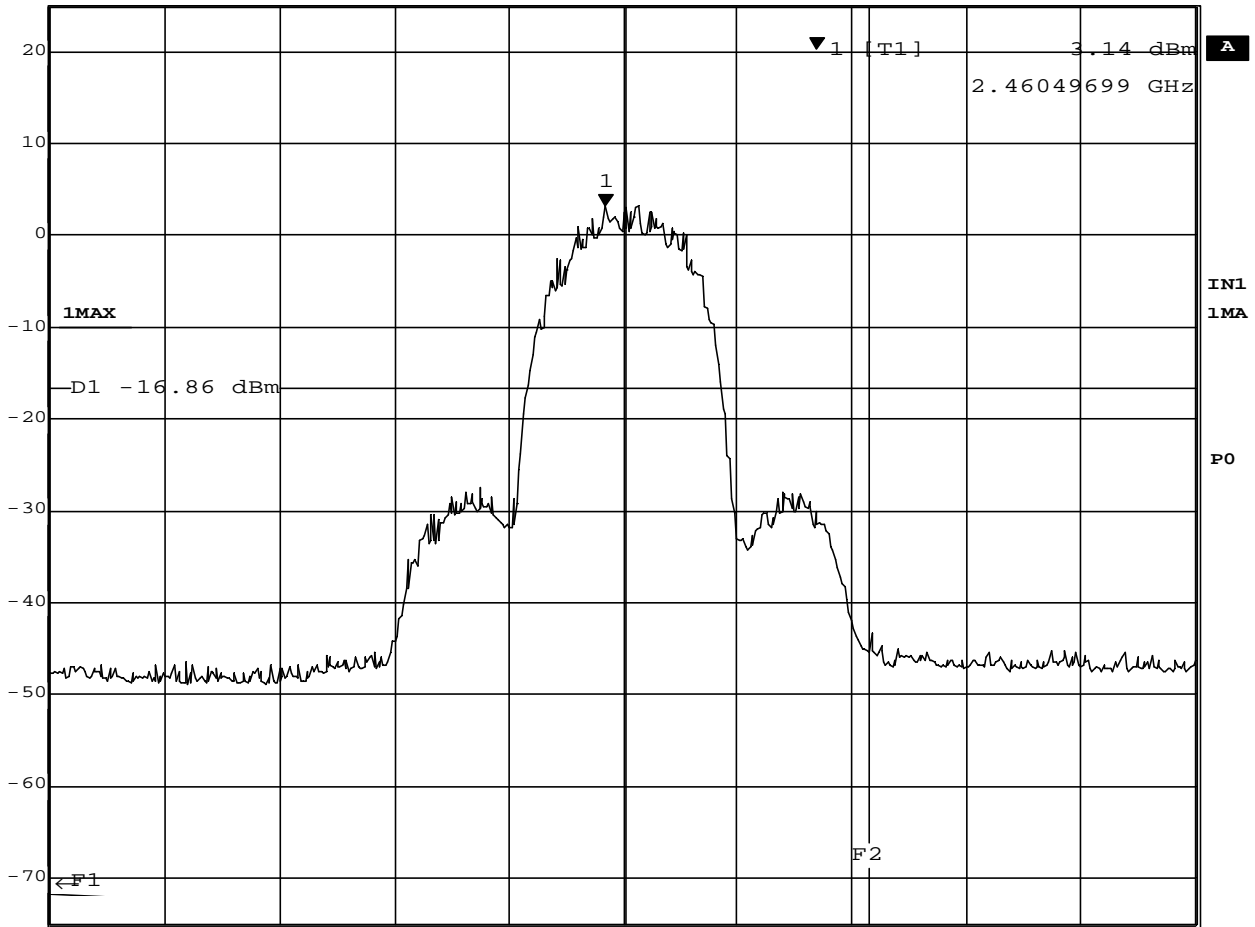

Center 2.462 GHz      10 MHz/      Span 100 MHz

Date: 24.MAY.2002 14:02:04

### 3. Transmitter Output Power

#### 3.1 Test Procedure

- A transmitter antenna terminal of EUT is connected to the input of a RF power sensor.
- Measurement is made while EUT is operating in transmission mode at the appropriate center frequency.

Table 3-1 : 6 dB Bandwidth Test Instruments

Description	Model	Serial Number
Power Meter	HP 436A	2604A24192
Power Sensor	HP 8482A	2607A10987
Coax cables: - Power Sensor <=> EUT	Length: 30 cm	Loss: 1.1dB

Notes: - HP: Hewlett Packard




Figure 3: Measurement setup for RF output power

#### 3.2 Measurement Results

Test Date: May 14, 2002

Table 3-2. EUT: M/T 2658-CGU, s/n AA-GFYR5, TX mode 11Mbps

Measured Frequency (MHz)	Power Meter Reading (dBm)	Cable Loss (dB)	Results		Limit [1W] (dBm)	Margin (dB)
			(dBm)	(W)		
2412 (ch. 1)	15.1	1.1	16.2	0.0417	30.0	13.8
2437 (ch. 6)	15.2	1.1	16.3	0.0427	30.0	13.7
2462 (ch. 11)	15.1	1.1	16.2	0.0417	30.0	13.8

Table 3-3. EUT: M/T 2658-CGU, s/n AA-GFYR5, TX mode 2Mbps

Measured Frequency (MHz)	Power Meter Reading (dBm)	Cable Loss (dB)	Results		Limit [1W] (dBm)	Margin (dB)
			(dBm)	(W)		
2412 (ch. 1)	15.0	1.1	16.1	0.0407	30.0	13.9
2437 (ch. 6)	15.1	1.1	16.2	0.0417	30.0	13.8
2462 (ch. 11)	15.0	1.1	16.1	0.0407	30.0	13.9

## 4. Transmitter Power Spectral Density

### 4.1 Test Procedure

The peak power density is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

The spectrum analyzer is set to:

RBW= 3kHz, VBW=100kHz, Span=10MHz, Sweep = 2.8 seconds

### 4.2 Test Instruments and Measurement Setup

Same as the Chapter 1(Table 1-1 & Figure 1).


### 4.3 Measurement Results


Test Date: April 24, 2002

Table 4-1. EUT: M/T 2658-CGU, s/n AA-GFYR5 , TX mode 11Mbps

Ch No.	Frequency (MHz)	Spectrum Analyzer Reading (dBm)	Cable loss (dB)	Result (dBm)	Limit (dBm)	Margin (dB)
1	2410.41	-9.6	1.7	-7.9	8.0	15.9
6	2435.41	-9.4	1.7	-7.7	8.0	15.7
11	2460.41	-9.5	1.7	-7.8	8.0	15.8

### 4.4 Trace Data


	Marker 1 [T1]	RBW	3 kHz	RF Att	40 dB
	Ref Lvl	-9.61 dBm	VBW	100 kHz	
	25 dBm	2.41040681 GHz	SWT	2.8 s	Unit

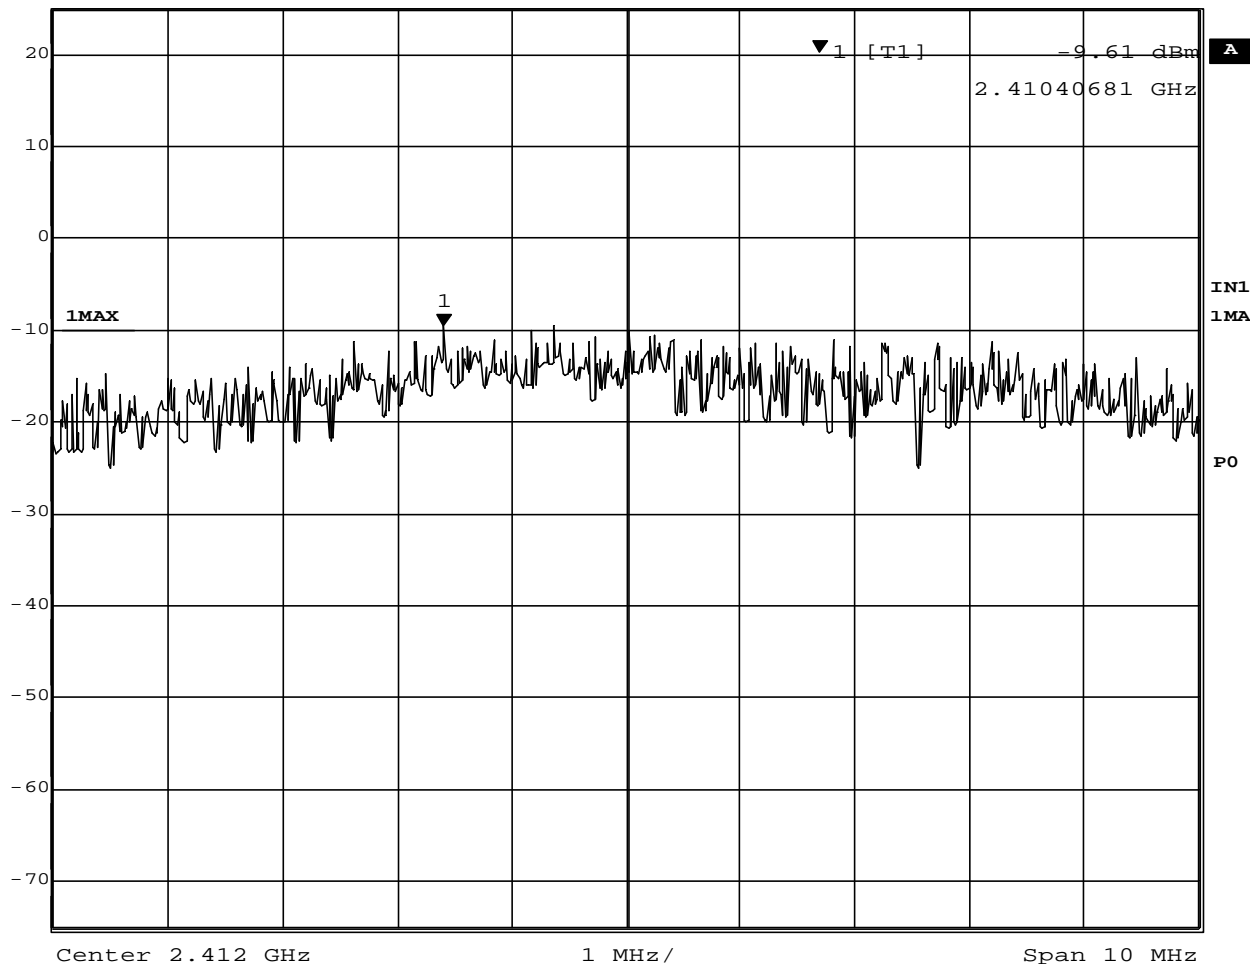

Date: 24.MAY.2002 14:11:58



Marker 1 [T1] RBW 3 kHz RF Att 40 dB  
Ref Lvl -9.43 dBm VBW 100 kHz  
25 dBm 2.43540681 GHz SWT 2.8 s Unit dBm

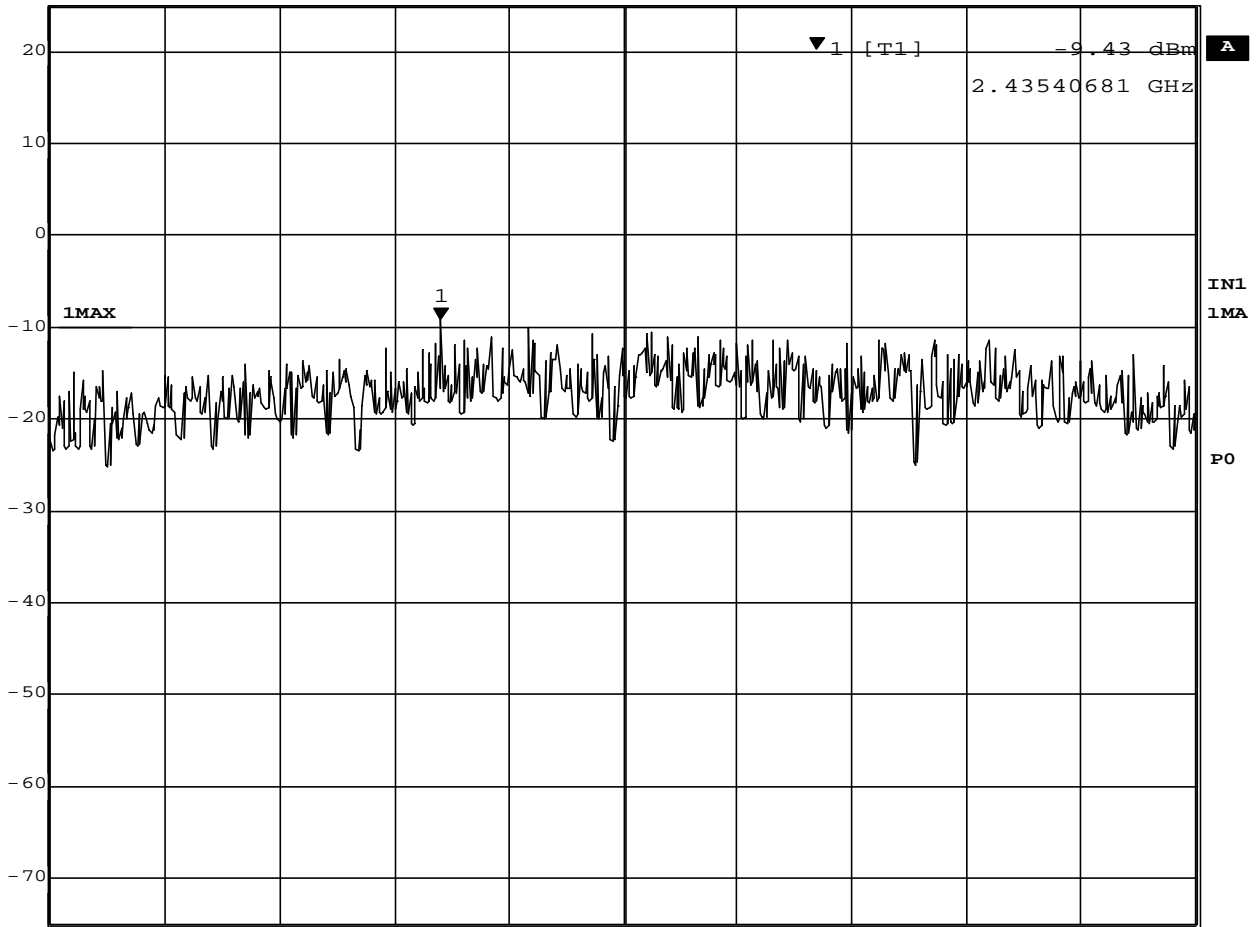


Center 2.437 GHz 1 MHz/ Span 10 MHz

Date: 24.MAY.2002 14:13:07





Marker 1 [T1] RBW 3 kHz RF Att 40 dB  
Ref Lvl -9.51 dBm VBW 100 kHz  
25 dBm 2.46040681 GHz SWT 2.8 s Unit dBm

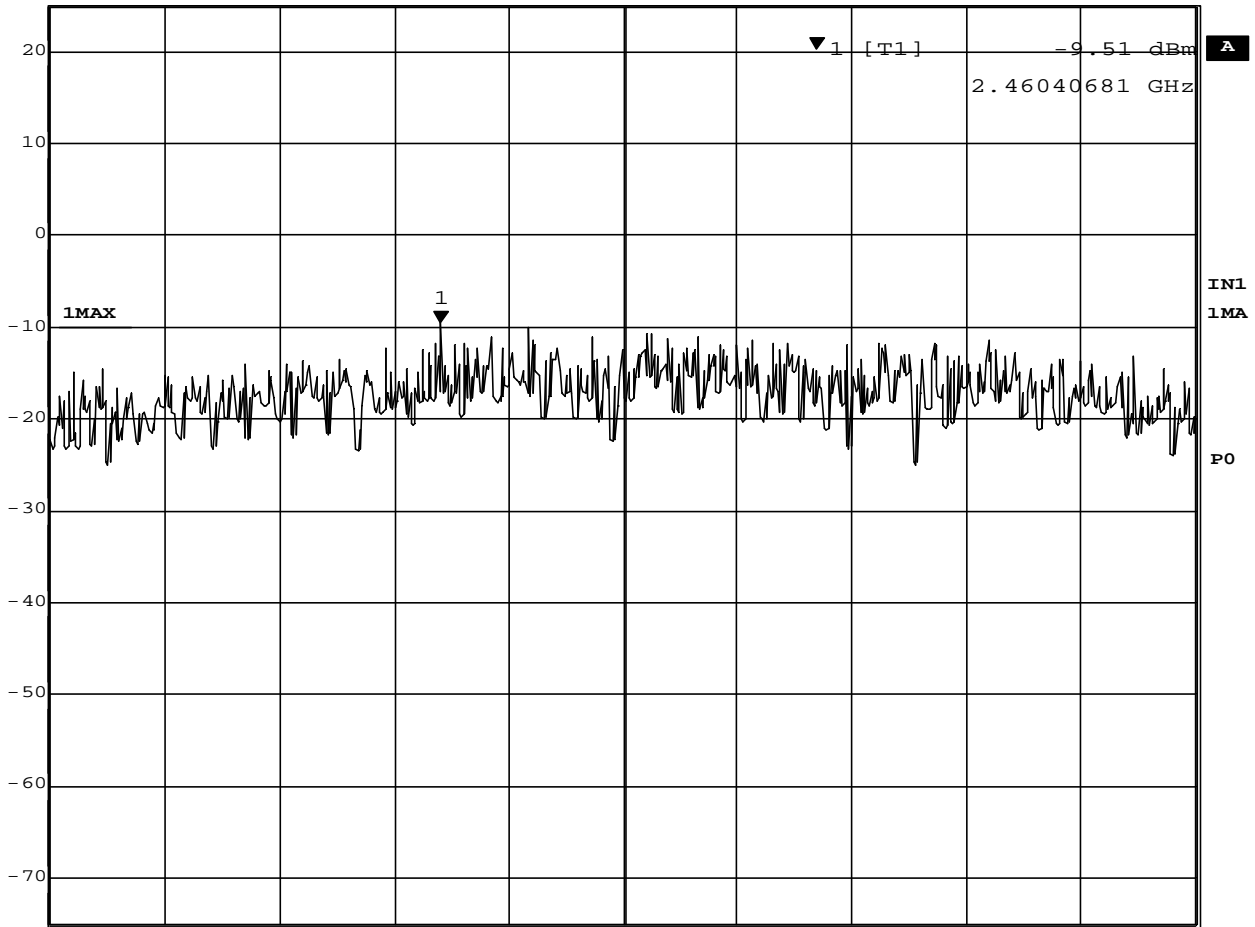

Center 2.462 GHz 1 MHz/ Span 10 MHz

Date: 24.MAY.2002 14:13:48

## 5. AC WIRELINE CONDUCTED EMISSIONS (450KHz – 30MHz)

### 5.1 Test Procedure

The conducted emissions are measured in the IBM shielded room with a spectrum analyzer in peak hold. Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9KHz. The emissions are maximized further by cable manipulation. The highest emissions relative to the limit are listed.

### 5.2 Test Instruments and Measurement Setup

Table 5-1. Conducted Emission Test Instrumentation

Description	Model	Serial Number
Computer	IBM 6589-13J	97-15613
Spectrum Analyzer (100Hz-1.5GHz)	HP 85680B	2841A04242
Spectrum Analyzer Display	HP 85662A	2816A16827
Quasi-Peak Adapter	HP 85650A	2811A01126
Receiver (9kHz-30MHz)	R&S ESH3	891806/012
LISN	EMCO 3825/2	1426
Switch/control unit	HP 3488A	2719A17228
Plotter	HP 7550A	2631A33619
Coax cables: - Liscn-L <=> SW/Con.unit (SW100) - Liscn-N <=> SW/Con.unit (SW101) - SW/Con.unit <=> RCVR (Input) - SW/Con.unit<=> Spe Ana.(Signal In)	Length: 4 m 4 m 1 m 1 m	- EMIC-L - EMIC-N - EMIC-R - EMIC-S

Notes: - HP: Hewlett Packard, R&S: Rohde & Schwarz

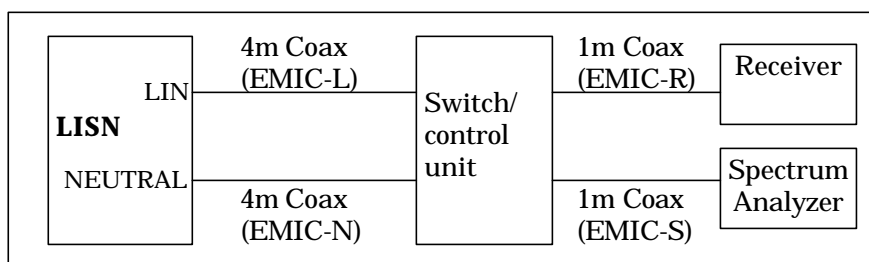


Figure 5. Cables for Conducted Emission Test

## 5.3 Measurement Results

The EUT was found to comply to the limits of FCC Part 15 Subpart C and RSS-210 with a margin of 19.9dB. The 6 highest emissions relative to the limits are reported.

Test Date: May 16, 2002

1) EUT in transmission mode

Table 5-2-1. EUT: M/T 2658-CGU, s/n AA-GFYR5, Ch.1(2412MHz) TX mode 11Mbps

Frequency (MHz)	QP Voltage (dB $\mu$ V)	QP Limit (dB $\mu$ V)	QP Voltage ( $\mu$ V)	QP Limit ( $\mu$ V)	Phase
0.4559	25.1	48	18.0	250	LINE
0.4938	28.1	48	25.4	250	LINE
0.5504	28.0	48	25.1	250	LINE
0.7480	20.5	48	10.6	250	LINE
1.2746	15.4	48	5.9	250	NEUTRAL
7.1255	17.7	48	7.7	250	LINE

Table 5-2-2. EUT: M/T 2658-CGU, s/n AA-GFYR5 , Ch.6(2437MHz) TX mode 11Mbps

Frequency (MHz)	QP Voltage (dB $\mu$ V)	QP Limit (dB $\mu$ V)	QP Voltage ( $\mu$ V)	QP Limit ( $\mu$ V)	Phase
0.4870	21.3	48	11.6	250	NEUTRAL
0.4992	27.0	48	22.4	250	LINE
0.5244	24.5	48	16.8	250	LINE
0.6511	23.4	48	14.8	250	LINE
0.7251	19.2	48	9.1	250	LINE
10.2662	18.4	48	8.3	250	LINE

Table 5-2-3. EUT: M/T 2658-CGU, s/n AA-GFYR5, Ch.11(2462MHz) TX mode 11Mbps

Frequency (MHz)	QP Voltage (dB $\mu$ V)	QP Limit (dB $\mu$ V)	QP Voltage ( $\mu$ V)	QP Limit ( $\mu$ V)	Phase
0.4612	22.7	48	13.6	250	LINE
0.5533	26.6	48	21.4	250	LINE
0.6554	22.6	48	13.5	250	NEUTRAL
0.7497	19.1	48	9.0	250	LINE
1.0893	14.1	48	5.1	250	NEUTRAL
7.4845	16.5	48	6.7	250	LINE

2) EUT in receiving mode

Table 5-2-4. EUT: M/T 2658-CGU, s/n AA-GFYR5, RX mode

Frequency (MHz)	QP Voltage (dB $\mu$ V)	QP Limit (dB $\mu$ V)	QP Voltage ( $\mu$ V)	QP Limit ( $\mu$ V)	Phase
0.4972	26.2	48	20.4	250	LINE
0.5350	24.5	48	16.8	250	LINE
0.6302	23.4	48	14.8	250	LINE
0.7256	16.9	48	7.0	250	LINE
0.8587	17.1	48	7.2	250	LINE
6.4936	18.4	48	8.3	250	LINE

## 6. RESTRICTED BANDS RADIATIONS (30MHz – 1GHz)

### 6.1 Test Procedure

Preliminary radiated emissions are measured in the semi-anechoic chamber at a 3 meter distance on every azimuth in both horizontal and vertical polarity. The antennas are also scanned in height. The emissions are recorded with a spectrum analyzer in peak hold mode. The identified emissions are further maximized by a cable manipulation. Emissions closest to the limits are measured in the quasi-peak mode with the tuned receiver using a bandwidth of 120kHz. The highest emissions relative to the limit are listed.

### 6.2 Test Instruments and Measurement Setup

Table 6-1 Radiated Emission Test Instrumentation

Description	Model	Serial Number
Computer	IBM 5551-L	#4
Spectrum Analyzer (100Hz-1.5GHz) for 30-200MHz	HP 85680B	3019A05155
Spectrum Analyzer Display for 30-200MHz	HP 85662A	3026A19353
Quasi-Peak Adapter for 30-200MHz	HP 85650A	3033A01449
Spectrum Analyzer (100Hz-1.5GHz) for 200-1000MHz	HP 85680B	2601A02634
Spectrum Analyzer Display for 200-1000MHz	HP 85662A	2542A12308
Quasi-Peak Adapter for 200-1000MHz	HP 85650A	2043A00062
Amplifier (100KHz-1.3GHz)		
- for 30-200MHz	HP 8447D	2805A02919
- for 200-1000MHz	HP 8447D	2944A03506
Biconical Antenna (30-200MHz)	EMCO 3108	2531
Log-Periodic Antenna (200-1000MHz)	EMCO 3146	2849
Receiver (20MHz-1.3GHz)	R&S ESVP	893202/018
Switch/control unit	HP 3488A	2719A17299
N-Coax cables:	Length:	
- Bi-coni Ant <=> 10m Cable	9 m	- EM103L01
- 10m Cable <=> Shield Panel	10 m	- EM103L02
- Shield Panel <=> RF Amp	7 m	- EM103L03
- RF Amp <=> Power Splitter	0.5m	- EM103L04
- Log-peri Ant <=> 10m Cable	9 m	- EM103H01
- 10m Cable <=> Shield Panel	10 m	- EM103H02
- Shield Panel <=> RF Amp	7 m	- EM103H03
- RF Amp <=> Power Splitter	0.5m	- EM103H04
Coax cables:		
- Power Splitter <=> SW/Con.unit (SW110)	1 m	- EM103L05
- Power Splitter <=> SW/Con.unit (SW300)	1 m	- EM103L06
- Power Splitter <=> SW/Con.unit (SW100)	1 m	- EM103H05
- Power Splitter <=> SW/Con.unit (SW301)	1 m	- EM103H06
- SW/Con.unit <=> Receiver (Input)	2 m	- EM1RCV

- SW/Con.unit <=> Spe Ana.(Signal In) for 30- 200MHz	2 m	- EM1SPL
- SW/Con.unit <=> Spe Ana.(Signal In) for 200-1000MHZ	2 m	- EM1SPH

Notes:

- HP: Hewlett Packard, R&S: Rohde & Schwarz

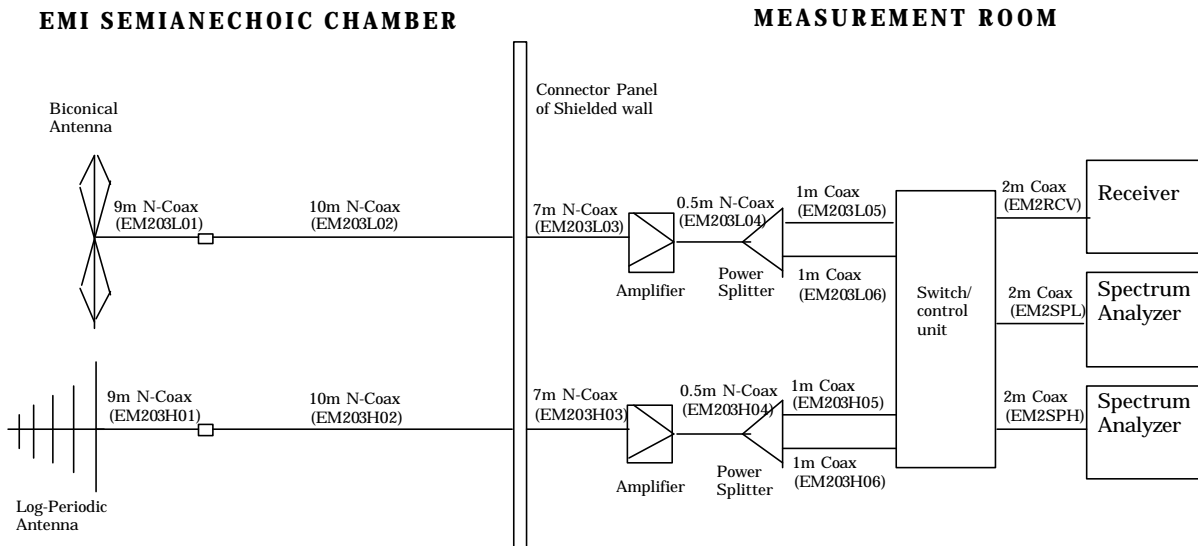


Figure 6 Cables for Radiated Emission Test

## 6.3 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. In this test facility, the Antenna Factor, Cable Loss, and Amplifier Gains are loaded into the Rohde & Schwarz Receiver and the corrected field strength can be read directly on the receiver. All factors are included in the reported data.

$$FS = R + AF + CORR$$

where:

FS	=	Field Strength
R	=	Measured Receiver Input Amplitude
AF	=	Antenna Factor
CORR	=	Correction Factor = CL - AG
CL	=	Cable Loss
AG	=	Amplifier Gain

For example :

Given a Receiver input reading of 51.5dB $\mu$ V; Antenna Factor of 8.5dB/m; Cable Loss of 1.3dB; and an Amplifier Gain of 26dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 = 35.3\text{dB}\mu\text{V/m}$$

Conversion between dB $\mu$ V/m (or dB $\mu$ V) and  $\mu$ V/m (or  $\mu$ V) are done as:

$$\text{Level(dB}\mu\text{V/m)} = 20 \times \text{Log( Level}(\mu\text{V/m) )}$$

$$40\text{dB}\mu\text{V/m} = 100\mu\text{V/m}$$

$$48\text{dB}\mu\text{V/m} = 250\mu\text{V/m}$$

## 6.4 Measurement Results

The EUT was found to comply to the limits of FCC Part 15 Subpart C and RSS-210 with a margin of 1.5 dB at 30MHz - 1000MHz band.

The 6 highest emissions relative to the limits are reported.

Test Date: May 14, 2002

### 1) EUT in transmission mode

Table 6-2-1. EUT: M/T 2658-CGU, s/n AA-GFYR5, Ch.1(2412MHz) TX mode 11Mbps

Frequency (MHz)	Polarity (H/V)	Measured (dB $\mu$ V)	Antenna Factor (dB/m)	Corr. Factor (dB)	Field Strength (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Field Strength ( $\mu$ V/m)	Limit ( $\mu$ V/m)
264.000	H	40.8	12.2	-14.7	38.3	46.0	82.2	200
283.498	V	44.8	13.3	-14.2	43.9	46.0	156.7	200
454.776	V	34.6	16.5	-13.8	37.3	46.0	73.3	200
631.679	V	29.9	19.2	-11.9	37.2	46.0	72.4	200
844.768	V	25.3	21.9	-10.0	37.2	46.0	72.4	200
916.359	V	24.1	22.5	-9.0	37.6	46.0	75.9	200

Table 6-2-2. EUT: M/T 2658-CGU, s/n AA-GFYR5, Ch.6(2437MHz) TX mode 11Mbps

Frequency (MHz)	Polarity (H/V)	Measured (dB $\mu$ V)	Antenna Factor (dB/m)	Corr. Factor (dB)	Field Strength (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Field Strength ( $\mu$ V/m)	Limit ( $\mu$ V/m)
264.000	H	41.6	12.2	-14.6	39.2	46.0	91.2	200
283.499	V	44.9	13.3	-14.2	44.0	46.0	158.5	200
454.776	V	35.1	16.5	-13.8	37.8	46.0	77.6	200
529.769	V	31.8	17.7	-13.4	36.1	46.0	63.8	200
601.607	V	29.3	18.7	-12.6	35.4	46.0	58.9	200
844.767	V	25.6	21.9	-10.0	37.5	46.0	75.0	200

Table 6-2-3. EUT: M/T 2658-CGU, s/n AA-GFYR5, Ch.11(2462MHz) TX mode 11Mbps

Frequency (MHz)	Polarity (H/V)	Measured (dB $\mu$ V)	Antenna Factor (dB/m)	Corr. Factor (dB)	Field Strength (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Field Strength ( $\mu$ V/m)	Limit ( $\mu$ V/m)
264.000	H	41.3	12.2	-14.6	38.9	46.0	88.1	200
283.498	V	45.4	13.3	-14.2	44.5	46.0	167.9	200
432.069	V	32.8	15.8	-13.6	35.0	46.0	56.2	200
454.777	V	35.6	16.5	-13.8	38.3	46.0	82.2	200
529.768	V	32.1	17.7	-13.4	36.4	46.0	66.1	200
631.686	V	30.3	19.2	-11.9	37.6	46.0	75.9	200



2) EUT in receiving mode

Table 6-2-4. EUT: M/T 2658-CGU, s/n AA-GFYR5, RX mode

Frequency (MHz)	Polarity (H/V)	Measured (dB $\mu$ V)	Antenna Factor (dB/m)	Corr. Factor (dB)	Field Strength (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Field Strength ( $\mu$ V/m)	Limit ( $\mu$ V/m)
159.752	H	37.7	12.4	-16.5	33.6	43.5	47.9	150
264.000	H	41.3	12.2	-14.6	38.9	46.0	88.1	200
283.498	V	44.7	13.3	-14.2	43.8	46.0	154.9	200
454.776	V	34.5	16.5	-13.8	37.2	46.0	72.4	200
480.077	V	32.8	17.1	-13.8	36.1	46.0	63.8	200
631.683	V	30.5	19.2	-11.9	37.8	46.0	77.6	200

## 7. RESTRICTED BANDS RADIATIONS (1GHz – 25GHz)

### 7.1 Test Procedure

Radiated emissions were measured in the frequency range with 1 GHz to 25GHz in transmitting mode and 1 GHz to 12.5 GHz in receiving mode. All tests were performed in the semi-anechoic chamber at a 3-meter distance (except for the frequency range with 18 GHz to 25 GHz where test distance was reduced to 1 meter) on both horizontal and vertical polarities. The antenna was also scanned in height. The emissions are recorded with a spectrum analyzer in peak hold mode. The identified emissions are further maximized as a function of cable manipulation, azimuth, and antenna height. The emissions closest to the limits are measured in the peak mode with the tuned spectrum analyzer using a bandwidth of 1MHz and the average setting mode with the tuned spectrum analyzer using resolution bandwidth of 1MHz / video bandwidth of 1kHz. The highest emissions relative to the limit are listed.

### 7.2 Test Instruments and Measurement Setup

Table 7 Radiated Emission Test Instrumentation (1GHz – 25GHz)

Description	Model	Serial Number
Spectrum Analyzer EMI Test Receiver	R&S ESI26	836119/003
Amplifier (1-26.5GHz)	HP 8449B	3008A00582
Horn Antenna (1- 18GHz)	EMCO 3115	9903-5774
Horn Antenna (3.95 – 5.85GHz)	EMCO 3160-5	1099
Horn Antenna (5.85 – 8.20GHz)	EMCO 3160-6	9712-1044
Horn Antenna (18- 26.5GHz)	EMCO 3160-9	0004-1202
SF106 cables: - Horn Ant => RF Amp. - RF Amp.<=>Spectrum Analyzer	Length: 6 m 15 m	- EM206SCO - EM215SCO

Notes: - HP: Hewlett Packard, R&S: Rohde & Schwarz

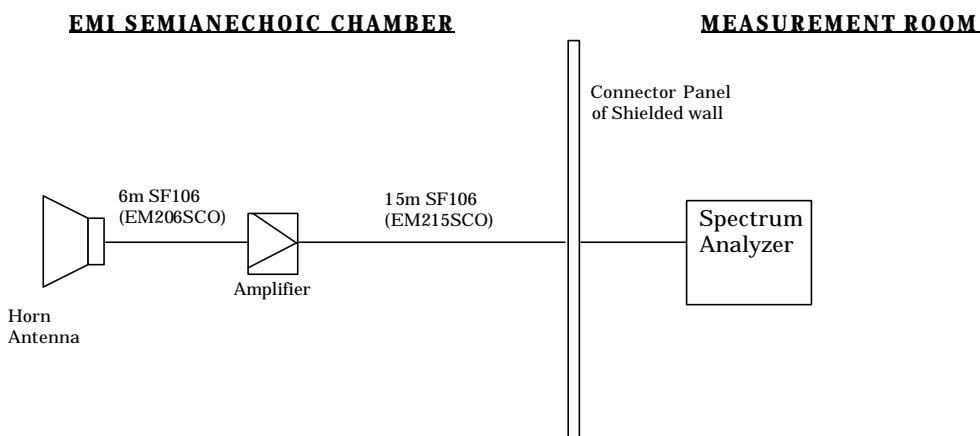


Figure 7 Cables for Radiated Emission Test

### 7.3 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. All factors are included in the reported data.

$$FS = R + AF + CORR - FO$$

where:

FS = Field Strength

R = Measured Spectrum analyzer Input Amplitude

AF = Antenna Factor

CORR = Correction Factor = CL-AG

CL = Cable Loss

AG = Amplifier Gain

FO = Distance Falloff Factor

For example:

Given a Spectrum Analyzer input reading of 51.5 dB $\mu$ V; Antenna Factor of 8.5 dB/m; Cable Loss of 1.3 dB; Falloff Factor of 0 dB; and an Amplifier Gain of 26 dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26 - 0.0 = 35.6 \text{ dB}\mu\text{V/m}$$

Conversions between dB $\mu$ V/m (or dB $\mu$ V) and  $\mu$ V/m (or  $\mu$ V) are done as :

$$\text{Level(dB}\mu\text{V/m)} = 20 \times \text{Log}(\text{Level}(\mu\text{V/m}))$$

$$40 \text{ dB}\mu\text{V/m} = 100 \mu\text{V/m}$$

$$48 \text{ dB}\mu\text{V/m} = 250 \mu\text{V/m}$$

## 7.4 Measurement Results

The EUT was found to comply to the limits of FCC Part 15 Subpart C and RSS-210 with a margin of 3.9 dB. The measurement was done for the frequency range of 1 GHz to 25 GHz in TX mode and 1 GHz to 12.5GHz in RX mode.

Test Date: May 15, 2002

### 1) EUT in transmission mode

Table 7-2-1. EUT: M/T 2658-CGU, s/n AA-GFYR5, Ch.1(2412MHz) TX mode 11Mbps

Frequency (GHz)	Polarity (H/V)	Measured (dBμV) (peak)	Measured (dBμV) (average)	Antenna Factor (dB/m)	Corr. Factor (dB)	Falloff Factor (dB)	Field Strength (dBμV/m) (peak)	FCC Limit (dBμV/m) (peak)	Field Strength (dBμV/m) (average)	FCC Limit (dBμV/m) (average)
1.248	V	58.6	-	24.7	-31.0	0.0	52.3	74.0	-	54.0
1.344	V	61.1	45.3	24.9	-30.8	0.0	55.2	74.0	39.4	54.0
1.365	V	56.5	-	25.0	-30.8	0.0	50.7	74.0	-	54.0
1.440	V	58.7	-	25.2	-30.6	0.0	53.3	74.0	-	54.0
1.772	V	58.0	46.0	26.5	-29.9	0.0	54.6	74.0	42.6	54.0
2.037	V	59.2	52.1	27.5	-29.5	0.0	57.2	74.0	50.1	54.0
2.387	V	58.6	46.8	28.2	-28.5	0.0	58.3	74.0	46.5	54.0
2.398	V	75.3	67.6	28.2	-28.4	0.0	75.1	NRB*	67.4	NRB*
2.413	V	109.3	101.3	28.2	-28.4	0.0	109.1	OB*	101.1	OB*
4.074	V	43.6	-	27.4	-24.3	0.0	46.7	74.0	-	54.0

\*Note: OB means “operation band” (2400-2483.5MHz); in this case limit is 1W (measured conducted with power meter).  
NRB means “non restricted band”.

Table 7-2-2. EUT: M/T 2658-CGU, s/n AA-GFYR5, Ch.6(2437MHz) TX mode 11Mbps

Frequency (GHz)	Polarity (H/V)	Measured (dBμV) (peak)	Measured (dBμV) (average)	Antenna Factor (dB/m)	Corr. Factor (dB)	Falloff Factor (dB)	Field Strength (dBμV/m) (peak)	FCC Limit (dBμV/m) (peak)	Field Strength (dBμV/m) (average)	FCC Limit (dBμV/m) (average)
1.248	V	58.8	-	24.7	-31.0	0.0	52.5	74.0	-	54.0
1.344	V	61.4	44.9	24.9	-30.8	0.0	55.5	74.0	39.0	54.0
1.365	V	56.0	-	25.0	-30.8	0.0	50.2	74.0	-	54.0
1.440	V	59.6	44.9	25.2	-30.6	0.0	54.2	74.0	39.5	54.0
1.772	V	57.8	46.1	26.5	-29.9	0.0	54.4	74.0	42.7	54.0
2.062	V	57.7	47.0	27.5	-29.4	0.0	55.8	74.0	45.1	54.0
2.389	H	58.6	46.1	28.2	-28.6	0.0	58.2	74.0	45.7	54.0
2.438	H	109.8	102.0	28.3	-28.4	0.0	109.7	OB*	101.9	OB*
2.484	H	57.3	46.3	28.4	-28.2	0.0	57.5	74.0	46.5	54.0
4.124	V	43.6	-	27.4	-24.3	0.0	46.7	74.0	-	54.0

\*Note: OB means “operation band” (2400-2483.5MHz); in this case limit is 1W (measured conducted with power meter).

Table 7-2-3. EUT: M/T 2658-CGU, s/n ZZ-00163, Ch.11(2462MHz) TX mode 11Mbps

Frequency (GHz)	Polarity (H/V)	Measured (dBμV) (peak)	Measured (dBμV) (average)	Antenna Factor (dB/m)	Corr. Factor (dB)	Falloff Factor (dB)	Field Strength (dBμV/m) (peak)	FCC Limit (dBμV/m) (peak)	Field Strength (dBμV/m) (average)	FCC Limit (dBμV/m) (average)
1.248	V	58.9	-	24.7	-31.0	0.0	52.6	74.0	-	54.0
1.344	V	61.2	44.8	24.9	-30.8	0.0	55.3	74.0	38.9	54.0
1.365	V	55.6	45.8	25.0	-30.8	0.0	49.8	74.0	40.0	54.0
1.440	V	59.0	-	25.2	-30.6	0.0	53.6	74.0	-	54.0
1.772	V	58.2	46.1	26.5	-29.9	0.0	54.8	74.0	42.7	54.0
2.089	V	59.1	50.8	27.6	-29.3	0.0	57.4	74.0	49.1	54.0
2.463	H	109.2	101.1	28.3	-28.3	0.0	109.2	OB*	101.1	OB*
2.484	H	60.8	49.2	28.4	-28.2	0.0	61.0	74.0	49.4	54.0
4.174	V	41.0	-	27.4	-24.2	0.0	44.2	74.0	-	54.0

\*Note: OB means “operation band” (2400-2483.5MHz); in this case limit is 1W (measured conducted with power meter).

2) EUT in receiving mode

Table 7-2-4. EUT: M/T 2658-CGU, s/n AA-GFYR5, RX mode

Frequency (GHz)	Polarity (H/V)	Measured (dBμV) (peak)	Measured (dBμV) (average)	Antenna Factor (dB/m)	Corr. Factor (dB)	Falloff Factor (dB)	Field Strength (dBμV/m) (peak)	FCC Limit (dBμV/m) (peak)	Field Strength (dBμV/m) (average)	FCC Limit (dBμV/m) (average)
1.248	V	58.5	-	24.7	-31.0	0.0	52.2	74.0	-	54.0
1.344	V	60.2	45.1	24.9	-30.8	0.0	54.3	74.0	39.2	54.0
1.365	V	55.7	-	25.0	-30.8	0.0	49.9	74.0	-	54.0
1.440	V	59.3	44.6	25.2	-30.6	0.0	53.9	74.0	39.2	54.0
1.772	V	57.3	46.2	26.5	-29.9	0.0	53.9	74.0	42.8	54.0
2.062	V	57.4	48.8	27.5	-29.4	0.0	55.5	74.0	46.9	54.0
4.124	V	43.0	-	27.4	-24.3	0.0	46.1	74.0	-	54.0