

**ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT  
CERTIFICATION TO FCC PART 15 REQUIREMENTS**

*for*

**INTENTIONAL RADIATOR**

**27.145MHZ RC TRANSMITTER**

**MODEL NO: 90883**

**BRAND NAME: TYCO RC – EASY DRIVERS CAR**

**FCC ID NO: APB90883-02A2T**

**REPORT NO: 02U1304-1**

**ISSUE DATE: MAY 16, 2002**

*Prepared for*

**MATTEL MT. LAUREL  
6000 MIDLANTIC DRIVE  
MT. LAUREL, NEW JERSEY 08054  
USA**

*Prepared by*

**COMPLIANCE CERTIFICATION SERVICES  
561F MONTEREY ROAD  
MORGAN HILL, CA 95037, USA  
TEL: (408) 463-0885  
FAX: (408) 463-0888**

---

## TABLE OF CONTENTS

|  |           |
|--|-----------|
| <b>1. VERIFICATION OF COMPLIANCE.....</b>  | <b>3</b>  |
| <b>2. PRODUCT DESCRIPTION .....</b>        | <b>4</b>  |
| <b>3. TEST FACILITY .....</b>              | <b>4</b>  |
| <b>4. MEASUREMENT STANDARDS.....</b>       | <b>4</b>  |
| <b>5. TEST METHODOLOGY .....</b>           | <b>4</b>  |
| <b>6. MEASUREMENT EQUIPMENT USED .....</b> | <b>5</b>  |
| <b>7. POWERLINE RFI LIMIT .....</b>        | <b>5</b>  |
| <b>8. RADIATED EMISSION LIMITS.....</b>    | <b>5</b>  |
| <b>9. SYSTEM TEST CONFIGURATION .....</b>  | <b>6</b>  |
| <b>10. EQUIPMENT MODIFICATION .....</b>    | <b>7</b>  |
| <b>11. TEST PROCEDURE AND RESULT.....</b>  | <b>7</b>  |
| <b>12. APPENDIX.....</b>                   | <b>14</b> |
| EXTERNAL & INTERNAL PHOTOS.....            | 14        |
| SCHEMATICS .....                           | 17        |
| BLOCK DIAGRAM .....                        | 17        |
| USER MANUAL.....                           | 17        |

## 1. VERIFICATION OF COMPLIANCE

COMPANY NAME : MATTEL MT. LAUREL  
6000 MIDLANTIC DRIVE  
MT. LAUREL, NEW JERSEY 08054  
USA

CONTACT PERSON : FRANK WINKLER/SENIOR ELECTRONICS ENGINEER

TELEPHONE NO. : 856-840-1259

EUT DESCRIPTION : 27.145MHz RC TRANSMITTER

MODEL NAME/NUMBER : 90883

BRAND NAME : TYCO RC-EASY DRIVERS CAR

SERIAL NUMBER : N/A

FCC ID : APB90883-02A2T

DATE TESTED : MAY 16, 2002

REPORT NUMBER : 02U1304-1

|                       |                           |
|-----------------------|---------------------------|
| TYPE OF EQUIPMENT     | RADIO CONTROL             |
| EQUIPMENT TYPE        | 27 MHz TRANSMITTER        |
| MEASUREMENT PROCEDURE | ANSI 63.4 / 1992          |
| LIMIT TYPE            | CERTIFICATION             |
| FCC RULE              | CFR 47, PART 15 SUBPART C |

The above equipment was tested by Compliance Engineering Services, Inc. for compliance with the requirements set forth in CFR 47, PART 15 SUBPART C. This said equipment in the configuration described in this report shows that maximum emission levels emanating from equipment are within the compliance requirements. **Warning** : This document reports conditions under which testing was conducted and results of tests performed. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification will constitute fraud and shall nullify the document.

Tested By:



FRANK IBRAHIM  
EMC ENGINEER  
COMPLIANCE CERTIFICATION SERVICES

Approved & Released For CCS By:



MIKE HECKROTTE  
CHIEF ENGINEER  
COMPLIANCE CERTIFICATION SERVICES

## 2. PRODUCT DESCRIPTION

|   |   |
|---|---|
| CHASSIS TYPE                              | Plastic   |
| Fundamental Frequency                     | 27.145 MHz                                      |
| Power Requirement                         | 9VDC  |
| Power Derived From                        | 9V Battery                                      |
| Type of Transmission                      | Data/Continuous                                 |
| Rated RF Output (mW)                      | Less than 30uW (average)                        |
| Type of Modulation                        | On Off Keying of a fixed frequency carrier wave |
| Necessary Channel Bandwidth               | 3KHz  |
| Emission Designator (ITU)                 | 2K00A1D   |
| Channel Bandwidth & Number of Channels    | Single Channel in the 26.96 to 27.28MHz Band    |
| Channel Access Method and Duplex Distance | Not Applicable-Simple Transmission              |
| Duty Cycle of Transmitter                 | 50% Duty Cycle                                  |
| Antenna Type(s) and Number of Each        | ~5" long, permanently attached whip antenna     |
| Intended Use                              | RC transmitter for controlling a toy vehicle    |
| Antenna Requirement                       | Permanently Affixed                             |
| Local Osc.                                | 27.145MHz                                       |
| Usage                                     | Toy   |

## 3. TEST FACILITY

The 3/10/30 meter open area test site and conducted measurement facility used to collect the radiated data is located at 561F Monterey Road, Morgan Hill, California, U.S.A. A detailed description of the test facility was submitted to the Commission on May 27,1994.

## 4. MEASUREMENT STANDARDS

The site is constructed and calibrated in conformance with the requirements of ANSI C63.4/1992.

## 5. TEST METHODOLOGY

For an intentional radiator, the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 KHz, up to at least the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower. (CFR 47 Section 15.33)

## 6. MEASUREMENT EQUIPMENT USED

| TEST EQUIPMENTS LIST               |                   |            |            |          |
|------------------------------------|-------------------|------------|------------|----------|
| Name of Equipment                  | Manufacturer      | Model No.  | Serial No. | Due Date |
| Active Loop Antenna, (10K - 30MHz) | EMCO              | 6502       | 9202-2722  | 4/20/03  |
| Spectrum Analyzer                  | HP 0.1K - 1.5GHz  | 8568B      | 2732A03661 | 5/10/02  |
| Spectrum Display                   | HP                | 85662A     | 2816A16696 | 5/4/02   |
| Quasi Peak Adapter                 | HP9K - 1GHz       | 85650A     | 2811A01155 | 5/4/02   |
| Pre-Amplifier, 25 dB               | HP0.1 - 1300MHz   | 8447D (P5) | 2944A06550 | 8/10/02  |
| Antenna, Bicon                     | Eaton30 - 200MHz  | 94455-1    | 1214       | 8/2/02   |
| Antenna, LP                        | EMCO200 - 2000MHz | 3146       | 9107-3163  | 8/2/02   |

## 7. POWERLINE RFI LIMIT

|                            |                |
|----------------------------|----------------|
| CONNECTED TO AC POWER LINE | SECTION 15.207 |
| BATTERY POWER              | NOT REQUIRED.  |

## 8. RADIATED EMISSION LIMITS

|  |                |
|--|----------------|
| GENERAL REQUIREMENTS                           | SECTION 15.209 |
| RESTRICTED BANDS OF OPERATION                  | SECTION 15.205 |
| OPERATION WITHIN THE BAND<br>26.96 - 27.28 MHZ | SECTION 15.227 |

## 9. SYSTEM TEST CONFIGURATION

The EUT was configured for testing in a typical fashion (as a customer would normally use it).



Radiated Open Site Test Set-up

## **10. EQUIPMENT MODIFICATION**

To achieve compliance to FCC Section 15.227 technical limits, the following change(s) were made during compliance testing:

No changes were required in order to achieve compliance to FCC Section 15.227.

## **11. TEST PROCEDURE AND RESULT**

### **11.1 Radiated Emission Test Procedure and Result**

1. The EUT was placed on a wooden table on the outdoor ground plane. The search antenna was placed 3 meter from the EUT. The EUT antenna was mounted vertically as per normal installation.
2. The turntable was slowly rotated to locate the direction of maximum emission at each emission falling in the restricted bands of 15.205.
3. Once maximum direction was determined, the search antenna was raised and lowered in both vertical and horizontal polarizations. The readings so obtained are recorded in the data listed below.



FCC, VCCI, CISPR, CE, AUSTEL, NZ  
UL, CSA, TUV, BSMI, DHHS, NVLAP

561F MONTEREY ROAD, SAN JOSE, CA 95037-9001  
PHONE: (408) 463-0885 FAX: (408) 463-0888


**Project #:** 02U1304-1  
**Report #:** 020513C02  
**Date & Time:** 05/13/02 11:26 AM  
**Test Engr:** Frank Ibrahim

**Company:** Mattel  
**EUT Description:** 27MHz Transmitter for RC toys, Easy Drivers Car, model: 90883  
**Test Configuration :** Stand Alone EUT  
**Type of Test:** FCC 15.227  
**Mode of Operation:** EUT transmitting at 27.175 MHz

[<< Main Sheet](#)

| Freq.           | Reading | AF    | Closs | Pre-amp | Level    | Limit | Margin | Pol   | Az    | Height  | Mark    |
|-----------------|---------|-------|-------|---------|----------|-------|--------|-------|-------|---------|---------|
| (MHz)           | (dBuV)  | (dB)  | (dB)  | (dB)    | (dBuV/m) | FCC_B | (dB)   | (H/V) | (Deg) | (Meter) | (P/Q/A) |
| 54.35           | 39.20   | 9.42  | 0.89  | 27.48   | 22.03    | 40.00 | -17.97 | 3mV   | 0.00  | 1.00    | P       |
| 81.53           | 40.20   | 7.86  | 1.09  | 27.40   | 21.74    | 40.00 | -18.26 | 3mV   | 0.00  | 1.00    | P       |
| 135.88          | 39.80   | 13.94 | 1.53  | 27.18   | 28.10    | 43.50 | -15.40 | 3mV   | 0.00  | 1.00    | P       |
| 54.35           | 41.20   | 9.42  | 0.89  | 27.48   | 24.03    | 40.00 | -15.97 | 3mH   | 0.00  | 1.00    | P       |
| 81.53           | 40.60   | 7.86  | 1.09  | 27.40   | 22.14    | 40.00 | -17.86 | 3mH   | 0.00  | 1.00    | P       |
| 108.70          | 40.60   | 10.65 | 1.31  | 27.31   | 25.25    | 43.50 | -18.25 | 3mH   | 0.00  | 1.00    | P       |
| Total data #: 6 |         |       |       |         |          |       |        |       |       |         |         |




|   |  |  |  |  |  |  |  |  |  |  |  |
|---|--|--|--|--|--|--|--|--|--|--|--|
|  <p style="text-align: center;">FCC, VCCI, CISPR, CE, AUSTEL, NZ<br/>UL, CSA, TUV, BSMI, DHHS, NVLAP</p> <p>561F MONTEREY ROAD, SAN JOSE, CA 95037-9001<br/>PHONE: (408) 463-0885 FAX: (408) 463-0888</p>                              |  |  |  |  |  | <p>02U1304-1</p> <hr/> <p>020513C01</p> <hr/> <p>05/13/02 9:53 AM</p> <hr/> <p>Frank Ibrahim</p> <hr/> |  |  |  |  |  |
|   |  |  |  |  |  |  |  |  |  |  |  |
| <p><b>Company:</b> <u>Mattel</u></p> <p><b>EUT Description:</b> <u>27MHz Transmitter for RC toys, Easy Drivers Car, model: 90883</u></p> <p><b>Test Configuration :</b> <u>Stand Alone EUT</u></p> <p><b>Type of Test:</b> <u>FCC 15.227</u></p> <p><b>Mode of Operation:</b> <u>EUT transmitting at 27.175 MHz</u></p> |  |  |  |  |  |  |  |  |  |  |  |


  


| Freq.  | Reading | AF   | Closs | Pre-amp | Level    | Limit  | Margin | Pol   | Az    | Height  | Mark    |
|--|---------|------|-------|---------|----------|--------|--------|-------|-------|---------|---------|
| (MHz)  | (dBuV)  | (dB) | (dB)  | (dB)    | (dBuV/m) | FCC_B  | (dB)   | (H/V) | (Deg) | (Meter) | (P/Q/A) |
| Y-Axis, Loop antenna at 270 degrees, Fund Freq                                   |         |      |       |         |          |        |        |       |       |         |         |
| 27.18  | 82.80   | 5.85 | 0.76  | 27.54   | 61.87    | 100.00 | -38.13 | 3mV   | 0.00  | 1.00    | P       |
| 27.18  | 59.40   | 5.85 | 0.76  | 27.54   | 38.47    | 80.00  | -41.53 | 3mV   | 0.00  | 1.00    | Av      |
| Low Bandedge, (Noise Floor):   |         |      |       |         |          |        |        |       |       |         |         |
| 26.96  | 37.70   | 5.85 | 0.76  | 27.54   | -23.23   | 29.54  | -52.77 | 3mV   | 0.00  | 1.00    | P       |
| High Bandedge, (Noise Floor):  |         |      |       |         |          |        |        |       |       |         |         |
| 27.28  | 48.60   | 5.85 | 0.76  | 27.54   | -12.33   | 29.54  | -41.87 | 3mV   | 0.00  | 1.00    | P       |
| Notes:   |         |      |       |         |          |        |        |       |       |         |         |
| There were no signals from the EUT between 27.175 and 30MHz                      |         |      |       |         |          |        |        |       |       |         |         |
| Distance Correction factor of -40dB was added to High and Low bandedges readings |         |      |       |         |          |        |        |       |       |         |         |


Note:

The fundamental limit is at 3m distance, the limit of bandedge and out of band emissions is at 30m distance, therefore 40 dB distance correction factor, (40 dB / decade) is applied for bandedge readings.

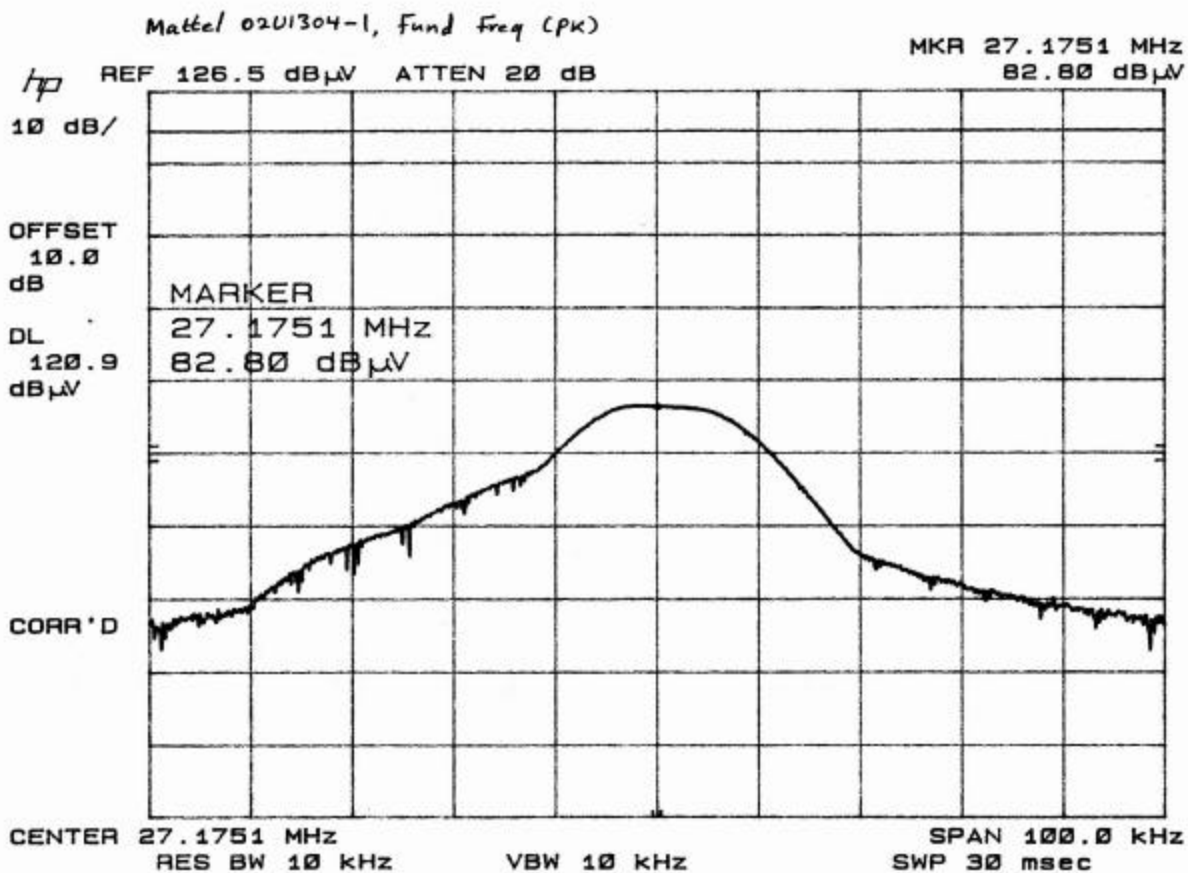

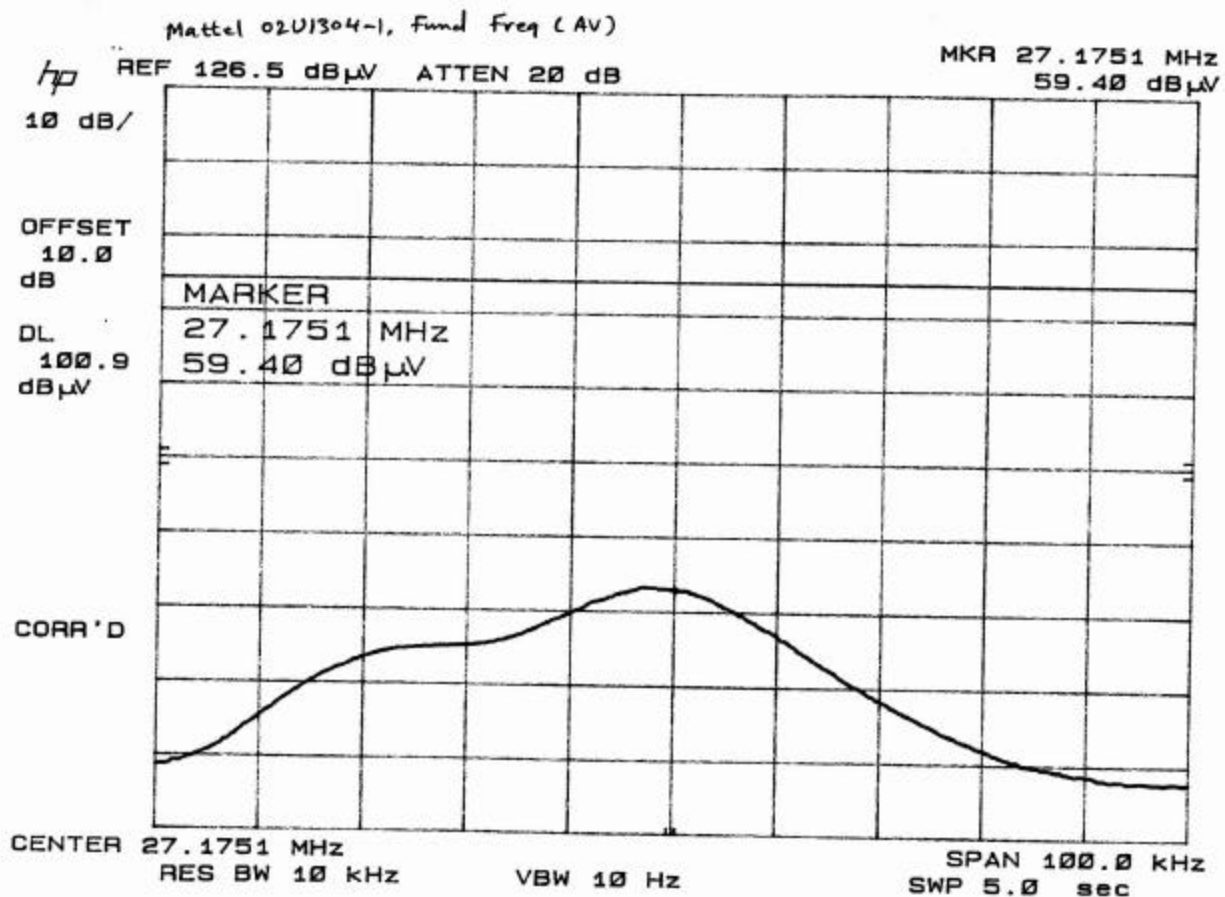


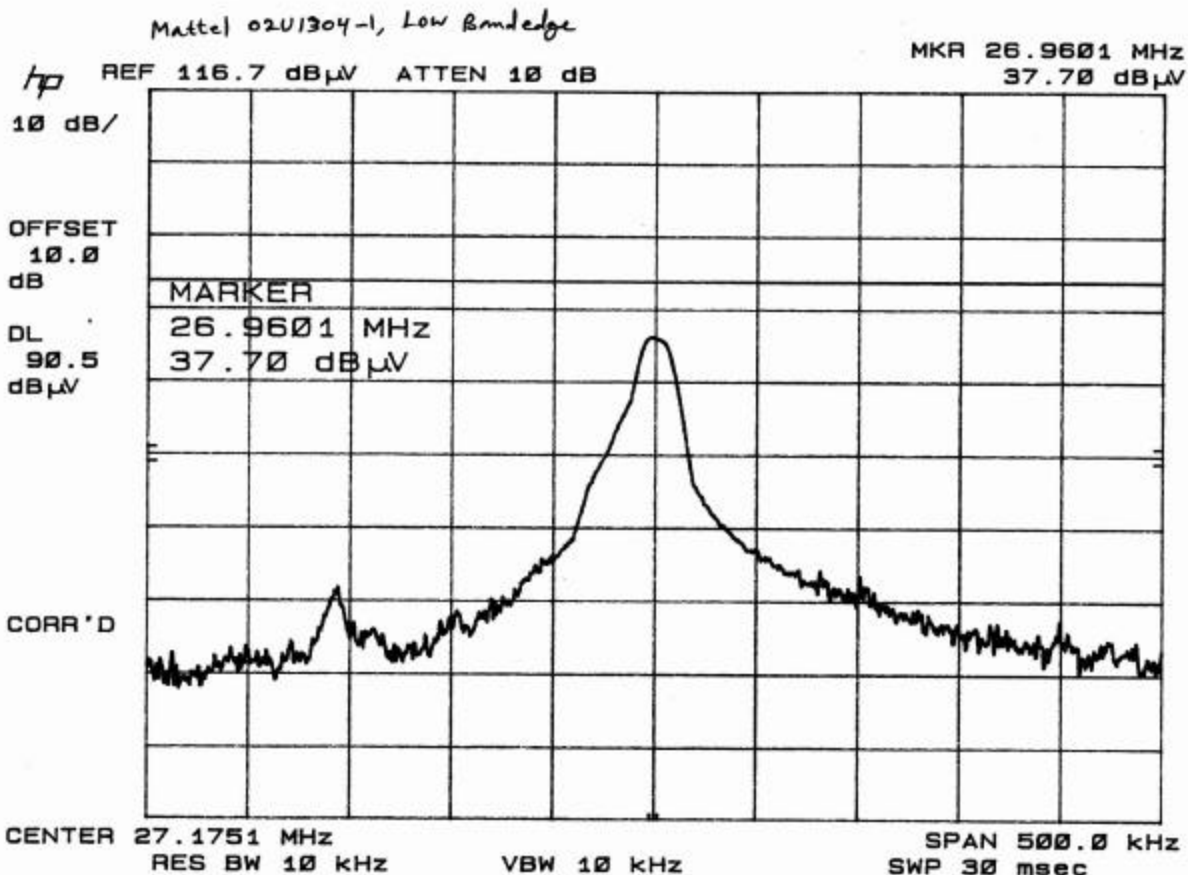

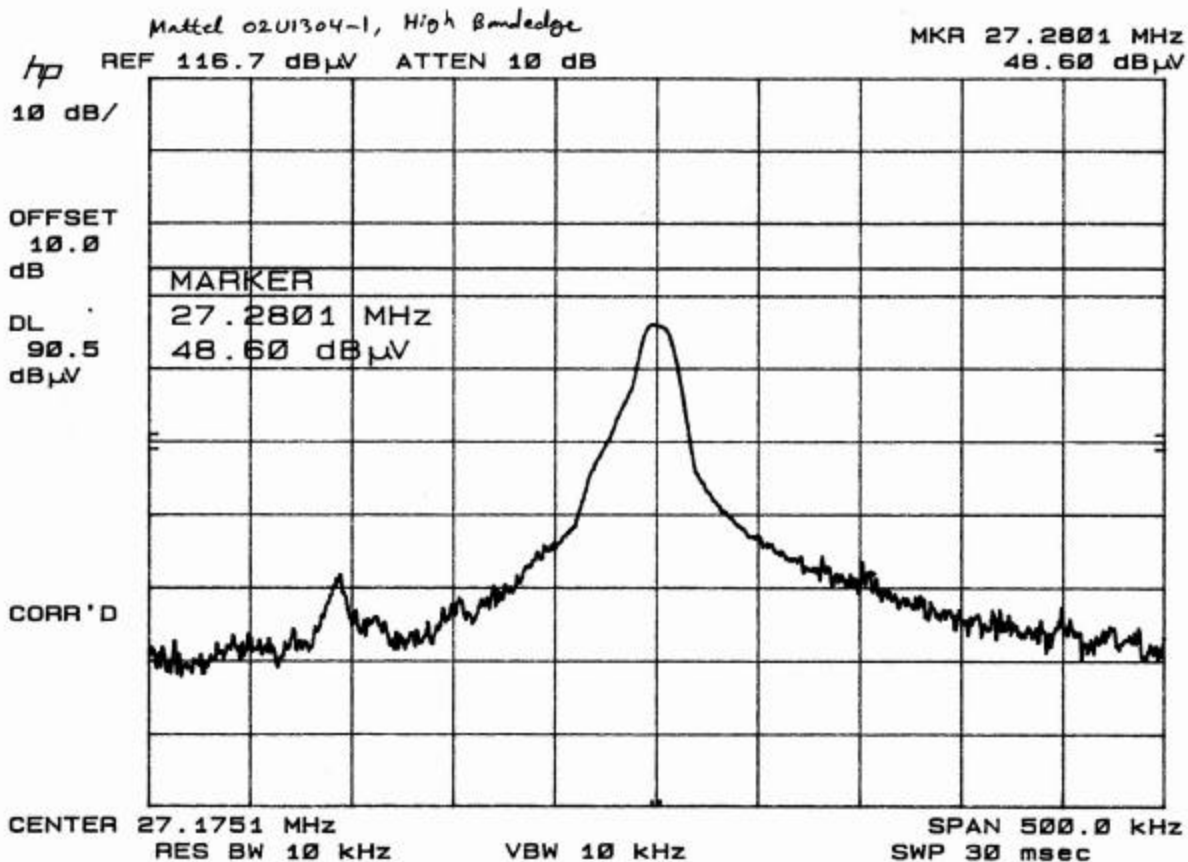




## 12. Appendix

### External & Internal Photos

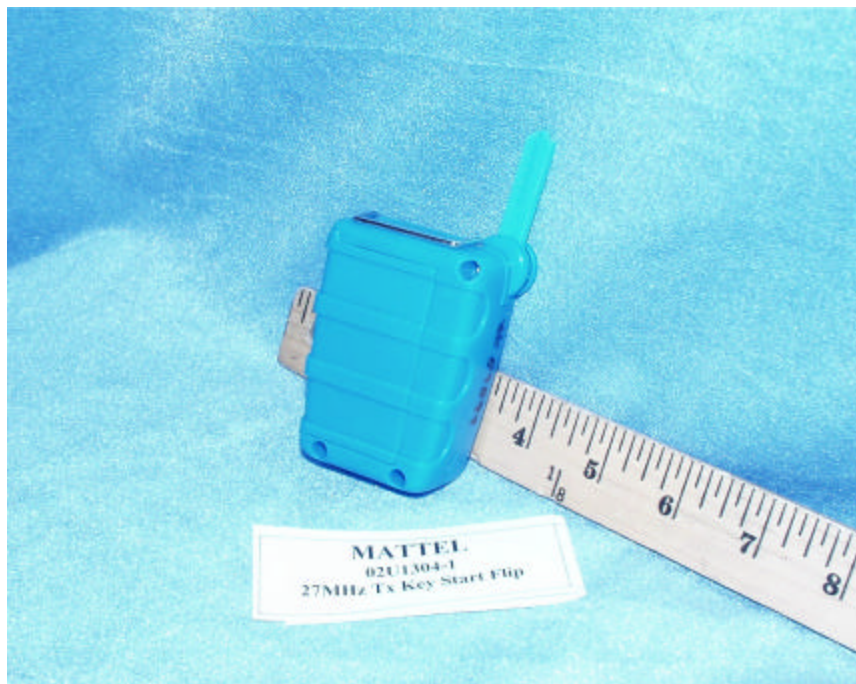



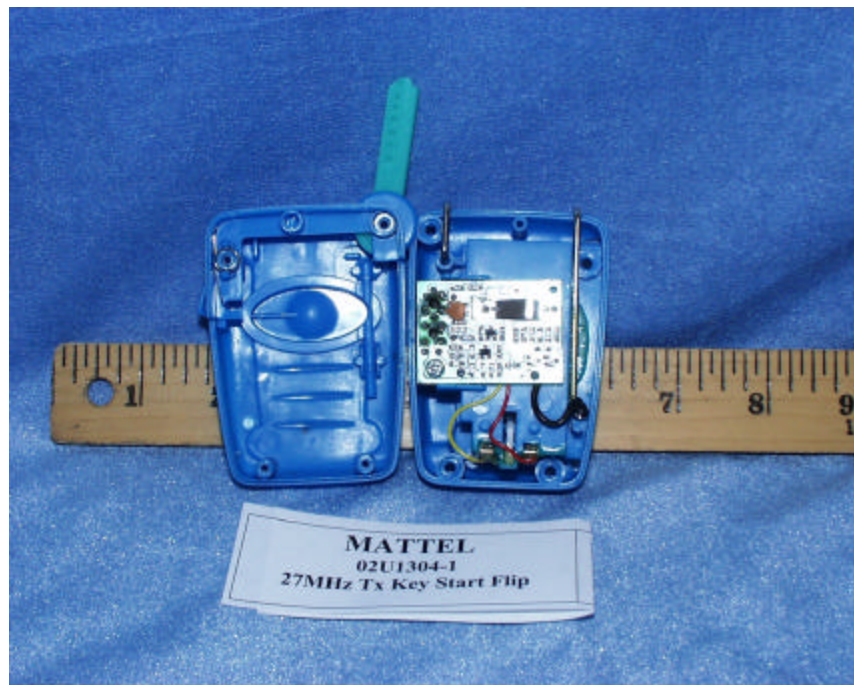

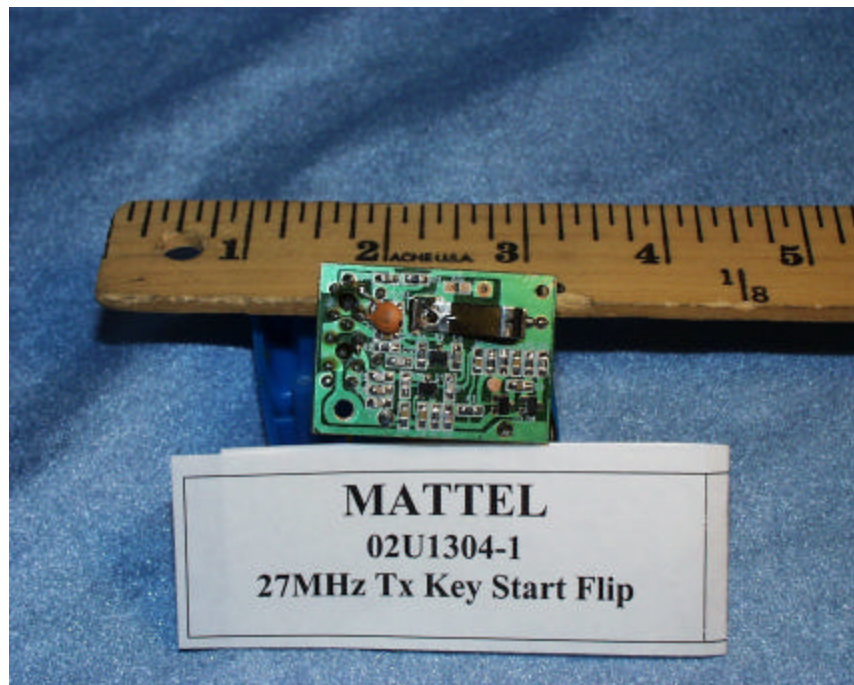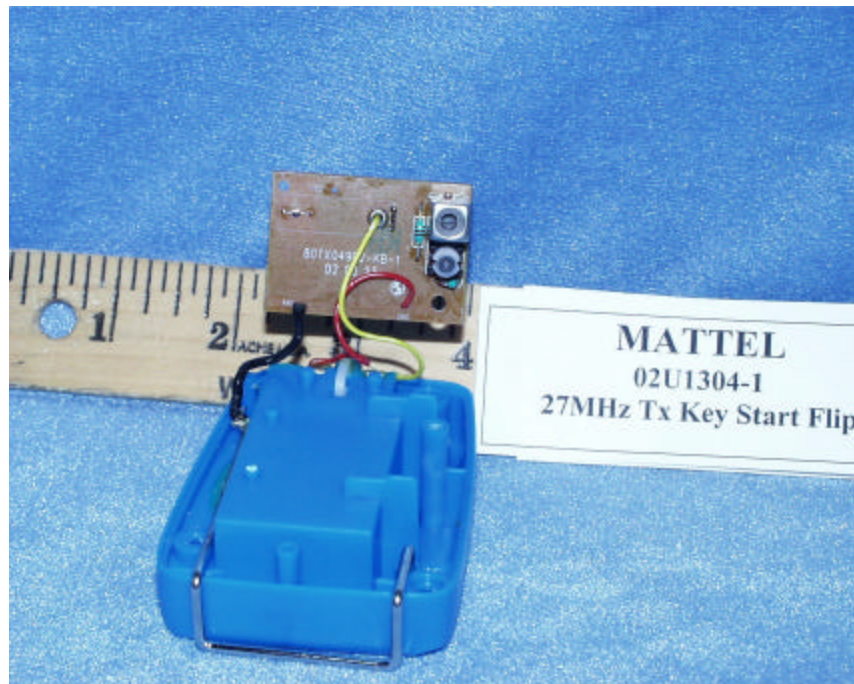



### **Schematics**

Please refer to attached sheets.

### **Block Diagram**

Please refer to attached sheets.

### **User Manual**

Please refer to attached sheets.

## **END OF REPORT**