

**ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT  
CERTIFICATION TO FCC PART 15 REQUIREMENTS**

*for*

**INTENTIONAL RADIATOR**

**49MHz RADIO CONTROL TRANSMITTER  
WITH SOUND**

**MODEL NO: 95086-49T**

**BRAND NAME: TYCO R/C-6V CORVETTE**

**FCC ID NO: APB95086-00A4T**

**REPORT NO: 01U0709-1**

**ISSUE DATE: MARCH 13, 2001**

*Prepared for*

**MATTEL MT. LAUREL  
6000 MIDATLANTIC DRIVE  
MOUNT LAUREL, NJ 08054  
USA**

*Prepared by*

**COMPLIANCE ENGINEERING SERVICES, INC.  
561 F MONTEREY ROAD  
MORGAN HILL, CA 95037, USA  
TEL: (408) 463-0885  
FAX: (408) 463-0888**

	<b>TABLE OF CONTENTS</b>	<b>PAGE</b>
1.	VERIFICATION OF COMPLIANCE.....	2
2.	PRODUCT DESCRIPTION.....	3
3.	TEST FACILITY .....	3
4.	MEASUREMENT STANDARDS .....	3
5.	TEST METHODOLOGY .....	3
6.	MEASUREMENT EQUIPMENT USED .....	4
7.	TEST PROCEDURES AND TEST RESULTS..... Radiated Emission Test Result( 15.235 (a)) Radiated Emission Test Result( 15.235 (b))	4
8.	RADIATED EMISSION TEST SETUP PHOTO.....	6

**EXHIBITS**

1. Proposed FCC ID Label Format
2. Authorization Letter
3. EUT Photographs
4. Schematic Diagram
5. User Manual

## 1. VERIFICATION OF COMPLIANCE

COMPANY NAME : MATTEL MT. LAUREL  
6000 MIDATLANTIC DRIVE  
MOUNT LAUREL, NJ 08054  
USA

CONTACT PERSON : FRANK WINKLER, SENIOR PROJECT ENGINEER

TELEPHONE NO. : (856) 840-1259

EUT DESCRIPTION : 49MHz RADIO CONTROL TRANSMITTER WITH SOUND

MODEL NAME/NUMBER : 95086-49T

BRAND NAME : TYCO R/C-6V CORVETTE

SERIAL NUMBER : N/A

FCC ID : APB95086-00A4T

DATE TESTED : MARCH 06, 2001

REPORT NUMBER : 01U0709-1

EQUIPMENT TYPE	49.86 MHz TRANSMITTER
MEASUREMENT PROCEDURE	ANSI 63.4 / 1992
LIMIT TYPE	CERTIFICATION
FCC RULE	CFR 47, PART 15.235

The above equipment was tested by Compliance Engineering Services, Inc. for compliance with the requirements set forth in CFR 47, PART 15. This said equipment in the configuration described in this report shows that maximum emission levels emanating from equipment are within the compliance requirements.

**Warning :** This document reports conditions under which testing was conducted and results of tests performed. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification will constitute fraud and shall nullify the document.

Tested and/or Reviewed By:

Released For CCS By:

---

MIKE ZHU  
SENIOR EMC ENGINEER  
COMPLIANCE CERTIFICATION SERVICES

---

THU CHAN  
SENIOR EMC ENGINEER  
COMPLIANCE CERTIFICATION SERVICES

## 2. PRODUCT DESCRIPTION

CHASSIS TYPE	PLASTIC
Fundamental Frequency	49.86 MHz
Power Source	9VOLT BATTERY
Transmitting Time	CONTINUOUS
Type of Antenna	PERMANENTLY ATTACHED
No. of Channel	1
NO. OF LAYER	1
Associated Receiver	APB95086-00A4R

## 3. TEST FACILITY

The 3/10/30 meter open area test site and conducted measurement facility used to collect the radiated data is located at 561F Monterey Road, Morgan Hill, California, U.S.A. A detailed description of the test facility was submitted to the Commission on May 27, 1994.

## 4. MEASUREMENT STANDARDS

The site is constructed and calibrated in conformance with the requirements of ANSI C63.4/1992.

## 5. TEST METHODOLOGY

For an intentional radiator, the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 KHz, up to at least the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower. (CFR 47 Section 15.33)

## 6. MEASUREMENT EQUIPMENT USED

Manufacturer	Model Number	Description	Cal Due Date
H.P.	8568B	Spectrum Analyzer (100Hz - 1.5GHz)	07/14/01
EATON	94455-1	Antenna, Biconical	09/12/01
BATTERY	N/A	6 Volt Nicad or 6V Alkaline (4 x AA)	N/A

## 7. TEST PROCEDURES AND TEST RESULTS

### RADIATED EMISSION TEST: ( 15.235 (a))

#### Test Procedure

1. The EUT was placed on a wooden table on the outdoor ground plane. The search antenna was placed 3 meter from the EUT. The EUT was placed in X,Y, and Z position to simulate the actual usage.
2. The turntable was slowly rotated to locate the direction of maximum emission at each EUT position. Once the maximum direction and EUT position was determined, the search antenna was raised and lowered in both vertical and horizontal polarization. The maximum reading so obtained are recorded in the data list below.

Test Result: Peak emission was under average limit. Refer to attached plots.

**RADIATED EMISSION TEST: ( 15.235 (b))**

Test Requirement : The field strength between the band edges and up to 10kHz above and below the band edges shall be attenuated at least 26 dB below the level of the unmodulated carrier or to the general limits in 15.209, which permits the higher emission levels. All emissions more than 10KHz from the band edges shall be below the levels specified in 15.209.

**Test Procedure:**

1. The EUT was placed on a wooden table on the outdoor ground plane. The search antenna was placed 3 meter from the EUT. The EUT was placed in X, Y, and Z position to simulate the actual usage.
2. The turntable was slowly rotated to locate the direction of maximum direction and EUT position was determined, the search antenna was raised and lowered in both vertical and horizontal polarizations. For band edge measurements a plot was taken in that position and orientation with 3KHz RES B/W and 100KHz VID B/W and compared to a limit line 26dB below the level measured in 12.235(a) plot ( $75.19\text{dBuV/m} - 26\text{dB} = 49.19\text{dBuV/m}$ ). For out of band measurements tabular data was taken.

Test results: All emissions were under specified limits. Refer to attached plots and tabular data sheet.

## 8. RADIATED EMISSION TEST SETUP PHOTOS





FCC, VCCI, CISPR, CE, AUSTEL, NZ  
UL, CSA, TUV, BSMI, DHHS, NVLAP

561F MONTEREY ROAD, SAN JOSE, CA 95037-9001  
PHONE: (408) 463-0885 FAX: (408) 463-0888

**Project #:** 01U0709-1

**Report #:** 010306C1

**Date & Time:** 03/06/01 9:51 AM

**Test Engr:** MIKE ZHU

**Company:** MATTEL MOUNT LAUREL FW

**EUT Description:** 49MHZ Radio Control Transmitter with sound,m/n:95086-49T

**Test Configuration :** EUT ONLY

**Type of Test:** FCC PART 15.235 AND 15.209

**Mode of Operation:** NORMAL

[<< Main Sheet](#)

[illegible]



FCC, VCCI, CISPR, CE, AUSTEL, NZ  
UL, CSA, TUV, BSMI, DHHS, NVLAP

561F MONTEREY ROAD, SAN JOSE, CA 95037-9001  
PHONE: (408) 463-0885 FAX: (408) 463-0888

Project #: 01U0709-1

Report #: 010306C1

Date & Time: 03/06/01 9:51 AM

*Test Engr:* MIKE ZHU

**Company:** MATTEL MOUNT LAUREL FW

**EUT Description:** 49MHZ Radio Control Transmitter with sound,m/n:95086-49T

**Test Configuration :** EUT ONLY

**Type of Test:** FCC PART 15.235 AND 15.209

**Mode of Operation:** NORMAL

C A-Site

C B-Site

© C-Site

C F-Site

### 6 Worst Data

Descending

Freq.	Reading	AF	Closs	Pre-amp	Level	Limit	Margin	Pol	Az	Height	Mark
(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	FCC_B	(dB)	(H/V)	(Deg)	(Meter)	(P/Q/A)
EUT POSITION:											
X:											
49.85	80.20	10.20	0.98	27.26	64.12	80.00	-15.88	3mV	90.00	1.00	P
49.85	84.40	11.69	0.98	27.26	69.81	80.00	-10.19	3mH	180.00	3.00	P
149.39	49.20	16.91	1.74	26.97	40.87	43.50	-2.63	3mH	30.00	3.00	P
Y:											
49.86	86.20	10.20	0.98	27.26	70.12	80.00	-9.88	3mV	60.00	1.00	P
49.86	72.20	11.69	0.98	27.26	57.61	80.00	-22.33	3mH	30.00	3.00	P
149.39	49.60	16.91	1.74	26.97	41.27	43.50	-2.23	3mH	30.00	3.00	P
Z:											
49.86	79.80	10.20	0.98	27.26	63.72	80.00	-16.28	3mV	60.00	1.00	P
49.86	73.90	11.69	0.98	27.26	59.31	80.00	-20.69	3mH	100.00	3.00	P
149.39	41.80	16.91	1.74	26.97	33.47	43.50	-10.03	3mH	180.00	3.00	P
X:											
249.30	42.50	13.16	2.27	26.52	31.40	46.00	-14.60	3mH	30.00	1.00	P
Total data #:10											
V.2c											
* Completed full scan in the range of 30-1000mhz in vertical and horizontal pol.											

Tk 95086-497

Mr

hp


MATTEL MOUNT LAUREL FW, FCC15.235 (B) MKR 49.8597 MHz  
REF 80.9 dBμV ATTEN 10 dB 67.00 dBμV

10 dB/

OFFSET  
-6.1  
dB

DL  
41.0  
dBμV

START 49.8100 MHz STOP 49.9100 MHz  
RES BW 10 KHZ VBW 10 KHZ SWP 30 msec

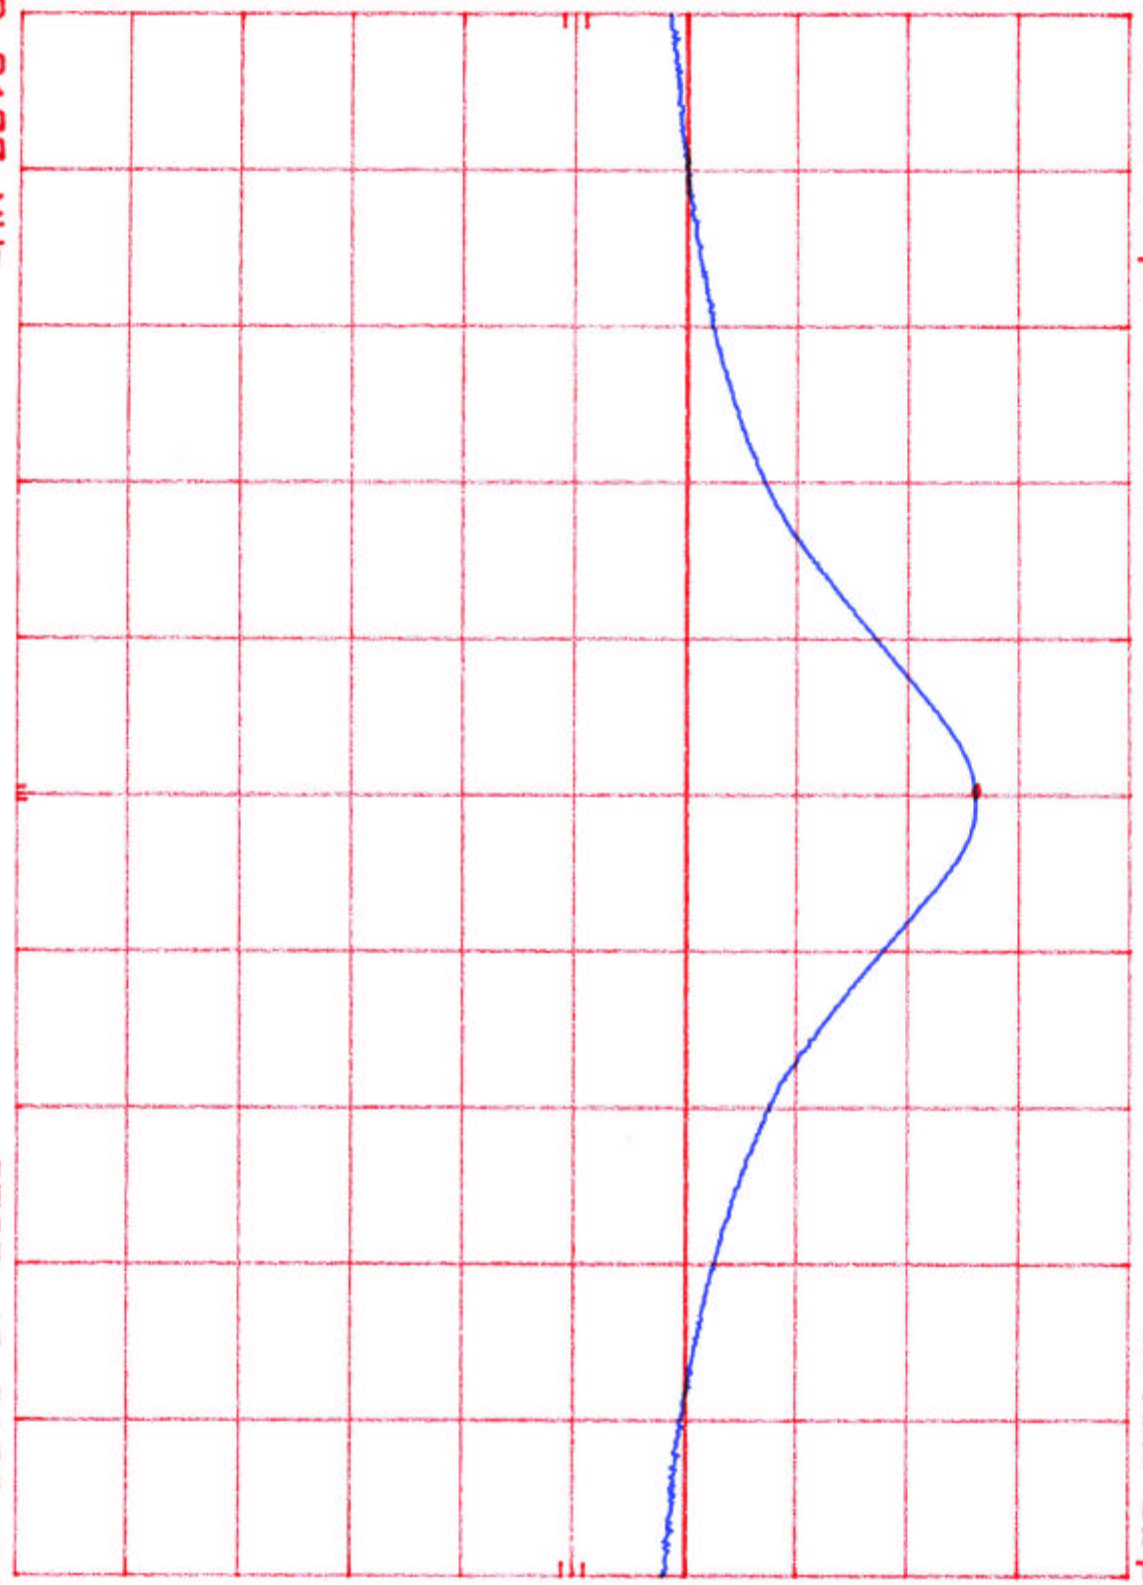

TX 01086-09-

142

MATTEL, FCC15.235 (D). FCCID APB95086-00A4T MKR 49.8597 MHz  
REF 80.9 dBμV ATTEN 10 dB 67.00 dBμV

HP

10 dB/

OFFSET  
-6.1

dB

DL

41.0  
dBμV

START 49.8100 MHz RES BW 10 KHZ VBW 10 KHZ STOP 49.9100 MHz  
SWP 30 msec

