# ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT CERTIFICATION TO FCC PART 15 REQUIREMENTS

for

#### UNINTENTIONAL RADIATOR

# 49 MHz RADIO CONTROL TOY GO KART (RECEIVER)

MODEL NO: 97599-49R

**BRAND NAME: TYCO R/C-SCREAMIN KART** 

FCC ID NO: APB97599-01A4R

**REPORT NO: 01U0958-2** 

DATE: SEPTEMBER 7, 2001

Prepared for
MATTEL MT. LAUREL
6000 MIDATLANTIC AVENUE
MOUNT LAUREL, NJ 08054
USA

*Prepared by* 

COMPLIANCE CERTIFICATION SERVICES 561 F MONTEREY ROAD MORGAN HILL, CA 95037, USA

TEL: (408) 463-0885 FAX: (408) 463-0888

# **TABLE OF CONTENTS**

| 1.  | VERIFICATION OF COMPLIANCE                         | 3 |
|-----|--|---|
| 2.  | PRODUCT DESCRIPTION                                | 4 |
| 3.  | TEST FACILITY                                      | 4 |
| 4.  | MEASUREMENT EQUIPMENT USED                         | 5 |
| 5.  | TEST CONFIGURATION                                 | 5 |
| 6.  | TESTS CONDUCTED                                    | 5 |
|     | RADIATED EMISSION TEST PROCEDURE                   |   |
| 8.  | COHERENT TESTS                                     | 6 |
| 9.  | EQUIPMENT MODIFICATIONS                            | 7 |
| 10. | TEST CONFIGURATION PHOTOS (RADIATED EMISSION TEST) | 8 |

- TEST DATA
  - o Coherent Emission Plot
  - o Radiated Emission Data
- PROPOSED FCC ID LABEL FORMAT
- AUTHORIZATION LETTER
- SCHEMATIC DIAGRAM
- USER MANUAL
- EUT PHOTOGRAPHS

#### EUT: 49 MHz RADIO CONTROL TOY (RECEIVER)

#### 1. VERIFICATION OF COMPLIANCE

COMPANY NAME : MATTEL MT. LAUREL

6000 MIDATLANTIC AVENUE MOUNT LAUREL, NJ 08054

USA

CONTACT PERSON : FRANK WINKLER/SENIOR PROJECT ENGINEER

TELEPHONE NO. : (856) 840-1149

EUT DESCRIPTION : 49 MHz RADIO CONTROL TOY GO KART (RECEIVER)

MODEL NAME/NUMBER : 97599-49R

BRAND NAME : TYCO R/C-SCREAMIN KART

FCC ID : APB97599-01A4R

DATE TESTED : SEPTEMBER 5, 2001

REPORT NUMBER : 01U0958-2

| TYPE OF EQUIPMENT     | RADIO CONTROL RECEIVER          |  |  |  |
|-----------------------|---------------------------------|--|--|--|
|                       | (UNINTENTIONAL RADIATOR)        |  |  |  |
| EQUIPMENT TYPE        | 49 MHz SUPERREGENERATE RECEIVER |  |  |  |
| MEASUREMENT PROCEDURE | ANSI 63.4 / 1992                |  |  |  |
| LIMIT TYPE            | CERTIFICATION                   |  |  |  |
| FCC RULE              | CFR 47, PART 15.109             |  |  |  |

The above equipment was tested by Compliance Engineering Services, Inc. for compliance with the requirements set forth in CFR 47, PART 15. This said equipment in the configuration described in this report shows that maximum emission levels emanating from equipment are within the compliance requirements. **Warning**: This document reports conditions under which testing was conducted and results of tests performed. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification will constitute fraud and shall nullify the document.

| MIKE ZHU SENIOR EMC ENGINEER COMPLIANCE CERTIFICATION SERVICES | Approved & Released For CCS By:   |
|--|-----------------------------------|
|  |                                   |
| MIKE ZHU   | THU CHAN                          |
| SENIOR EMC ENGINEER  | SENIOR EMC ENGINNER               |
| COMPLIANCE CERTIFICATION SERVICES                              | COMPLIANCE CERTIFICATION SERVICES |

Page 3

### 2. PRODUCT DESCRIPTION

MATTEL MT. LAUREL, Model TYCO R/C-SCREAMIN KART is the receiving portion of a remote control toy. The associated Transmitter is manufactured by MATTEL MT. LAUREL, Model No 97595-27T, FCC ID APB97577-01A4T.

#### 3. TEST FACILITY

The 3 meter open area test site and conducted measurement facility used to collect the radiated data is located at 561F Monterey Road, Morgan Hill, California, U.S.A. A detailed description of the test facilities was submitted to the Commission on May 27, 1994.

The measuring instrument, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

# 4. MEASUREMENT EQUIPMENT USED

| TEST EQUIPMENTS LIST |                         |            |            |          |  |  |  |
|----------------------|-------------------------|------------|------------|----------|--|--|--|
| Name of Equipment    | Manufacturer            | Model No.  | Serial No. | Due Date |  |  |  |
| Spectrum Analyzer    | HP 0.1K - 1.5GHz        | 8568B      | 2732A03661 | 5/10/02  |  |  |  |
| Spectrum Display     | HP                      | 85662A     | 2816A16696 | 5/10/02  |  |  |  |
| Quasi Peak Adapter   | HP9K - 1GHz             | 85650A     | 2811A01155 | 5/10/02  |  |  |  |
| Pre-Amplifier,25 dB  | HP0.1 - 1300MHz         | 8447D (P8) | 2944A06589 | 9/19/01  |  |  |  |
| Antenna, Bilog       | Schaffner-Chase30M-2GHz | CBL6112B   | 2586       | 12/11/01 |  |  |  |
| Signal Generator     | HP 10M - 20GHz          | 83732B     | US34490599 | 3/21/02  |  |  |  |

#### 5. TEST CONFIGURATION

Set signal generator to transmit at 49 MHz. Adjusted generator level and frequency to get the maximum coherent and emission of the Eut. The receiver receives the signal. All the wires are placed on the turntable to their maximum length to simulate the worse emission condition.

#### 6. TESTS CONDUCTED

| CFR 47, 15.109 |             | CONDUCTED AT 3 METERS |
|----------------|-------------|-----------------------|
| RADIATED EMIS  | SSION TESTS |                       |

#### 7. RADIATED EMISSION TEST PROCEDURE

The EUT and all other support equipment are placed on a wooden table 80 cm above the ground screen. Antenna to EUT distance is 3 meters. During the test, the table is rotated 360 degrees to maximize emissions and the antenna is positioned from 1 to 4 meters above the ground screen to further maximize emissions. The antenna is polarized in both vertical and horizontal positions.

Monitor the frequency range of interest at a fixed antenna height and EUT azimuth. Frequency span should be small enough to easily differentiate between broadcast stations and intermittent ambients. Rotate EUT 360 degrees to maximize emissions received from EUT. If emission increases by more than 1 dB, or if another emission appears that is greater by 1 dB, return to azimuth where maximum occurred and perform additional cable manipulation to further maximize received emission.

Move antenna up and down to further maximize suspected highest amplitude signal. If emission increased by 1 dB or more, or if another emission appears that is greater by 1dB or more, return to antenna height where maximum signal was observed and manipulate cables to produce highest emissions, noting frequency and amplitude.

#### 8. **COHERENT TEST**

During Radiated Emission Tests, H.P. Signal Generator Model No: 8640B was used to radiate unmodulated CW signal to EUT at 49.882 MHz. Please refer to radiated emission data for six highest readings.

REPORT NO: 01U0958-2 FCC ID: APB97599-01A4R DATE: AUGUST 31, 2001

EUT: 49 MHz RADIO CONTROL TOY (RECEIVER)

## 9. EQUIPMENT MODIFICATIONS


To achieve compliance to FCC Section 15.109, the following change(s) were made during compliance testing:

No changes were required in order to achieve compliance to FCC Section 15.109.


#### 10. TEST CONFIGURATION PHOTOS (Radiated Emission Test)





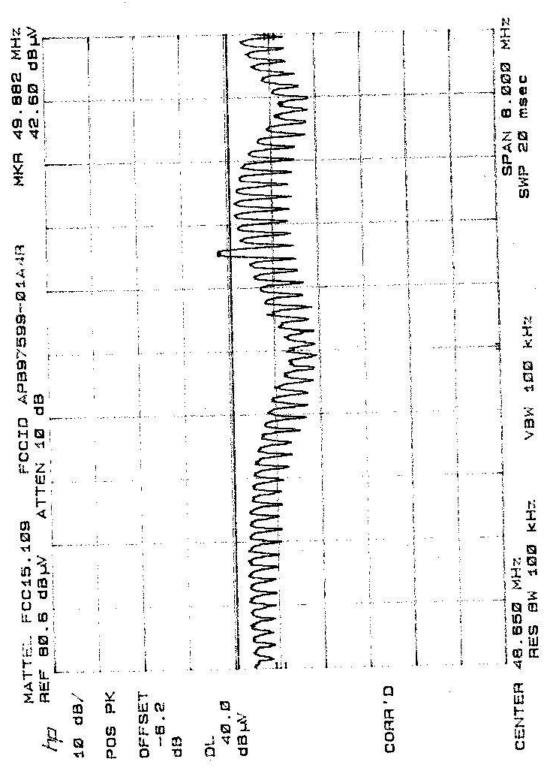

COHERENT EMISSION PLOT

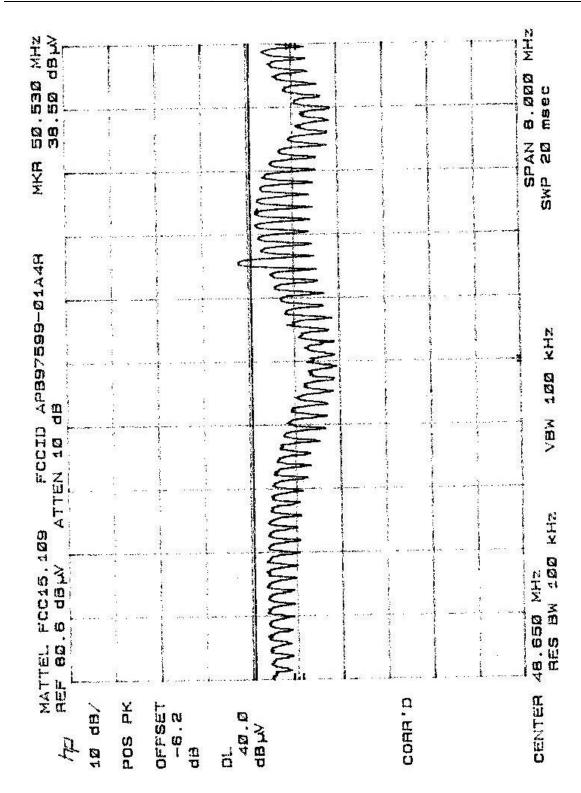

COHERENT EMISSION PLOT



FCC, VCCI, CISPR, CE, AUSTEL, NZ UL, CSA, TUV, BSMI, DHHS, NVLAP Report #: 0
Date & Time: 0
Test Engr: M

Project #:

01U0958-2 010905C2

09/05/01 2:03 PM MIKE ZHU

561F MONTEREY ROAD, SAN JOSE, CA 95037-9001 PHONE: (408) 463-0885 FAX: (408) 463-0888

Company: MATTEL MOUNT LAUREL FW

EUT Description: 49MHZ Radio Control Toy Go Kart,M/N:Tyco R/C-Screamin Kart

Test Configuration: EUT/SIGNAL GENERATOR

Type of Test: FCC CLASS B

Mode of Operation: NORMAL

<< Main Sheet

| Reading | AF  | Closs  | Pre-amp   | Level  | Limit   | Margin  | Pol  | Az   | Height  | Mark   |
|---------|---|--|---|--|---|---|--|--|---|--|
| (dBuV)  | (dB)                                      | (dB)   | (dB)  |  |   | (dB)  | (H/V)  | (Deg)  | (Meter)   | (P/Q/A)  |
| 54.80   | 10.01                                     | 0.98   | 27.26   | 38.53  | 40.00   | -1.47   | 3mV  | 60.00  | 1.00  | Р  |
| 54.40   | 10.05                                     | 0.98   | 27.26   | 38.18  | 40.00   | -1.82   | 3mV  | 60.00  | 1.00  | Р  |
| 54.40   | 9.96                                      | 0.99   | 27.26   | 38.09  | 40.00   | -1.91   | 3mV  | 60.00  | 1.00  | Р  |
| 53.70   | 10.10                                     | 0.98   | 27.26   | 37.52  | 40.00   | -2.48   | 3mV  | 60.00  | 1.00  | Р  |
| 53.70   | 9.91                                      | 0.99   | 27.26   | 37.34  | 40.00   | -2.66   | 3mV  | 60.00  | 1.00  | Р  |
| 53.00   | 9.87                                      | 0.99   | 27.26   | 36.60  | 40.00   | -3.40   | 3mV  | 60.00  | 1.00  | Р  |
| Data    |   |  |   |  |   |   |  |  |   |  |
|         |   |  |   |  |   |   |  |  |   |  |
|         |   |  |   |  |   |   |  |  |   |  |
|         |   |  |   |  |   |   |  |  |   |  |
|         |   |  |   |  |   |   |  |  |   |  |
|         |   |  |   |  |   |   |  |  |   |  |
|         |   |  |   |  |   |   |  |  |   |  |
|         |   |  |   |  |   |   |  |  |   |  |
|         |   |  |   |  |   |   |  |  |   |  |
|         |   |  |   |  |   |   |  |  |   |  |
|         |   |  |   |  |   |   |  |  |   |  |
|         |   |  |   |  |   |   |  |  |   |  |
|         |   |  |   |  |   |   |  |  |   |  |
|         |   |  |   |  |   |   |  |  |   |  |
|         | 54.80<br>54.40<br>54.40<br>53.70<br>53.70 | 54.80         10.01           54.40         10.05           54.40         9.96           53.70         10.10           53.70         9.91           53.00         9.87 | (dBuV)         (dB)         (dB)           54.80         10.01         0.98           54.40         10.05         0.98           54.40         9.96         0.99           53.70         10.10         0.98           53.70         9.91         0.99           53.00         9.87         0.99 | (dBuV)         (dB)         (dB)         (dB)           54.80         10.01         0.98         27.26           54.40         10.05         0.98         27.26           54.40         9.96         0.99         27.26           53.70         10.10         0.98         27.26           53.70         9.91         0.99         27.26           53.00         9.87         0.99         27.26 | (dBuV)         (dB)         (dB)         (dB)         (dBuV/m)           54.80         10.01         0.98         27.26         38.53           54.40         10.05         0.98         27.26         38.18           54.40         9.96         0.99         27.26         38.09           53.70         10.10         0.98         27.26         37.52           53.70         9.91         0.99         27.26         37.34           53.00         9.87         0.99         27.26         36.60 | (dBuV)         (dB)         (dB)         (dB)         (dBuV/m)         FCC_B           54.80         10.01         0.98         27.26         38.53         40.00           54.40         10.05         0.98         27.26         38.18         40.00           54.40         9.96         0.99         27.26         38.09         40.00           53.70         10.10         0.98         27.26         37.52         40.00           53.70         9.91         0.99         27.26         37.34         40.00           53.00         9.87         0.99         27.26         36.60         40.00 | (dBuV)         (dB)         (dB)         (dB)         (dBuV/m)         FCC_B         (dB)           54.80         10.01         0.98         27.26         38.53         40.00         -1.47           54.40         10.05         0.98         27.26         38.18         40.00         -1.82           54.40         9.96         0.99         27.26         38.09         40.00         -1.91           53.70         10.10         0.98         27.26         37.52         40.00         -2.48           53.70         9.91         0.99         27.26         37.34         40.00         -2.66           53.00         9.87         0.99         27.26         36.60         40.00         -3.40 | (dBuV)         (dB)         (dB)         (dB)         (dBuV/m)         FCC_B         (dB)         (H/V)           54.80         10.01         0.98         27.26         38.53         40.00         -1.47         3mV           54.40         10.05         0.98         27.26         38.18         40.00         -1.82         3mV           54.40         9.96         0.99         27.26         38.09         40.00         -1.91         3mV           53.70         10.10         0.98         27.26         37.52         40.00         -2.48         3mV           53.70         9.91         0.99         27.26         37.34         40.00         -2.66         3mV           53.00         9.87         0.99         27.26         36.60         40.00         -3.40         3mV | (dBuV)         (dB)         (dB)         (dBuV/m)         FCC_B         (dB)         (H/V)         (Deg)           54.80         10.01         0.98         27.26         38.53         40.00         -1.47         3mV         60.00           54.40         10.05         0.98         27.26         38.18         40.00         -1.82         3mV         60.00           54.40         9.96         0.99         27.26         38.09         40.00         -1.91         3mV         60.00           53.70         10.10         0.98         27.26         37.52         40.00         -2.48         3mV         60.00           53.70         9.91         0.99         27.26         37.34         40.00         -2.66         3mV         60.00           53.00         9.87         0.99         27.26         36.60         40.00         -3.40         3mV         60.00 | (dBuV)         (dB)         (dB)         (dB)         (dBuV/m)         FCC_B         (dB)         (H/V)         (Deg)         (Meter)           54.80         10.01         0.98         27.26         38.53         40.00         -1.47         3mV         60.00         1.00           54.40         10.05         0.98         27.26         38.18         40.00         -1.82         3mV         60.00         1.00           54.40         9.96         0.99         27.26         38.09         40.00         -1.91         3mV         60.00         1.00           53.70         10.10         0.98         27.26         37.32         40.00         -2.48         3mV         60.00         1.00           53.70         9.91         0.99         27.26         37.34         40.00         -2.66         3mV         60.00         1.00           53.00         9.87         0.99         27.26         36.60         40.00         -3.40         3mV         60.00         1.00 |

#### RADIATED EMISSION DATA



**EXTERNAL PHOTO** 



**EXTERNAL PHOTO** 




**EXTERNAL PHOTO** 




**EXTERNAL PHOTO** 




**EXTERNAL PHOTO** 

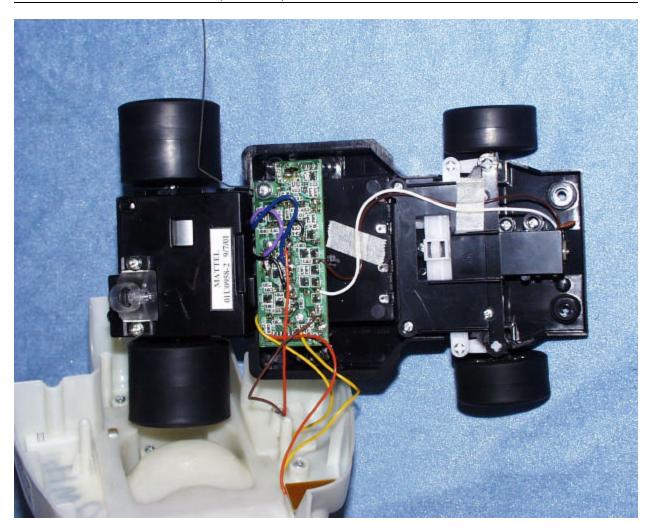

INTERNAL PHOTO

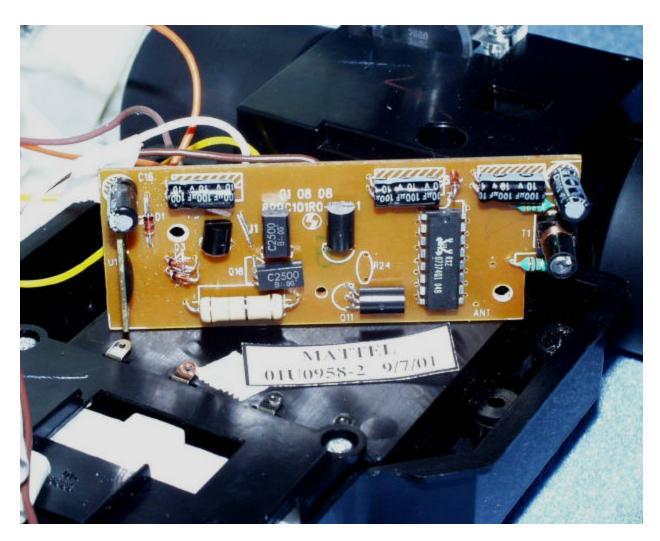


INTERNAL PHOTO

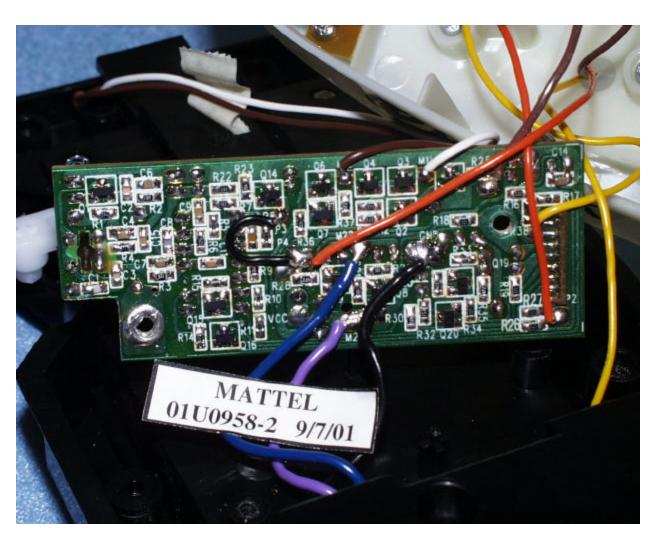

INTERNAL PHOTO



INTERNAL PHOTO

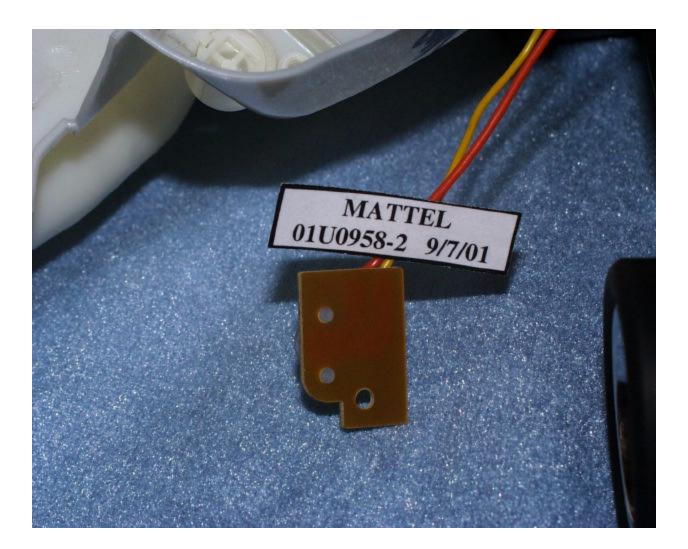

INTERNAL PHOTO

**DATE: AUGUST 31, 2001** 

## PROPOSED FCC ID LABEL AND LOCATION

#### MATTEL MT. LAUREL

FCC ID: APB97599-01A4R

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.



FCC ID LABEL