


File: F:\Test Template\上海ITS\2022\220523032 SA750\A\2.4G\BE\4\_00001.EMI

Date: 2022-06-03

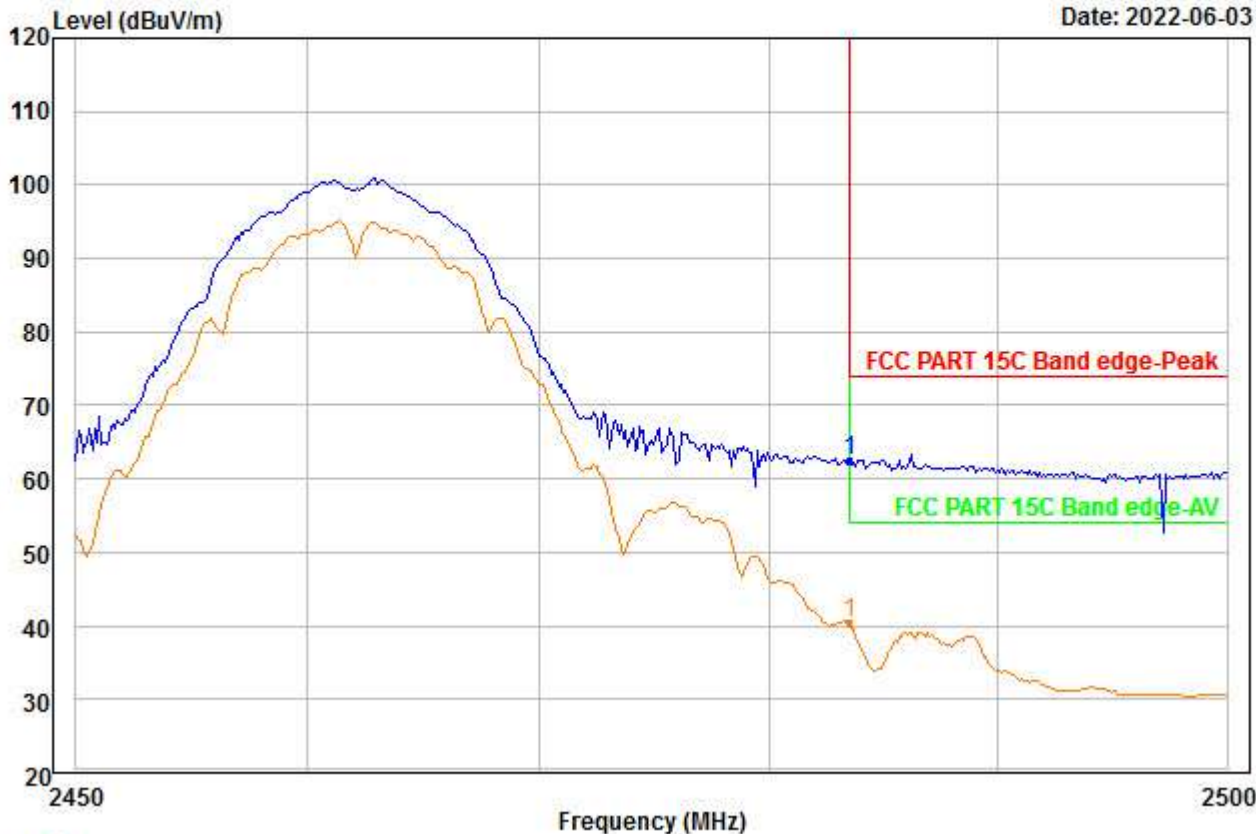


Trace: 1

Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : B\_ANT0\_2462  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 2483.500	70.54	32.95	48.09	0.00	7.03	62.43	74.00	-11.57	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\2.4G\BE\4\_00002.EMI

Date: 2022-06-03

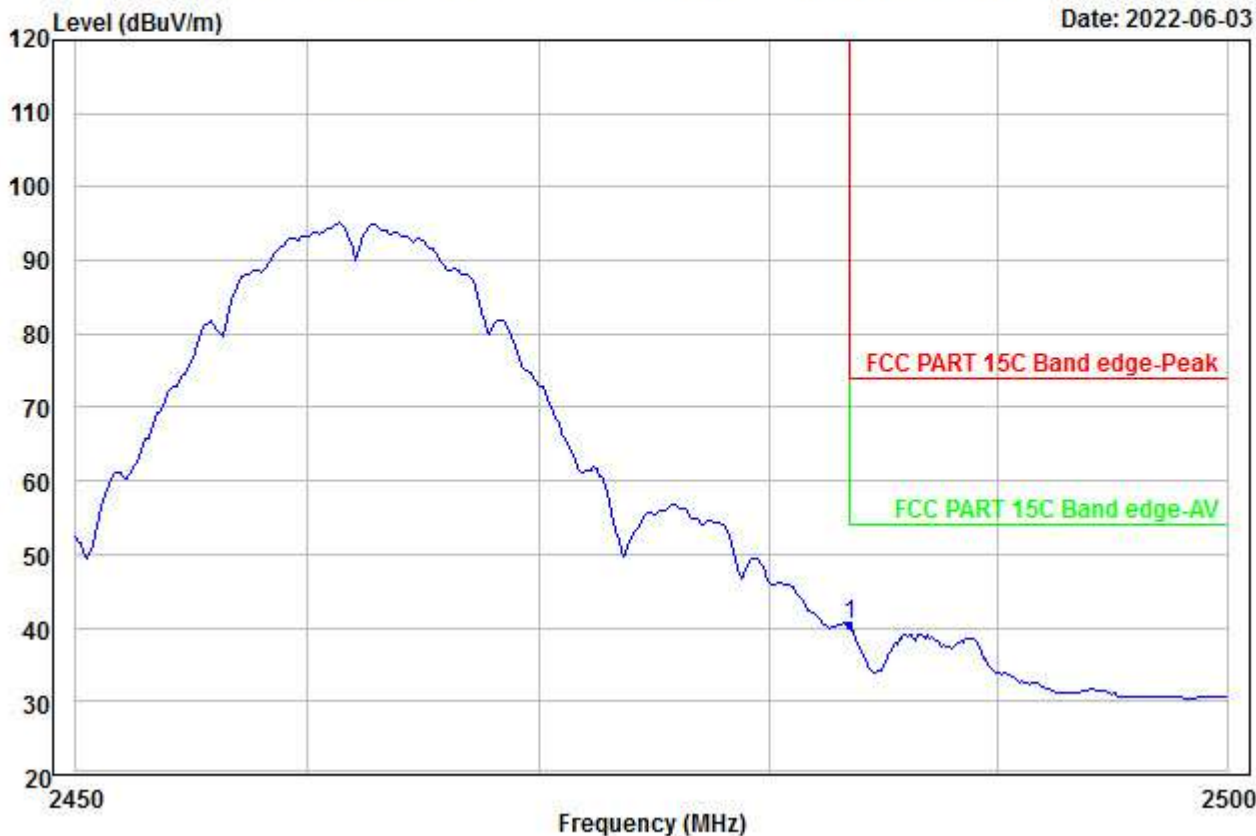


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : B\_ANT0\_2462  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 2483.500	48.52	32.95	48.09	0.00	7.03	40.41	54.00	-13.59	---	---	Aver

File: F:\Test Template\上海ITSI\2022\220523032 SA750\A\2.4G\BE\4\_00003.EMI

Date: 2022-06-03

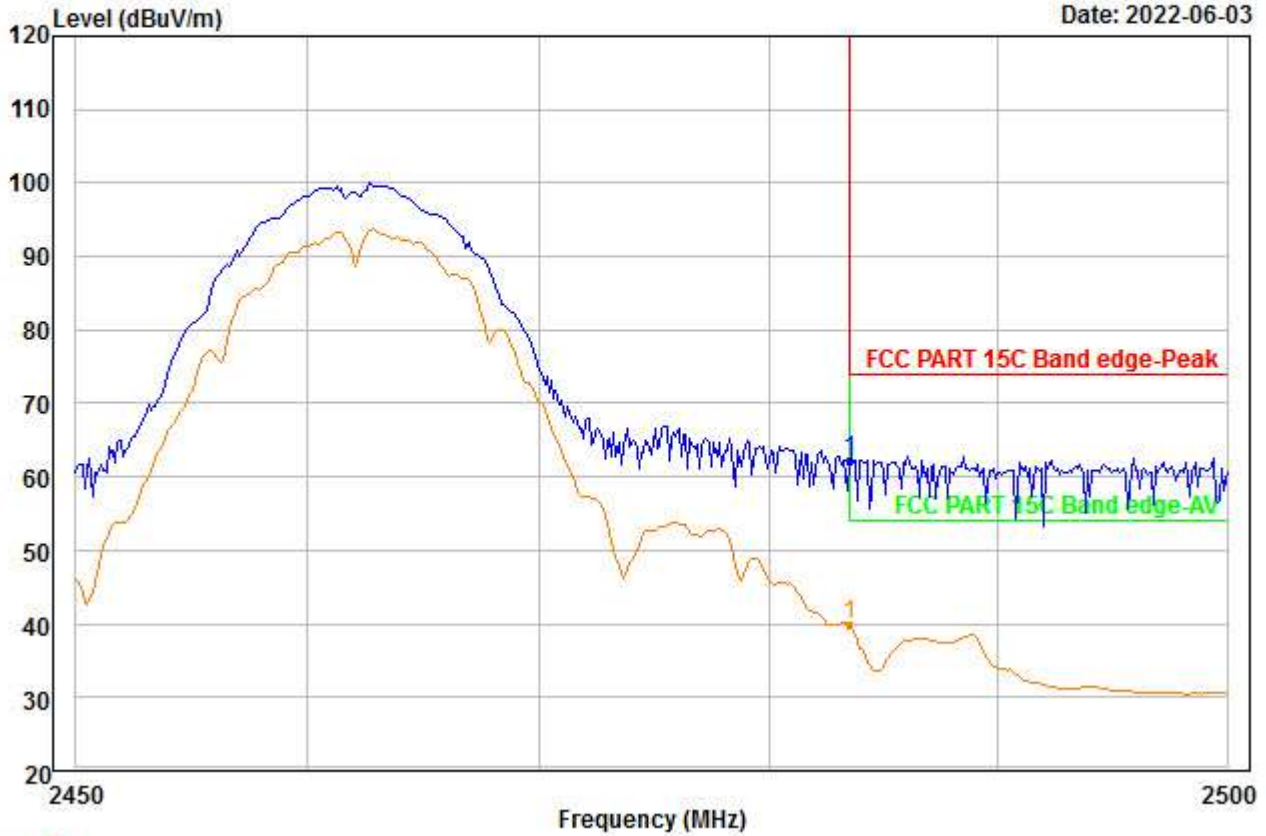


Trace: 1

Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : B\_ANT0\_2462  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 2483.500	70.36	32.95	48.09	0.00	7.03	62.25	74.00	-11.75	---	---	Peak

File: F:\Test Template\上海\ITS\2022\220523032 SA750\A\2.4G\BE\4\_00004.EMI

Date: 2022-06-03

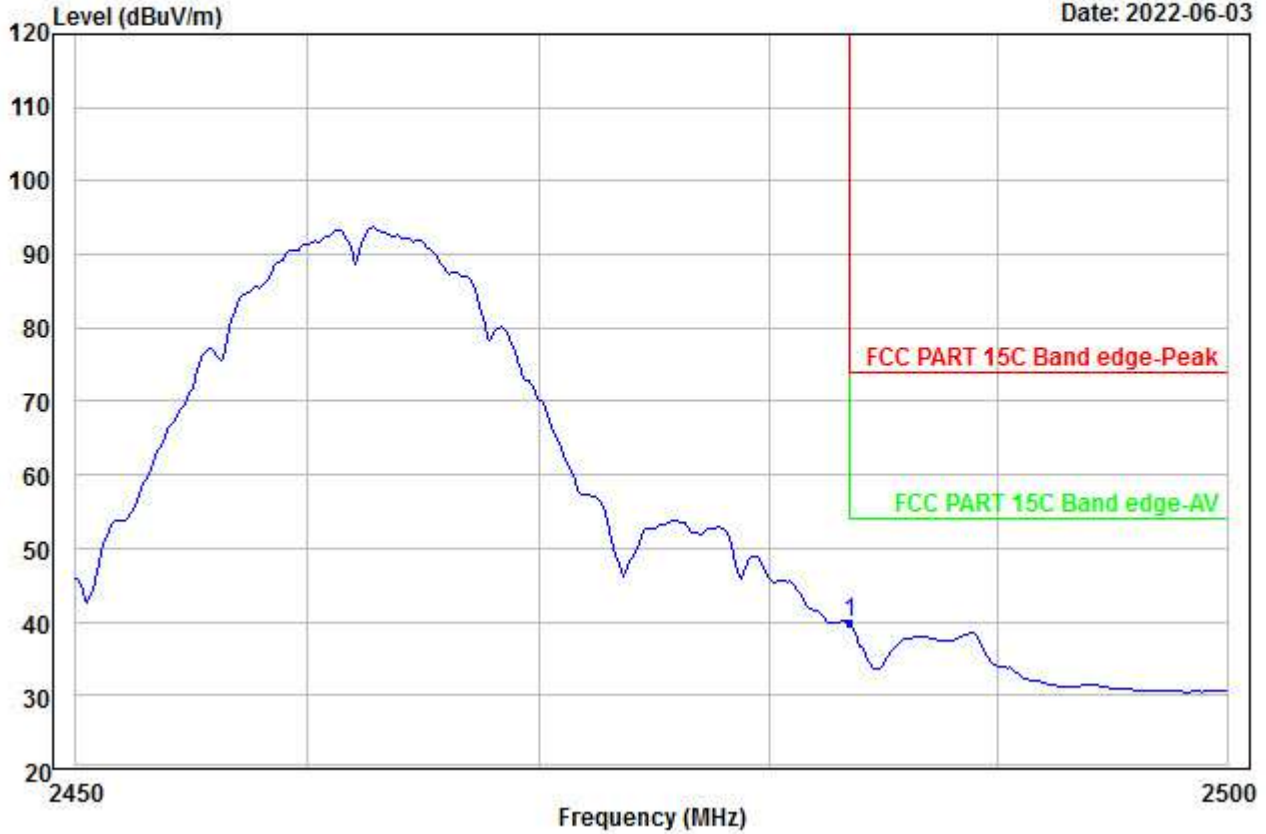


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : B\_ANT0\_2462  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 2483.500	48.01	32.95	48.09	0.00	7.03	39.90	54.00	-14.10	---	---	Aver

File: F:\Test Template\上海ITSI\2022\220523032 SA750\A\2.4G\BE\4\_00005.EMI

Date: 2022-06-03

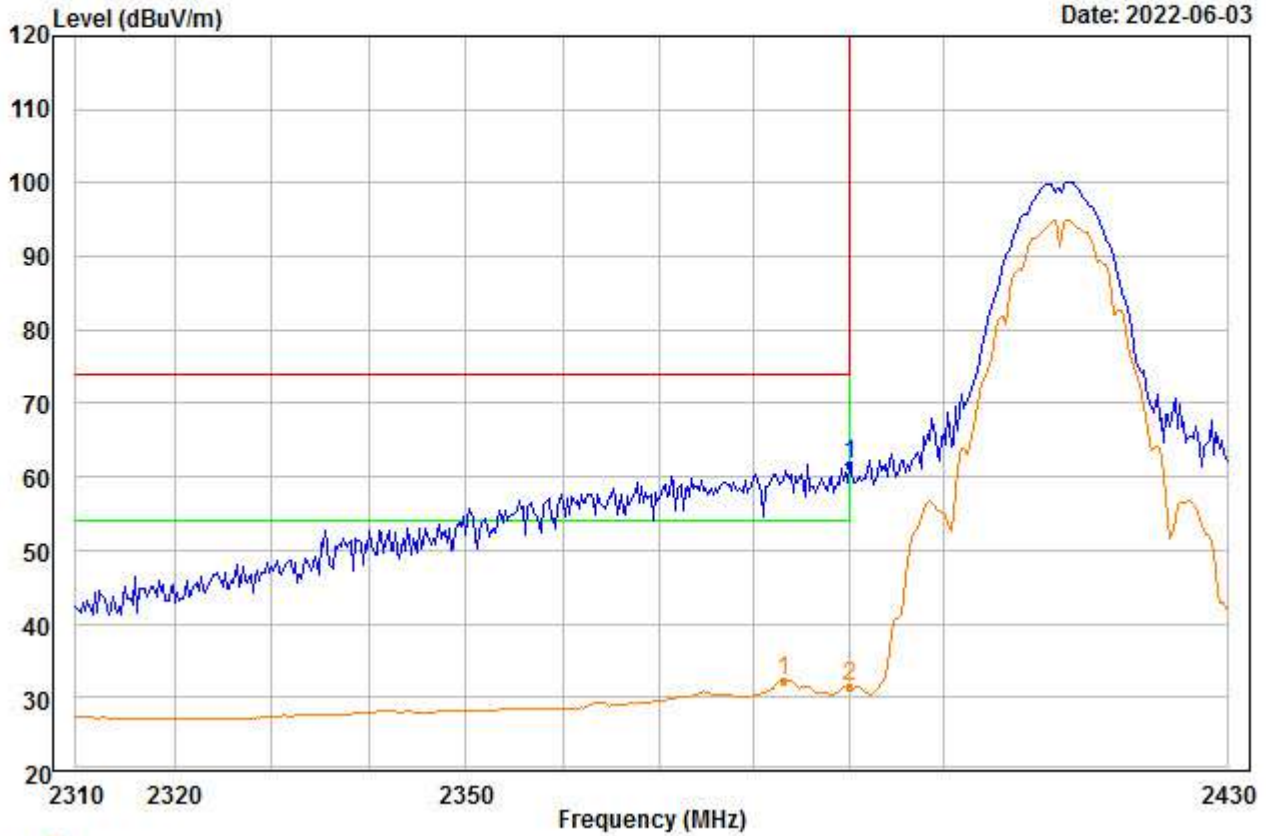


Trace: 1

Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : B\_ANT0\_2412  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 2390.000	70.04	32.69	48.03	0.00	6.90	61.60	74.00	-12.40	---	---	Peak

File: F:\Test Template\上海ITSI\2022\220523032 SA750\A\2.4G\BE\4\_00006.EMI

Date: 2022-06-03

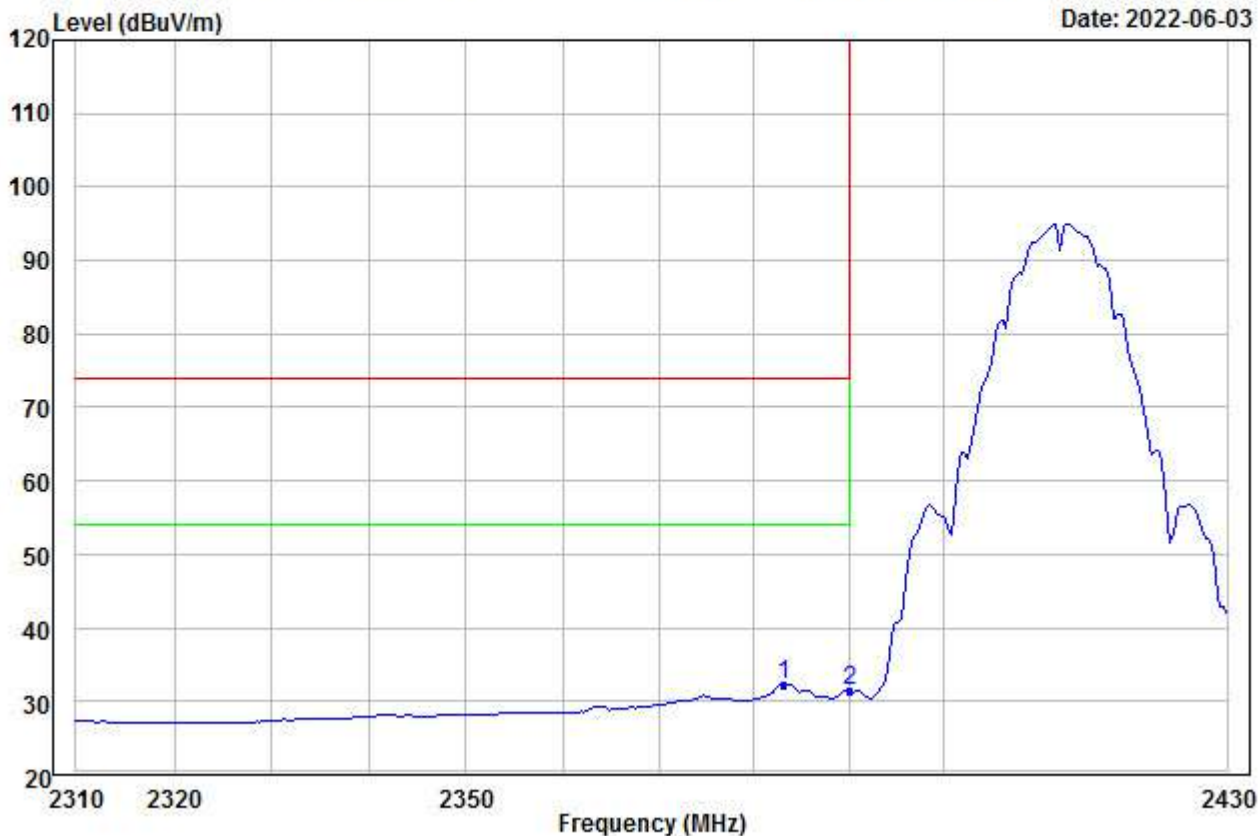


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : B\_ANT0\_2412  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 2383.106	40.80	32.67	48.03	0.00	6.89	32.33	54.00	-21.67	---	---	Aver
2 2390.000	39.77	32.69	48.03	0.00	6.90	31.33	54.00	-22.67	---	---	Aver

File: F:\Test Template\上海ITSI\2022\220523032 SA750\A\2.4G\BE\4\_00007.EMI

Date: 2022-06-03

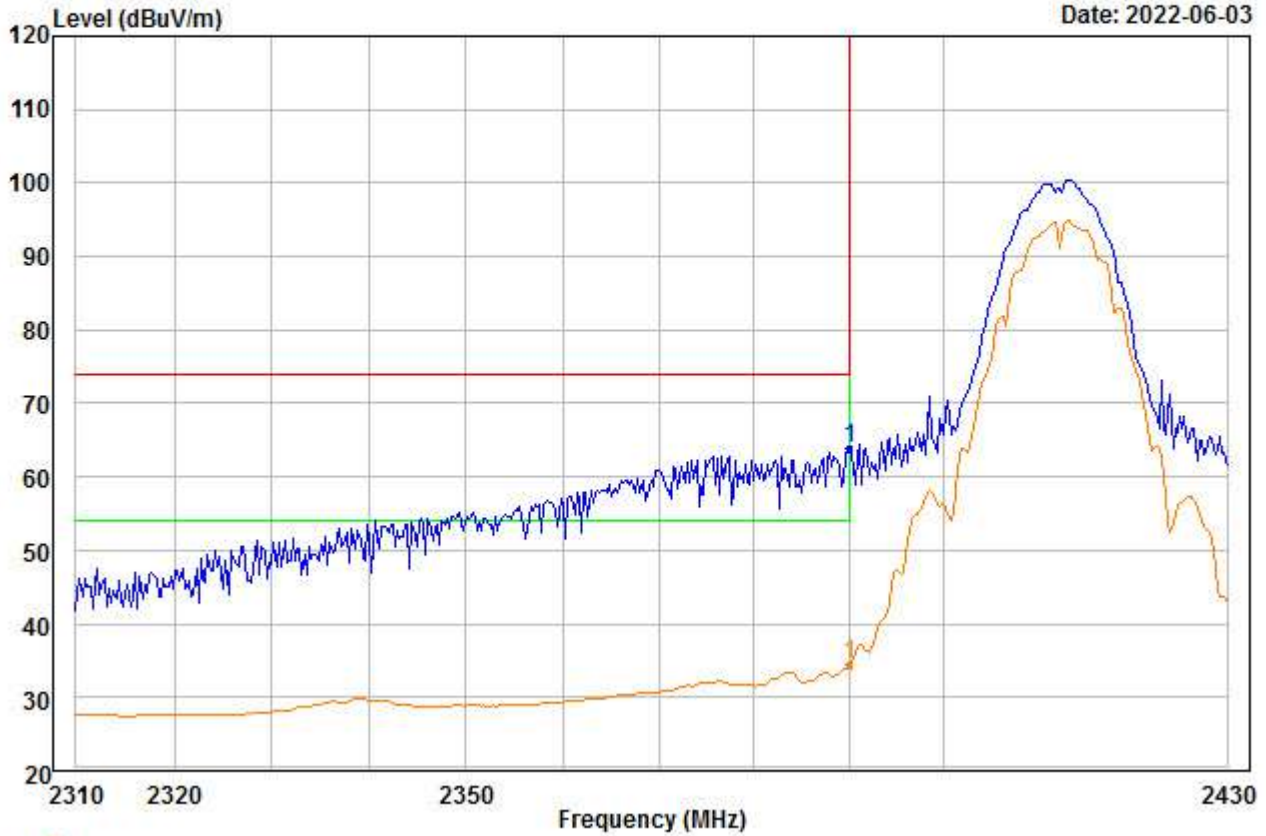


Trace: 1

Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : B\_ANT0\_2412  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 2390.000	72.31	32.69	48.03	0.00	6.90	63.87	74.00	-10.13	---	---	Peak

File: F:\Test Template\上海ITSI\2022\220523032 SA750\A\2.4G\BE\4\_00008.EMI

Date: 2022-06-03

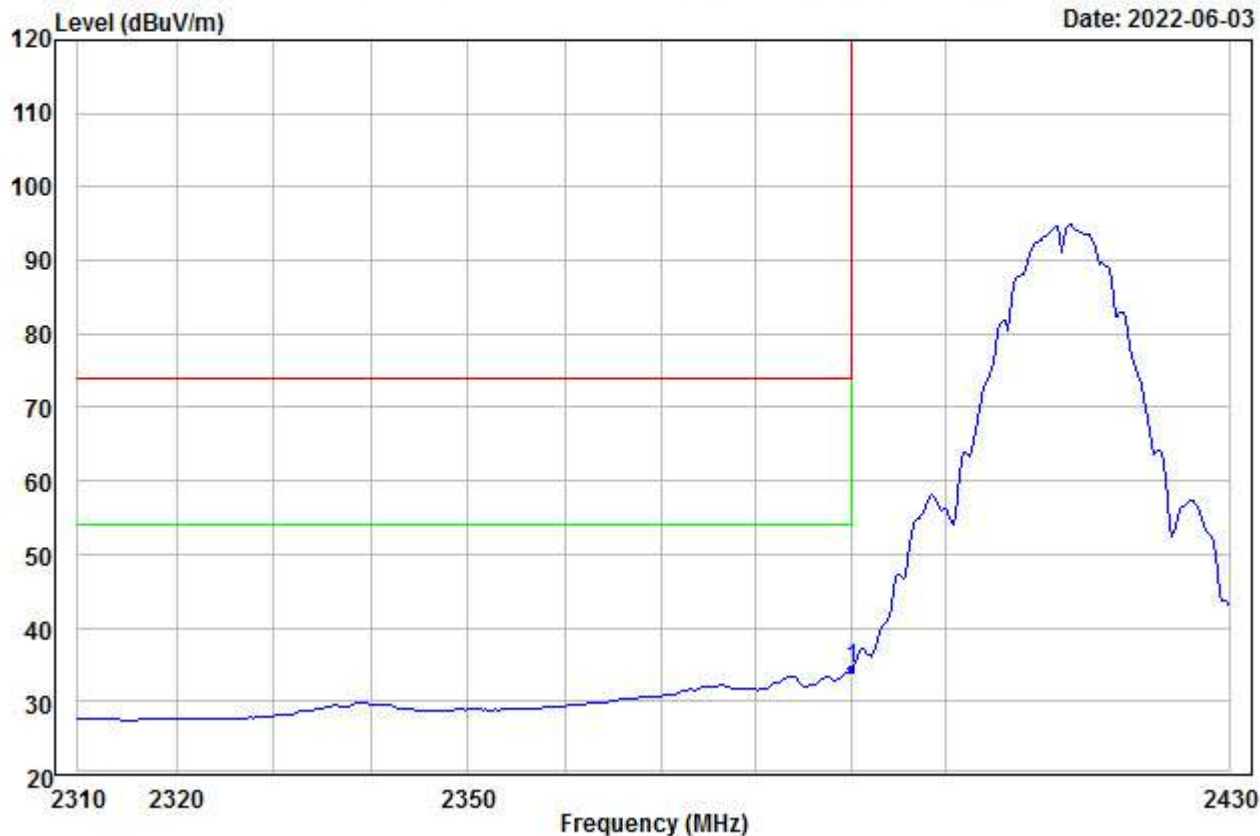


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : B\_ANT0\_2412  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:
Freq	Level	Factor	Factor	Factor	Loss	Level	Line	Limit		
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 2390.000	42.80	32.69	48.03	0.00	6.90	34.36	54.00	-19.64	---	--- Aver



File: F:\Test Template\上海ITSI\2022\220523032 SA750\A\2.4G\BE\4\_00009.EMI

Date: 2022-06-03

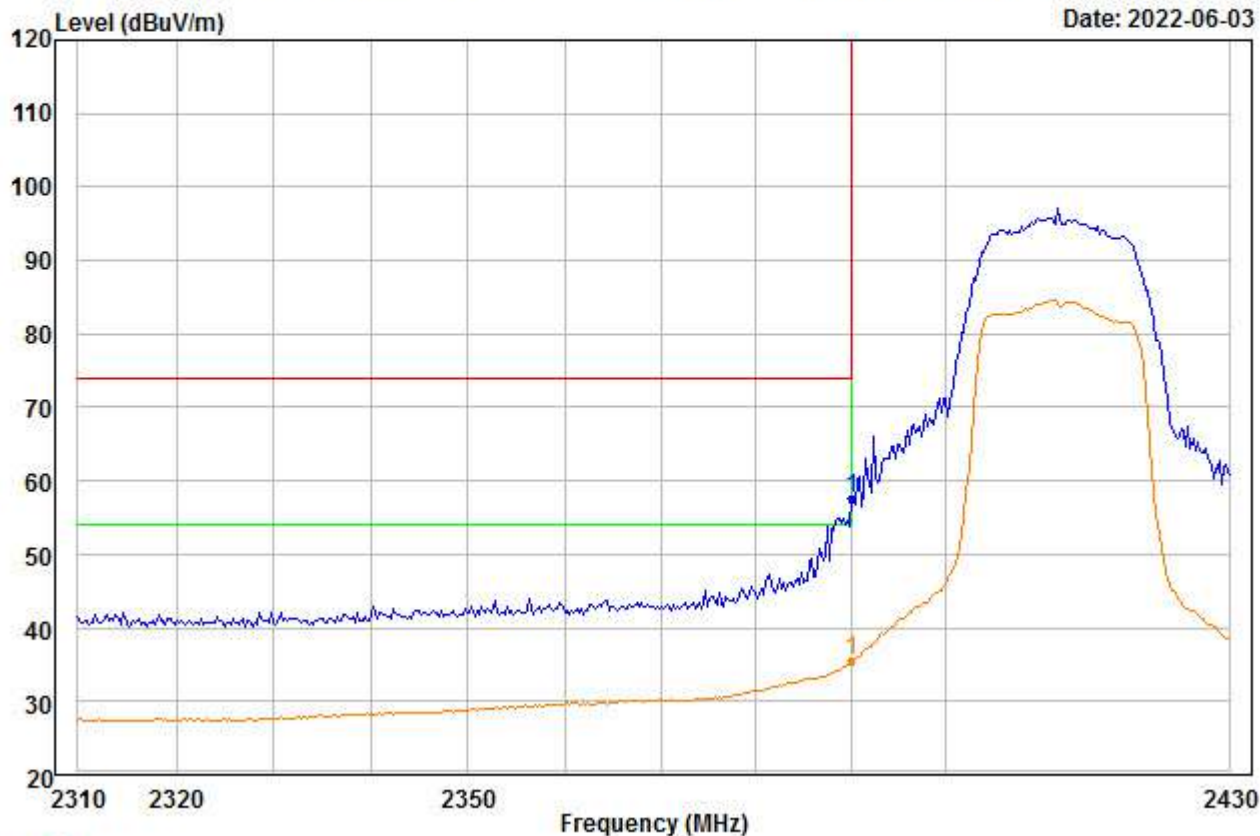


Trace: 1

Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : G\_ANT0\_2412  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 2390.000	65.97	32.69	48.03	0.00	6.90	57.53	74.00	-16.47	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\2.4G\BE\4\_00010.EMI

Date: 2022-06-03

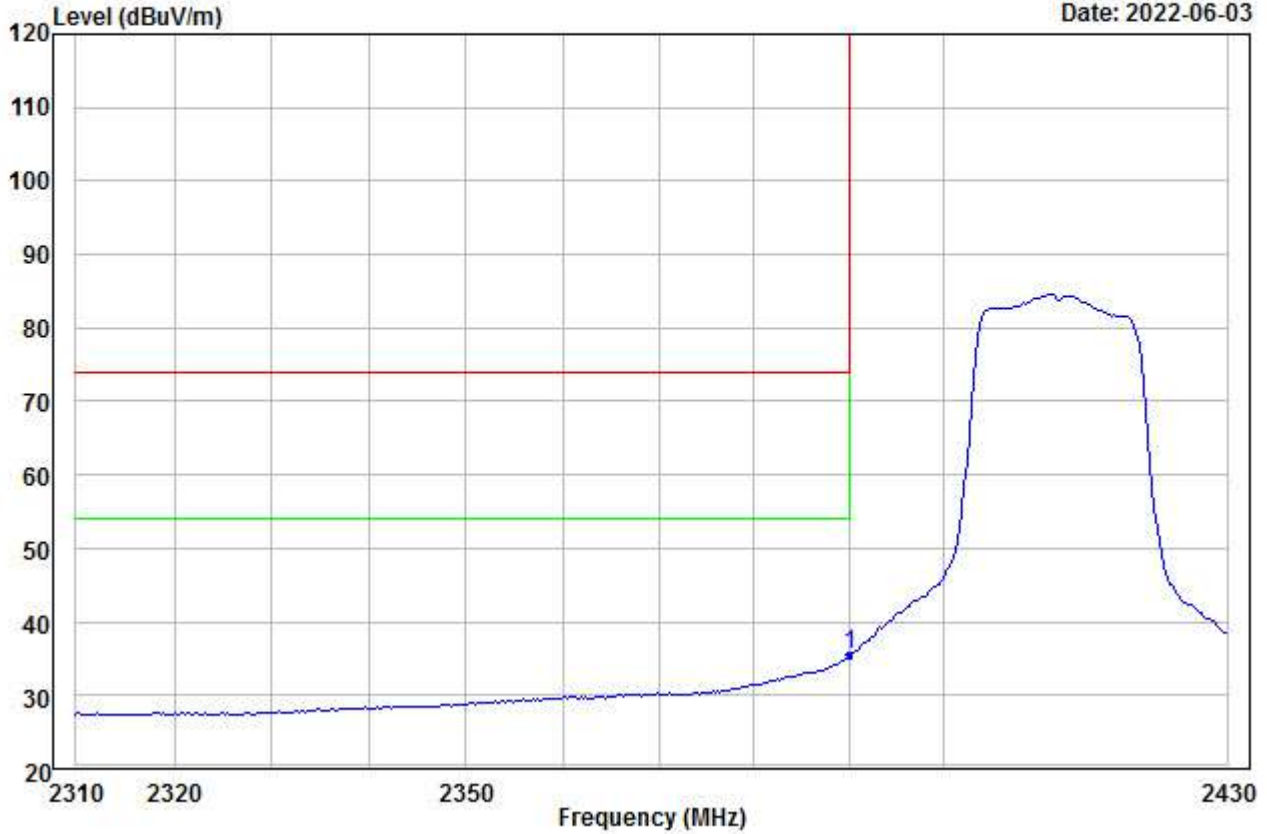


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : G\_ANT0\_2412  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Level	Line	Limit			
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 2390.000	44.09	32.69	48.03	0.00	6.90	35.65	54.00	-18.35	---	---	Aver

File: F:\Test Template\上海ITSI\2022\220523032 SA750\A\2.4G\BE\4\_00011.EMI

Date: 2022-06-03

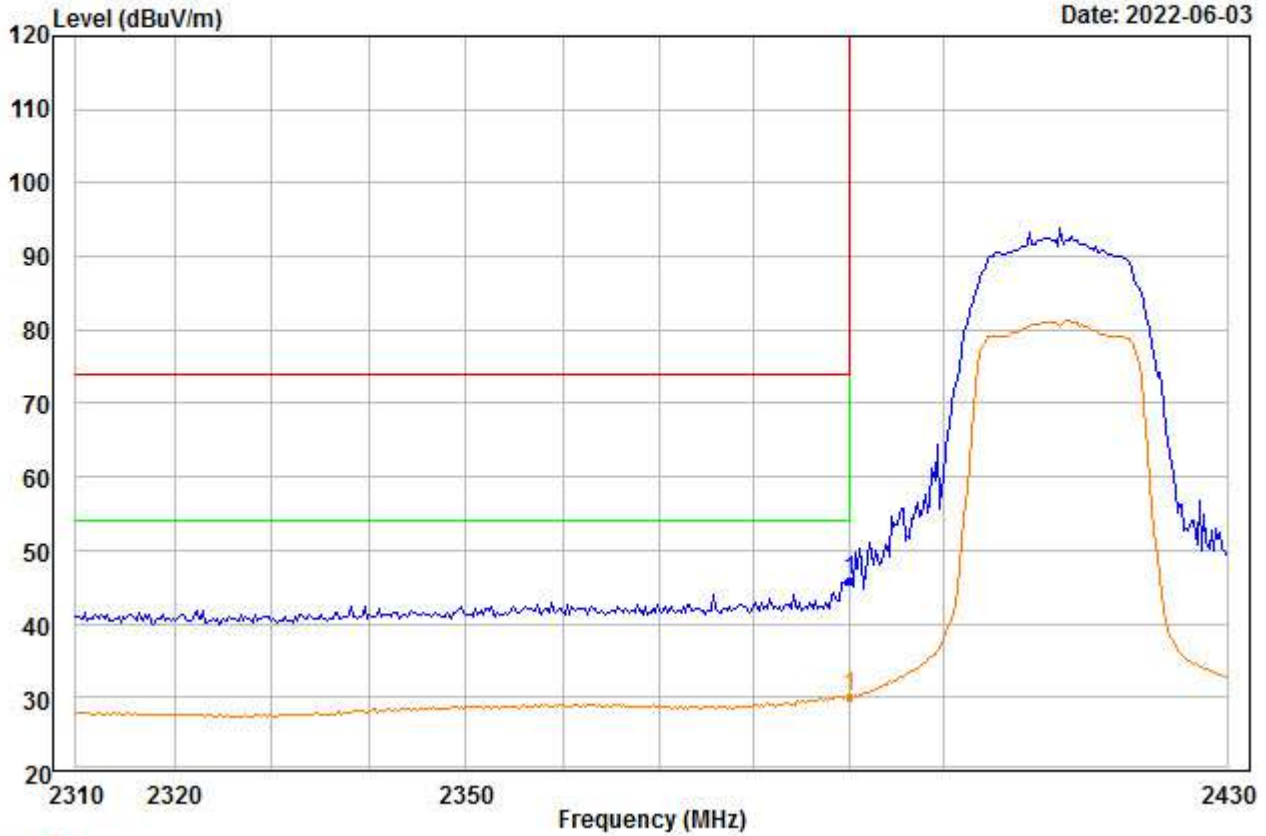


Trace: 1

Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : G\_ANT0\_2412  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 2390.000	54.37	32.69	48.03	0.00	6.90	45.93	74.00	-28.07	---	---	Peak

File: F:\Test Template\上海ITSI\2022\220523032 SA750\A\2.4G\BE\4\_00012.EMI

Date: 2022-06-03

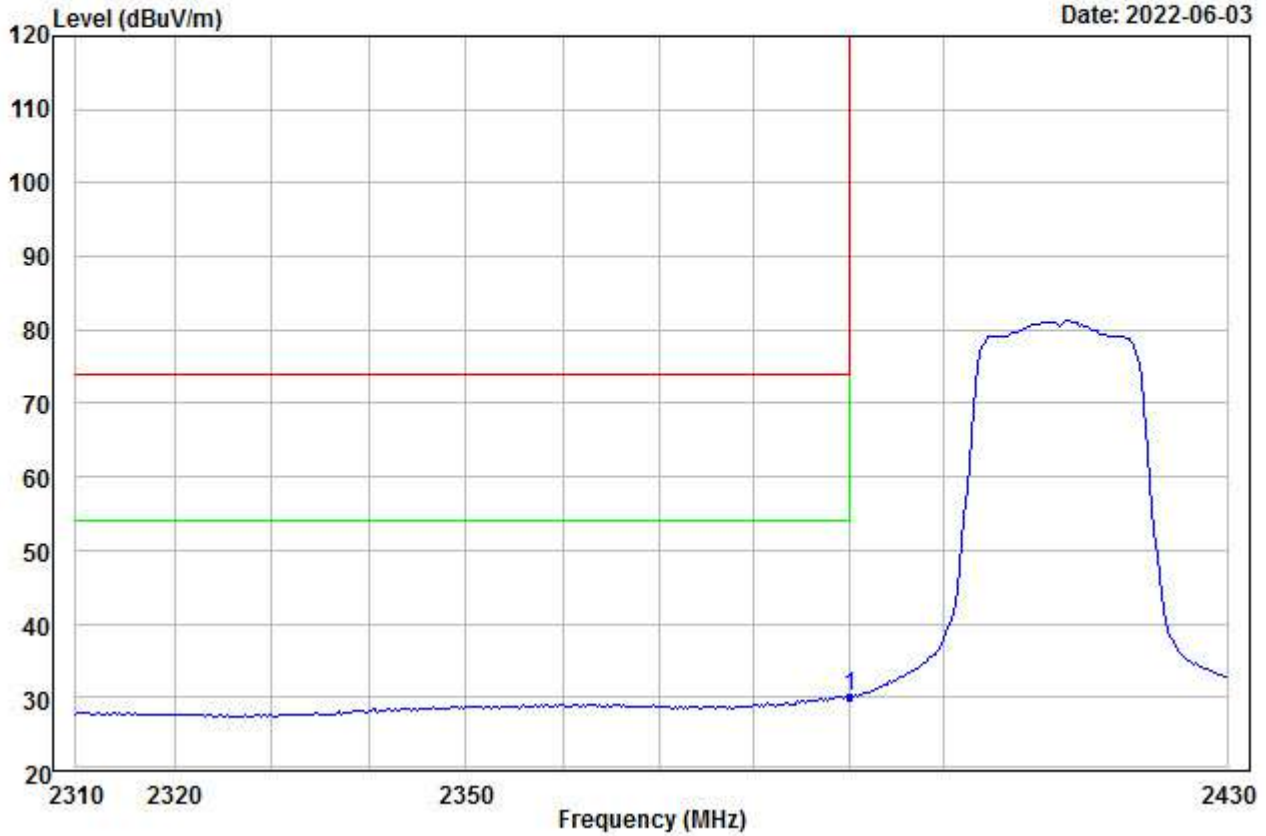


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : G\_ANT0\_2412  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 2390.000	38.41	32.69	48.03	0.00	6.90	29.97	54.00	-24.03	---	---	Aver

File: F:\Test Template\上海ITSI\2022\220523032 SA750\A\2.4G\BE\4\_00013.EMI

Date: 2022-06-03

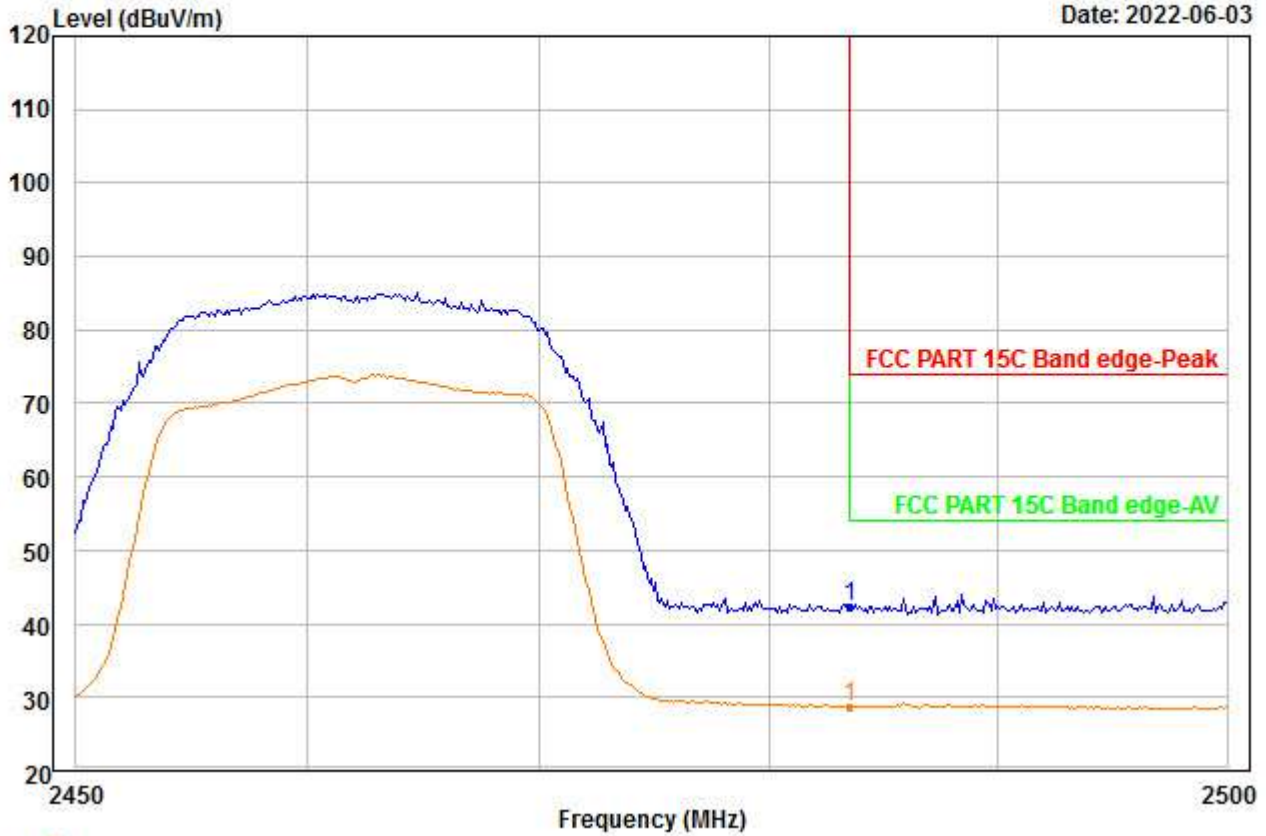


Trace: 1  
 Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : G\_ANT0\_2462  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 2483.500	50.53	32.95	48.09	0.00	7.03	42.42	74.00	-31.58	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\2.4G\BE\4\_00014.EMI

Date: 2022-06-03

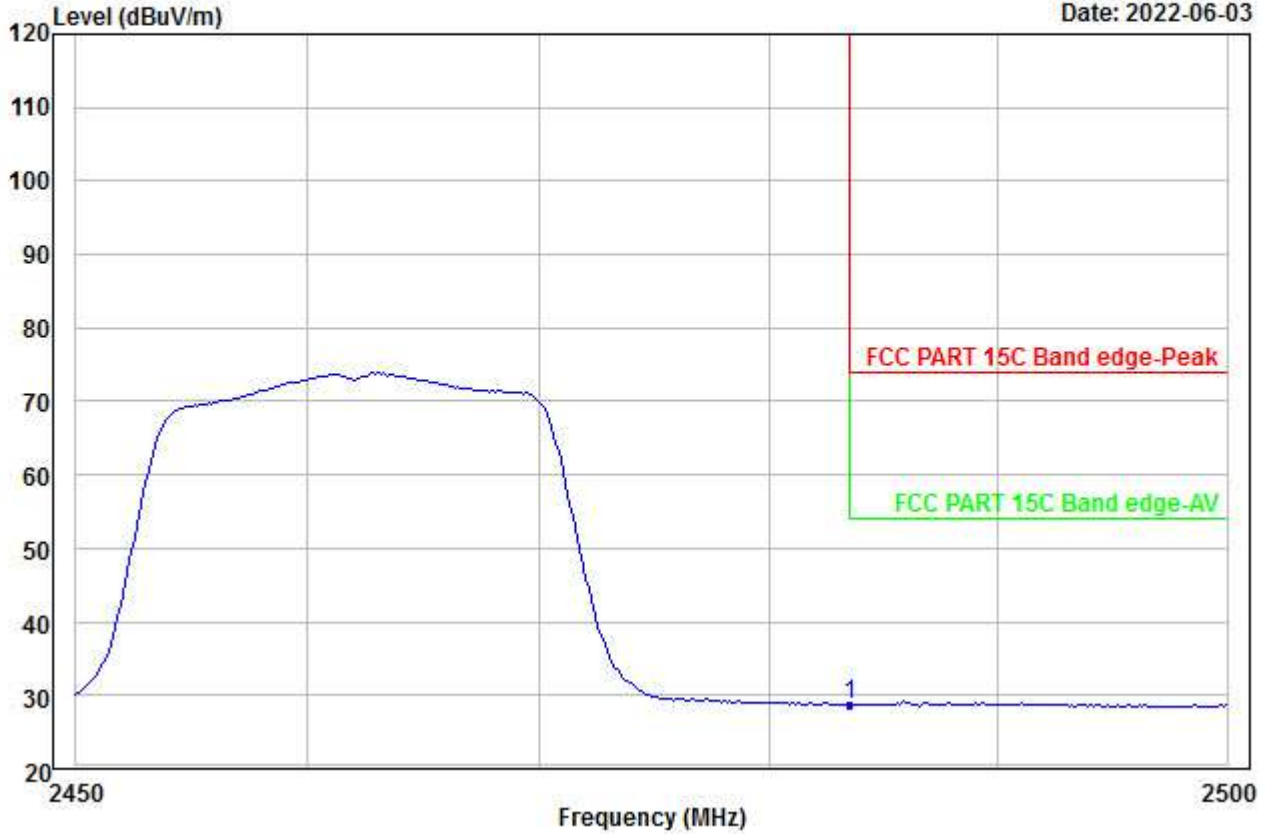


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : G\_ANT0\_2462  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 2483.500	36.90	32.95	48.09	0.00	7.03	28.79	54.00	-25.21	---	---	Aver

File: F:\Test Template\上海ITSI\2022\220523032 SA750\A\2.4G\BE\4\_00015.EMI

Date: 2022-06-03

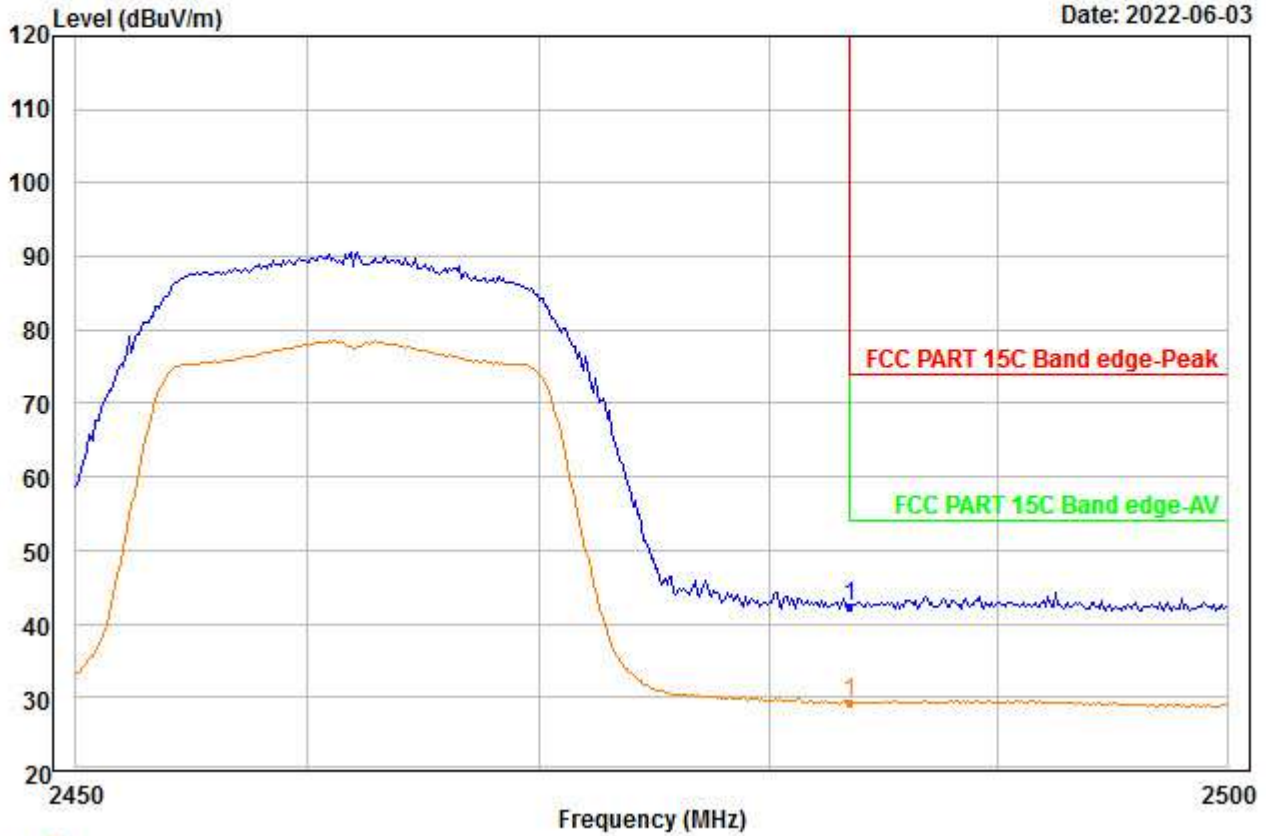


Trace: 1

Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : G\_ANT0\_2462  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 2483.500	50.54	32.95	48.09	0.00	7.03	42.43	74.00	-31.57	---	---	Peak

File: F:\Test Template\上海ITSI\2022\220523032 SA750\A\2.4G\BE\4\_00016.EMI

Date: 2022-06-03

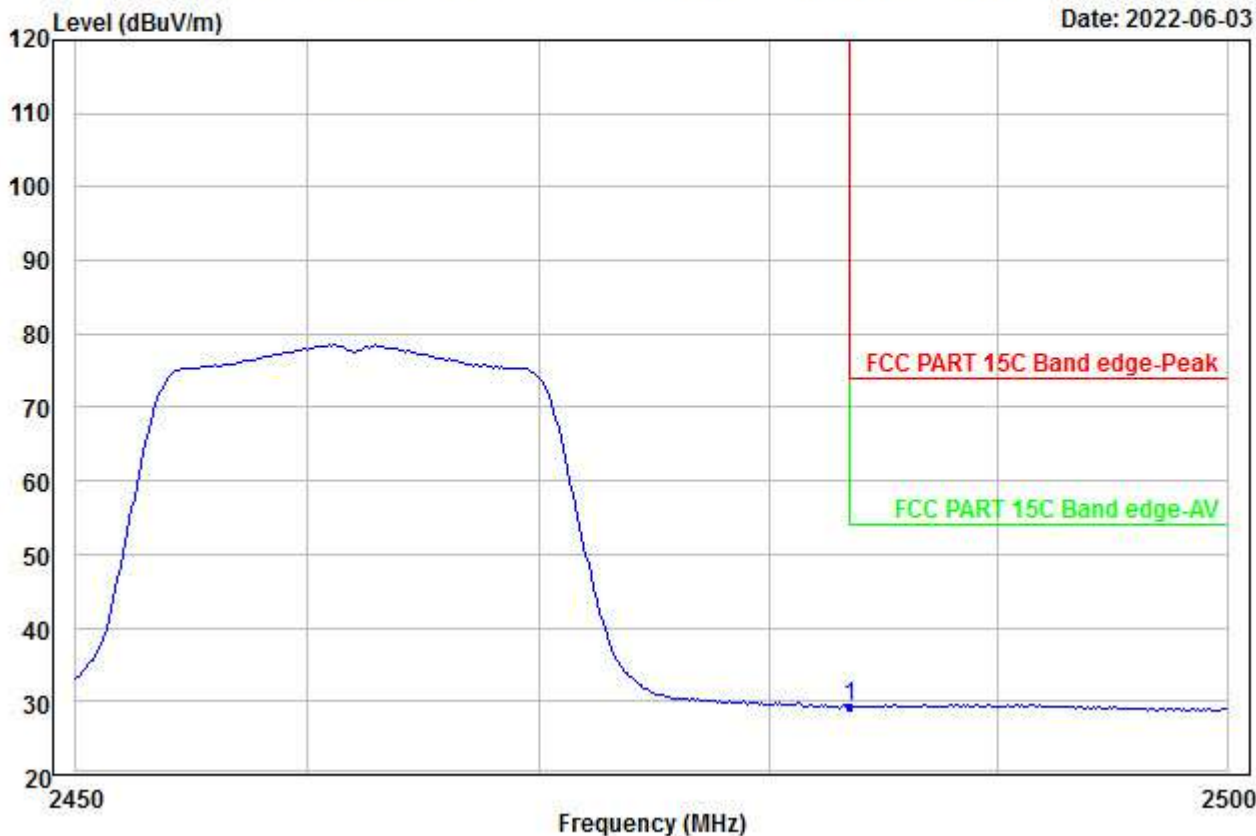


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : G\_ANT0\_2462  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 2483.500	37.32	32.95	48.09	0.00	7.03	29.21	54.00	-24.79	---	---	Aver



File: F:\Test Template\上海ITS\2022\220523032 SA750\A\2.4G\BE\4\_00017.EMI

Date: 2022-06-03

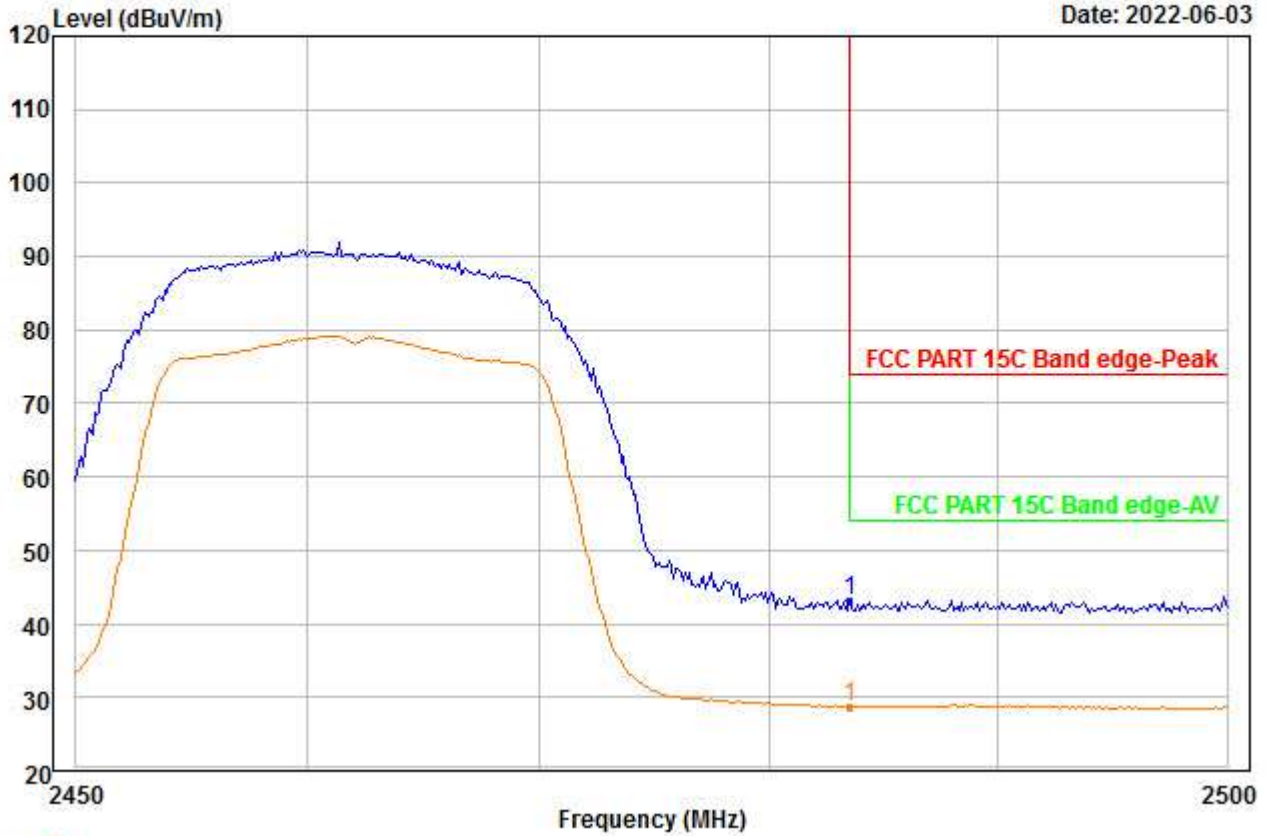


Trace: 1

Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : G\_ANT1\_2462  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 2483.500	51.21	32.95	48.09	0.00	7.03	43.10	74.00	-30.90	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\2.4G\BE\4\_00018.EMI

Date: 2022-06-03

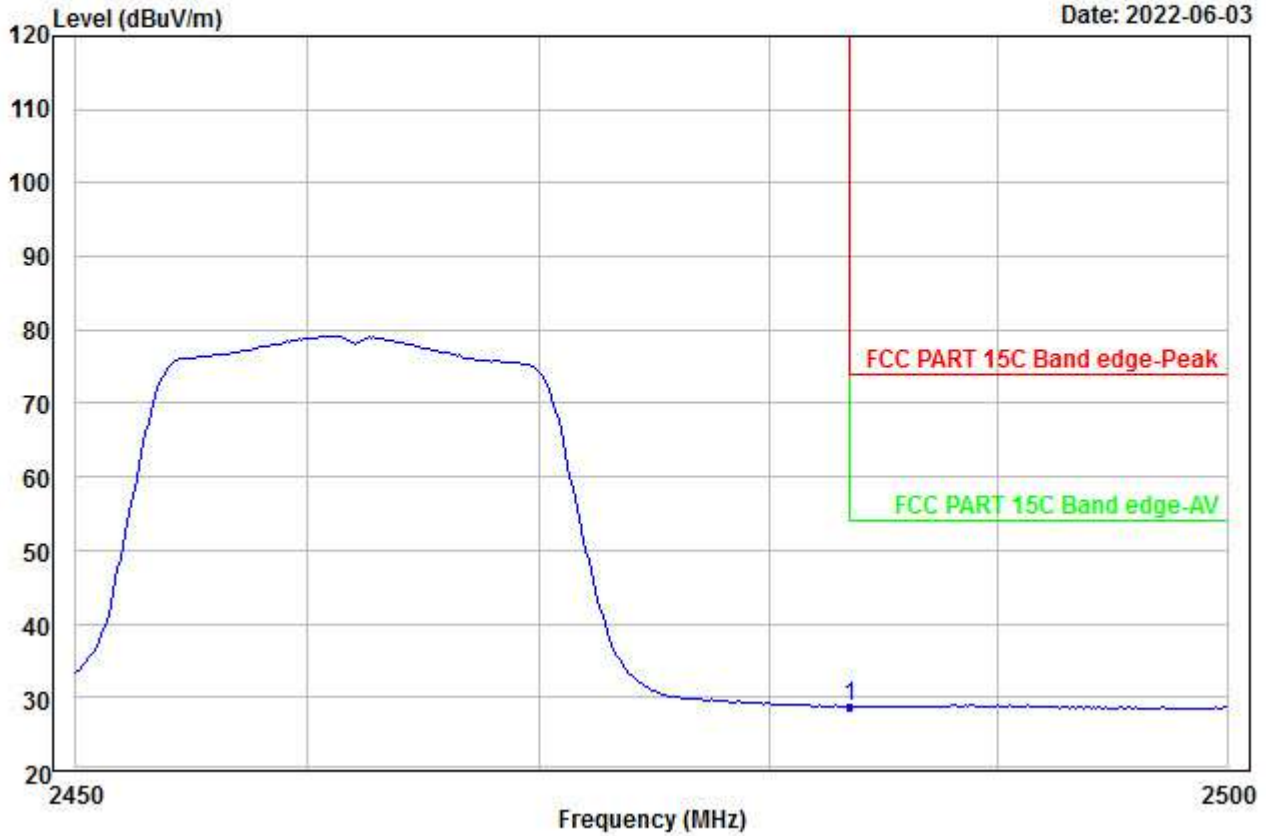


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : G\_ANT1\_2462  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 2483.500	36.96	32.95	48.09	0.00	7.03	28.85	54.00	-25.15	---	---	Aver

File: F:\Test Template\上海\ITS\2022\220523032 SA750\A\2.4G\BE\4\_00019.EMI

Date: 2022-06-03

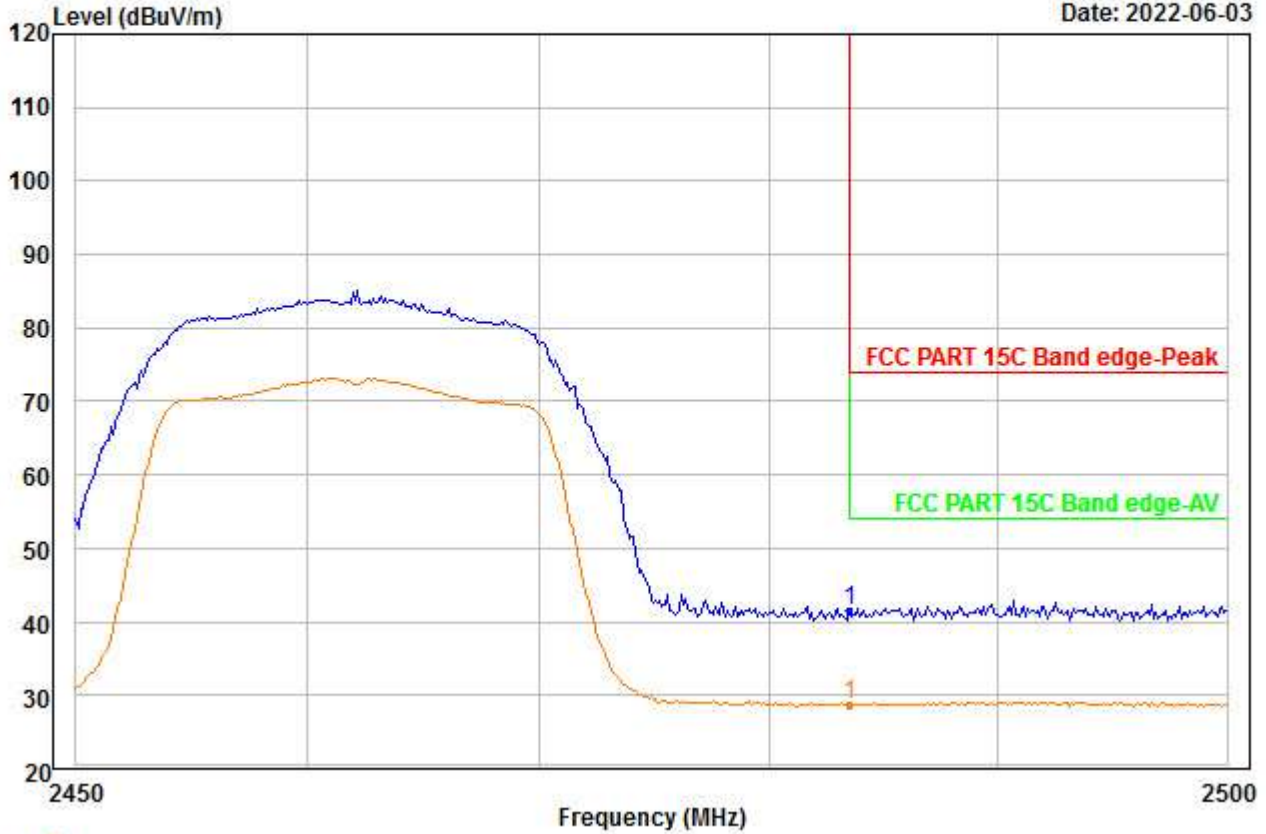


Trace: 1  
 Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : G\_ANT1\_2462  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 2483.500	49.62	32.95	48.09	0.00	7.03	41.51	74.00	-32.49	---	---	Peak

File: F:\Test Template\上海\ITS\2022\220523032 SA750\A\2.4G\BE\4\_00020.EMI

Date: 2022-06-03

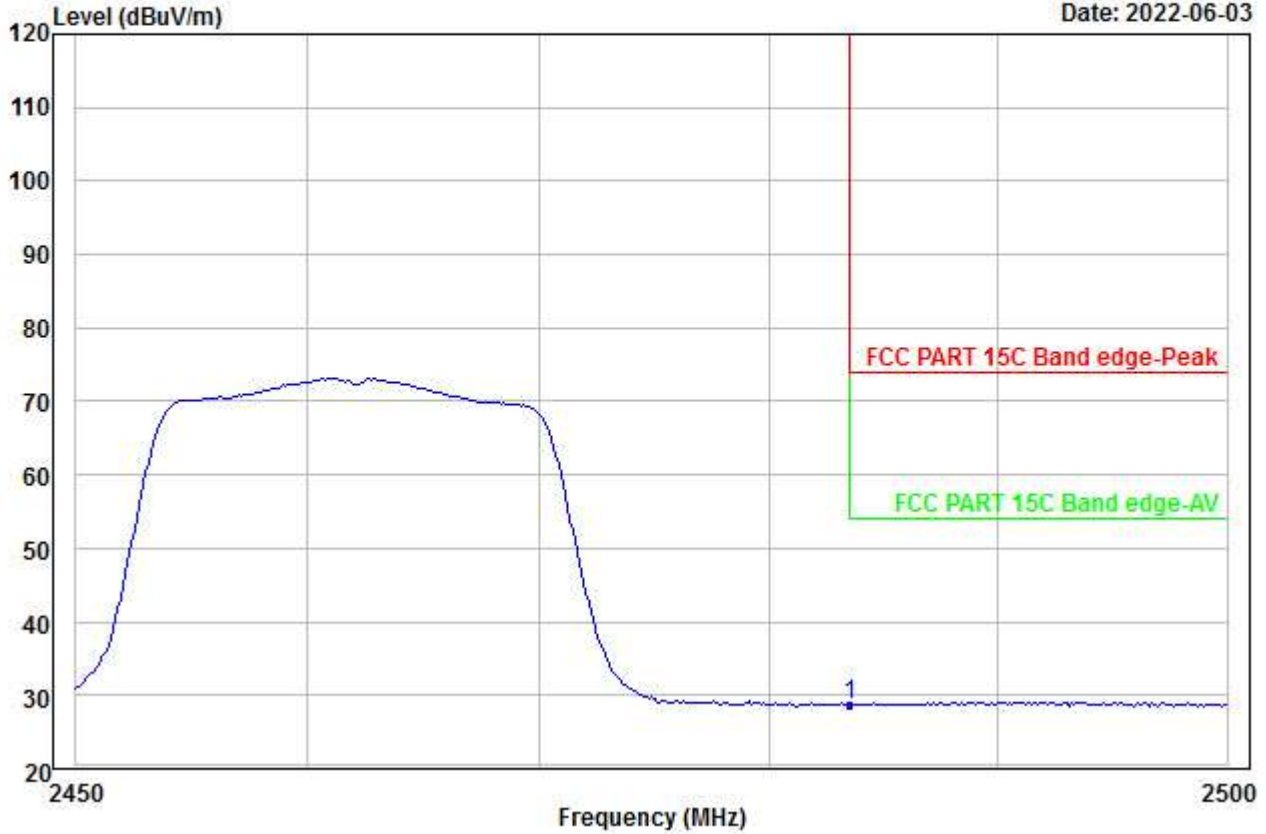


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : G\_ANT1\_2462  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 2483.500	36.79	32.95	48.09	0.00	7.03	28.68	54.00	-25.32	---	---	Aver

File: F:\Test Template\上海ITSI\2022\220523032 SA750\A\2.4G\BE\4\_00021.EMI

Date: 2022-06-03

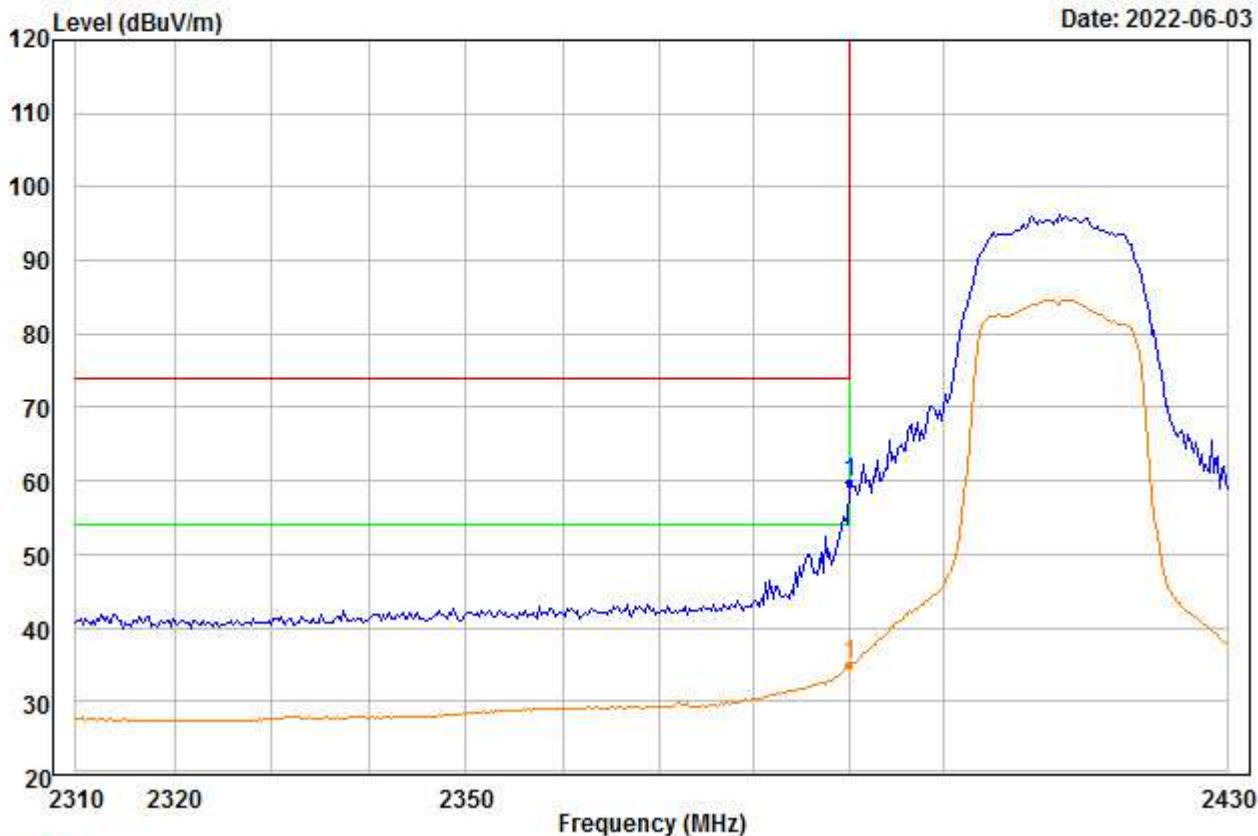

Trace: 1

Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : G\_ANT1\_2412  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 2390.000	68.18	32.69	48.03	0.00	6.90	59.74	74.00	-14.26	---	---	Peak

File: F:\Test Template\上海ITSI\2022\220523032 SA750\A\2.4G\BE\4\_00022.EMI

Date: 2022-06-03




Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : G\_ANT1\_2412  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 2390.000	43.30	32.69	48.03	0.00	6.90	34.86	54.00	-19.14	---	---	Aver

File: F:\Test Template\上海ITSI\2022\220523032 SA750\A\2.4G\BE\4\_00023.EMI

Date: 2022-06-03

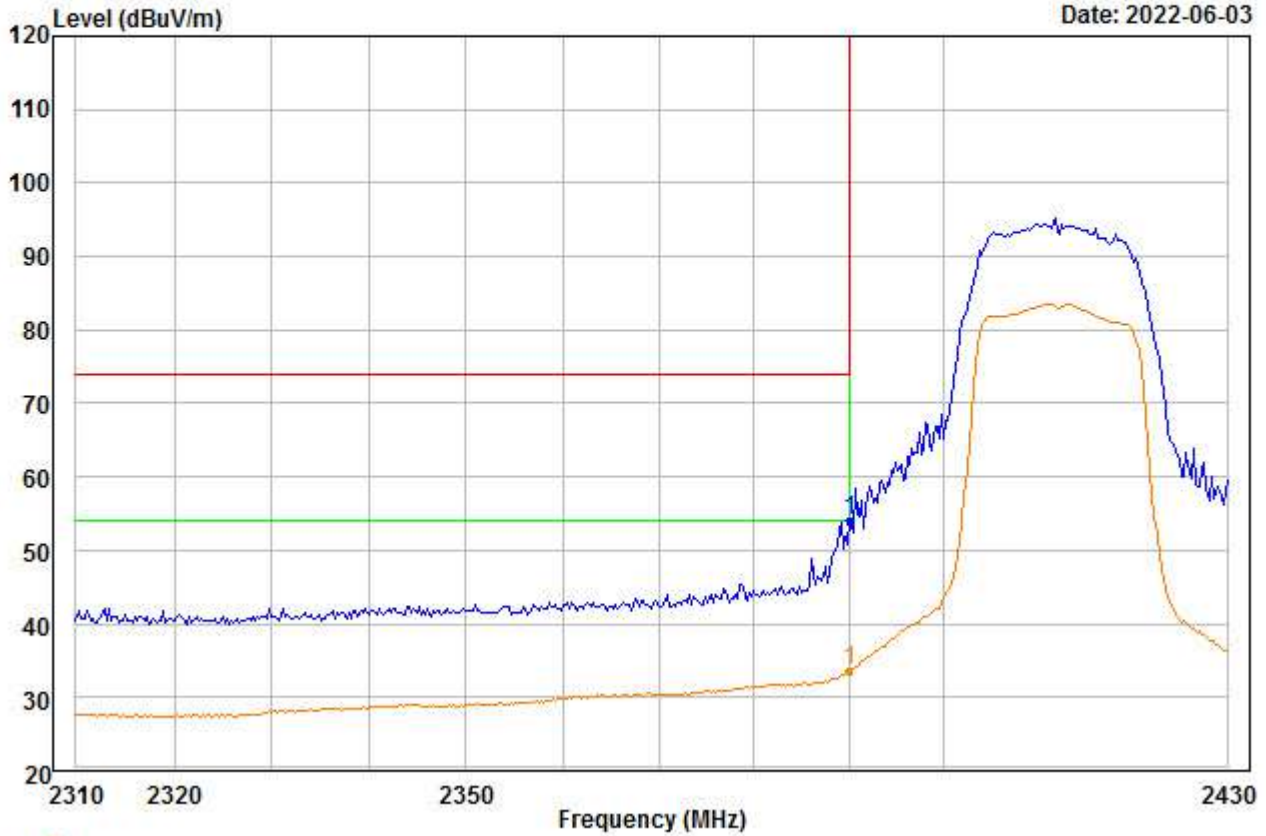


Trace: 1

Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : G\_ANT1\_2412  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 2390.000	62.49	32.69	48.03	0.00	6.90	54.05	74.00	-19.95	---	---	Peak

File: F:\Test Template\上海ITSI\2022\220523032 SA750\A\2.4G\BE\4\_00024.EMI

Date: 2022-06-03

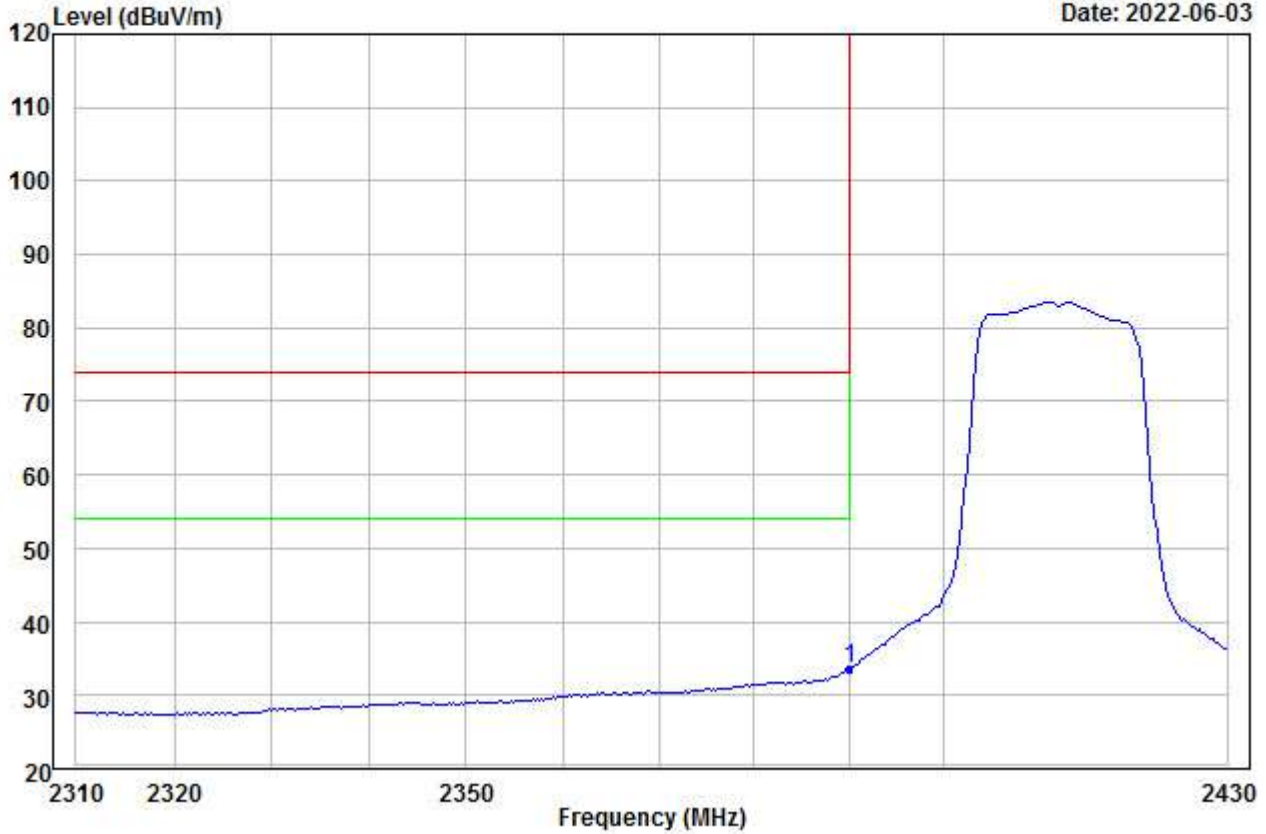


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : G\_ANT1\_2412  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 2390.000	42.03	32.69	48.03	0.00	6.90	33.59	54.00	-20.41	---	---	Aver



File: F:\Test Template\上海ITSI\2022\220523032 SA750\A\2.4G\BE\4\_00025.EMI

Date: 2022-06-03

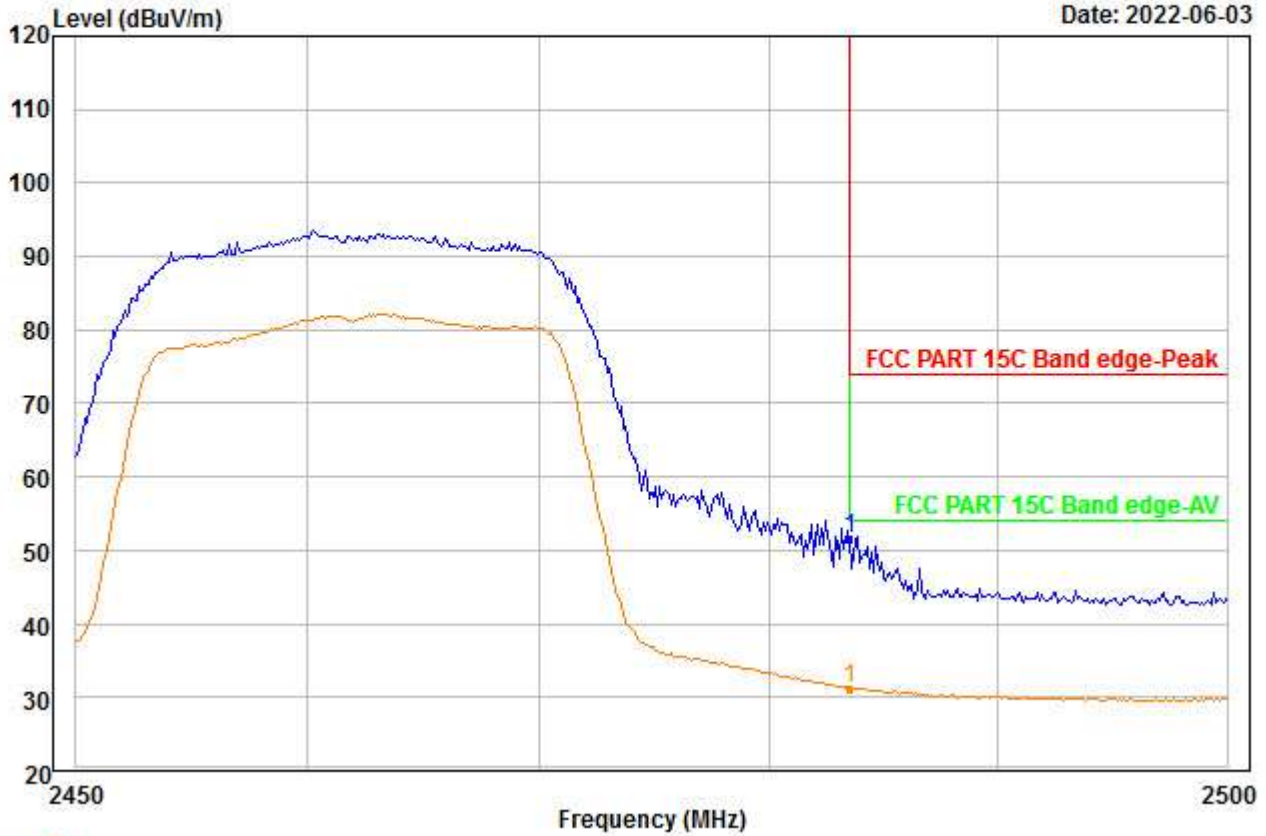


Trace: 1

Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : N20\_ANT0+1\_2462  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 2483.500	59.68	32.95	48.09	0.00	7.03	51.57	74.00	-22.43	---	---	Peak

File: F:\Test Template\上海\ITS\2022\220523032 SA750\A\2.4G\BE\4\_00026.EMI

Date: 2022-06-03

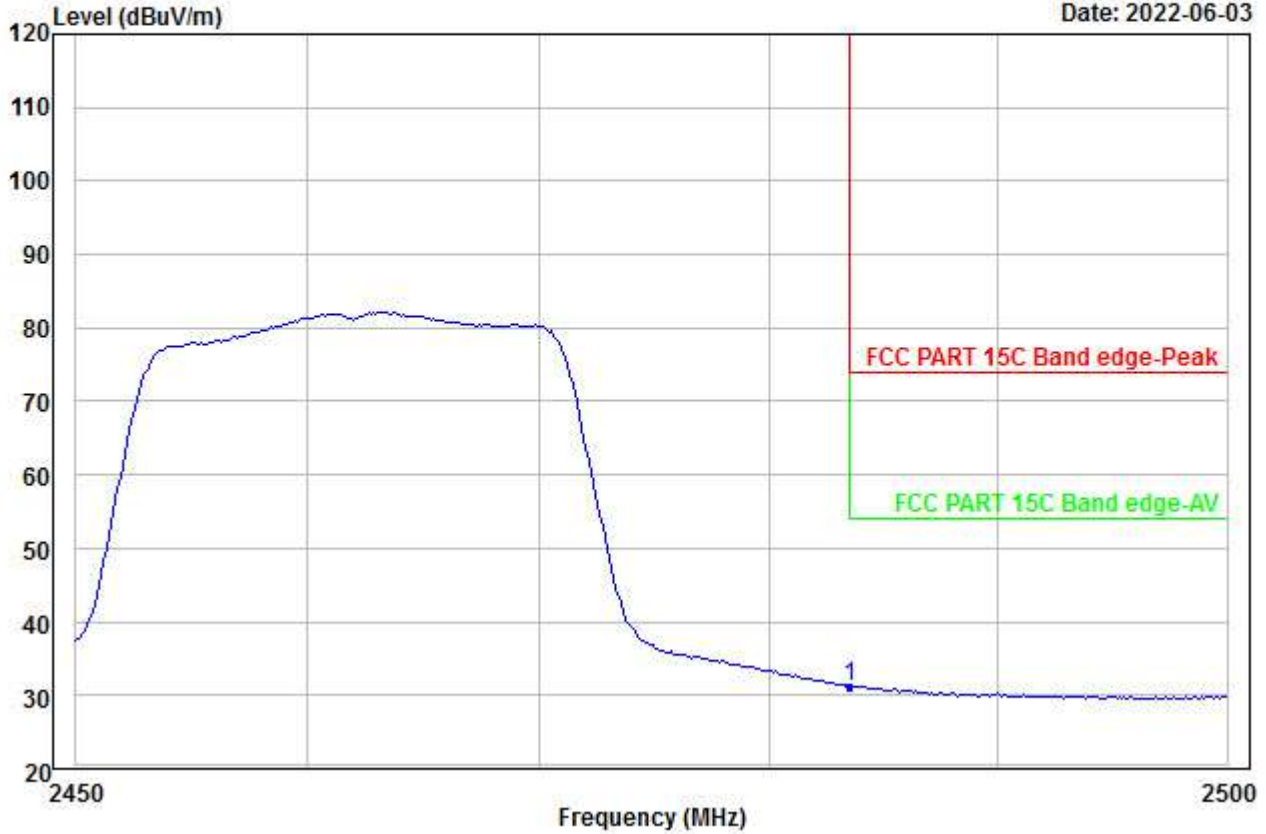


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : N20\_ANT0+1\_2462  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 2483.500	39.37	32.95	48.09	0.00	7.03	31.26	54.00	-22.74	---	---	Aver

File: F:\Test Template\上海\ITS\2022\220523032 SA750\A\2.4G\BE\4\_00027.EMI

Date: 2022-06-03

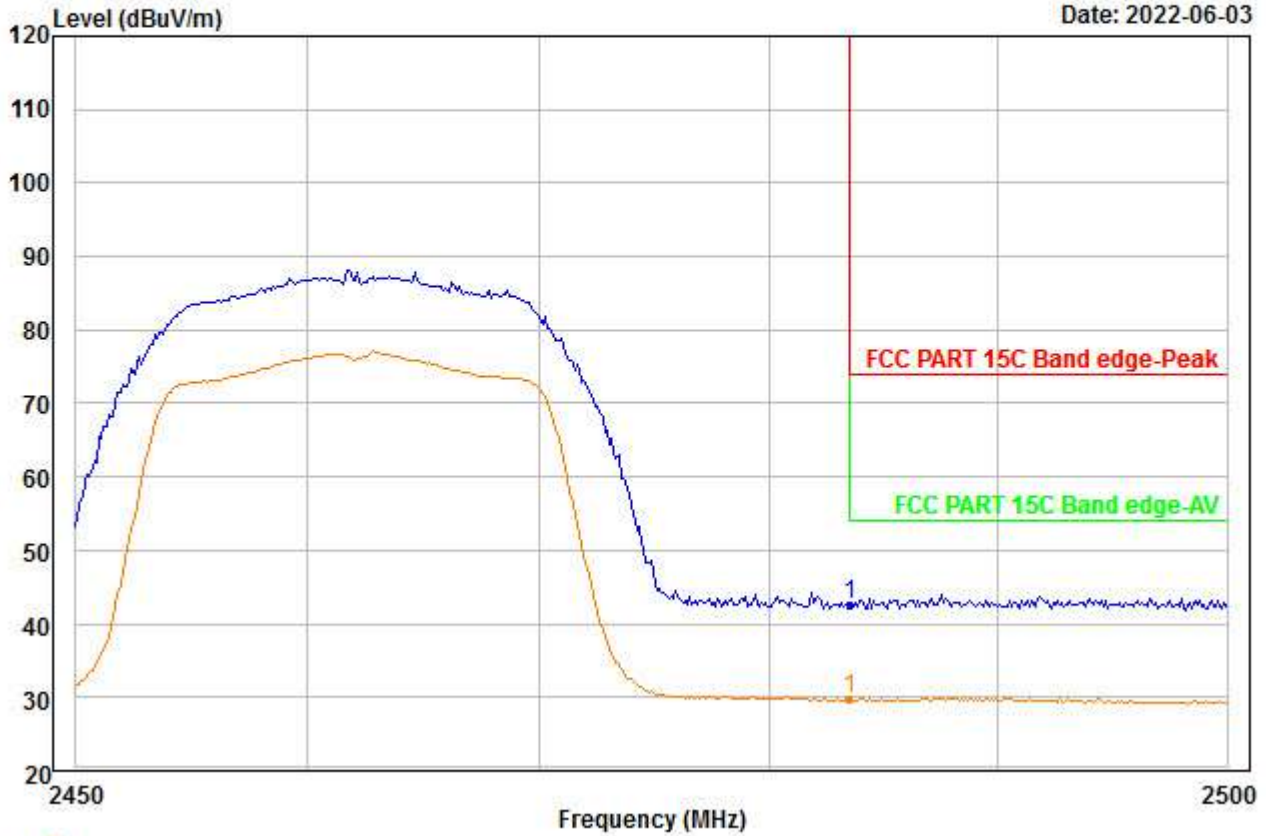


Trace: 1  
 Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : N20\_ANT0+1\_2462  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 2483.500	50.81	32.95	48.09	0.00	7.03	42.70	74.00	-31.30	---	---	Peak

File: F:\Test Template\上海\ITS\2022\220523032 SA750\A\2.4G\BE\4\_00028.EMI

Date: 2022-06-03

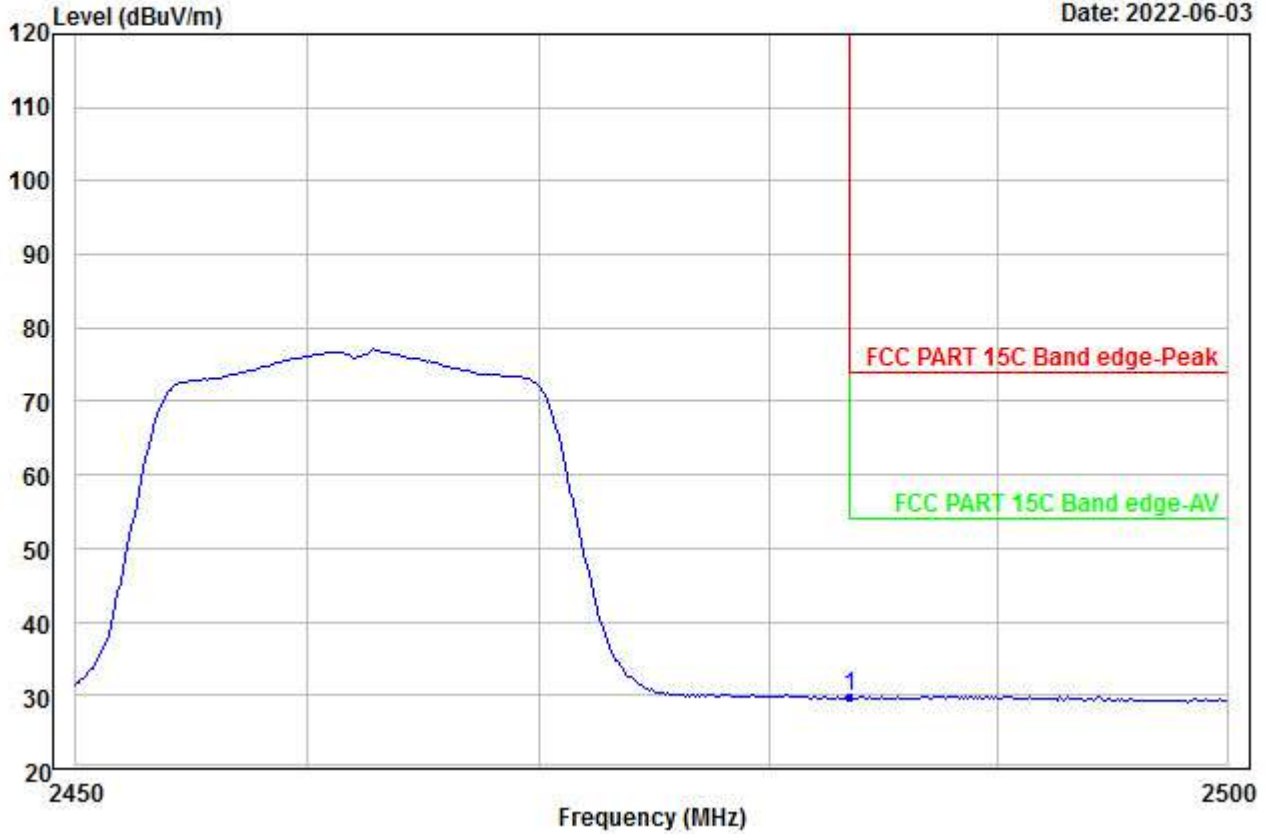


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : N20\_ANT0+1\_2462  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 2483.500	37.82	32.95	48.09	0.00	7.03	29.71	54.00	-24.29	---	---	Aver

File: F:\Test Template\上海ITSI\2022\220523032 SA750\A\2.4G\BE\4\_00029.EMI

Date: 2022-06-04

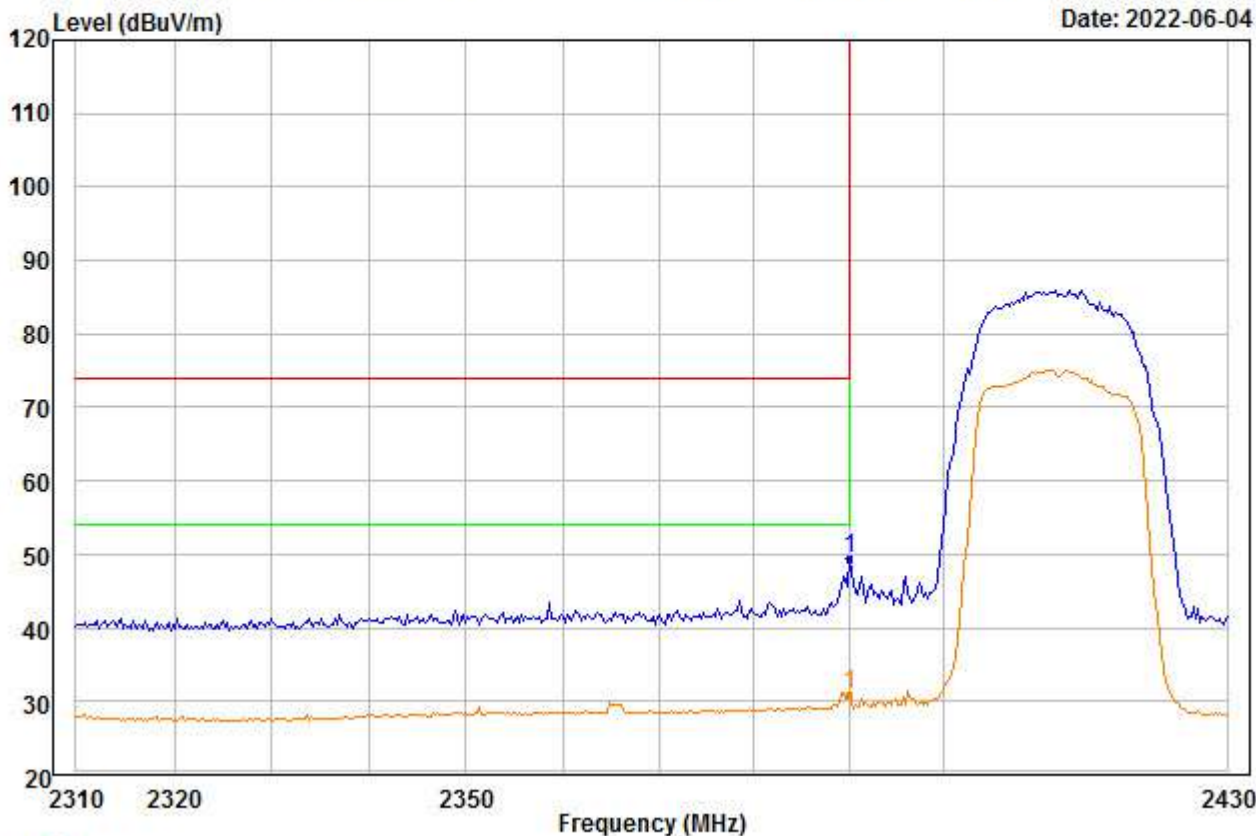


Trace: 1

Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : N20\_ANT0+1\_2412  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 2390.000	57.80	32.69	48.03	0.00	6.90	49.36	74.00	-24.64	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\2.4G\BE\4\_00030.EMI

Date: 2022-06-04

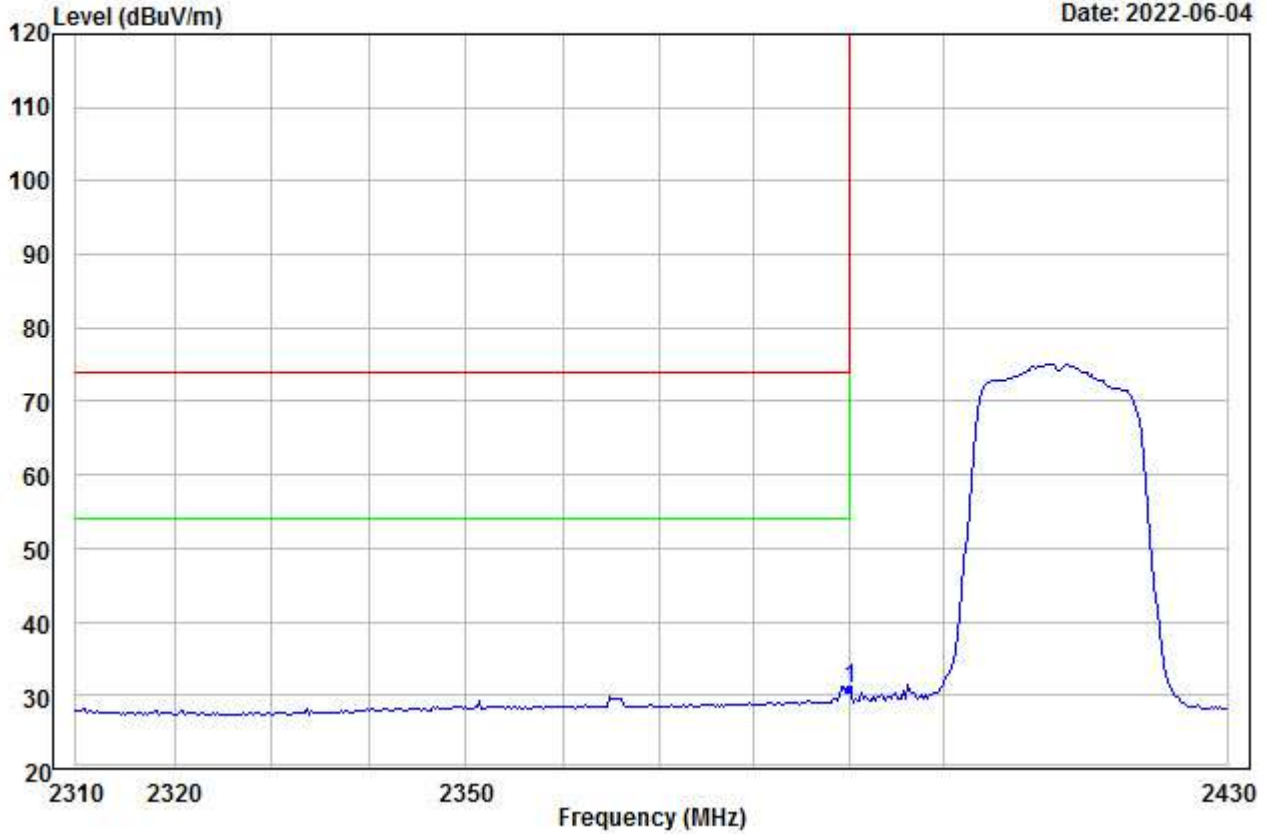


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : N20\_ANT0+1\_2412  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 2390.000	39.33	32.69	48.03	0.00	6.90	30.89	54.00	-23.11	---	---	Aver

File: F:\Test Template\上海ITSI\2022\220523032 SA750\A\2.4G\BE\4\_00031.EMI

Date: 2022-06-04

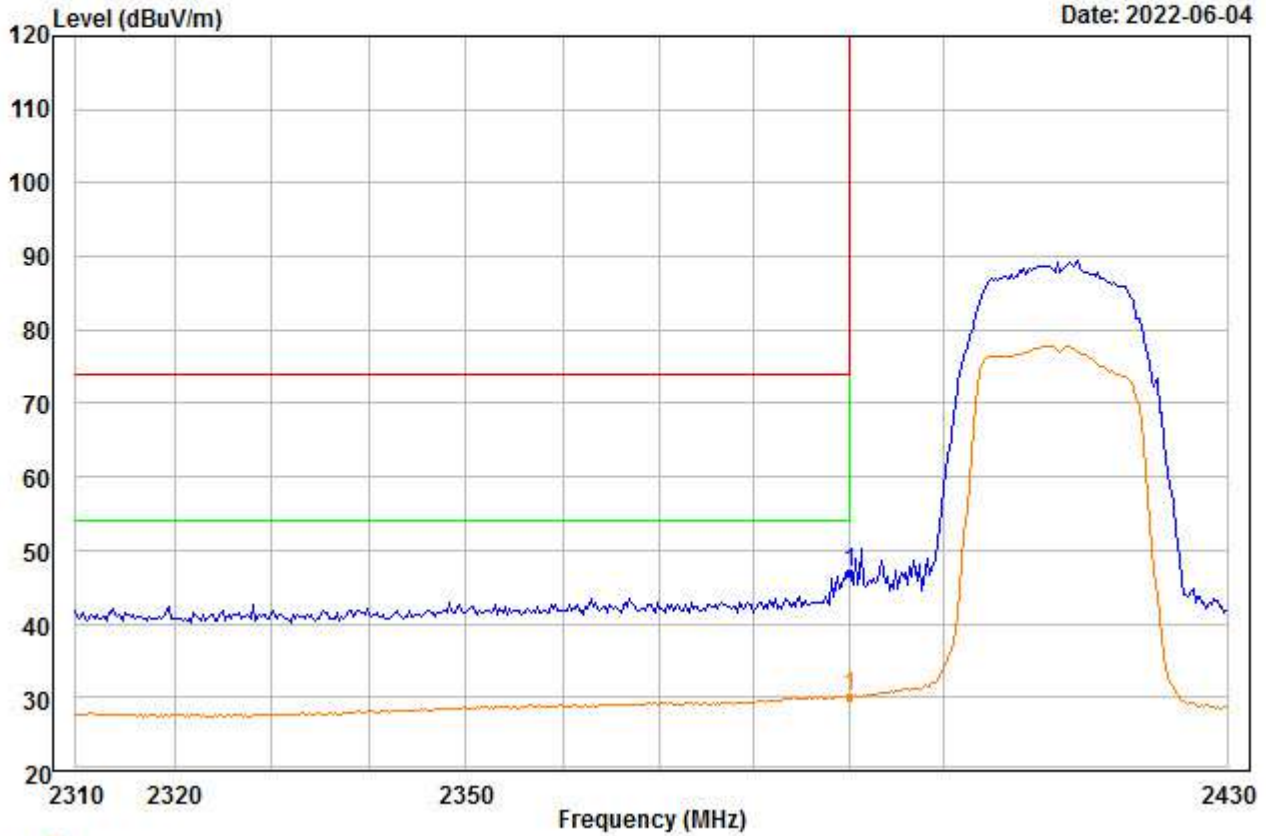


Trace: 1

Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : N20\_ANT0+1\_2412  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 2390.000	55.32	32.69	48.03	0.00	6.90	46.88	74.00	-27.12	---	---	Peak

File: F:\Test Template\上海ITSI\2022\220523032 SA750\A\2.4G\BE\4\_00032.EMI

Date: 2022-06-04

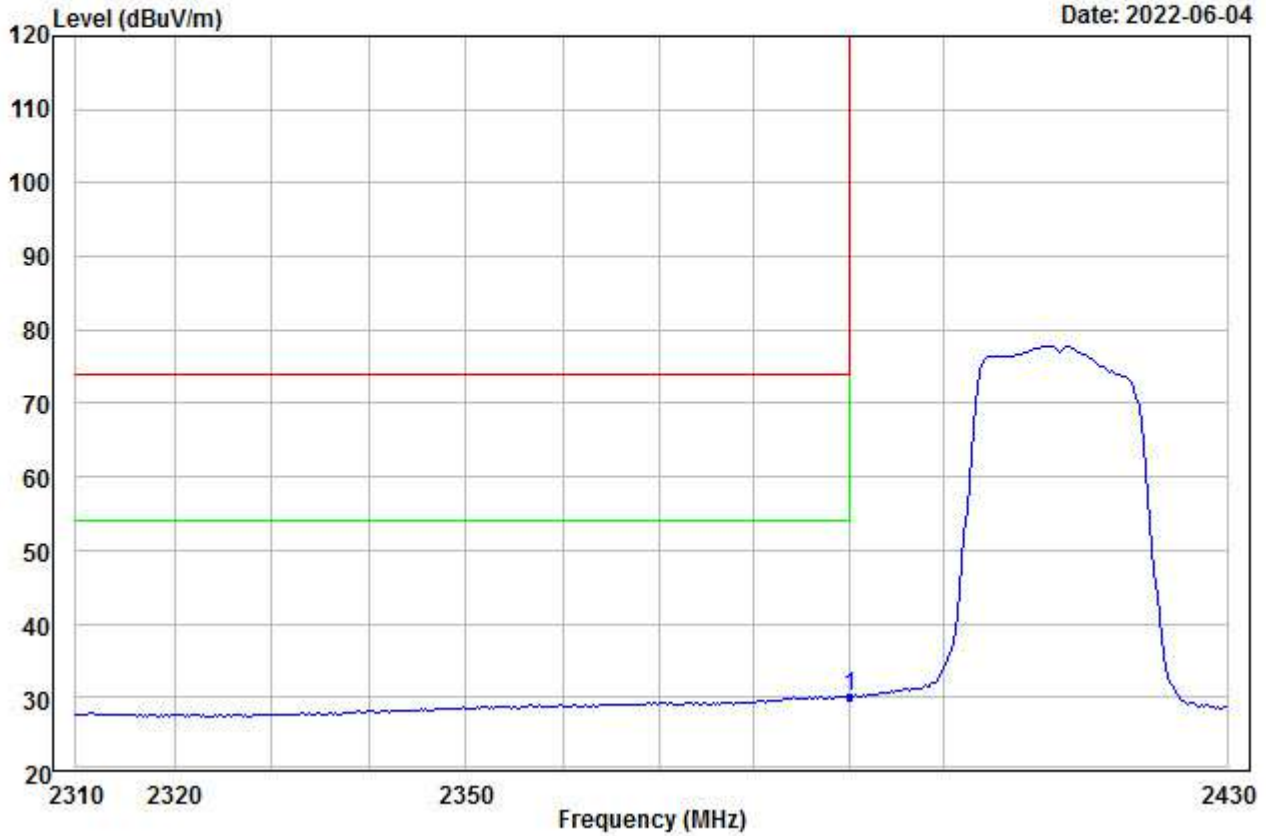


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : N20\_ANT0+1\_2412  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 2390.000	38.57	32.69	48.03	0.00	6.90	30.13	54.00	-23.87	---	---	Aver



File: F:\Test Template\上海\ITS\2022\220523032 SA750\A\2.4G\BE\4\_00033.EMI

Date: 2022-06-04

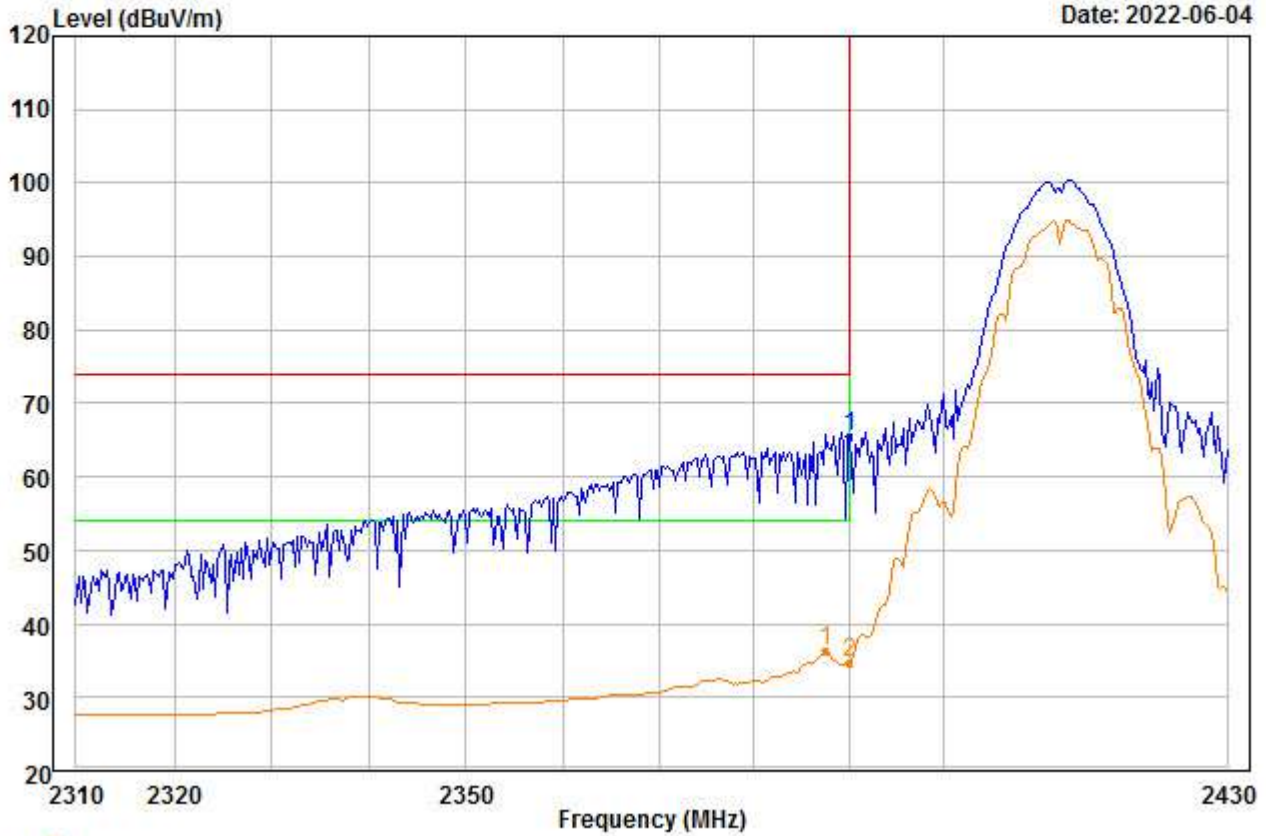


Trace: 1

Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : B\_ANT0\_2412  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 2390.000	73.95	32.69	48.03	0.00	6.90	65.51	74.00	-8.49	---	---	Peak

File: F:\Test Template\上海ITSI\2022\220523032 SA750\A\2.4G\BE\4\_00034.EMI

Date: 2022-06-04

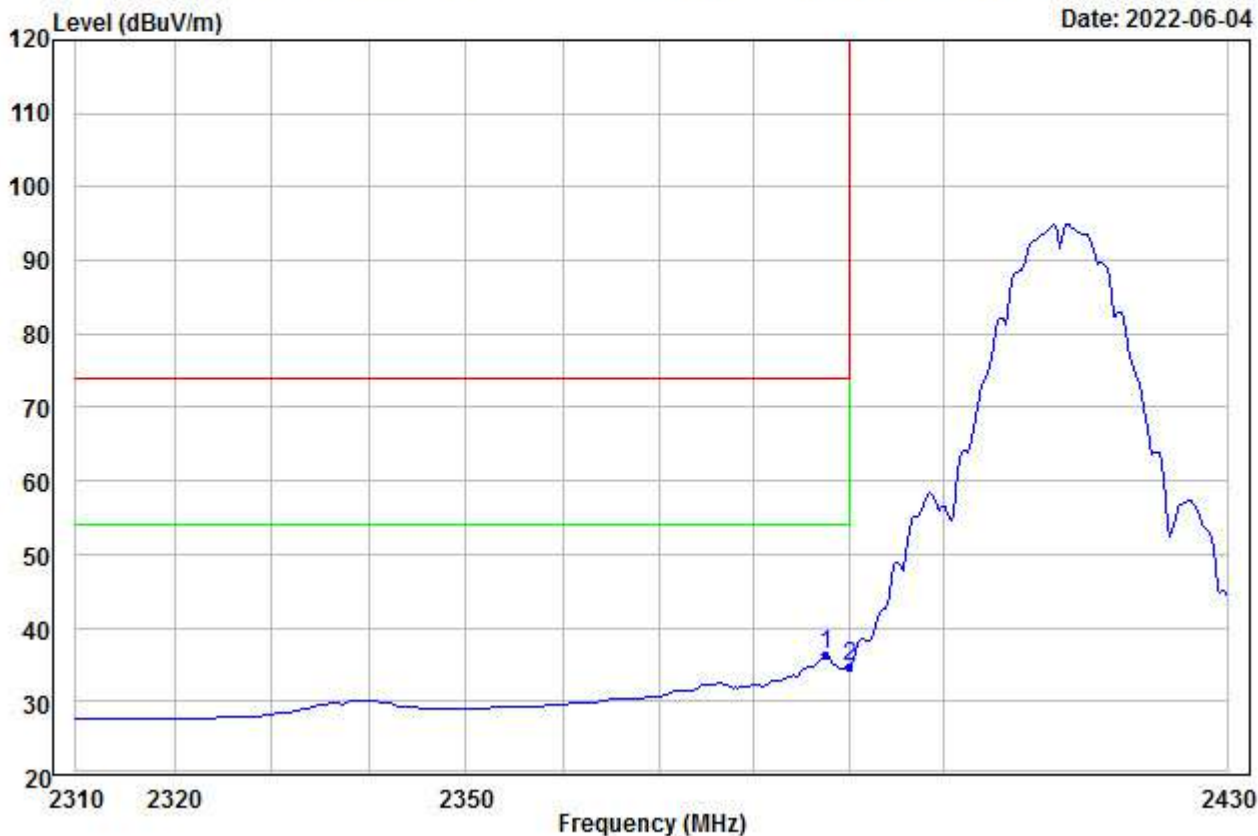


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : B\_ANT0\_2412  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 2387.435	44.74	32.68	48.03	0.00	6.89	36.28	54.00	-17.72	---	---	Aver
2 2390.000	43.09	32.69	48.03	0.00	6.90	34.65	54.00	-19.35	---	---	Aver

File: F:\Test Template\上海ITSI\2022\220523032 SA750\A\2.4G\BE\4\_00035.EMI

Date: 2022-06-04

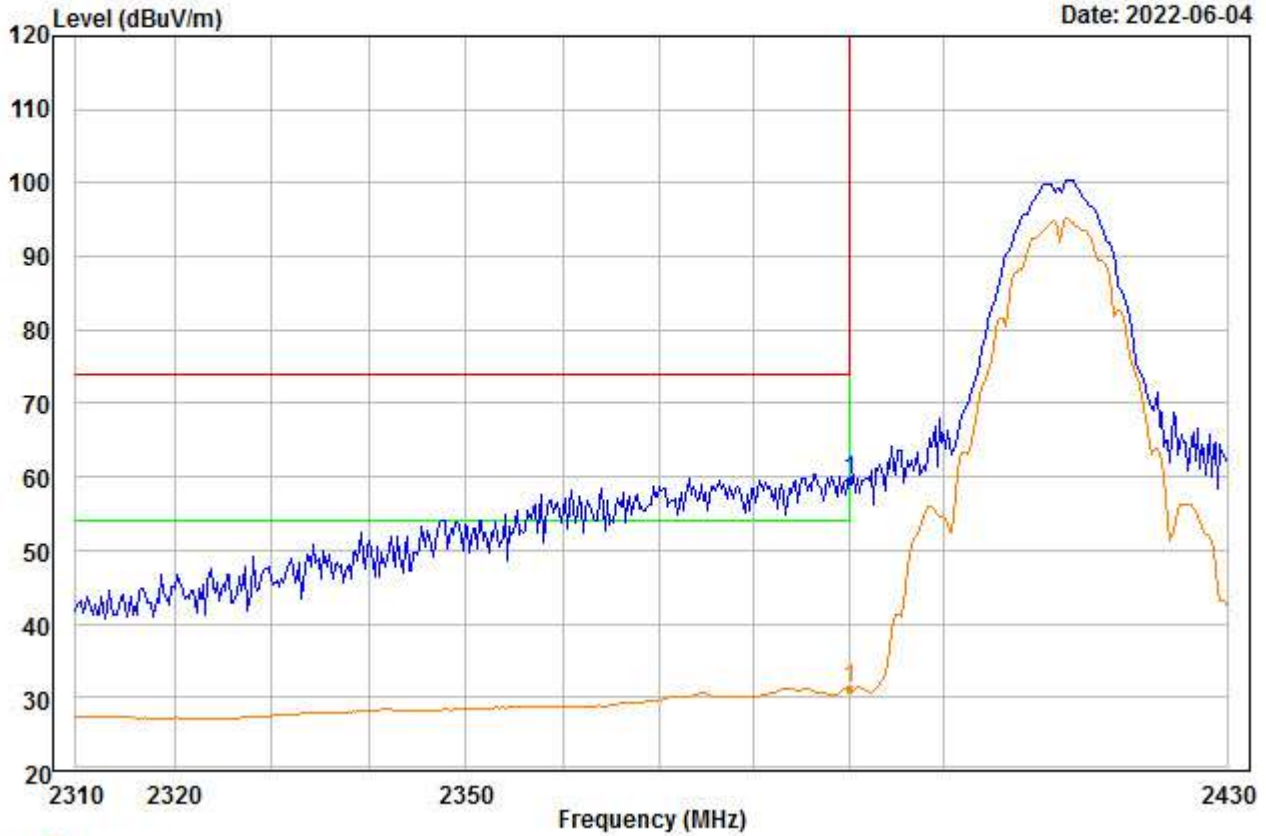


Trace: 1

Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : B\_ANT0\_2412  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 2390.000	67.93	32.69	48.03	0.00	6.90	59.49	74.00	-14.51	---	---	Peak

File: F:\Test Template\上海ITSI\2022\220523032 SA750\A\2.4G\BE\4\_00036.EMI

Date: 2022-06-04

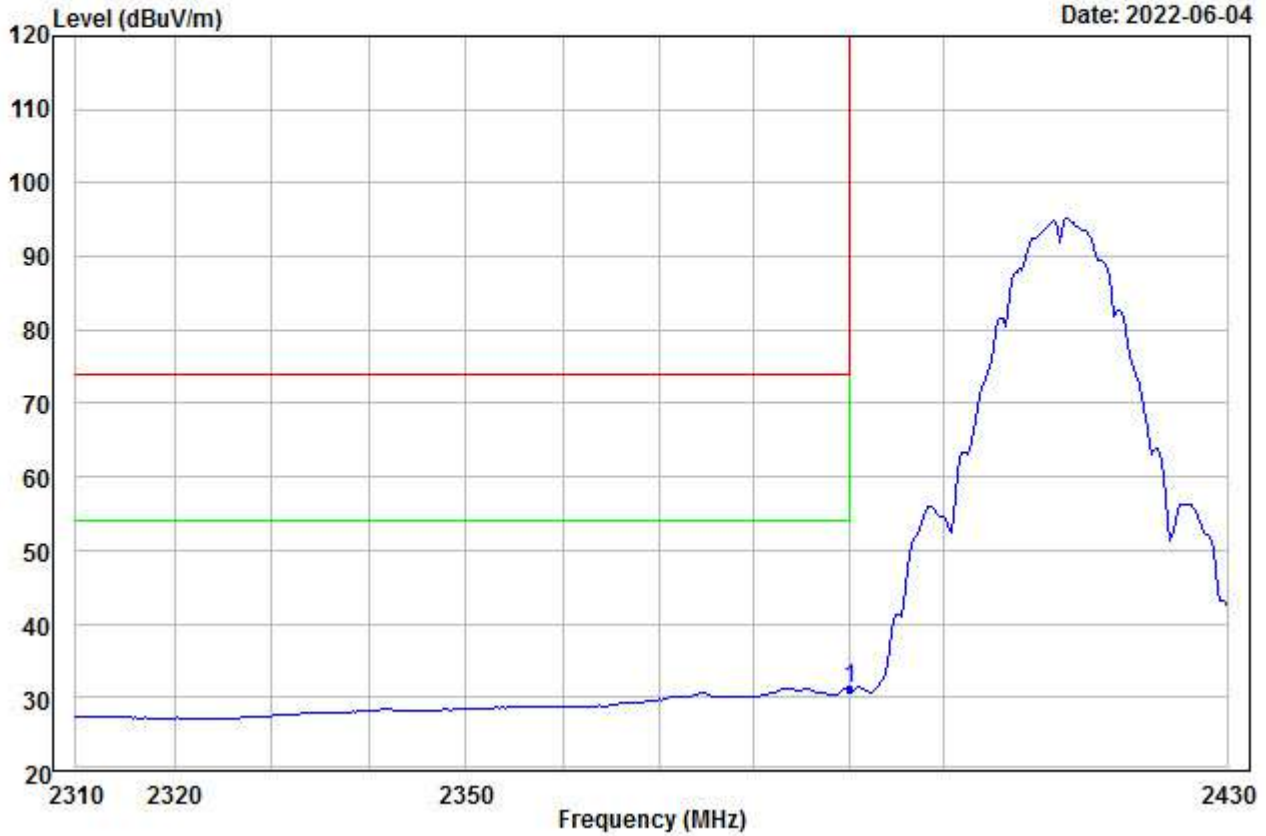


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : B\_ANT0\_2412  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 2390.000	39.49	32.69	48.03	0.00	6.90	31.05	54.00	-22.95	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\2.4G\BE\4\_00037.EMI

Date: 2022-06-04

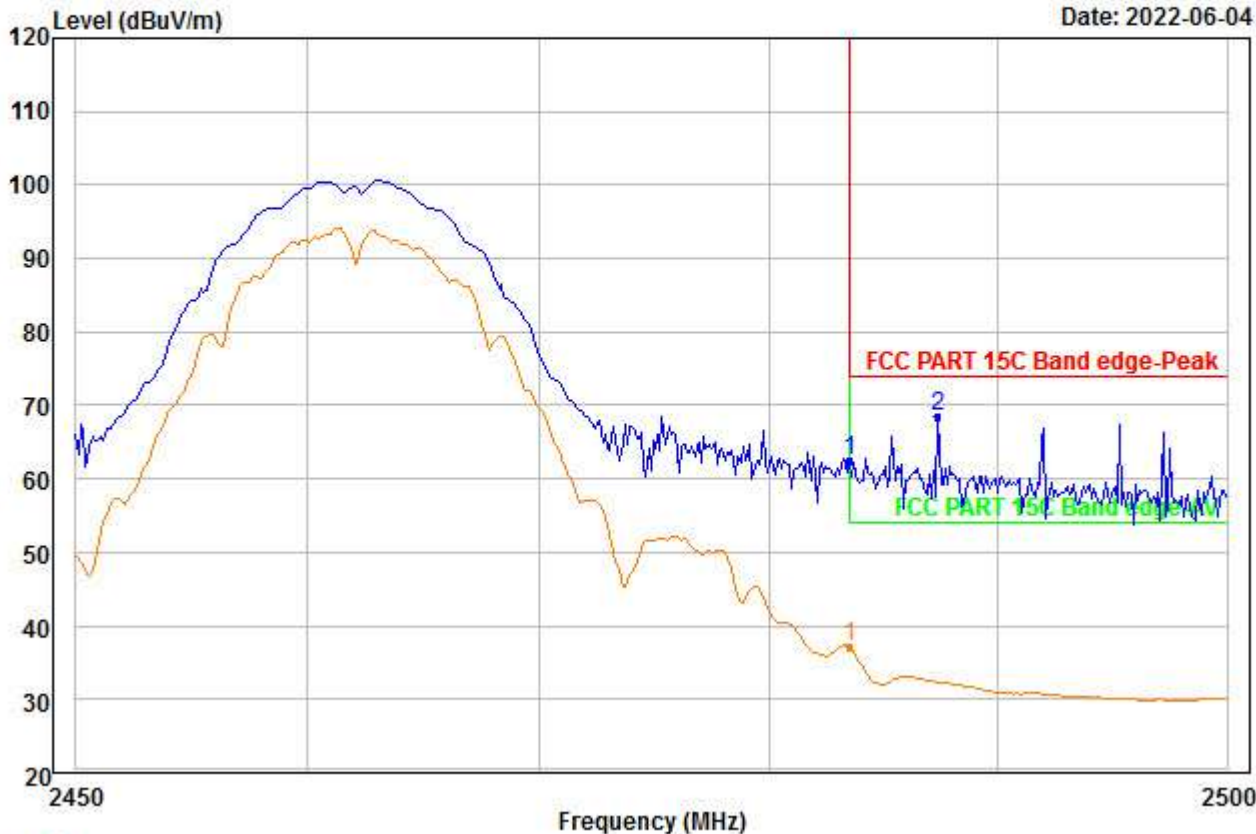


Trace: 1  
 Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : B\_ANT0\_2462  
 Remark :

	Read Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	2483.500	70.63	32.95	48.09	0.00	7.03	62.52	74.00	-11.48	---	---	Peak
2 PP	2487.375	76.66	32.96	48.09	0.00	7.03	68.56	74.00	-5.44	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\2.4G\BE\4\_00038.EMI

Date: 2022-06-04

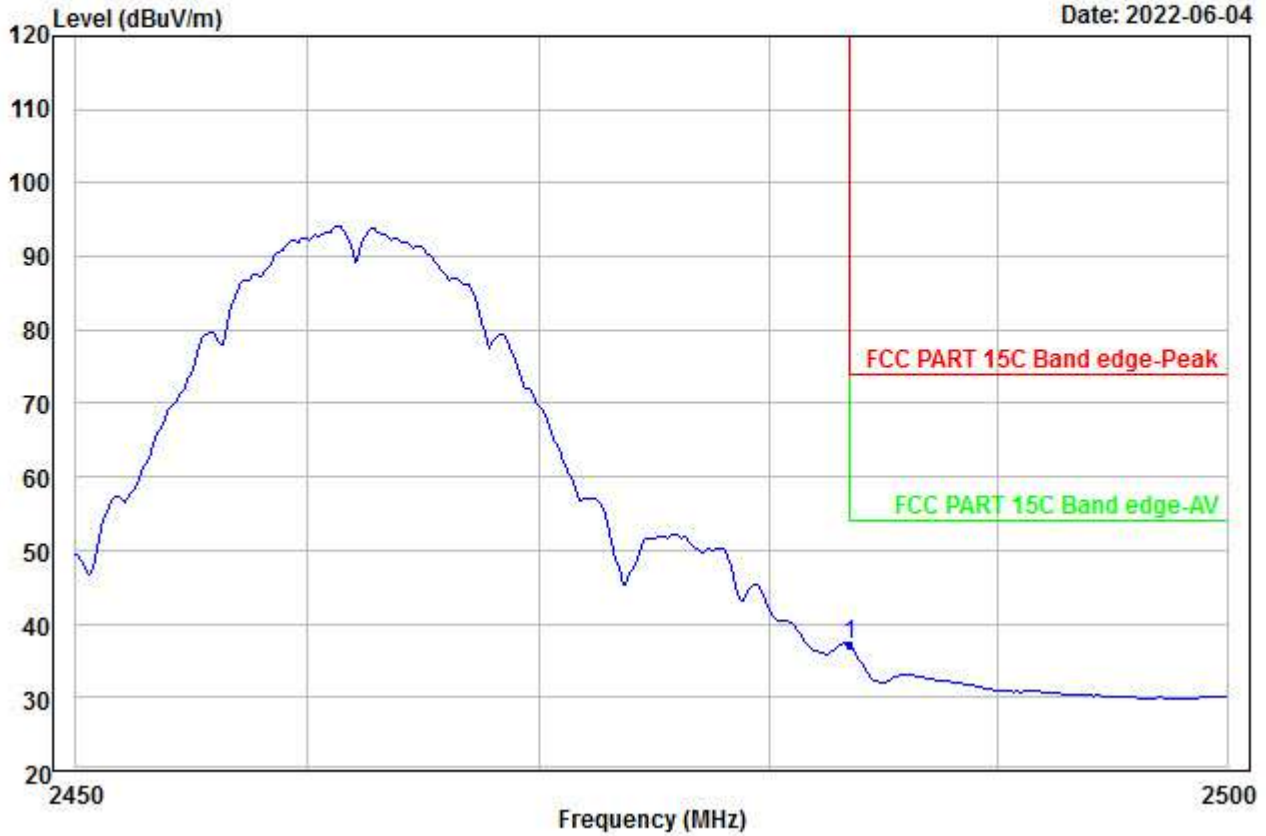


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : B\_ANT0\_2462  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 2483.500	45.30	32.95	48.09	0.00	7.03	37.19	54.00	-16.81	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\2.4G\BE\4\_00039.EMI

Date: 2022-06-04

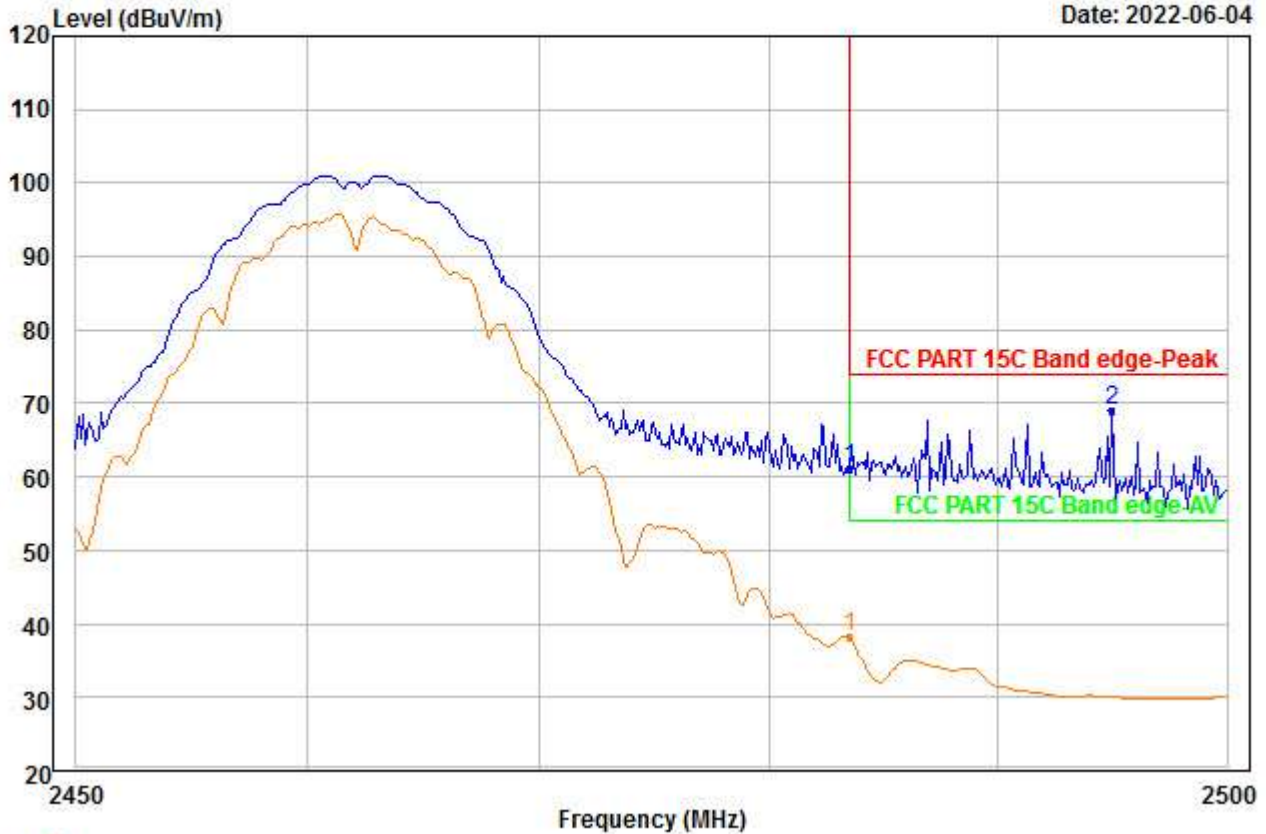


Trace: 1

Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : B\_ANT0\_2462  
 Remark :

	Read Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	2483.500	69.38	32.95	48.09	0.00	7.03	61.27	74.00	-12.73	---	---	Peak
2 PP	2494.990	77.16	32.99	48.10	0.00	7.04	69.09	74.00	-4.91	---	---	Peak

File: F:\Test Template\上海ITSI\2022\220523032 SA750\A\2.4G\BE\4\_00040.EMI

Date: 2022-06-04

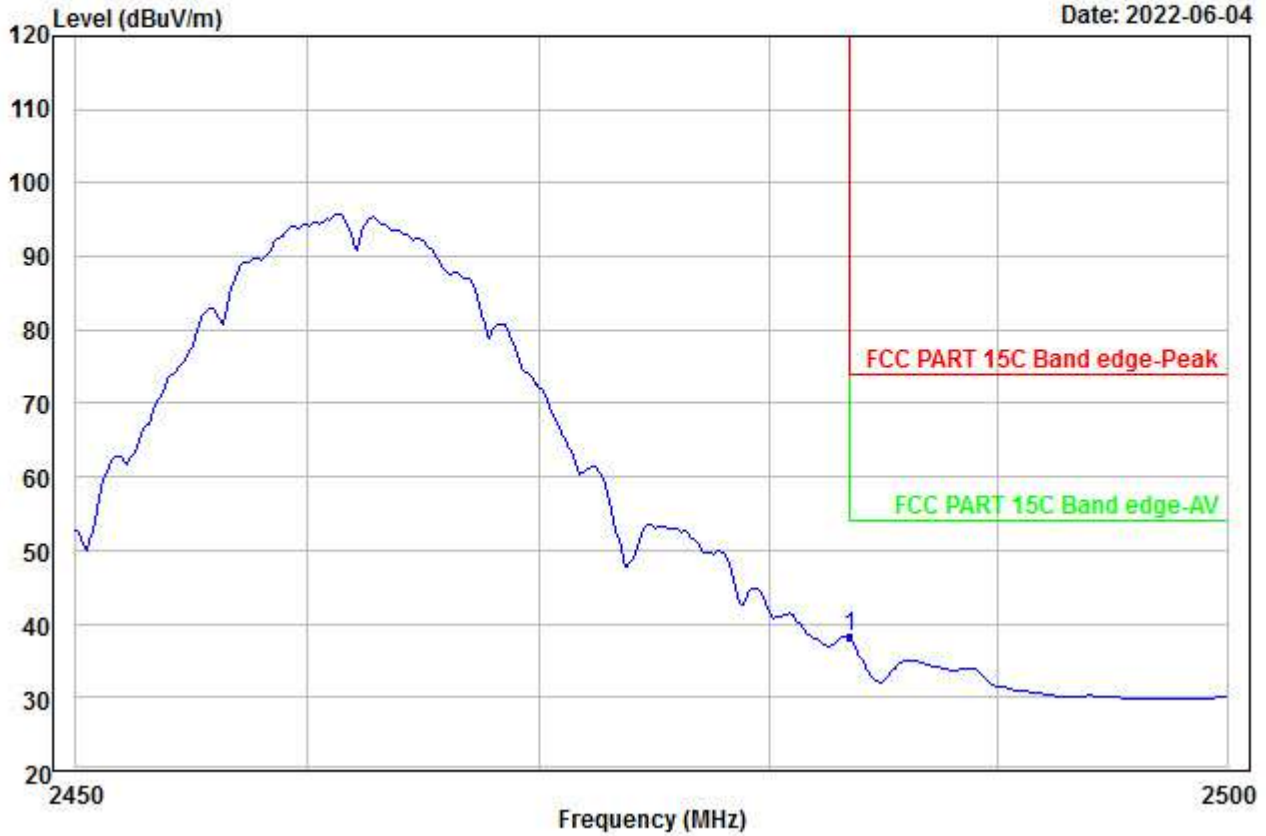

Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : B\_ANT0\_2462  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 2483.500	46.26	32.95	48.09	0.00	7.03	38.15	54.00	-15.85	---	---	Aver