


File: F:\Test Template\上海ITS\2022\220523032 SA750\A\2.4G\RSE\4\_00001.EMI

Date: 2022-06-08

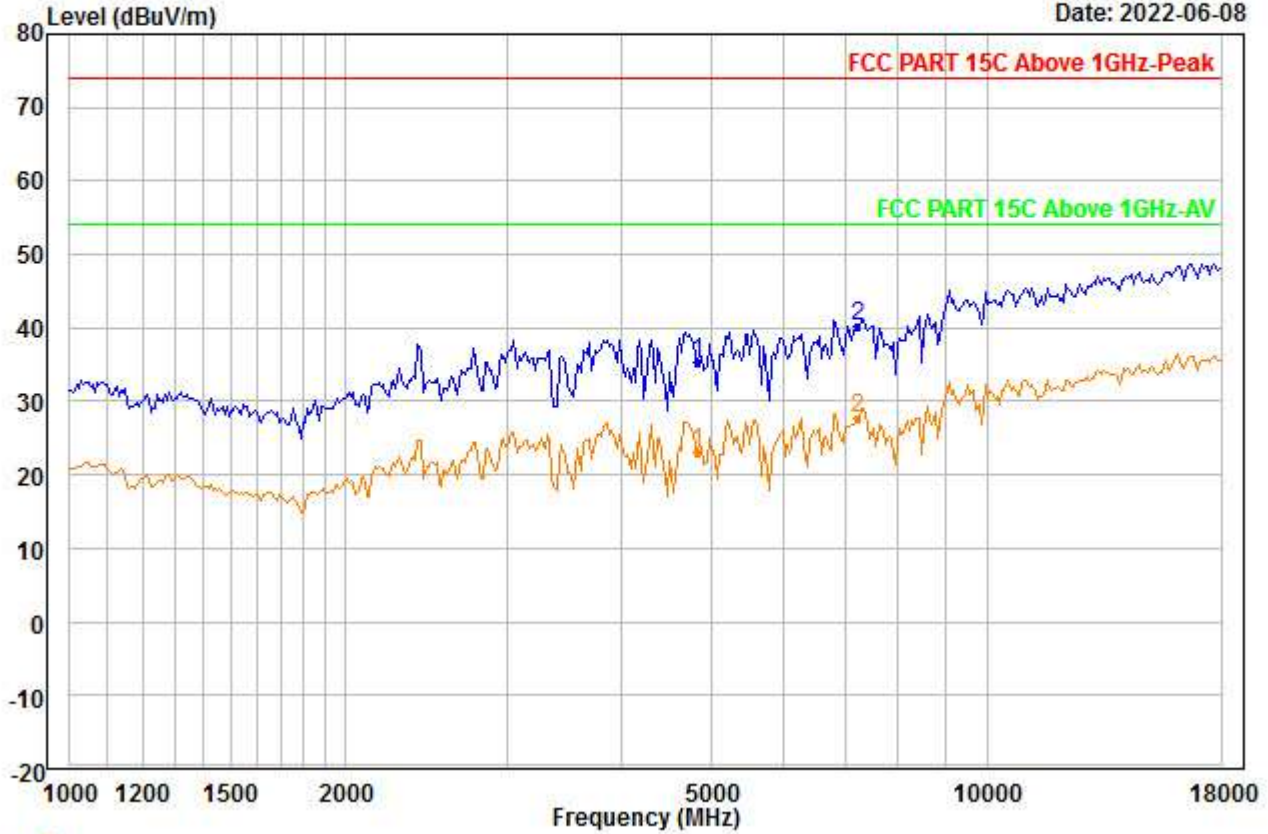


Trace: 1

Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : B\_ANT0\_2412  
 Remark :

	Read Freq	Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4824.000	37.73	34.70	46.56	0.00	9.53	35.40	74.00	-38.60	---	---	Peak
2 PP	7236.000	38.75	36.13	46.14	0.00	11.48	40.22	74.00	-33.78	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\2.4G\RSE\4\_00002.EMI

Date: 2022-06-08

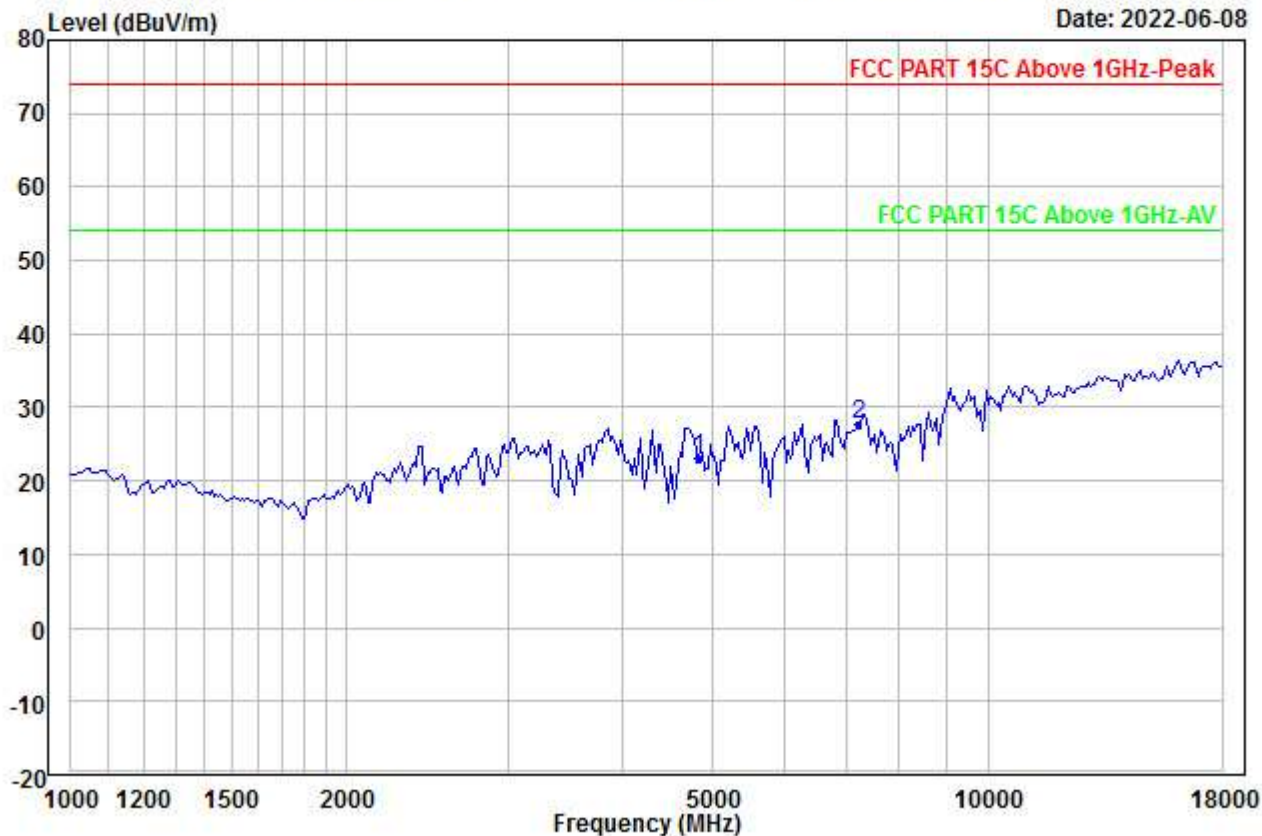


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : B\_ANT0\_2412  
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4824.000	25.27	34.70	46.56	0.00	9.53	22.94	54.00	-31.06	---	---	Aver
2 PP	7236.000	26.26	36.13	46.14	0.00	11.48	27.73	54.00	-26.27	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\2.4G\RSE\4\_00003.EMI

Date: 2022-06-08

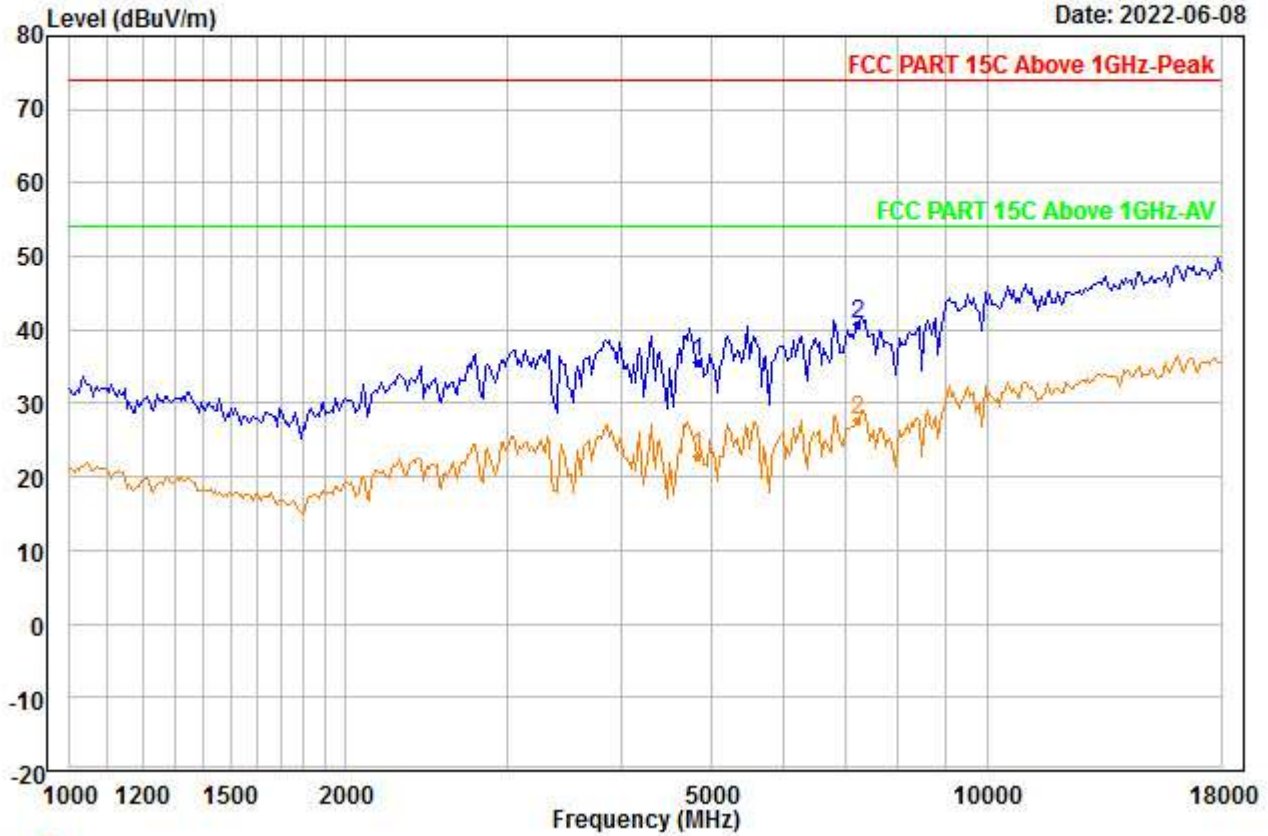

Trace: 1


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : B\_ANT0\_2412  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:		
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit					
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg		
1	4824.000	37.79	34.70	46.56	0.00	9.53	35.46	74.00	-38.54	---	---	Peak
2 PP	7236.000	39.23	36.13	46.14	0.00	11.48	40.70	74.00	-33.30	---	---	Peak



File: F:\Test Template\上海ITS\2022\220523032 SA750\A\2.4G\RSE\4\_00004.EMI

Date: 2022-06-08

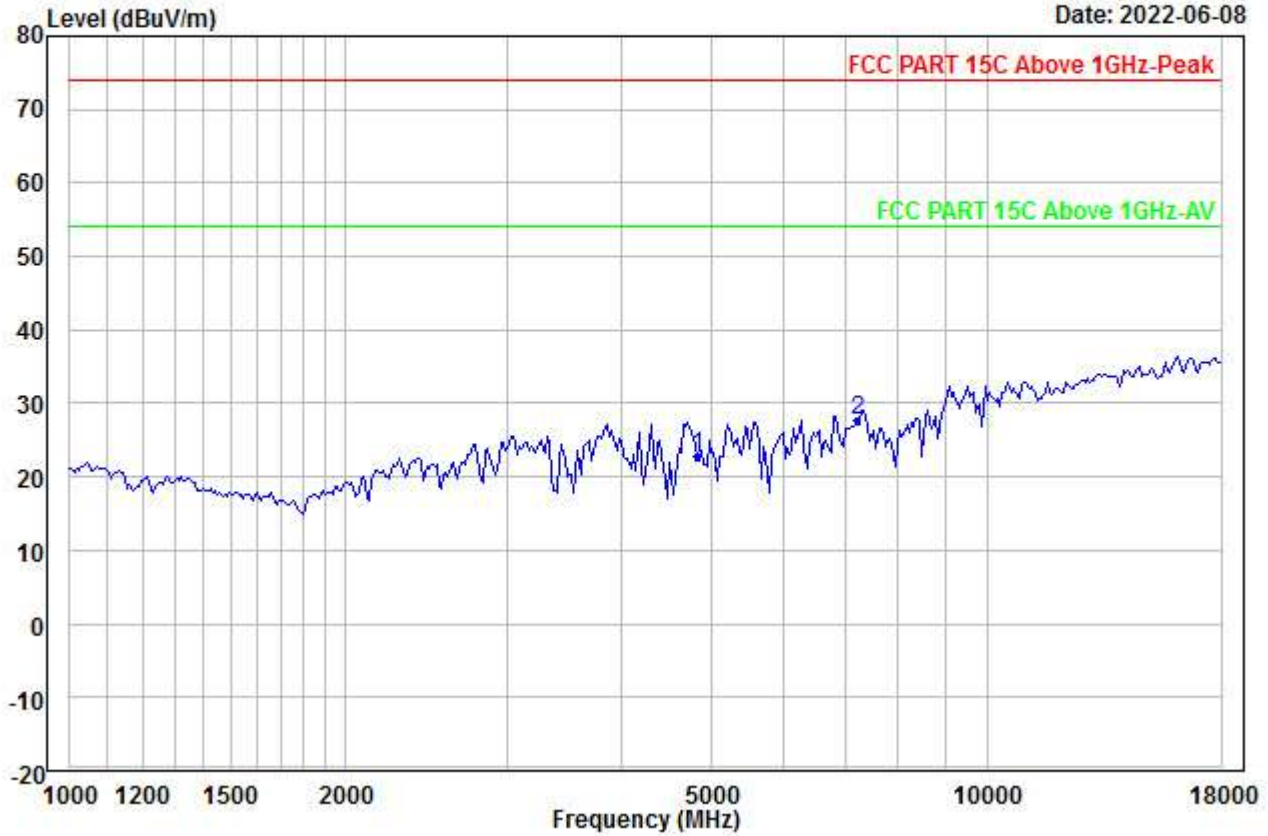


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : B\_ANT0\_2412  
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4824.000	25.11	34.70	46.56	0.00	9.53	22.78	54.00	-31.22	---	---	Aver
2 PP	7236.000	26.26	36.13	46.14	0.00	11.48	27.73	54.00	-26.27	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\2.4G\RSE\4\_00005.EMI

Date: 2022-06-08

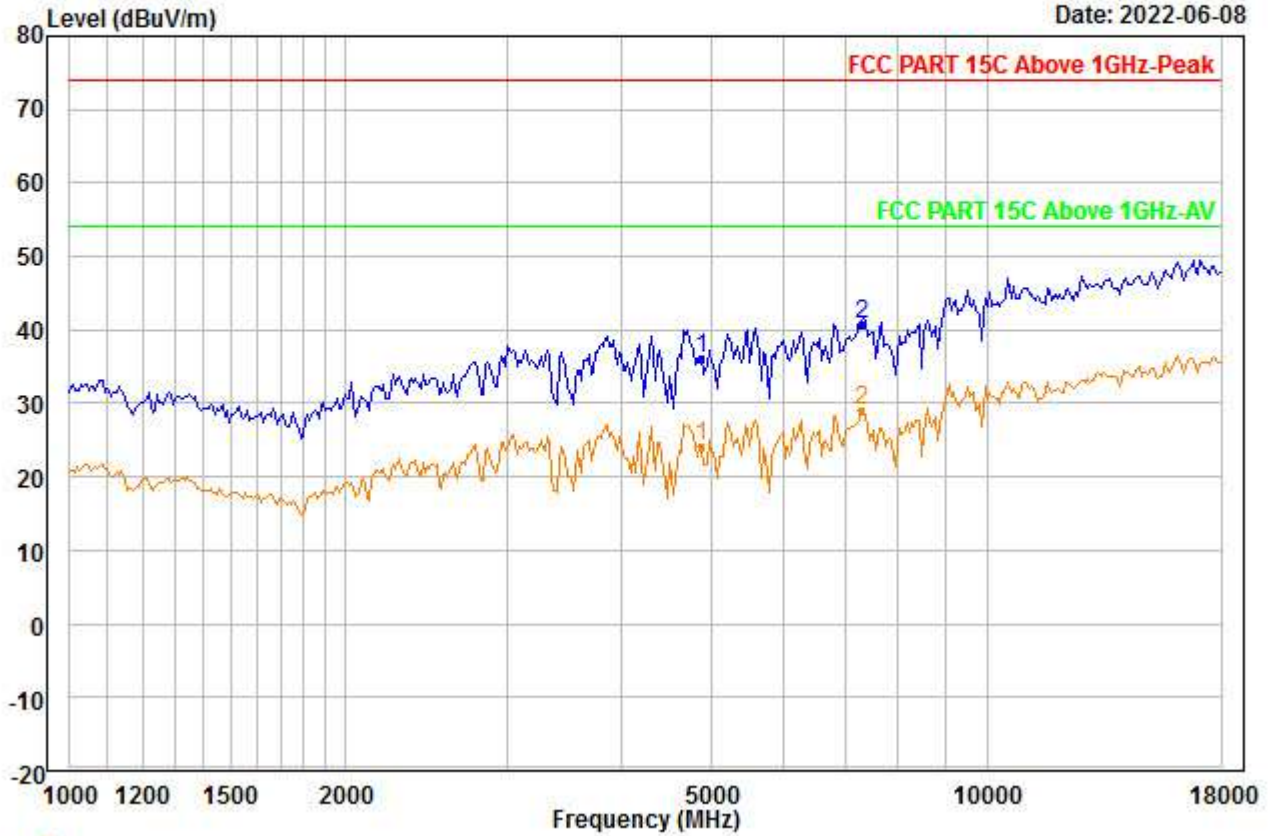


Trace: 1

Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : B\_ANT0\_2437  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:		
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit					
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg		
1	4874.000	38.43	34.70	46.57	0.00	9.58	36.14	74.00	-37.86	---	---	Peak
2 PP	7311.000	39.17	36.24	46.19	0.00	11.55	40.77	74.00	-33.23	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\2.4G\RSE\4\_00006.EMI

Date: 2022-06-08

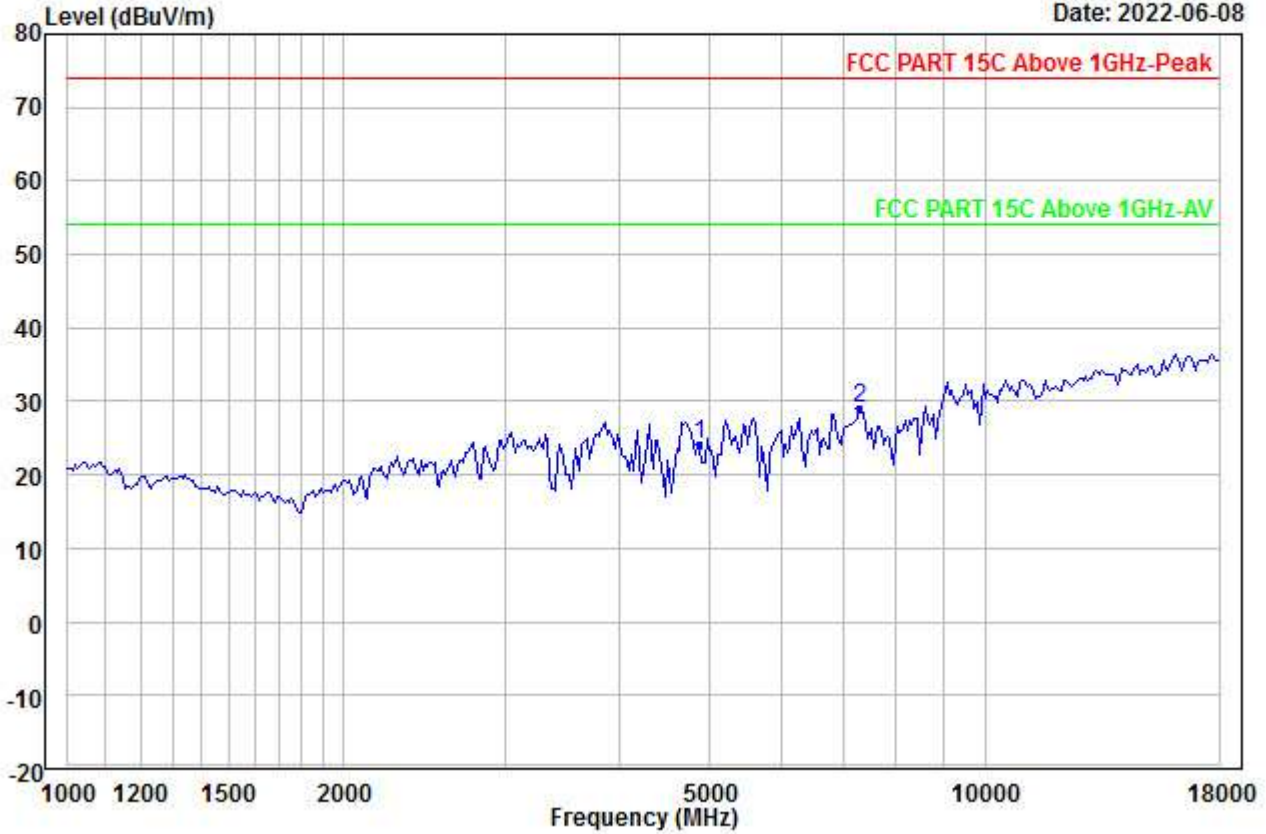


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : B\_ANT0\_2437  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:		
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit					
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg		
1	4874.000	26.43	34.70	46.57	0.00	9.58	24.14	54.00	-29.86	---	---	Aver
2 PP	7311.000	27.44	36.24	46.19	0.00	11.55	29.04	54.00	-24.96	---	---	Aver



File: F:\Test Template\上海ITS\2022\220523032 SA750\A\2.4G\RSE\4\_00007.EMI

Date: 2022-06-08

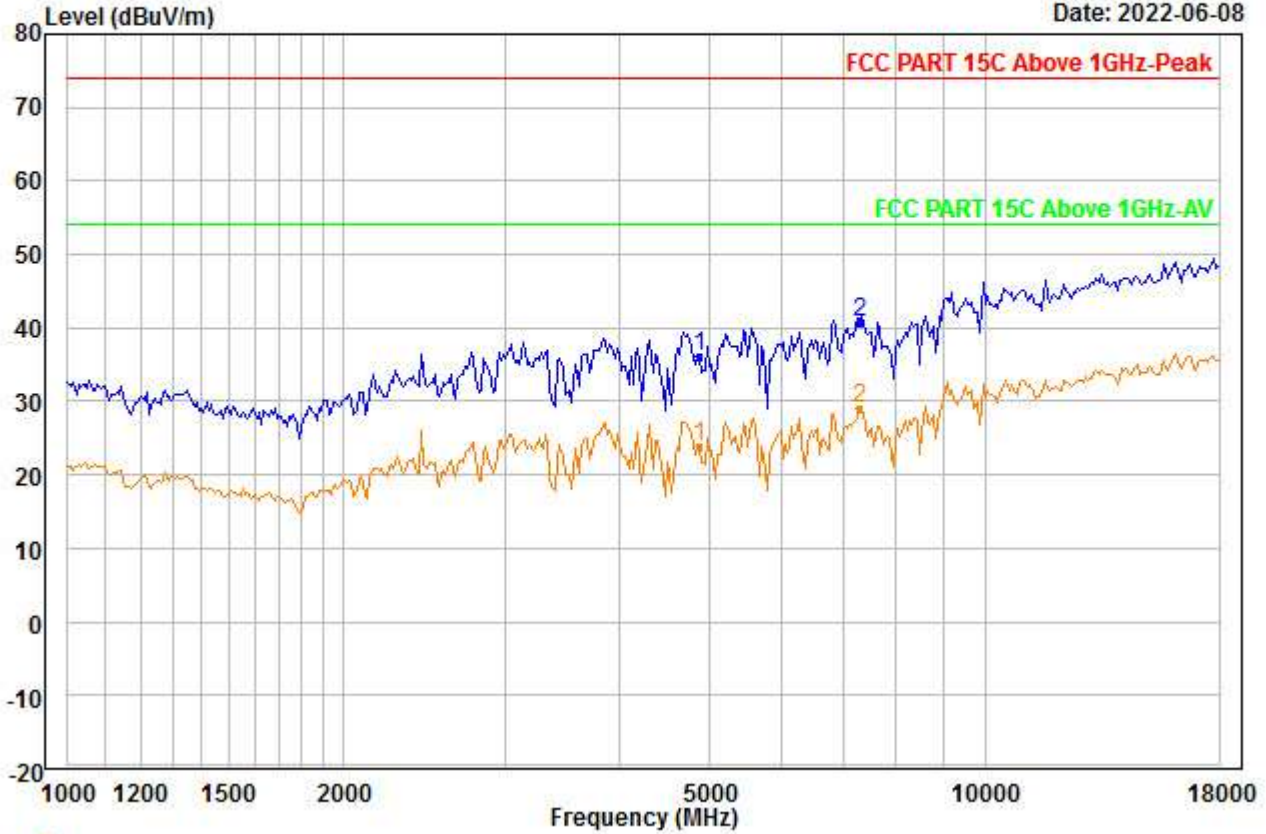


Trace: 1

Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : B\_ANT0\_2437  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:		
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit					
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg		
1	4874.000	38.52	34.70	46.57	0.00	9.58	36.23	74.00	-37.77	---	---	Peak
2	PP 7311.000	39.05	36.24	46.19	0.00	11.55	40.65	74.00	-33.35	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\2.4G\RSE\4\_00008.EMI

Date: 2022-06-08

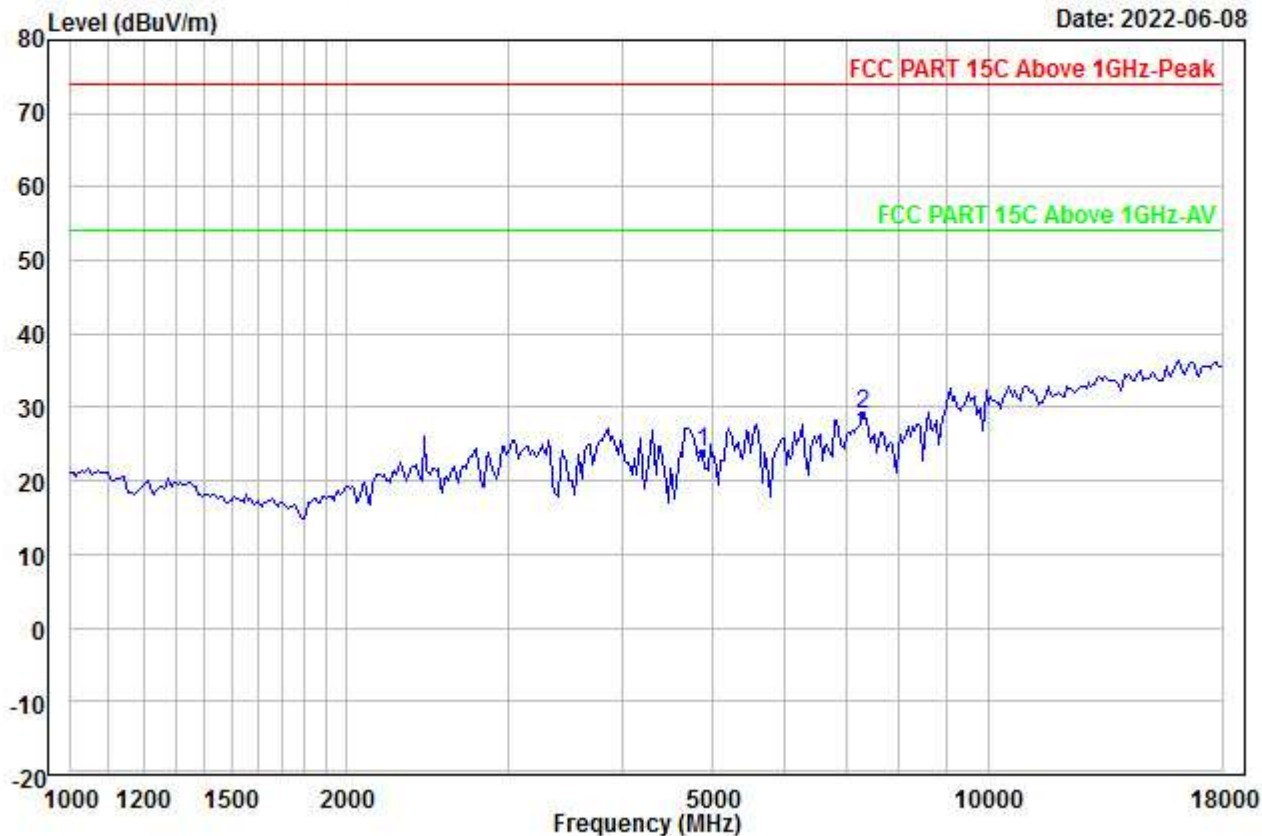


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : B\_ANT0\_2437  
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4874.000	26.29	34.70	46.57	0.00	9.58	24.00	54.00	-30.00	---	---	Aver
2 PP	7311.000	27.44	36.24	46.19	0.00	11.55	29.04	54.00	-24.96	---	---	Aver



File: F:\Test Template\上海ITS\2022\220523032 SA750\A\2.4G\RSE\4\_00009.EMI

Date: 2022-06-08

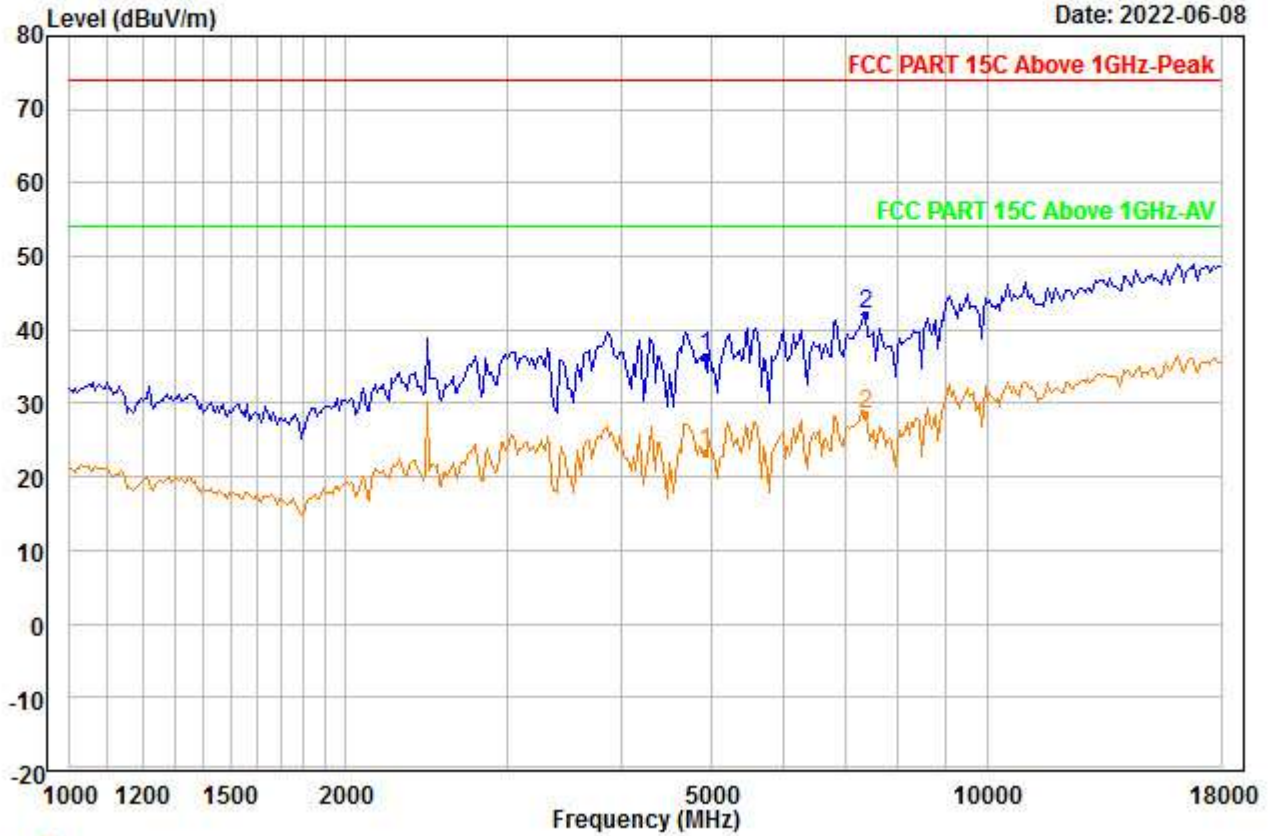


Trace: 1

Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : B\_ANT0\_2462  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:		
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit					
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg		
1	4924.000	38.68	34.70	46.58	0.00	9.62	36.42	74.00	-37.58	---	---	Peak
2 PP	7386.000	40.29	36.34	46.23	0.00	11.61	42.01	74.00	-31.99	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\2.4G\RSE\4\_00010.EMI

Date: 2022-06-08

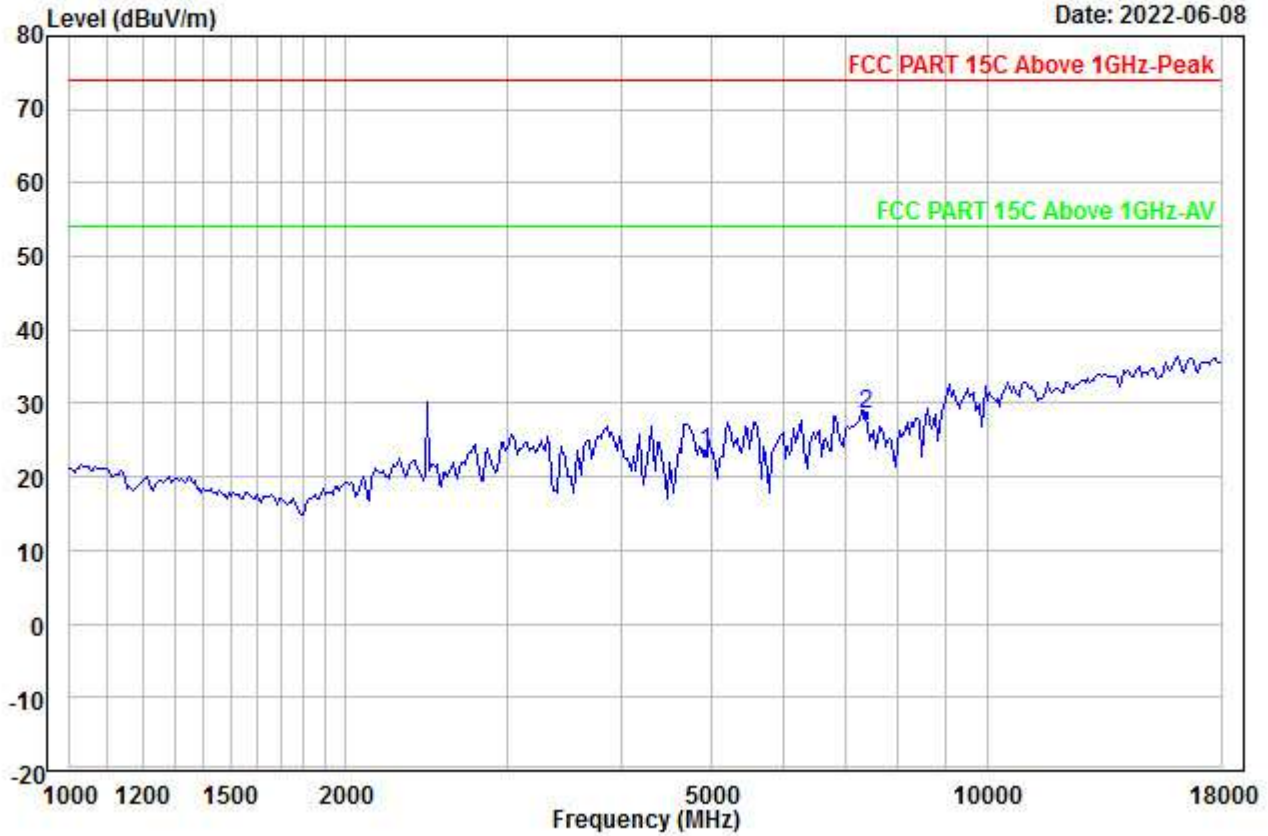


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : B\_ANT0\_2462  
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4924.000	25.70	34.70	46.58	0.00	9.62	23.44	54.00	-30.56	---	---	Aver
2 PP	7386.000	26.83	36.34	46.23	0.00	11.61	28.55	54.00	-25.45	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\2.4G\RSE\4\_00011.EMI

Date: 2022-06-08

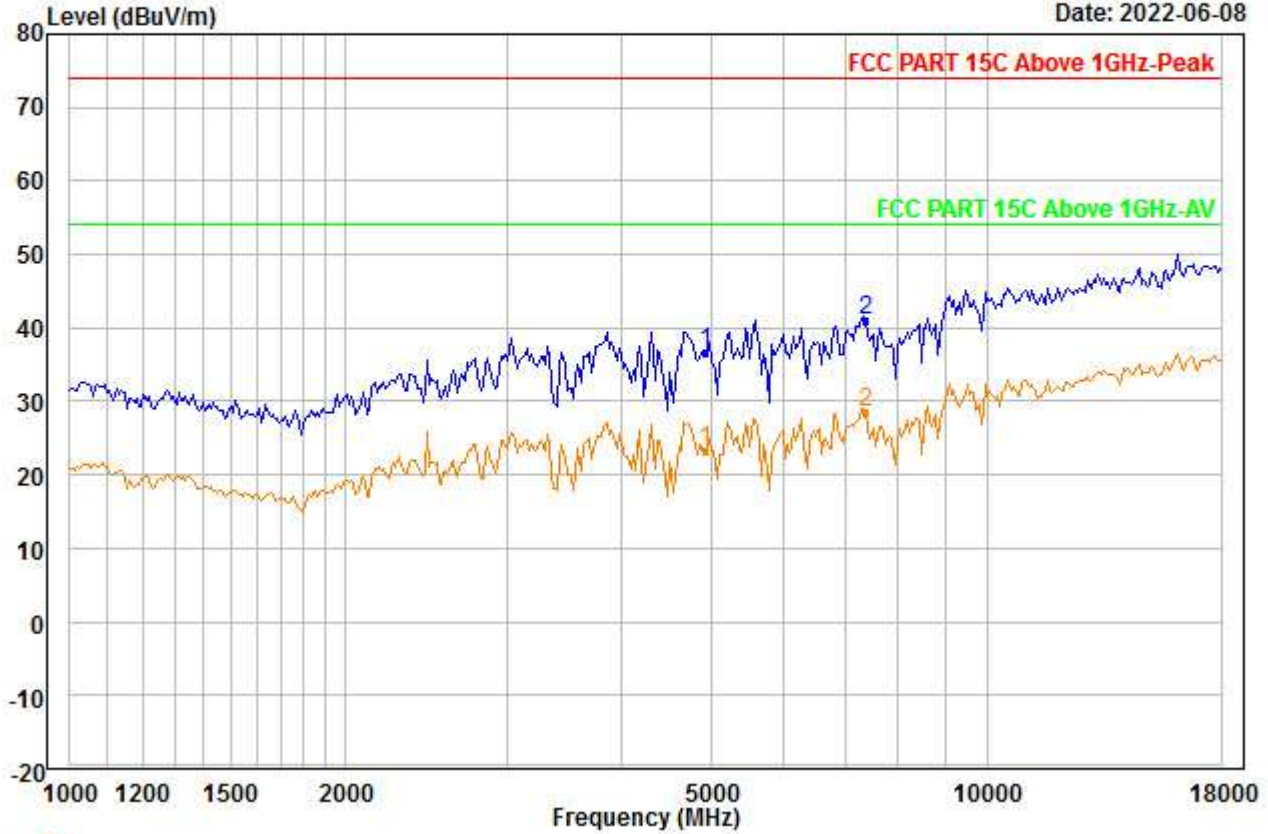

Trace: 1


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : B\_ANT0\_2462  
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4924.000	38.97	34.70	46.58	0.00	9.62	36.71	74.00	-37.29	---	---	Peak
2 PP	7386.000	39.35	36.34	46.23	0.00	11.61	41.07	74.00	-32.93	---	---	Peak



File: F:\Test Template\上海ITS\2022\220523032 SA750\A\2.4G\RSE\4\_00012.EMI

Date: 2022-06-08

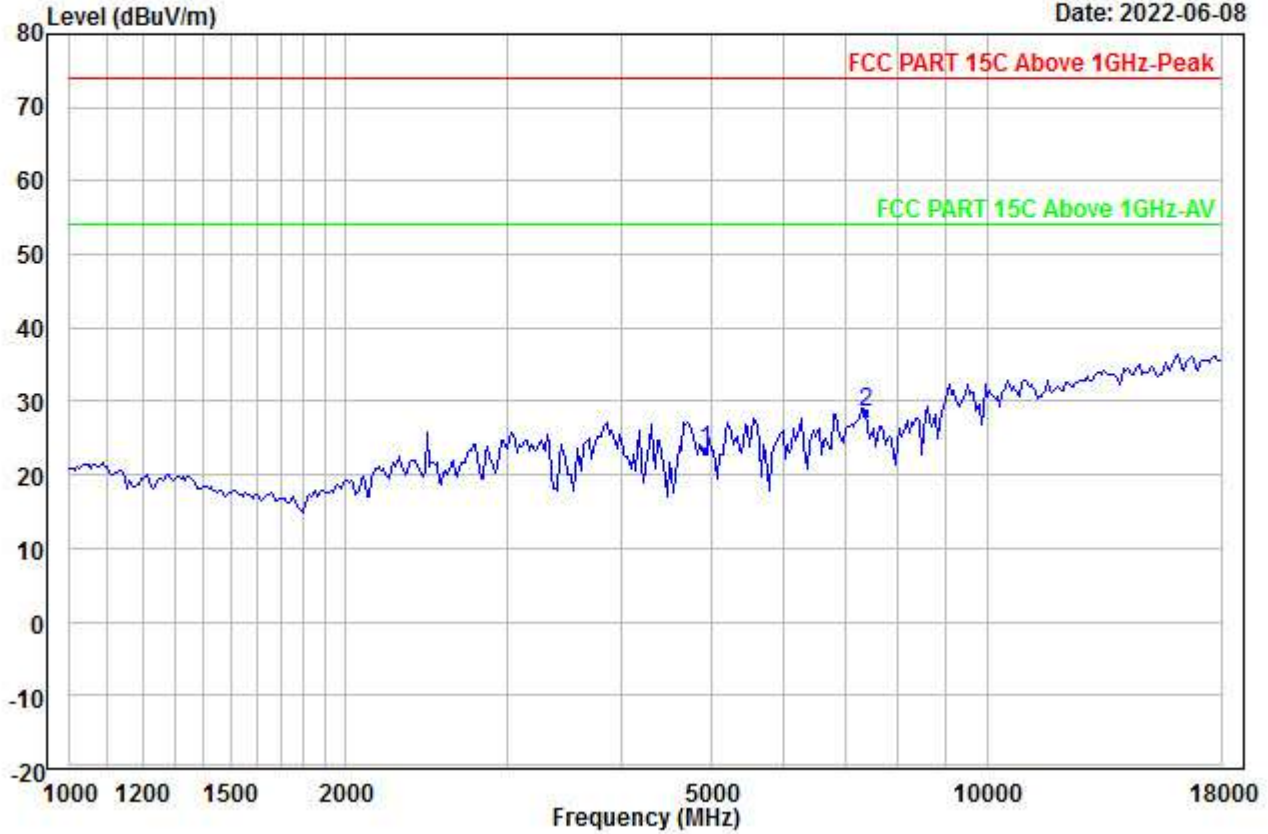


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : B\_ANT0\_2462  
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4924.000	25.70	34.70	46.58	0.00	9.62	23.44	54.00	-30.56	---	---	Aver
2 PP	7386.000	26.89	36.34	46.23	0.00	11.61	28.61	54.00	-25.39	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\2.4G\RSE\4\_00013.EMI

Date: 2022-06-08

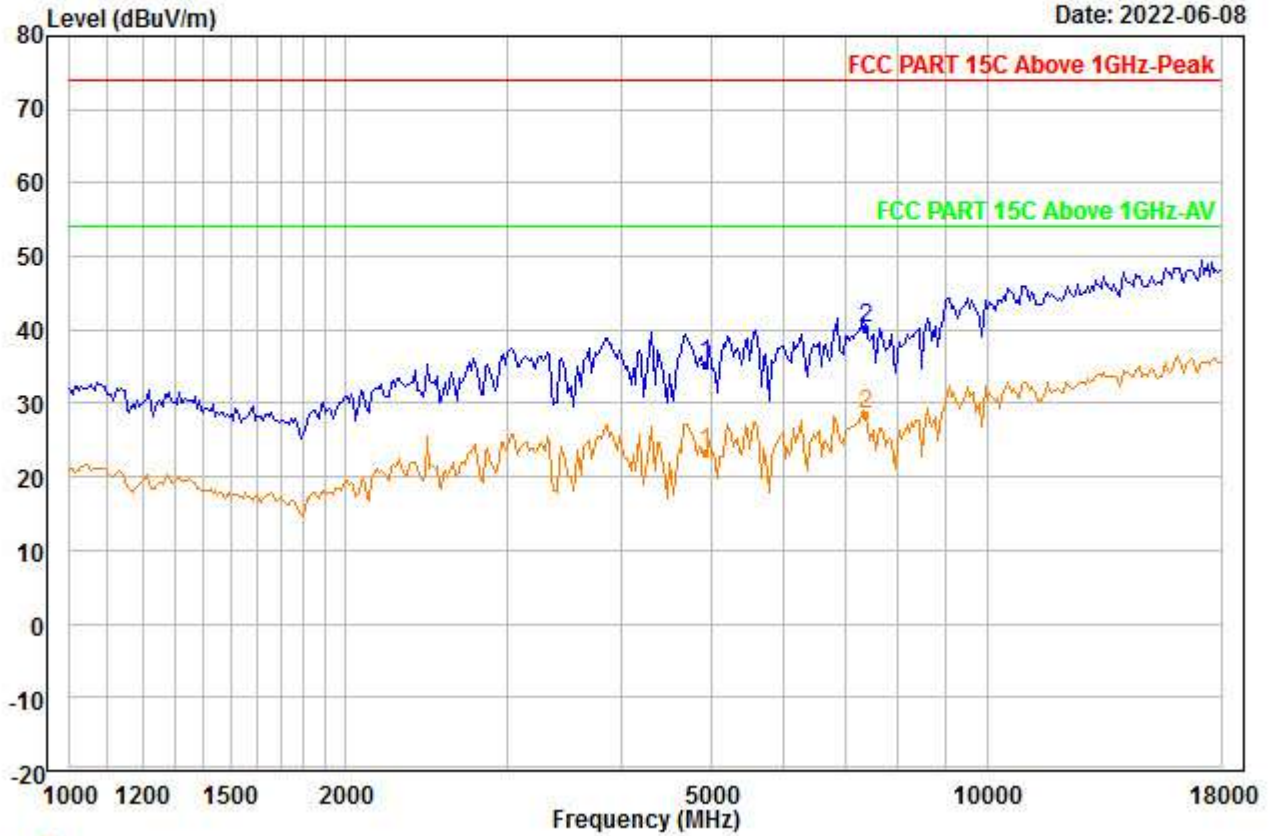


Trace: 1

Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : B\_ANT1\_2462  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:		
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit					
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg		
1	4924.000	37.68	34.70	46.58	0.00	9.62	35.42	74.00	-38.58	---	---	Peak
2 PP	7386.000	38.41	36.34	46.23	0.00	11.61	40.13	74.00	-33.87	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\2.4G\RSE\4\_00014.EMI

Date: 2022-06-08

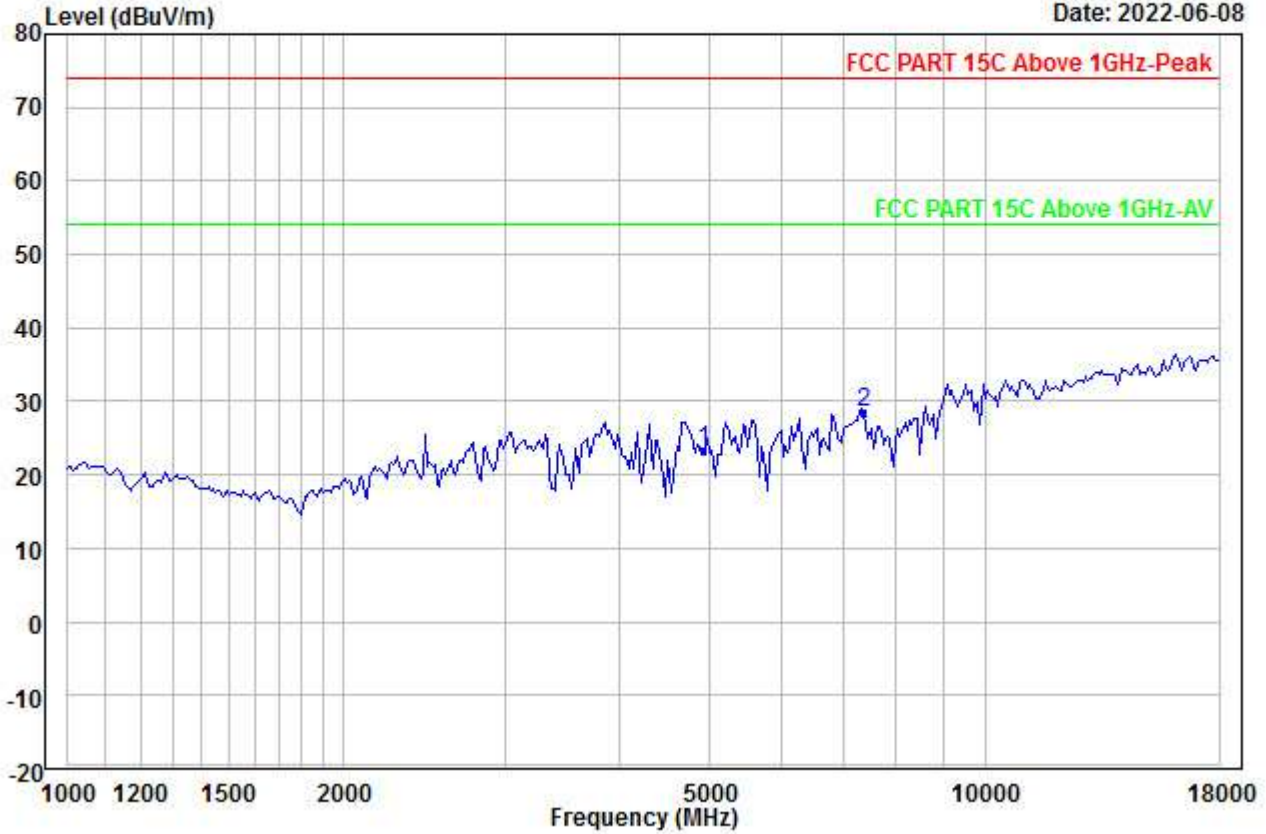


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : B\_ANT1\_2462  
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4924.000	25.70	34.70	46.58	0.00	9.62	23.44	54.00	-30.56	---	---	Aver
2 PP	7386.000	26.69	36.34	46.23	0.00	11.61	28.41	54.00	-25.59	---	---	Aver



File: F:\Test Template\上海ITS\2022\220523032 SA750\A\2.4G\RSE\4\_00015.EMI

Date: 2022-06-08

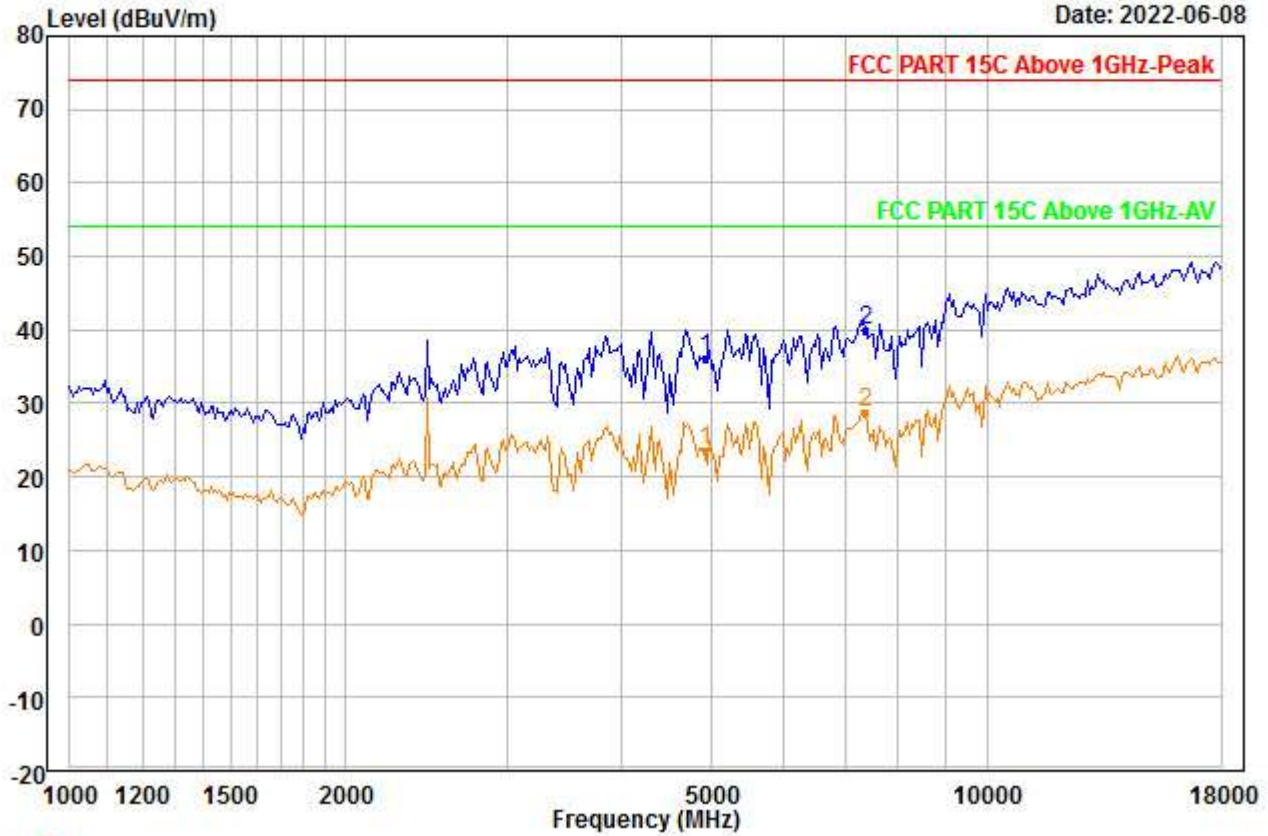


Trace: 1

Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : B\_ANT1\_2462  
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4924.000	38.40	34.70	46.58	0.00	9.62	36.14	74.00	-37.86	---	---	Peak
2 PP	7386.000	38.29	36.34	46.23	0.00	11.61	40.01	74.00	-33.99	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\2.4G\RSE\4\_00016.EMI

Date: 2022-06-08

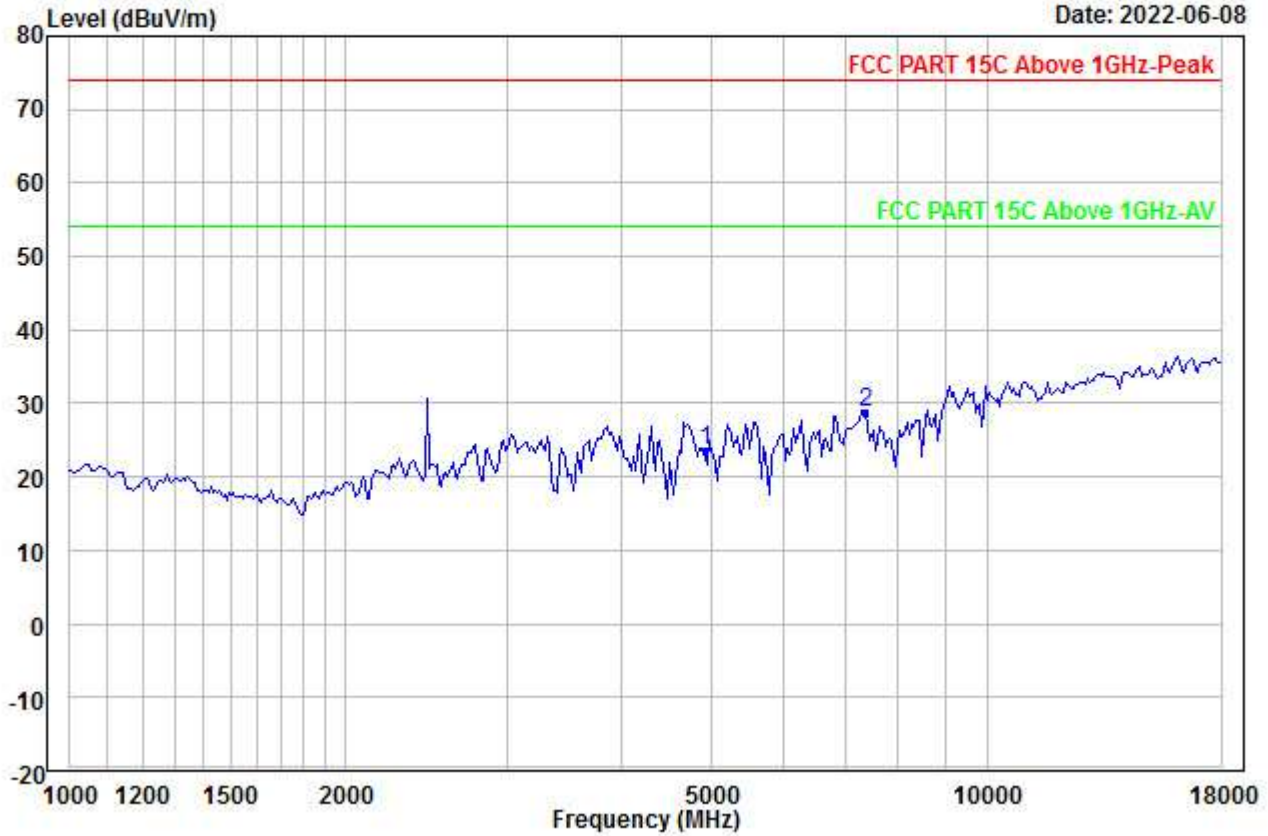


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : B\_ANT1\_2462  
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4924.000	25.79	34.70	46.58	0.00	9.62	23.53	54.00	-30.47	---	---	Aver
2 PP	7386.000	26.96	36.34	46.23	0.00	11.61	28.68	54.00	-25.32	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\2.4G\RSE\4\_00017.EMI

Date: 2022-06-08

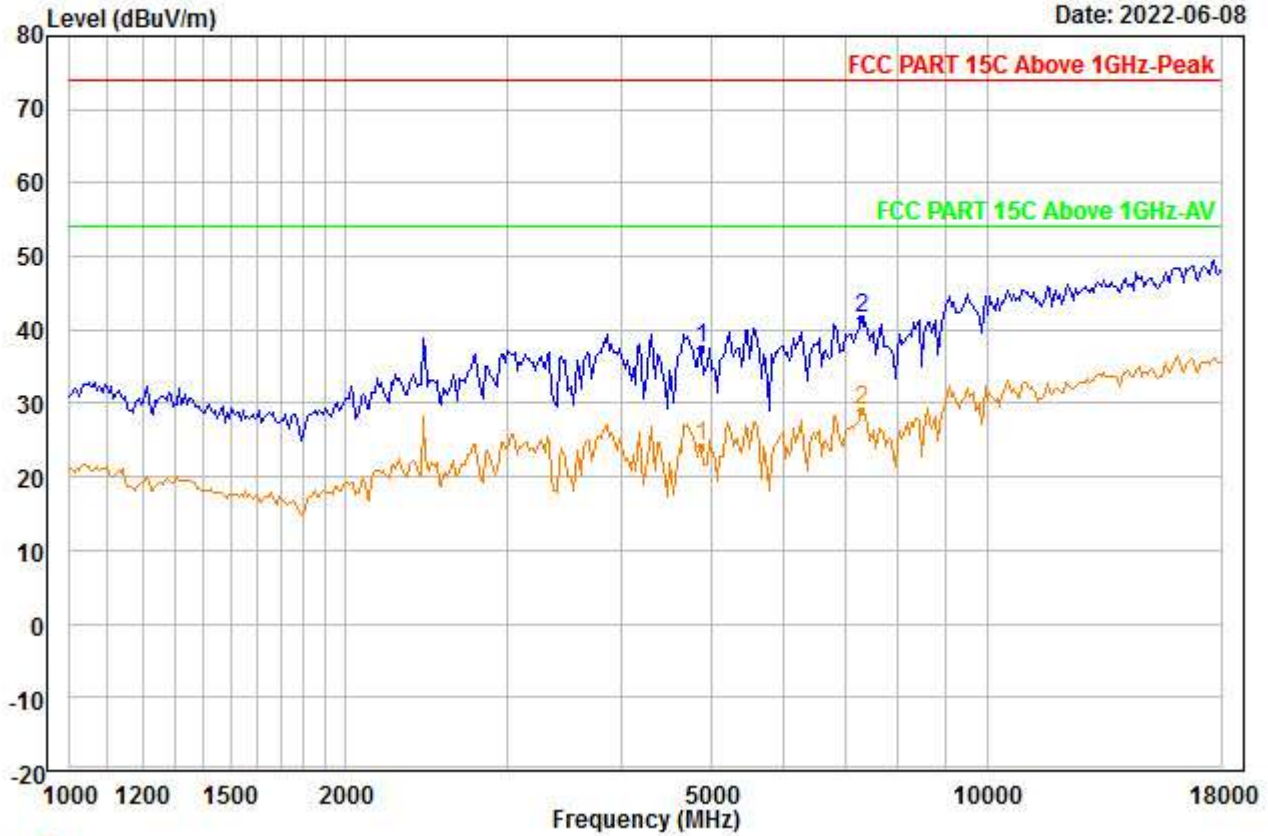

Trace: 1


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : B\_ANT1\_2437  
 Remark :

	Read Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4874.000	39.75	34.70	46.57	0.00	9.58	37.46	74.00	-36.54	---	---	Peak
2 PP	7311.000	39.87	36.24	46.19	0.00	11.55	41.47	74.00	-32.53	---	---	Peak



File: F:\Test Template\上海ITS\2022\220523032 SA750\A\2.4G\RSE\4\_00018.EMI

Date: 2022-06-08

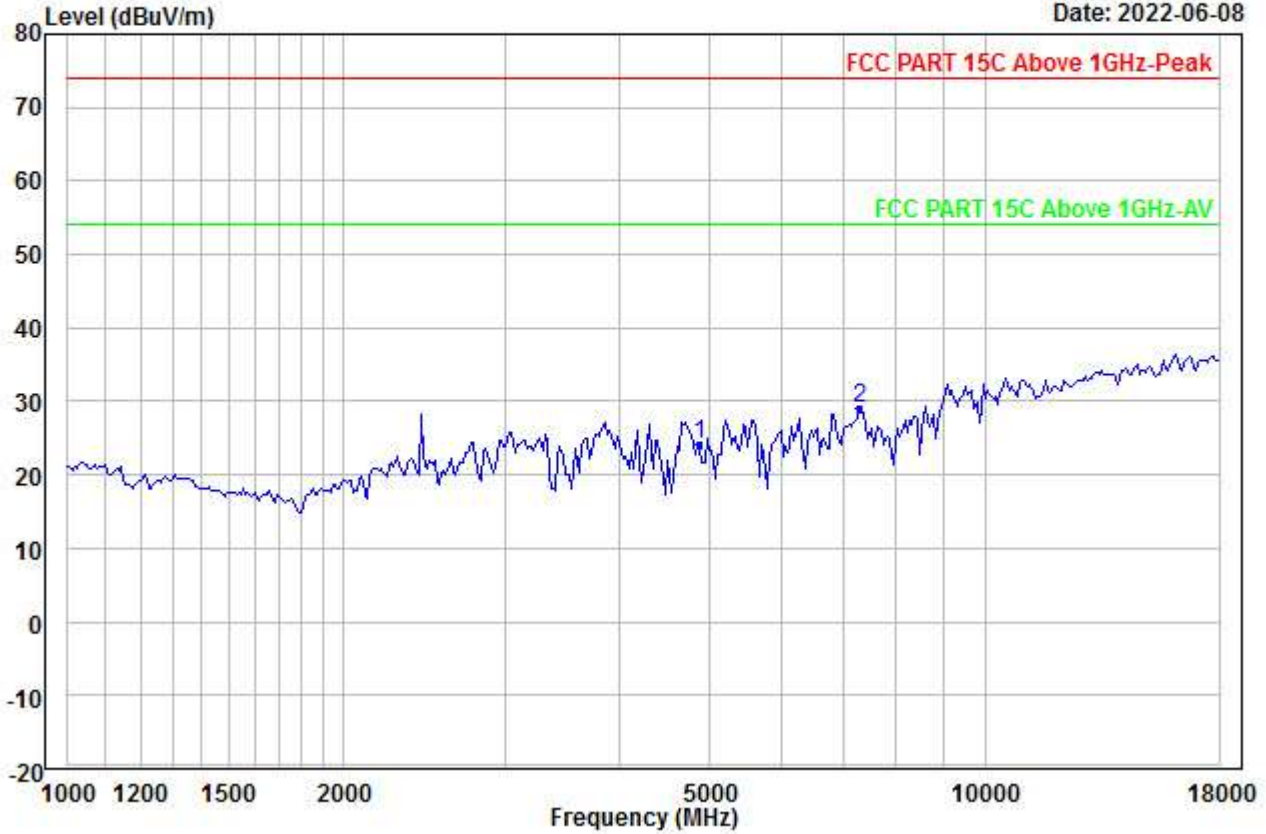


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : B\_ANT1\_2437  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:		
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit					
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg		
1	4874.000	26.36	34.70	46.57	0.00	9.58	24.07	54.00	-29.93	---	---	Aver
2 PP	7311.000	27.38	36.24	46.19	0.00	11.55	28.98	54.00	-25.02	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\2.4G\RSE\4\_00019.EMI

Date: 2022-06-08

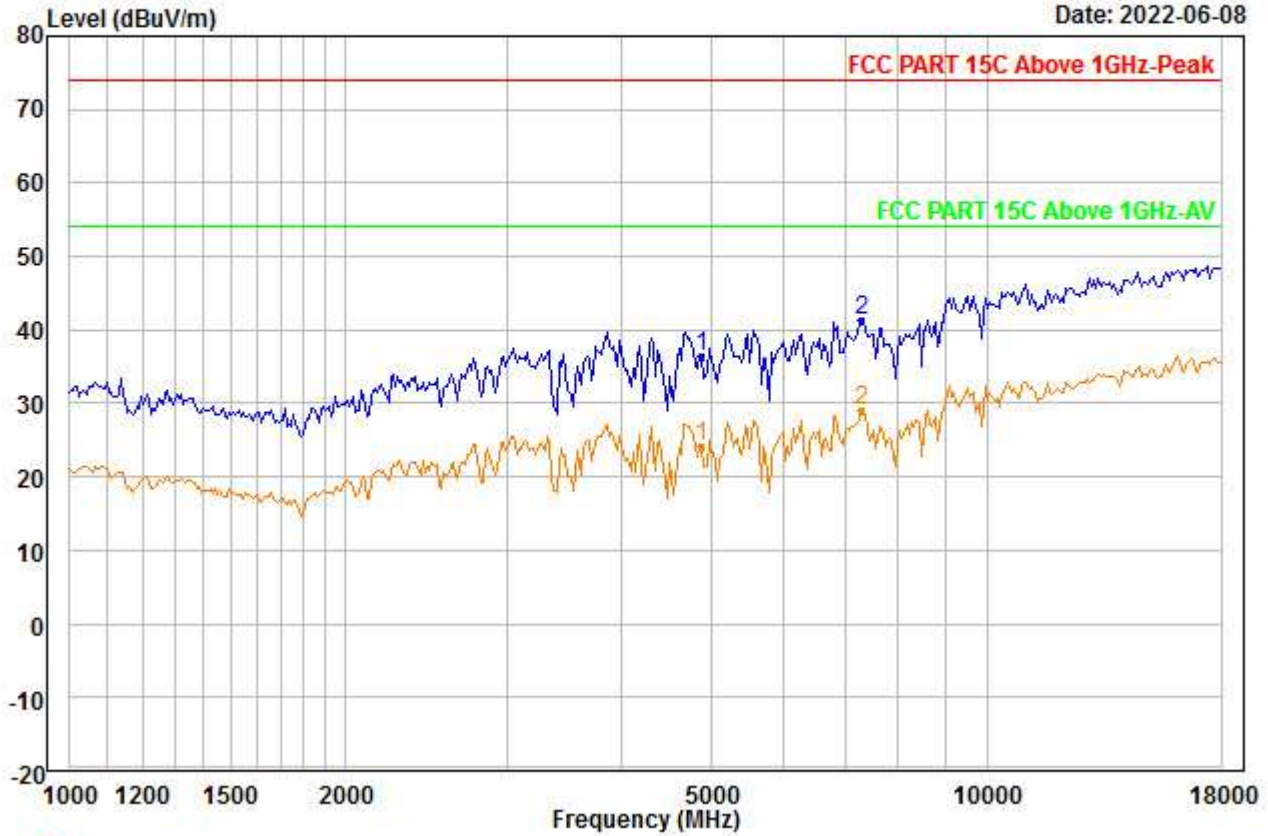


Trace: 1

Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : B\_ANT1\_2437  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:		
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit					
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg		
1	4874.000	38.76	34.70	46.57	0.00	9.58	36.47	74.00	-37.53	---	---	Peak
2 PP	7311.000	39.73	36.24	46.19	0.00	11.55	41.33	74.00	-32.67	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\2.4G\RSE\4\_00020.EMI

Date: 2022-06-08

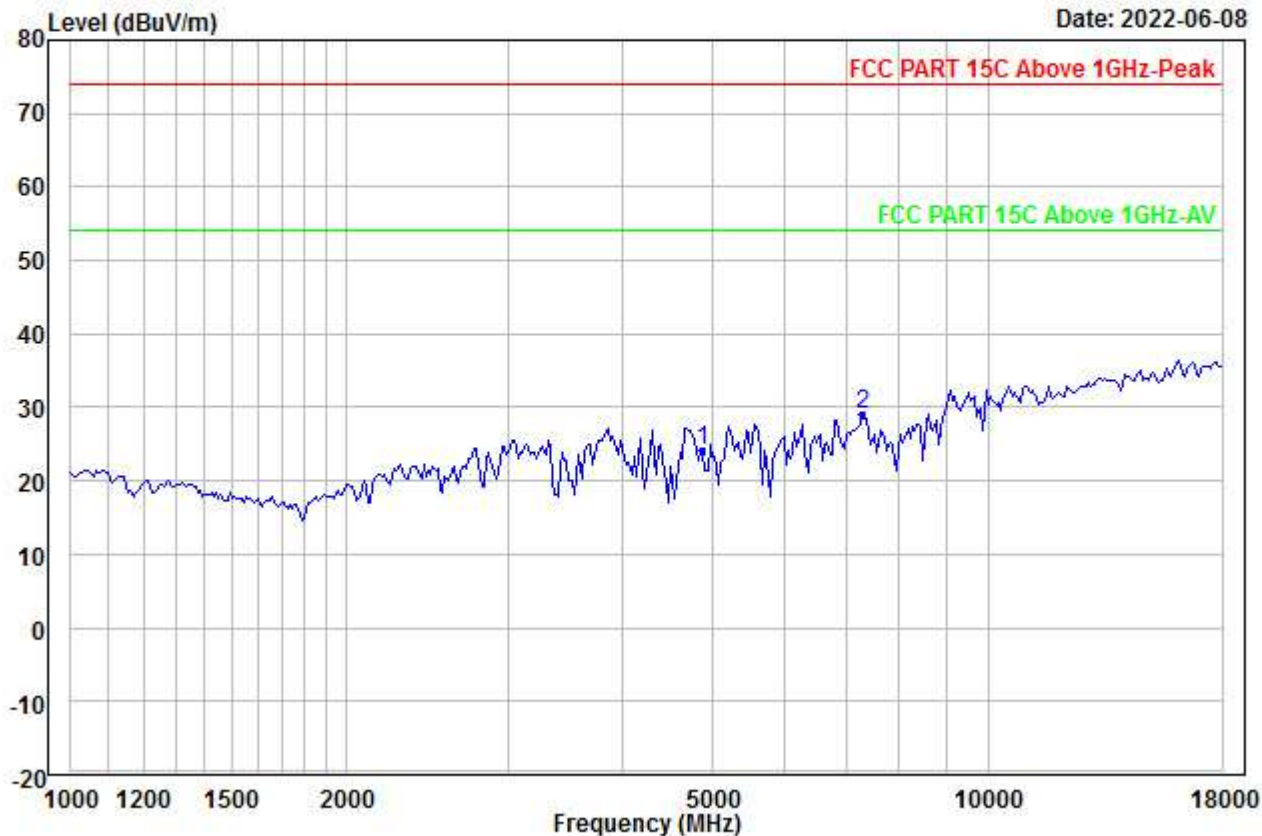


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : B\_ANT1\_2437  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:		
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit					
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg		
1	4874.000	26.36	34.70	46.57	0.00	9.58	24.07	54.00	-29.93	---	---	Aver
2 PP	7311.000	27.38	36.24	46.19	0.00	11.55	28.98	54.00	-25.02	---	---	Aver



File: F:\Test Template\上海ITS\2022\220523032 SA750\A\2.4G\RSE\4\_00021.EMI

Date: 2022-06-08

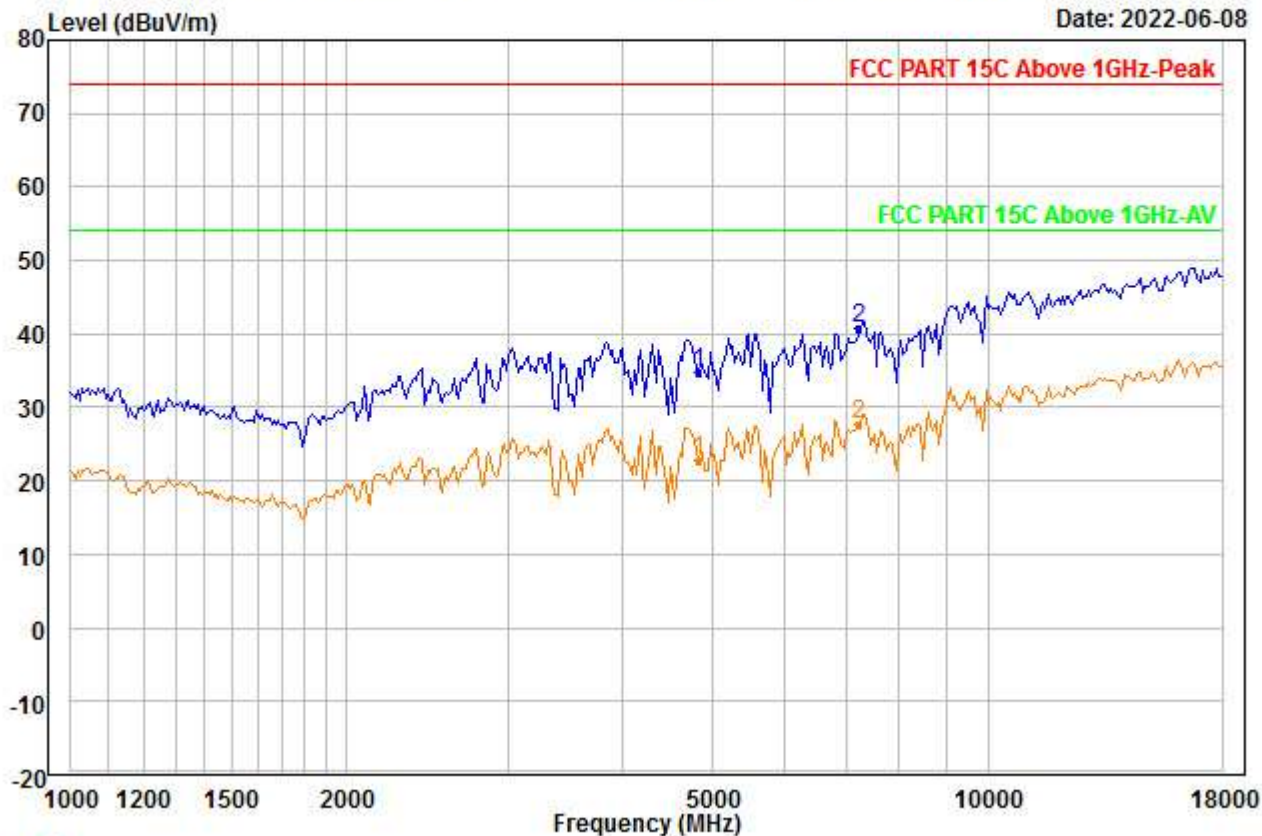


Trace: 1

Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : B\_ANT1\_2412  
 Remark :

	Read Freq	Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4824.000	37.09	34.70	46.56	0.00	9.53	34.76	74.00	-39.24	---	---	Peak
2 PP	7236.000	39.22	36.13	46.14	0.00	11.48	40.69	74.00	-33.31	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\2.4G\RSE\4\_00022.EMI

Date: 2022-06-08

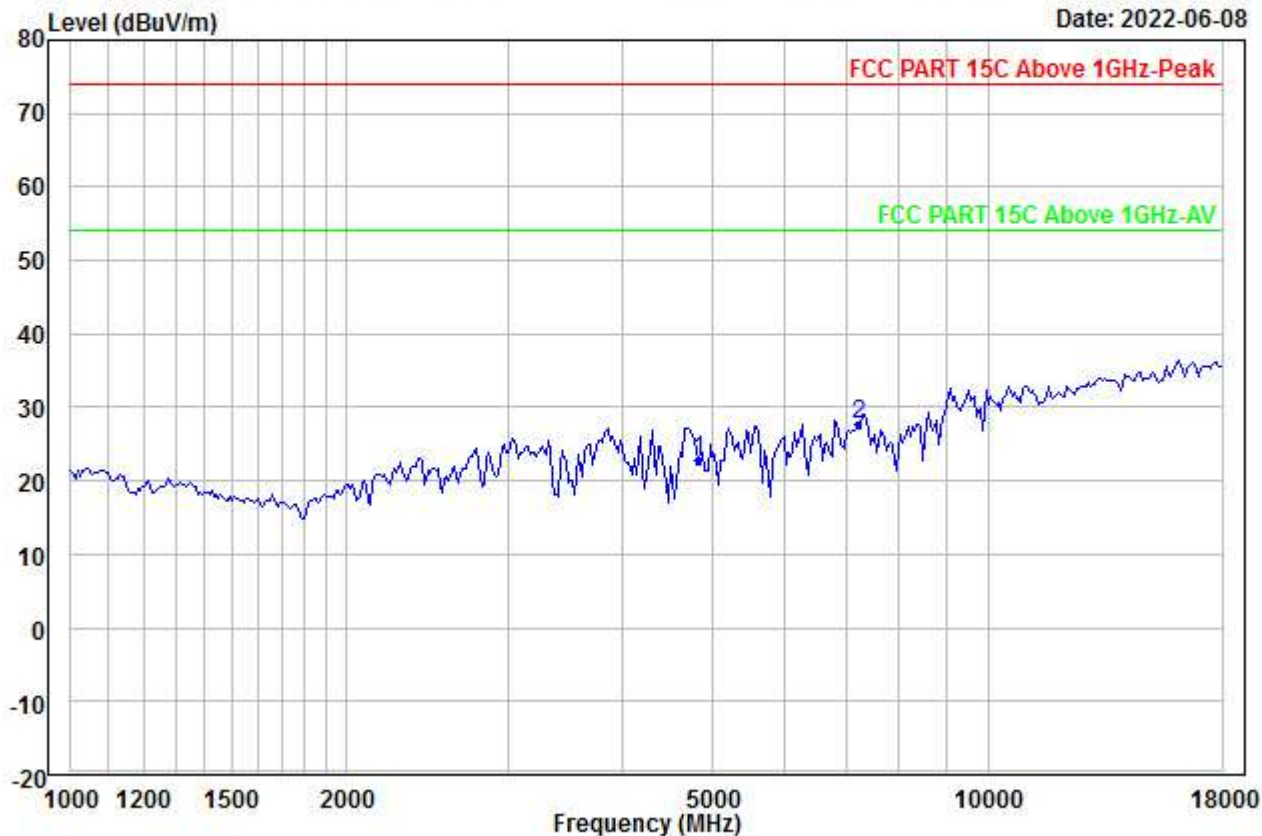


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : B\_ANT1\_2412  
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4824.000	25.11	34.70	46.56	0.00	9.53	22.78	54.00	-31.22	---	---	Aver
2 PP	7236.000	26.26	36.13	46.14	0.00	11.48	27.73	54.00	-26.27	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\2.4G\RSE\4\_00023.EMI

Date: 2022-06-08

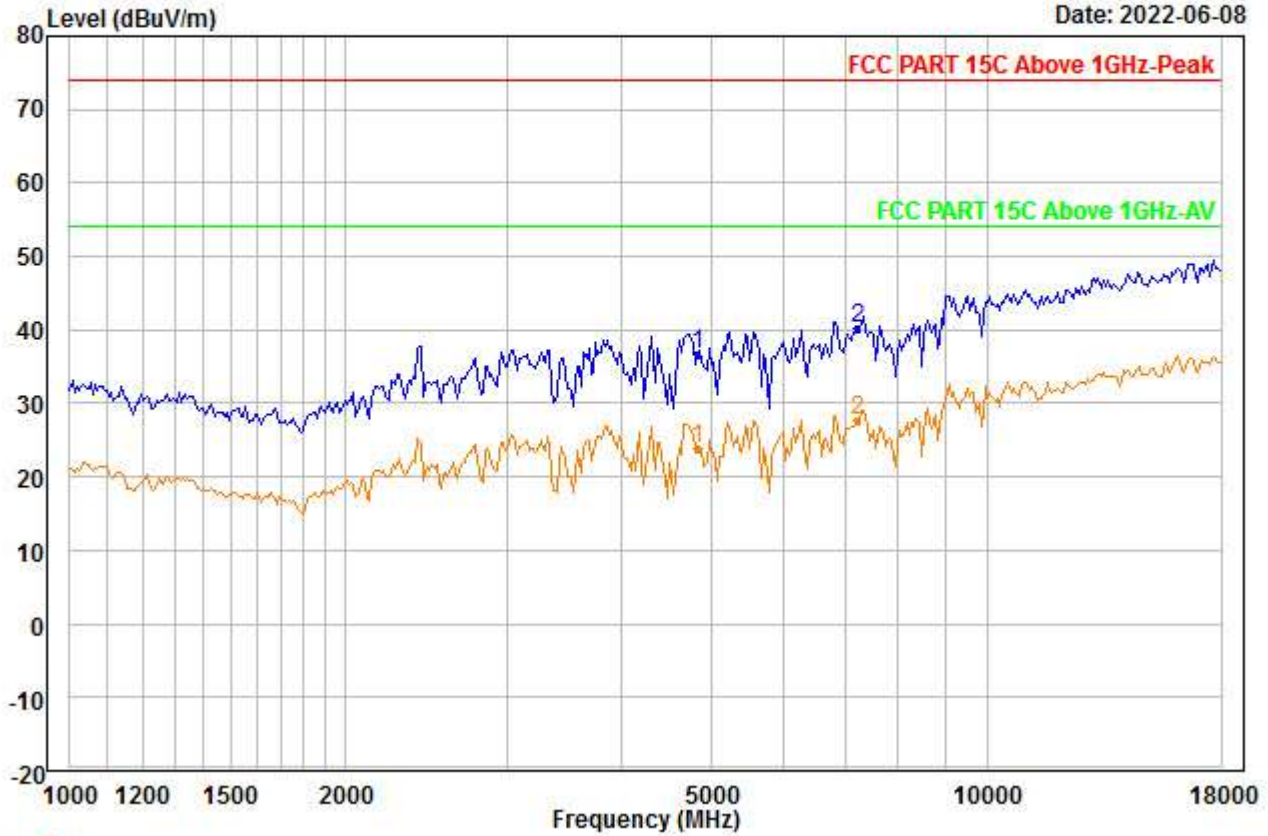

Trace: 1


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : B\_ANT1\_2412  
 Remark :

	Read Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4824.000	38.95	34.70	46.56	0.00	9.53	36.62	74.00	-37.38	---	---	Peak
2 PP	7236.000	38.78	36.13	46.14	0.00	11.48	40.25	74.00	-33.75	---	---	Peak



File: F:\Test Template\上海ITS\2022\220523032 SA750\A\2.4G\RSE\4\_00024.EMI

Date: 2022-06-08

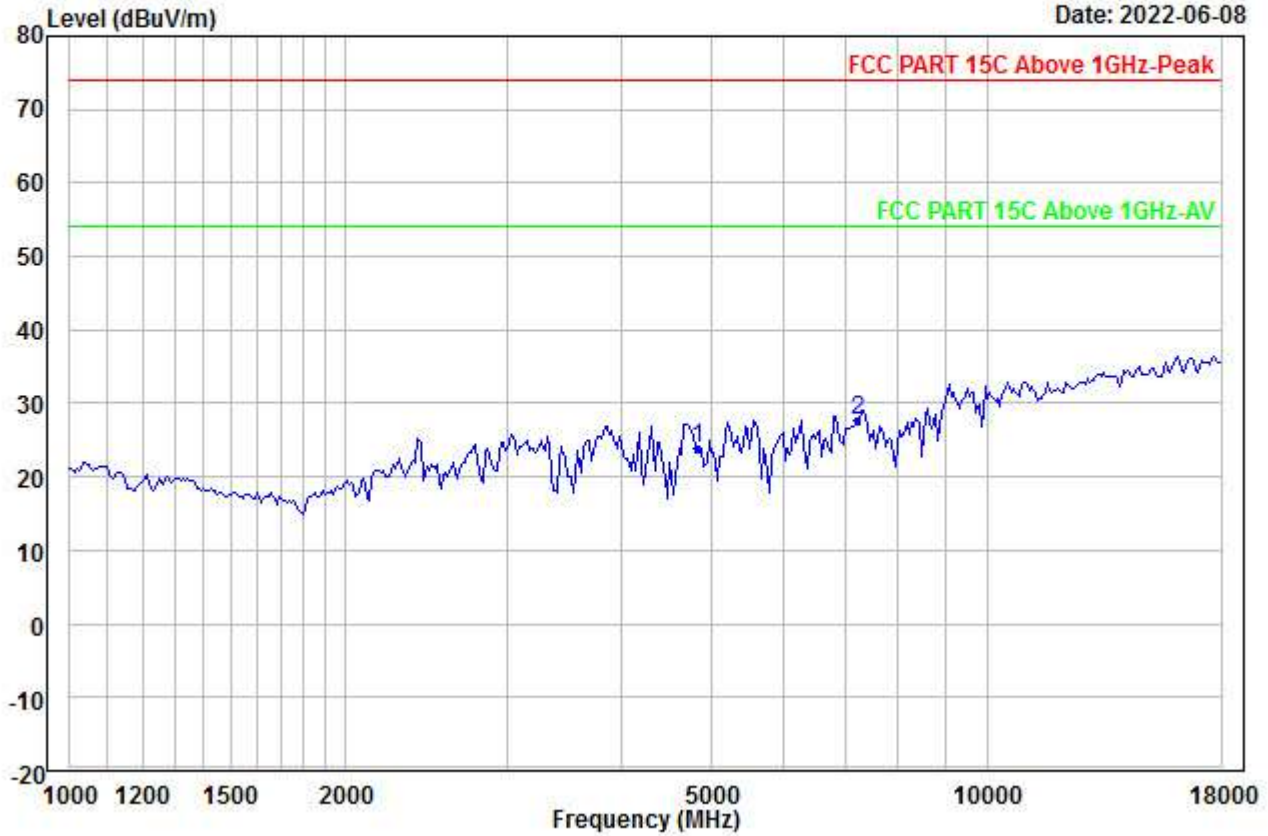


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : B\_ANT1\_2412  
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4824.000	26.11	34.70	46.56	0.00	9.53	23.78	54.00	-30.22	---	---	Aver
2 PP	7236.000	26.12	36.13	46.14	0.00	11.48	27.59	54.00	-26.41	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\2.4G\RSE\4\_00025.EMI

Date: 2022-06-08

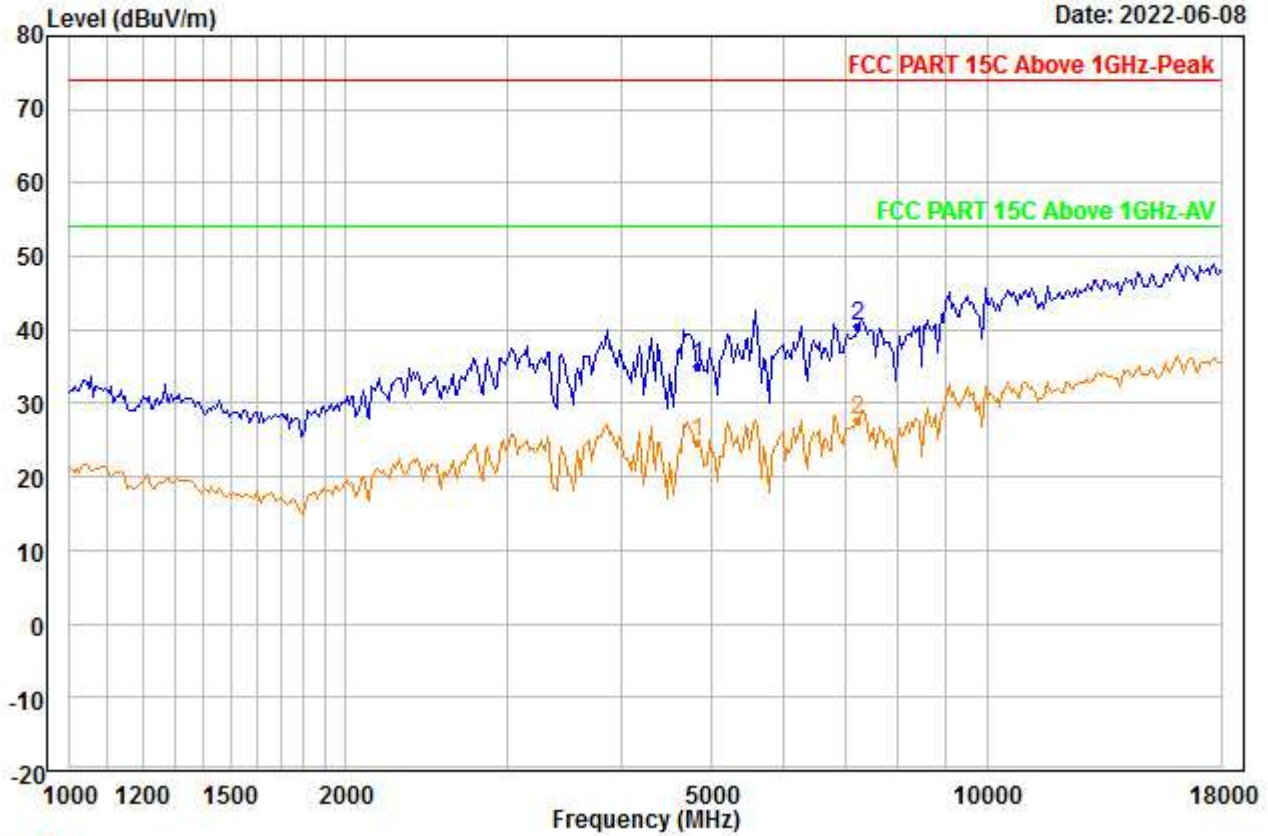


Trace: 1

Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : G\_ANT0\_2412  
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4824.000	37.27	34.70	46.56	0.00	9.53	34.94	74.00	-39.06	---	---	Peak
2 PP	7236.000	39.16	36.13	46.14	0.00	11.48	40.63	74.00	-33.37	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\2.4G\RSE\4\_00026.EMI

Date: 2022-06-08

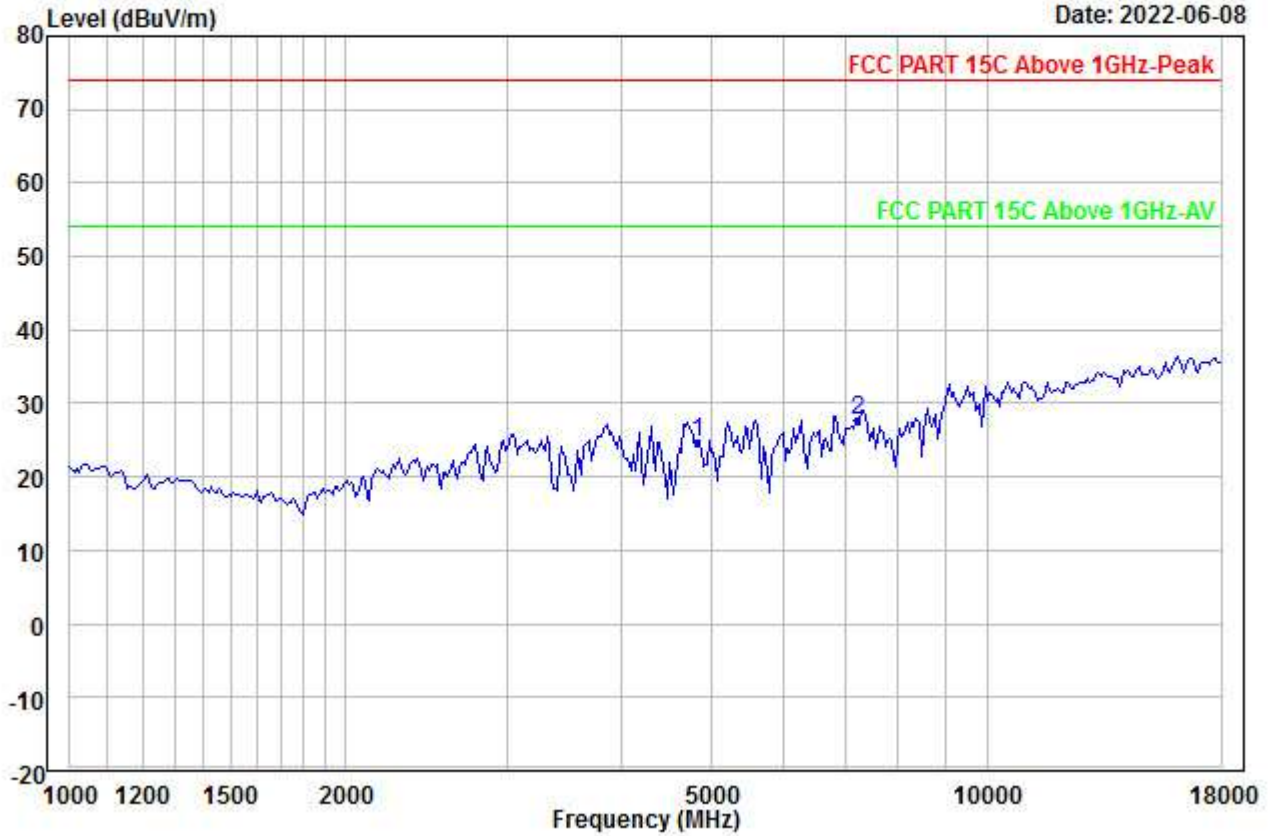


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : G\_ANT0\_2412  
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4824.000	27.11	34.70	46.56	0.00	9.53	24.78	54.00	-29.22	---	---	Aver
2 PP	7236.000	26.19	36.13	46.14	0.00	11.48	27.66	54.00	-26.34	---	---	Aver



File: F:\Test Template\上海ITS\2022\220523032 SA750\A\2.4G\RSE\4\_00027.EMI

Date: 2022-06-08

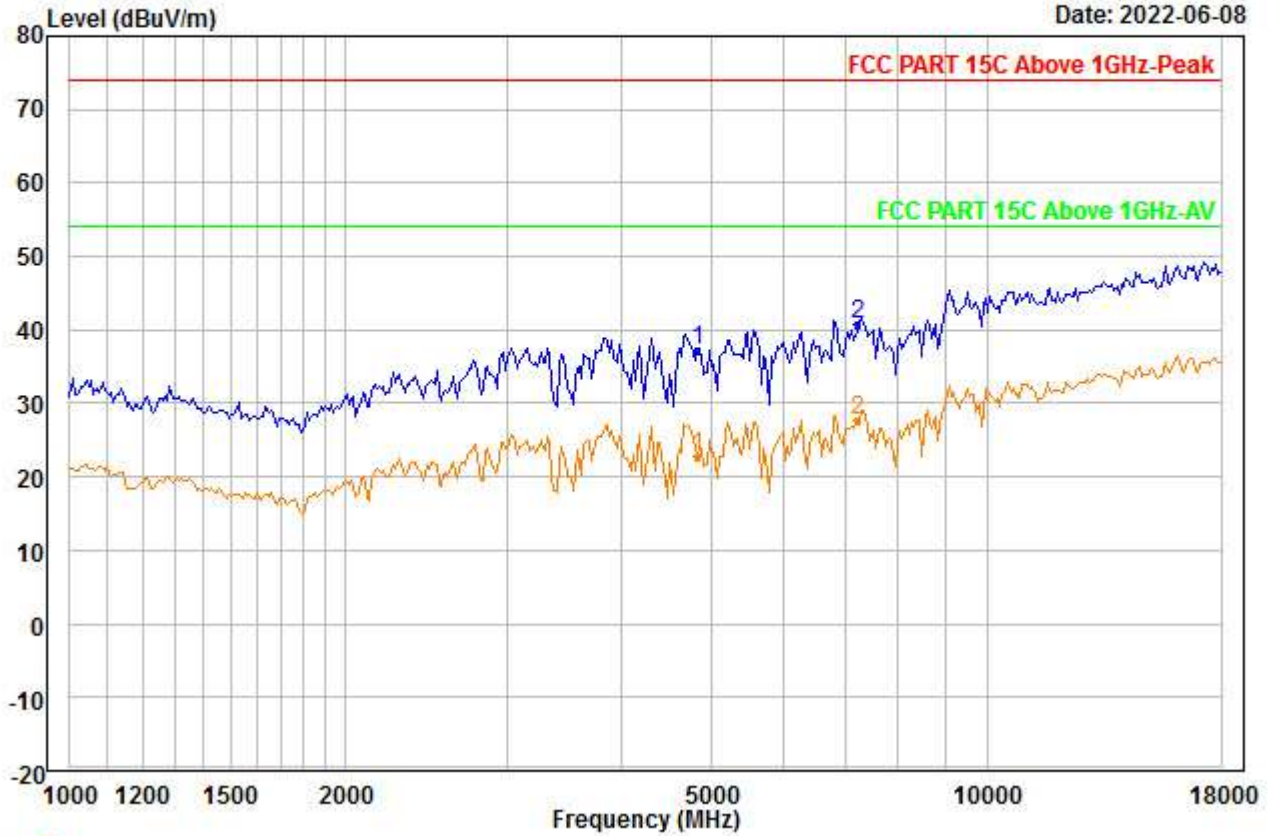


Trace: 1

Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : G\_ANT0\_2412  
 Remark :

	Read Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4824.000	39.58	34.70	46.56	0.00	9.53	37.25	74.00	-36.75	---	---	Peak
2 PP	7236.000	39.39	36.13	46.14	0.00	11.48	40.86	74.00	-33.14	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\2.4G\RSE\4\_00028.EMI

Date: 2022-06-08

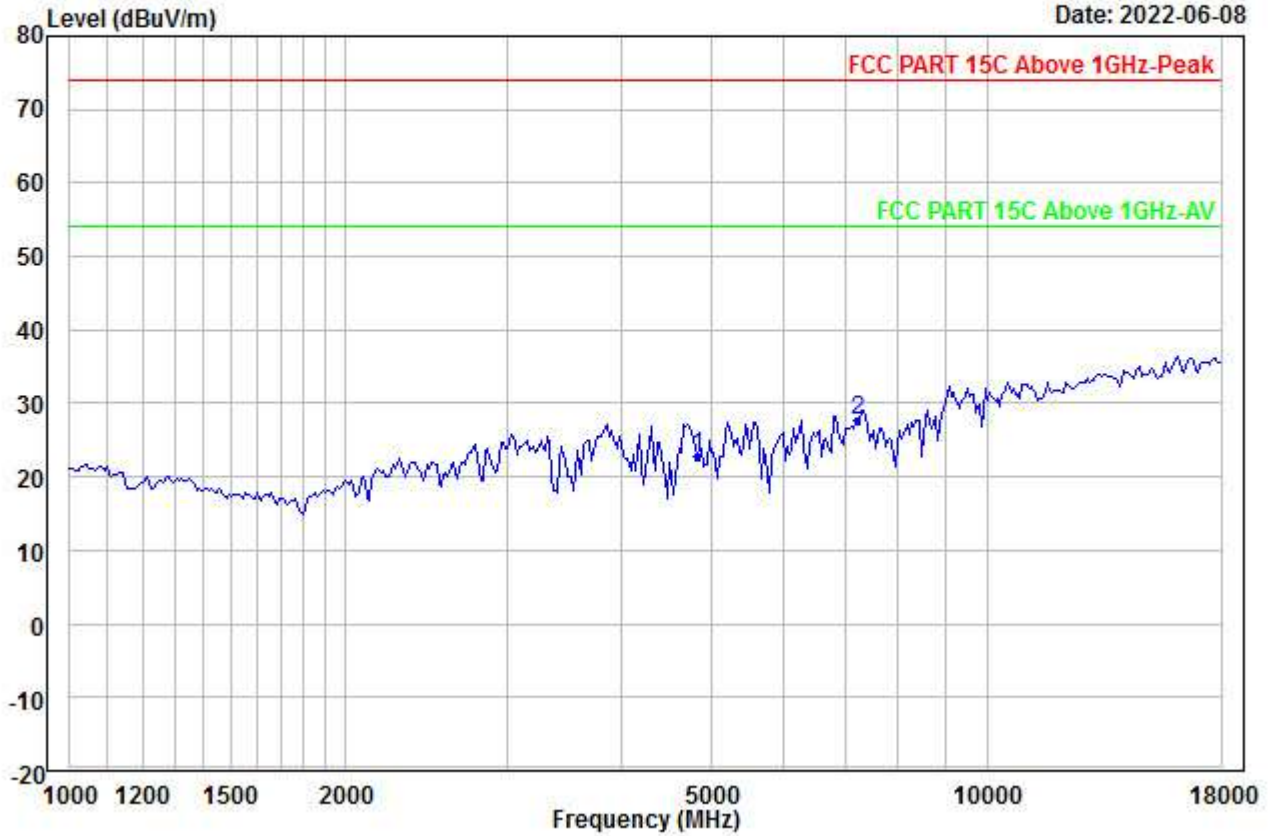


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : G\_ANT0\_2412  
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4824.000	25.11	34.70	46.56	0.00	9.53	22.78	54.00	-31.22	---	---	Aver
2 PP	7236.000	26.12	36.13	46.14	0.00	11.48	27.59	54.00	-26.41	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\2.4G\RSE\4\_00029.EMI

Date: 2022-06-08

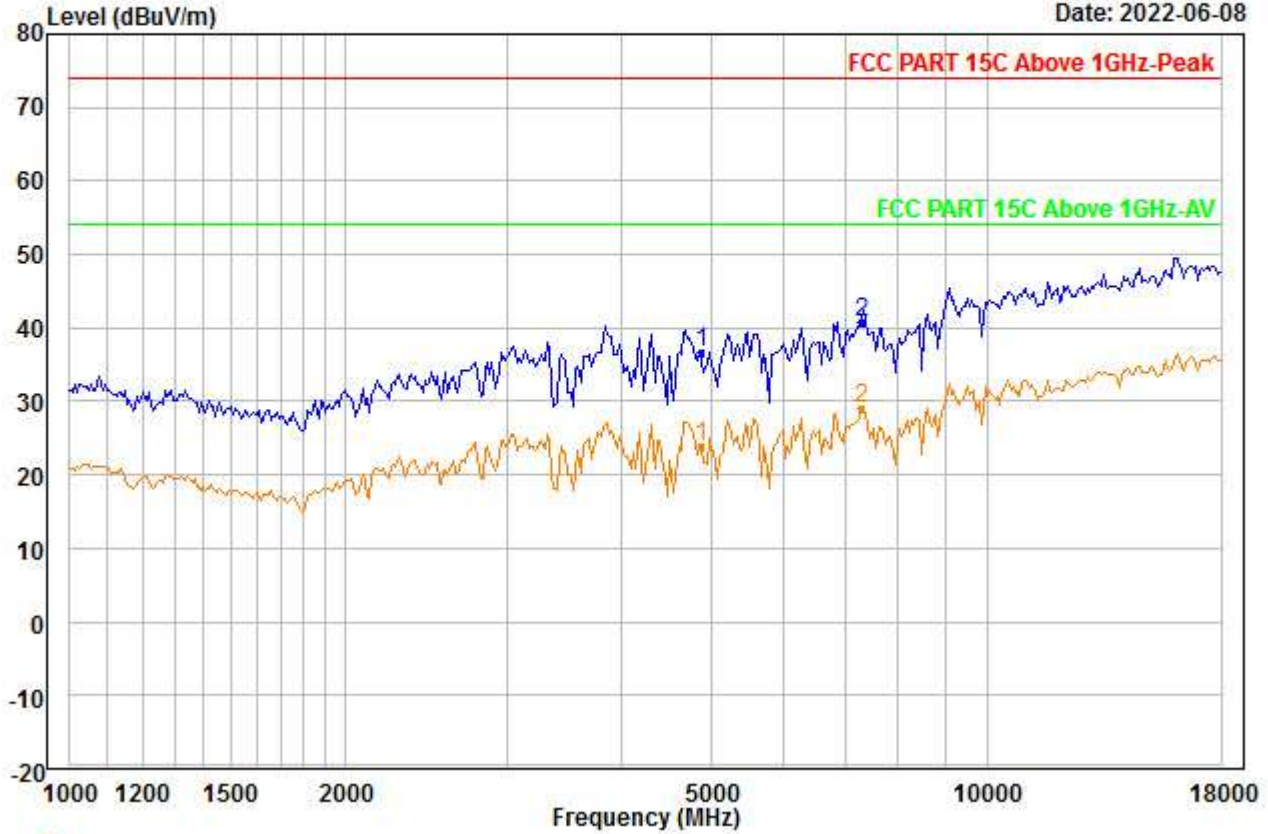


Trace: 1  
 Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : G\_ANT0\_2437  
 Remark :

	Read Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4874.000	39.07	34.70	46.57	0.00	9.58	36.78	74.00	-37.22	---	---	Peak
2 PP	7311.000	39.08	36.24	46.19	0.00	11.55	40.68	74.00	-33.32	---	---	Peak



File: F:\Test Template\上海ITS\2022\220523032 SA750\A\2.4G\RSE\4\_00030.EMI

Date: 2022-06-08

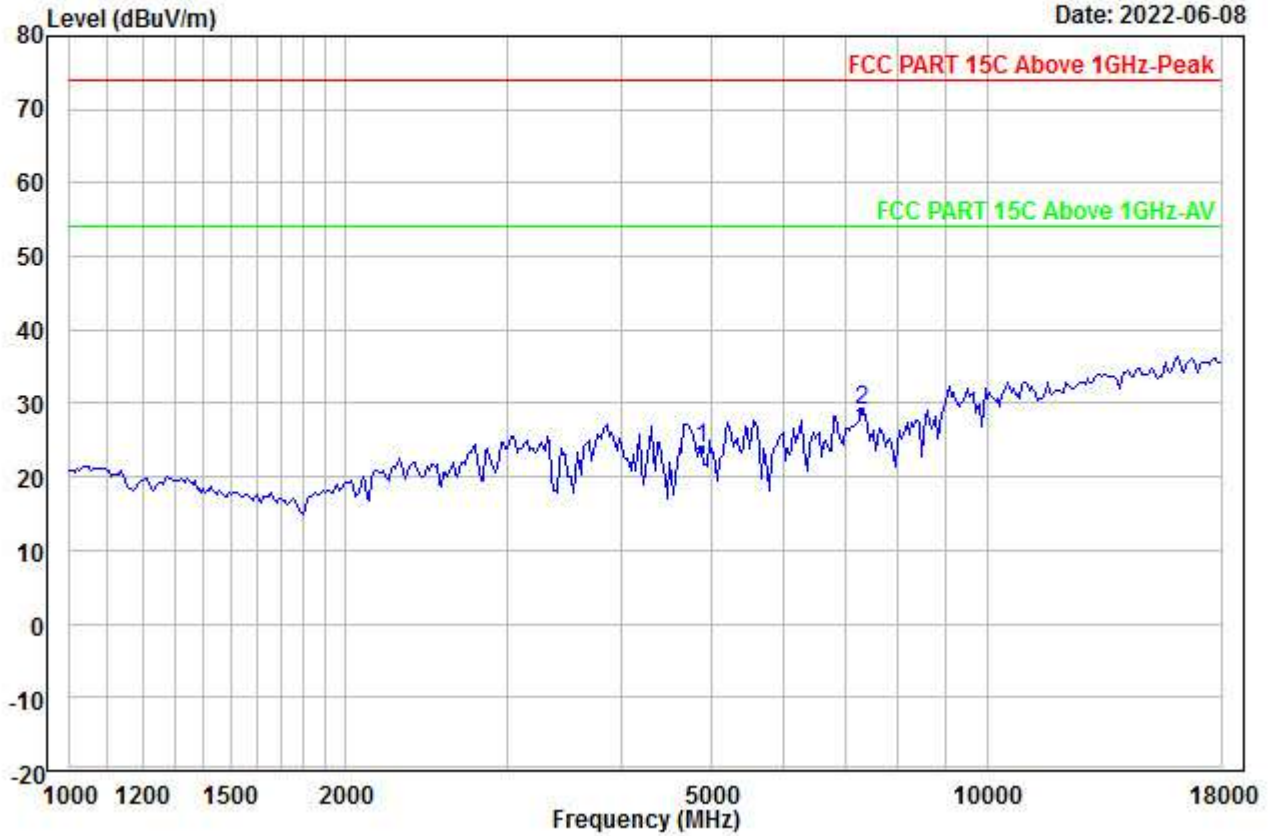


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : G\_ANT0\_2437  
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4874.000	26.29	34.70	46.57	0.00	9.58	24.00	54.00	-30.00	---	---	Aver
2 PP	7311.000	27.32	36.24	46.19	0.00	11.55	28.92	54.00	-25.08	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\2.4G\RSE\4\_00031.EMI

Date: 2022-06-08

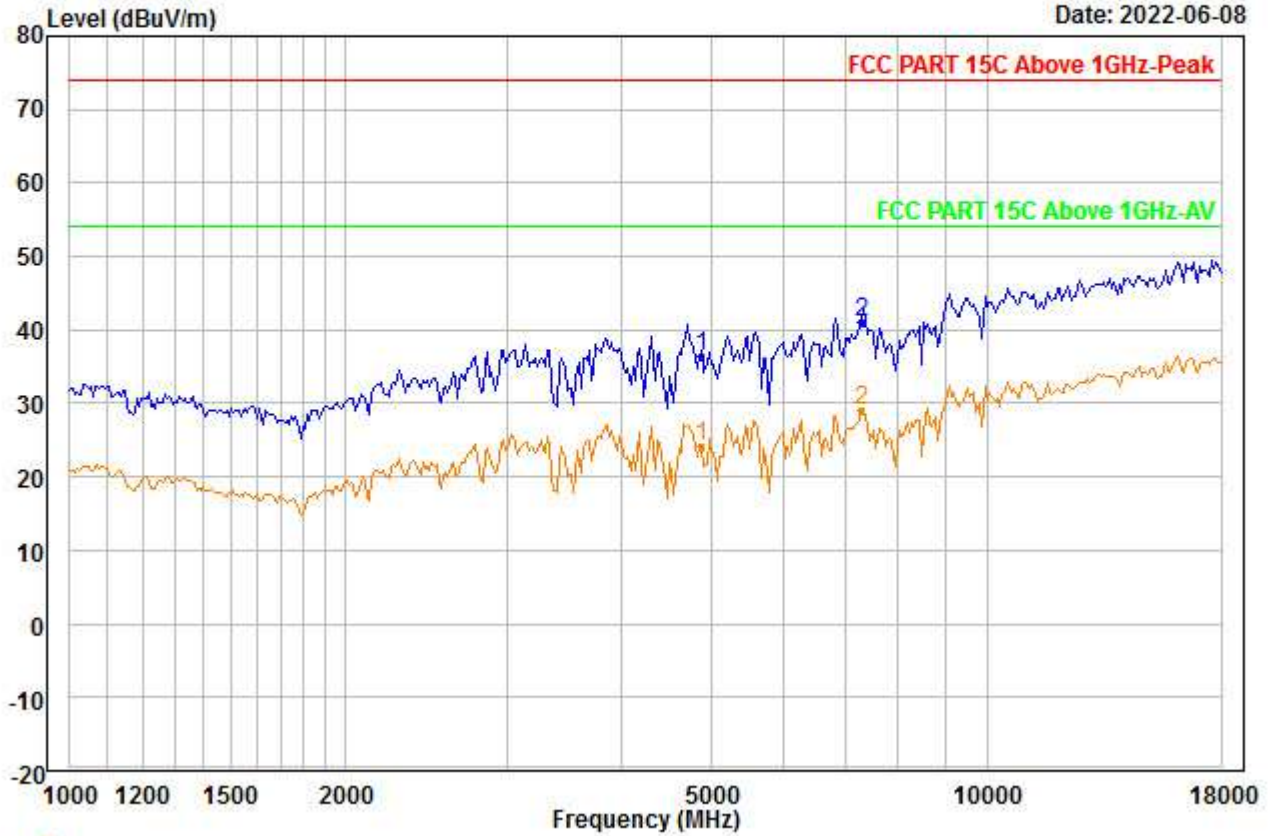


Trace: 1

Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : G\_ANT0\_2437  
 Remark :

	Read Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4874.000	38.81	34.70	46.57	0.00	9.58	36.52	74.00	-37.48	---	---	Peak
2 PP	7311.000	39.38	36.24	46.19	0.00	11.55	40.98	74.00	-33.02	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\2.4G\RSE\4\_00032.EMI

Date: 2022-06-08

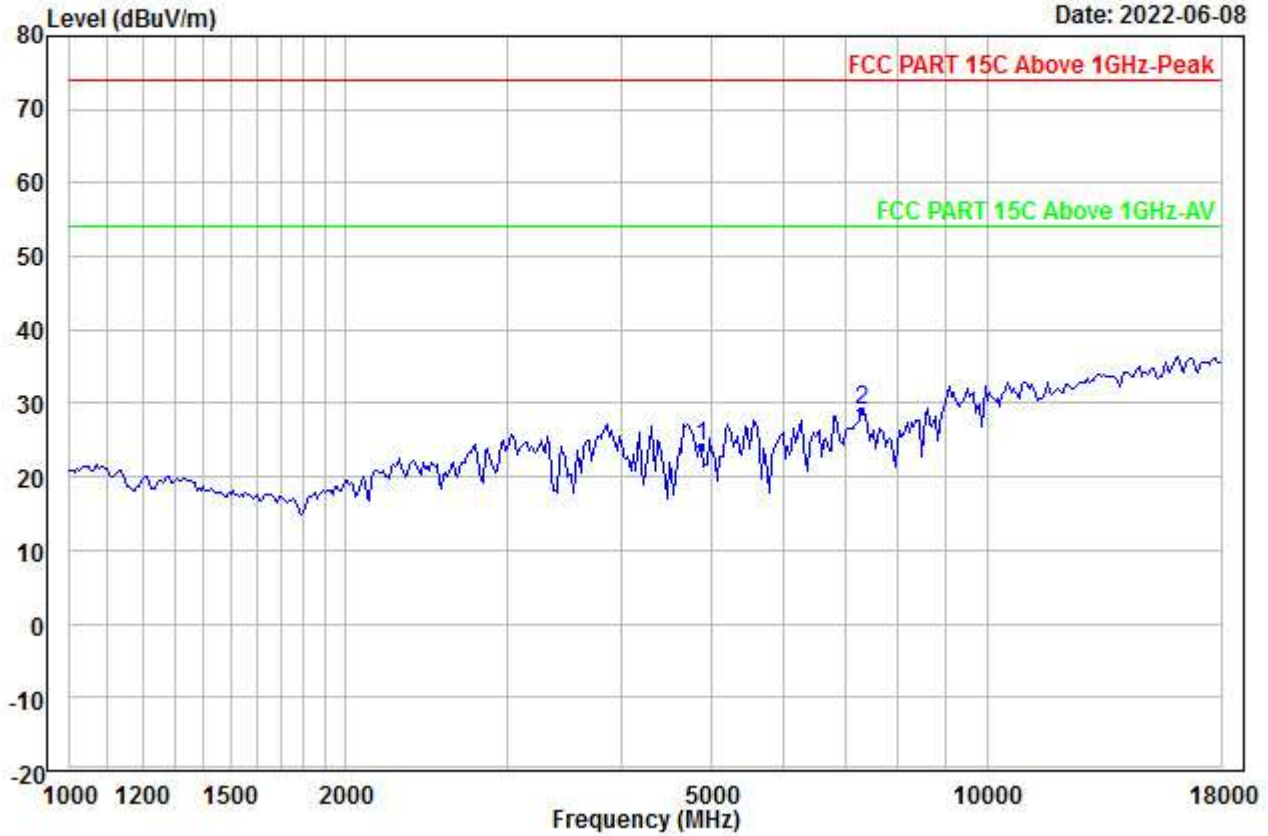


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : G\_ANT0\_2437  
 Remark :

	Read Freq	Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4874.000	26.43	34.70	46.57	0.00	9.58	24.14	54.00	-29.86	---	---	Aver
2 PP	7311.000	27.38	36.24	46.19	0.00	11.55	28.98	54.00	-25.02	---	---	Aver



File: F:\Test Template\上海ITS\2022\220523032 SA750\A\2.4G\RSE\4\_00033.EMI

Date: 2022-06-08

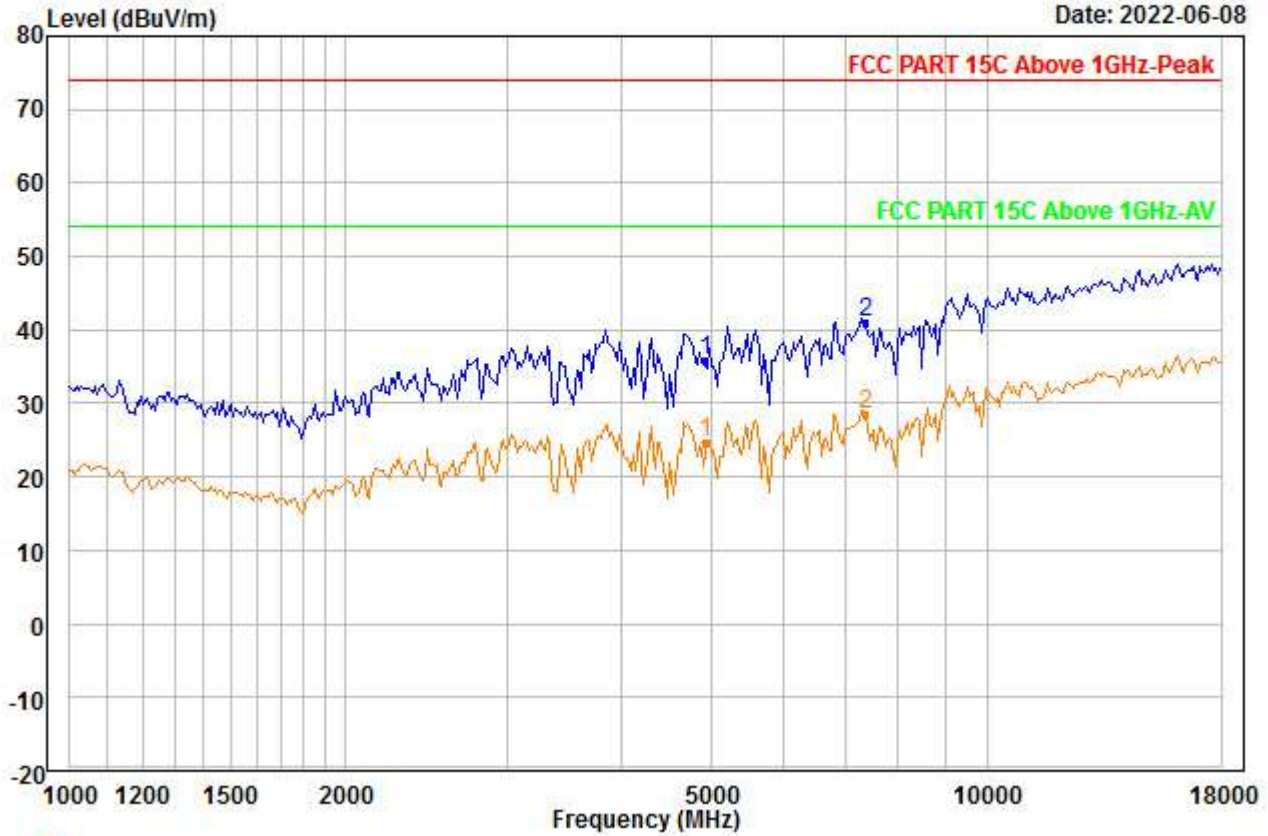


Trace: 1

Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : G\_ANT0\_2462  
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4924.000	38.16	34.70	46.58	0.00	9.62	35.90	74.00	-38.10	---	---	Peak
2 PP	7386.000	39.38	36.34	46.23	0.00	11.61	41.10	74.00	-32.90	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\2.4G\RSE\4\_00034.EMI

Date: 2022-06-08

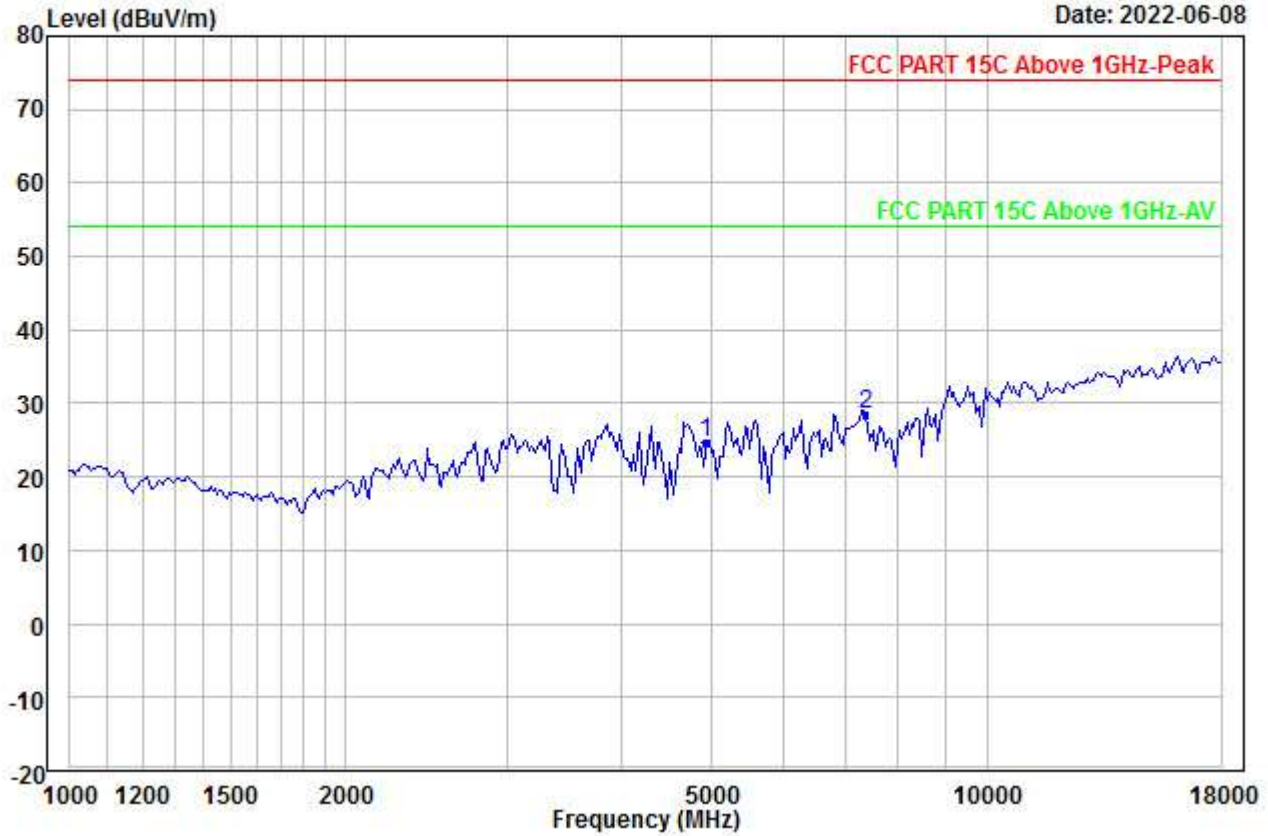


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : G\_ANT0\_2462  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:		
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit					
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg		
1	4934.000	26.91	34.70	46.59	0.00	9.62	24.64	54.00	-29.36	---	---	Aver
2 PP	7386.000	26.89	36.34	46.23	0.00	11.61	28.61	54.00	-25.39	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\2.4G\RSE\4\_00035.EMI

Date: 2022-06-08

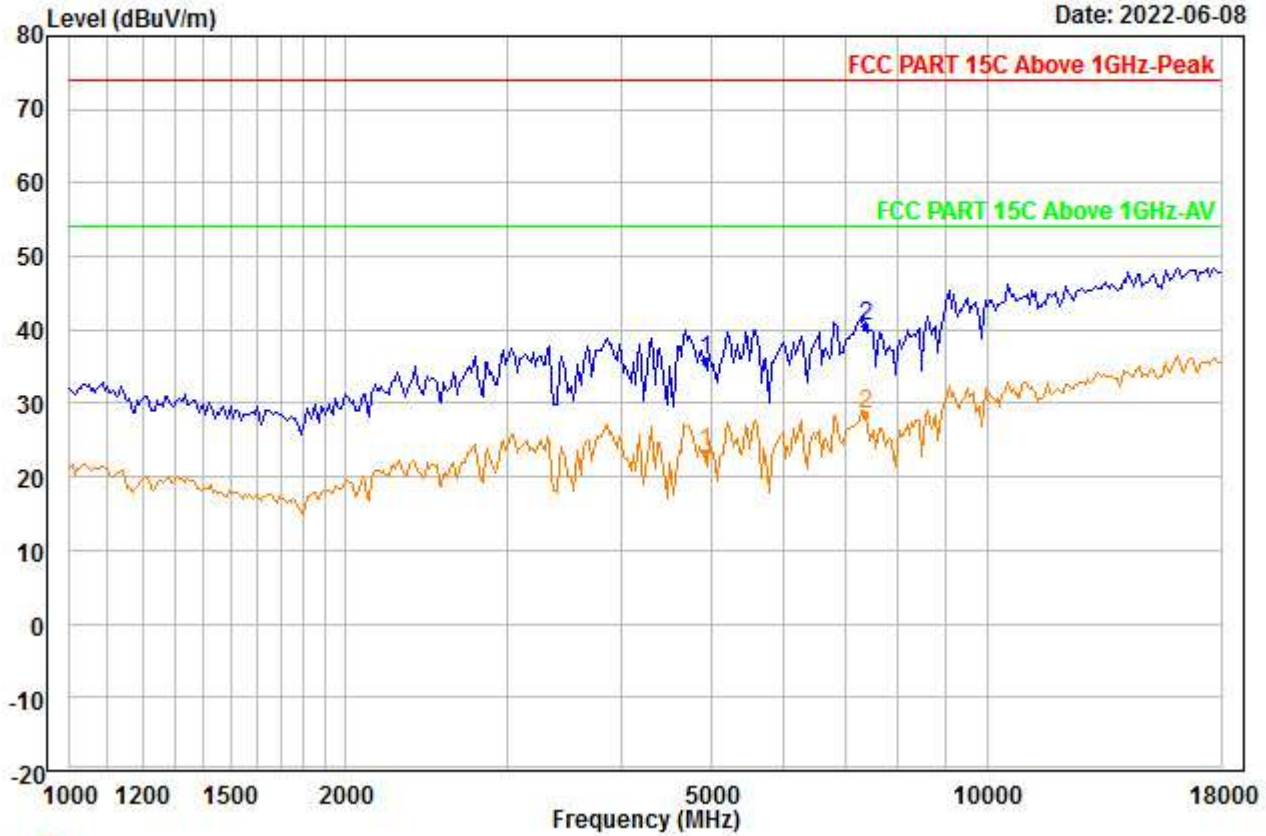

Trace: 1


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : G\_ANT0\_2462  
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4924.000	38.24	34.70	46.58	0.00	9.62	35.98	74.00	-38.02	---	---	Peak
2 PP	7386.000	38.69	36.34	46.23	0.00	11.61	40.41	74.00	-33.59	---	---	Peak



File: F:\Test Template\上海ITS\2022\220523032 SA750\A\2.4G\RSE\4\_00036.EMI

Date: 2022-06-08

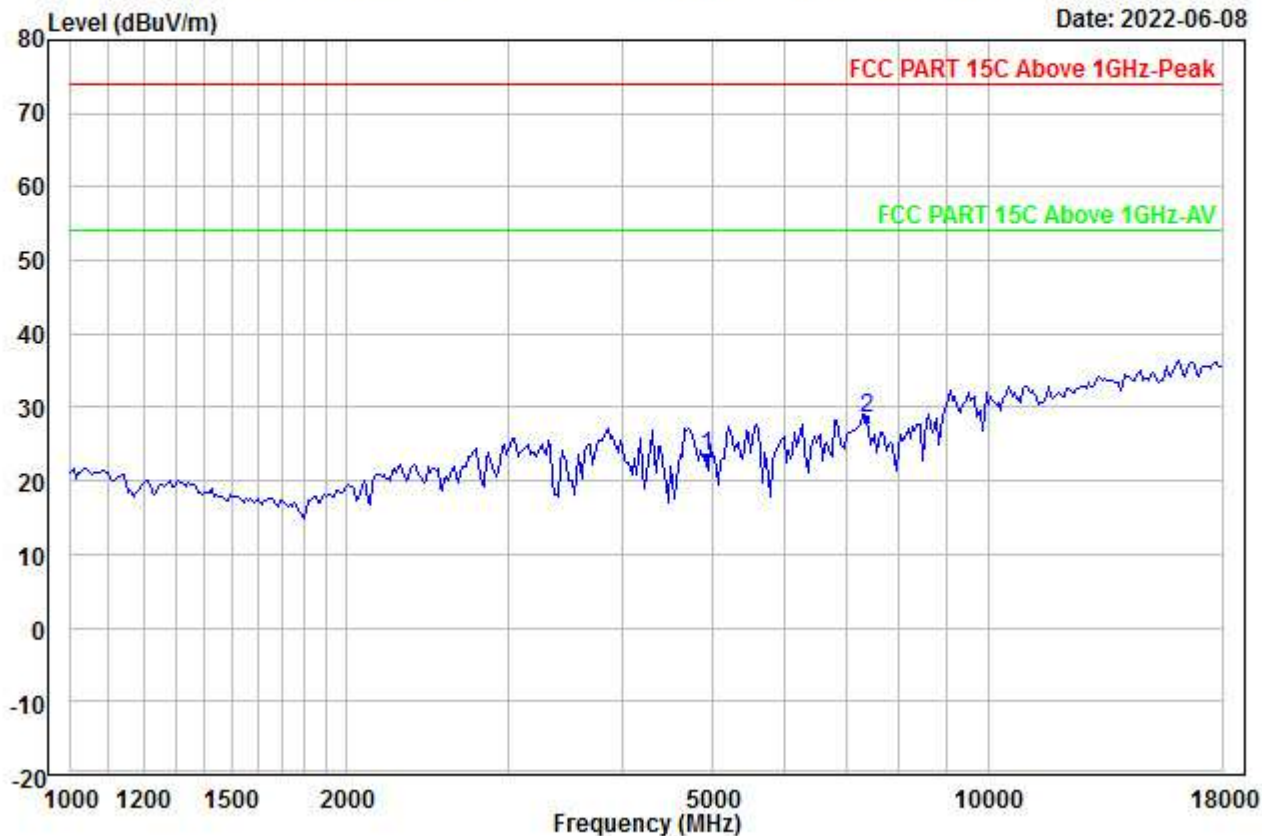


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : G\_ANT0\_2462  
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4924.000	25.70	34.70	46.58	0.00	9.62	23.44	54.00	-30.56	---	---	Aver
2 PP	7386.000	26.76	36.34	46.23	0.00	11.61	28.48	54.00	-25.52	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\2.4G\RSE\4\_00037.EMI

Date: 2022-06-08

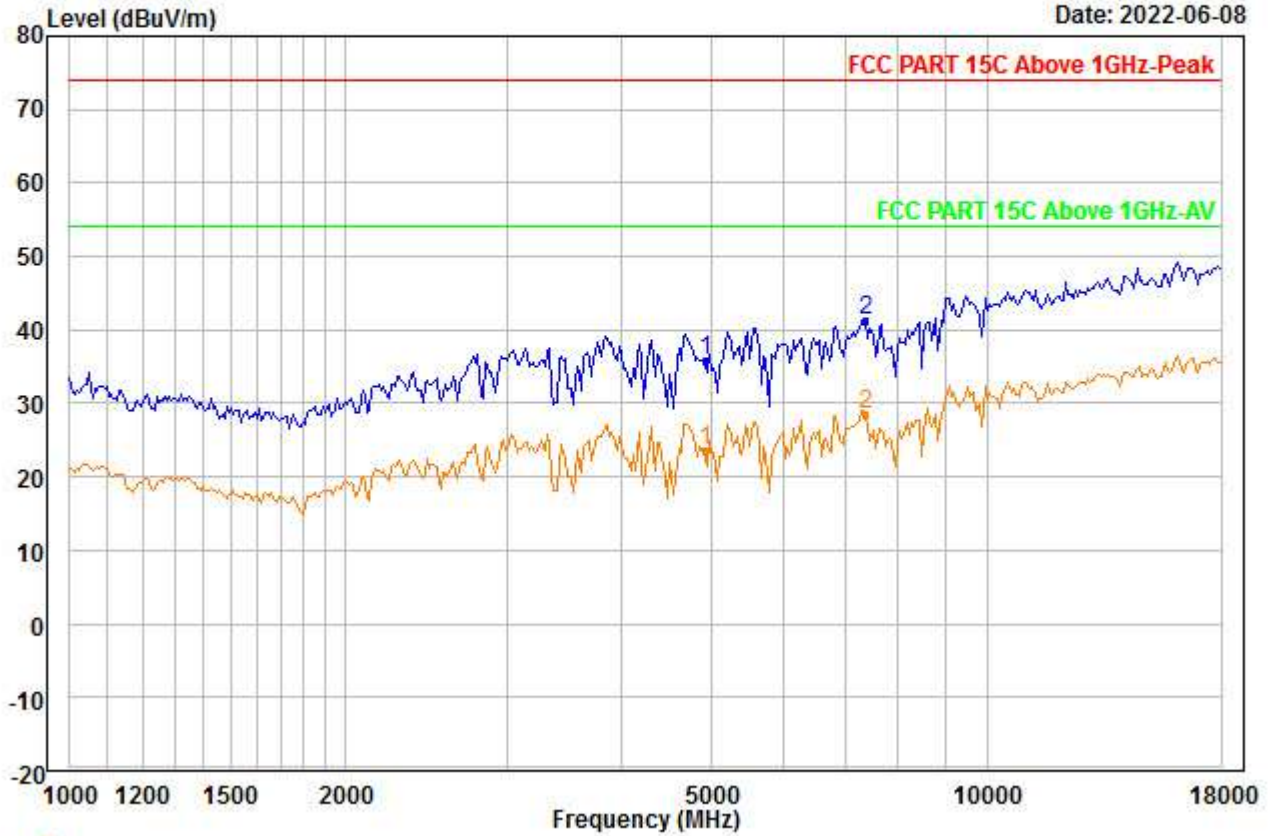


Trace: 1

Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : G\_ANT1\_2462  
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4924.000	38.05	34.70	46.58	0.00	9.62	35.79	74.00	-38.21	---	---	Peak
2 PP	7386.000	39.71	36.34	46.23	0.00	11.61	41.43	74.00	-32.57	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\2.4G\RSE\4\_00038.EMI

Date: 2022-06-08

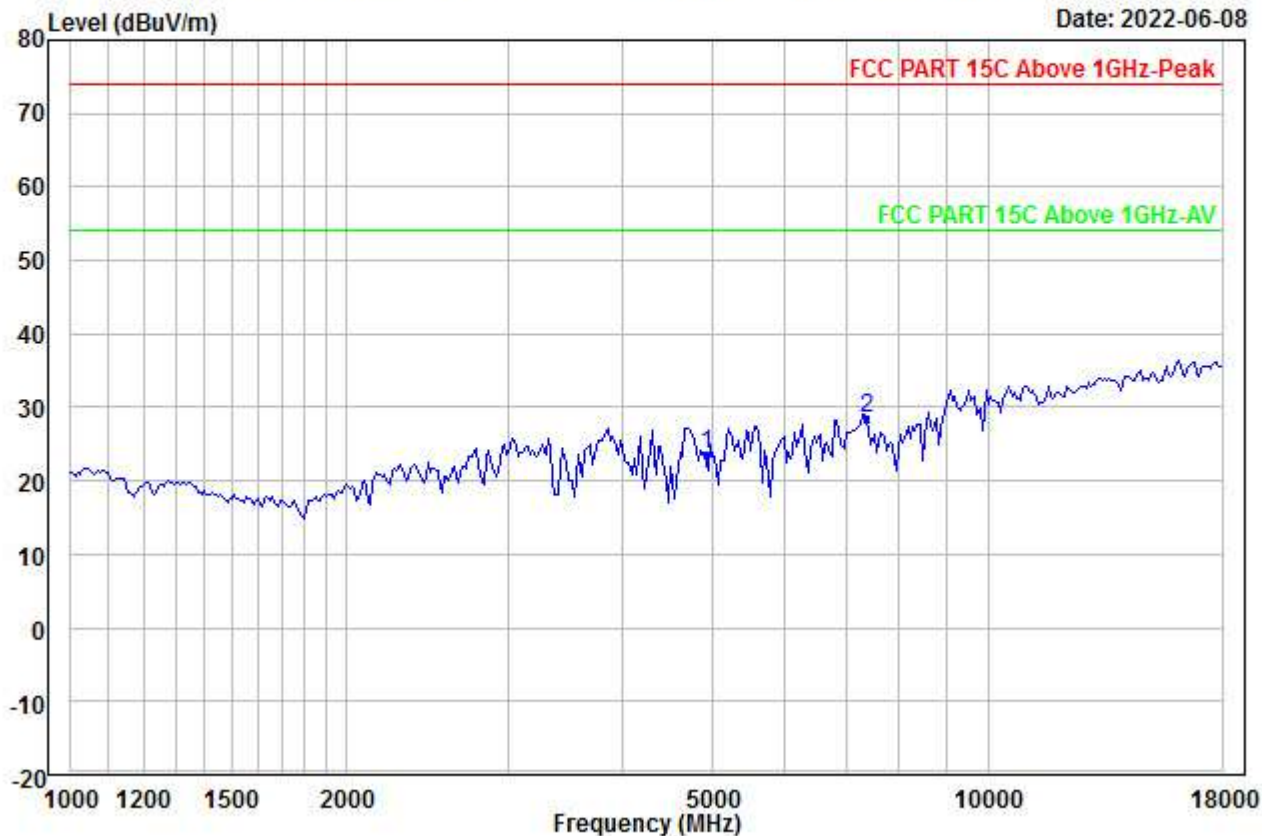


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : G\_ANT1\_2462  
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4924.000	25.79	34.70	46.58	0.00	9.62	23.53	54.00	-30.47	---	---	Aver
2 PP	7386.000	26.83	36.34	46.23	0.00	11.61	28.55	54.00	-25.45	---	---	Aver



File: F:\Test Template\上海ITS\2022\220523032 SA750\A\2.4G\RSE\4\_00039.EMI

Date: 2022-06-08

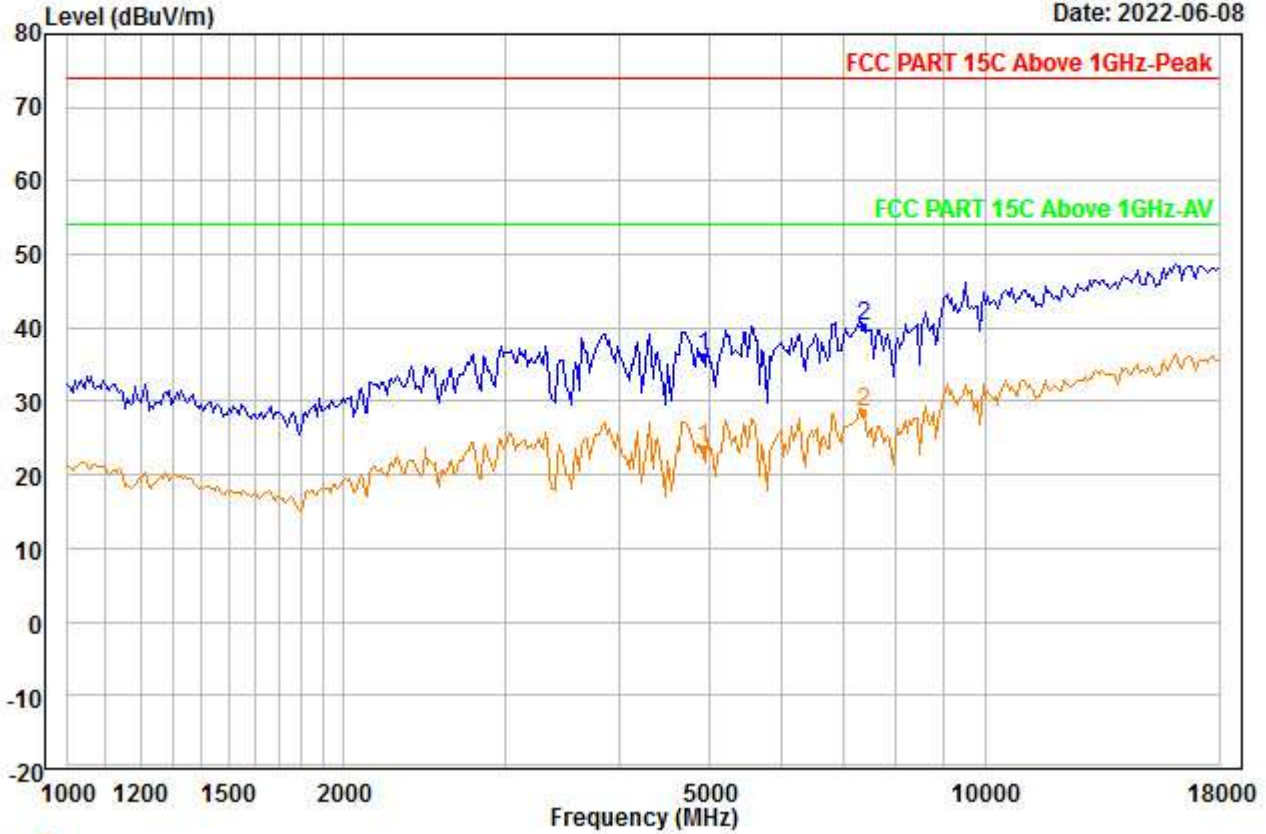


Trace: 1

Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : G\_ANT1\_2462  
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4924.000	38.38	34.70	46.58	0.00	9.62	36.12	74.00	-37.88	---	---	Peak
2 PP	7386.000	38.48	36.34	46.23	0.00	11.61	40.20	74.00	-33.80	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\2.4G\RSE\4\_00040.EMI

Date: 2022-06-08

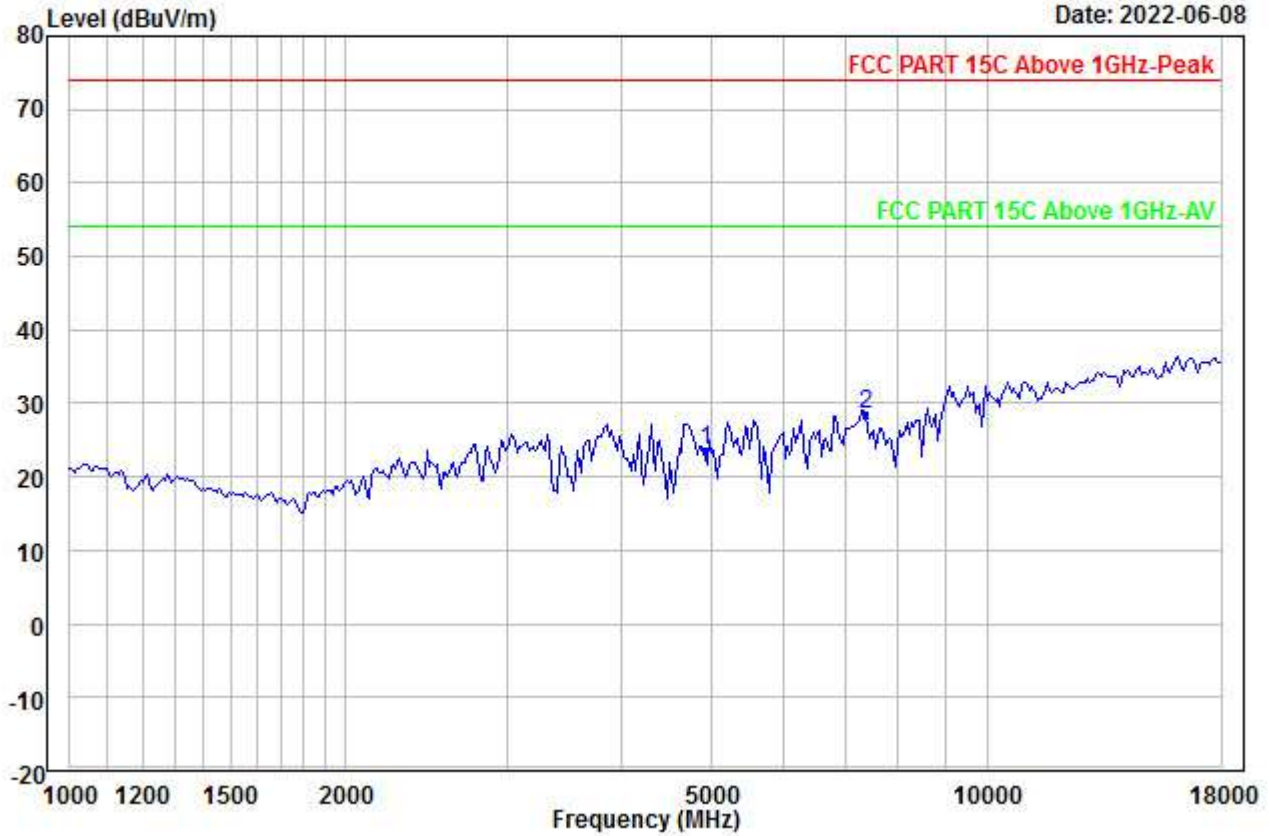


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : G\_ANT1\_2462  
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4924.000	25.79	34.70	46.58	0.00	9.62	23.53	54.00	-30.47	---	---	Aver
2 PP	7386.000	26.83	36.34	46.23	0.00	11.61	28.55	54.00	-25.45	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\2.4G\RSE\4\_00041.EMI

Date: 2022-06-08

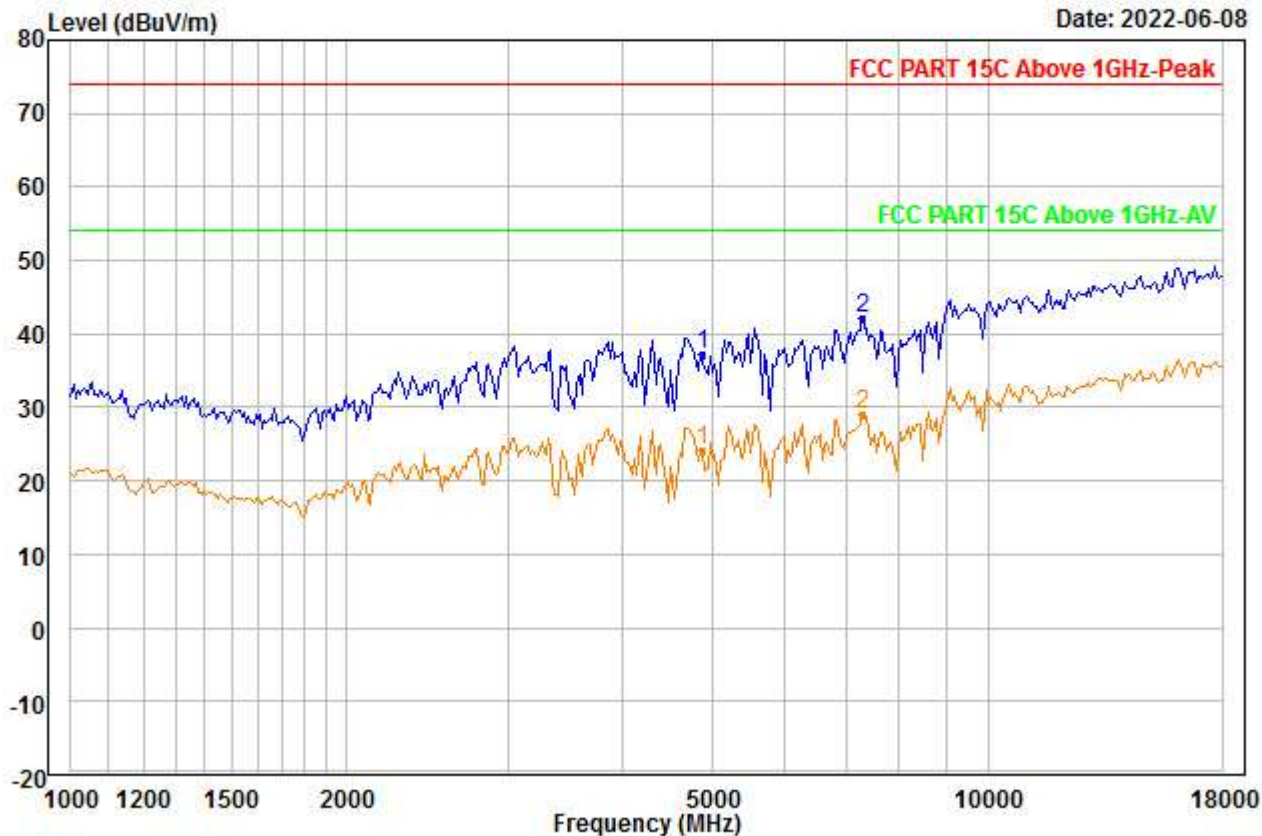

Trace: 1


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : G\_ANT1\_2437  
 Remark :

	Read Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4874.000	39.43	34.70	46.57	0.00	9.58	37.14	74.00	-36.86	---	---	Peak
2 PP	7311.000	40.40	36.24	46.19	0.00	11.55	42.00	74.00	-32.00	---	---	Peak



File: F:\Test Template\上海ITS\2022\220523032 SA750\A\2.4G\RSE\4\_00042.EMI

Date: 2022-06-08

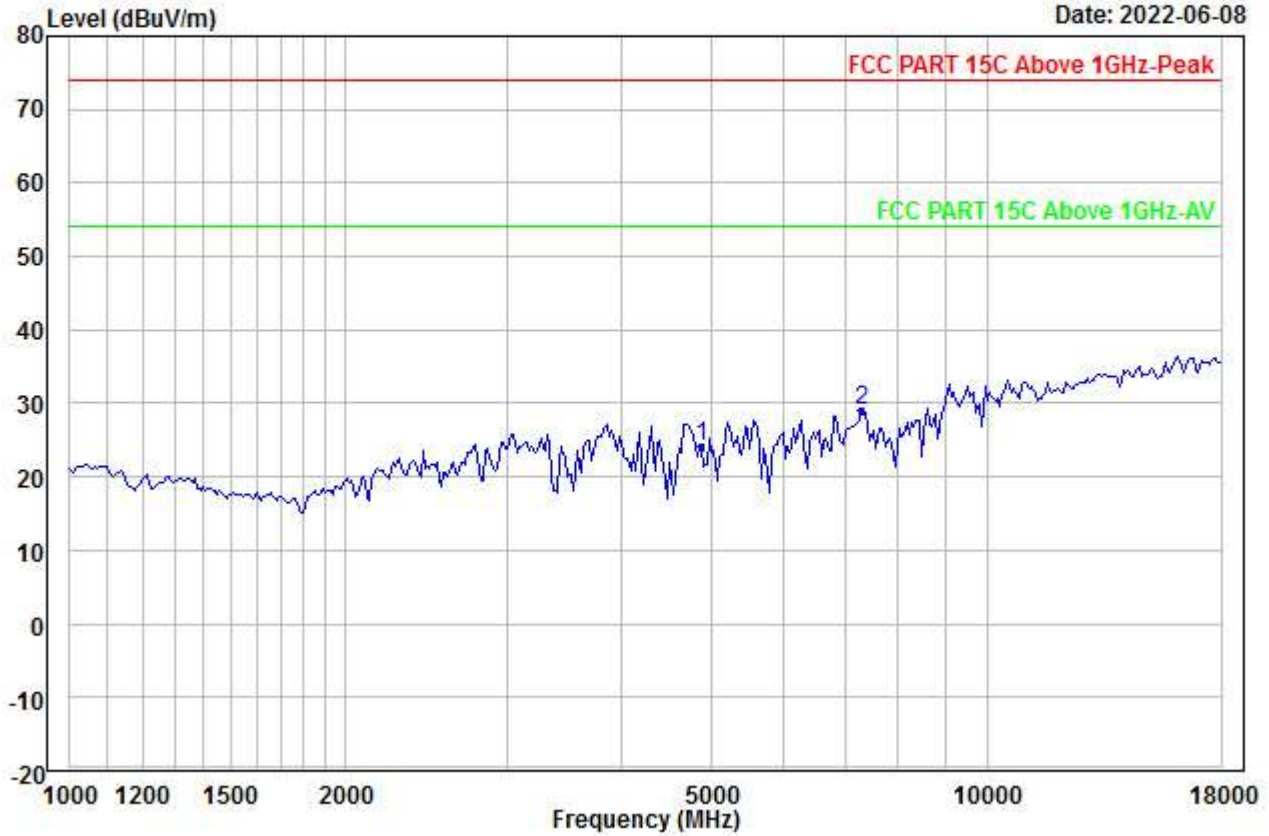


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : G\_ANT1\_2437  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:		
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit					
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg		
1	4874.000	26.36	34.70	46.57	0.00	9.58	24.07	54.00	-29.93	---	---	Aver
2 PP	7311.000	27.44	36.24	46.19	0.00	11.55	29.04	54.00	-24.96	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\2.4G\RSE\4\_00043.EMI

Date: 2022-06-08

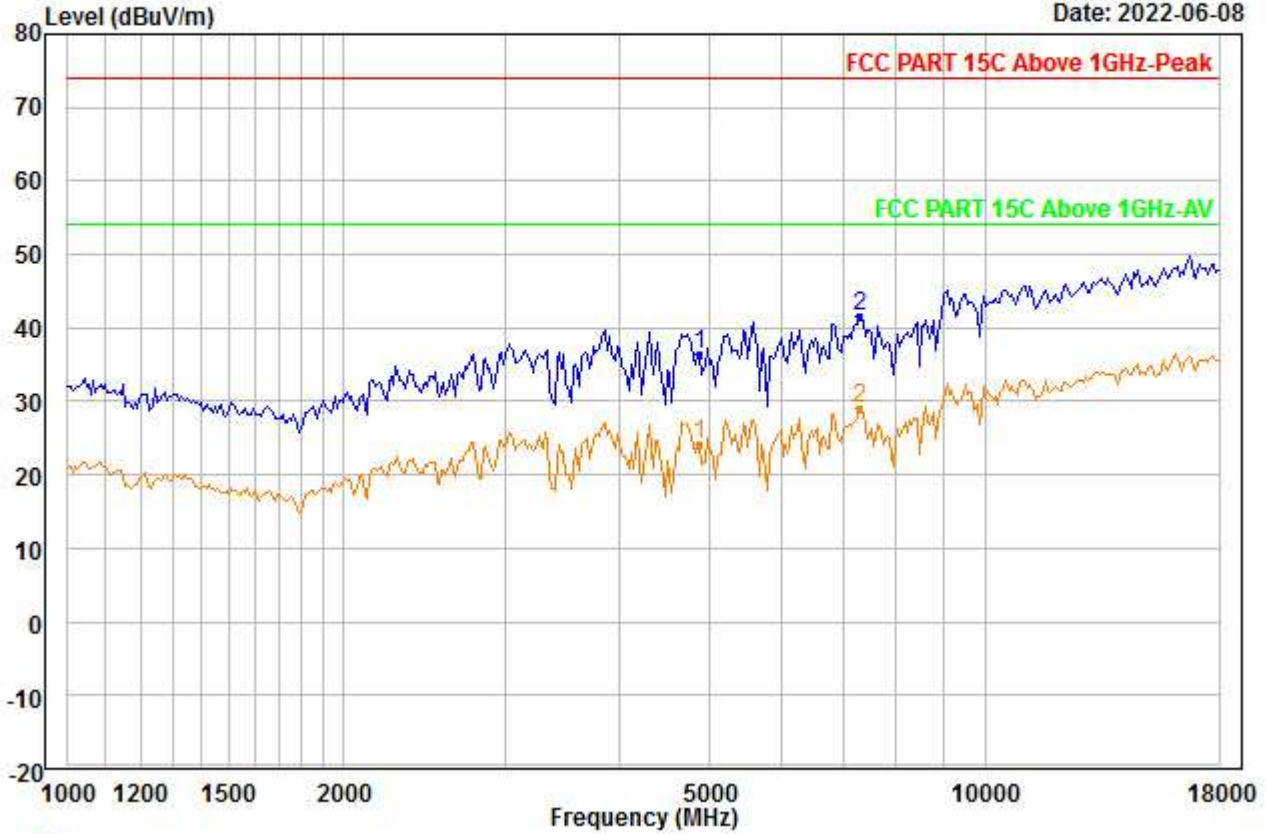


Trace: 1

Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : G\_ANT1\_2437  
 Remark :

	Read Freq	Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4874.000	38.71	34.70	46.57	0.00	9.58	36.42	74.00	-37.58	---	---	Peak
2 PP	7311.000	39.98	36.24	46.19	0.00	11.55	41.58	74.00	-32.42	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\2.4G\RSE\4\_00044.EMI

Date: 2022-06-08

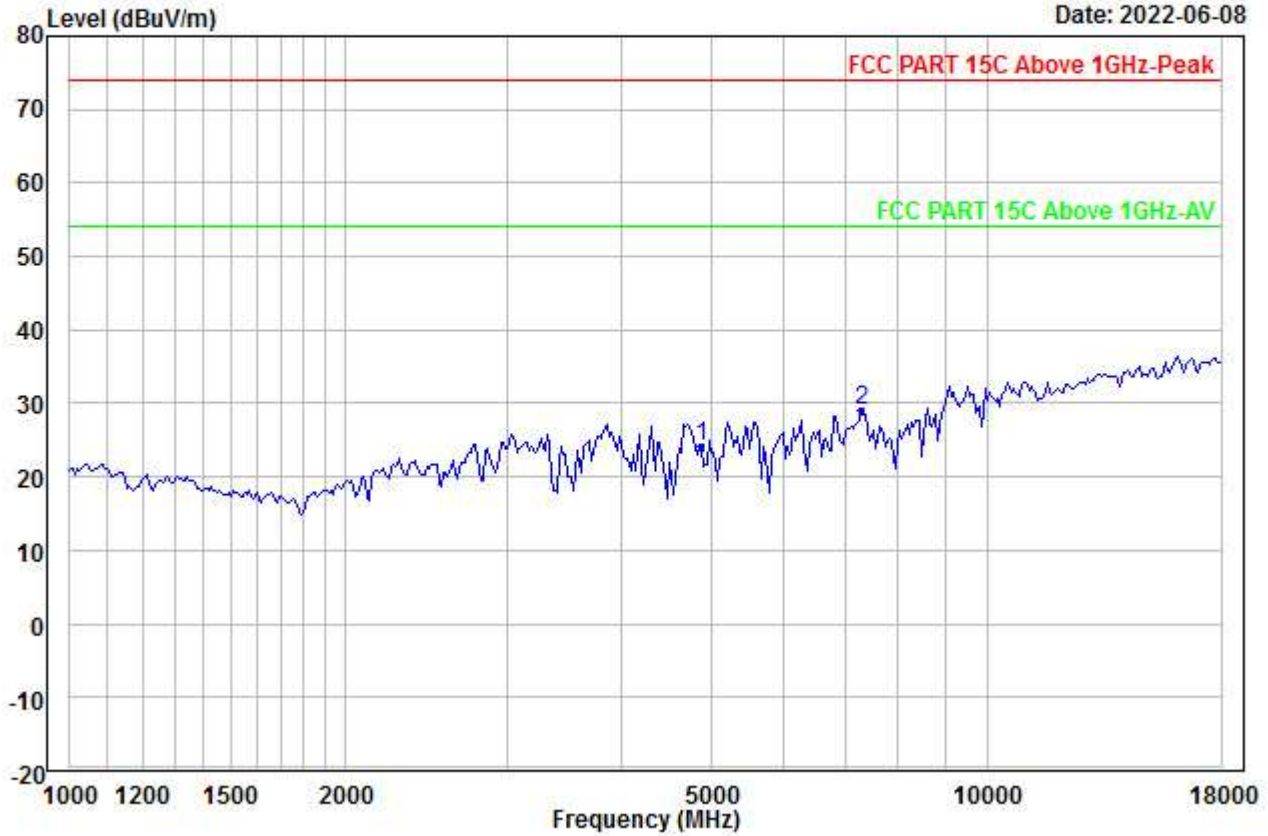


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : G\_ANT1\_2437  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rema		
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit					
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg		
1	4874.000	26.36	34.70	46.57	0.00	9.58	24.07	54.00	-29.93	---	---	Aver
2 PP	7311.000	27.38	36.24	46.19	0.00	11.55	28.98	54.00	-25.02	---	---	Aver



File: F:\Test Template\上海ITS\2022\220523032 SA750\A\2.4G\RSE\4\_00045.EMI

Date: 2022-06-08

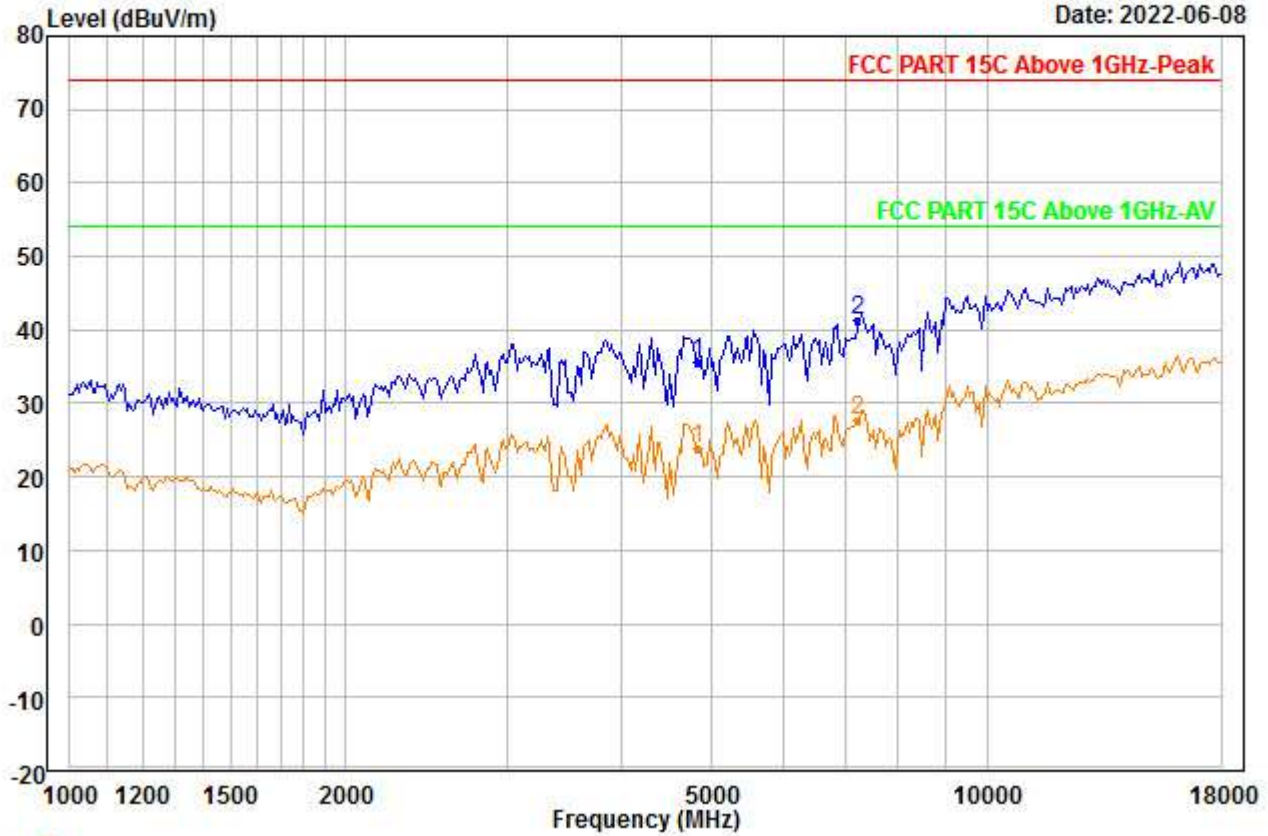


Trace: 1

Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : G\_ANT1\_2412  
 Remark :

	Read Freq	Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4824.000	38.05	34.70	46.56	0.00	9.53	35.72	74.00	-38.28	---	---	Peak
2 PP	7236.000	39.76	36.13	46.14	0.00	11.48	41.23	74.00	-32.77	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\2.4G\RSE\4\_00046.EMI

Date: 2022-06-08

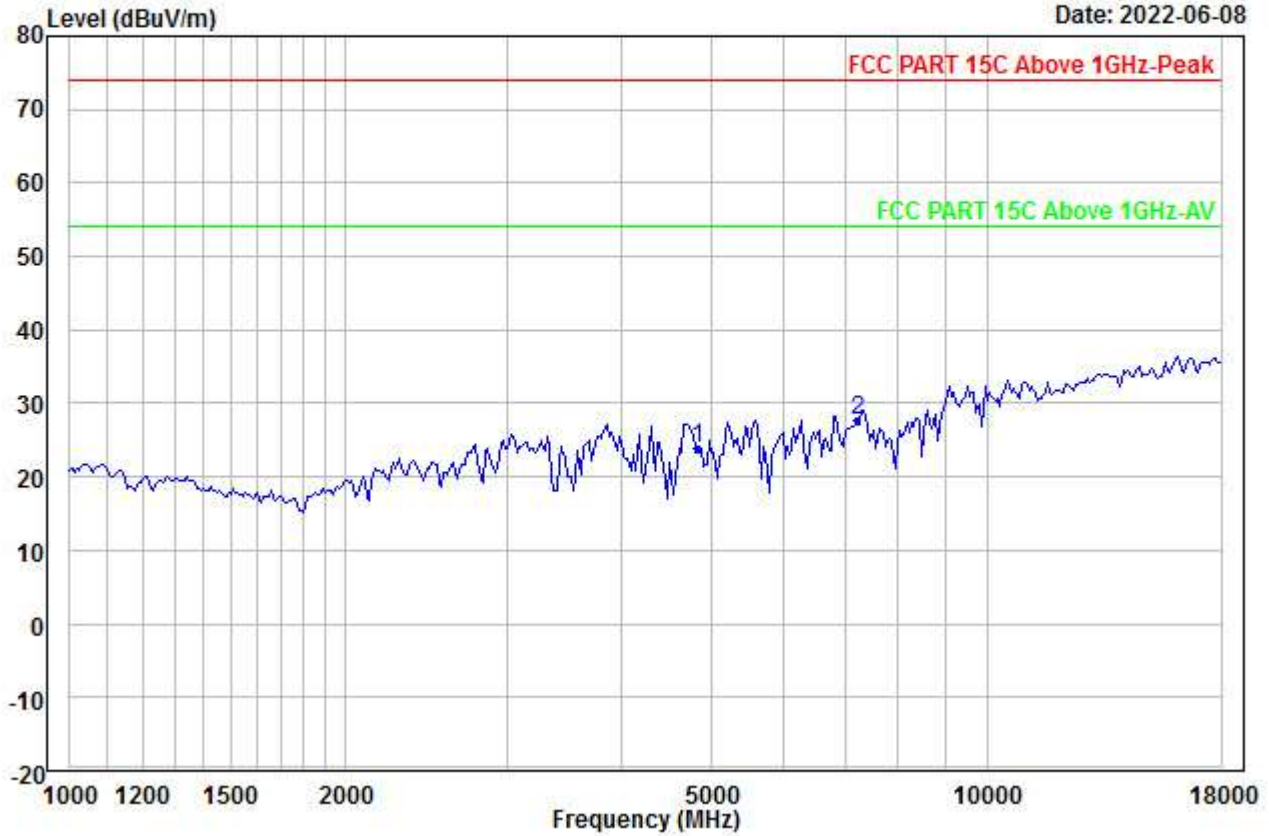


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : G\_ANT1\_2412  
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4824.000	26.11	34.70	46.56	0.00	9.53	23.78	54.00	-30.22	---	---	Aver
2 PP	7236.000	26.12	36.13	46.14	0.00	11.48	27.59	54.00	-26.41	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\2.4G\RSE\4\_00047.EMI

Date: 2022-06-08

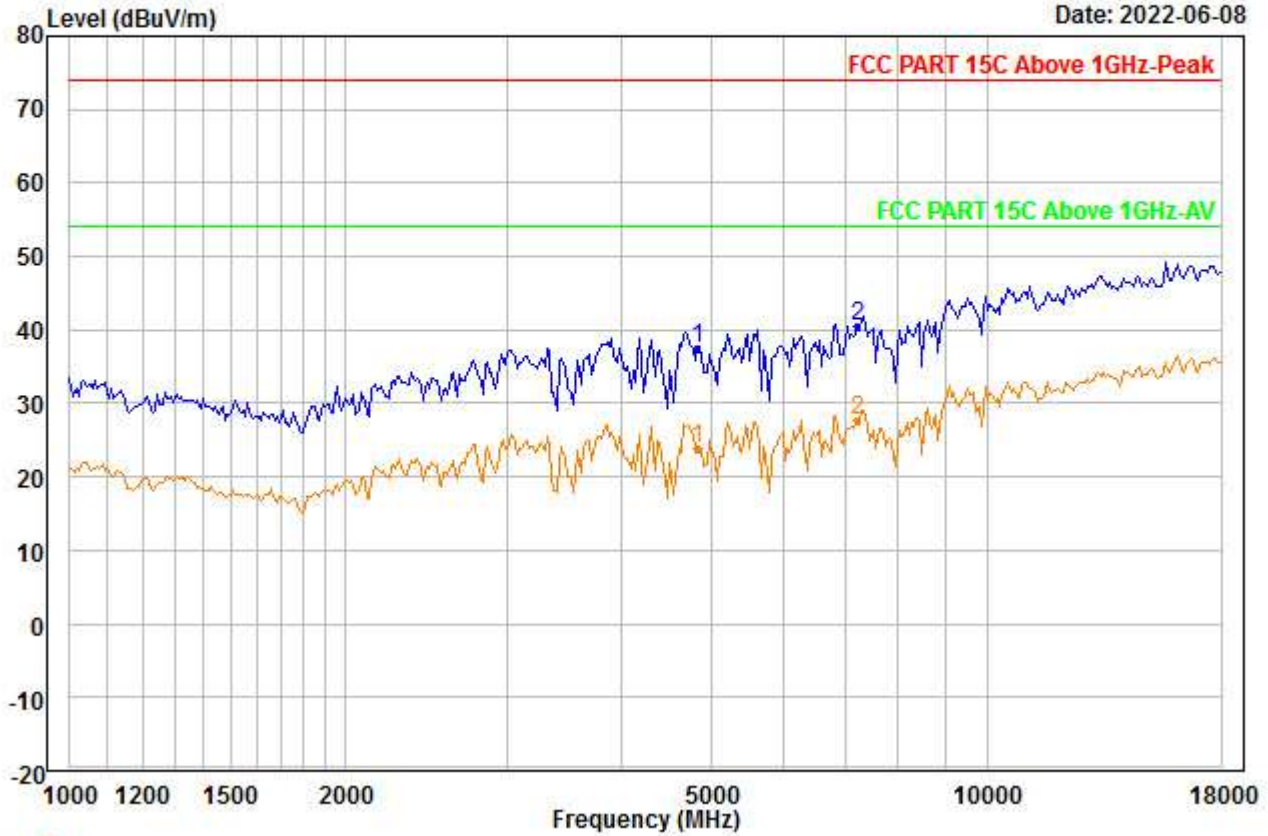

Trace: 1


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : G\_ANT1\_2412  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:		
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit					
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg		
1	4824.000	39.83	34.70	46.56	0.00	9.53	37.50	74.00	-36.50	---	---	Peak
2 PP	7236.000	39.06	36.13	46.14	0.00	11.48	40.53	74.00	-33.47	---	---	Peak



File: F:\Test Template\上海ITS\2022\220523032 SA750\A\2.4G\RSE\4\_00048.EMI

Date: 2022-06-08

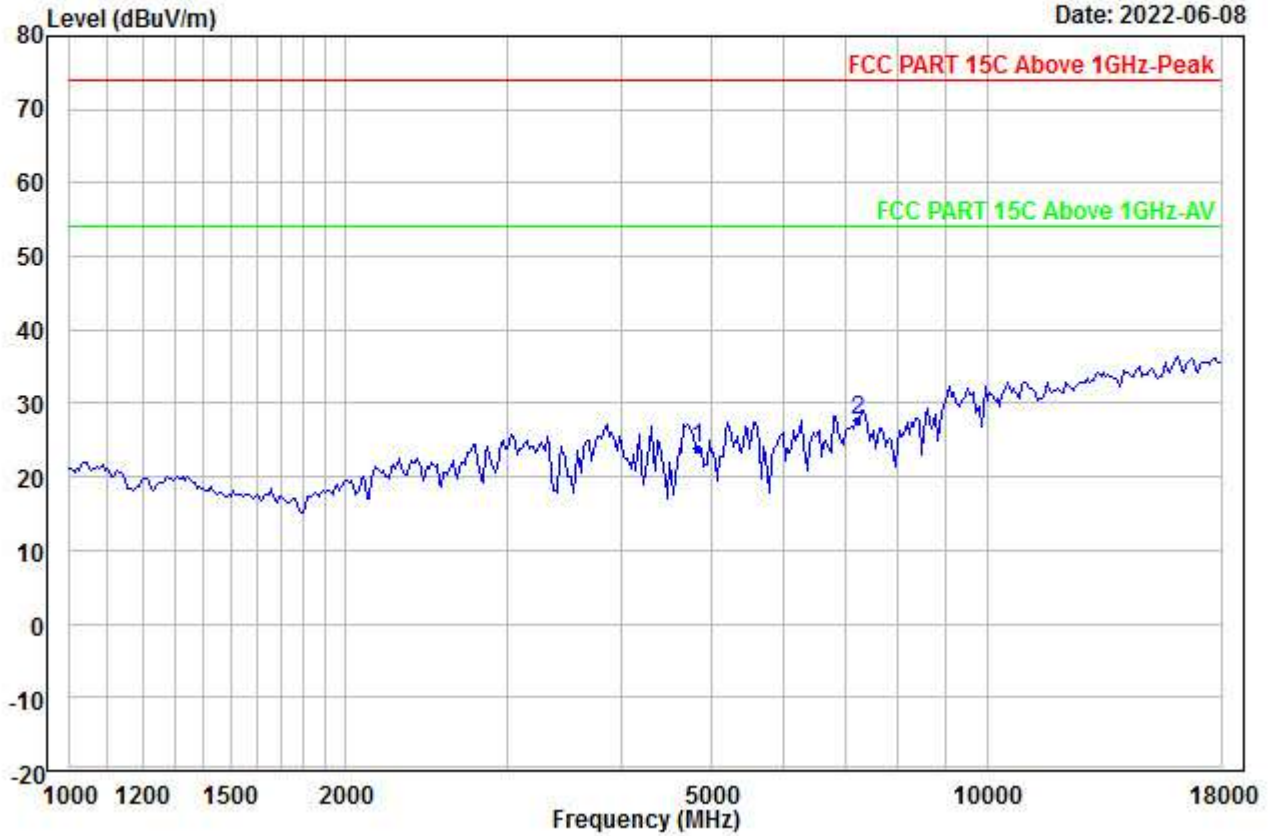


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : G\_ANT1\_2412  
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4824.000	26.11	34.70	46.56	0.00	9.53	23.78	54.00	-30.22	---	---	Aver
2 PP	7236.000	26.19	36.13	46.14	0.00	11.48	27.66	54.00	-26.34	---	---	Aver

File: F:\Test Template\上海\ITS\2022\220523032 SA750\A\2.4G\RSE\4\_00049.EMI

Date: 2022-06-08

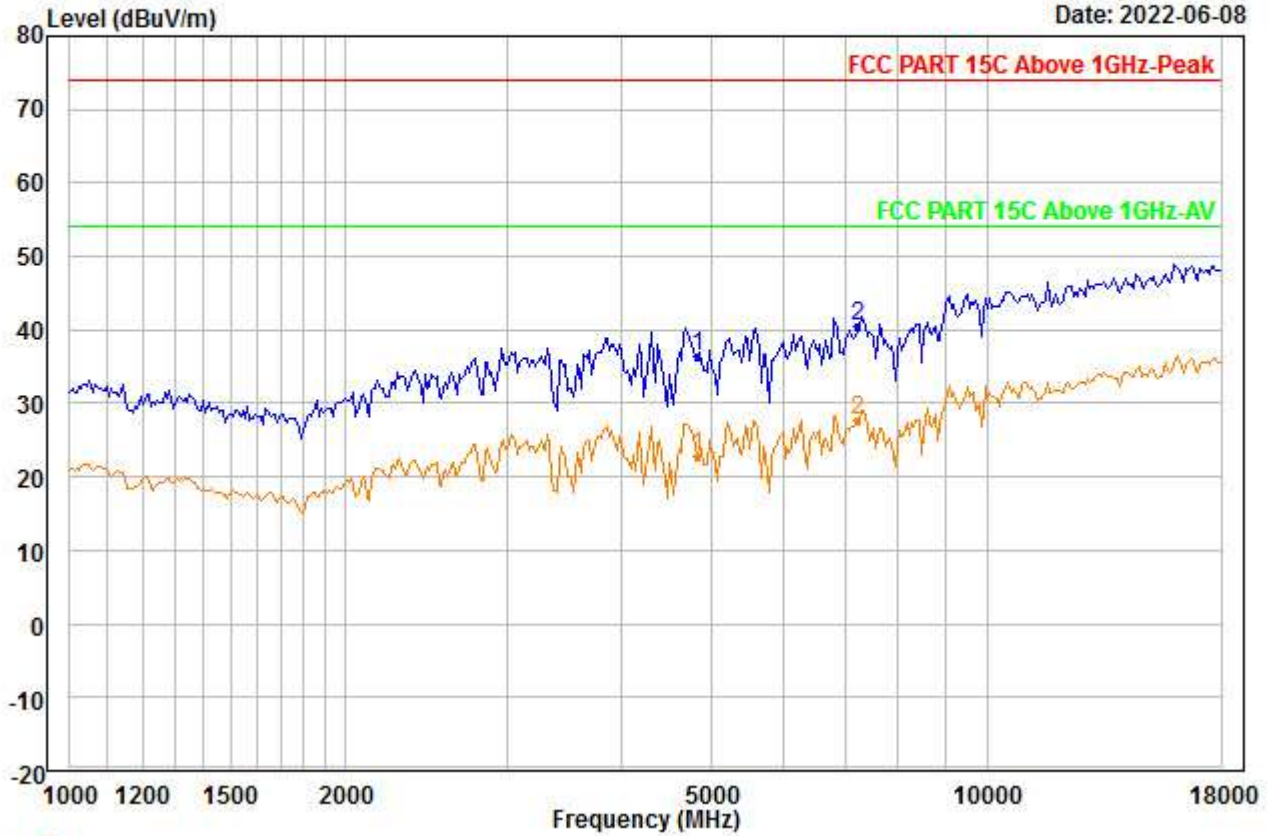


Trace: 1

Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : N20\_ANT0+1\_2412  
 Remark :

	Read Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4824.000	38.77	34.70	46.56	0.00	9.53	36.44	74.00	-37.56	---	---	Peak
2 PP	7236.000	38.93	36.13	46.14	0.00	11.48	40.40	74.00	-33.60	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\2.4G\RSE\4\_00050.EMI

Date: 2022-06-08

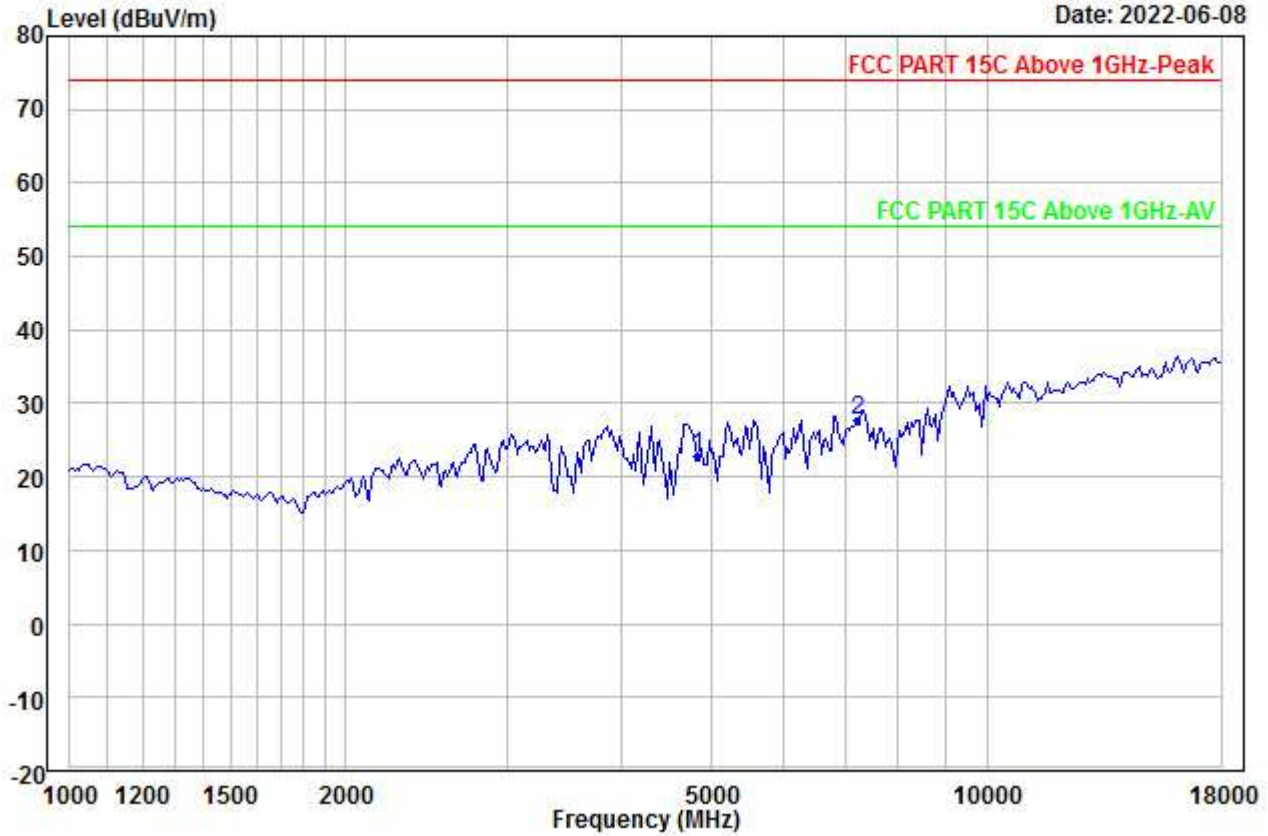


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : N20\_ANT0+1\_2412  
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4824.000	25.19	34.70	46.56	0.00	9.53	22.86	54.00	-31.14	---	---	Aver
2 PP	7236.000	26.12	36.13	46.14	0.00	11.48	27.59	54.00	-26.41	---	---	Aver



File: F:\Test Template\上海ITS\2022\220523032 SA750\A\2.4G\RSE\4\_00051.EMI

Date: 2022-06-08

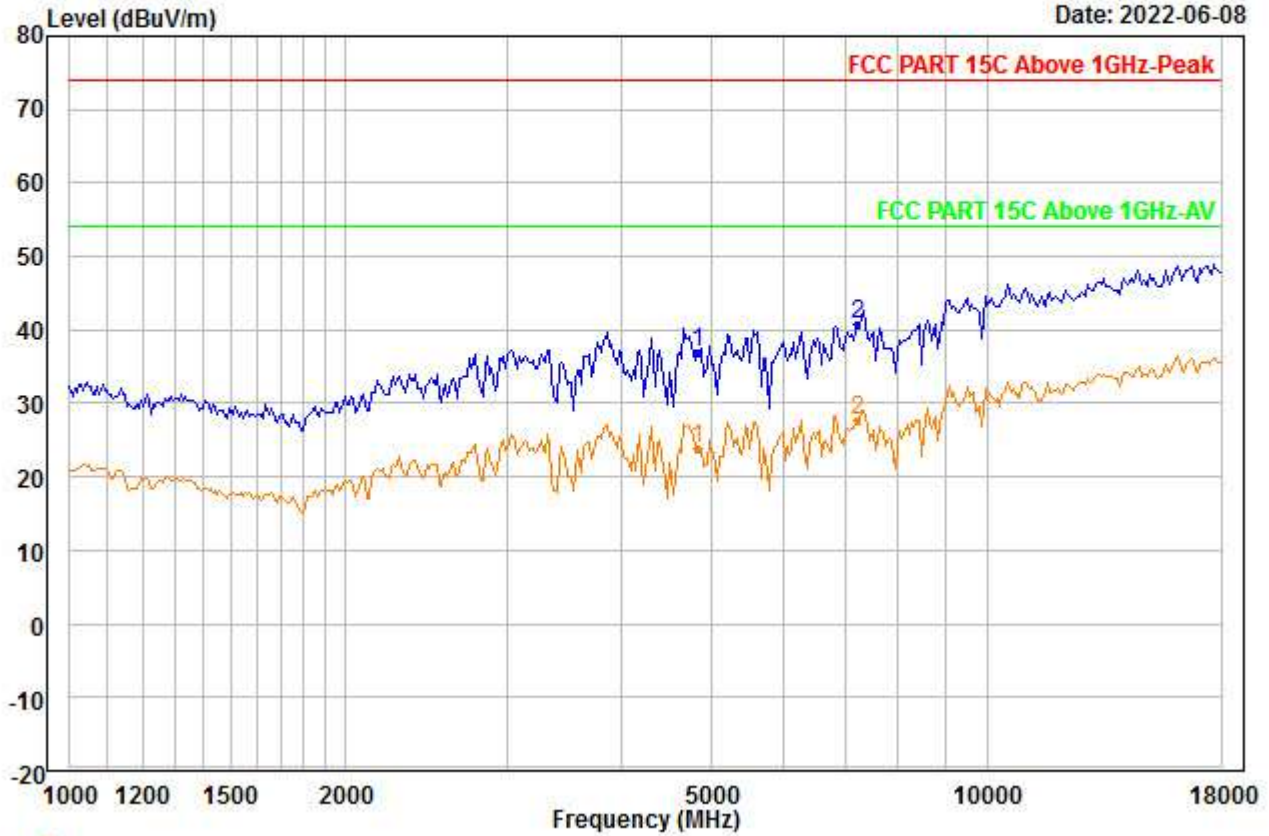


Trace: 1

Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : N20\_ANT0+1\_2412  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:		
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit					
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg		
1	4824.000	39.29	34.70	46.56	0.00	9.53	36.96	74.00	-37.04	---	---	Peak
2 PP	7236.000	39.36	36.13	46.14	0.00	11.48	40.83	74.00	-33.17	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\2.4G\RSE\4\_00052.EMI

Date: 2022-06-08

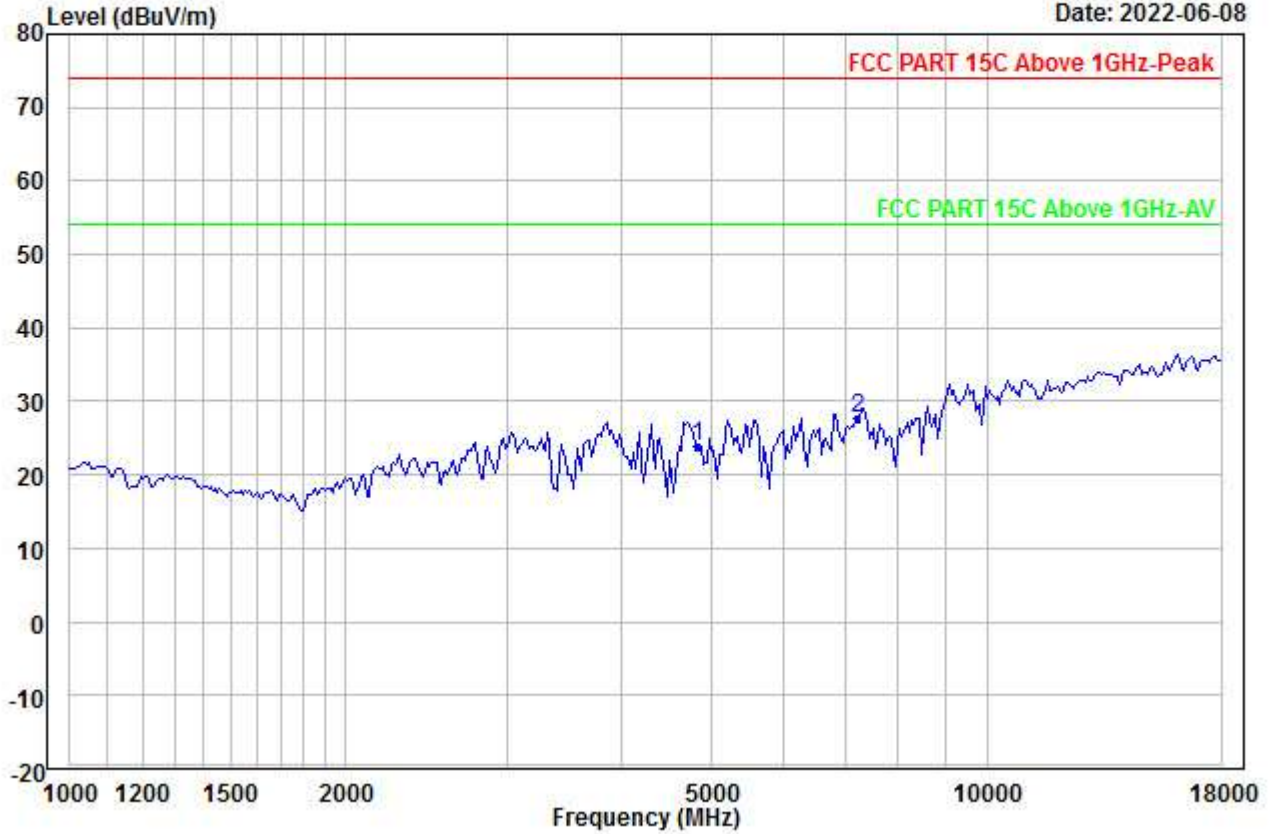


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : N20\_ANT0+1\_2412  
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4824.000	26.19	34.70	46.56	0.00	9.53	23.86	54.00	-30.14	---	---	Aver
2 PP	7236.000	26.12	36.13	46.14	0.00	11.48	27.59	54.00	-26.41	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\2.4G\RSE\4\_00053.EMI

Date: 2022-06-08

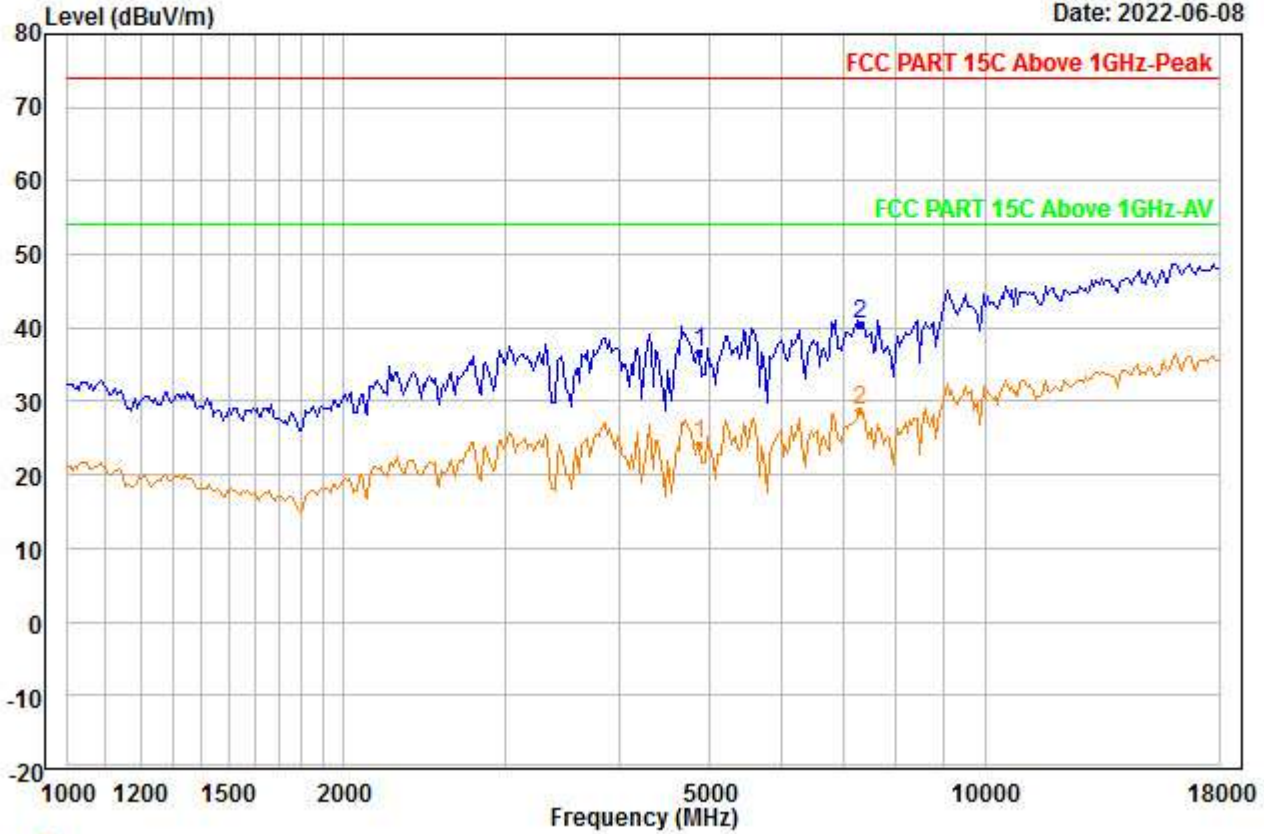

Trace: 1


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : N20\_ANT0+1\_2437  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:		
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit					
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg		
1	4874.000	39.08	34.70	46.57	0.00	9.58	36.79	74.00	-37.21	---	---	Peak
2 PP	7311.000	38.82	36.24	46.19	0.00	11.55	40.42	74.00	-33.58	---	---	Peak



File: F:\Test Template\上海ITS\2022\220523032 SA750\A\2.4G\RSE\4\_00054.EMI

Date: 2022-06-08

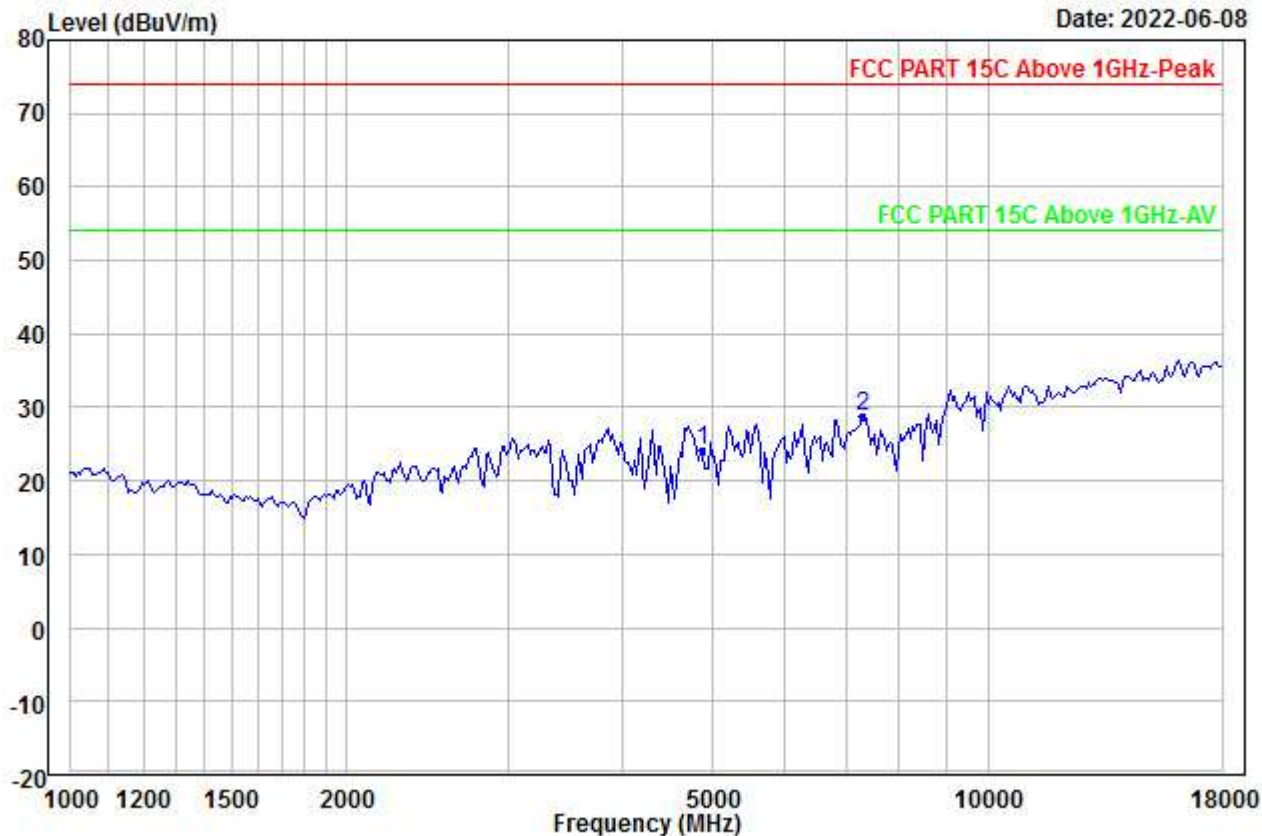


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : N20\_ANT0+1\_2437  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:		
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit					
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg		
1	4874.000	26.43	34.70	46.57	0.00	9.58	24.14	54.00	-29.86	---	---	Aver
2 PP	7311.000	27.26	36.24	46.19	0.00	11.55	28.86	54.00	-25.14	---	---	Aver

File: F:\Test Template\上海ITSI\2022\220523032 SA750\A\2.4G\RSE\4\_00055.EMI

Date: 2022-06-08

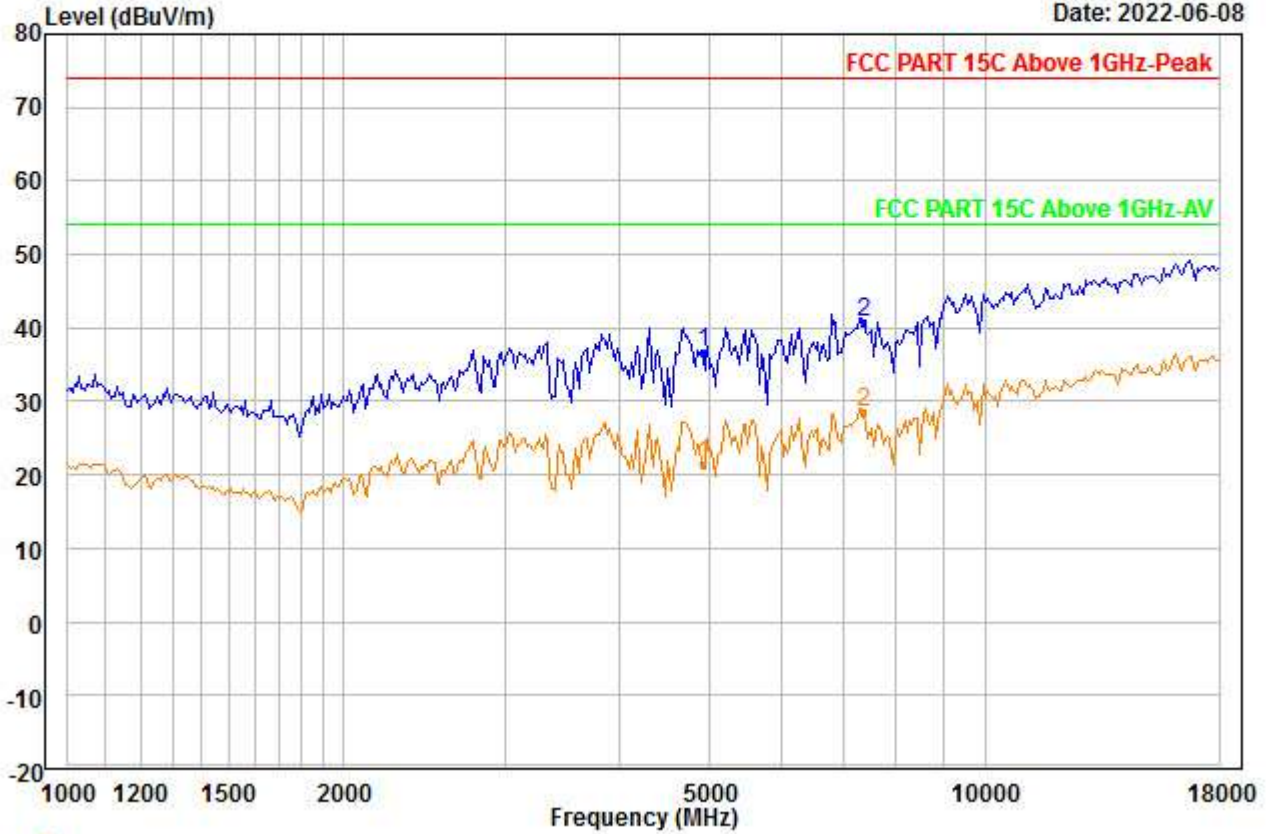


Trace: 1

Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : N20\_ANT0+1\_2437  
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4924.000	38.95	34.70	46.58	0.00	9.62	36.69	74.00	-37.31	---	---	Peak
2 PP	7386.000	39.13	36.34	46.23	0.00	11.61	40.85	74.00	-33.15	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\2.4G\RSE\4\_00056.EMI

Date: 2022-06-08

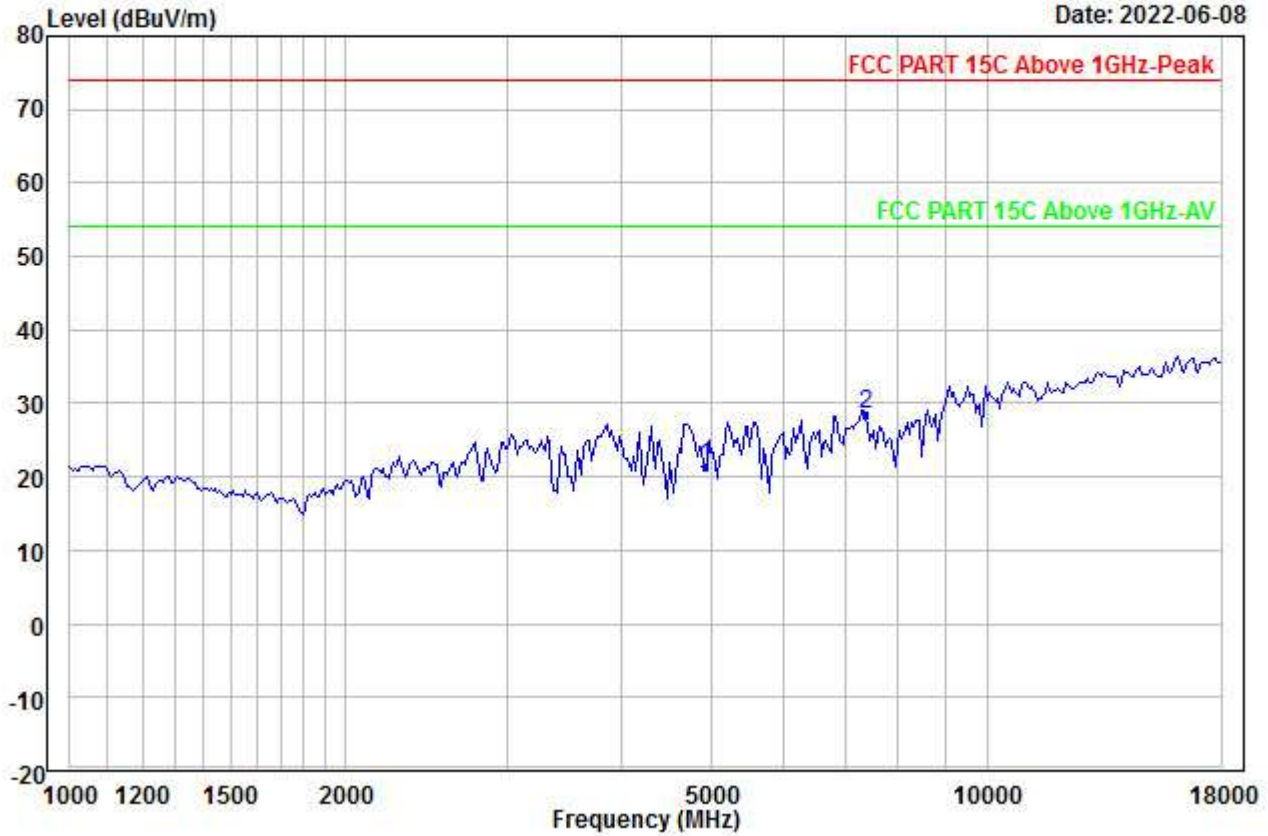


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : N20\_ANT0+1\_2437  
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4924.000	23.70	34.70	46.58	0.00	9.62	21.44	54.00	-32.56	---	---	Aver
2 PP	7386.000	26.83	36.34	46.23	0.00	11.61	28.55	54.00	-25.45	---	---	Aver



File: F:\Test Template\上海ITS\2022\220523032 SA750\A\2.4G\RSE\4\_00057.EMI

Date: 2022-06-08

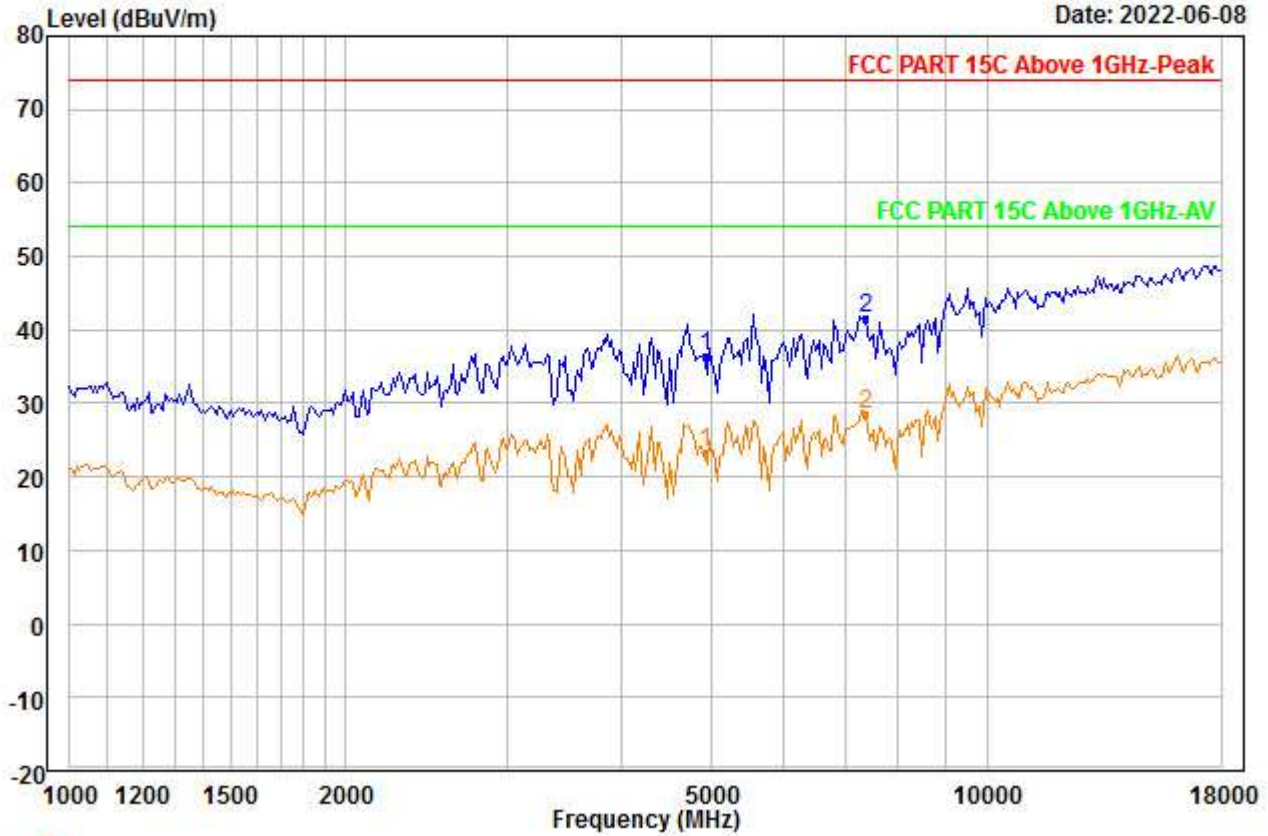


Trace: 1

Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : N20\_ANT0+1\_2462  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:		
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit					
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg		
1	4924.000	38.76	34.70	46.58	0.00	9.62	36.50	74.00	-37.50	---	---	Peak
2 PP	7386.000	39.74	36.34	46.23	0.00	11.61	41.46	74.00	-32.54	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\2.4G\RSE\4\_00058.EMI

Date: 2022-06-08

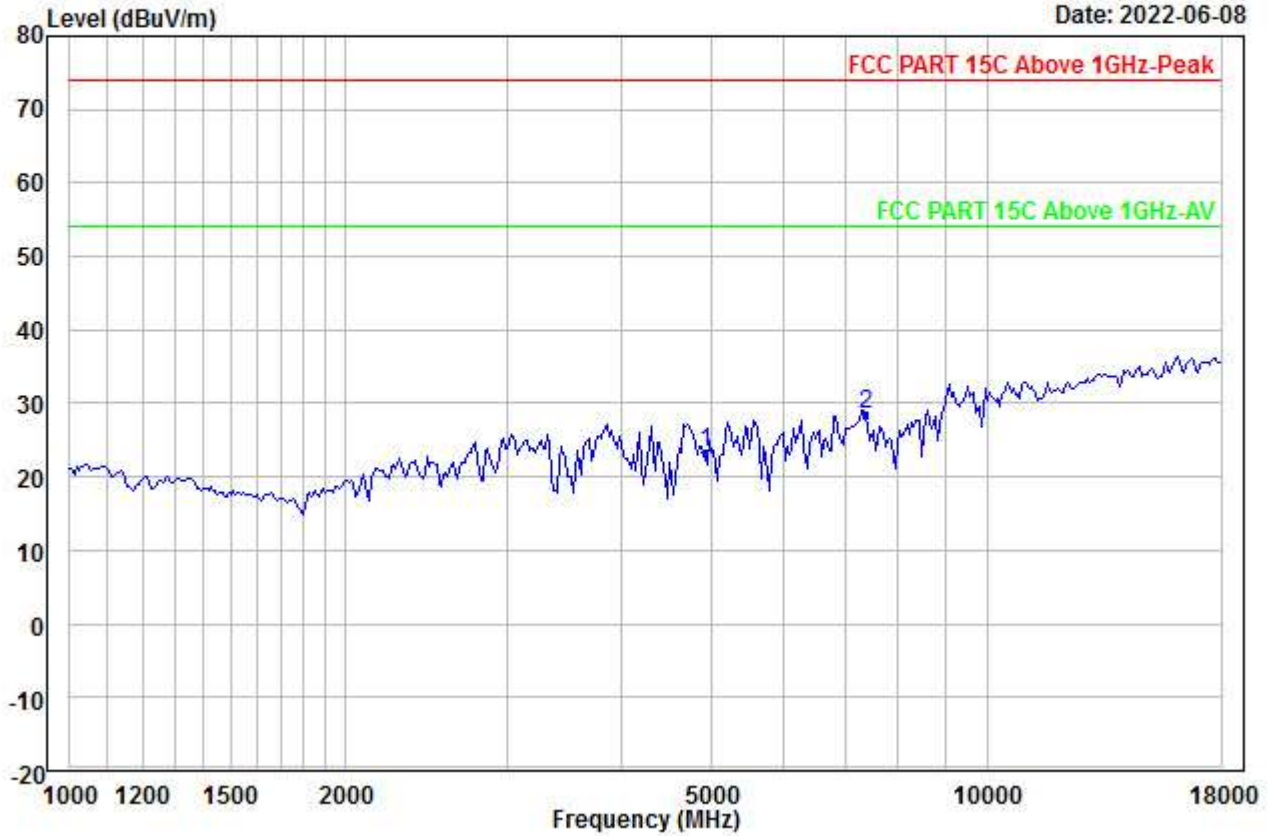


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : N20\_ANT0+1\_2462  
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4924.000	25.70	34.70	46.58	0.00	9.62	23.44	54.00	-30.56	---	---	Aver
2 PP	7386.000	26.83	36.34	46.23	0.00	11.61	28.55	54.00	-25.45	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\2.4G\RSE\4\_00059.EMI

Date: 2022-06-08

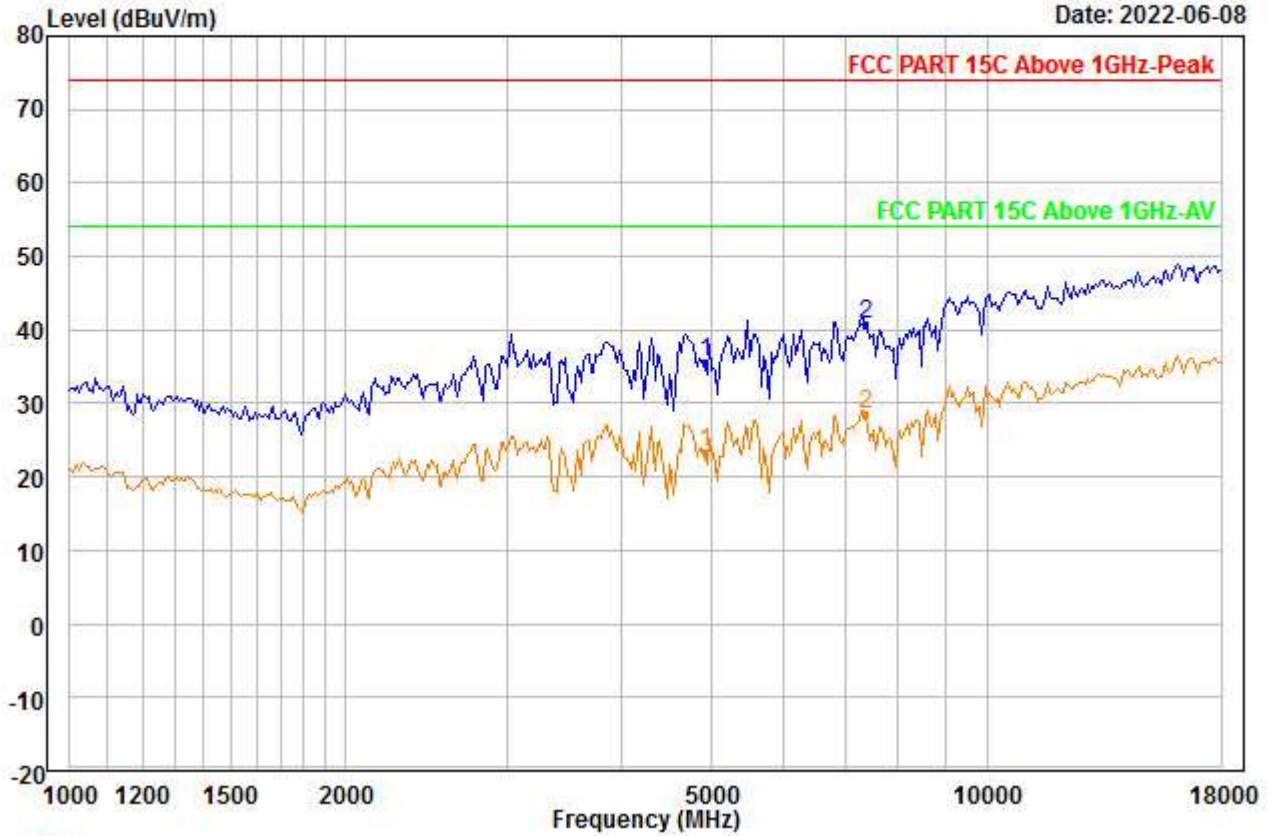

Trace: 1


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : N20\_ANT0+1\_2462  
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4924.000	37.81	34.70	46.58	0.00	9.62	35.55	74.00	-38.45	---	---	Peak
2 PP	7386.000	39.05	36.34	46.23	0.00	11.61	40.77	74.00	-33.23	---	---	Peak



File: F:\Test Template\上海ITS\2022\220523032 SA750\A\2.4G\RSE\4\_00060.EMI

Date: 2022-06-08

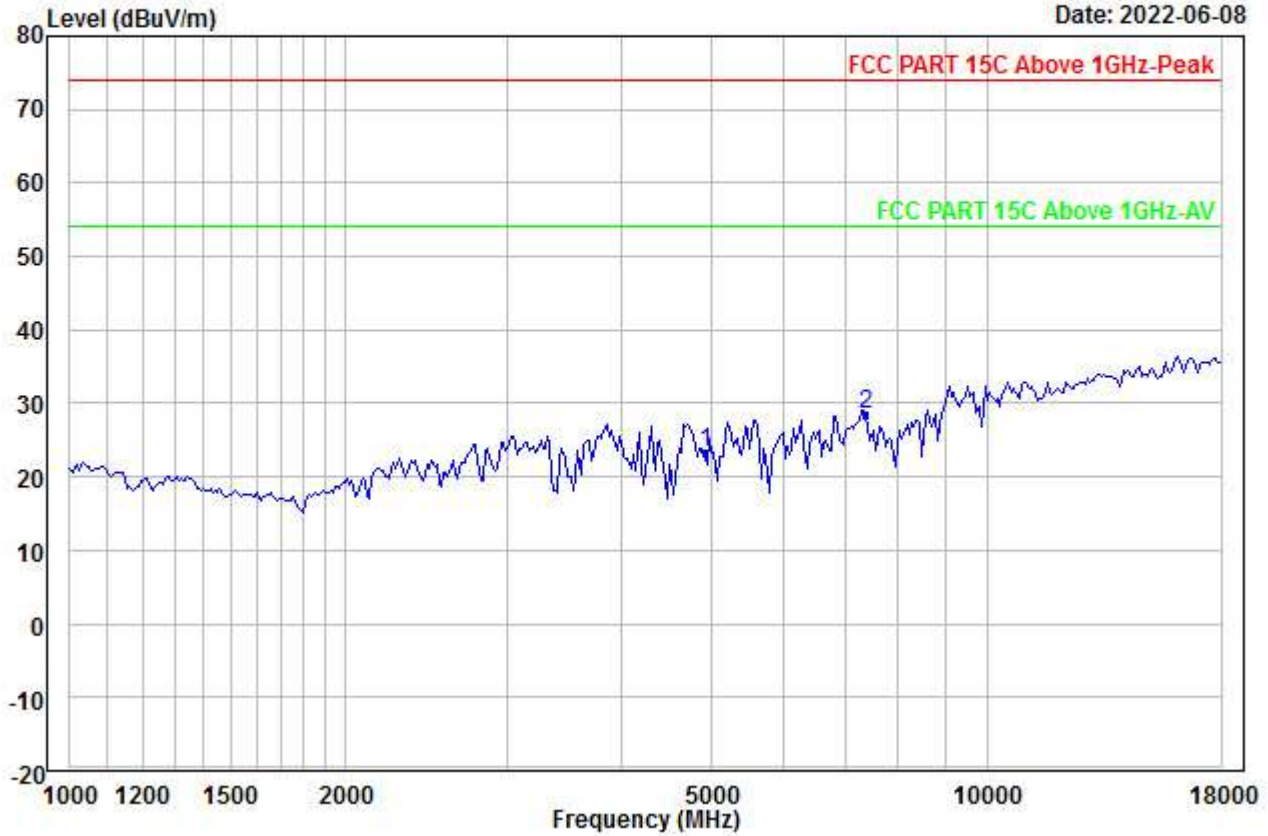

Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : N20\_ANT0+1\_2462  
 Remark :

	Read Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4924.000	25.70	34.70	46.58	0.00	9.62	23.44	54.00	-30.56	---	---	Aver
2 PP	7386.000	26.76	36.34	46.23	0.00	11.61	28.48	54.00	-25.52	---	---	Aver