


File: F:\Test Template\上海ITSI\2022\220523032 SA750\B\2.4G\BE\4_00001.EMI

Date: 2022-06-05

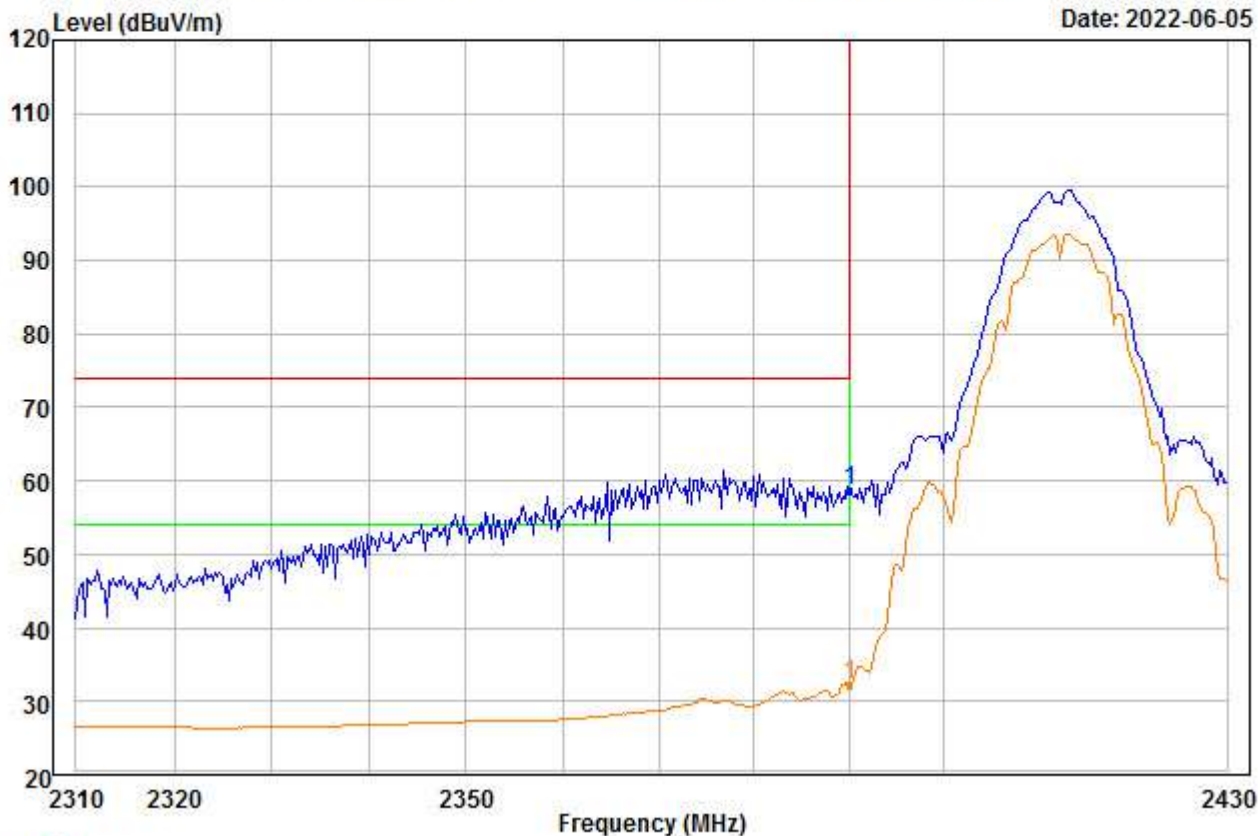


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : B_ANT0_2412
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 2390.000	67.10	32.69	48.03	0.00	6.90	58.66	74.00	-15.34	---	---	Peak

File: F:\Test Template\上海ITSI\2022\220523032 SA750\B\2.4G\BE\4_00002.EMI

Date: 2022-06-05

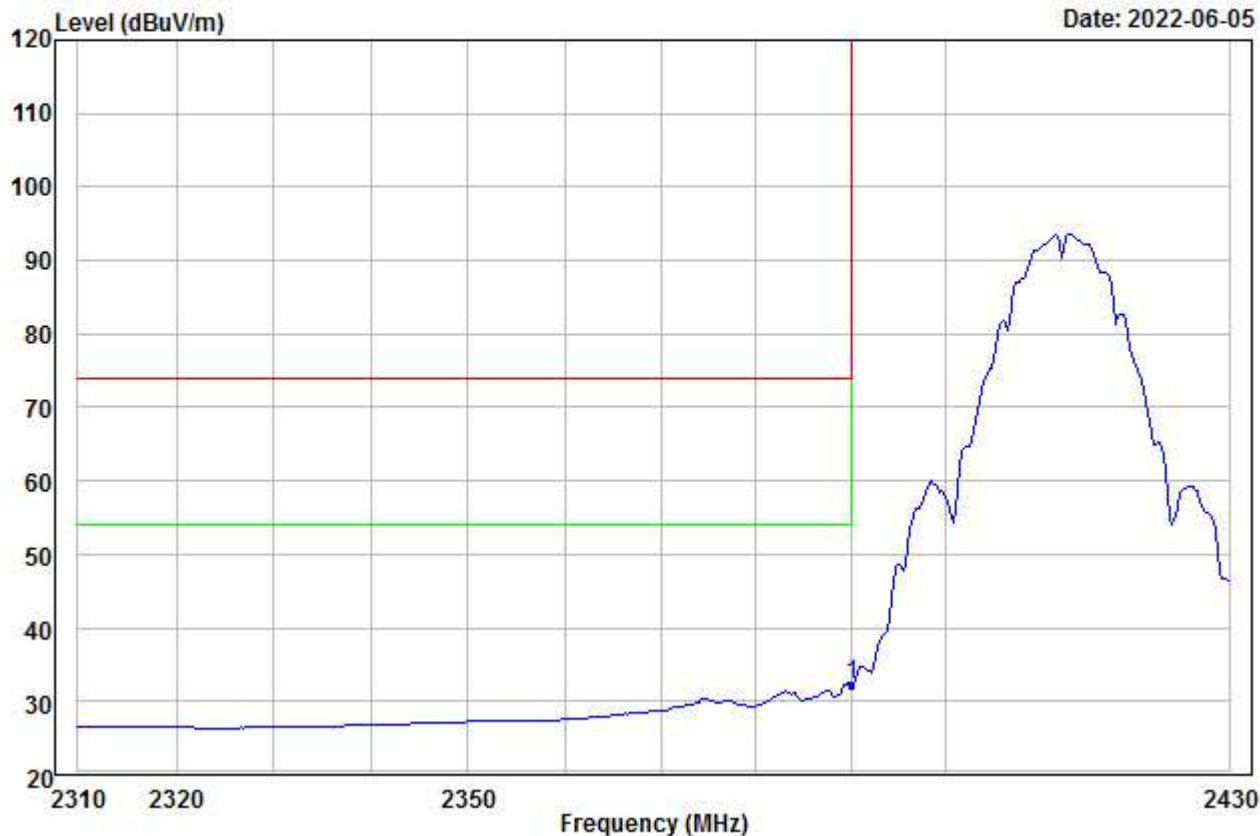


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : B_ANT0_2412
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit			
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 2390.000	40.82	32.69	48.03	0.00	6.90	32.38	54.00	-21.62	---	--- Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\BE\4_00003.EMI

Date: 2022-06-05

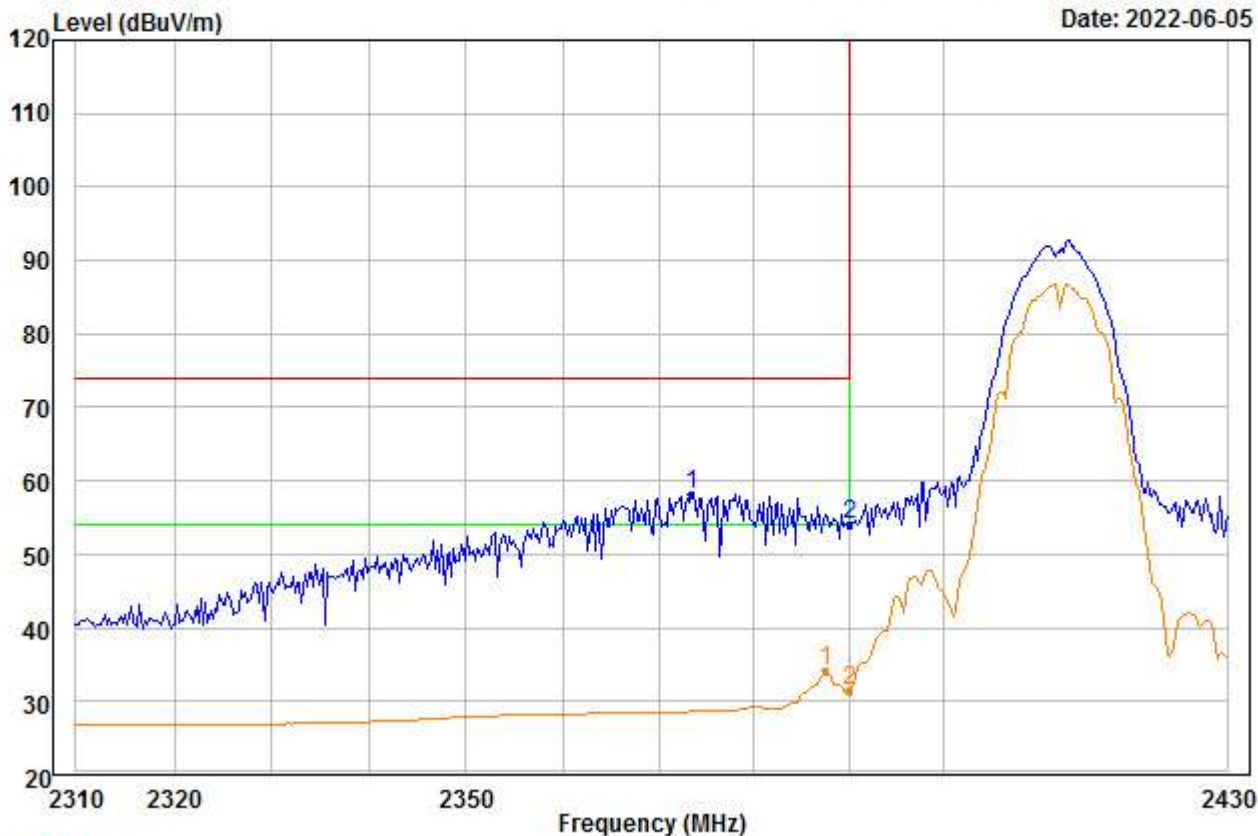


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : B_ANT0_2412
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 2373.487	66.66	32.65	48.02	0.00	6.87	58.16	74.00	-15.84	---	---	Peak
2 2390.000	62.54	32.69	48.03	0.00	6.90	54.10	74.00	-19.90	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\BE\4_00004.EMI

Date: 2022-06-05

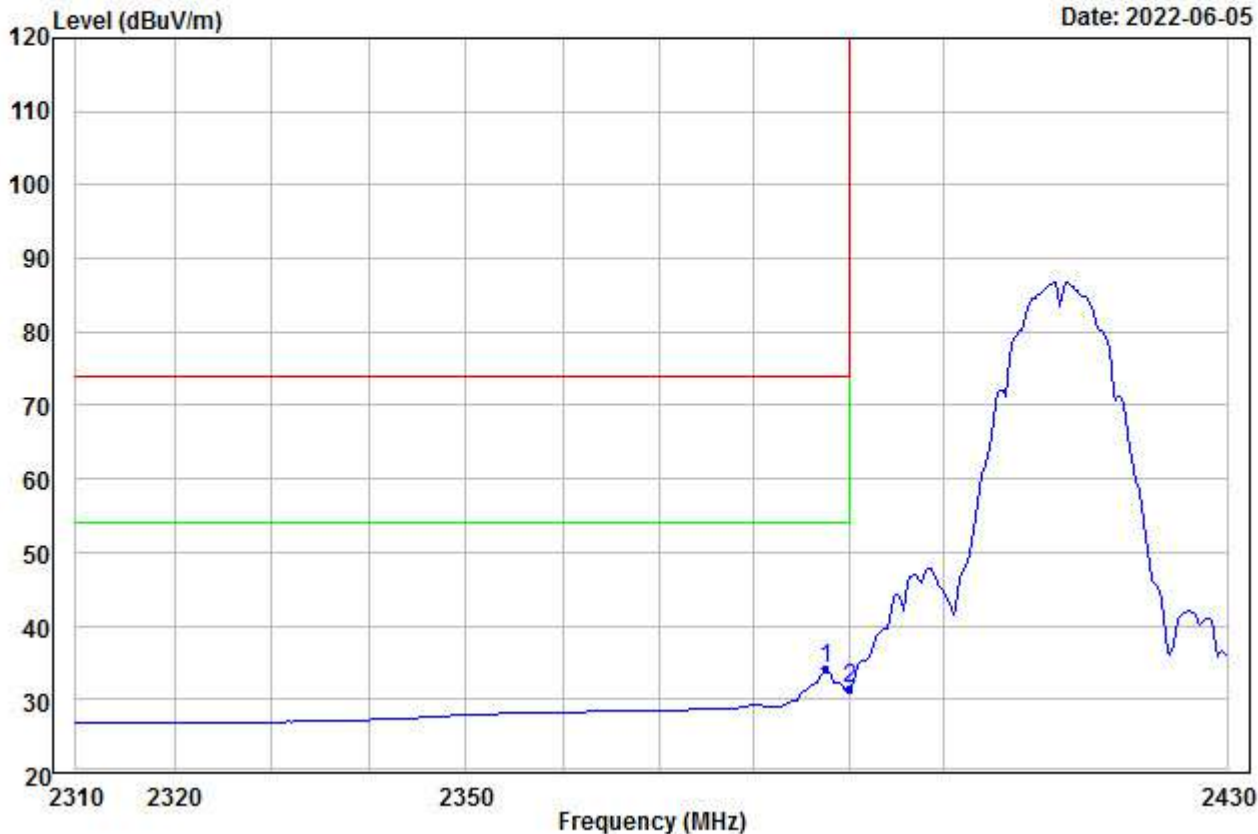


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : B_ANT0_2412
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 2387.435	42.62	32.68	48.03	0.00	6.89	34.16	54.00	-19.84	---	---	Aver
2 2390.000	39.91	32.69	48.03	0.00	6.90	31.47	54.00	-22.53	---	---	Aver

File: F:\Test Template\上海ITSI\2022\220523032 SA750\B\2.4G\BE\4_00005.EMI

Date: 2022-06-05

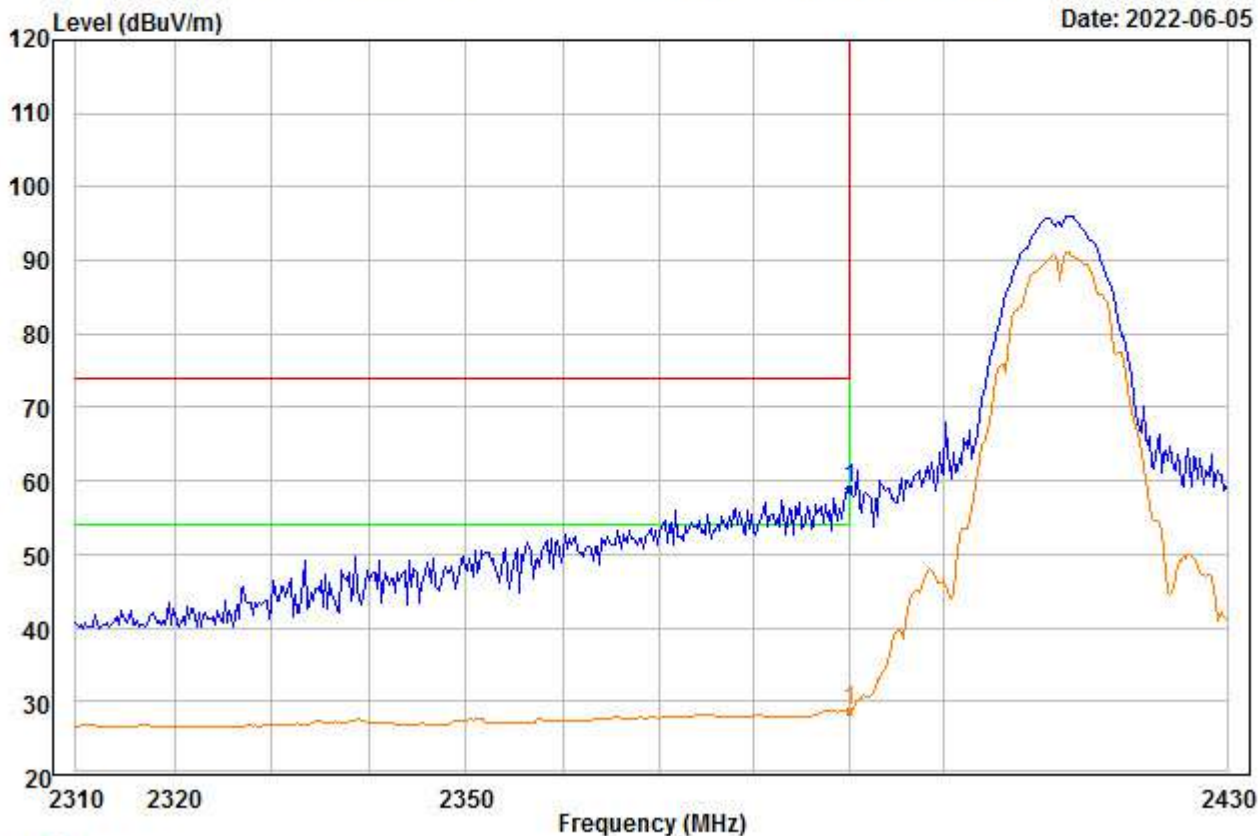


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : B_ANT1_2412
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 2390.000	67.40	32.69	48.03	0.00	6.90	58.96	74.00	-15.04	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\BE\4_00006.EMI

Date: 2022-06-05

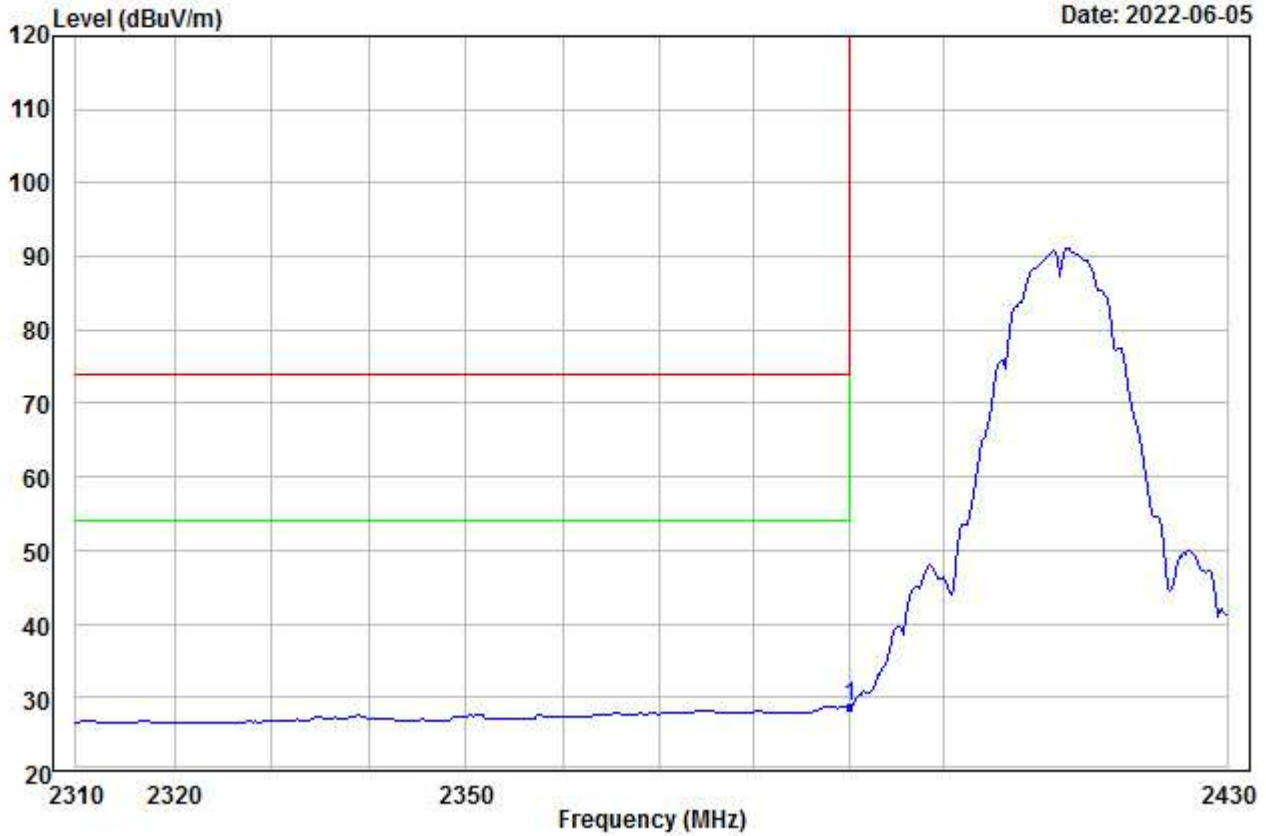


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : B_ANT1_2412
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit			
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 2390.000	37.25	32.69	48.03	0.00	6.90	28.81	54.00	-25.19	---	--- Aver

File: F:\Test Template\上海ITSI\2022\220523032 SA750\B\2.4G\BE\4_00007.EMI

Date: 2022-06-05

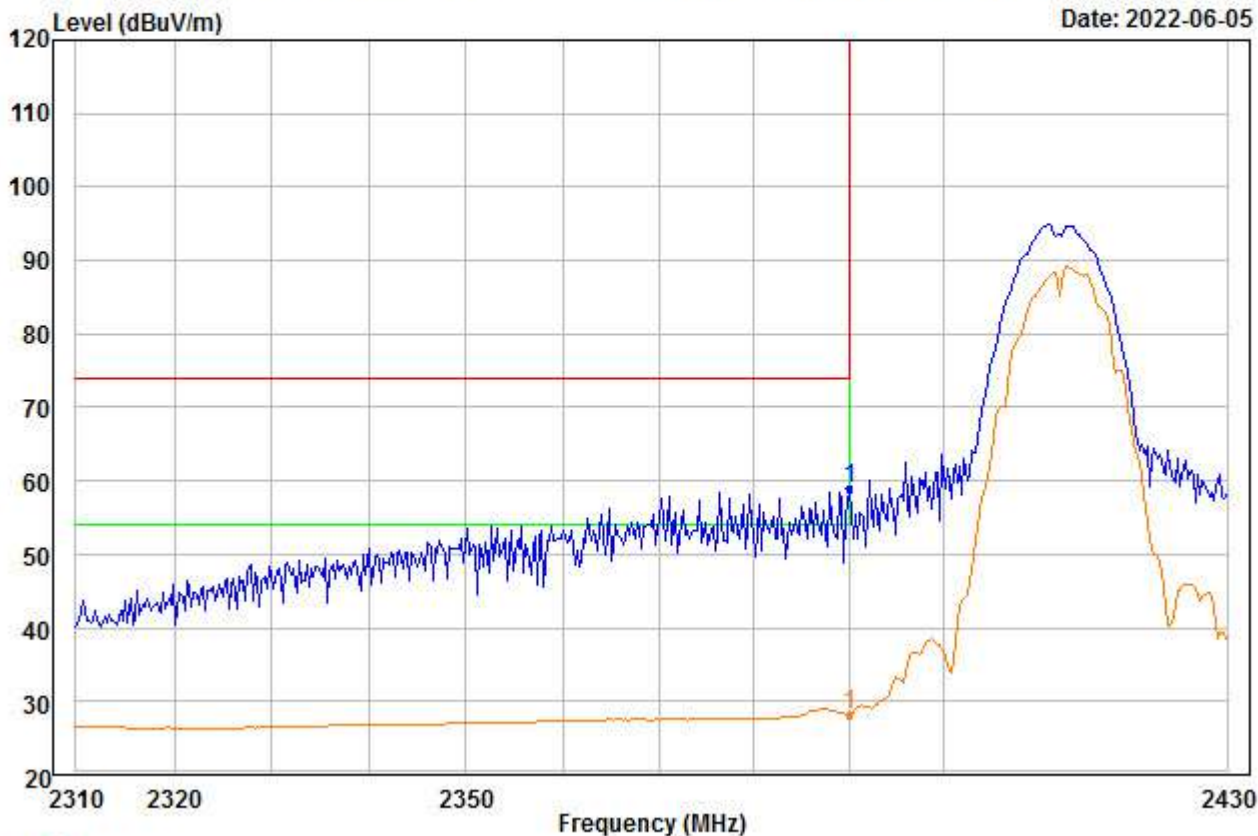


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : B_ANT1_2412
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 2390.000	67.52	32.69	48.03	0.00	6.90	59.08	74.00	-14.92	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\BE\4_00008.EMI

Date: 2022-06-05

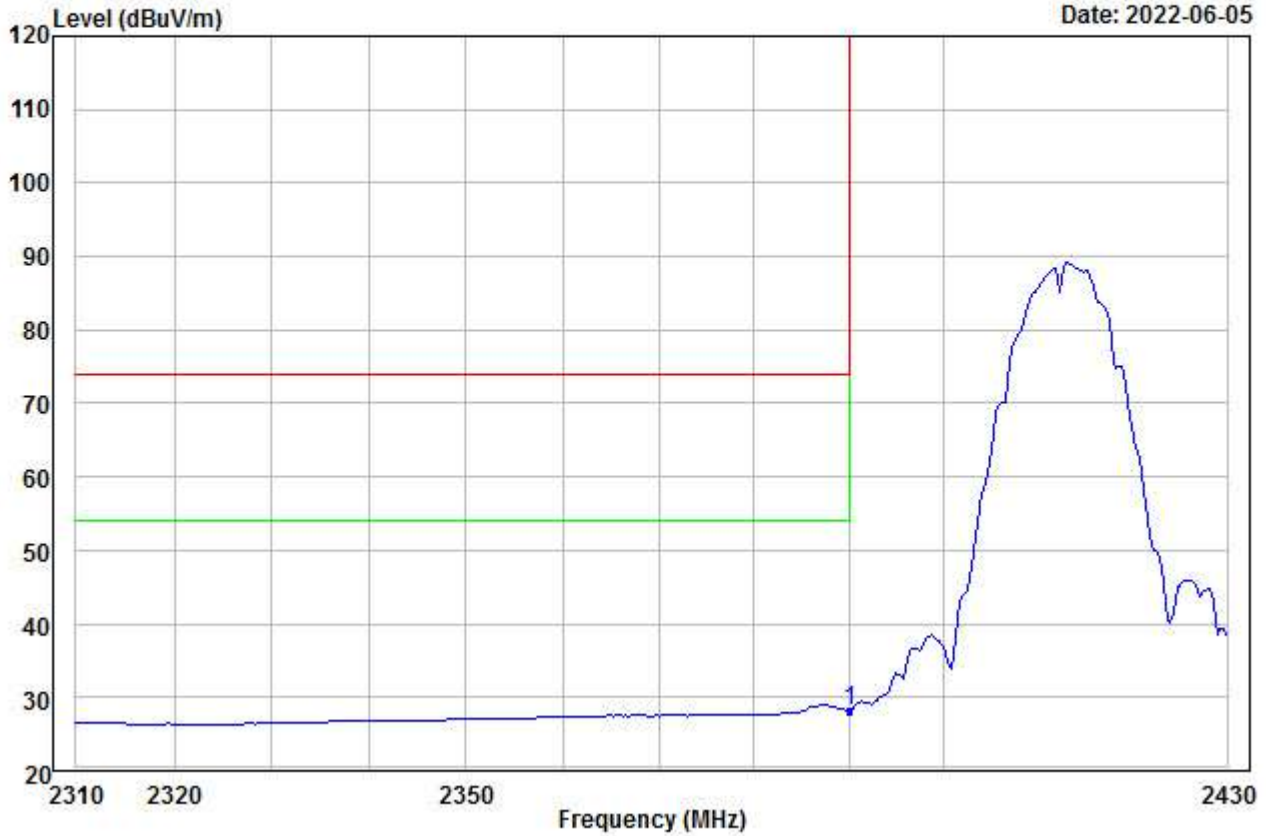


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : B_ANT1_2412
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit			
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 2390.000	36.69	32.69	48.03	0.00	6.90	28.25	54.00	-25.75	---	--- Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\BE\4_00009.EMI

Date: 2022-06-06

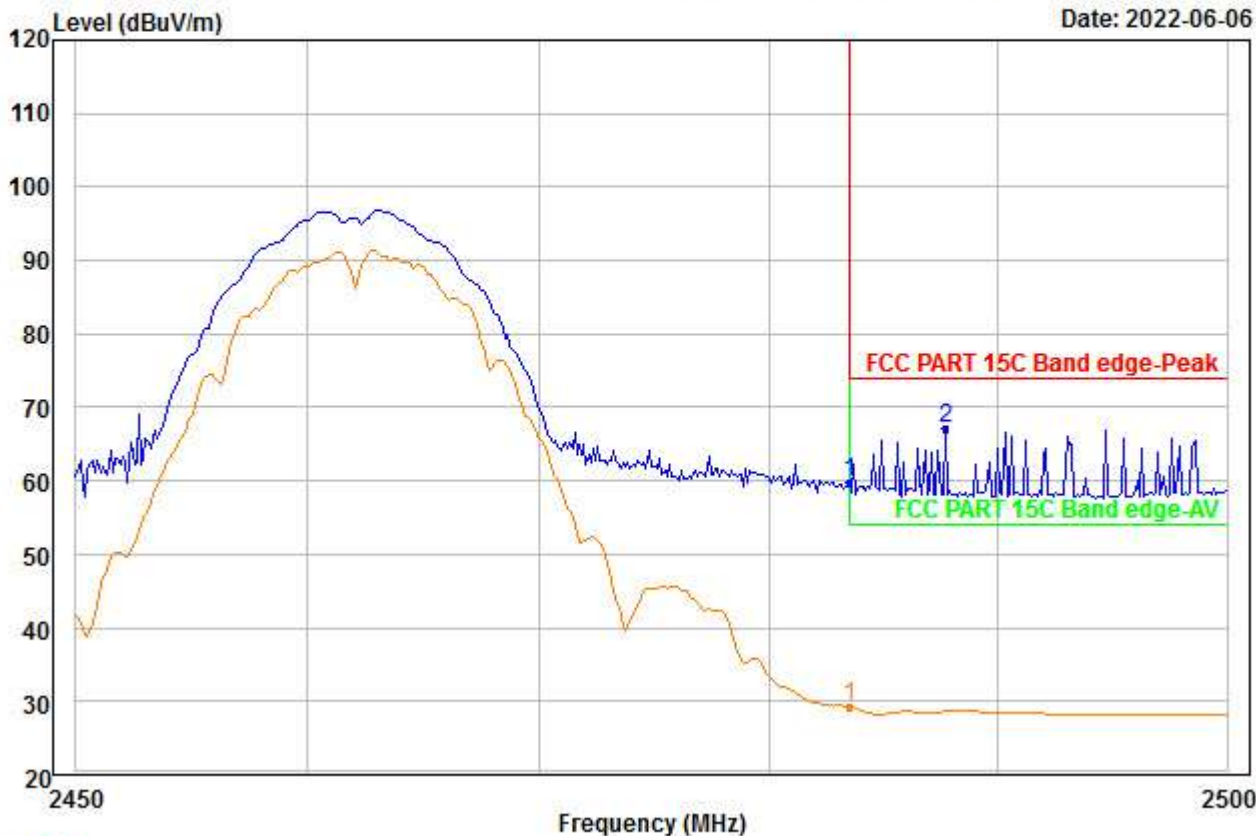


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : B_ANT1_2462
 Remark :

	Read Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	2483.500	67.80	32.95	48.09	0.00	7.03	59.69	74.00	-14.31	---	---	Peak
2 PP	2487.675	75.10	32.97	48.09	0.00	7.03	67.01	74.00	-6.99	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\BE\4_00010.EMI

Date: 2022-06-06

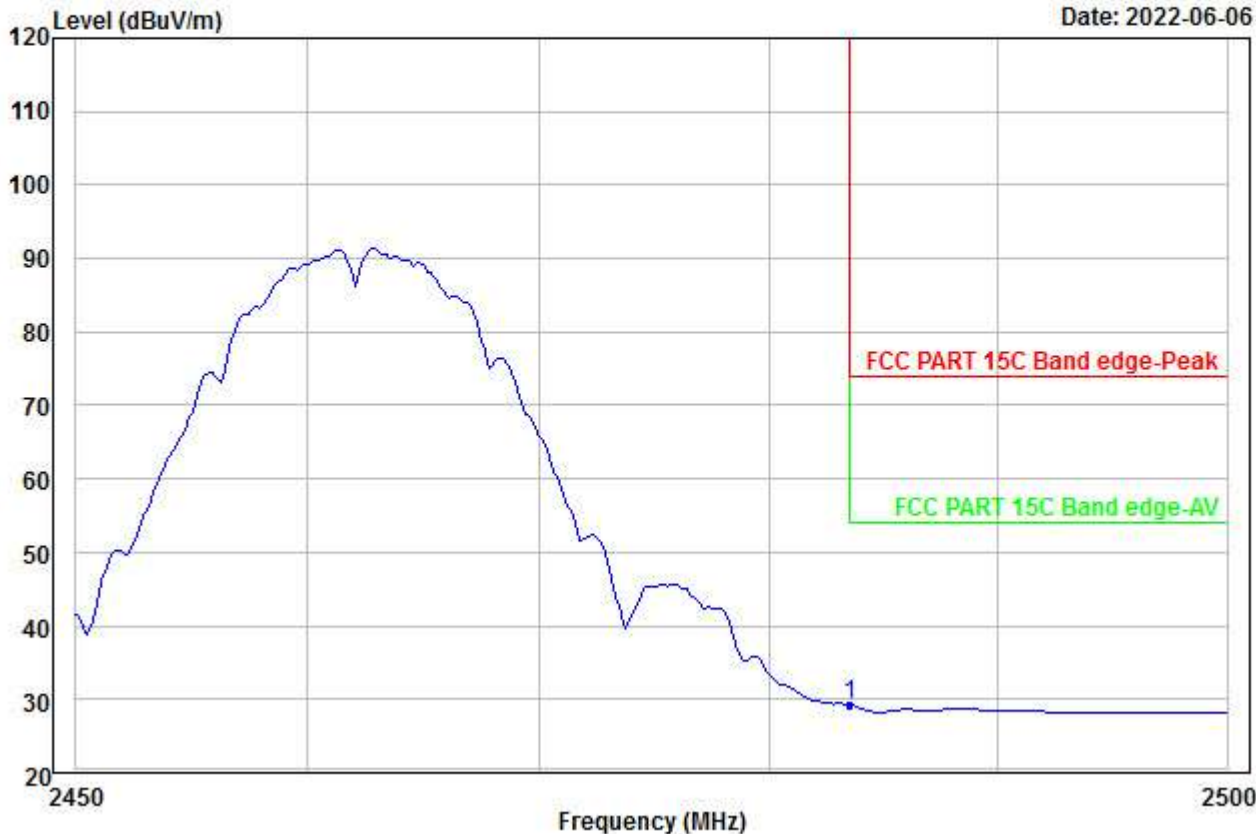


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : B_ANT1_2462
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 2483.500	37.44	32.95	48.09	0.00	7.03	29.33	54.00	-24.67	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\BE\4_00011.EMI

Date: 2022-06-06

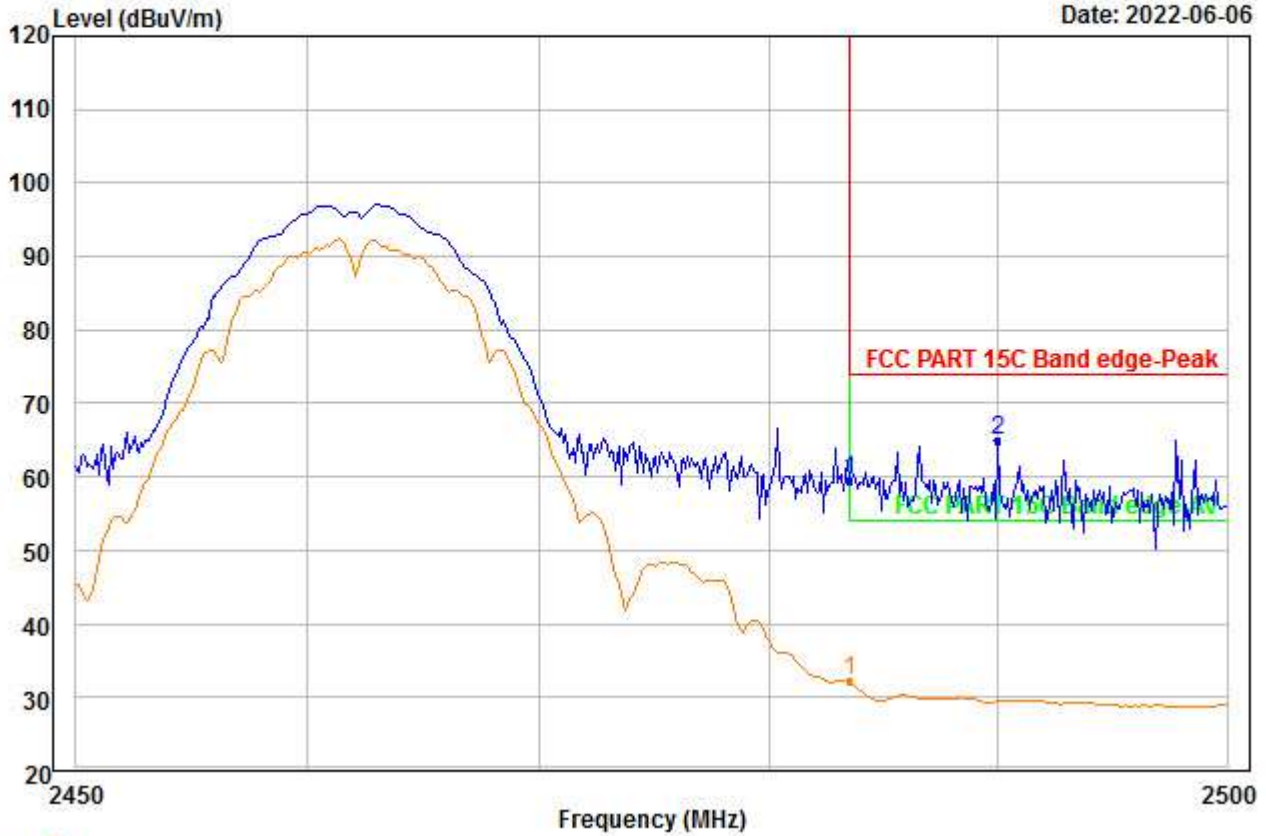


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : B_ANT1_2462
 Remark :

	Read Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	2483.500	67.71	32.95	48.09	0.00	7.03	59.60	74.00	-14.40	---	---	Peak
2 PP	2489.980	73.15	32.97	48.09	0.00	7.04	65.07	74.00	-8.93	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\BE\4_00012.EMI

Date: 2022-06-06

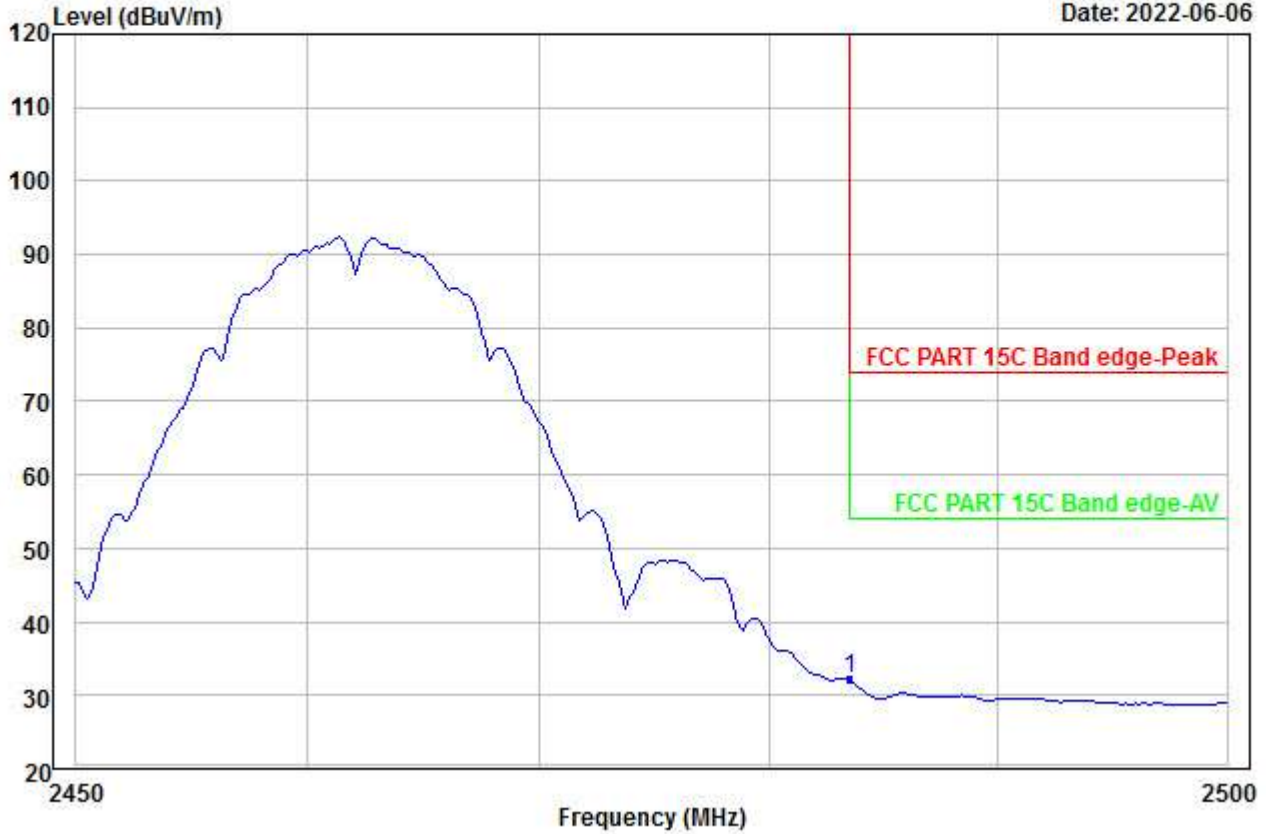


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : B_ANT1_2462
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 2483.500	40.34	32.95	48.09	0.00	7.03	32.23	54.00	-21.77	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\BE\4_00013.EMI

Date: 2022-06-06

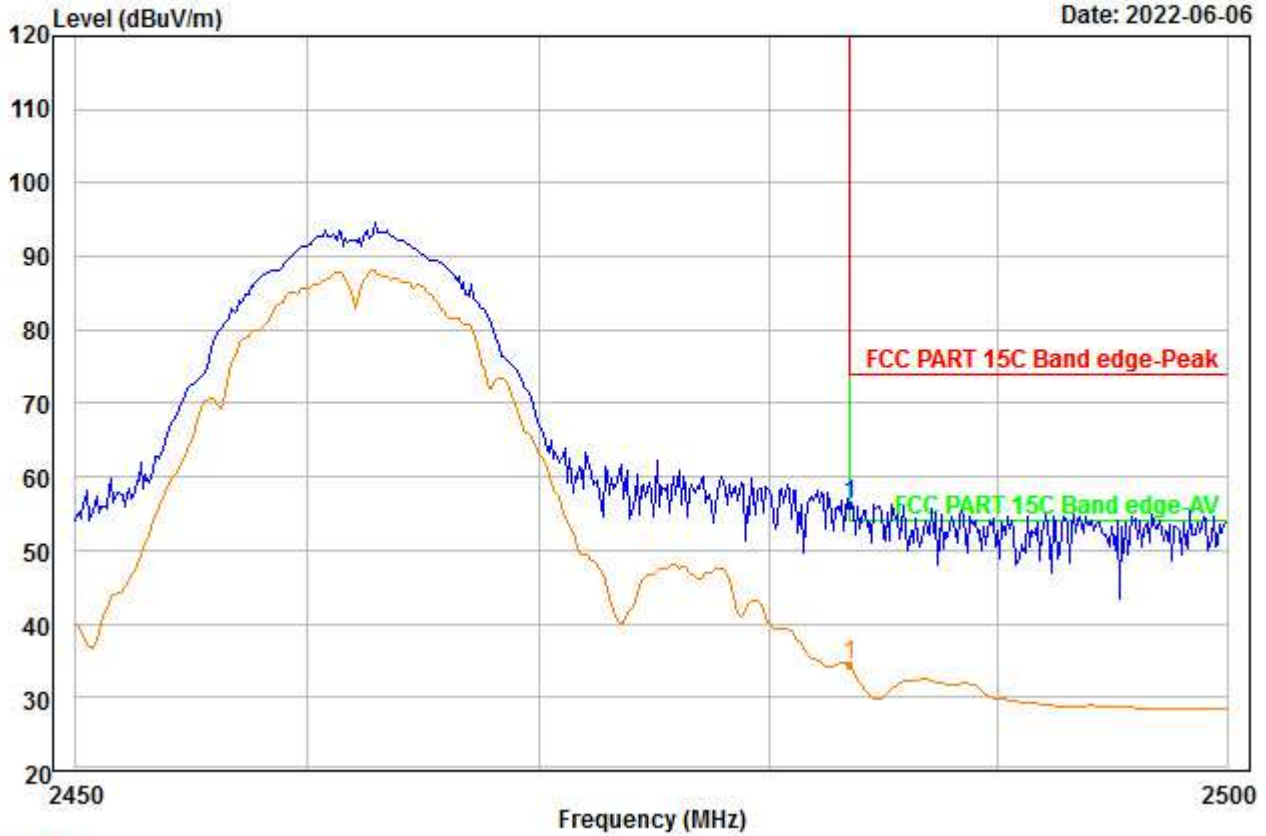


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : B_ANT0_2462
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 2483.500	64.24	32.95	48.09	0.00	7.03	56.13	74.00	-17.87	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\BE\4_00014.EMI

Date: 2022-06-06

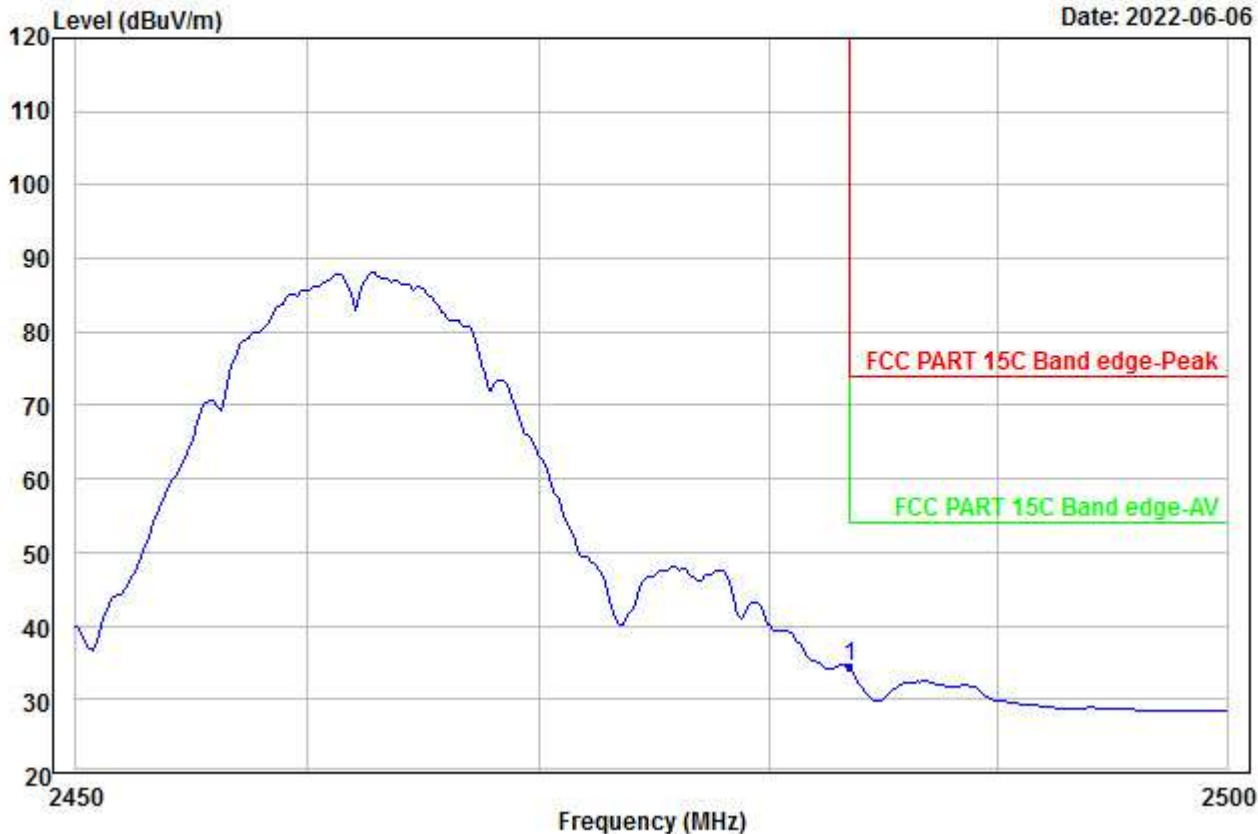


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : B_ANT0_2462
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 2483.500	42.42	32.95	48.09	0.00	7.03	34.31	74.00	-39.69	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\BE\4_00015.EMI

Date: 2022-06-06

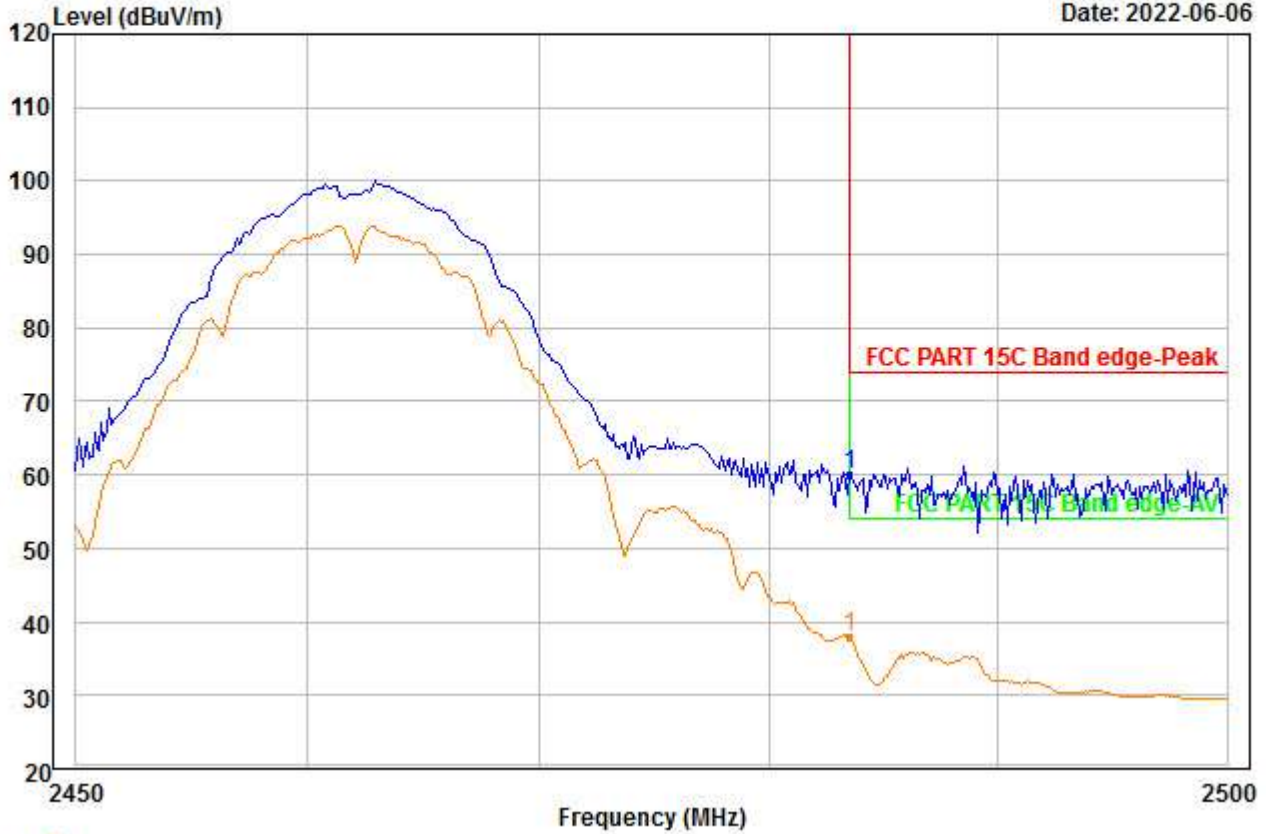


Trace: 1
 Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : B_ANT0_2462
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 2483.500	68.05	32.95	48.09	0.00	7.03	59.94	74.00	-14.06	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\BE\4_00016.EMI

Date: 2022-06-06

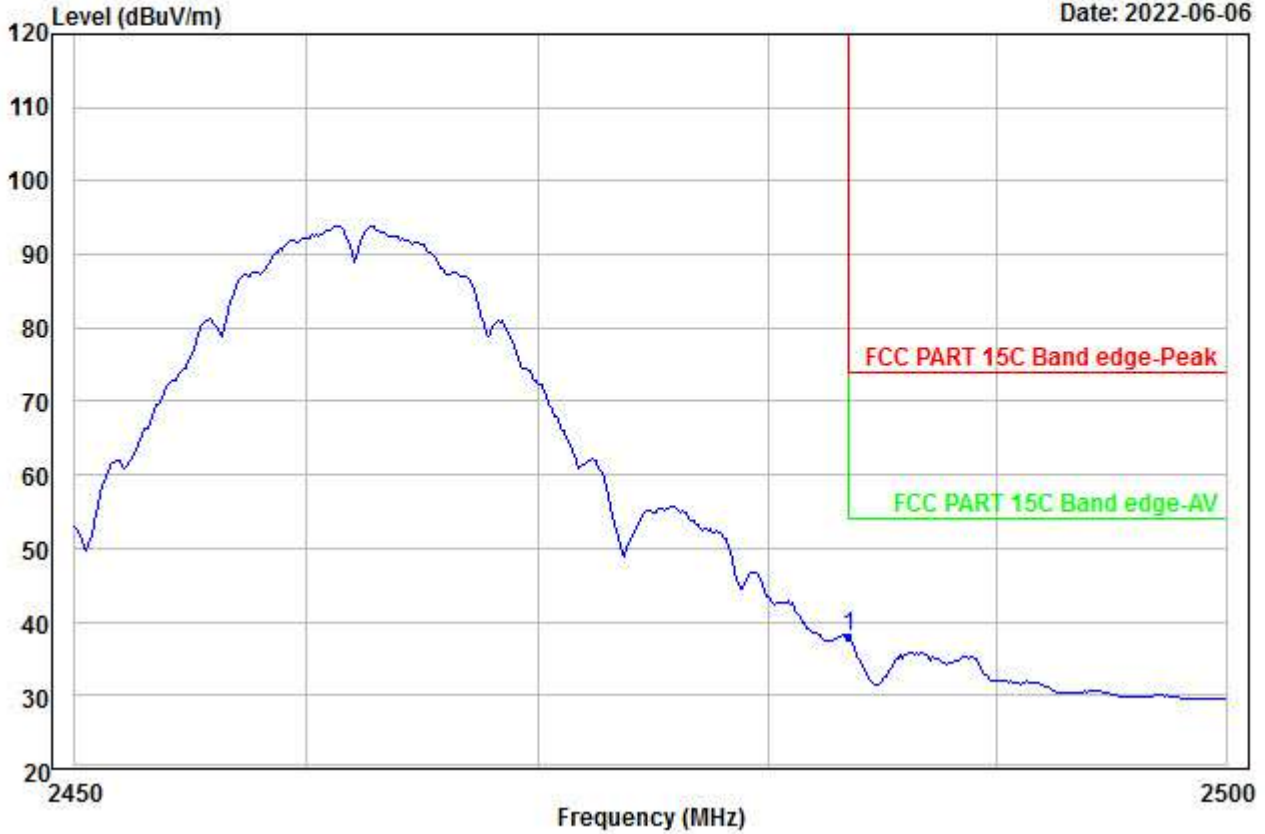


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : B_ANT0_2462
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 2483.500	46.12	32.95	48.09	0.00	7.03	38.01	74.00	-35.99	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\BE\4_00017.EMI

Date: 2022-06-06

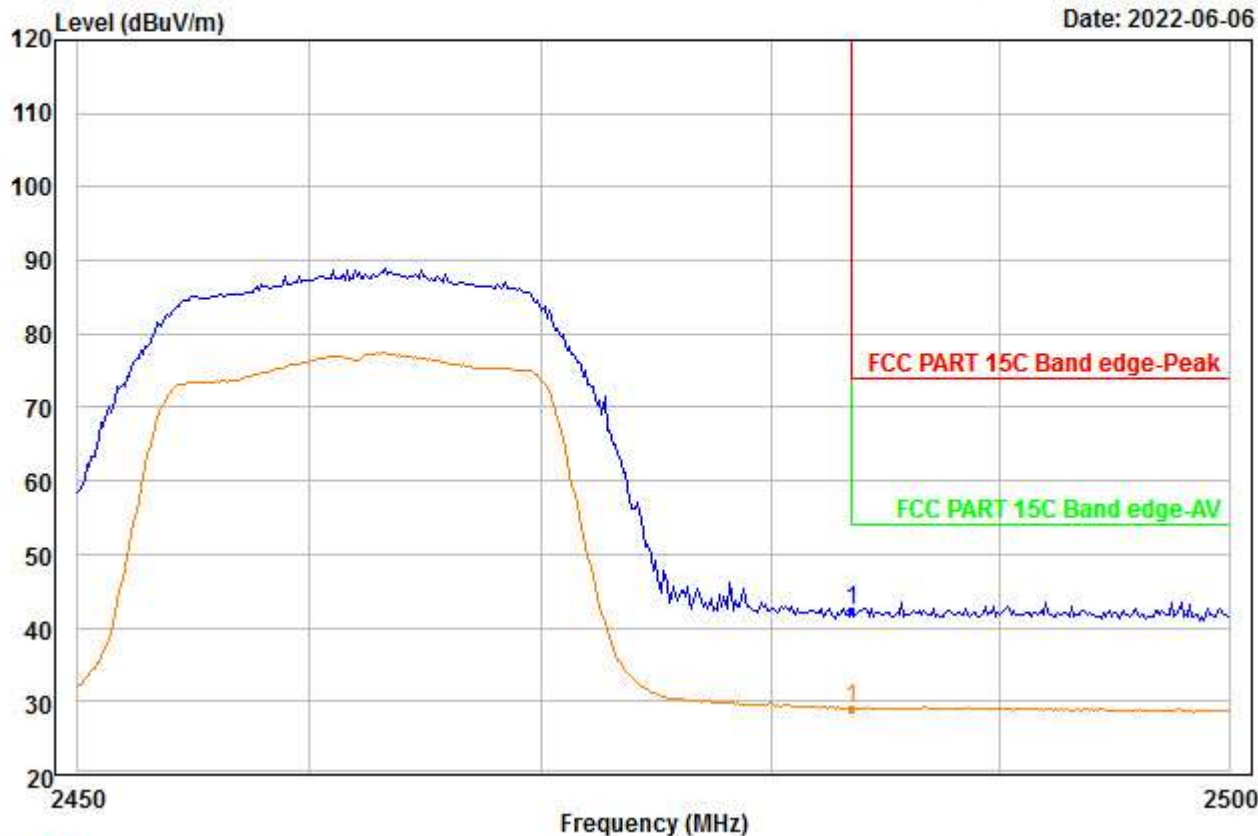


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : G_ANT0_2462
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 2483.500	50.47	32.95	48.09	0.00	7.03	42.36	74.00	-31.64	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\BE\4_00018.EMI

Date: 2022-06-06

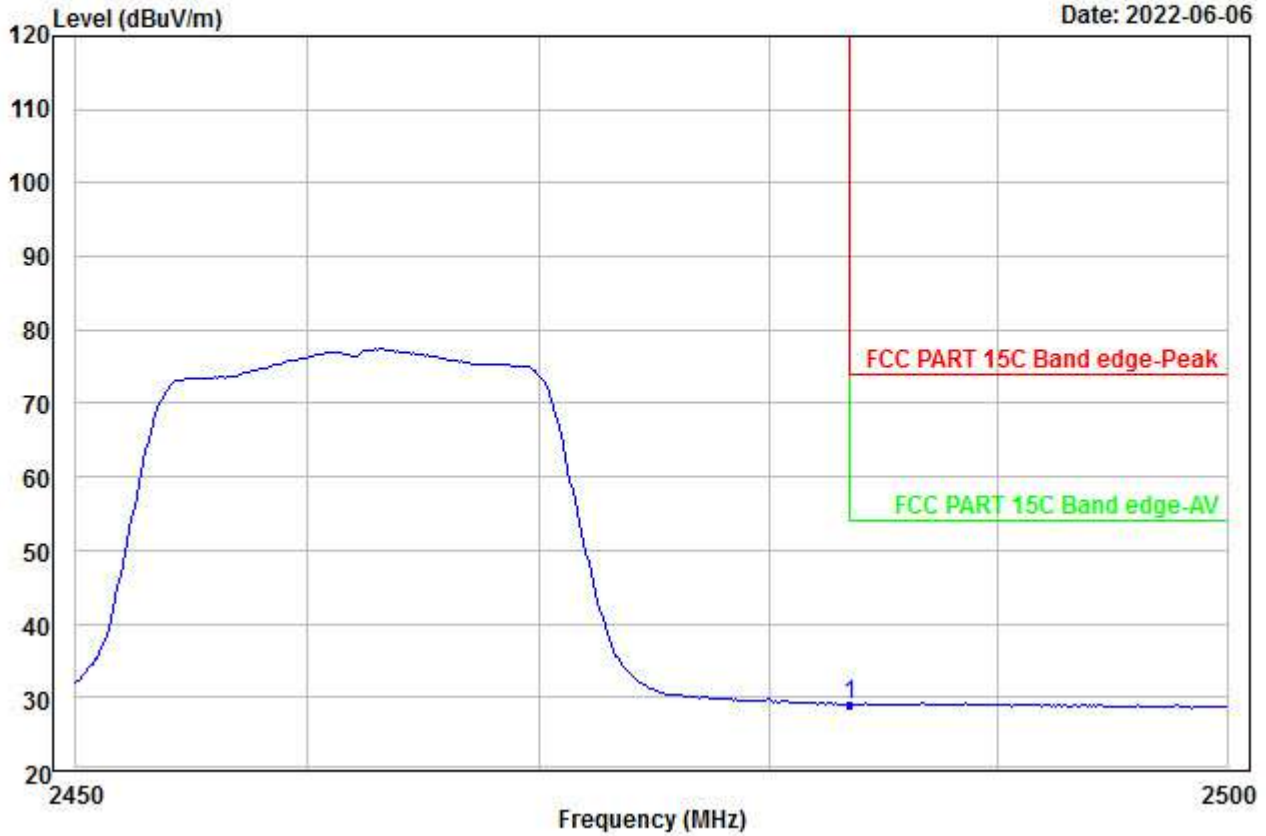


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : G_ANT0_2462
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 2483.500	37.20	32.95	48.09	0.00	7.03	29.09	54.00	-24.91	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\BE\4_00019.EMI

Date: 2022-06-06

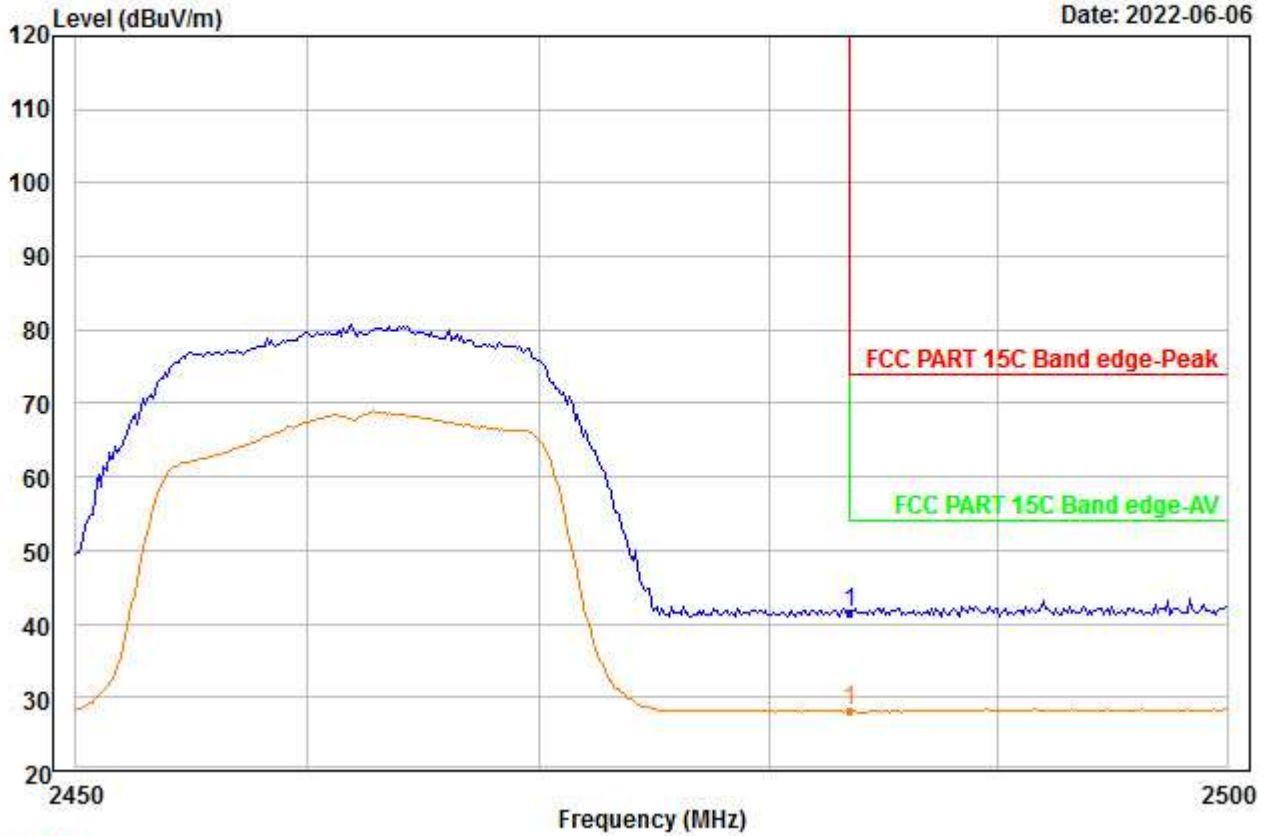


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : G_ANT0_2462
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 2483.500	49.57	32.95	48.09	0.00	7.03	41.46	74.00	-32.54	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\BE\4_00020.EMI

Date: 2022-06-06

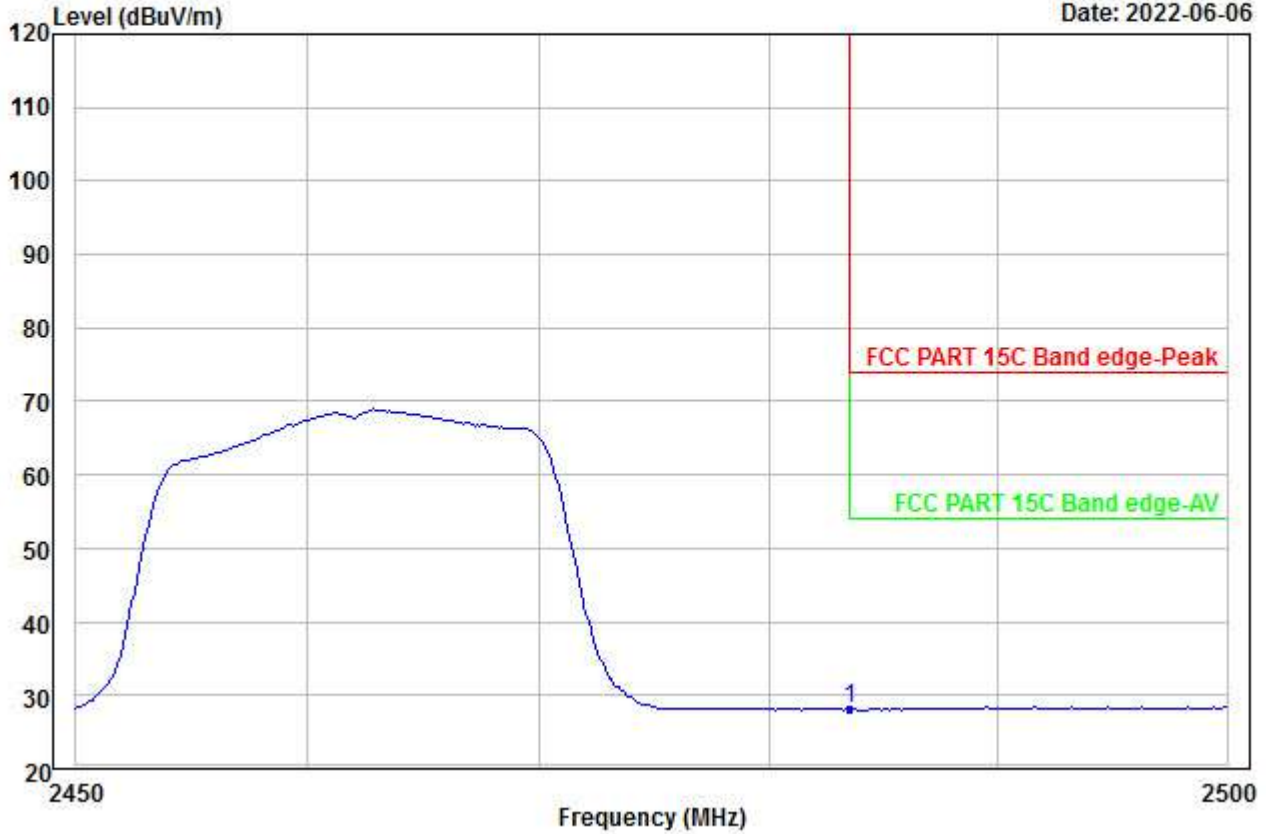


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : G_ANT0_2462
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 2483.500	36.24	32.95	48.09	0.00	7.03	28.13	54.00	-25.87	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\BE\4_00021.EMI

Date: 2022-06-06

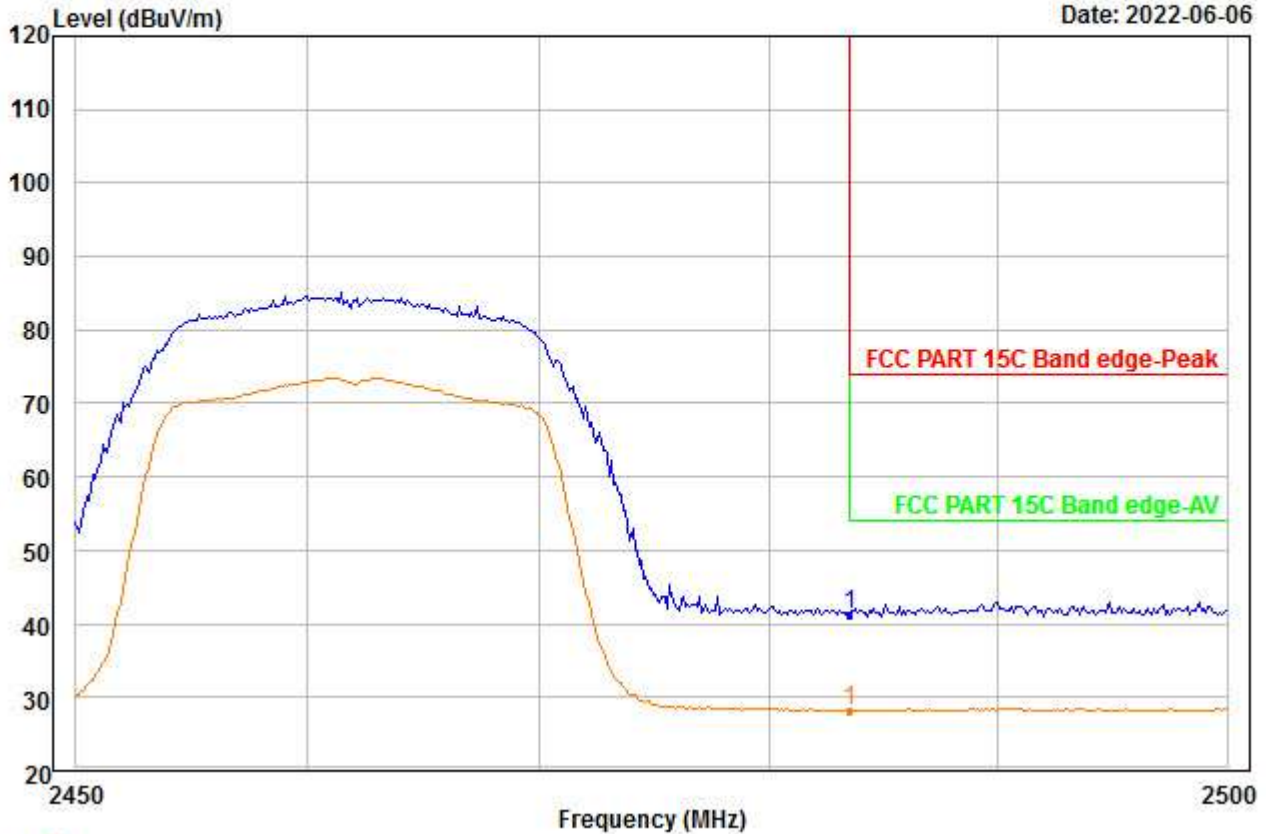


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : G_ANT1_2462
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 2483.500	49.48	32.95	48.09	0.00	7.03	41.37	74.00	-32.63	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\BE\4_00022.EMI

Date: 2022-06-06

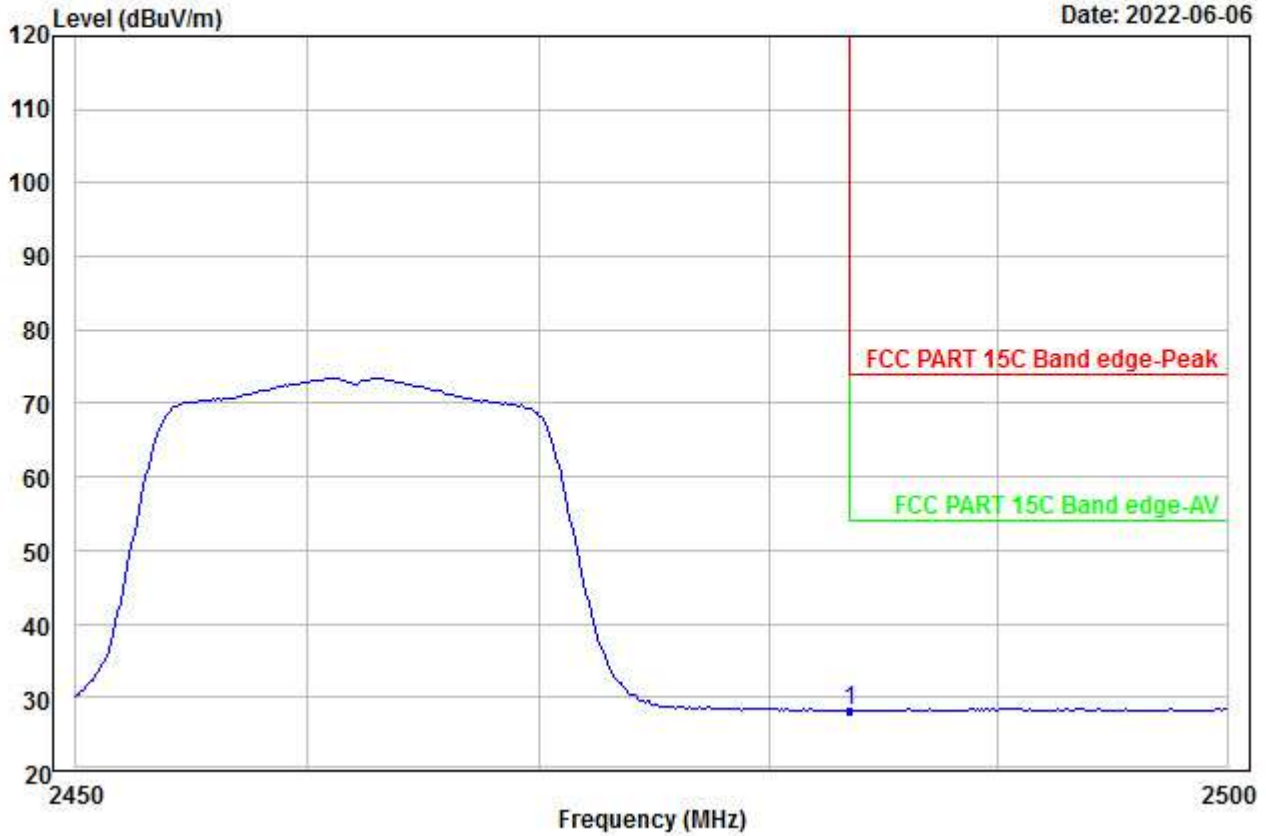


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : G_ANT1_2462
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 2483.500	36.28	32.95	48.09	0.00	7.03	28.17	54.00	-25.83	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\BE\4_00023.EMI

Date: 2022-06-06

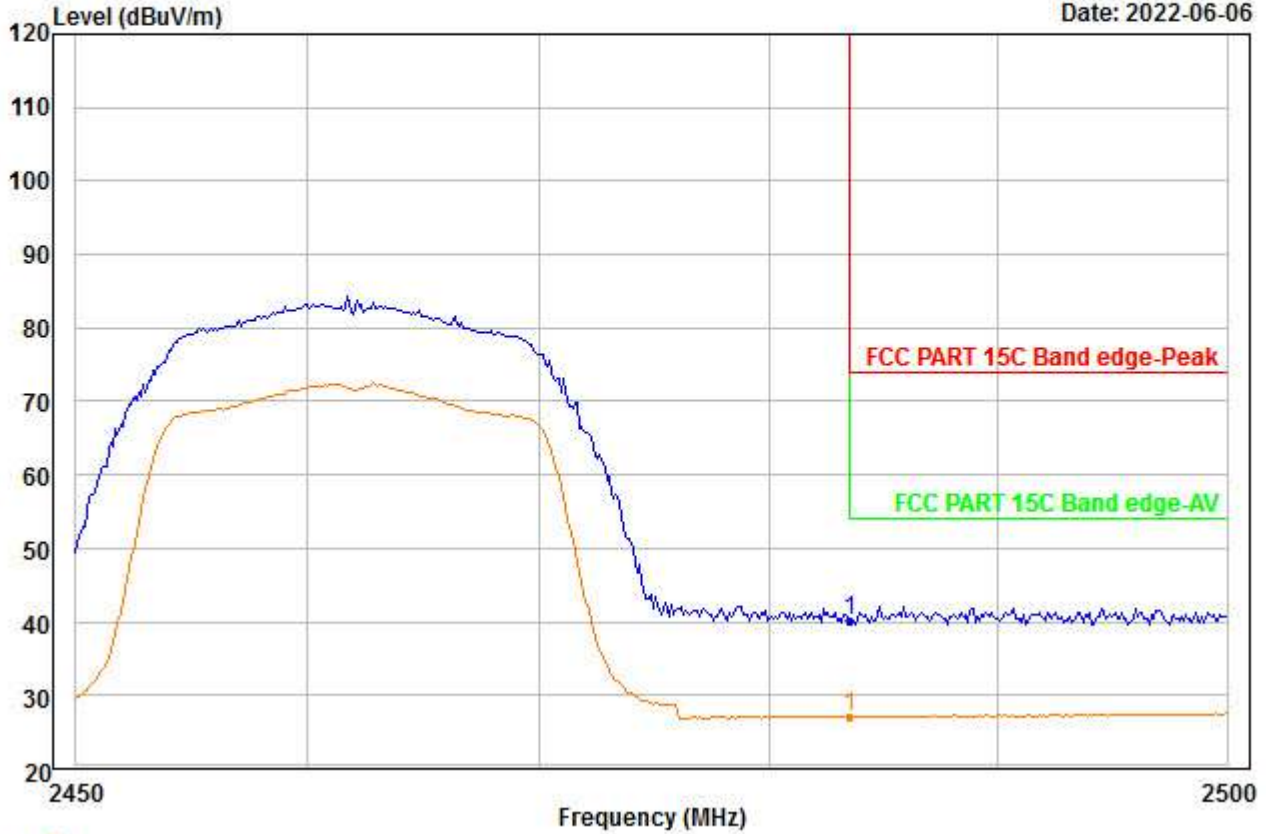


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : G_ANT1_2462
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit			
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 2483.500	48.26	32.95	48.09	0.00	7.03	40.15	74.00	-33.85	---	--- Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\BE\4_00024.EMI

Date: 2022-06-06

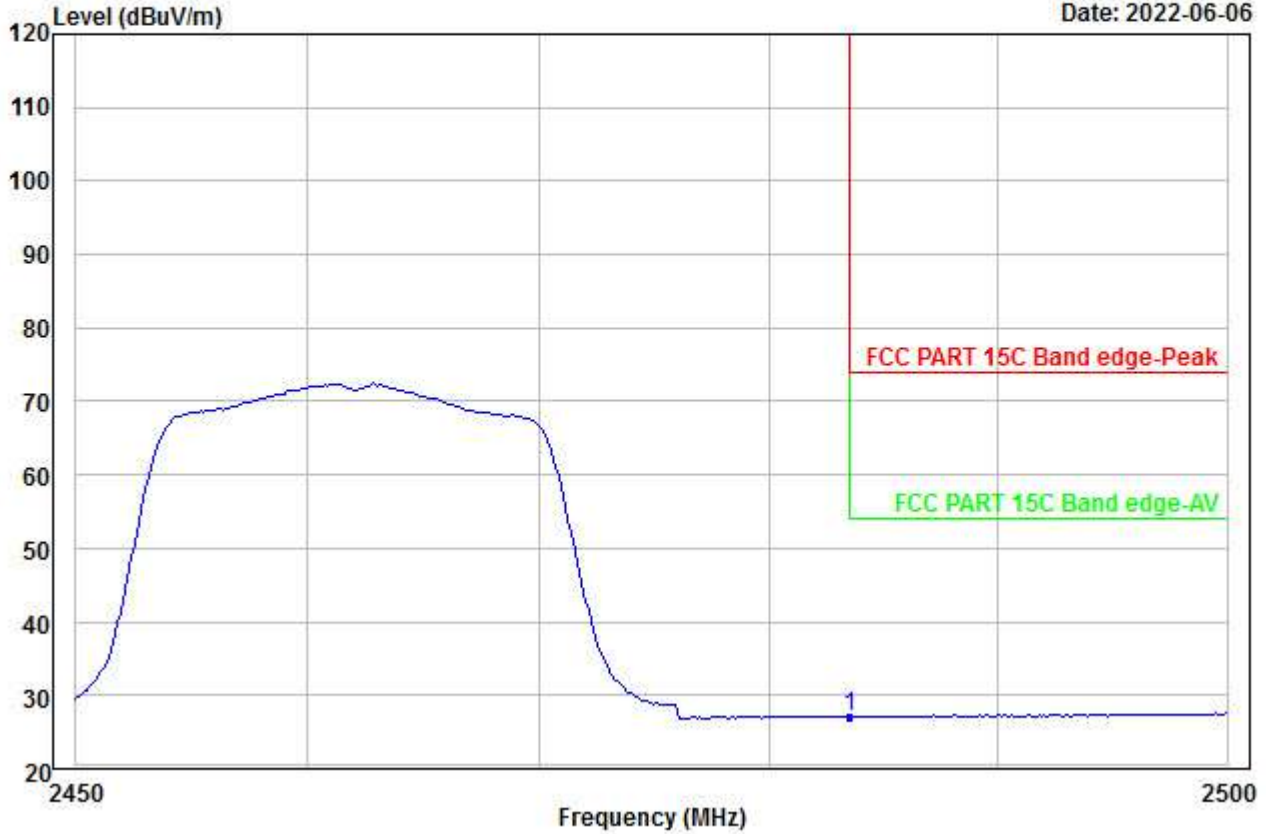


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : G_ANT1_2462
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 2483.500	35.14	32.95	48.09	0.00	7.03	27.03	54.00	-26.97	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\BE\4_00025.EMI

Date: 2022-06-06

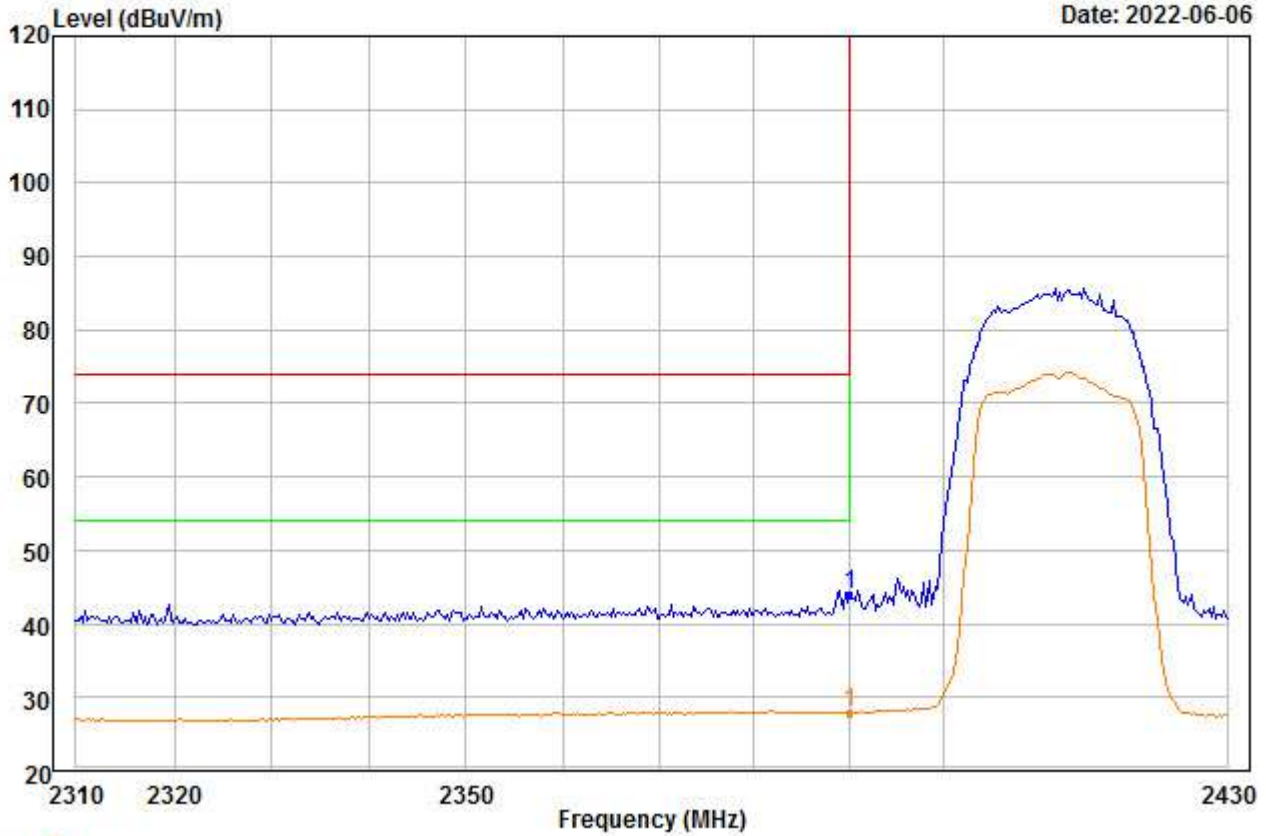


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : G_ANT1_2412
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 2390.000	52.34	32.69	48.03	0.00	6.90	43.90	74.00	-30.10	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\BE\4_00026.EMI

Date: 2022-06-06

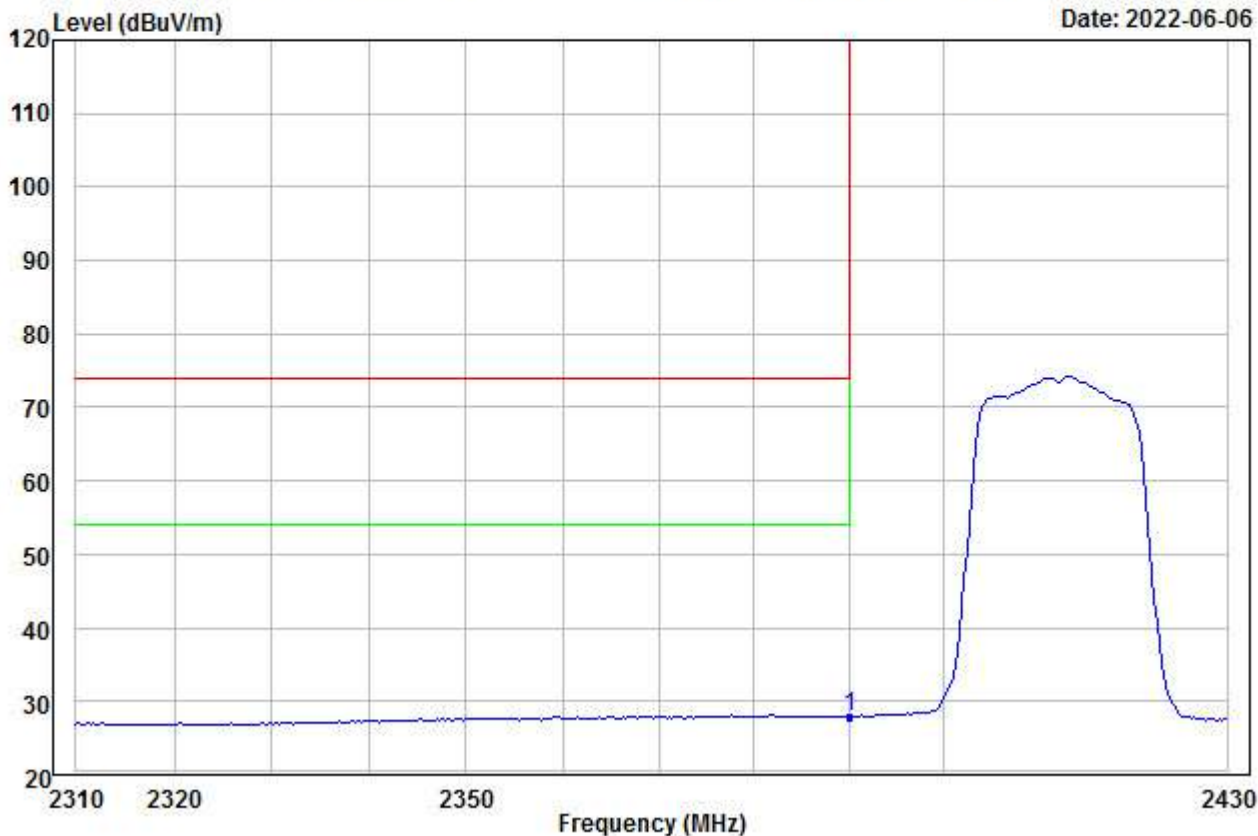


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : G_ANT1_2412
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 2390.000	36.41	32.69	48.03	0.00	6.90	27.97	54.00	-26.03	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\BE\4_00027.EMI

Date: 2022-06-06

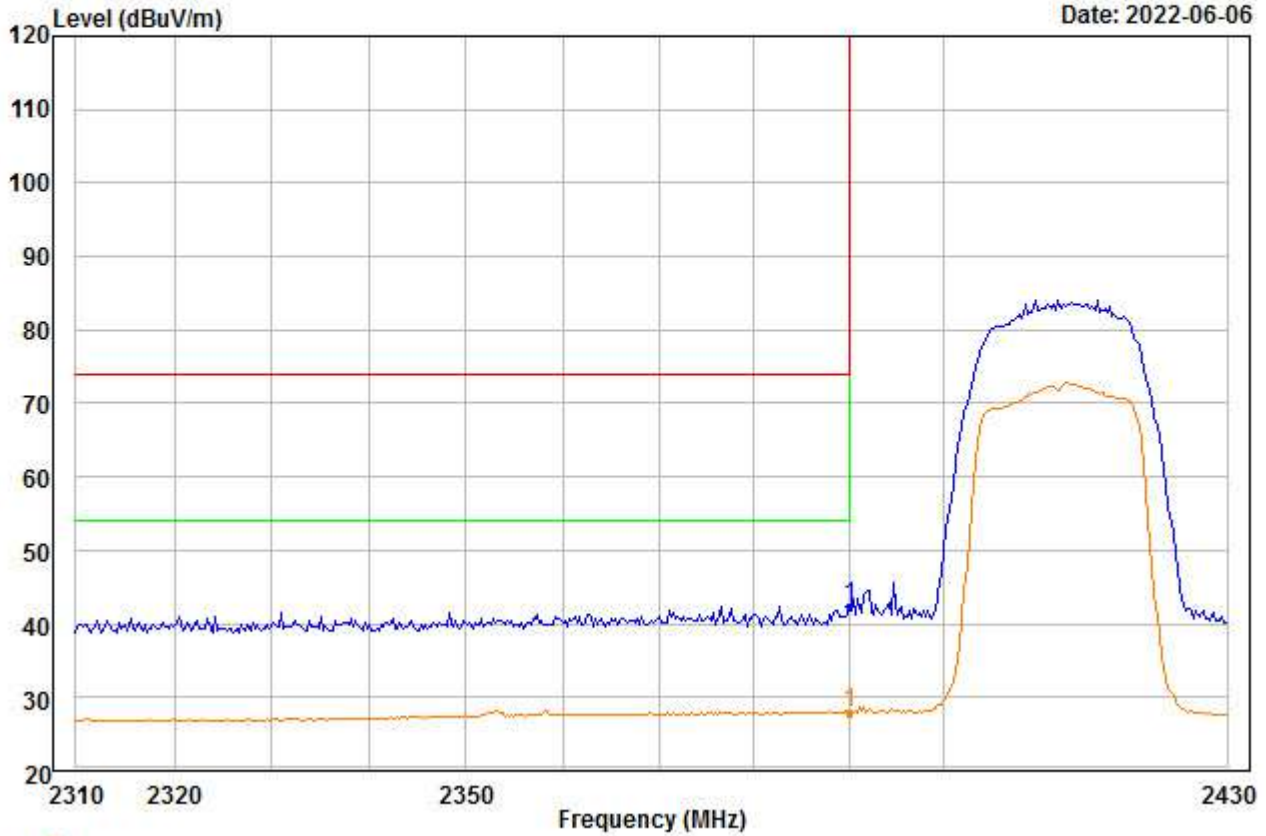


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : G_ANT1_2412
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 2390.000	50.72	32.69	48.03	0.00	6.90	42.28	74.00	-31.72	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\BE\4_00028.EMI

Date: 2022-06-06

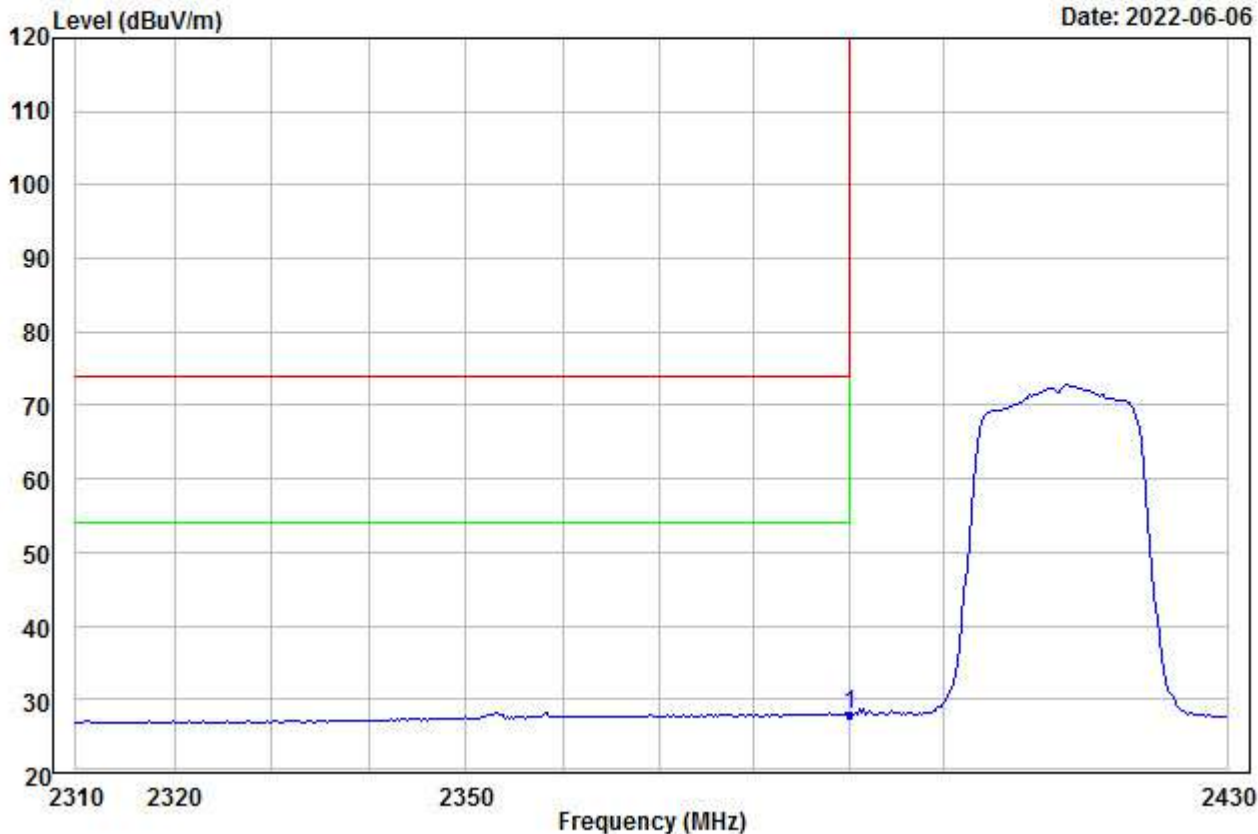


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : G_ANT1_2412
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 2390.000	36.39	32.69	48.03	0.00	6.90	27.95	54.00	-26.05	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\BE\4_00029.EMI

Date: 2022-06-06

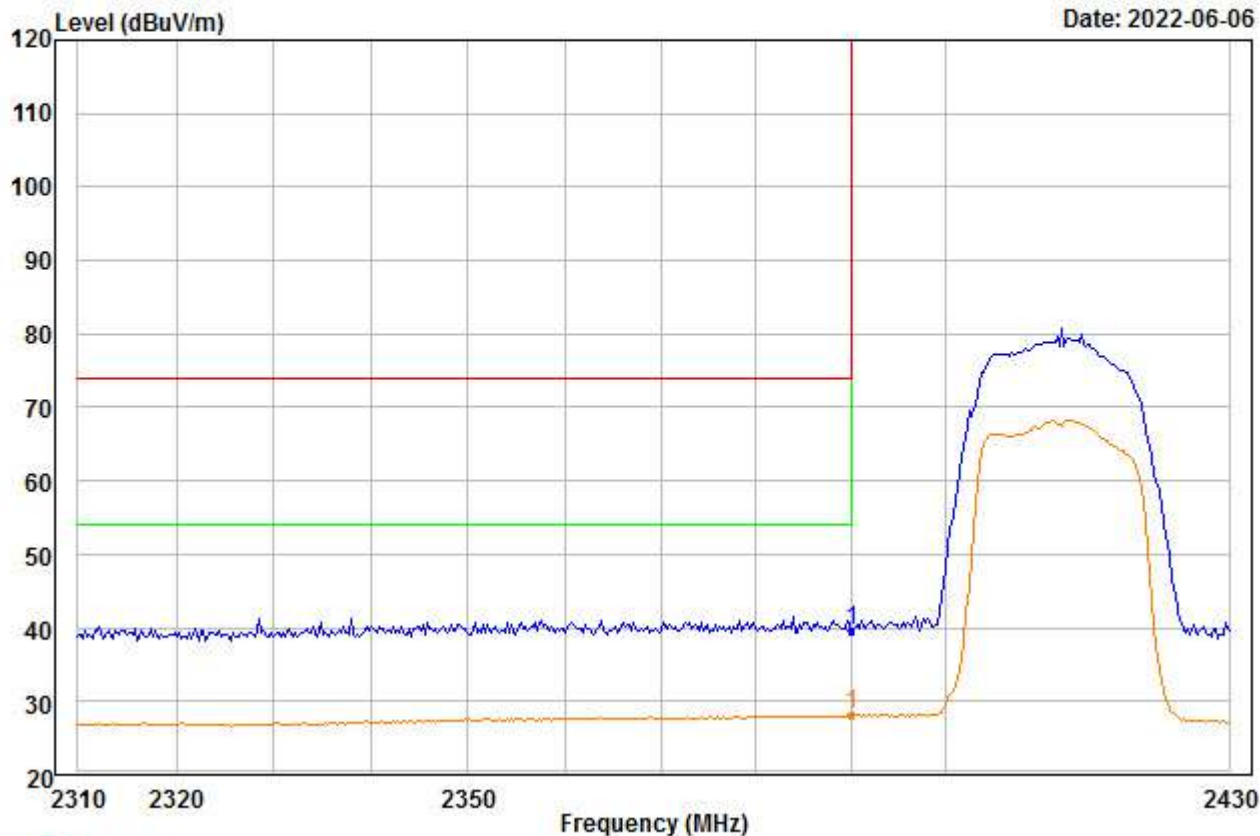


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : G_ANT0_2412
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 2390.000	48.11	32.69	48.03	0.00	6.90	39.67	74.00	-34.33	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\BE\4_00030.EMI

Date: 2022-06-06

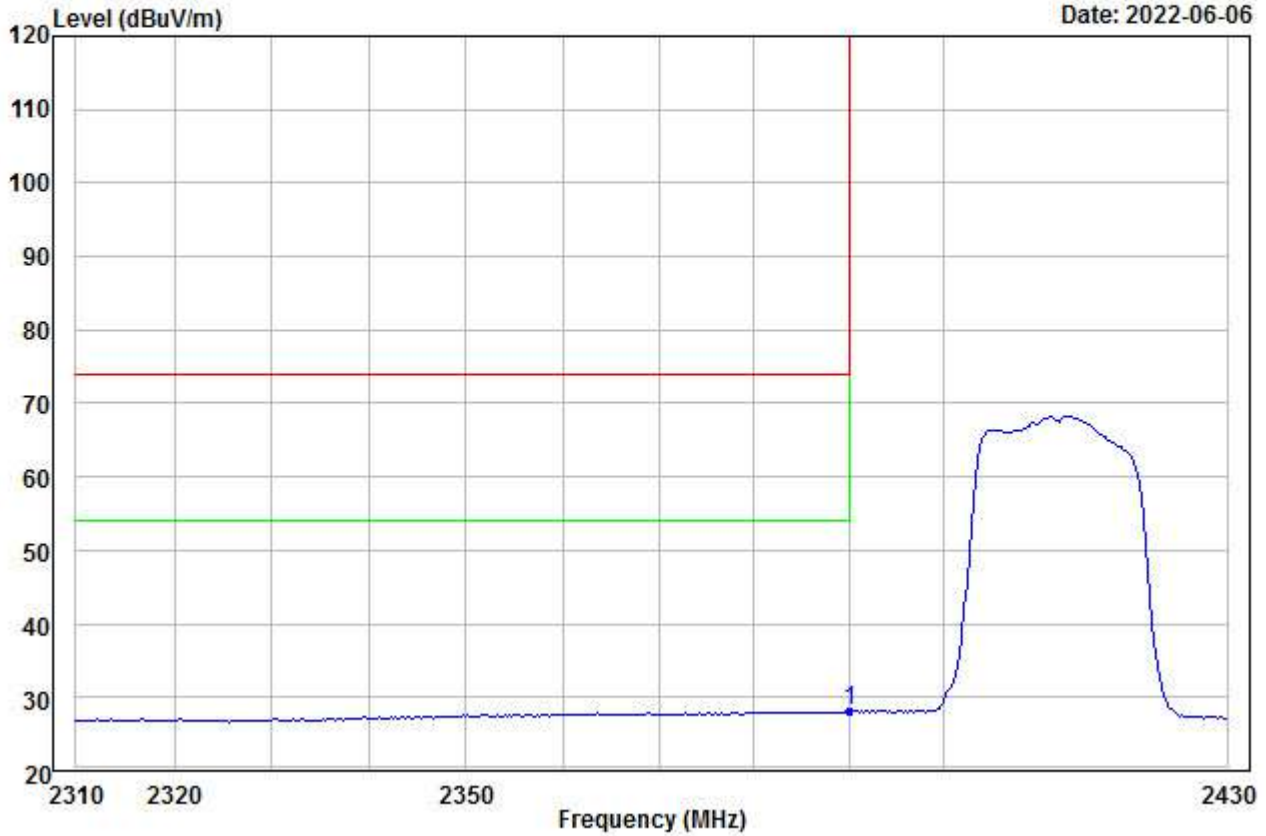


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : G_ANT0_2412
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit			
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 2390.000	36.58	32.69	48.03	0.00	6.90	28.14	54.00	-25.86	---	--- Aver

File: F:\Test Template\上海ITSI\2022\220523032 SA750\B\2.4G\BE\4_00031.EMI

Date: 2022-06-06

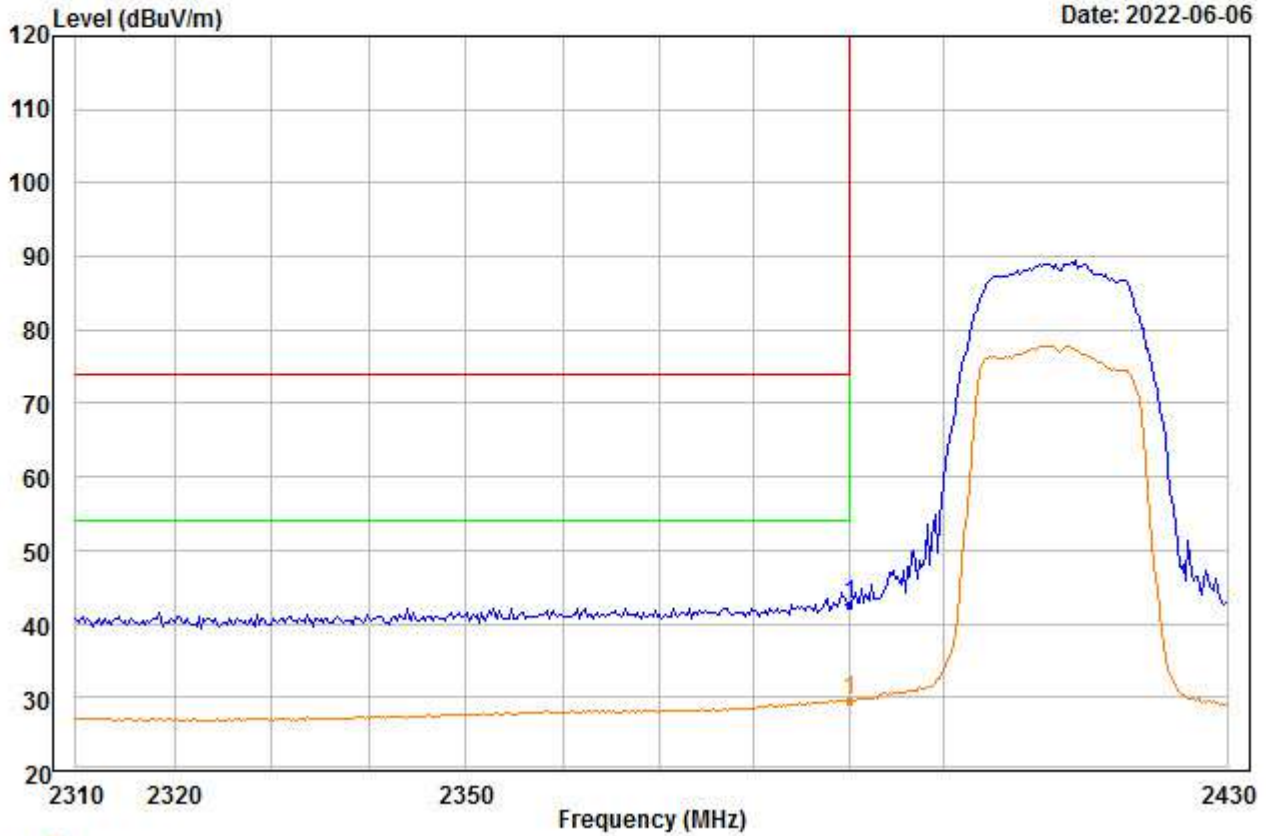


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : G_ANT0_2412
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Level	Line	Limit			
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 2390.000	51.02	32.69	48.03	0.00	6.90	42.58	74.00	-31.42	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\BE\4_00032.EMI

Date: 2022-06-06

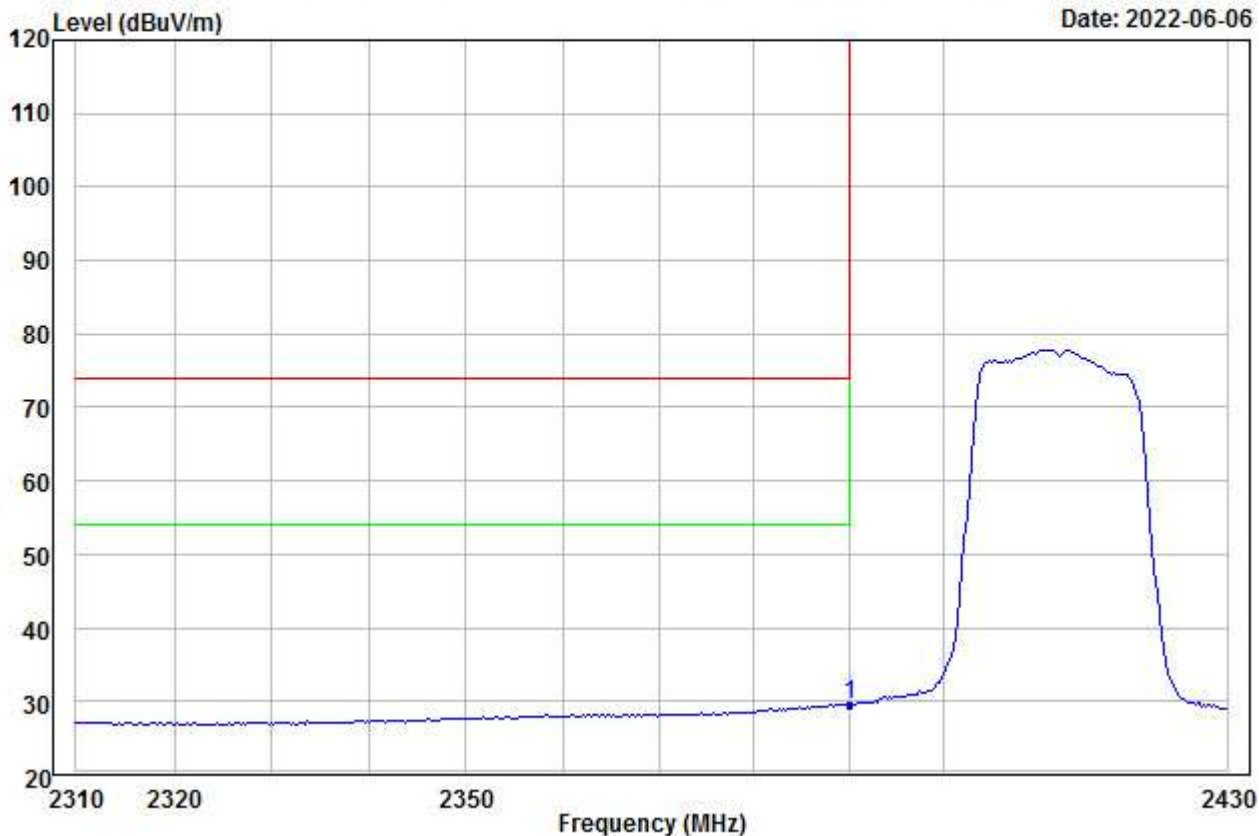


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : G_ANT0_2412
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 2390.000	38.07	32.69	48.03	0.00	6.90	29.63	54.00	-24.37	---	---	Aver

File: F:\Test Template\上海ITSI\2022\220523032 SA750\B\2.4G\BE\4_00033.EMI

Date: 2022-06-06

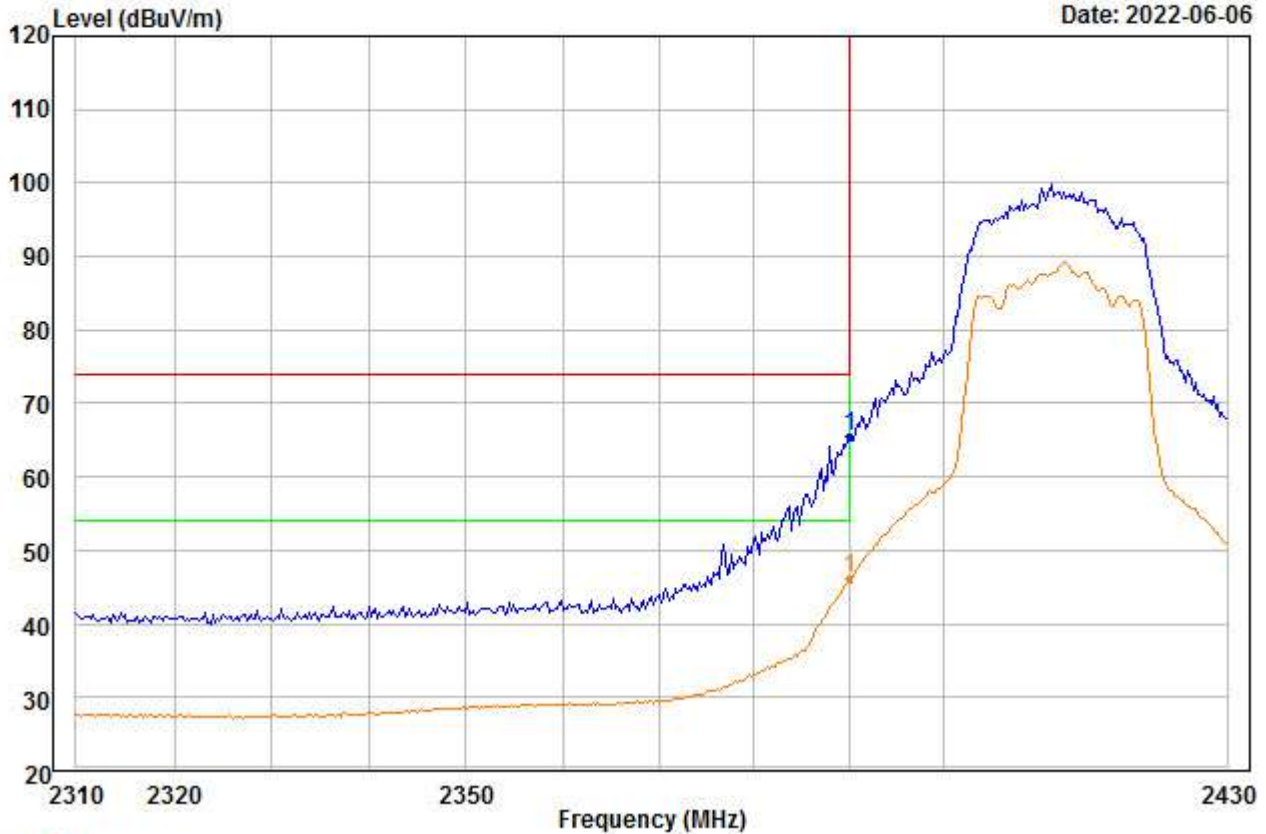

Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_2412
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 2390.000	73.95	32.69	48.03	0.00	6.90	65.51	74.00	-8.49	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\BE\4_00034.EMI

Date: 2022-06-06




Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_2412
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Level	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 2390.000	54.58	32.69	48.03	0.00	6.90	46.14	54.00	-7.86	---	---	Aver

File: F:\Test Template\上海ITSI\2022\220523032 SA750\B\2.4G\BE\4_00035.EMI

Date: 2022-06-06

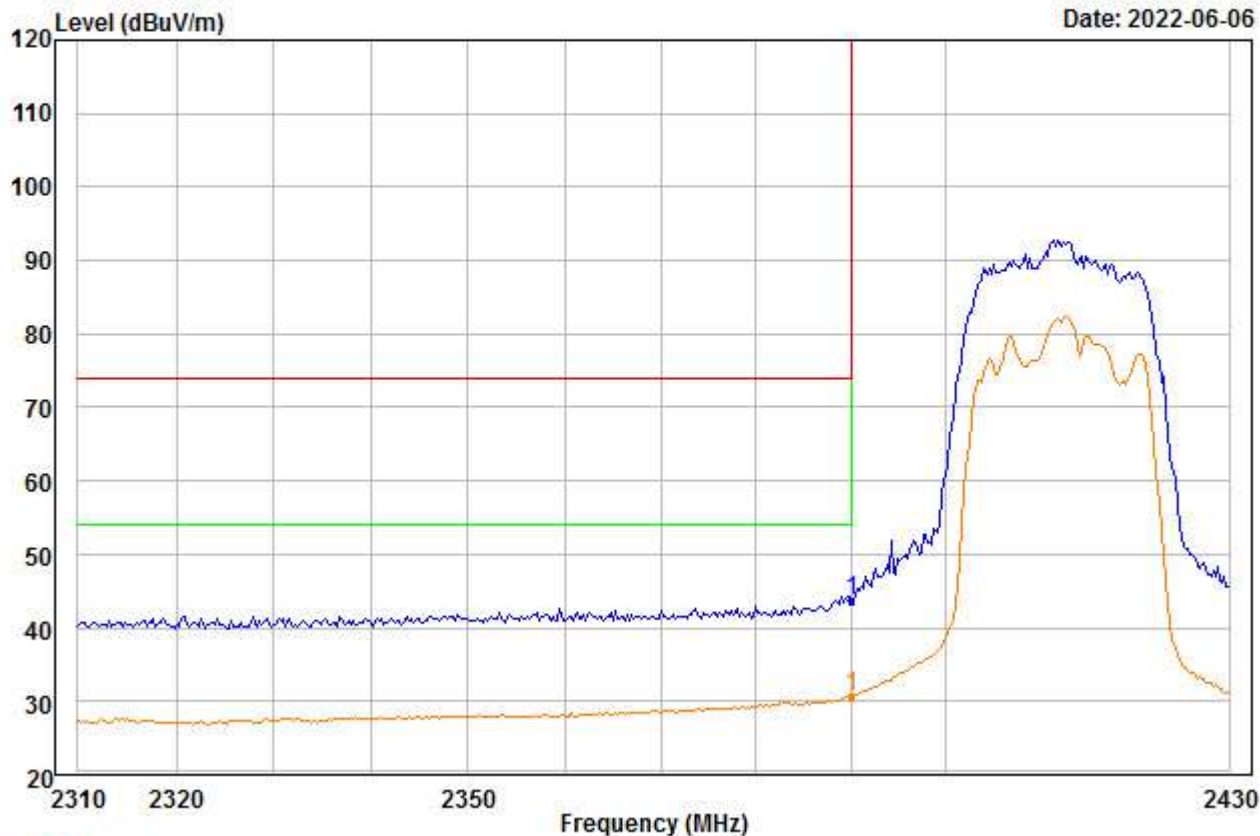


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_2412
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Level	Line	Limit			
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 2390.000	52.18	32.69	48.03	0.00	6.90	43.74	74.00	-30.26	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\BE\4_00036.EMI

Date: 2022-06-06

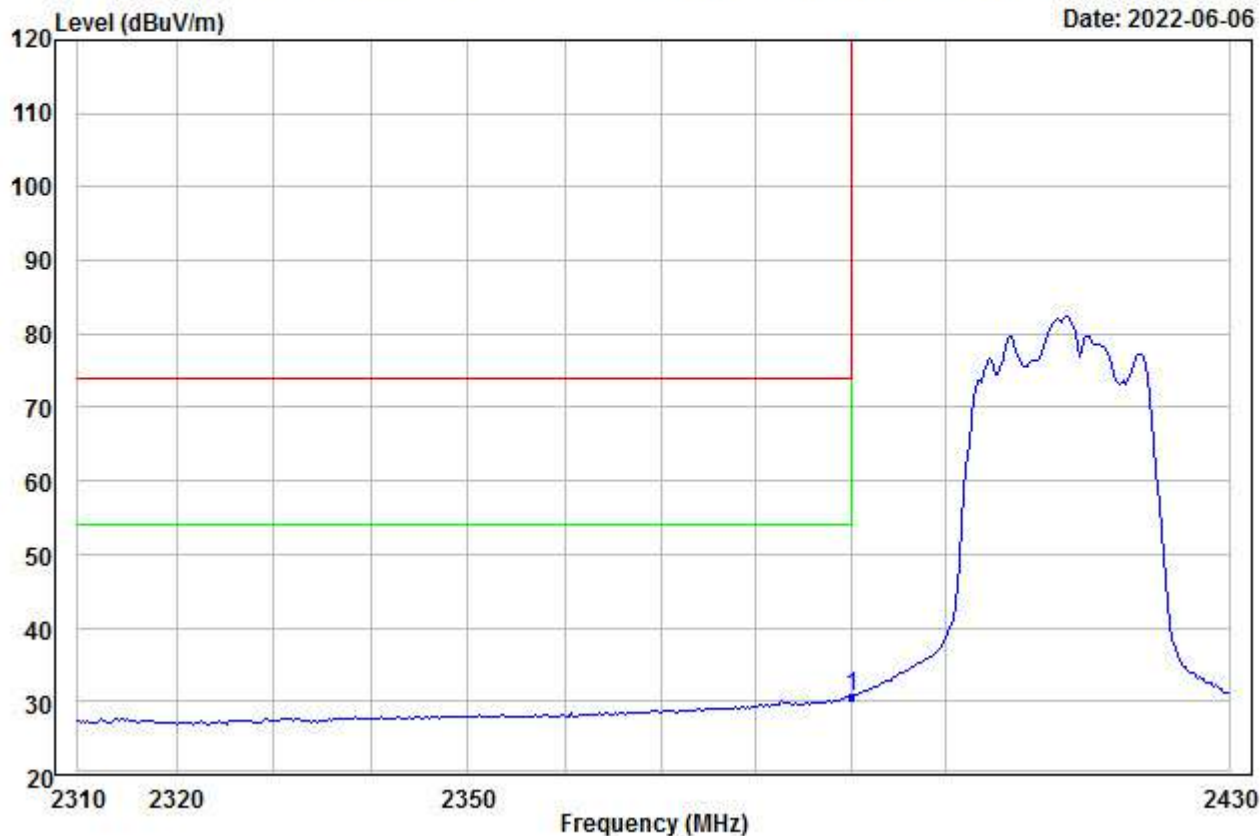


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_2412
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit			
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 2390.000	39.18	32.69	48.03	0.00	6.90	30.74	54.00	-23.26	---	--- Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\BE\4_00037.EMI

Date: 2022-06-06

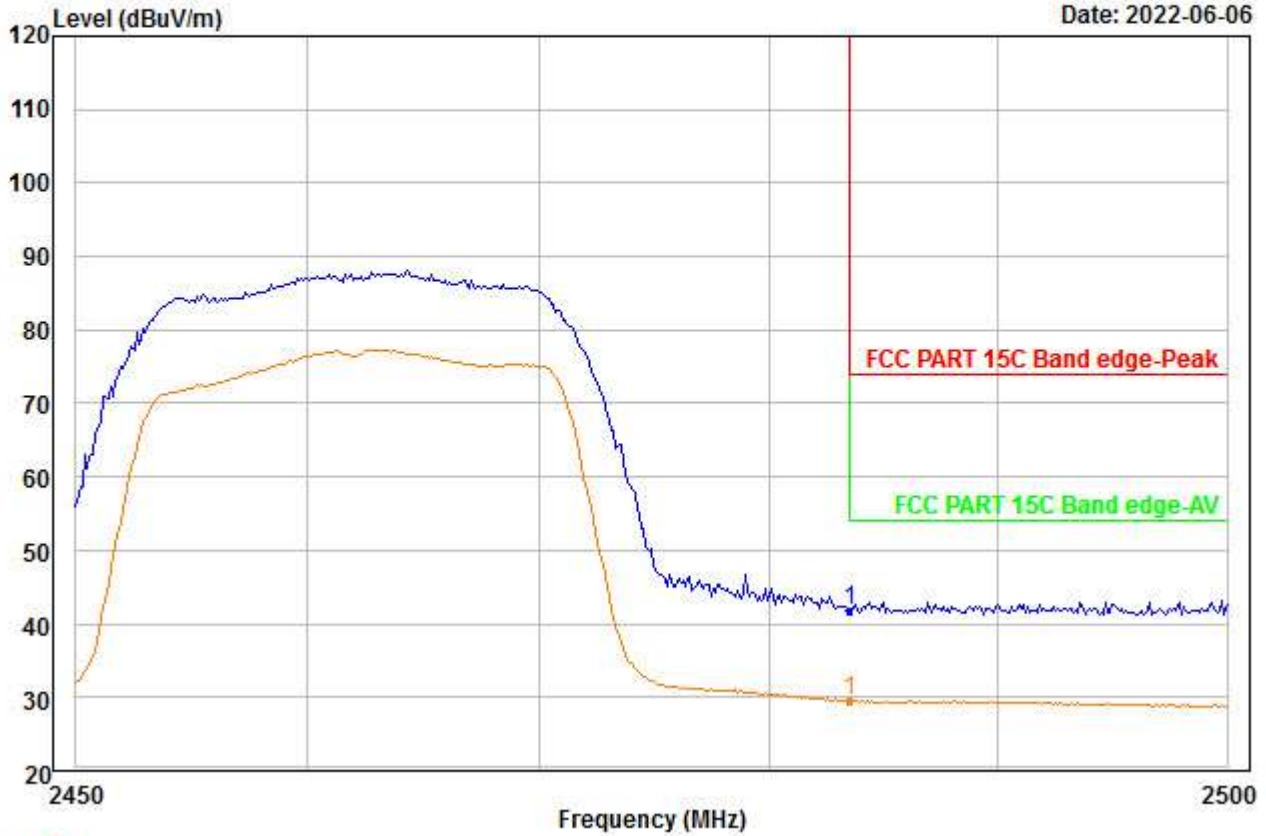


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_2412
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 2483.500	49.95	32.95	48.09	0.00	7.03	41.84	74.00	-32.16	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\BE\4_00038.EMI

Date: 2022-06-06

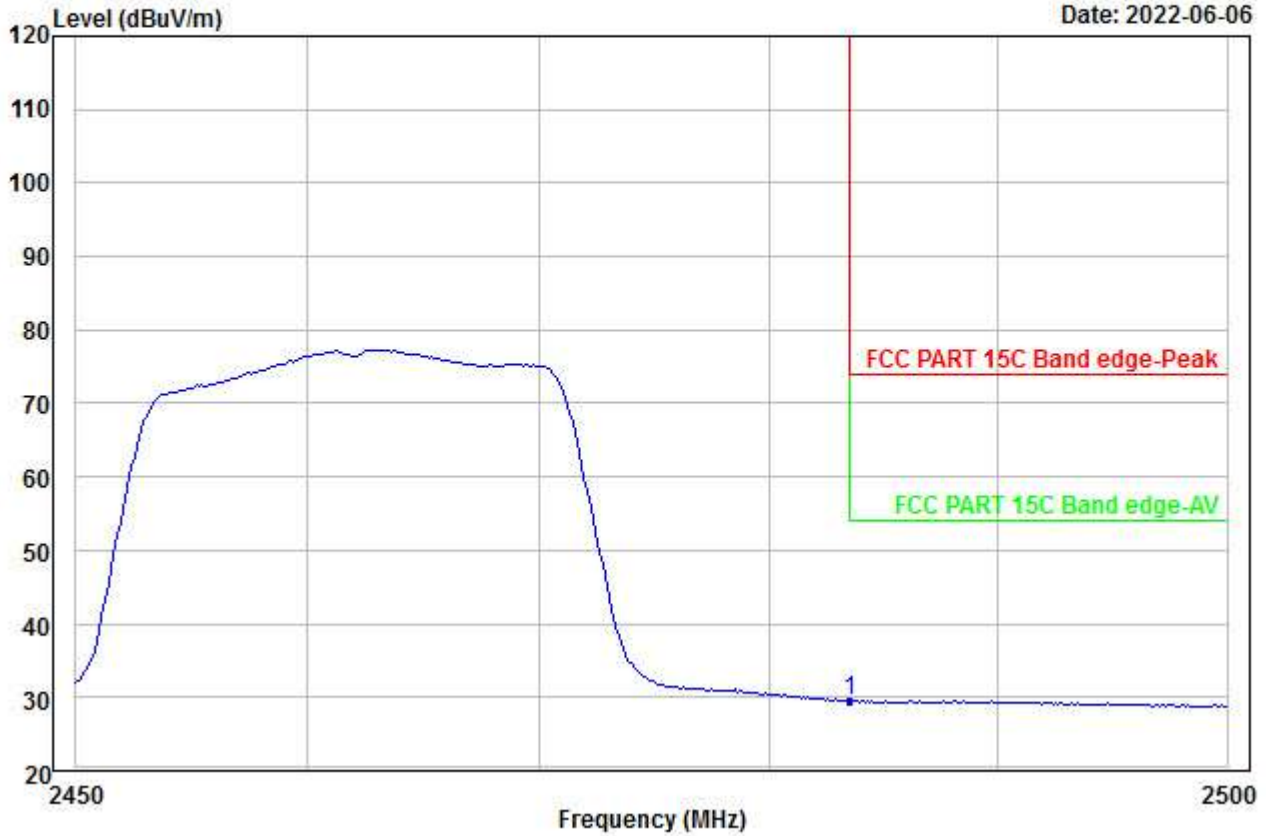


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_2412
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 2483.500	37.60	32.95	48.09	0.00	7.03	29.49	54.00	-24.51	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\BE\4_00039.EMI

Date: 2022-06-06

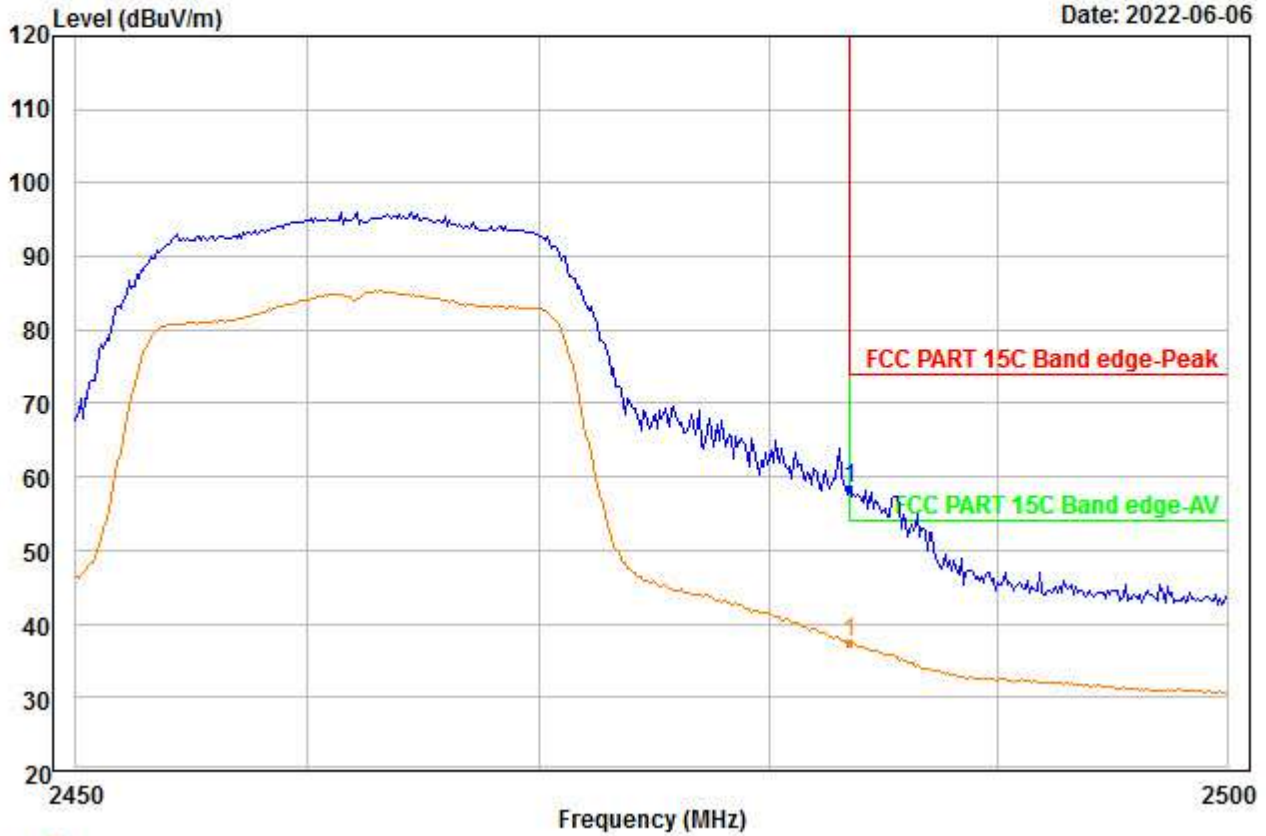


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_2412
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 2483.500	66.61	32.95	48.09	0.00	7.03	58.50	74.00	-15.50	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\BE\4_00040.EMI

Date: 2022-06-06

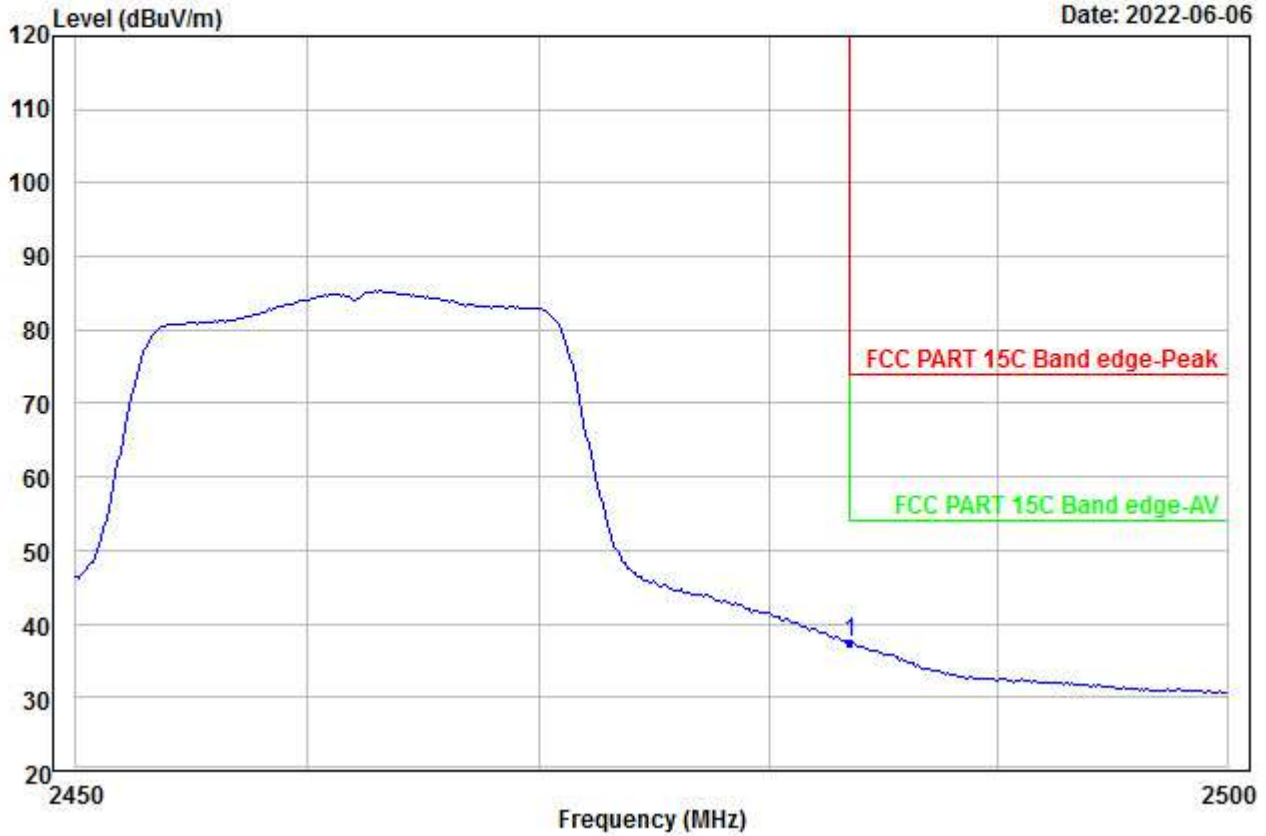

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_2412
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 2483.500	45.58	32.95	48.09	0.00	7.03	37.47	54.00	-16.53	---	---	Aver