


File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\RSE\4_00001.EMI

Date: 2022-06-09

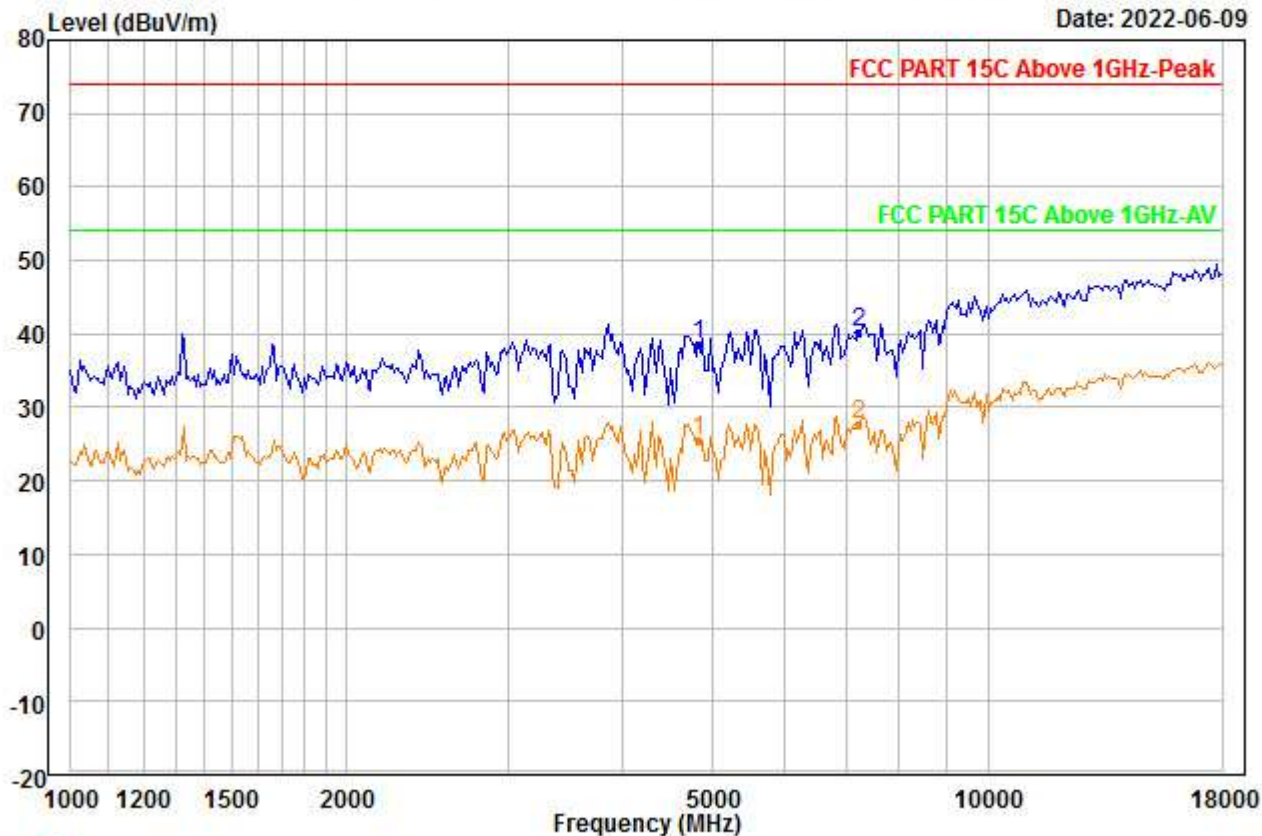


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : B_ANT0_2412
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4824.000	40.83	34.70	46.56	0.00	9.53	38.50	74.00	-35.50	---	---	Peak
2 PP	7236.000	38.76	36.13	46.14	0.00	11.48	40.23	74.00	-33.77	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\RSE\4_00002.EMI

Date: 2022-06-09

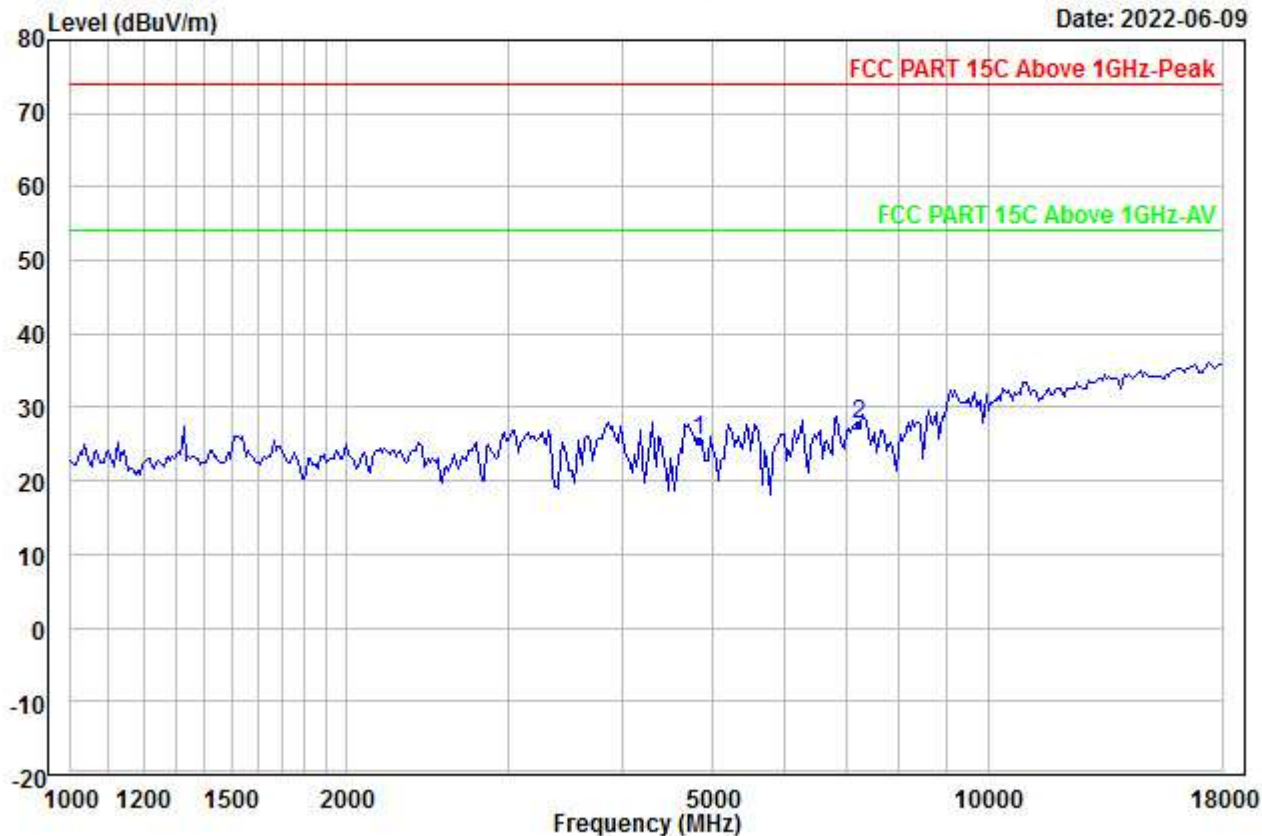


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : B_ANT0_2412
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4824.000	27.88	34.70	46.56	0.00	9.53	25.55	54.00	-28.45	---	---	Aver
2 PP	7236.000	26.19	36.13	46.14	0.00	11.48	27.66	54.00	-26.34	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\RSE\4_00003.EMI

Date: 2022-06-09

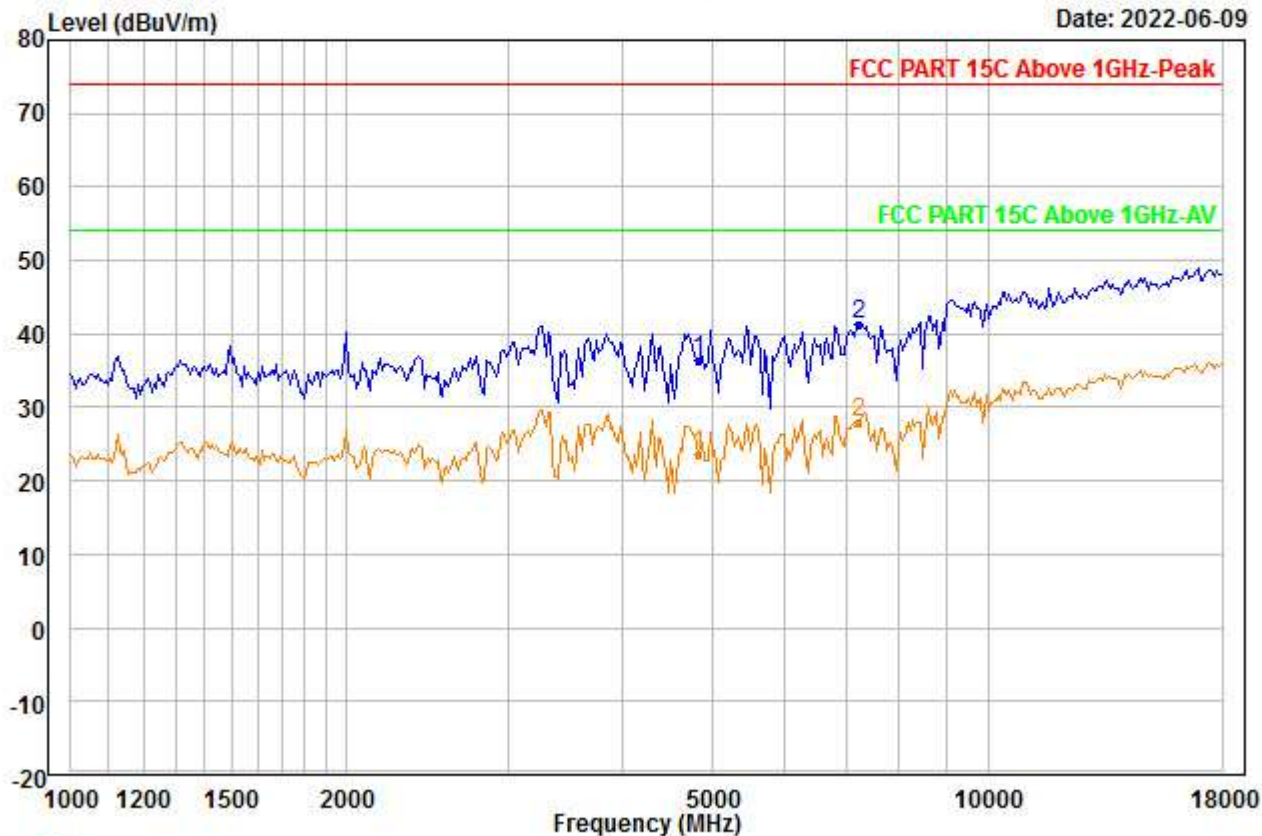


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : B_ANT0_2412
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4824.000	38.63	34.70	46.56	0.00	9.53	36.30	74.00	-37.70	---	---	Peak
2 PP	7236.000	39.76	36.13	46.14	0.00	11.48	41.23	74.00	-32.77	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\RSE\4_00004.EMI

Date: 2022-06-09

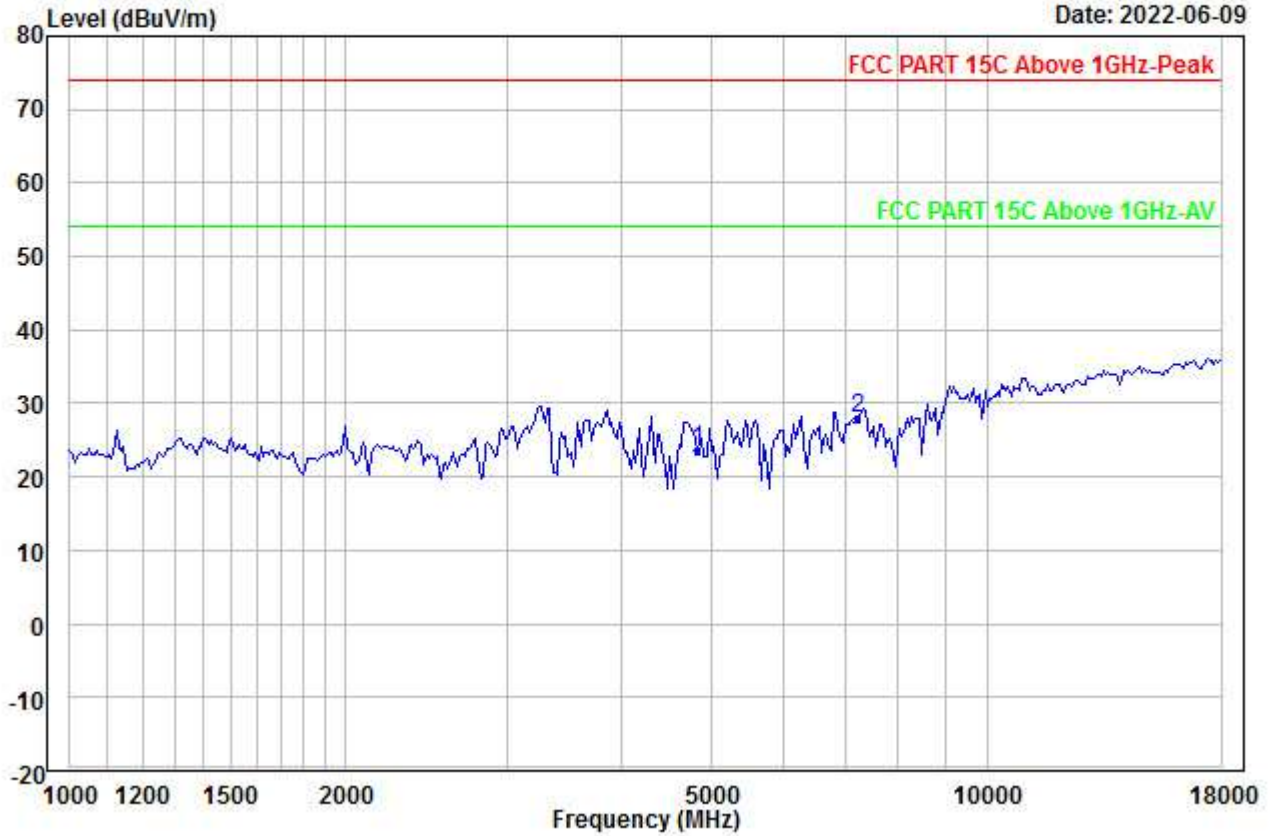


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : B_ANT0_2412
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4824.000	25.95	34.70	46.56	0.00	9.53	23.62	54.00	-30.38	---	---	Aver
2 PP	7236.000	26.47	36.13	46.14	0.00	11.48	27.94	54.00	-26.06	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\RSE\4_00005.EMI

Date: 2022-06-09

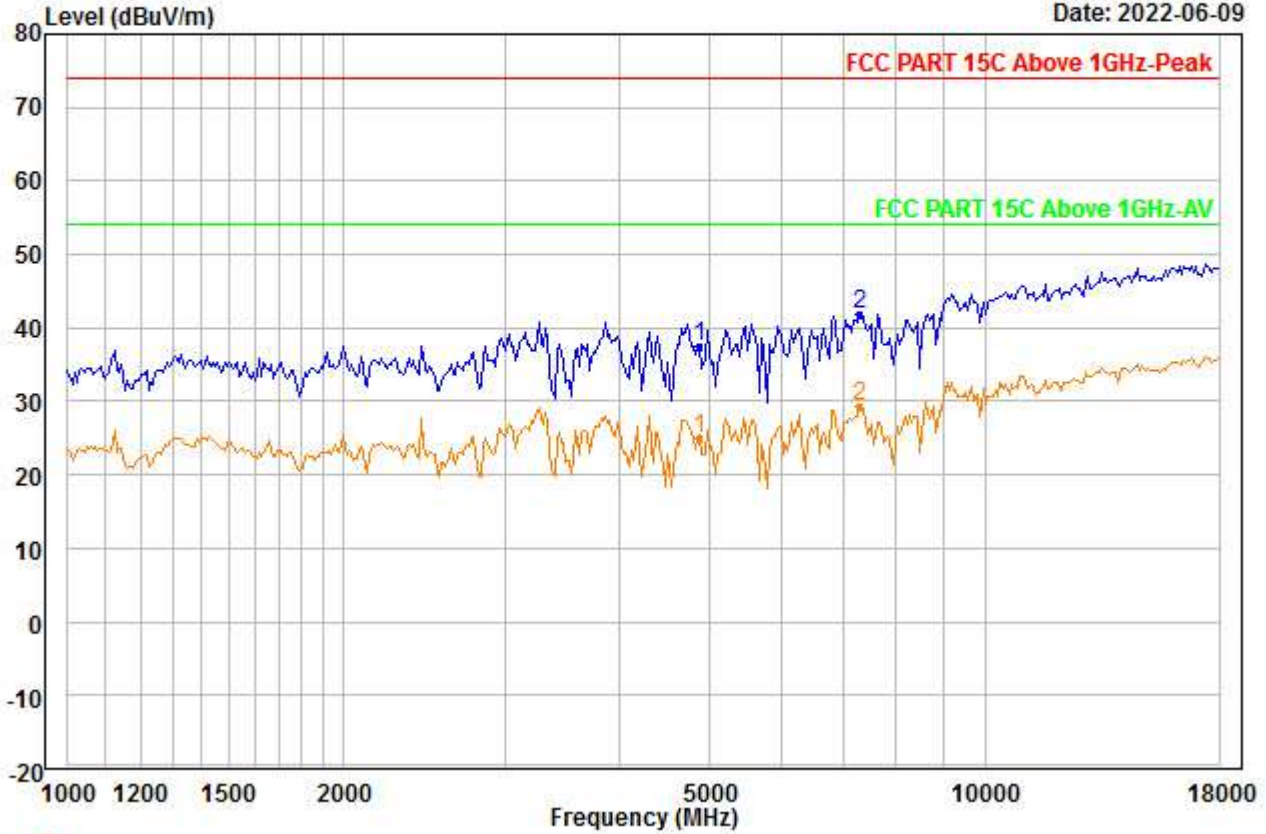


Trace: 1
 Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : B_ANT0_2437
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4874.000	39.79	34.70	46.57	0.00	9.58	37.50	74.00	-36.50	---	---	Peak
2 PP	7311.000	40.37	36.24	46.19	0.00	11.55	41.97	74.00	-32.03	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\RSE\4_00006.EMI

Date: 2022-06-09

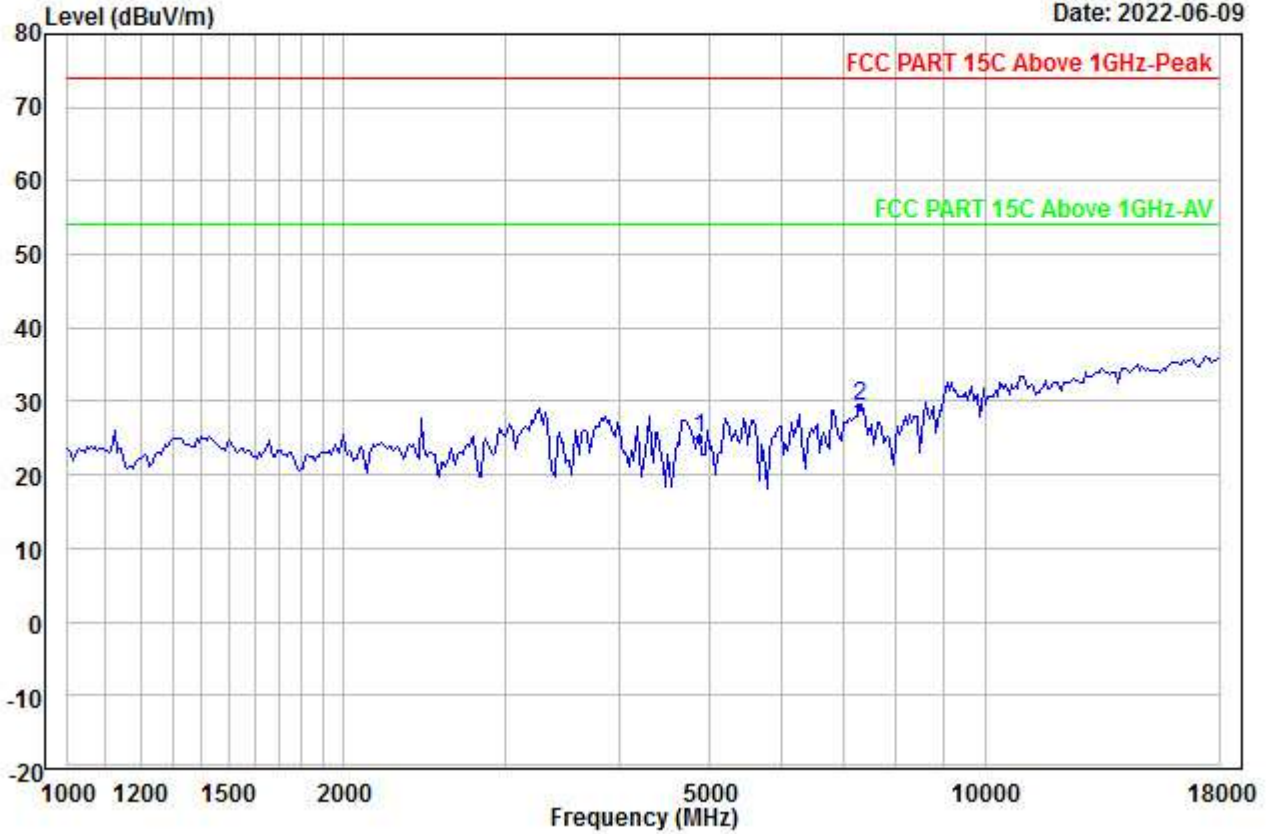


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : B_ANT0_2437
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4874.000	27.34	34.70	46.57	0.00	9.58	25.05	54.00	-28.95	---	---	Aver
2 PP	7311.000	27.68	36.24	46.19	0.00	11.55	29.28	54.00	-24.72	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\RSE\4_00007.EMI

Date: 2022-06-09

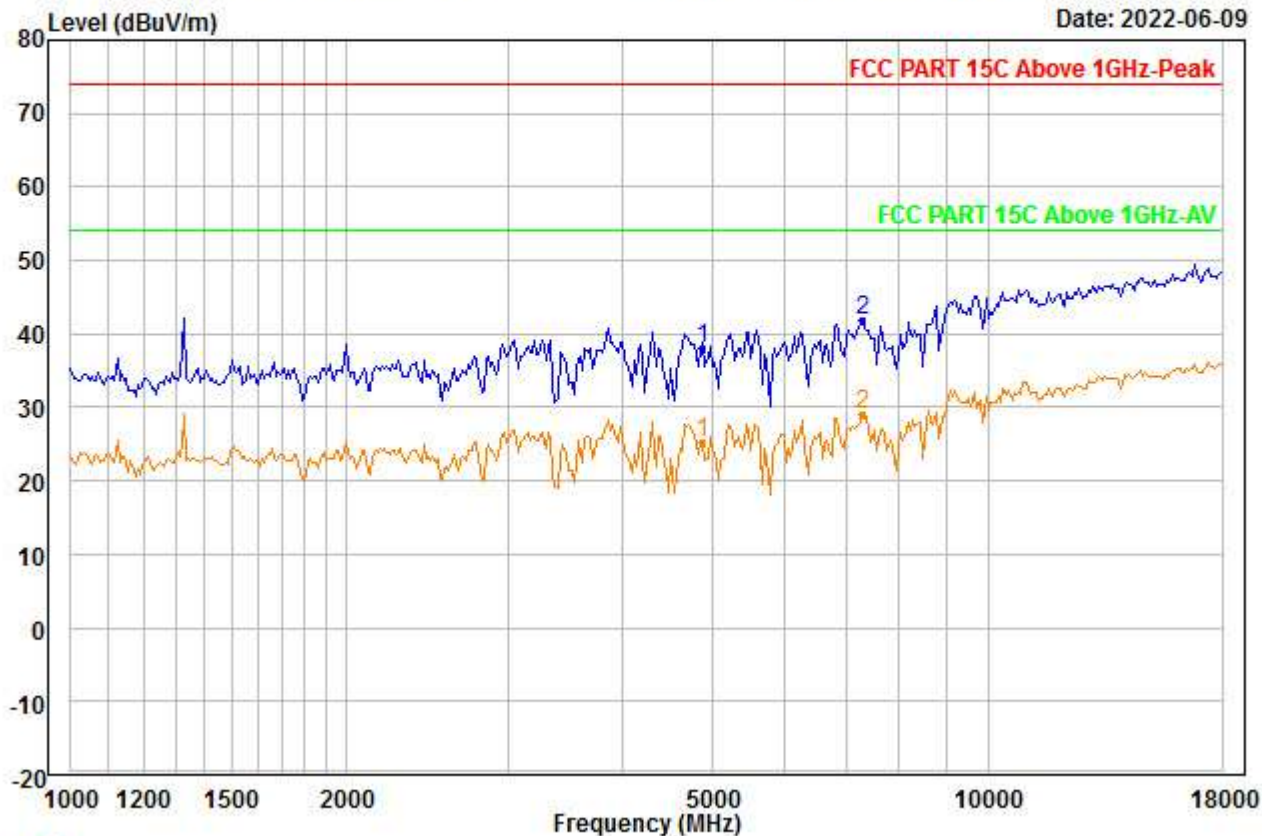


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : B_ANT0_2437
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4874.000	40.36	34.70	46.57	0.00	9.58	38.07	74.00	-35.93	---	---	Peak
2 PP	7311.000	40.15	36.24	46.19	0.00	11.55	41.75	74.00	-32.25	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\RSE\4_00008.EMI

Date: 2022-06-09

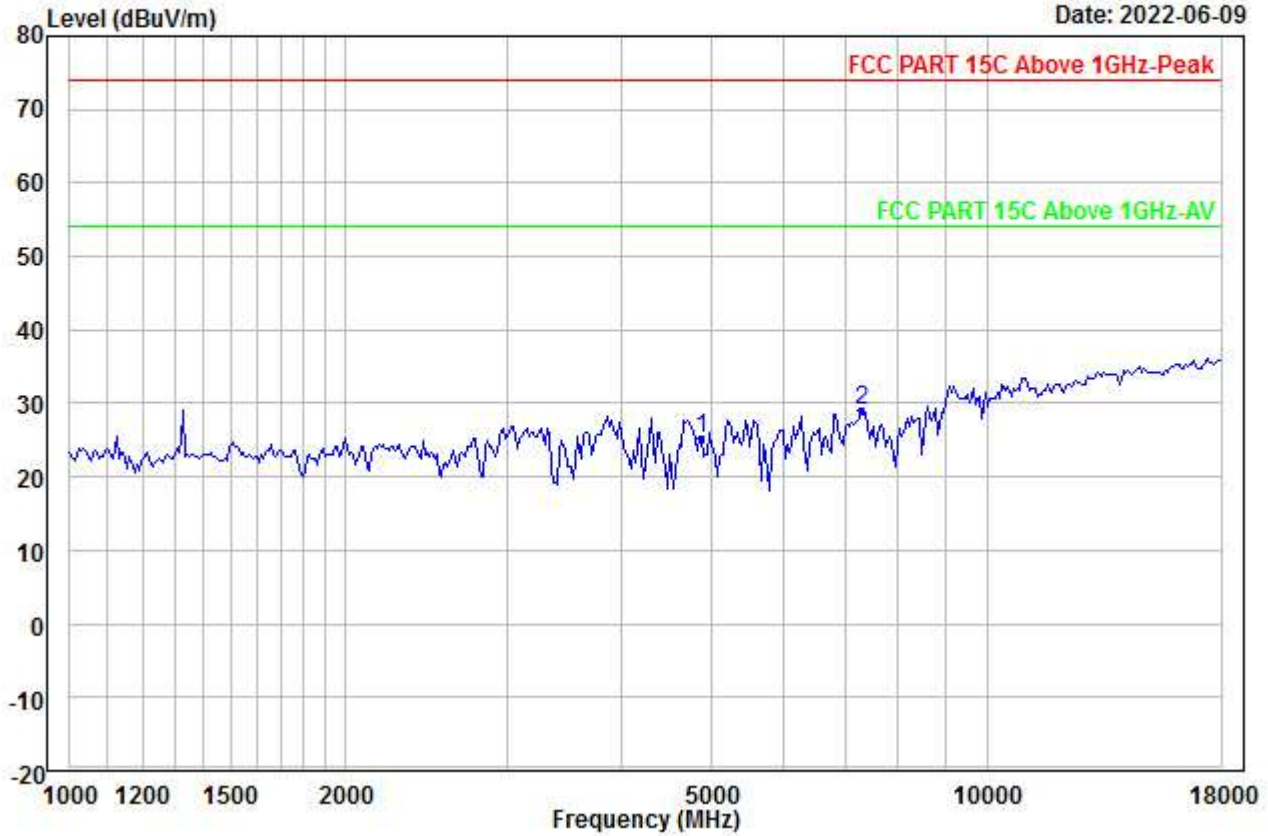


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : B_ANT0_2437
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4874.000	27.40	34.70	46.57	0.00	9.58	25.11	54.00	-28.89	---	---	Aver
2 PP	7311.000	27.38	36.24	46.19	0.00	11.55	28.98	54.00	-25.02	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\RSE\4_00009.EMI

Date: 2022-06-09

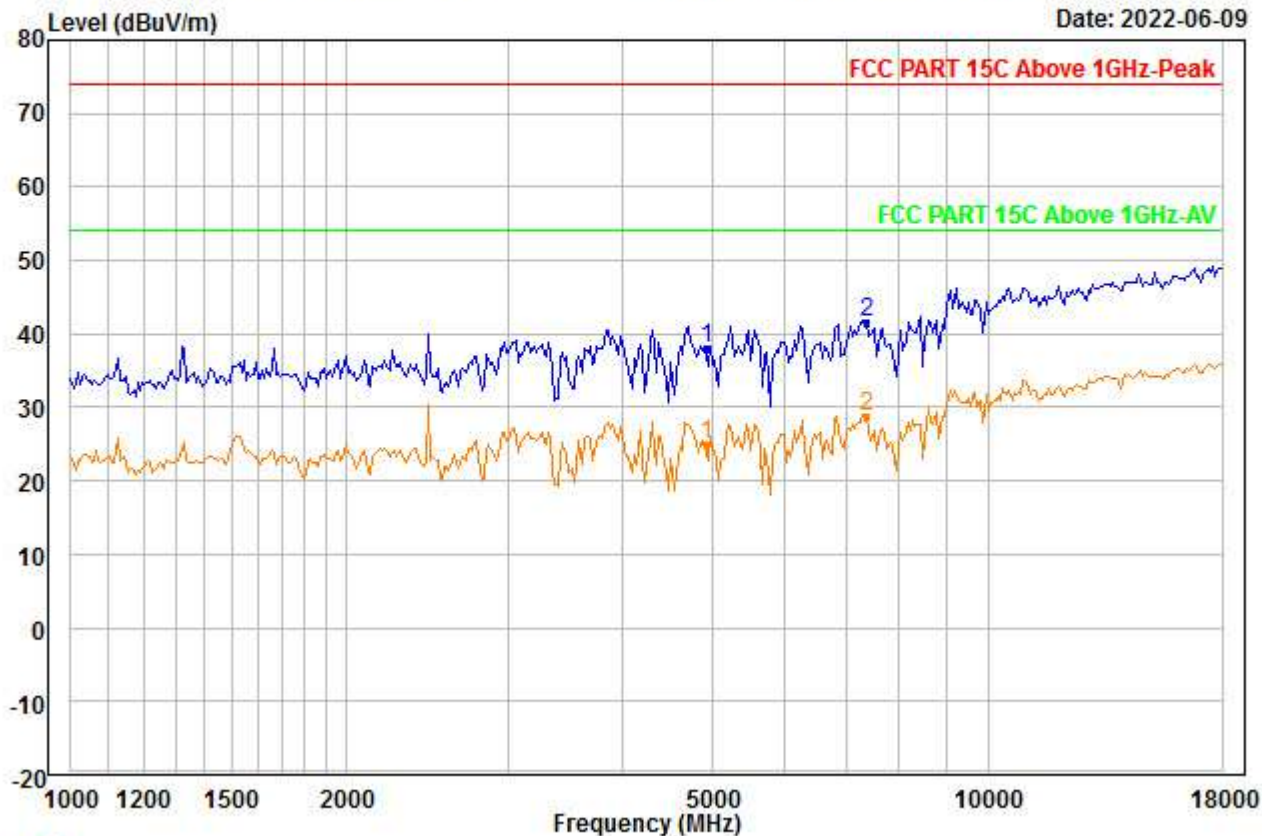


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : B_ANT0_2462
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 4924.000	40.25	34.70	46.58	0.00	9.62	37.99	74.00	-36.01	---	---	Peak
2 PP 7386.000	39.85	36.34	46.23	0.00	11.61	41.57	74.00	-32.43	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\RSE\4_00010.EMI

Date: 2022-06-09

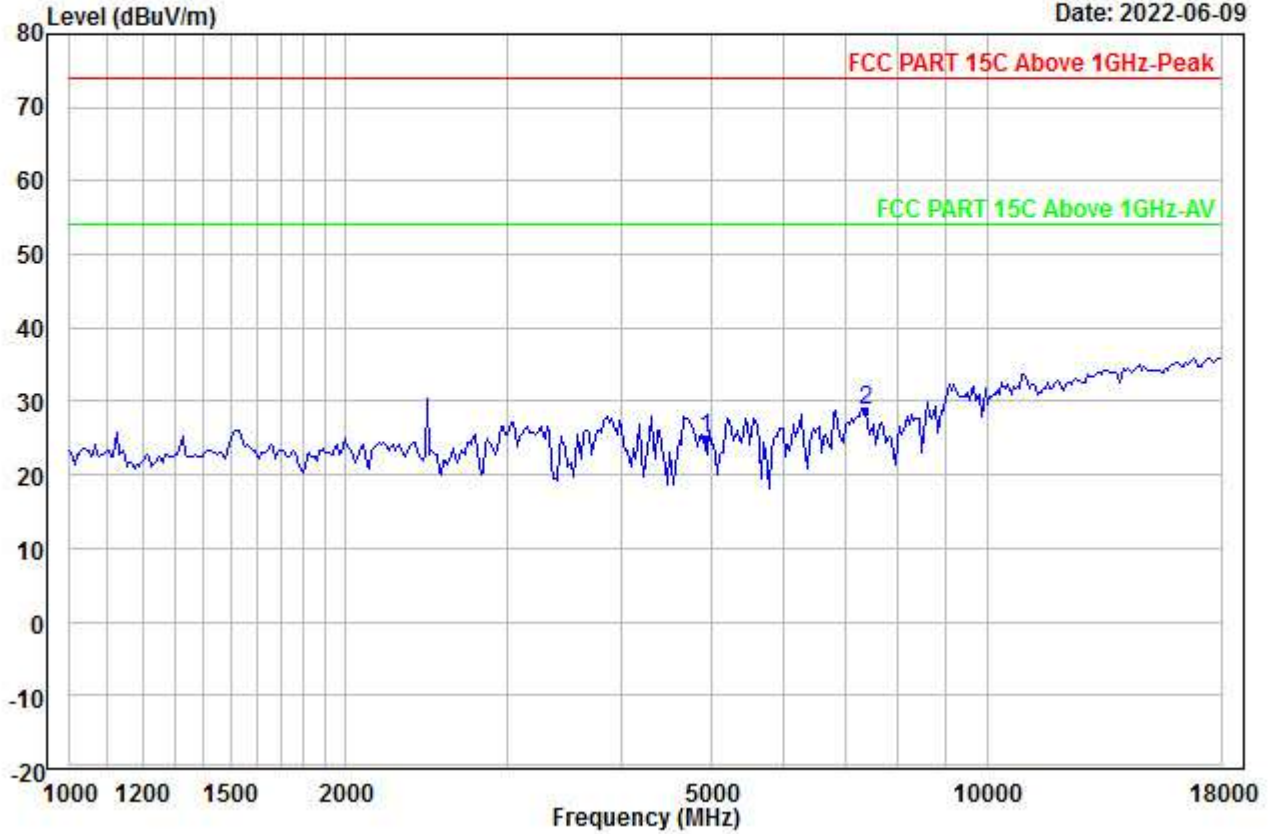


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : B_ANT0_2462
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4924.000	27.25	34.70	46.58	0.00	9.62	24.99	54.00	-29.01	---	---	Aver
2 PP	7386.000	27.02	36.34	46.23	0.00	11.61	28.74	54.00	-25.26	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\RSE\4_00011.EMI

Date: 2022-06-09

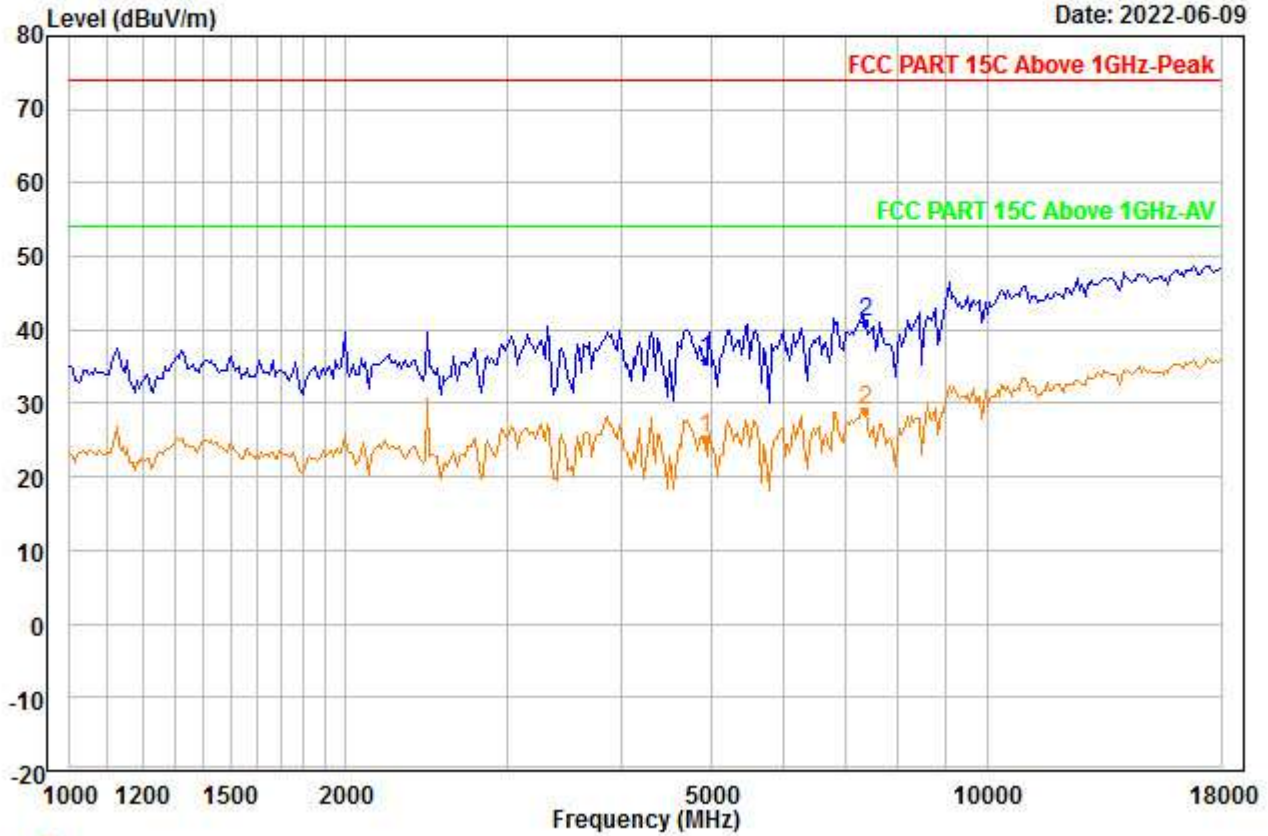


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : B_ANT0_2462
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4924.000	38.03	34.70	46.58	0.00	9.62	35.77	74.00	-38.23	---	---	Peak
2 PP	7386.000	39.24	36.34	46.23	0.00	11.61	40.96	74.00	-33.04	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\RSE\4_00012.EMI

Date: 2022-06-09

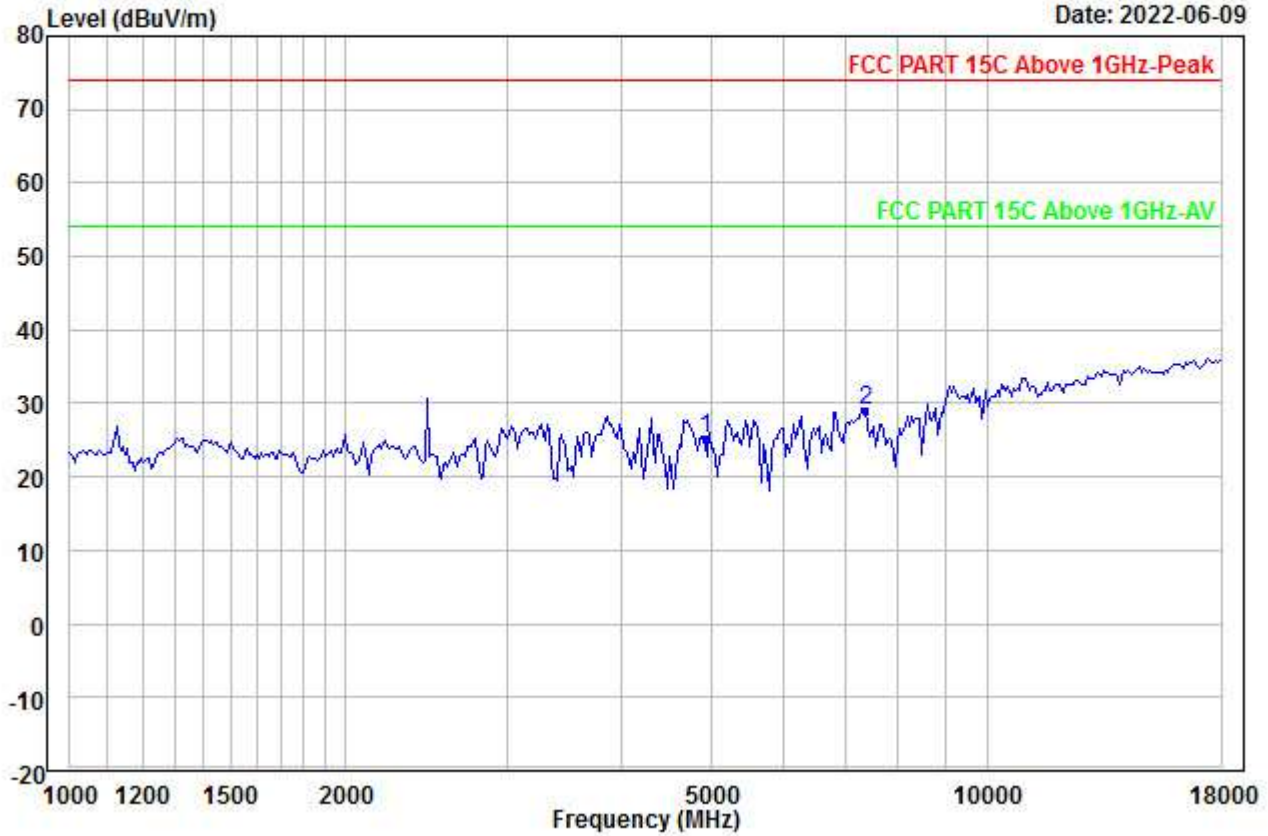


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : B_ANT0_2462
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rema		
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit					
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg		
1	4924.000	27.41	34.70	46.58	0.00	9.62	25.15	54.00	-28.85	---	---	Aver
2	PP 7386.000	27.21	36.34	46.23	0.00	11.61	28.93	54.00	-25.07	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\RSE\4_00013.EMI

Date: 2022-06-09

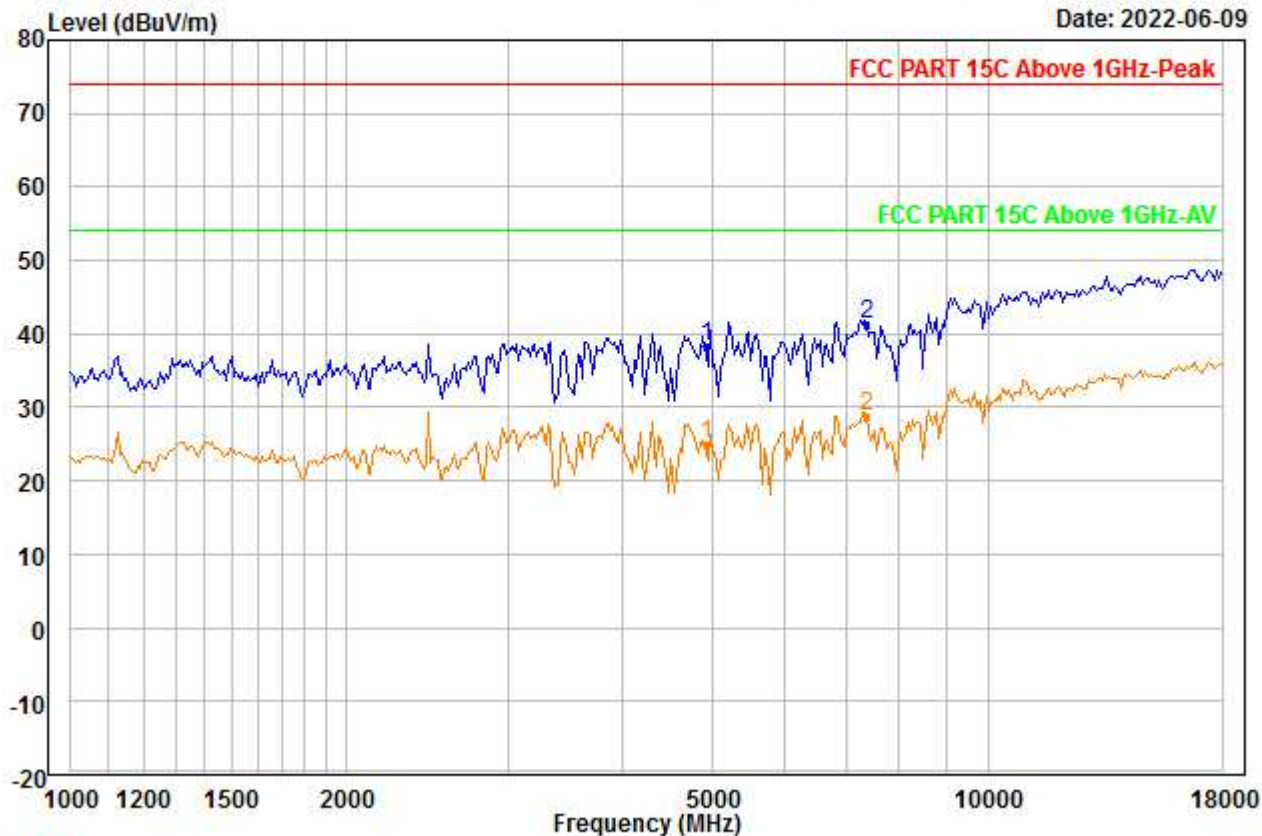


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : B_ANT1_2462
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4924.000	40.70	34.70	46.58	0.00	9.62	38.44	74.00	-35.56	---	---	Peak
2 PP	7386.000	39.65	36.34	46.23	0.00	11.61	41.37	74.00	-32.63	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\RSE\4_00014.EMI

Date: 2022-06-09

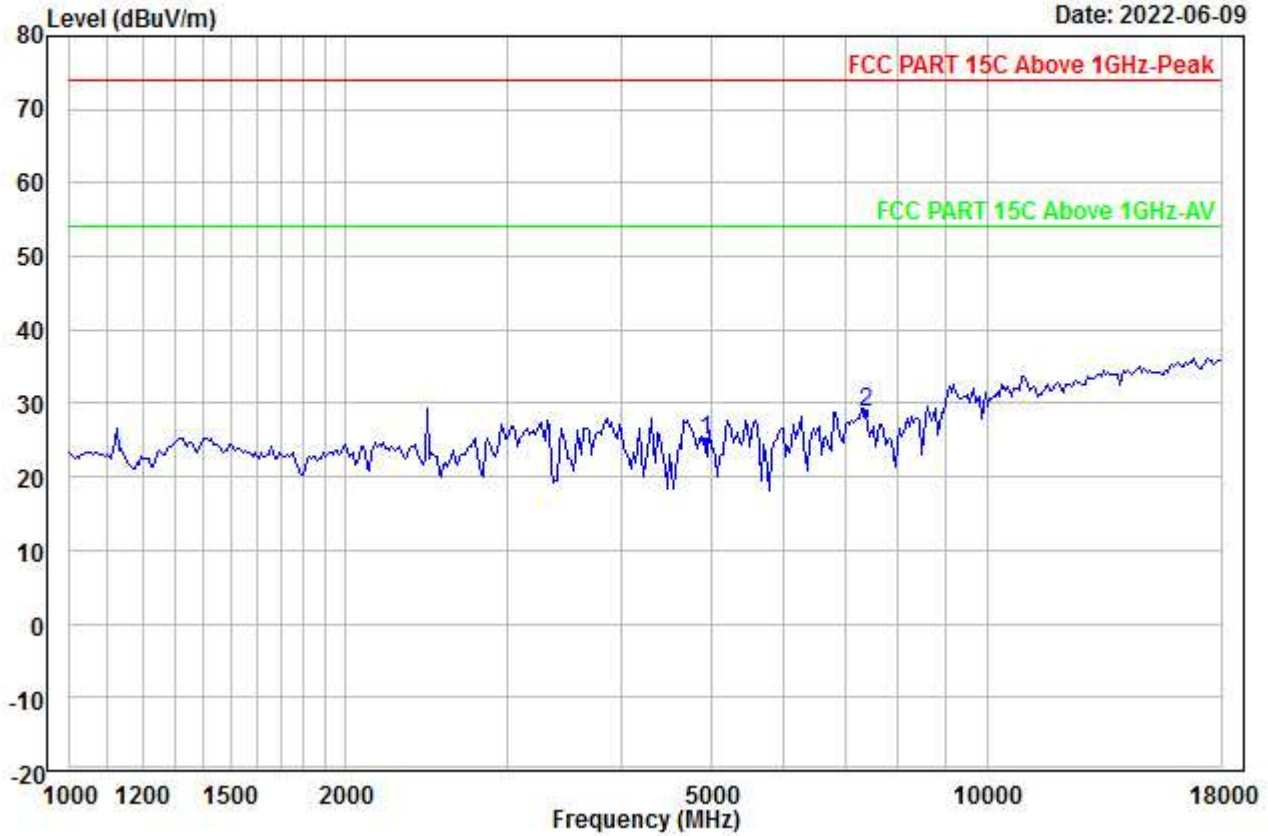


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : B_ANT1_2462
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4924.000	27.17	34.70	46.58	0.00	9.62	24.91	54.00	-29.09	---	---	Aver
2 PP	7386.000	27.15	36.34	46.23	0.00	11.61	28.87	54.00	-25.13	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\RSE\4_00015.EMI

Date: 2022-06-09

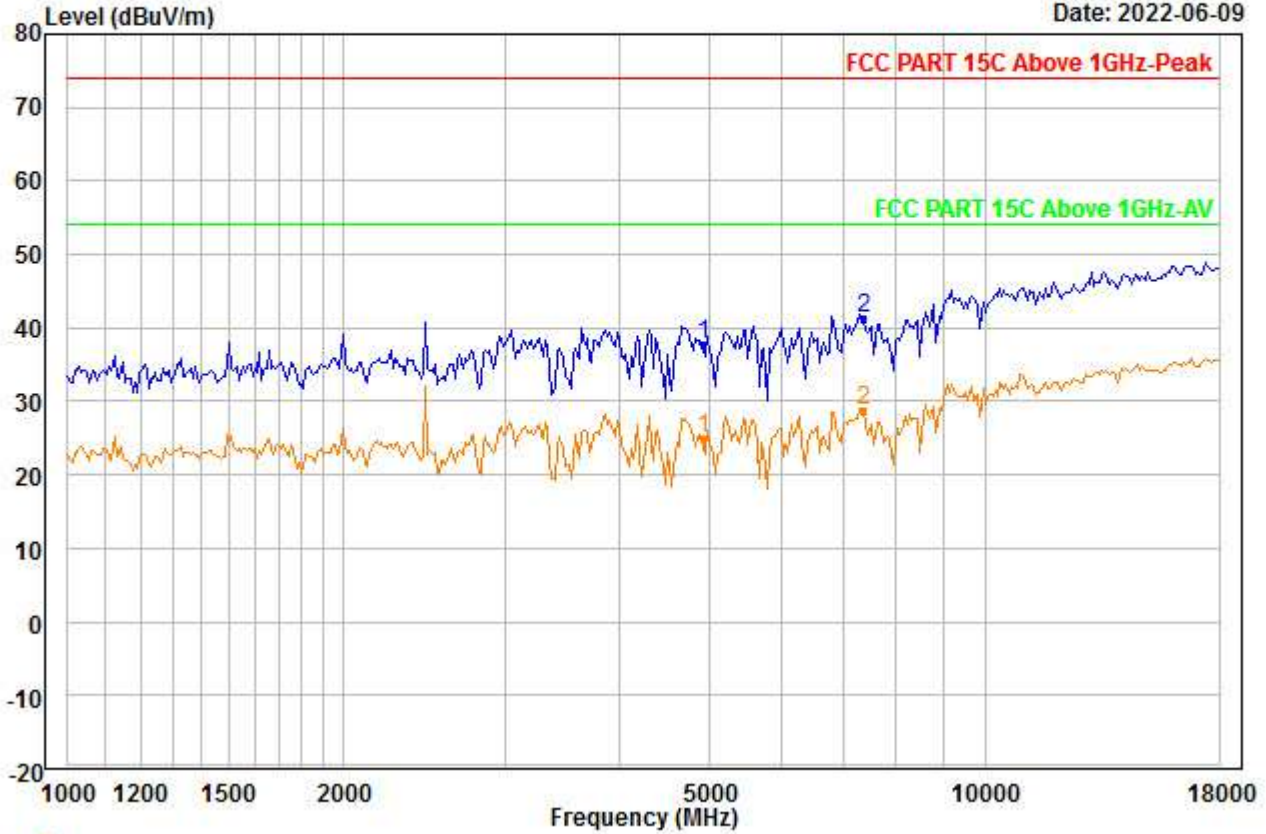


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : B_ANT1_2462
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4924.000	40.10	34.70	46.58	0.00	9.62	37.84	74.00	-36.16	---	---	Peak
2 PP	7386.000	39.59	36.34	46.23	0.00	11.61	41.31	74.00	-32.69	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\RSE\4_00016.EMI

Date: 2022-06-09

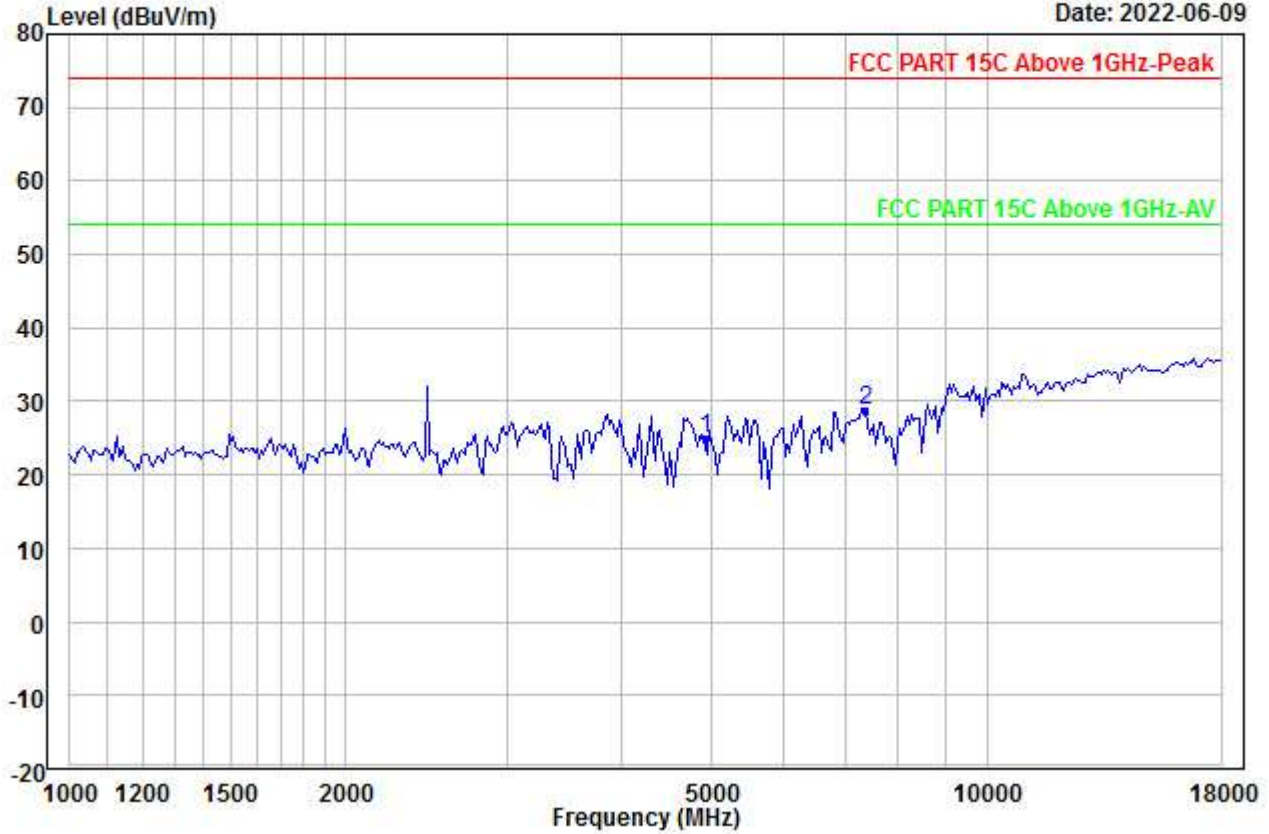


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : B_ANT1_2462
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4924.000	27.33	34.70	46.58	0.00	9.62	25.07	54.00	-28.93	---	---	Aver
2 PP	7386.000	27.15	36.34	46.23	0.00	11.61	28.87	54.00	-25.13	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\RSE\4_00017.EMI

Date: 2022-06-09

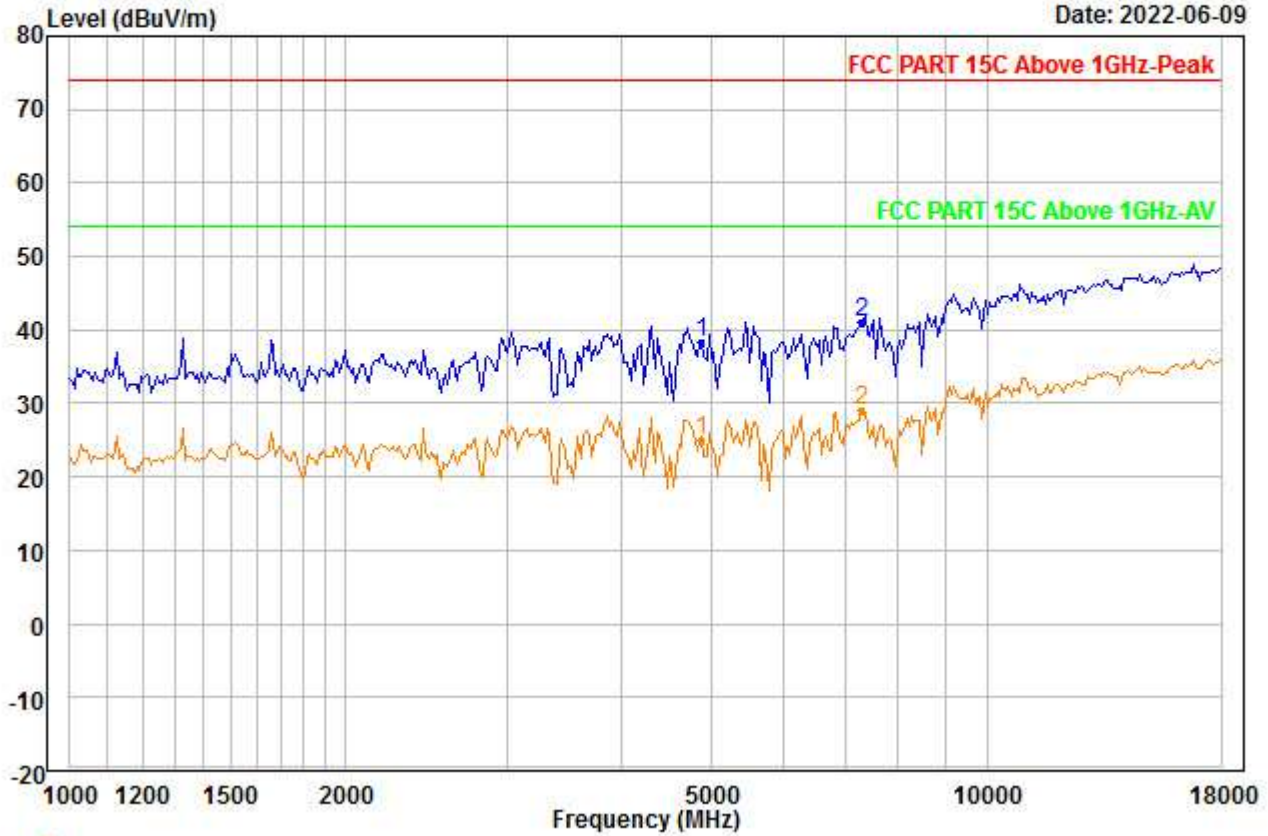


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : B_ANT1_2437
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4874.000	40.56	34.70	46.57	0.00	9.58	38.27	74.00	-35.73	---	---	Peak
2 PP	7311.000	39.38	36.24	46.19	0.00	11.55	40.98	74.00	-33.02	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\RSE\4_00018.EMI

Date: 2022-06-09

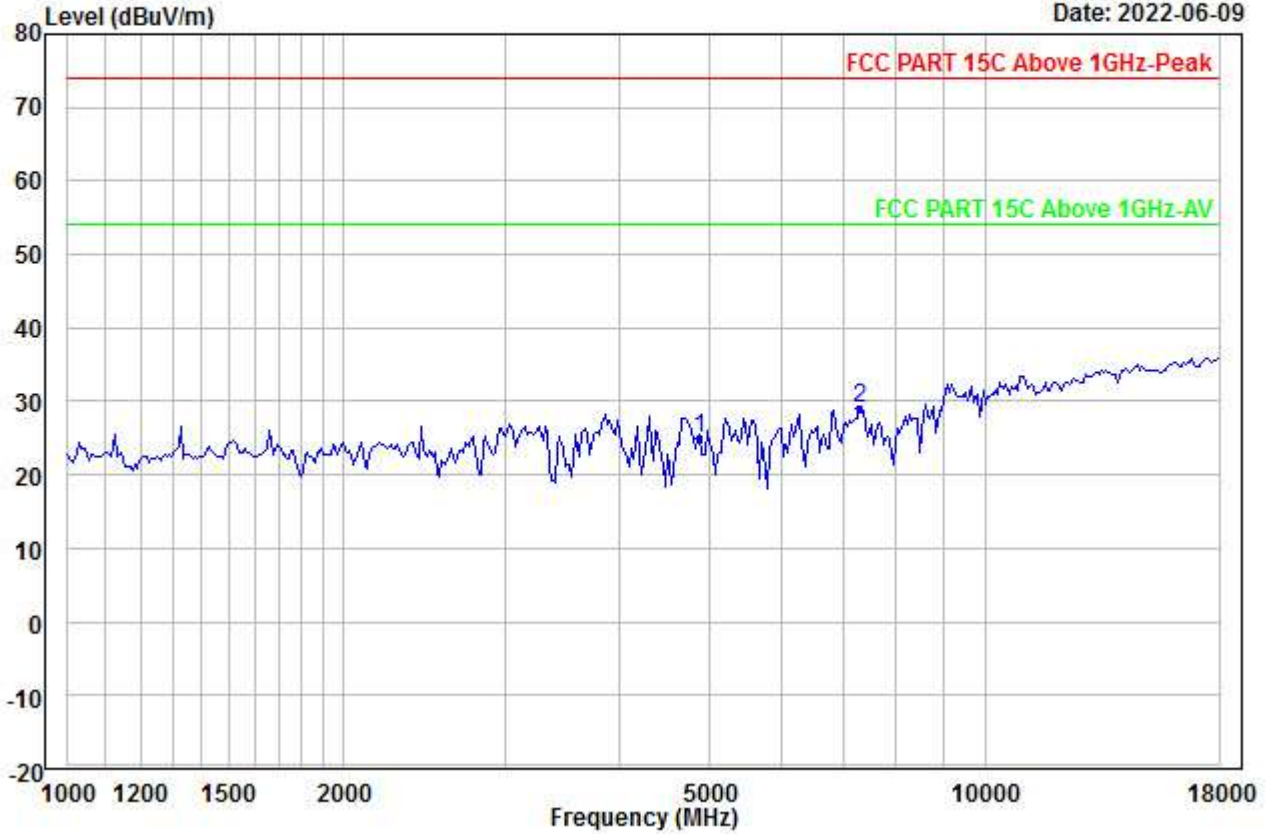


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : B_ANT1_2437
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4874.000	27.34	34.70	46.57	0.00	9.58	25.05	54.00	-28.95	---	---	Aver
2 PP	7311.000	27.44	36.24	46.19	0.00	11.55	29.04	54.00	-24.96	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\RSE\4_00019.EMI

Date: 2022-06-09

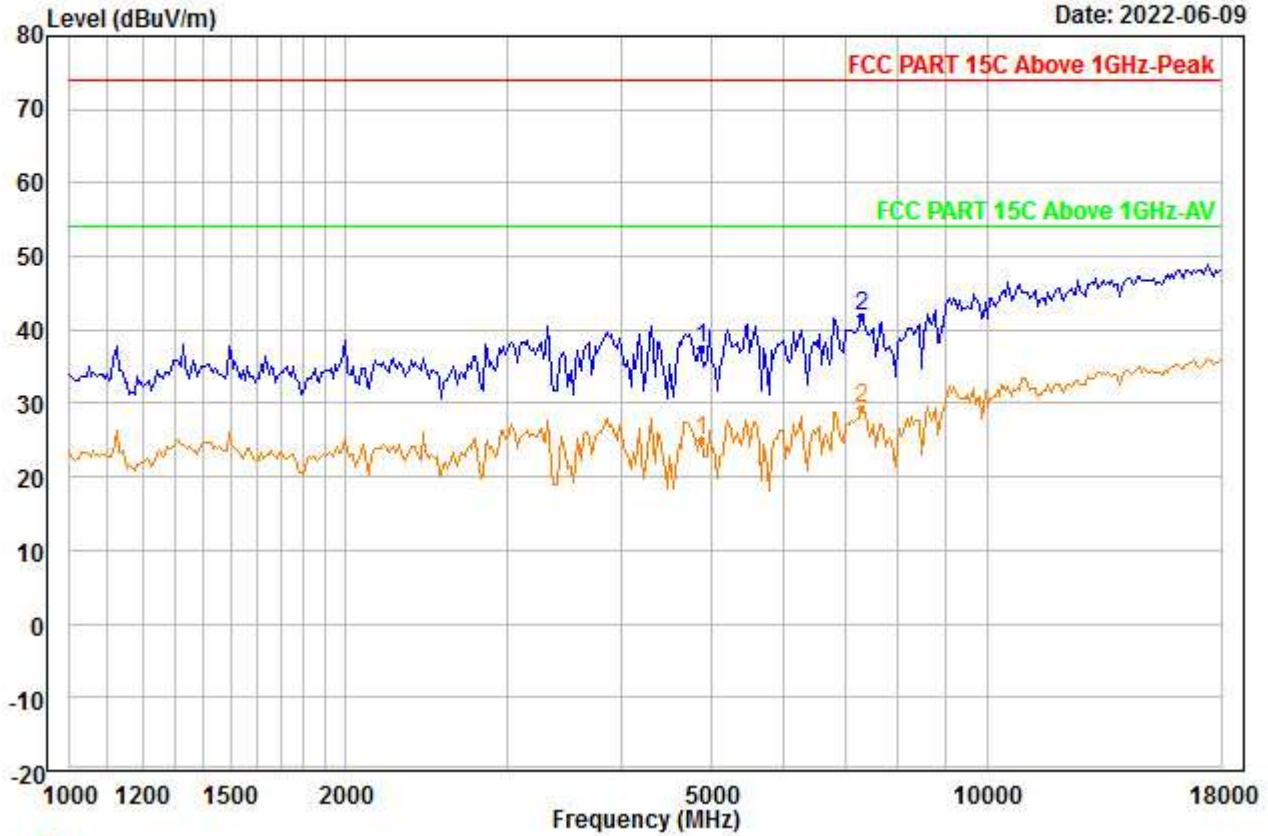


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : B_ANT1_2437
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4874.000	39.67	34.70	46.57	0.00	9.58	37.38	74.00	-36.62	---	---	Peak
2 PP	7311.000	40.22	36.24	46.19	0.00	11.55	41.82	74.00	-32.18	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\RSE\4_00020.EMI

Date: 2022-06-09

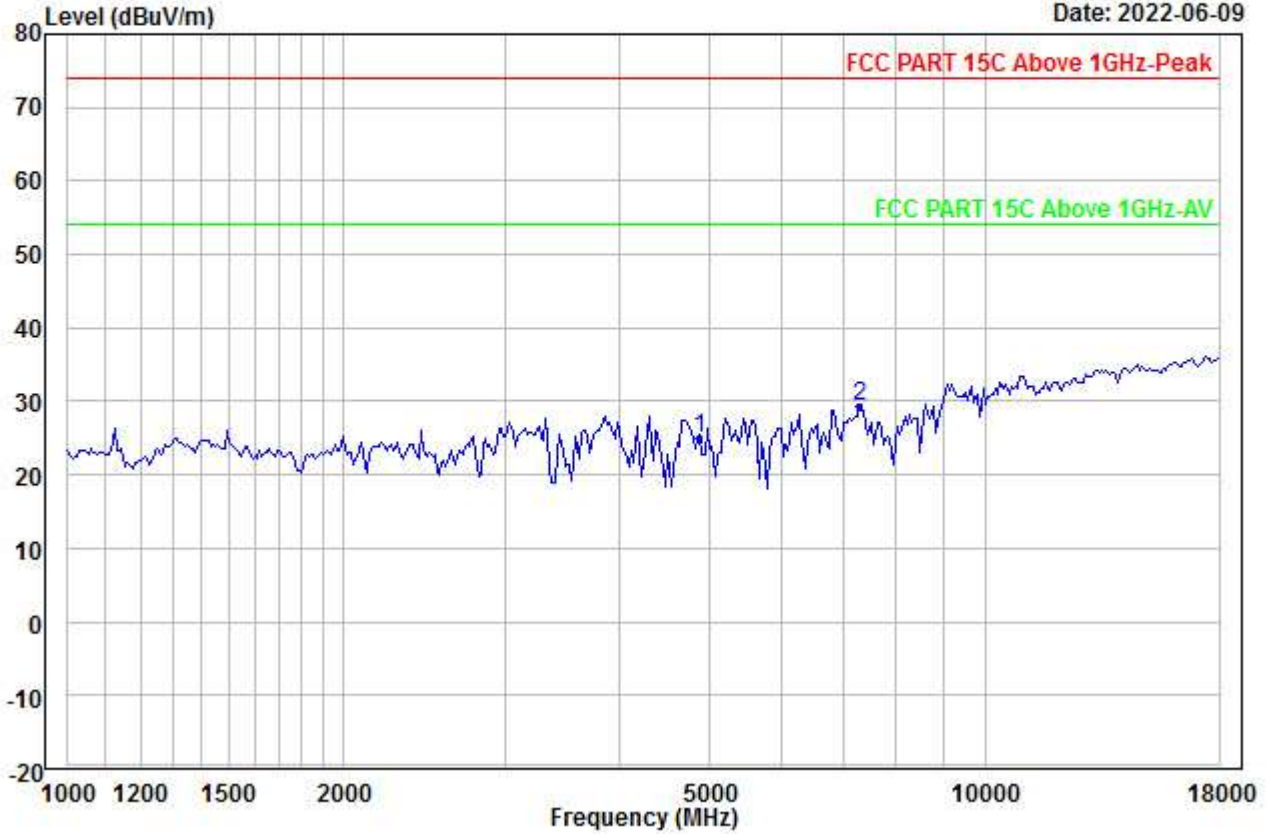


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : B_ANT1_2437
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:		
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit					
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg		
1	4874.000	27.28	34.70	46.57	0.00	9.58	24.99	54.00	-29.01	---	---	Aver
2 PP	7311.000	27.68	36.24	46.19	0.00	11.55	29.28	54.00	-24.72	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\RSE\4_00021.EMI

Date: 2022-06-09

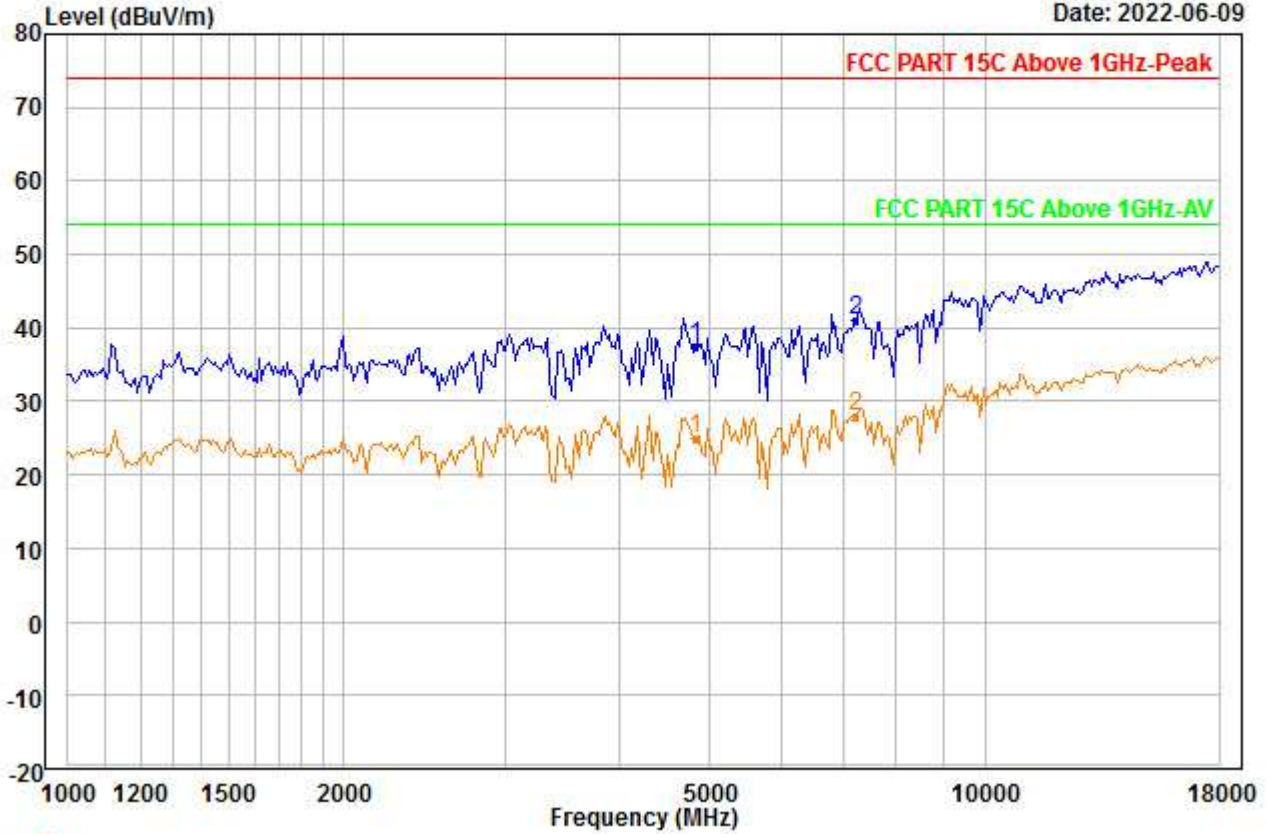


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : B_ANT1_2412
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4824.000	39.94	34.70	46.56	0.00	9.53	37.61	74.00	-36.39	---	---	Peak
2 PP	7236.000	39.52	36.13	46.14	0.00	11.48	40.99	74.00	-33.01	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\RSE\4_00022.EMI

Date: 2022-06-09

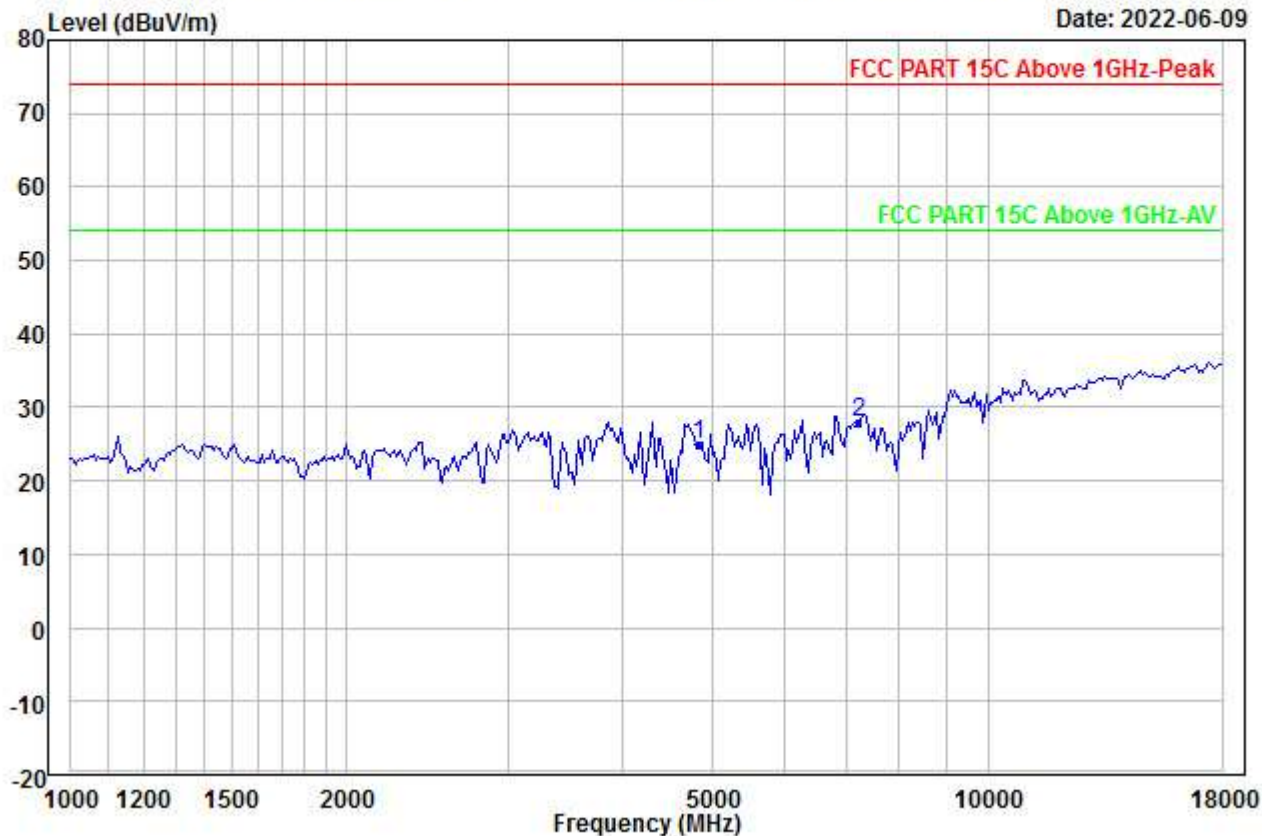


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : B_ANT1_2412
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4824.000	27.17	34.70	46.56	0.00	9.53	24.84	54.00	-29.16	---	---	Aver
2 PP	7236.000	26.47	36.13	46.14	0.00	11.48	27.94	54.00	-26.06	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\RSE\4_00023.EMI

Date: 2022-06-09

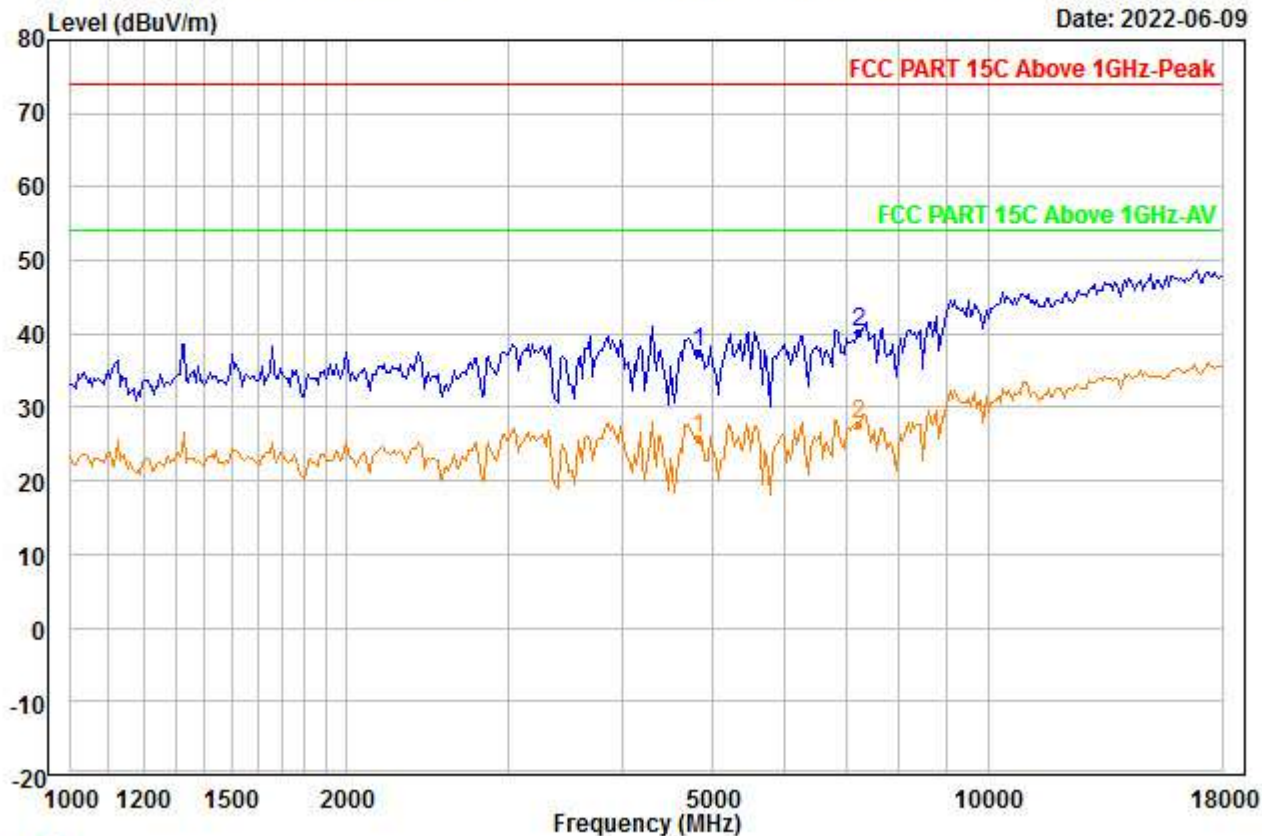


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : B_ANT1_2412
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4824.000	39.88	34.70	46.56	0.00	9.53	37.55	74.00	-36.45	---	---	Peak
2 PP	7236.000	38.88	36.13	46.14	0.00	11.48	40.35	74.00	-33.65	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\RSE\4_00024.EMI

Date: 2022-06-09

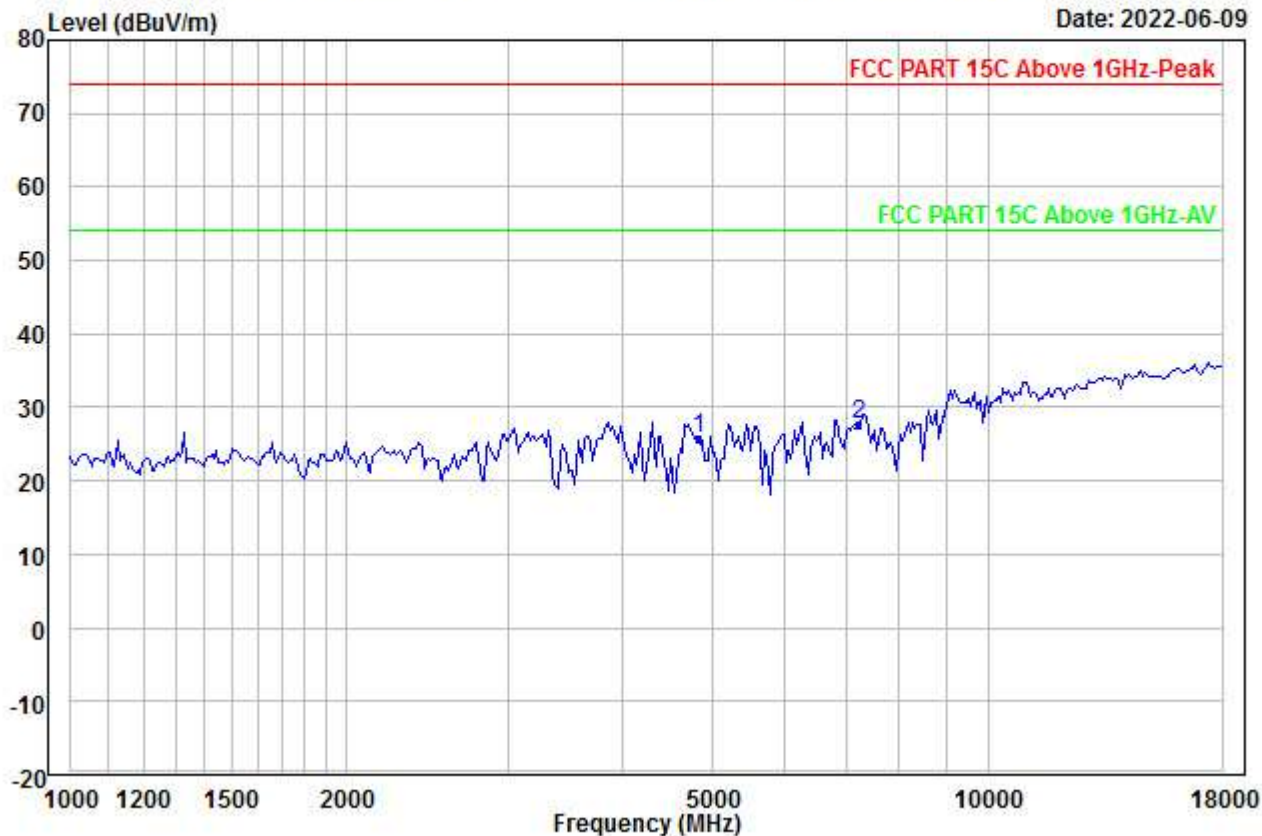


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : B_ANT1_2412
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4824.000	28.17	34.70	46.56	0.00	9.53	25.84	54.00	-28.16	---	---	Aver
2 PP	7236.000	26.26	36.13	46.14	0.00	11.48	27.73	54.00	-26.27	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\RSE\4_00025.EMI

Date: 2022-06-09

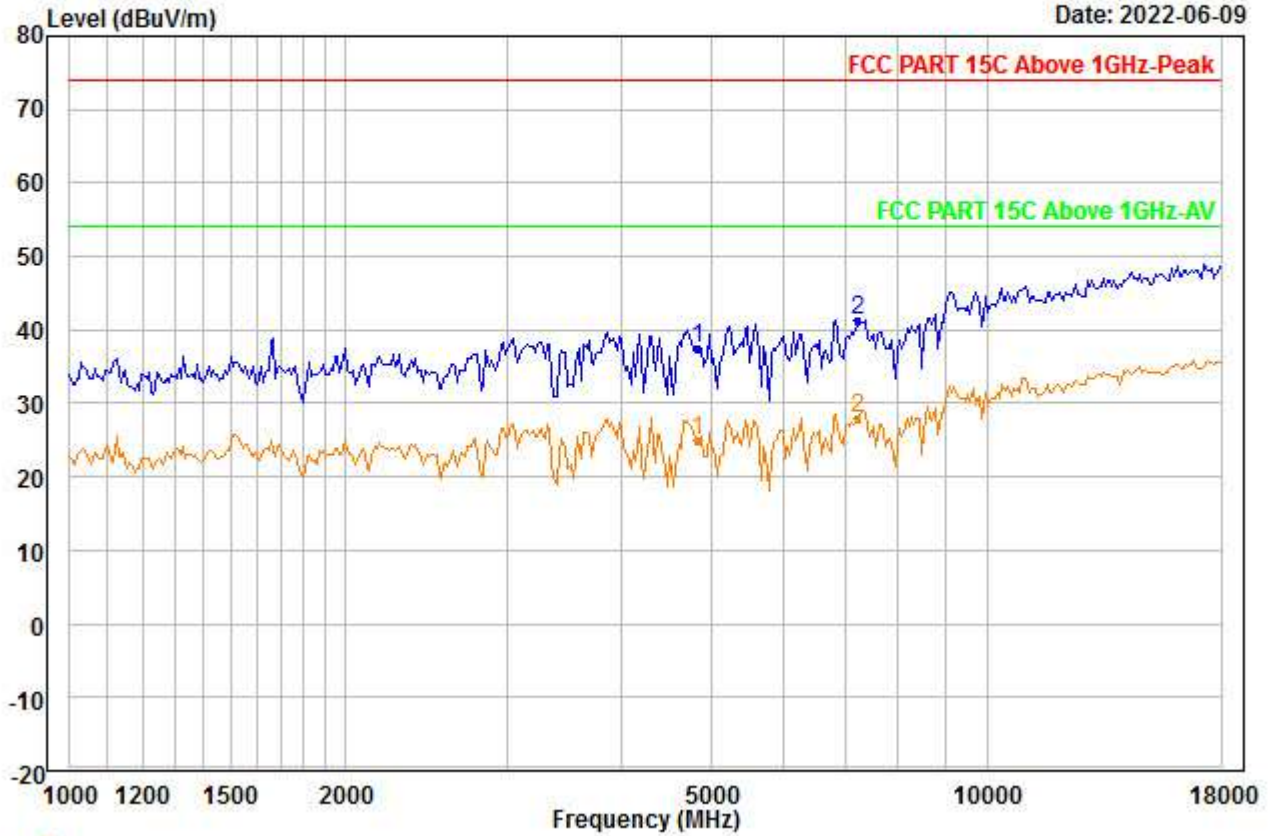


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : G_ANT1_2412
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4824.000	39.86	34.70	46.56	0.00	9.53	37.53	74.00	-36.47	---	---	Peak
2 PP	7236.000	39.83	36.13	46.14	0.00	11.48	41.30	74.00	-32.70	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\RSE\4_00026.EMI

Date: 2022-06-09

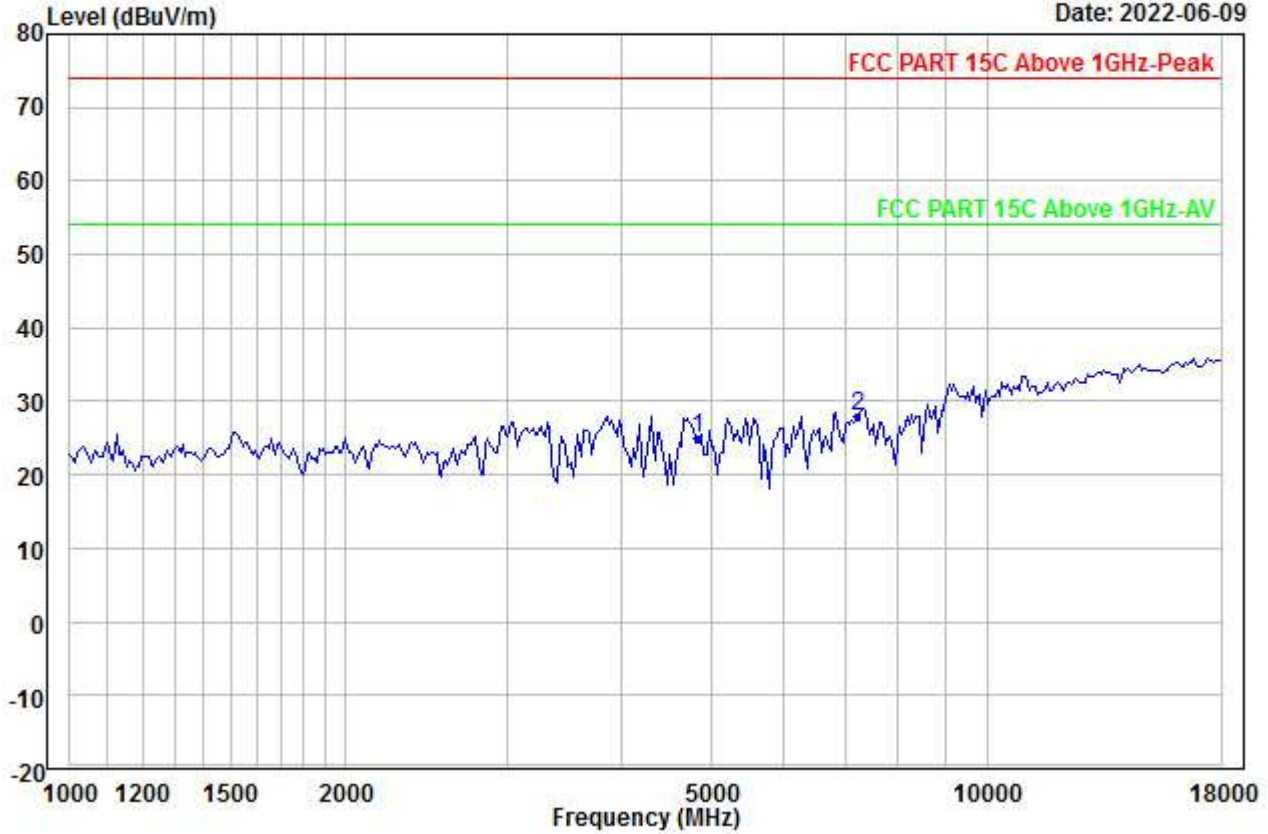


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : G_ANT1_2412
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4824.000	27.17	34.70	46.56	0.00	9.53	24.84	54.00	-29.16	---	---	Aver
2 PP	7236.000	26.40	36.13	46.14	0.00	11.48	27.87	54.00	-26.13	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\RSE\4_00027.EMI

Date: 2022-06-09

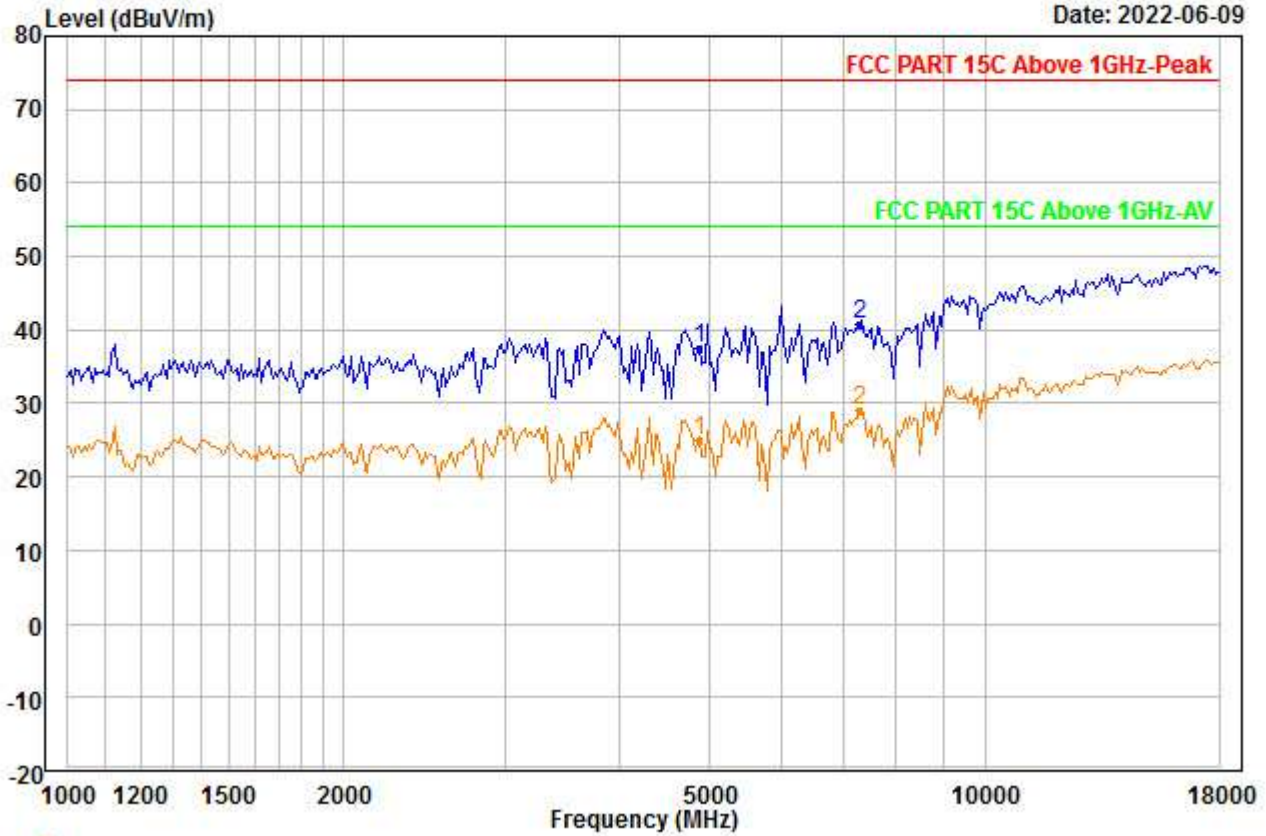


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : G_ANT1_2412
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4874.000	39.89	34.70	46.57	0.00	9.58	37.60	74.00	-36.40	---	---	Peak
2 PP	7311.000	39.03	36.24	46.19	0.00	11.55	40.63	74.00	-33.37	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\RSE\4_00028.EMI

Date: 2022-06-09

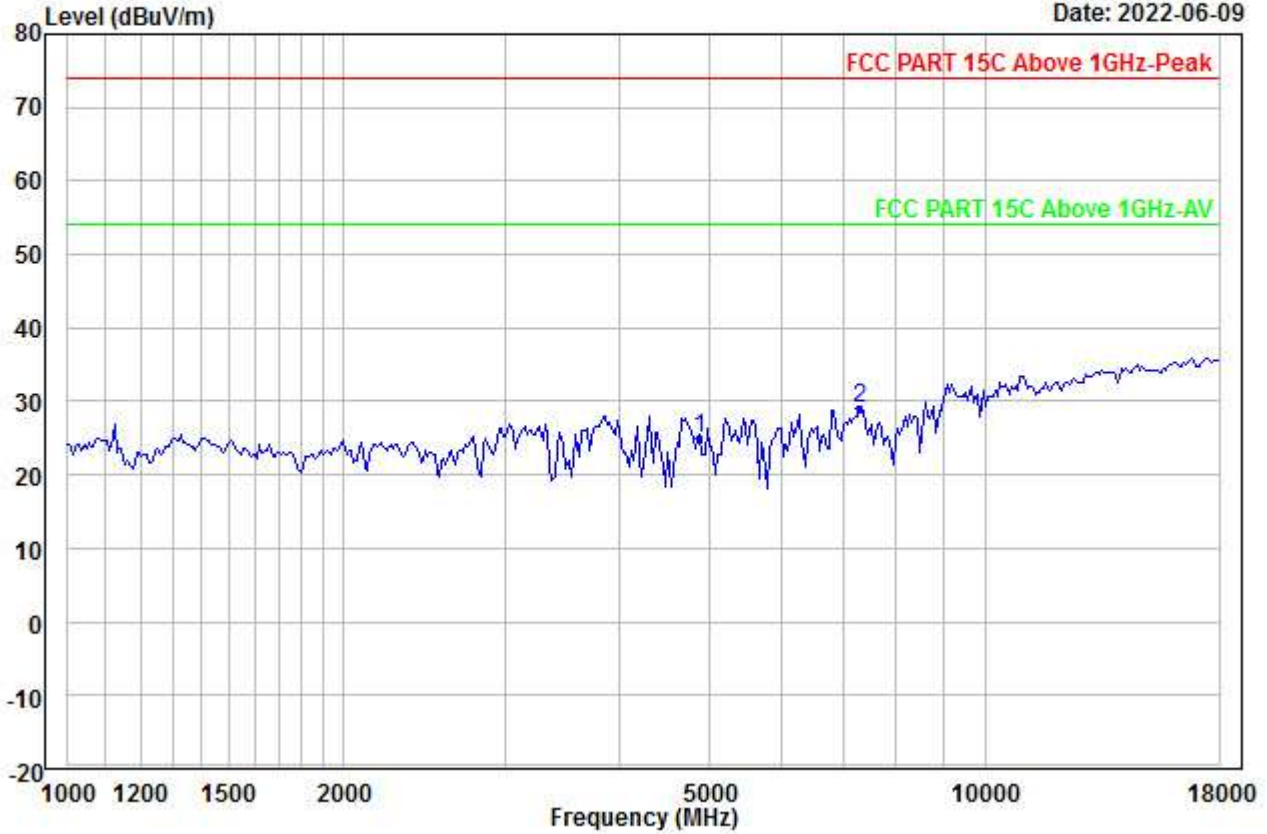


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : G_ANT1_2412
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4874.000	27.28	34.70	46.57	0.00	9.58	24.99	54.00	-29.01	---	---	Aver
2 PP	7311.000	27.50	36.24	46.19	0.00	11.55	29.10	54.00	-24.90	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\RSE\4_00029.EMI

Date: 2022-06-09

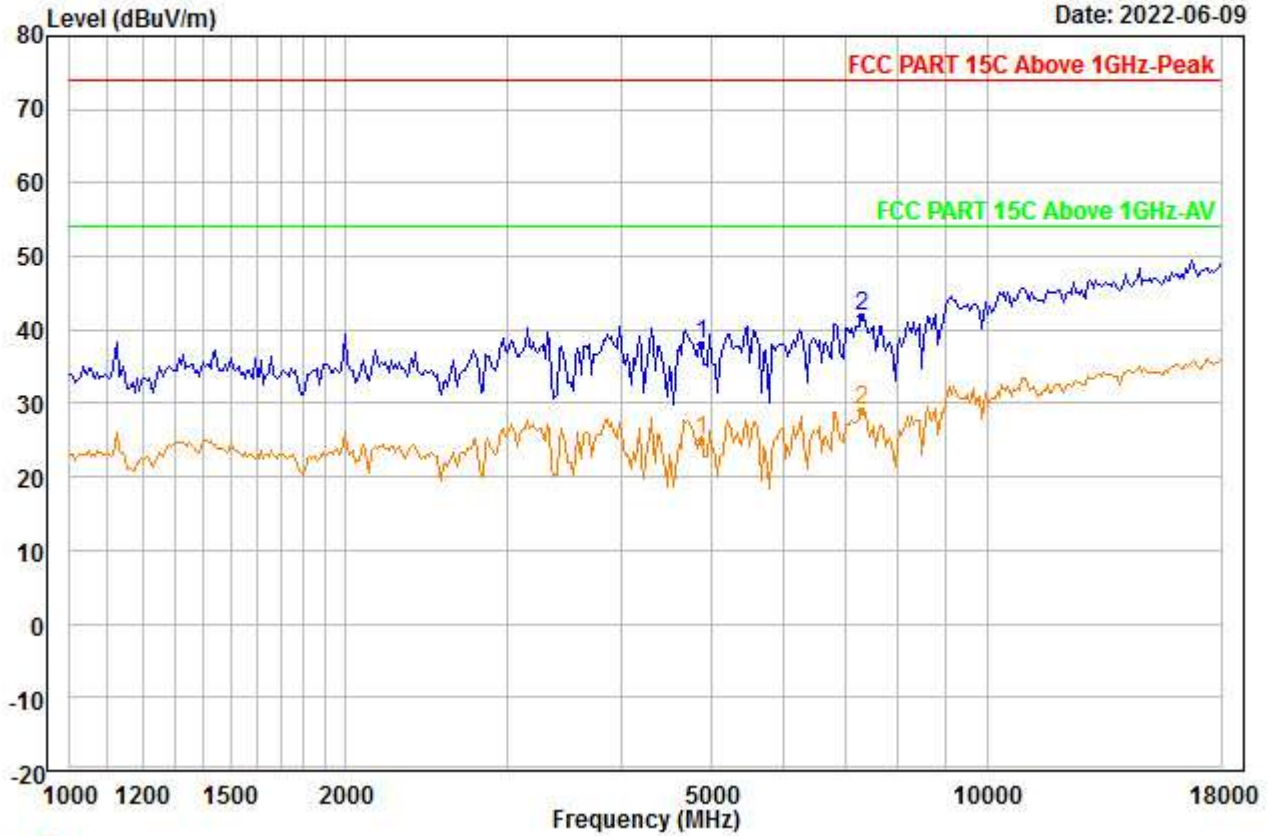


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : G_ANT1_2437
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4874.000	40.29	34.70	46.57	0.00	9.58	38.00	74.00	-36.00	---	---	Peak
2 PP	7311.000	40.12	36.24	46.19	0.00	11.55	41.72	74.00	-32.28	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\RSE\4_00030.EMI

Date: 2022-06-09

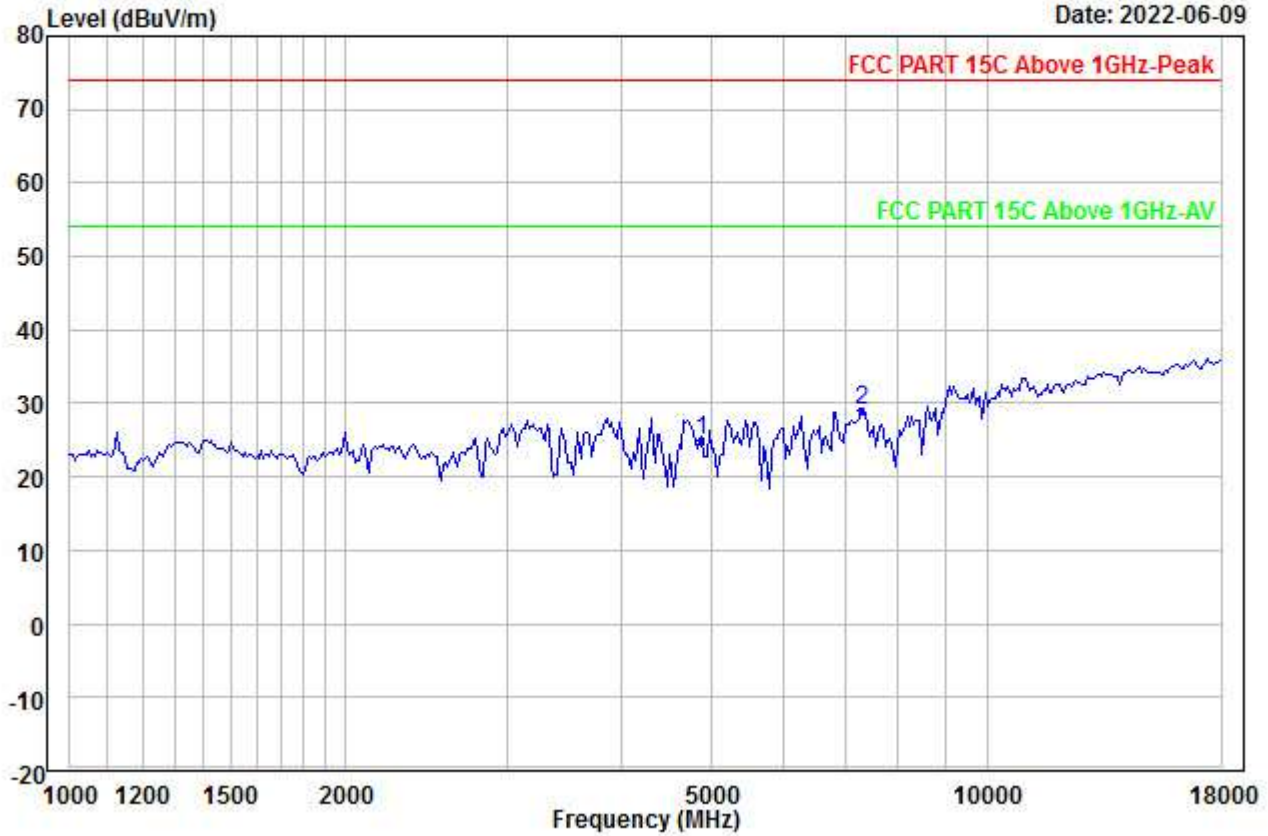


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : G_ANT1_2437
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rema		
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit					
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg		
1	4874.000	27.28	34.70	46.57	0.00	9.58	24.99	54.00	-29.01	---	---	Aver
2 PP	7311.000	27.50	36.24	46.19	0.00	11.55	29.10	54.00	-24.90	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\RSE\4_00031.EMI

Date: 2022-06-09

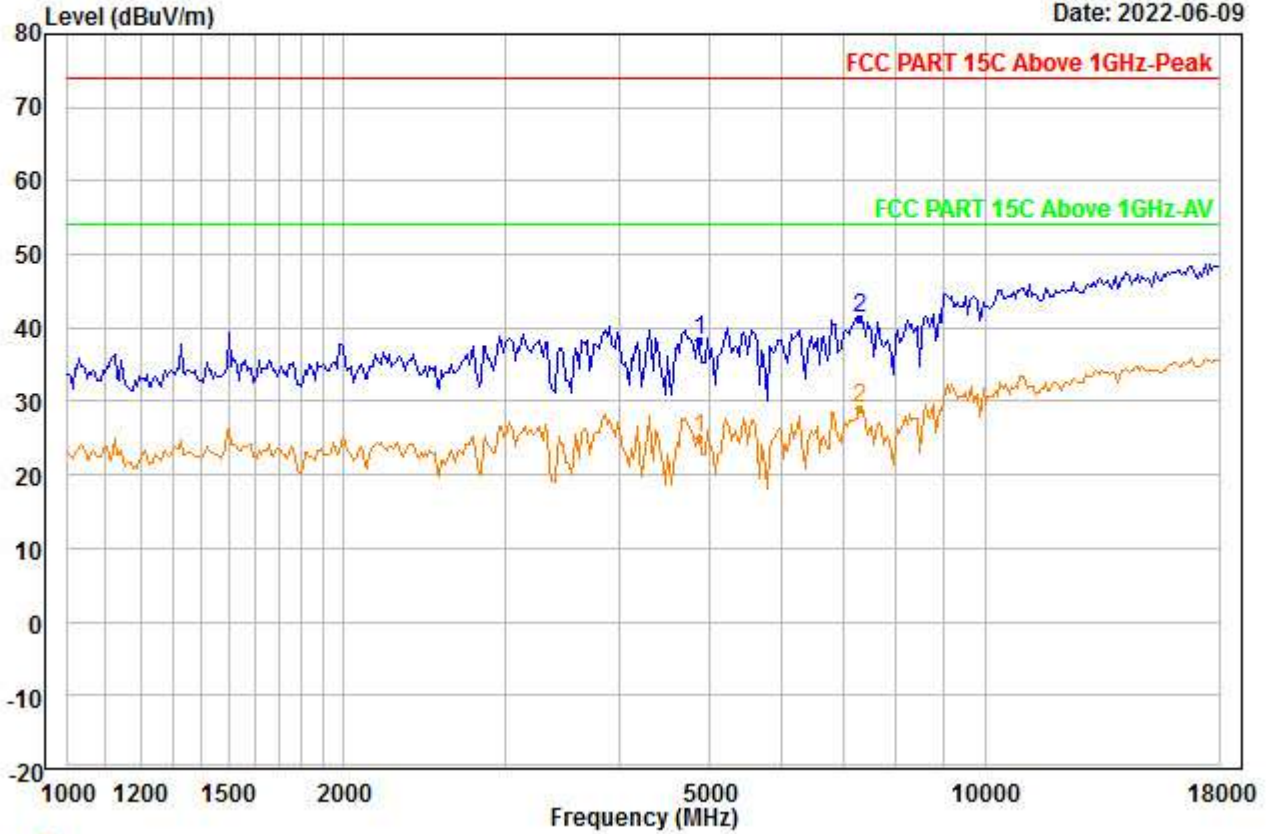


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : G_ANT1_2437
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4874.000	40.70	34.70	46.57	0.00	9.58	38.41	74.00	-35.59	---	---	Peak
2 PP	7311.000	39.81	36.24	46.19	0.00	11.55	41.41	74.00	-32.59	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\RSE\4_00032.EMI

Date: 2022-06-09

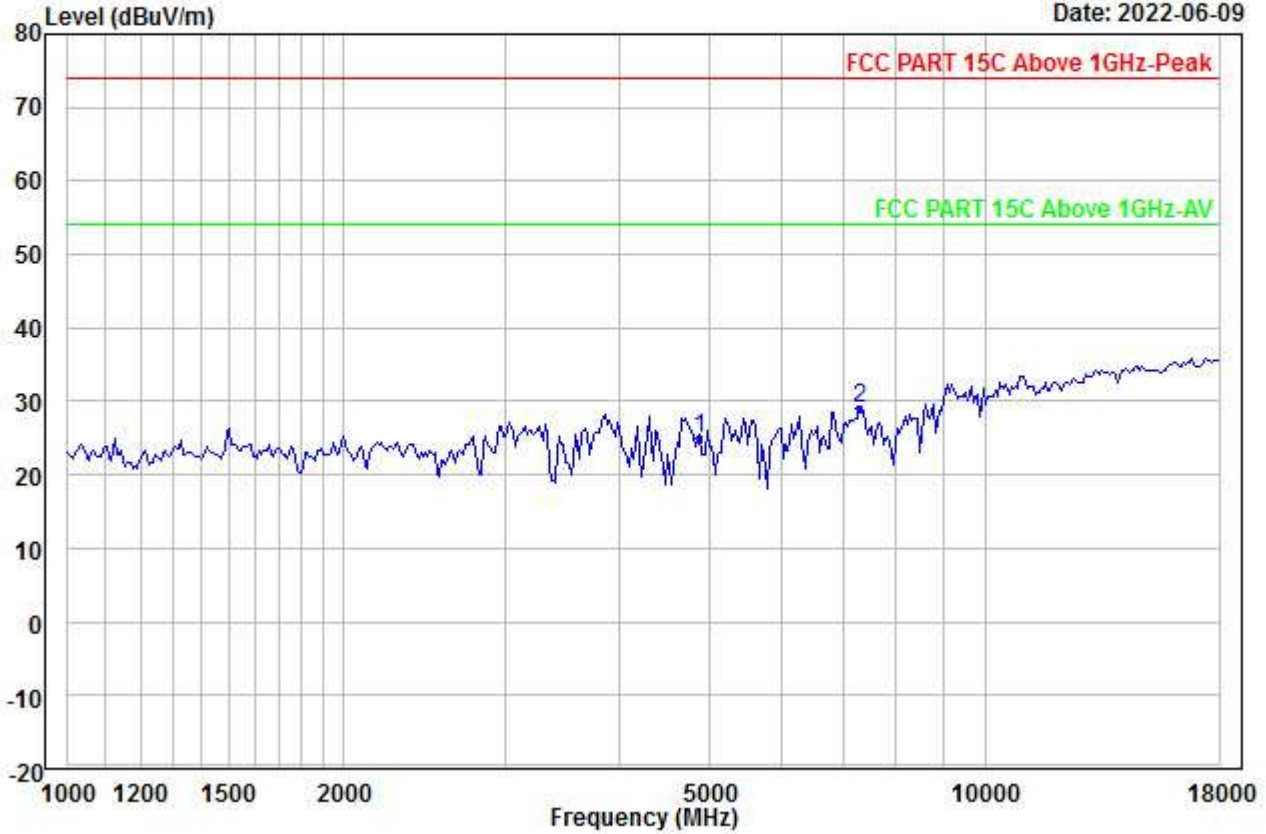


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : G_ANT1_2437
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4874.000	27.28	34.70	46.57	0.00	9.58	24.99	54.00	-29.01	---	---	Aver
2 PP	7311.000	27.32	36.24	46.19	0.00	11.55	28.92	54.00	-25.08	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\RSE\4_00033.EMI

Date: 2022-06-09

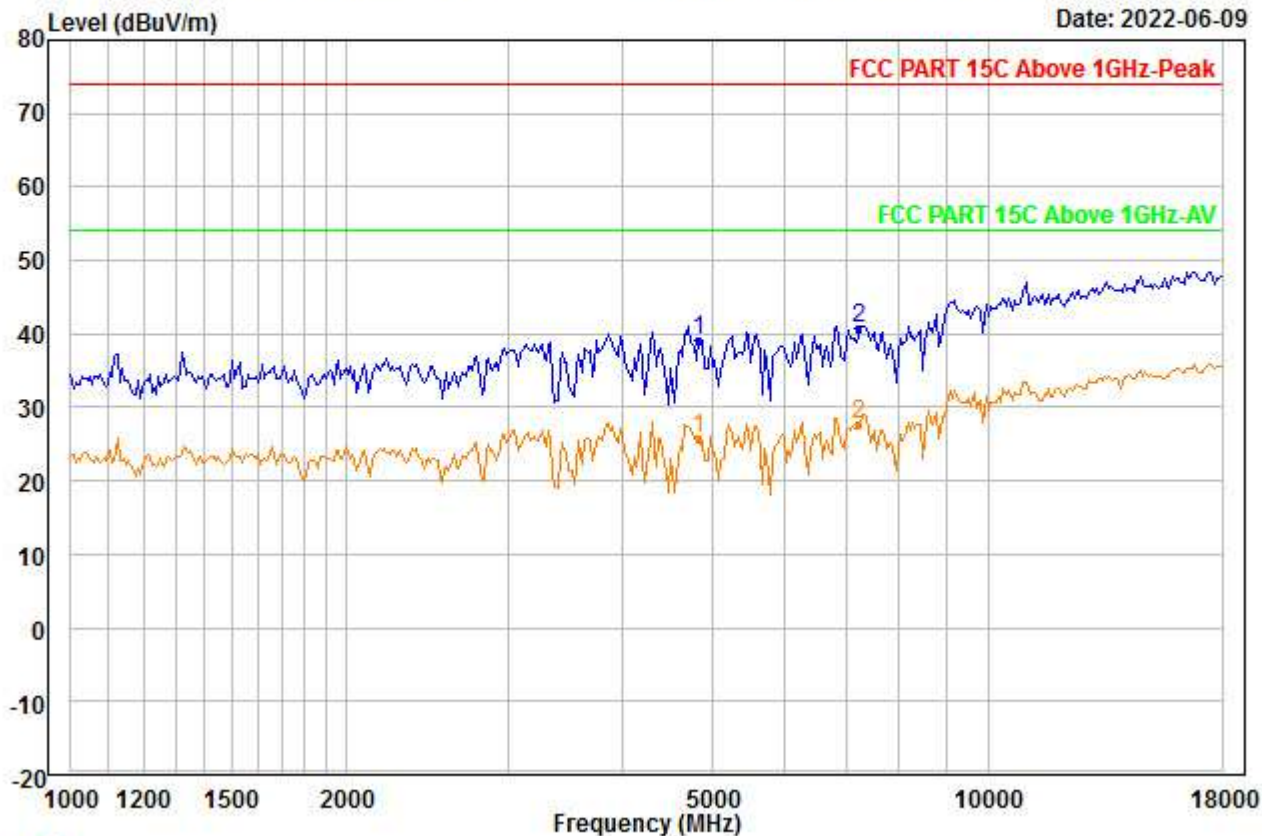


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : G_ANT1_2412
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4824.000	41.59	34.70	46.56	0.00	9.53	39.26	74.00	-34.74	---	---	Peak
2 PP	7236.000	39.36	36.13	46.14	0.00	11.48	40.83	74.00	-33.17	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\RSE\4_00034.EMI

Date: 2022-06-09

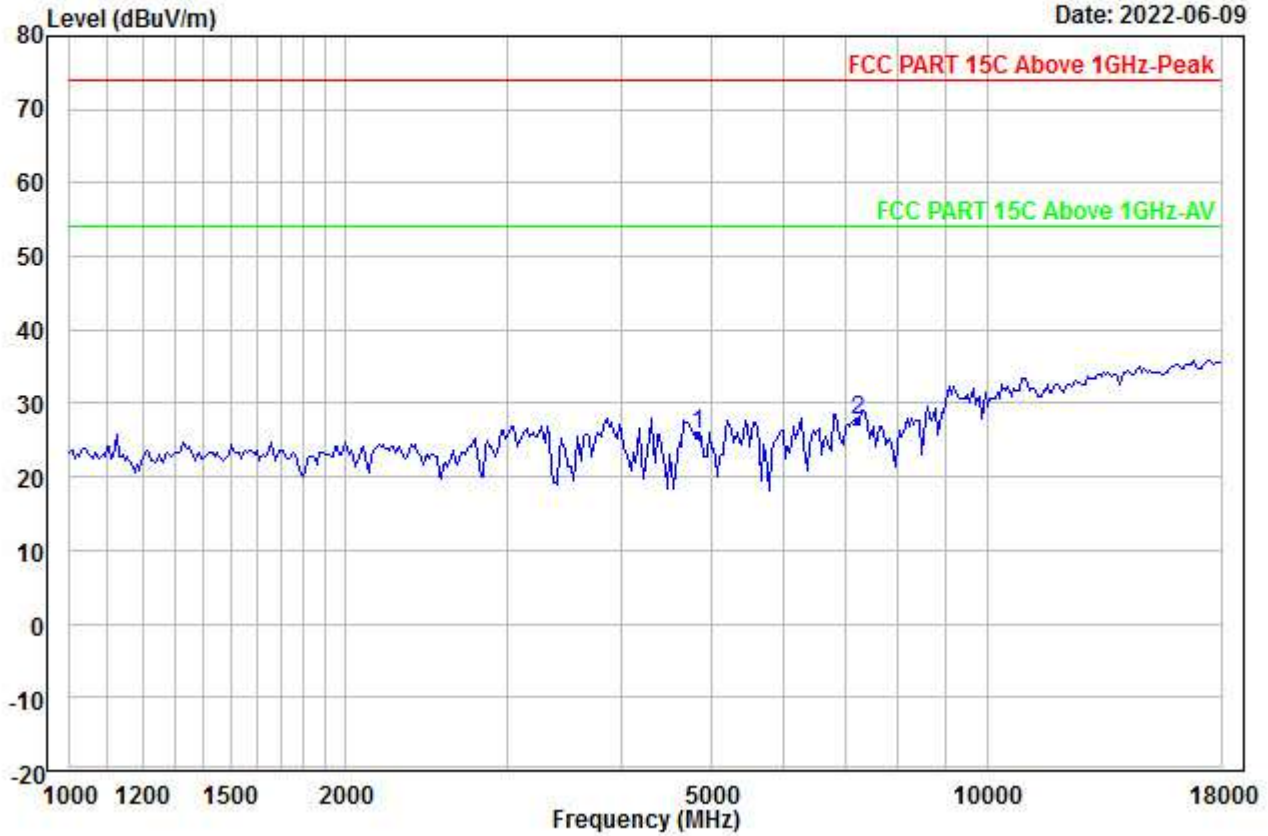


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : G_ANT1_2412
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:		
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit					
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg		
1	4824.000	28.02	34.70	46.56	0.00	9.53	25.69	54.00	-28.31	---	---	Aver
2 PP	7236.000	26.33	36.13	46.14	0.00	11.48	27.80	54.00	-26.20	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\RSE\4_00035.EMI

Date: 2022-06-09

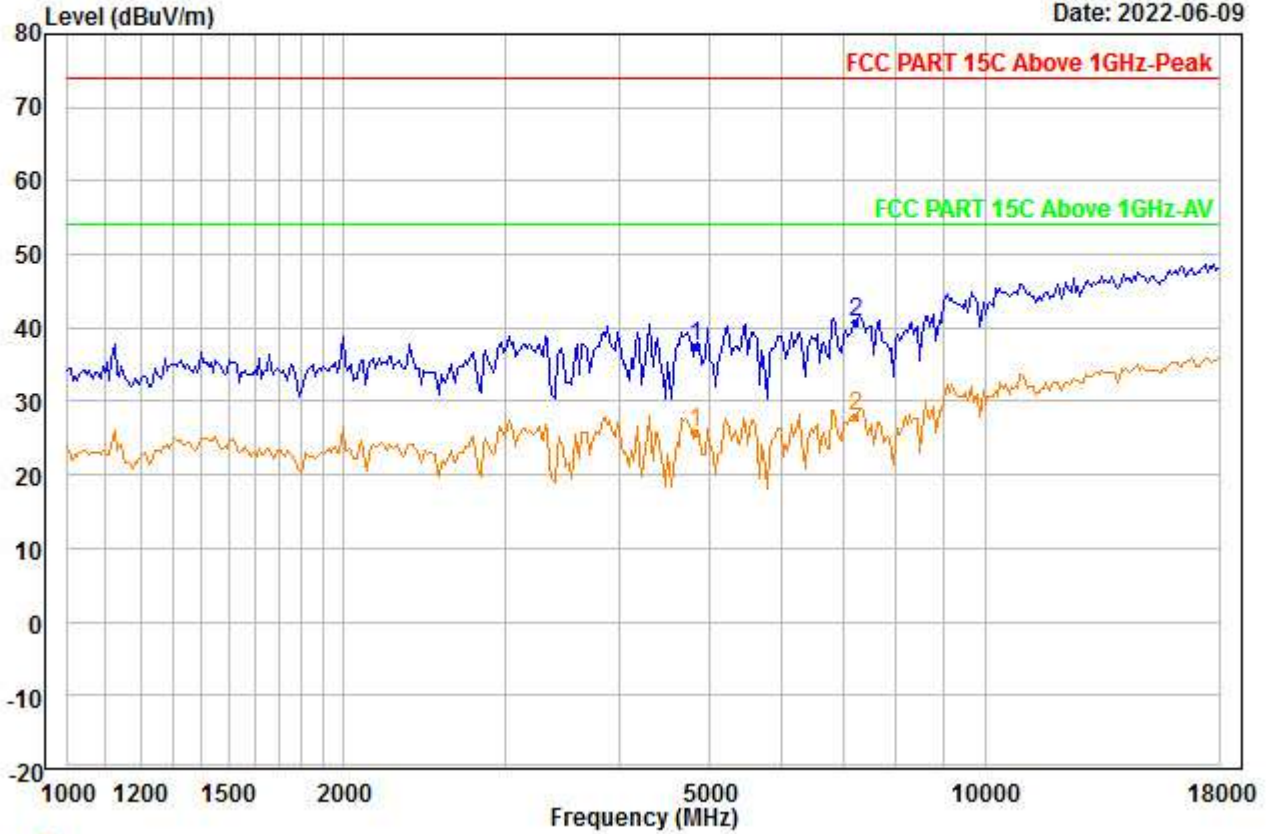


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : G_ANT1_2412
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4824.000	39.84	34.70	46.56	0.00	9.53	37.51	74.00	-36.49	---	---	Peak
2 PP	7236.000	39.36	36.13	46.14	0.00	11.48	40.83	74.00	-33.17	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\RSE\4_00036.EMI

Date: 2022-06-09

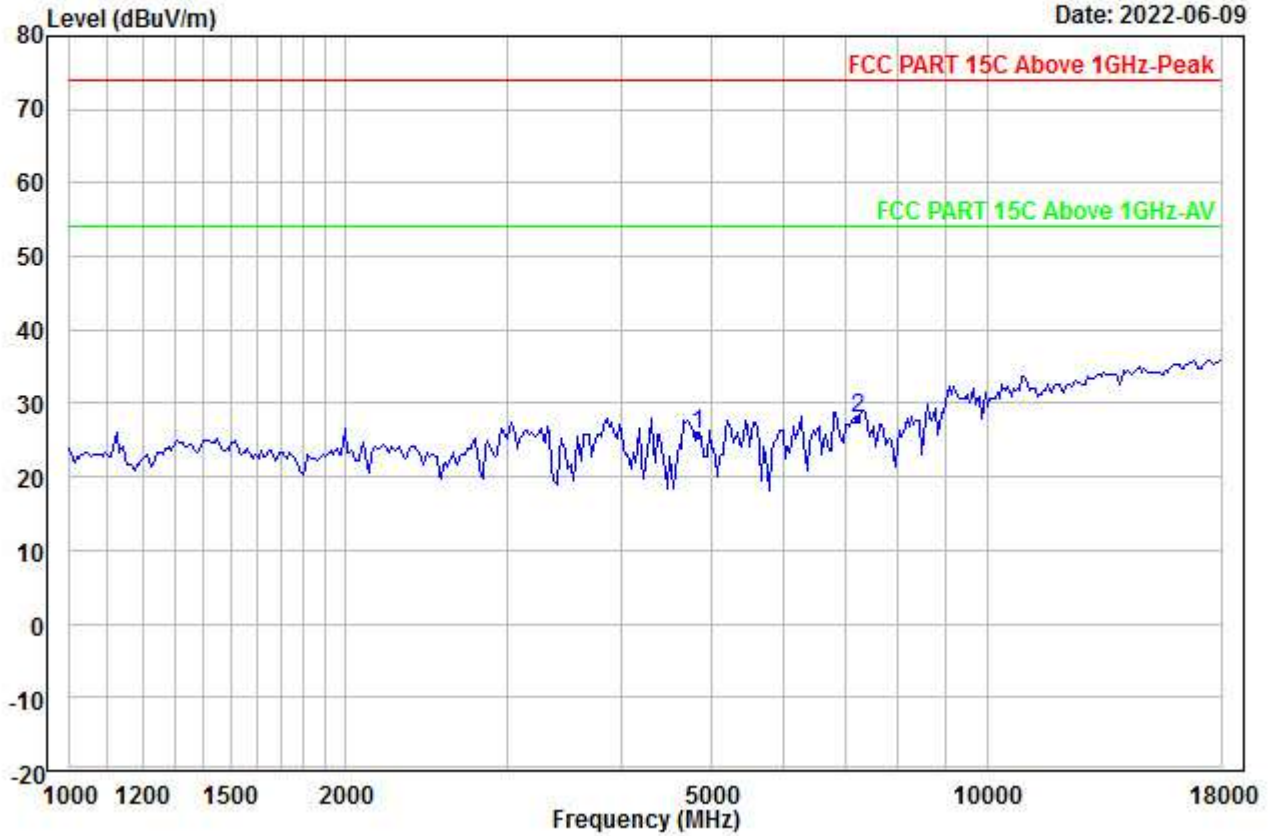


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : G_ANT1_2412
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4824.000	28.10	34.70	46.56	0.00	9.53	25.77	54.00	-28.23	---	---	Aver
2 PP	7236.000	26.47	36.13	46.14	0.00	11.48	27.94	54.00	-26.06	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\RSE\4_00037.EMI

Date: 2022-06-09

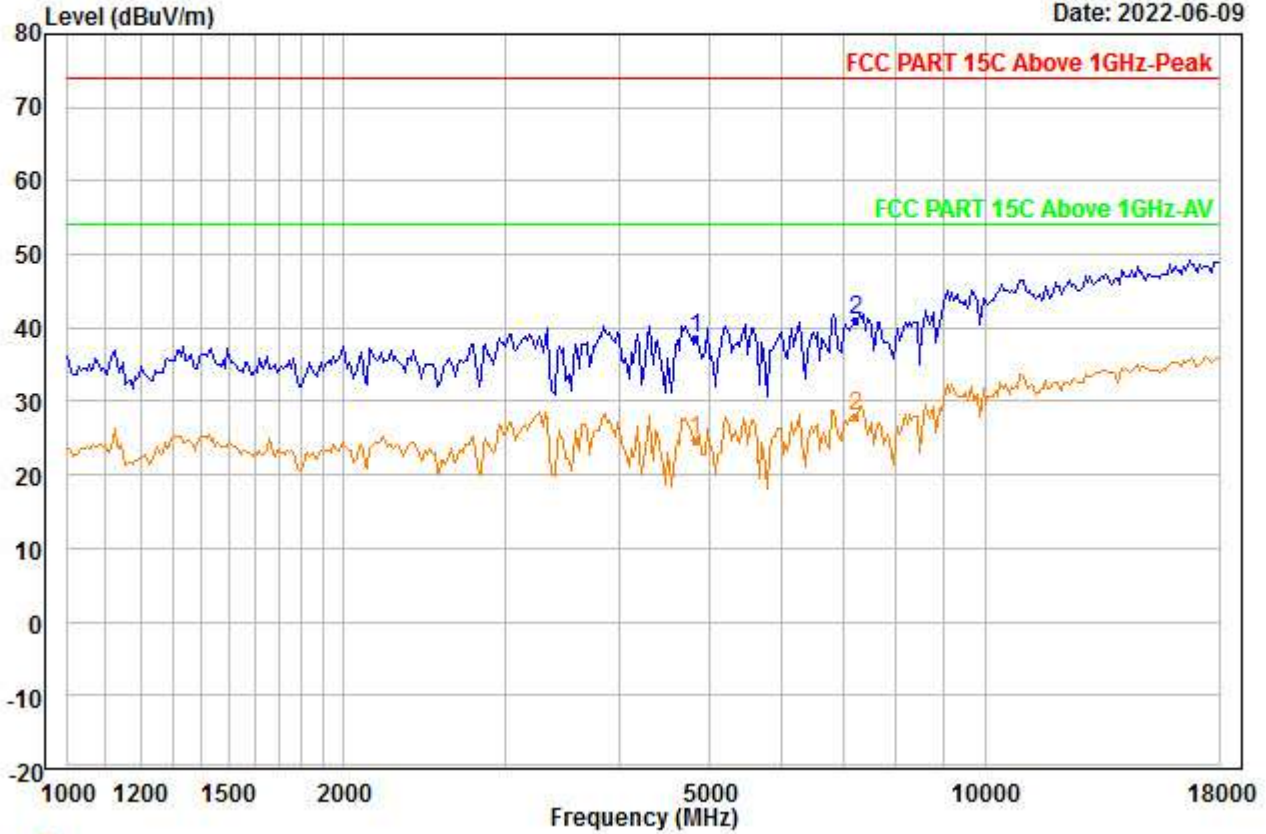


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : G_ANT0_2412
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4824.000	40.94	34.70	46.56	0.00	9.53	38.61	74.00	-35.39	---	---	Peak
2 PP	7236.000	39.65	36.13	46.14	0.00	11.48	41.12	74.00	-32.88	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\RSE\4_00038.EMI

Date: 2022-06-09

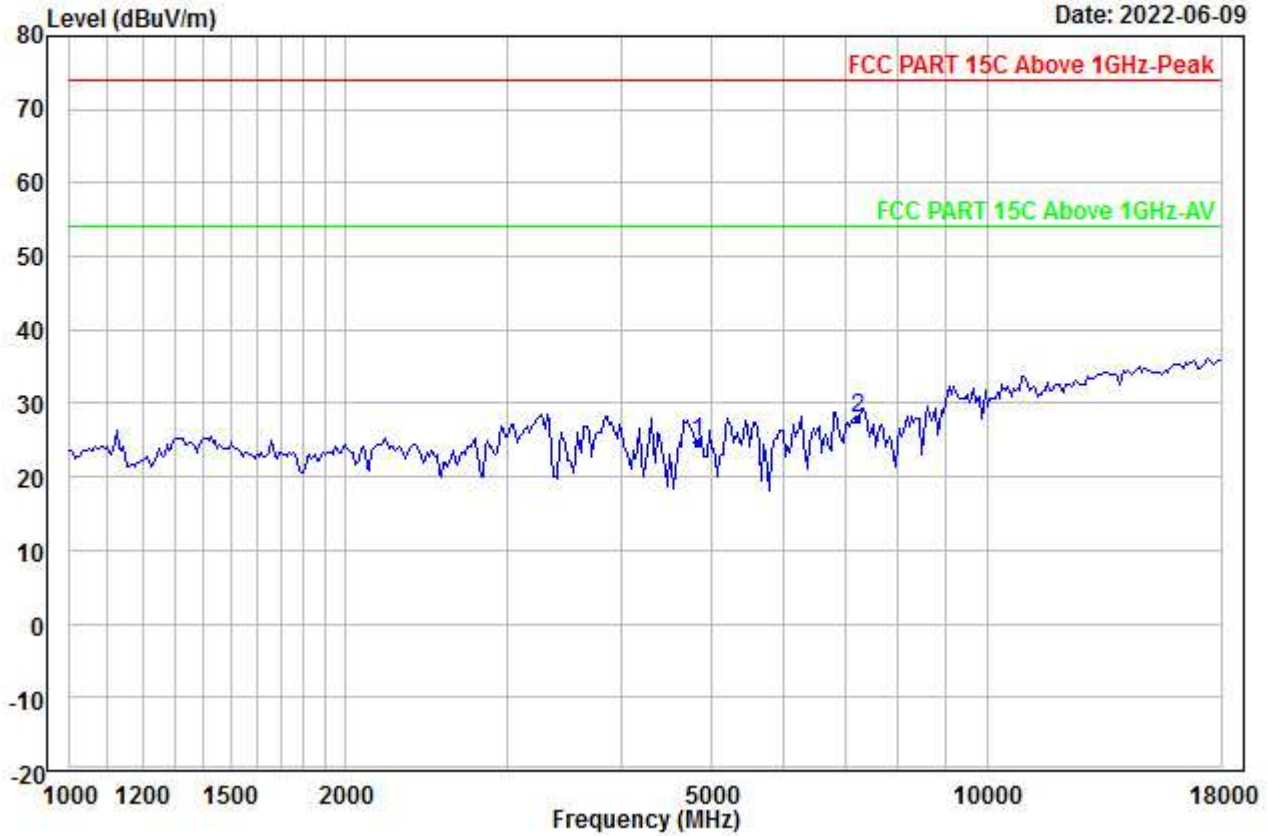


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : G_ANT0_2412
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4824.000	27.10	34.70	46.56	0.00	9.53	24.77	54.00	-29.23	---	---	Aver
2 PP	7236.000	26.54	36.13	46.14	0.00	11.48	28.01	54.00	-25.99	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\RSE\4_00039.EMI

Date: 2022-06-09

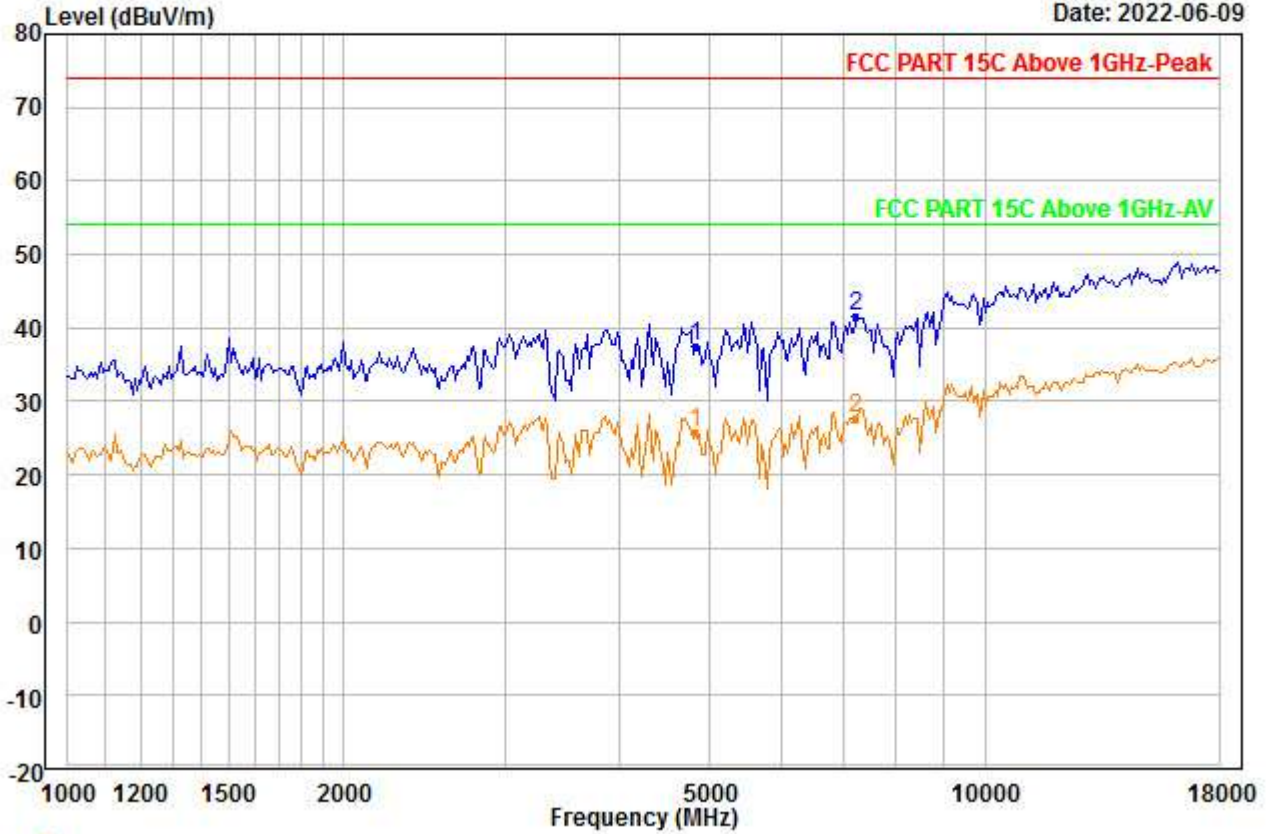


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : G_ANT0_2412
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4824.000	39.73	34.70	46.56	0.00	9.53	37.40	74.00	-36.60	---	---	Peak
2 PP	7236.000	40.01	36.13	46.14	0.00	11.48	41.48	74.00	-32.52	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\RSE\4_00040.EMI

Date: 2022-06-09

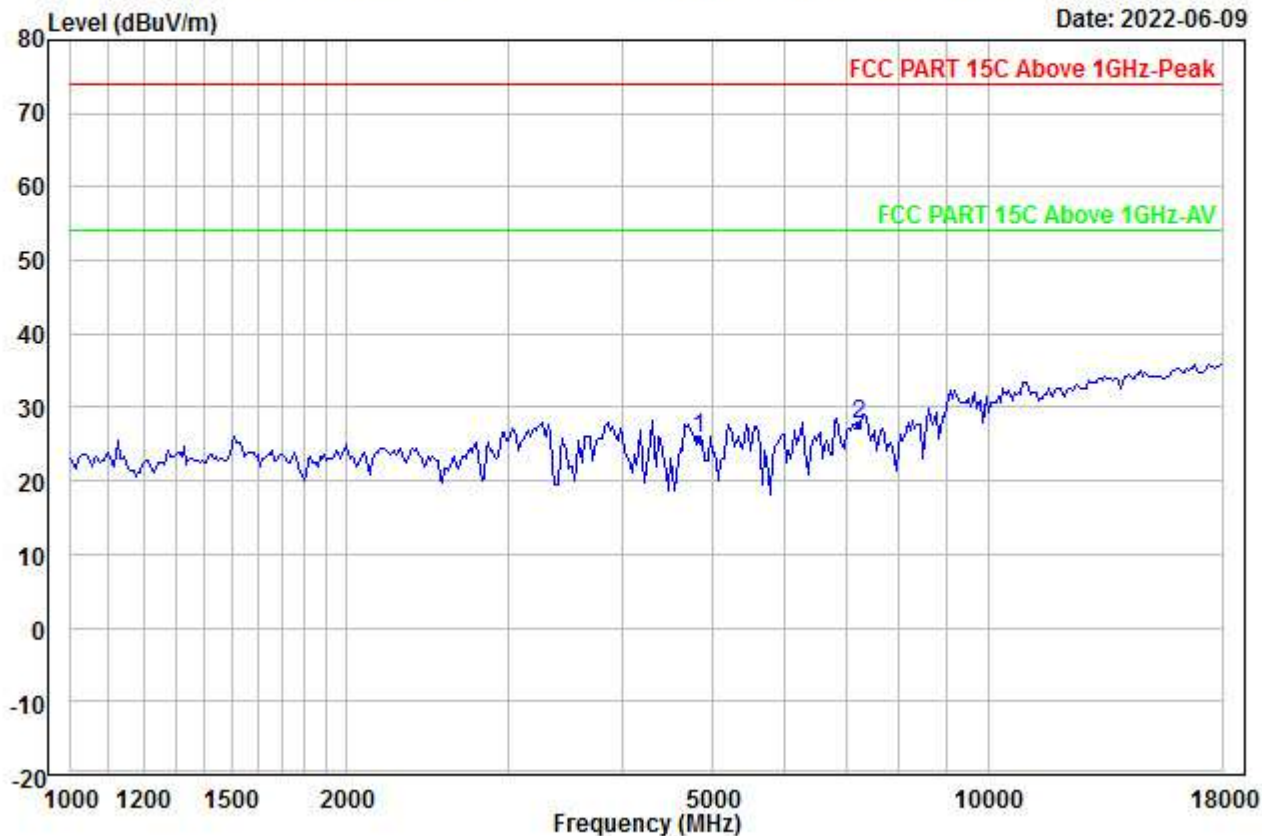


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : G_ANT0_2412
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4824.000	28.02	34.70	46.56	0.00	9.53	25.69	54.00	-28.31	---	---	Aver
2 PP	7236.000	26.33	36.13	46.14	0.00	11.48	27.80	54.00	-26.20	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\RSE\4_00041.EMI

Date: 2022-06-09

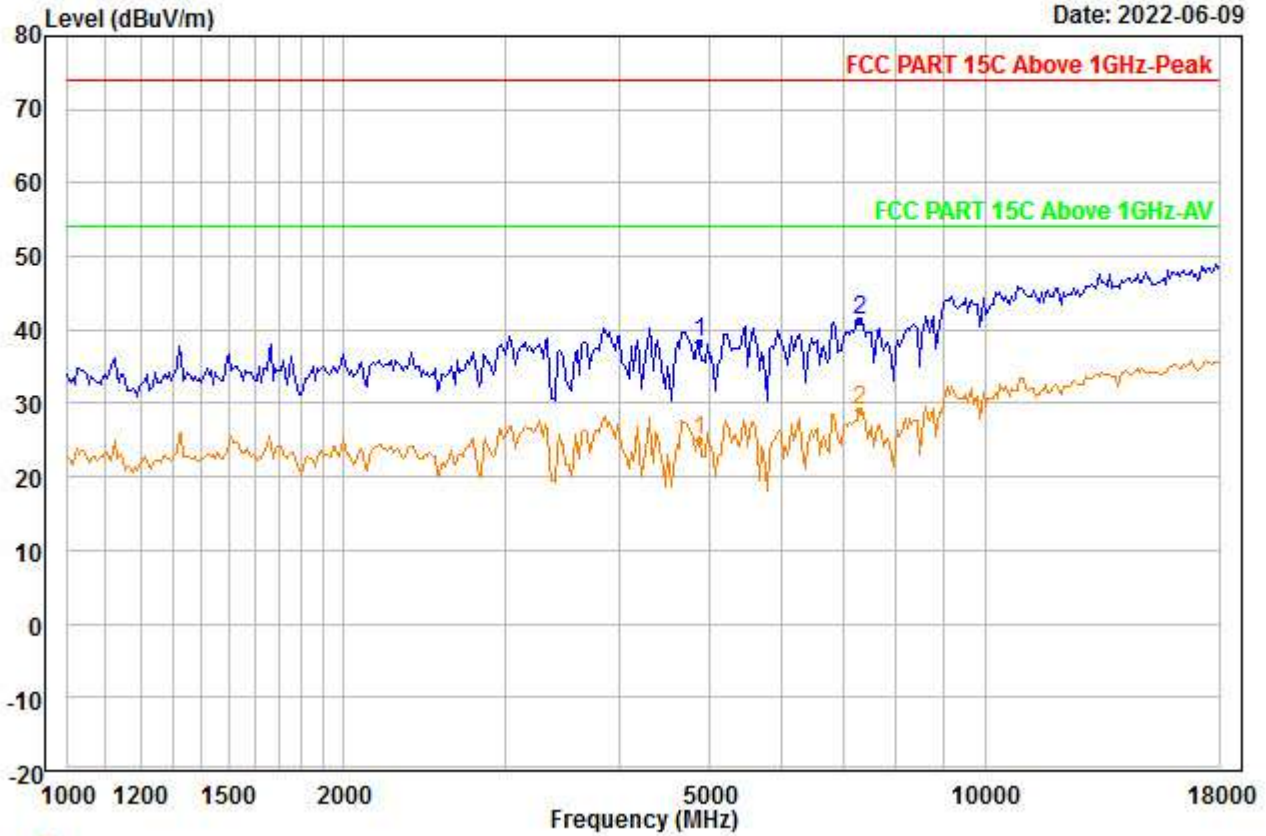


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : G_ANT0_2437
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4874.000	40.69	34.70	46.57	0.00	9.58	38.40	74.00	-35.60	---	---	Peak
2 PP	7311.000	39.74	36.24	46.19	0.00	11.55	41.34	74.00	-32.66	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\RSE\4_00042.EMI

Date: 2022-06-09

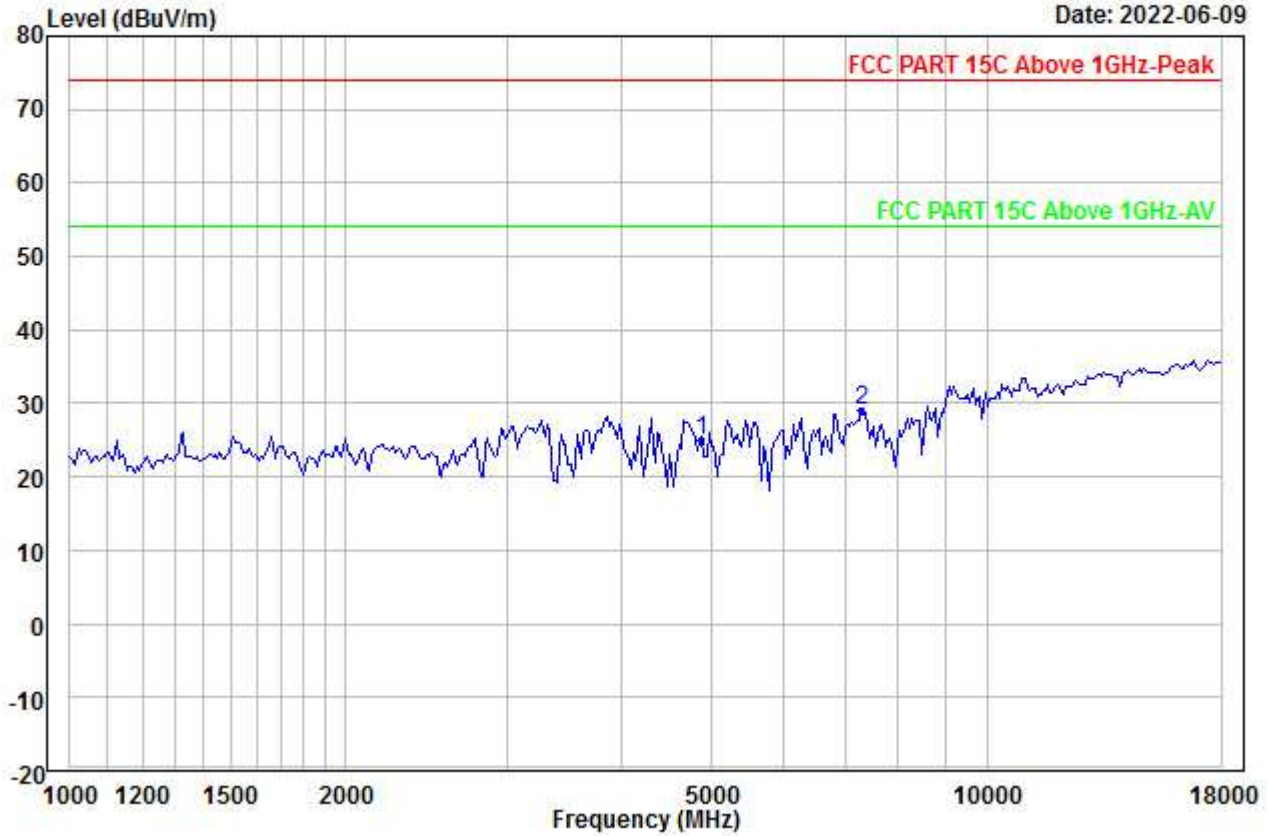


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : G_ANT0_2437
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4874.000	27.34	34.70	46.57	0.00	9.58	25.05	54.00	-28.95	---	---	Aver
2 PP	7311.000	27.32	36.24	46.19	0.00	11.55	28.92	54.00	-25.08	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\RSE\4_00043.EMI

Date: 2022-06-10

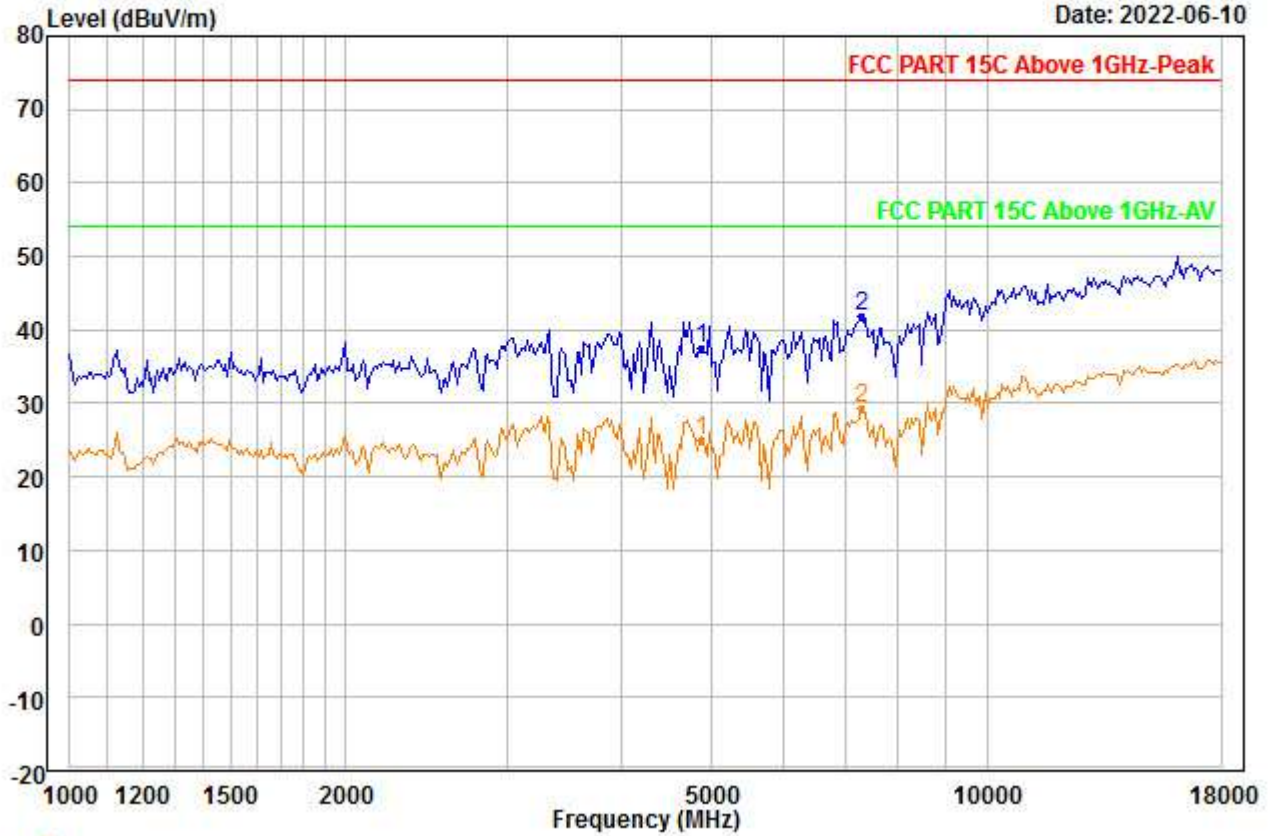


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : G_ANT0_2437
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:		
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit					
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg		
1	4874.000	39.89	34.70	46.57	0.00	9.58	37.60	74.00	-36.40	---	---	Peak
2 PP	7311.000	40.18	36.24	46.19	0.00	11.55	41.78	74.00	-32.22	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\RSE\4_00044.EMI

Date: 2022-06-10

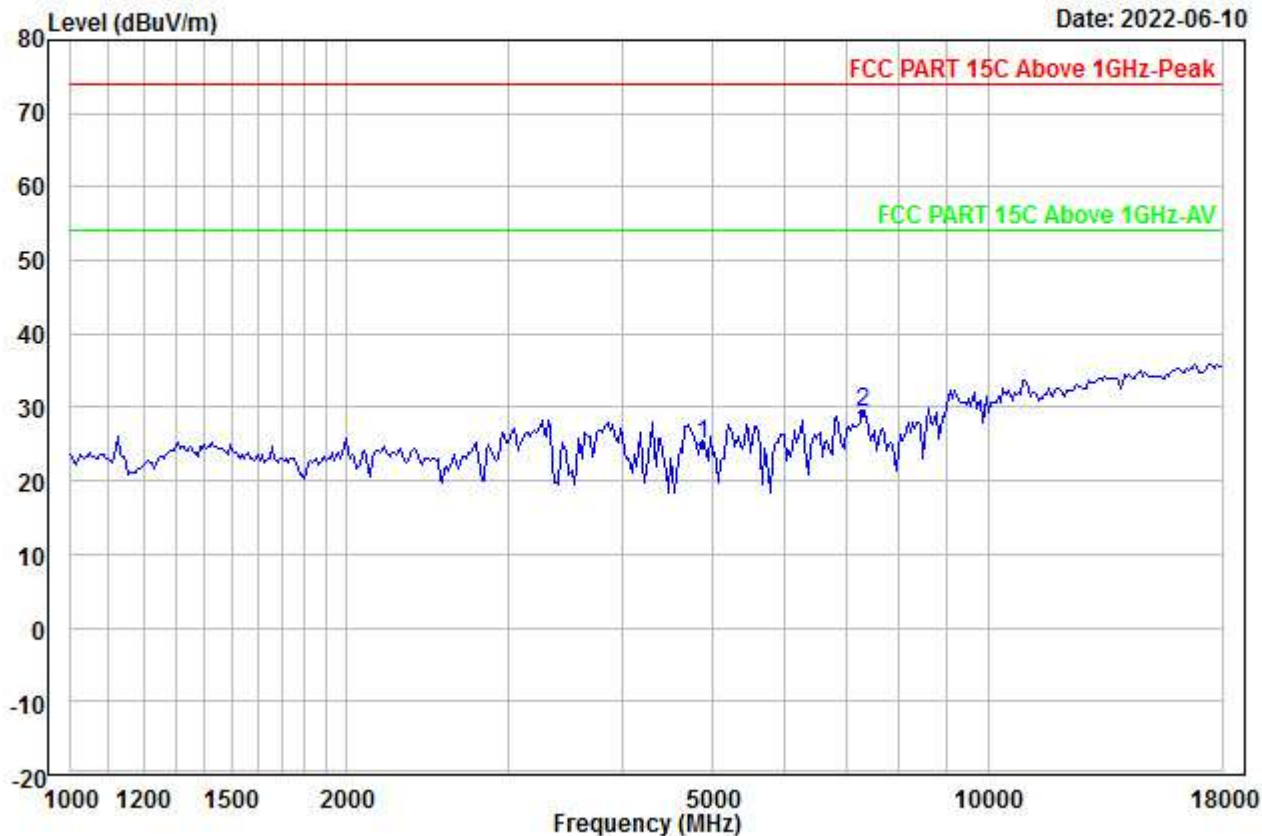


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : G_ANT0_2437
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4874.000	27.28	34.70	46.57	0.00	9.58	24.99	54.00	-29.01	---	---	Aver
2 PP	7311.000	27.62	36.24	46.19	0.00	11.55	29.22	54.00	-24.78	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\RSE\4_00045.EMI

Date: 2022-06-10

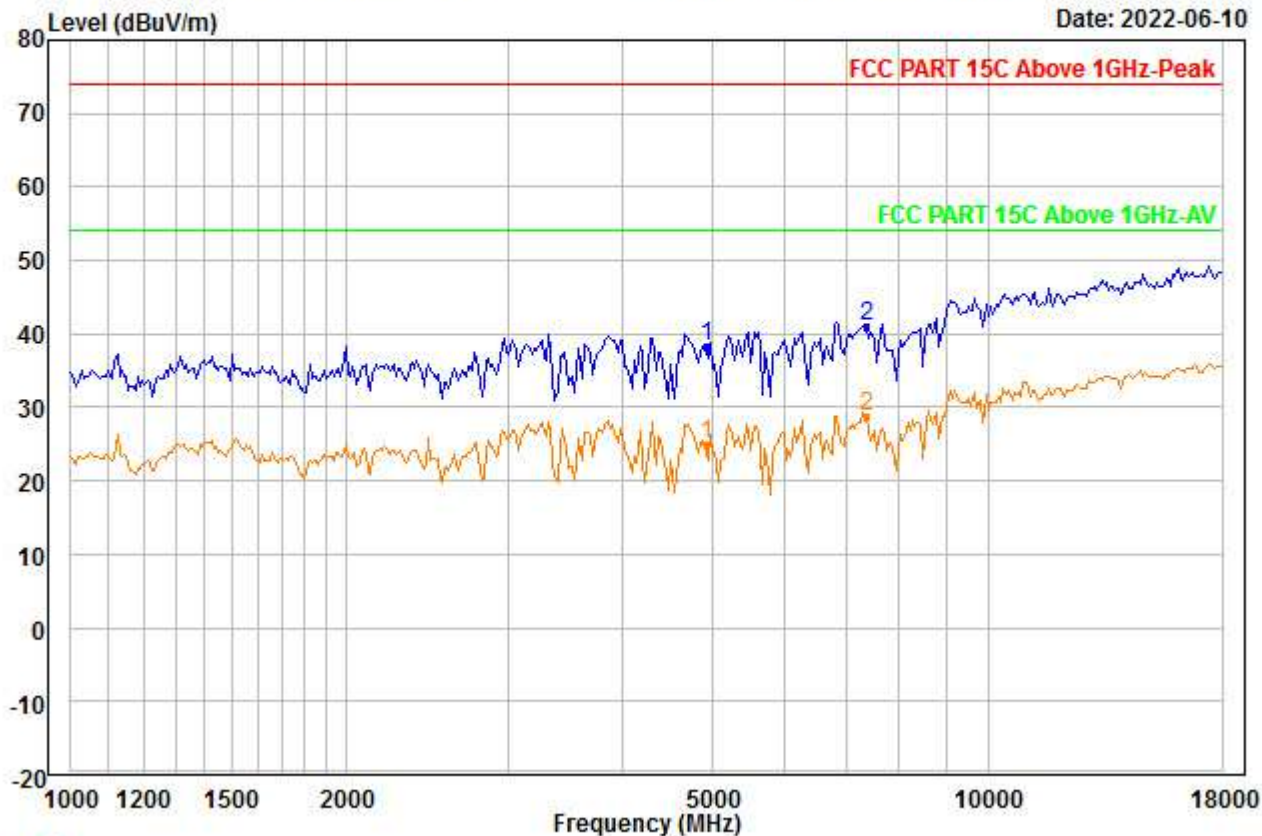


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : G_ANT0_2462
 Remark :

	Read Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4924.000	40.70	34.70	46.58	0.00	9.62	38.44	74.00	-35.56	---	---	Peak
2 PP	7386.000	39.41	36.34	46.23	0.00	11.61	41.13	74.00	-32.87	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\RSE\4_00046.EMI

Date: 2022-06-10

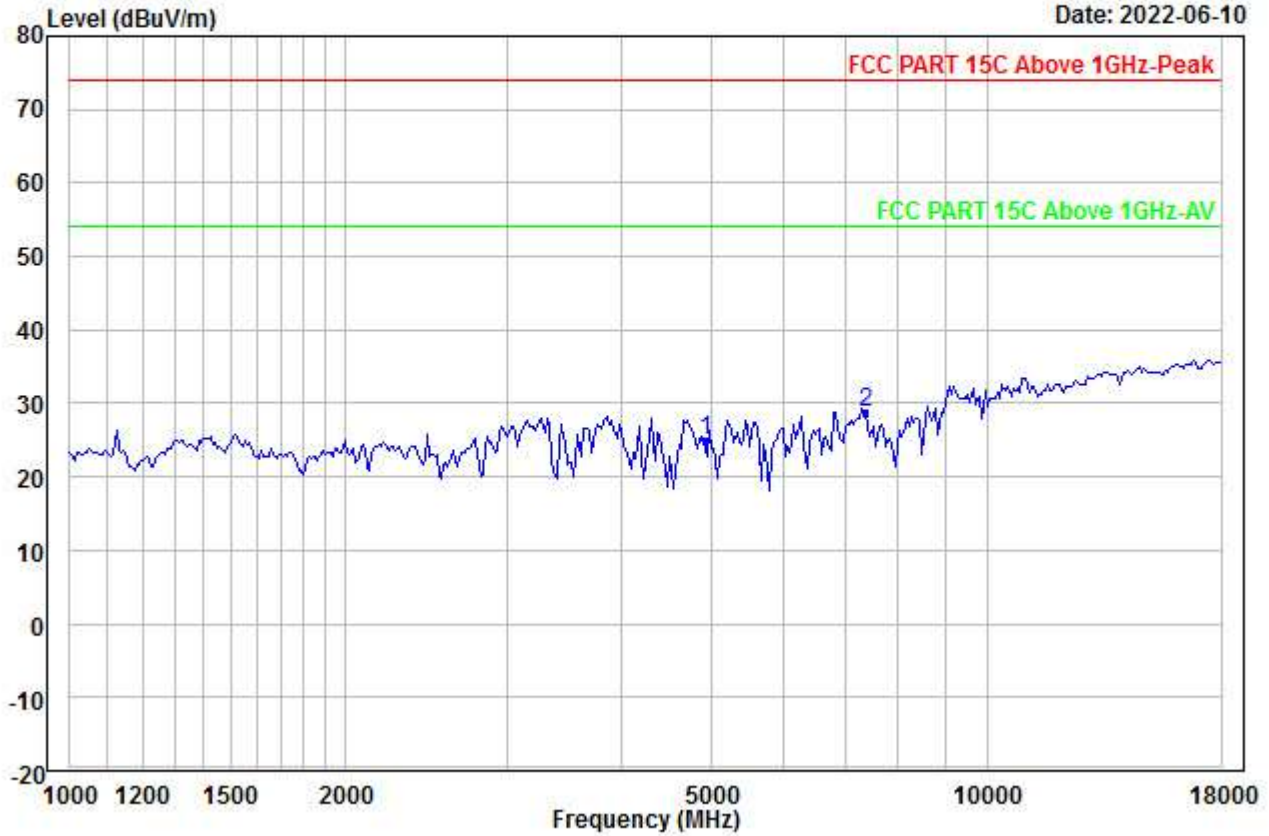


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : G_ANT0_2462
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4924.000	27.09	34.70	46.58	0.00	9.62	24.83	54.00	-29.17	---	---	Aver
2 PP	7386.000	27.09	36.34	46.23	0.00	11.61	28.81	54.00	-25.19	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\RSE\4_00047.EMI

Date: 2022-06-10

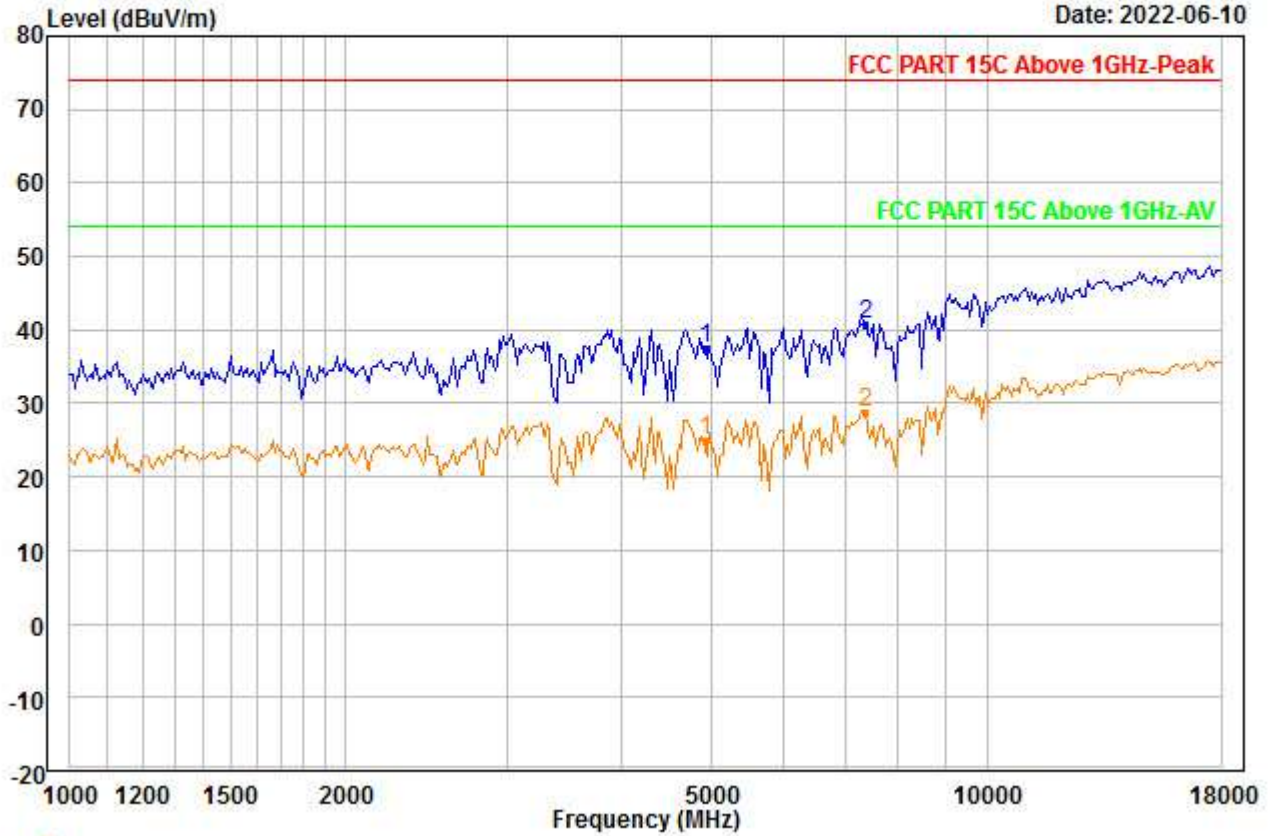


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : G_ANT0_2462
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4924.000	39.70	34.70	46.58	0.00	9.62	37.44	74.00	-36.56	---	---	Peak
2 PP	7386.000	38.95	36.34	46.23	0.00	11.61	40.67	74.00	-33.33	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\RSE\4_00048.EMI

Date: 2022-06-10

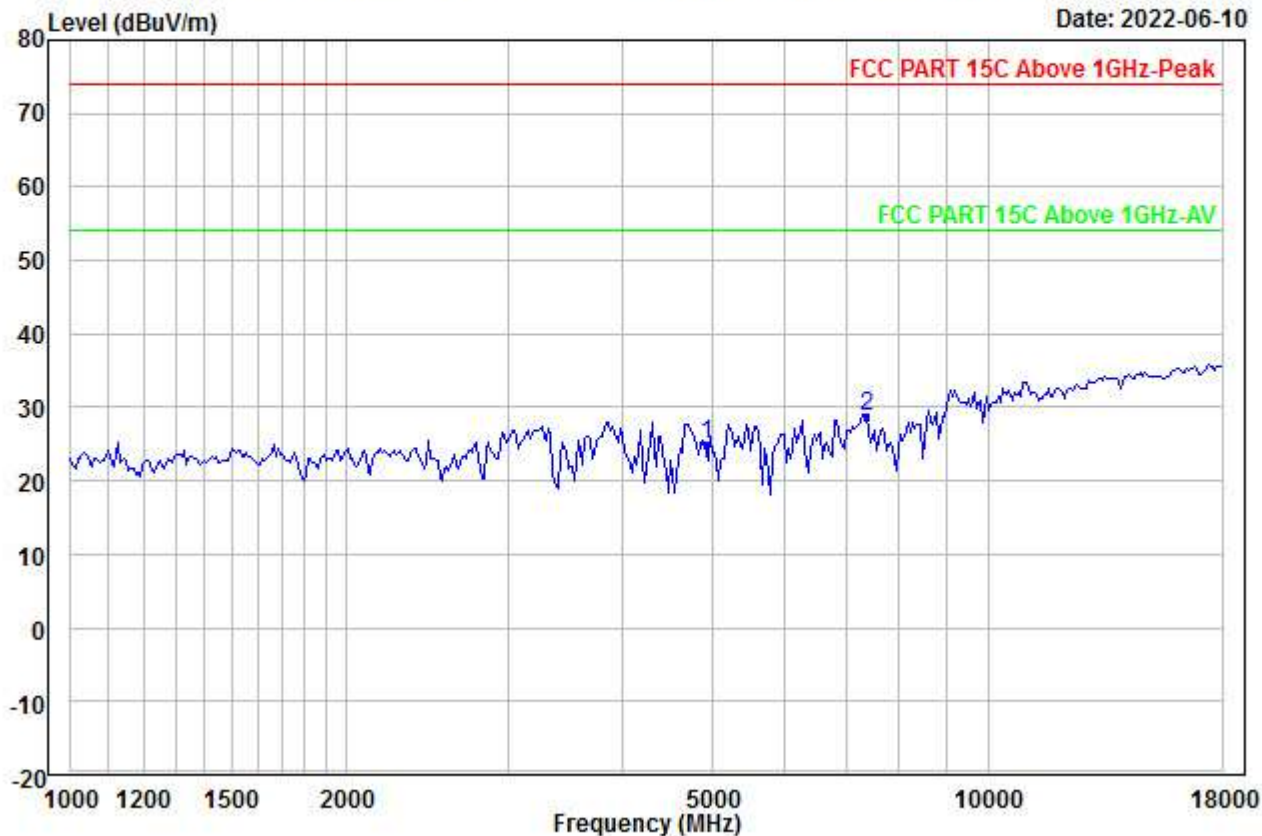


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : G_ANT0_2462
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4924.000	27.25	34.70	46.58	0.00	9.62	24.99	54.00	-29.01	---	---	Aver
2 PP	7386.000	26.96	36.34	46.23	0.00	11.61	28.68	54.00	-25.32	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\RSE\4_00049.EMI

Date: 2022-06-10

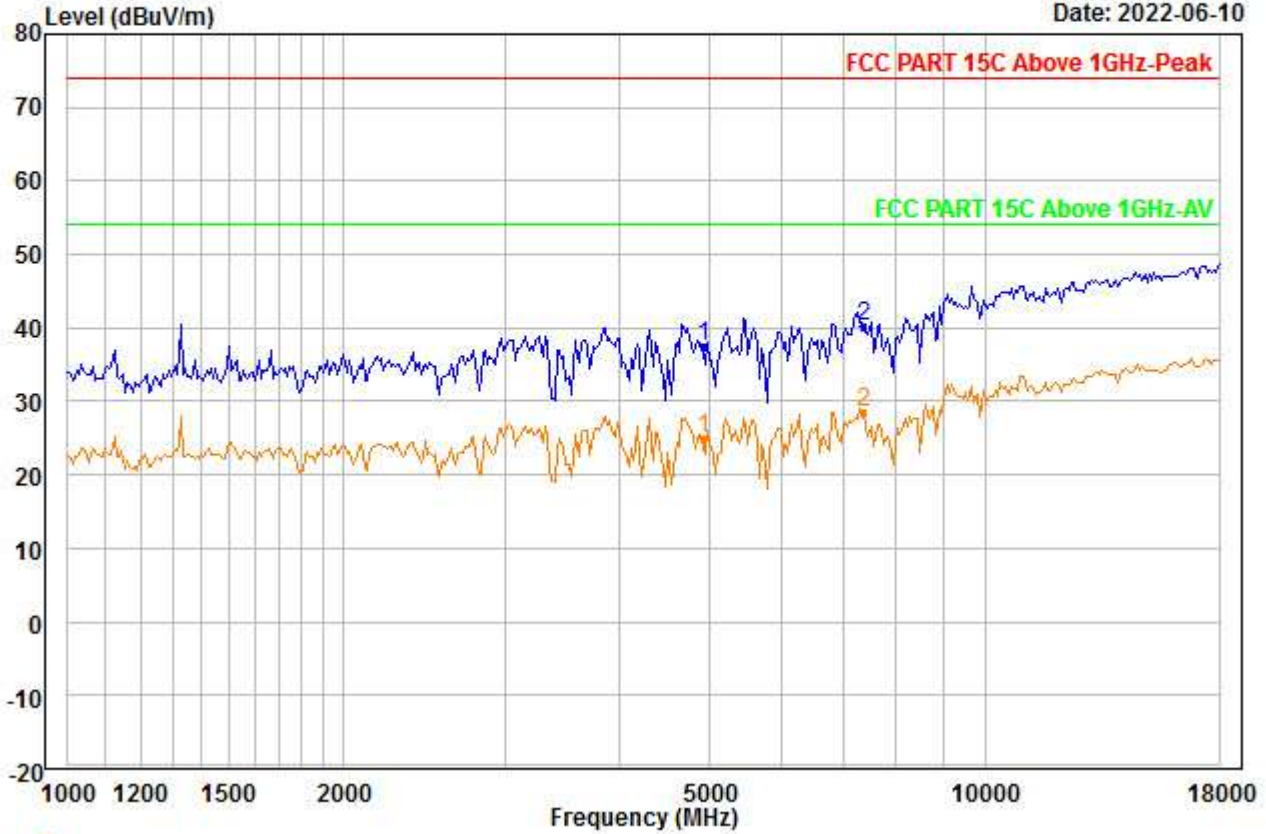


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_2462
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4924.000	39.79	34.70	46.58	0.00	9.62	37.53	74.00	-36.47	---	---	Peak
2 PP	7386.000	38.41	36.34	46.23	0.00	11.61	40.13	74.00	-33.87	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\RSE\4_00050.EMI

Date: 2022-06-10

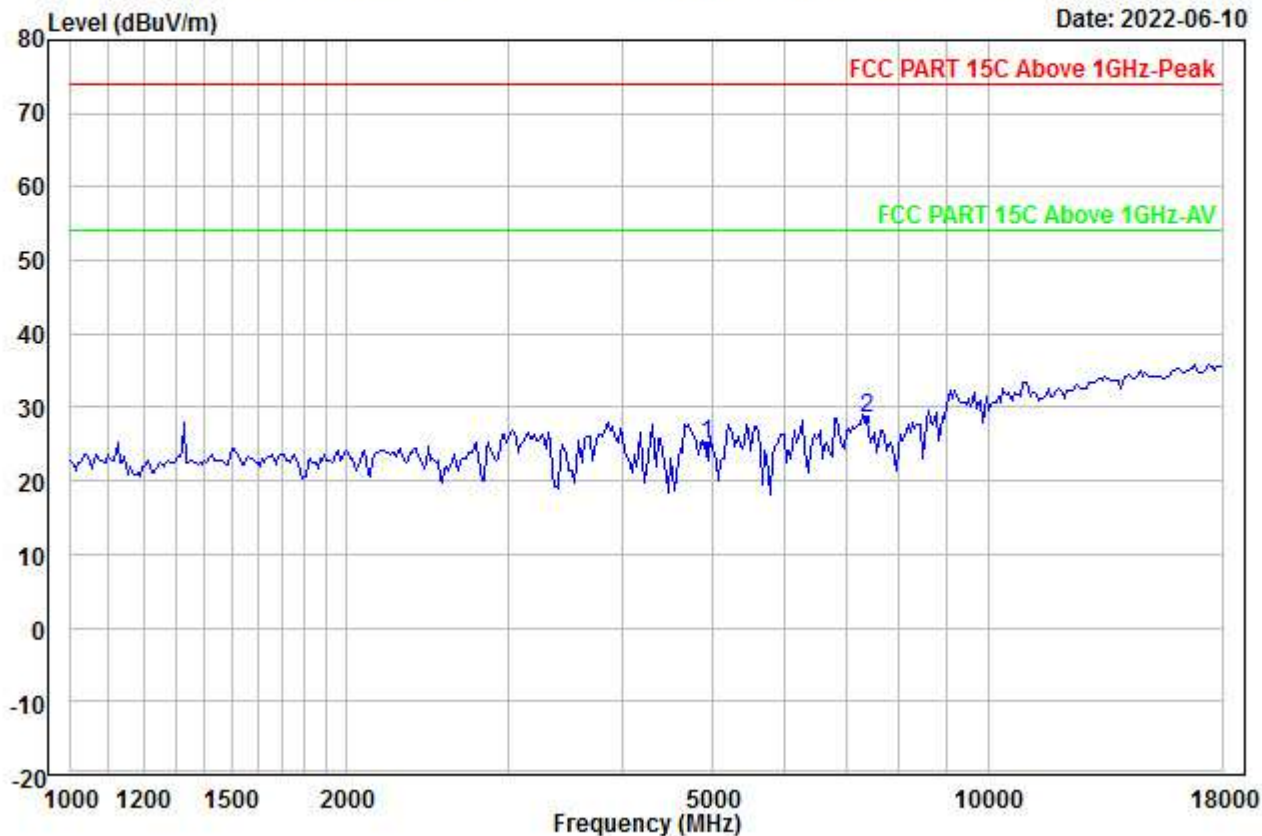


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_2462
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4924.000	27.09	34.70	46.58	0.00	9.62	24.83	54.00	-29.17	---	---	Aver
2 PP	7386.000	26.69	36.34	46.23	0.00	11.61	28.41	54.00	-25.59	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\RSE\4_00051.EMI

Date: 2022-06-10

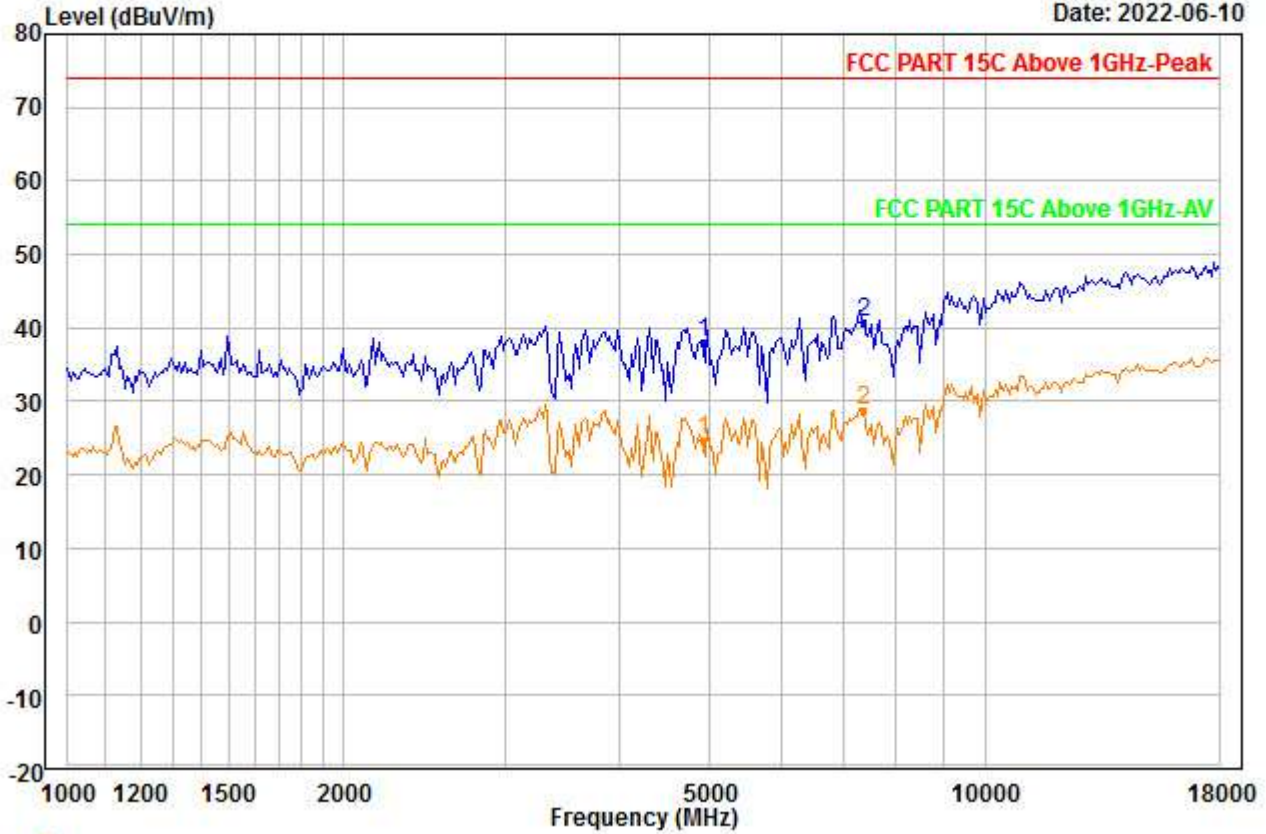


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_2462
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4924.000	40.32	34.70	46.58	0.00	9.62	38.06	74.00	-35.94	---	---	Peak
2 PP	7386.000	39.01	36.34	46.23	0.00	11.61	40.73	74.00	-33.27	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\RSE\4_00052.EMI

Date: 2022-06-10

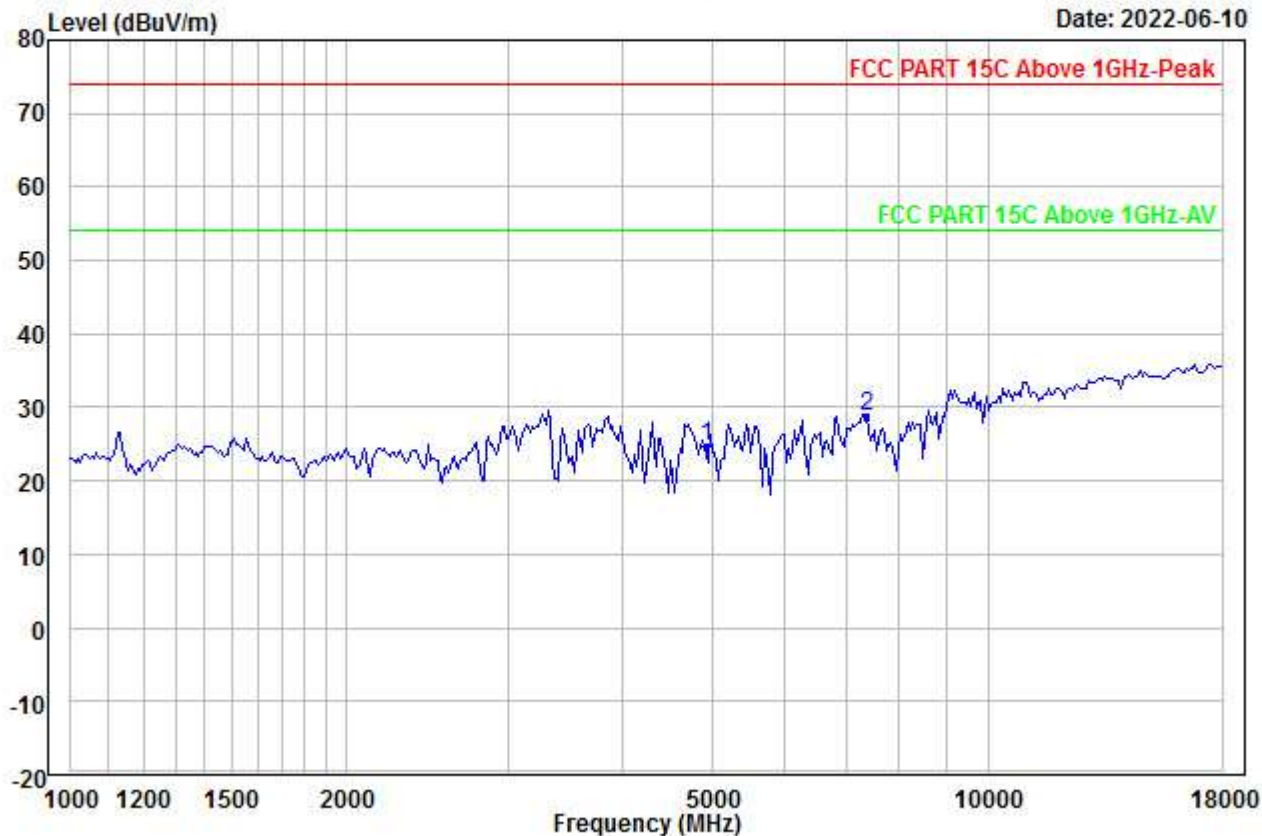


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_2462
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4924.000	27.01	34.70	46.58	0.00	9.62	24.75	54.00	-29.25	---	---	Aver
2 PP	7386.000	27.02	36.34	46.23	0.00	11.61	28.74	54.00	-25.26	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\RSE\4_00053.EMI

Date: 2022-06-10

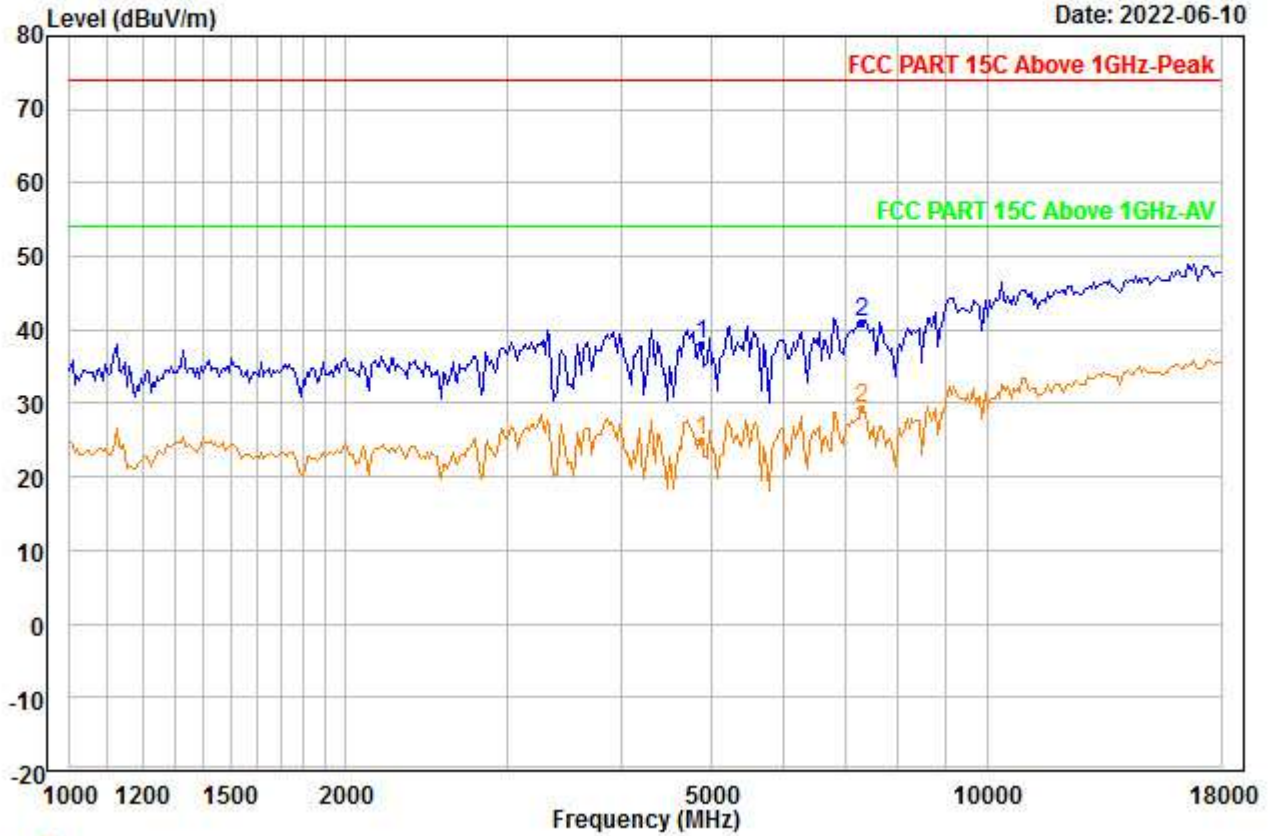


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_2437
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:		
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit					
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg		
1	4874.000	40.20	34.70	46.57	0.00	9.58	37.91	74.00	-36.09	---	---	Peak
2 PP	7311.000	39.44	36.24	46.19	0.00	11.55	41.04	74.00	-32.96	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\RSE\4_00054.EMI

Date: 2022-06-10

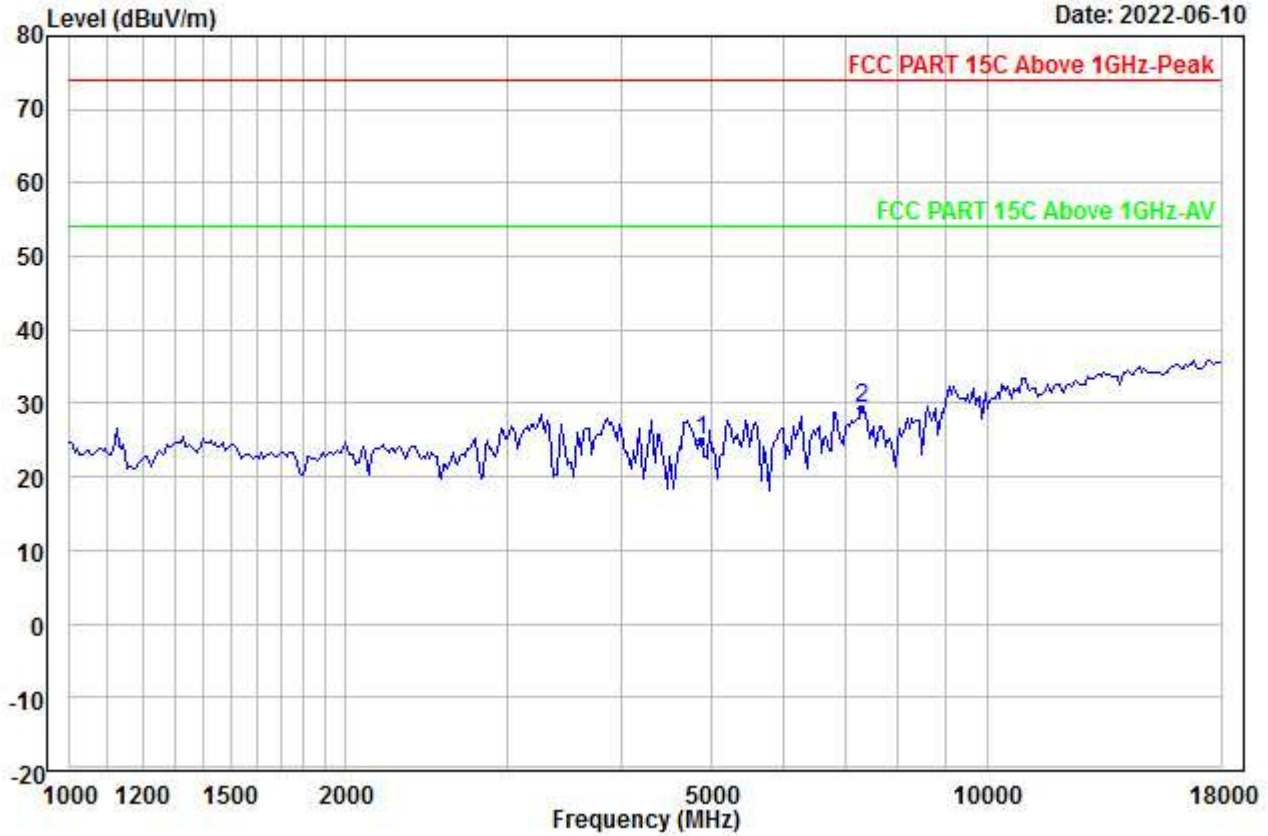


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_2437
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4874.000	27.22	34.70	46.57	0.00	9.58	24.93	54.00	-29.07	---	---	Aver
2 PP	7311.000	27.74	36.24	46.19	0.00	11.55	29.34	54.00	-24.66	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\RSE\4_00055.EMI

Date: 2022-06-10

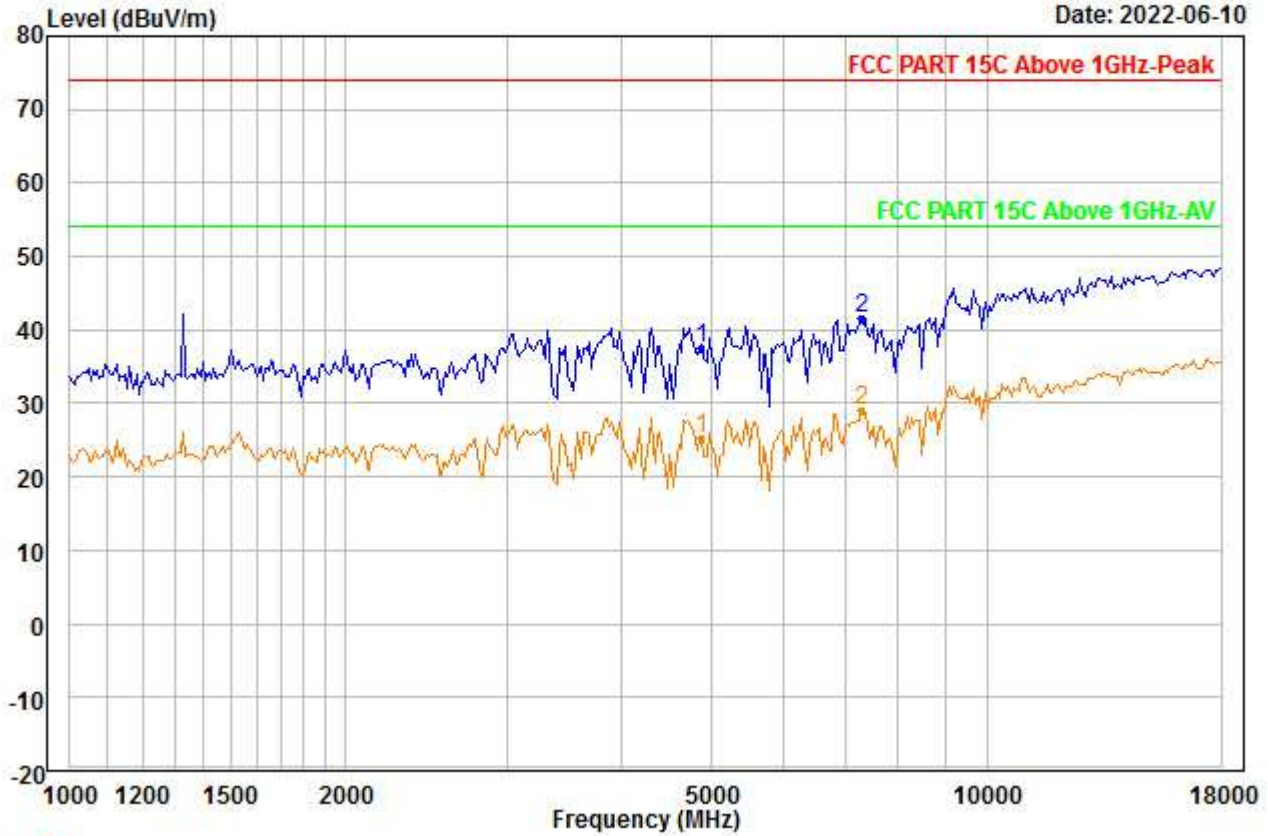


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_2437
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4874.000	39.69	34.70	46.57	0.00	9.58	37.40	74.00	-36.60	---	---	Peak
2 PP	7311.000	39.87	36.24	46.19	0.00	11.55	41.47	74.00	-32.53	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\RSE\4_00056.EMI

Date: 2022-06-10

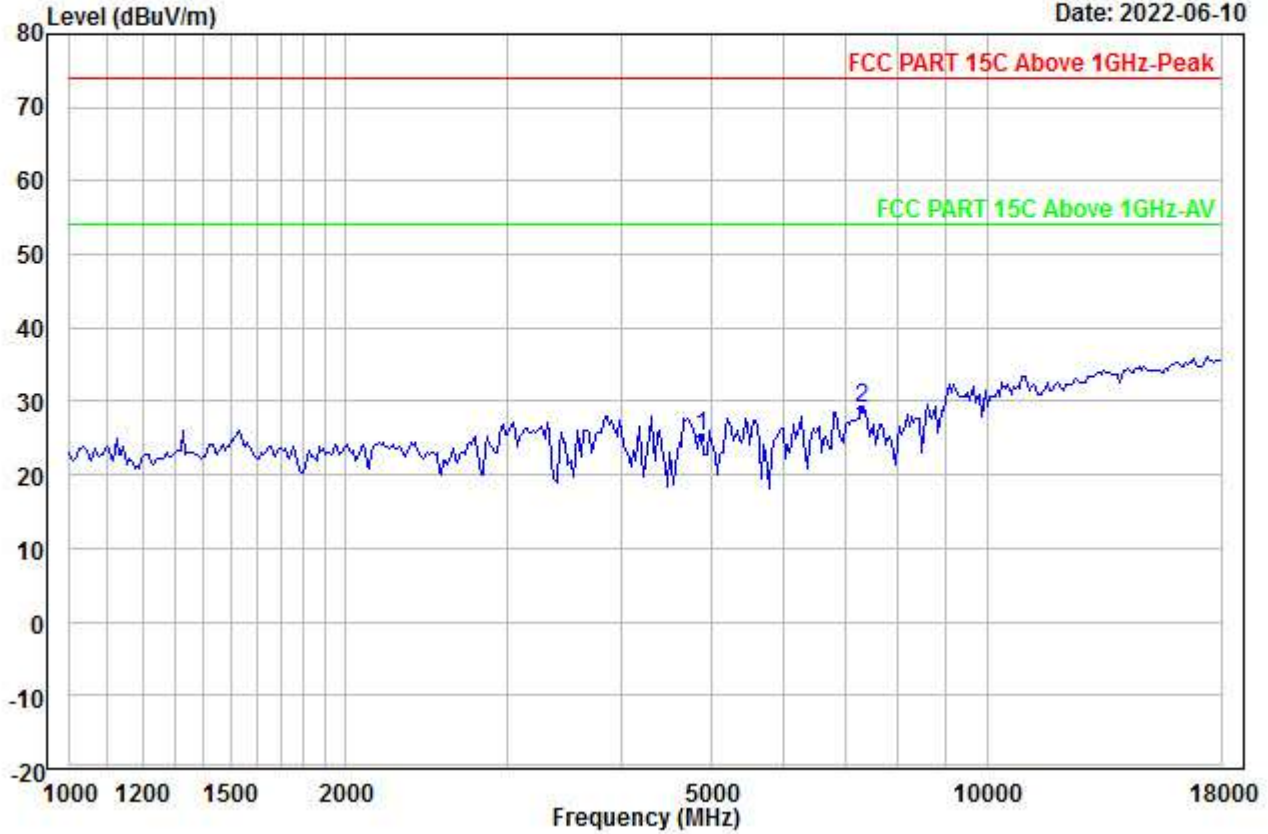


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_2437
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4874.000	27.46	34.70	46.57	0.00	9.58	25.17	54.00	-28.83	---	---	Aver
2 PP	7311.000	27.50	36.24	46.19	0.00	11.55	29.10	54.00	-24.90	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\RSE\4_00057.EMI

Date: 2022-06-10

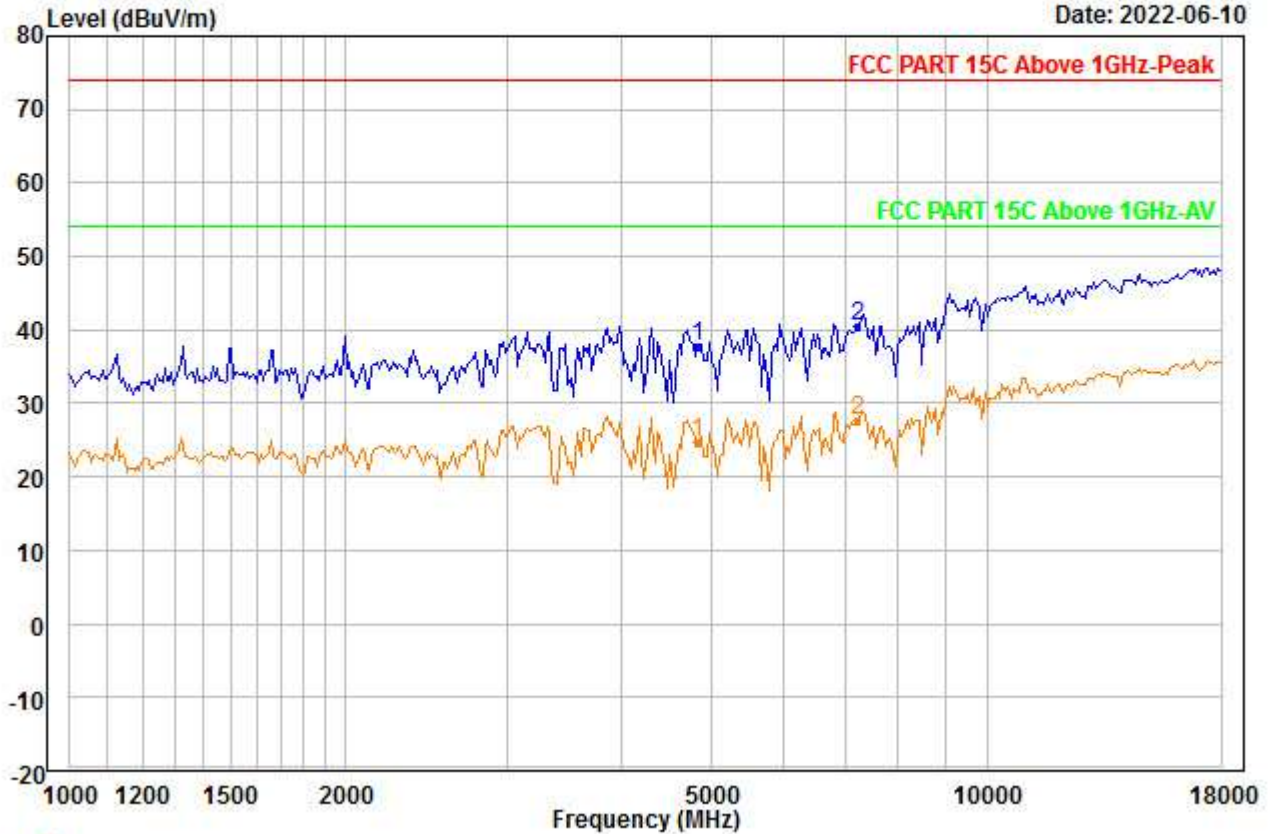


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_2412
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4824.000	40.14	34.70	46.56	0.00	9.53	37.81	74.00	-36.19	---	---	Peak
2 PP	7236.000	39.16	36.13	46.14	0.00	11.48	40.63	74.00	-33.37	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\RSE\4_00058.EMI

Date: 2022-06-10

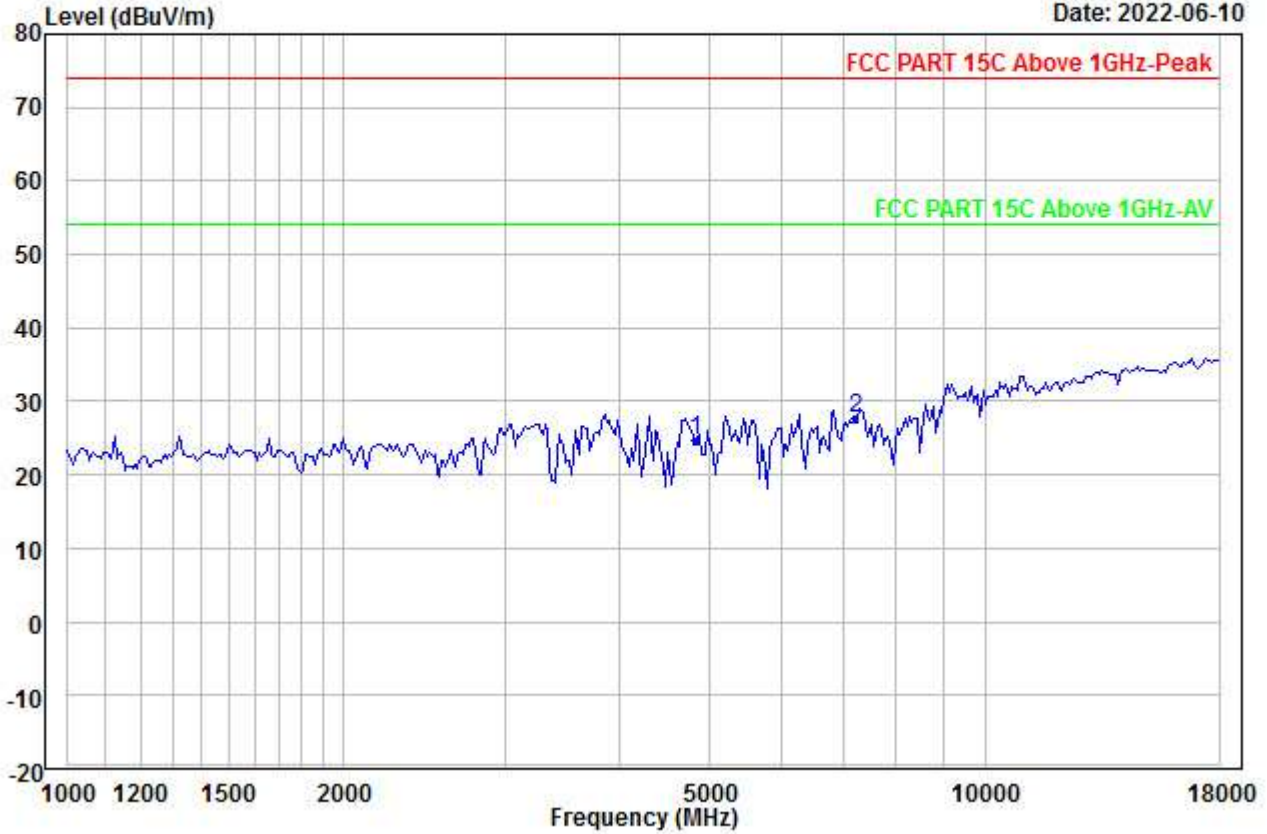


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_2412
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4824.000	27.02	34.70	46.56	0.00	9.53	24.69	54.00	-29.31	---	---	Aver
2 PP	7236.000	26.33	36.13	46.14	0.00	11.48	27.80	54.00	-26.20	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\RSE\4_00059.EMI

Date: 2022-06-10

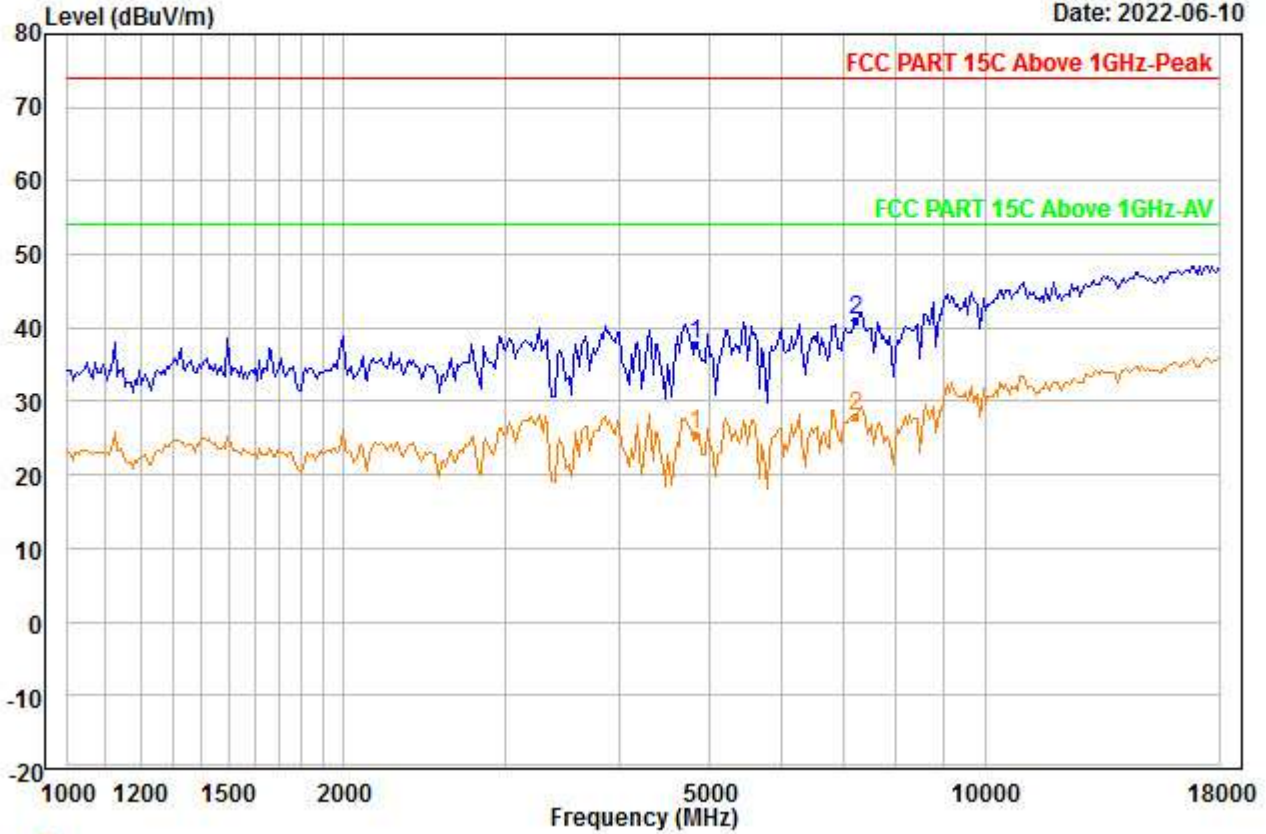


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_2412
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4824.000	40.08	34.70	46.56	0.00	9.53	37.75	74.00	-36.25	---	---	Peak
2 PP	7236.000	39.67	36.13	46.14	0.00	11.48	41.14	74.00	-32.86	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\2.4G\RSE\4_00060.EMI

Date: 2022-06-10

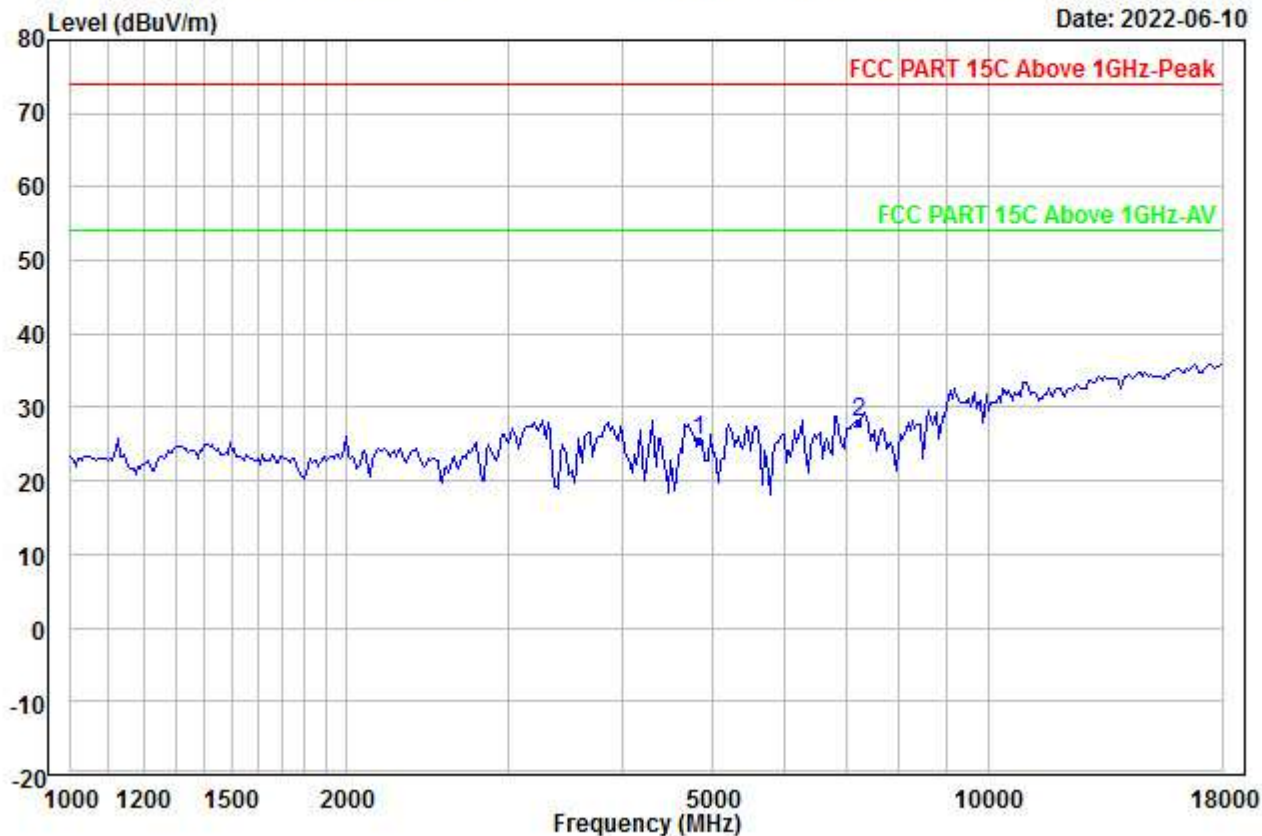

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_2412
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4824.000	27.95	34.70	46.56	0.00	9.53	25.62	54.00	-28.38	---	---	Aver
2 PP	7236.000	26.47	36.13	46.14	0.00	11.48	27.94	54.00	-26.06	---	---	Aver