


File: F:\Test Template\上海ITS\2022\220523032 SA750\A\BTIRSE\4_00001.EMI

Date: 2022-06-08

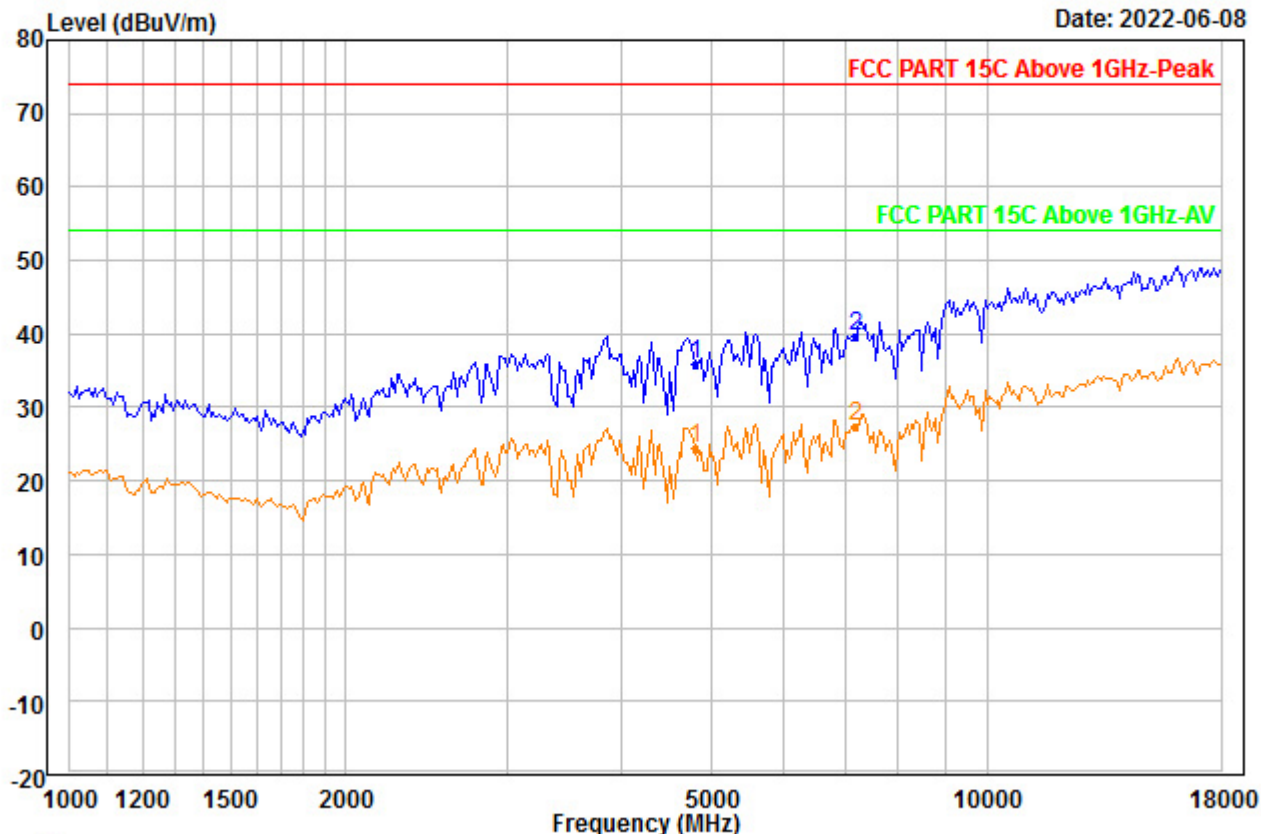


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : BLE_2402
 Remark :

	Read Freq	Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4804.000	38.32	34.70	46.56	0.00	9.52	35.98	74.00	-38.02	---	---	Peak
2 PP	7206.000	38.34	36.09	46.12	0.00	11.46	39.77	74.00	-34.23	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\BTIRSE\4_00002.EMI

Date: 2022-06-08

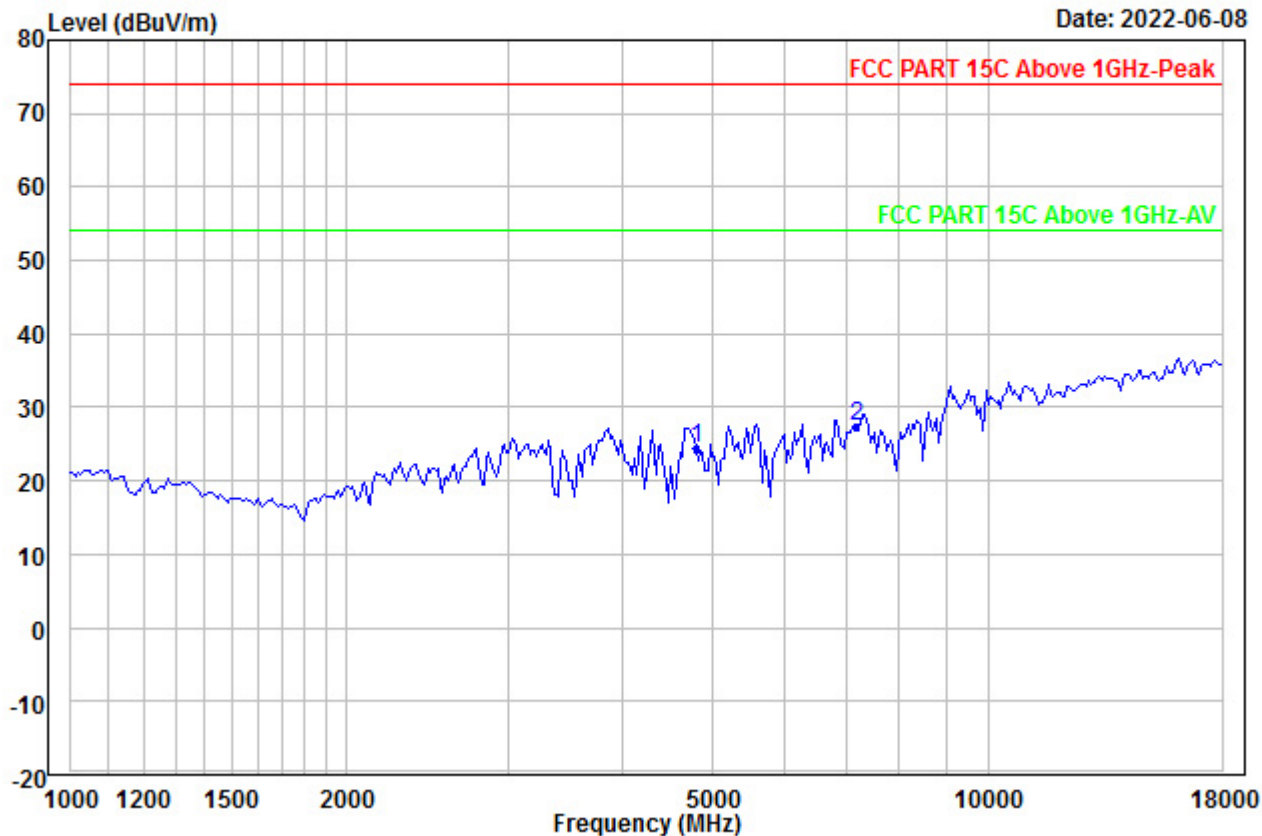


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : BLE_2402
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4804.000	26.64	34.70	46.56	0.00	9.52	24.30	54.00	-29.70	---	---	Aver
2	PP 7206.000	25.94	36.09	46.12	0.00	11.46	27.37	54.00	-26.63	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\BTIRSE\4_00003.EMI

Date: 2022-06-08

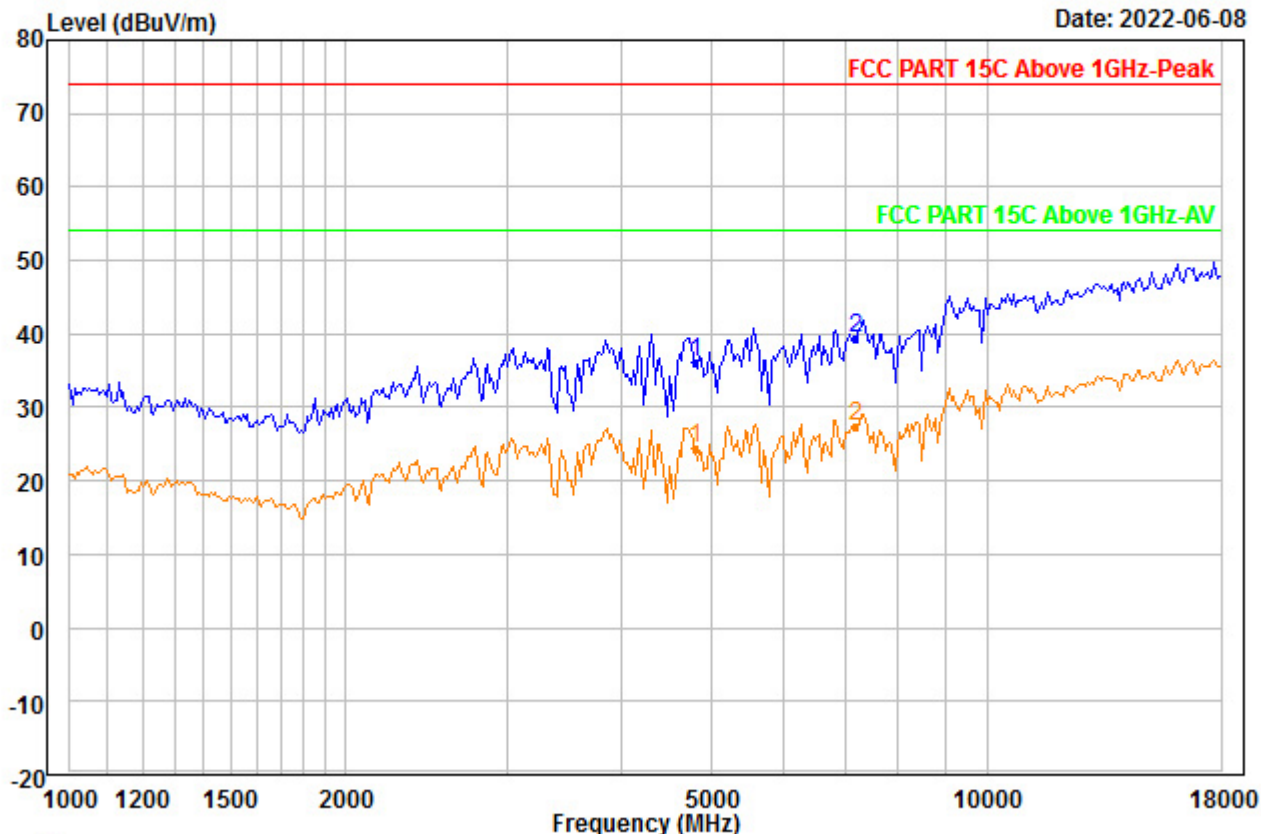


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : BLE_2402
 Remark :

	Read Freq	Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4804.000	38.51	34.70	46.56	0.00	9.52	36.17	74.00	-37.83	---	---	Peak
2 PP	7205.000	37.93	36.09	46.12	0.00	11.46	39.36	74.00	-34.64	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\BTIRSE\4_00004.EMI

Date: 2022-06-08

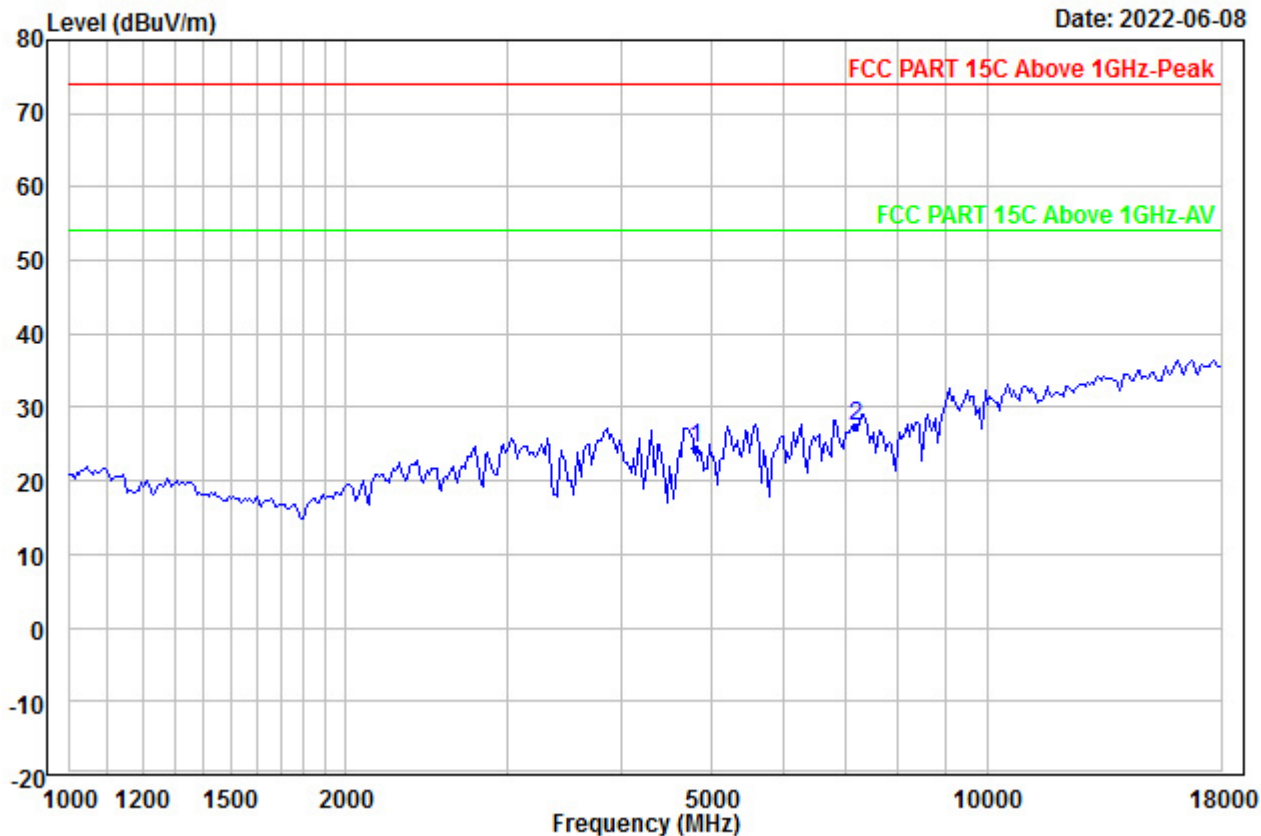


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : BLE_2402
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rema		
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit					
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg		
1	4804.000	26.64	34.70	46.56	0.00	9.52	24.30	54.00	-29.70	---	---	Aver
2	PP 7206.000	25.94	36.09	46.12	0.00	11.46	27.37	54.00	-26.63	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\BTIRSE\4_00005.EMI

Date: 2022-06-08

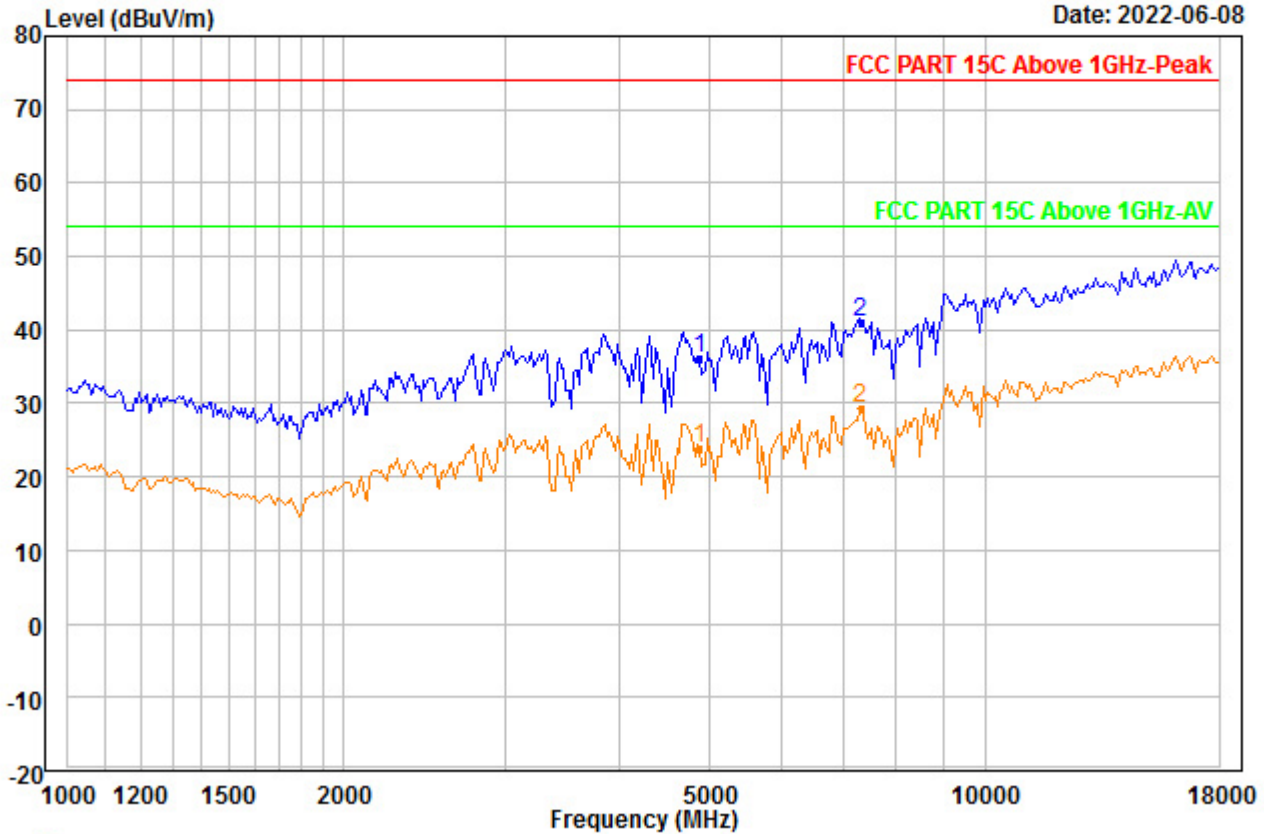


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : BLE_2440
 Remark :

	Read Freq	Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4880.000	38.32	34.70	46.58	0.00	9.58	36.02	74.00	-37.98	---	---	Peak
2 PP	7320.000	39.36	36.25	46.19	0.00	11.55	40.97	74.00	-33.03	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\BTIRSE\4_00006.EMI

Date: 2022-06-08

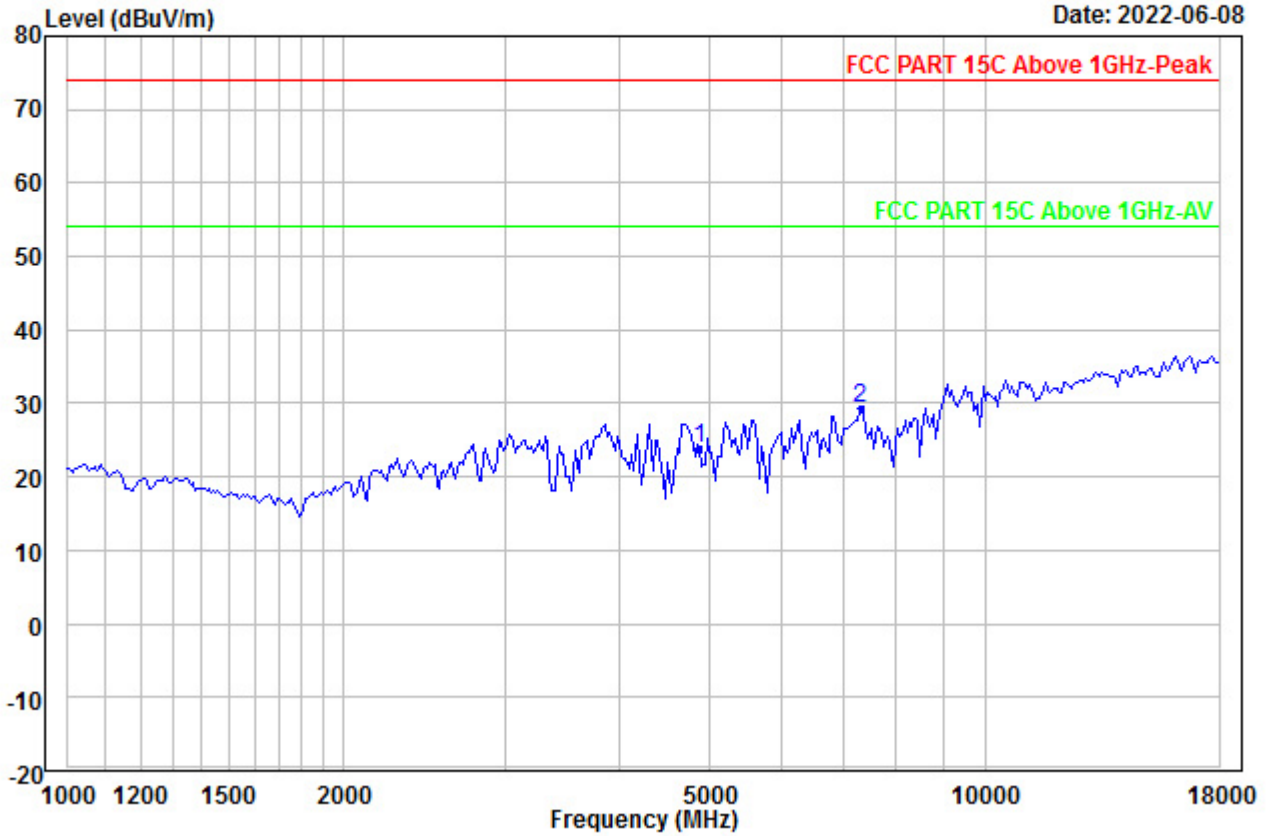


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : BLE_2440
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rema		
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit					
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg		
1	4880.000	26.25	34.70	46.58	0.00	9.58	23.95	54.00	-30.05	---	---	Aver
2	PP 7320.000	27.62	36.25	46.19	0.00	11.55	29.23	54.00	-24.77	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\BTIRSE\4_00007.EMI

Date: 2022-06-08

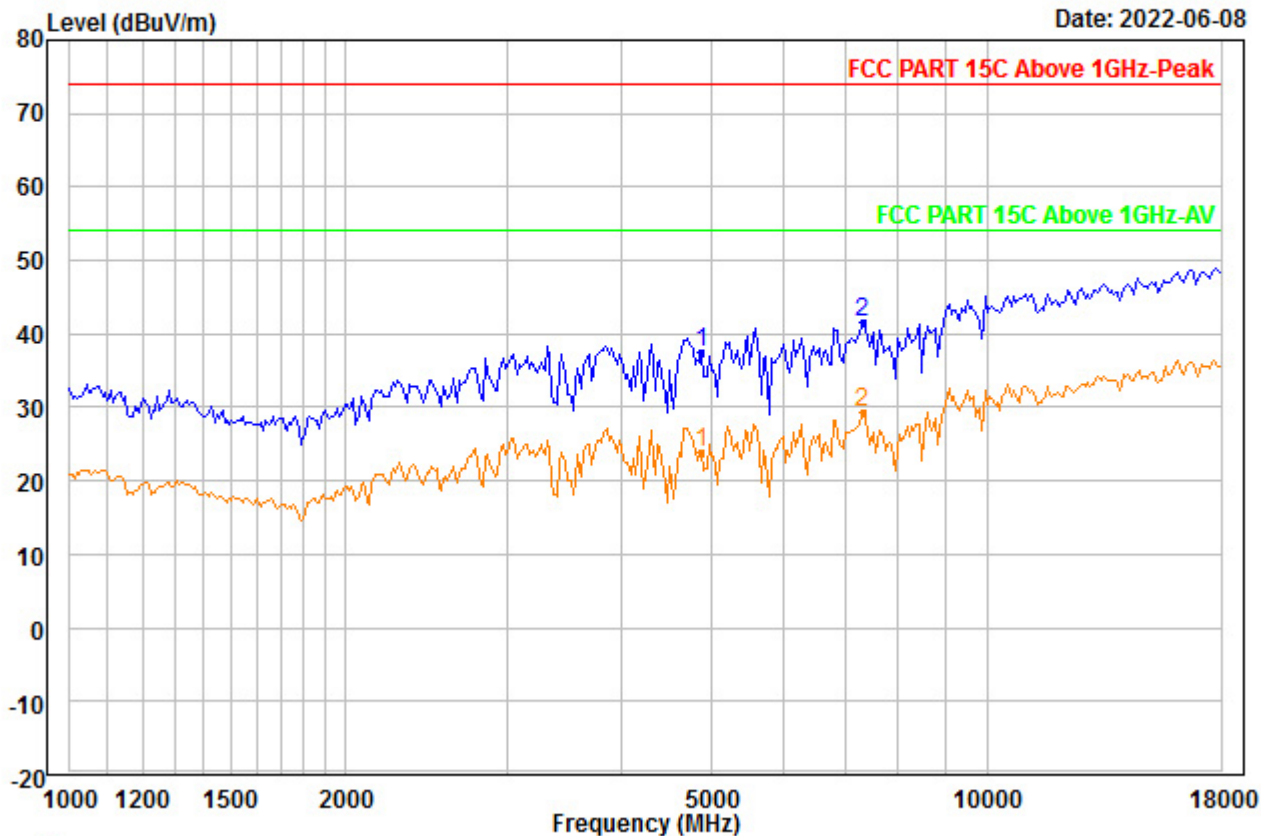


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : BLE_2440
 Remark :

	Read Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4880.000	39.78	34.70	46.58	0.00	9.58	37.48	74.00	-36.52	---	---	Peak
2 PP	7320.000	39.90	36.25	46.19	0.00	11.55	41.51	74.00	-32.49	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\BTIRSE\4_00008.EMI

Date: 2022-06-08

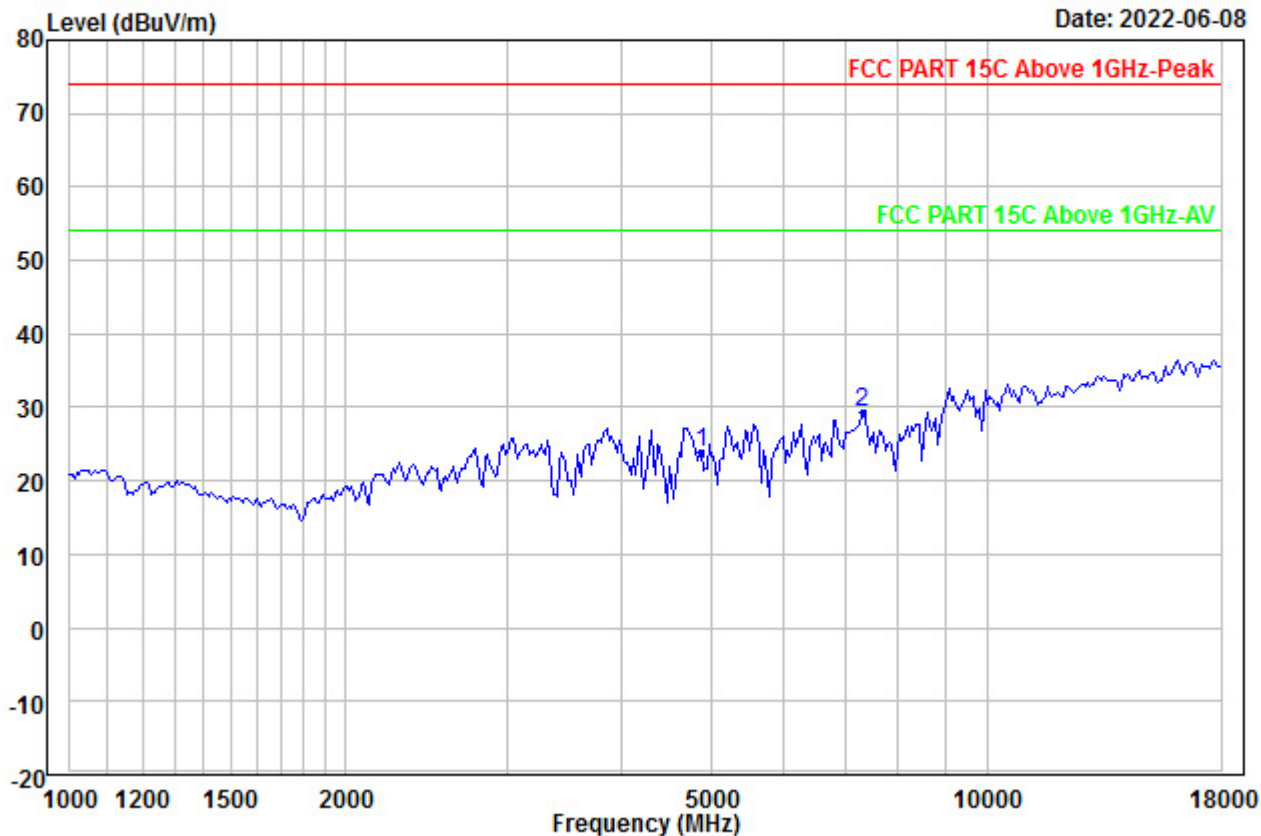


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : BLE_2440
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rema		
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit					
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg		
1	4880.000	26.17	34.70	46.58	0.00	9.58	23.87	54.00	-30.13	---	---	Aver
2	PP 7320.000	27.62	36.25	46.19	0.00	11.55	29.23	54.00	-24.77	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\BTIRSE\4_00009.EMI

Date: 2022-06-08

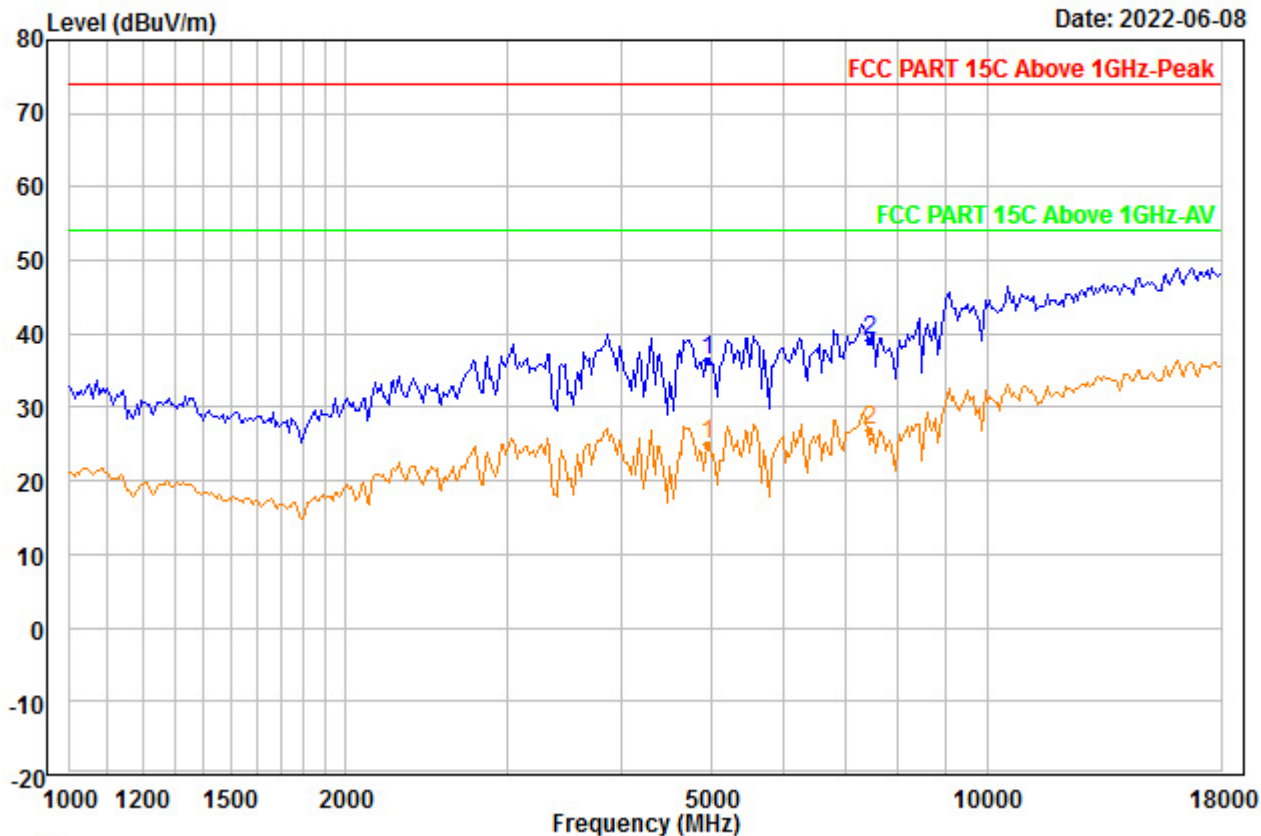


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : BLE_2480
 Remark :

	Read Freq	Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4960.000	38.58	34.70	46.59	0.00	9.64	36.33	74.00	-37.67	---	---	Peak
2 PP	7440.000	37.40	36.42	46.26	0.00	11.65	39.21	74.00	-34.79	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\BTIRSE4_00010.EMI

Date: 2022-06-08

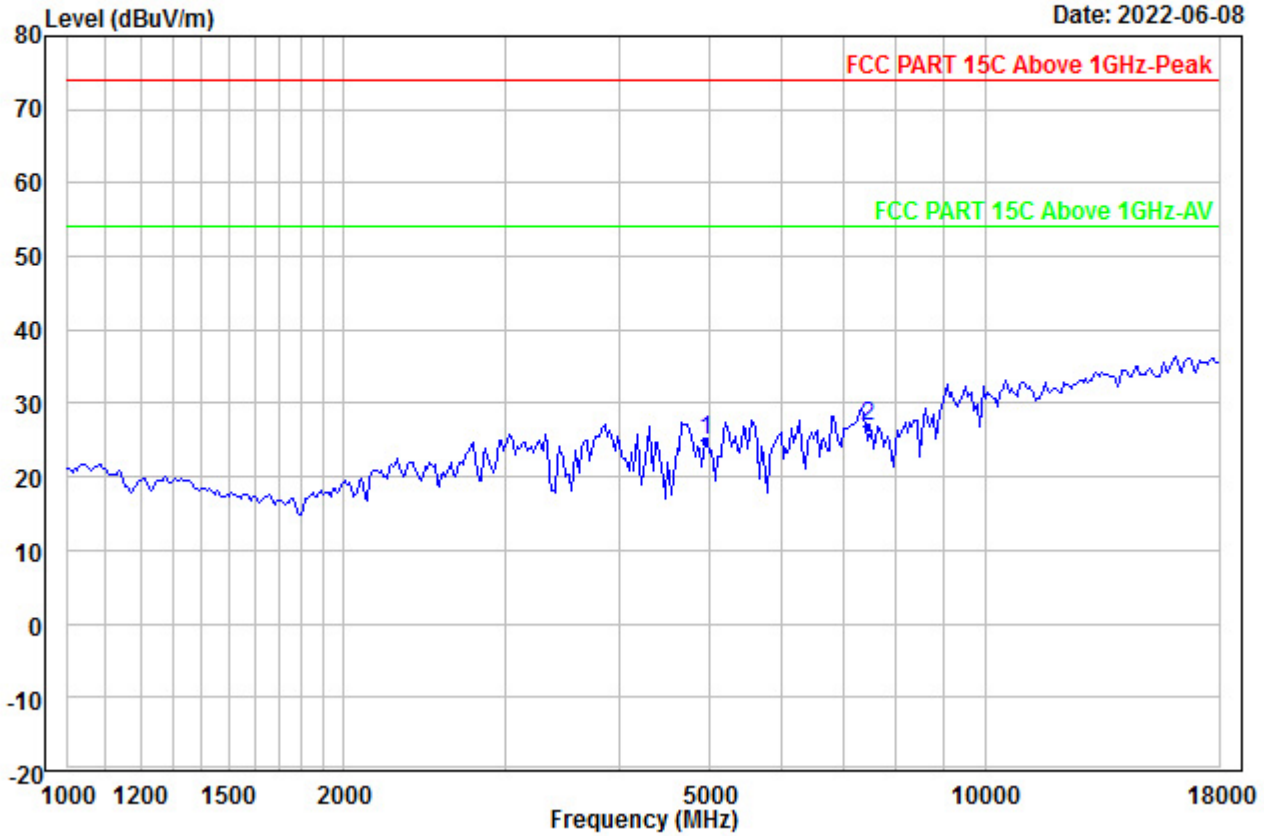


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : BLE_2480
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rema		
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit					
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg		
1	4960.000	27.16	34.70	46.59	0.00	9.64	24.91	54.00	-29.09	---	---	Aver
2	PP 7440.000	25.06	36.42	46.26	0.00	11.65	26.87	54.00	-27.13	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\BTIRSE\4_00011.EMI

Date: 2022-06-08

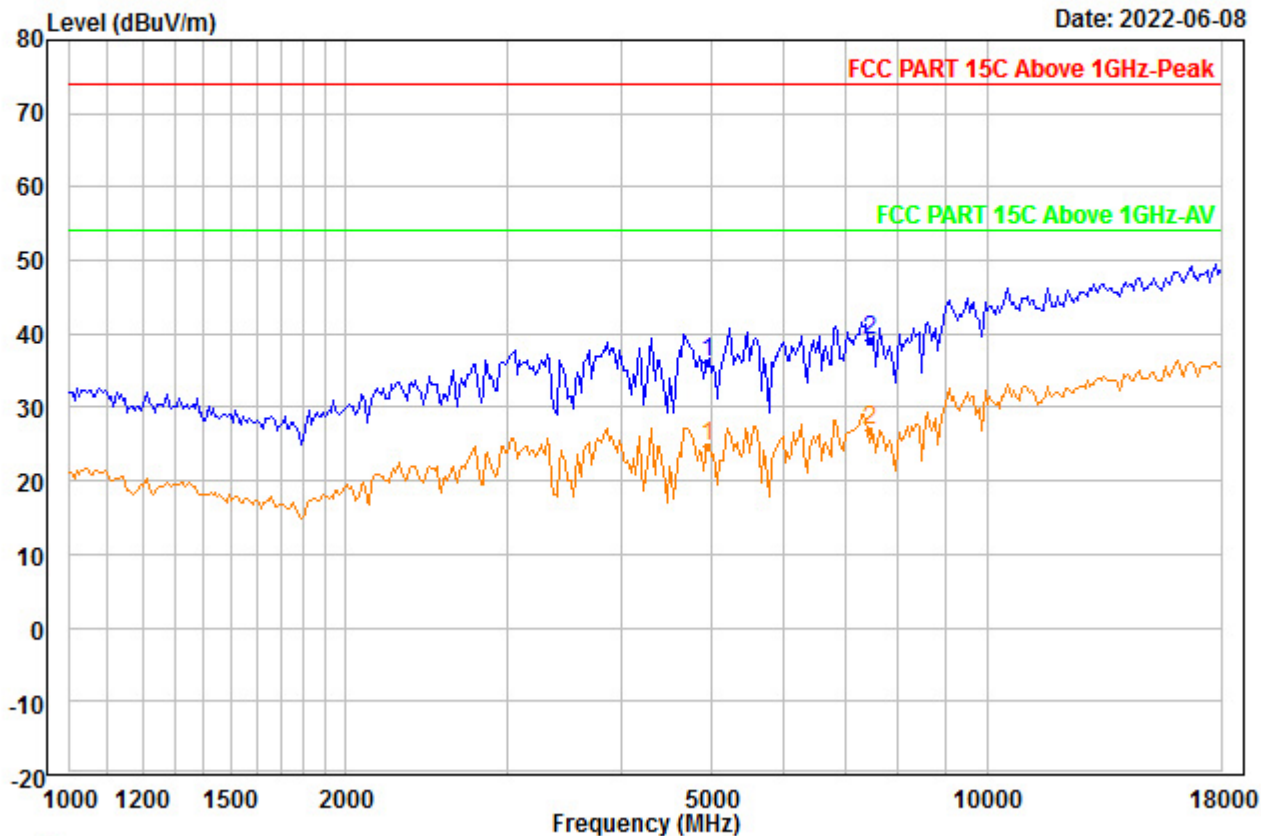


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : BLE_2480
 Remark :

	Read Freq	Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	4960.000	38.51	34.70	46.59	0.00	9.64	36.26	74.00	-37.74	---	---	Peak
2 PP	7440.000	37.32	36.42	46.26	0.00	11.65	39.13	74.00	-34.87	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\BTIRSE4_00012.EMI

Date: 2022-06-08

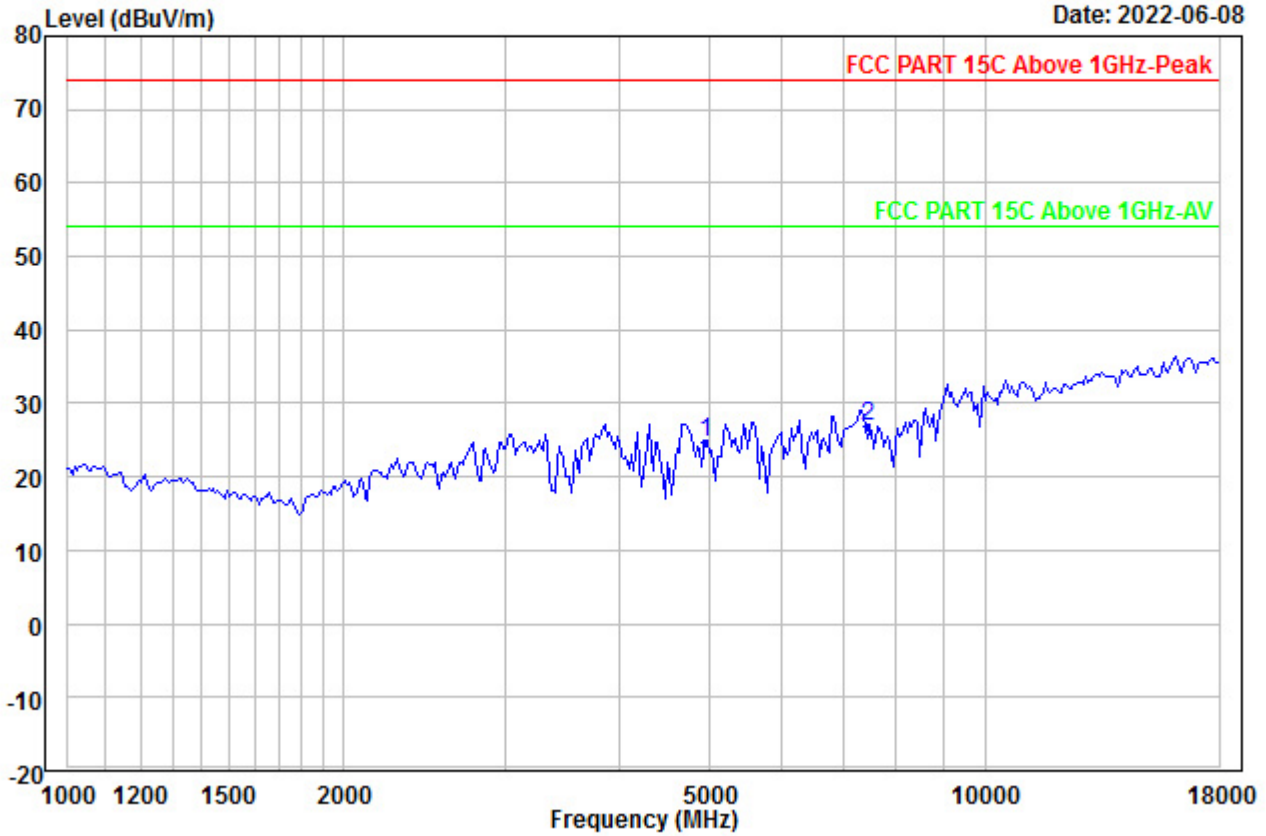

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : BLE_2480
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rema		
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit					
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg		
1	4960.000	26.98	34.70	46.59	0.00	9.64	24.73	54.00	-29.27	---	---	Aver
2	PP 7440.000	25.06	36.42	46.26	0.00	11.65	26.87	54.00	-27.13	---	---	Aver