


File: F:\Test Template\上海ITS\2022\220523032 SA750\BIBT\BE\4\_00001.EMI

Date: 2022-06-05

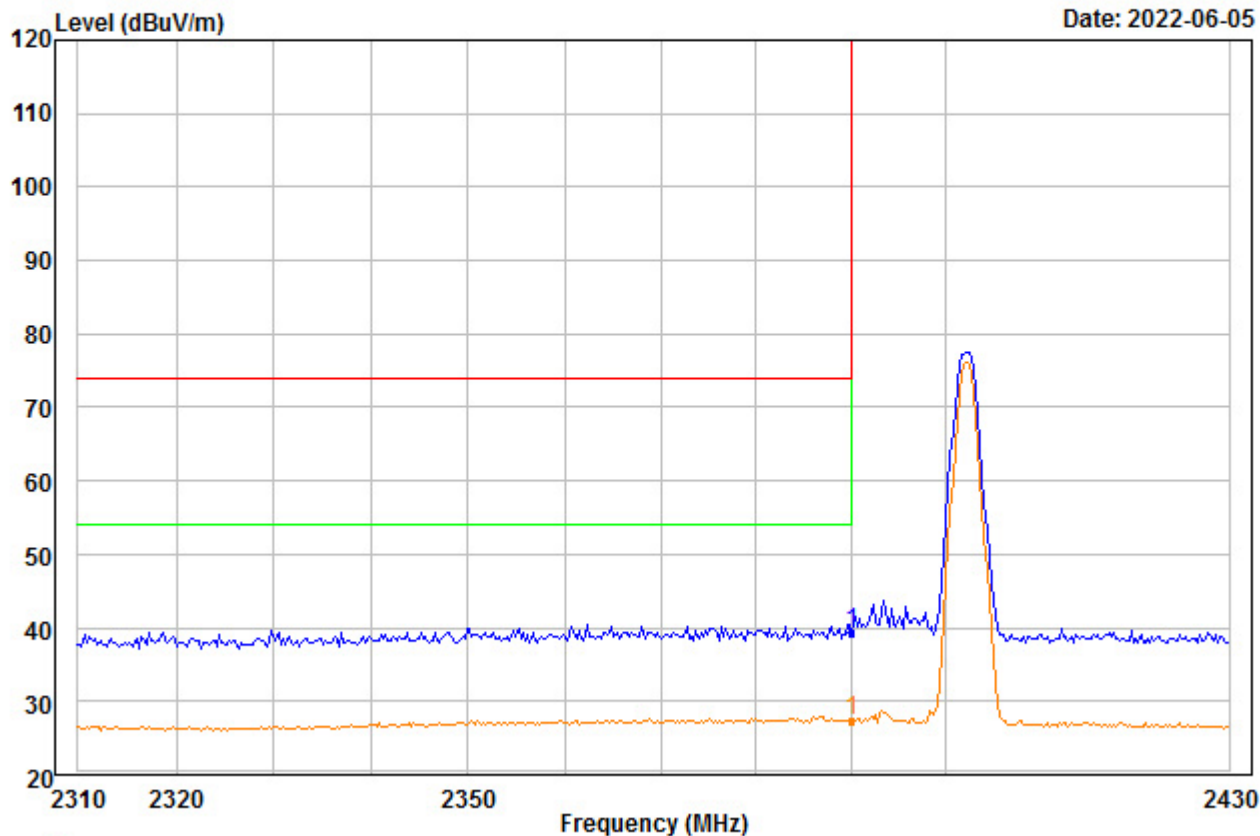


Trace: 1

Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : BLE\_2402  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rema	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 2390.000	47.69	32.69	48.03	0.00	6.90	39.25	74.00	-34.75	---	---	Peak

File: F:\Test Template\上海ITSI\2022\220523032 SA750\BIBT\BE\4\_00002.EMI

Date: 2022-06-05

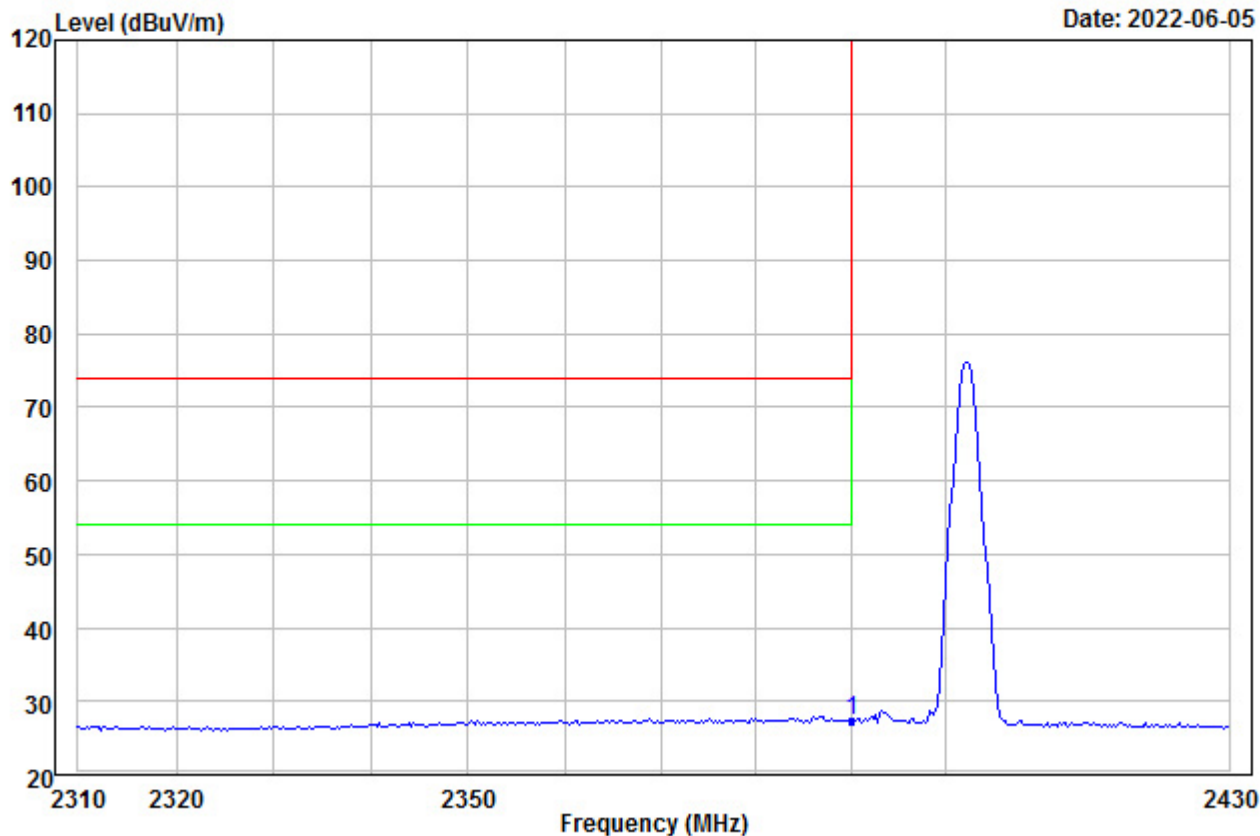


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : BLE\_2402  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rema	
Freq	Level	Factor	Factor	Factor	Loss	Level	Line	Limit			
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 2390.000	35.85	32.69	48.03	0.00	6.90	27.41	54.00	-26.59	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\BIBT\BE\4\_00003.EMI

Date: 2022-06-05

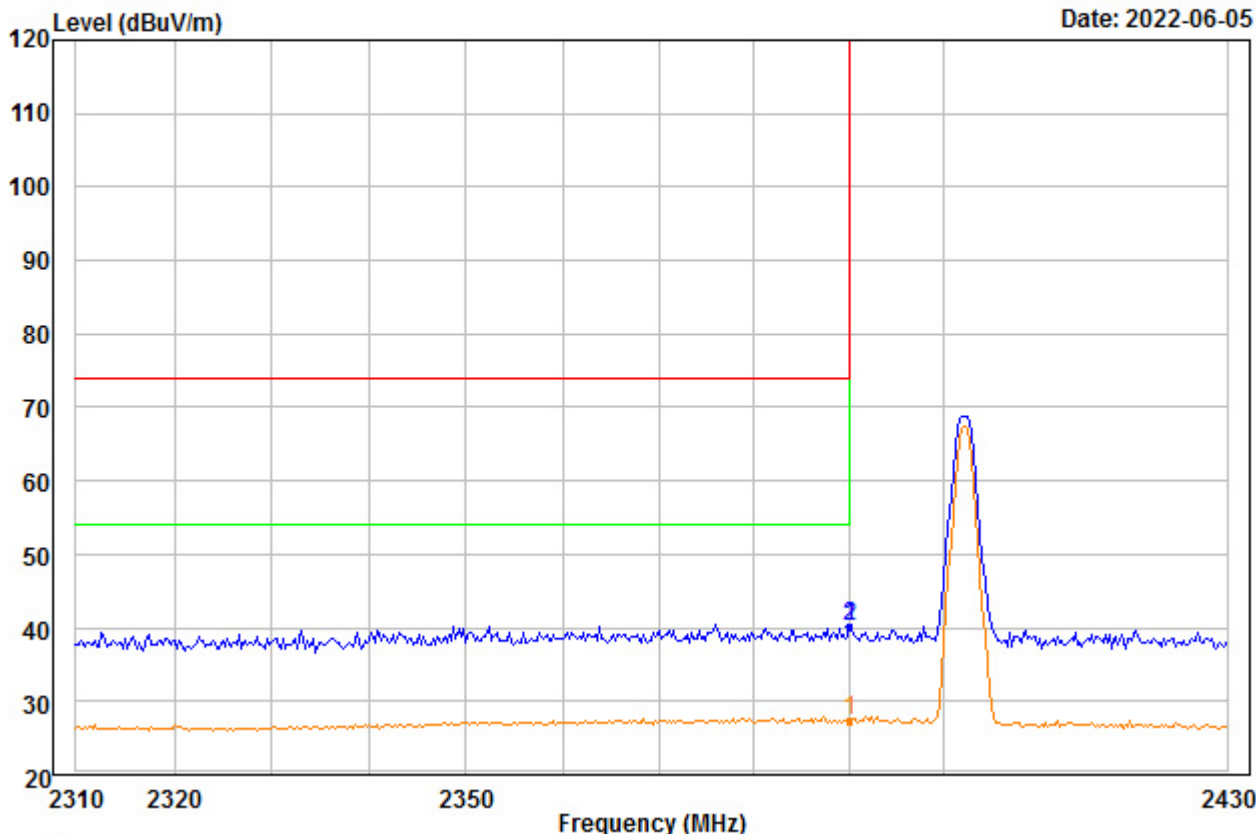


Trace: 1

Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : BLE\_2402  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rema	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 2390.000	48.71	32.69	48.03	0.00	6.90	40.27	74.00	-33.73	---	---	Peak
2 2390.000	48.71	32.69	48.03	0.00	6.90	40.27	74.00	-33.73	---	---	Peak

File: F:\Test Template\上海ITSI\2022\220523032 SA750\BIBT\BE\4\_00004.EMI

Date: 2022-06-05

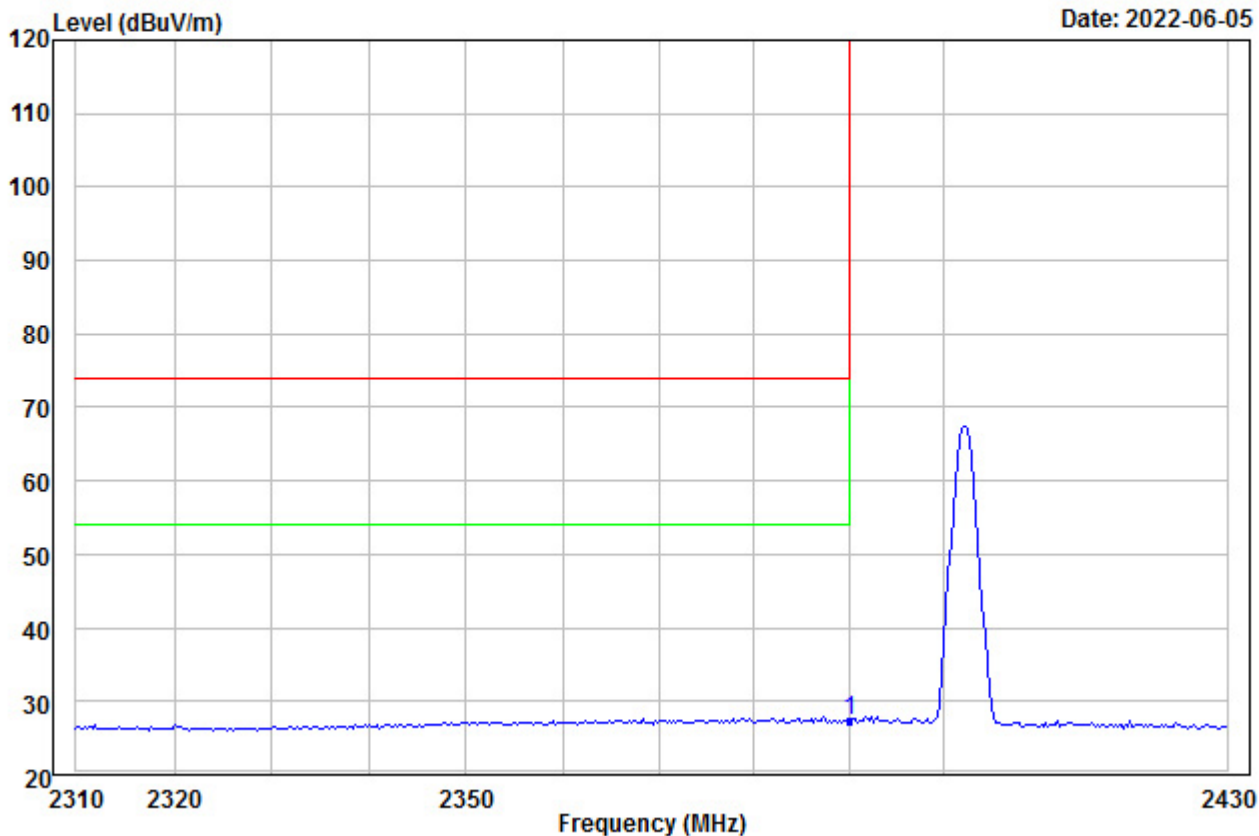


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : BLE\_2402  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rema	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 2390.000	35.72	32.69	48.03	0.00	6.90	27.28	54.00	-26.72	---	---	Aver

File: F:\Test Template\上海ITSI\2022\220523032 SA750\BIBT\BE\4\_00005.EMI

Date: 2022-06-05

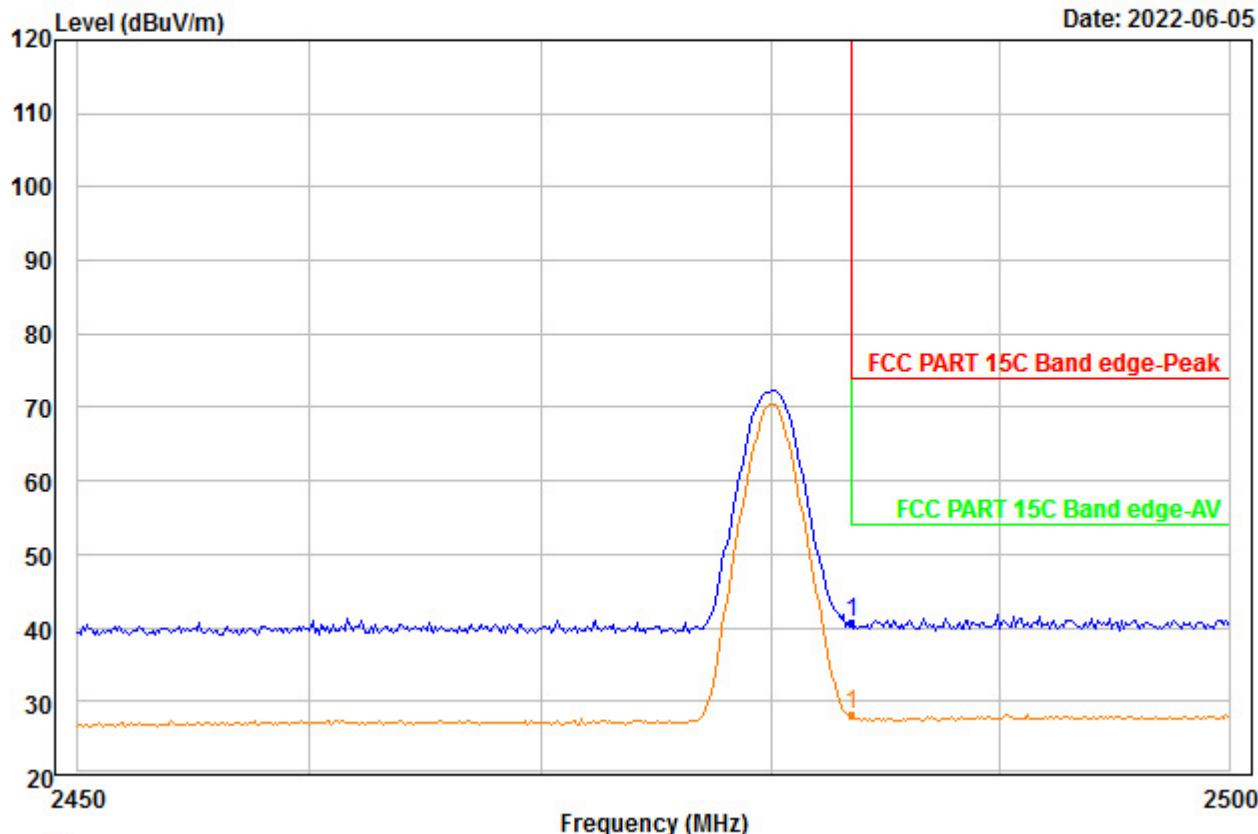


Trace: 1

Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : BLE\_2480  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rema	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 2483.500	48.76	32.95	48.09	0.00	7.03	40.65	74.00	-33.35	---	---	Peak

File: F:\Test Template\上海ITSI\2022\220523032 SA750\BIBT\BE\4\_00006.EMI

Date: 2022-06-05

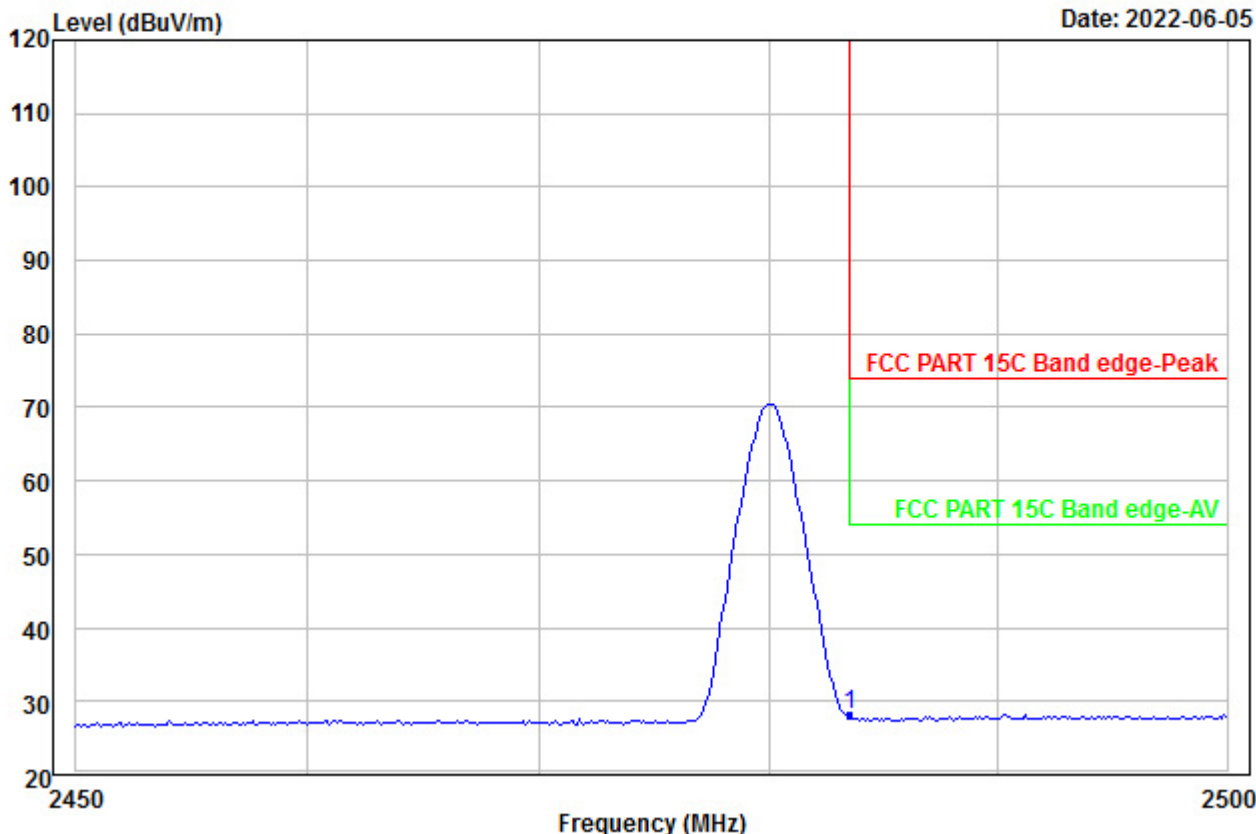


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : BLE\_2480  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rema	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 2483.500	36.21	32.95	48.09	0.00	7.03	28.10	54.00	-25.90	---	---	Aver

File: F:\Test Template\上海ITSI\2022\220523032 SA750\BIBT\BE\4\_00007.EMI

Date: 2022-06-05

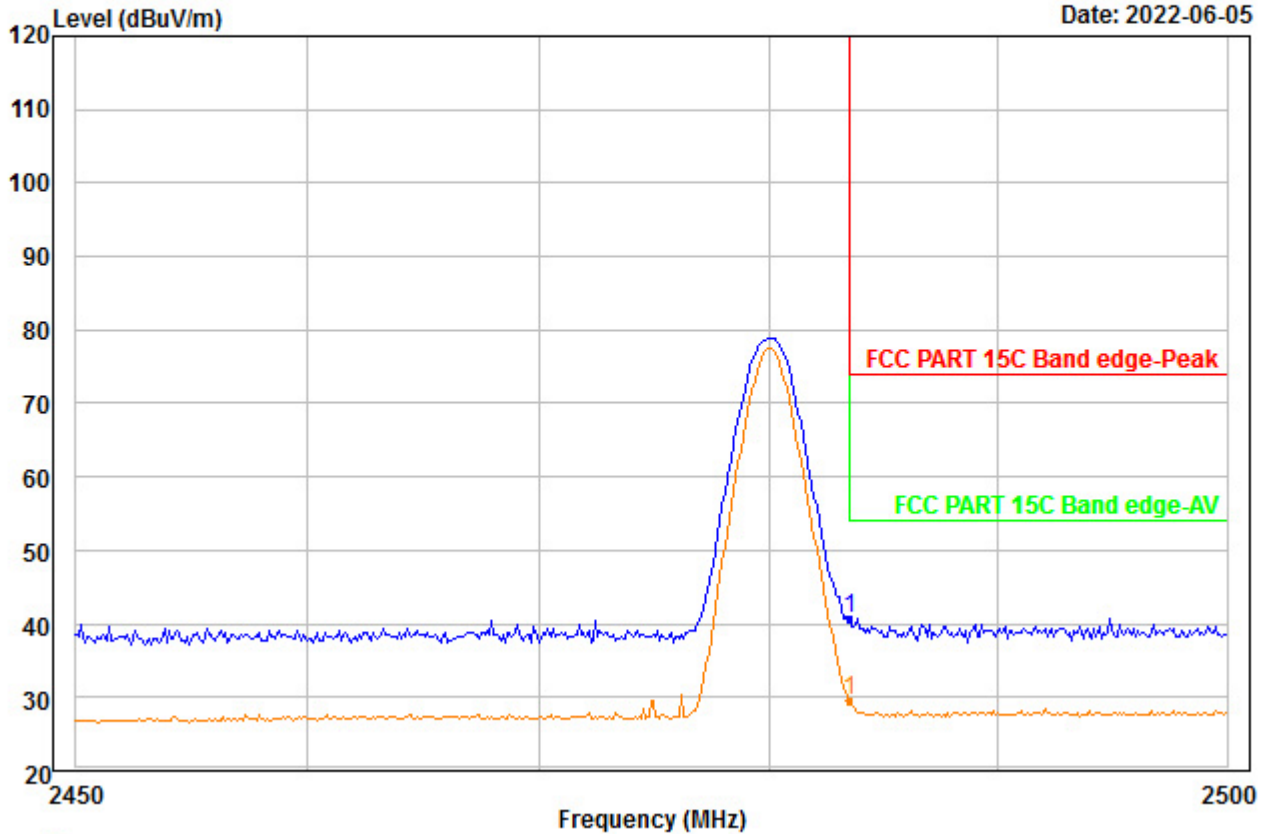


Trace: 1

Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : BLE\_2480  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rema	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 2483.500	48.69	32.95	48.09	0.00	7.03	40.58	74.00	-33.42	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\BIBT\BE\4\_00008.EMI

Date: 2022-06-05

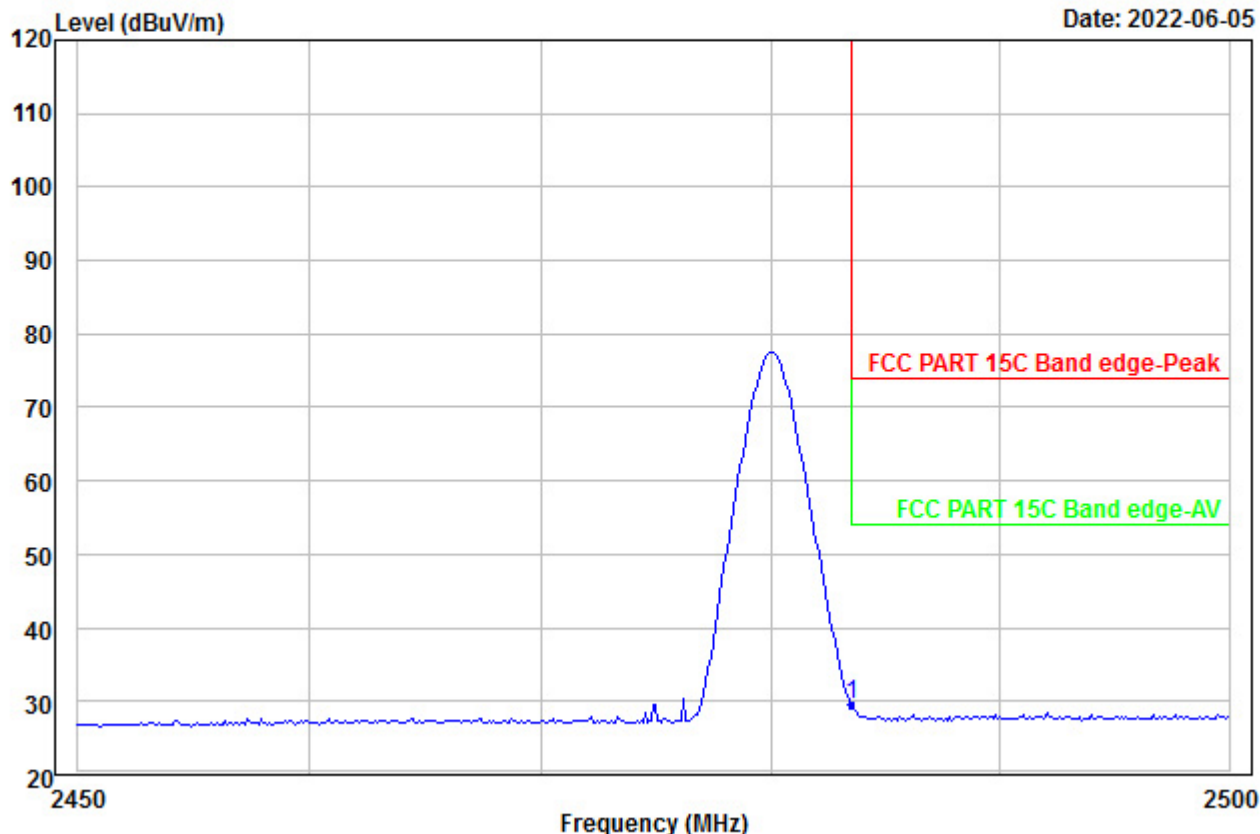

Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : BLE\_2480  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rema	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 2483.500	37.70	32.95	48.09	0.00	7.03	29.59	54.00	-24.41	---	---	Aver