


File: F:\Test Template\上海ITS\2022\220523032 SA750\BIBTRSE\4\_00001.EMI

Date: 2022-06-10

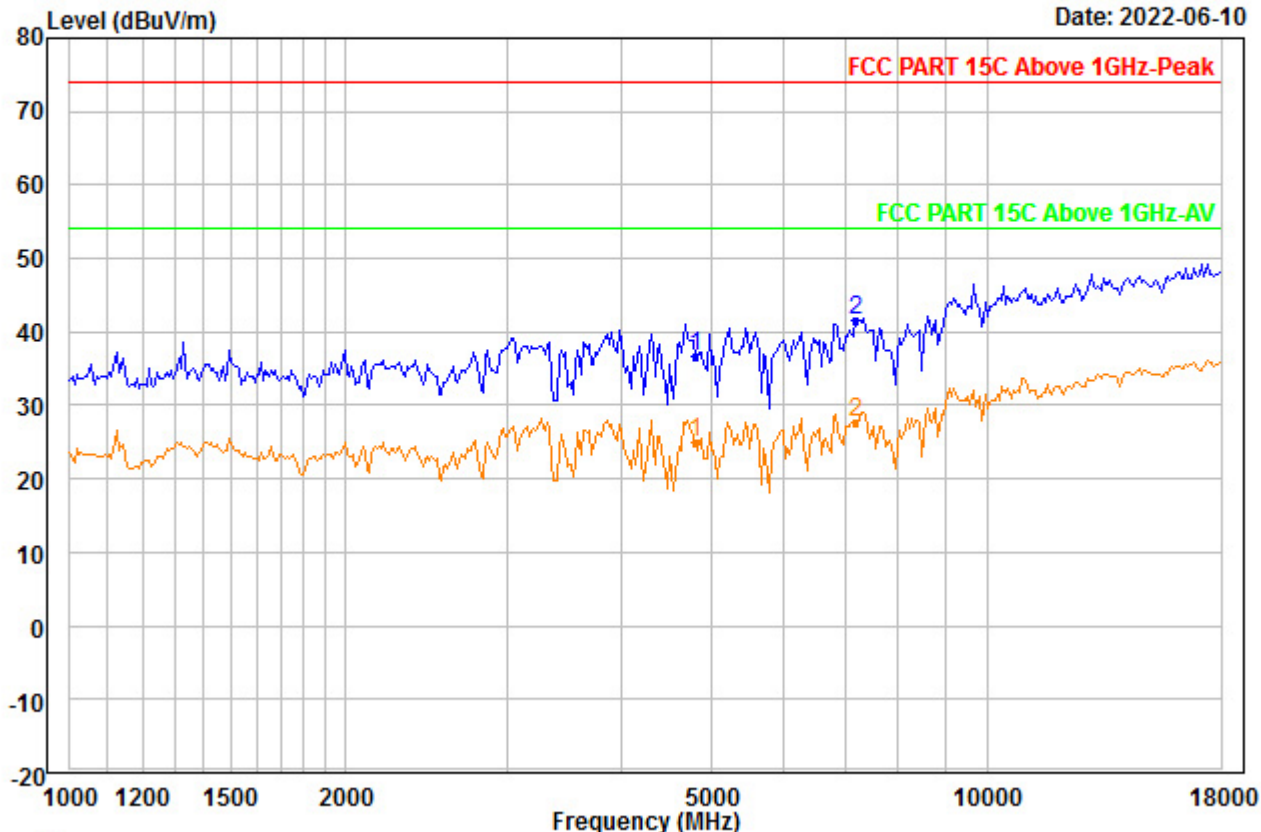


Trace: 1

Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : BLE\_2402  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rema		
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit					
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg		
1	4804.000	38.90	34.70	46.56	0.00	9.52	36.56	74.00	-37.44	---	---	Peak
2	PP 7206.000	40.16	36.09	46.12	0.00	11.46	41.59	74.00	-32.41	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\BIBTRSE\4\_00002.EMI

Date: 2022-06-10

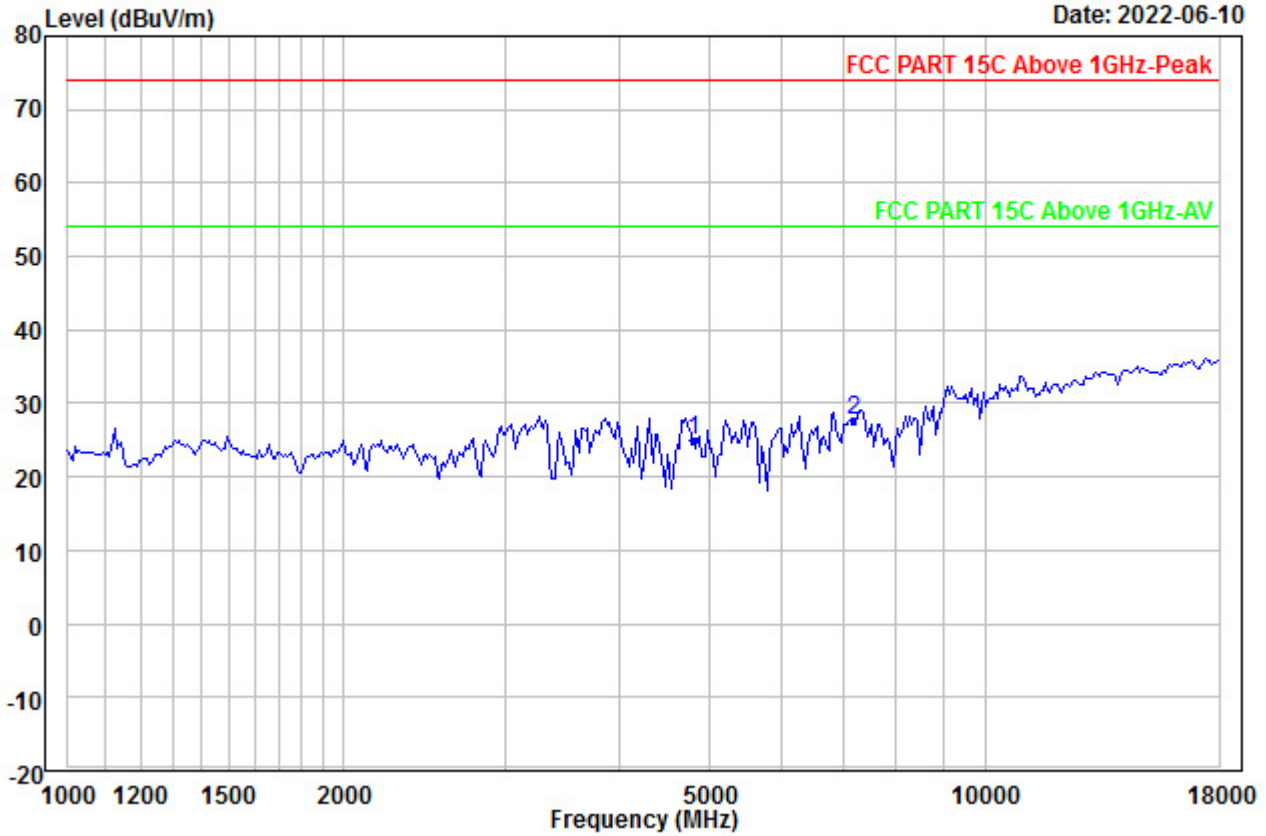


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : BLE\_2402  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rema		
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit					
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg		
1	4804.000	27.29	34.70	46.56	0.00	9.52	24.95	54.00	-29.05	---	---	Aver
2	PP 7206.000	26.16	36.09	46.12	0.00	11.46	27.59	54.00	-26.41	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\BIBTRSE\4\_00003.EMI

Date: 2022-06-10

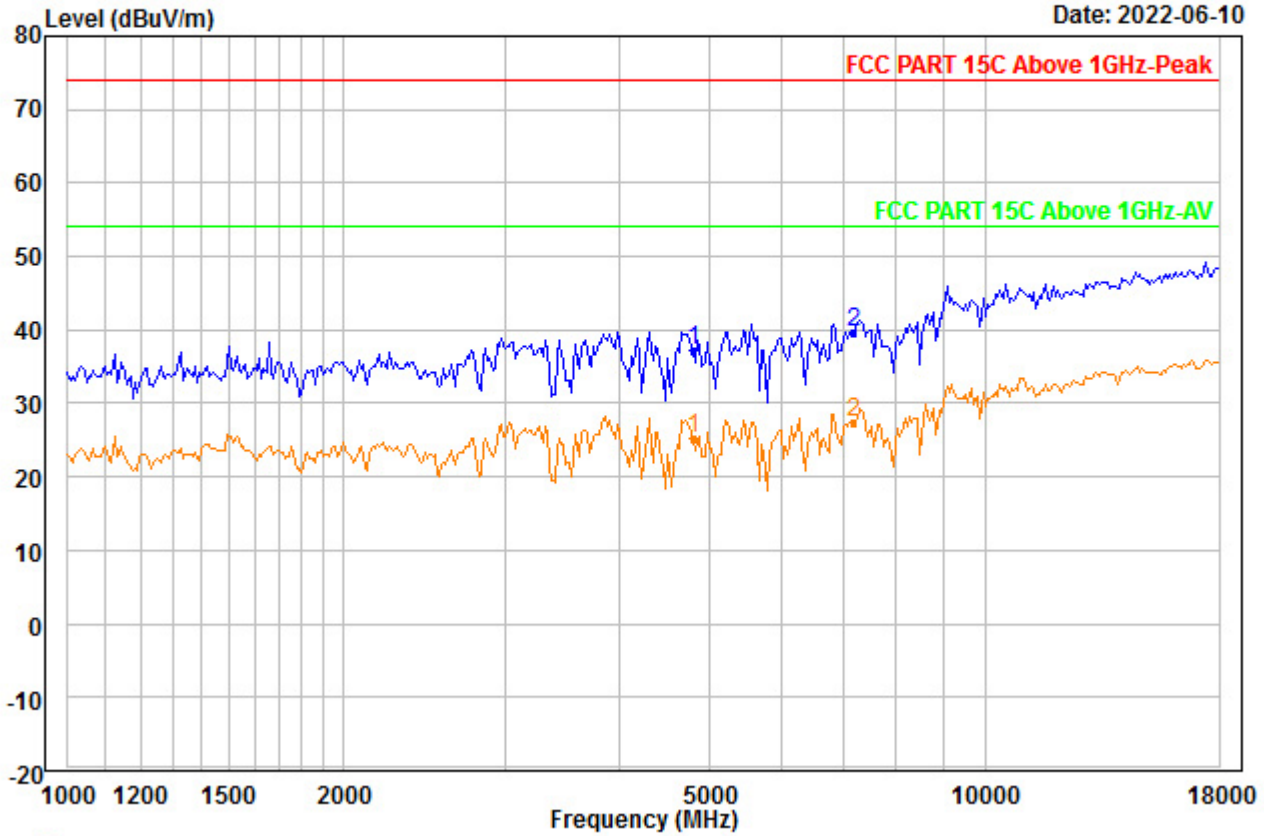


Trace: 1

Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : BLE\_2402  
 Remark :

	Read Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBUV/m	dBUV/m	dB	cm	deg	
1	4804.000	39.55	34.70	46.56	0.00	9.52	37.21	74.00	-36.79	---	---	Peak
2 PP	7206.000	38.34	36.09	46.12	0.00	11.46	39.77	74.00	-34.23	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\BIBTRSE\4\_00004.EMI

Date: 2022-06-10

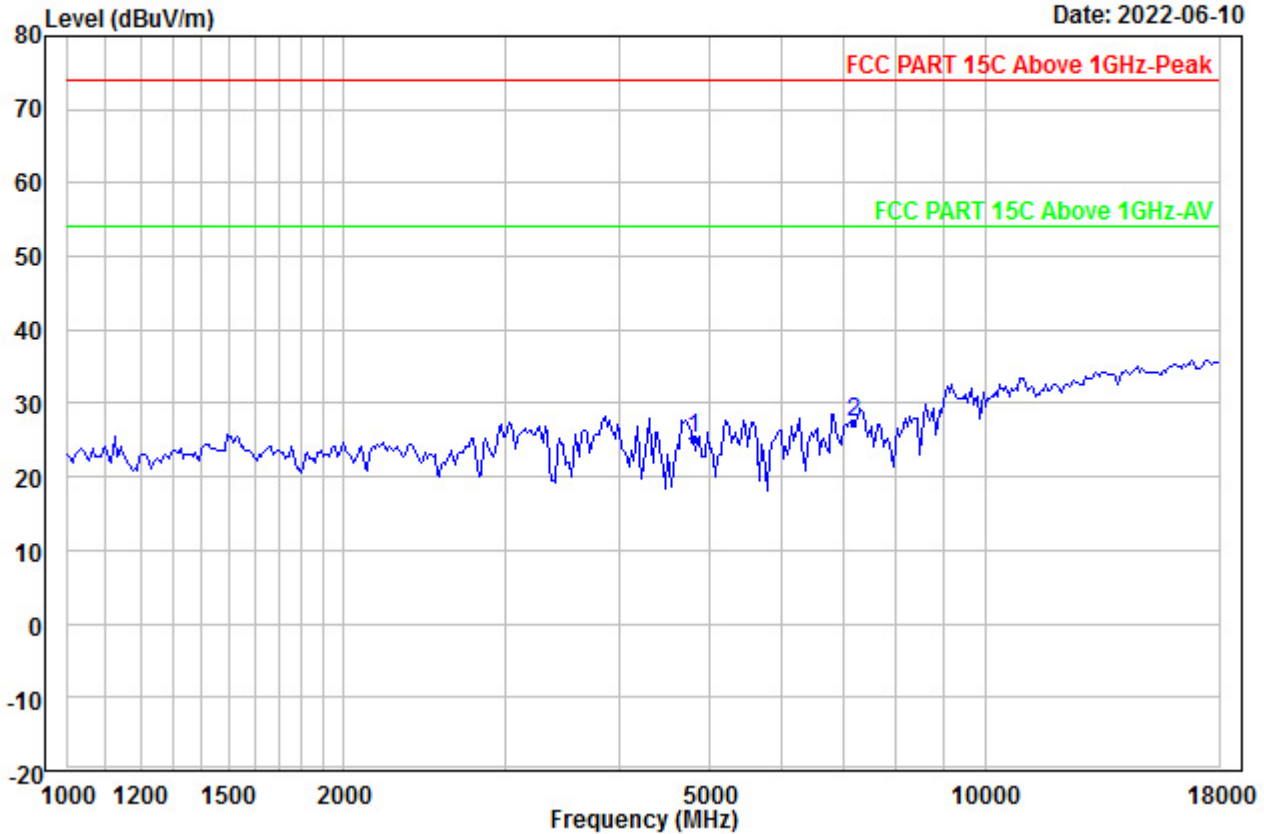


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : BLE\_2402  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rema		
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit					
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg		
1	4804.000	27.54	34.70	46.56	0.00	9.52	25.20	54.00	-28.80	---	---	Aver
2	PP 7206.000	26.09	36.09	46.12	0.00	11.46	27.52	54.00	-26.48	---	---	Aver



File: F:\Test Template\上海ITS\2022\220523032 SA750\BIBTRSE\4\_00005.EMI

Date: 2022-06-10

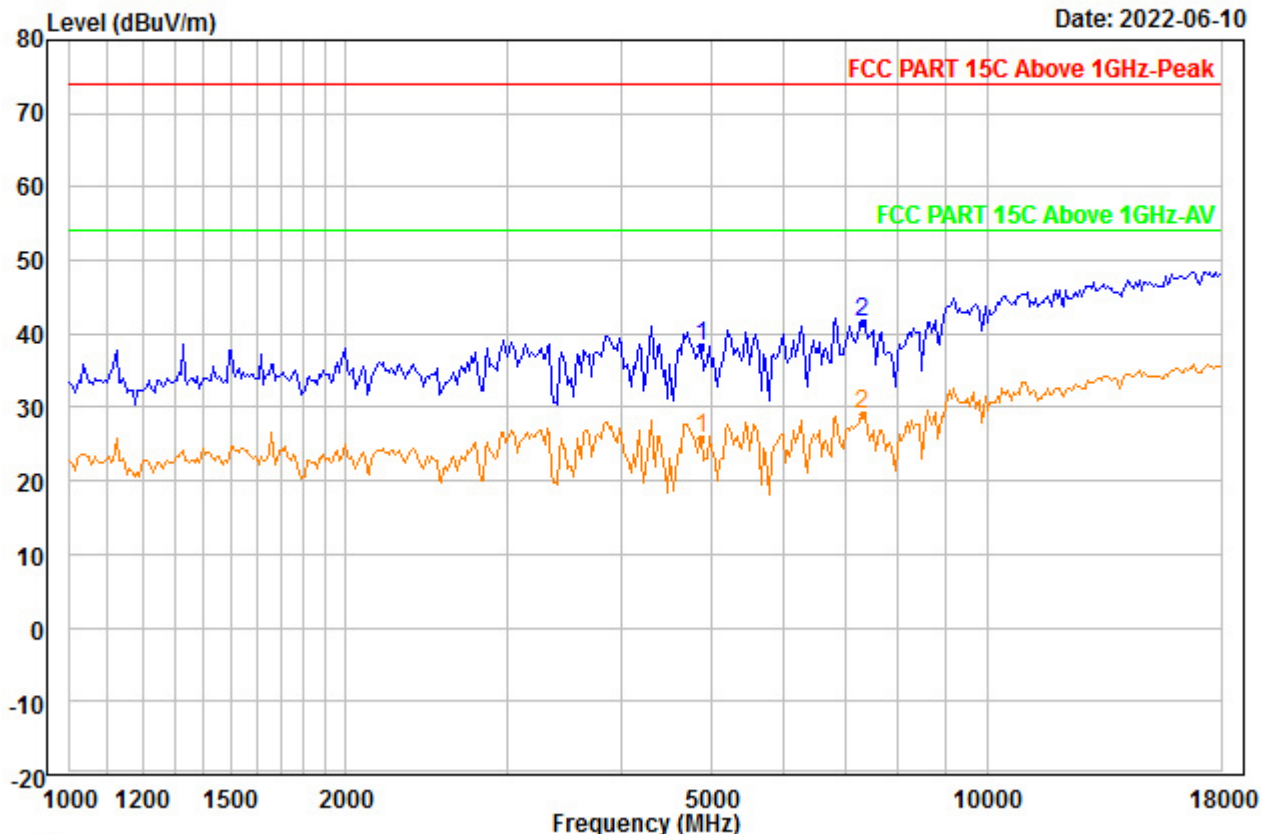


Trace: 1

Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : BLE\_2440  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rema	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 4880.000	40.67	34.70	46.58	0.00	9.58	38.37	74.00	-35.63	---	---	Peak
2 PP 7320.000	39.96	36.25	46.19	0.00	11.55	41.57	74.00	-32.43	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\BIBTRSE\4\_00006.EMI

Date: 2022-06-10

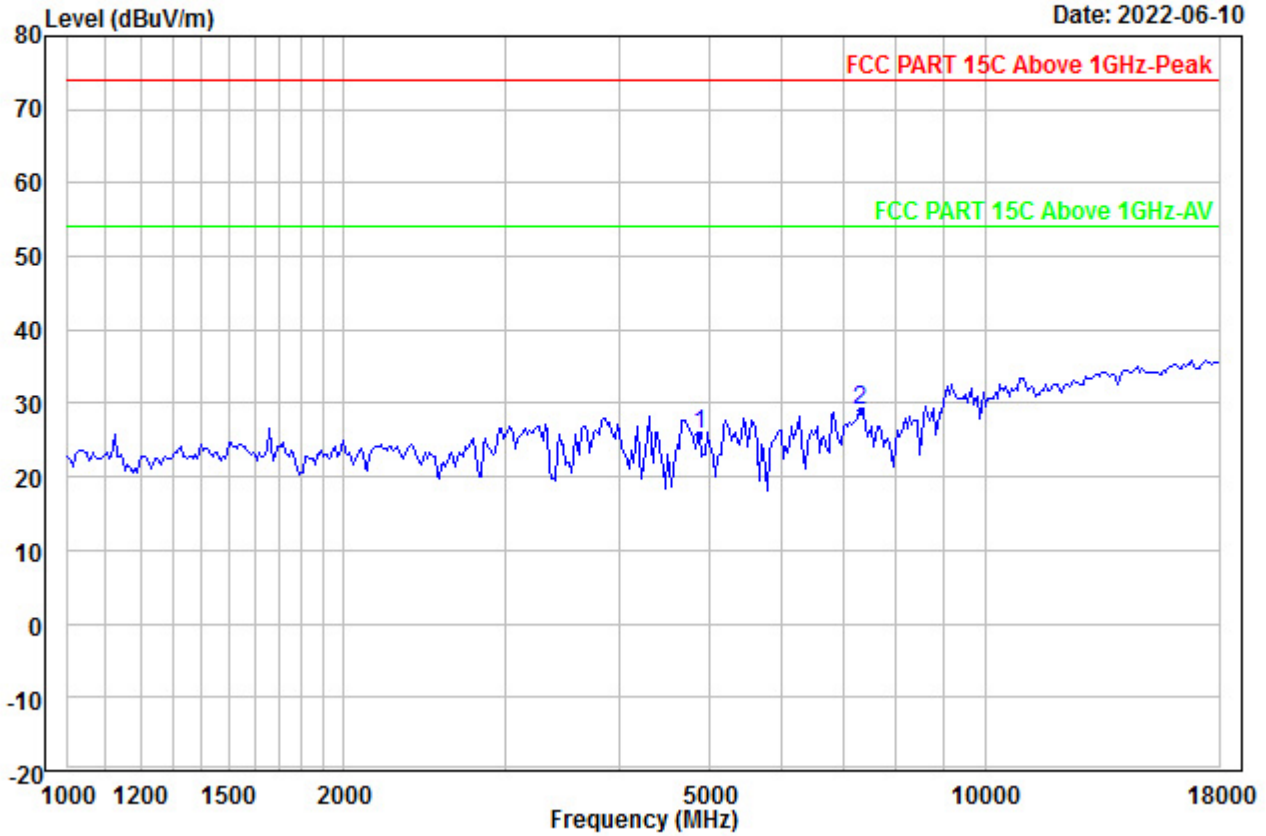


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : BLE\_2440  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rema		
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit					
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg		
1	4880.000	28.03	34.70	46.58	0.00	9.58	25.73	54.00	-28.27	---	---	Aver
2	PP 7320.000	27.44	36.25	46.19	0.00	11.55	29.05	54.00	-24.95	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\BIBTRSE\4\_00007.EMI

Date: 2022-06-10

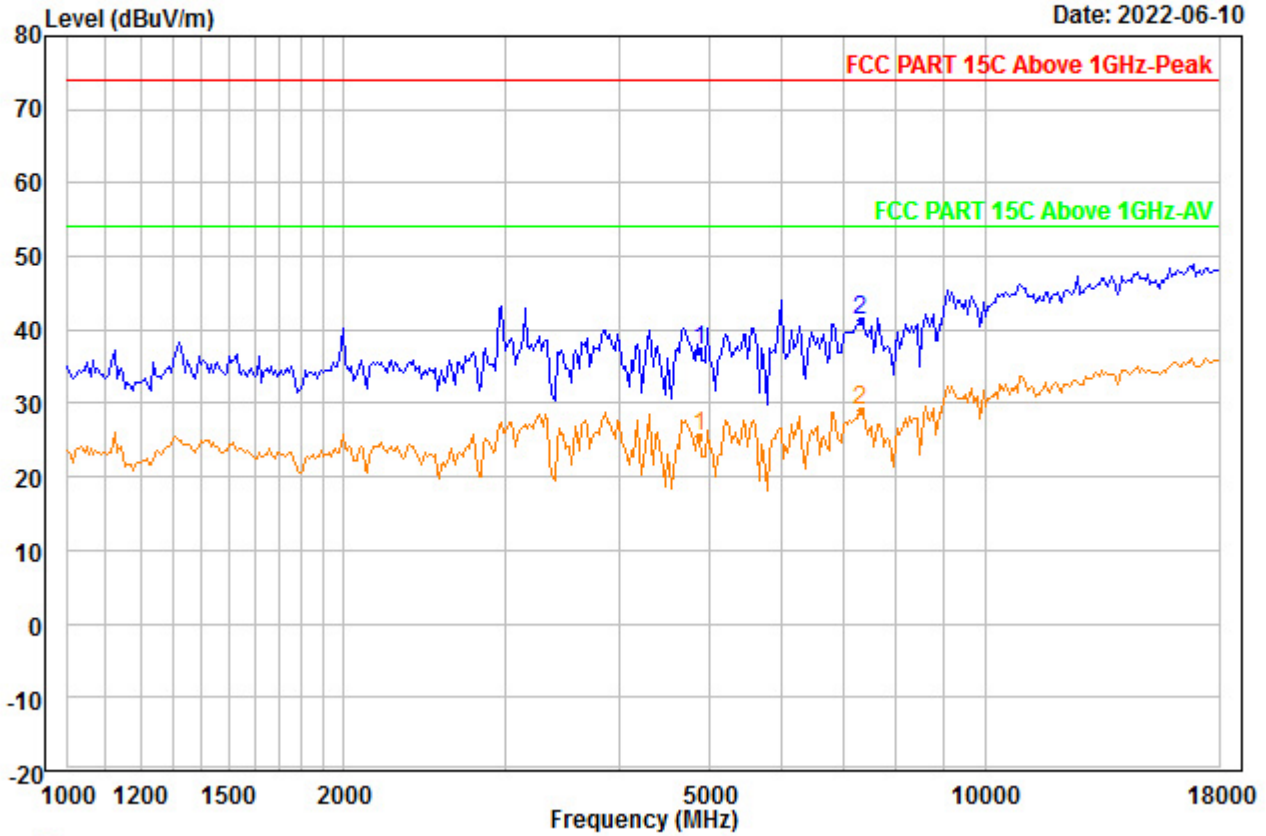


Trace: 1

Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : BLE\_2440  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rema		
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit					
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg		
1	4880.000	39.61	34.70	46.58	0.00	9.58	37.31	74.00	-36.69	---	---	Peak
2 PP	7320.000	39.69	36.25	46.19	0.00	11.55	41.30	74.00	-32.70	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\BIBTRSE\4\_00008.EMI

Date: 2022-06-10

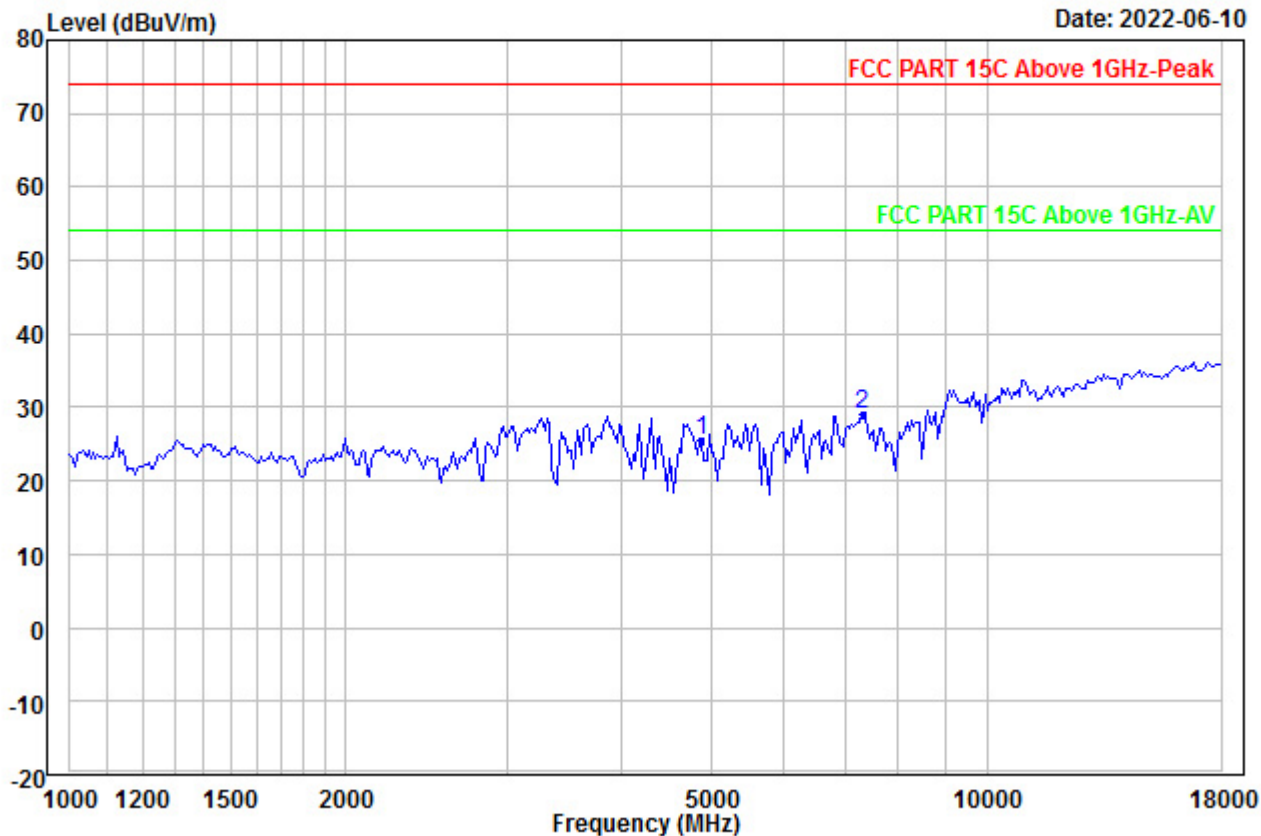


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : BLE\_2440  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rema		
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit					
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg		
1	4880.000	27.68	34.70	46.58	0.00	9.58	25.38	54.00	-28.62	---	---	Aver
2	PP 7320.000	27.56	36.25	46.19	0.00	11.55	29.17	54.00	-24.83	---	---	Aver



File: F:\Test Template\上海ITS\2022\220523032 SA750\BIBTRSE\4\_00009.EMI

Date: 2022-06-10

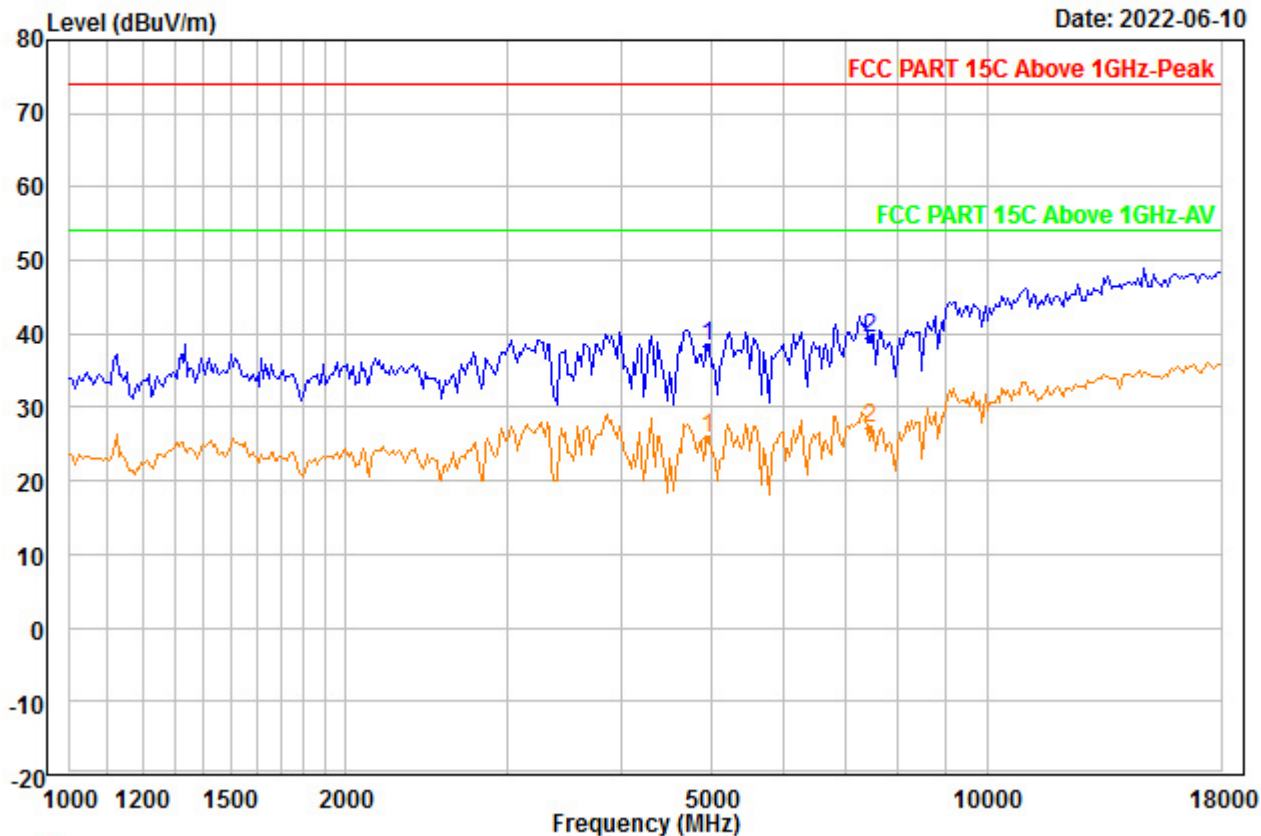


Trace: 1

Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : BLE\_2480  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rema		
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit					
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg		
1	4960.000	40.45	34.70	46.59	0.00	9.64	38.20	74.00	-35.80	---	---	Peak
2	PP 7440.000	37.63	36.42	46.26	0.00	11.65	39.44	74.00	-34.56	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\BIBTRSE\4\_00010.EMI

Date: 2022-06-10

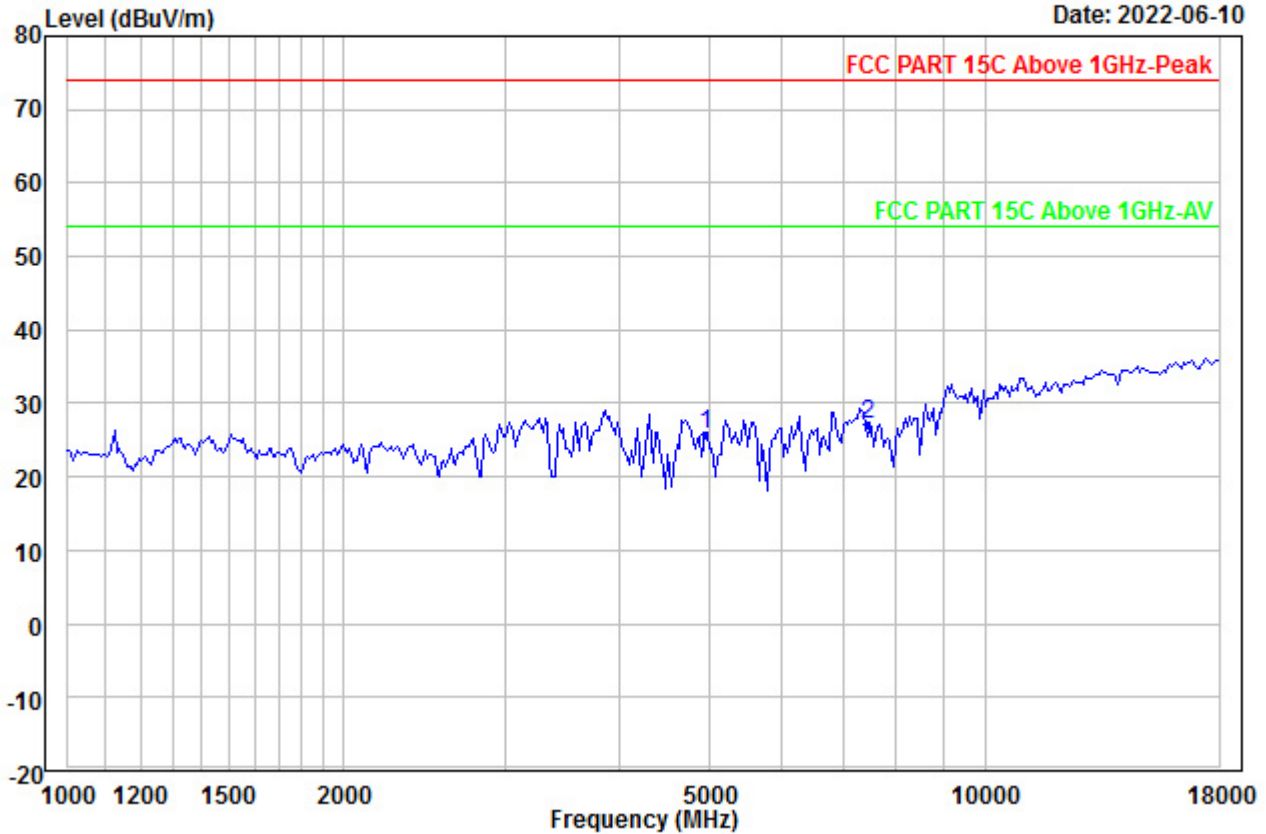


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : BLE\_2480  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rema		
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit					
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg		
1	4960.000	28.02	34.70	46.59	0.00	9.64	25.77	54.00	-28.23	---	---	Aver
2	PP 7440.000	25.38	36.42	46.26	0.00	11.65	27.19	54.00	-26.81	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\BIBTRSE\4\_00011.EMI

Date: 2022-06-10

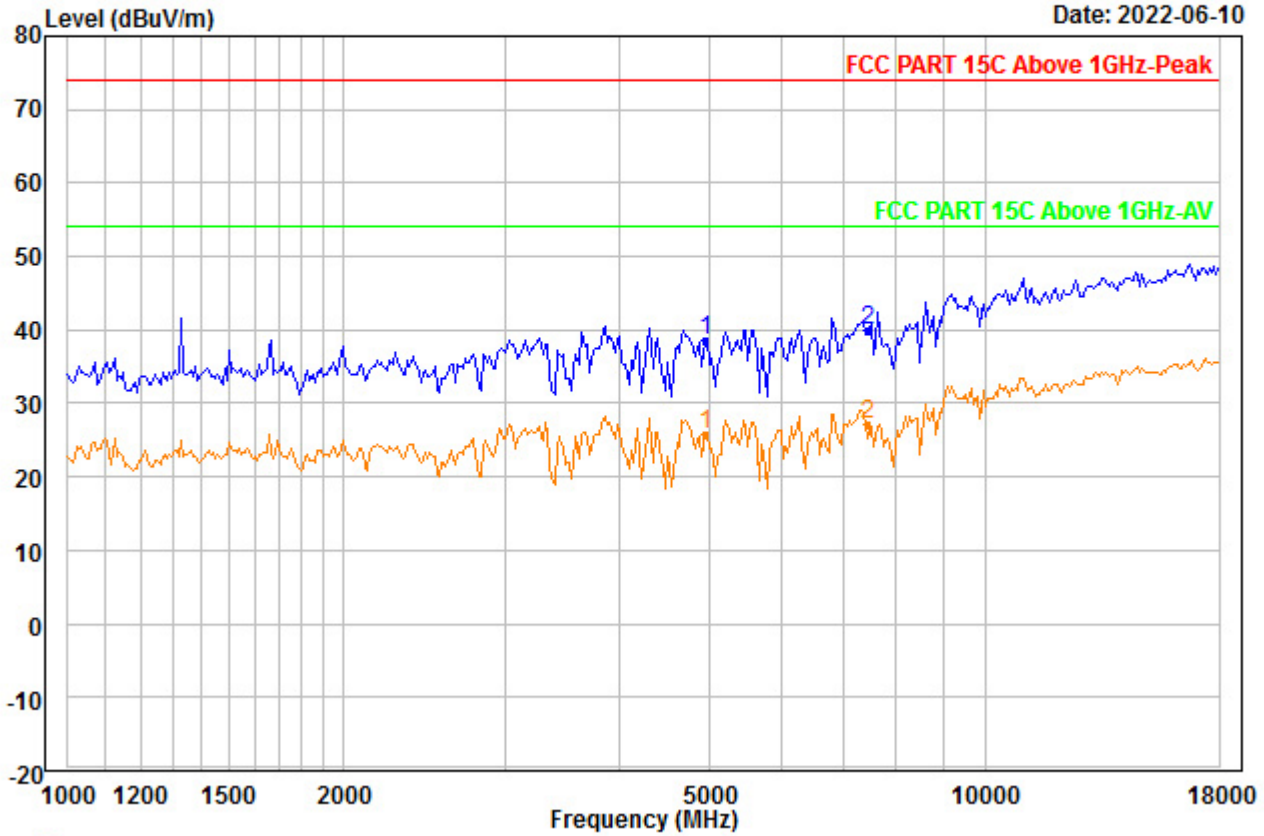


Trace: 1

Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : BLE\_2480  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rema		
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit					
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg		
1	4960.000	40.91	34.70	46.59	0.00	9.64	38.66	74.00	-35.34	---	---	Peak
2	PP 7440.000	38.04	36.42	46.26	0.00	11.65	39.85	74.00	-34.15	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\BIBTRSE\4\_00012.EMI

Date: 2022-06-10

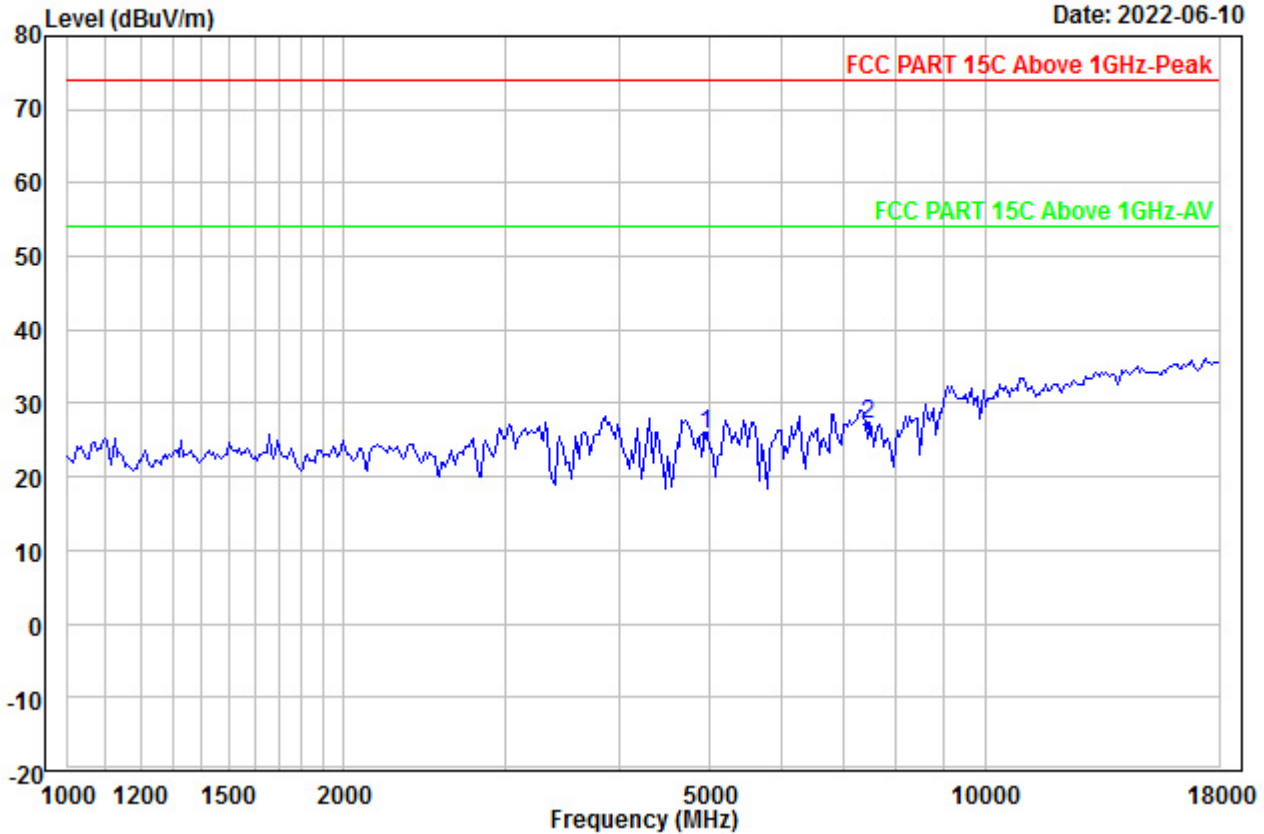

Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : BLE\_2480  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rema		
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit					
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg		
1	4960.000	28.02	34.70	46.59	0.00	9.64	25.77	54.00	-28.23	---	---	Aver
2	PP 7440.000	25.30	36.42	46.26	0.00	11.65	27.11	54.00	-26.89	---	---	Aver