


File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4\_00001.EMI

Date: 2022-06-04

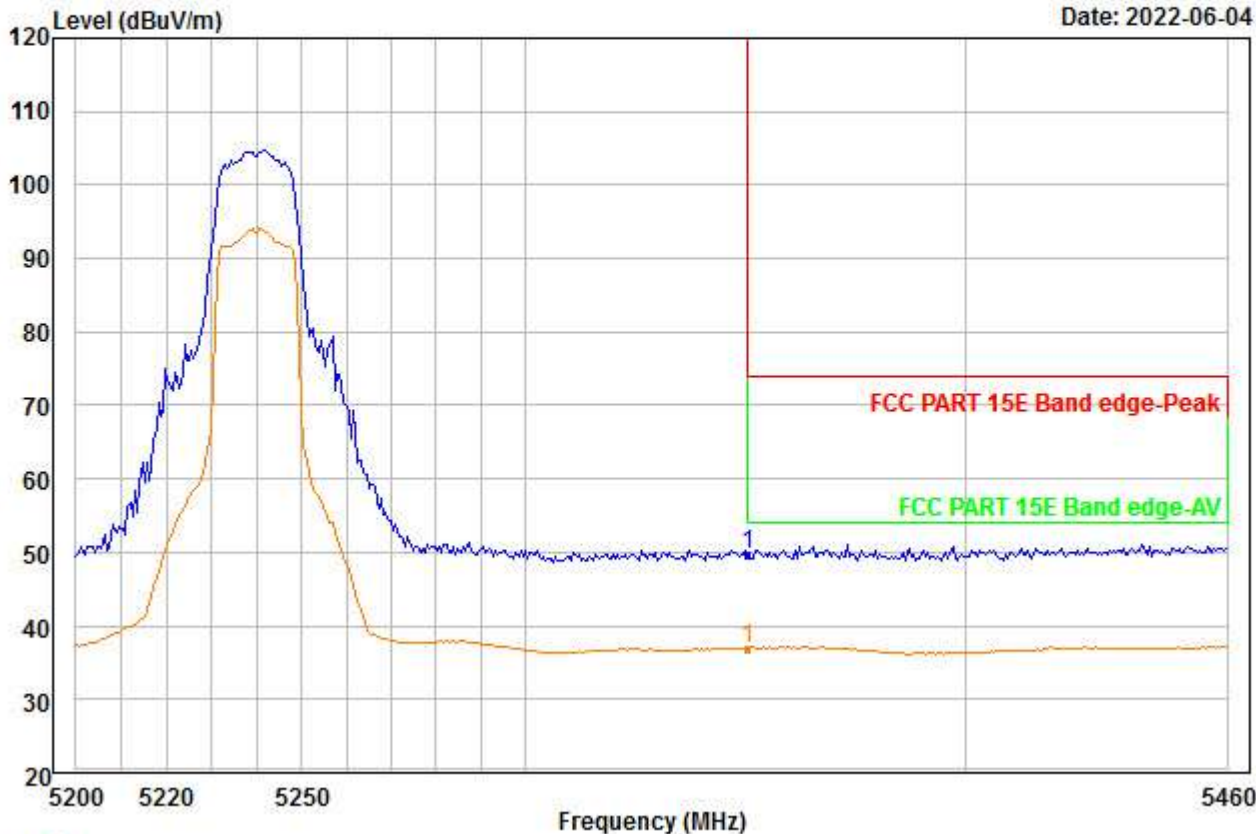


Trace: 1

Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT0\_5240  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit			
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 5350.000	50.46	35.12	45.97	0.00	10.18	49.79	74.00	-24.21	---	--- Peak

File: F:\Test Template\上海\ITS\2022\220523032 SA750\A\5G\BE\4\_00002.EMI

Date: 2022-06-04

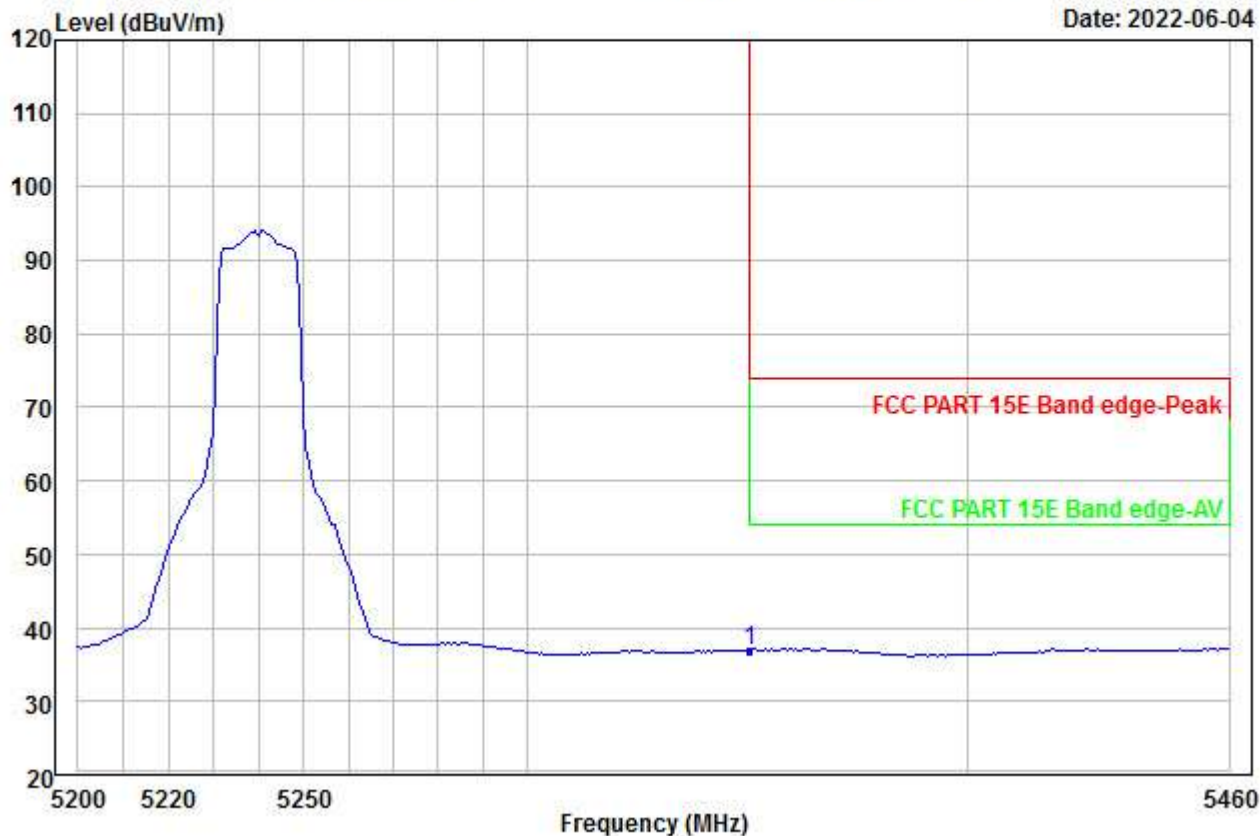


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT0\_5240  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5350.000	37.57	35.12	45.97	0.00	10.18	36.90	54.00	-17.10	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4\_00003.EMI

Date: 2022-06-04

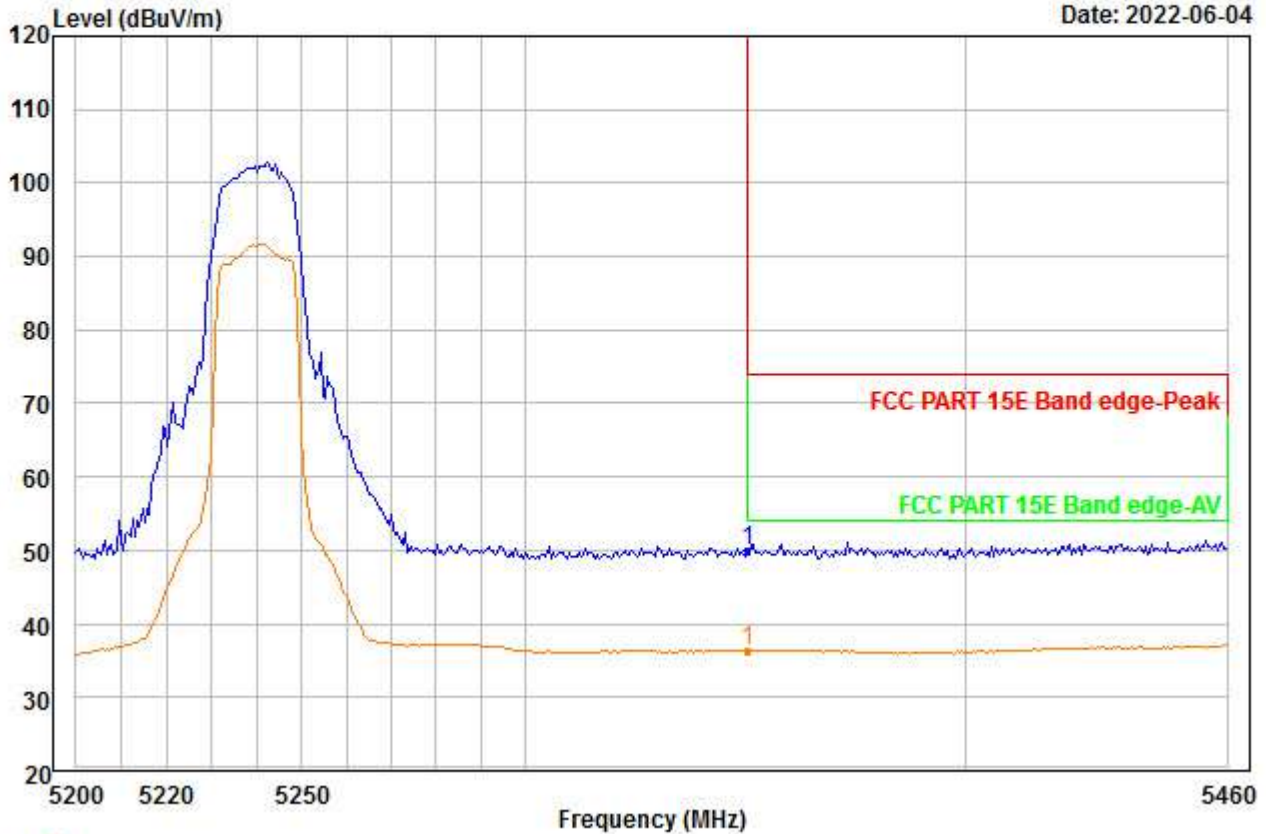


Trace: 1

Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT0\_5240  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit			
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 5350.000	50.61	35.12	45.97	0.00	10.18	49.94	74.00	-24.06	---	--- Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4\_00004.EMI

Date: 2022-06-04

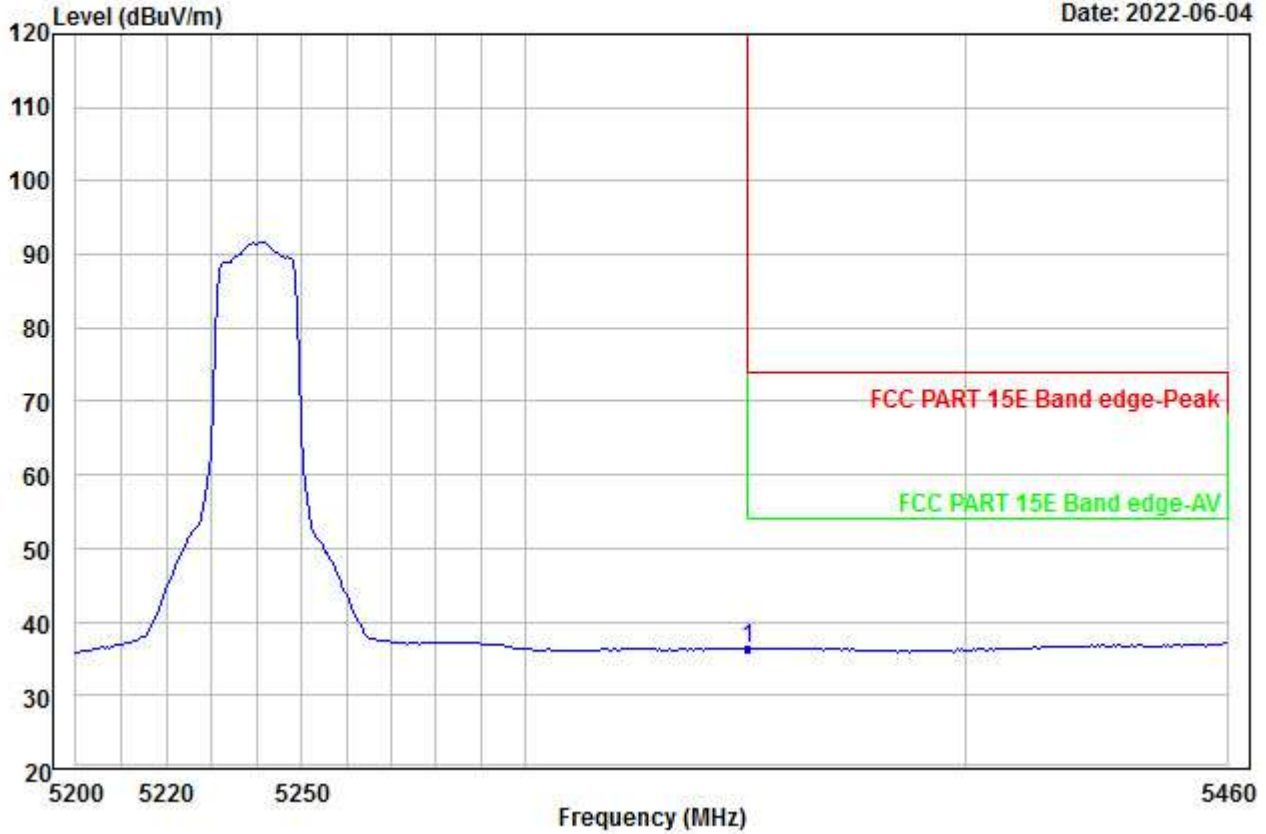


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT0\_5240  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5350.000	37.02	35.12	45.97	0.00	10.18	36.35	54.00	-17.65	---	---	Aver

File: F:\Test Template\上海\ITS\2022\220523032 SA750\A\5G\BE\4\_00005.EMI

Date: 2022-06-04

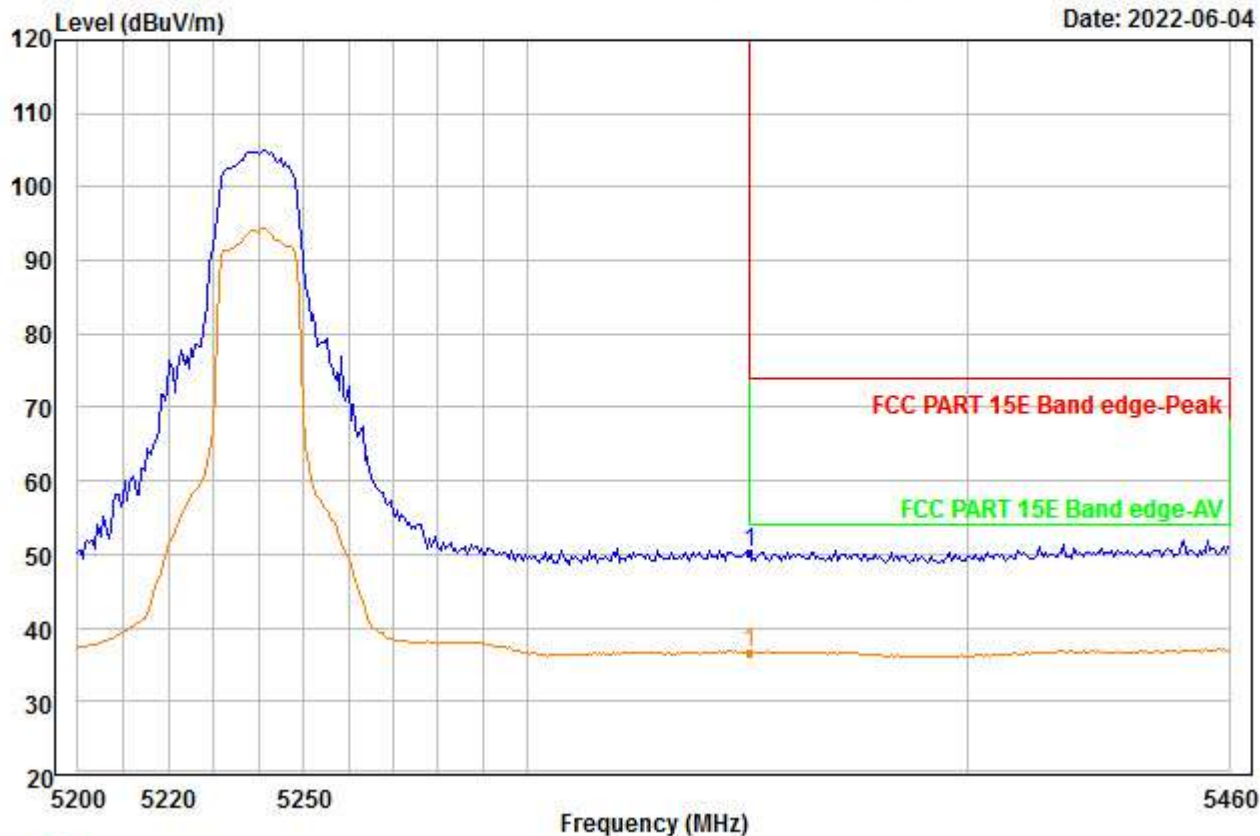


Trace: 1

Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT1\_5240  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5350.000	50.79	35.12	45.97	0.00	10.18	50.12	74.00	-23.88	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4\_00006.EMI

Date: 2022-06-04

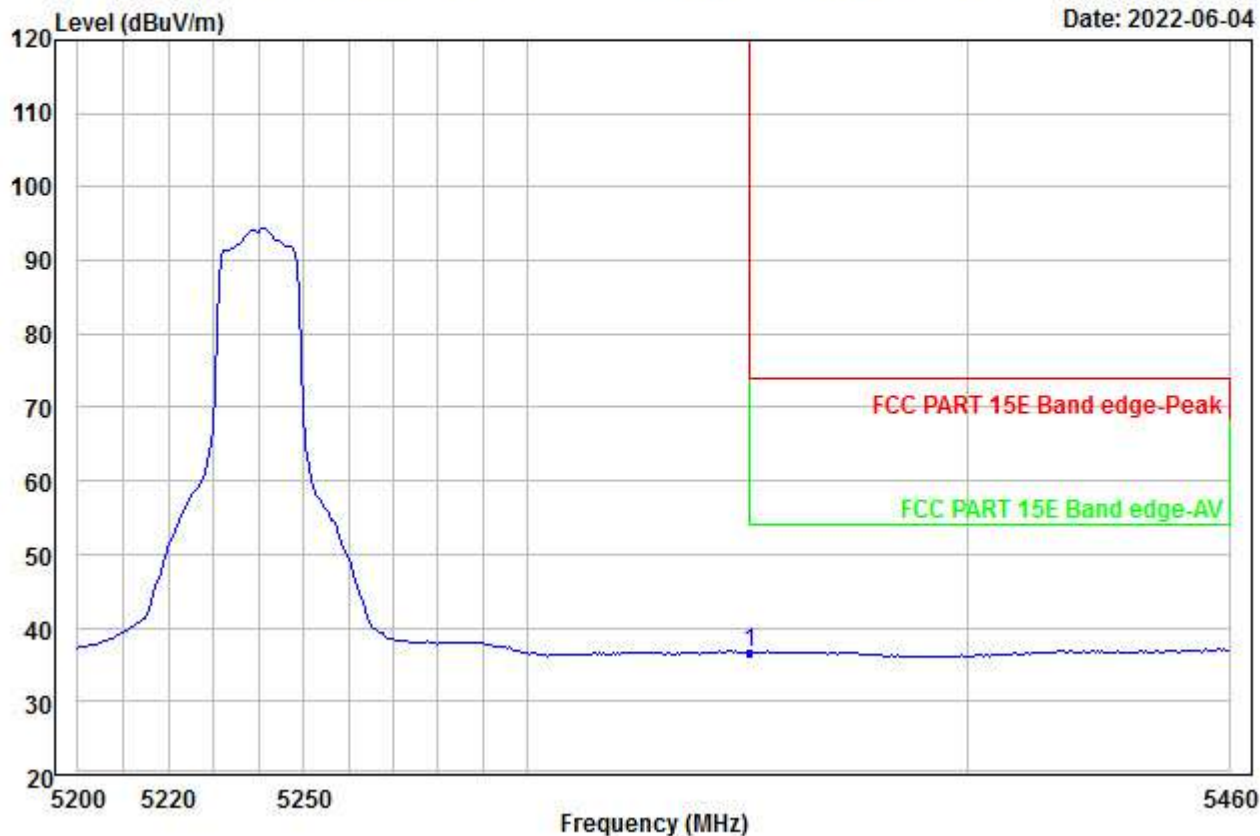


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT1\_5240  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5350.000	37.28	35.12	45.97	0.00	10.18	36.61	54.00	-17.39	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4\_00007.EMI

Date: 2022-06-04

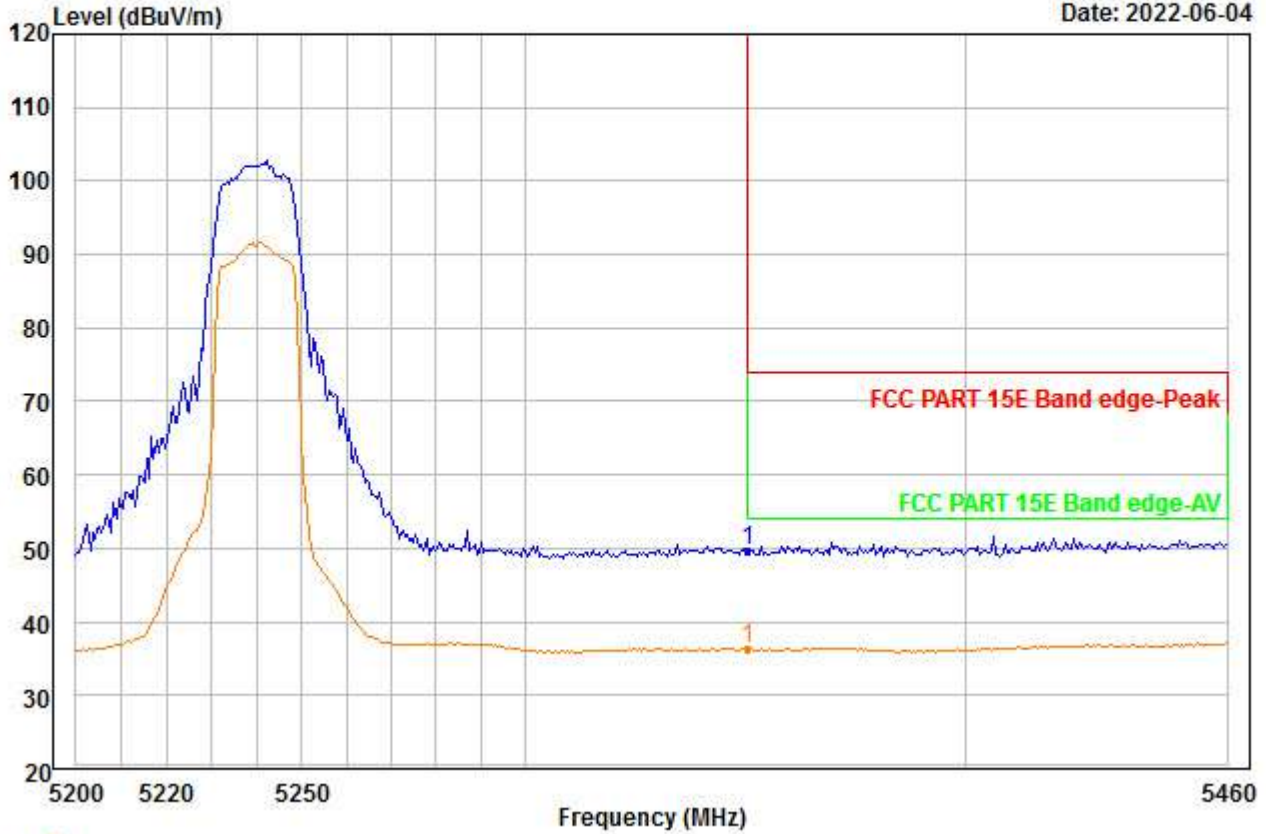


Trace: 1

Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT1\_5240  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5350.000	50.46	35.12	45.97	0.00	10.18	49.79	74.00	-24.21	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4\_00008.EMI

Date: 2022-06-04

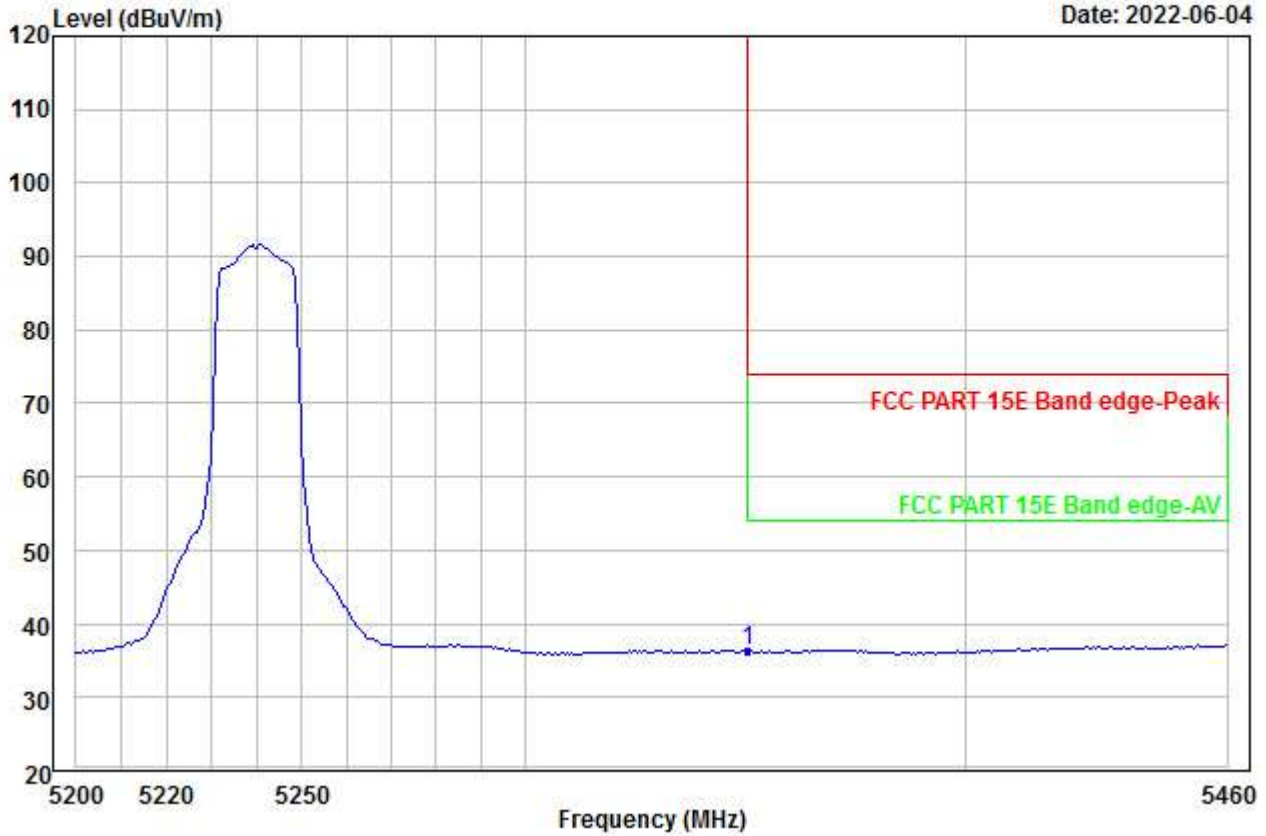


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT1\_5240  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5350.000	36.95	35.12	45.97	0.00	10.18	36.28	54.00	-17.72	---	---	Aver



File: F:\Test Template\上海ITSI\2022\220523032 SA750\A\5G\BE\4\_00009.EMI

Date: 2022-06-04

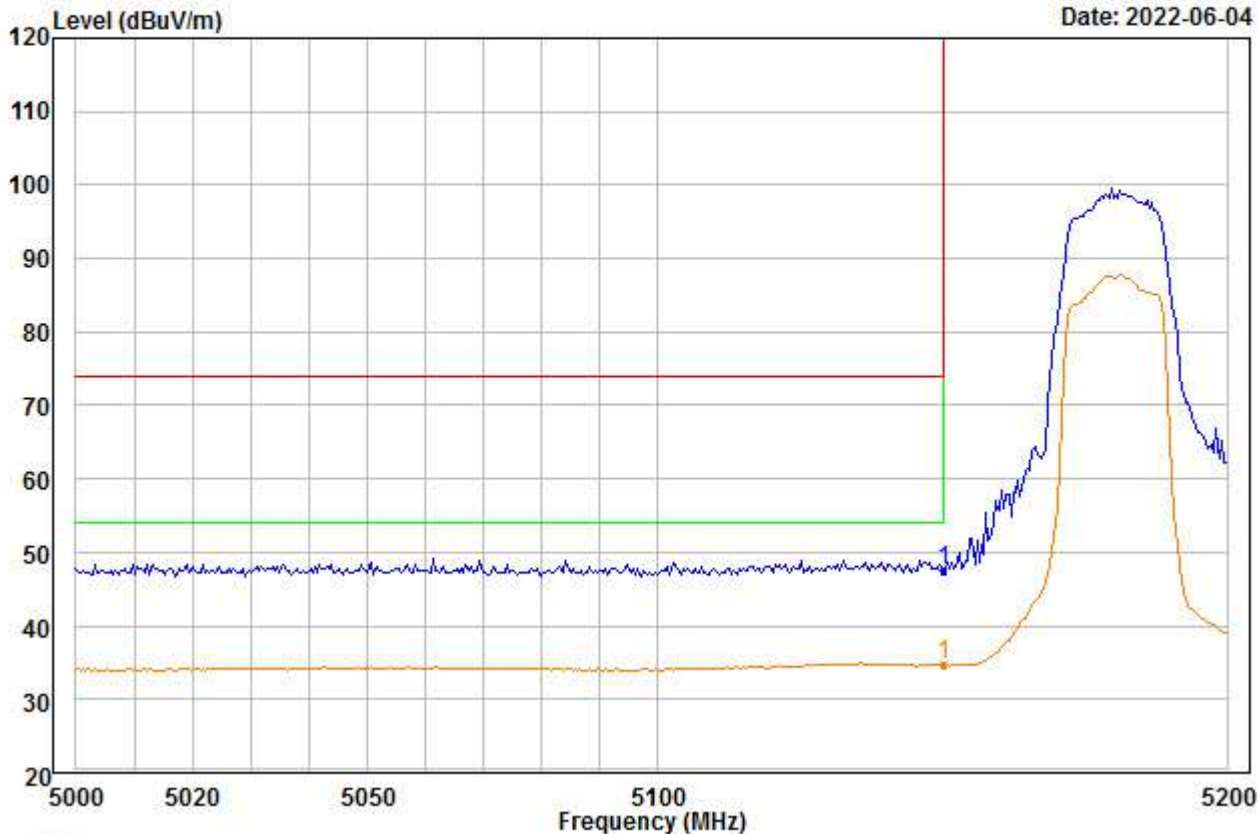


Trace: 1

Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT1\_5180  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5150.000	49.14	34.88	46.33	0.00	9.78	47.47	74.00	-26.53	---	---	Peak

File: F:\Test Template\上海ITSI\2022\220523032 SA750\A\5G\BE\4\_00010.EMI

Date: 2022-06-04

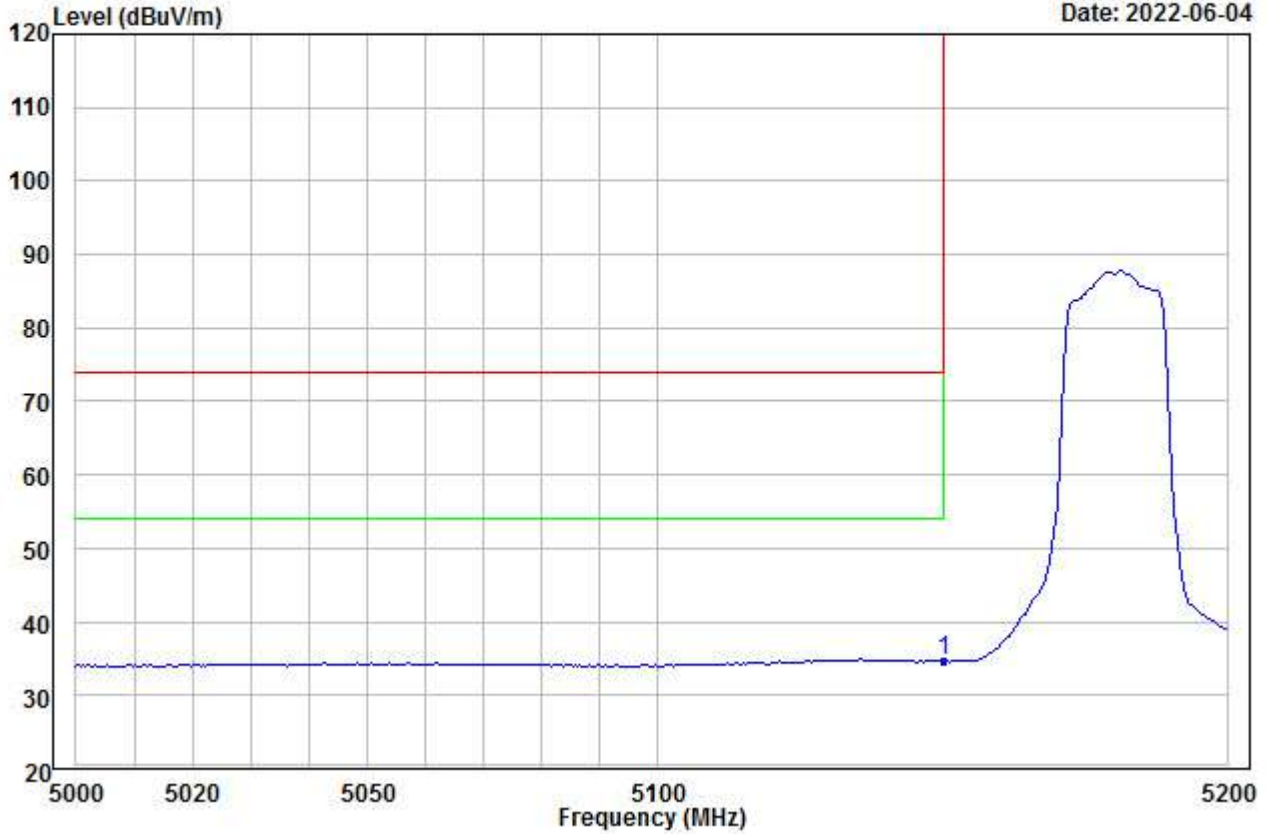


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT1\_5180  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5150.000	36.34	34.88	46.33	0.00	9.78	34.67	54.00	-19.33	---	---	Aver

File: F:\Test Template\上海ITSI\2022\220523032 SA750\A\5G\BE\4\_00011.EMI

Date: 2022-06-04

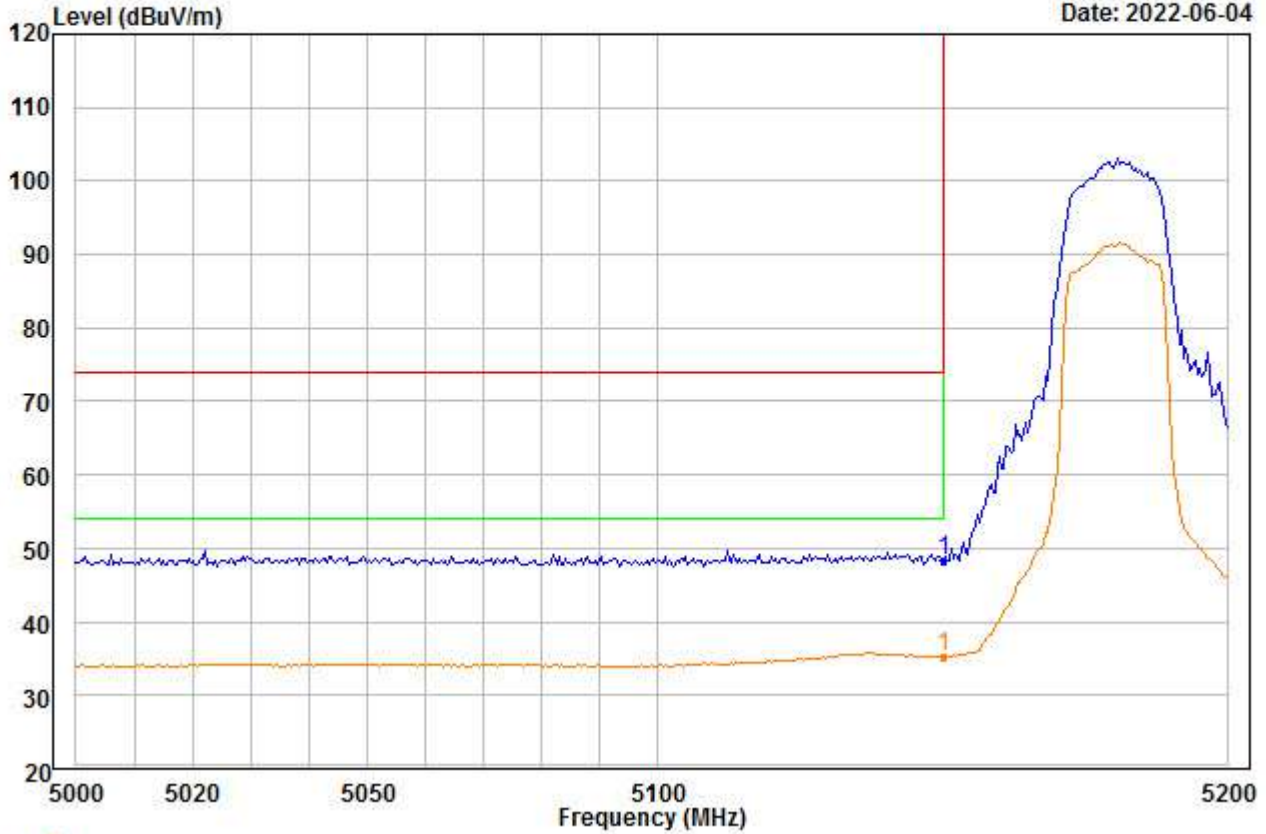


Trace: 1

Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT1\_5180  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5150.000	50.13	34.88	46.33	0.00	9.78	48.46	74.00	-25.54	---	---	Peak

File: F:\Test Template\上海ITSI\2022\220523032 SA750\A\5G\BE\4\_00012.EMI

Date: 2022-06-04

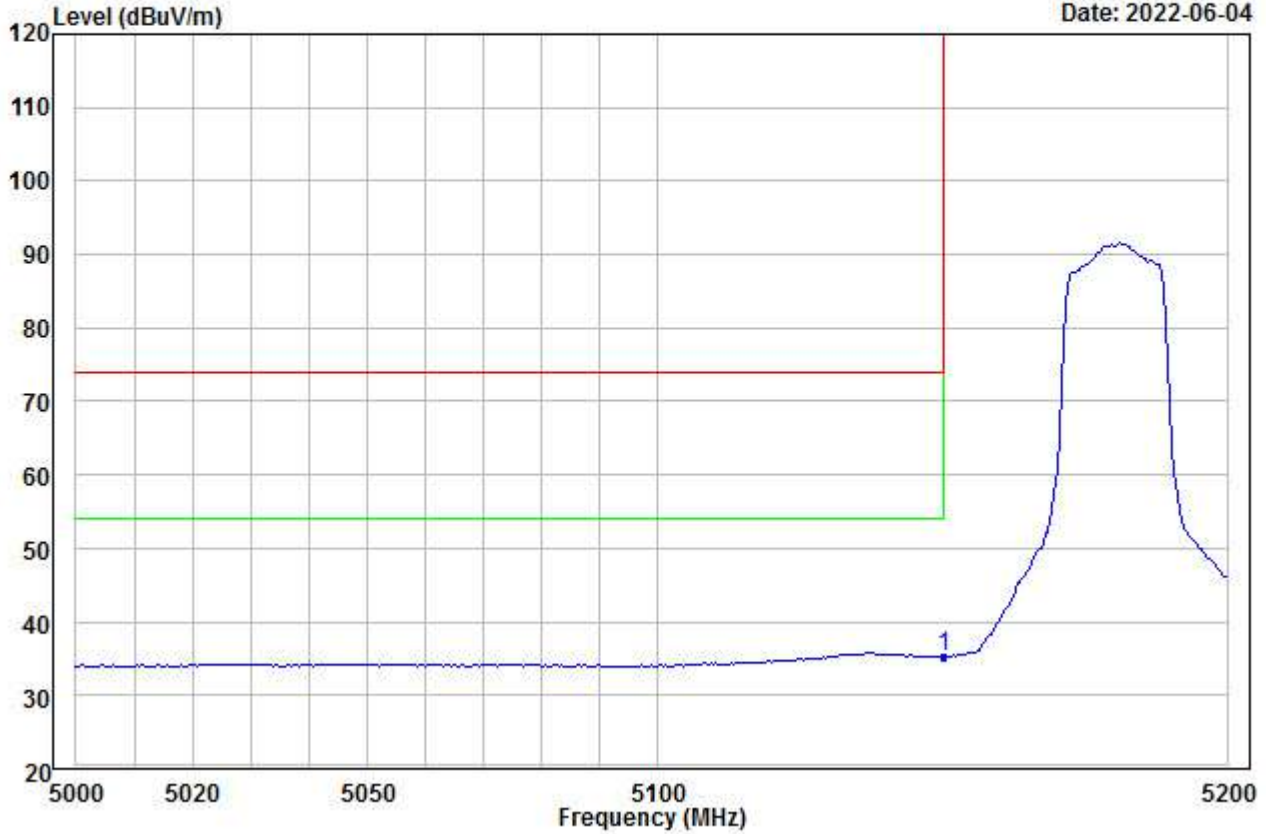


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT1\_5180  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:
Freq	Level	Factor	Factor	Factor	Loss	Level	Line	Limit		
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 5150.000	36.94	34.88	46.33	0.00	9.78	35.27	54.00	-18.73	---	--- Aver

File: F:\Test Template\上海ITSI\2022\220523032 SA750\A\5G\BE\4\_00013.EMI

Date: 2022-06-04

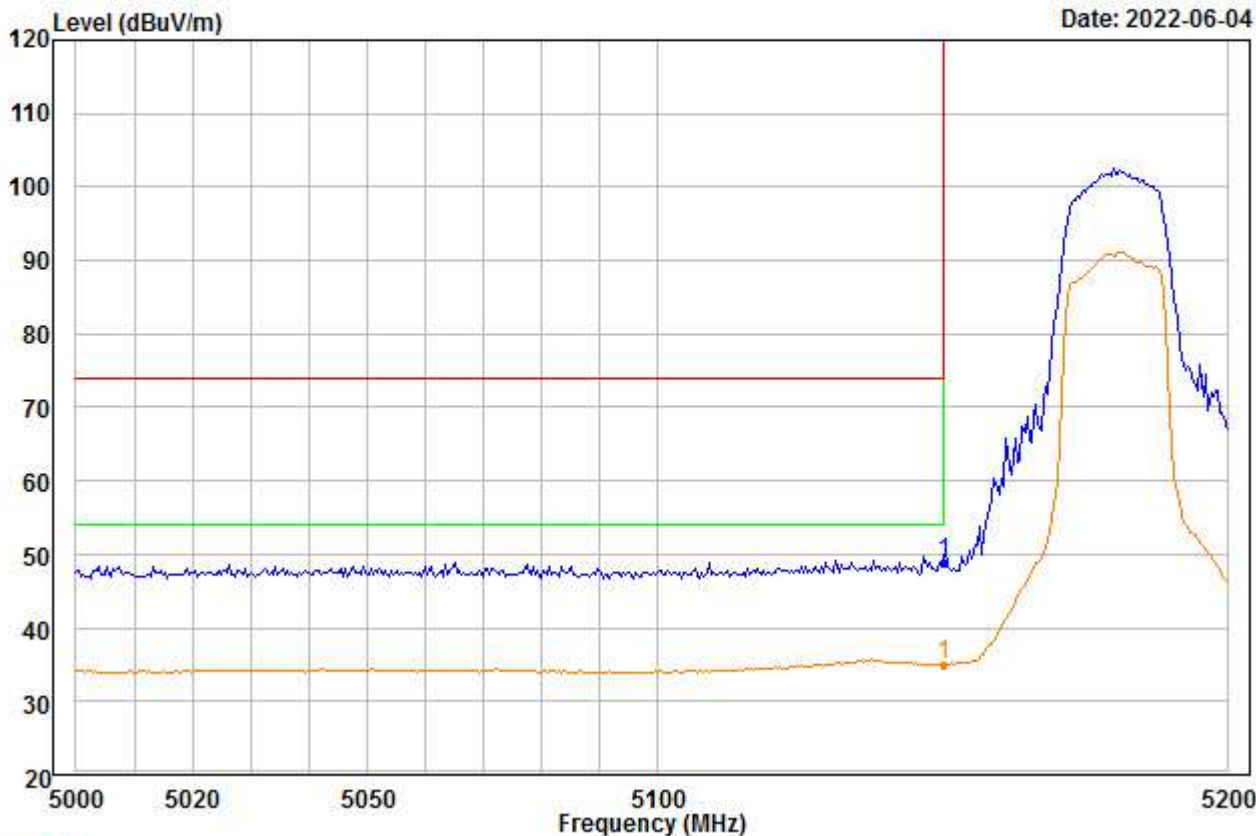


Trace: 1

Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT0\_5180  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5150.000	50.42	34.88	46.33	0.00	9.78	48.75	74.00	-25.25	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4\_00014.EMI

Date: 2022-06-04

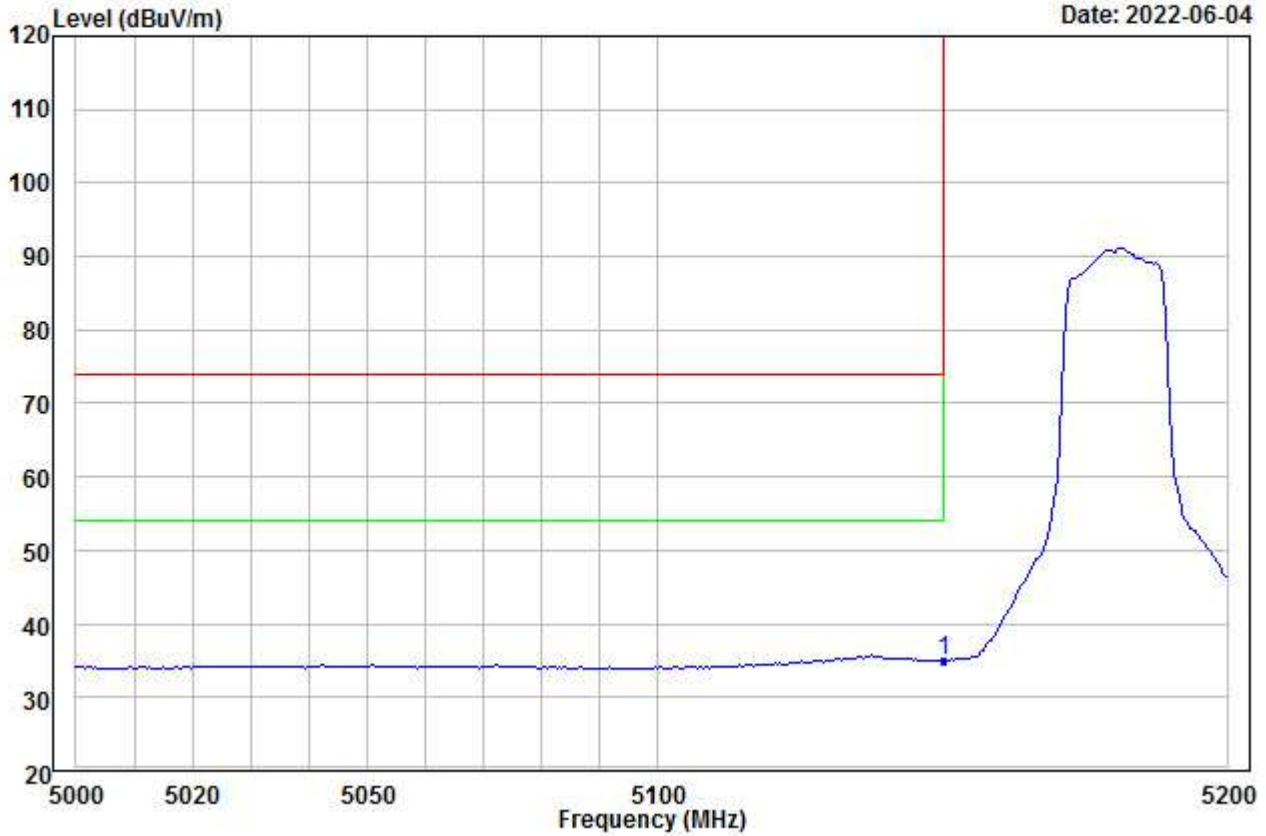


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT0\_5180  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Level	Line	Limit			
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5150.000	36.72	34.88	46.33	0.00	9.78	35.05	54.00	-18.95	---	---	Aver

File: F:\Test Template\上海ITSI\2022\220523032 SA750\A\5G\BE\4\_00015.EMI

Date: 2022-06-04

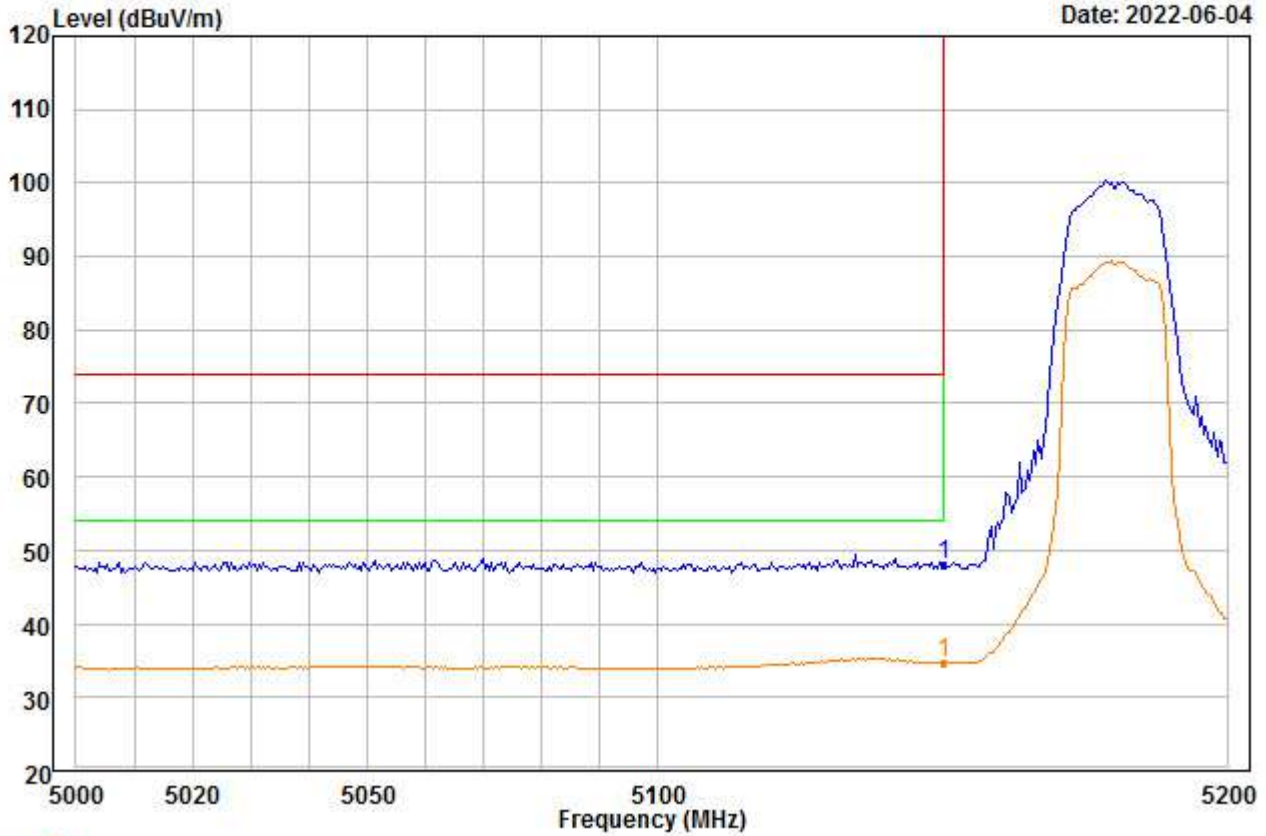


Trace: 1

Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT0\_5180  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5150.000	49.75	34.88	46.33	0.00	9.78	48.08	74.00	-25.92	---	---	Peak

File: F:\Test Template\上海ITSI\2022\220523032 SA750\A\5G\BE\4\_00016.EMI

Date: 2022-06-04

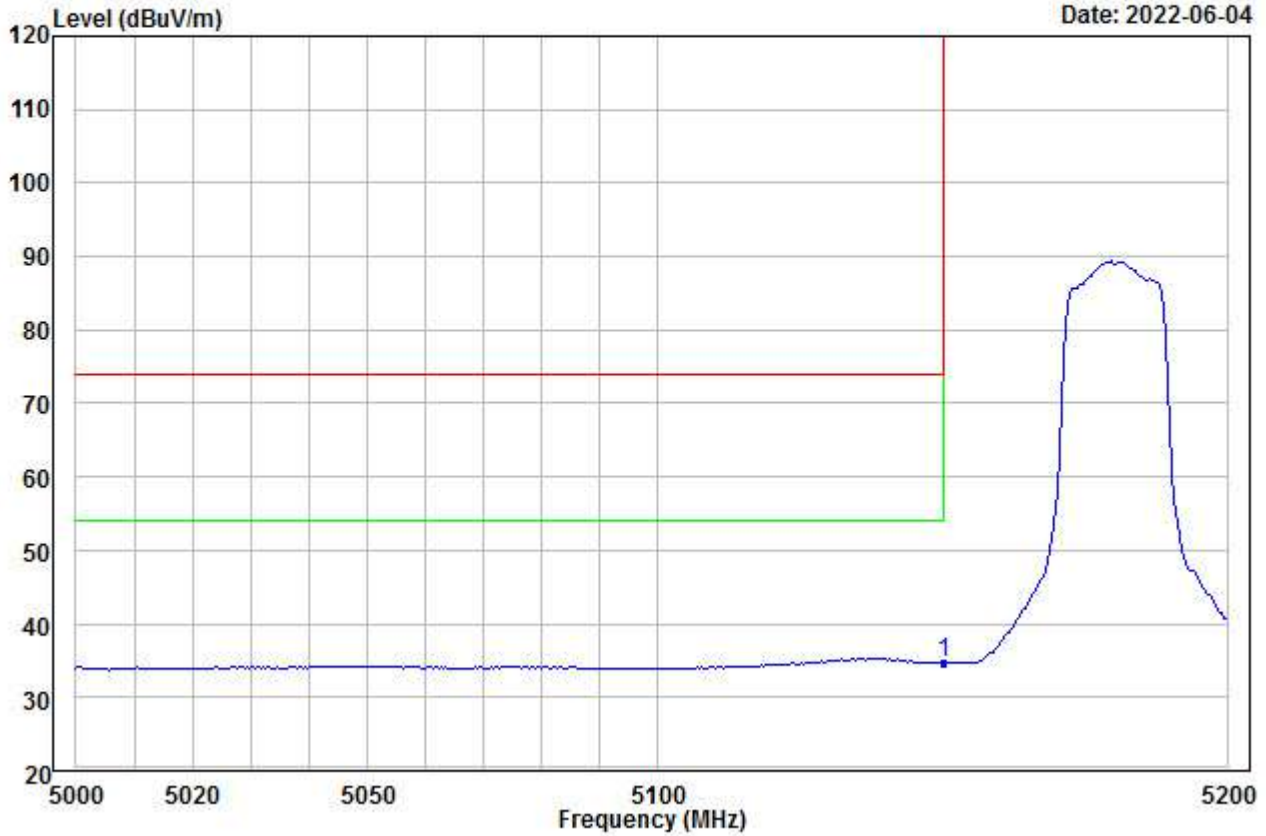


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT0\_5180  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5150.000	36.40	34.88	46.33	0.00	9.78	34.73	54.00	-19.27	---	---	Aver



File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4\_00017.EMI

Date: 2022-06-04

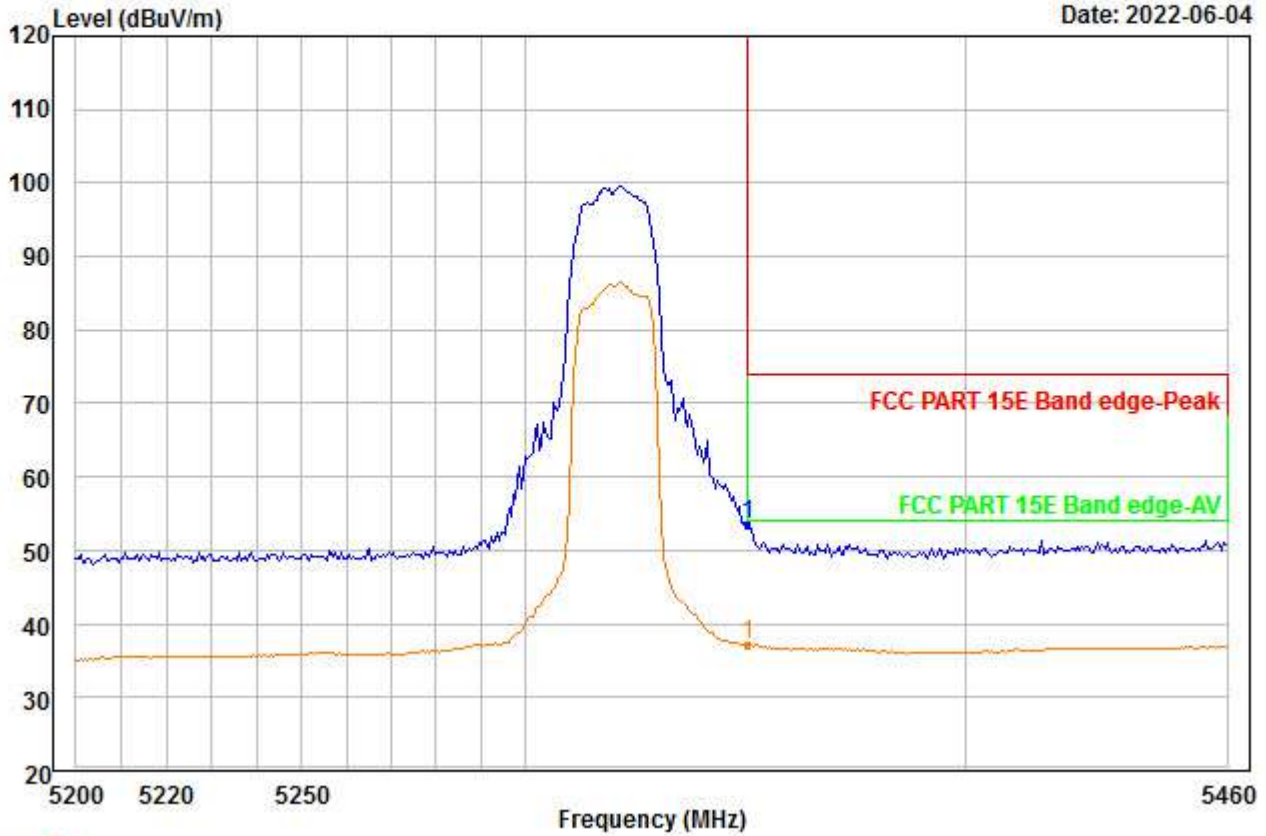


Trace: 1

Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT0\_5320  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5350.000	54.11	35.12	45.97	0.00	10.18	53.44	74.00	-20.56	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4\_00018.EMI

Date: 2022-06-04

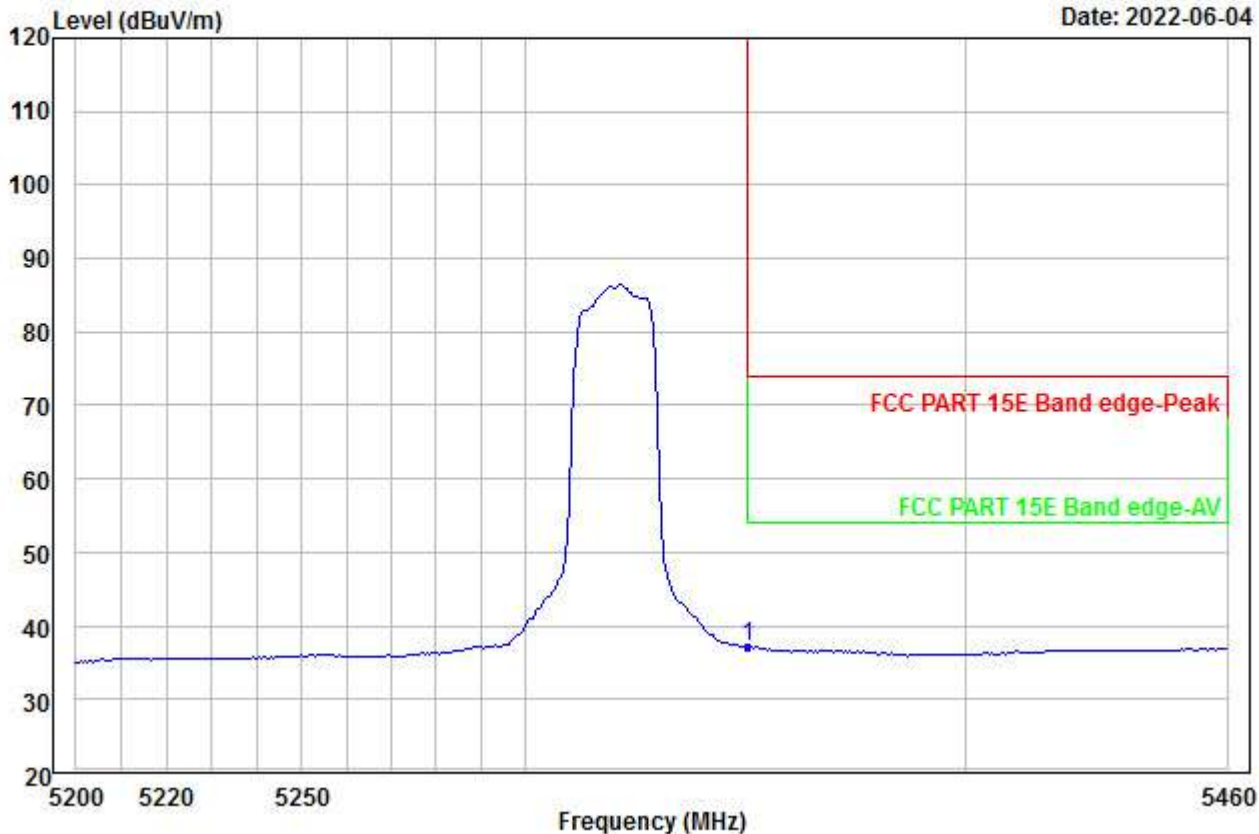


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT0\_5320  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5350.000	37.95	35.12	45.97	0.00	10.18	37.28	54.00	-16.72	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4\_00019.EMI

Date: 2022-06-04

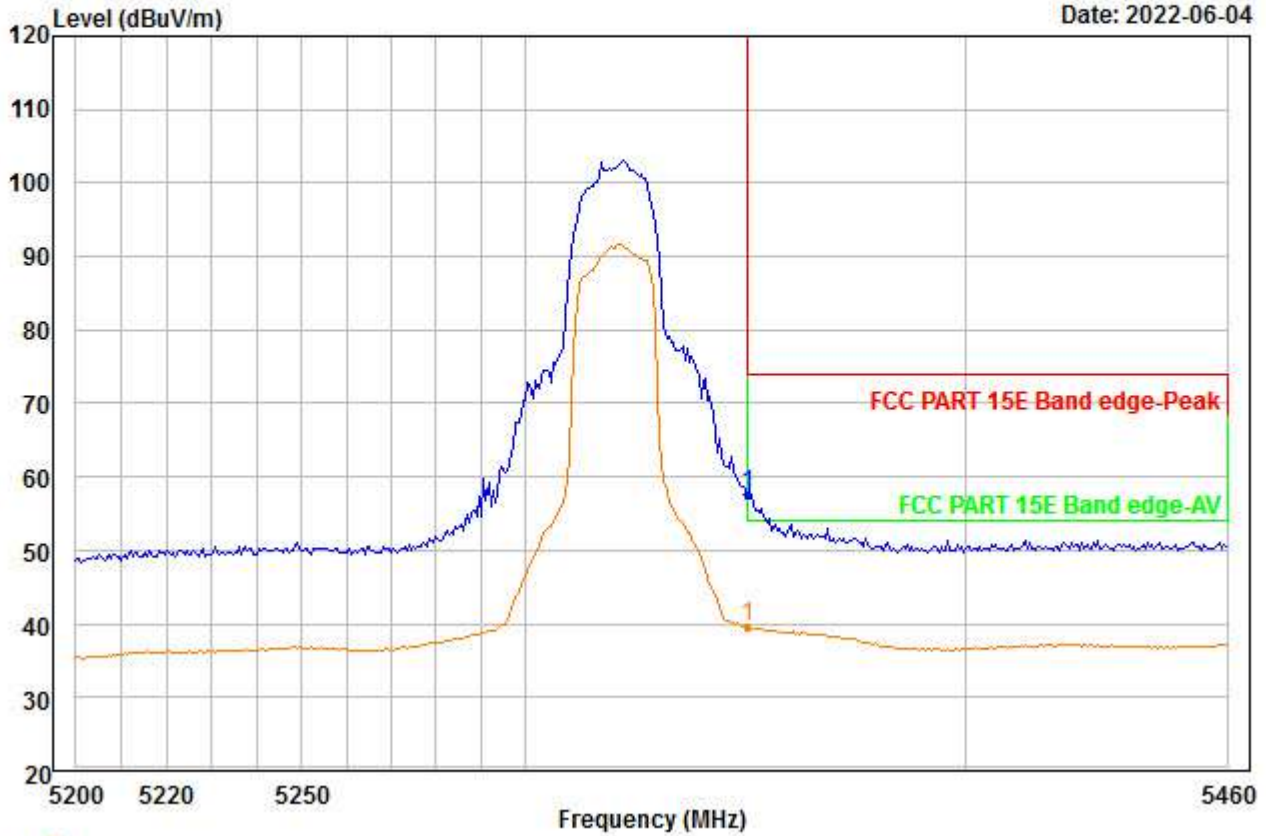


Trace: 1

Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT0\_5320  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5350.000	58.39	35.12	45.97	0.00	10.18	57.72	74.00	-16.28	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4\_00020.EMI

Date: 2022-06-04

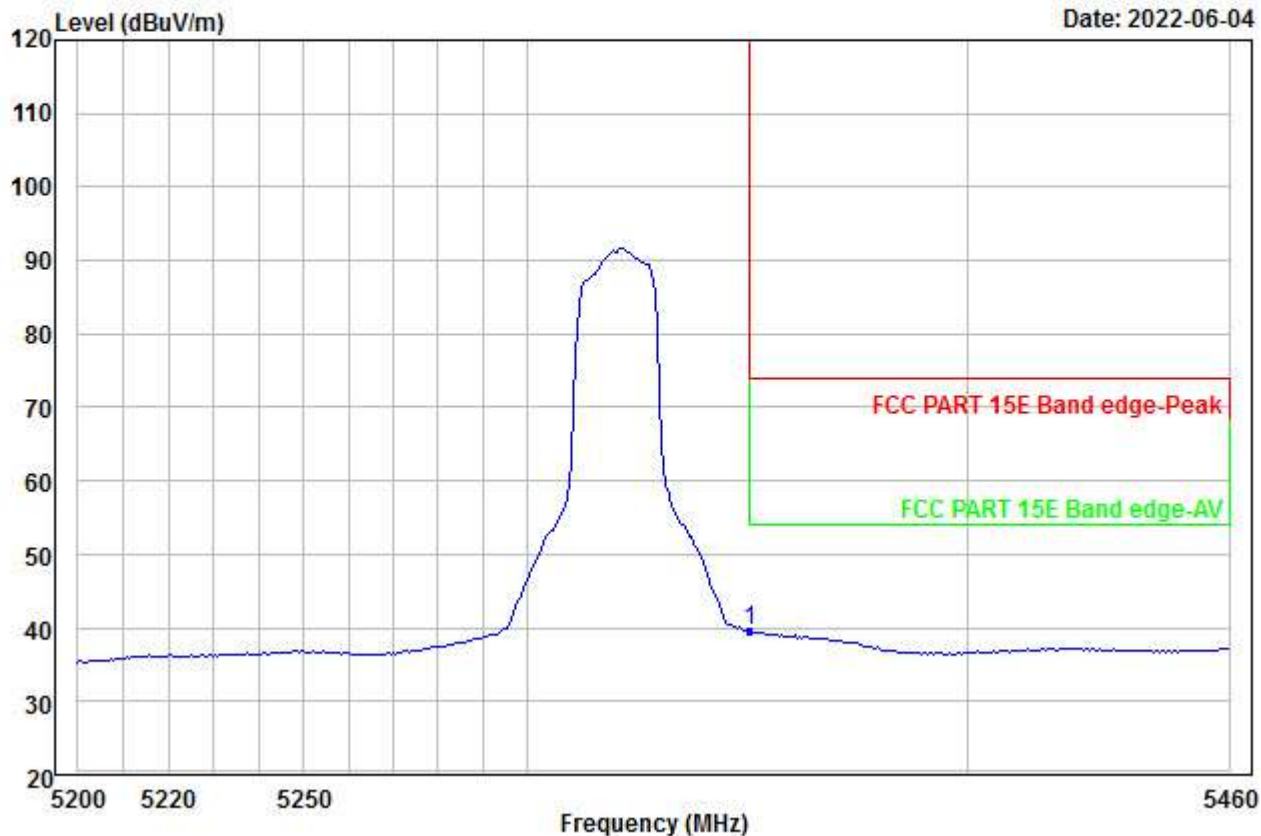


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT0\_5320  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5350.000	40.31	35.12	45.97	0.00	10.18	39.64	54.00	-14.36	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4\_00021.EMI

Date: 2022-06-04

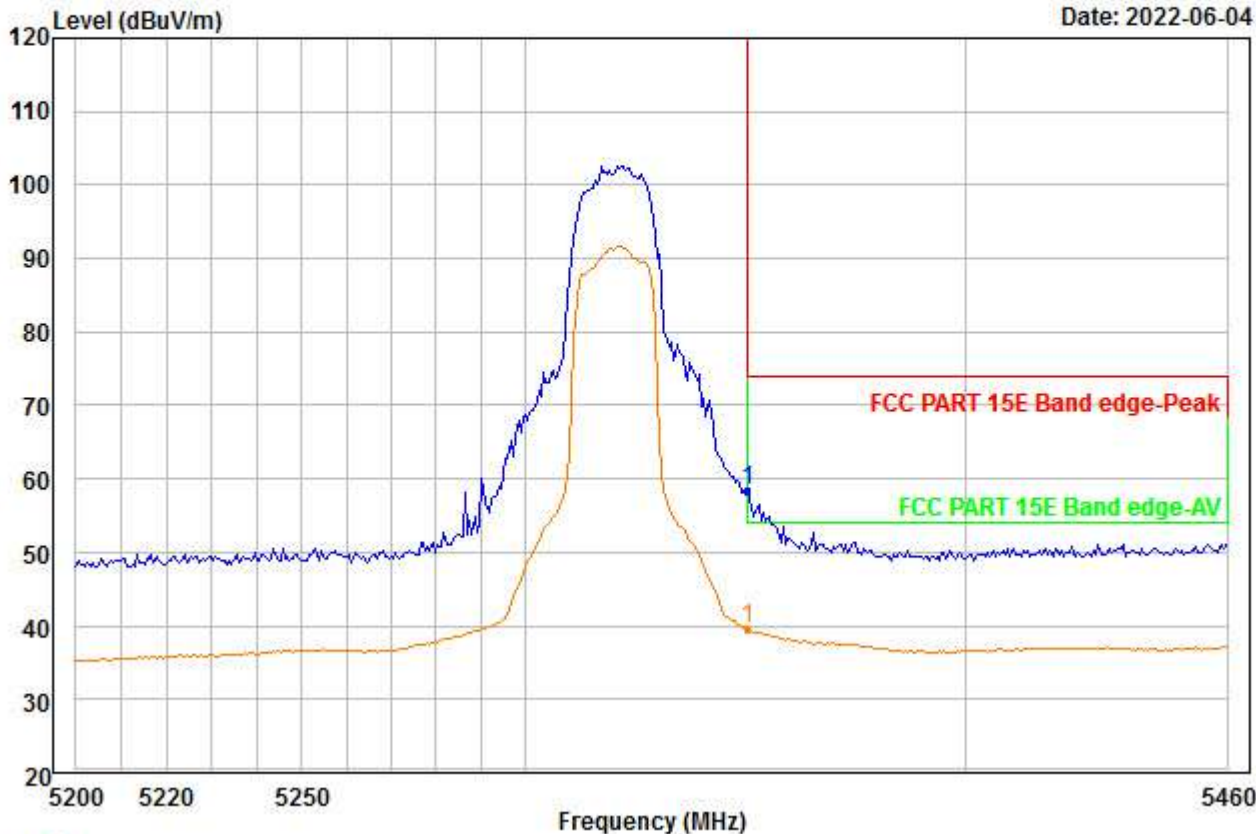


Trace: 1

Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT1\_5320  
 Remark :

	Read Freq	Ant Level	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks	
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	cm	deg		
1 PP	5350.000	58.98	35.12	45.97	0.00	10.18	58.31	74.00	-15.69	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4\_00022.EMI

Date: 2022-06-04

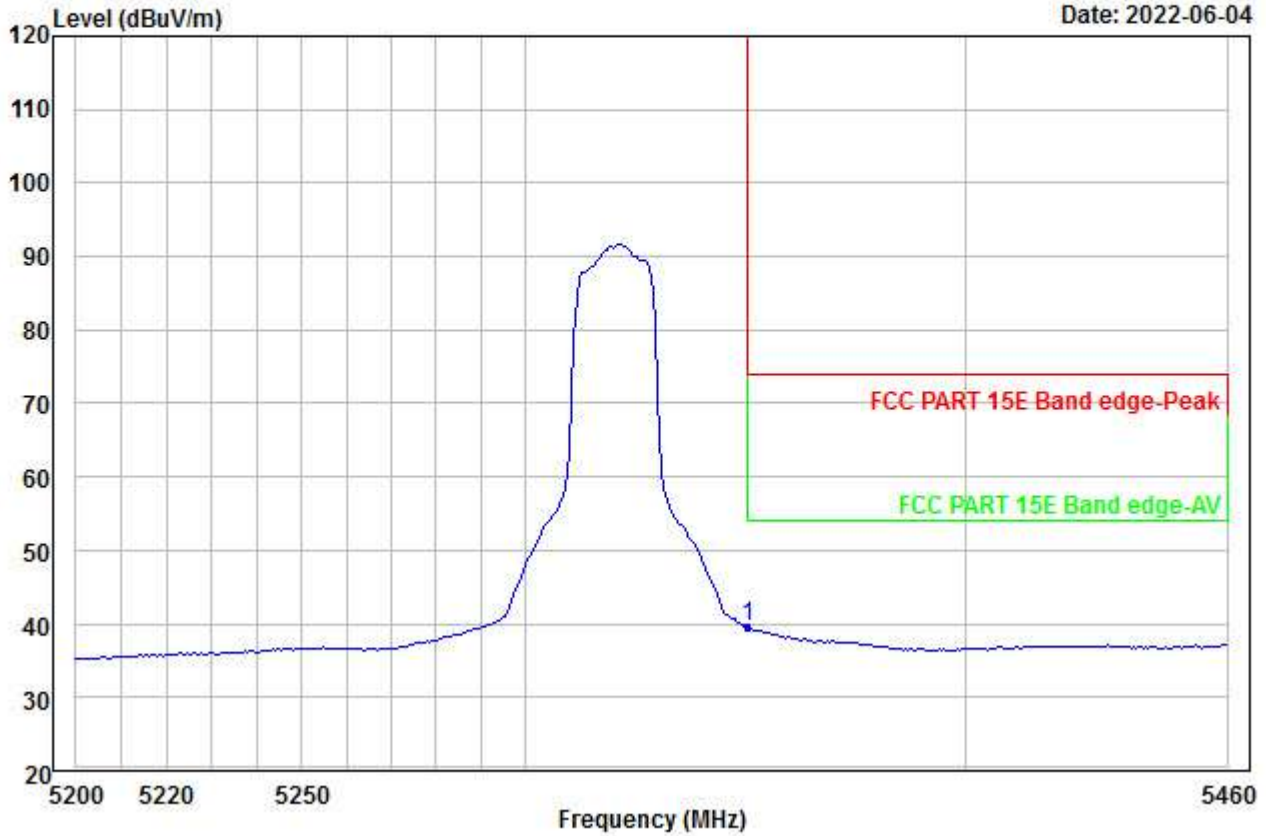


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT1\_5320  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5350.000	40.28	35.12	45.97	0.00	10.18	39.61	54.00	-14.39	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4\_00023.EMI

Date: 2022-06-04

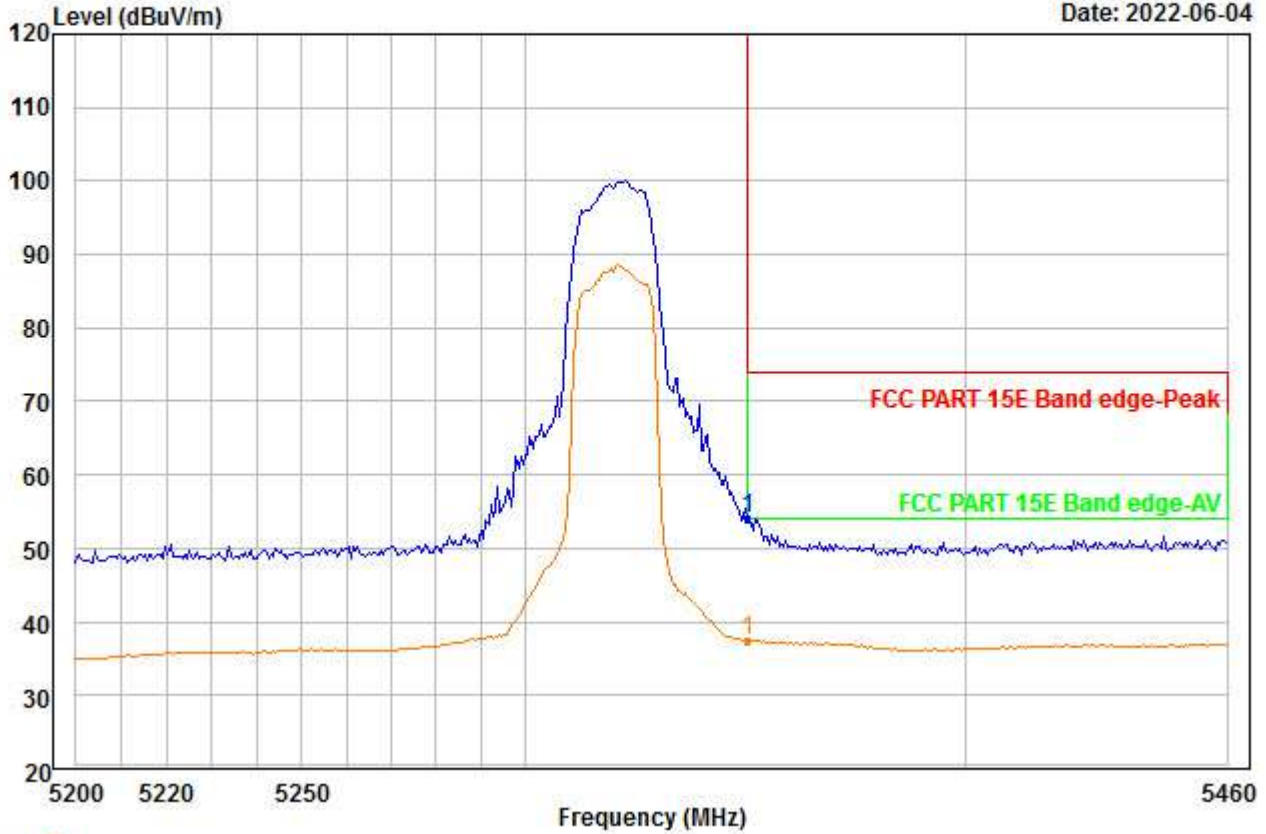


Trace: 1

Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT1\_5320  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5350.000	54.63	35.12	45.97	0.00	10.18	53.96	74.00	-20.04	---	---	Peak

File: F:\Test Template\上海\ITS\2022\220523032 SA750\A\5G\BE\4\_00024.EMI

Date: 2022-06-04

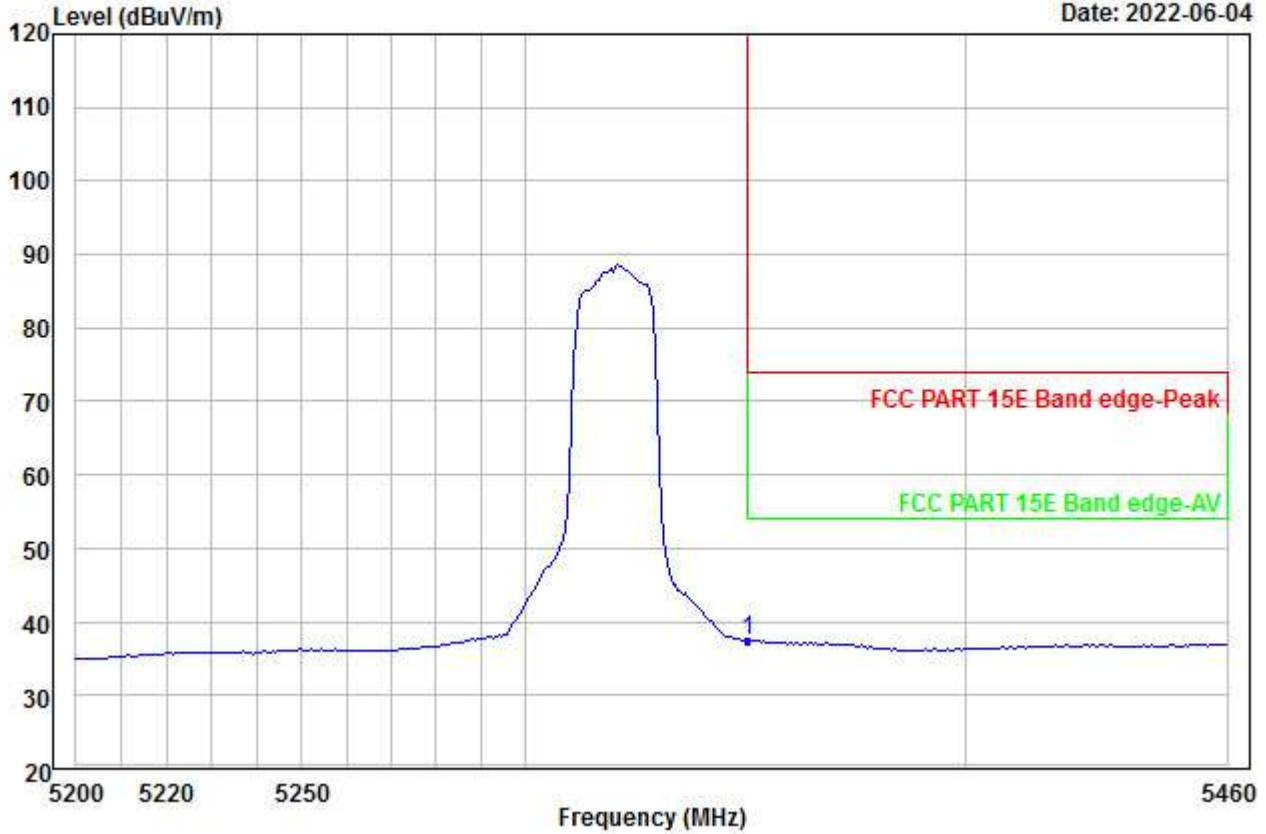


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT1\_5320  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5350.000	38.18	35.12	45.97	0.00	10.18	37.51	54.00	-16.49	---	---	Aver



File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4\_00025.EMI

Date: 2022-06-04

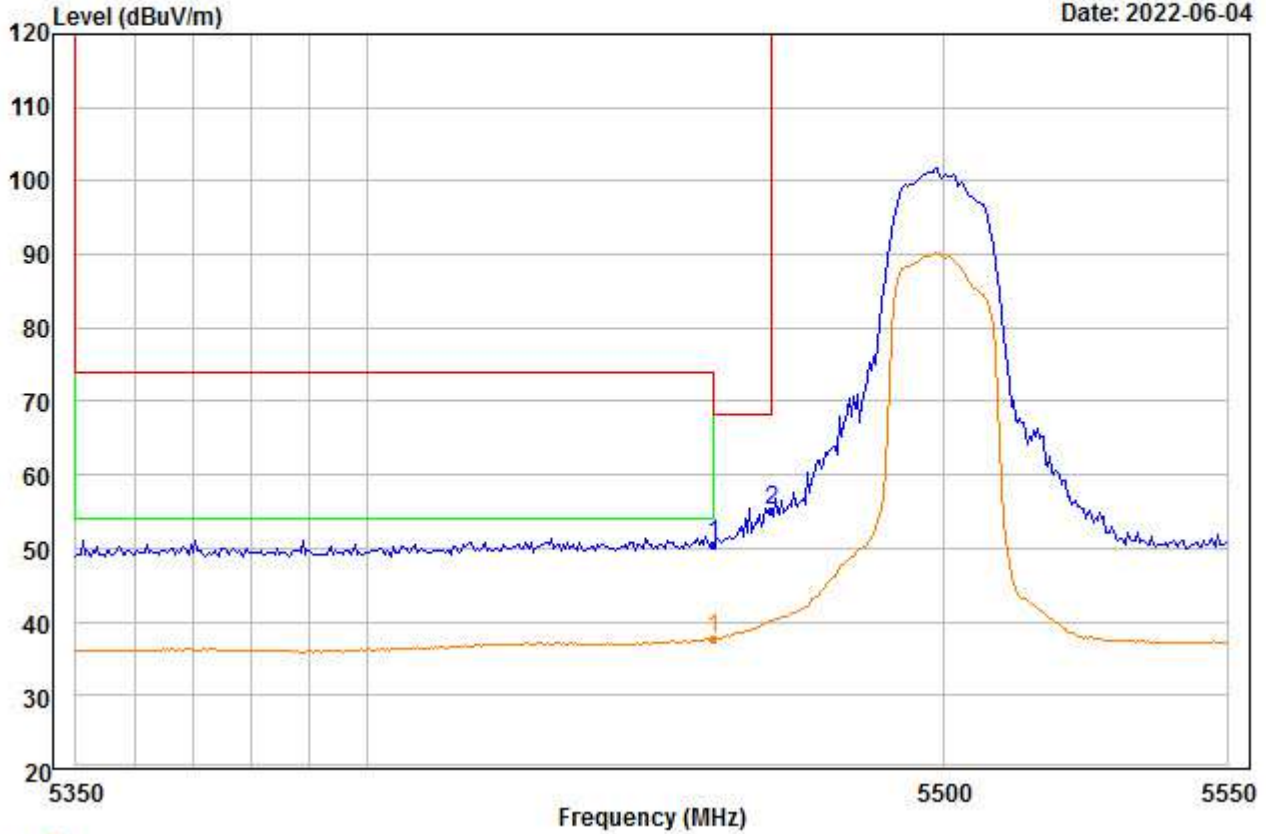


Trace: 1

Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT1\_5500  
 Remark :

	Read Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	5460.000	50.66	35.25	45.77	0.00	10.44	50.58	68.20	-17.62	---	---	Peak
2 PP	5470.000	55.28	35.26	45.75	0.00	10.47	55.26	68.20	-12.94	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4\_00026.EMI

Date: 2022-06-04

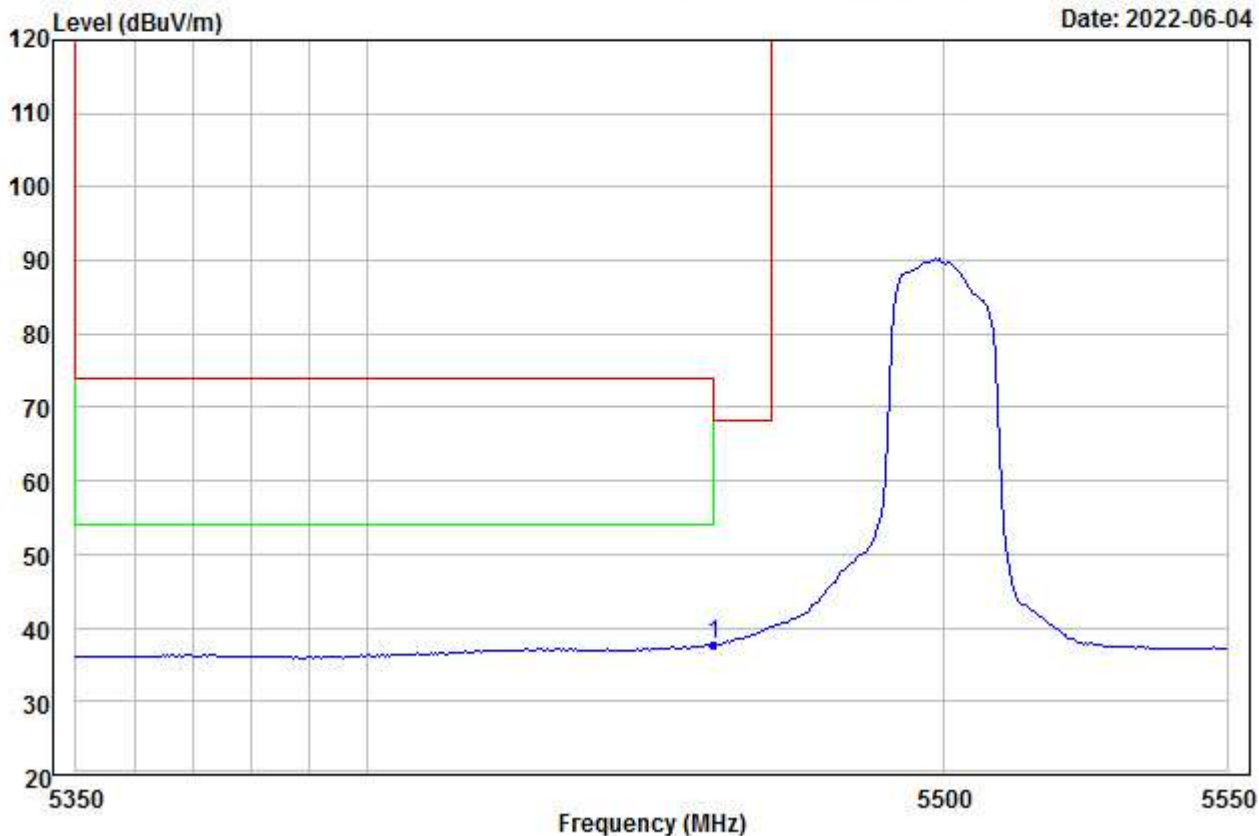


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT1\_5500  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5460.000	37.78	35.25	45.77	0.00	10.44	37.70	54.00	-16.30	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4\_00027.EMI

Date: 2022-06-04

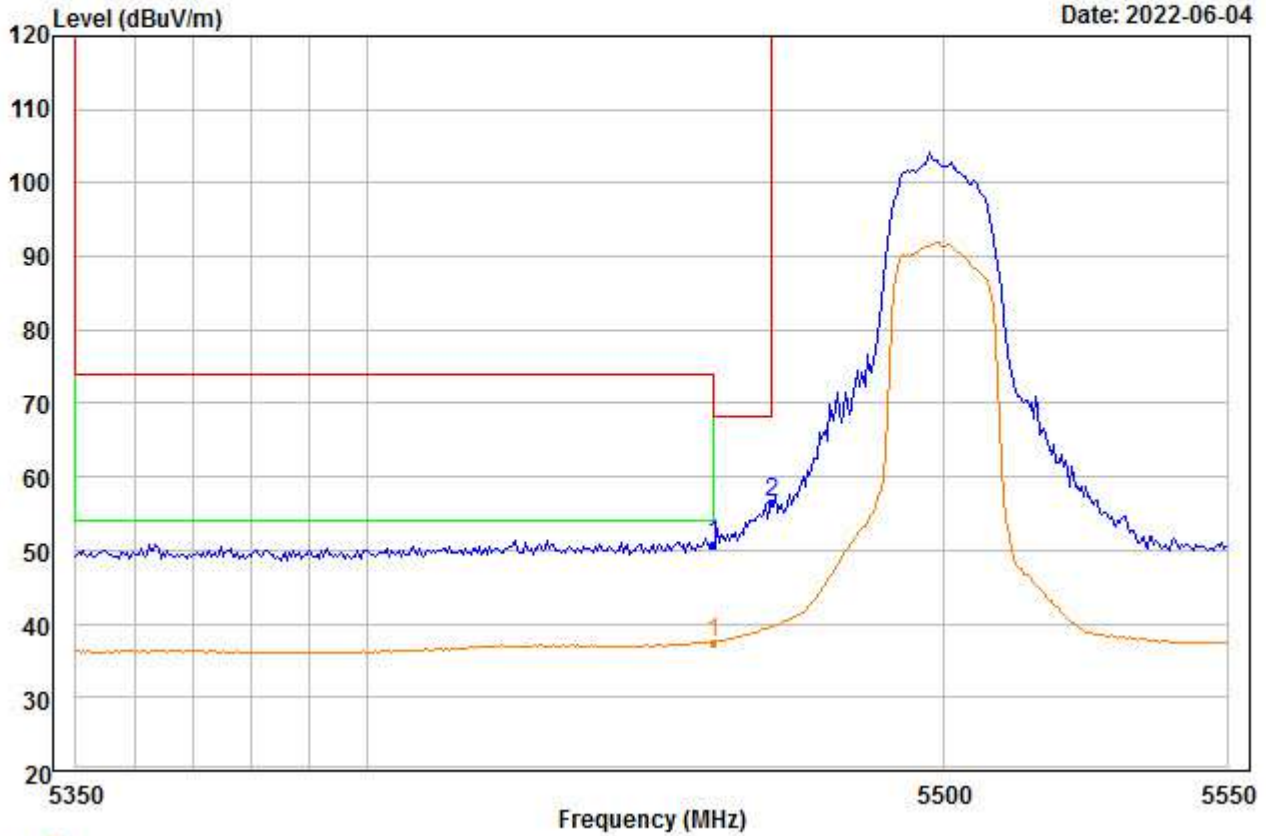


Trace: 1

Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT1\_5500  
 Remark :

	Read Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	5460.000	51.00	35.25	45.77	0.00	10.44	50.92	68.20	-17.28	---	---	Peak
2 PP	5470.000	56.53	35.26	45.75	0.00	10.47	56.51	68.20	-11.69	---	---	Peak

File: F:\Test Template\上海\ITS\2022\220523032 SA750\A\5G\BE\4\_00028.EMI

Date: 2022-06-04

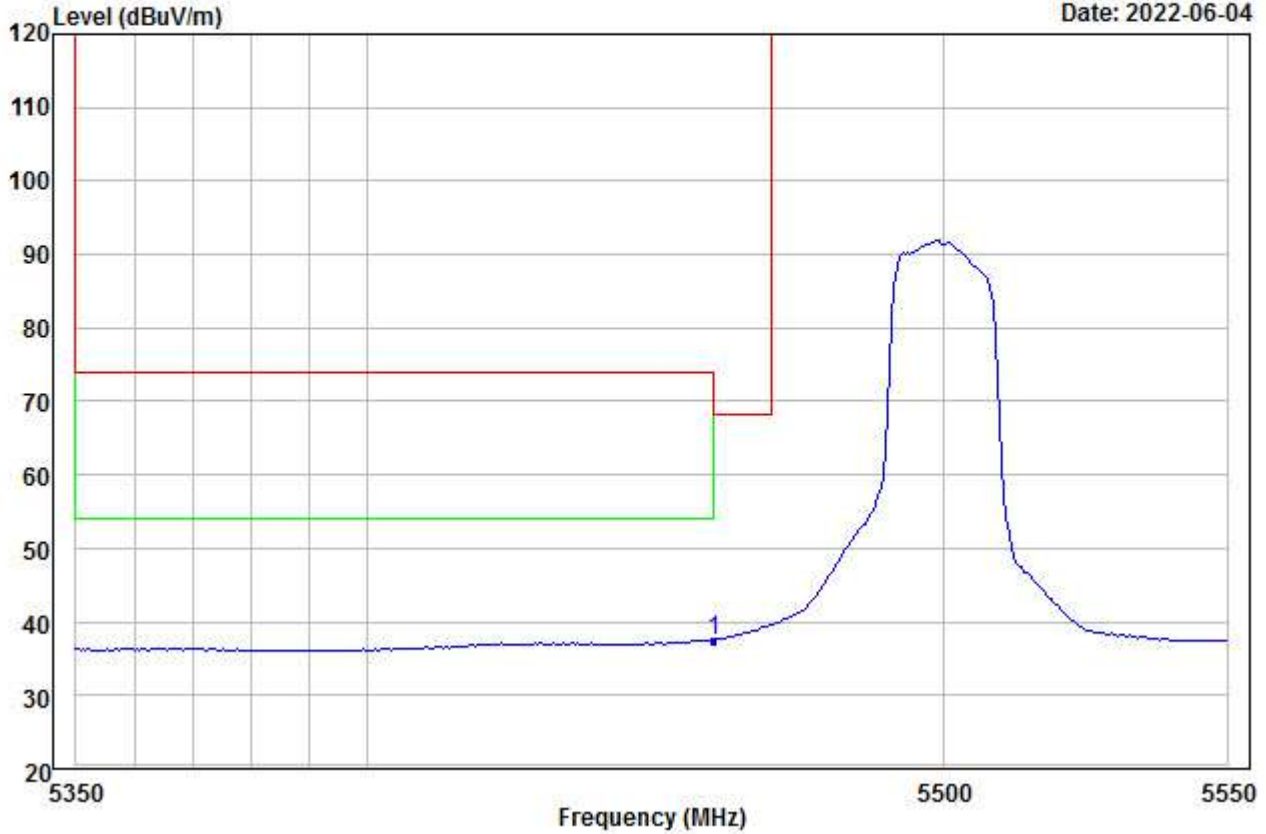


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT1\_5500  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5460.000	37.59	35.25	45.77	0.00	10.44	37.51	54.00	-16.49	---	---	Aver

File: F:\Test Template\上海\ITS\2022\220523032 SA750\A\5G\BE\4\_00029.EMI

Date: 2022-06-04

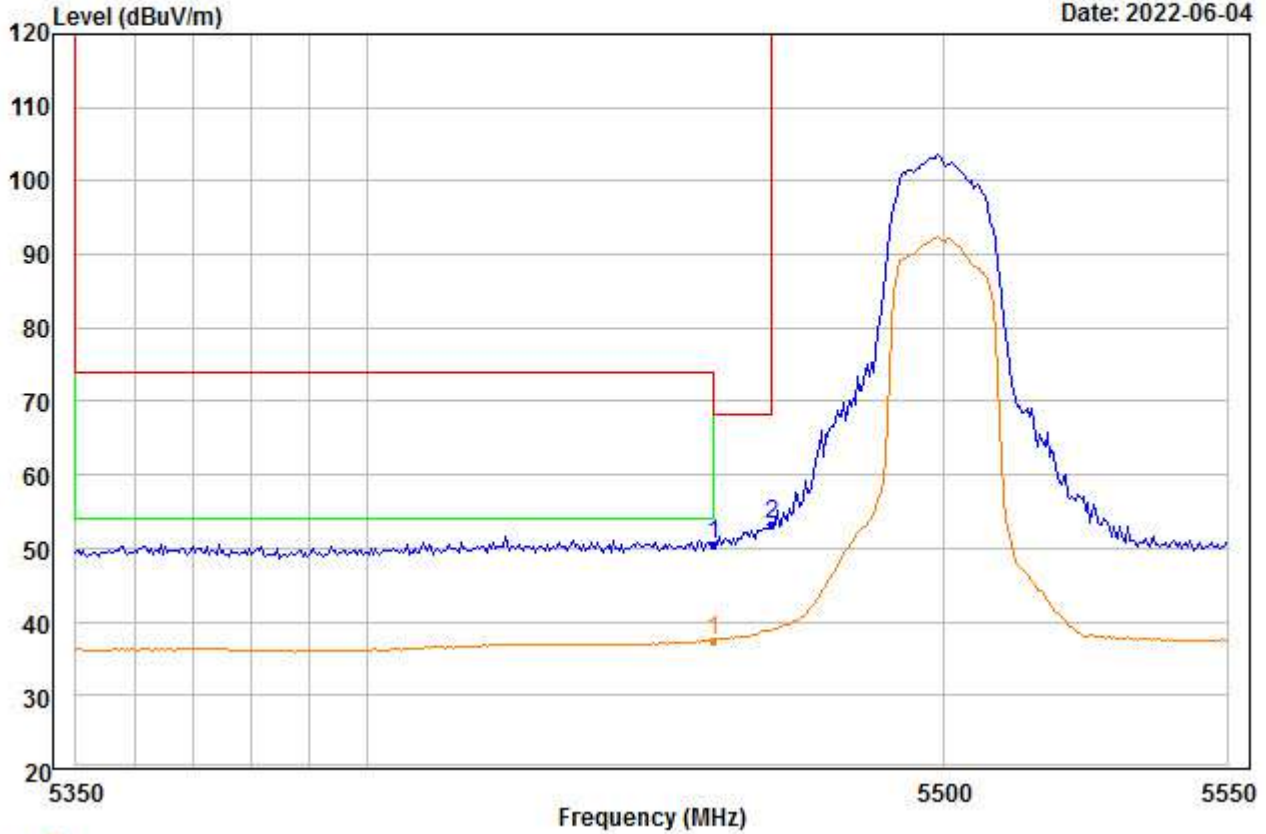


Trace: 1

Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT0\_5500  
 Remark :

	Read Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	5460.000	50.73	35.25	45.77	0.00	10.44	50.65	68.20	-17.55	---	---	Peak
2 PP	5470.000	53.38	35.26	45.75	0.00	10.47	53.36	68.20	-14.84	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4\_00030.EMI

Date: 2022-06-04

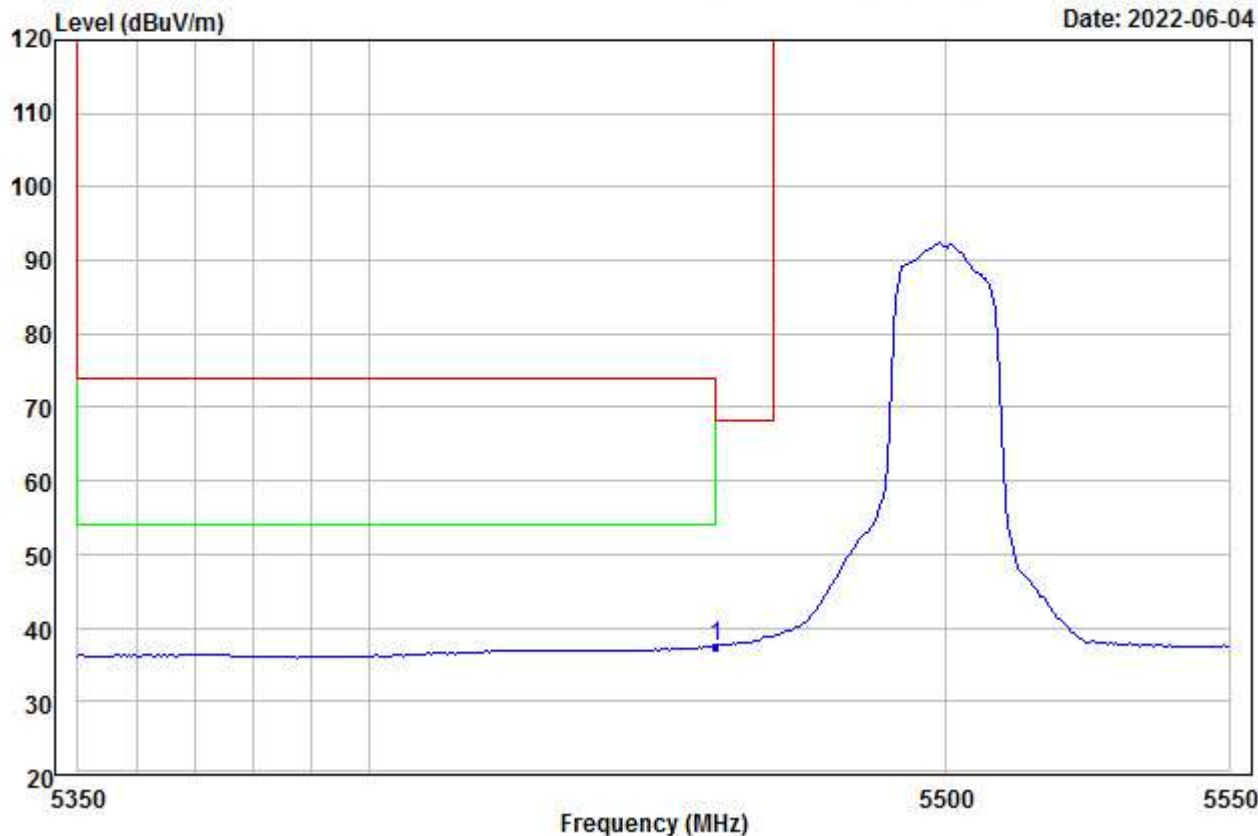


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT0\_5500  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5460.000	37.57	35.25	45.77	0.00	10.44	37.49	54.00	-16.51	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4\_00031.EMI

Date: 2022-06-04

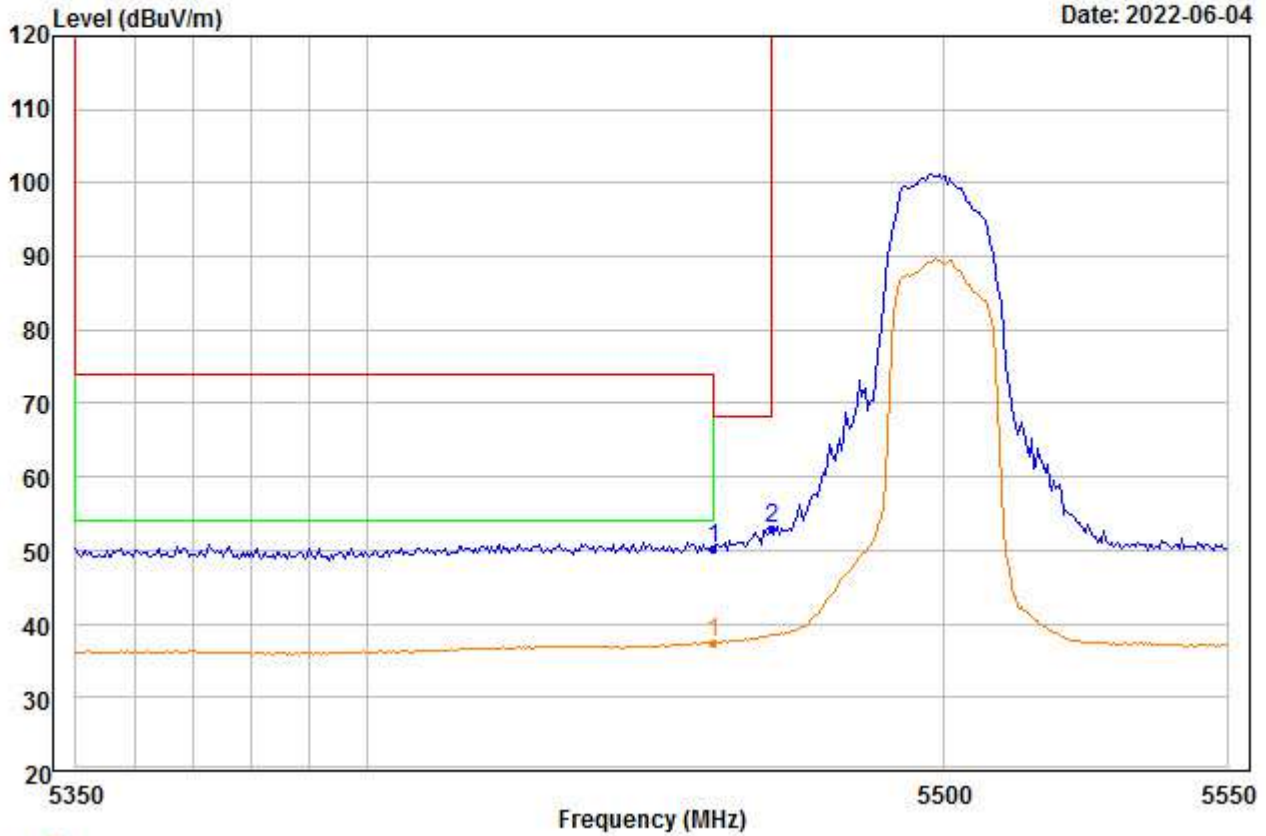


Trace: 1

Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT0\_5500  
 Remark :

	Read Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	5460.000	50.32	35.25	45.77	0.00	10.44	50.24	68.20	-17.96	---	---	Peak
2 PP	5470.000	52.92	35.26	45.75	0.00	10.47	52.90	68.20	-15.30	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4\_00032.EMI

Date: 2022-06-04

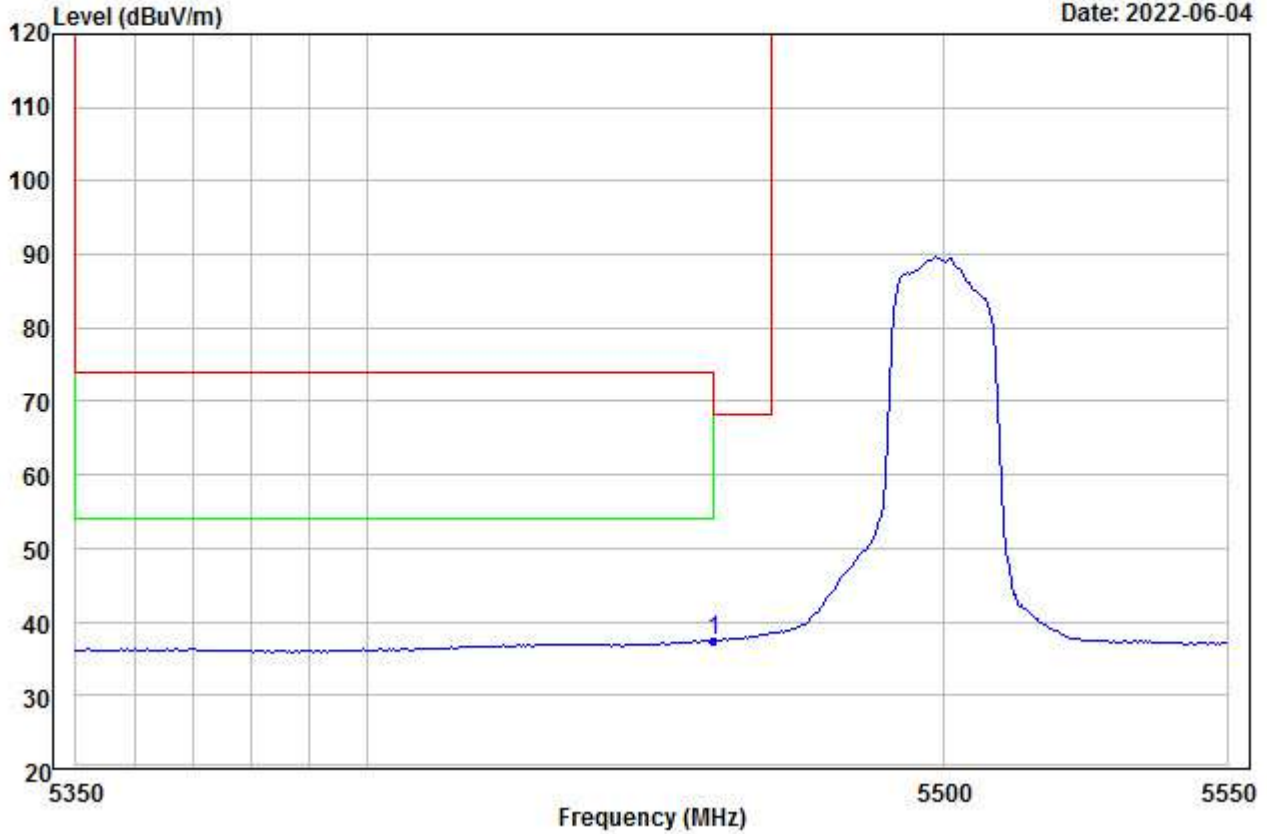


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT0\_5500  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5460.000	37.44	35.25	45.77	0.00	10.44	37.36	54.00	-16.64	---	---	Aver



File: F:\Test Template\上海\ITS\2022\220523032 SA750\A\5G\BE\4\_00033.EMI

Date: 2022-06-04

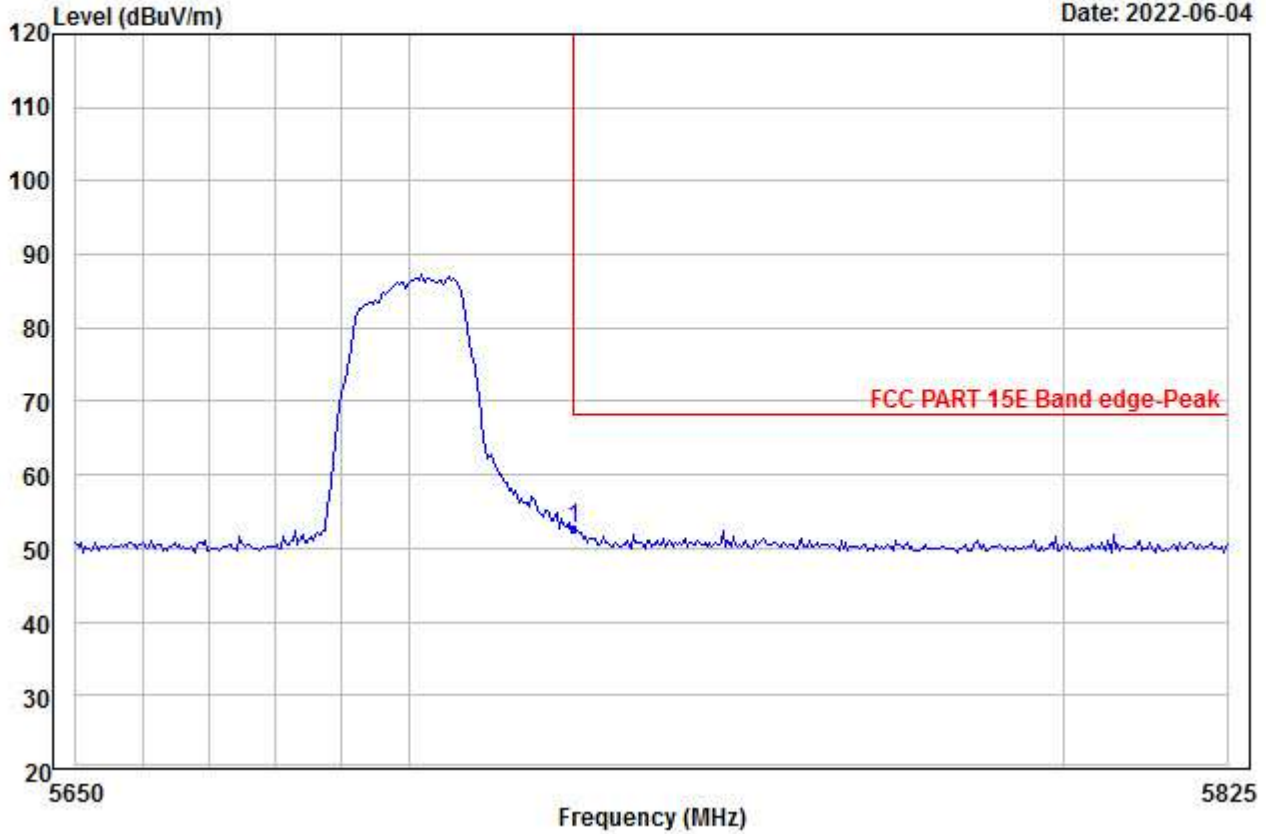


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT0\_5700  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5725.000	53.12	35.26	45.57	0.00	9.94	52.75	68.20	-15.45	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4\_00034.EMI

Date: 2022-06-04

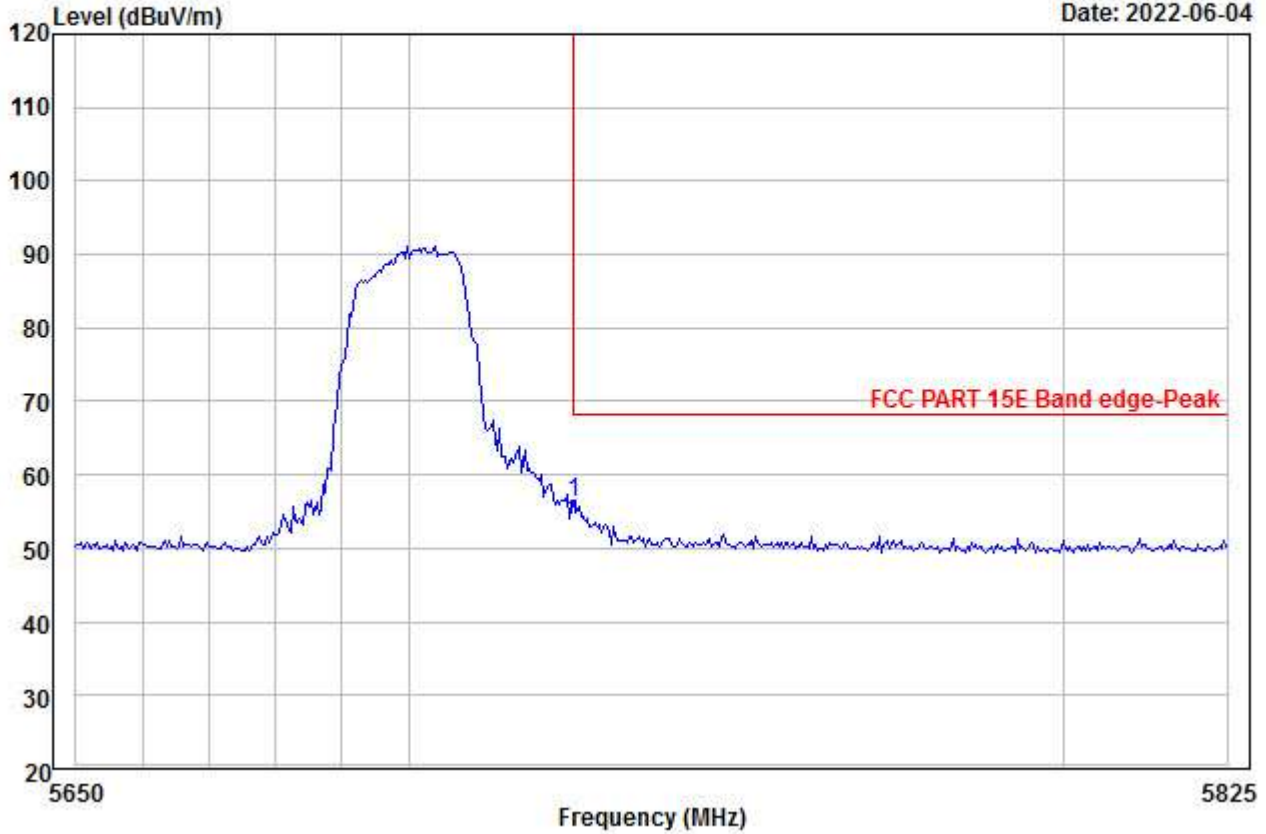


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT0\_5700  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5725.000	56.50	35.26	45.57	0.00	9.94	56.13	68.20	-12.07	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4\_00035.EMI

Date: 2022-06-04

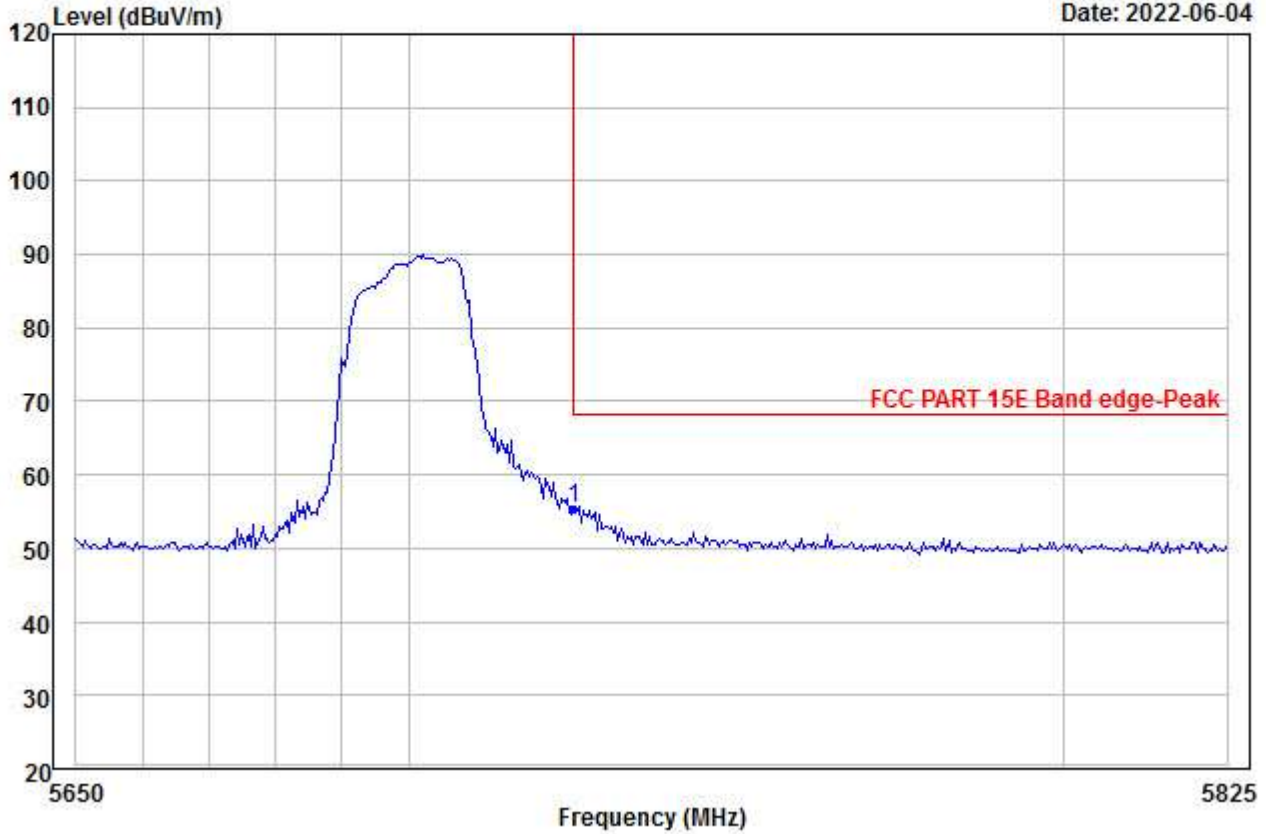


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT1\_5700  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Level	Line	Limit			
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5725.000	55.77	35.26	45.57	0.00	9.94	55.40	68.20	-12.80	---	---	Peak

File: F:\Test Template\上海\ITS\2022\220523032 SA750\A\5G\BE\4\_00036.EMI

Date: 2022-06-04

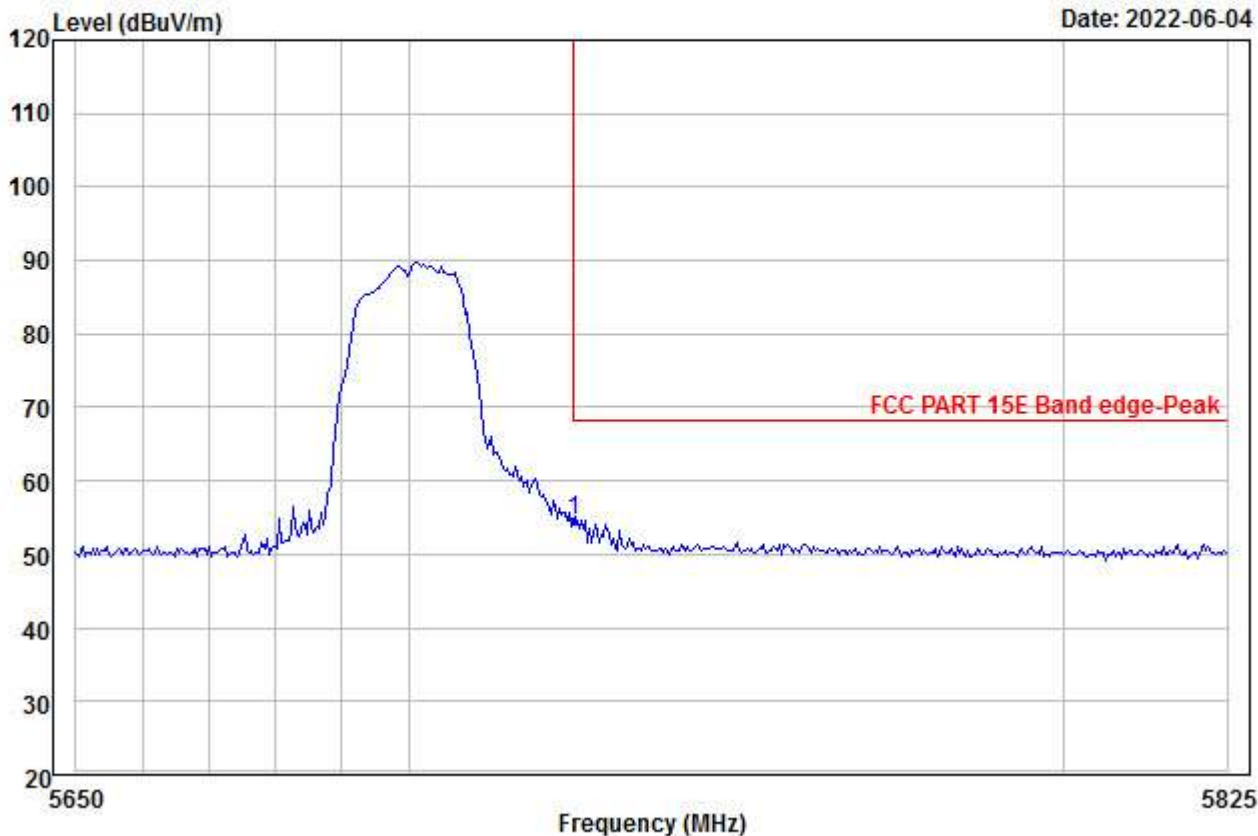


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT1\_5700  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5725.000	54.97	35.26	45.57	0.00	9.94	54.60	68.20	-13.60	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4\_00037.EMI

Date: 2022-06-04

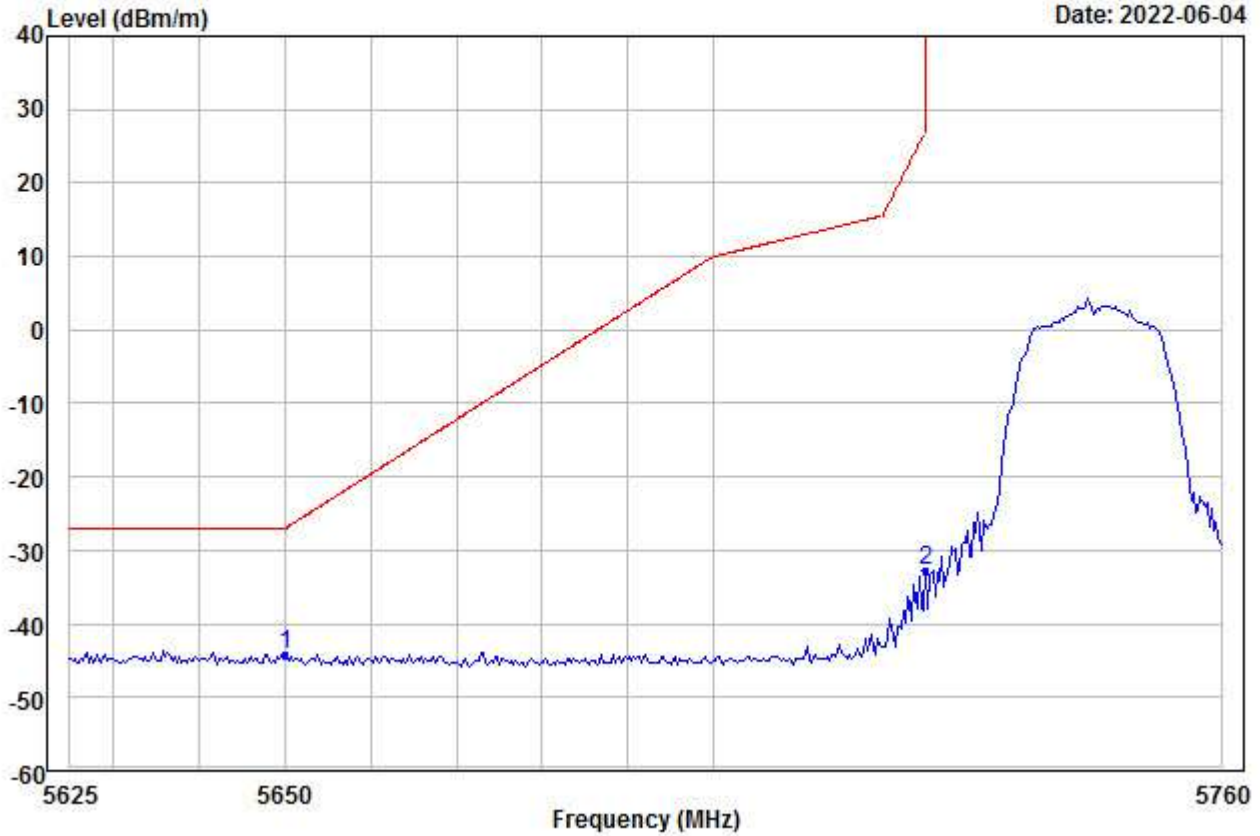


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT1\_5745  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBm	dB/m	dB	dB	dB	dBm/m	dBm/m	dB	cm	deg	
1 PP 5650.000	-55.66	35.27	45.61	0.00	21.88	-44.12	-27.00	-17.12	---	---	Peak
2 5725.000	-44.22	35.26	45.57	0.00	21.68	-32.85	27.00	-59.85	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4\_00038.EMI

Date: 2022-06-04

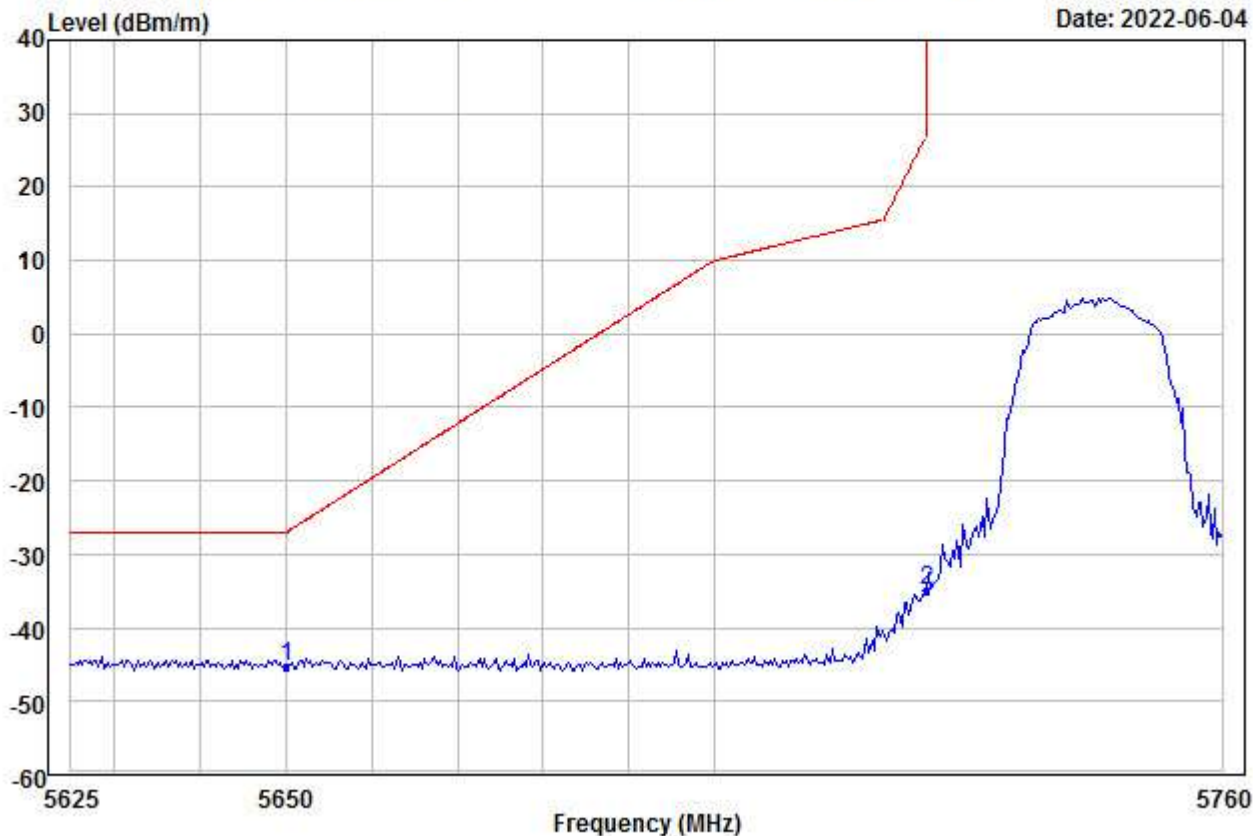


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT1\_5745  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBm	dB/m	dB	dB	dB	dBm/m	dBm/m	dB	cm	deg	
1 PP 5650.000	-56.73	35.27	45.61	0.00	21.88	-45.19	-27.00	-18.19	---	---	Peak
2 5725.000	-46.35	35.26	45.57	0.00	21.68	-34.98	27.00	-61.98	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4\_00039.EMI

Date: 2022-06-04

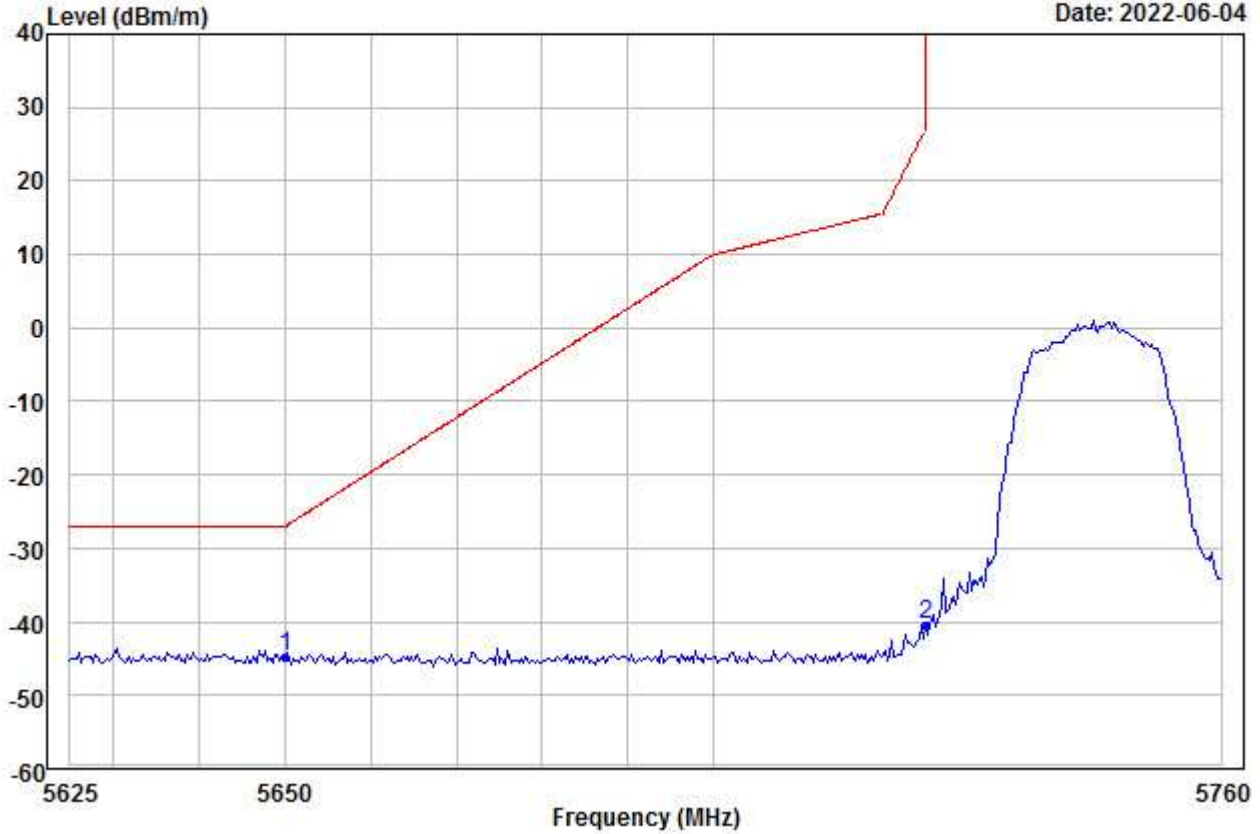


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT0\_5745  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Level	Limit				
MHz	dBm	dB/m	dB	dB	dB	dBm/m	dBm/m	dB	cm	deg	
1 PP 5650.000	-56.41	35.27	45.61	0.00	21.88	-44.87	-27.00	-17.87	---	---	Peak
2 5725.000	-51.77	35.26	45.57	0.00	21.68	-40.40	27.00	-67.40	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4\_00040.EMI

Date: 2022-06-04

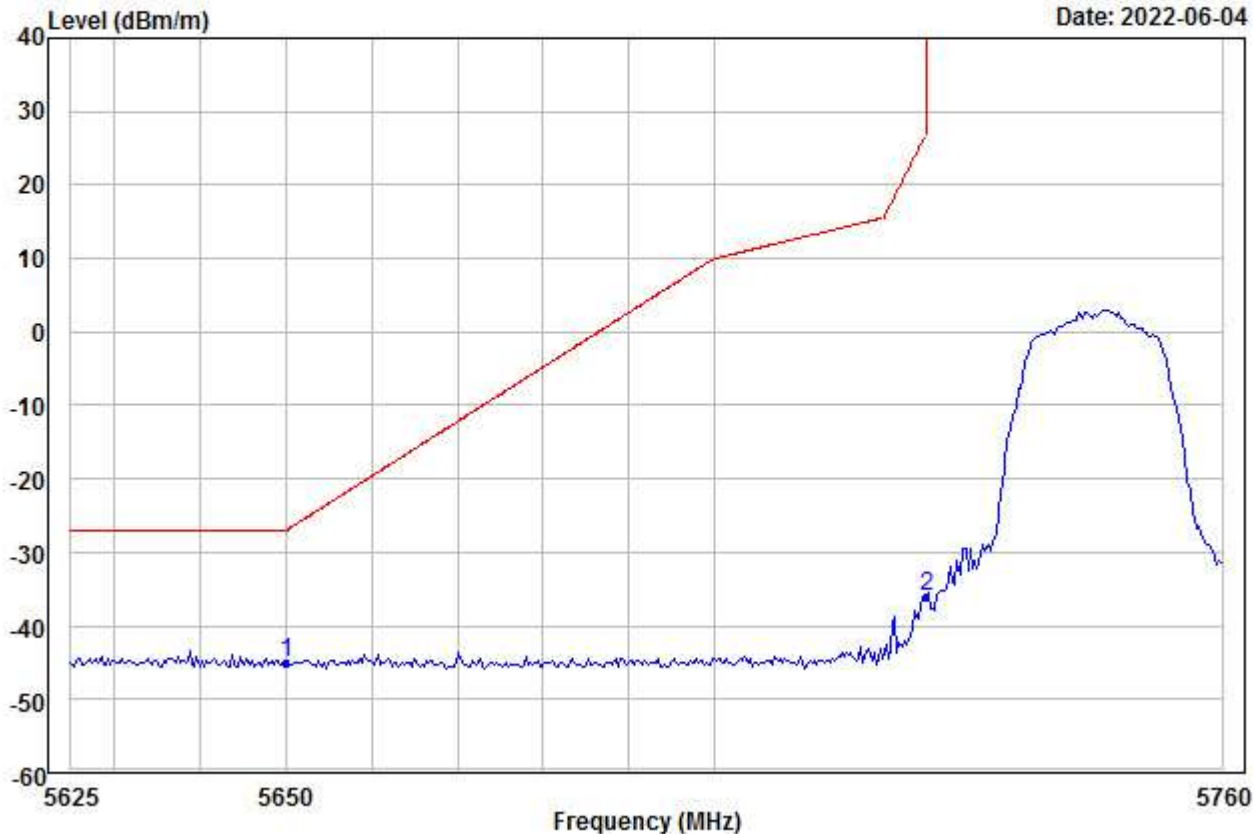


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT0\_5745  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBm	dB/m	dB	dB	dB	dBm/m	dBm/m	dB	cm	deg	
1 PP 5650.000	-56.66	35.27	45.61	0.00	21.88	-45.12	-27.00	-18.12	---	---	Peak
2 5725.000	-47.48	35.26	45.57	0.00	21.68	-36.11	27.00	-63.11	---	---	Peak



File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4\_00041.EMI

Date: 2022-06-04

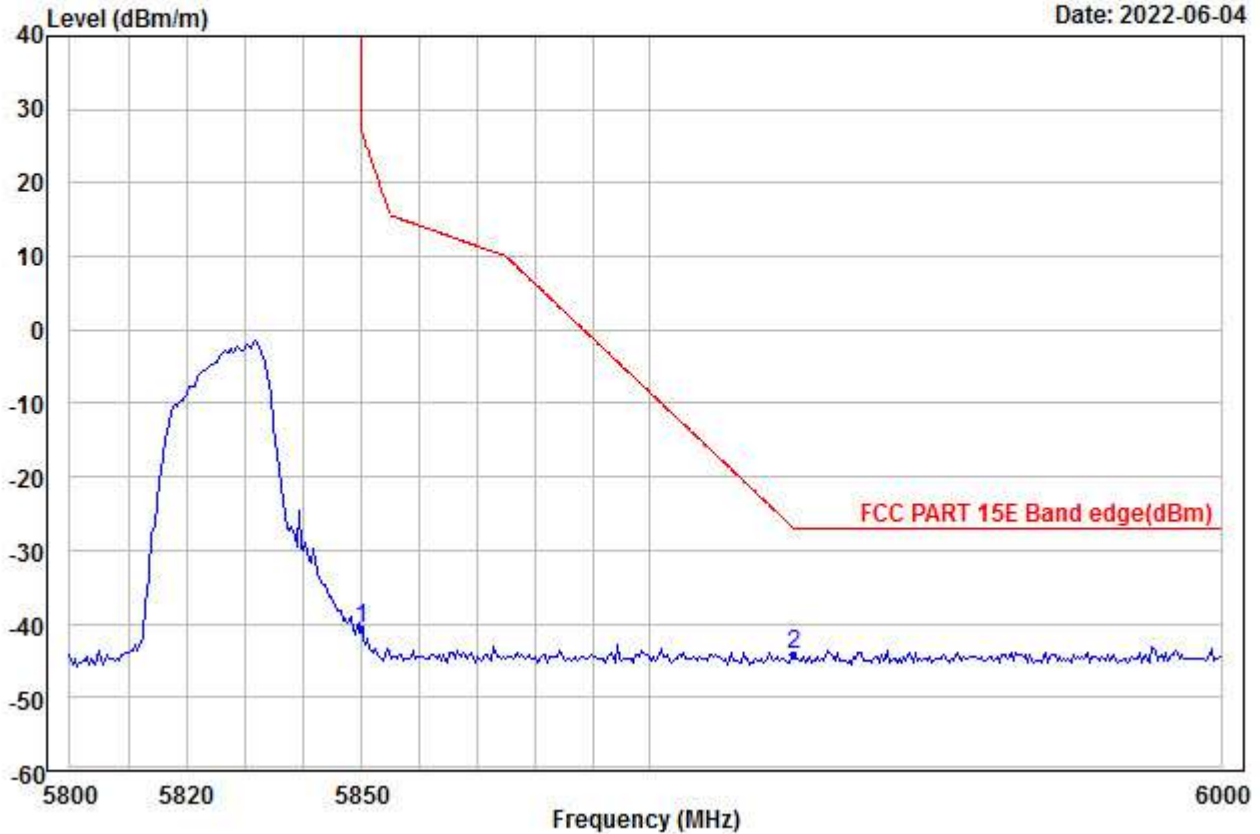


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT0\_5825  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:		
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit					
MHz	dBm	dB/m	dB	dB	dB	dBm/m	dBm/m	dB	cm	deg		
1	5850.000	-51.98	35.23	45.49	0.00	21.47	-40.77	27.00	-67.77	---	---	Peak
2 PP	5925.000	-55.44	35.22	45.44	0.00	21.44	-44.22	-27.00	-17.22	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4\_00042.EMI

Date: 2022-06-04

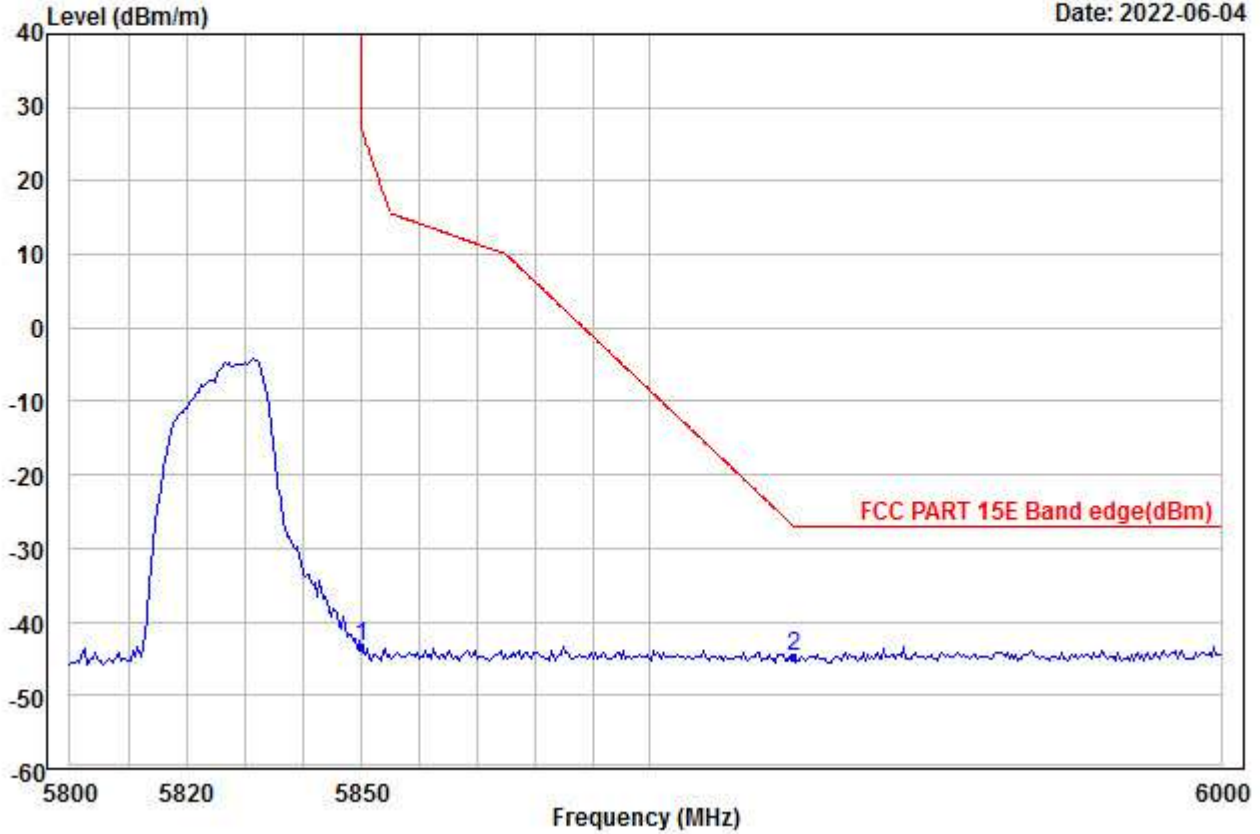


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT0\_5825  
 Remark :

	Read Freq	Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBm	dB/m	dB	dB	dB	dBm/m	dBm/m	dB	cm	deg	
1	5850.000	-54.49	35.23	45.49	0.00	21.47	-43.28	27.00	-70.28	---	---	Peak
2 PP	5925.000	-56.01	35.22	45.44	0.00	21.44	-44.79	-27.00	-17.79	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4\_00043.EMI

Date: 2022-06-04

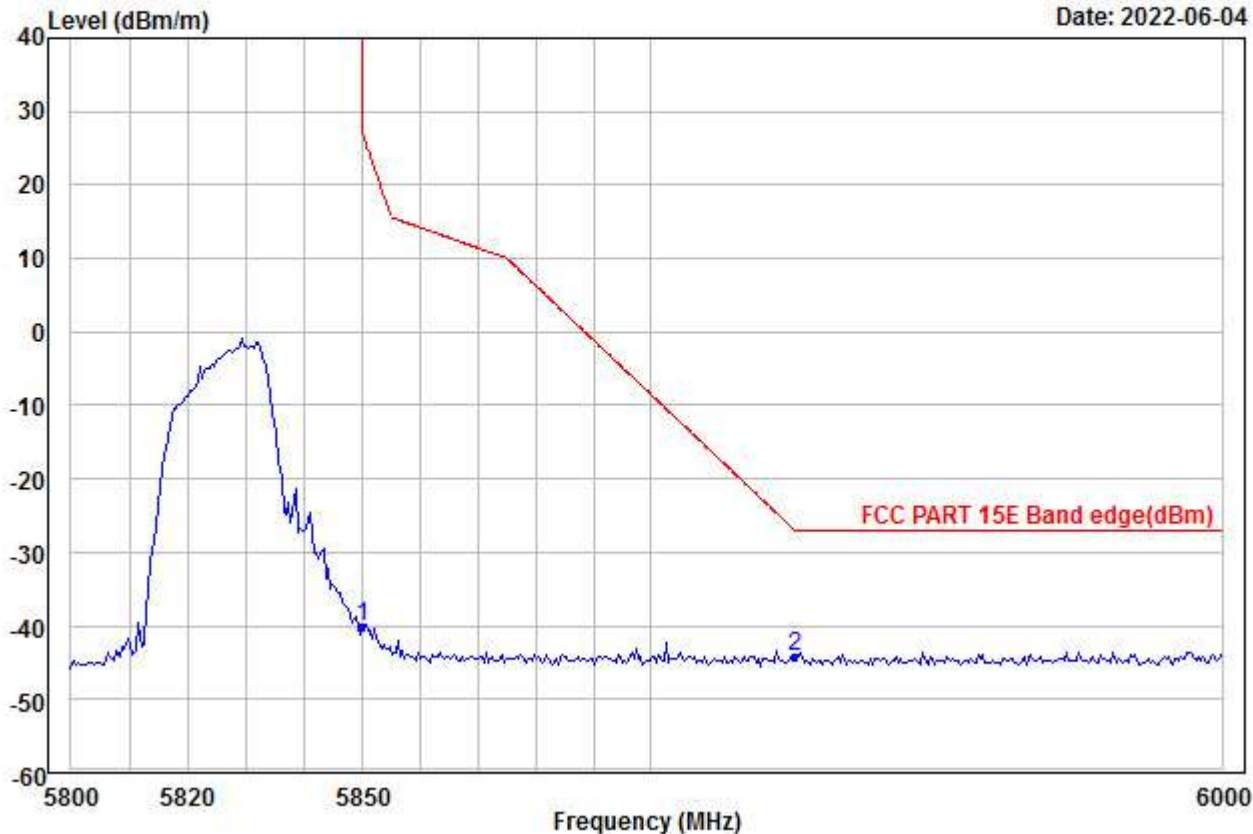


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT1\_5825  
 Remark :

	Read Freq	Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBm	dB/m	dB	dB	dB	dBm/m	dBm/m	dB	cm	deg	
1	5850.000	-51.31	35.23	45.49	0.00	21.47	-40.10	27.00	-67.10	---	---	Peak
2 PP	5925.000	-55.29	35.22	45.44	0.00	21.44	-44.07	-27.00	-17.07	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4\_00044.EMI

Date: 2022-06-04

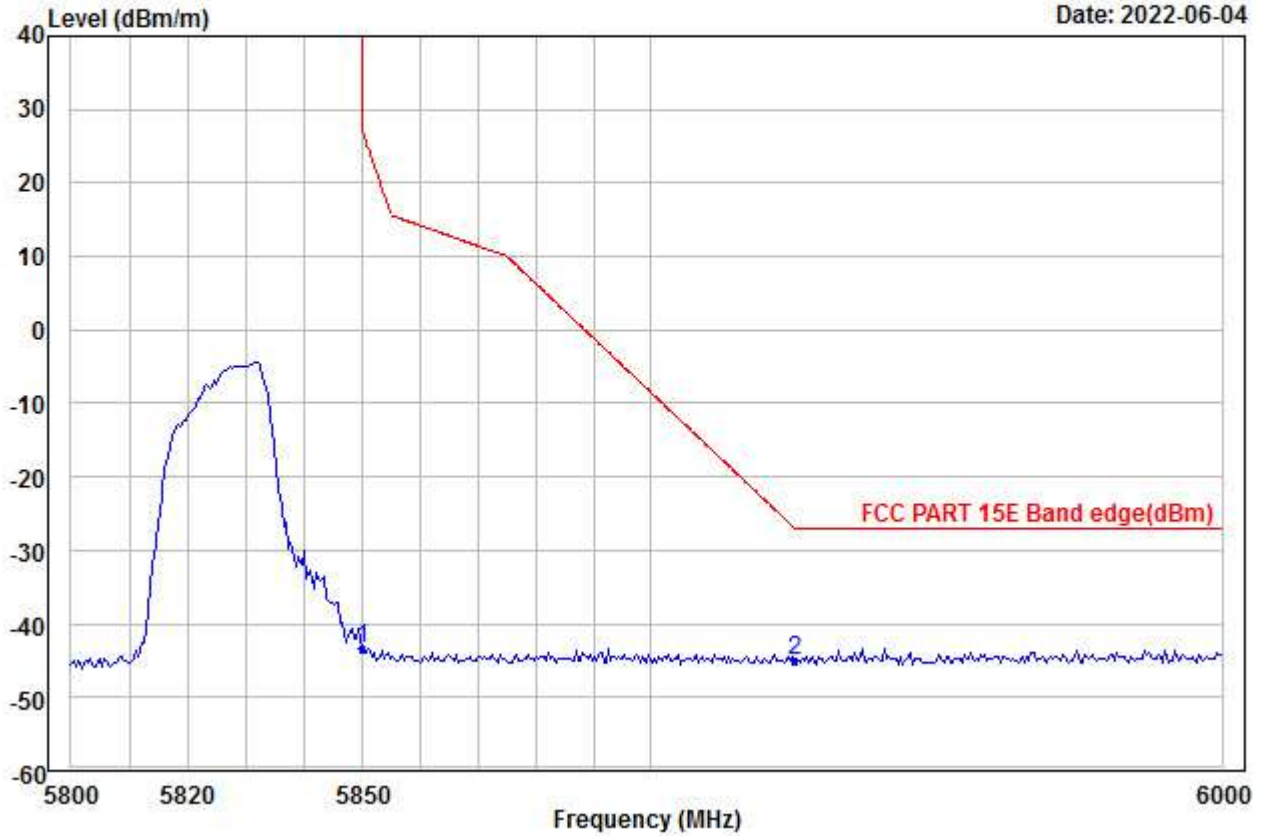


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT1\_5825  
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBm	dB/m	dB	dB	dB	dBm/m	dBm/m	dB	cm	deg	
1	5850.000	-54.70	35.23	45.49	0.00	21.47	-43.49	27.00	-70.49	---	---	Peak
2 PP	5925.000	-56.22	35.22	45.44	0.00	21.44	-45.00	-27.00	-18.00	---	---	Peak

File: F:\Test Template\上海ITSI\2022\220523032 SA750\A\5G\BE\4\_00045.EMI

Date: 2022-06-04

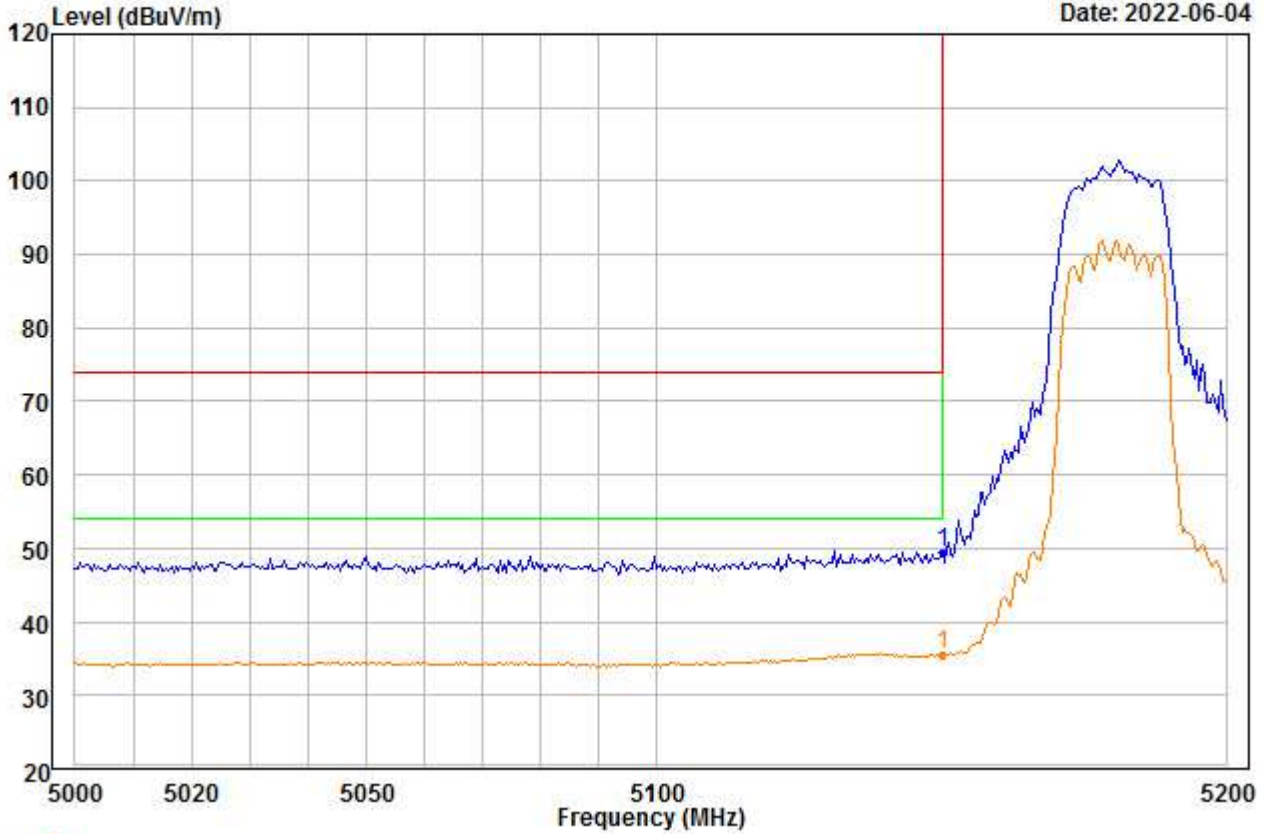


Trace: 1

Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : N20\_ANT0+1\_5180  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5150.000	50.97	34.88	46.33	0.00	9.78	49.30	74.00	-24.70	---	---	Peak

File: F:\Test Template\上海ITSI\2022\220523032 SA750\A\5G\BE\4\_00046.EMI

Date: 2022-06-04

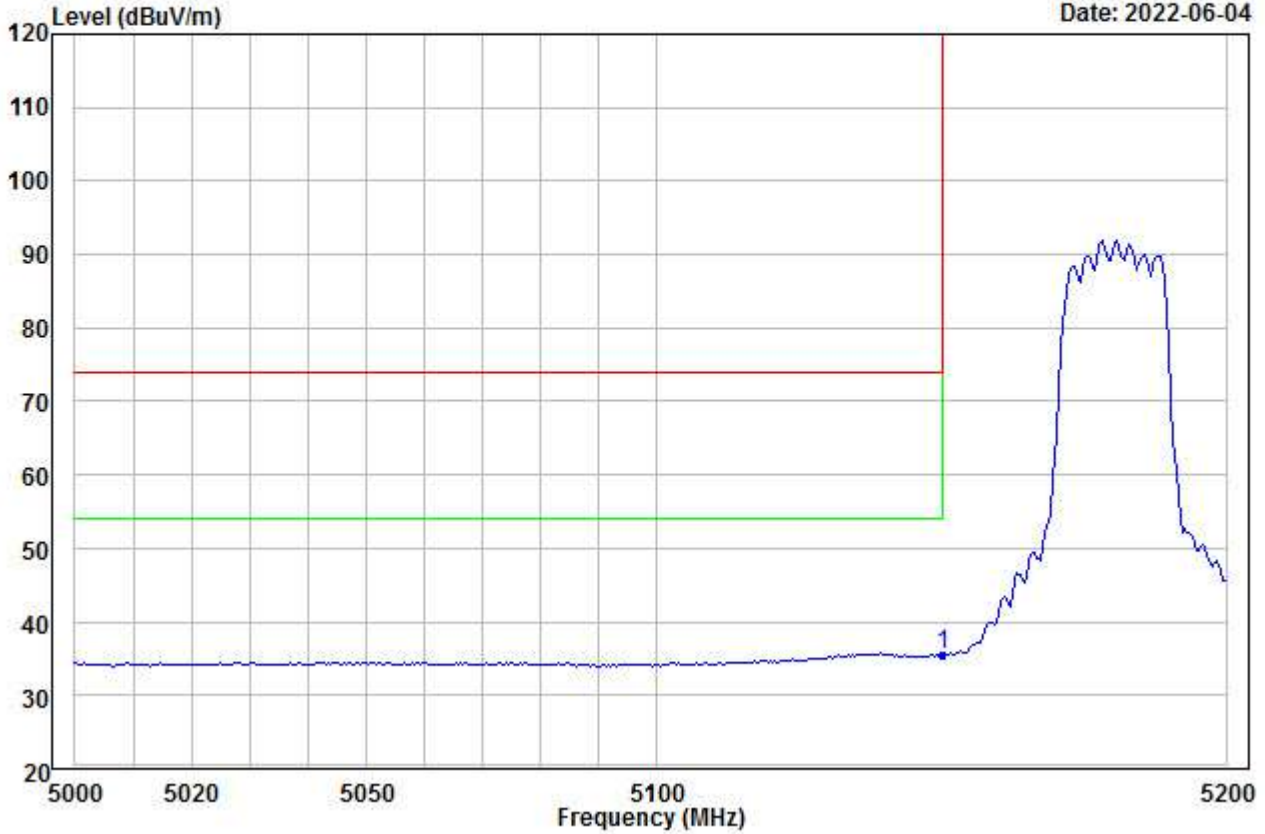


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : N20\_ANT0+1\_5180  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5150.000	37.11	34.88	46.33	0.00	9.78	35.44	54.00	-18.56	---	---	Aver

File: F:\Test Template\上海ITSI\2022\220523032 SA750\A\5G\BE\4\_00047.EMI

Date: 2022-06-04

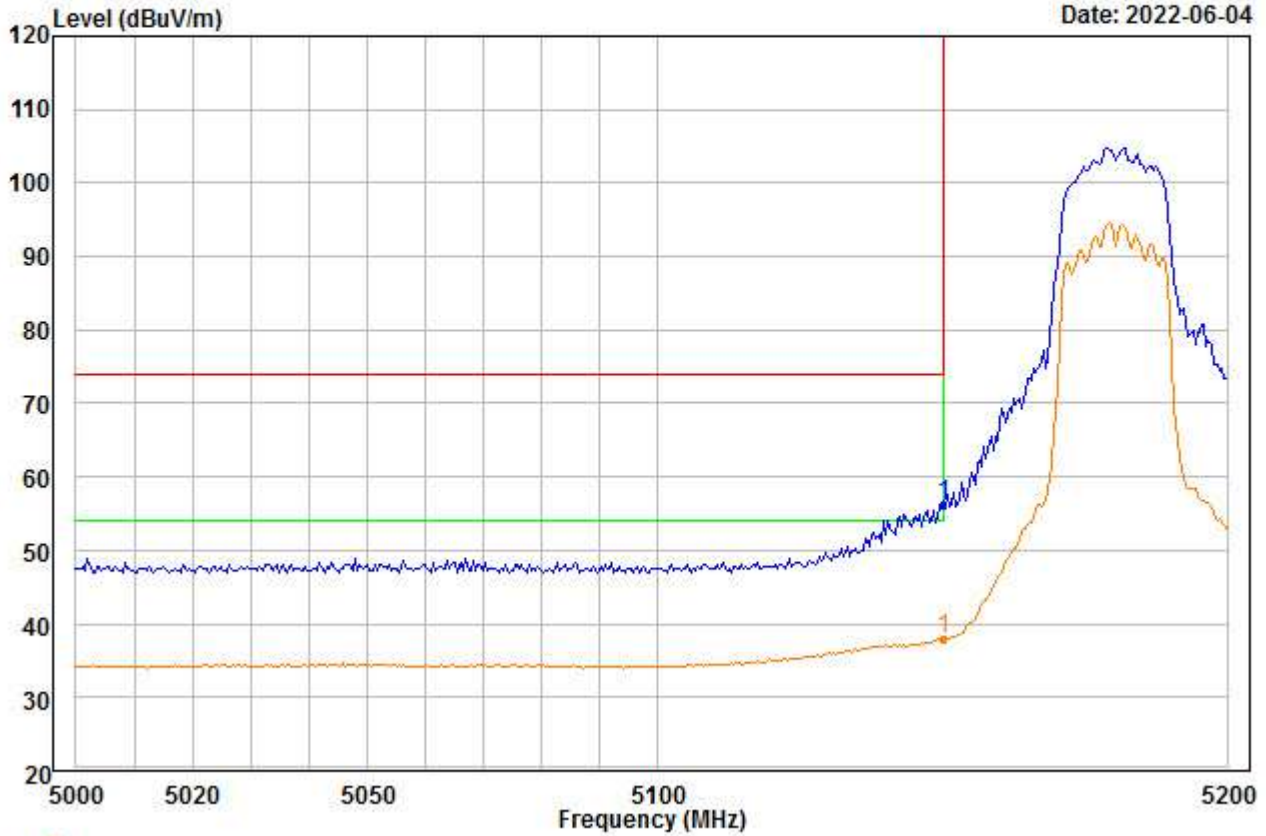


Trace: 1

Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : N20\_ANT0+1\_5180  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5150.000	58.01	34.88	46.33	0.00	9.78	56.34	74.00	-17.66	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4\_00048.EMI

Date: 2022-06-04

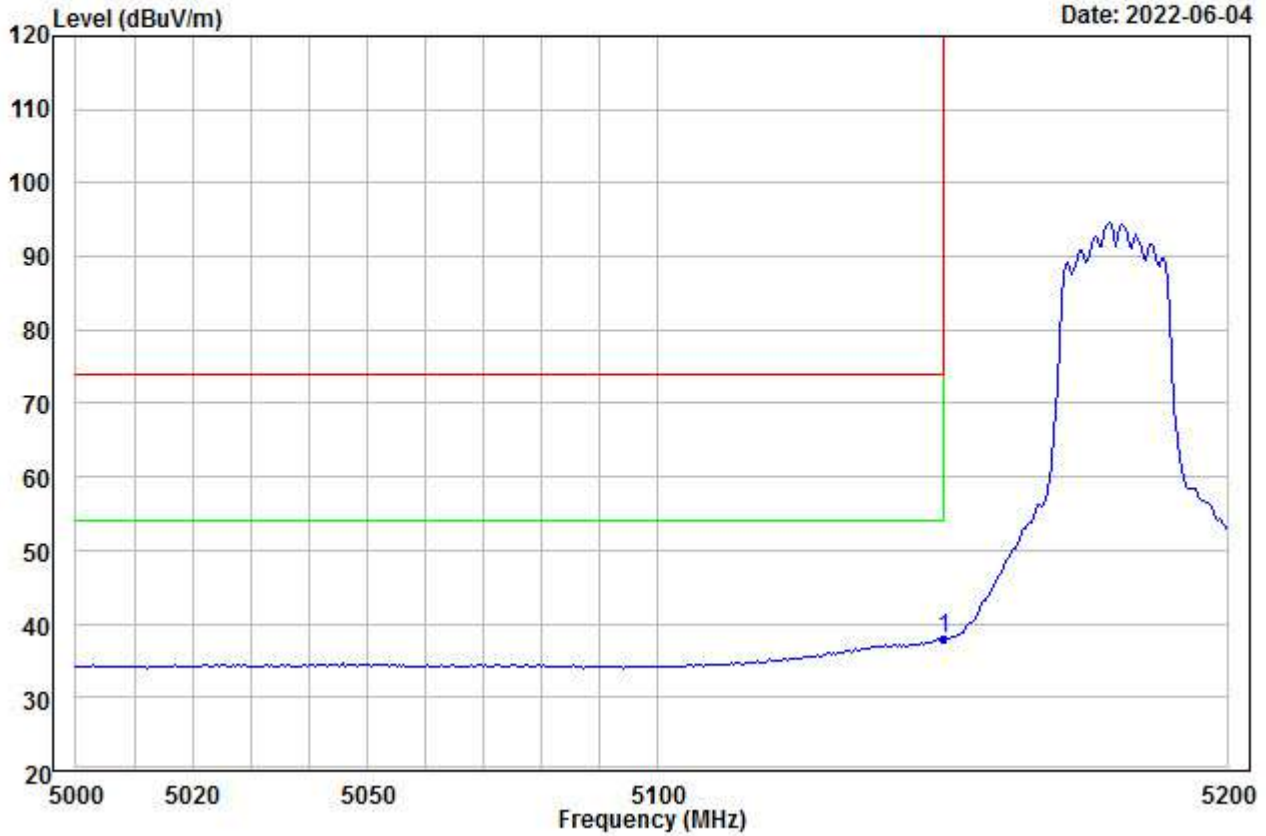


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : N20\_ANT0+1\_5180  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5150.000	39.54	34.88	46.33	0.00	9.78	37.87	54.00	-16.13	---	---	Aver



File: F:\Test Template\上海\ITS\2022\220523032 SA750\A\5G\BE\4\_00049.EMI

Date: 2022-06-04

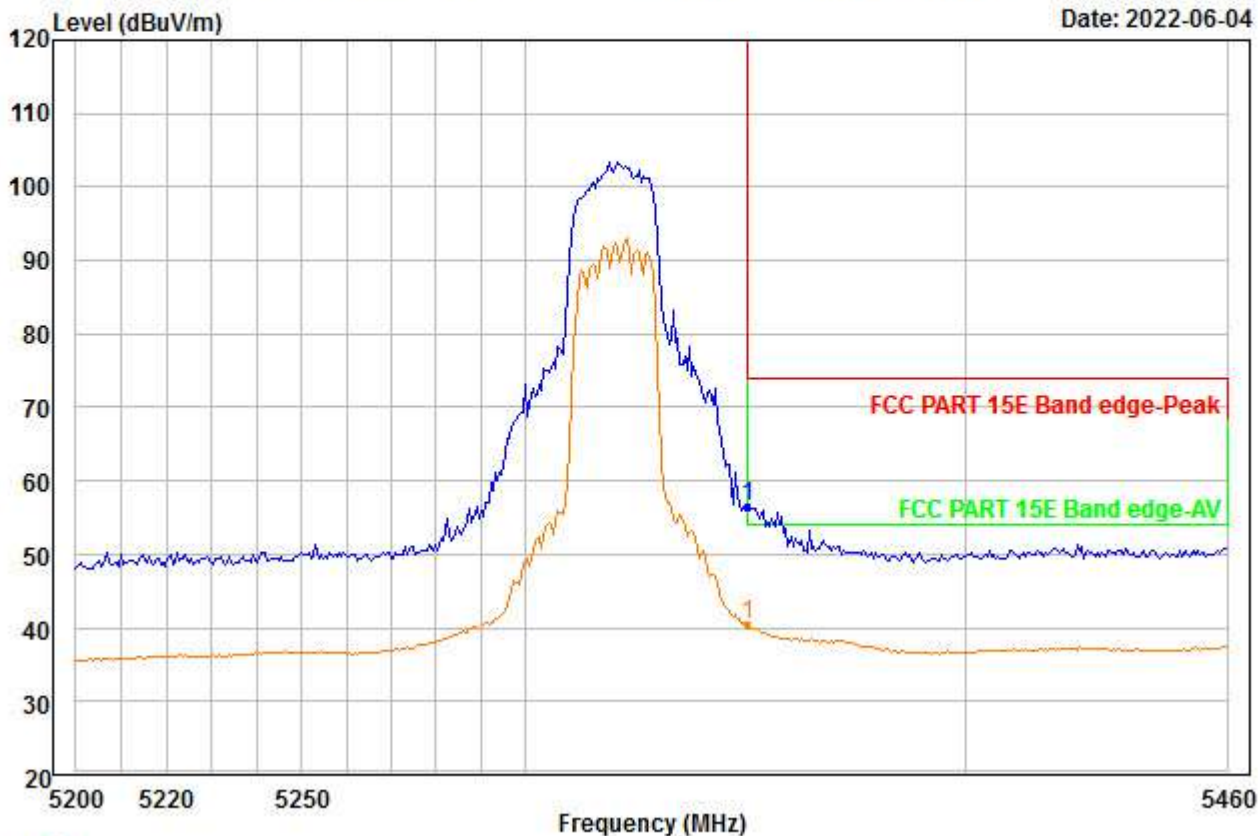


Trace: 1

Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : N20\_ANT0+1\_5320  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5350.000	57.08	35.12	45.97	0.00	10.18	56.41	74.00	-17.59	---	---	Peak

File: F:\Test Template\上海\ITS\2022\220523032 SA750\A\5G\BE\4\_00050.EMI

Date: 2022-06-04

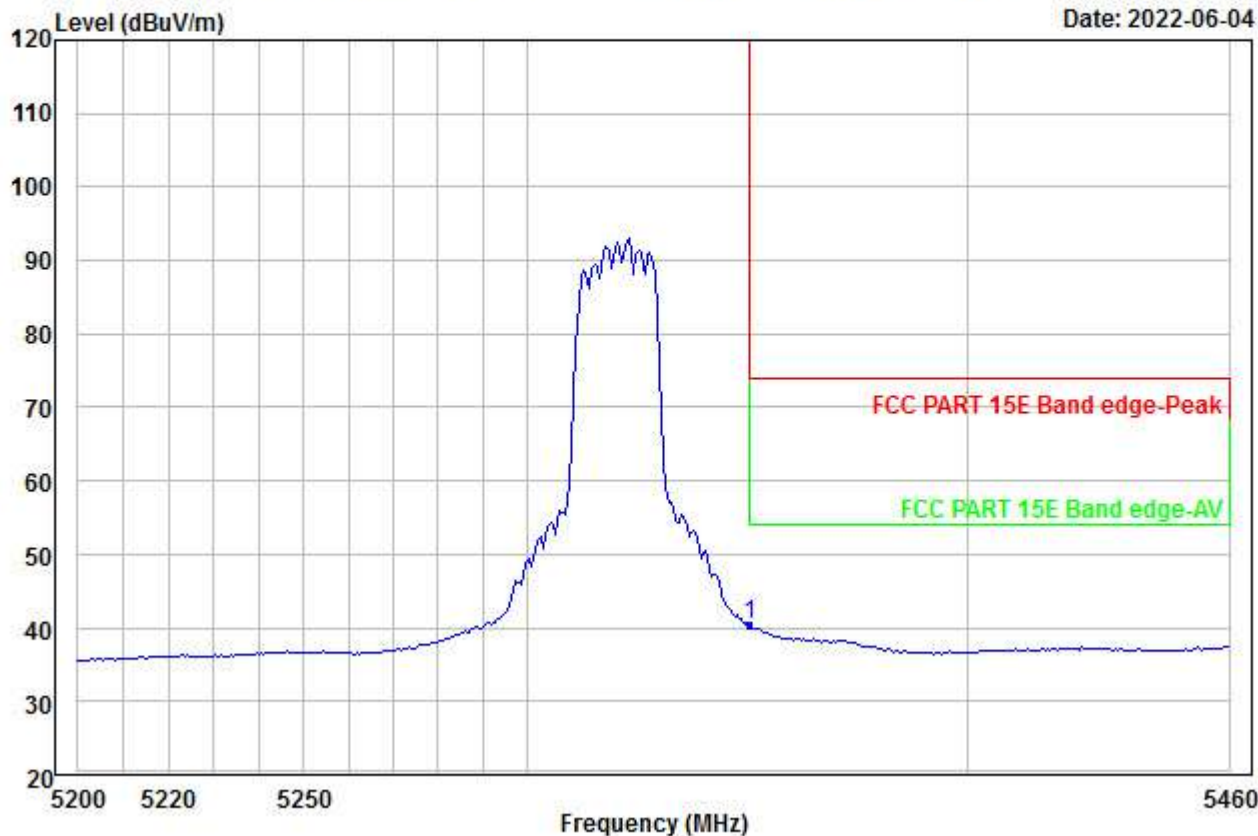


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : N20\_ANT0+1\_5320  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5350.000	41.18	35.12	45.97	0.00	10.18	40.51	54.00	-13.49	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4\_00051.EMI

Date: 2022-06-04

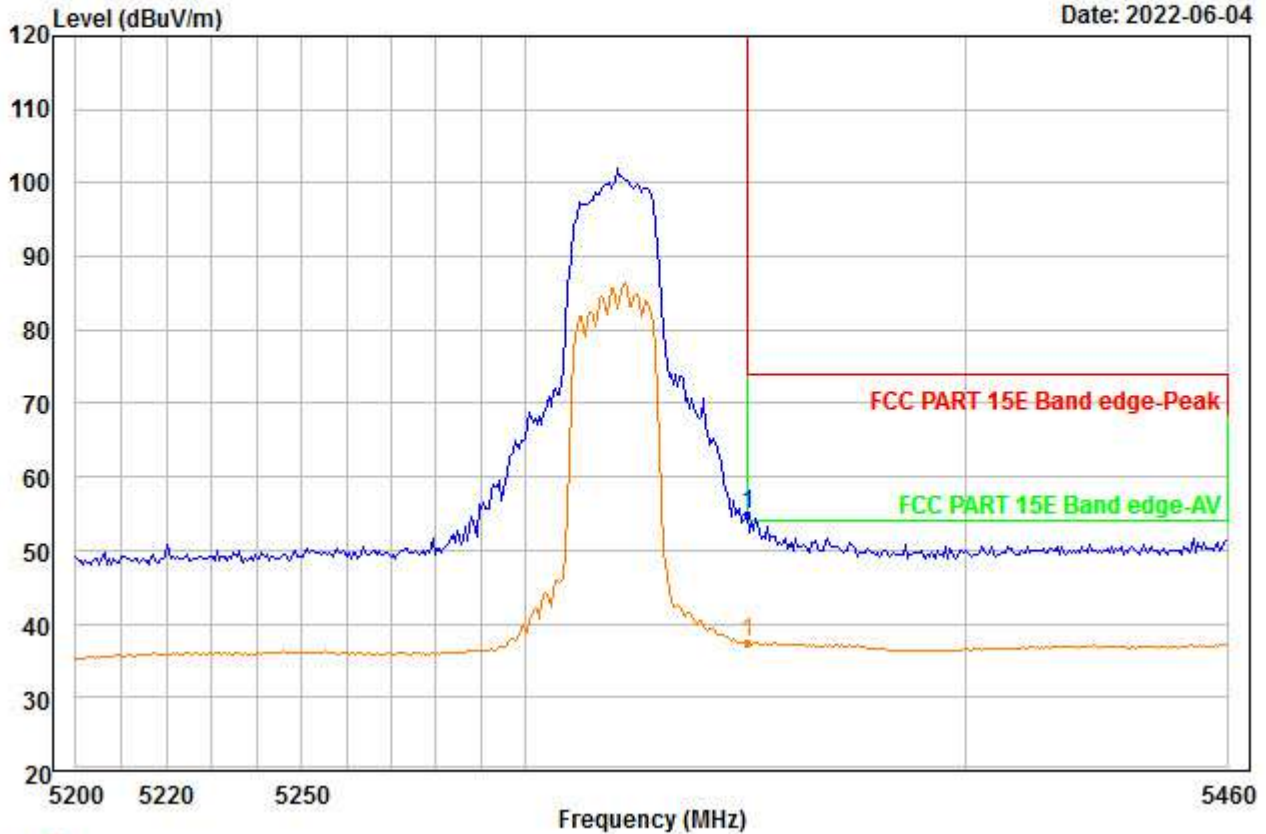


Trace: 1

Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : N20\_ANT0+1\_5320  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5350.000	55.47	35.12	45.97	0.00	10.18	54.80	74.00	-19.20	---	---	Peak

File: F:\Test Template\上海\ITS\2022\220523032 SA750\A\5G\BE\4\_00052.EMI

Date: 2022-06-04

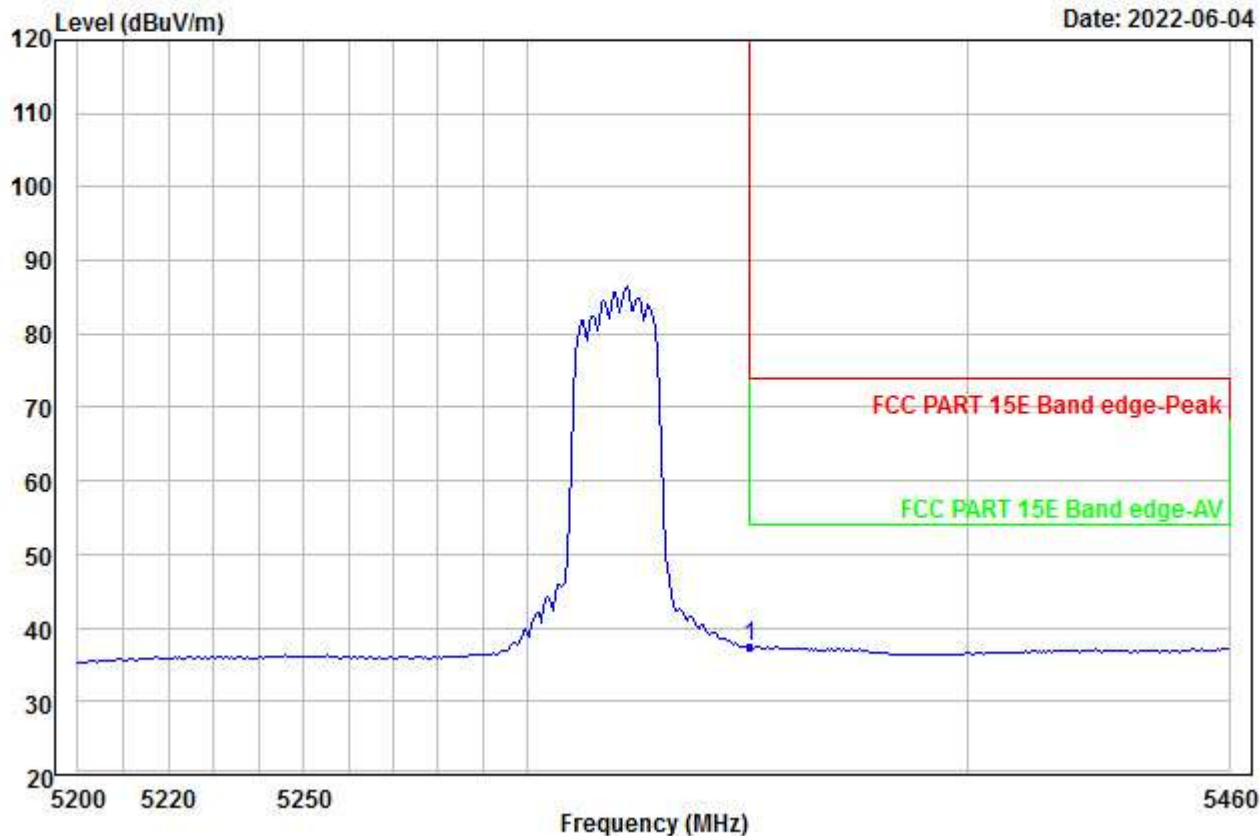


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : N20\_ANT0+1\_5320  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5350.000	38.06	35.12	45.97	0.00	10.18	37.39	54.00	-16.61	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4\_00053.EMI

Date: 2022-06-04

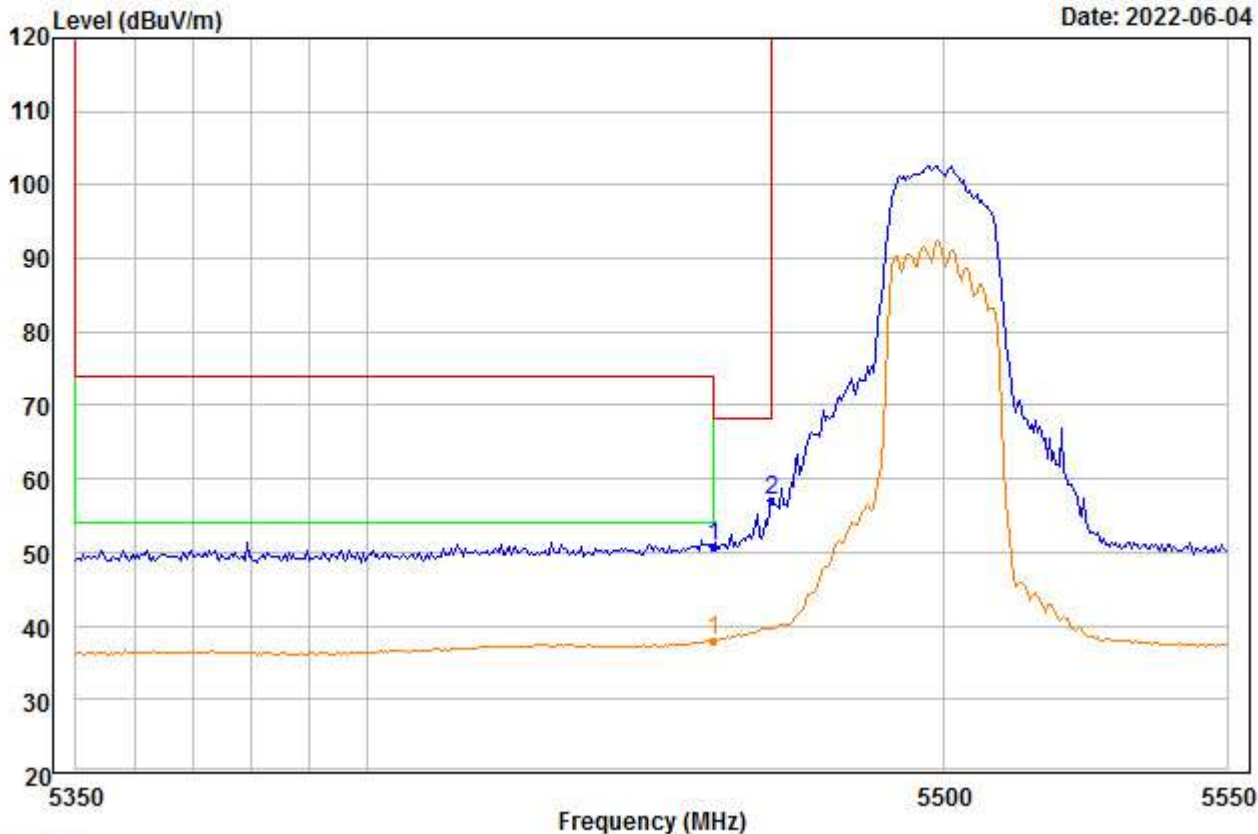


Trace: 1  
 Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : N20\_ANT0+1\_5500  
 Remark :

	Read Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Limit Level	Over Limit	APos	TPos	Remarks	
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	5460.000	50.77	35.25	45.77	0.00	10.44	50.69	68.20	-17.51	---	---	Peak
2 PP	5470.000	57.06	35.26	45.75	0.00	10.47	57.04	68.20	-11.16	---	---	Peak

File: F:\Test Template\上海ITSI\2022\220523032 SA750\A\5G\BE\4\_00054.EMI

Date: 2022-06-04

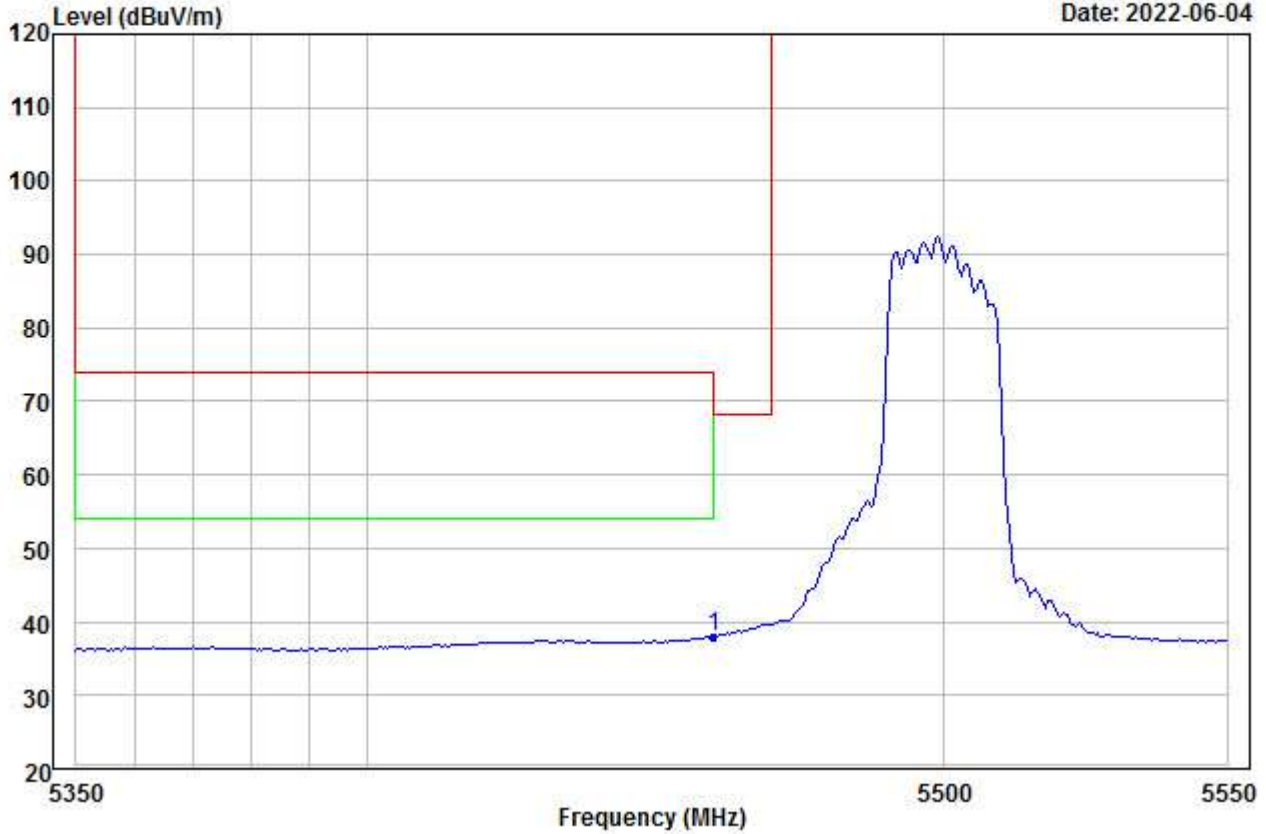


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : N20\_ANT0+1\_5500  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5460.000	37.95	35.25	45.77	0.00	10.44	37.87	54.00	-16.13	---	---	Aver

File: F:\Test Template\上海ITSI\2022\220523032 SA750\A\5G\BE\4\_00055.EMI

Date: 2022-06-04

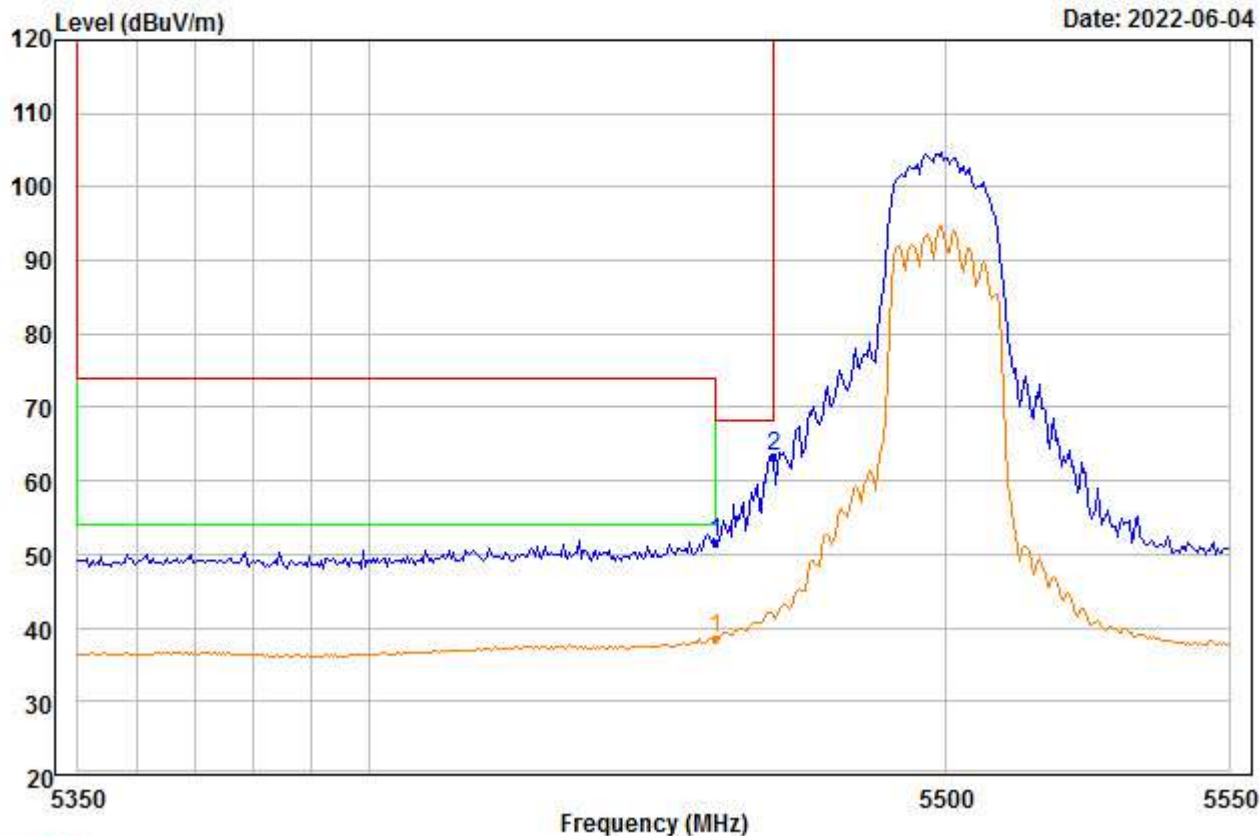


Trace: 1

Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : N20\_ANT0+1\_5500  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:		
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit					
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg		
1	5460.000	51.70	35.25	45.77	0.00	10.44	51.62	68.20	-16.58	---	---	Peak
2 PP	5470.000	63.29	35.26	45.75	0.00	10.47	63.27	68.20	-4.93	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4\_00056.EMI

Date: 2022-06-04

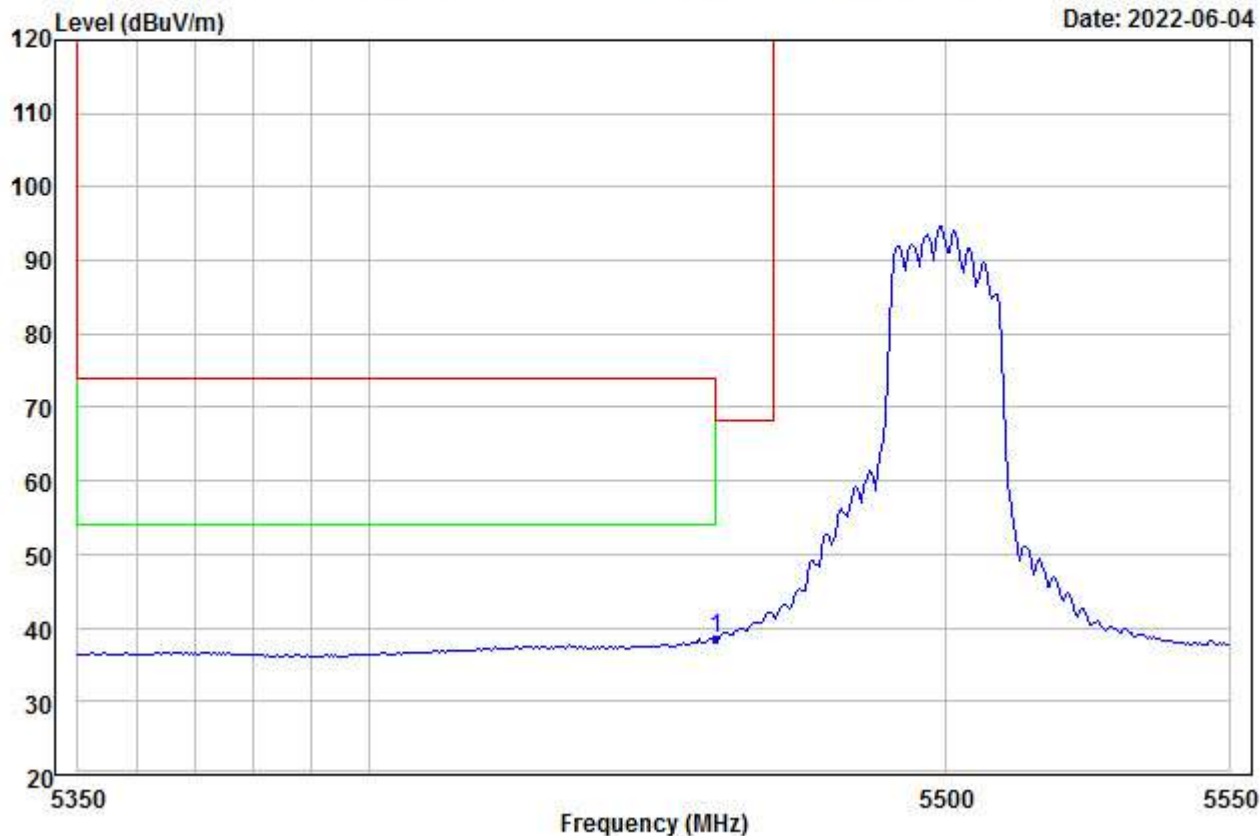


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : N20\_ANT0+1\_5500  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5460.000	38.63	35.25	45.77	0.00	10.44	38.55	54.00	-15.45	---	---	Aver



File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4\_00057.EMI

Date: 2022-06-04

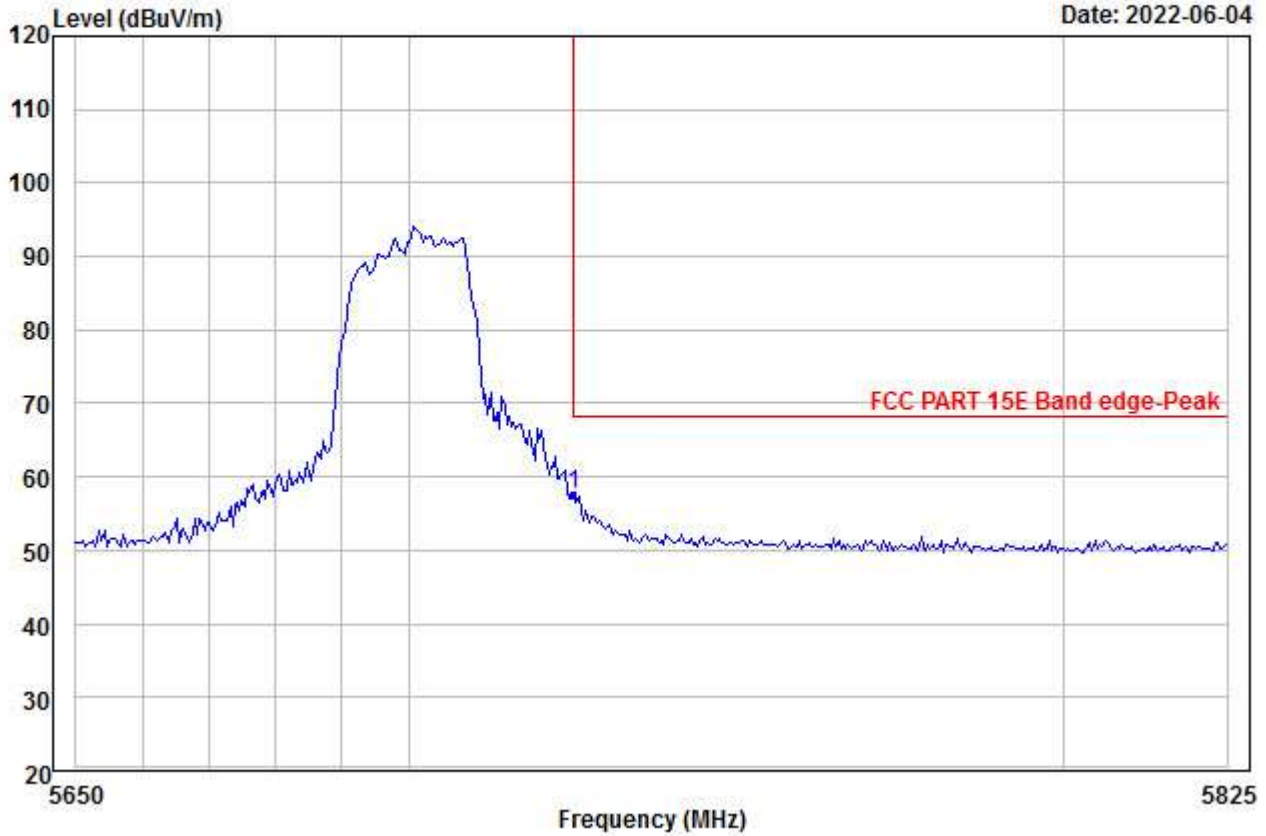


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : N20\_ANT0+1\_5700  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5725.000	57.91	35.26	45.57	0.00	9.94	57.54	68.20	-10.66	---	---	Peak

File: F:\Test Template\上海\ITS\2022\220523032 SA750\A\5G\BE\4\_00058.EMI

Date: 2022-06-04

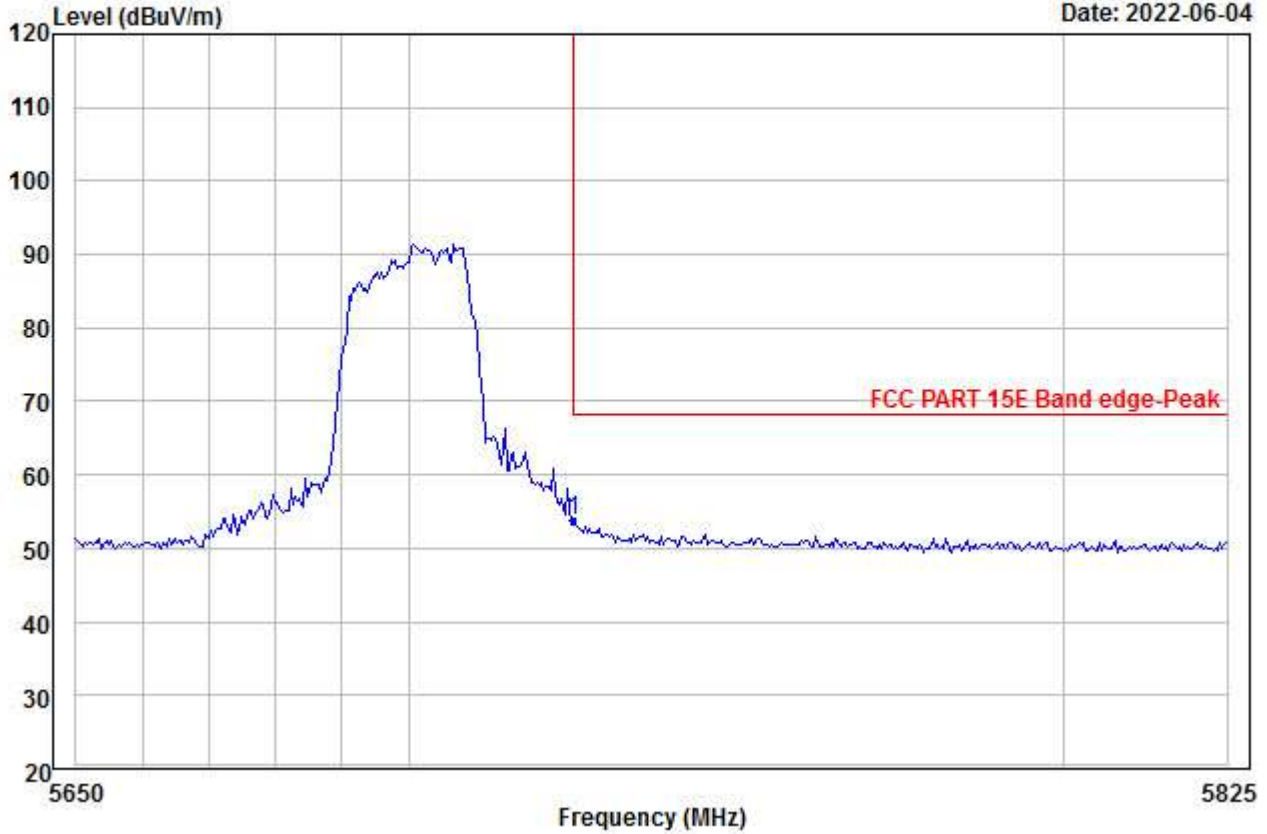


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : N20\_ANT0+1\_5700  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5725.000	54.04	35.26	45.57	0.00	9.94	53.67	68.20	-14.53	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4\_00059.EMI

Date: 2022-06-04

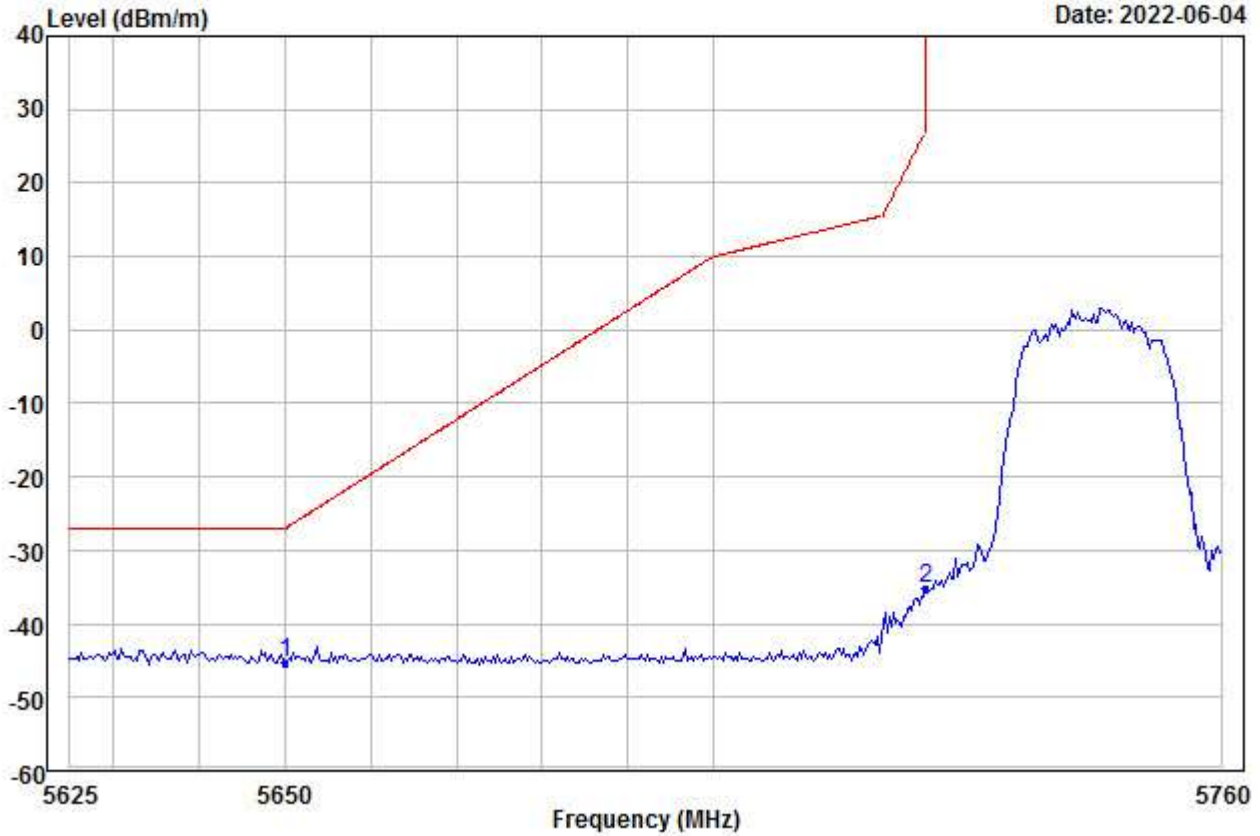


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : N20\_ANT0+1\_5745  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBm	dB/m	dB	dB	dB	dBm/m	dBm/m	dB	cm	deg	
1 PP 5650.000	-56.69	35.27	45.61	0.00	21.88	-45.15	-27.00	-18.15	---	---	Peak
2 5725.000	-46.69	35.26	45.57	0.00	21.68	-35.32	27.00	-62.32	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4\_00060.EMI

Date: 2022-06-04

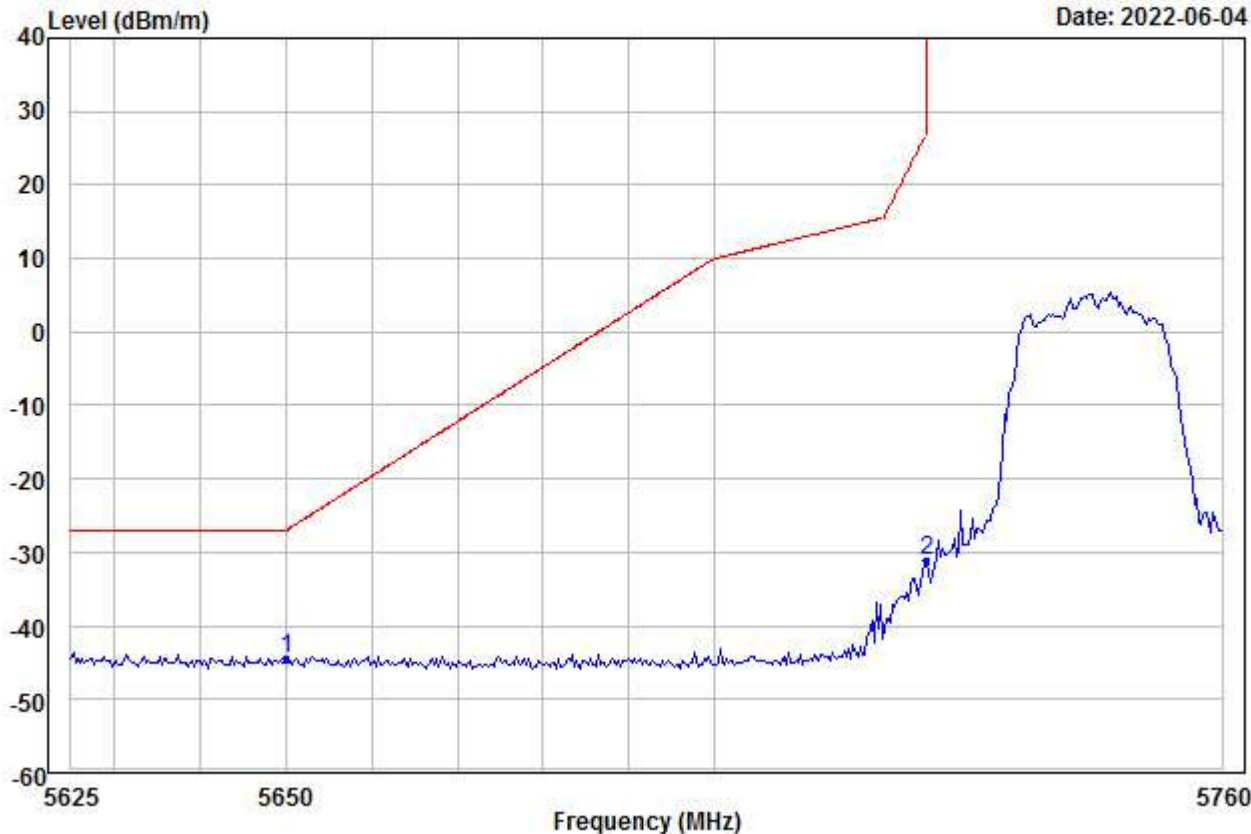


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : N20\_ANT0+1\_5745  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Level	Line	Limit			
MHz	dBm	dB/m	dB	dB	dB	dBm/m	dBm/m	dB	cm	deg	
1 PP 5650.000	-55.92	35.27	45.61	0.00	21.88	-44.38	-27.00	-17.38	---	---	Peak
2 5725.000	-42.54	35.26	45.57	0.00	21.68	-31.17	27.00	-58.17	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4\_00061.EMI

Date: 2022-06-04

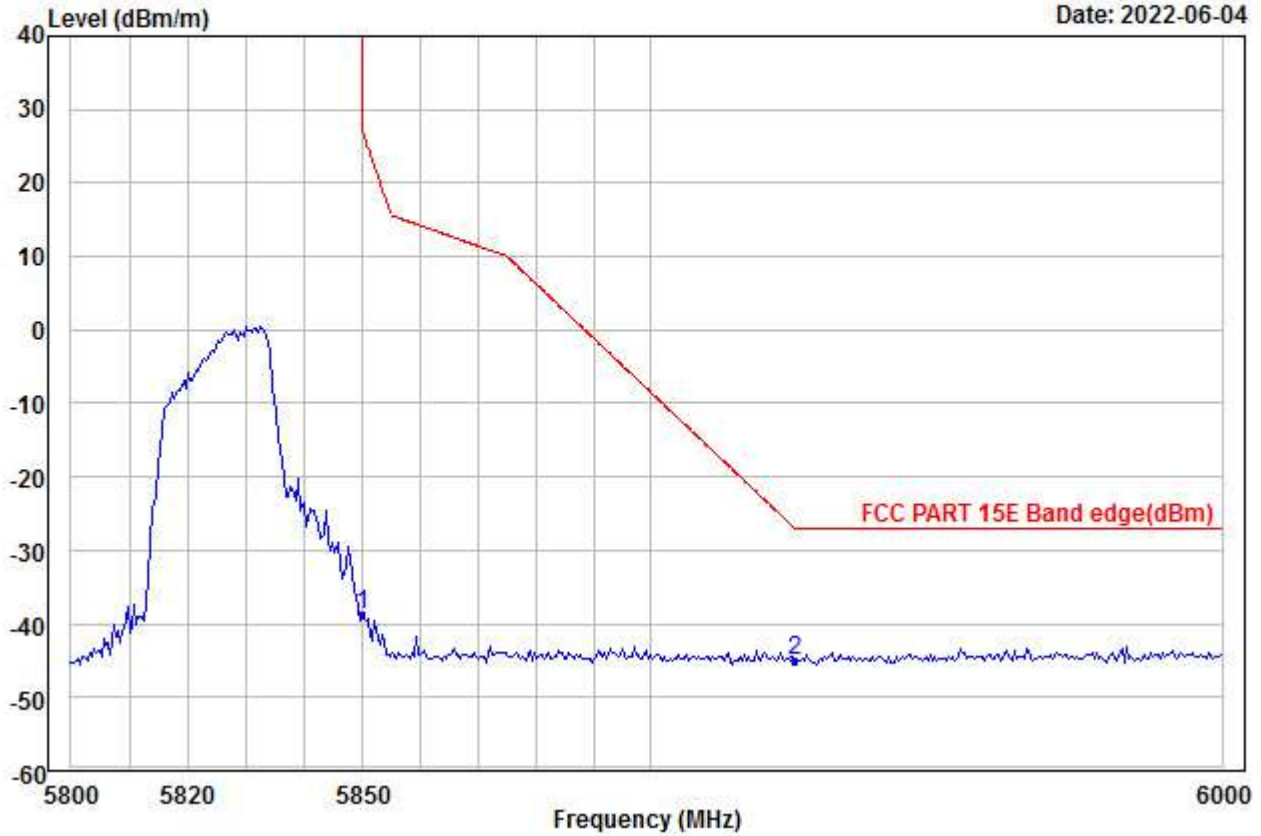


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : N20\_ANT0+1\_5825  
 Remark :

	Read Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBm	dB/m	dB	dB	dB	dBm/m	dBm/m	dB	cm	deg	
1	5850.000	-50.02	35.23	45.49	0.00	21.47	-38.81	27.00	-65.81	---	---	Peak
2 PP	5925.000	-56.31	35.22	45.44	0.00	21.44	-45.09	-27.00	-18.09	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4\_00062.EMI

Date: 2022-06-04

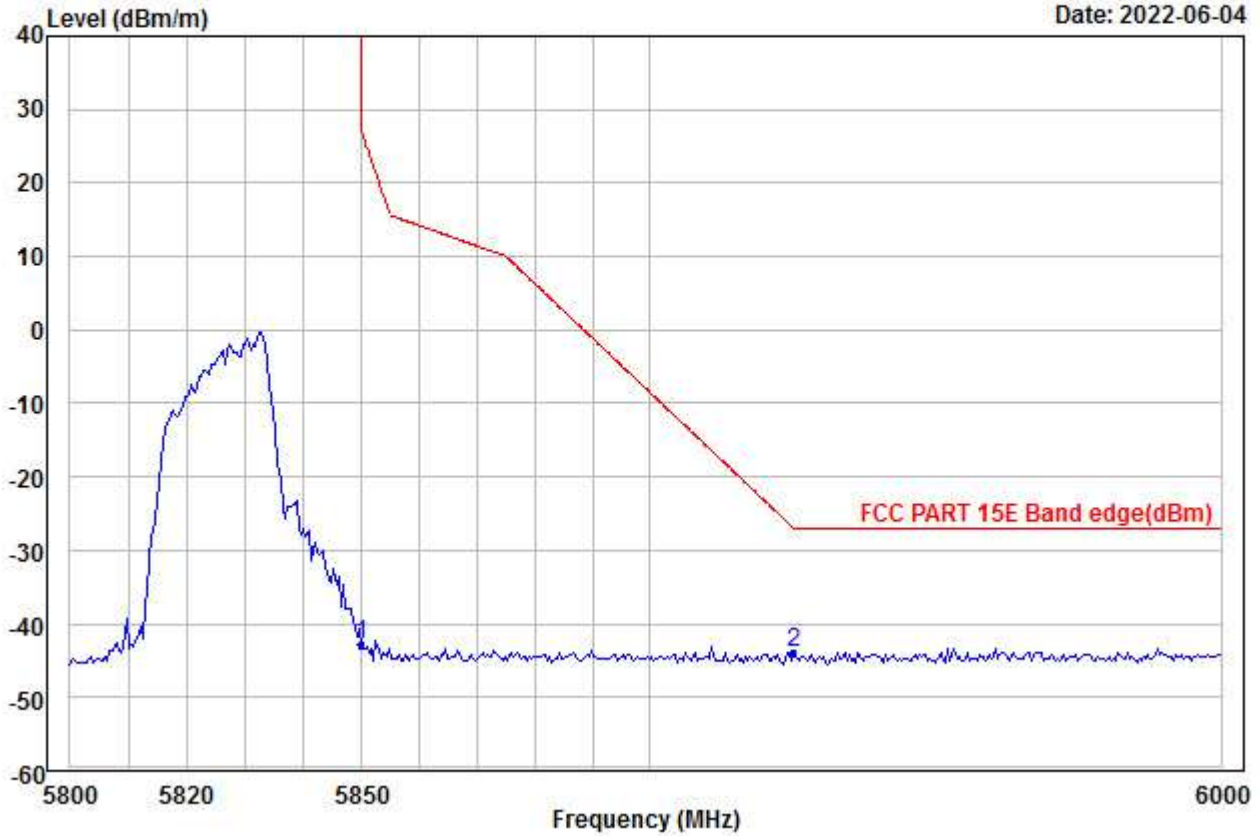


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : N20\_ANT0+1\_5825  
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBm	dB/m	dB	dB	dB	dBm/m	dBm/m	dB	cm	deg	
1	5850.000	-54.12	35.23	45.49	0.00	21.47	-42.91	27.00	-69.91	---	---	Peak
2 PP	5925.000	-55.17	35.22	45.44	0.00	21.44	-43.95	-27.00	-16.95	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4\_00063.EMI

Date: 2022-06-07

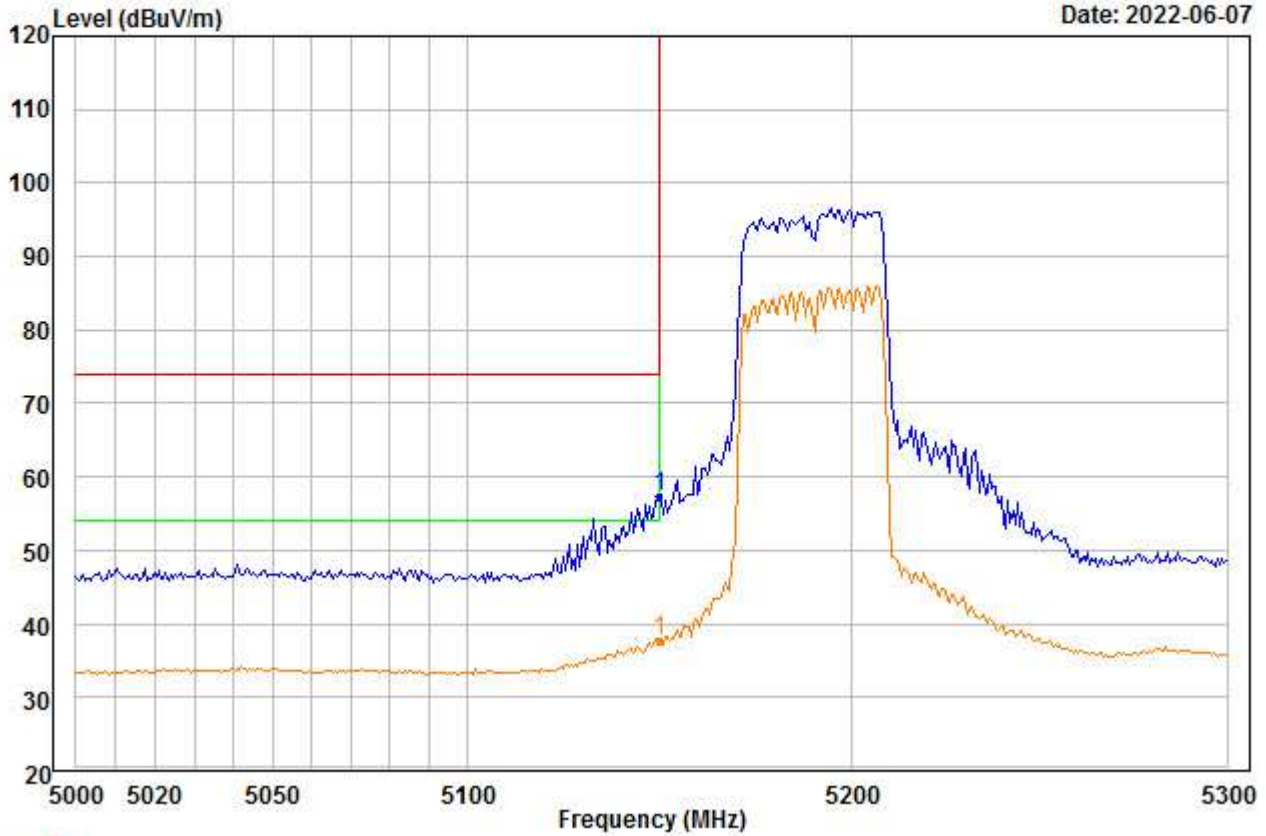


Trace: 1

Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : N40\_ANT0+1\_5190  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5150.000	59.04	34.88	46.33	0.00	9.78	57.37	74.00	-16.63	---	---	Peak

File: F:\Test Template\上海ITSI\2022\220523032 SA750\A\5G\BE\4\_00064.EMI

Date: 2022-06-07

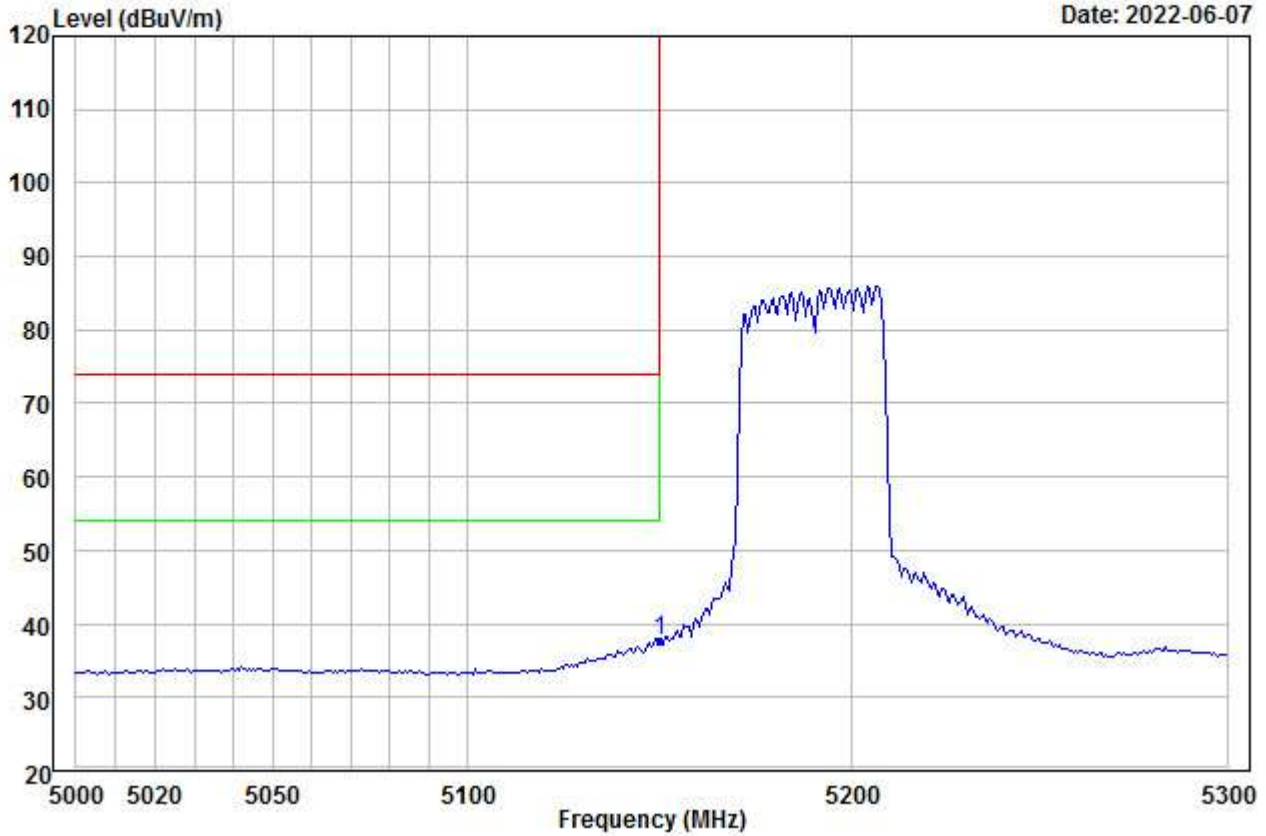


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : N40\_ANT0+1\_5190  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5150.000	39.28	34.88	46.33	0.00	9.78	37.61	54.00	-16.39	---	---	Aver



File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4\_00065.EMI

Date: 2022-06-07

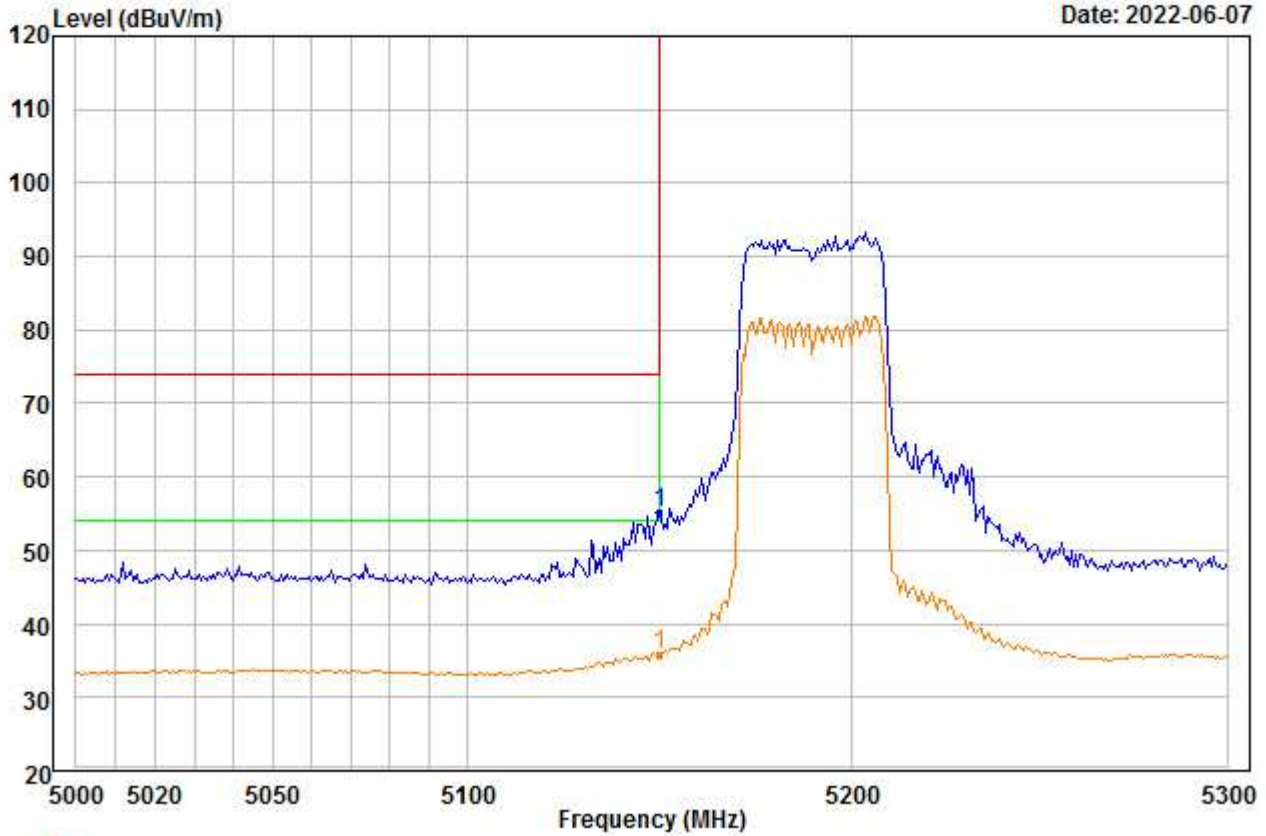


Trace: 1

Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : N40\_ANT0+1\_5190  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5150.000	56.74	34.88	46.33	0.00	9.78	55.07	74.00	-18.93	---	---	Peak

File: F:\Test Template\上海ITSI\2022\220523032 SA750\A\5G\BE\4\_00066.EMI

Date: 2022-06-07

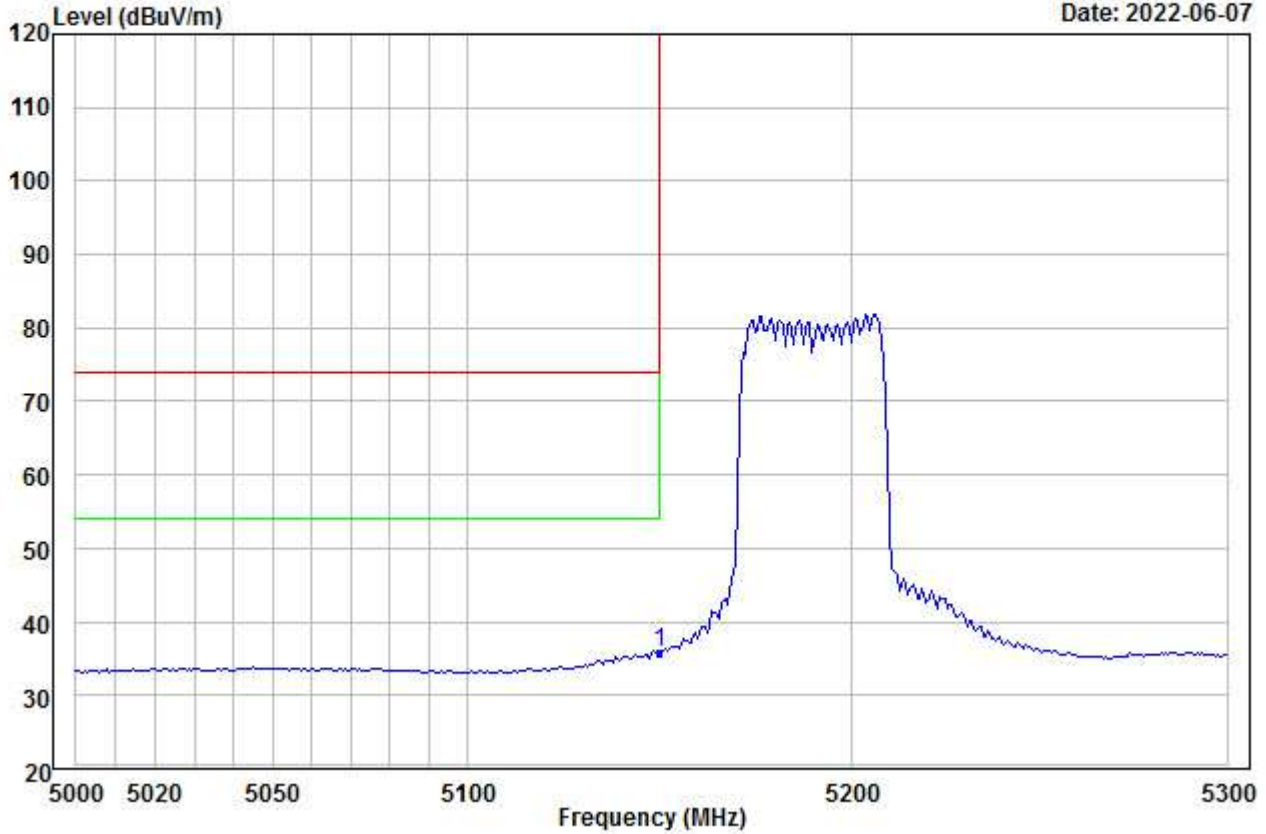


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : N40\_ANT0+1\_5190  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5150.000	37.35	34.88	46.33	0.00	9.78	35.68	54.00	-18.32	---	---	Aver

File: F:\Test Template\上海ITSI\2022\220523032 SA750\A\5G\BE\4\_00067.EMI

Date: 2022-06-07

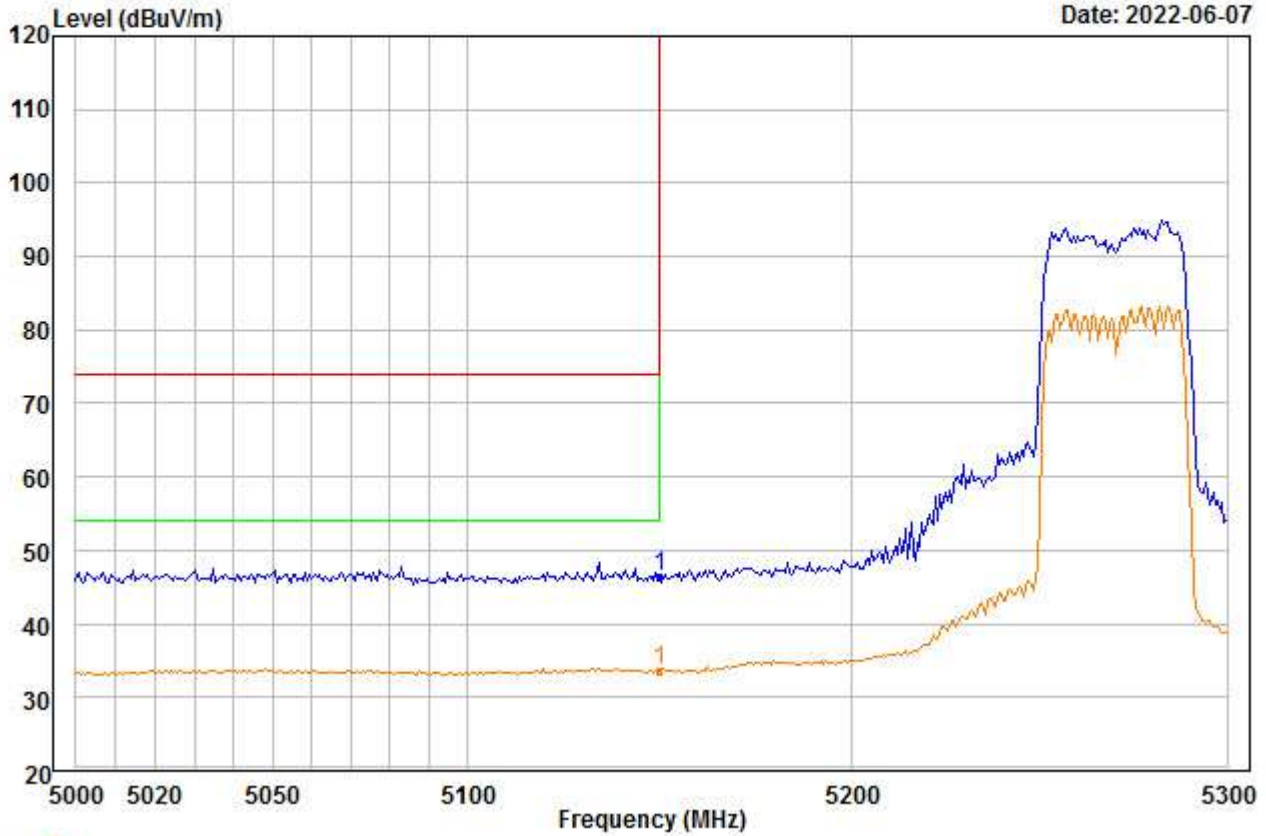


Trace: 1

Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : N40\_ANT0+1\_5270  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5150.000	48.17	34.88	46.33	0.00	9.78	46.50	74.00	-27.50	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4\_00068.EMI

Date: 2022-06-07

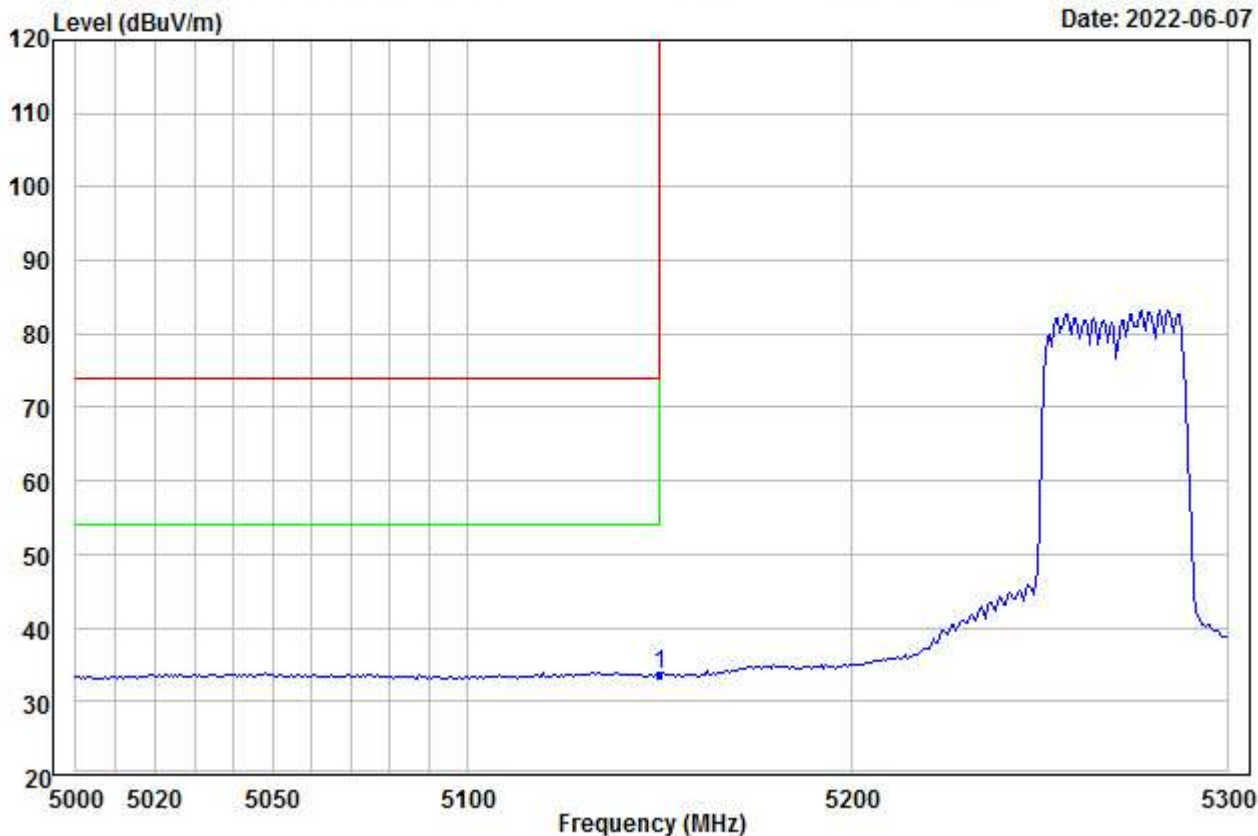


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : N40\_ANT0+1\_5270  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5150.000	35.22	34.88	46.33	0.00	9.78	33.55	54.00	-20.45	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4\_00069.EMI

Date: 2022-06-07

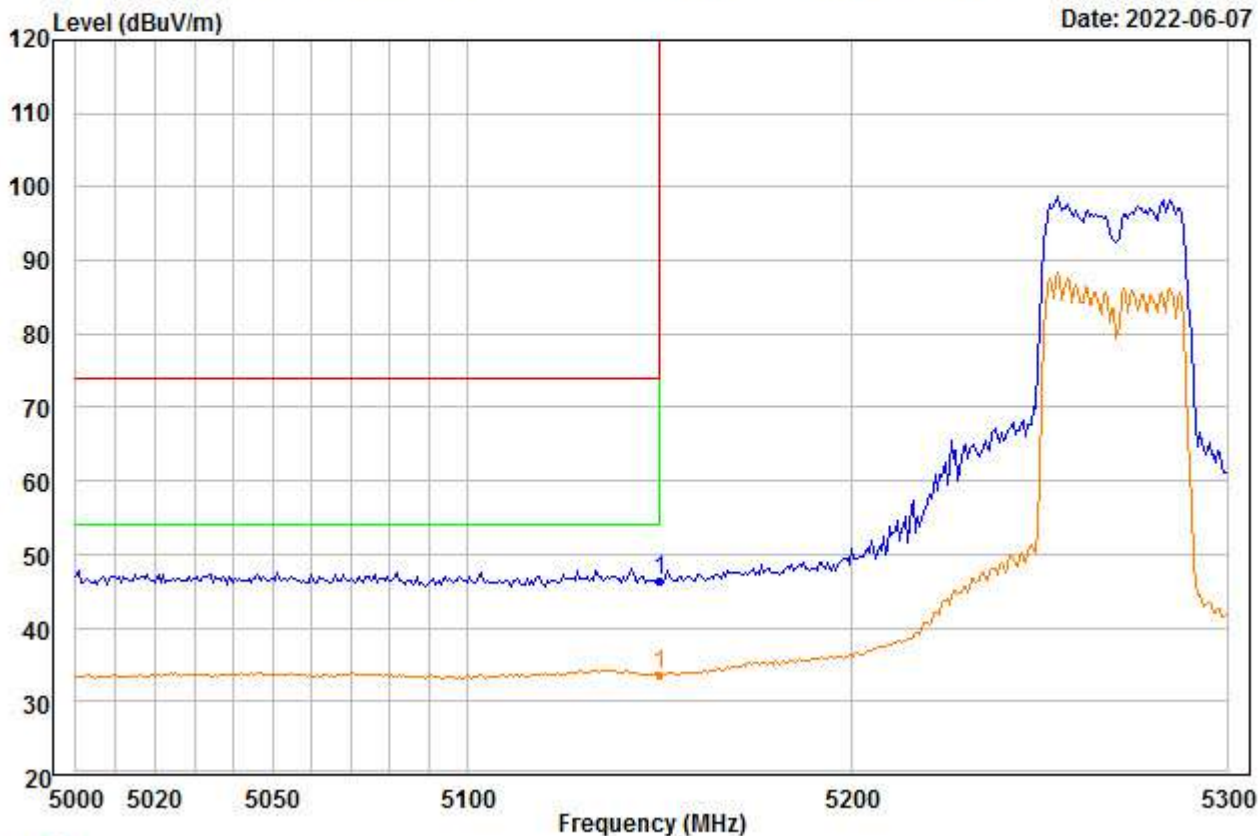


Trace: 1

Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : N40\_ANT0+1\_5270  
 Remark :

	Read Freq	Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP	5150.000	48.00	34.88	46.33	0.00	9.78	46.33	74.00	-27.67	---	---	Peak

File: F:\Test Template\上海ITSI\2022\220523032 SA750\A\5G\BE\4\_00070.EMI

Date: 2022-06-07

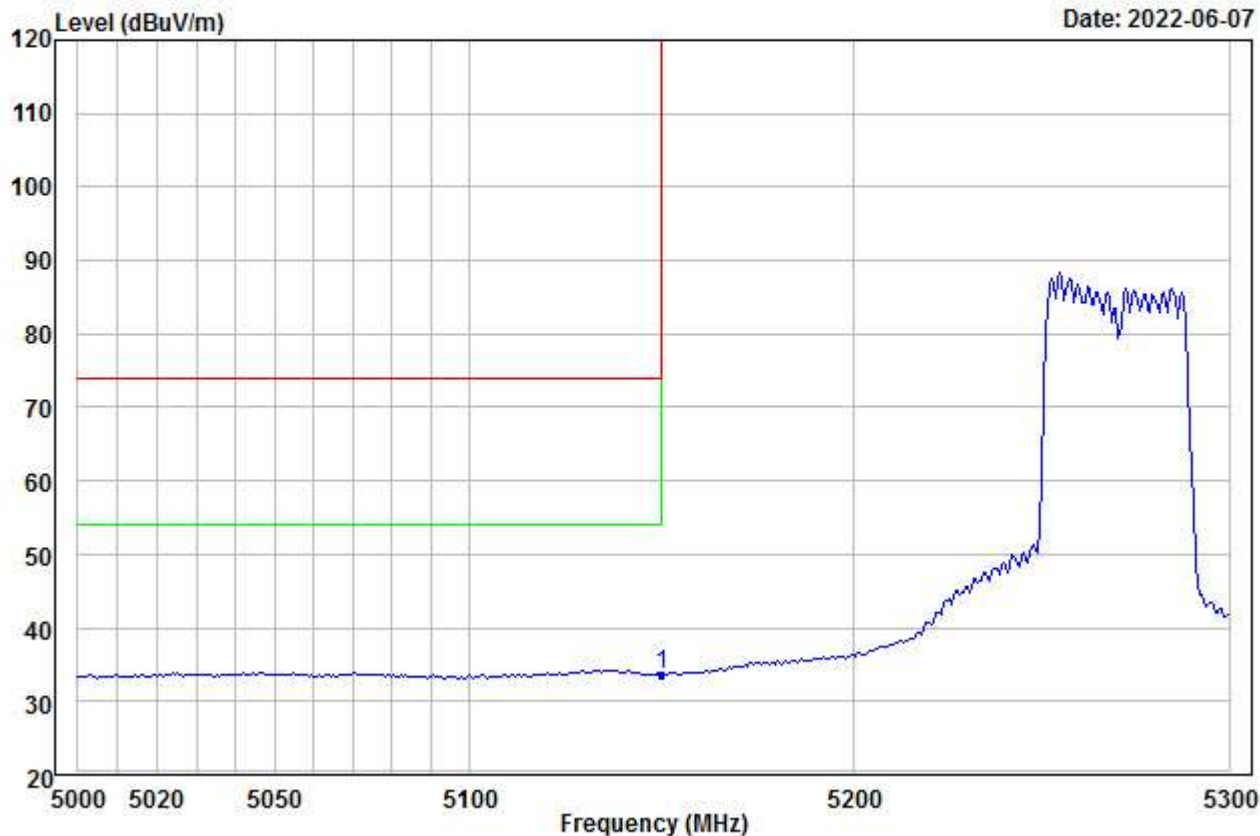


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : N40\_ANT0+1\_5270  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5150.000	35.31	34.88	46.33	0.00	9.78	33.64	54.00	-20.36	---	---	Aver

File: F:\Test Template\上海\ITS\2022\220523032 SA750\A\5G\BE\4\_00071.EMI

Date: 2022-06-07

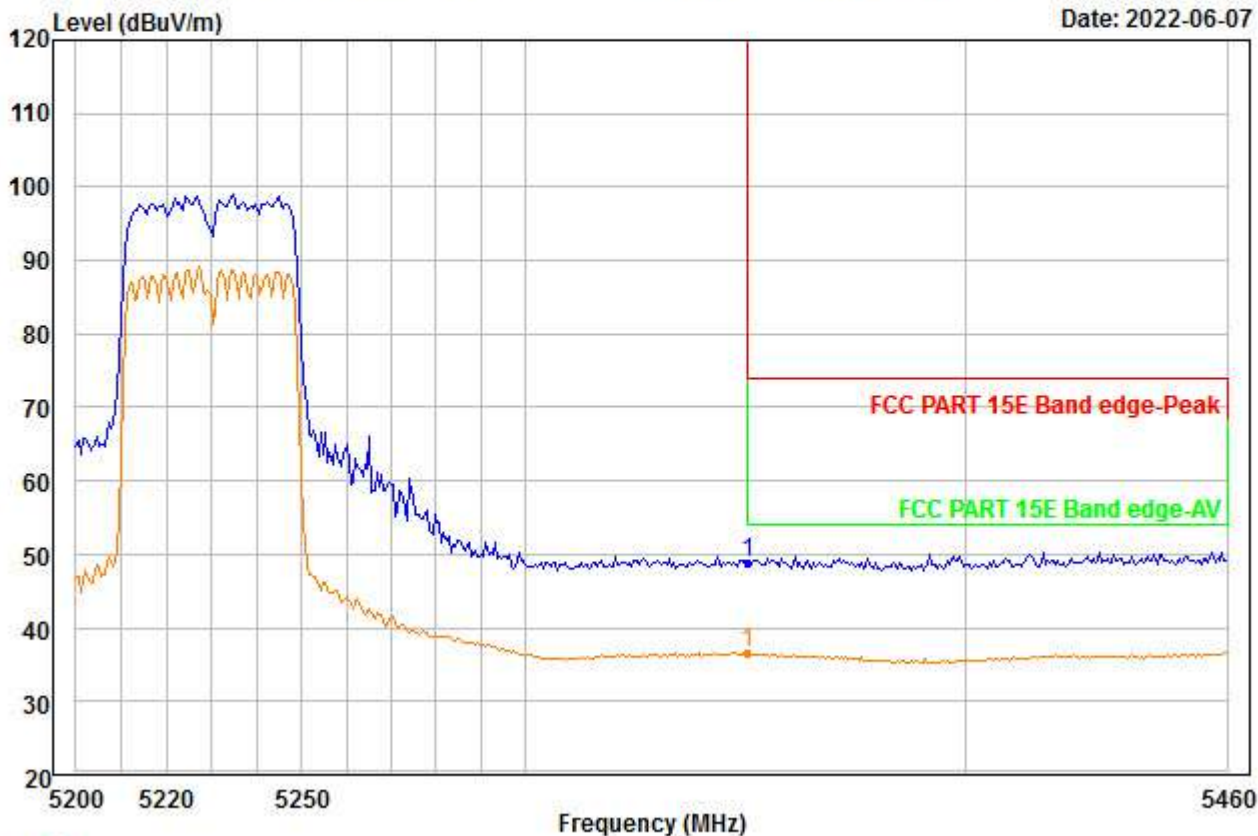


Trace: 1

Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : N40\_ANT0+1\_5230  
 Remark :

	Read Freq	Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP	5350.000	49.63	35.12	45.97	0.00	10.18	48.96	74.00	-25.04	---	---	Peak

File: F:\Test Template\上海\ITS\2022\220523032 SA750\A\5G\BE\4\_00072.EMI

Date: 2022-06-07

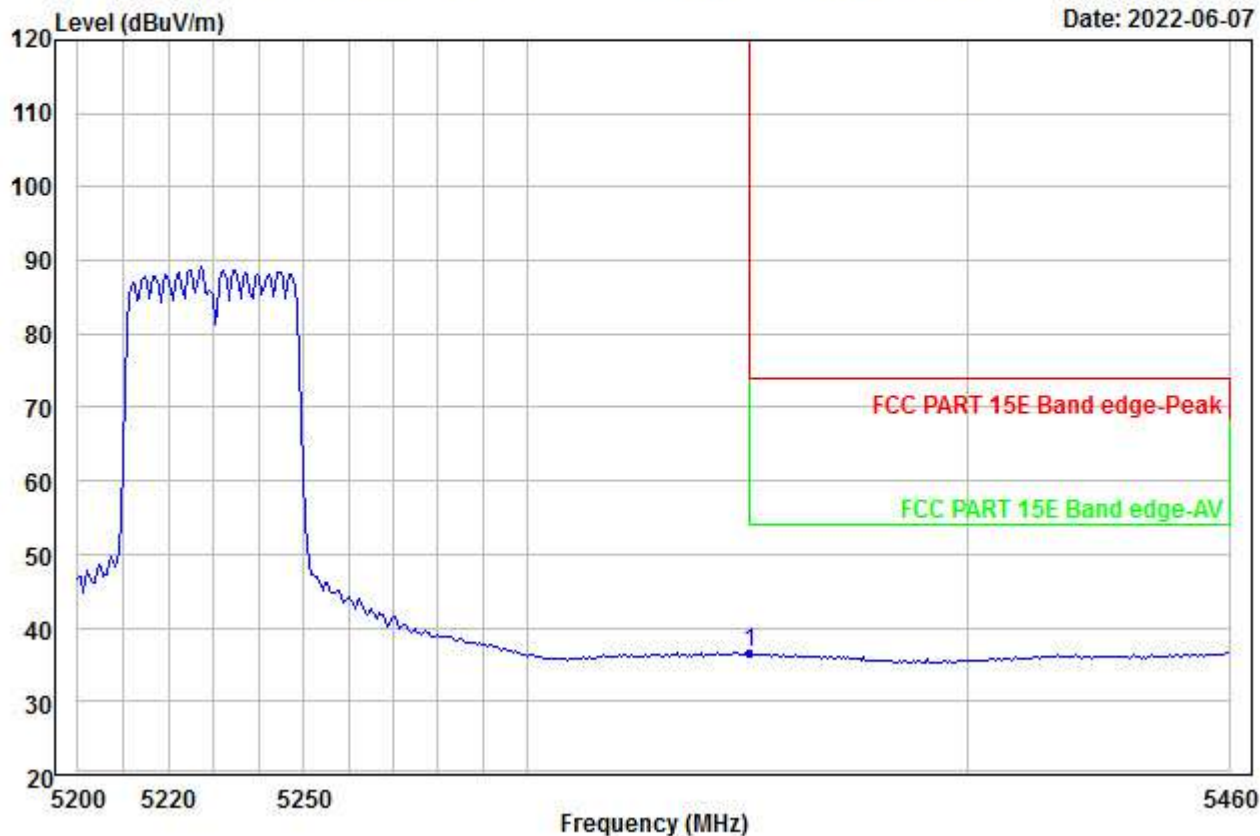


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : N40\_ANT0+1\_5230  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5350.000	37.29	35.12	45.97	0.00	10.18	36.62	54.00	-17.38	---	---	Aver



File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4\_00073.EMI

Date: 2022-06-07

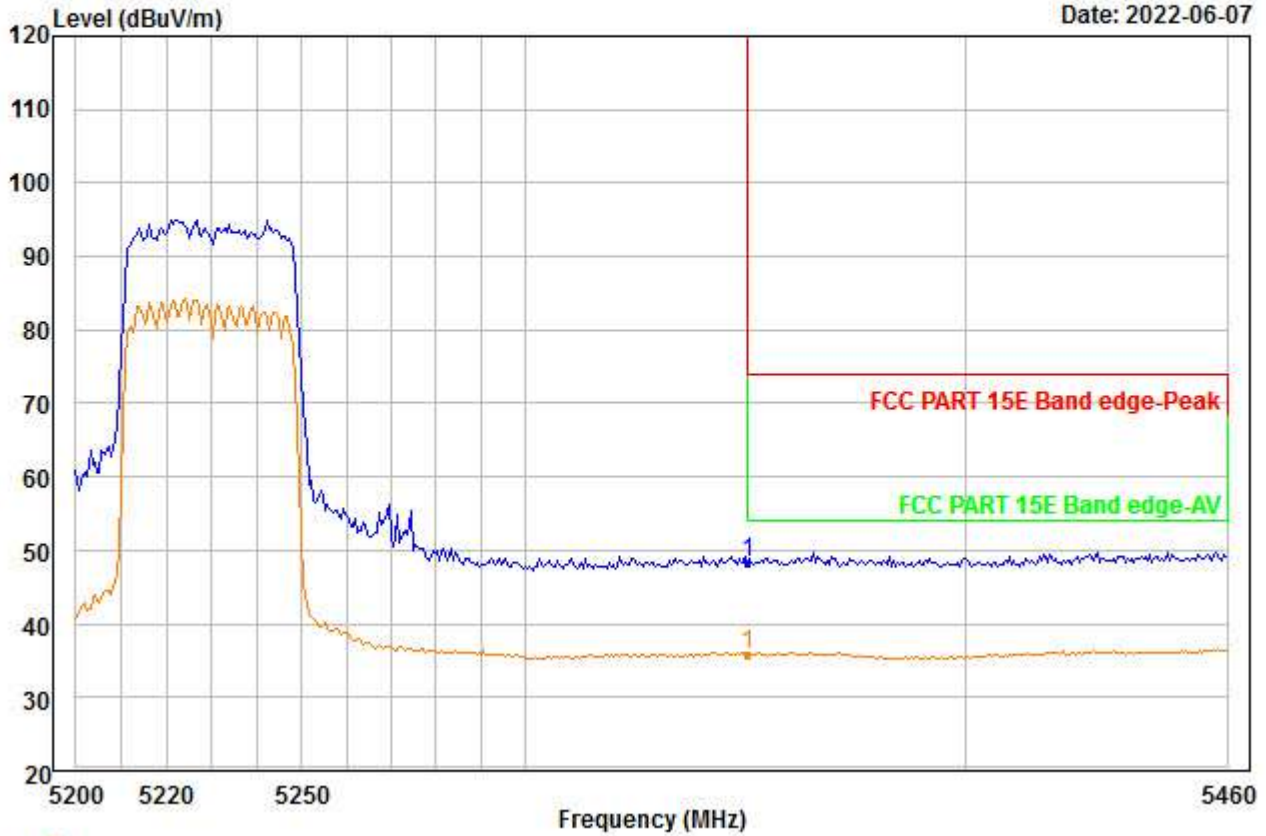


Trace: 1

Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : N40\_ANT0+1\_5230  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit			
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 5350.000	48.95	35.12	45.97	0.00	10.18	48.28	74.00	-25.72	---	--- Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4\_00074.EMI

Date: 2022-06-07

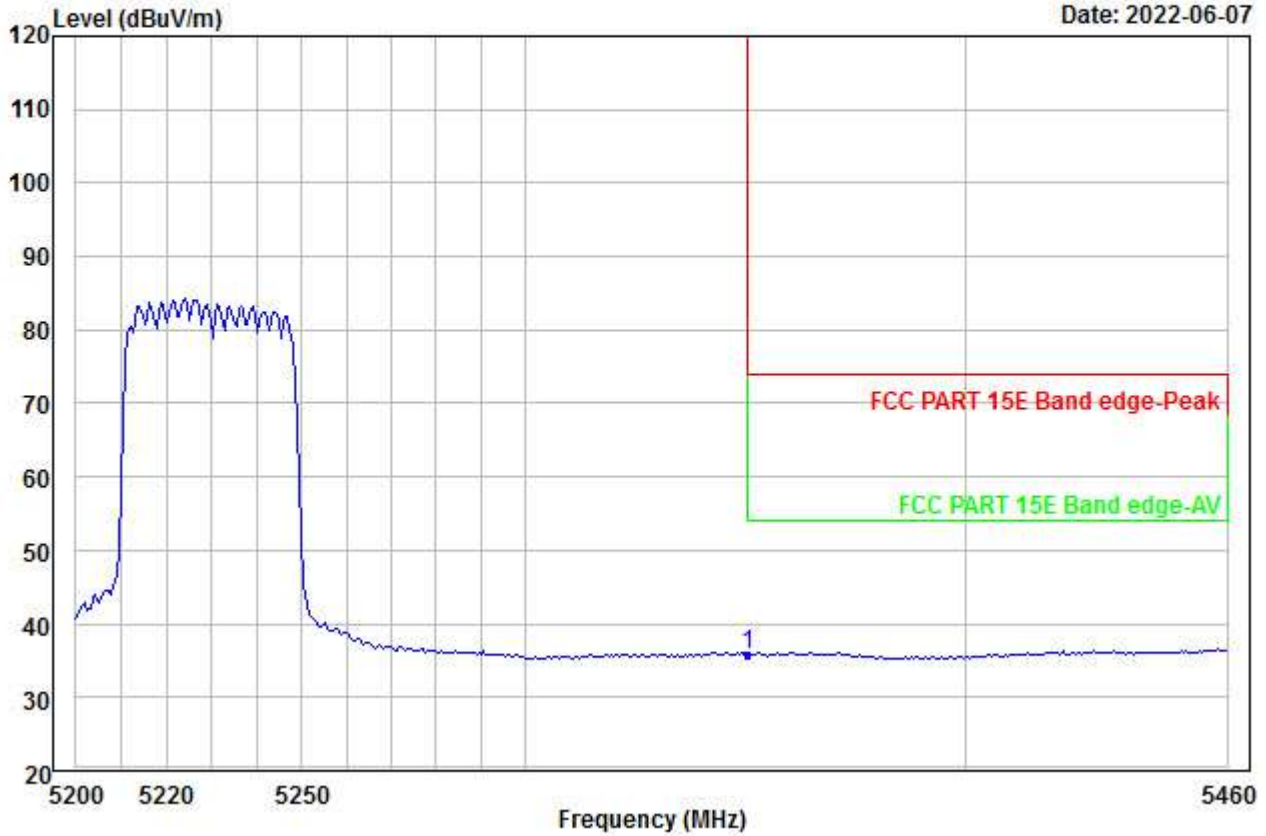


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : N40\_ANT0+1\_5230  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5350.000	36.52	35.12	45.97	0.00	10.18	35.85	54.00	-18.15	---	---	Aver

File: F:\Test Template\上海\ITS\2022\220523032 SA750\A\5G\BE\4\_00075.EMI

Date: 2022-06-07

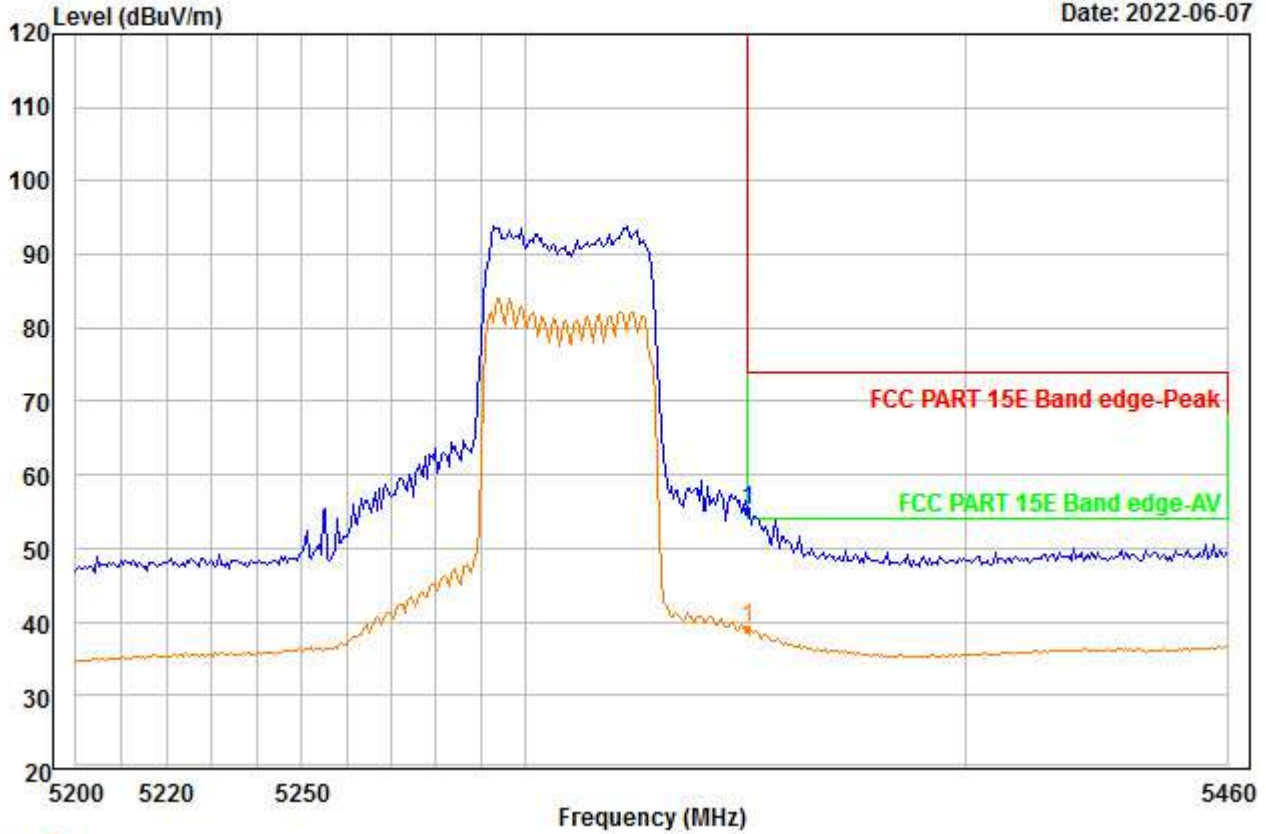


Trace: 1

Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : N40\_ANT0+1\_5310  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5350.000	55.93	35.12	45.97	0.00	10.18	55.26	74.00	-18.74	---	---	Peak

File: F:\Test Template\上海\ITS\2022\220523032 SA750\A\5G\BE\4\_00076.EMI

Date: 2022-06-07

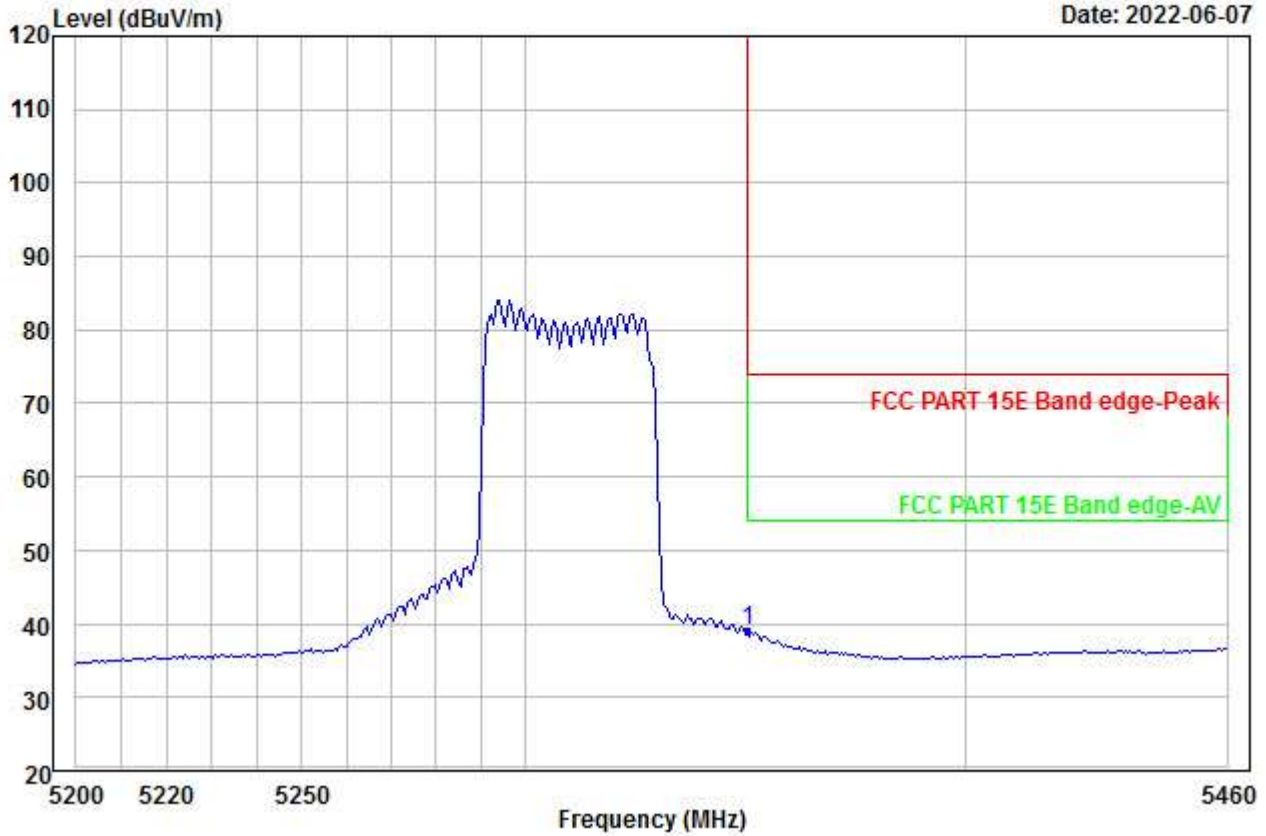


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : N40\_ANT0+1\_5310  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5350.000	39.63	35.12	45.97	0.00	10.18	38.96	54.00	-15.04	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4\_00077.EMI

Date: 2022-06-07

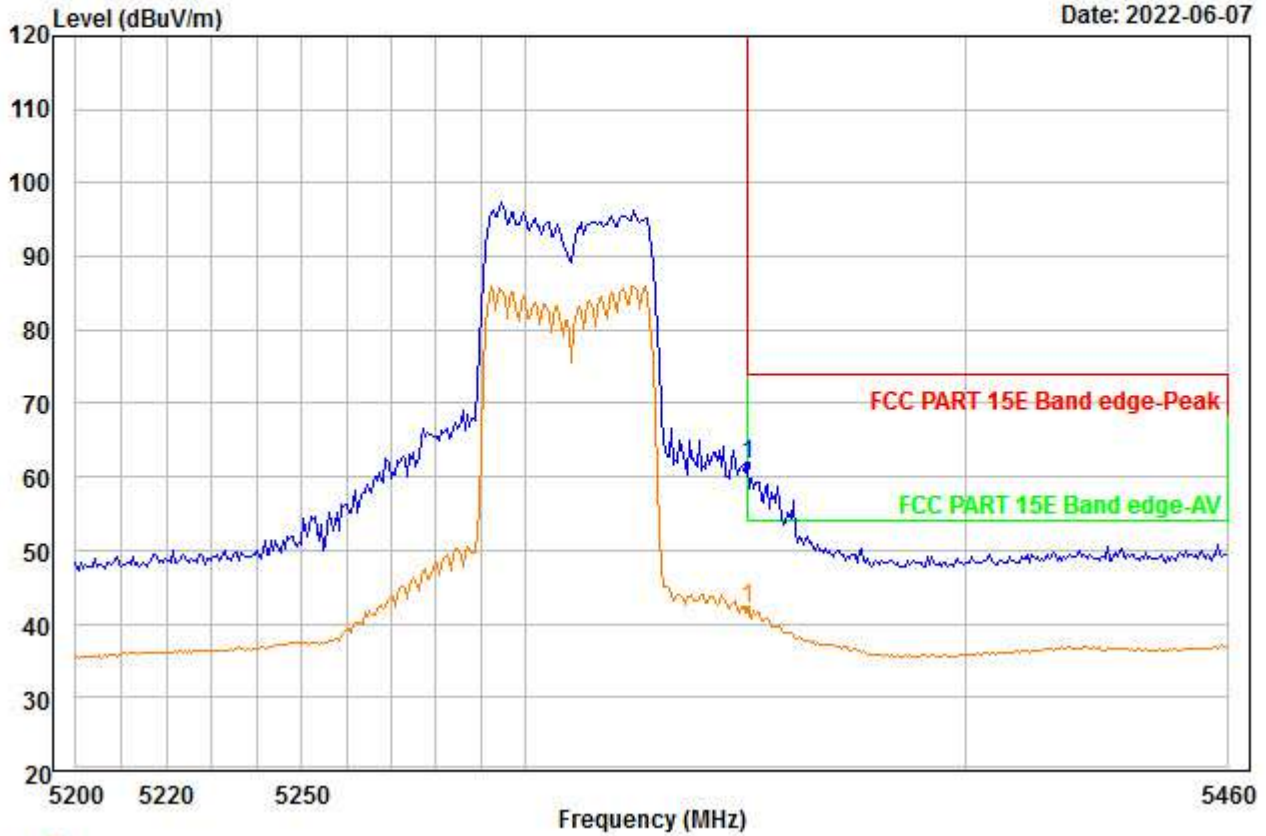


Trace: 1

Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : N40\_ANT0+1\_5310  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5350.000	62.25	35.12	45.97	0.00	10.18	61.58	74.00	-12.42	---	---	Peak

File: F:\Test Template\上海\ITS\2022\220523032 SA750\A\5G\BE\4\_00078.EMI

Date: 2022-06-07

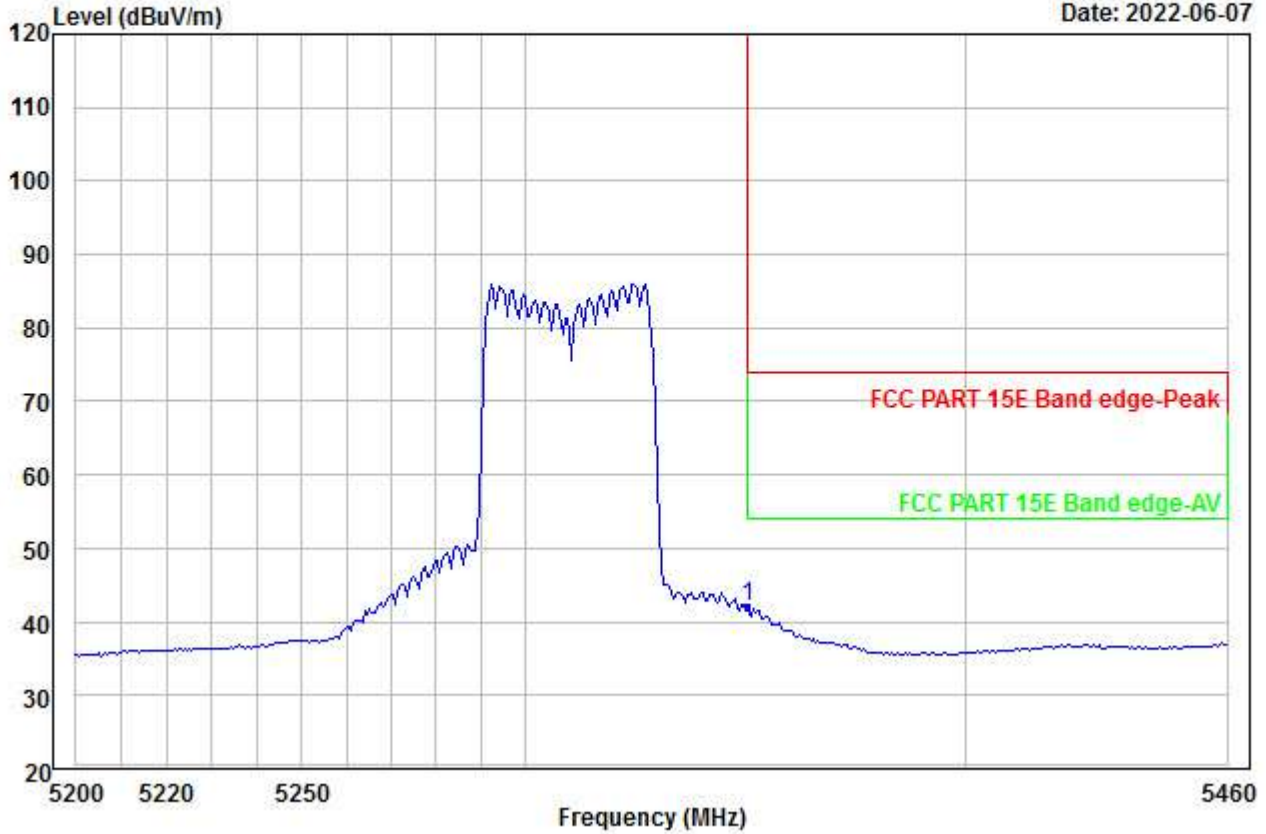


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : N40\_ANT0+1\_5310  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5350.000	42.78	35.12	45.97	0.00	10.18	42.11	54.00	-11.89	---	---	Aver

File: F:\Test Template\上海\ITS\2022\220523032 SA750\A\5G\BE\4\_00079.EMI

Date: 2022-06-07

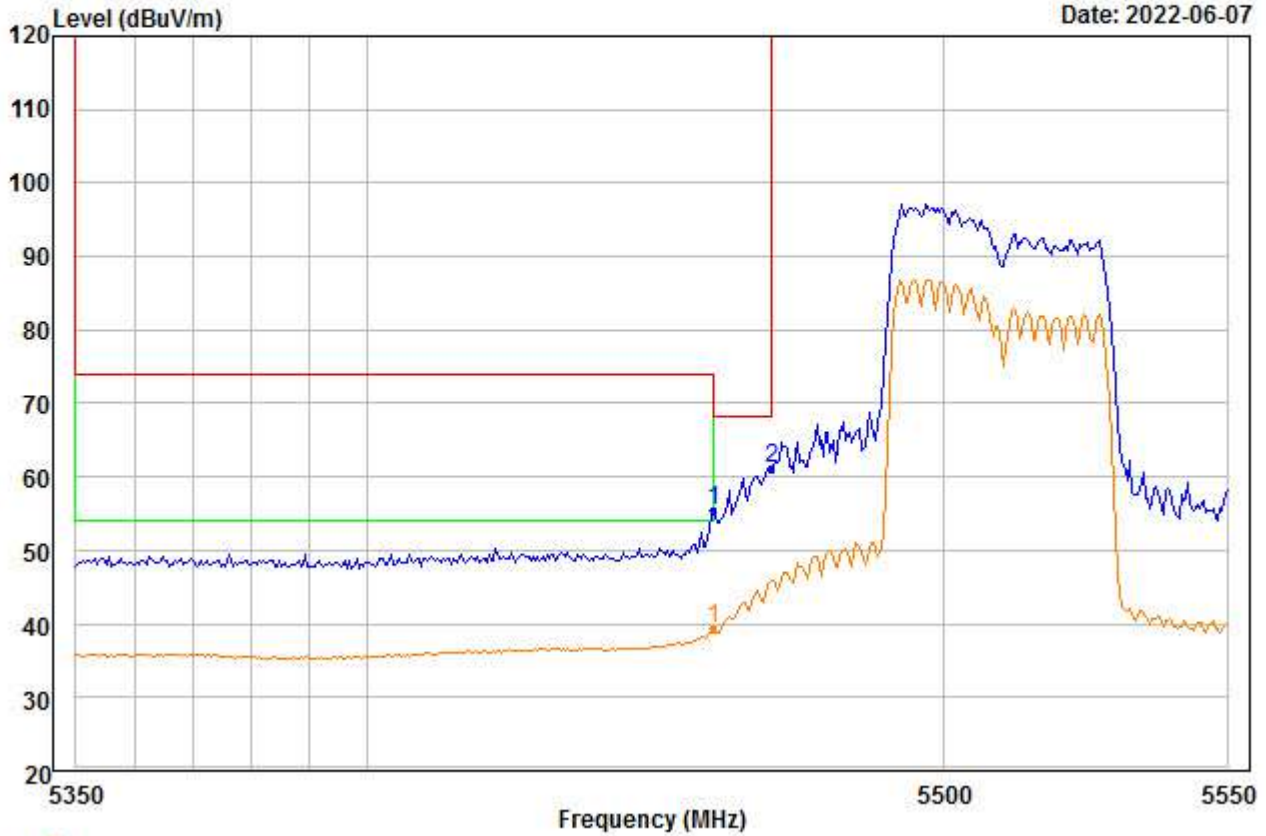


Trace: 1

Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : N40\_ANT0+1\_5510  
 Remark :

	Read Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	5460.000	55.40	35.25	45.77	0.00	10.44	55.32	68.20	-12.88	---	---	Peak
2 PP	5470.000	61.24	35.26	45.75	0.00	10.47	61.22	68.20	-6.98	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4\_00080.EMI

Date: 2022-06-07

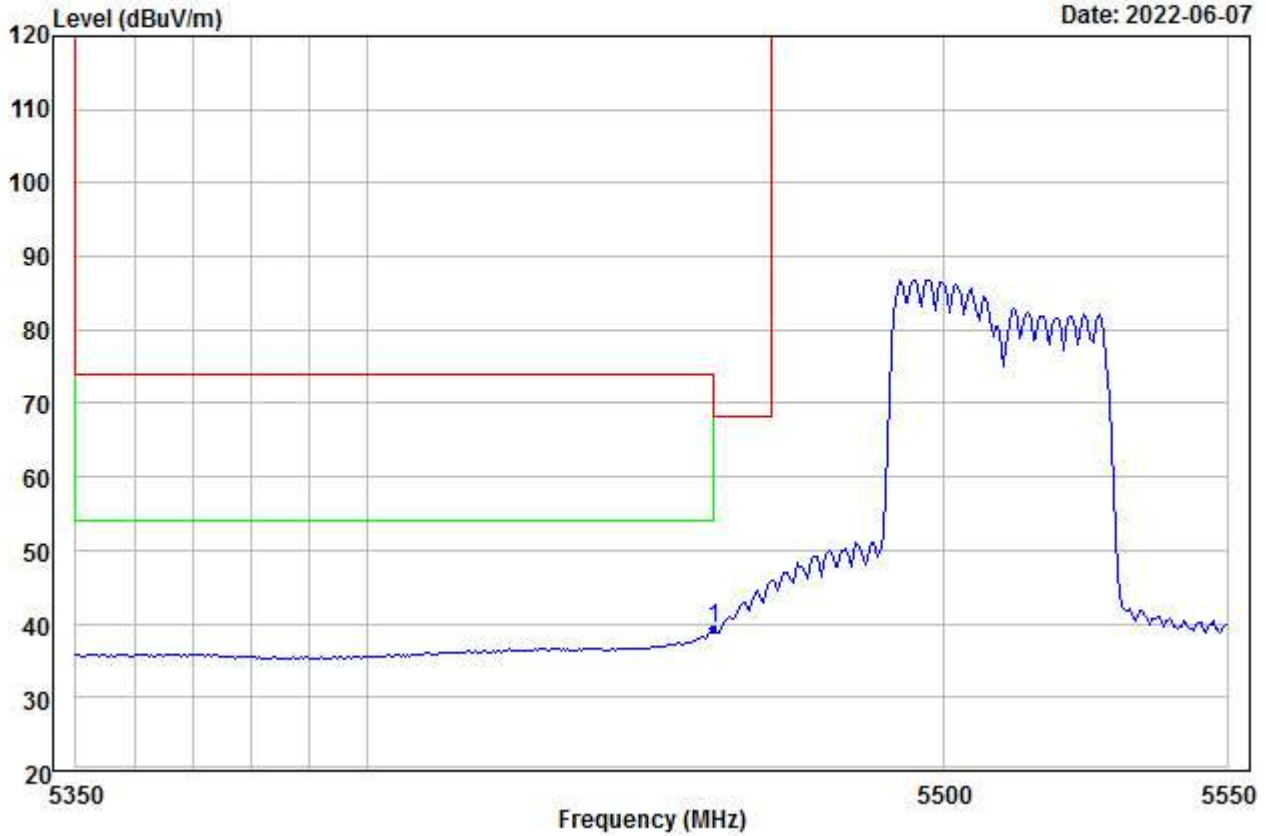


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : N40\_ANT0+1\_5510  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit			
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 5460.000	39.31	35.25	45.77	0.00	10.44	39.23	54.00	-14.77	---	--- Aver



File: F:\Test Template\上海ITSI\2022\220523032 SA750\A\5G\BE\4\_00081.EMI

Date: 2022-06-07

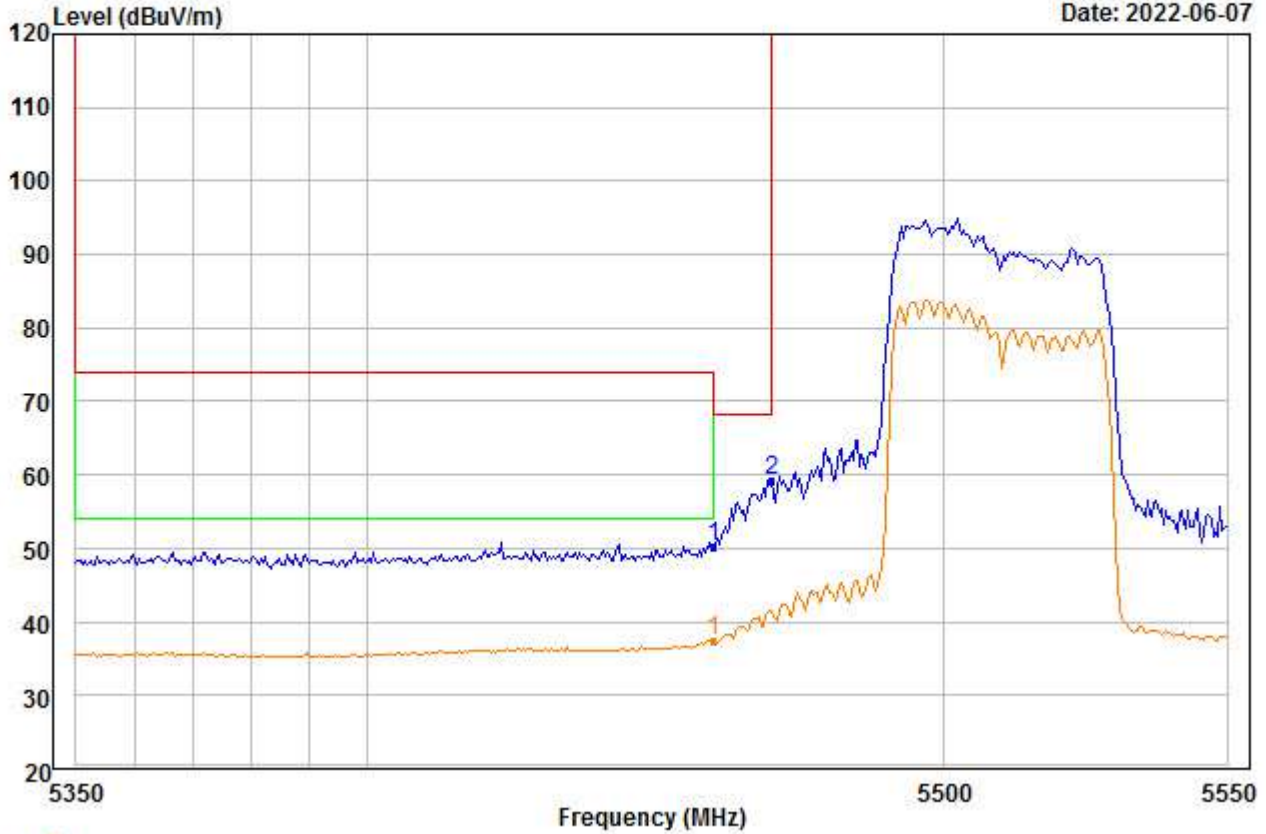


Trace: 1

Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : N40\_ANT0+1\_5510  
 Remark :

	Read Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	5460.000	50.44	35.25	45.77	0.00	10.44	50.36	68.20	-17.84	---	---	Peak
2 PP	5470.000	59.23	35.26	45.75	0.00	10.47	59.21	68.20	-8.99	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4\_00082.EMI

Date: 2022-06-07

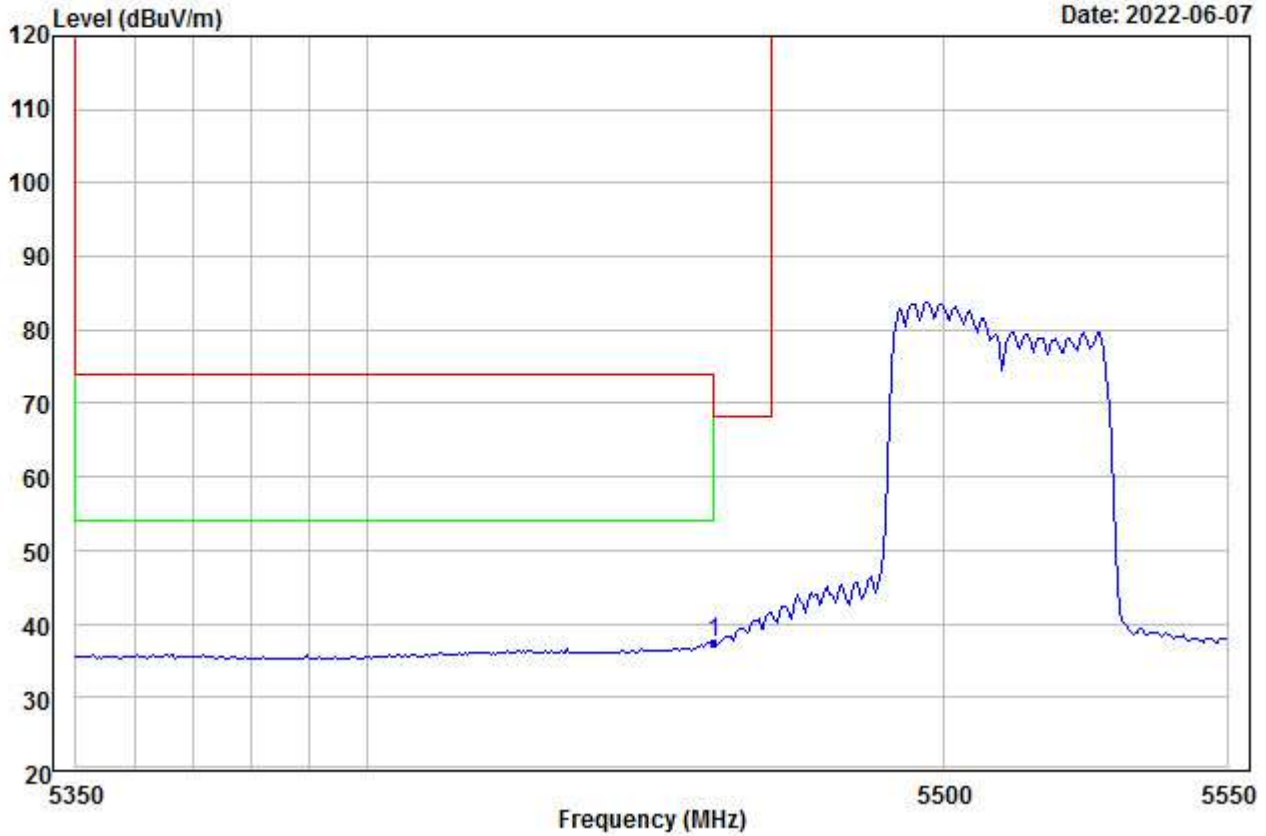


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : N40\_ANT0+1\_5510  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5460.000	37.62	35.25	45.77	0.00	10.44	37.54	54.00	-16.46	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4\_00083.EMI

Date: 2022-06-07

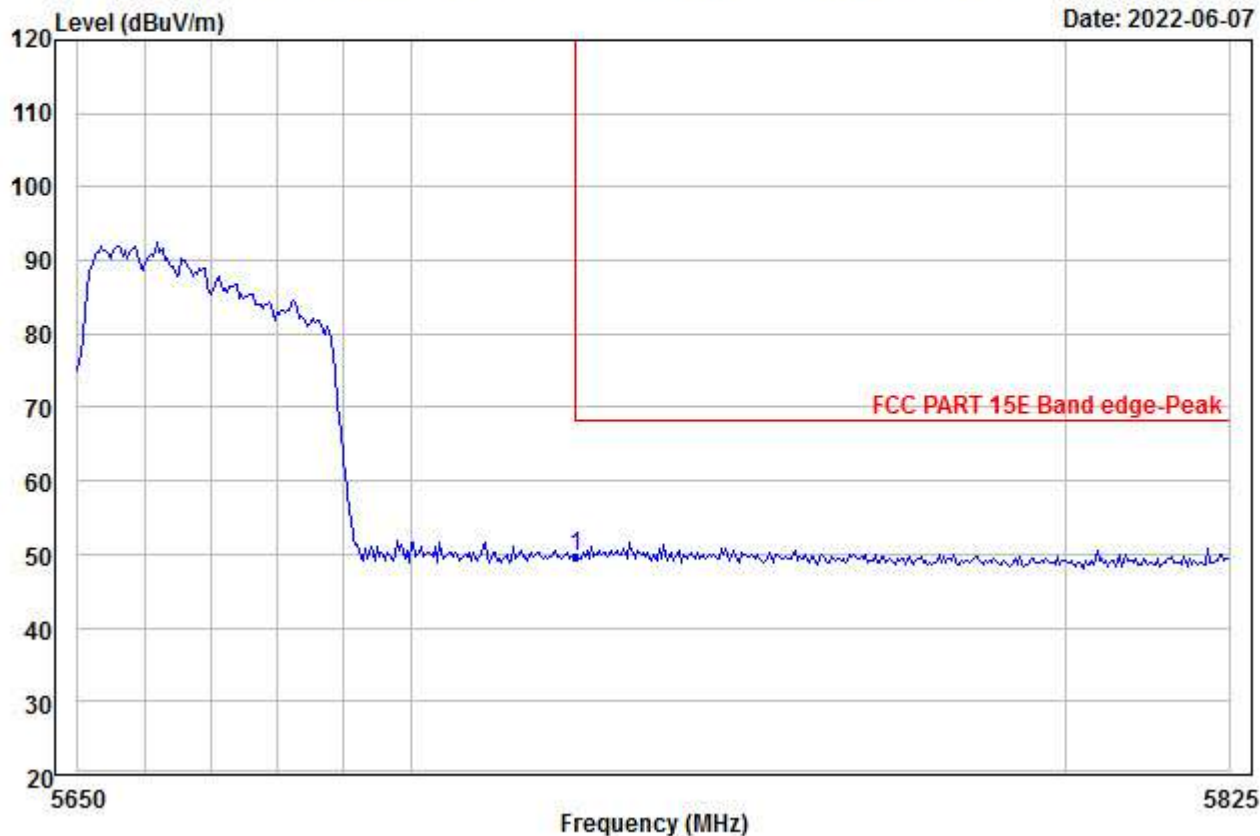


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : N40\_ANT0+1\_5670  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5725.000	50.19	35.26	45.57	0.00	9.94	49.82	68.20	-18.38	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4\_00084.EMI

Date: 2022-06-07

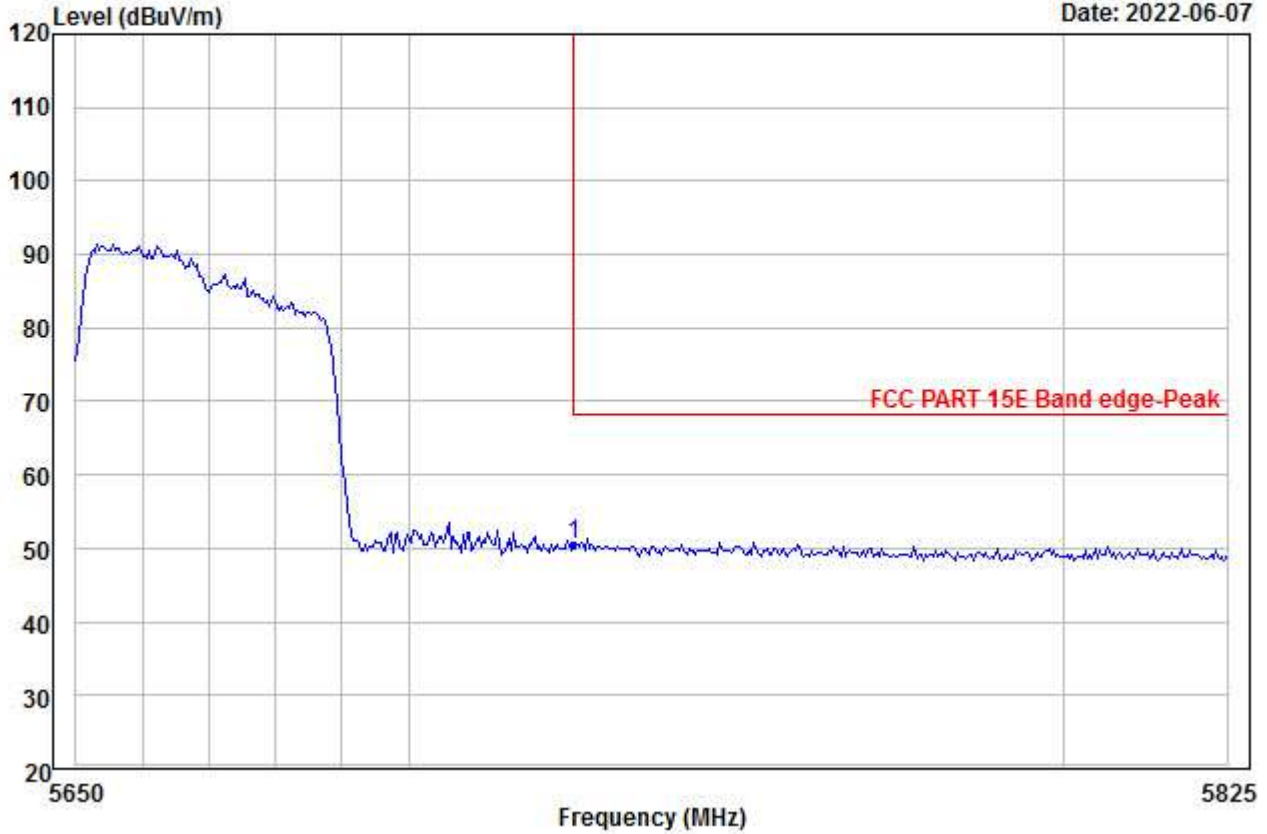


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : N40\_ANT0+1\_5670  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5725.000	50.80	35.26	45.57	0.00	9.94	50.43	68.20	-17.77	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4\_00085.EMI

Date: 2022-06-07

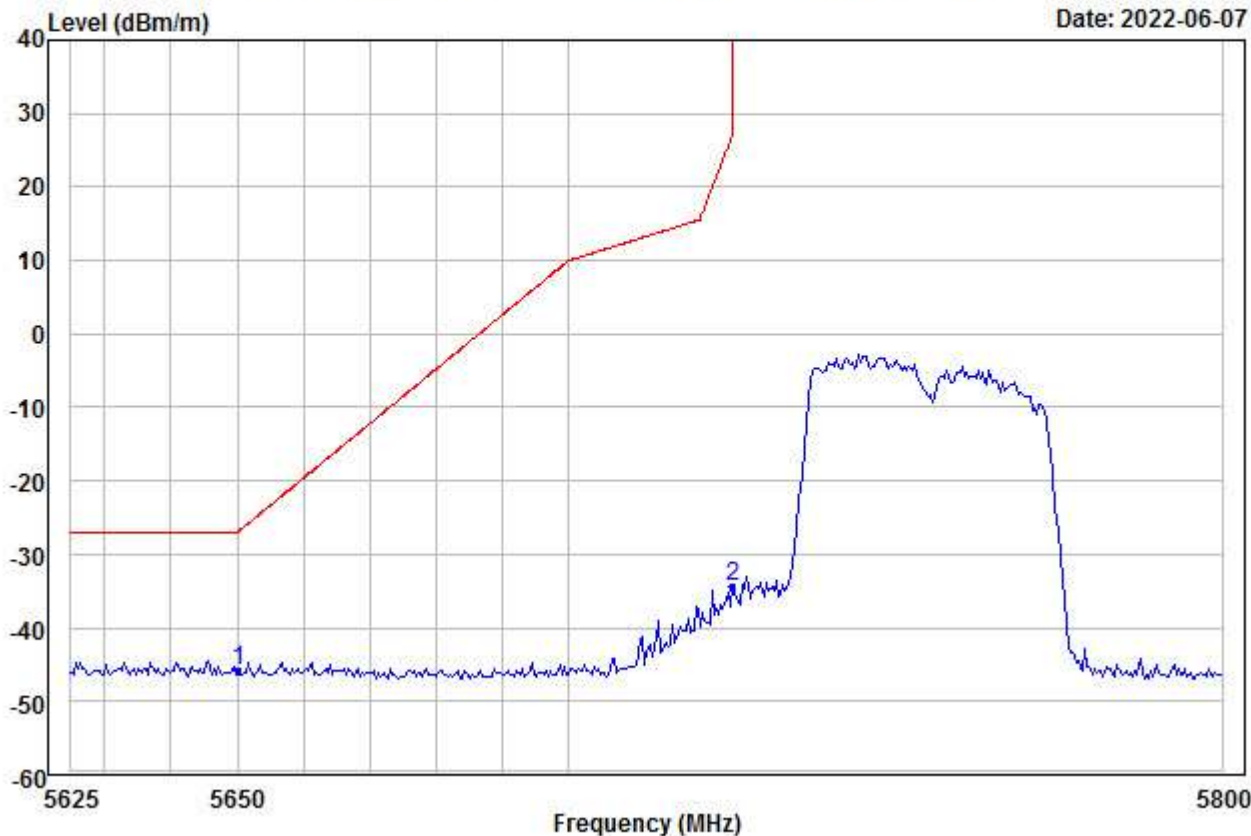


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : N40\_ANT0+1\_5755  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBm	dB/m	dB	dB	dB	dBm/m	dBm/m	dB	cm	deg	
1 PP 5650.000	-57.34	35.27	45.61	0.00	21.88	-45.80	-27.00	-18.80	---	---	Peak
2 5725.000	-45.86	35.26	45.57	0.00	21.68	-34.49	27.00	-61.49	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4\_00086.EMI

Date: 2022-06-07

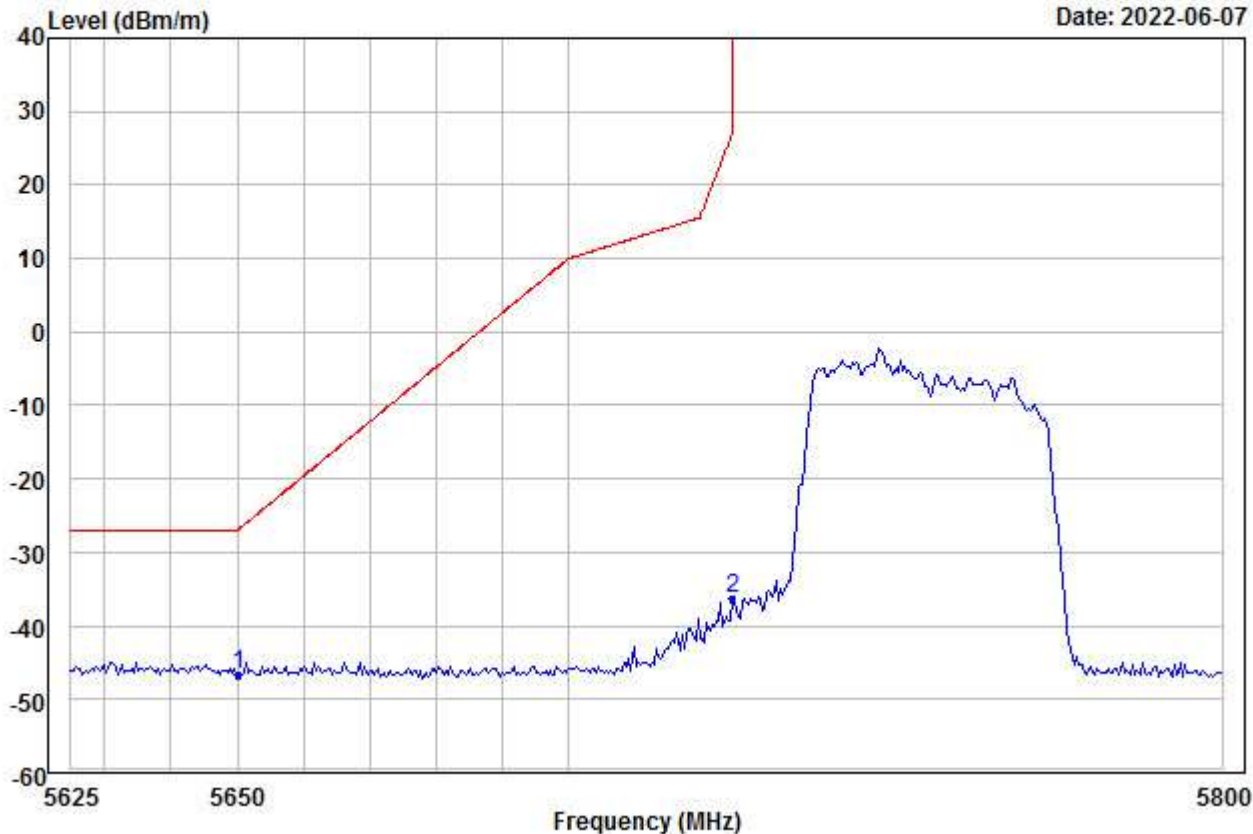


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : N40\_ANT0+1\_5755  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBm	dB/m	dB	dB	dB	dBm/m	dB	cm	deg		
1 PP 5650.000	-58.32	35.27	45.61	0.00	21.88	-46.78	-27.00	-19.78	---	---	Peak
2 5725.000	-47.73	35.26	45.57	0.00	21.68	-36.36	27.00	-63.36	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4\_00087.EMI

Date: 2022-06-07

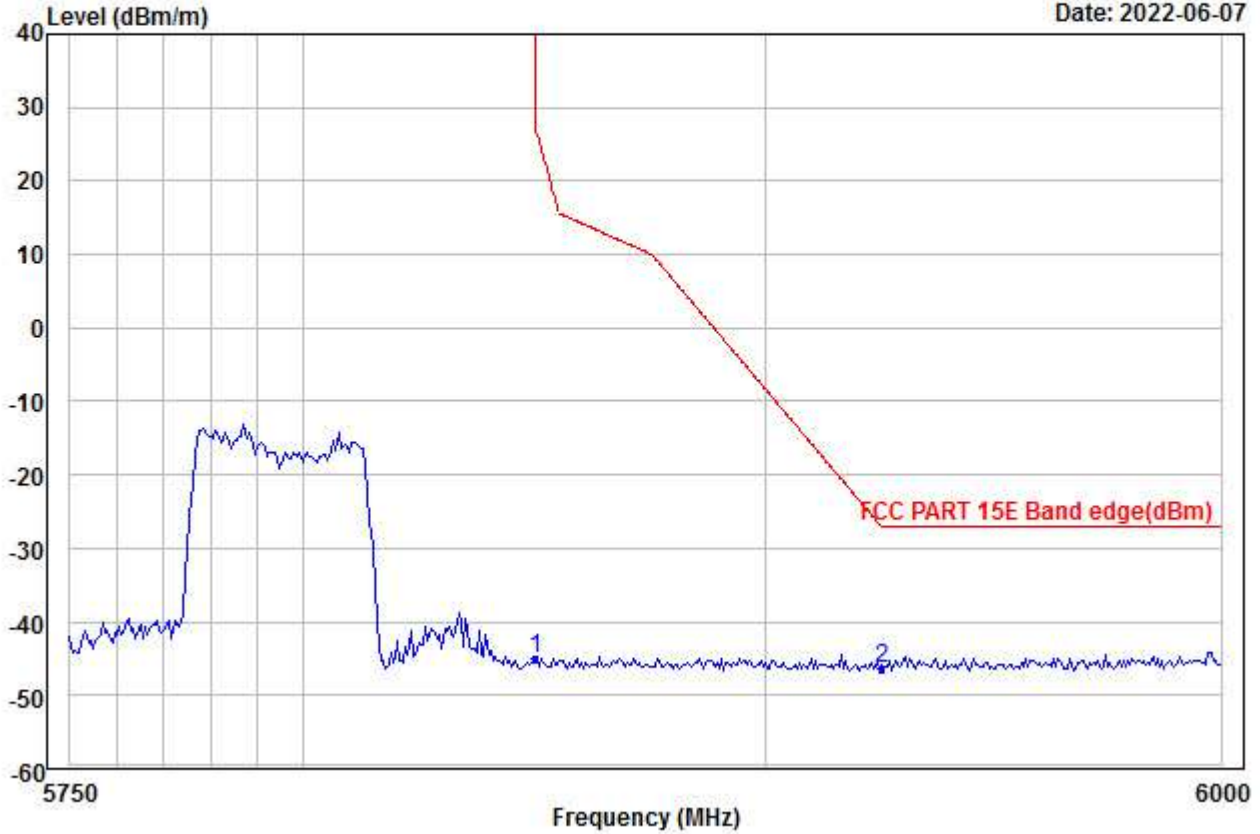


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : N40\_ANT0+1\_5795  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:		
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit					
MHz	dBm	dB/m	dB	dB	dB	dBm/m	dBm/m	dB	cm	deg		
1	5850.000	-56.22	35.23	45.49	0.00	21.47	-45.01	27.00	-72.01	---	---	Peak
2 PP	5925.000	-57.47	35.22	45.44	0.00	21.44	-46.25	-27.00	-19.25	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4\_00088.EMI

Date: 2022-06-07

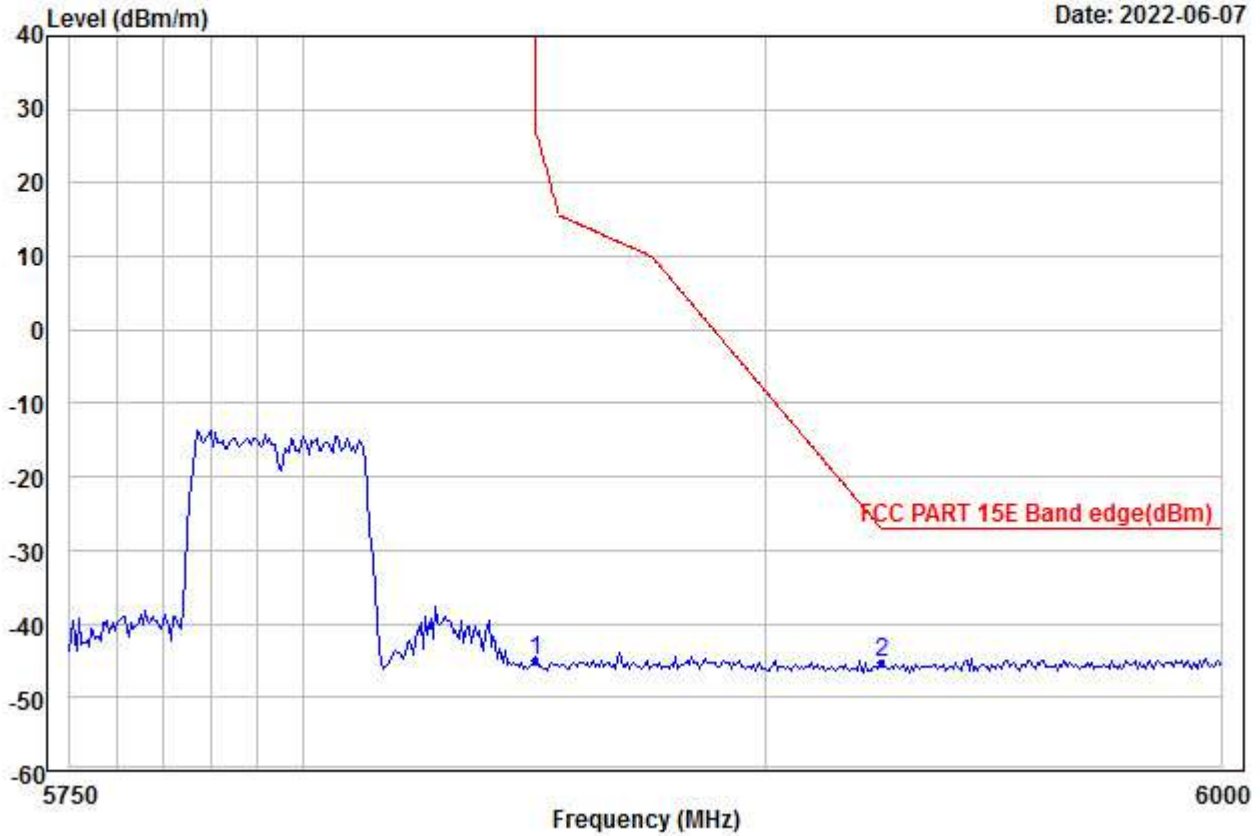


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : N40\_ANT0+1\_5795  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rema		
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit					
MHz	dBm	dB/m	dB	dB	dB	dBm/m	dBm/m	dB	cm	deg		
1	5850.000	-56.18	35.23	45.49	0.00	21.47	-44.97	27.00	-71.97	---	---	Peak
2 PP	5925.000	-56.55	35.22	45.44	0.00	21.44	-45.33	-27.00	-18.33	---	---	Peak



File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4\_00089.EMI

Date: 2022-06-07

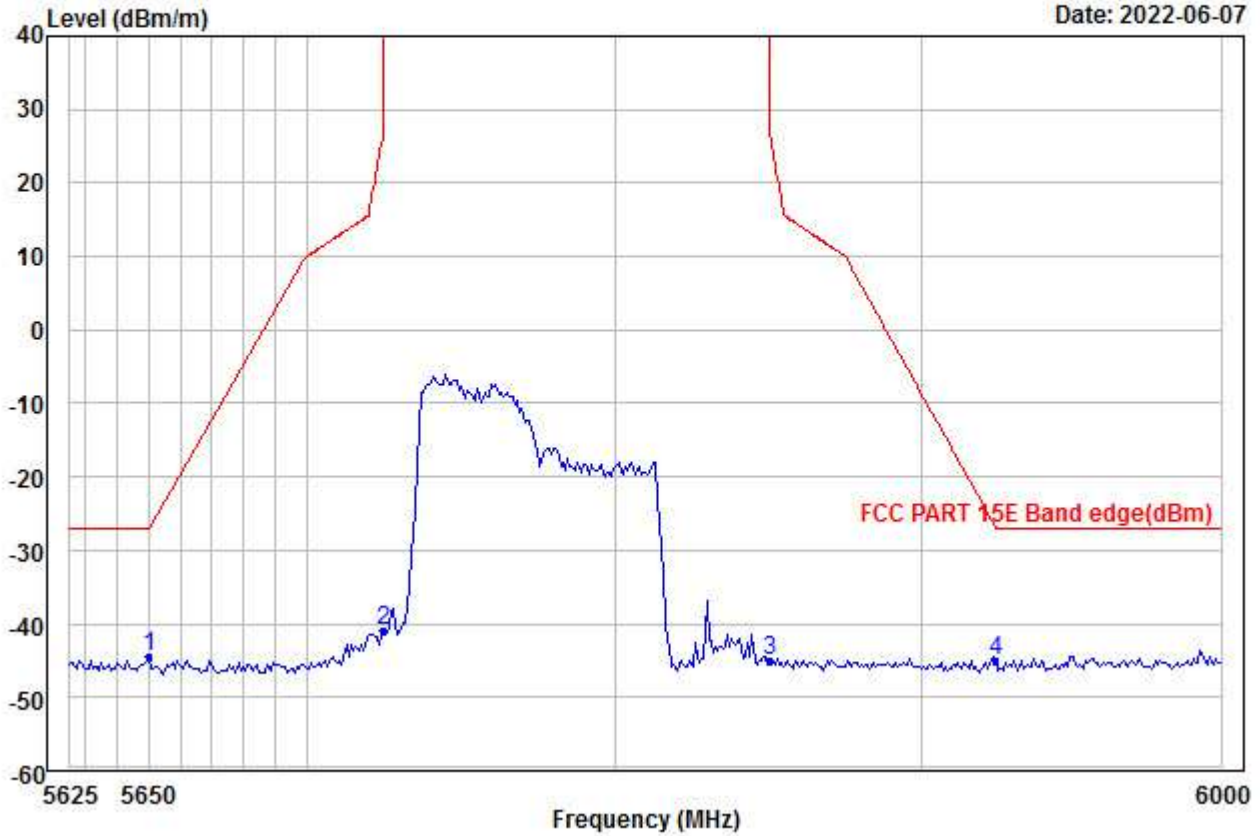


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : AC80\_ANT0+1\_5775  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rema	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBm	dB/m	dB	dB	dB	dBm/m	dBm/m	dB	cm	deg	
1 PP 5650.000	-56.04	35.27	45.61	0.00	21.88	-44.50	-27.00	-17.50	---	---	Peak
2 5725.000	-52.20	35.26	45.57	0.00	21.68	-40.83	27.00	-67.83	---	---	Peak
3 5850.000	-56.29	35.23	45.49	0.00	21.47	-45.08	27.00	-72.08	---	---	Peak
4 5925.000	-56.26	35.22	45.44	0.00	21.44	-45.04	-27.00	-18.04	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4\_00090.EMI

Date: 2022-06-07

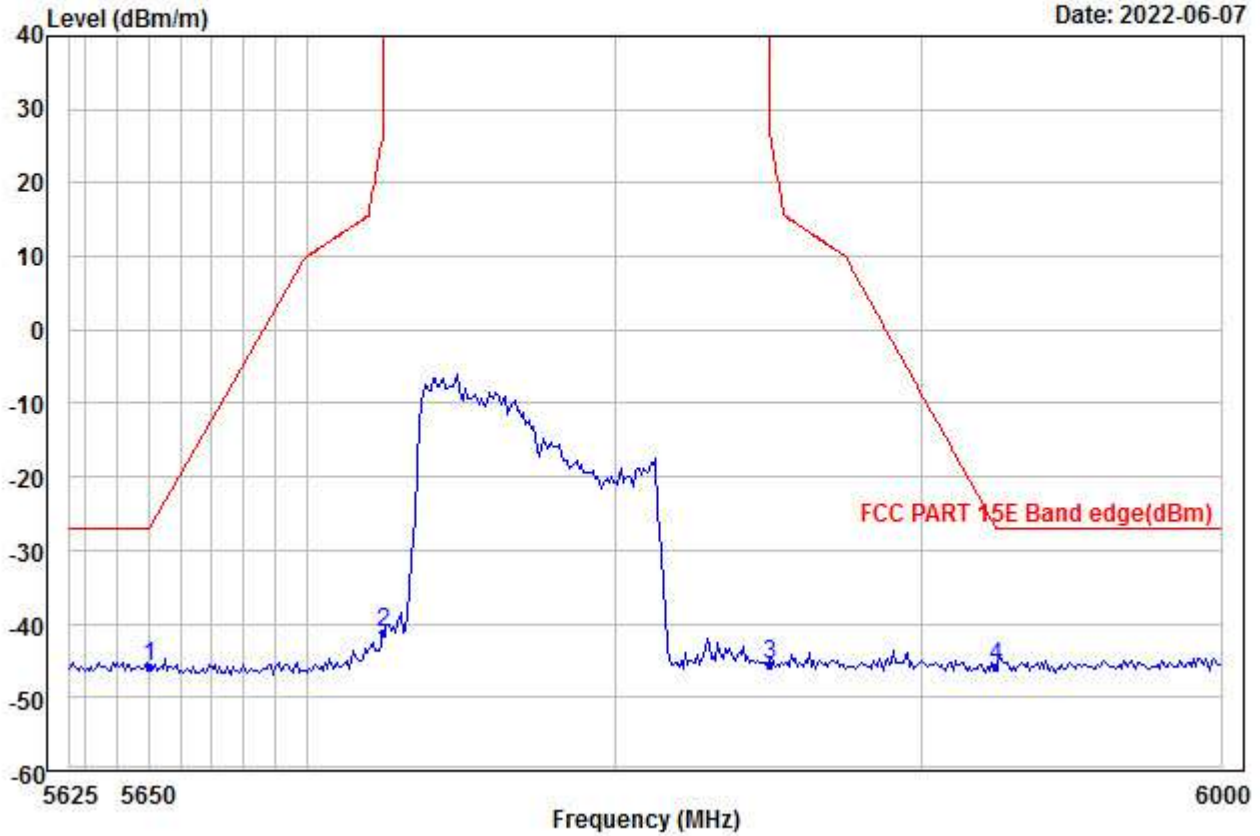


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : AC80\_ANT0+1\_5775  
 Remark :

	Read Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBm	dB/m	dB	dB	dB	dBm/m	dBm/m	dB	cm	deg	
1	5650.000	-57.43	35.27	45.61	0.00	21.88	-45.89	-27.00	-18.89	---	---	Peak
2	5725.000	-52.68	35.26	45.57	0.00	21.68	-41.31	27.00	-68.31	---	---	Peak
3	5850.000	-56.66	35.23	45.49	0.00	21.47	-45.45	27.00	-72.45	---	---	Peak
4 PP	5925.000	-57.07	35.22	45.44	0.00	21.44	-45.85	-27.00	-18.85	---	---	Peak

File: F:\Test Template\上海\ITS\2022\220523032 SA750\A\5G\BE\4\_00091.EMI

Date: 2022-06-07

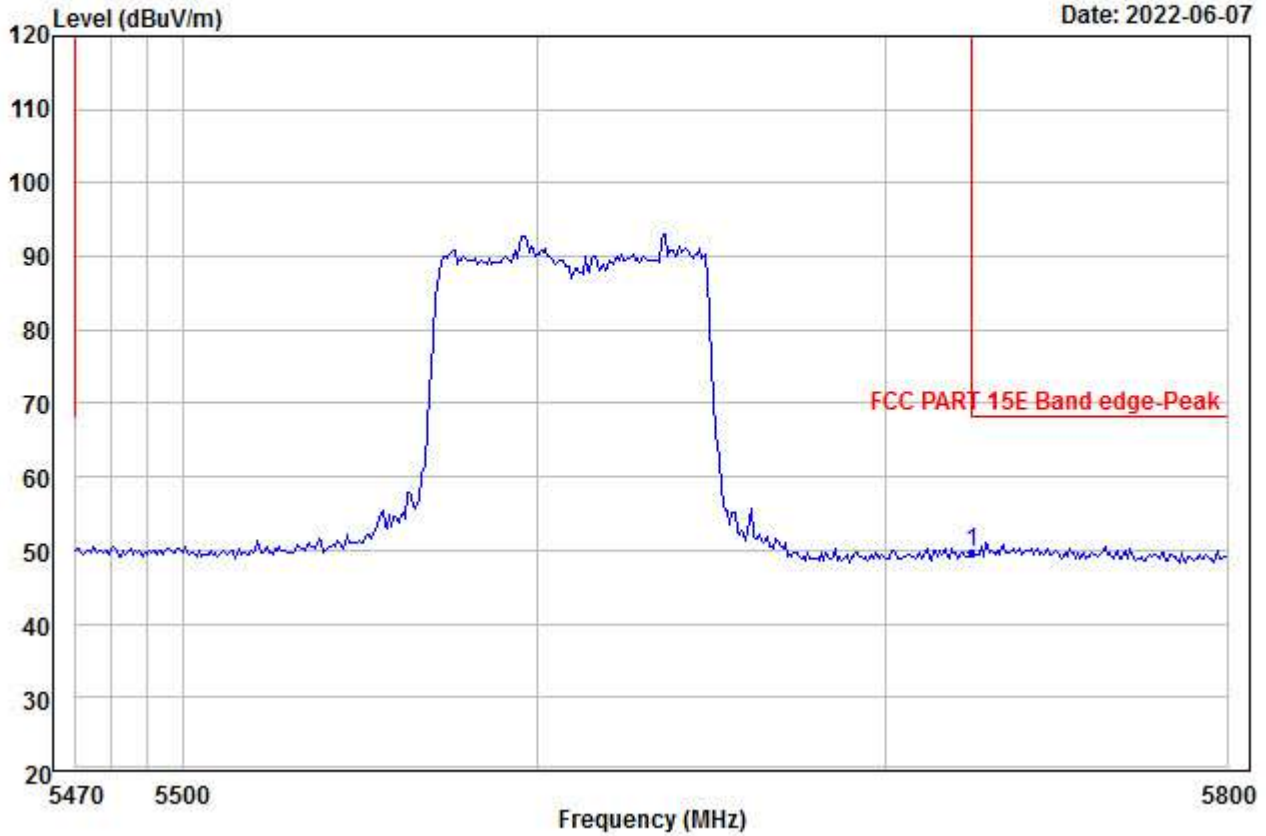


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : AC80\_ANT0+1\_5610  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5725.000	50.04	35.26	45.57	0.00	9.94	49.67	68.20	-18.53	---	---	Peak

File: F:\Test Template\上海\ITS\2022\220523032 SA750\A\5G\BE\4\_00092.EMI

Date: 2022-06-07

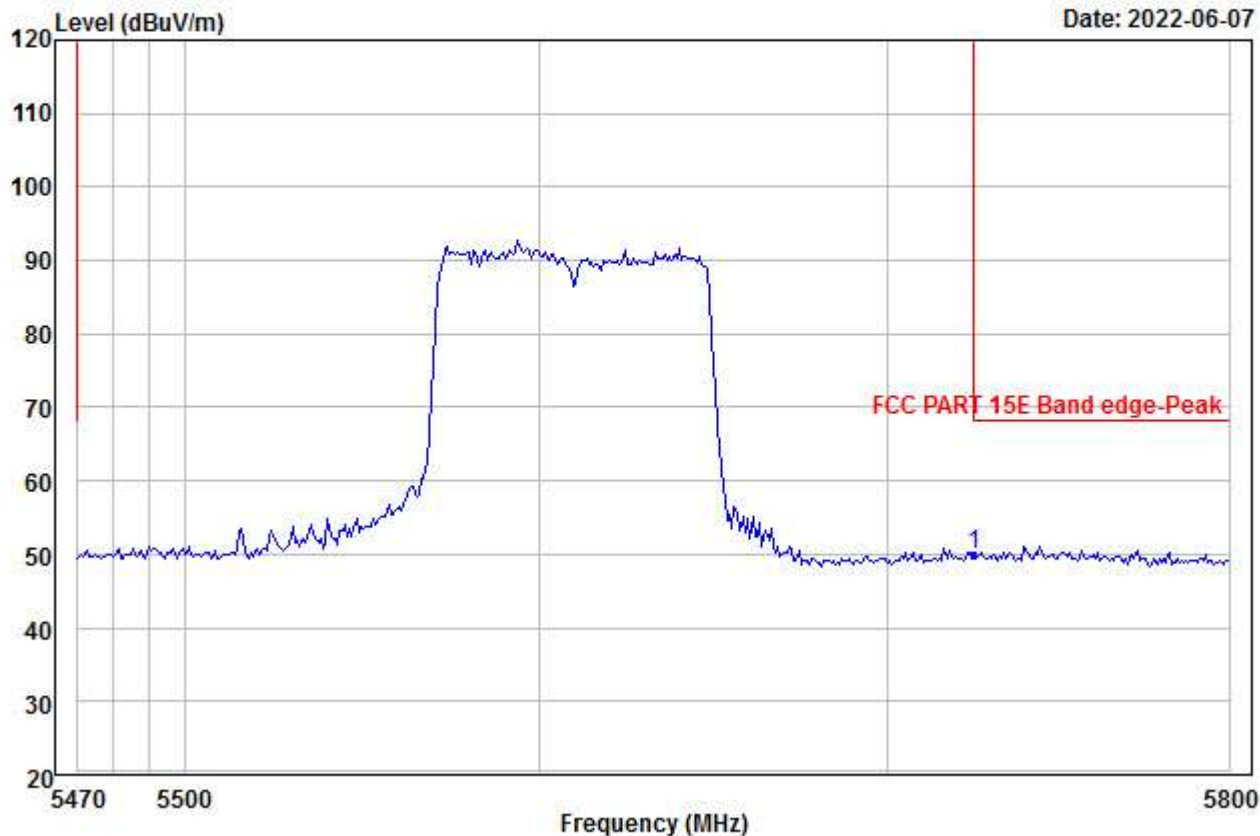


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : AC80\_ANT0+1\_5610  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5725.000	50.38	35.26	45.57	0.00	9.94	50.01	68.20	-18.19	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4\_00093.EMI

Date: 2022-06-07

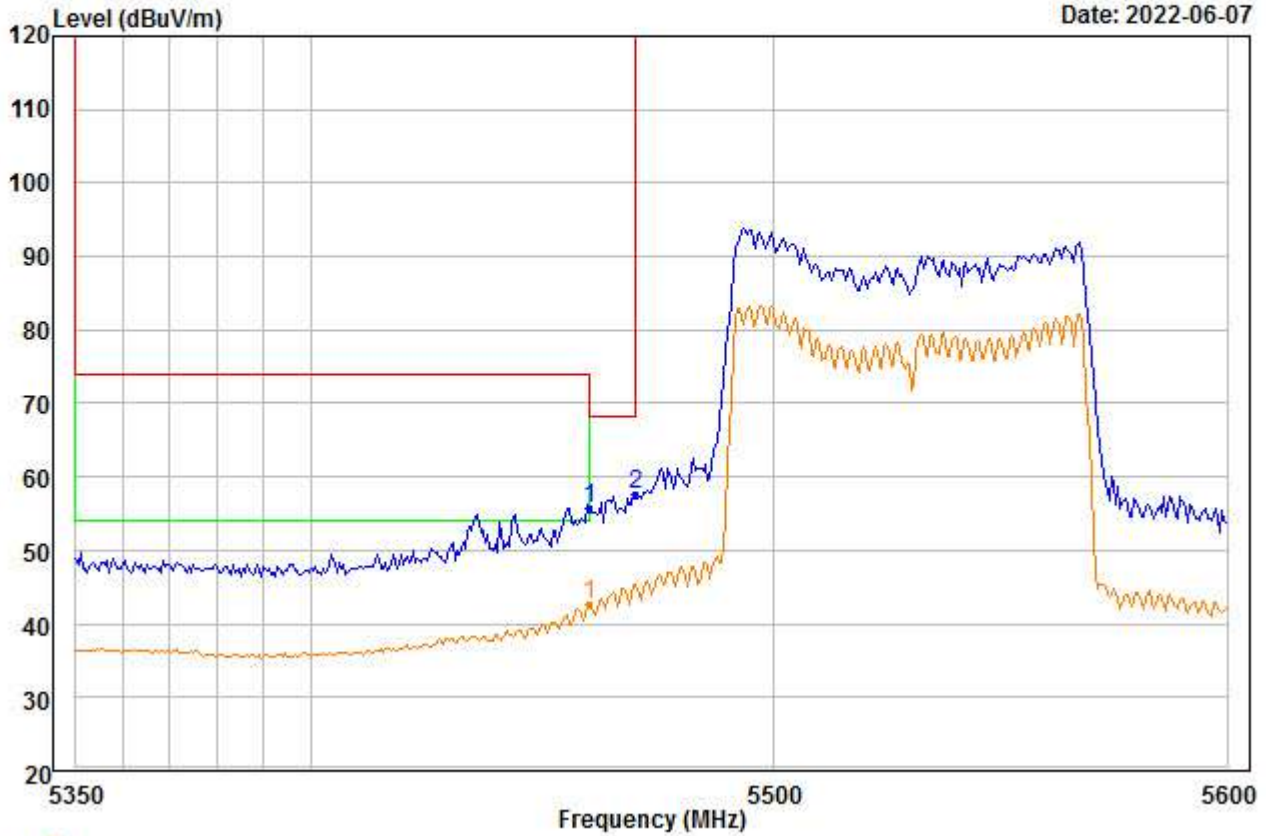


Trace: 1

Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : AC80\_ANT0+1\_5530  
 Remark :

	Read Freq	Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	5460.000	55.68	35.25	45.77	0.00	10.44	55.60	68.20	-12.60	---	---	Peak
2 PP	5470.000	57.67	35.26	45.75	0.00	10.47	57.65	68.20	-10.55	---	---	Peak

File: F:\Test Template\上海\ITS\2022\220523032 SA750\A\5G\BE\4\_00094.EMI

Date: 2022-06-07

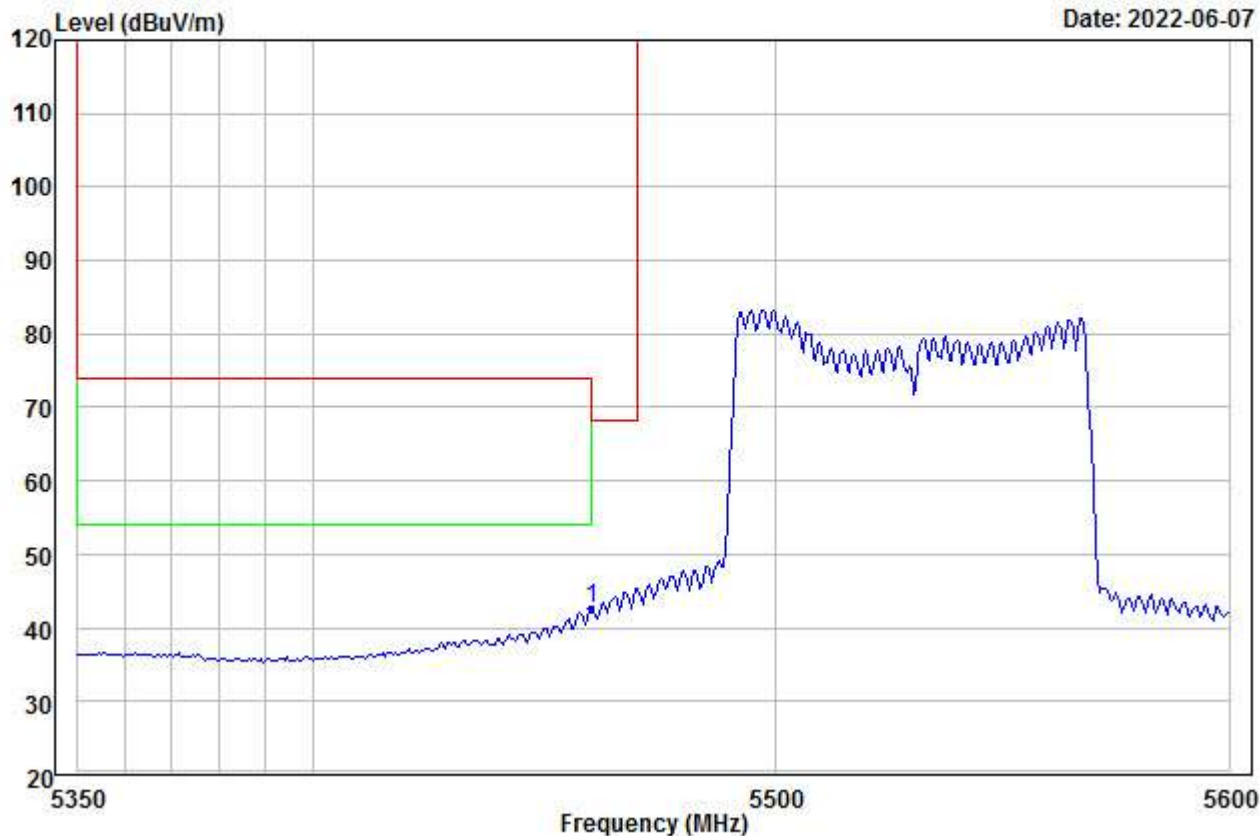


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : AC80\_ANT0+1\_5530  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5460.000	42.68	35.25	45.77	0.00	10.44	42.60	54.00	-11.40	---	---	Aver

File: F:\Test Template\上海\ITS\2022\220523032 SA750\A\5G\BE\4\_00095.EMI

Date: 2022-06-07

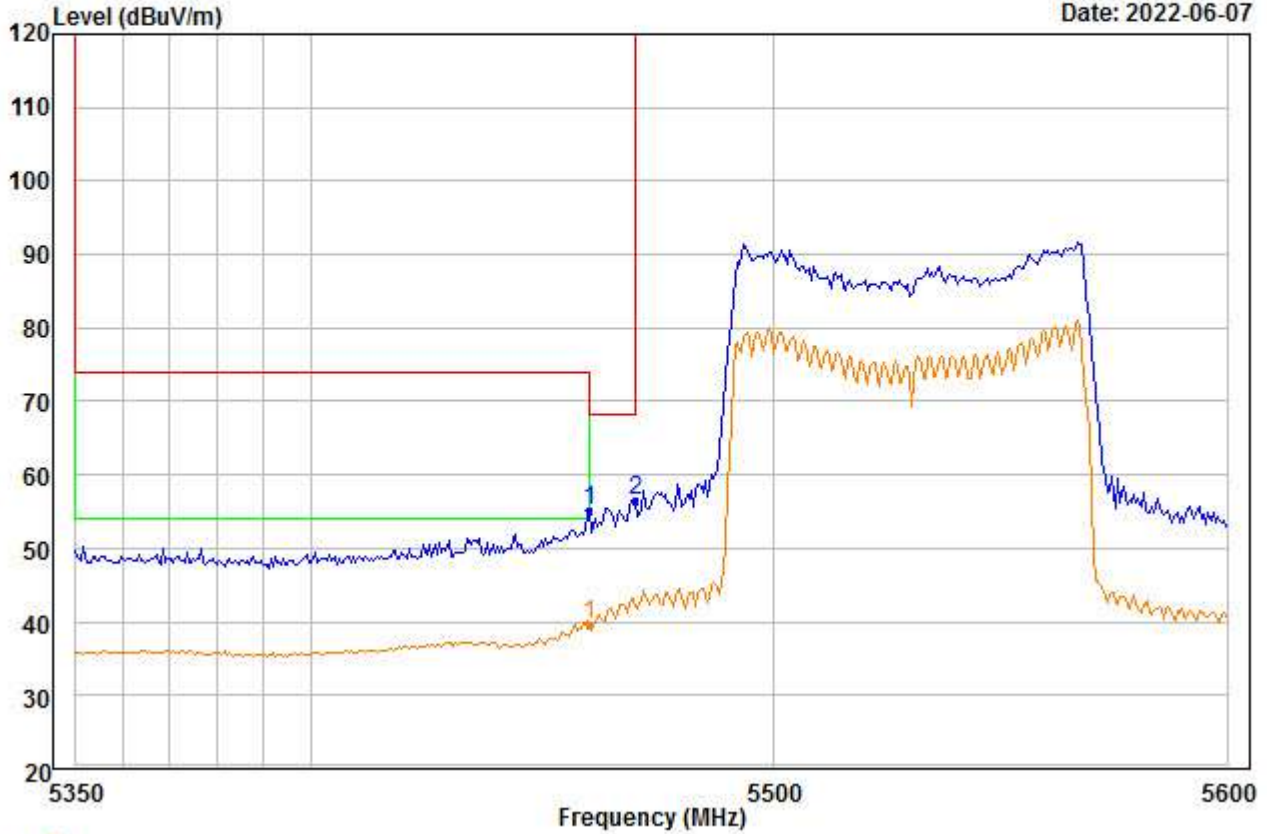


Trace: 1

Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : AC80\_ANT0+1\_5530  
 Remark :

	Read Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Limit Level	Over Limit	APos	TPos	Remarks	
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	5460.000	55.23	35.25	45.77	0.00	10.44	55.15	68.20	-13.05	---	---	Peak
2 PP	5470.000	56.62	35.26	45.75	0.00	10.47	56.60	68.20	-11.60	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4\_00096.EMI

Date: 2022-06-07

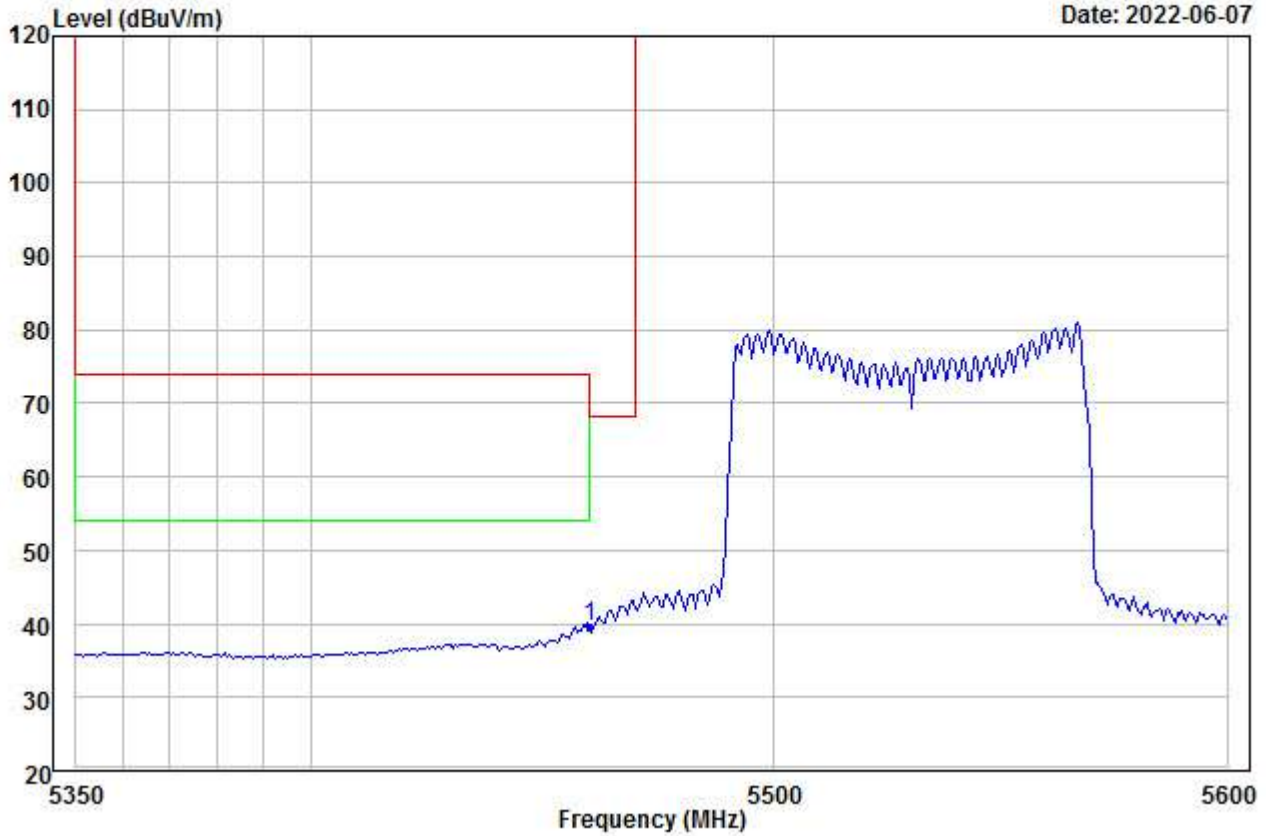


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : AC80\_ANT0+1\_5530  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5460.000	39.72	35.25	45.77	0.00	10.44	39.64	54.00	-14.36	---	---	Aver



File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4\_00097.EMI

Date: 2022-06-07

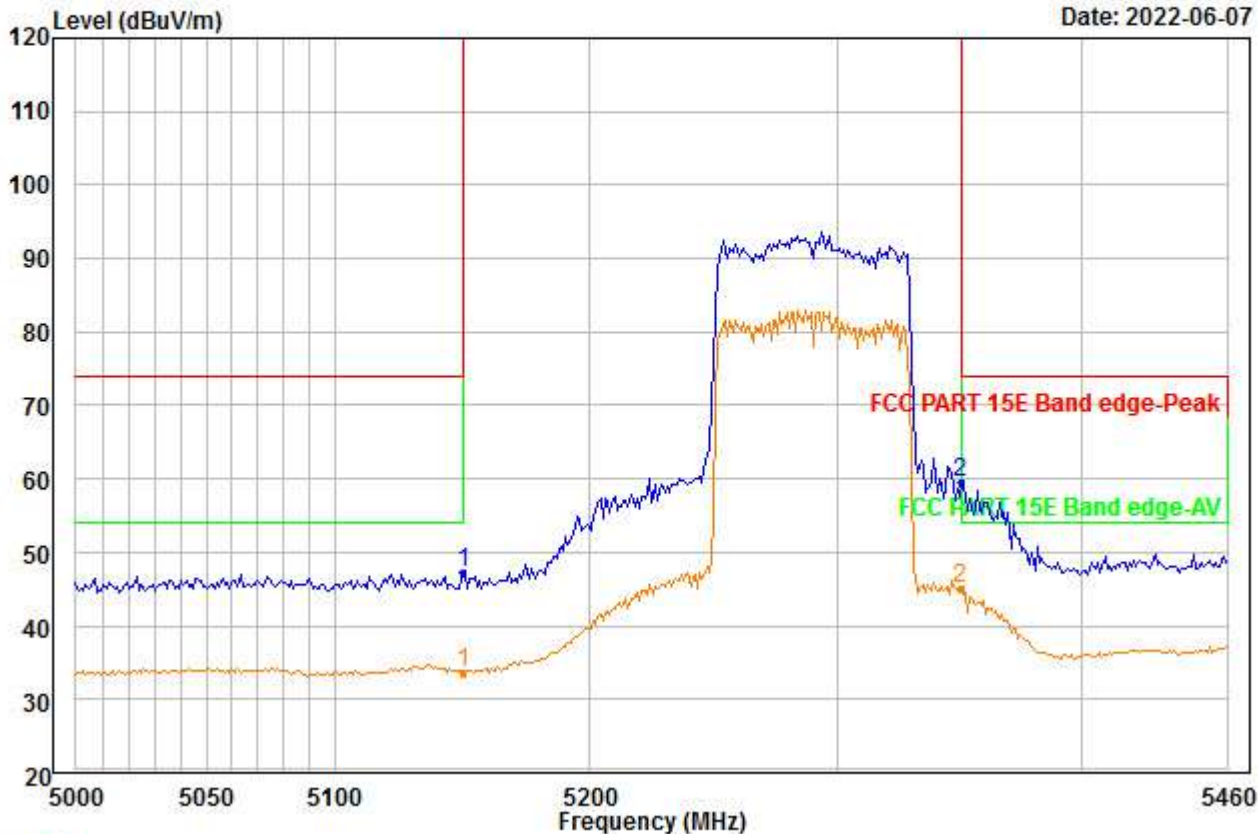


Trace: 1

Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : AC80\_ANT0+1\_5290  
 Remark :

	Read Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	5150.000	48.90	34.88	46.33	0.00	9.78	47.23	74.00	-26.77	---	---	Peak
2 PP	5350.000	60.16	35.12	45.97	0.00	10.18	59.49	74.00	-14.51	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4\_00098.EMI

Date: 2022-06-07

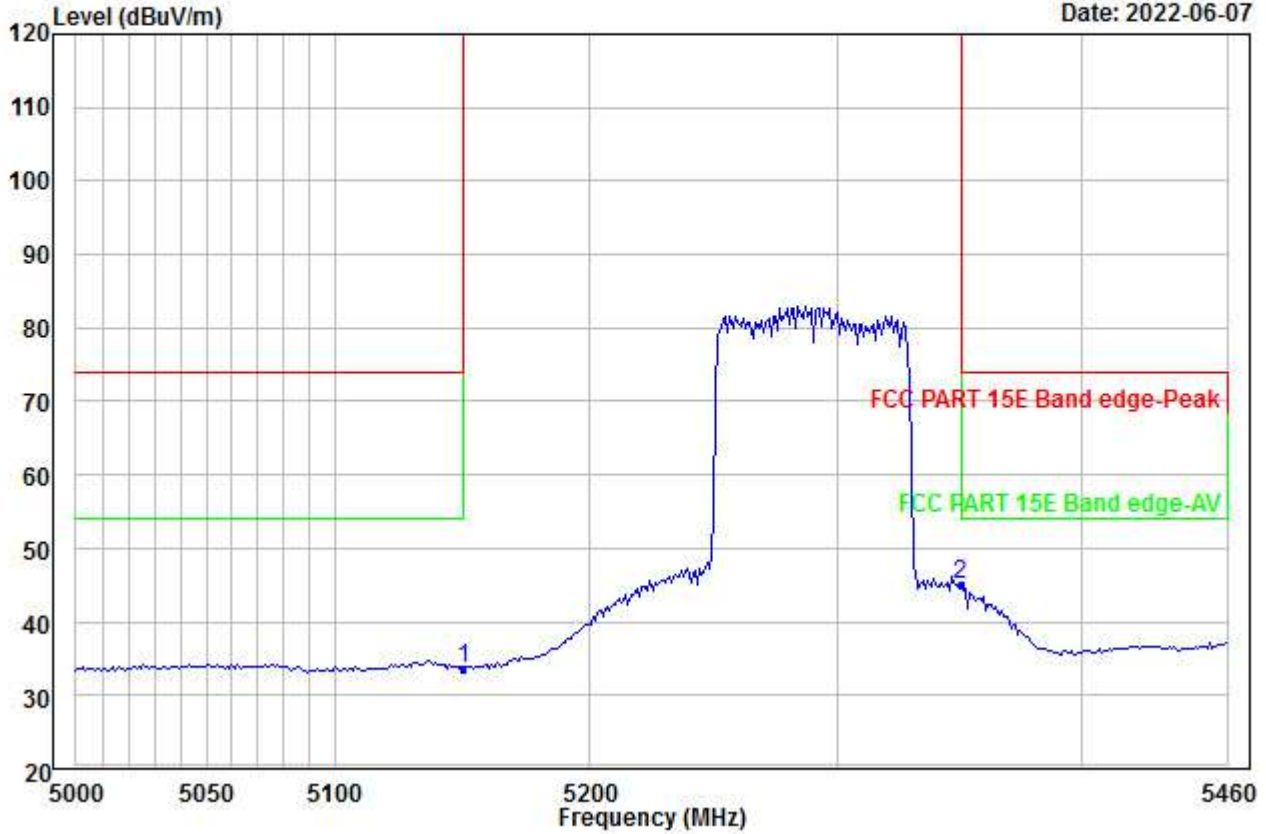


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : AC80\_ANT0+1\_5290  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:		
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit					
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg		
1	5150.000	35.39	34.88	46.33	0.00	9.78	33.72	54.00	-20.28	---	---	Aver
2 PP	5350.000	45.62	35.12	45.97	0.00	10.18	44.95	54.00	-9.05	---	---	Aver

File: F:\Test Template\上海ITSI\2022\220523032 SA750\A\5G\BE\4\_00099.EMI

Date: 2022-06-07

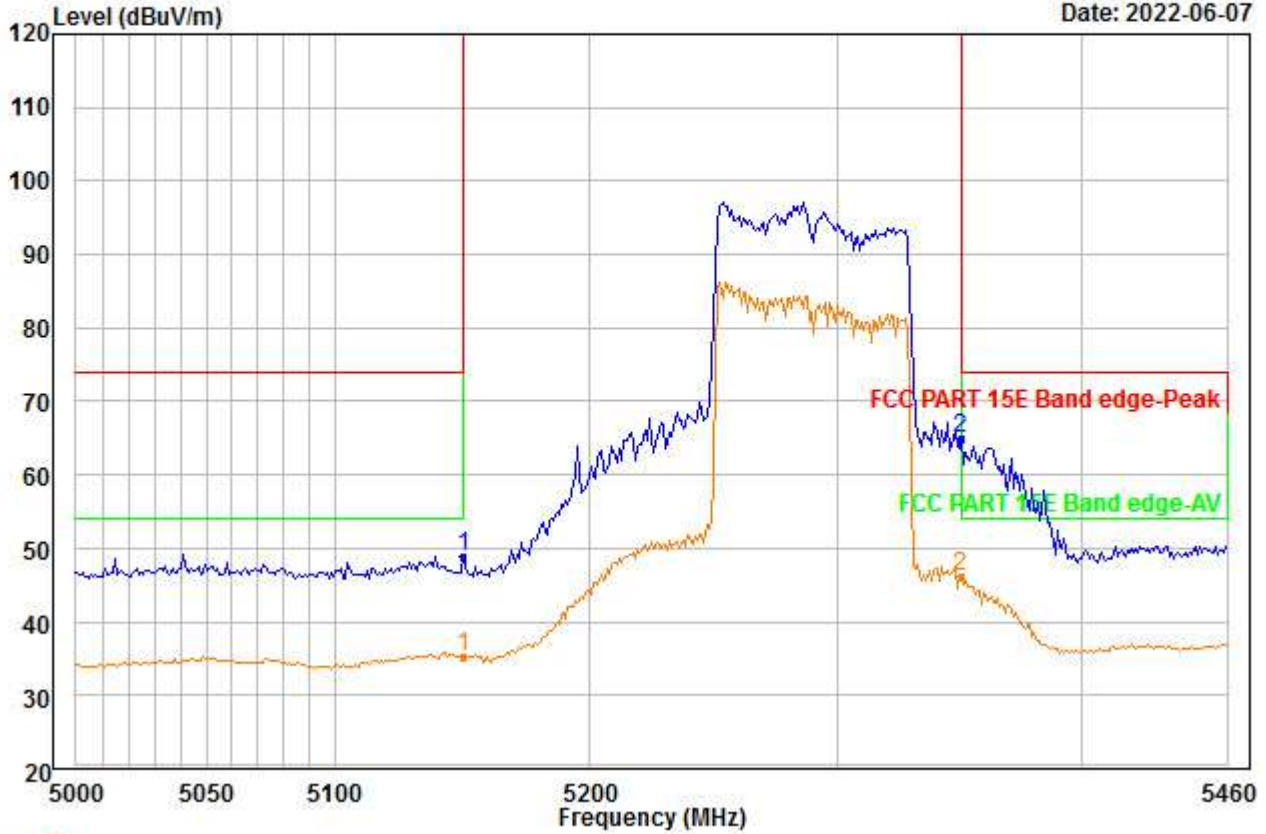


Trace: 1

Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : AC80\_ANT0+1\_5290  
 Remark :

	Read Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	5150.000	50.59	34.88	46.33	0.00	9.78	48.92	74.00	-25.08	---	---	Peak
2 PP	5350.000	65.62	35.12	45.97	0.00	10.18	64.95	74.00	-9.05	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4\_00100.EMI

Date: 2022-06-07

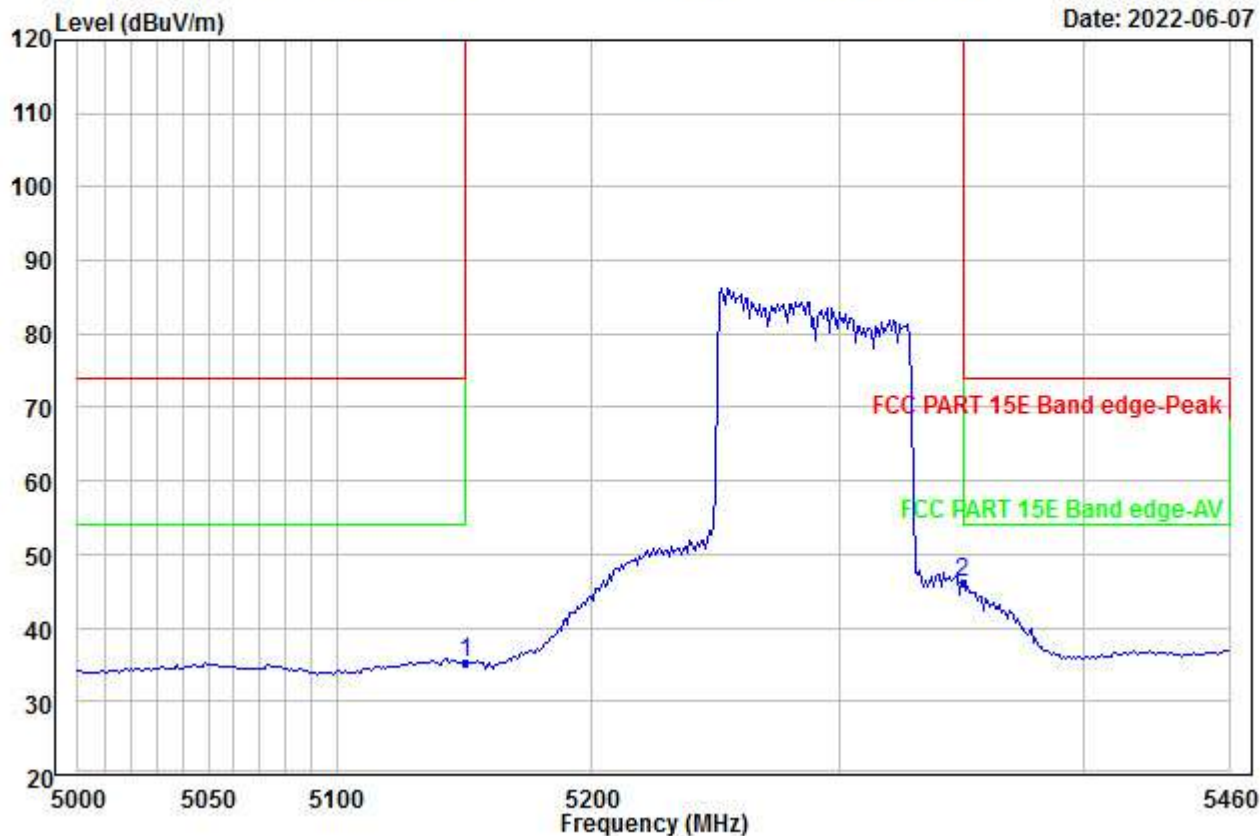


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : AC80\_ANT0+1\_5290  
 Remark :

	Read Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	5150.000	36.94	34.88	46.33	0.00	9.78	35.27	54.00	-18.73	---	---	Aver
2 PP	5350.000	46.87	35.12	45.97	0.00	10.18	46.20	54.00	-7.80	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4\_00101.EMI

Date: 2022-06-07

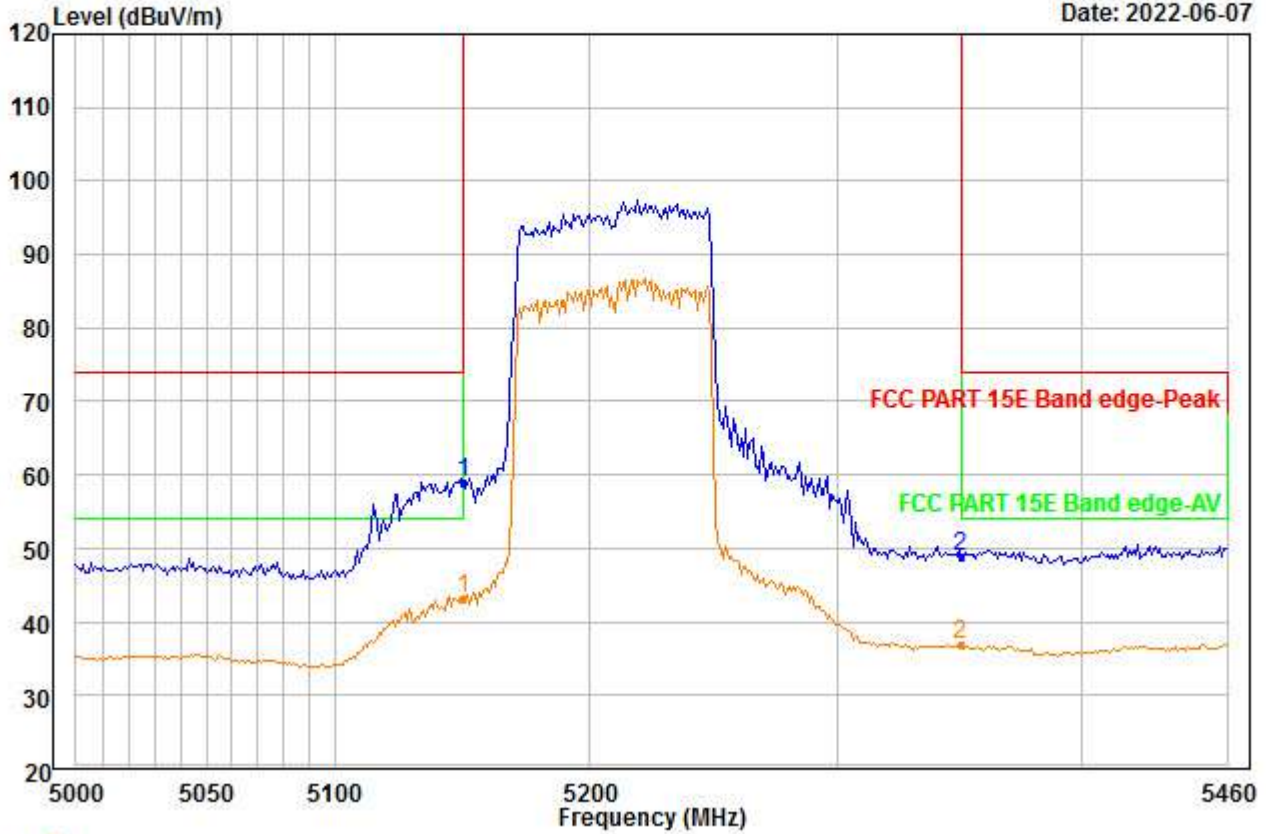


Trace: 1

Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : AC80\_ANT0+1\_5210  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5150.000	60.73	34.88	46.33	0.00	9.78	59.06	74.00	-14.94	---	---	Peak
2 5350.000	49.57	35.12	45.97	0.00	10.18	48.90	74.00	-25.10	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4\_00102.EMI

Date: 2022-06-07

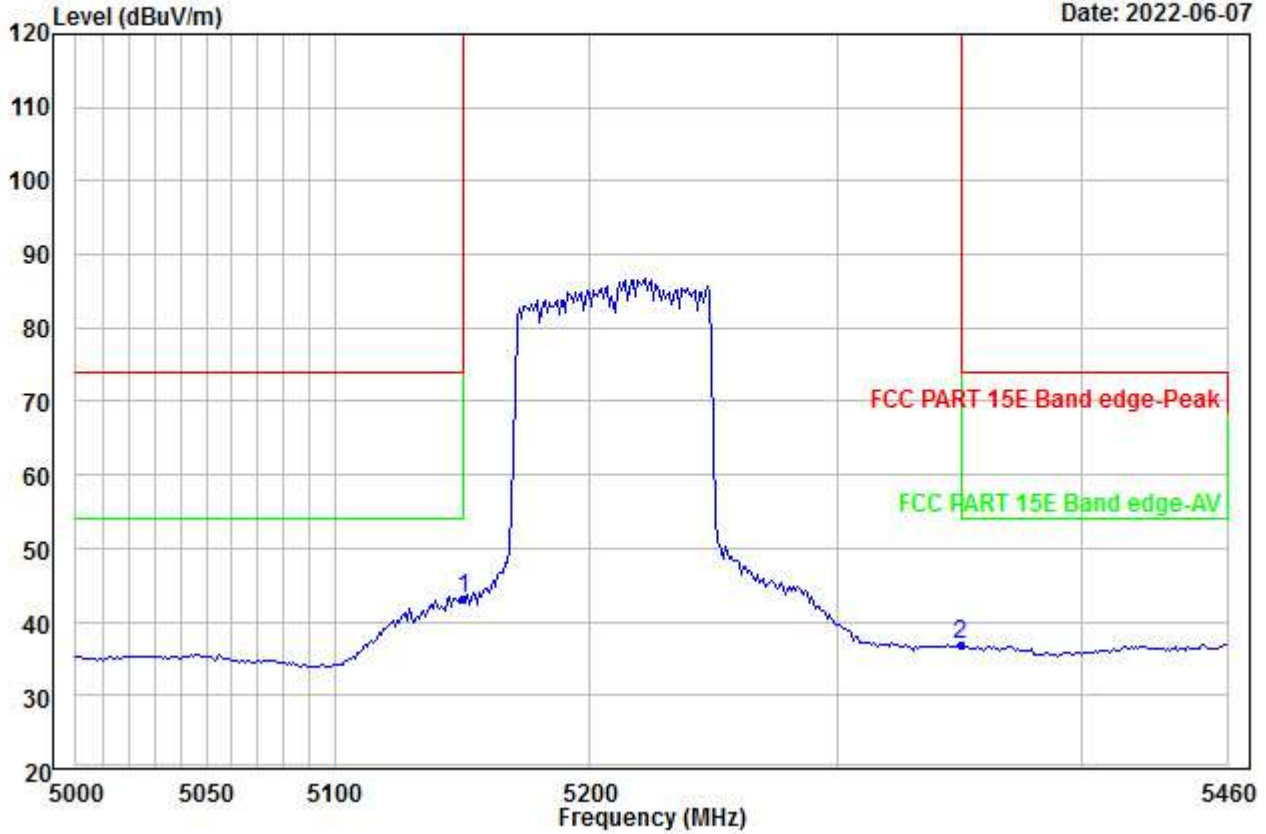


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : AC80\_ANT0+1\_5210  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5150.000	44.80	34.88	46.33	0.00	9.78	43.13	54.00	-10.87	---	---	Aver
2 5350.000	37.52	35.12	45.97	0.00	10.18	36.85	54.00	-17.15	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4\_00103.EMI

Date: 2022-06-07

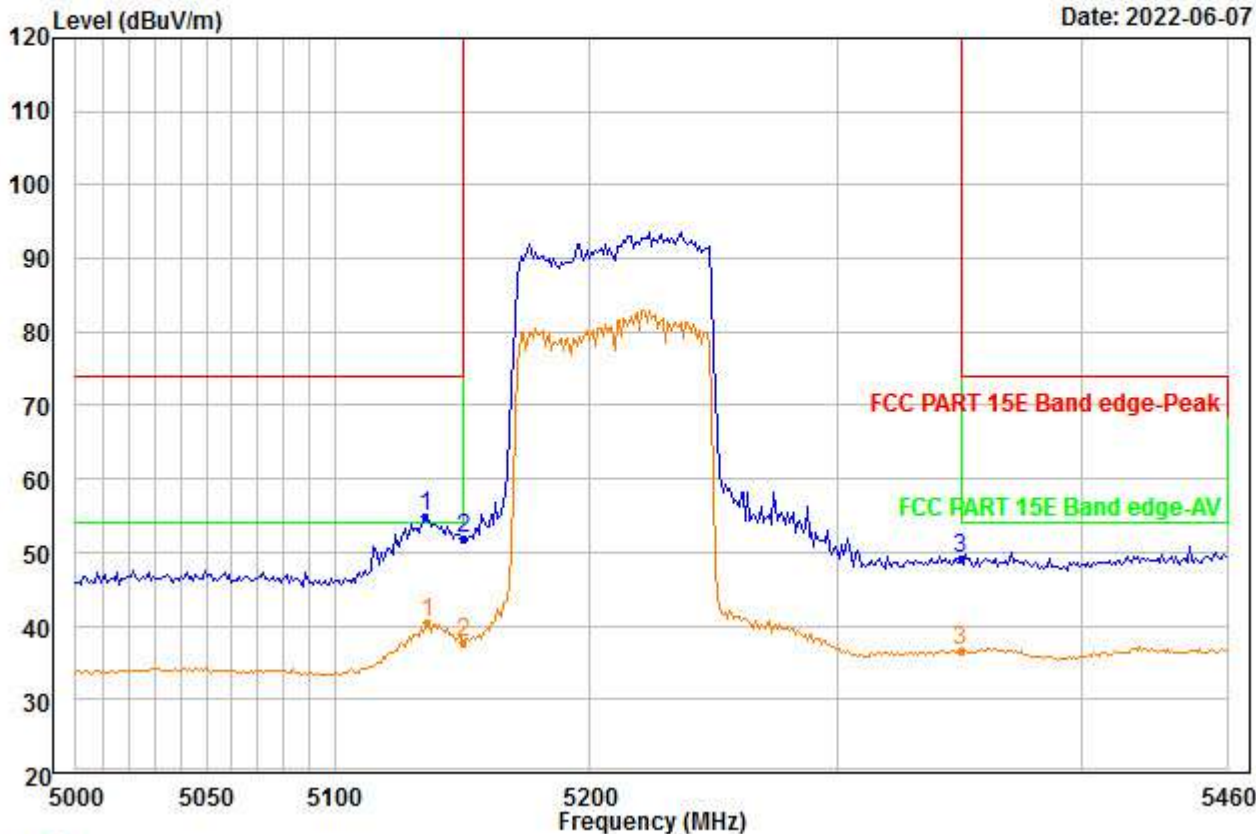


Trace: 1

Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : AC80\_ANT0+1\_5210  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5135.511	56.66	34.86	46.36	0.00	9.76	54.92	74.00	-19.08	---	---	Peak
2 5150.000	53.57	34.88	46.33	0.00	9.78	51.90	74.00	-22.10	---	---	Peak
3 5350.000	49.86	35.12	45.97	0.00	10.18	49.19	74.00	-24.81	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4\_00104.EMI

Date: 2022-06-07

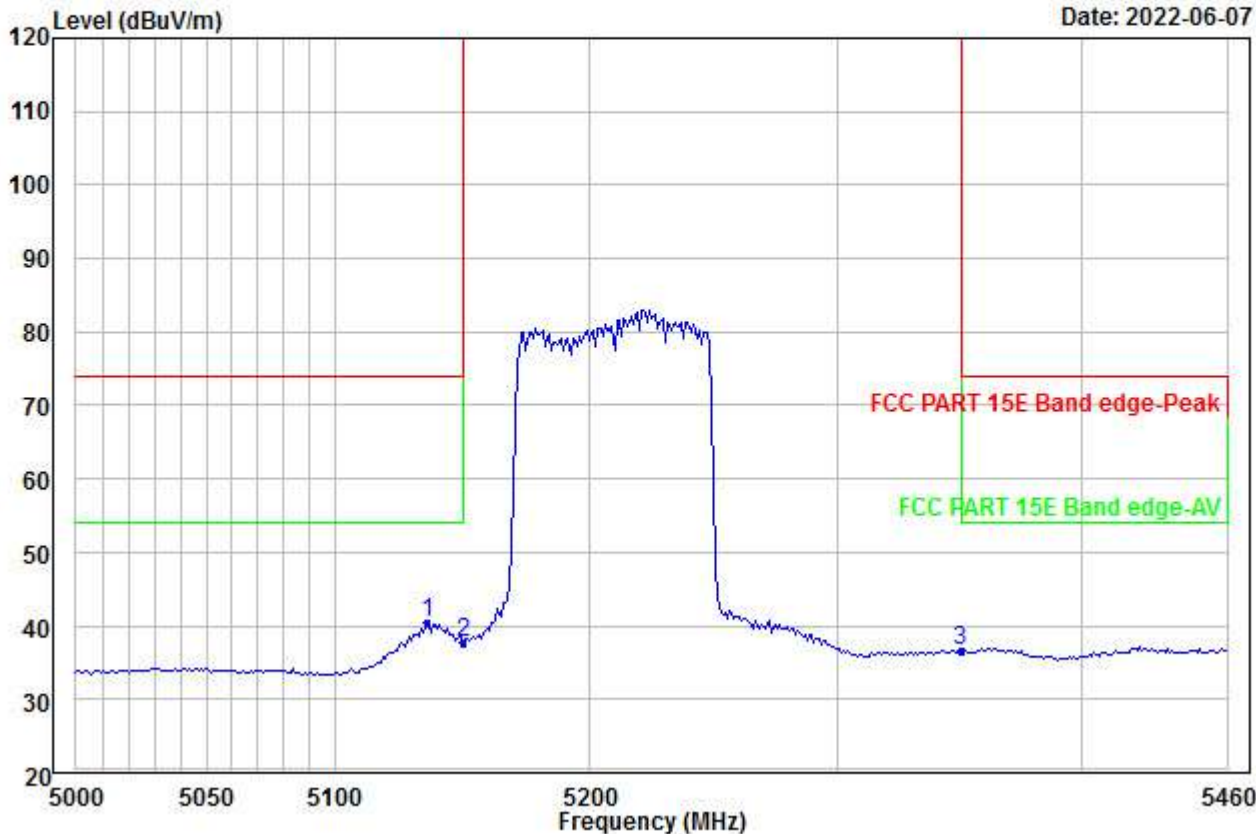


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : AC80\_ANT0+1\_5210  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5136.433	42.06	34.86	46.35	0.00	9.77	40.34	54.00	-13.66	---	---	Aver
2 5150.000	39.34	34.88	46.33	0.00	9.78	37.67	54.00	-16.33	---	---	Aver
3 5350.000	37.25	35.12	45.97	0.00	10.18	36.58	54.00	-17.42	---	---	Aver



File: F:\Test Template\上海ITSI\2022\220523032 SA750\A\5G\BE\4\_00105.EMI

Date: 2022-06-07

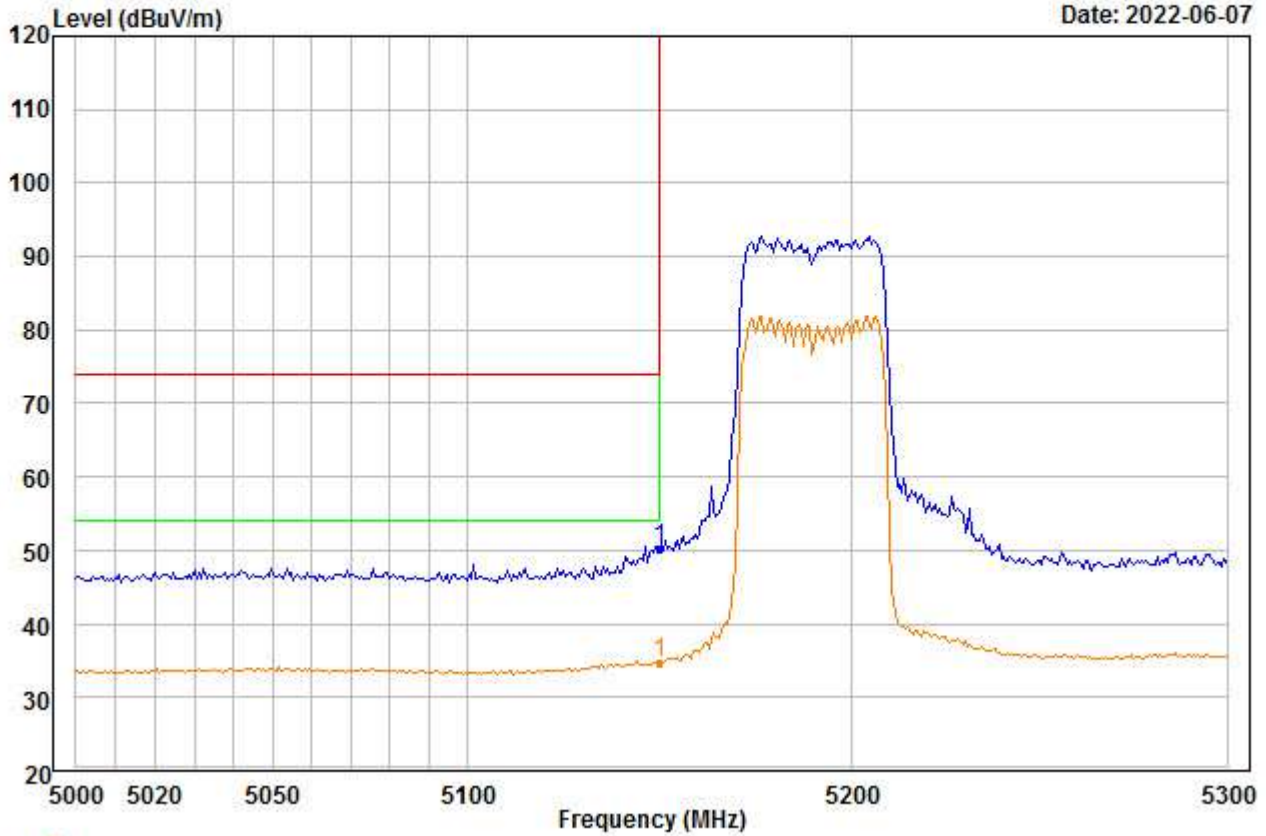


Trace: 1

Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : AC40\_ANT0+1\_5190  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5150.000	51.88	34.88	46.33	0.00	9.78	50.21	74.00	-23.79	---	---	Peak

File: F:\Test Template\上海ITSI\2022\220523032 SA750\A\5G\BE\4\_00106.EMI

Date: 2022-06-07

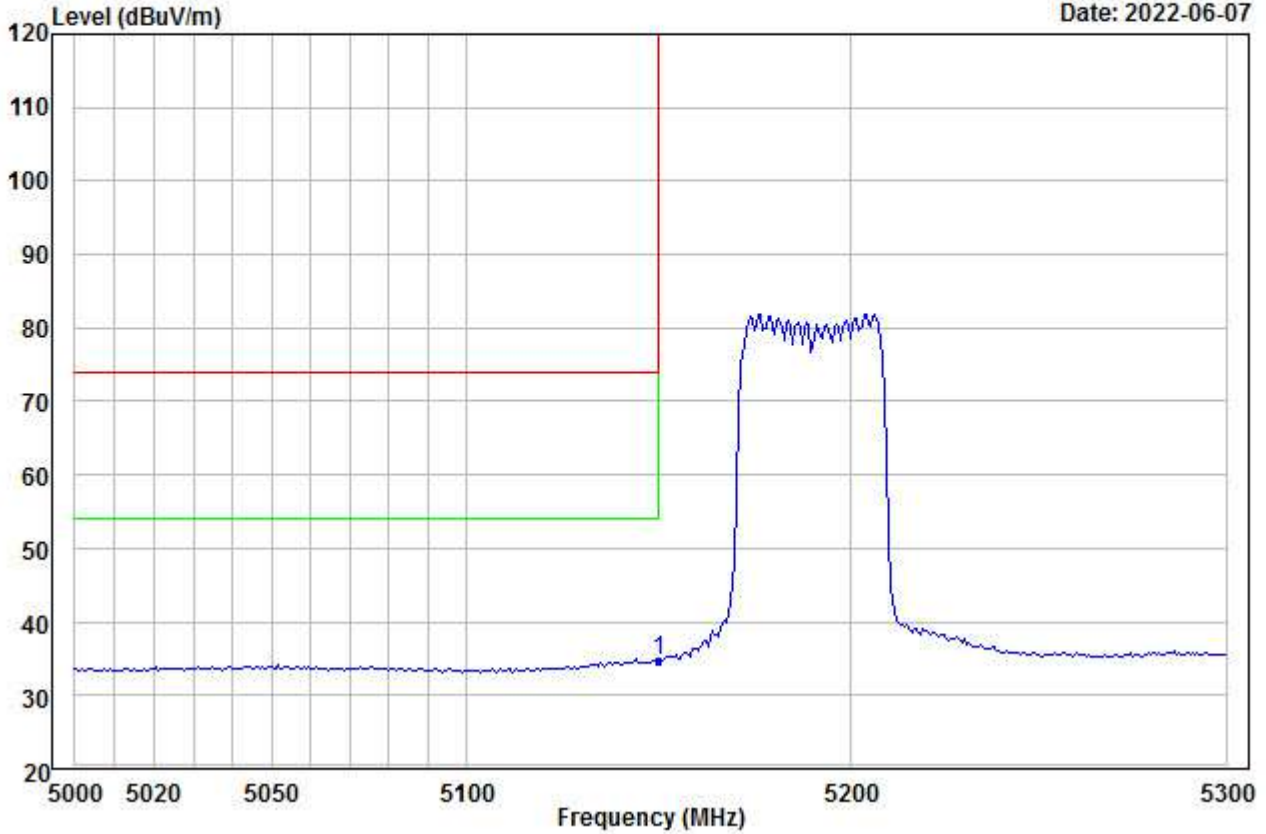


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : AC40\_ANT0+1\_5190  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5150.000	36.33	34.88	46.33	0.00	9.78	34.66	54.00	-19.34	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4\_00107.EMI

Date: 2022-06-07

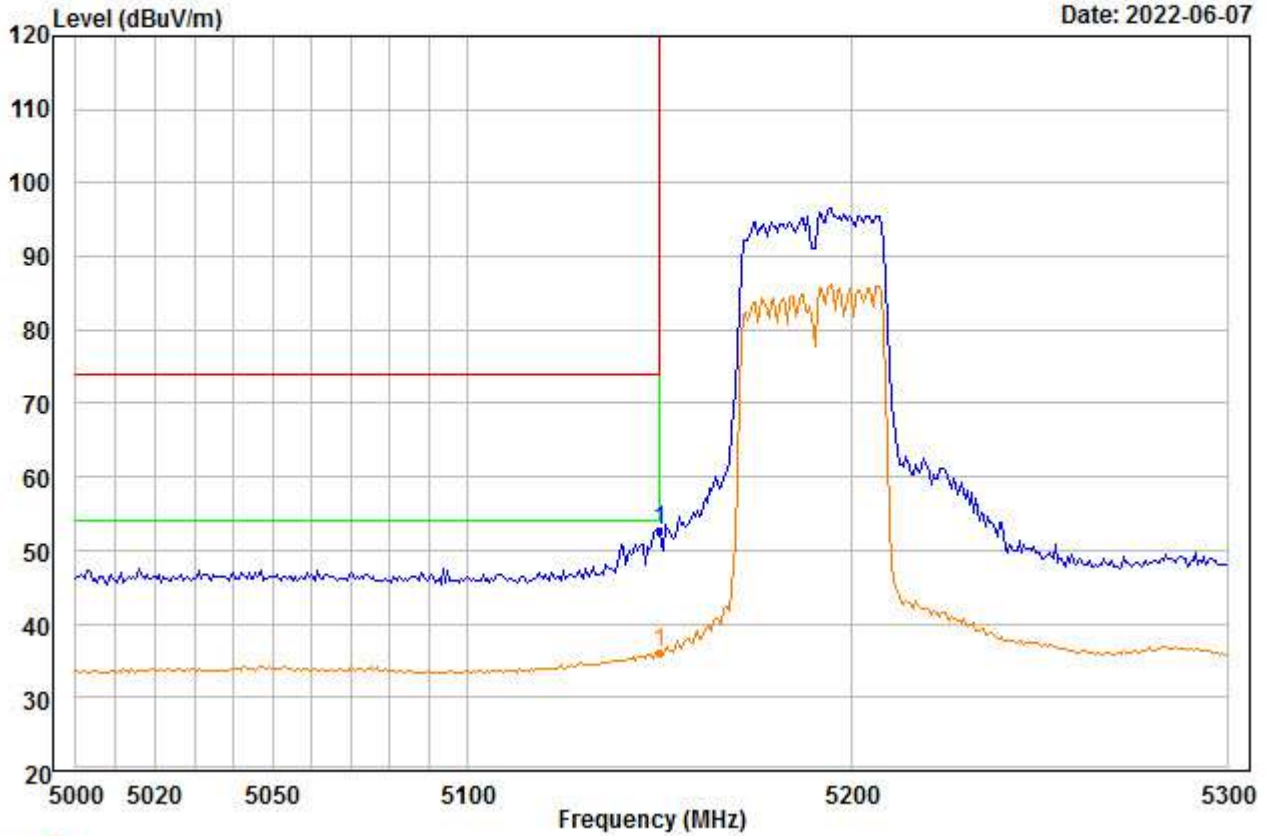


Trace: 1

Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : AC40\_ANT0+1\_5190  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5150.000	54.43	34.88	46.33	0.00	9.78	52.76	74.00	-21.24	---	---	Peak

File: F:\Test Template\上海ITSI\2022\220523032 SA750\A\5G\BE\4\_00108.EMI

Date: 2022-06-07

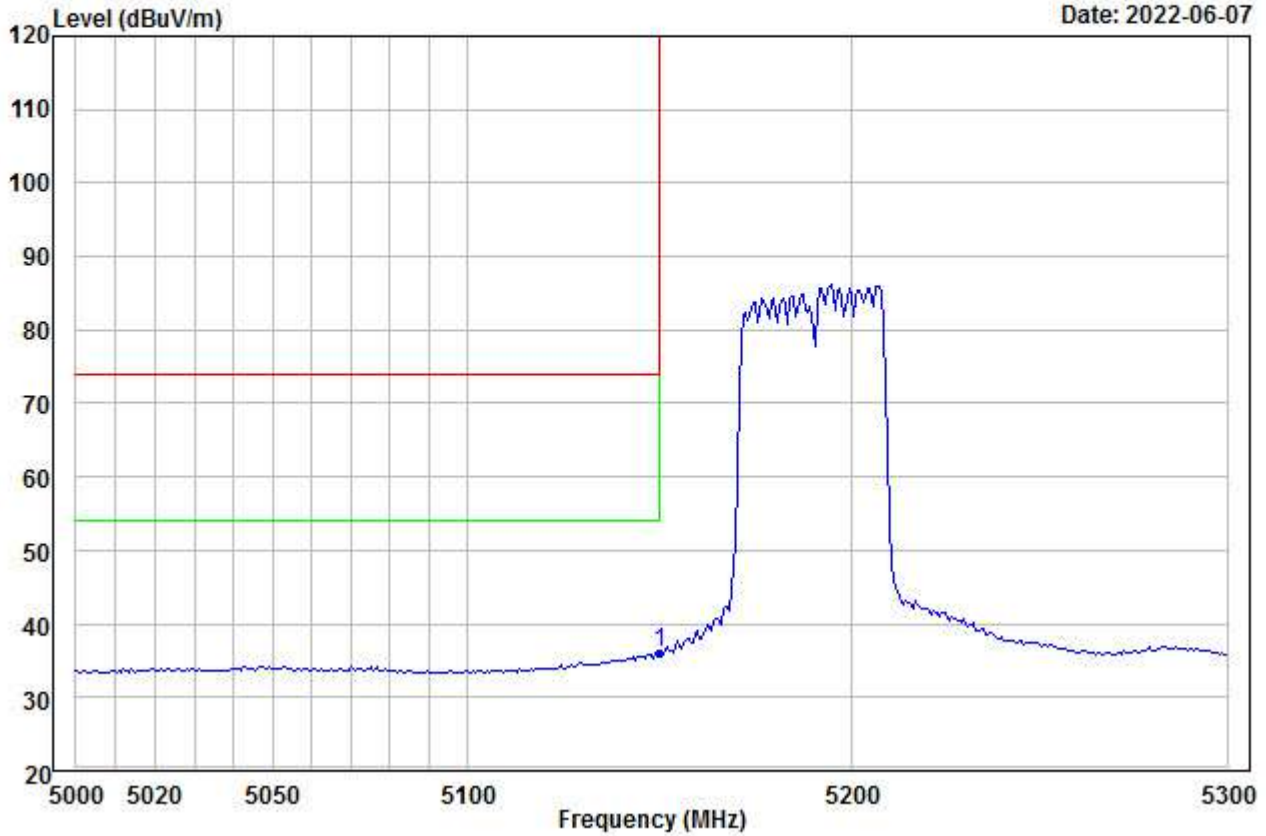


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : AC40\_ANT0+1\_5190  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5150.000	37.83	34.88	46.33	0.00	9.78	36.16	54.00	-17.84	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4\_00109.EMI

Date: 2022-06-07

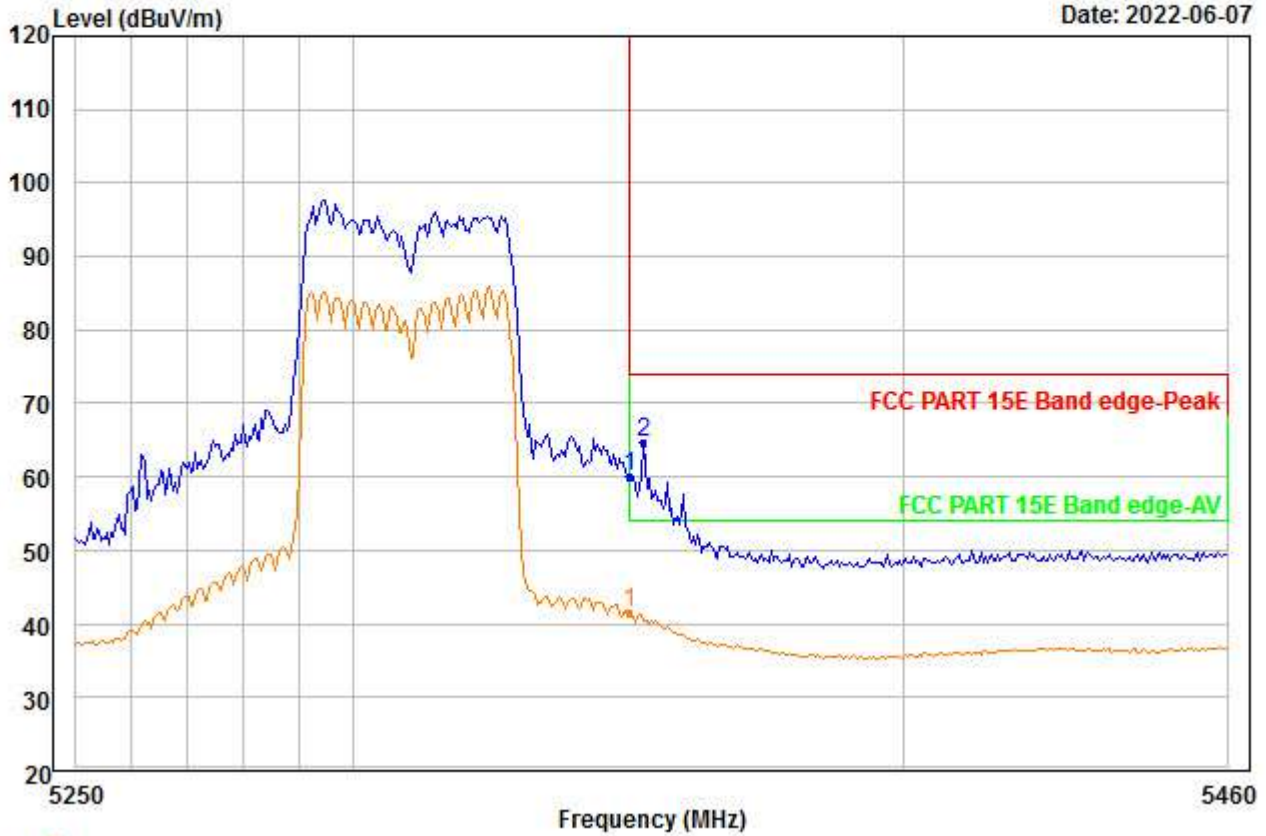


Trace: 1

Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : AC40\_ANT0+1\_5310  
 Remark :

	Read Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	5350.000	60.62	35.12	45.97	0.00	10.18	59.95	74.00	-14.05	---	---	Peak
2 PP	5352.686	65.35	35.12	45.97	0.00	10.18	64.68	74.00	-9.32	---	---	Peak

File: F:\Test Template\上海\ITS\2022\220523032 SA750\A\5G\BE\4\_00110.EMI

Date: 2022-06-07

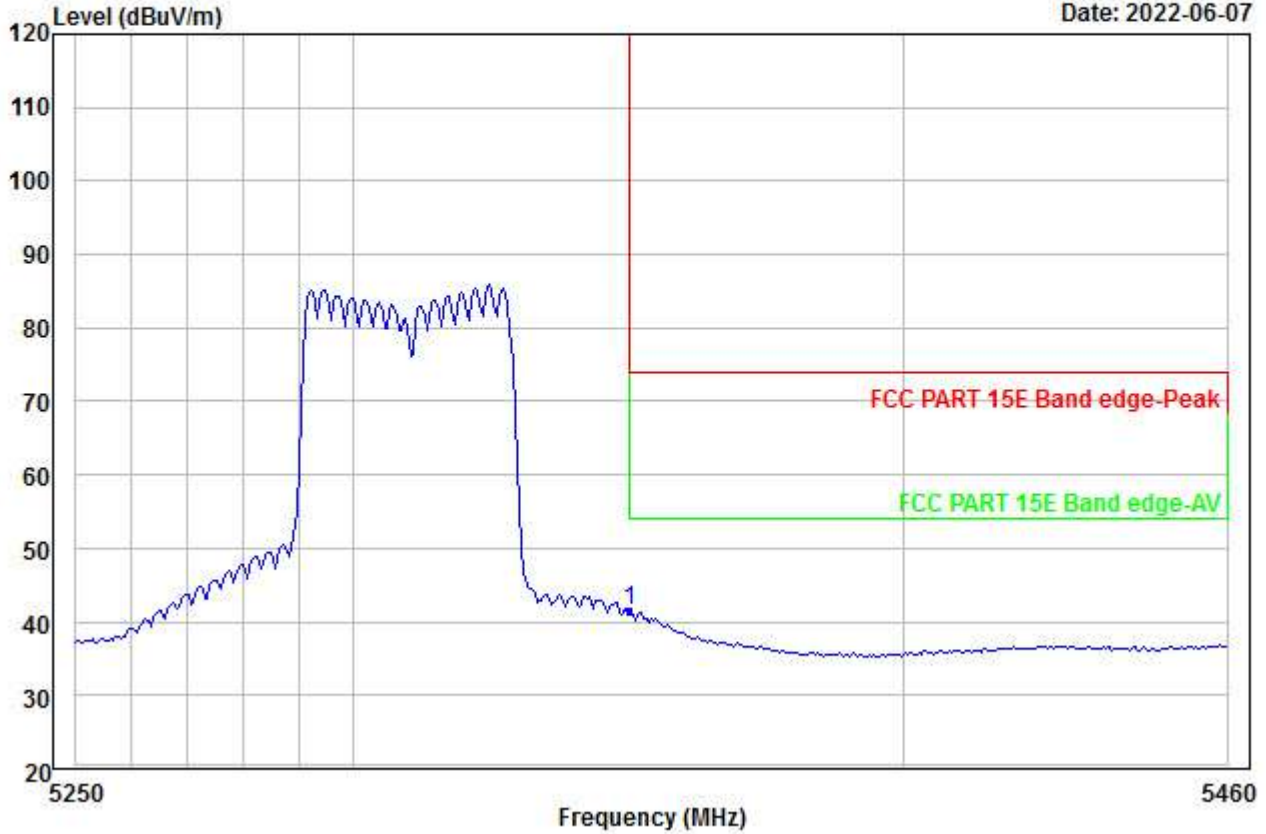


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : AC40\_ANT0+1\_5310  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5350.000	42.17	35.12	45.97	0.00	10.18	41.50	54.00	-12.50	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4\_00111.EMI

Date: 2022-06-07

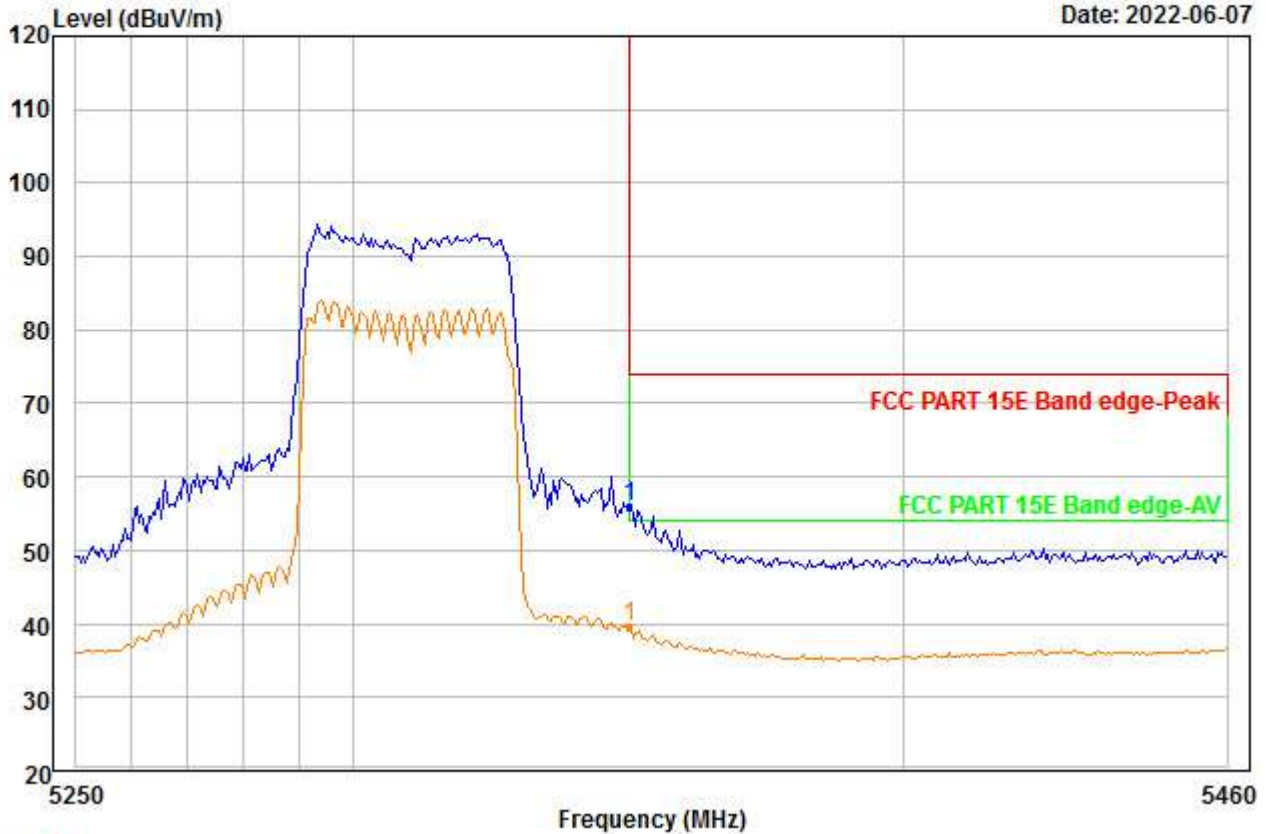


Trace: 1

Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : AC40\_ANT0+1\_5310  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5350.000	56.70	35.12	45.97	0.00	10.18	56.03	74.00	-17.97	---	---	Peak

File: F:\Test Template\上海\ITS\2022\220523032 SA750\A\5G\BE\4\_00112.EMI

Date: 2022-06-07

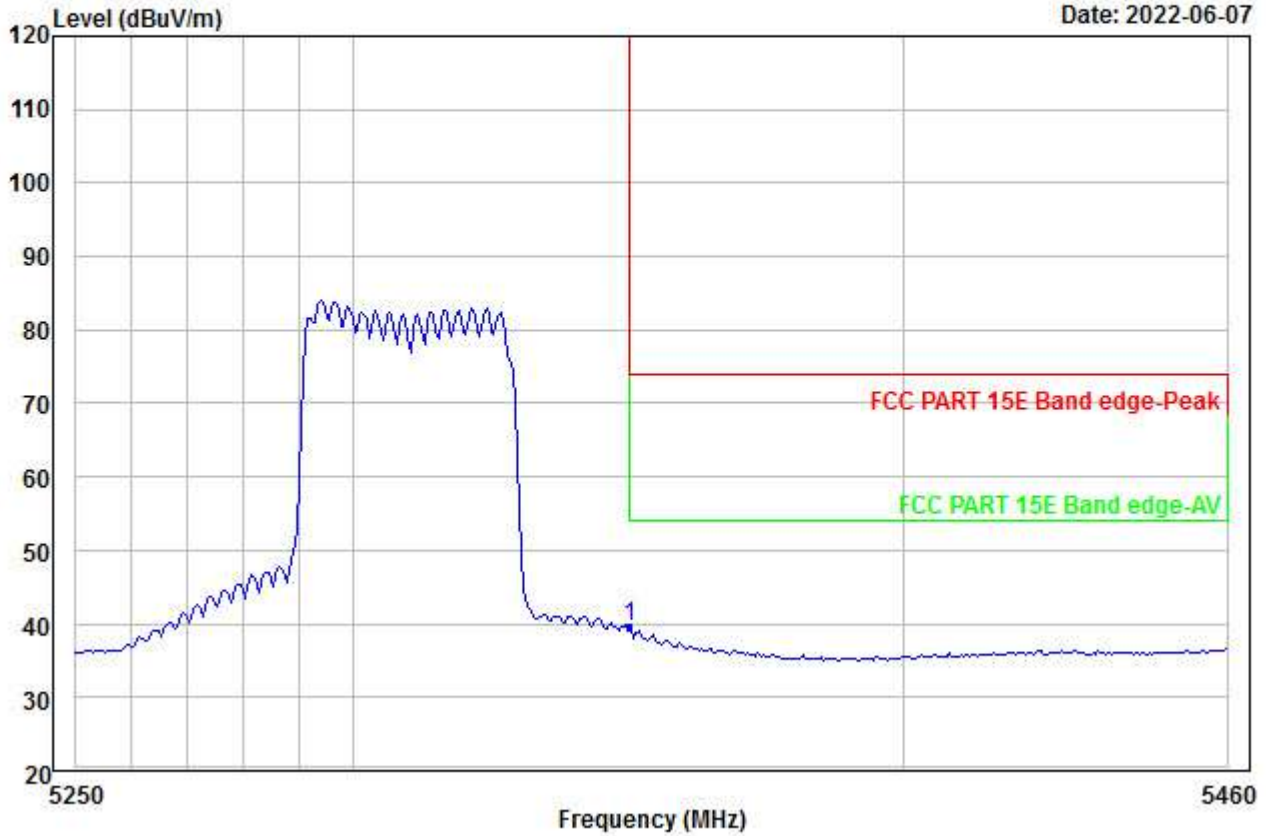

Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : AC40\_ANT0+1\_5310  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5350.000	40.16	35.12	45.97	0.00	10.18	39.49	54.00	-14.51	---	---	Aver