


File: F:\Test Template\上海\ITS\2022\220523032 SA750\A\5G\BE\4_00113.EMI

Date: 2022-06-07

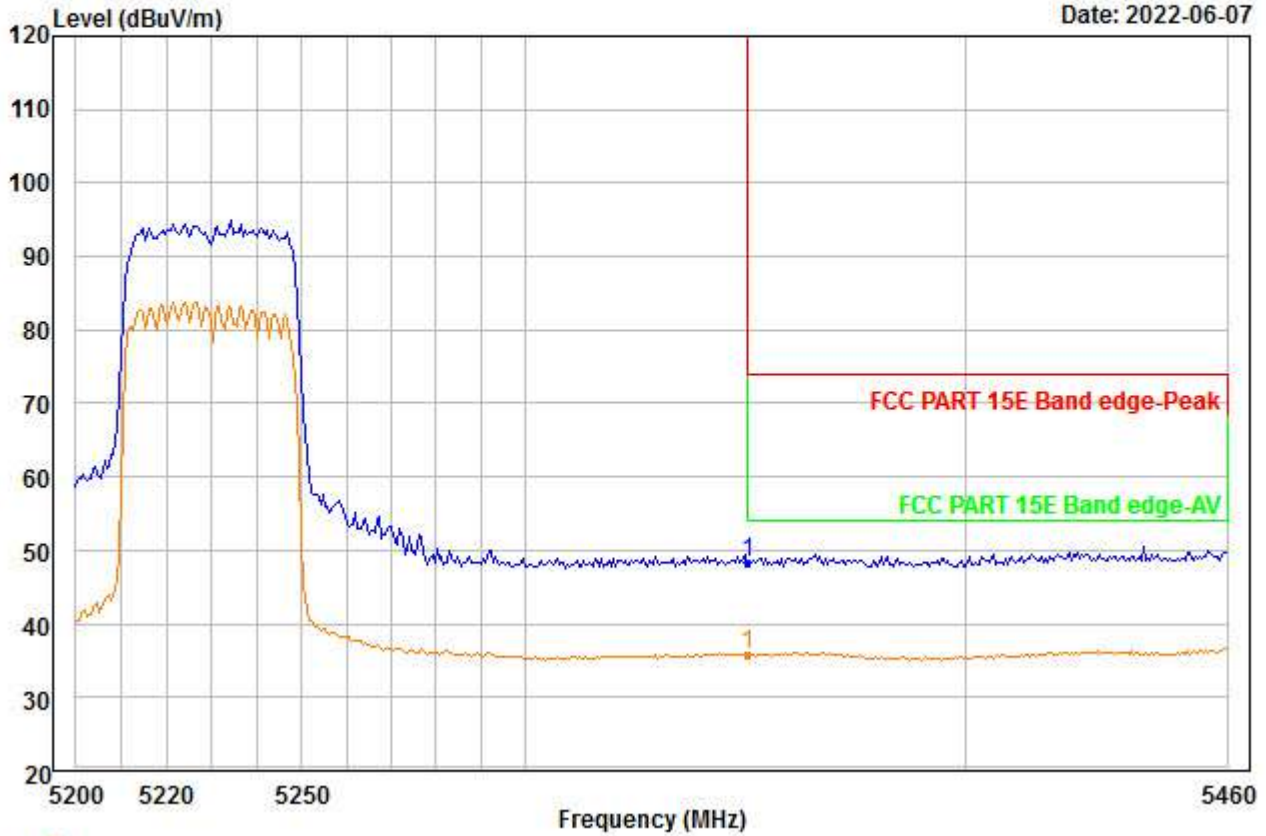


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5230
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit			
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 5350.000	49.00	35.12	45.97	0.00	10.18	48.33	74.00	-25.67	---	--- Peak

File: F:\Test Template\上海\ITS\2022\220523032 SA750\A\5G\BE\4_00114.EMI

Date: 2022-06-07

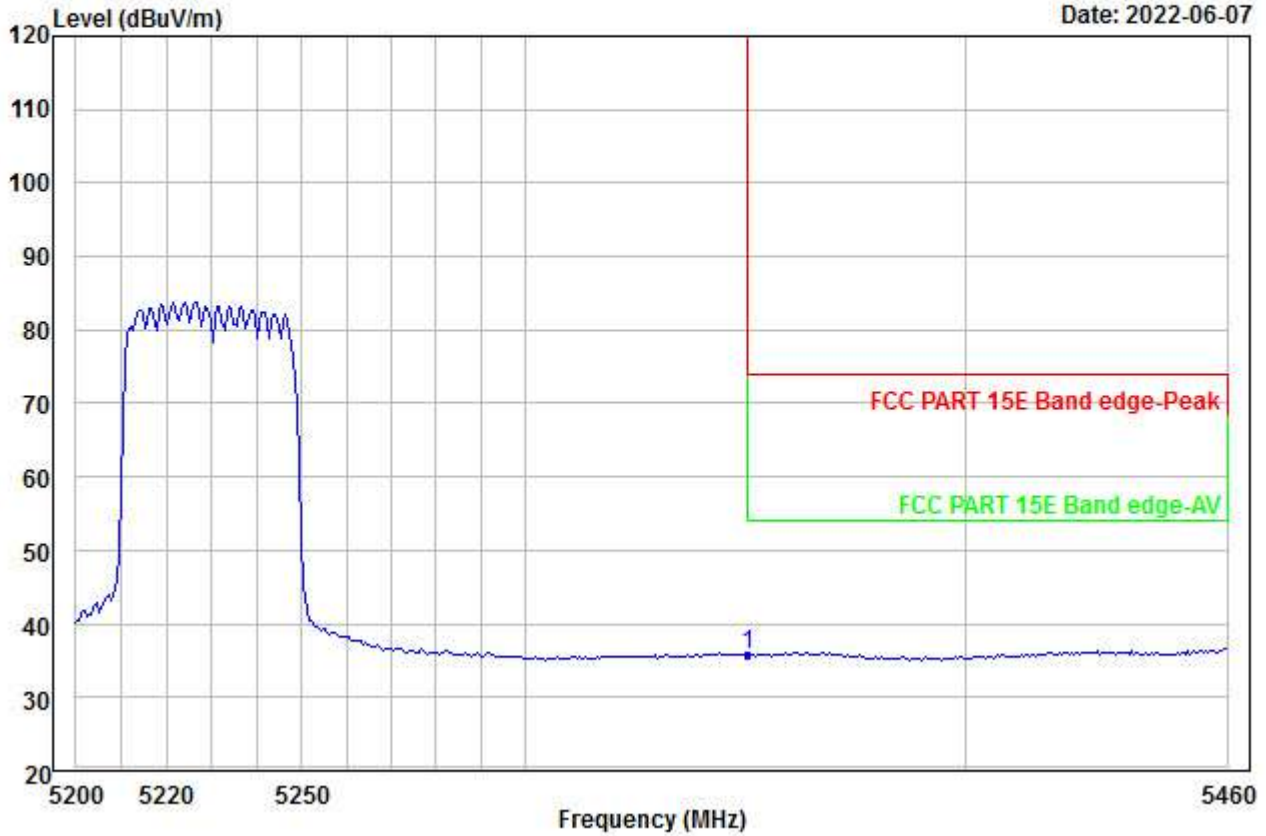


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5230
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5350.000	36.43	35.12	45.97	0.00	10.18	35.76	54.00	-18.24	---	---	Aver

File: F:\Test Template\上海\ITS\2022\220523032 SA750\A\5G\BE\4_00115.EMI

Date: 2022-06-07

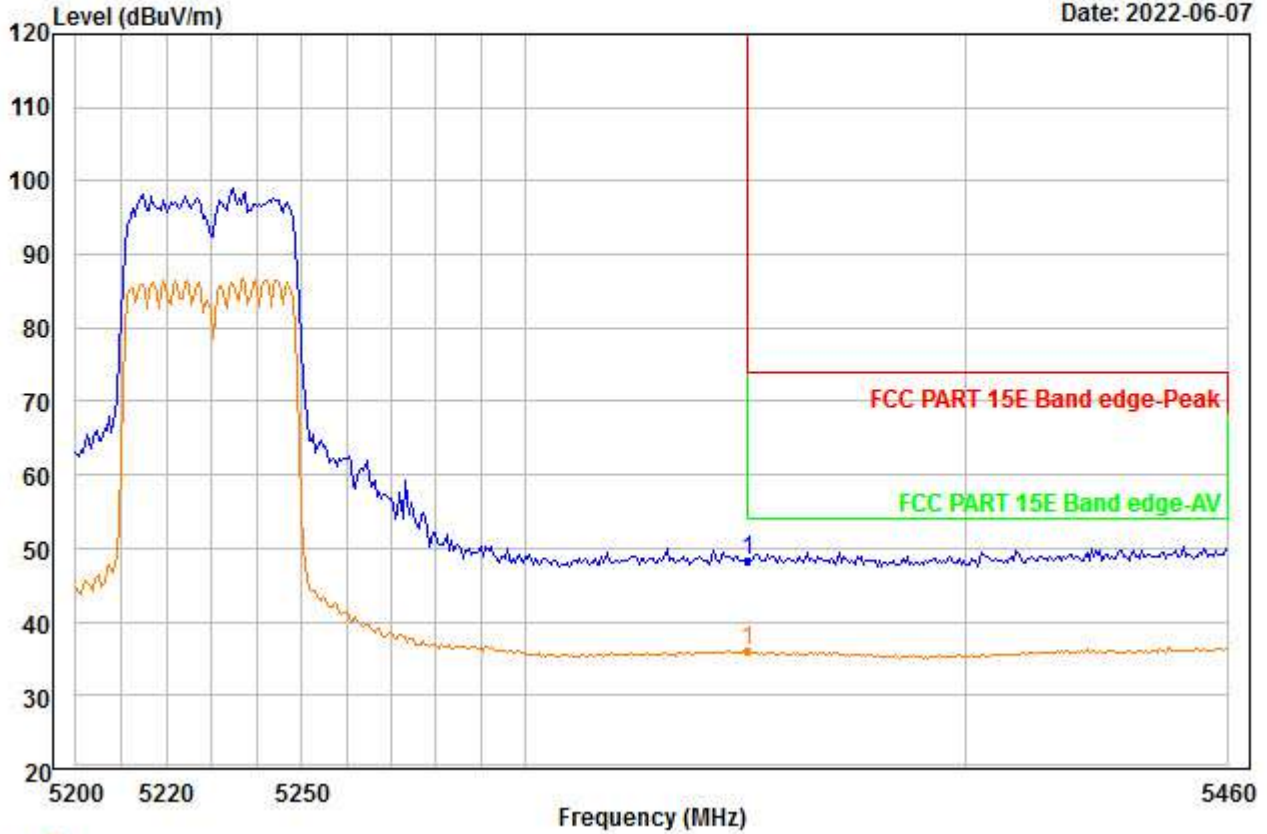


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5230
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5350.000	49.09	35.12	45.97	0.00	10.18	48.42	74.00	-25.58	---	---	Peak

File: F:\Test Template\上海\ITS\2022\220523032 SA750\A\5G\BE\4_00116.EMI

Date: 2022-06-07

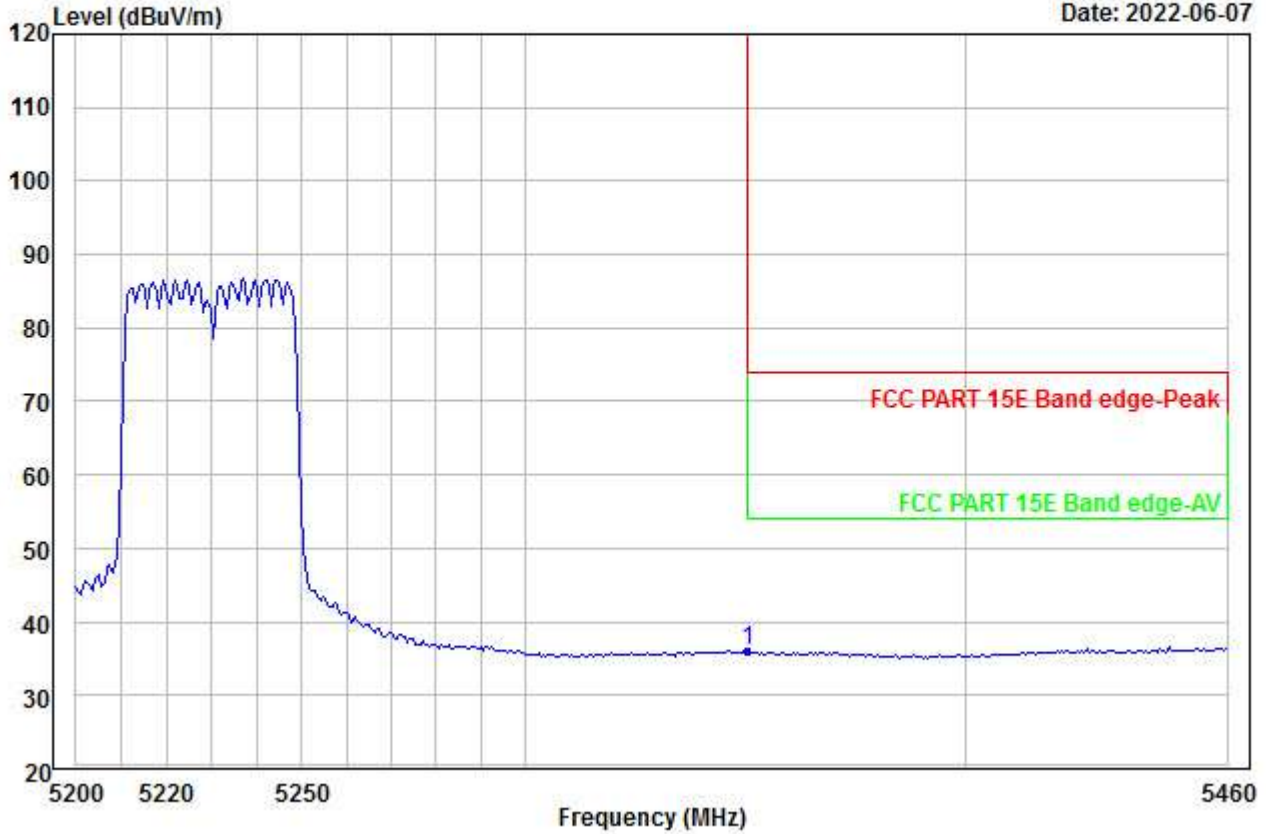


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5230
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5350.000	36.70	35.12	45.97	0.00	10.18	36.03	54.00	-17.97	---	---	Aver

File: F:\Test Template\上海ITSI\2022\220523032 SA750\A\5G\BE\4_00117.EMI

Date: 2022-06-07

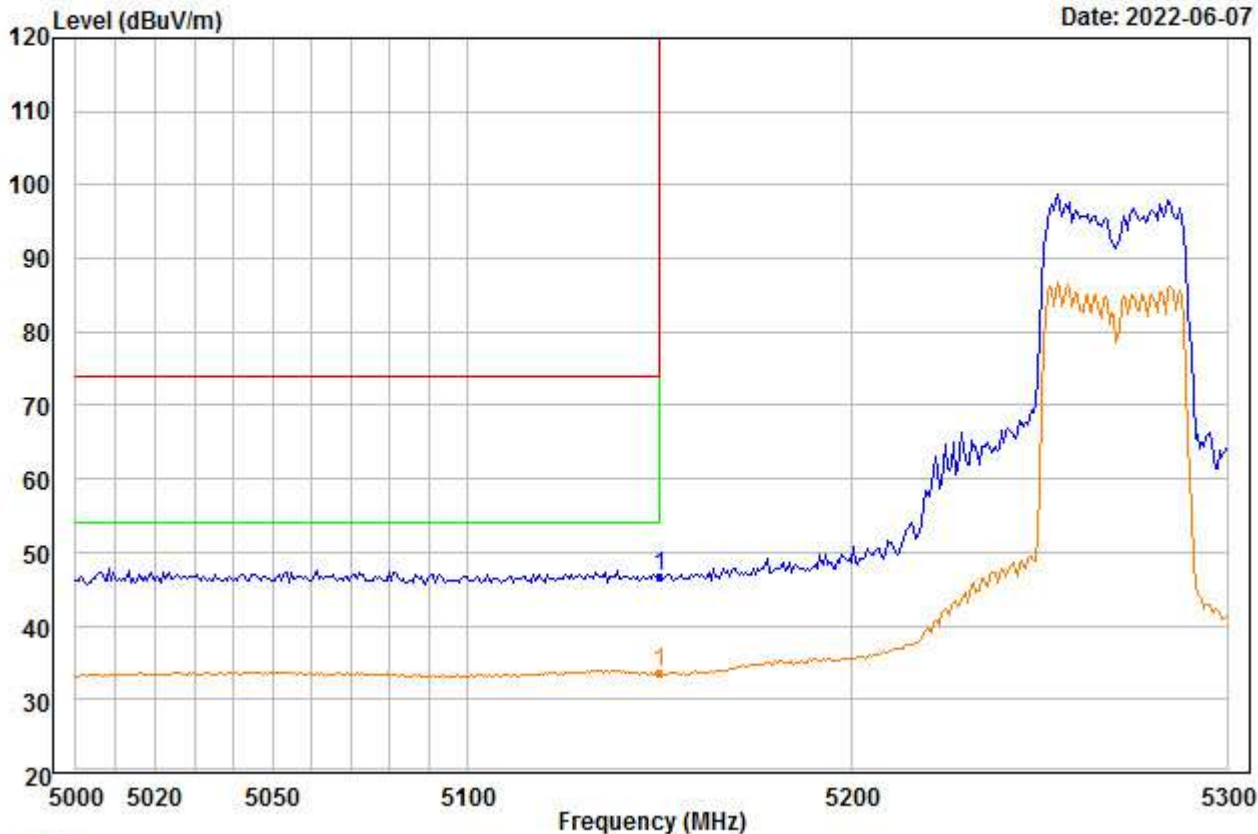


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5270
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5150.000	48.35	34.88	46.33	0.00	9.78	46.68	74.00	-27.32	---	---	Peak

File: F:\Test Template\上海ITSI\2022\220523032 SA750\A\5G\BE\4_00118.EMI

Date: 2022-06-07

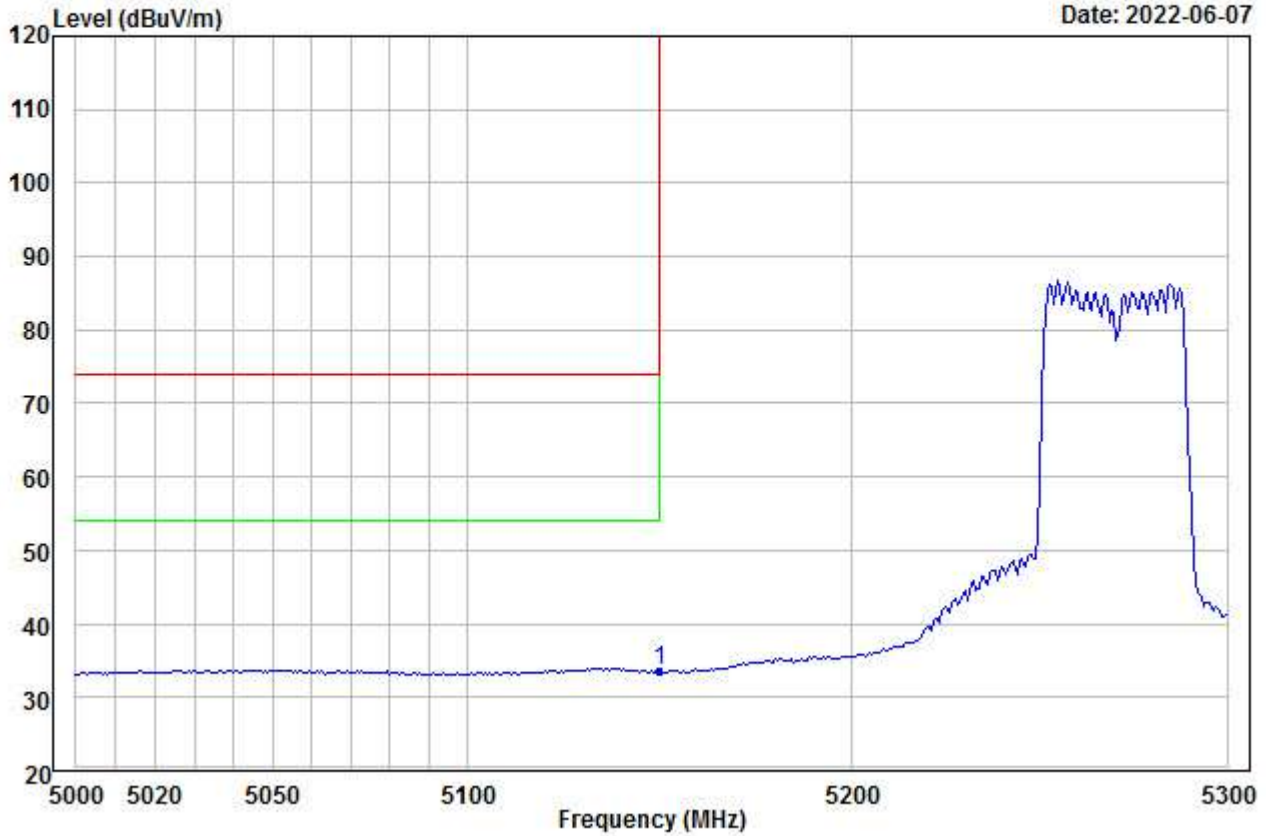


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5270
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5150.000	35.28	34.88	46.33	0.00	9.78	33.61	54.00	-20.39	---	---	Aver

File: F:\Test Template\上海ITSI\2022\220523032 SA750\A\5G\BE\4_00119.EMI

Date: 2022-06-07

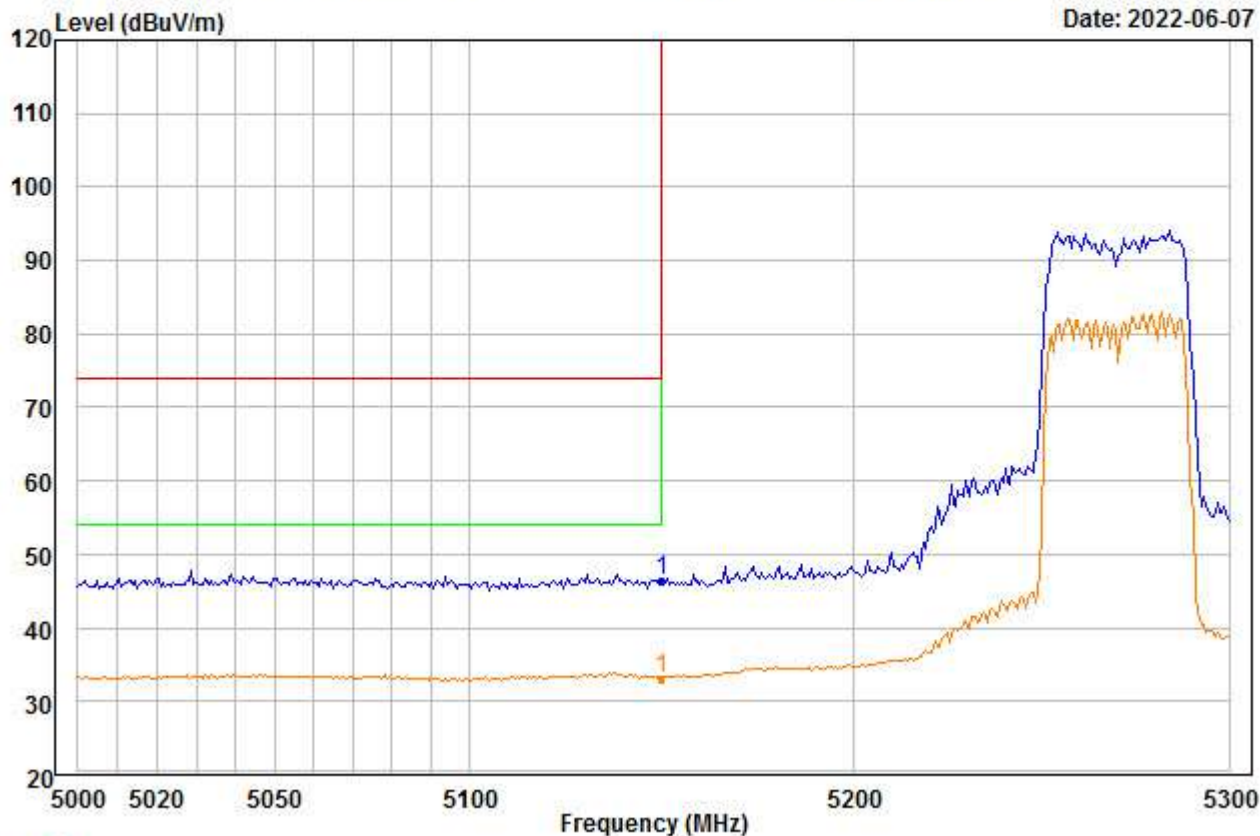


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5270
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5150.000	47.97	34.88	46.33	0.00	9.78	46.30	74.00	-27.70	---	---	Peak

File: F:\Test Template\上海ITSI\2022\220523032 SA750\A\5G\BE\4_00120.EMI

Date: 2022-06-07

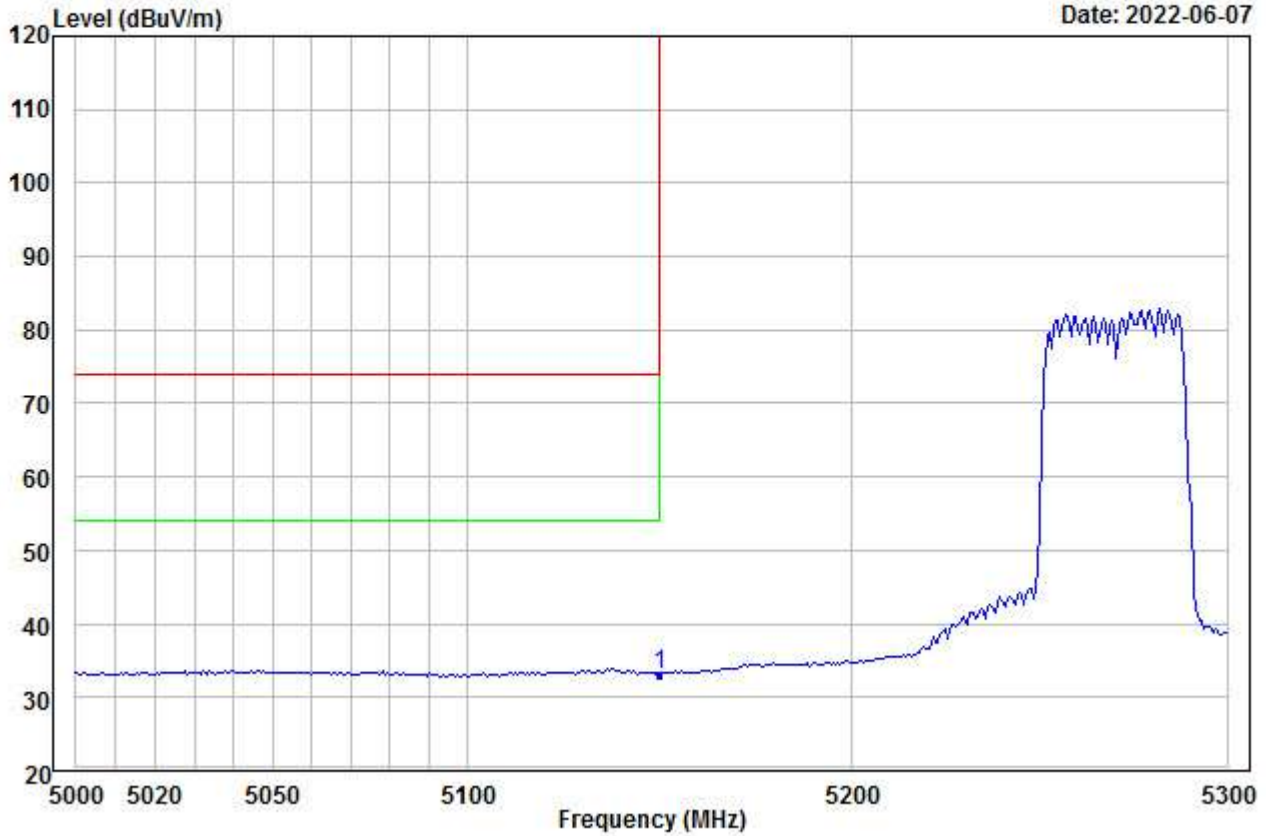


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5270
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5150.000	34.87	34.88	46.33	0.00	9.78	33.20	54.00	-20.80	---	---	Aver

File: F:\Test Template\上海\ITS\2022\220523032 SA750\A\5G\BE\4_00121.EMI

Date: 2022-06-07

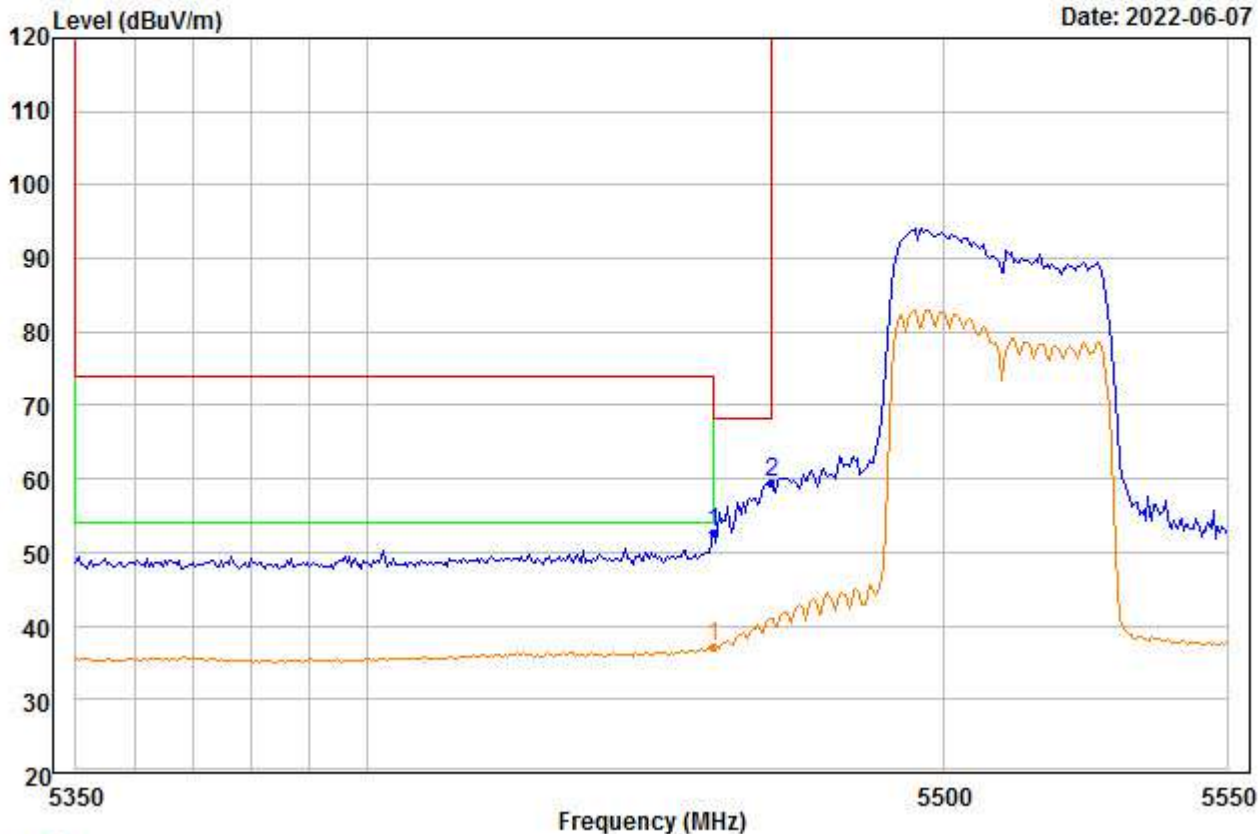


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5510
 Remark :

	Read Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	5460.000	52.84	35.25	45.77	0.00	10.44	52.76	68.20	-15.44	---	---	Peak
2 PP	5470.000	59.64	35.26	45.75	0.00	10.47	59.62	68.20	-8.58	---	---	Peak

File: F:\Test Template\上海ITSI\2022\220523032 SA750\A\5G\BE\4_00122.EMI

Date: 2022-06-07

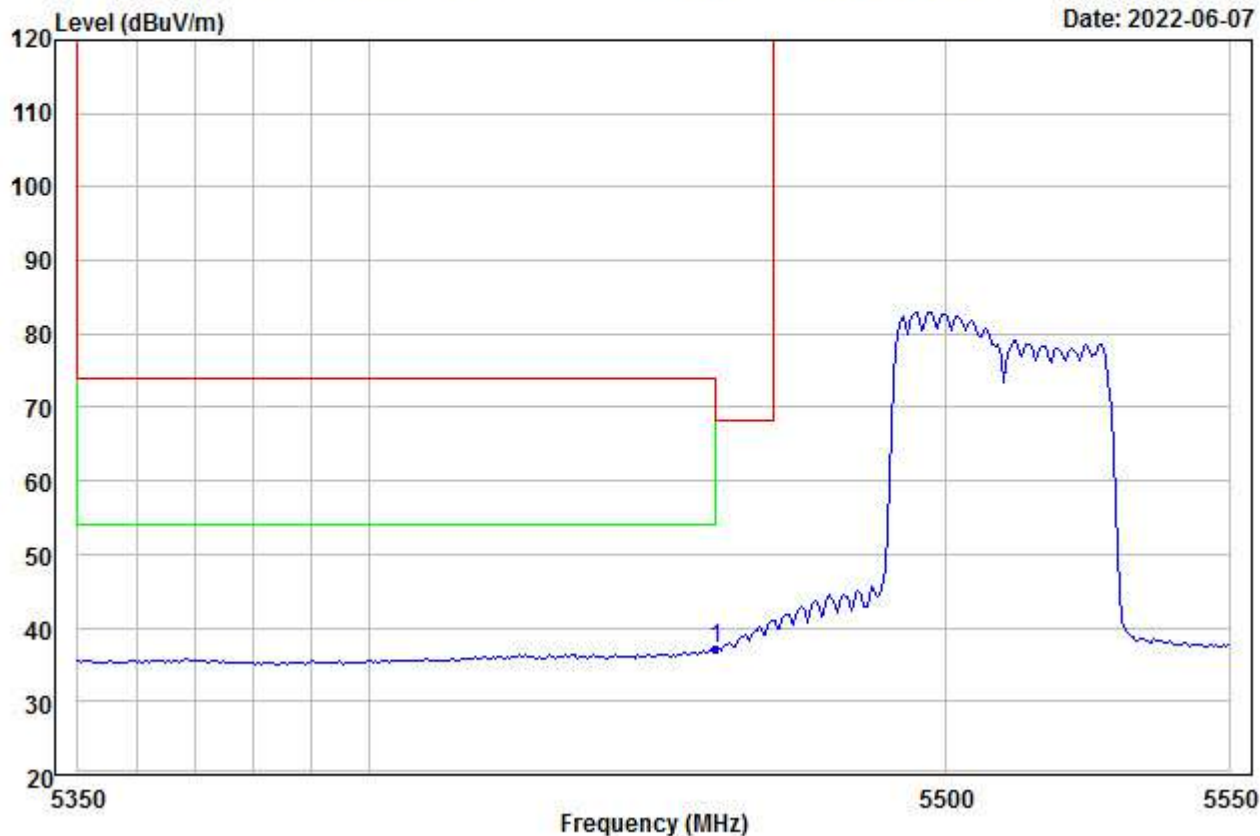


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5510
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5460.000	37.26	35.25	45.77	0.00	10.44	37.18	54.00	-16.82	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4_00123.EMI

Date: 2022-06-07

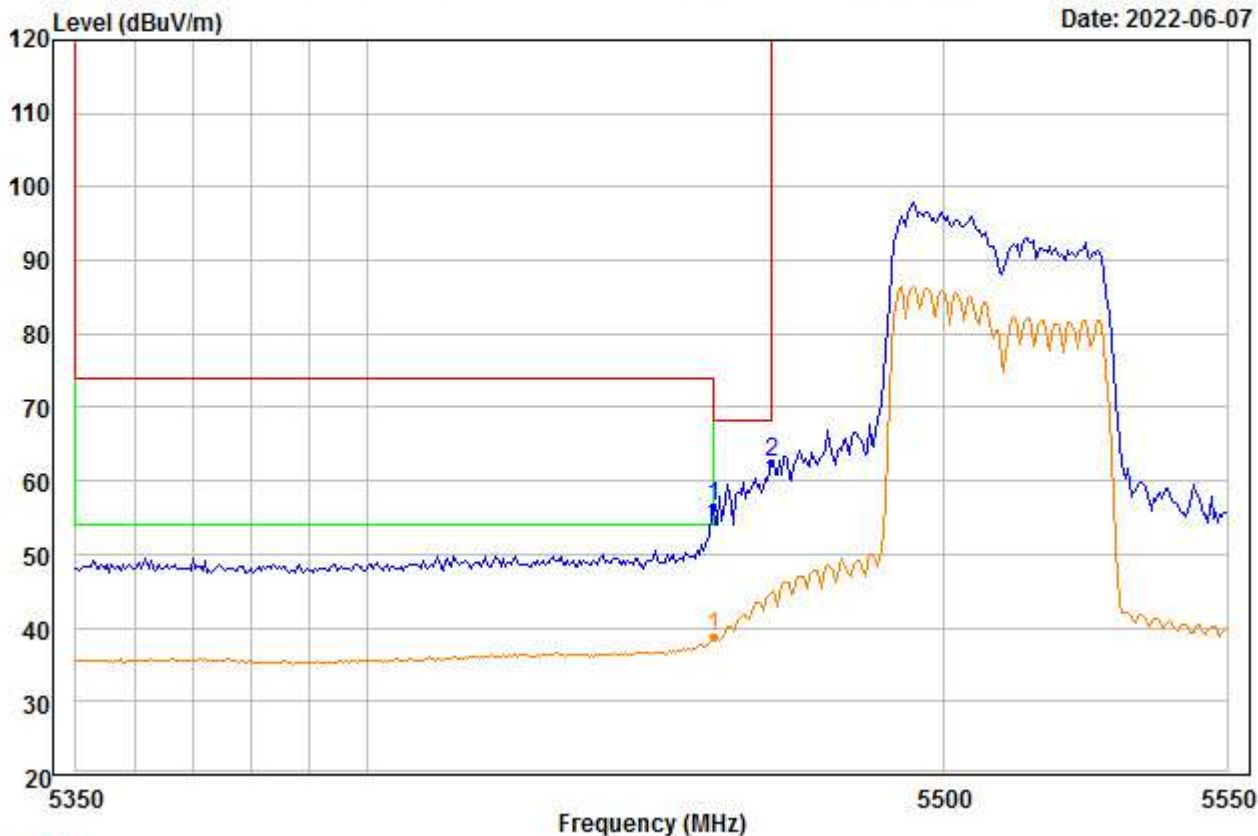


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5510
 Remark :

	Read Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	5460.000	56.62	35.25	45.77	0.00	10.44	56.54	68.20	-11.66	---	---	Peak
2 PP	5470.000	62.54	35.26	45.75	0.00	10.47	62.52	68.20	-5.68	---	---	Peak

File: F:\Test Template\上海ITSI\2022\220523032 SA750\A\5G\BE\4_00124.EMI

Date: 2022-06-07

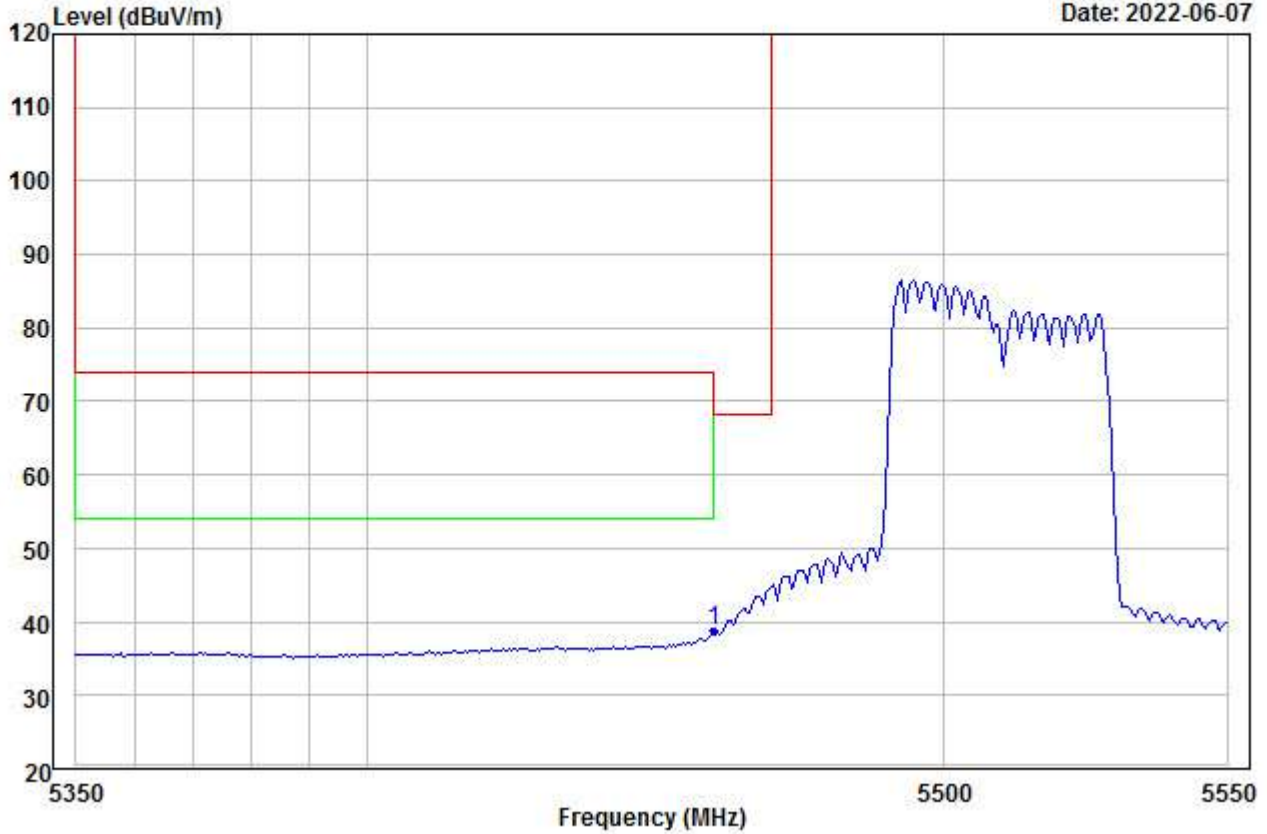


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5510
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5460.000	38.78	35.25	45.77	0.00	10.44	38.70	54.00	-15.30	---	---	Aver

File: F:\Test Template\上海\ITS\2022\220523032 SA750\A\5G\BE\4_00125.EMI

Date: 2022-06-07

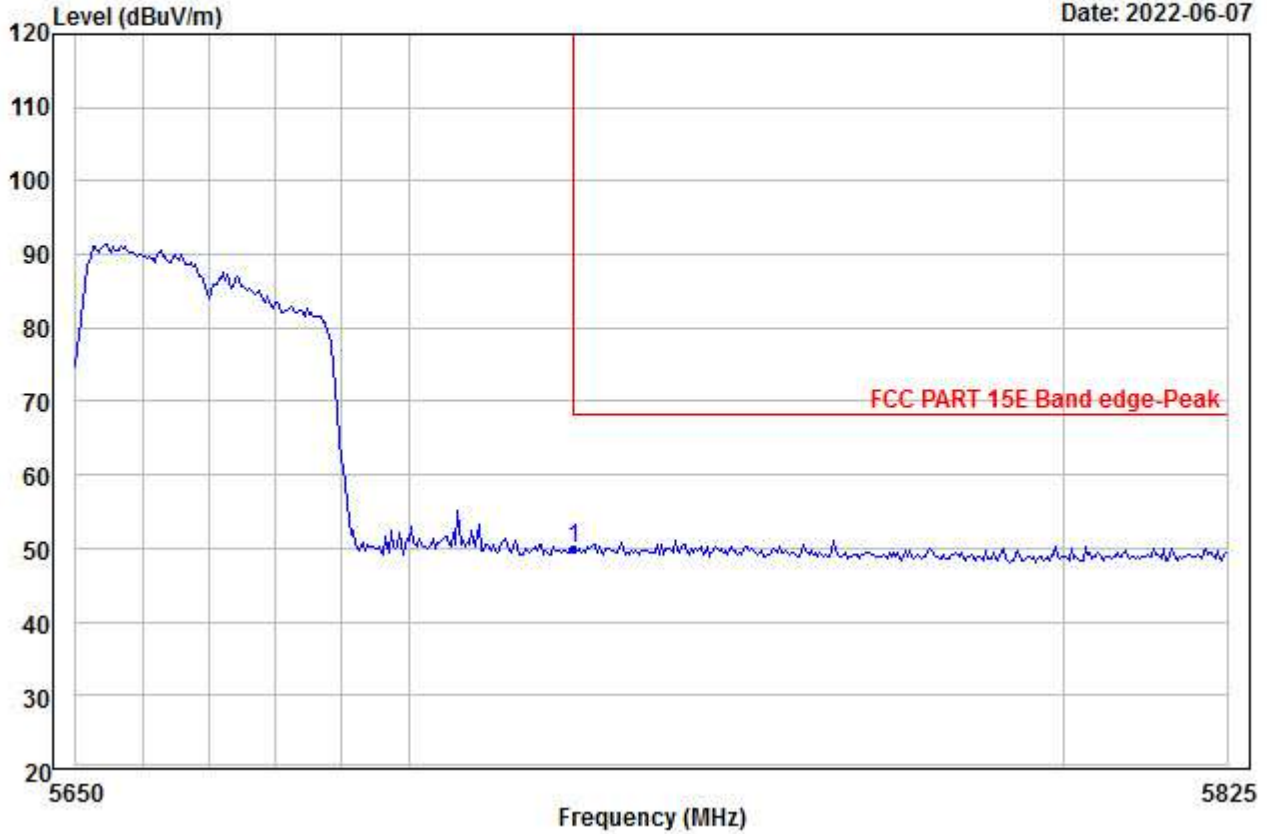


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5670
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Level	Line	Limit			
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5725.000	50.36	35.26	45.57	0.00	9.94	49.99	68.20	-18.21	---	---	Peak

File: F:\Test Template\上海\ITS\2022\220523032 SA750\A\5G\BE\4_00126.EMI

Date: 2022-06-07

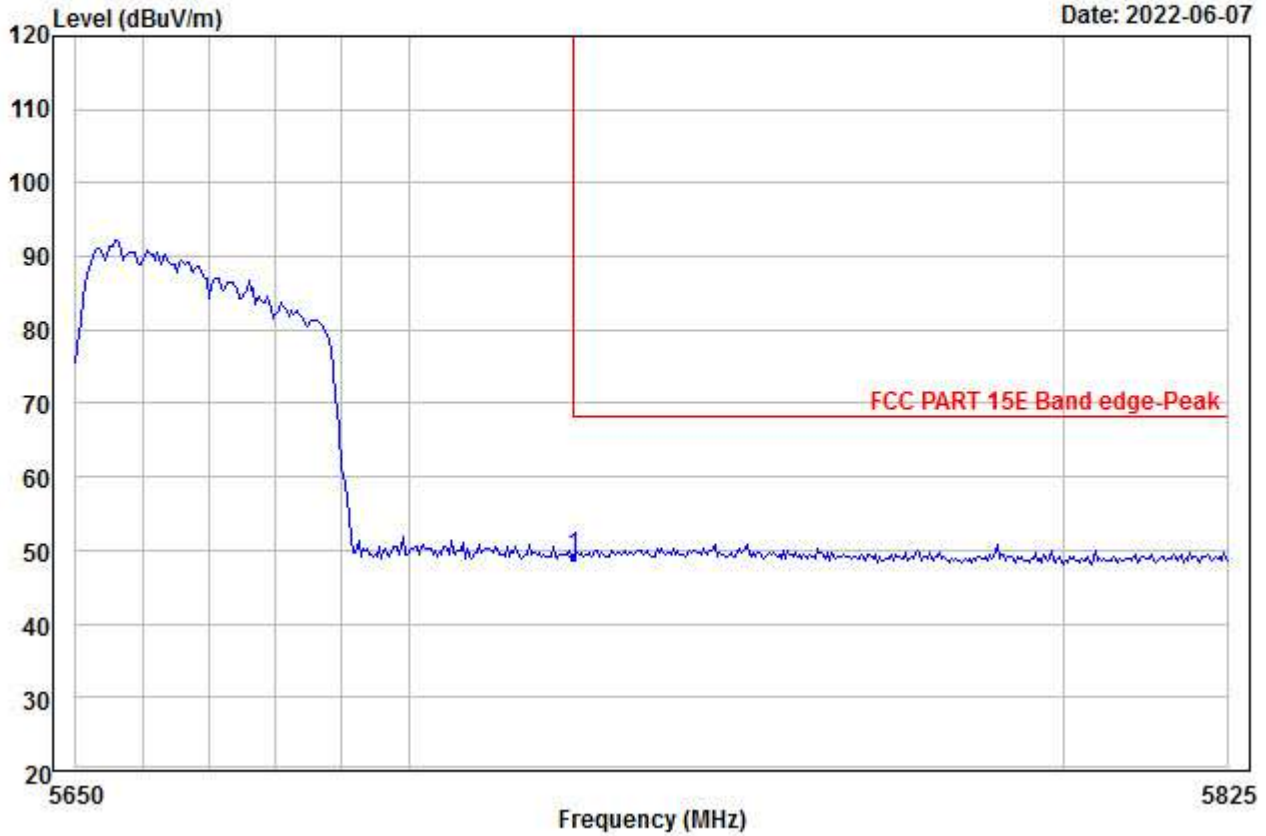


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5670
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5725.000	49.59	35.26	45.57	0.00	9.94	49.22	68.20	-18.98	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4_00127.EMI

Date: 2022-06-08

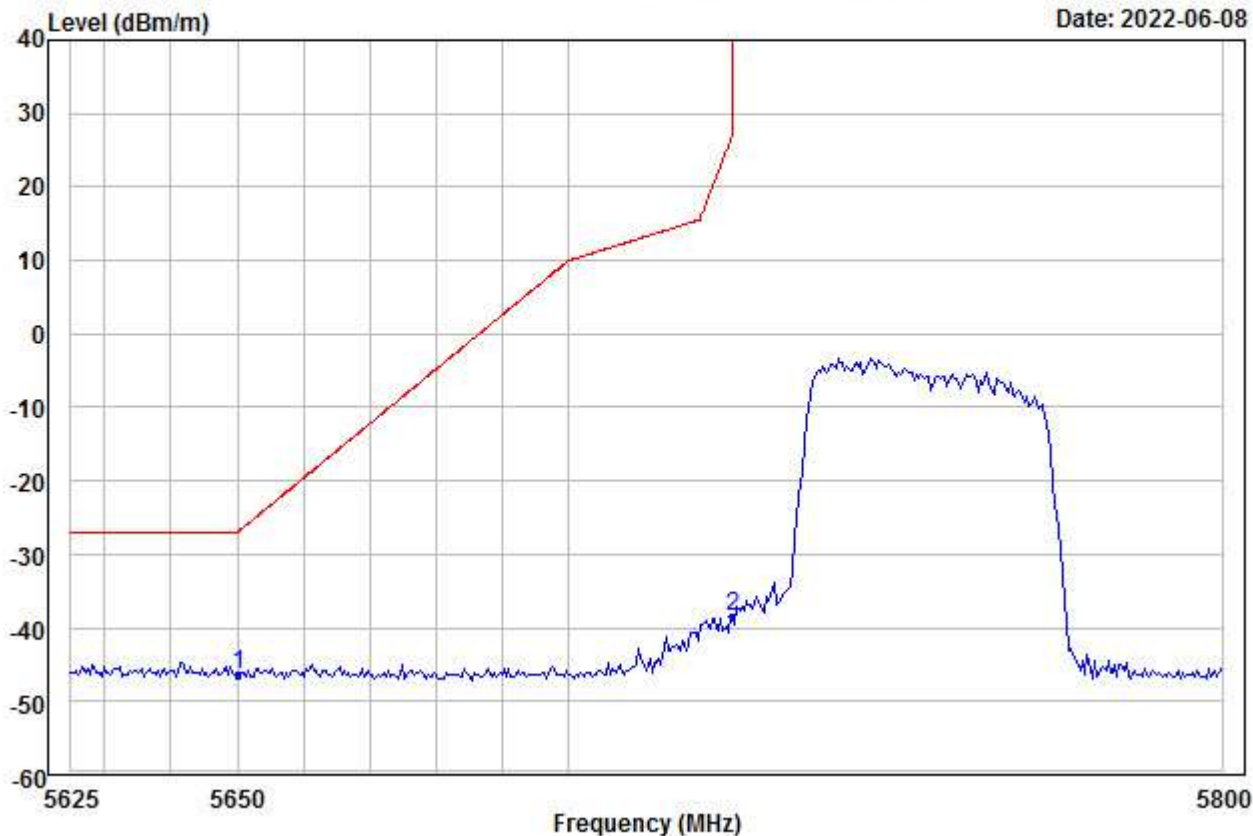


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5755
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBm	dB/m	dB	dB	dB	dBm/m	dB	cm	deg		
1 PP 5650.000	-57.81	35.27	45.61	0.00	21.88	-46.27	-27.00	-19.27	---	---	Peak
2 5725.000	-49.73	35.26	45.57	0.00	21.68	-38.36	27.00	-65.36	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4_00128.EMI

Date: 2022-06-08

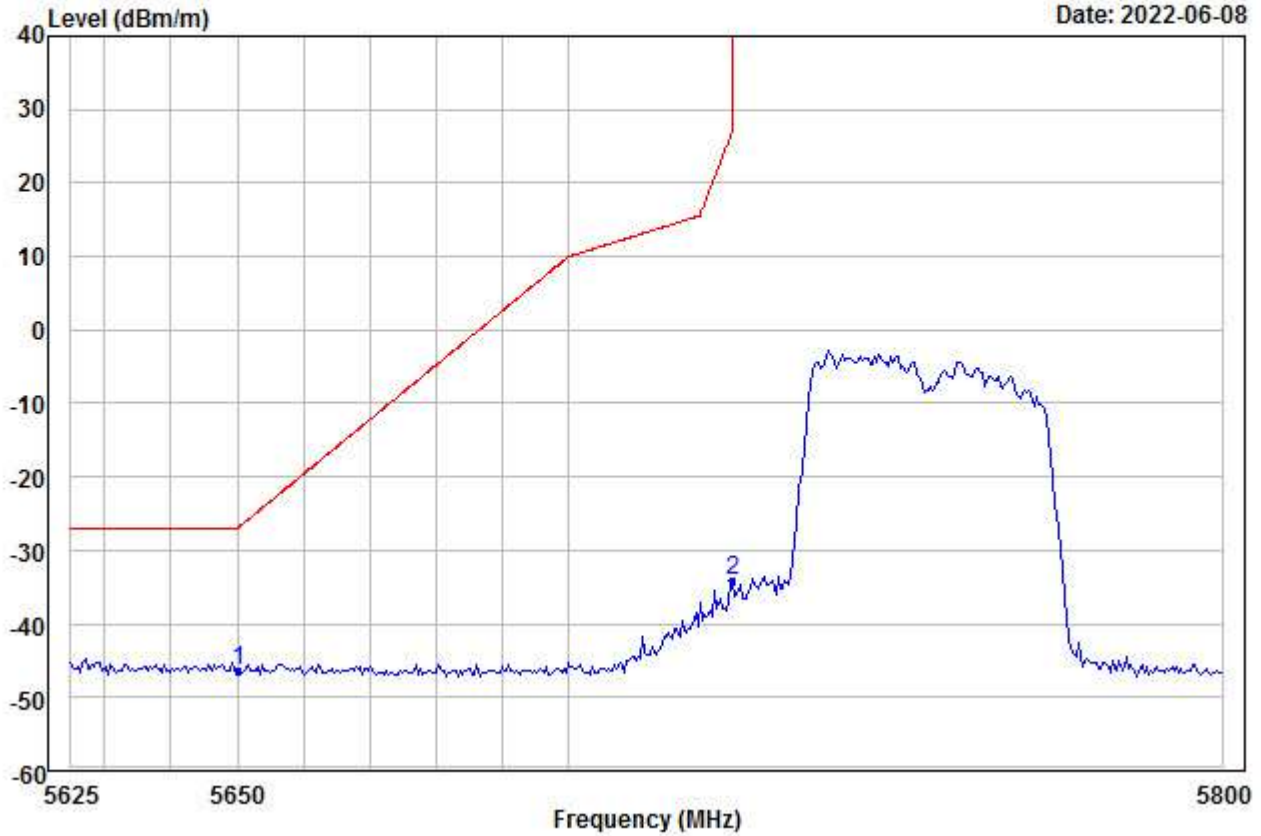


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5755
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBm	dB/m	dB	dB	dB	dBm/m	dB	cm	deg		
1 PP 5650.000	-57.88	35.27	45.61	0.00	21.88	-46.34	-27.00	-19.34	---	---	Peak
2 5725.000	-45.37	35.26	45.57	0.00	21.68	-34.00	27.00	-61.00	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4_00129.EMI

Date: 2022-06-08

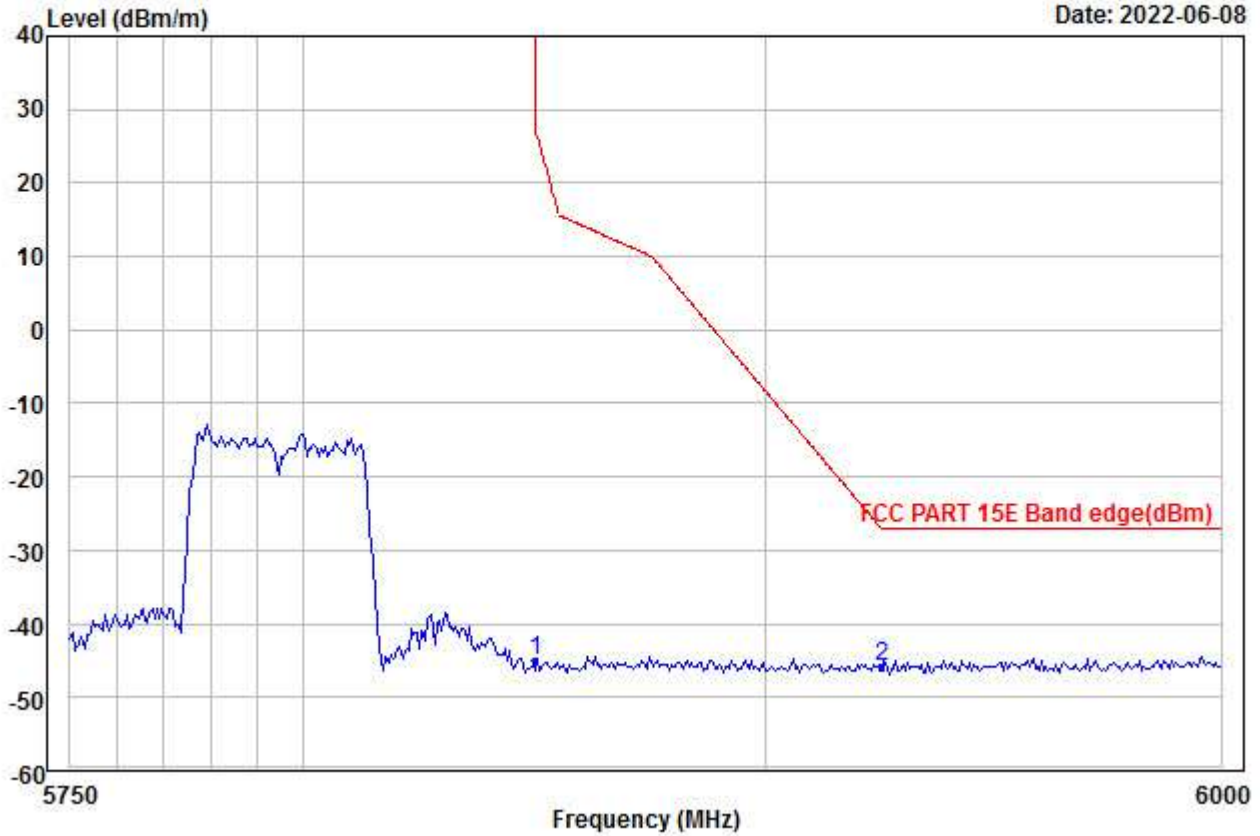


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5795
 Remark :

	Read Freq	Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBm	dB/m	dB	dB	dB	dBm/m	dBm/m	dB	cm	deg	
1	5850.000	-56.11	35.23	45.49	0.00	21.47	-44.90	27.00	-71.90	---	---	Peak
2 PP	5925.000	-57.10	35.22	45.44	0.00	21.44	-45.88	-27.00	-18.88	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4_00130.EMI

Date: 2022-06-08

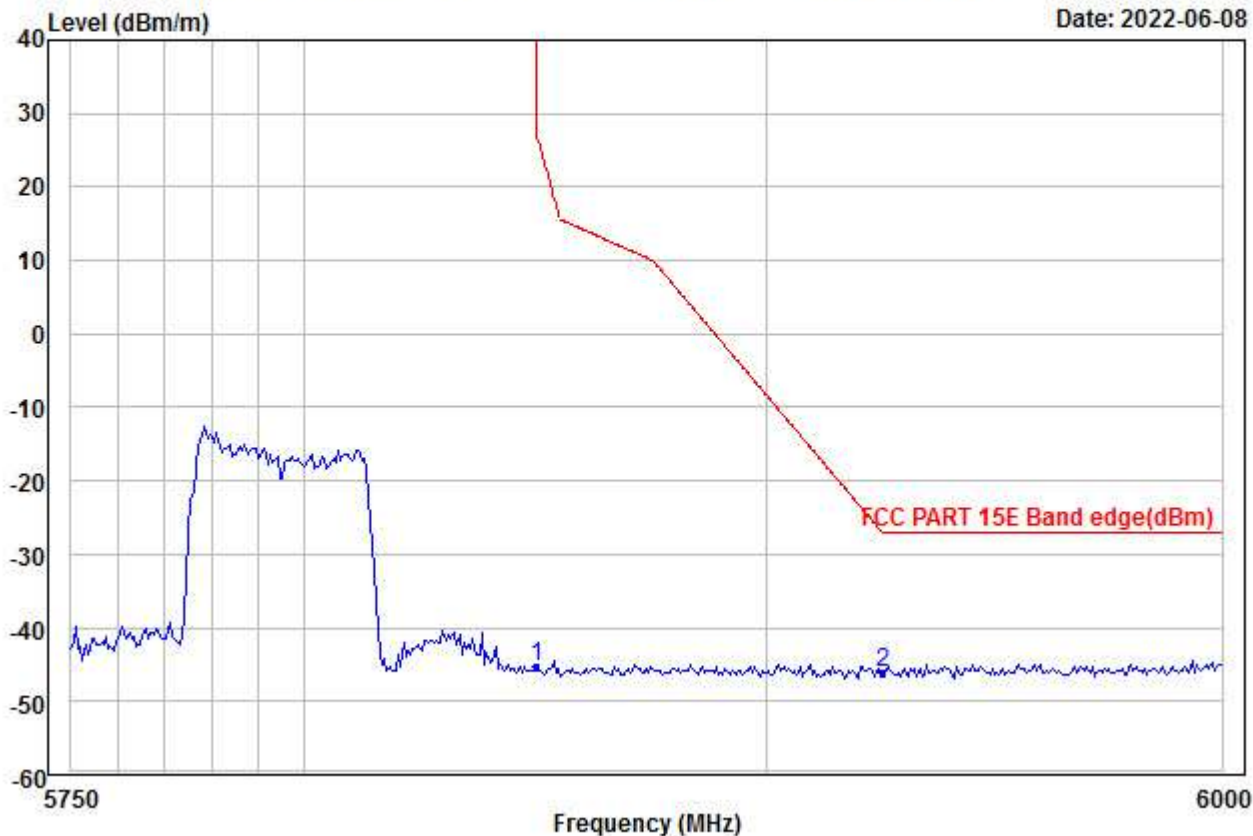


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5795
 Remark :

	Read Freq	Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBm	dB/m	dB	dB	dB	dBm/m	dBm/m	dB	cm	deg	
1	5850.000	-56.55	35.23	45.49	0.00	21.47	-45.34	27.00	-72.34	---	---	Peak
2 PP	5925.000	-57.42	35.22	45.44	0.00	21.44	-46.20	-27.00	-19.20	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4_00131.EMI

Date: 2022-06-08

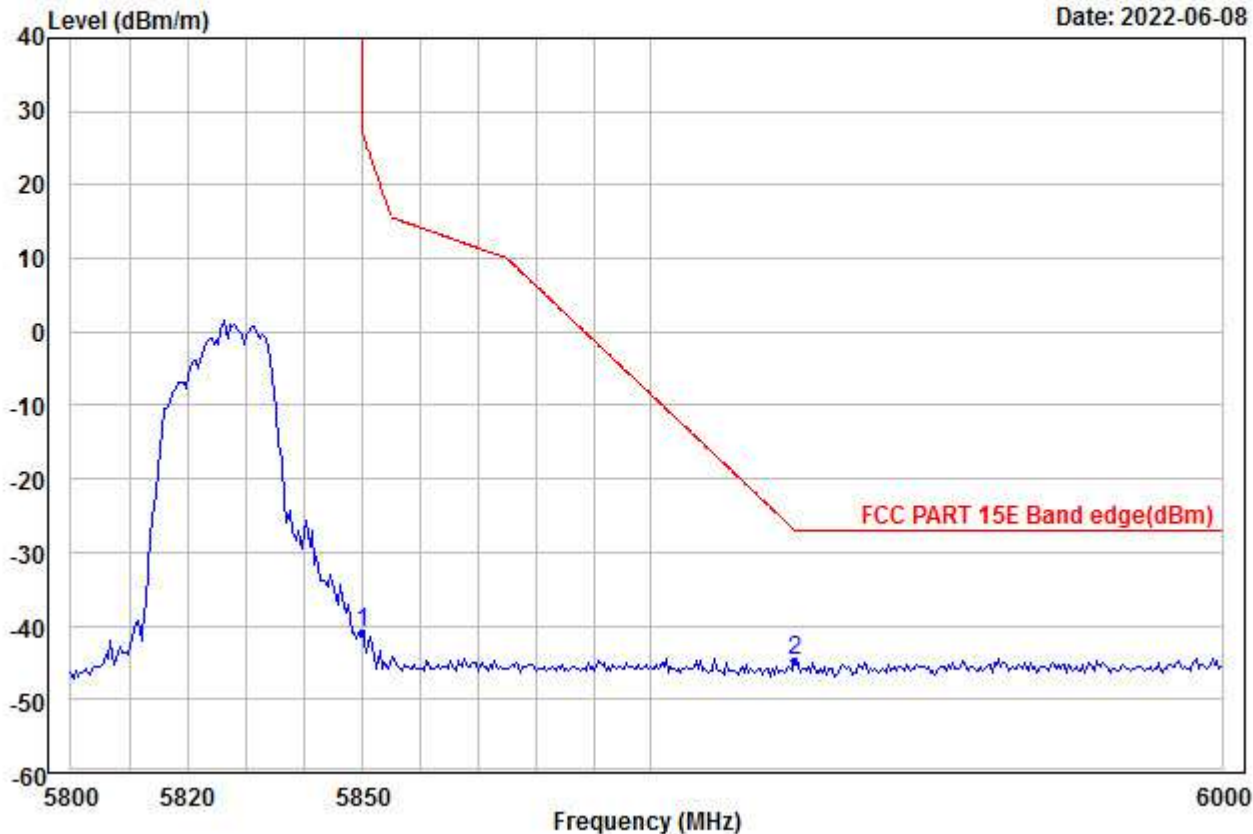


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5825
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBm	dB/m	dB	dB	dB	dBm/m	dBm/m	dB	cm	deg	
1	5850.000	-52.11	35.23	45.49	0.00	21.47	-40.90	27.00	-67.90	---	---	Peak
2 PP	5925.000	-55.86	35.22	45.44	0.00	21.44	-44.64	-27.00	-17.64	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4_00132.EMI

Date: 2022-06-08

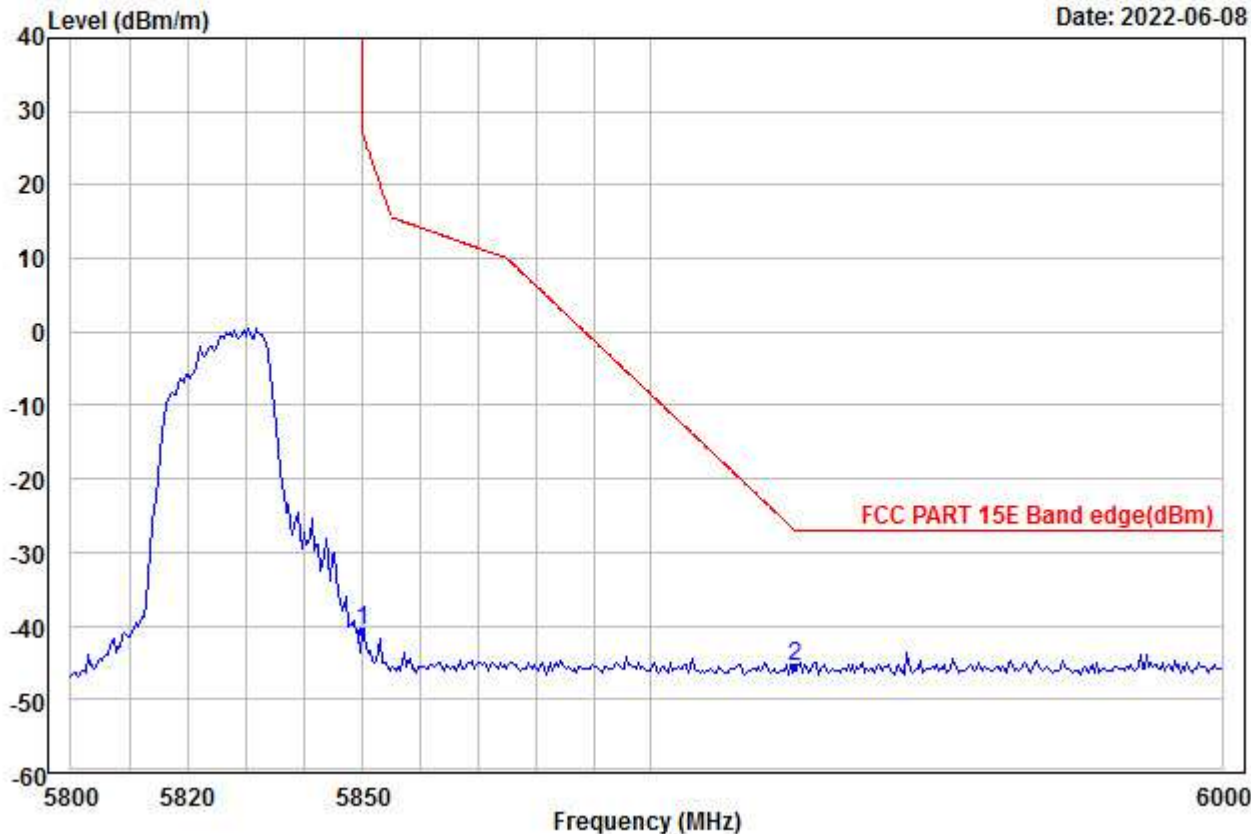


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5825
 Remark :

	Read Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBm	dB/m	dB	dB	dB	dBm/m	dBm/m	dB	cm	deg	
1	5850.000	-51.91	35.23	45.49	0.00	21.47	-40.70	27.00	-67.70	---	---	Peak
2 PP	5925.000	-56.89	35.22	45.44	0.00	21.44	-45.67	-27.00	-18.67	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4_00133.EMI

Date: 2022-06-08

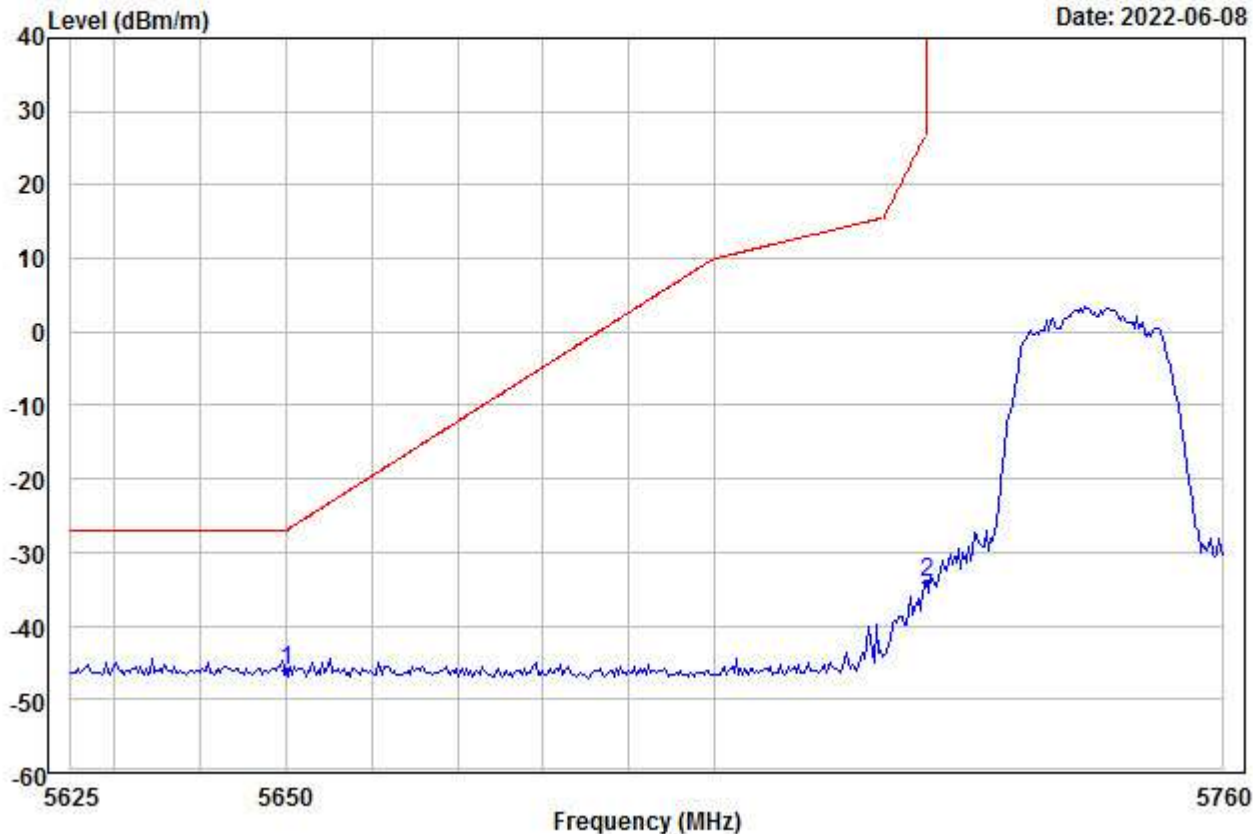


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5745
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBm	dB/m	dB	dB	dB	dBm/m	dBm/m	dB	cm	deg	
1 PP 5650.000	-57.72	35.27	45.61	0.00	21.88	-46.18	-27.00	-19.18	---	---	Peak
2 5725.000	-45.55	35.26	45.57	0.00	21.68	-34.18	27.00	-61.18	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4_00134.EMI

Date: 2022-06-08

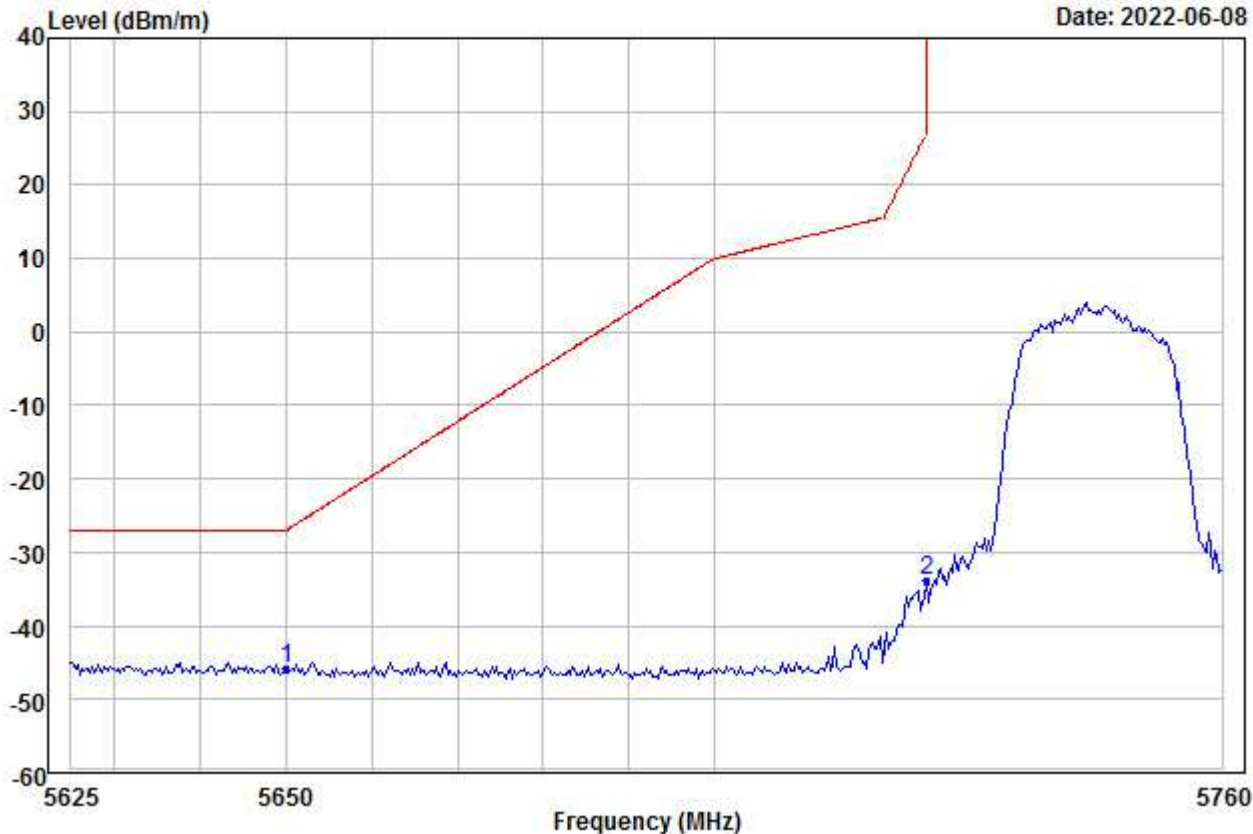


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5745
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBm	dB/m	dB	dB	dB	dBm/m	dBm/m	dB	cm	deg	
1 PP 5650.000	-57.48	35.27	45.61	0.00	21.88	-45.94	-27.00	-18.94	---	---	Peak
2 5725.000	-45.21	35.26	45.57	0.00	21.68	-33.84	27.00	-60.84	---	---	Peak

File: F:\Test Template\上海\ITS\2022\220523032 SA750\A\5G\BE\4_00135.EMI

Date: 2022-06-08

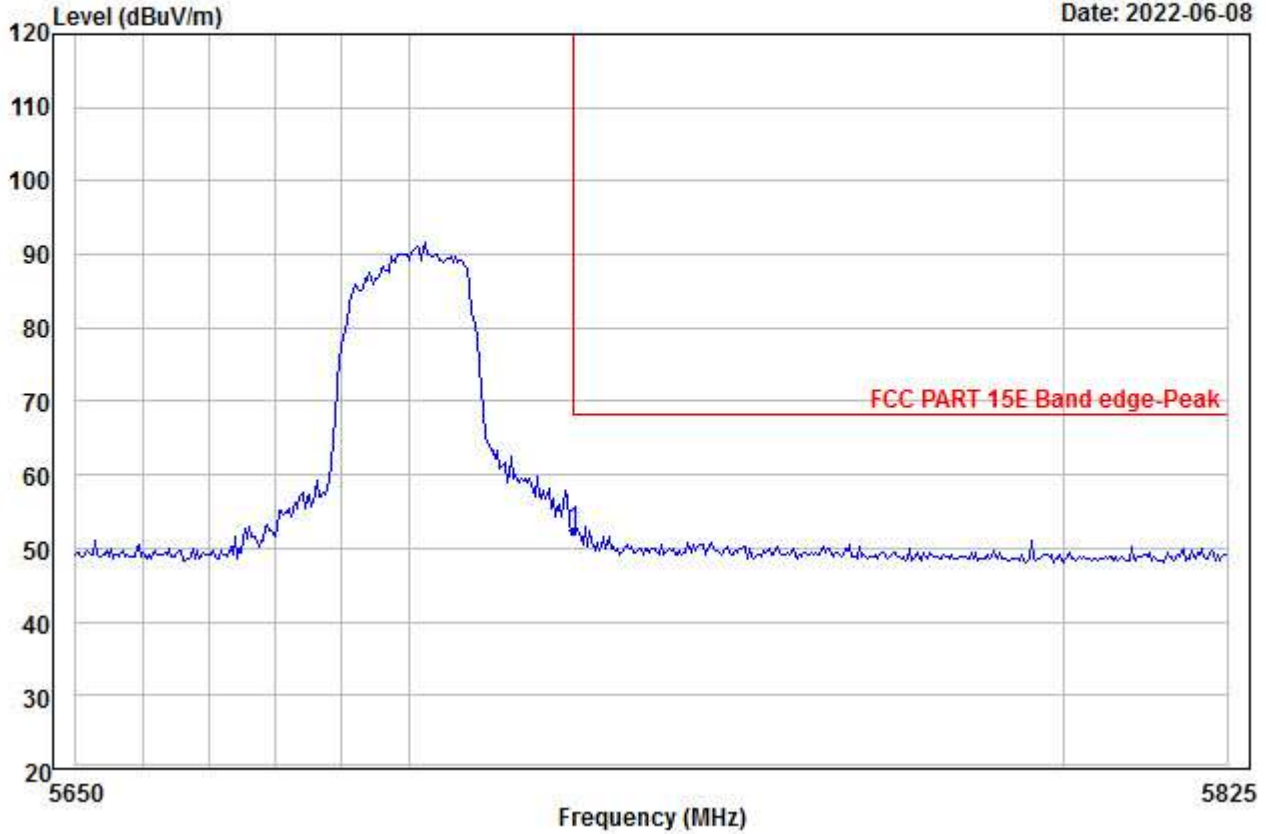


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5700
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5725.000	52.83	35.26	45.57	0.00	9.94	52.46	68.20	-15.74	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4_00136.EMI

Date: 2022-06-08

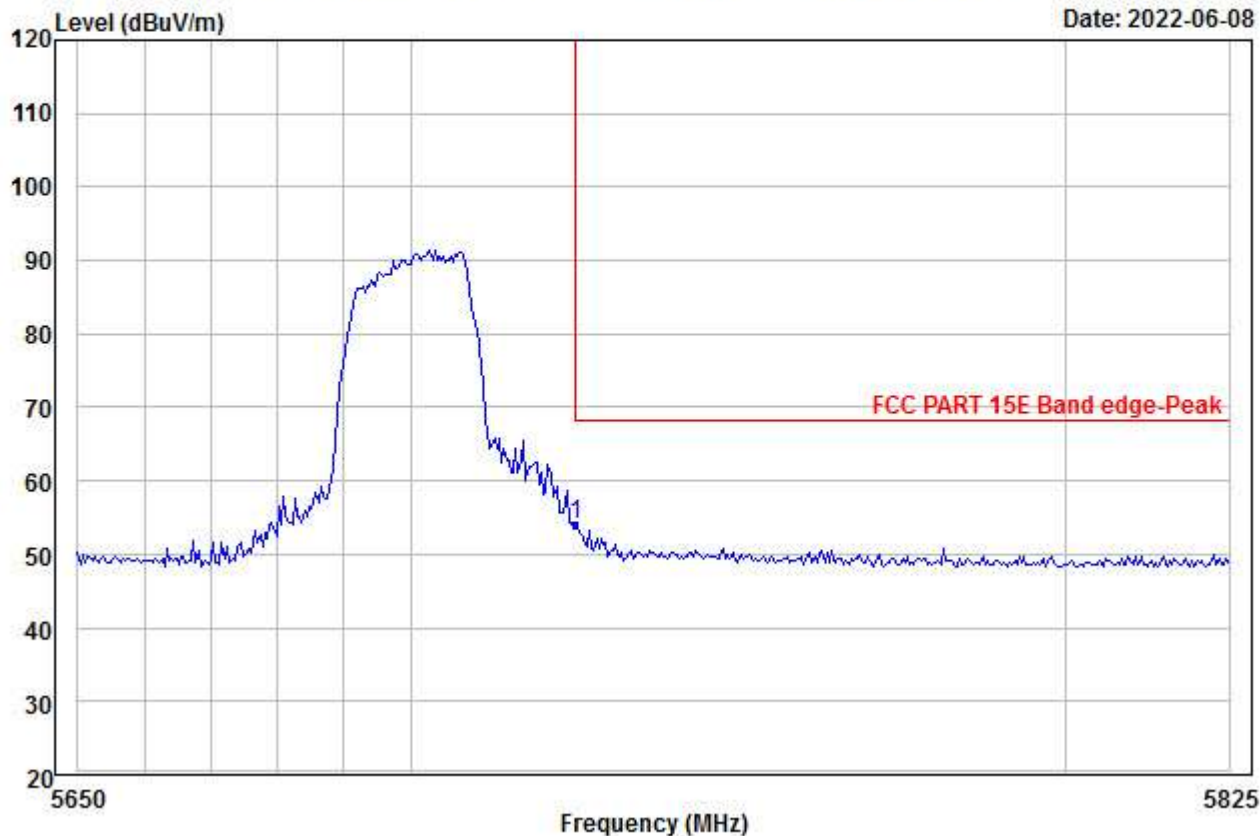


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5700
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5725.000	54.35	35.26	45.57	0.00	9.94	53.98	68.20	-14.22	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4_00137.EMI

Date: 2022-06-08

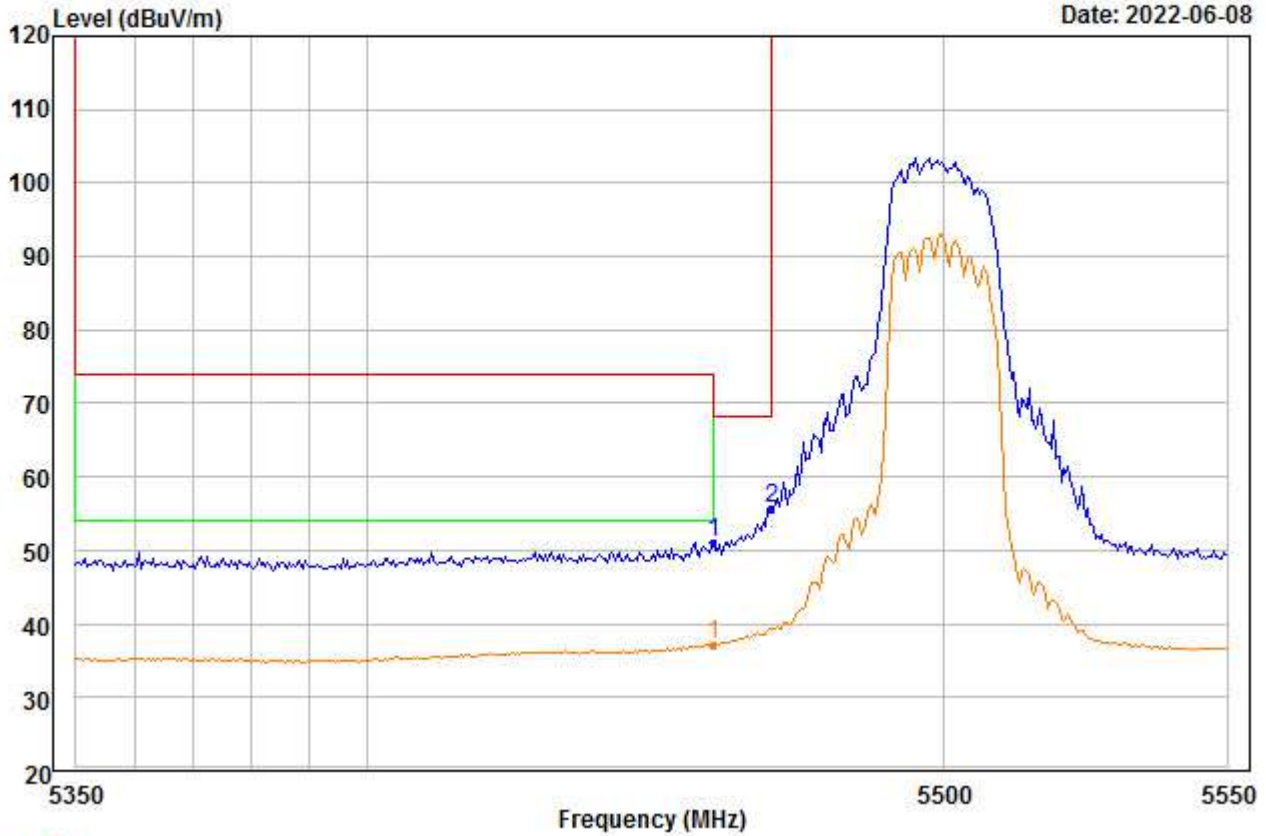


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5500
 Remark :

	Read Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	5460.000	51.19	35.25	45.77	0.00	10.44	51.11	68.20	-17.09	---	---	Peak
2 PP	5470.000	55.77	35.26	45.75	0.00	10.47	55.75	68.20	-12.45	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4_00138.EMI

Date: 2022-06-08

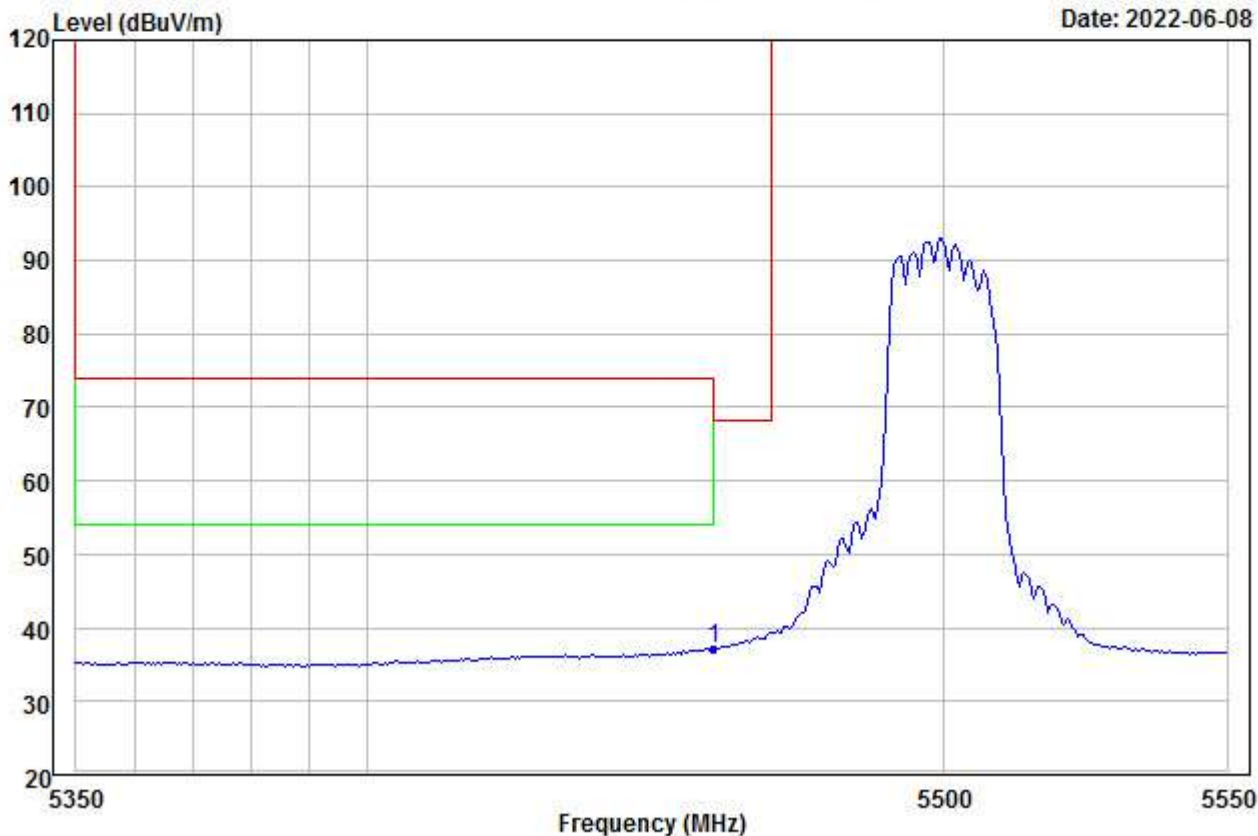


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5500
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5460.000	37.31	35.25	45.77	0.00	10.44	37.23	54.00	-16.77	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4_00139.EMI

Date: 2022-06-08

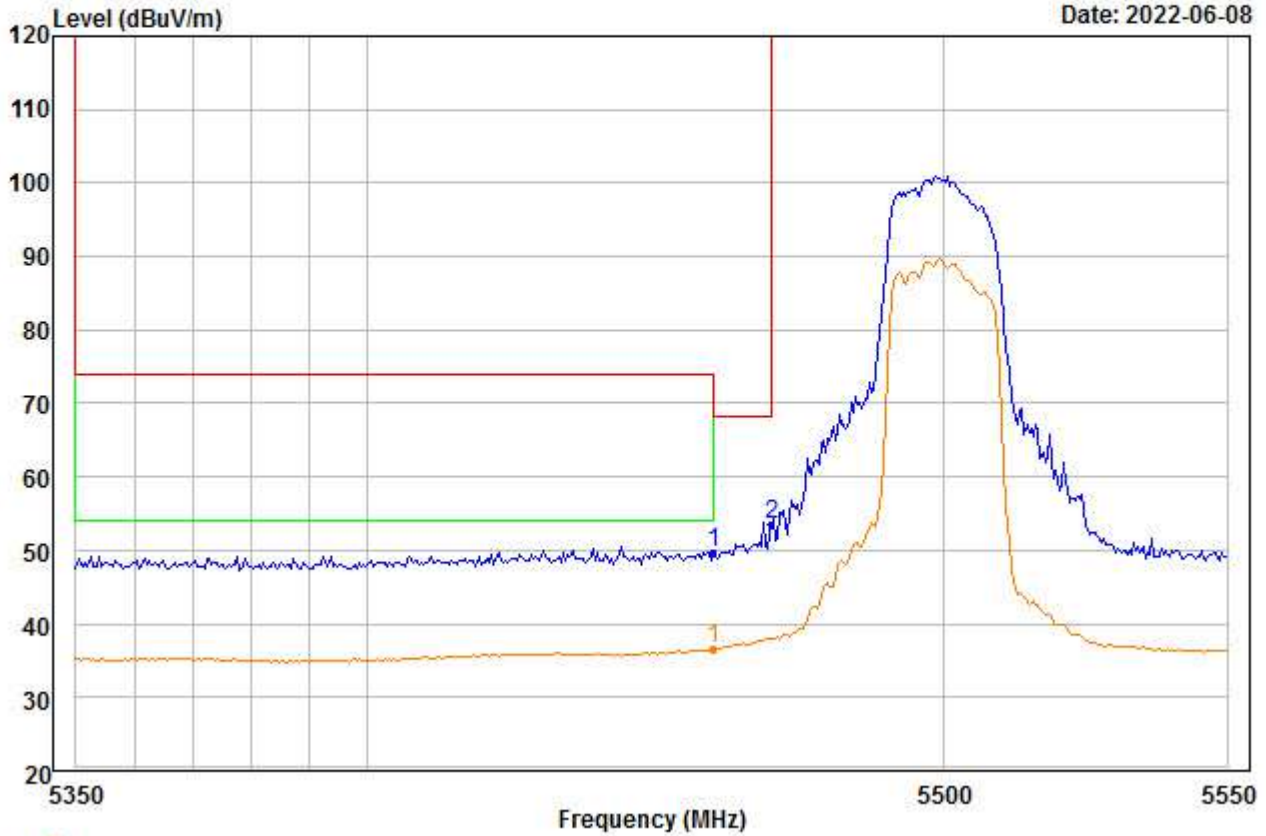


Trace: 1
 Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5500
 Remark :

	Read Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	5460.000	49.69	35.25	45.77	0.00	10.44	49.61	68.20	-18.59	---	---	Peak
2 PP	5470.000	53.44	35.26	45.75	0.00	10.47	53.42	68.20	-14.78	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4_00140.EMI

Date: 2022-06-08

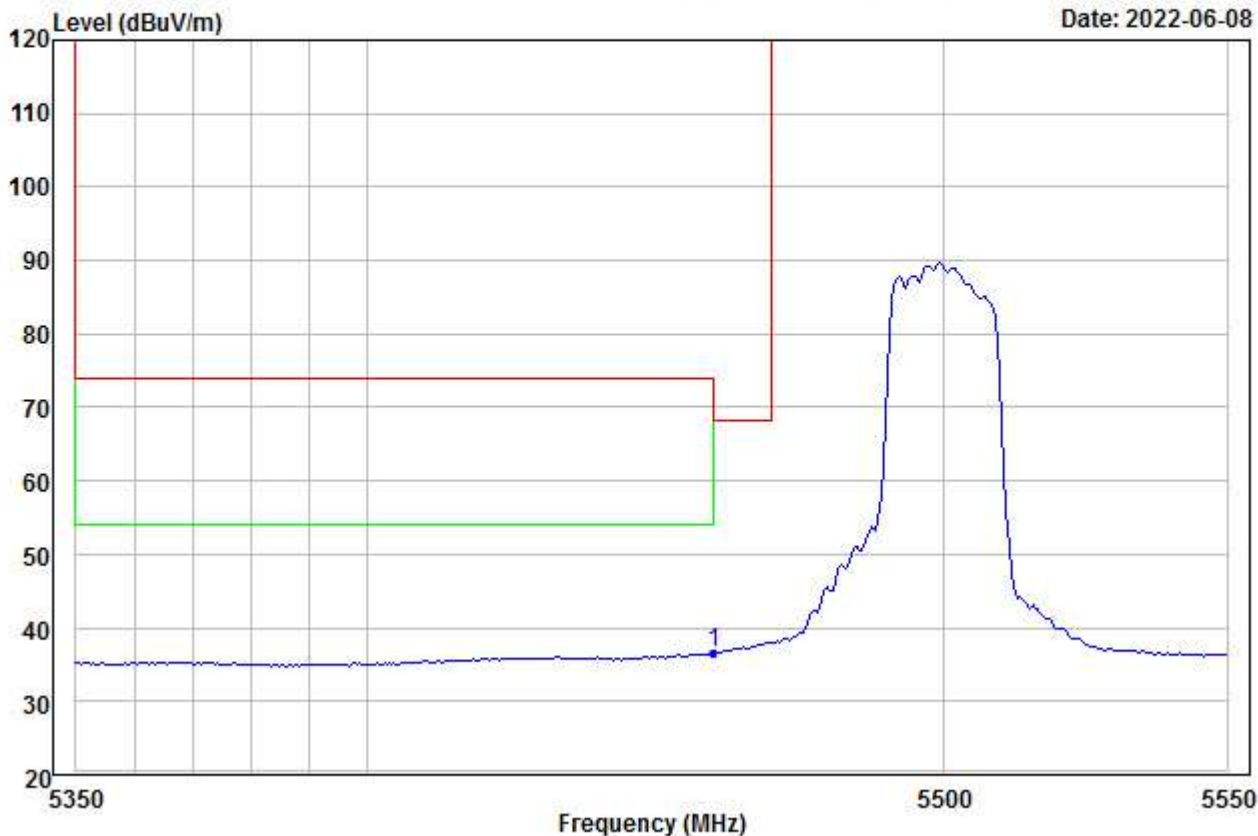


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5500
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit			
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 5460.000	36.62	35.25	45.77	0.00	10.44	36.54	54.00	-17.46	---	--- Aver

File: F:\Test Template\上海ITSI\2022\220523032 SA750\A\5G\BE\4_00141.EMI

Date: 2022-06-08

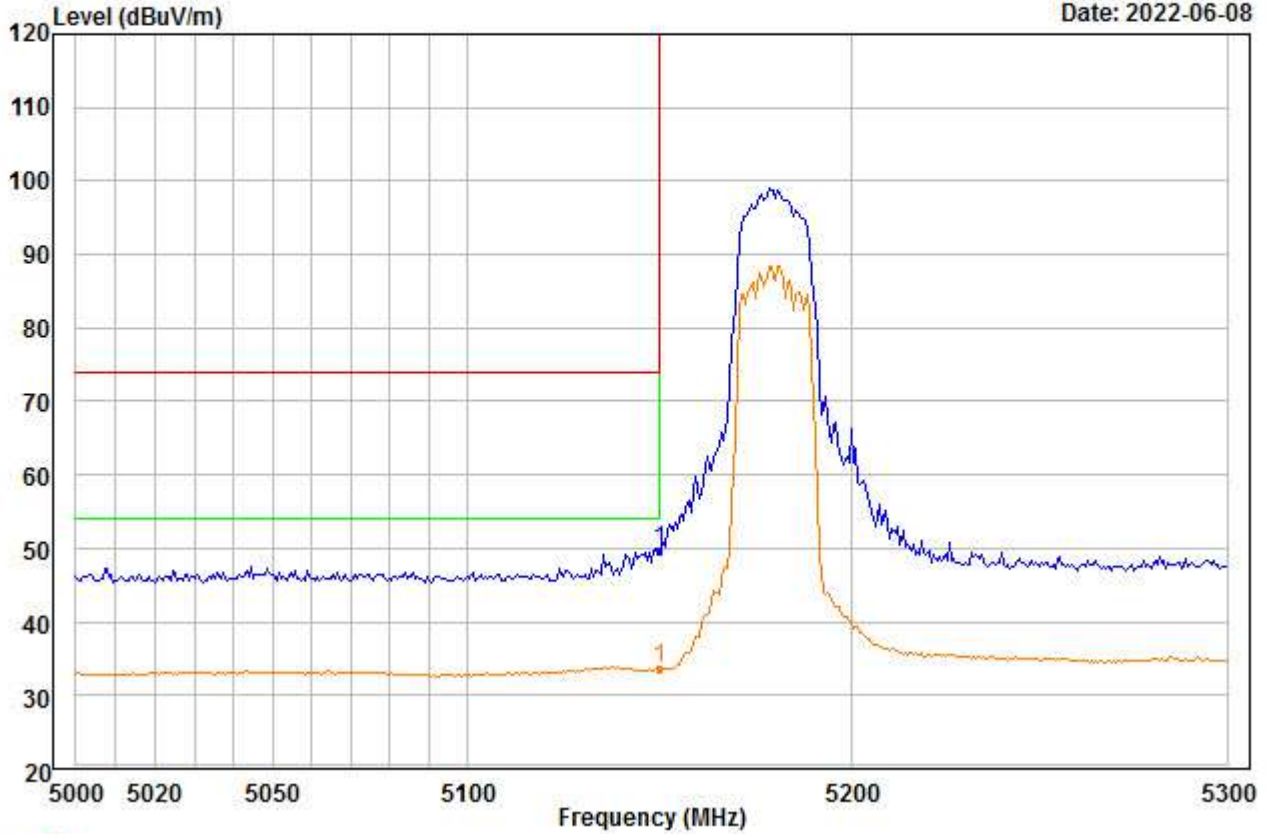


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5180
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5150.000	51.33	34.88	46.33	0.00	9.78	49.66	74.00	-24.34	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4_00142.EMI

Date: 2022-06-08

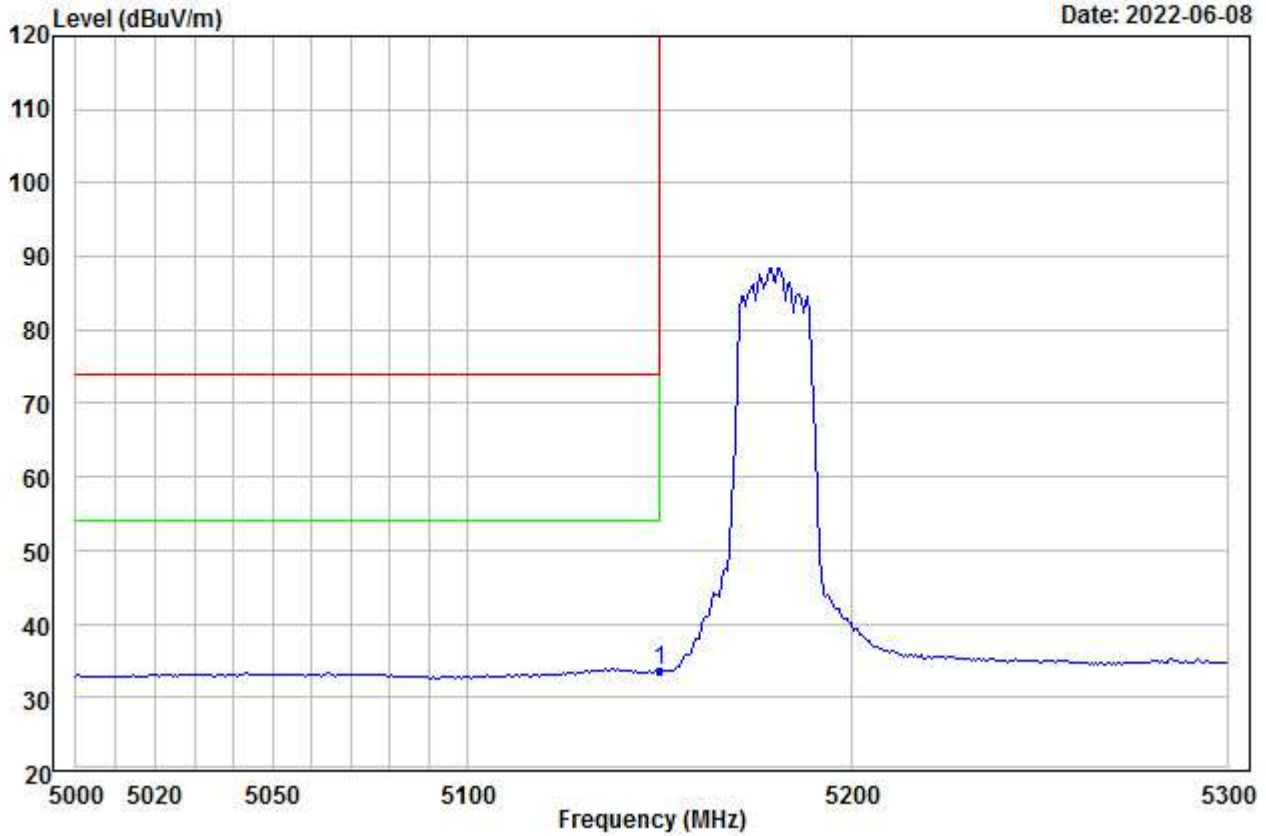


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5180
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5150.000	35.30	34.88	46.33	0.00	9.78	33.63	54.00	-20.37	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4_00143.EMI

Date: 2022-06-08

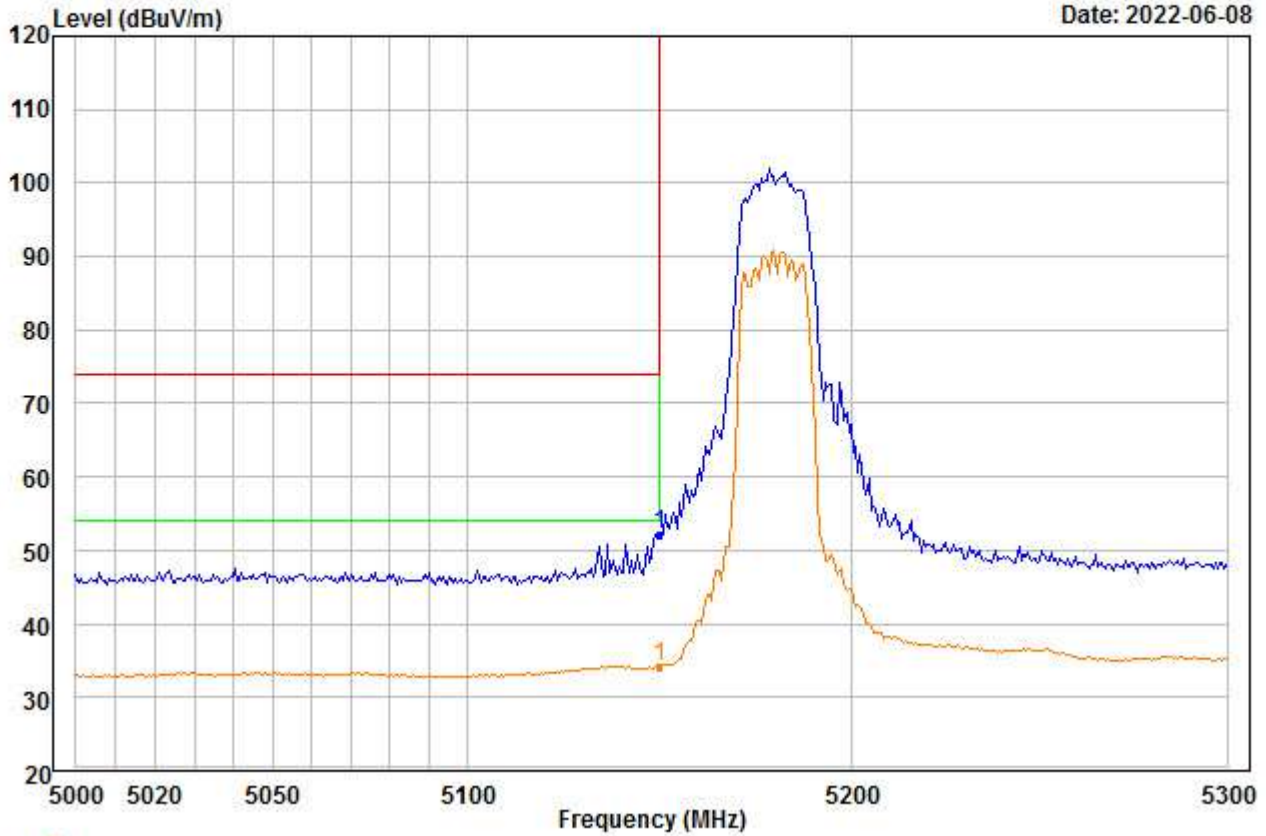


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5180
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5150.000	53.79	34.88	46.33	0.00	9.78	52.12	74.00	-21.88	---	---	Peak

File: F:\Test Template\上海ITSI\2022\220523032 SA750\A\5G\BE\4_00144.EMI

Date: 2022-06-08

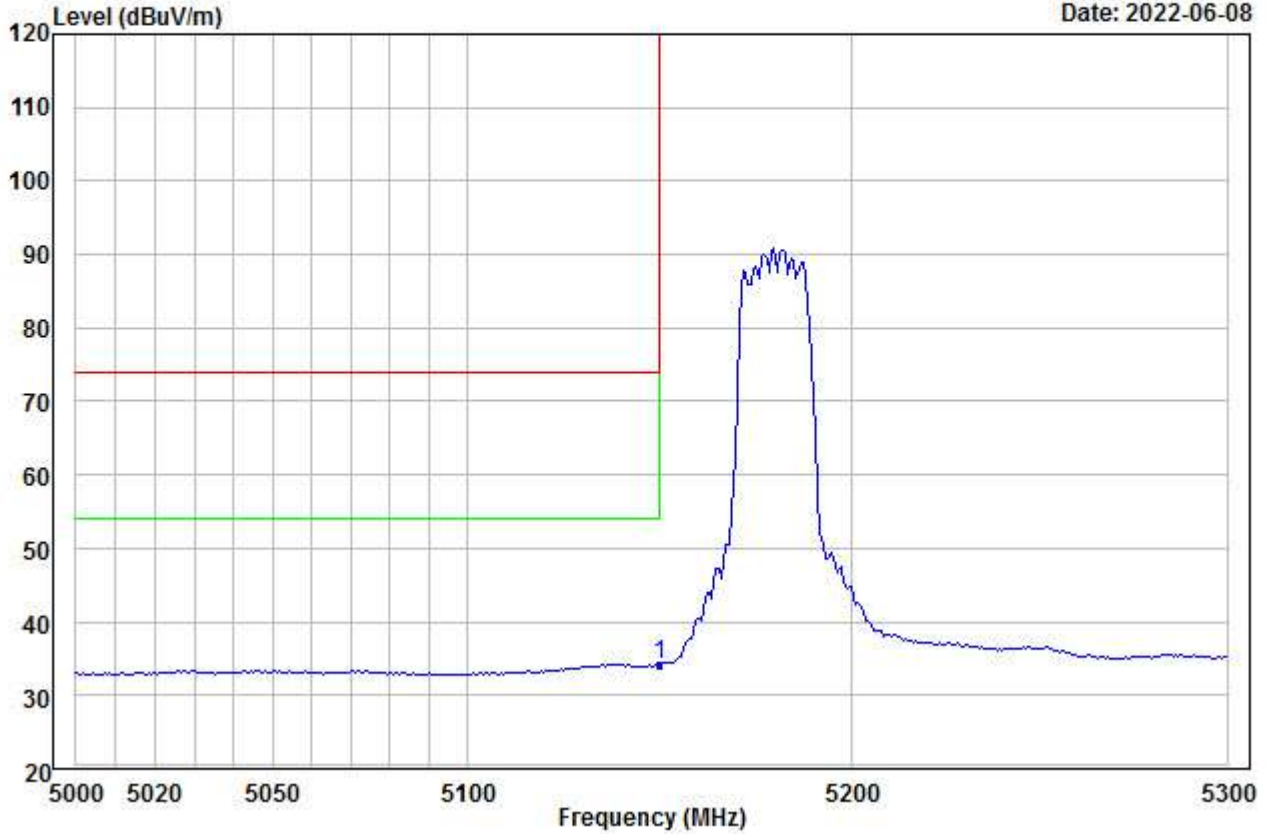


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5180
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5150.000	35.78	34.88	46.33	0.00	9.78	34.11	54.00	-19.89	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4_00145.EMI

Date: 2022-06-08

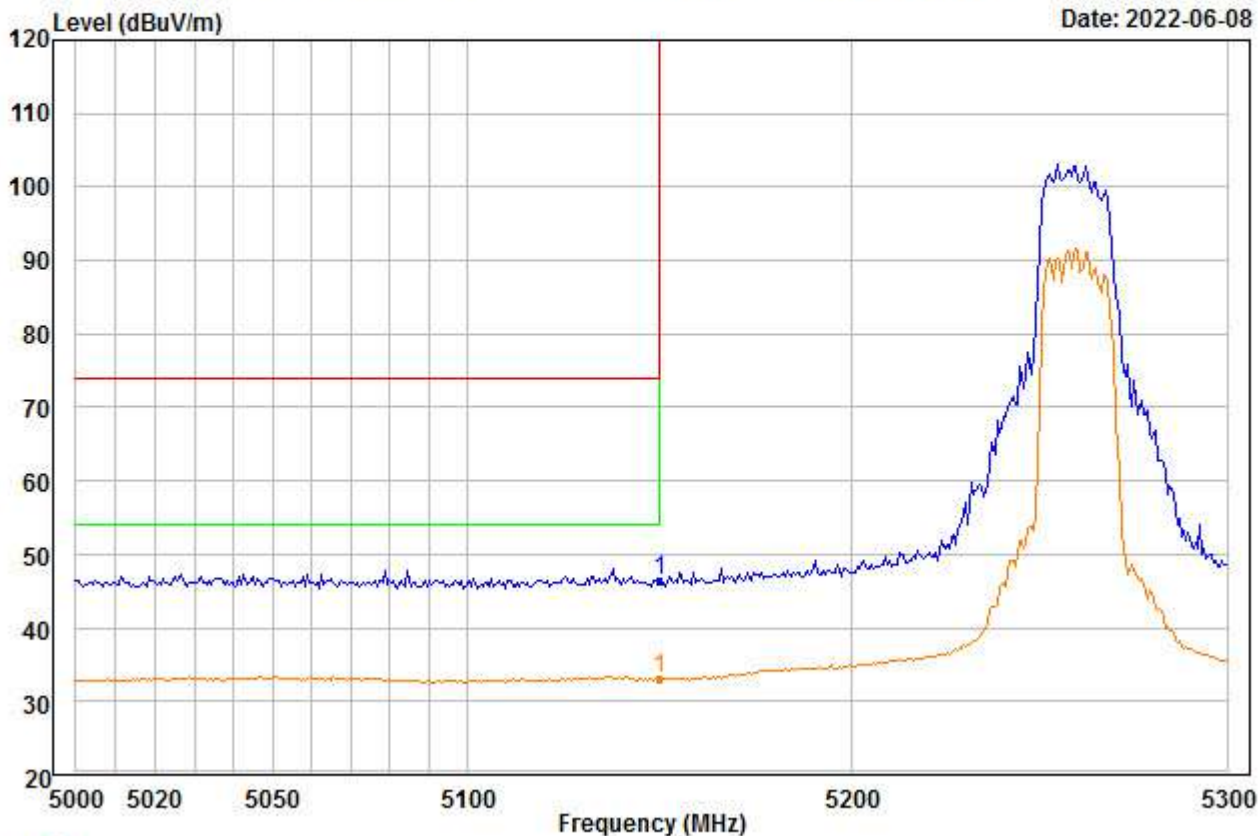


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5260
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5150.000	48.21	34.88	46.33	0.00	9.78	46.54	74.00	-27.46	---	---	Peak

File: F:\Test Template\上海ITSI\2022\220523032 SA750\A\5G\BE\4_00146.EMI

Date: 2022-06-08

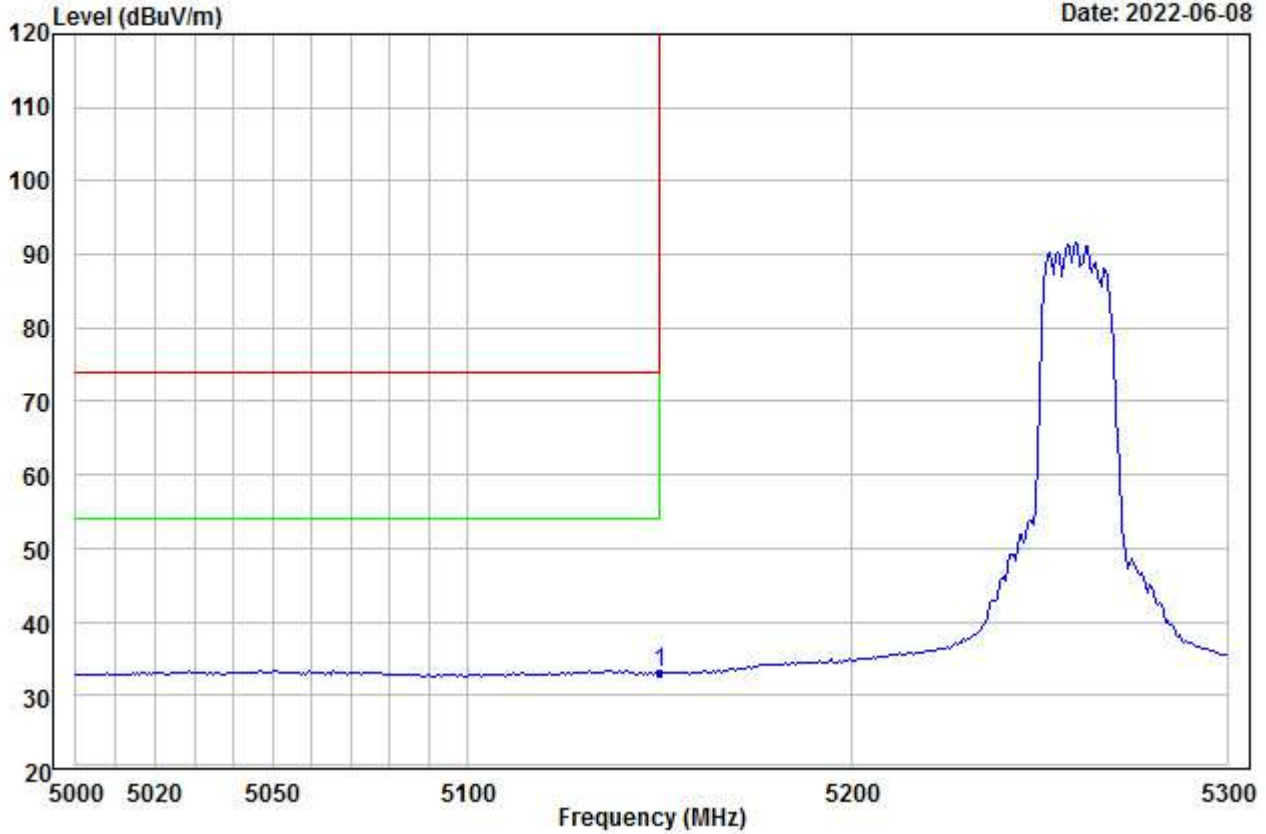


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5260
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5150.000	34.64	34.88	46.33	0.00	9.78	32.97	54.00	-21.03	---	---	Aver

File: F:\Test Template\上海ITSI\2022\220523032 SA750\A\5G\BE\4_00147.EMI

Date: 2022-06-08

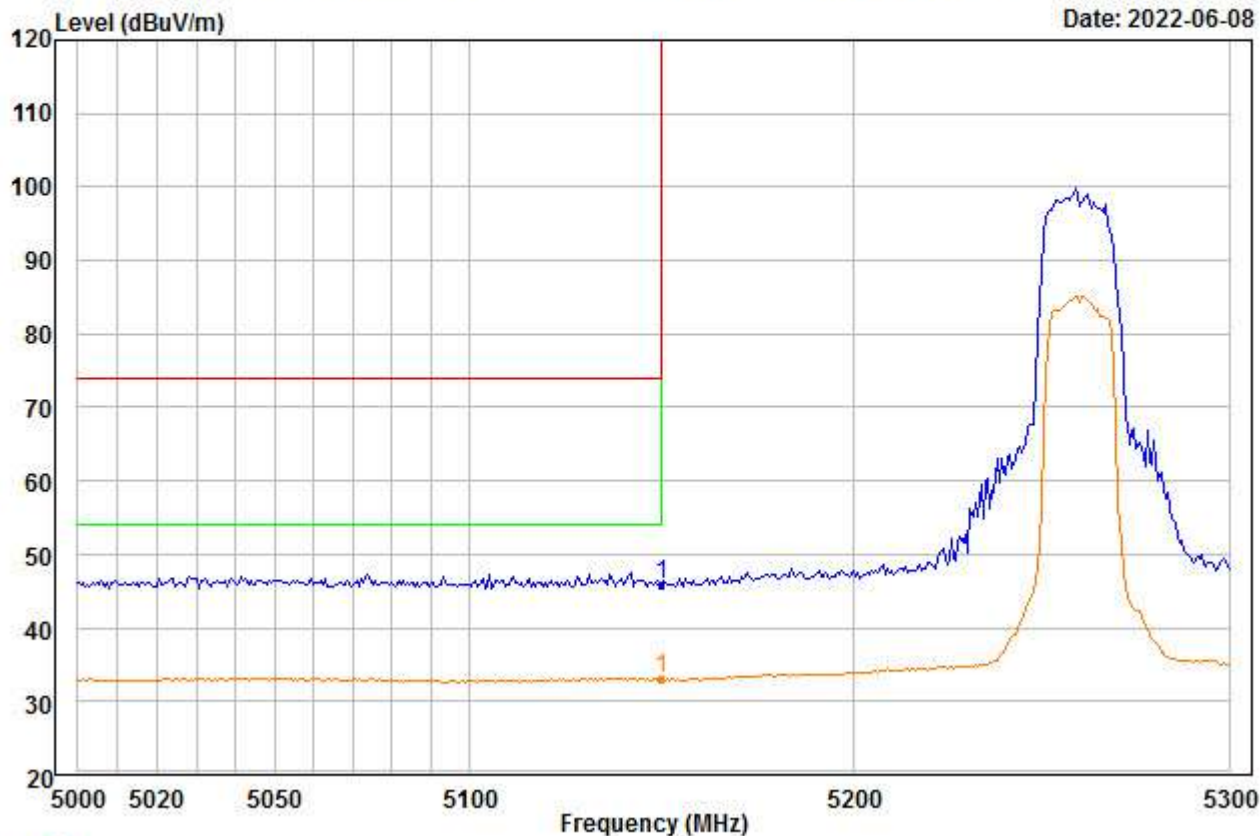


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5260
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5150.000	47.57	34.88	46.33	0.00	9.78	45.90	74.00	-28.10	---	---	Peak

File: F:\Test Template\上海ITSI\2022\220523032 SA750\A\5G\BE\4_00148.EMI

Date: 2022-06-08

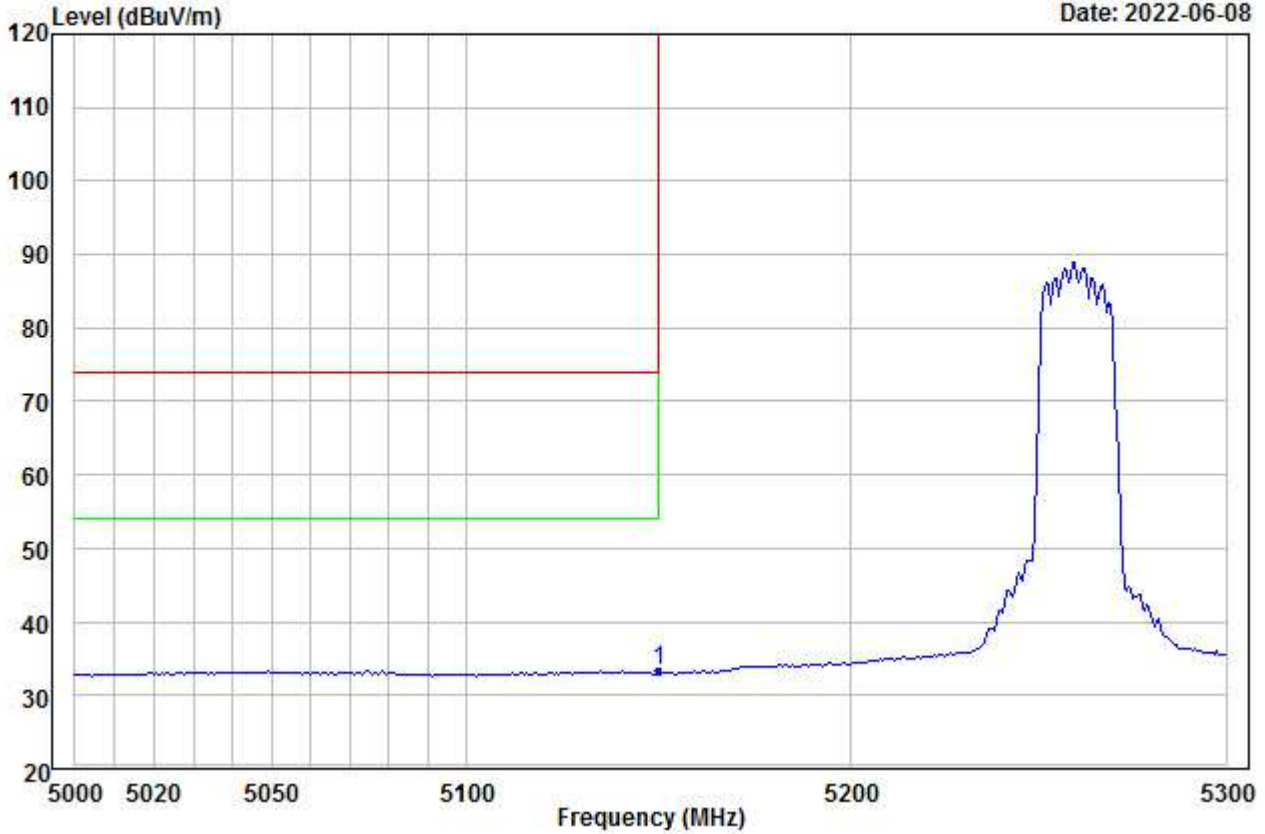


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5260
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5150.000	34.89	34.88	46.33	0.00	9.78	33.22	54.00	-20.78	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4_00149.EMI

Date: 2022-06-08

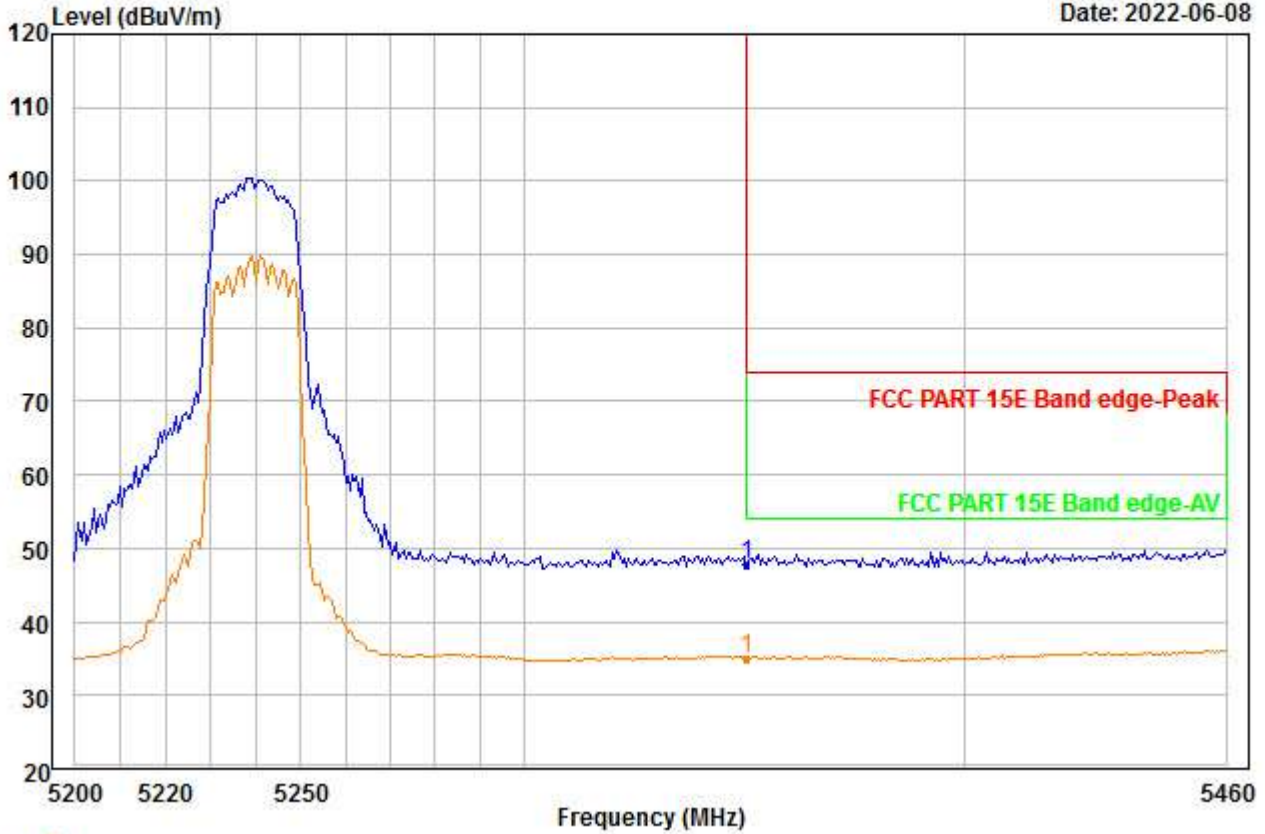


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5240
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5350.000	48.44	35.12	45.97	0.00	10.18	47.77	74.00	-26.23	---	---	Peak

File: F:\Test Template\上海\ITS\2022\220523032 SA750\A\5G\BE\4_00150.EMI

Date: 2022-06-08

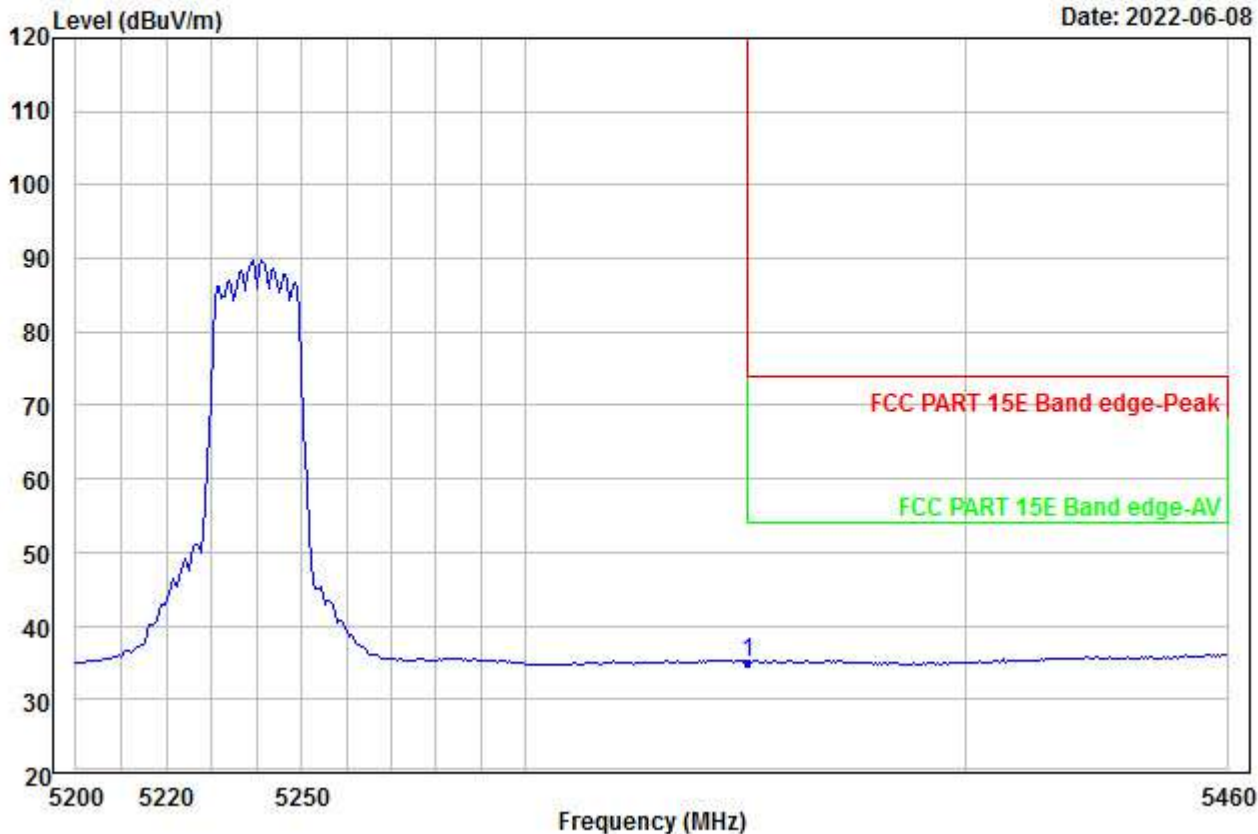


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5240
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit			
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 5350.000	35.73	35.12	45.97	0.00	10.18	35.06	54.00	-18.94	---	--- Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4_00151.EMI

Date: 2022-06-08

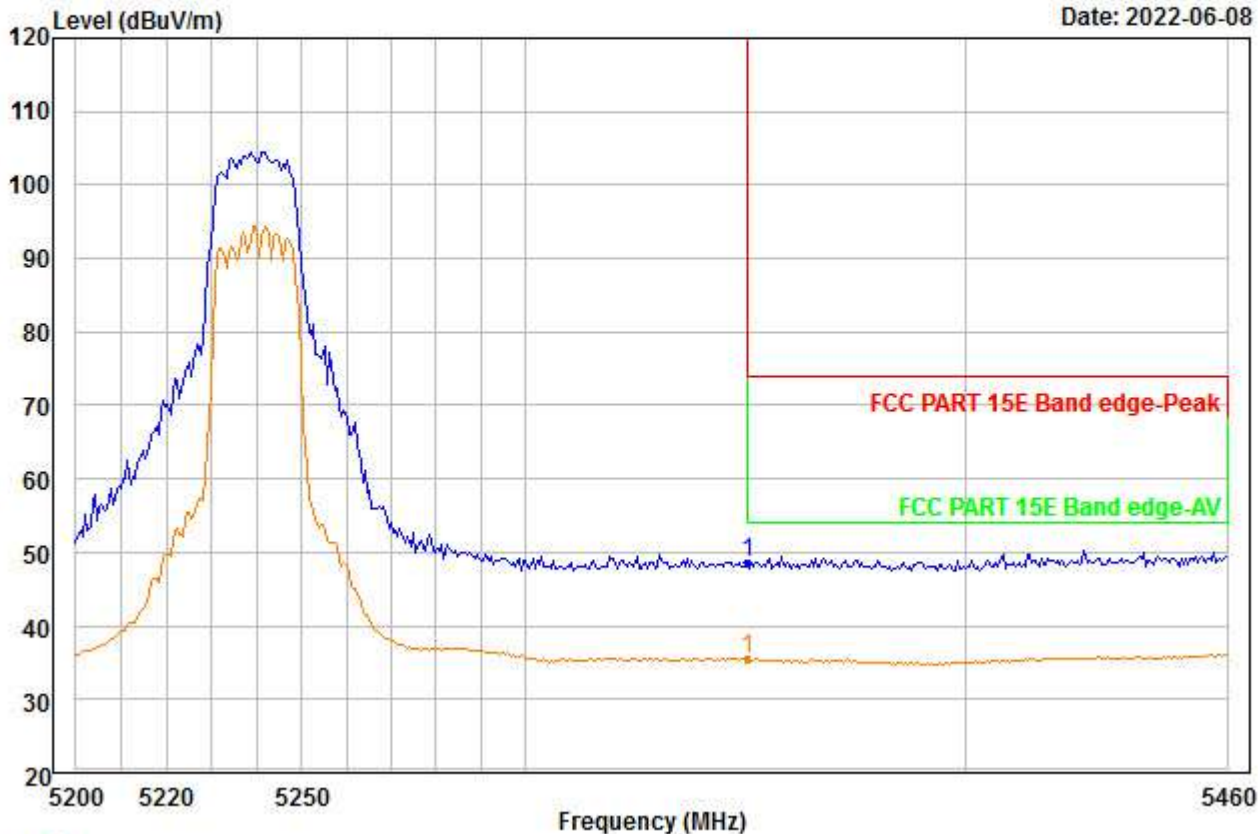


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5240
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5350.000	49.37	35.12	45.97	0.00	10.18	48.70	74.00	-25.30	---	---	Peak

File: F:\Test Template\上海\ITS\2022\220523032 SA750\A\5G\BE\4_00152.EMI

Date: 2022-06-08

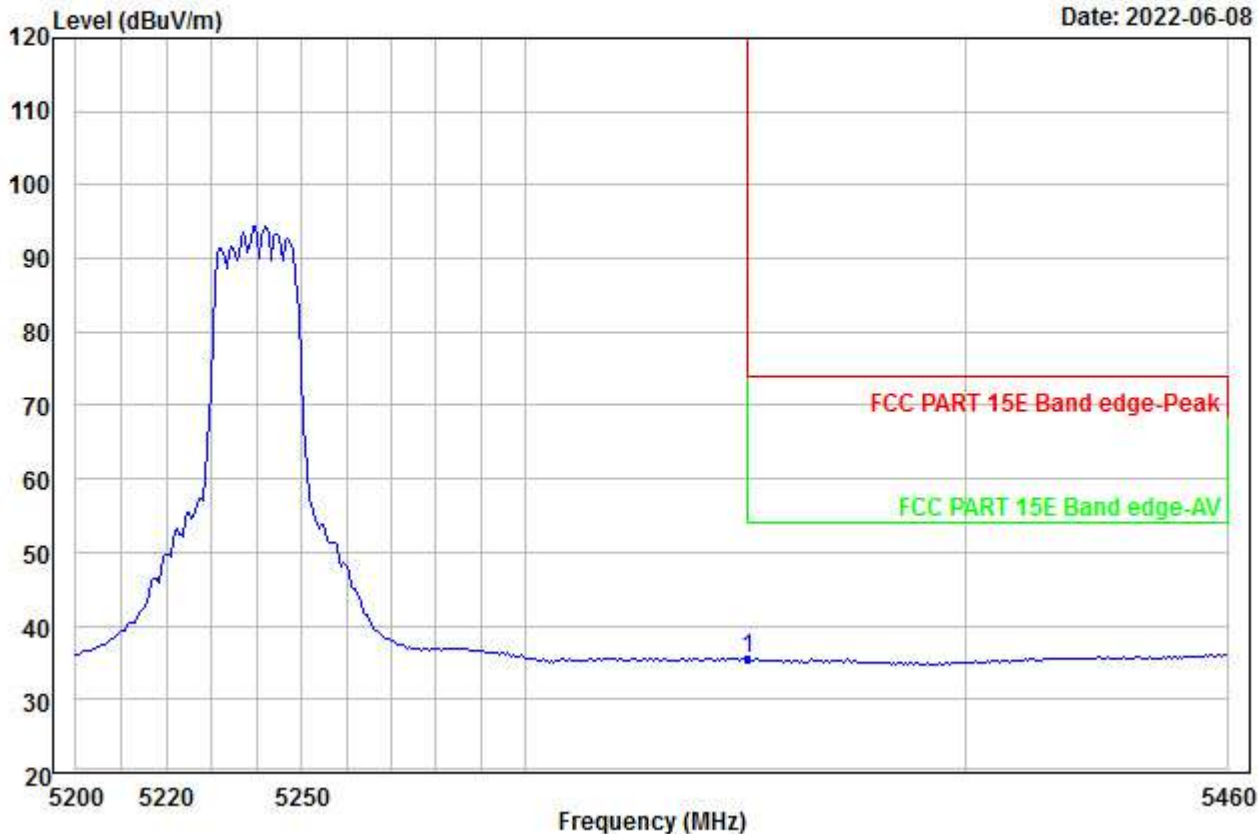


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5240
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5350.000	36.13	35.12	45.97	0.00	10.18	35.46	54.00	-18.54	---	---	Aver

File: F:\Test Template\上海\ITS\2022\220523032 SA750\A\5G\BE\4_00153.EMI

Date: 2022-06-08

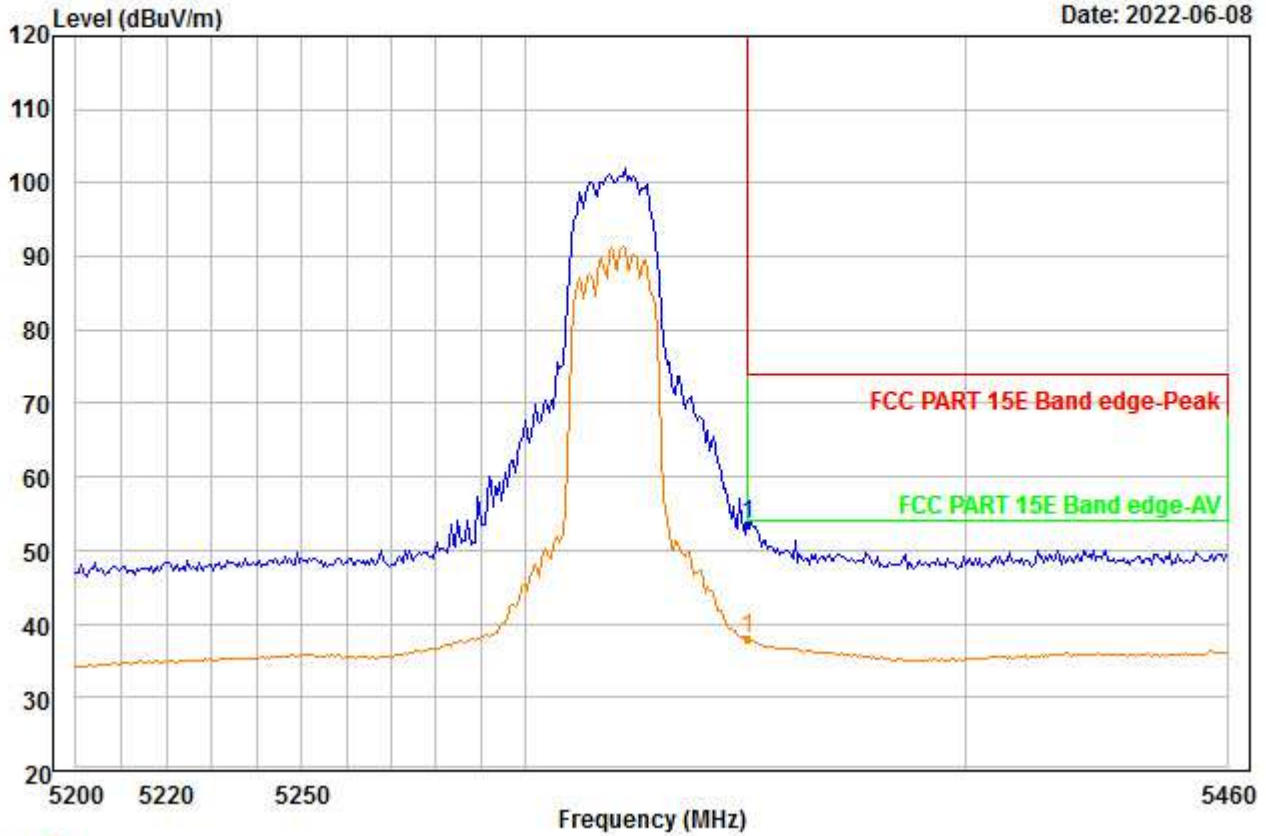


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5320
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5350.000	54.28	35.12	45.97	0.00	10.18	53.61	74.00	-20.39	---	---	Peak

File: F:\Test Template\上海\ITS\2022\220523032 SA750\A\5G\BE\4_00154.EMI

Date: 2022-06-08

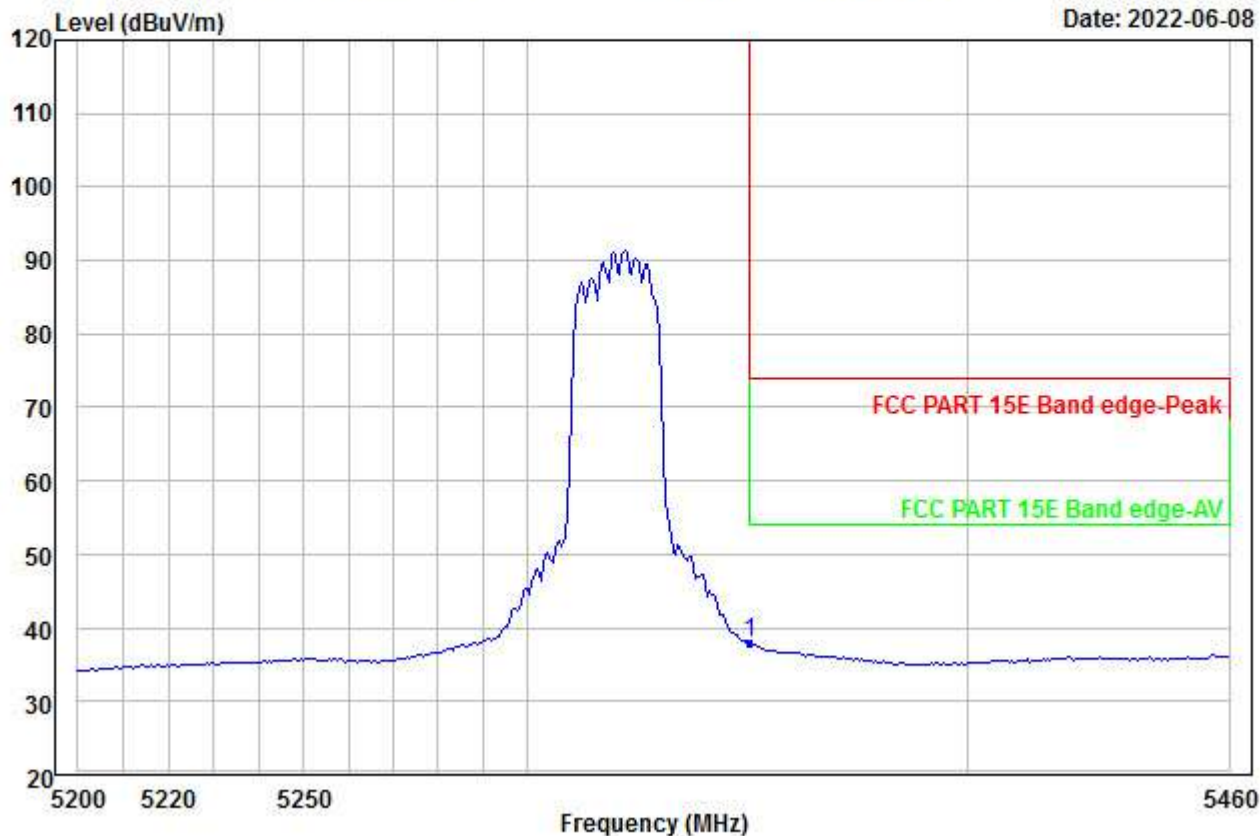


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5320
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5350.000	38.57	35.12	45.97	0.00	10.18	37.90	54.00	-16.10	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4_00155.EMI

Date: 2022-06-08

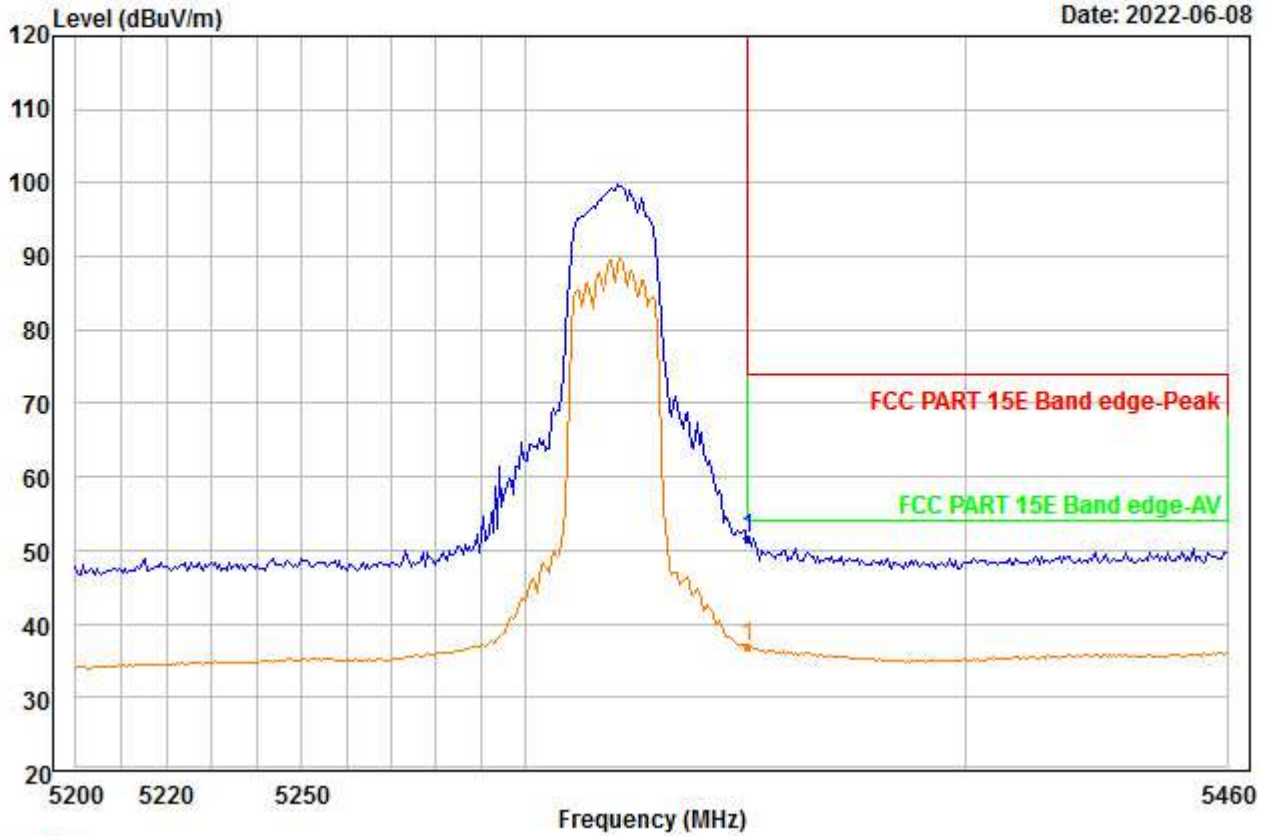


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5320
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5350.000	52.18	35.12	45.97	0.00	10.18	51.51	74.00	-22.49	---	---	Peak

File: F:\Test Template\上海\ITS\2022\220523032 SA750\A\5G\BE\4_00156.EMI

Date: 2022-06-08

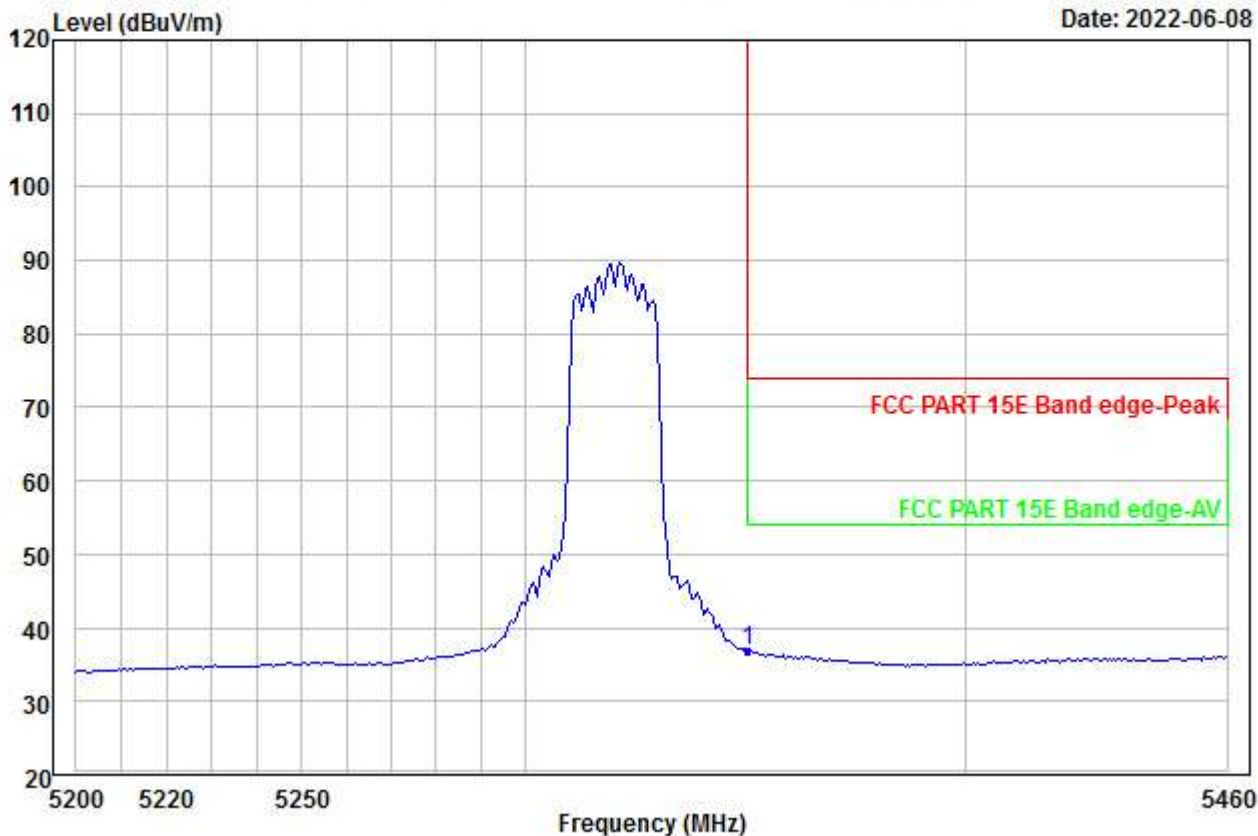


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5320
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5350.000	37.69	35.12	45.97	0.00	10.18	37.02	54.00	-16.98	---	---	Aver

File: F:\Test Template\上海ITSI\2022\220523032 SA750\A\5G\BE\4_00157.EMI

Date: 2022-06-08

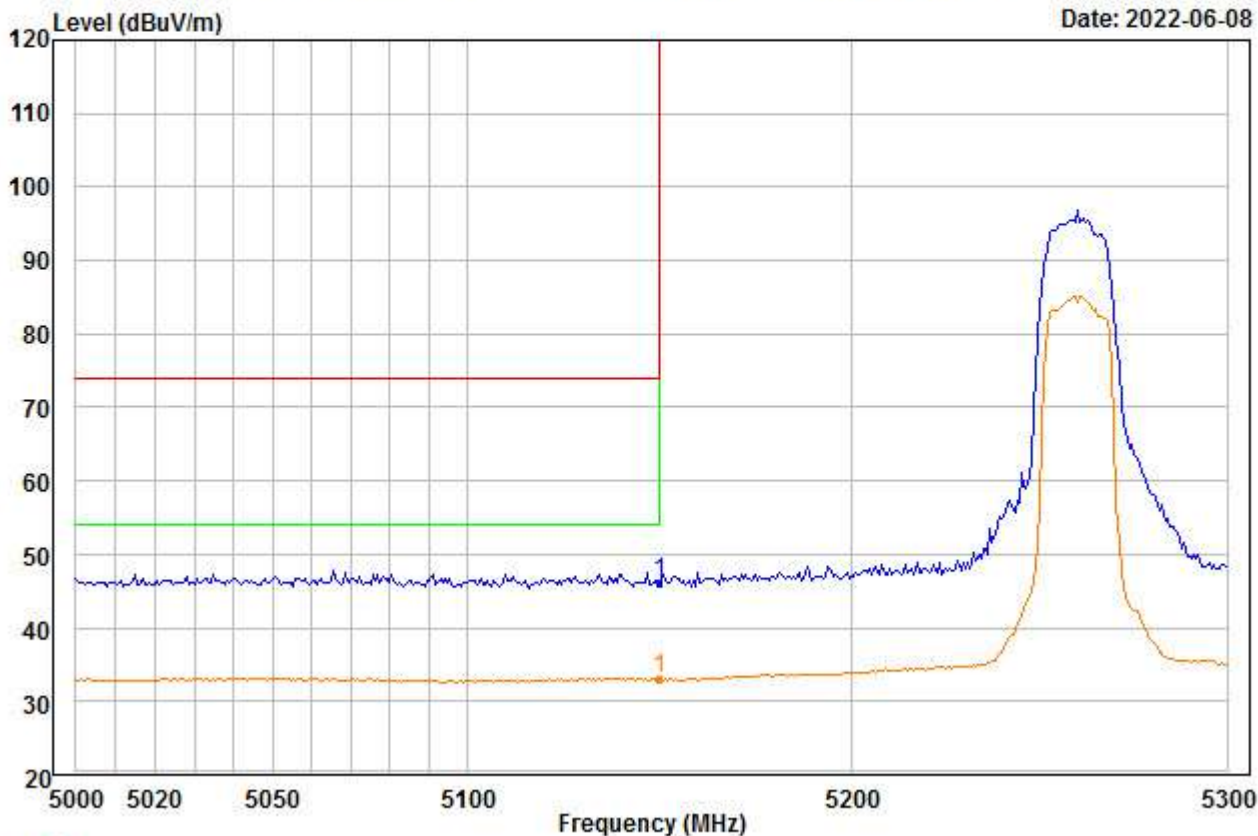


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5260
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5150.000	47.71	34.88	46.33	0.00	9.78	46.04	74.00	-27.96	---	---	Peak

File: F:\Test Template\上海ITSI\2022\220523032 SA750\A\5G\BE\4_00158.EMI

Date: 2022-06-08

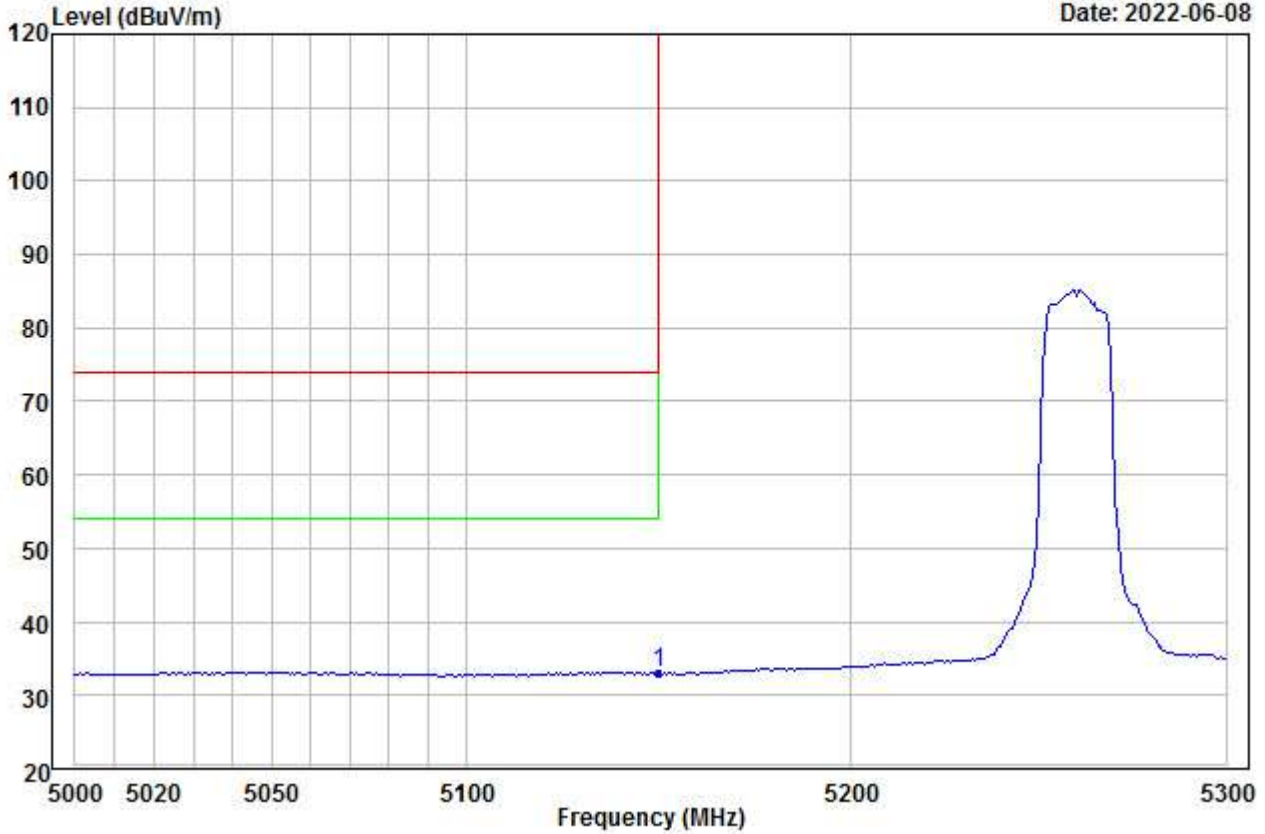


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5260
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5150.000	34.68	34.88	46.33	0.00	9.78	33.01	54.00	-20.99	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4_00159.EMI

Date: 2022-06-08

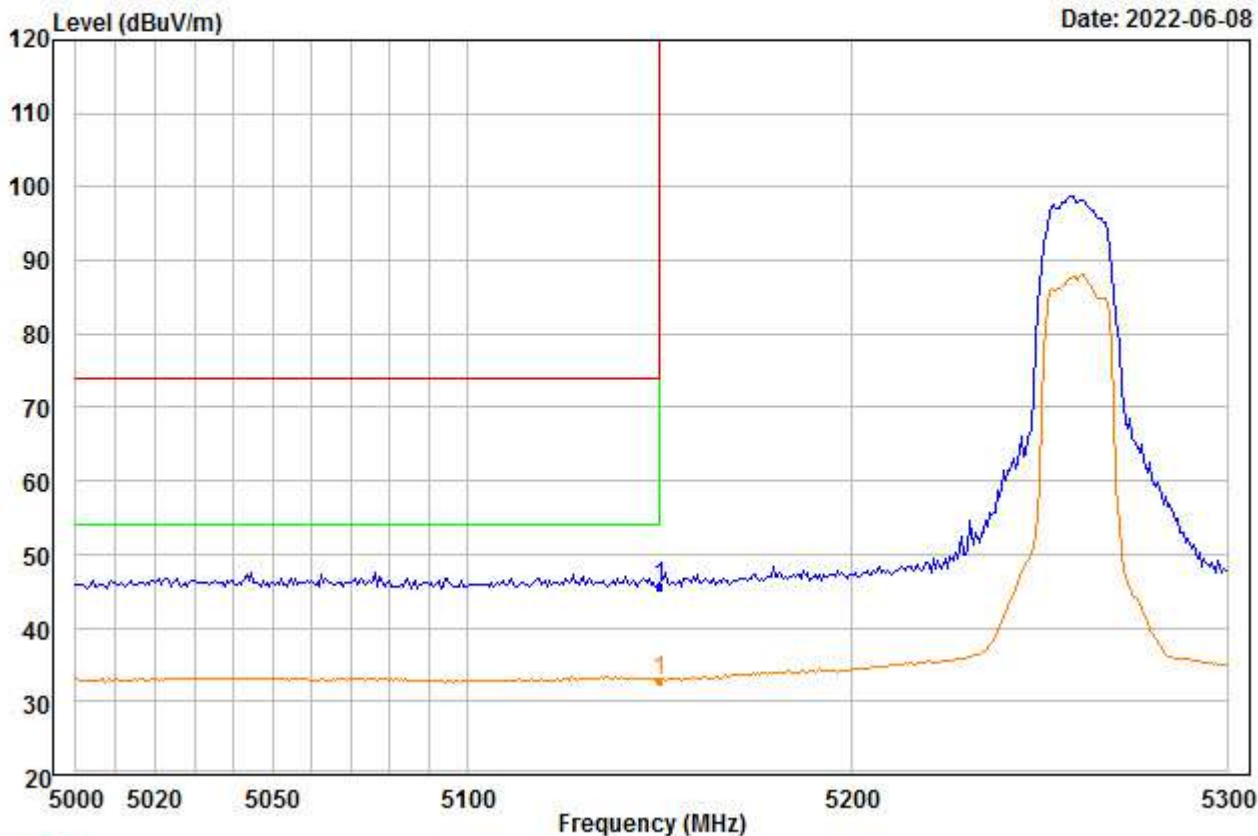


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5260
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5150.000	47.33	34.88	46.33	0.00	9.78	45.66	74.00	-28.34	---	---	Peak

File: F:\Test Template\上海ITSI\2022\220523032 SA750\A\5G\BE\4_00160.EMI

Date: 2022-06-08

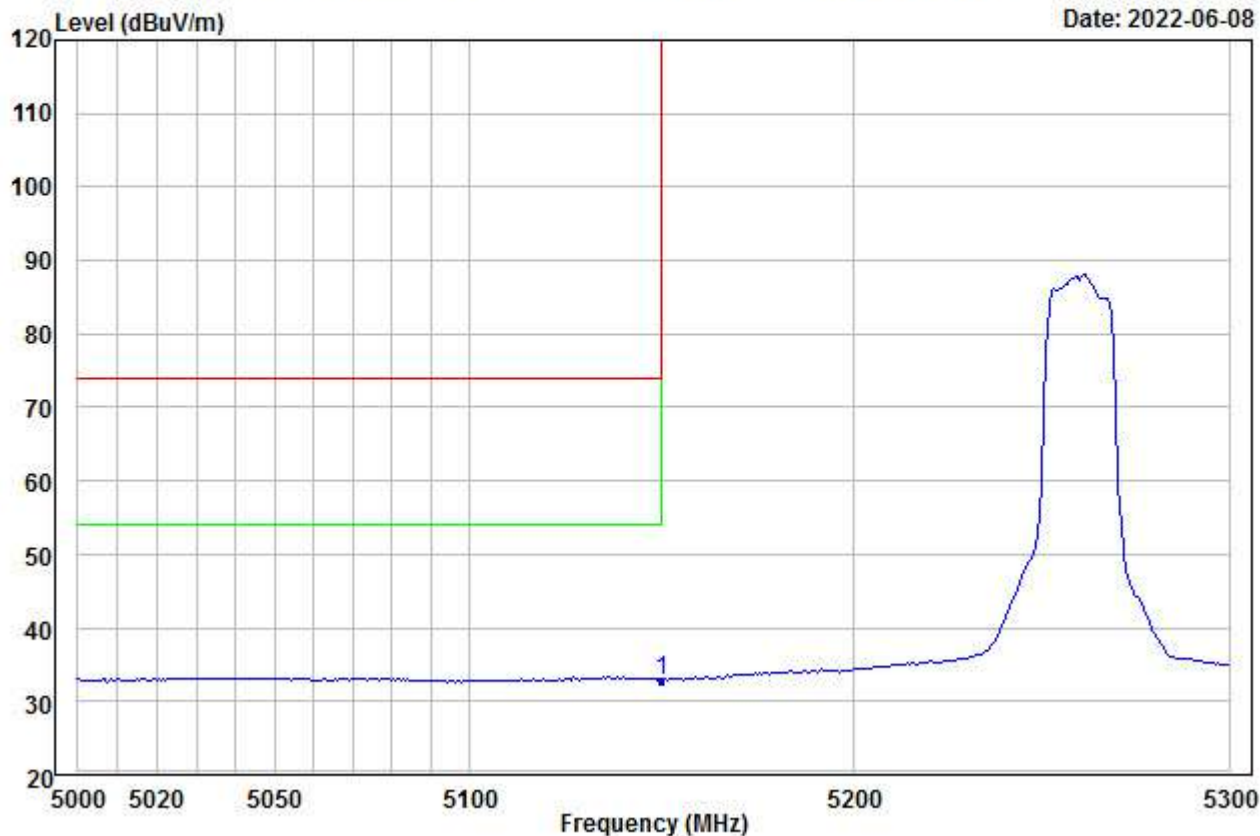


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5260
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5150.000	34.59	34.88	46.33	0.00	9.78	32.92	54.00	-21.08	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4_00161.EMI

Date: 2022-06-08

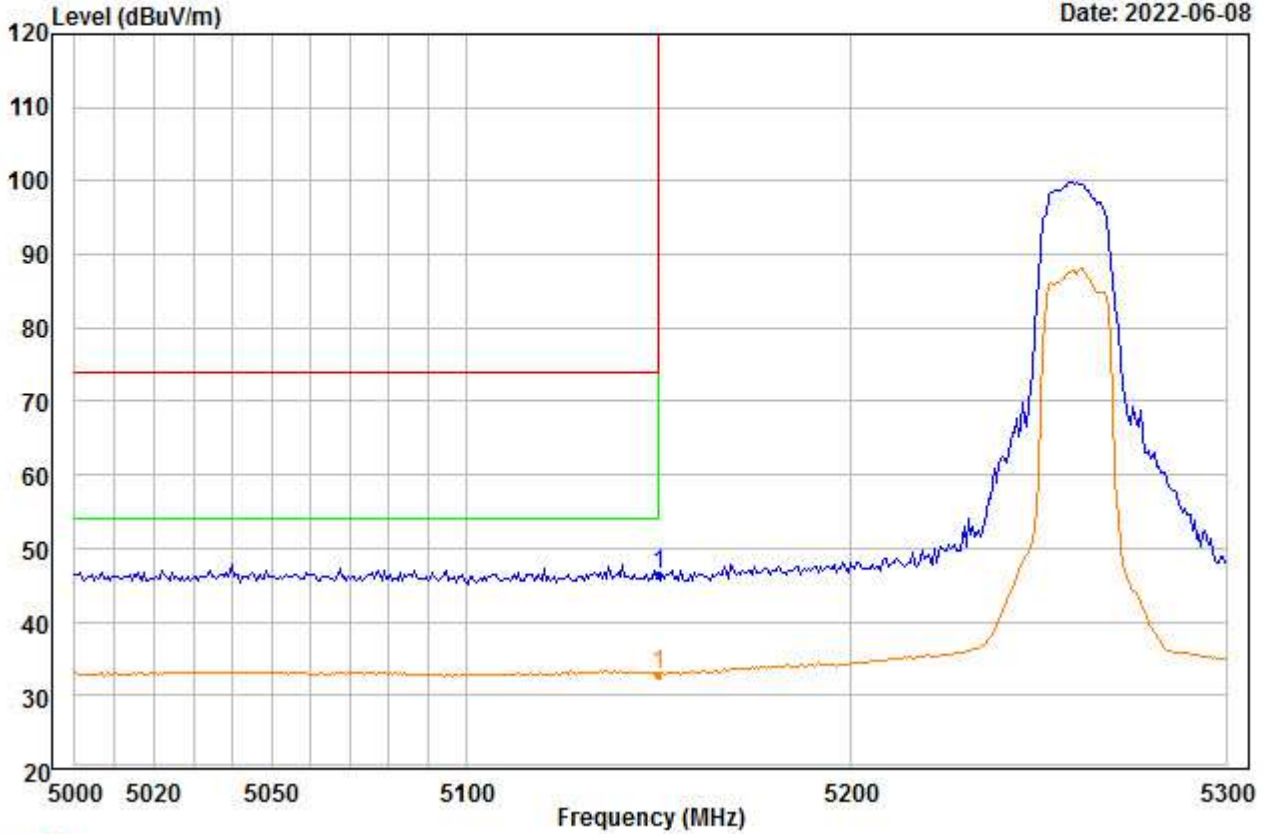


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5260
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5150.000	48.01	34.88	46.33	0.00	9.78	46.34	74.00	-27.66	---	---	Peak

File: F:\Test Template\上海ITSI\2022\220523032 SA750\A\5G\BE\4_00162.EMI

Date: 2022-06-08

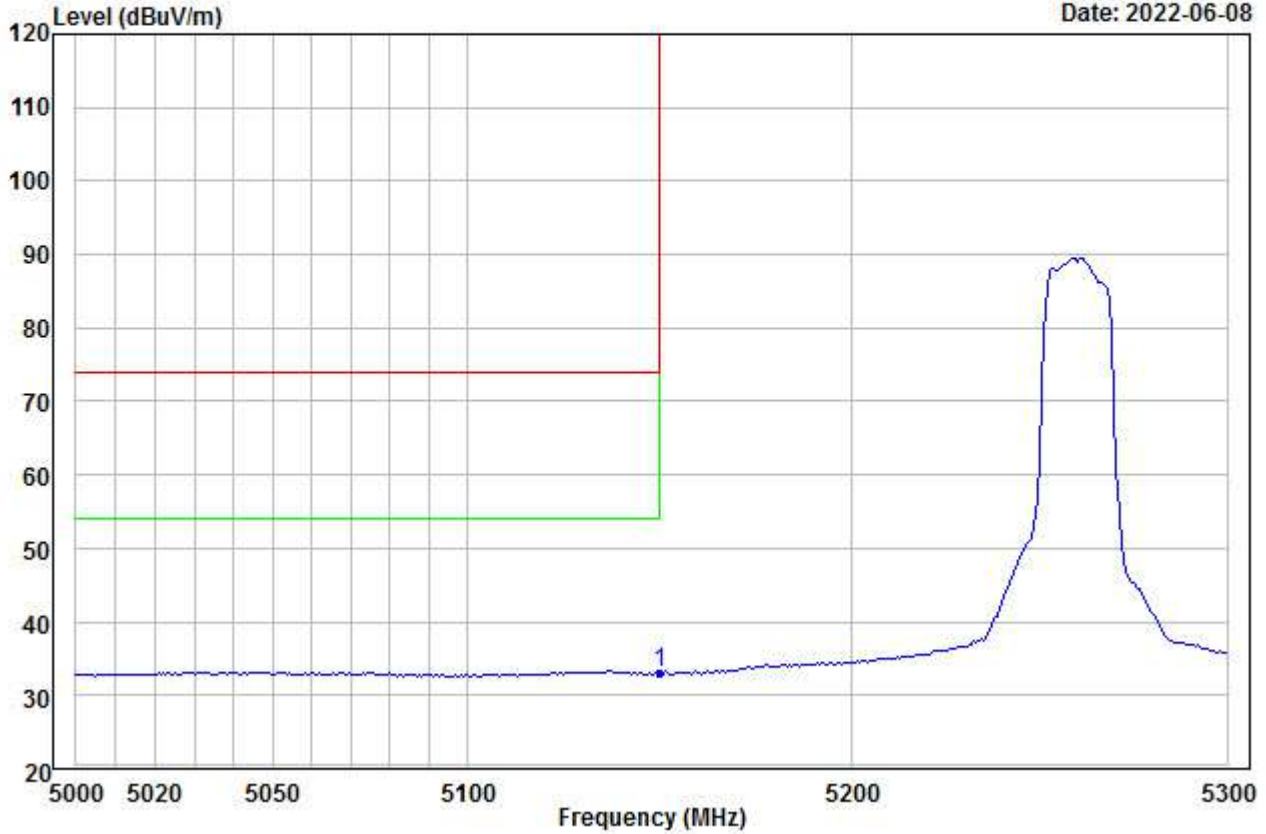


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5260
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5150.000	34.72	34.88	46.33	0.00	9.78	33.05	54.00	-20.95	---	---	Aver

File: F:\Test Template\上海\ITS\2022\220523032 SA750\A\5G\BE\4_00163.EMI

Date: 2022-06-08

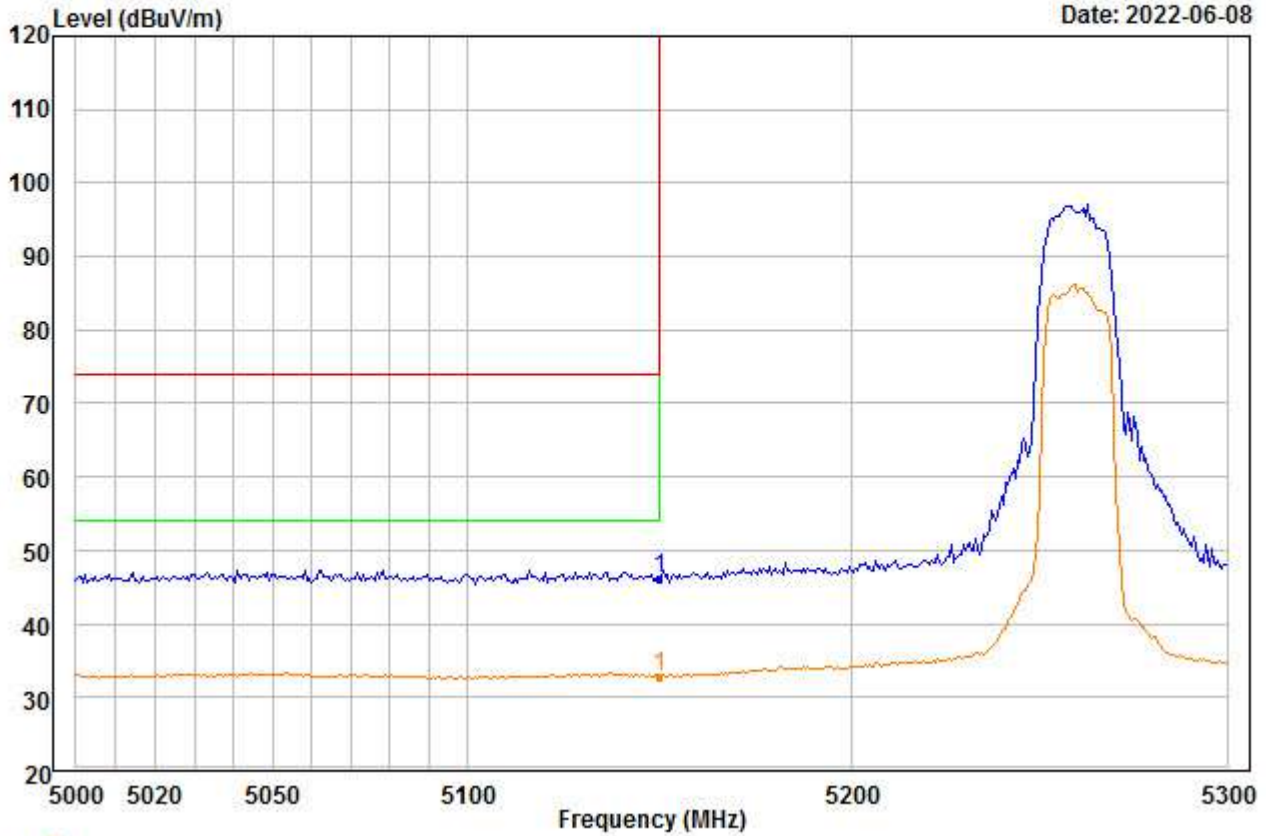


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5260
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5150.000	47.76	34.88	46.33	0.00	9.78	46.09	74.00	-27.91	---	---	Peak

File: F:\Test Template\上海ITSI\2022\220523032 SA750\A\5G\BE\4_00164.EMI

Date: 2022-06-08

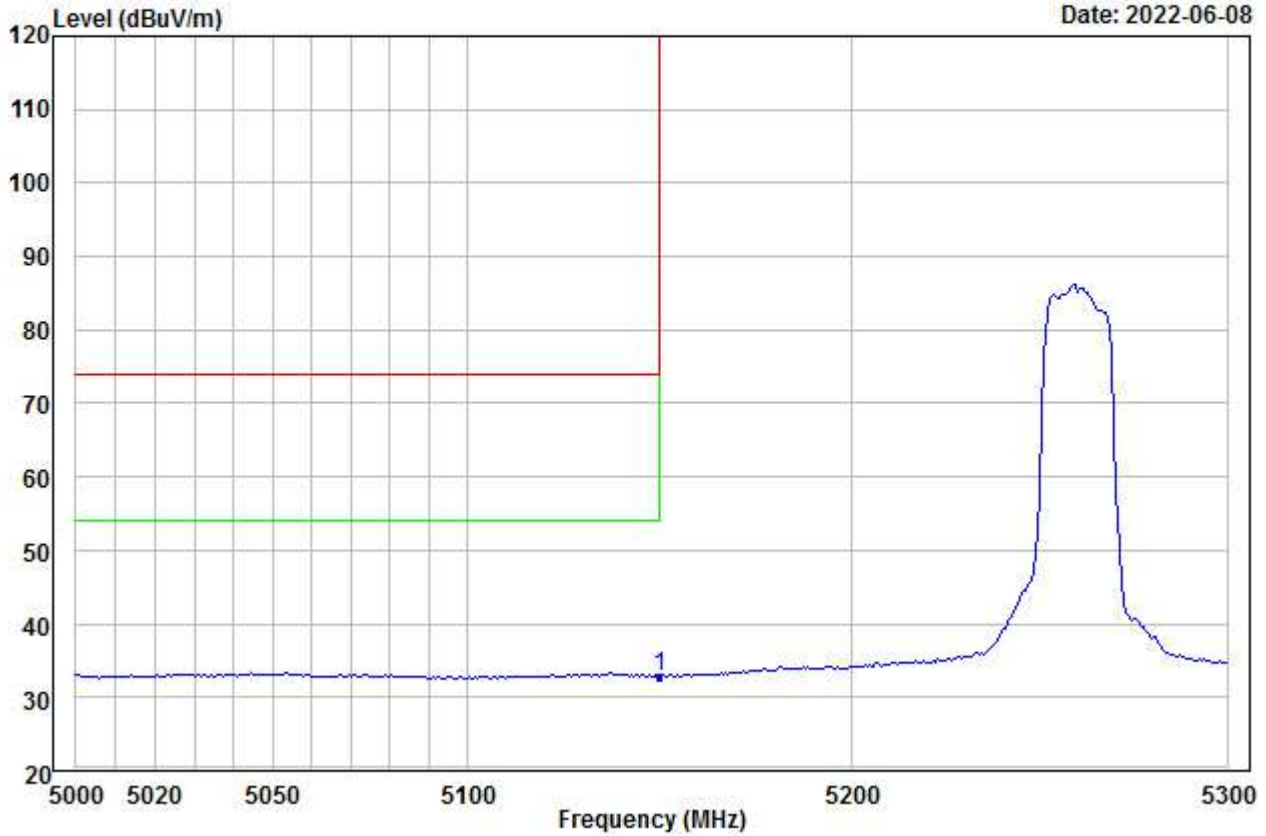


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5260
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5150.000	34.57	34.88	46.33	0.00	9.78	32.90	54.00	-21.10	---	---	Aver

File: F:\Test Template\上海ITSI\2022\220523032 SA750\A\5G\BE\4_00165.EMI

Date: 2022-06-08

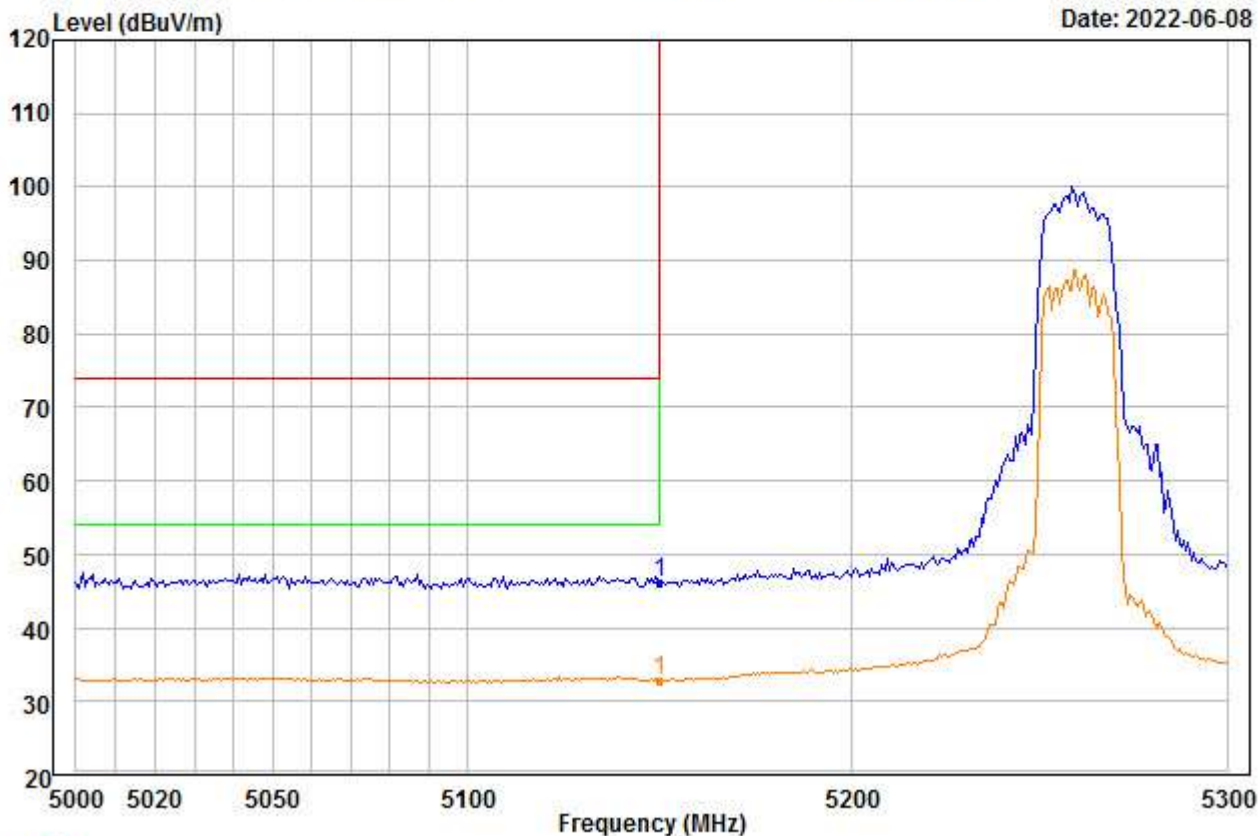


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5260
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5150.000	47.83	34.88	46.33	0.00	9.78	46.16	74.00	-27.84	---	---	Peak

File: F:\Test Template\上海ITSI\2022\220523032 SA750\A\5G\BE\4_00166.EMI

Date: 2022-06-08

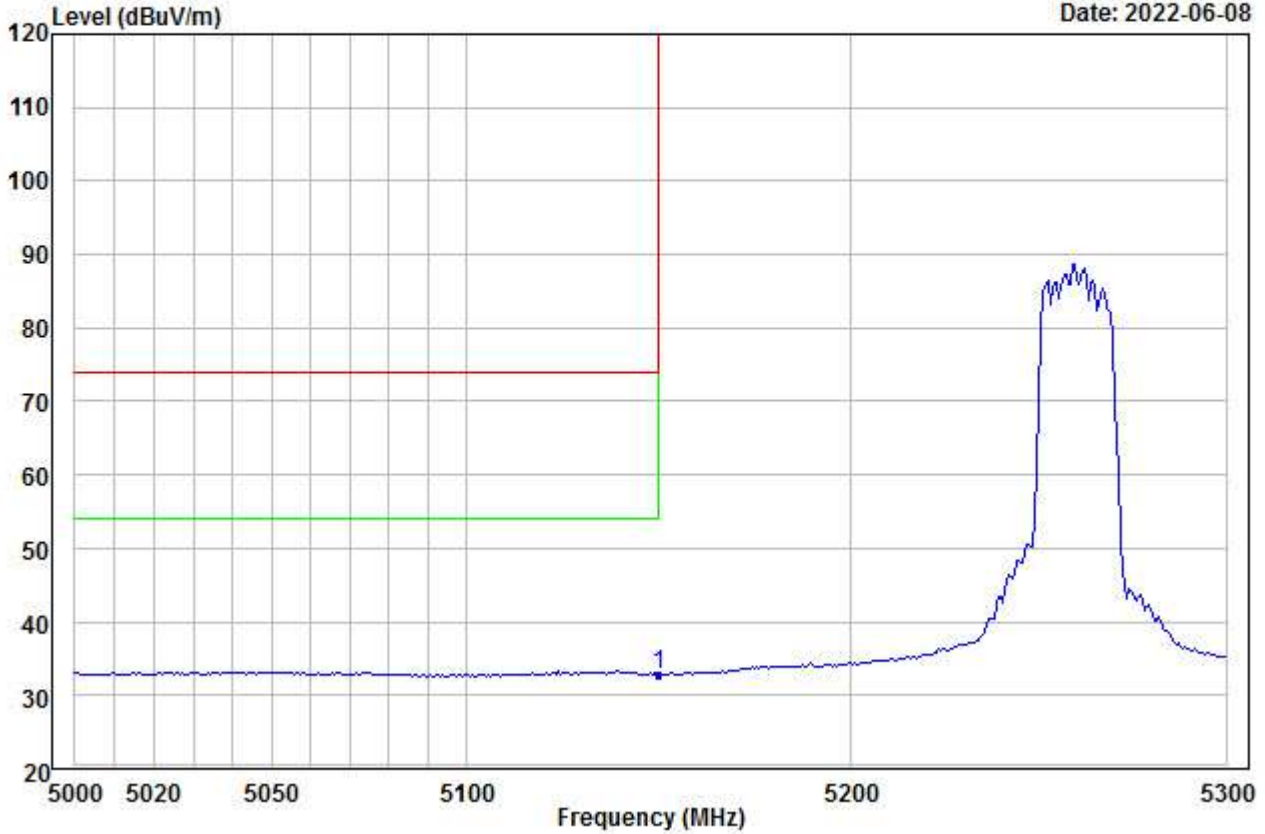


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5260
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5150.000	34.56	34.88	46.33	0.00	9.78	32.89	54.00	-21.11	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4_00167.EMI

Date: 2022-06-08

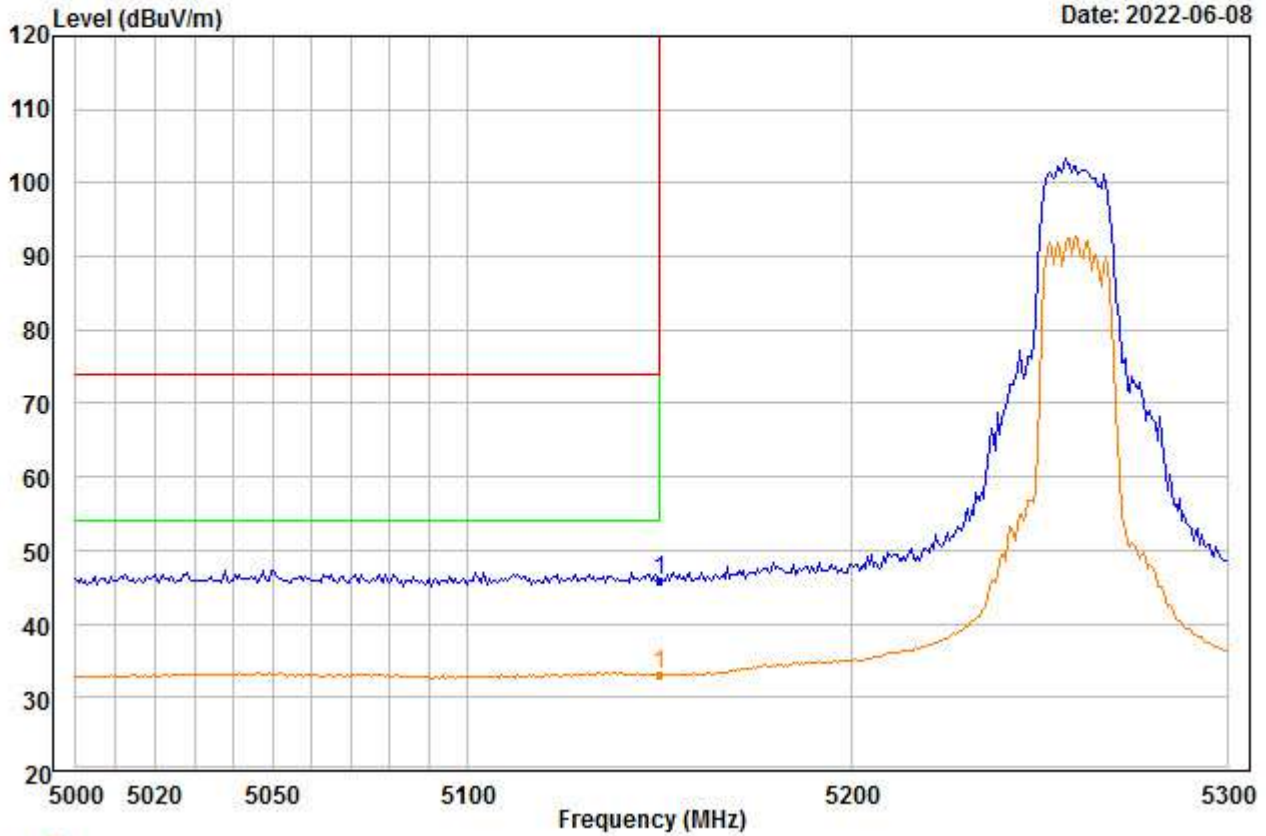


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5260
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5150.000	47.59	34.88	46.33	0.00	9.78	45.92	74.00	-28.08	---	---	Peak

File: F:\Test Template\上海ITSI\2022\220523032 SA750\A\5G\BE\4_00168.EMI

Date: 2022-06-08

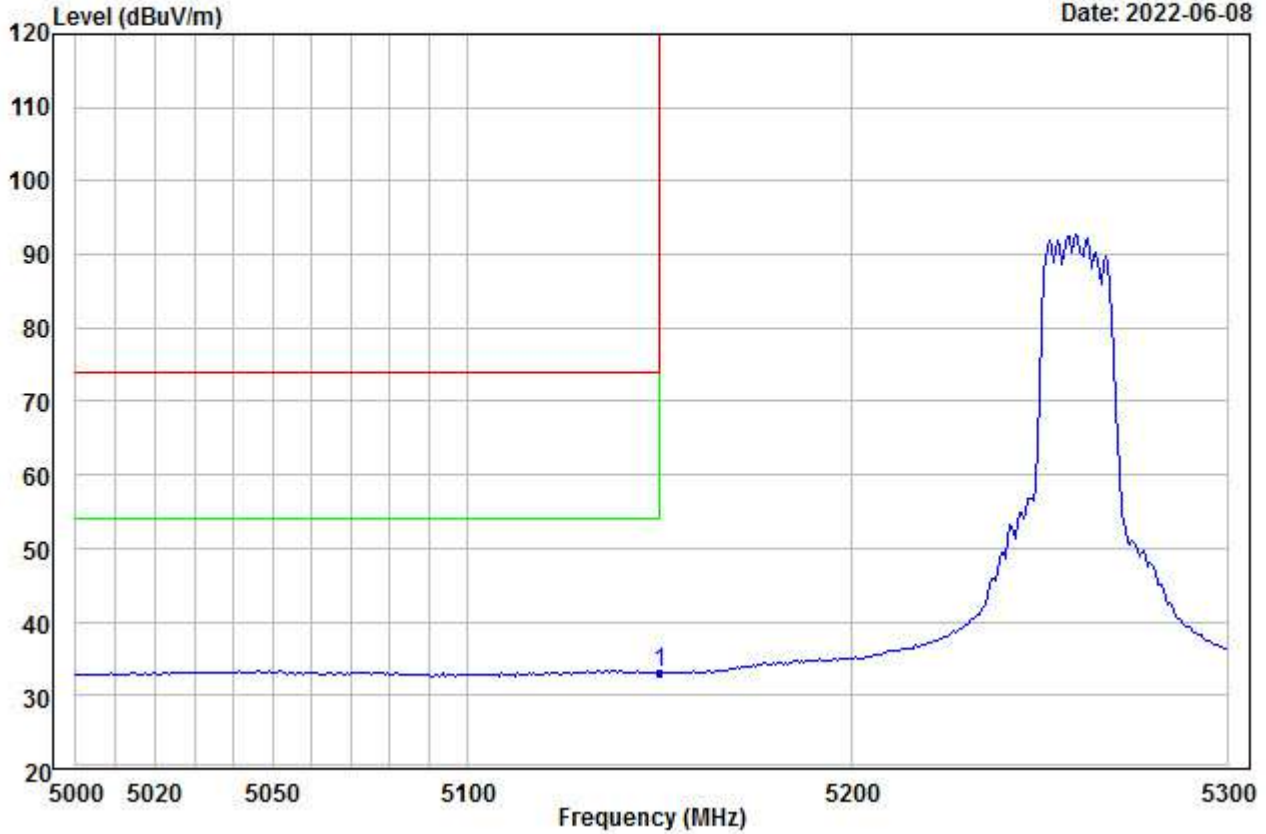


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5260
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5150.000	34.77	34.88	46.33	0.00	9.78	33.10	54.00	-20.90	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4_00169.EMI

Date: 2022-06-08

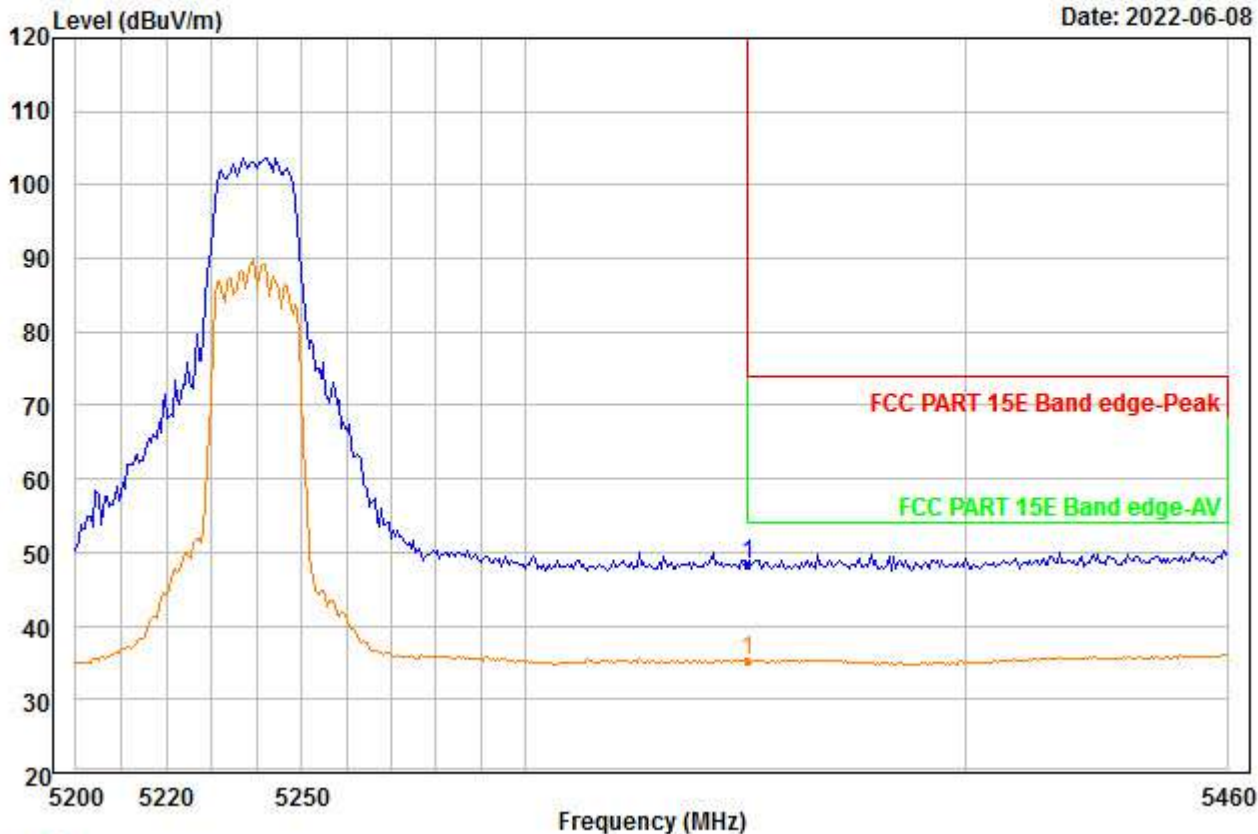


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5240
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:
Freq	Level	Factor	Factor	Factor	Loss	Level	Line	Limit		
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 5350.000	48.90	35.12	45.97	0.00	10.18	48.23	74.00	-25.77	---	--- Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4_00170.EMI

Date: 2022-06-08

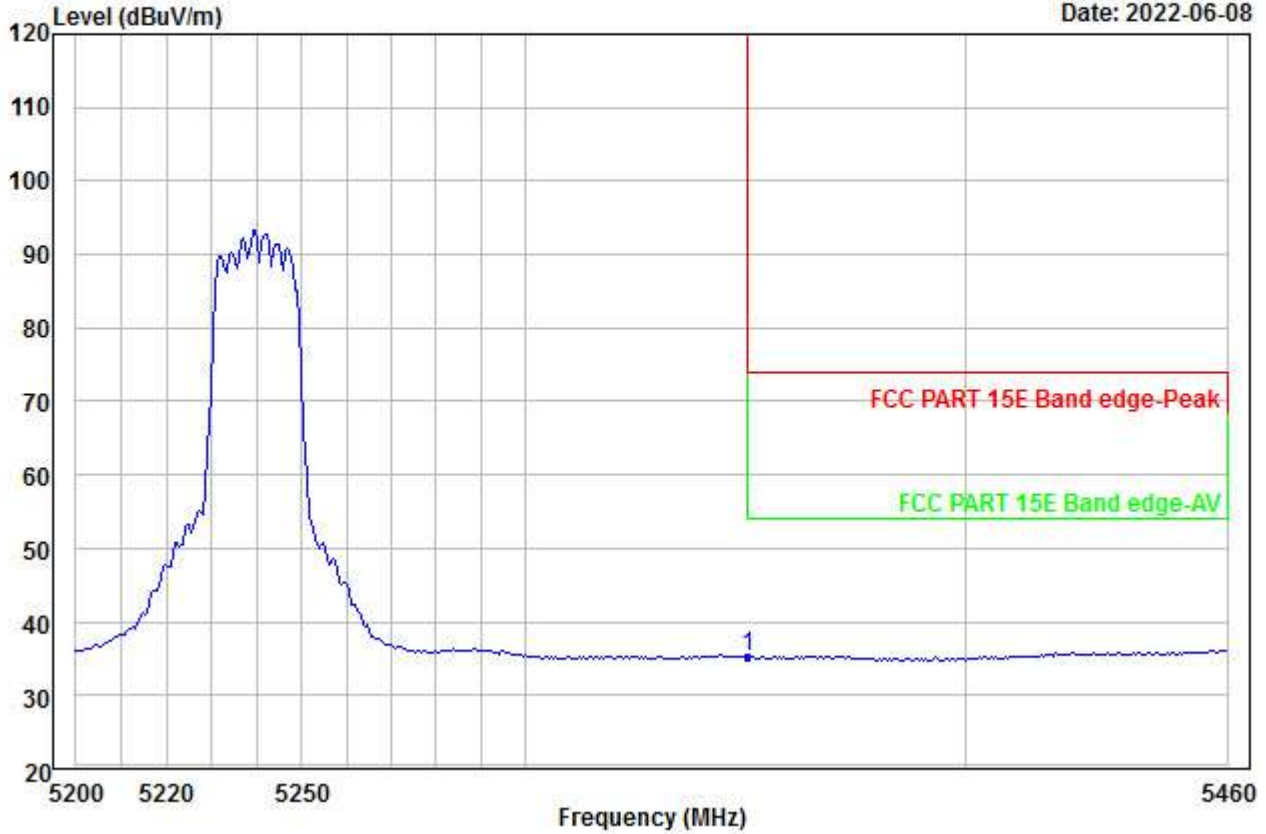


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5240
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5350.000	35.92	35.12	45.97	0.00	10.18	35.25	54.00	-18.75	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\BE\4_00171.EMI

Date: 2022-06-08

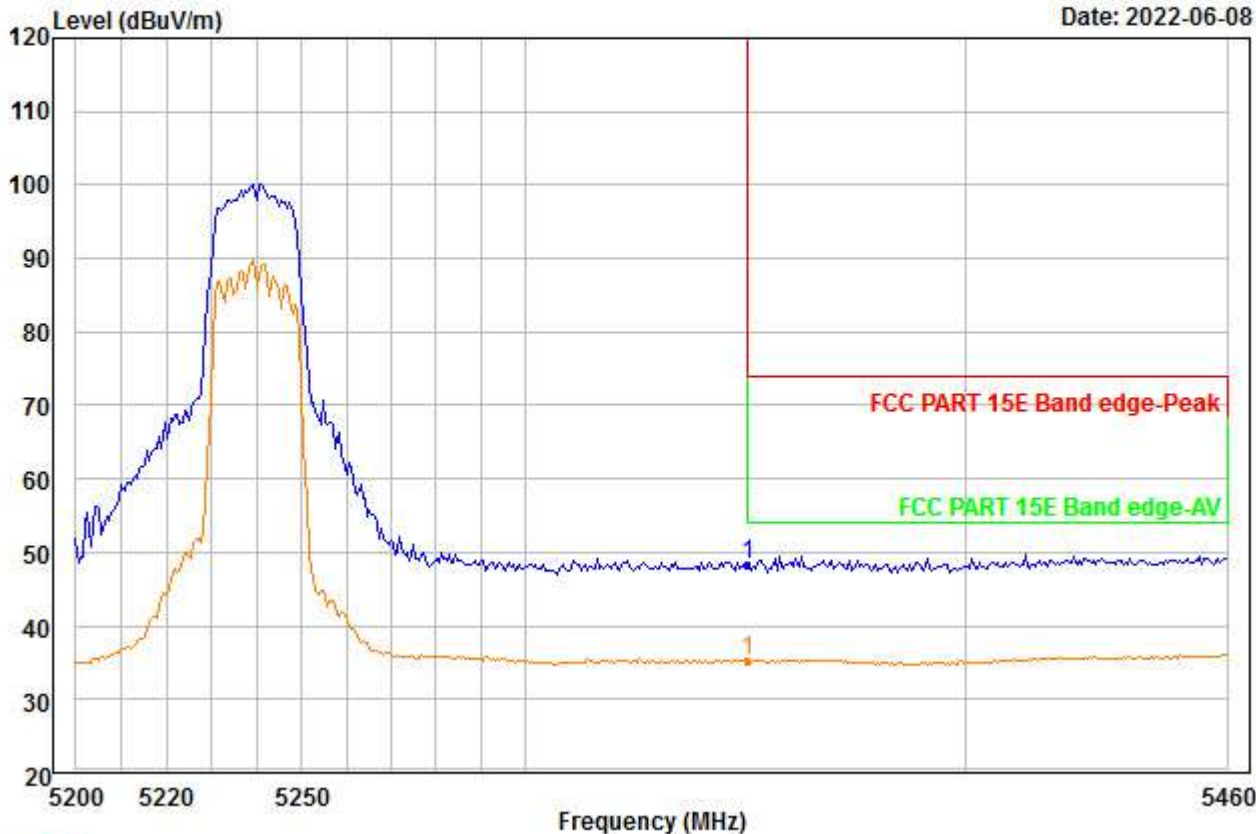


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5240
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5350.000	48.90	35.12	45.97	0.00	10.18	48.23	74.00	-25.77	---	---	Peak

File: F:\Test Template\上海\ITS\2022\220523032 SA750\A\5G\BE\4_00172.EMI

Date: 2022-06-08

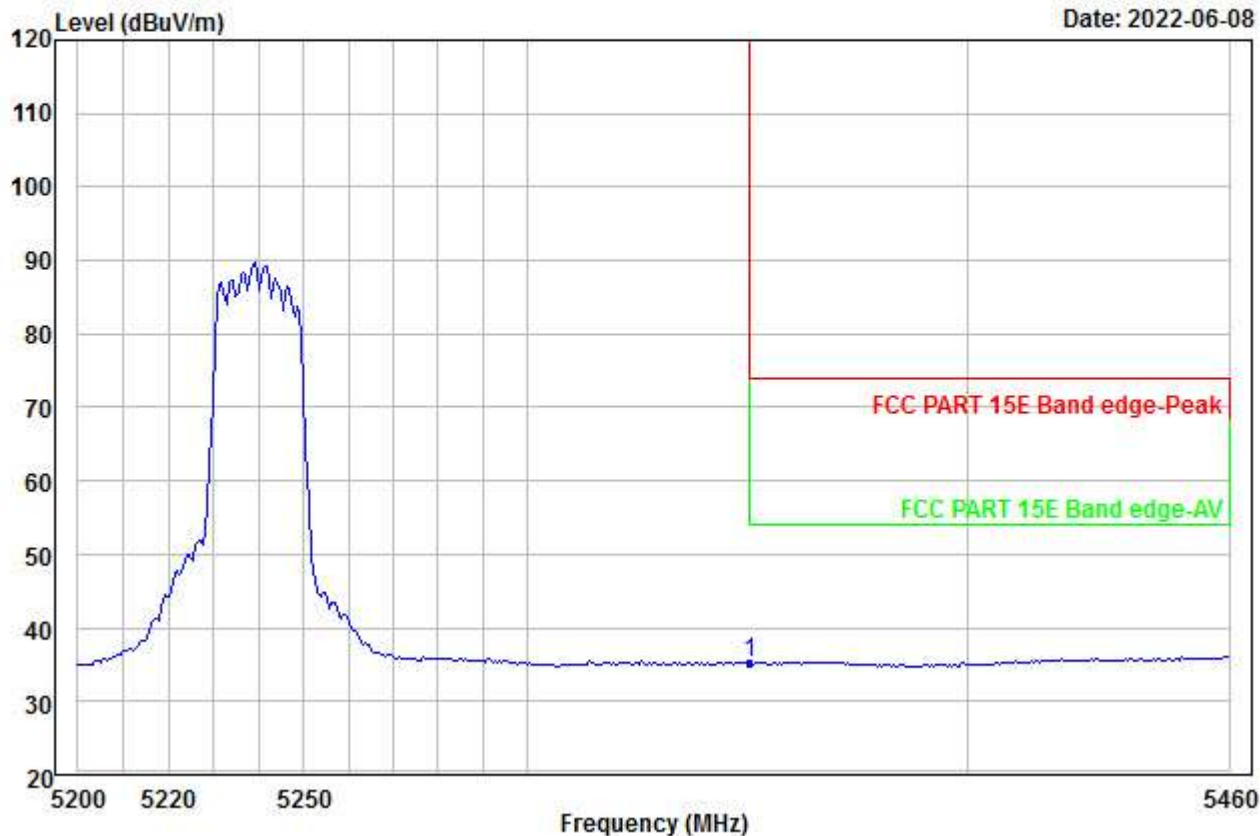

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5240
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5350.000	35.91	35.12	45.97	0.00	10.18	35.24	54.00	-18.76	---	---	Aver