


File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00001.EMI

Date: 2022-06-08

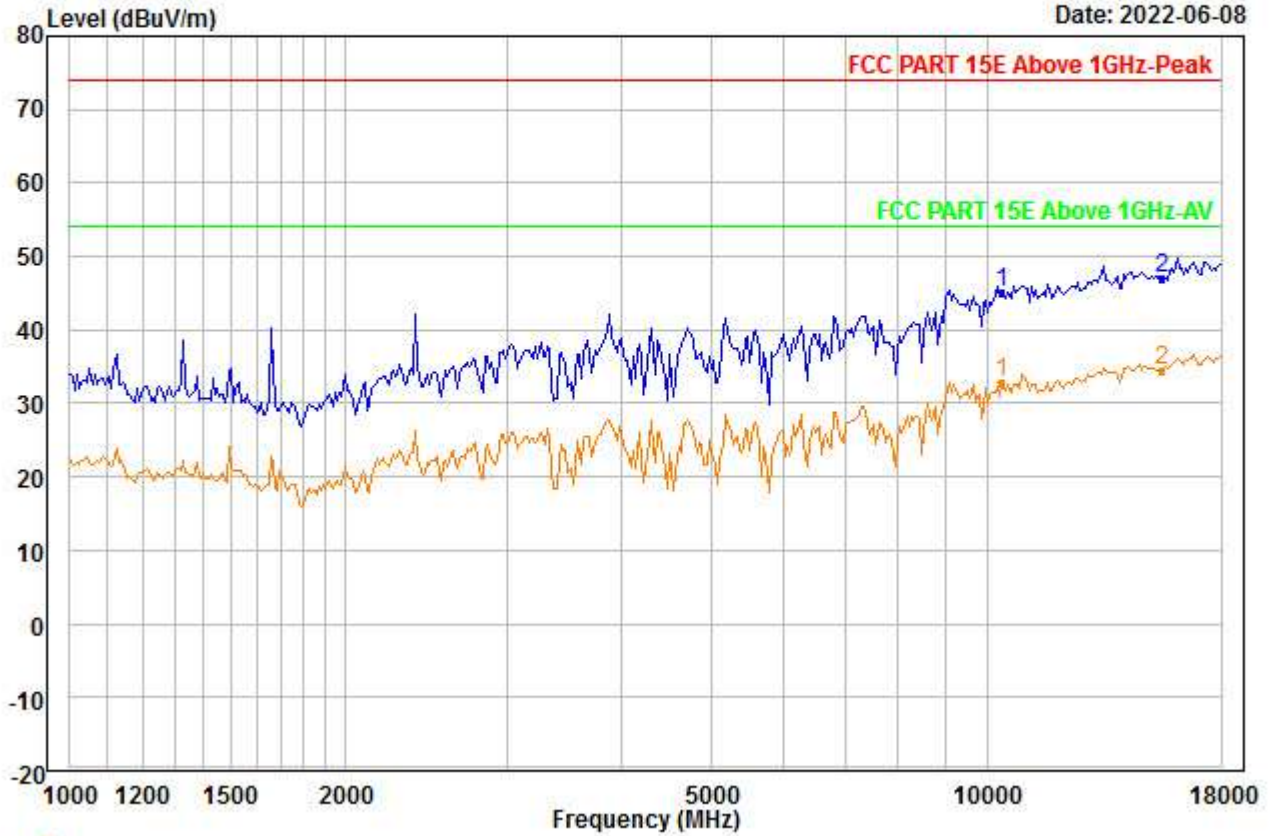


Trace: 1

Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT0\_5180  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10360.000	38.99	38.12	45.96	0.00	14.08	45.23	74.00	-28.77	---	---	Peak
2 PP15540.000	35.74	40.26	45.93	0.00	16.94	47.01	74.00	-26.99	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00002.EMI

Date: 2022-06-08

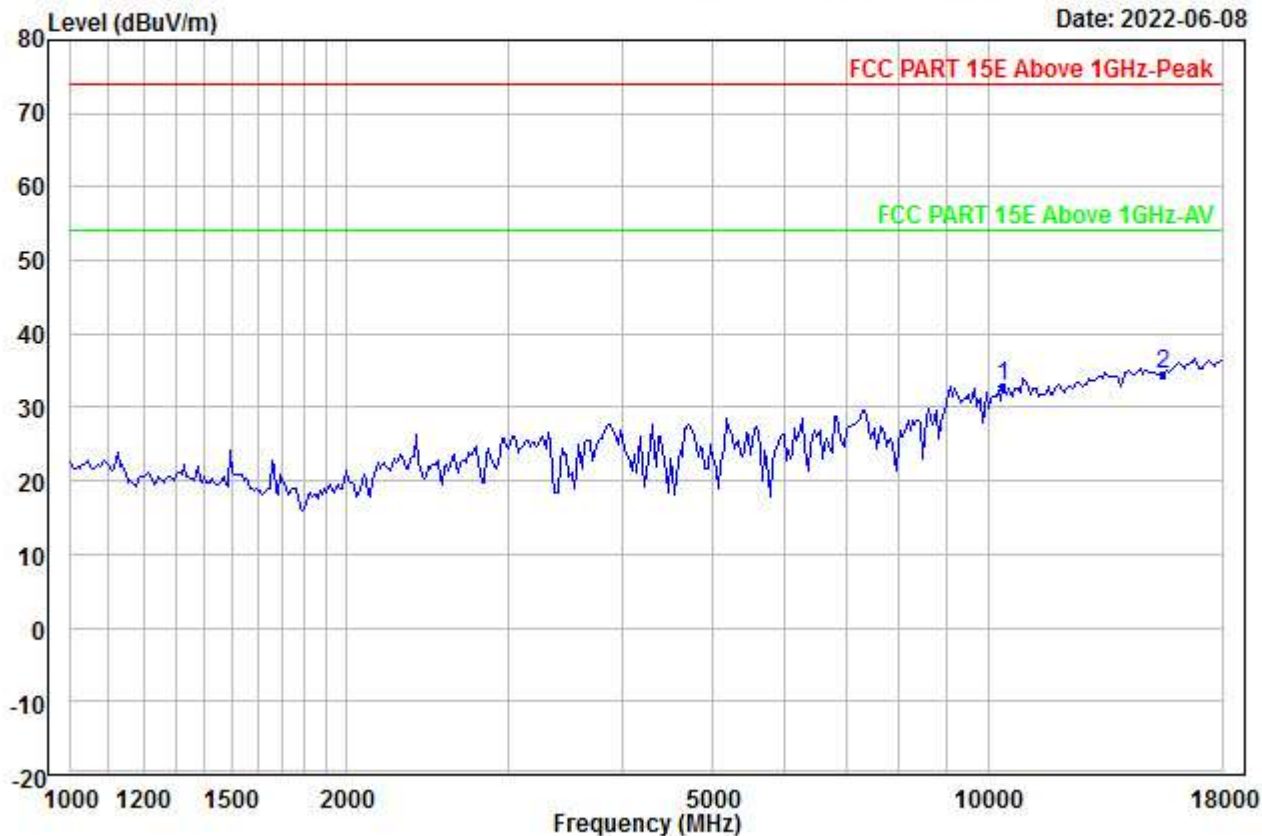


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT0\_5180  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10360.000	26.53	38.12	45.96	0.00	14.08	32.77	54.00	-21.23	---	---	Aver
2 PP15540.000	23.26	40.26	45.93	0.00	16.94	34.53	54.00	-19.47	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00003.EMI

Date: 2022-06-08

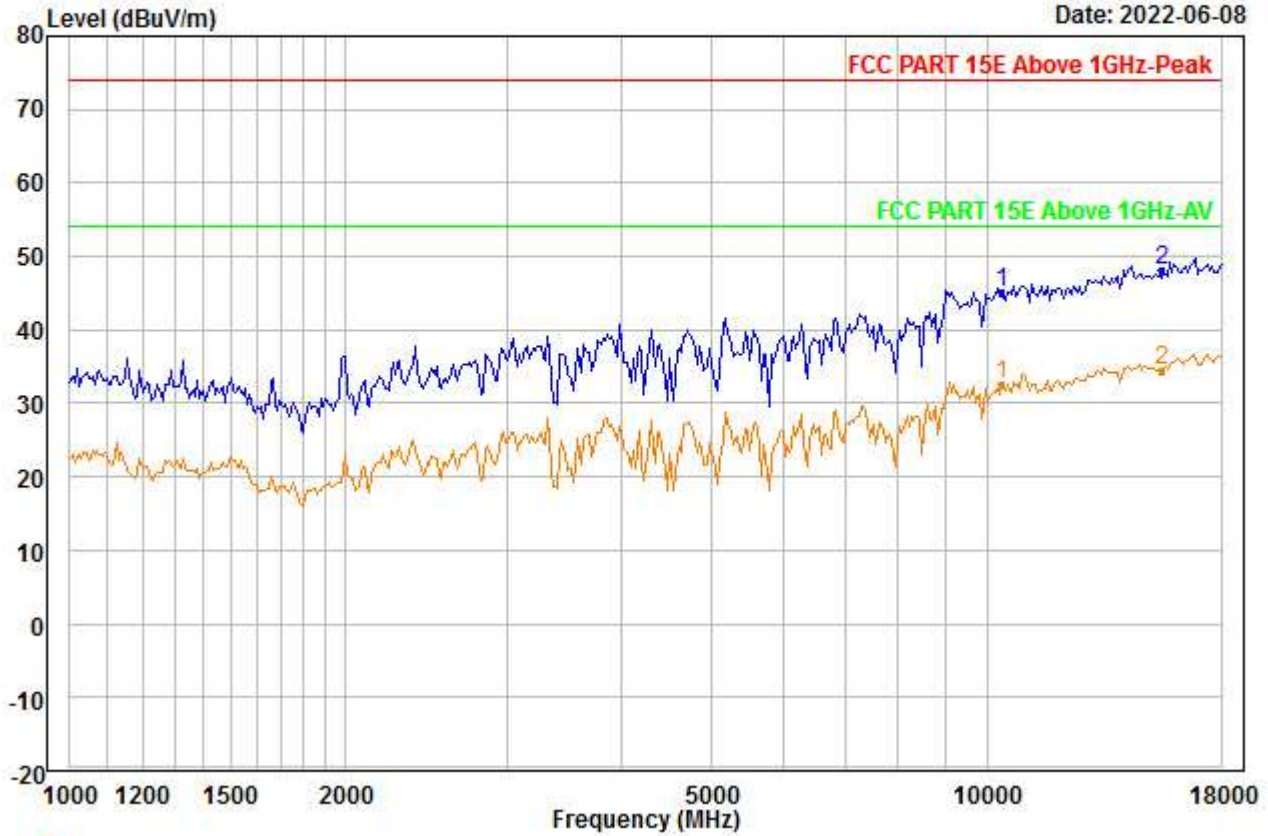


Trace: 1

Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT0\_5180  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10360.000	39.00	38.12	45.96	0.00	14.08	45.24	74.00	-28.76	---	---	Peak
2 PP15540.000	36.72	40.26	45.93	0.00	16.94	47.99	74.00	-26.01	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00004.EMI

Date: 2022-06-08

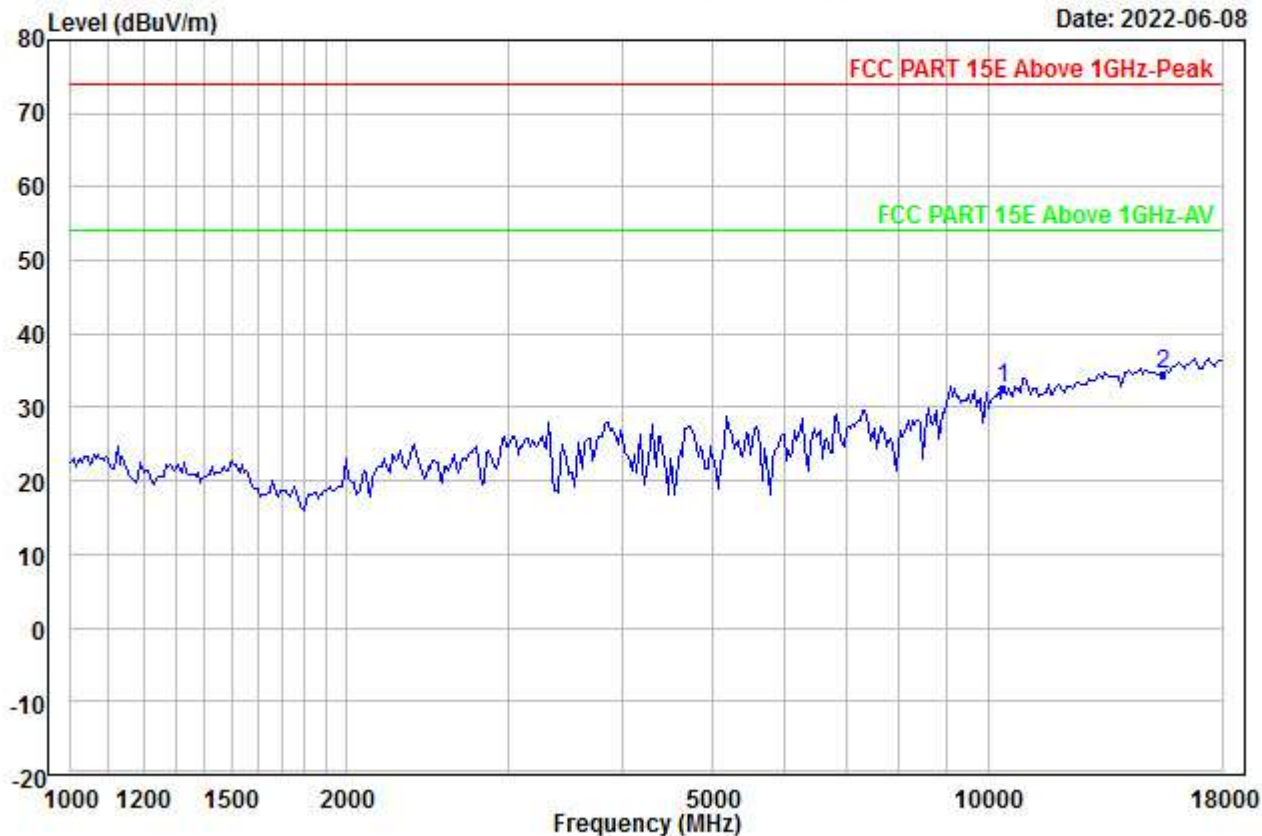


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT0\_5180  
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10360.000	26.46	38.12	45.96	0.00	14.08	32.70	54.00	-21.30	---	---	Aver
2	PP15540.000	23.36	40.26	45.93	0.00	16.94	34.63	54.00	-19.37	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00005.EMI

Date: 2022-06-08

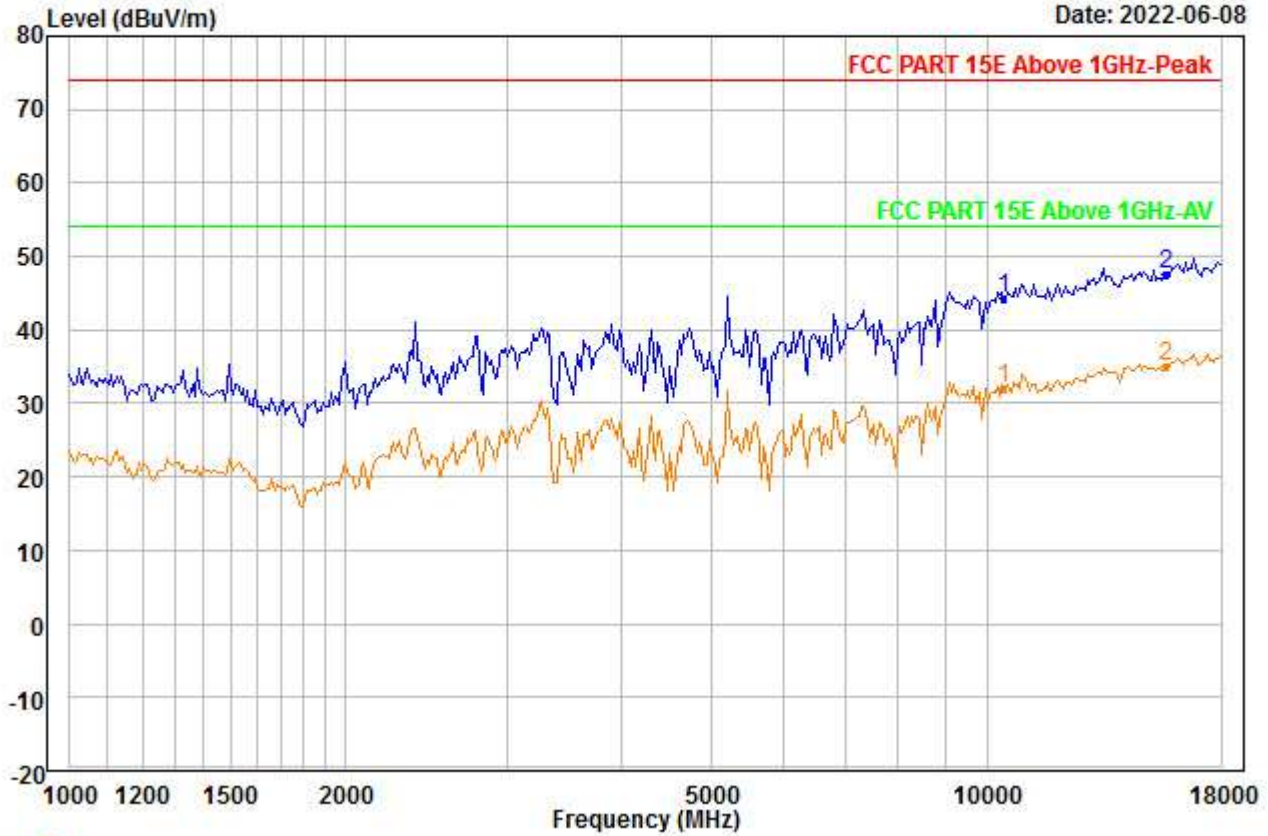


Trace: 1

Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT0\_5220  
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10440.000	38.06	38.16	45.92	0.00	14.06	44.36	74.00	-29.64	---	---	Peak
2	PP15660.000	36.11	40.42	46.03	0.00	17.01	47.51	74.00	-26.49	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00006.EMI

Date: 2022-06-08

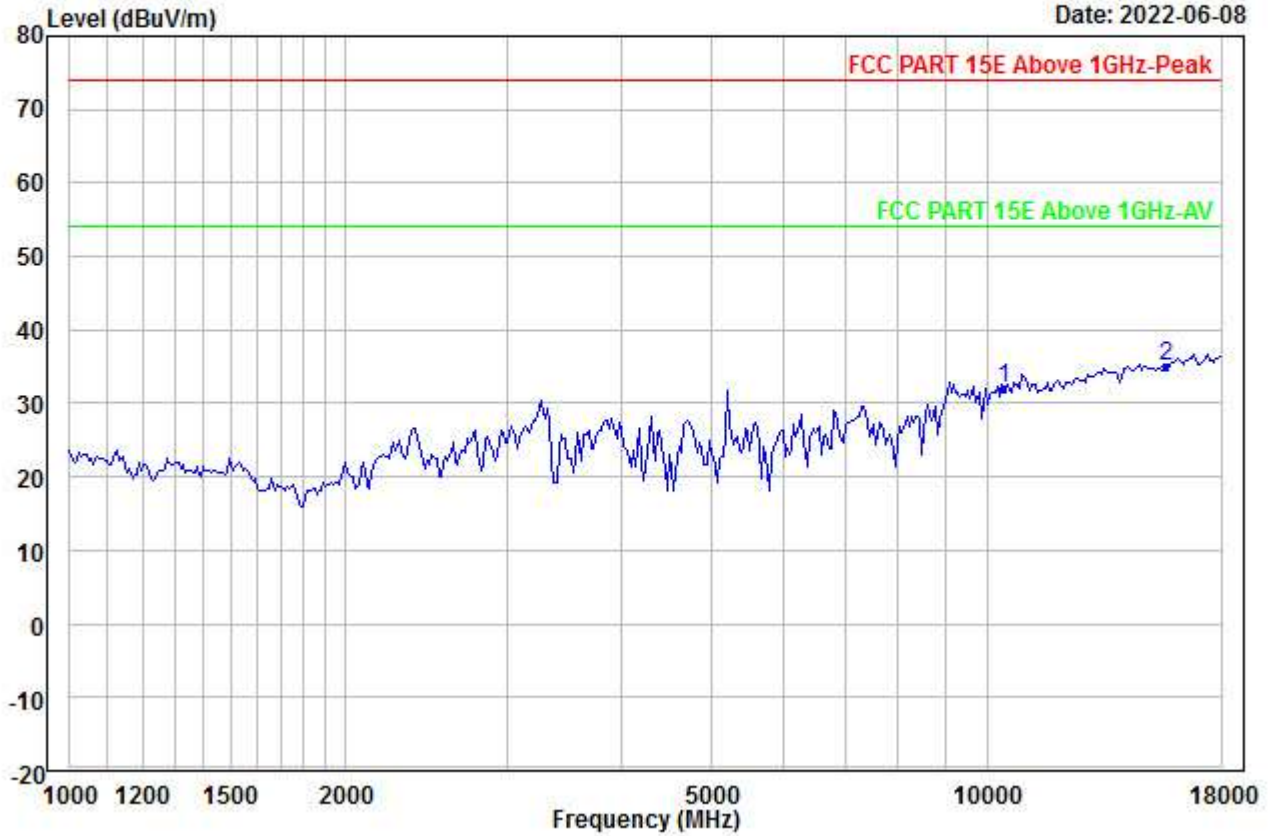


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT0\_5220  
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10440.000	25.80	38.16	45.92	0.00	14.06	32.10	54.00	-21.90	---	---	Aver
2	PP15660.000	23.63	40.42	46.03	0.00	17.01	35.03	54.00	-18.97	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00007.EMI

Date: 2022-06-08

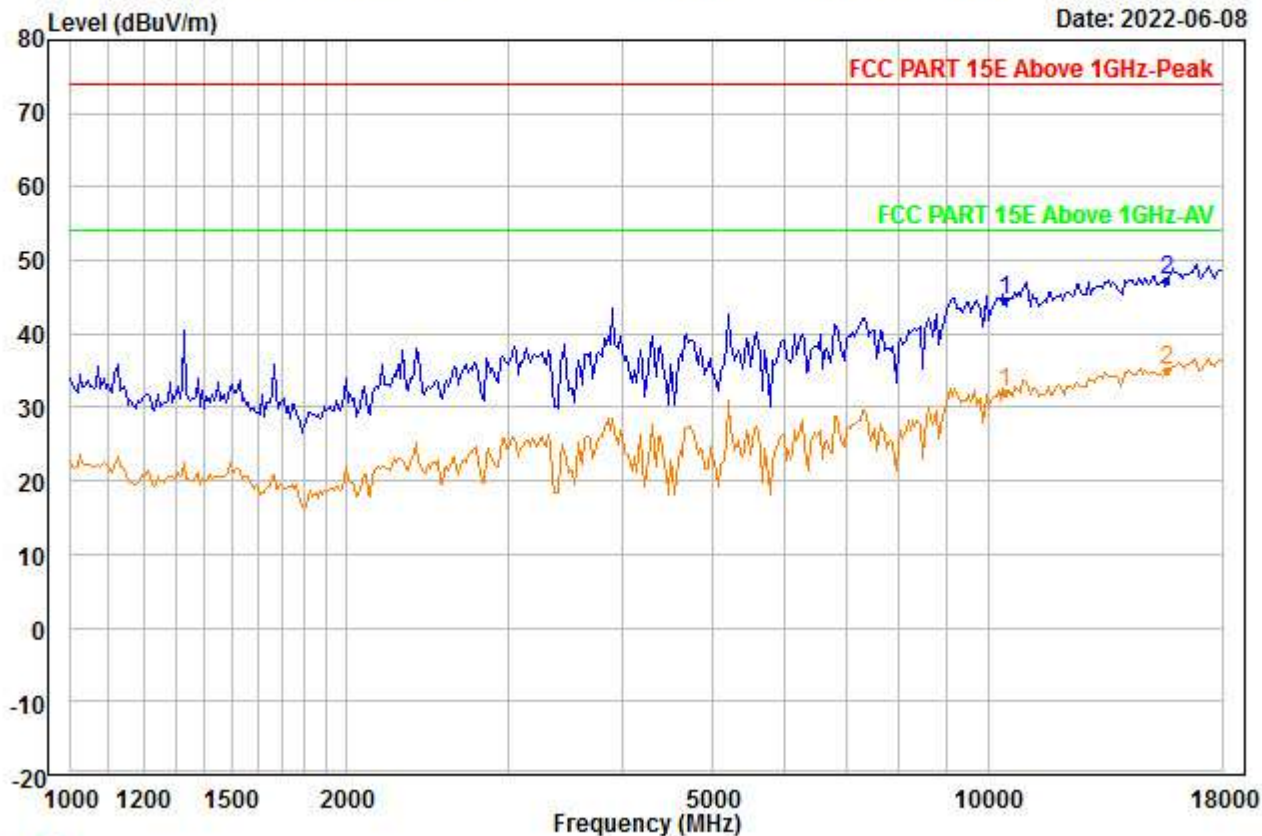


Trace: 1

Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT0\_5220  
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10440.000	38.26	38.16	45.92	0.00	14.06	44.56	74.00	-29.44	---	---	Peak
2	PP15660.000	35.95	40.42	46.03	0.00	17.01	47.35	74.00	-26.65	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00008.EMI

Date: 2022-06-08

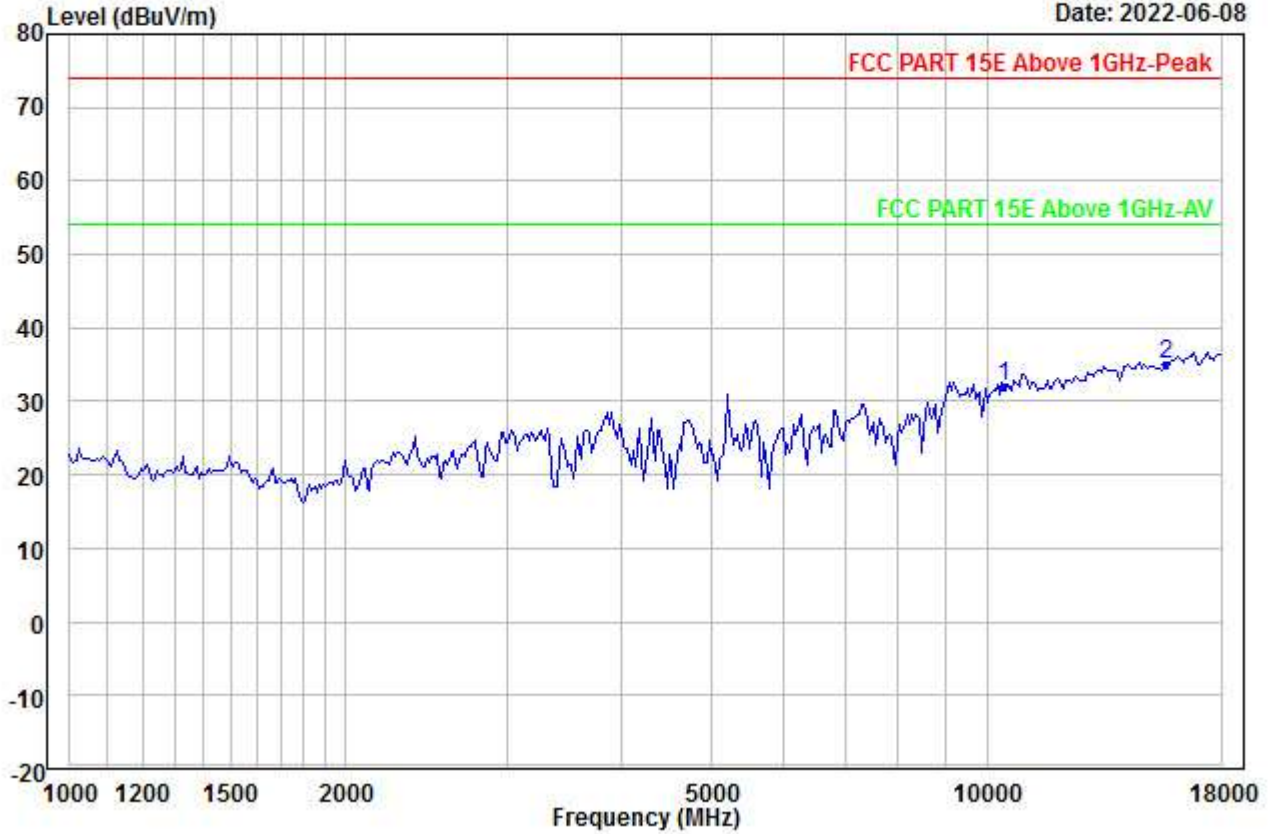


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT0\_5220  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10440.000	25.73	38.16	45.92	0.00	14.06	32.03	54.00	-21.97	---	---	Aver
2 PP15660.000	23.63	40.42	46.03	0.00	17.01	35.03	54.00	-18.97	---	---	Aver



File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00009.EMI

Date: 2022-06-08

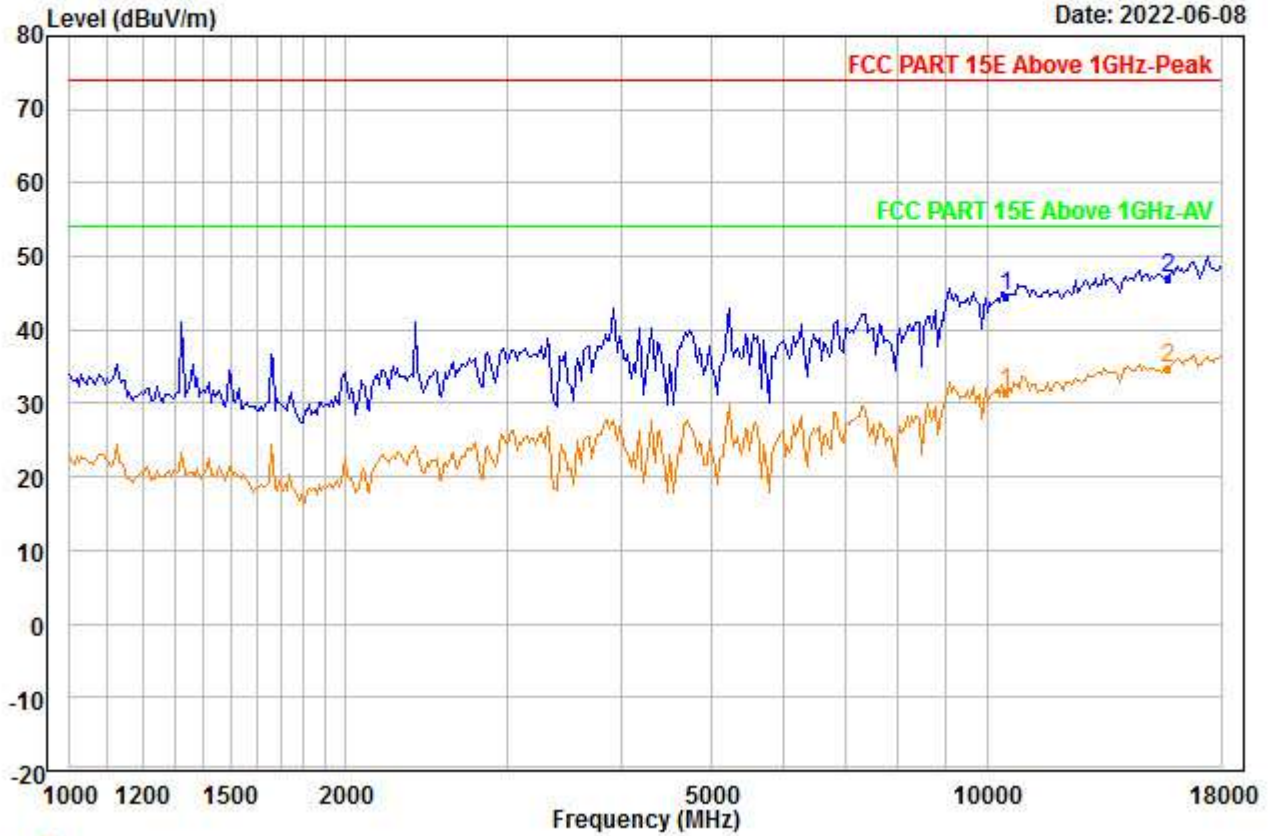


Trace: 1

Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT0\_5240  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10480.000	38.31	38.19	45.91	0.00	14.05	44.64	74.00	-29.36	---	---	Peak
2 PP15720.000	35.58	40.51	46.08	0.00	17.05	47.06	74.00	-26.94	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00010.EMI

Date: 2022-06-08

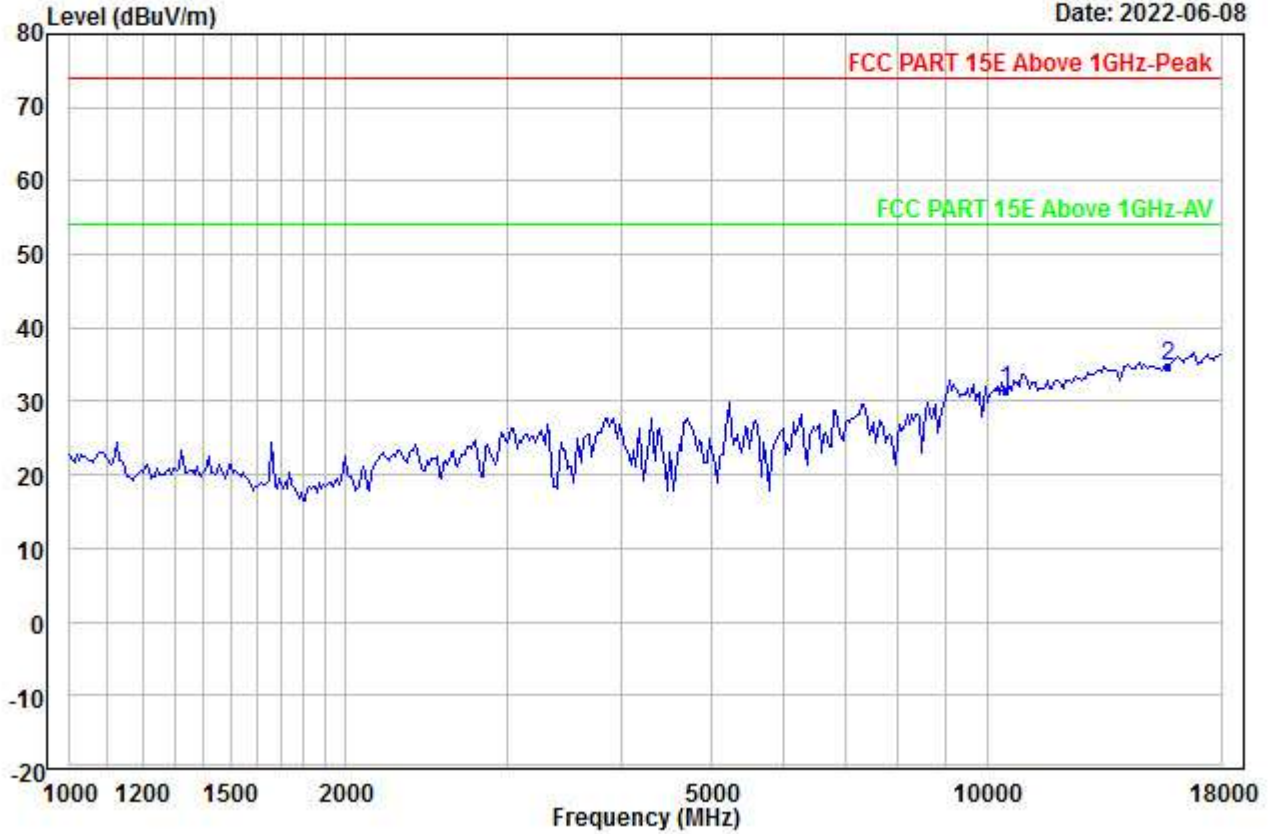


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT0\_5240  
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10480.000	25.28	38.19	45.91	0.00	14.05	31.61	54.00	-22.39	---	---	Aver
2	PP15720.000	23.17	40.51	46.08	0.00	17.05	34.65	54.00	-19.35	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00011.EMI

Date: 2022-06-08

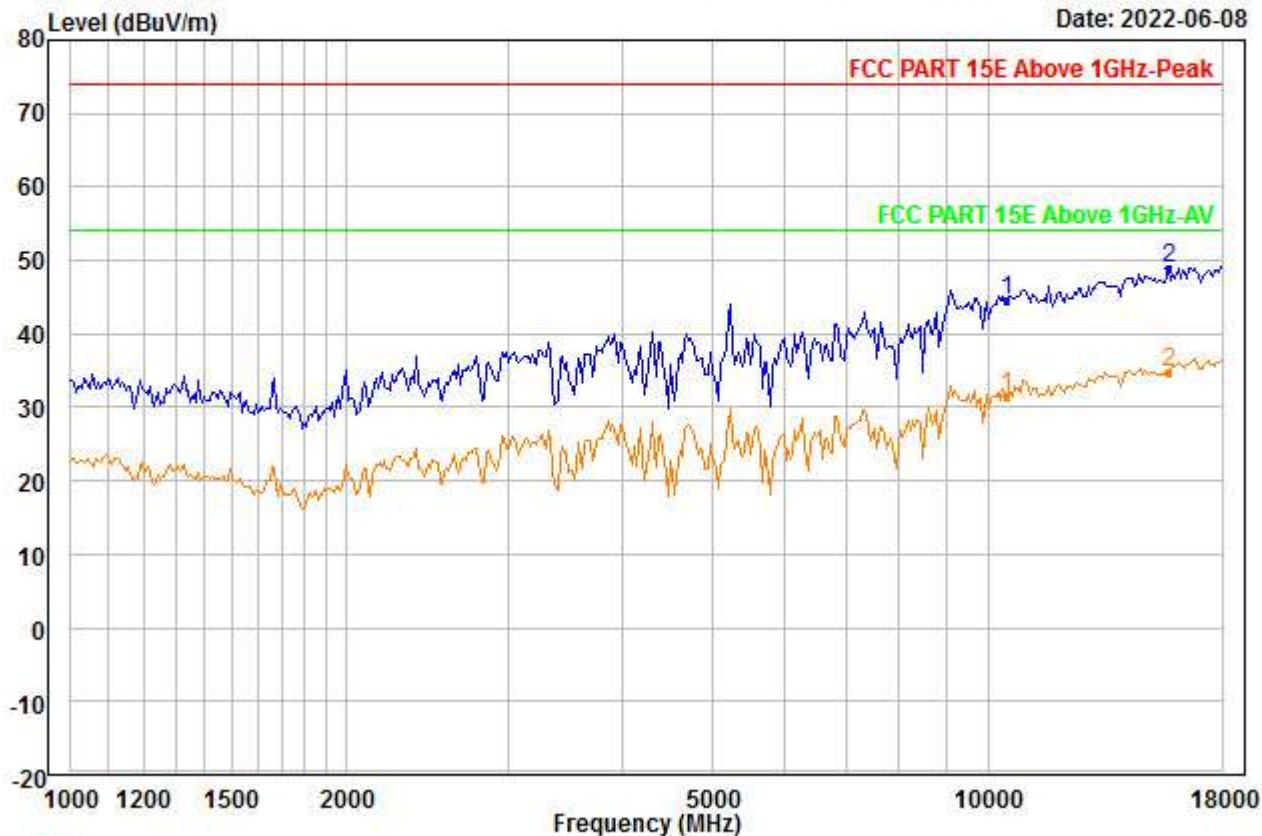


Trace: 1

Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT0\_5240  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10480.000	38.35	38.19	45.91	0.00	14.05	44.68	74.00	-29.32	---	---	Peak
2 PP15720.000	37.37	40.51	46.08	0.00	17.05	48.85	74.00	-25.15	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00012.EMI

Date: 2022-06-08

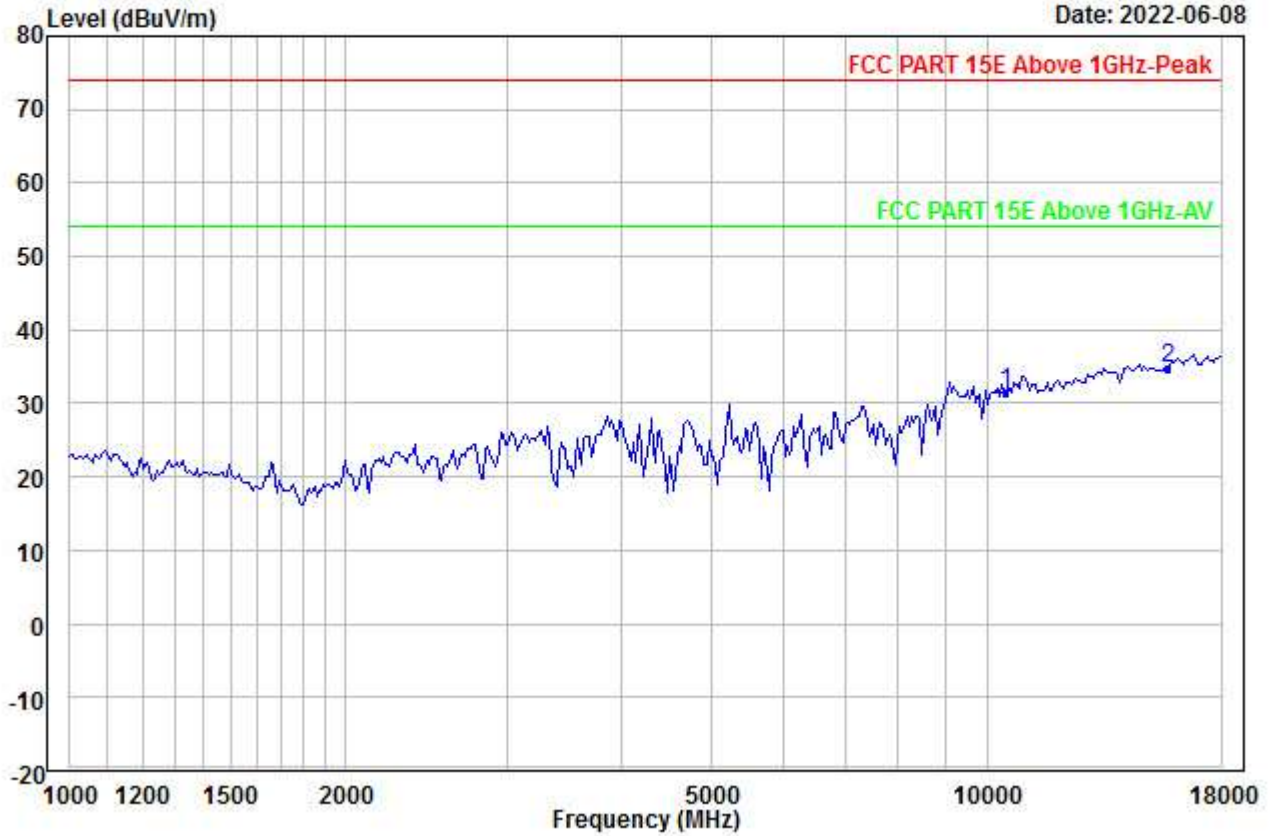


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT0\_5240  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10480.000	25.28	38.19	45.91	0.00	14.05	31.61	54.00	-22.39	---	---	Aver
2 PP15720.000	23.17	40.51	46.08	0.00	17.05	34.65	54.00	-19.35	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00013.EMI

Date: 2022-06-08

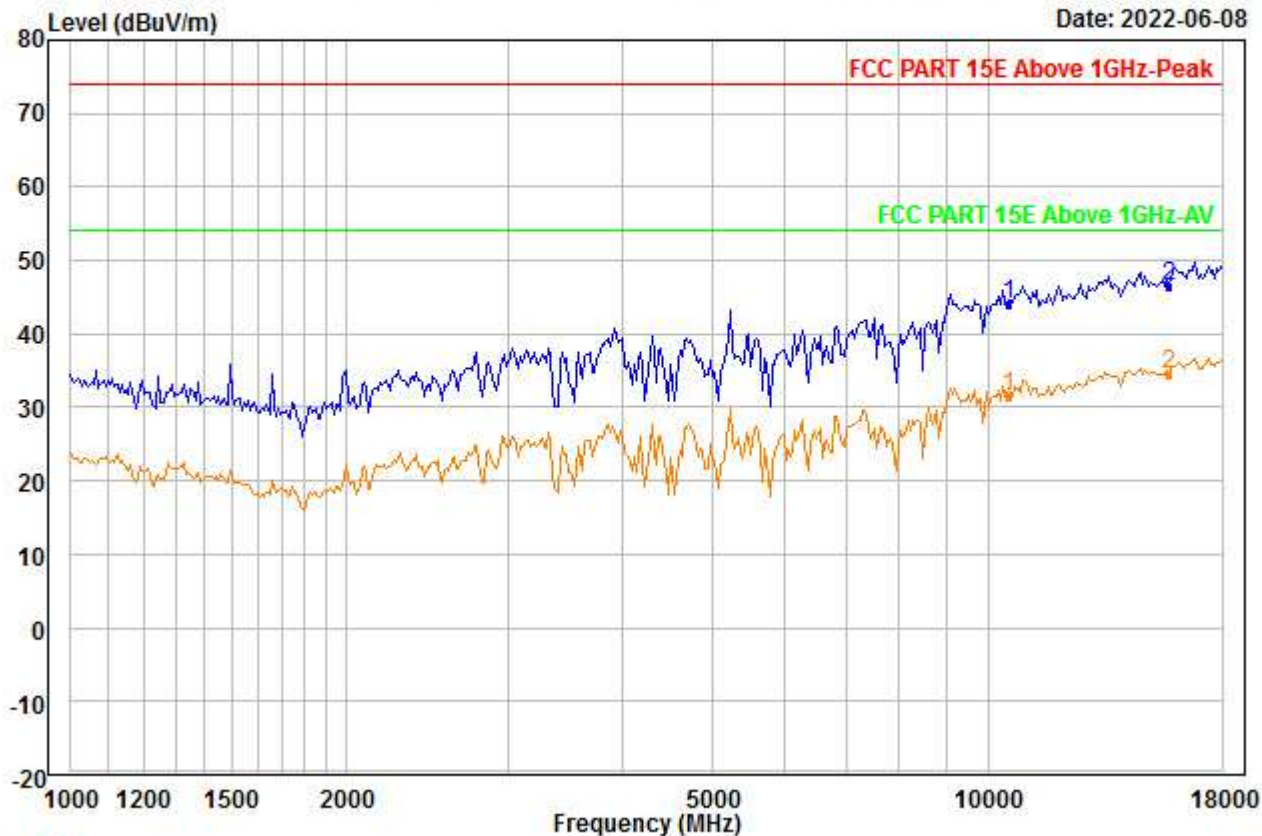


Trace: 1

Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT0\_5260  
 Remark :

	Read Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10520.000	37.65	38.21	45.86	0.00	14.04	44.04	74.00	-29.96	---	---	Peak
2	PP15780.000	35.03	40.59	46.12	0.00	17.09	46.59	74.00	-27.41	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00014.EMI

Date: 2022-06-08

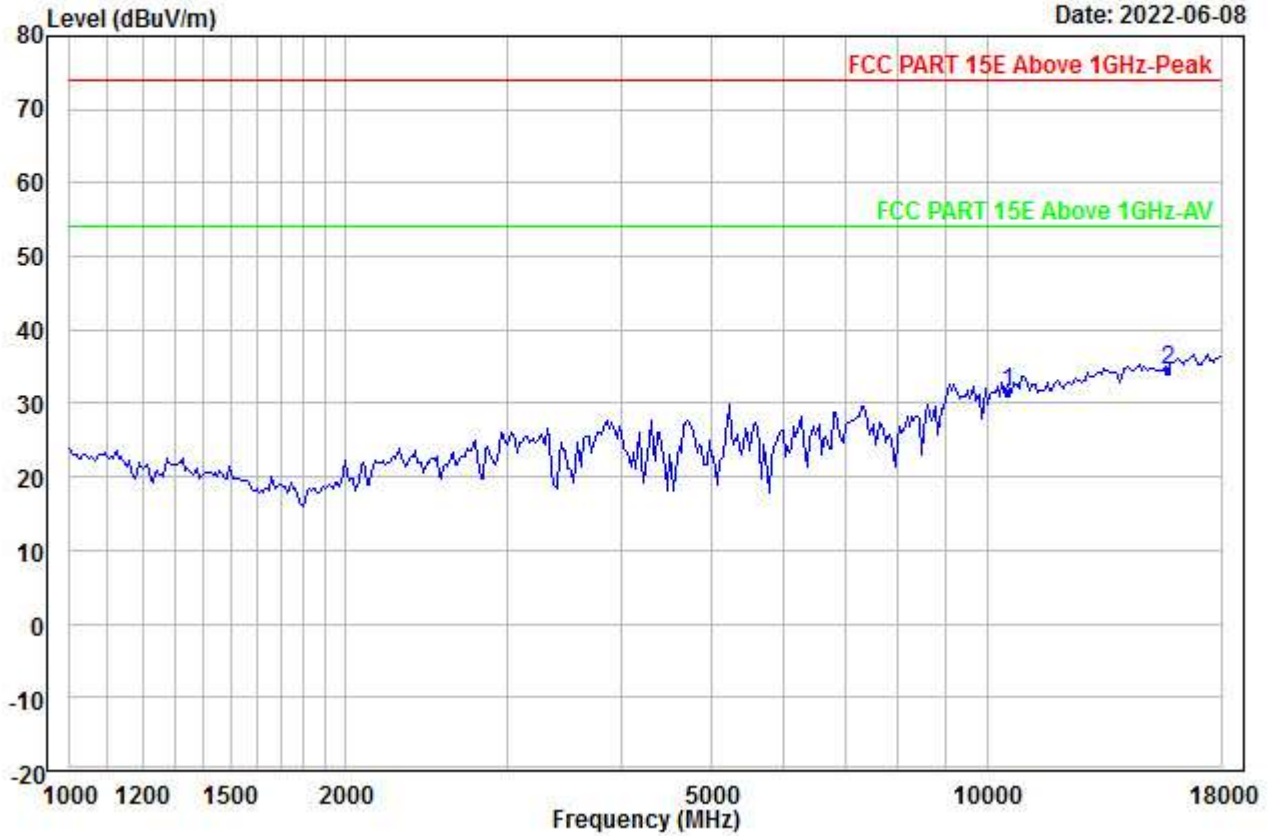


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT0\_5260  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10520.000	25.22	38.21	45.86	0.00	14.04	31.61	54.00	-22.39	---	---	Aver
2 PP15780.000	22.99	40.59	46.12	0.00	17.09	34.55	54.00	-19.45	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00015.EMI

Date: 2022-06-08

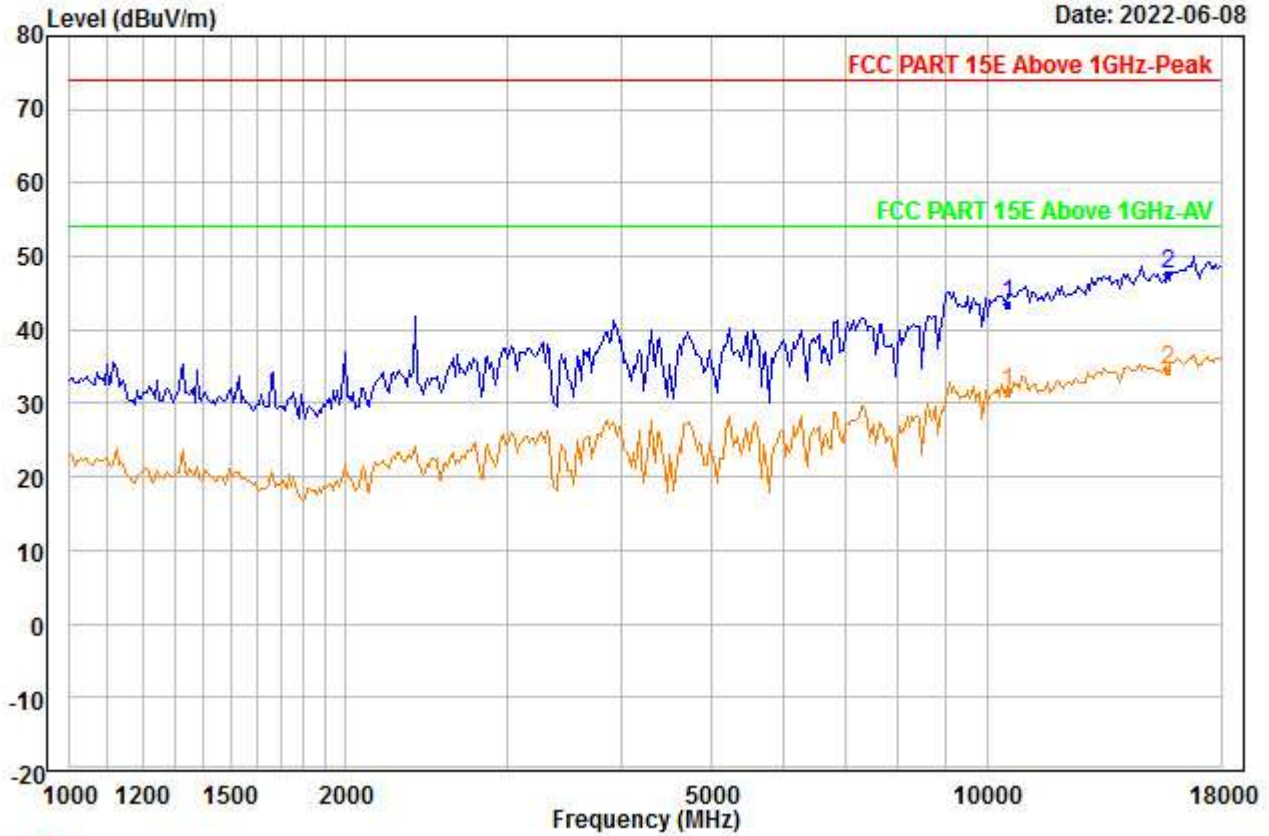


Trace: 1

Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT0\_5260  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10520.000	37.07	38.21	45.86	0.00	14.04	43.46	74.00	-30.54	---	---	Peak
2 PP15780.000	36.04	40.59	46.12	0.00	17.09	47.60	74.00	-26.40	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00016.EMI

Date: 2022-06-08

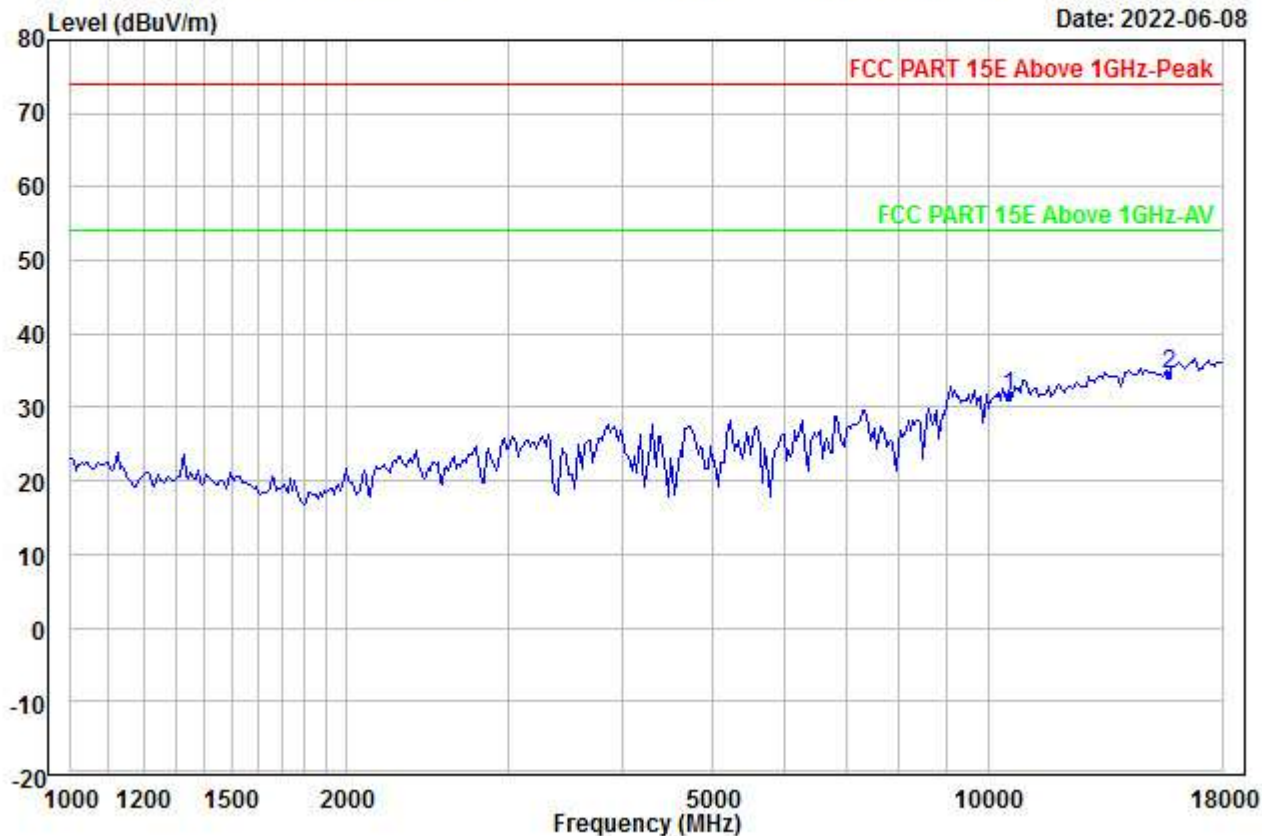


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT0\_5260  
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10520.000	25.22	38.21	45.86	0.00	14.04	31.61	54.00	-22.39	---	---	Aver
2	PP15780.000	22.99	40.59	46.12	0.00	17.09	34.55	54.00	-19.45	---	---	Aver



File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00017.EMI

Date: 2022-06-08

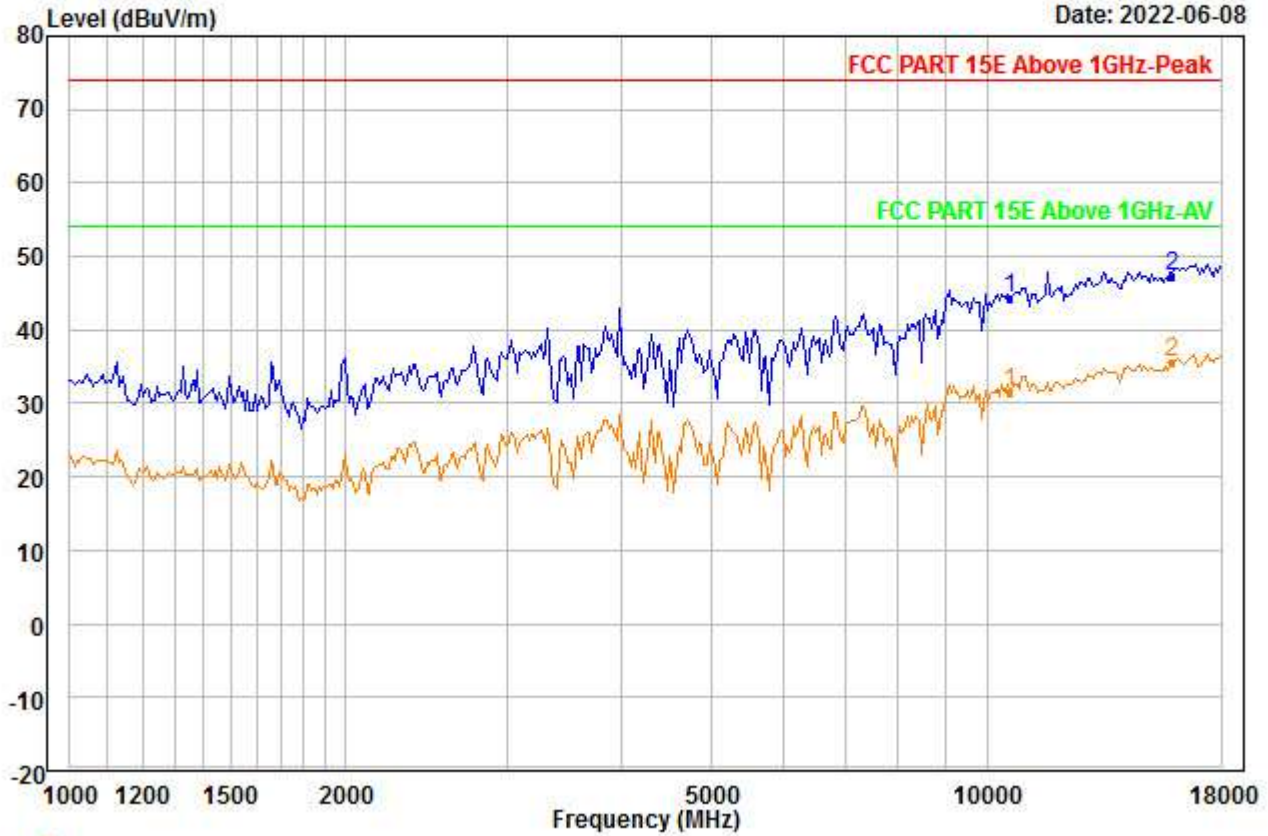


Trace: 1

Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT0\_5300  
 Remark :

	Read Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10600.000	37.80	38.26	45.72	0.00	14.02	44.36	74.00	-29.64	---	---	Peak
2	PP15900.000	35.63	40.76	46.22	0.00	17.17	47.34	74.00	-26.66	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00018.EMI

Date: 2022-06-08

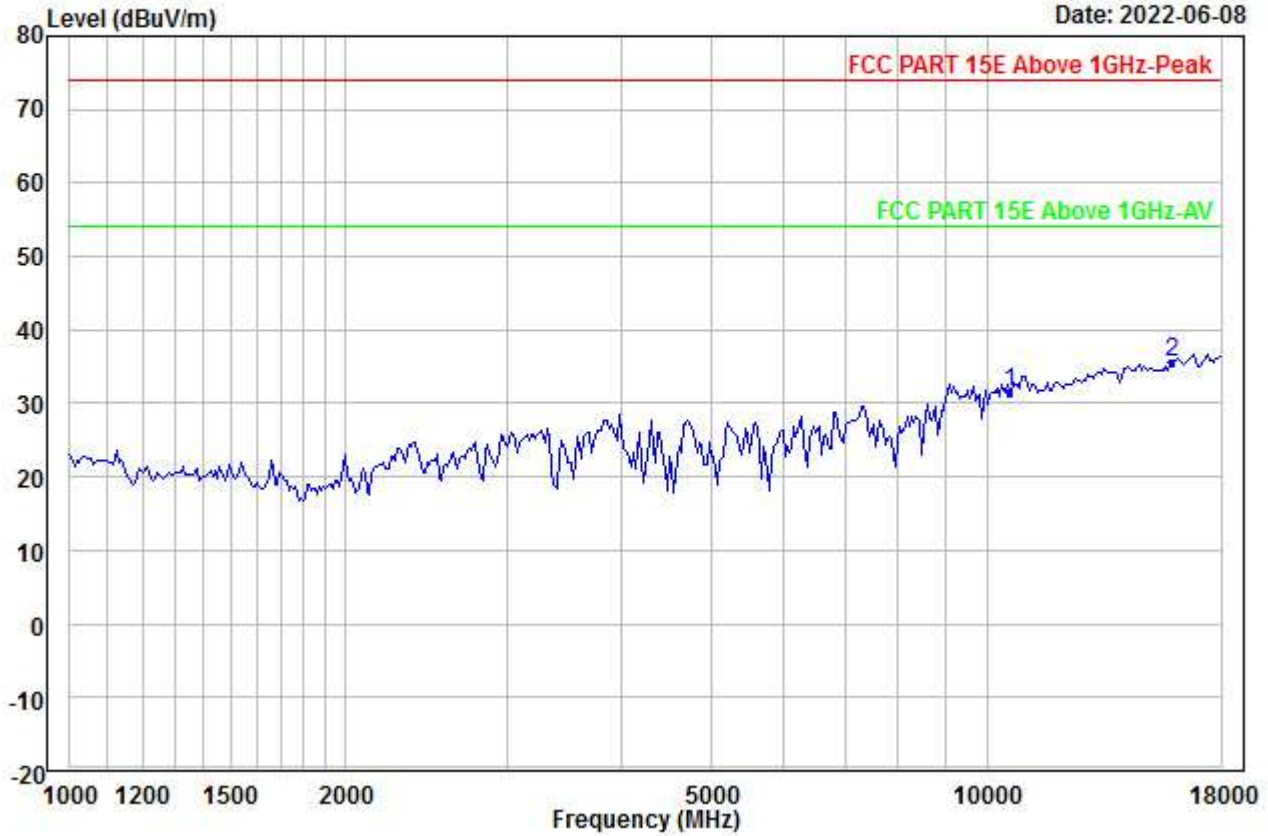


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT0\_5300  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10600.000	24.83	38.26	45.72	0.00	14.02	31.39	54.00	-22.61	---	---	Aver
2 PP15900.000	23.75	40.76	46.22	0.00	17.17	35.46	54.00	-18.54	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00019.EMI

Date: 2022-06-08

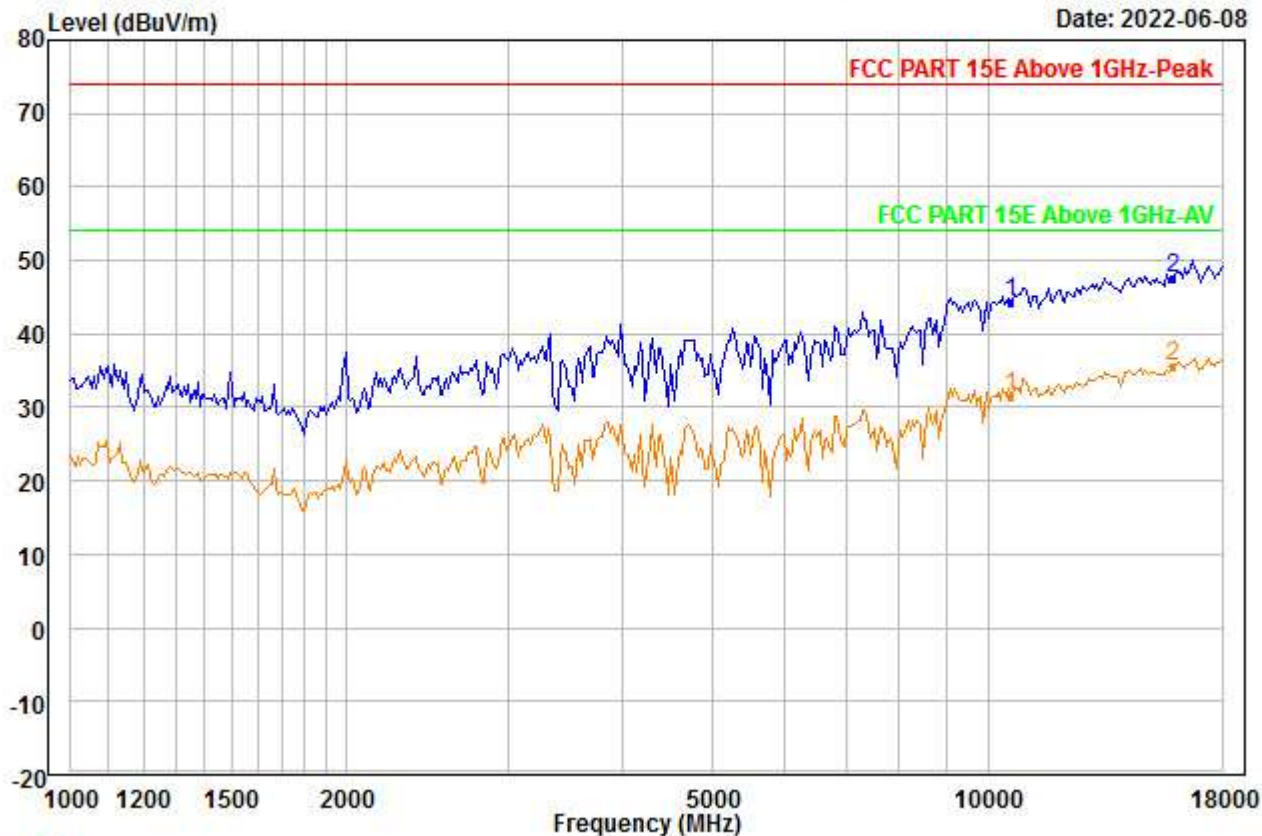


Trace: 1

Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT0\_5300  
 Remark :

	Read Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10600.000	37.76	38.26	45.72	0.00	14.02	44.32	74.00	-29.68	---	---	Peak
2	PP15900.000	35.94	40.76	46.22	0.00	17.17	47.65	74.00	-26.35	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00020.EMI

Date: 2022-06-08

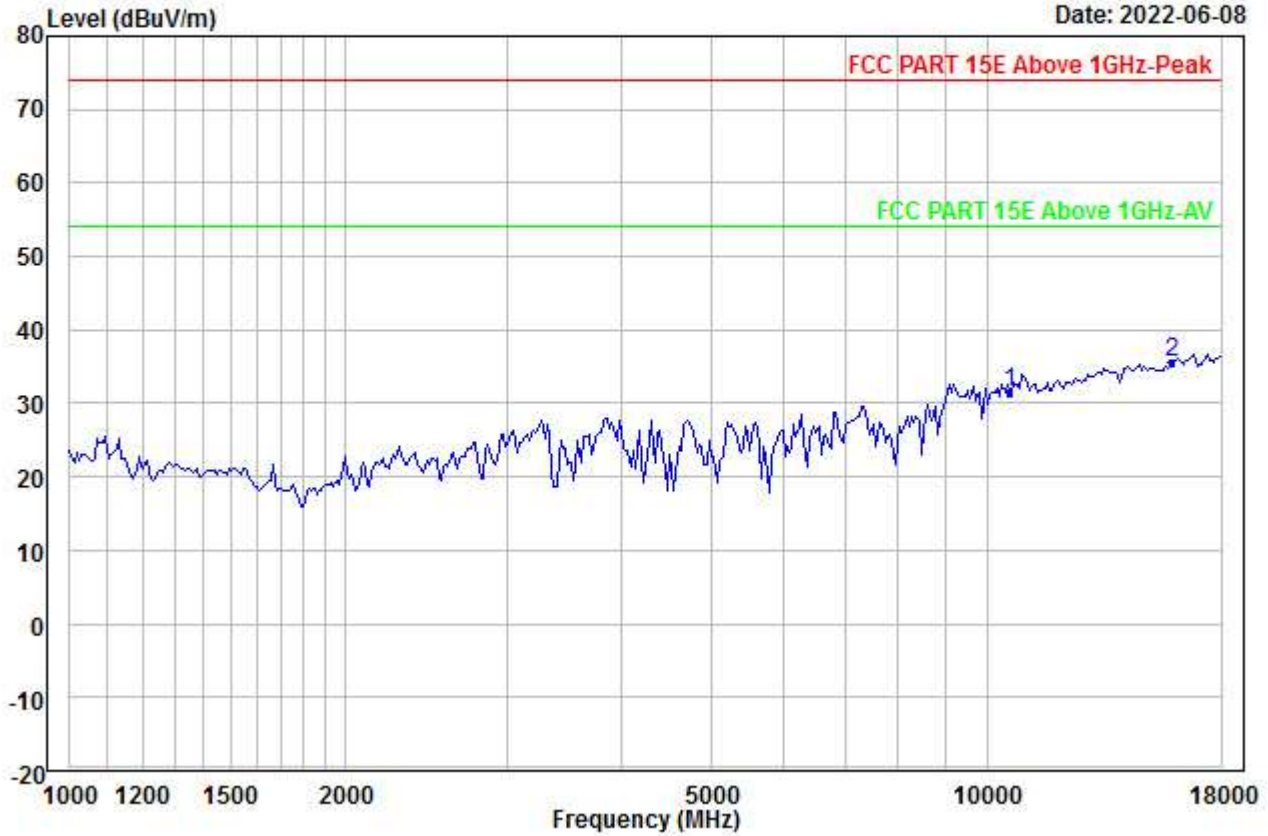


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT0\_5300  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10600.000	24.91	38.26	45.72	0.00	14.02	31.47	54.00	-22.53	---	---	Aver
2 PP15900.000	23.75	40.76	46.22	0.00	17.17	35.46	54.00	-18.54	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00021.EMI

Date: 2022-06-08

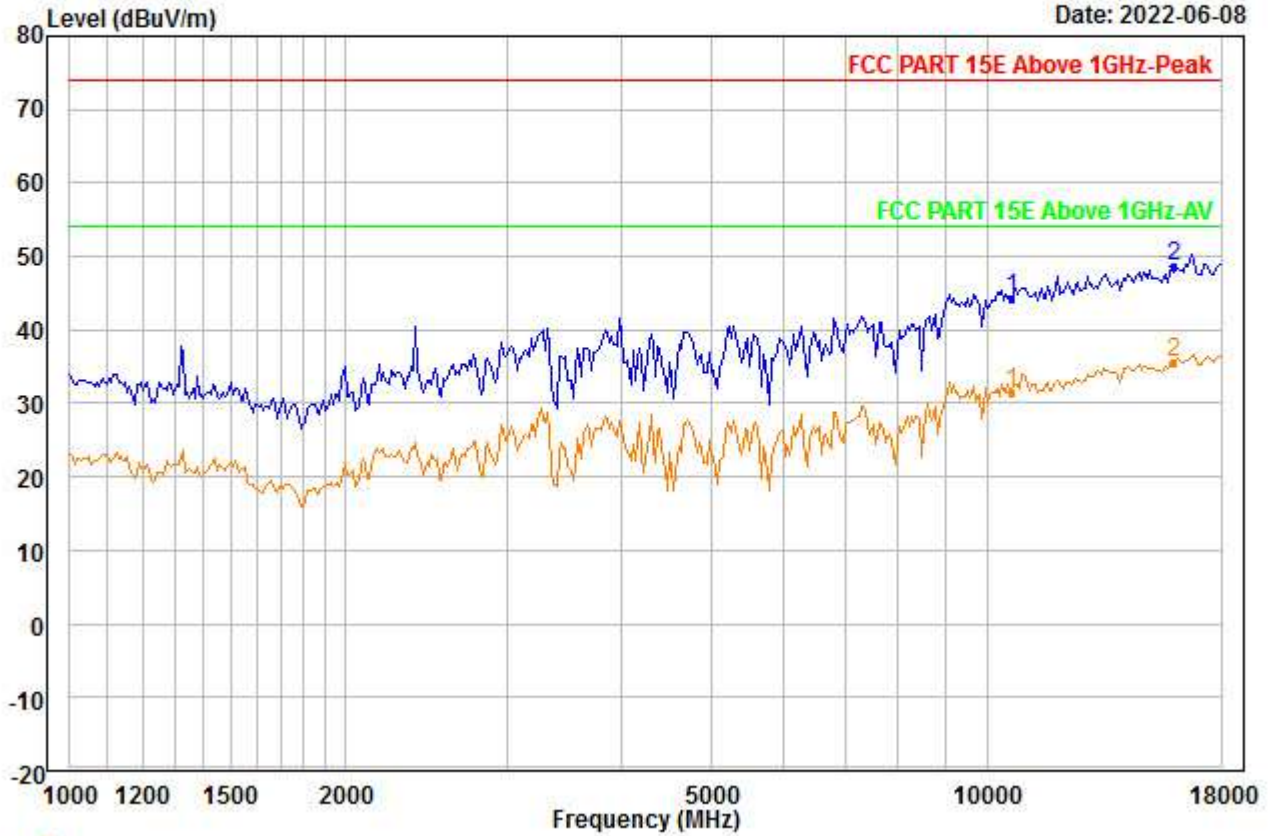


Trace: 1

Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT0\_5320  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10640.000	37.59	38.28	45.65	0.00	14.01	44.23	74.00	-29.77	---	---	Peak
2 PP15960.000	36.78	40.84	46.27	0.00	17.20	48.55	74.00	-25.45	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00022.EMI

Date: 2022-06-08

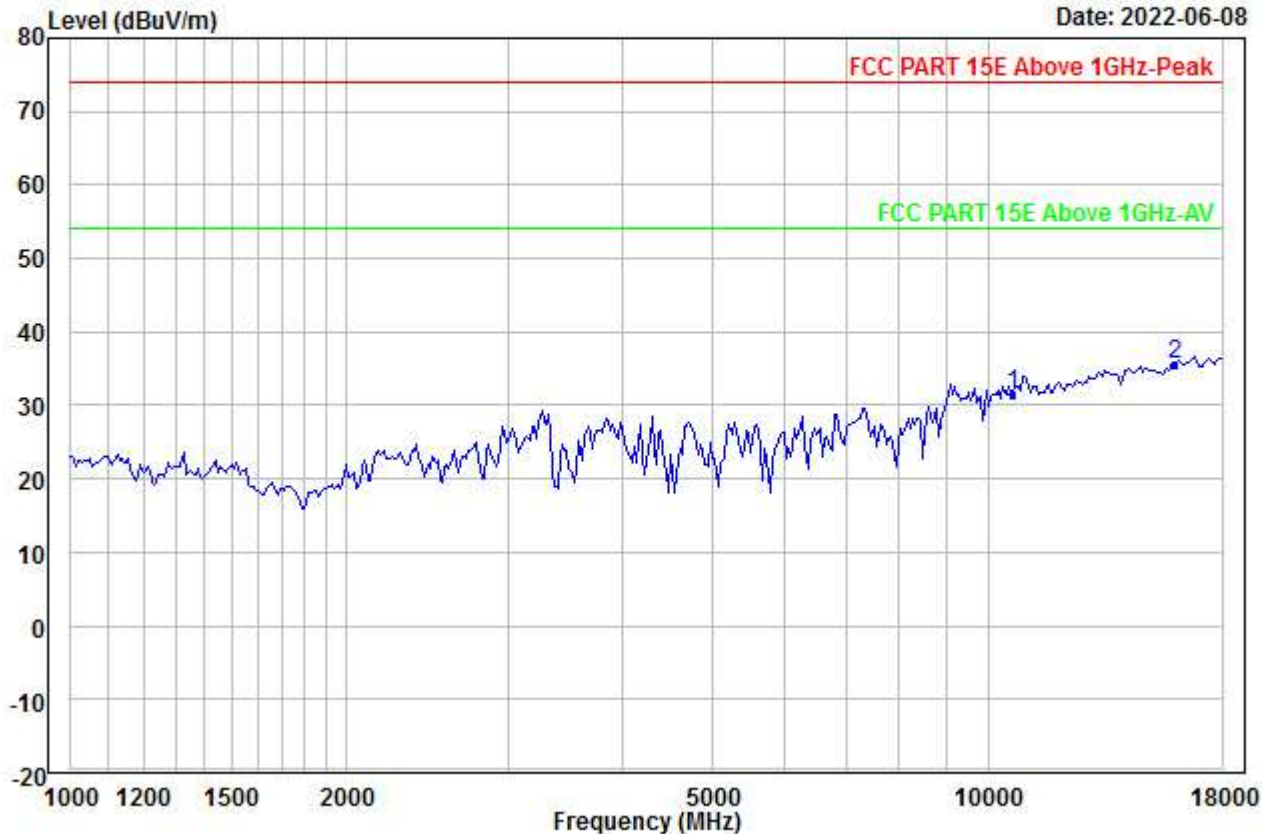


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT0\_5320  
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10640.000	24.75	38.28	45.65	0.00	14.01	31.39	54.00	-22.61	---	---	Aver
2	PP15960.000	23.79	40.84	46.27	0.00	17.20	35.56	54.00	-18.44	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00023.EMI

Date: 2022-06-08

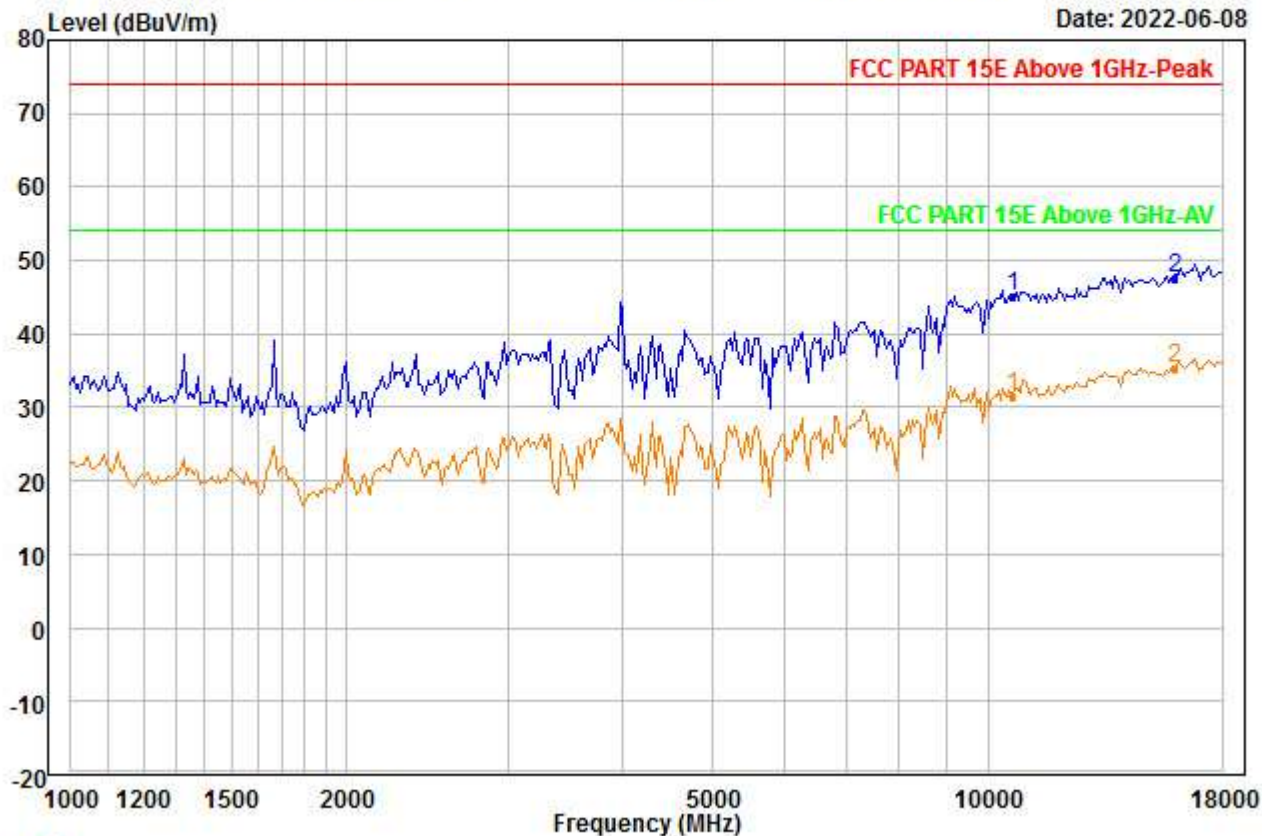


Trace: 1

Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT0\_5320  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10640.000	38.61	38.28	45.65	0.00	14.01	45.25	74.00	-28.75	---	---	Peak
2 PP15960.000	35.85	40.84	46.27	0.00	17.20	47.62	74.00	-26.38	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\RSE\4\_00024.EMI

Date: 2022-06-08

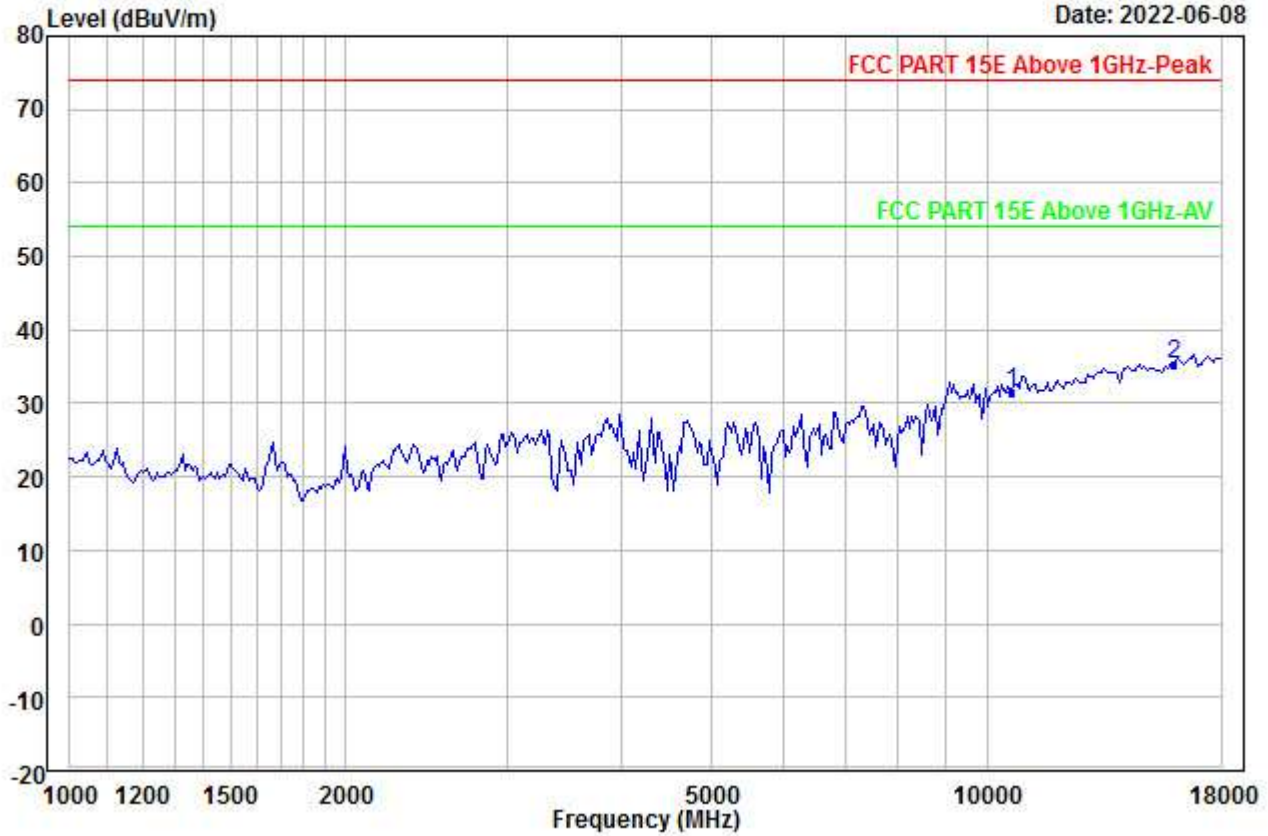


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT0\_5320  
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10640.000	24.75	38.28	45.65	0.00	14.01	31.39	54.00	-22.61	---	---	Aver
2	PP15960.000	23.60	40.84	46.27	0.00	17.20	35.37	54.00	-18.63	---	---	Aver



File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\RSE\4\_00025.EMI

Date: 2022-06-08

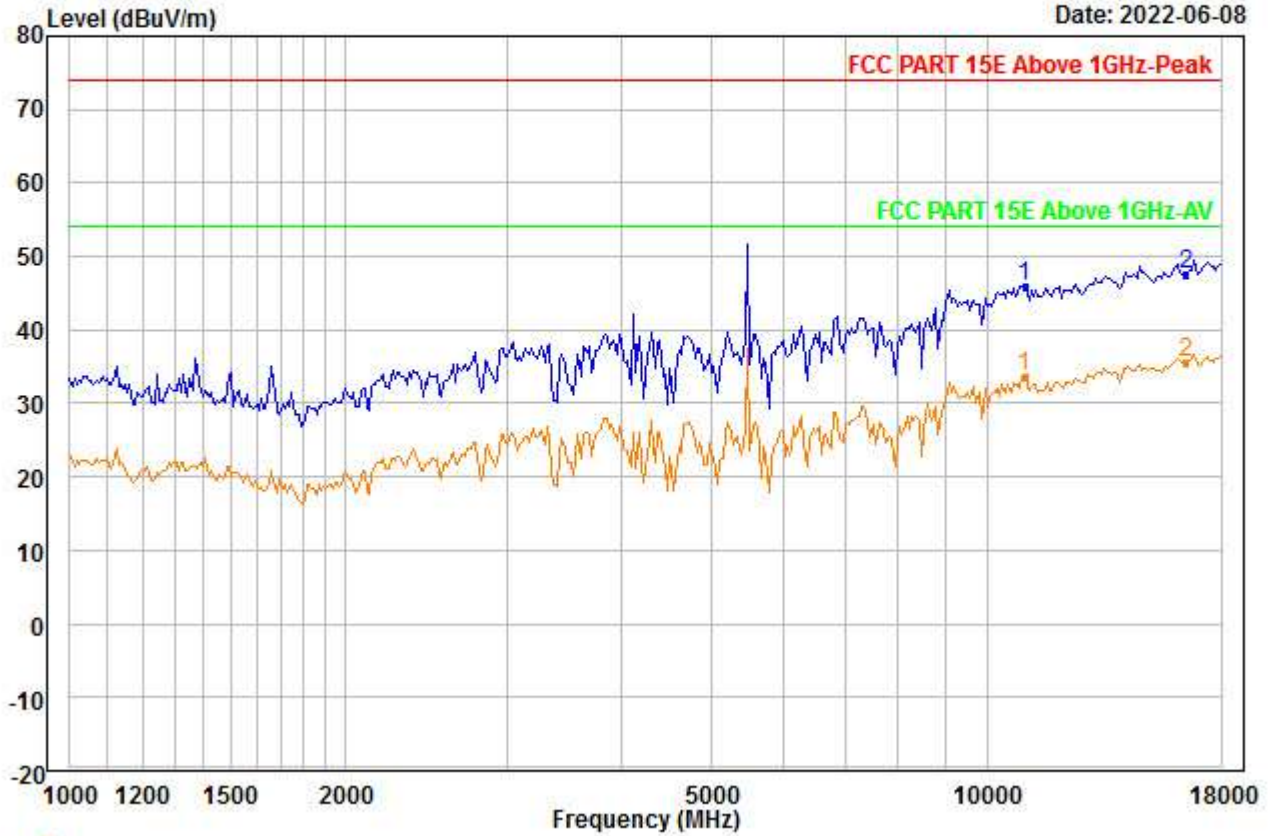


Trace: 1

Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT0\_5500  
 Remark :

	Read Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11000.000	38.57	38.50	45.00	0.00	13.92	45.99	74.00	-28.01	---	---	Peak
2	PP16500.000	35.32	41.50	46.60	0.00	17.45	47.67	74.00	-26.33	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00026.EMI

Date: 2022-06-08

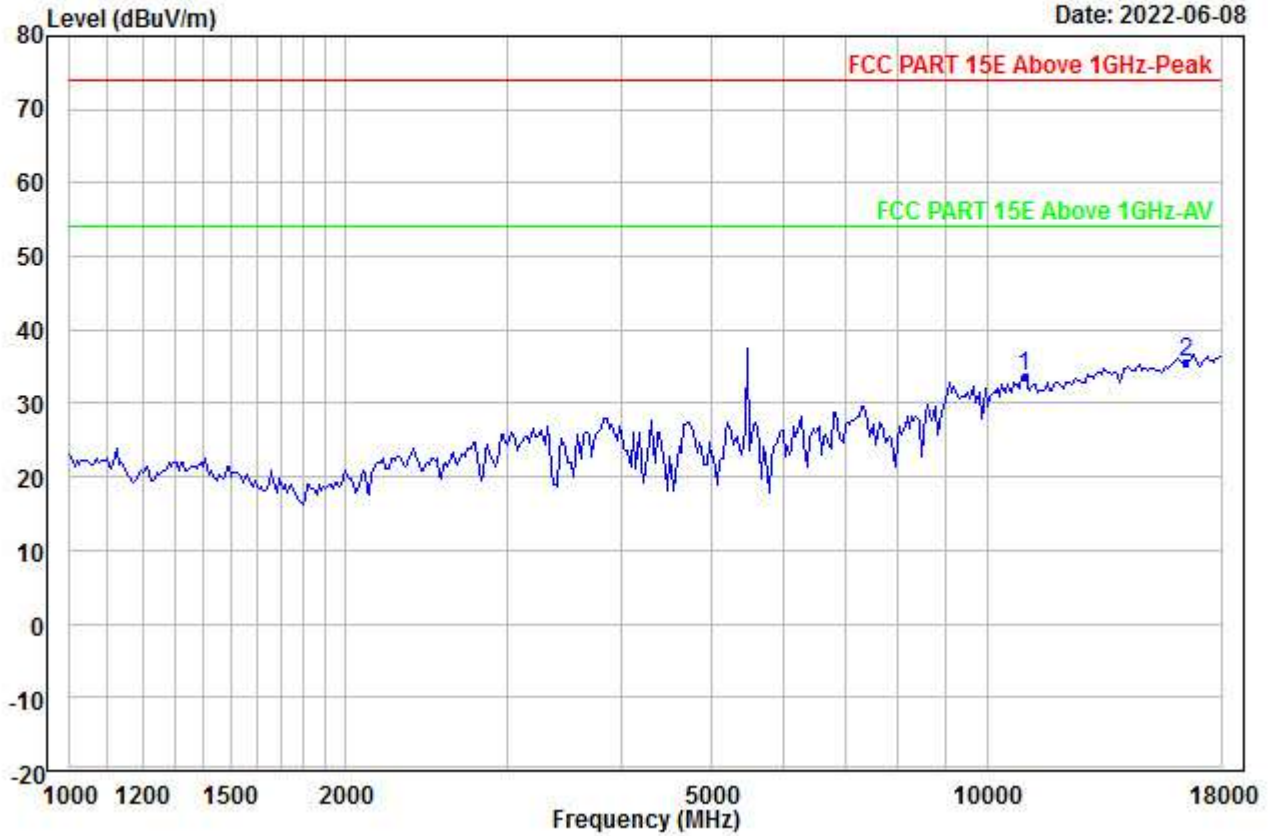


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT0\_5500  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 11000.000	26.16	38.50	45.00	0.00	13.92	33.58	54.00	-20.42	---	---	Aver
2 PP16500.000	23.33	41.50	46.60	0.00	17.45	35.68	54.00	-18.32	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00027.EMI

Date: 2022-06-08

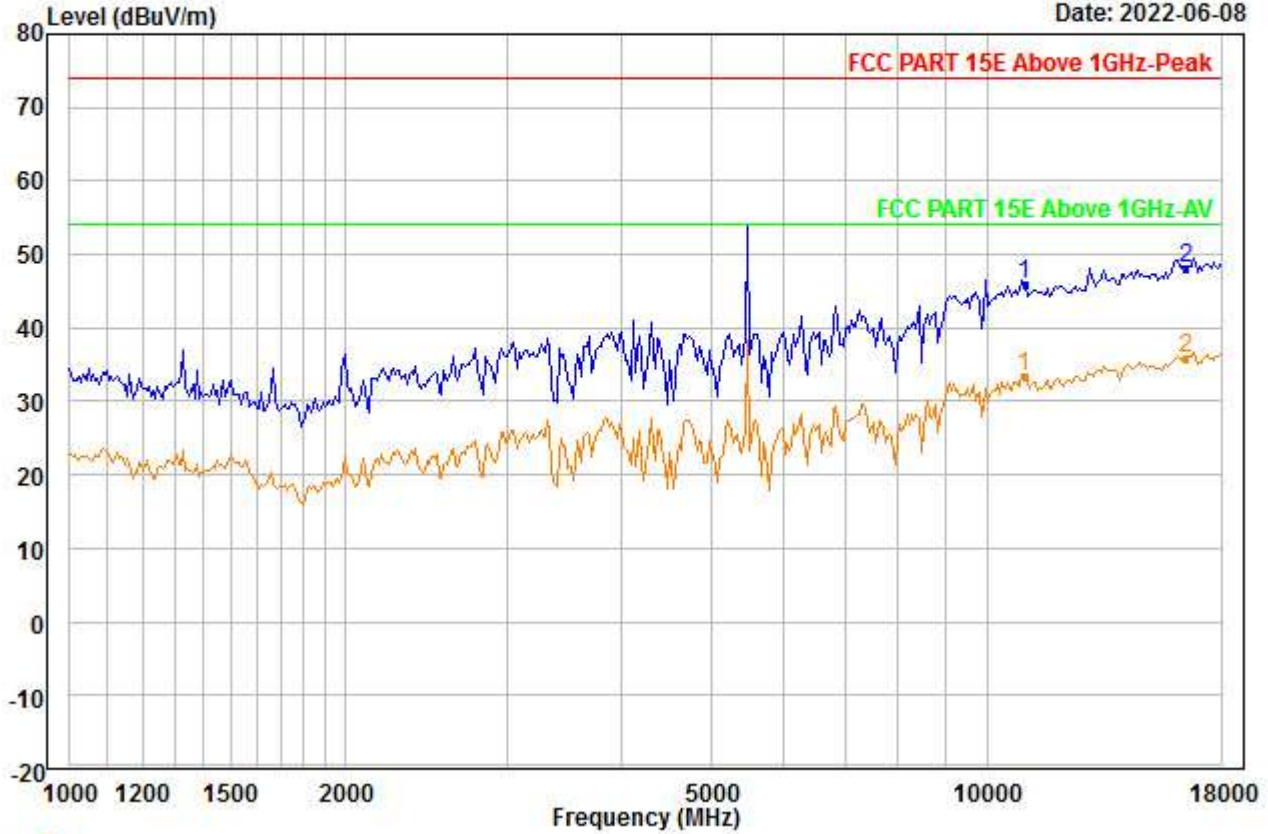


Trace: 1

Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT0\_5500  
 Remark :

	Read Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11000.000	38.62	38.50	45.00	0.00	13.92	46.04	74.00	-27.96	---	---	Peak
2	PP16500.000	35.71	41.50	46.60	0.00	17.45	48.06	74.00	-25.94	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00028.EMI

Date: 2022-06-08

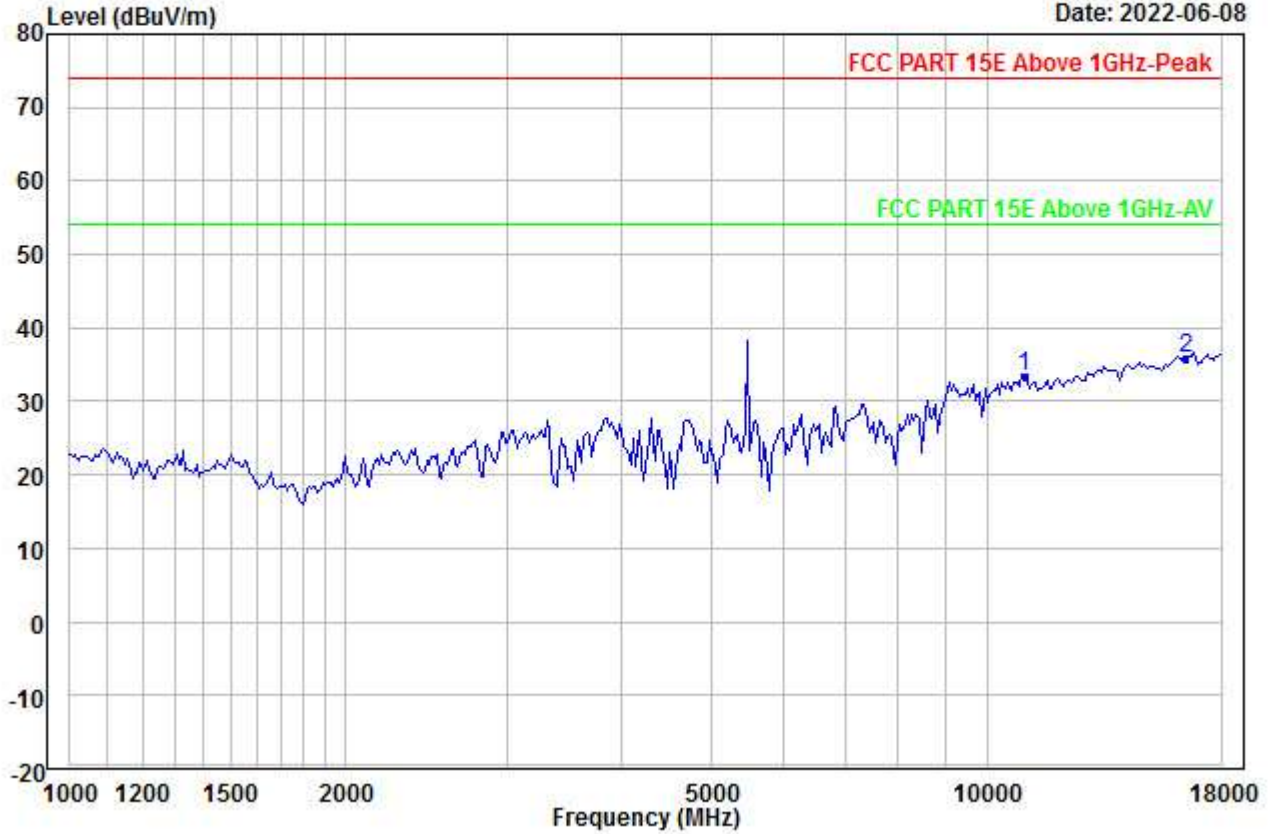


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT0\_5500  
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11000.000	26.09	38.50	45.00	0.00	13.92	33.51	54.00	-20.49	---	---	Aver
2	PP16500.000	23.43	41.50	46.60	0.00	17.45	35.78	54.00	-18.22	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00029.EMI

Date: 2022-06-08

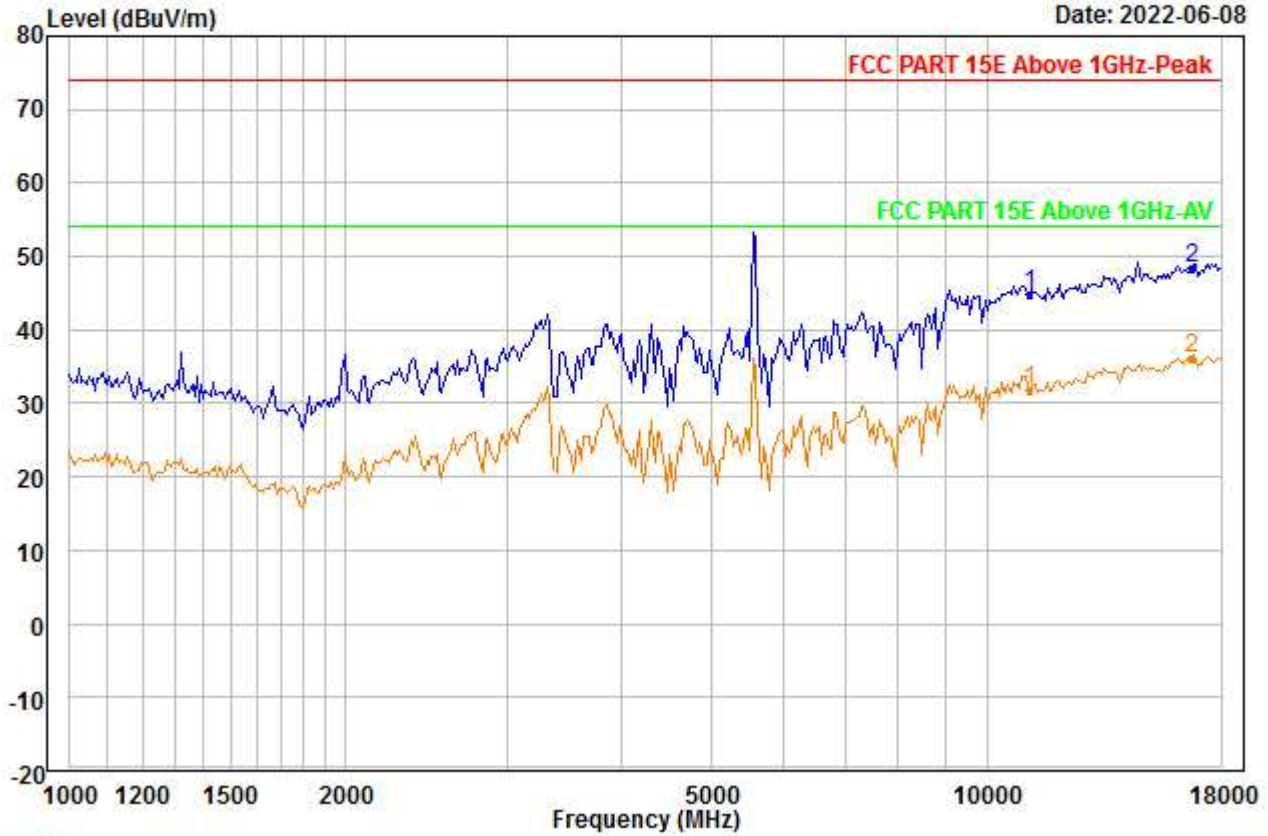


Trace: 1

Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT0\_5580  
 Remark :

	Read Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11160.000	37.53	38.63	45.35	0.00	14.04	44.85	74.00	-29.15	---	---	Peak
2	PP16740.000	35.91	41.88	46.89	0.00	17.56	48.46	74.00	-25.54	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00030.EMI

Date: 2022-06-08

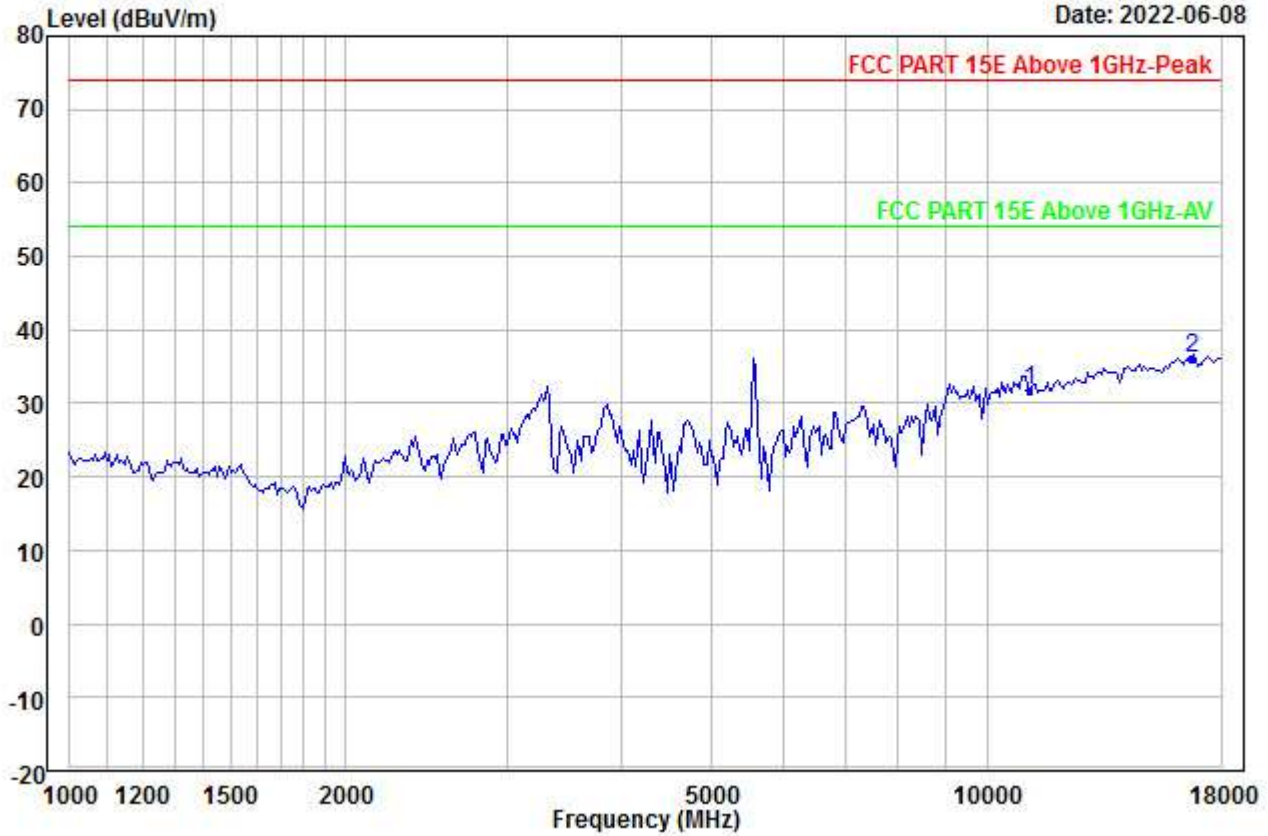


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT0\_5580  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 11160.000	24.36	38.63	45.35	0.00	14.04	31.68	54.00	-22.32	---	---	Aver
2 PP16740.000	23.68	41.88	46.89	0.00	17.56	36.23	54.00	-17.77	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00031.EMI

Date: 2022-06-08

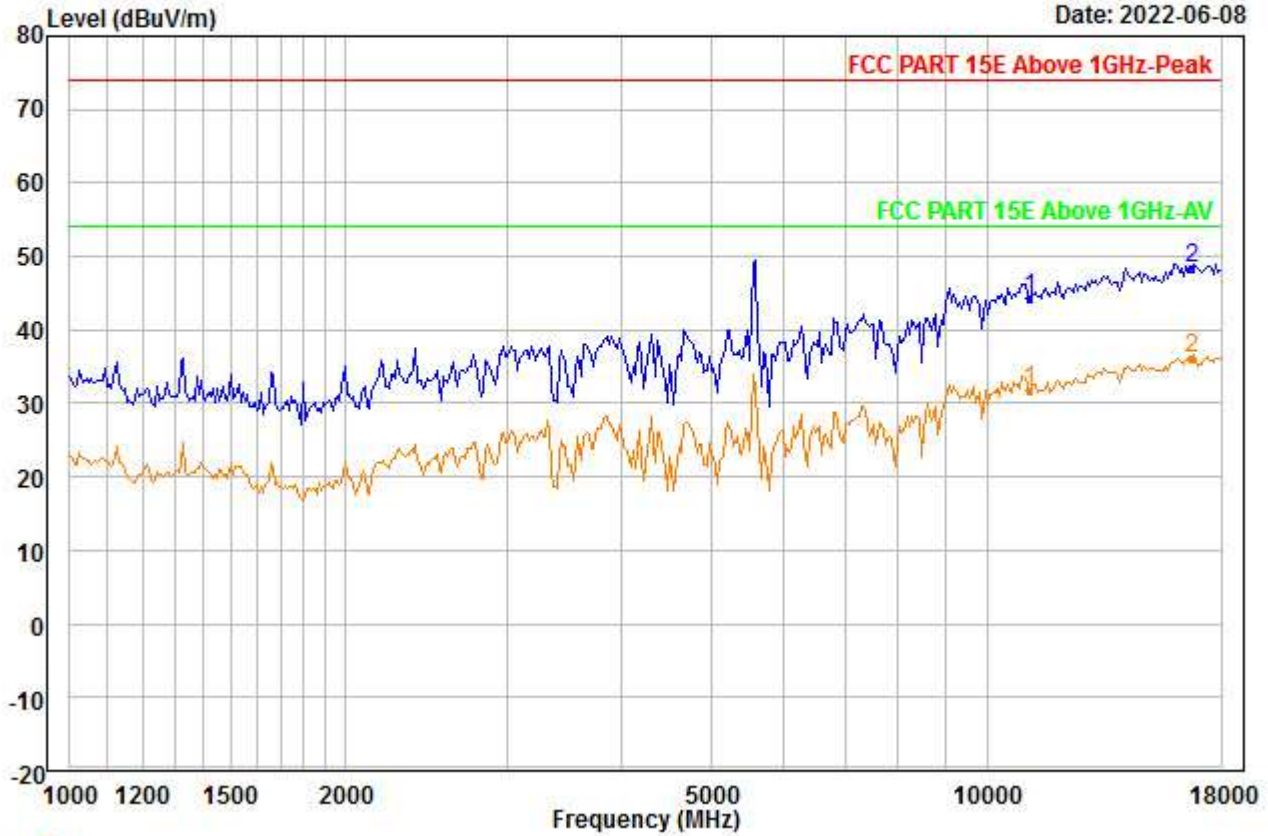


Trace: 1

Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT0\_5580  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 11160.000	36.89	38.63	45.35	0.00	14.04	44.21	74.00	-29.79	---	---	Peak
2 PP16740.000	35.93	41.88	46.89	0.00	17.56	48.48	74.00	-25.52	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00032.EMI

Date: 2022-06-08

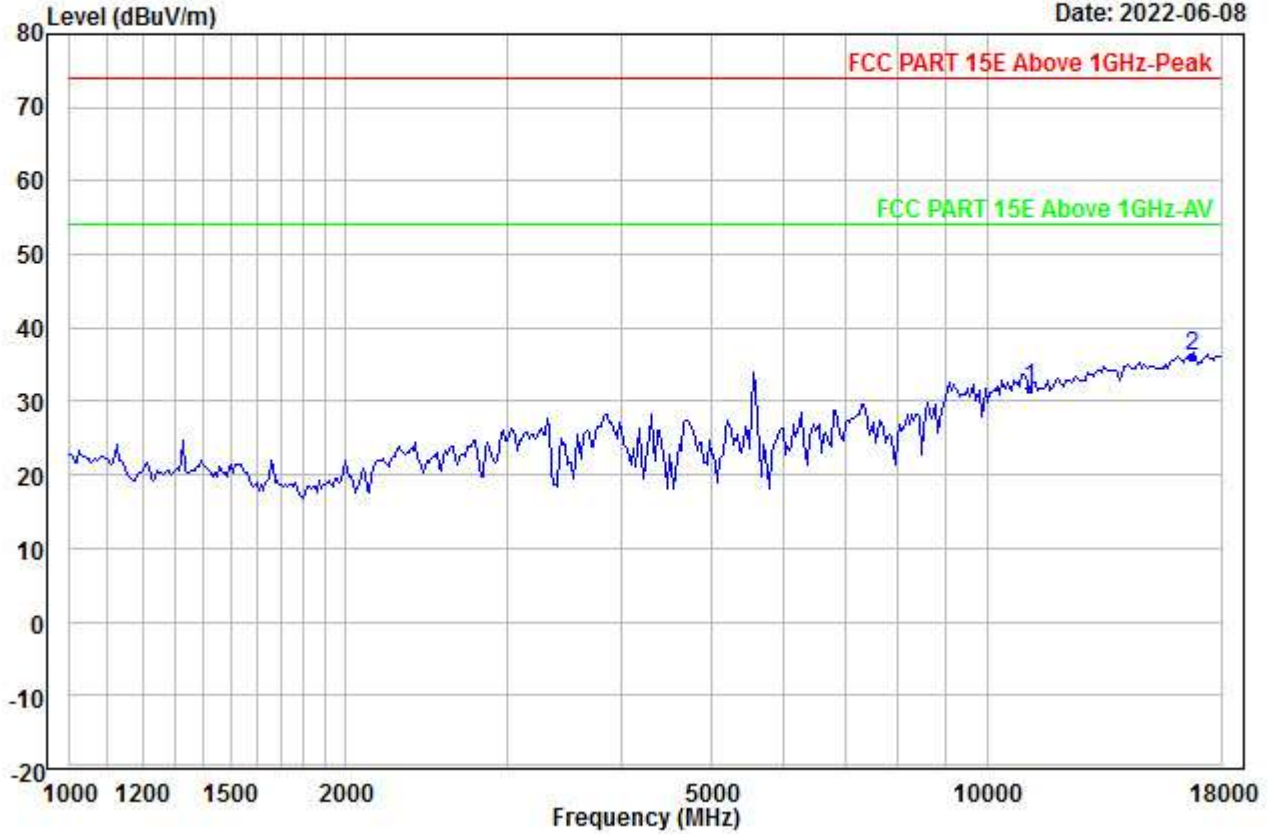


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT0\_5580  
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11160.000	24.36	38.63	45.35	0.00	14.04	31.68	54.00	-22.32	---	---	Aver
2	PP16740.000	23.68	41.88	46.89	0.00	17.56	36.23	54.00	-17.77	---	---	Aver



File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00033.EMI

Date: 2022-06-08

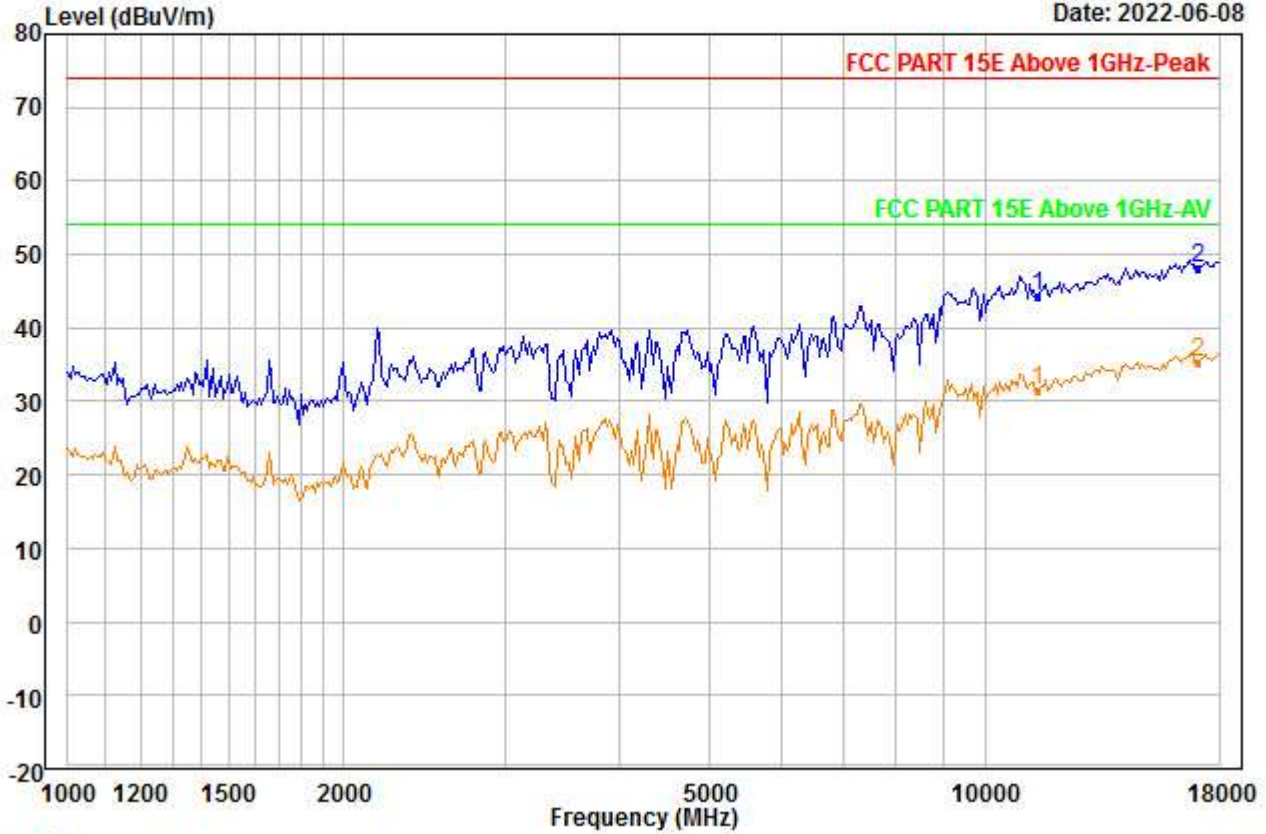


Trace: 1

Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT0\_5700  
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11400.000	37.23	38.82	45.88	0.00	14.21	44.38	74.00	-29.62	---	---	Peak
2	PP17100.000	35.20	42.26	47.08	0.00	17.74	48.12	74.00	-25.88	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00034.EMI

Date: 2022-06-08

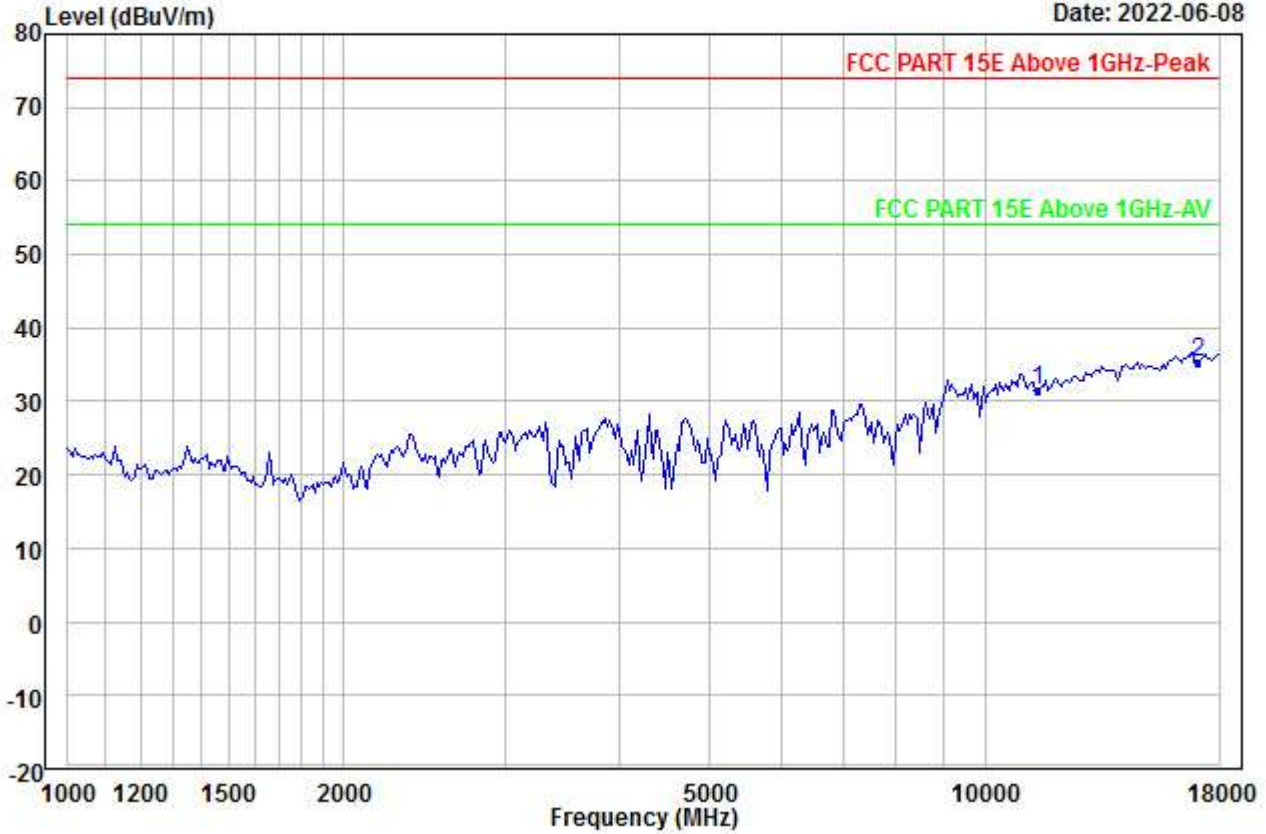


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT0\_5700  
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11400.000	24.36	38.82	45.88	0.00	14.21	31.51	54.00	-22.49	---	---	Aver
2	PP17100.000	22.26	42.26	47.08	0.00	17.74	35.18	54.00	-18.82	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00035.EMI

Date: 2022-06-08

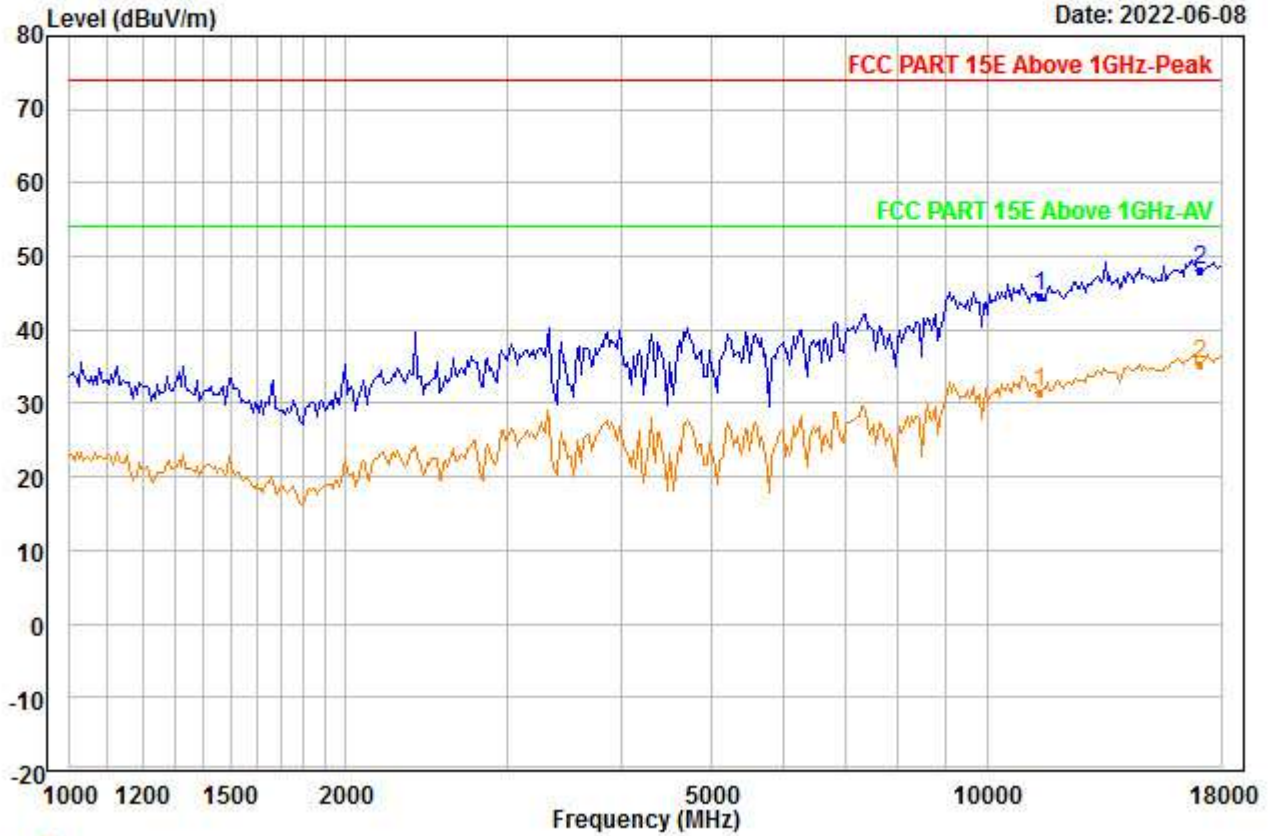


Trace: 1

Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT0\_5700  
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11400.000	37.33	38.82	45.88	0.00	14.21	44.48	74.00	-29.52	---	---	Peak
2	PP17100.000	35.30	42.26	47.08	0.00	17.74	48.22	74.00	-25.78	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00036.EMI

Date: 2022-06-08

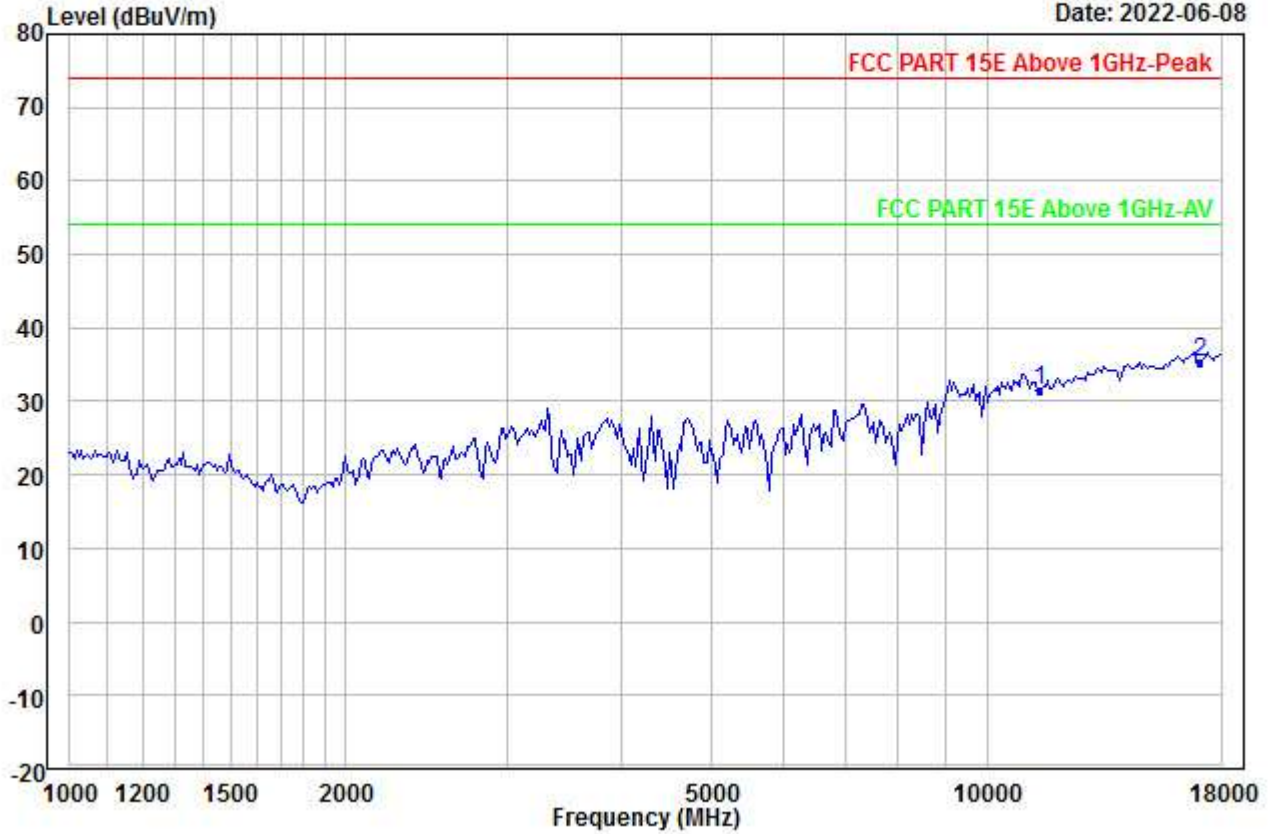


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT0\_5700  
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11400.000	24.36	38.82	45.88	0.00	14.21	31.51	54.00	-22.49	---	---	Aver
2	PP17100.000	22.26	42.26	47.08	0.00	17.74	35.18	54.00	-18.82	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00037.EMI

Date: 2022-06-08

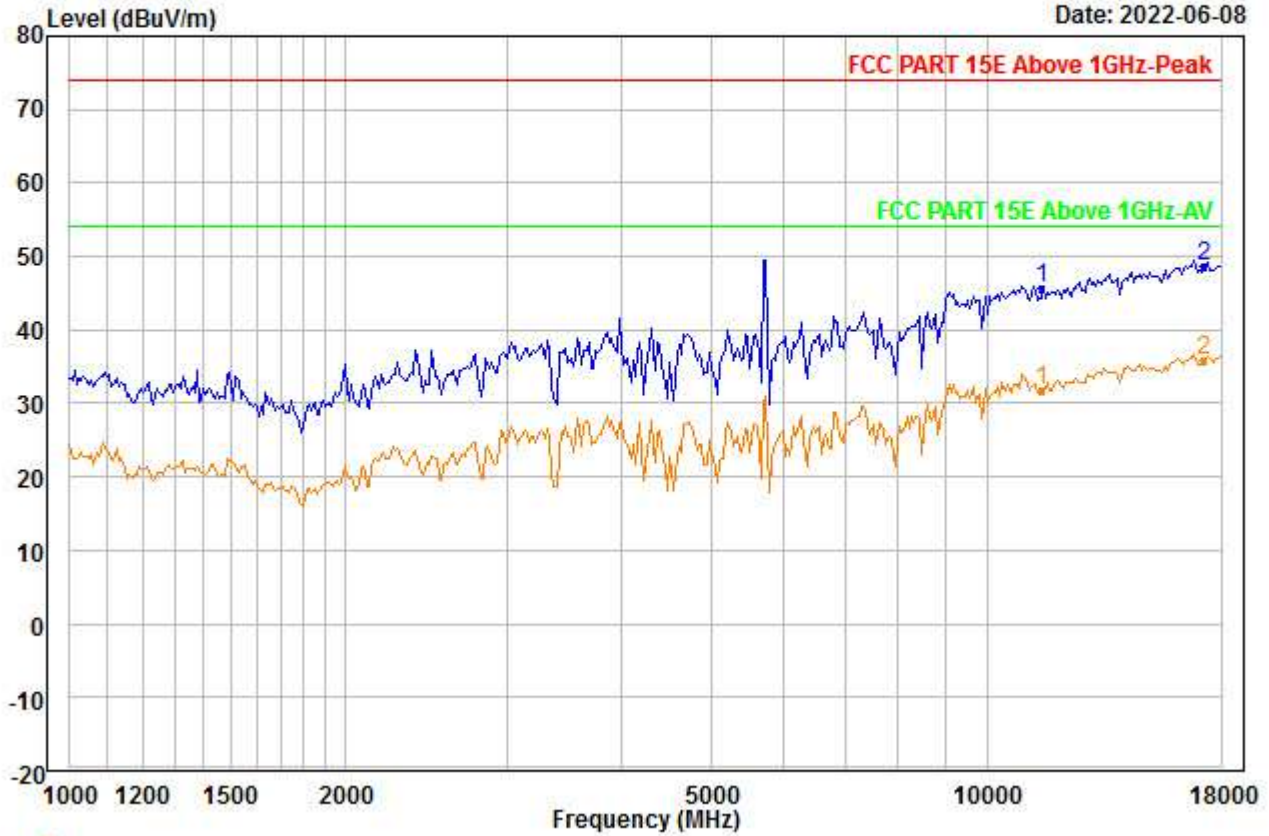


Trace: 1

Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT0\_5745  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 11490.000	38.70	38.89	46.08	0.00	14.28	45.79	74.00	-28.21	---	---	Peak
2 PP17235.000	35.48	42.21	46.92	0.00	17.83	48.60	74.00	-25.40	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00038.EMI

Date: 2022-06-08

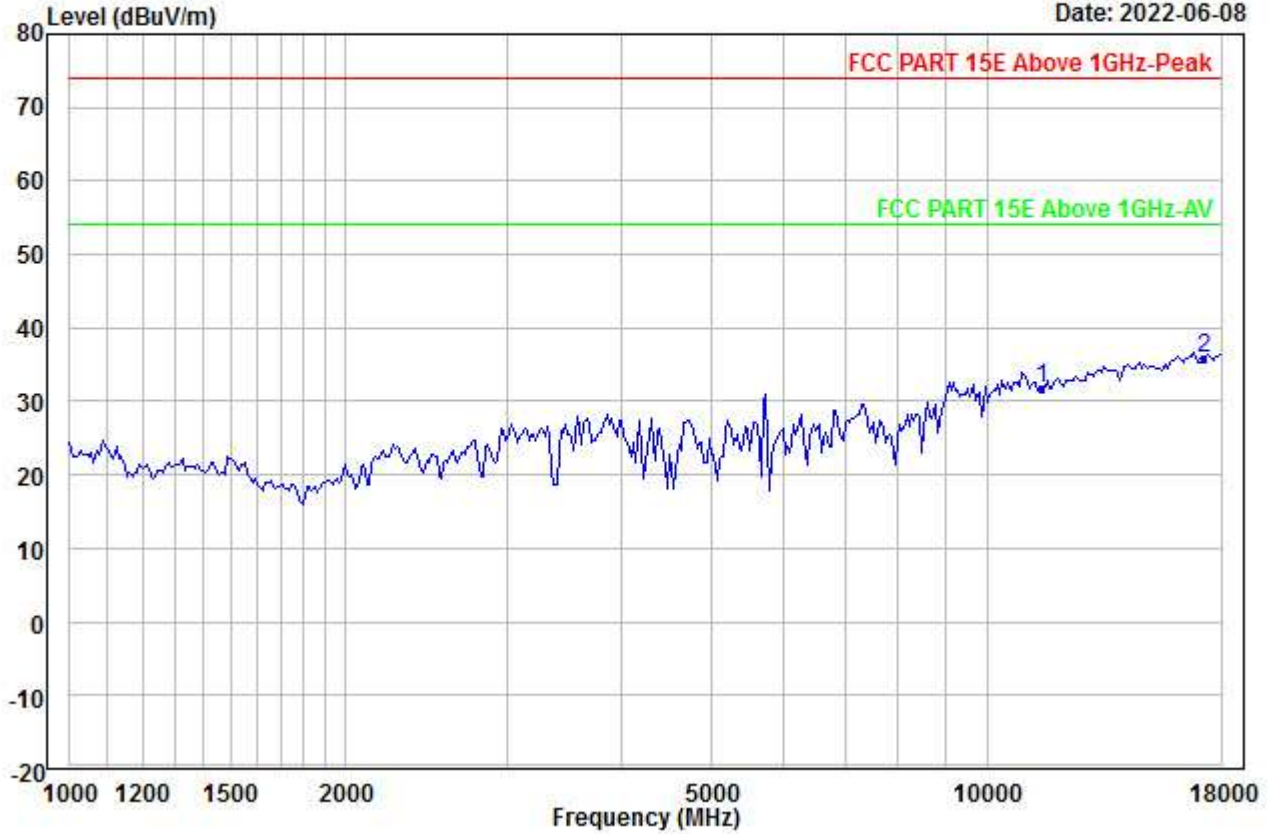


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT0\_5745  
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11490.000	24.81	38.89	46.08	0.00	14.28	31.90	54.00	-22.10	---	---	Aver
2	PP17235.000	22.78	42.21	46.92	0.00	17.83	35.90	54.00	-18.10	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00039.EMI

Date: 2022-06-08

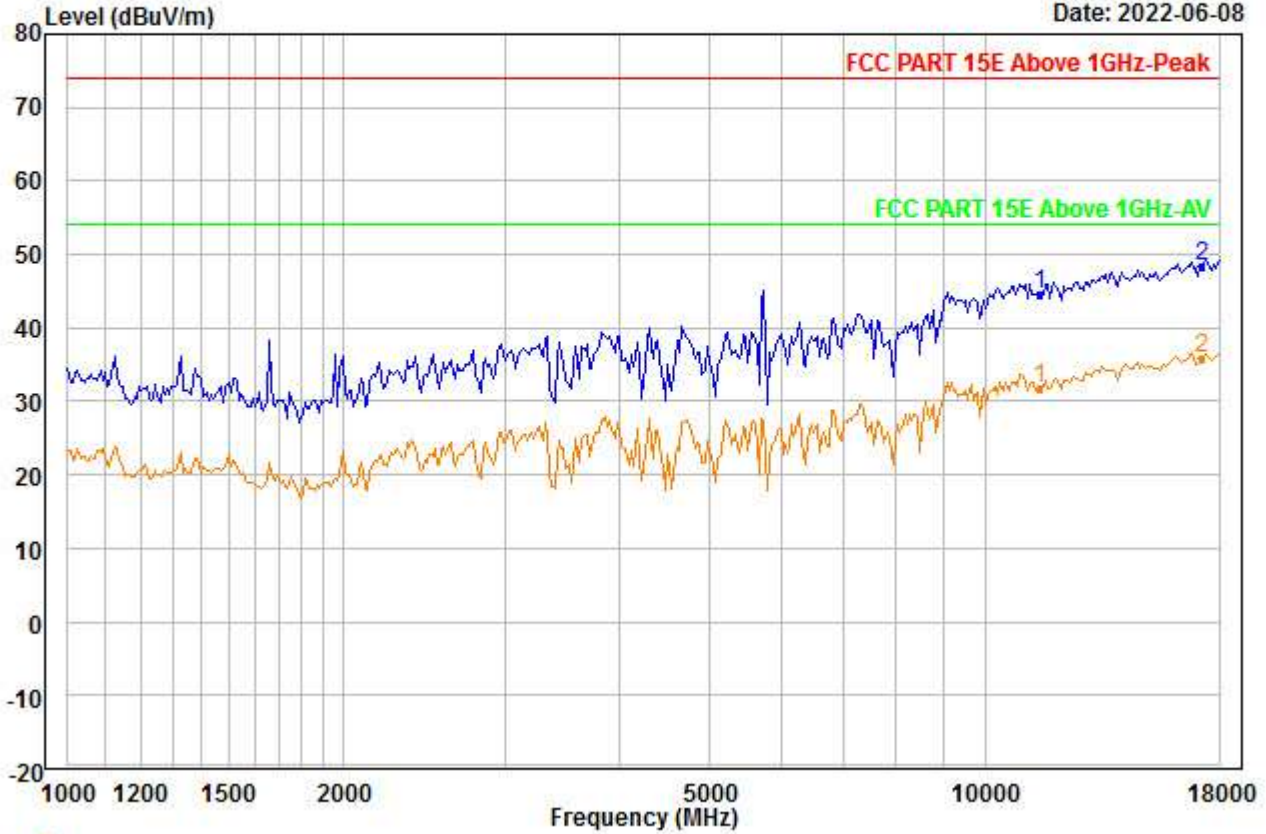


Trace: 1

Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT0\_5745  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 11490.000	37.37	38.89	46.08	0.00	14.28	44.46	74.00	-29.54	---	---	Peak
2 PP17235.000	35.38	42.21	46.92	0.00	17.83	48.50	74.00	-25.50	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00040.EMI

Date: 2022-06-08

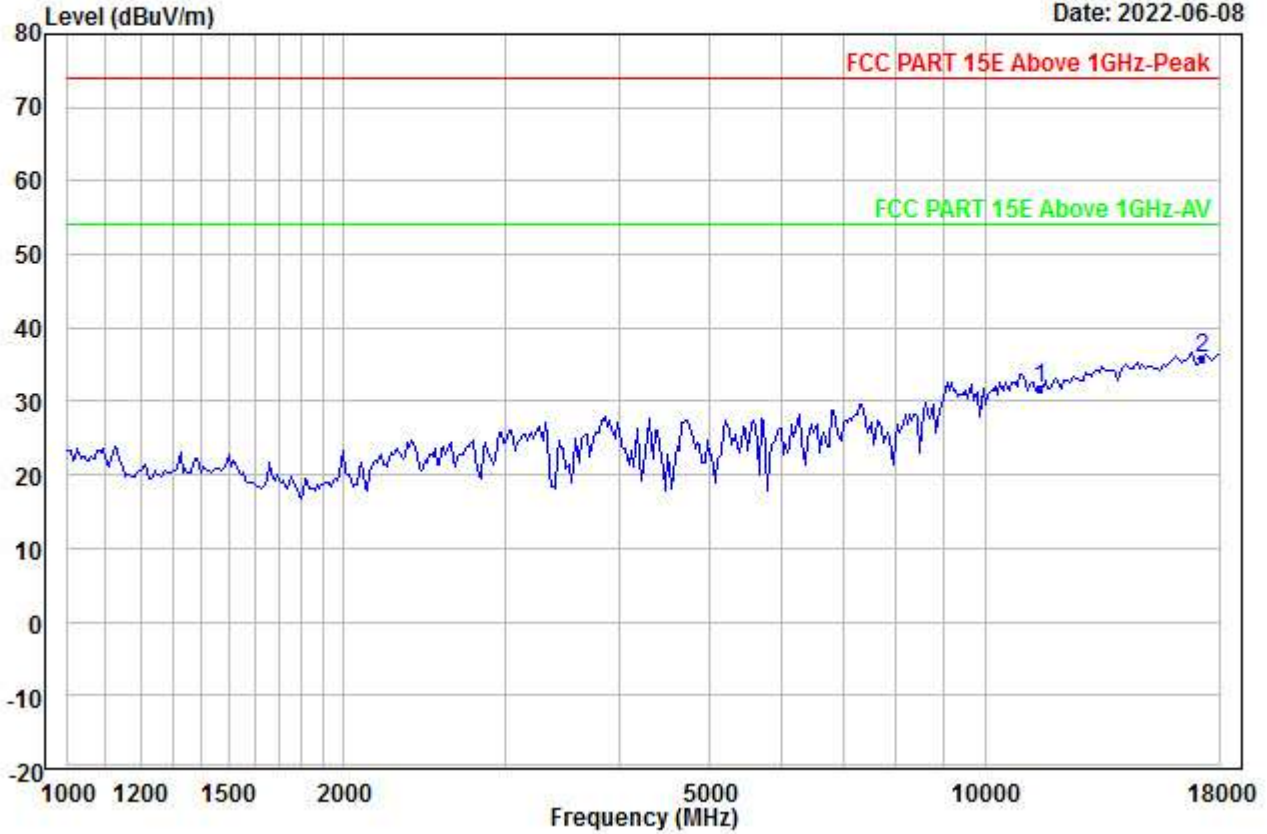


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT0\_5745  
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11490.000	24.81	38.89	46.08	0.00	14.28	31.90	54.00	-22.10	---	---	Aver
2	PP17235.000	22.78	42.21	46.92	0.00	17.83	35.90	54.00	-18.10	---	---	Aver



File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00041.EMI

Date: 2022-06-08

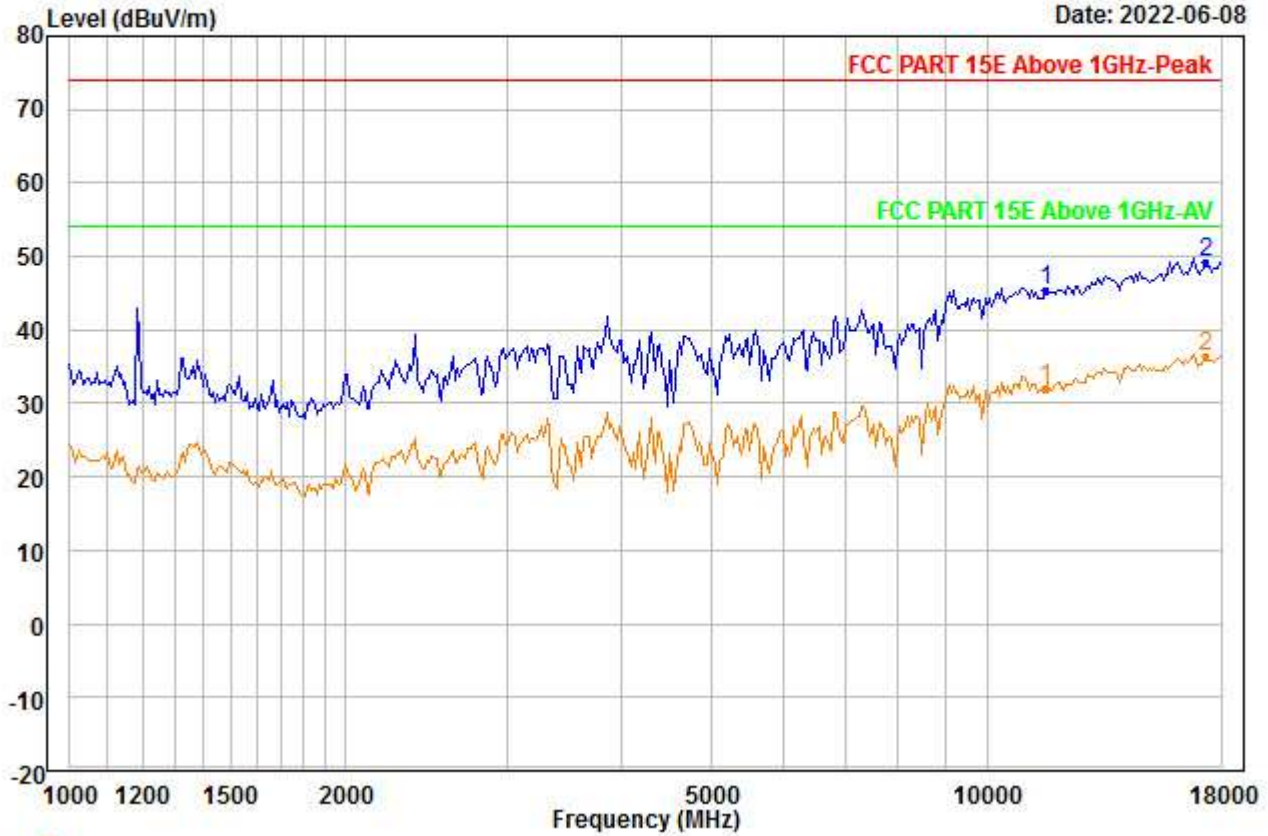


Trace: 1

Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT0\_5785  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 11570.000	38.09	38.94	46.09	0.00	14.34	45.28	74.00	-28.72	---	---	Peak
2 PP17355.000	36.05	42.16	46.77	0.00	17.90	49.34	74.00	-24.66	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00042.EMI

Date: 2022-06-08

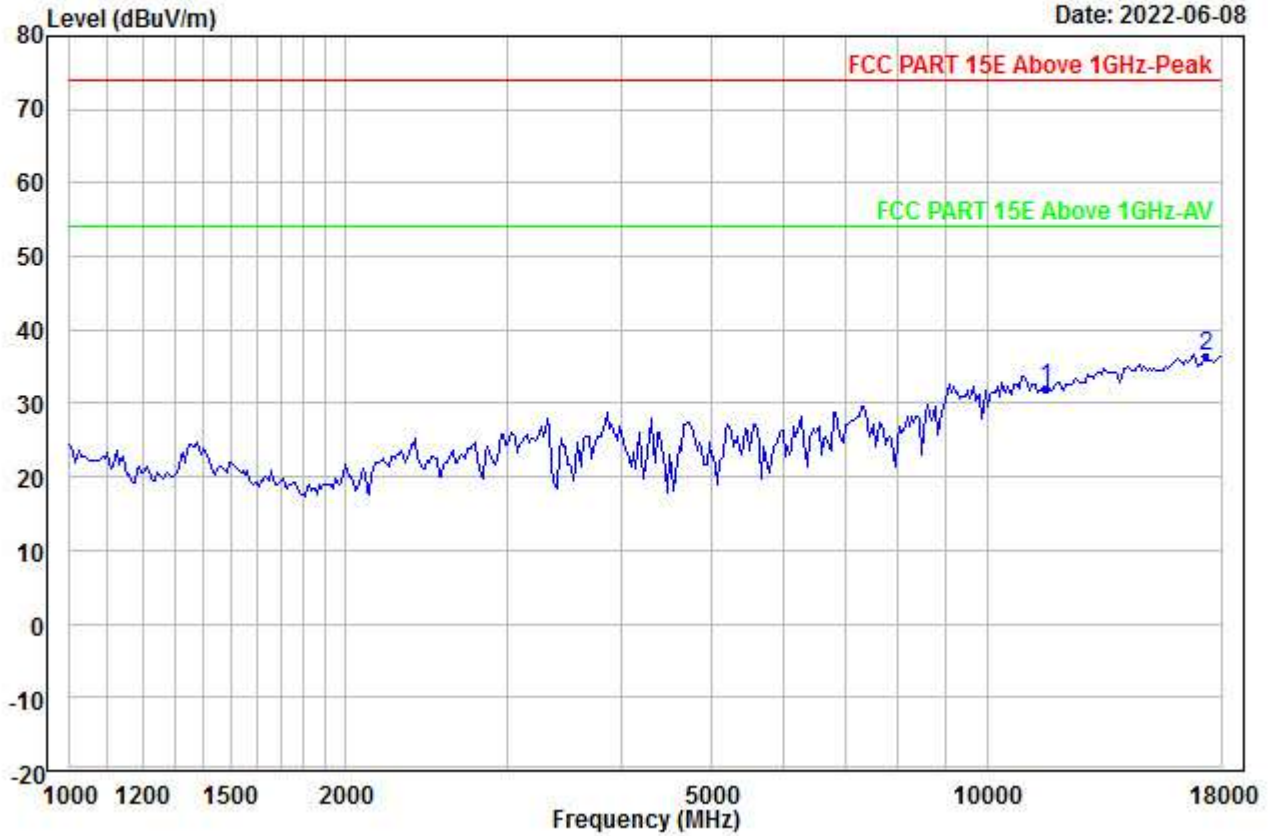


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT0\_5785  
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11570.000	24.89	38.94	46.09	0.00	14.34	32.08	54.00	-21.92	---	---	Aver
2	PP17355.000	23.17	42.16	46.77	0.00	17.90	36.46	54.00	-17.54	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00043.EMI

Date: 2022-06-08

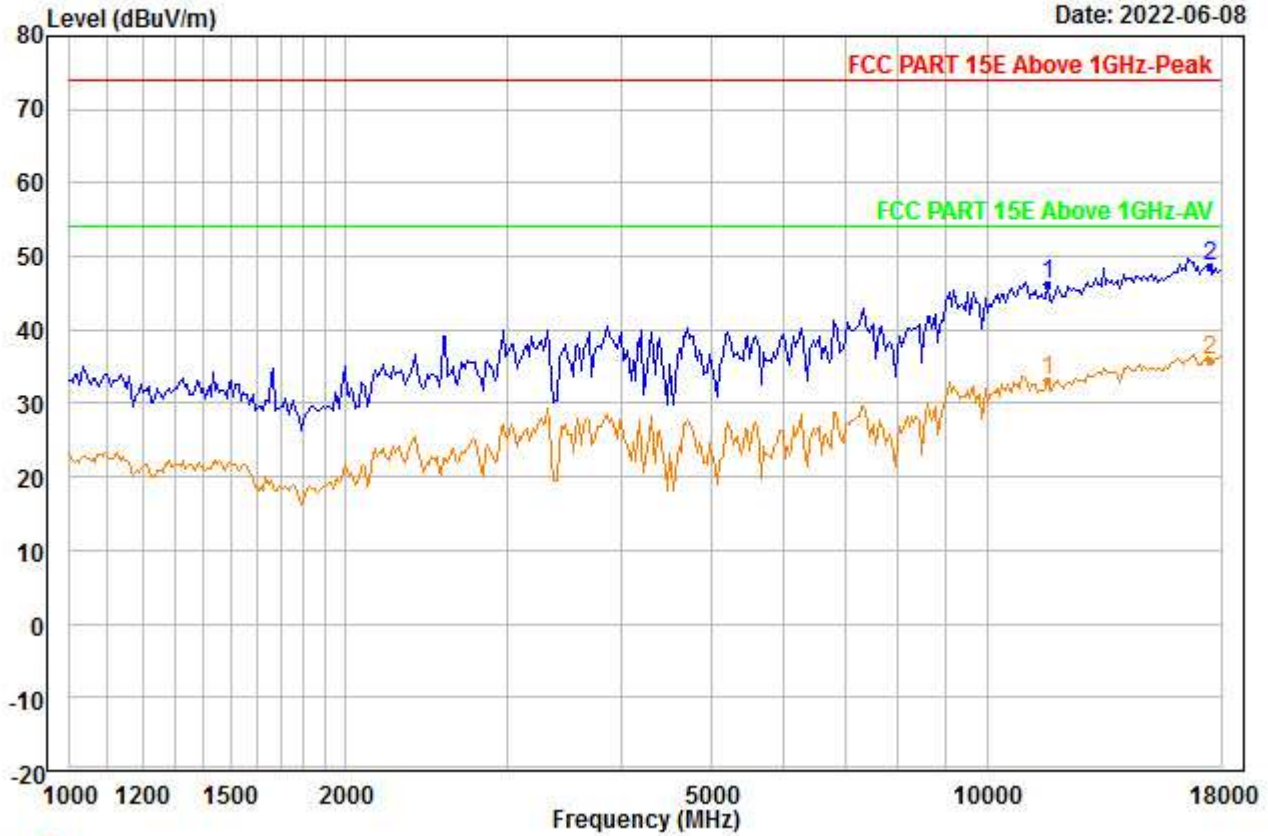


Trace: 1

Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT0\_5785  
 Remark :

	Read Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11650.000	38.79	38.99	46.07	0.00	14.39	46.10	74.00	-27.90	---	---	Peak
2	PP17475.000	35.13	42.11	46.63	0.00	17.98	48.59	74.00	-25.41	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00044.EMI

Date: 2022-06-08

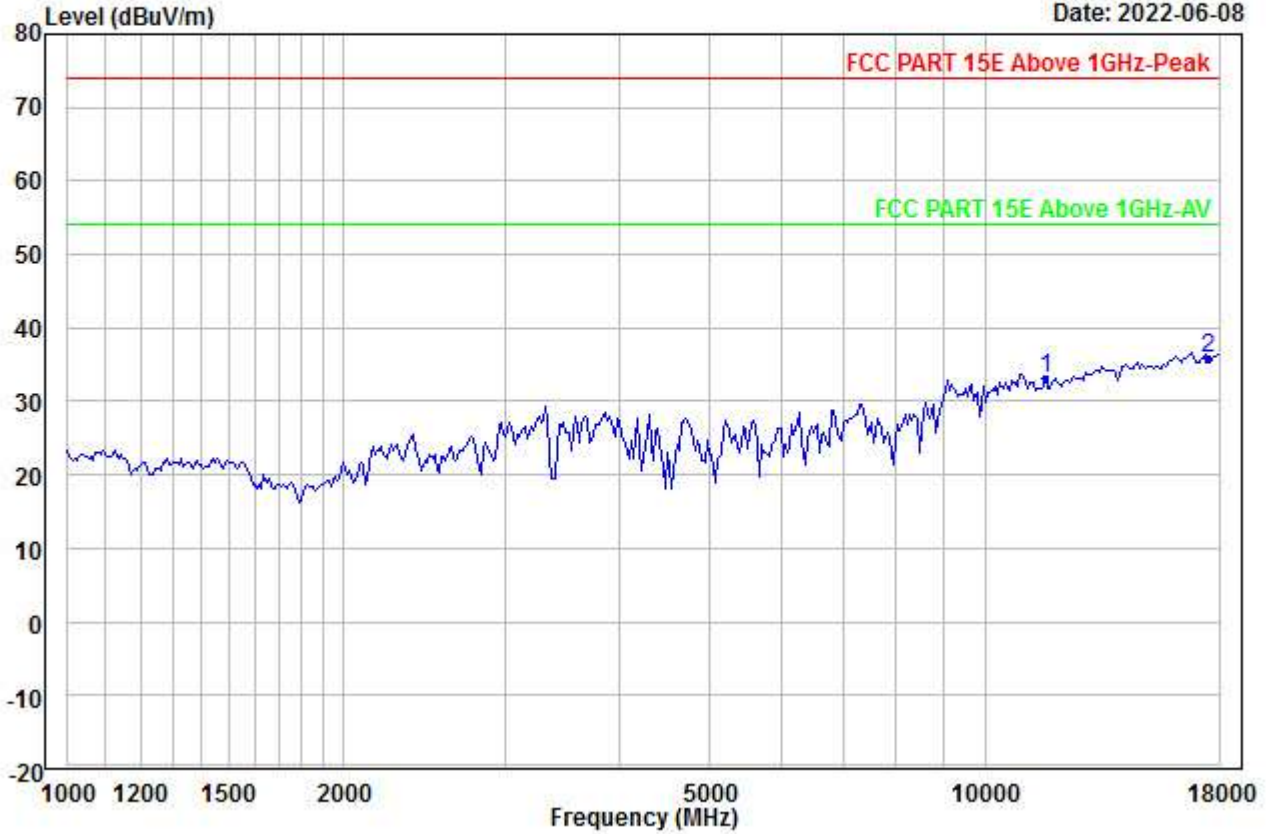


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT0\_5785  
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11650.000	25.74	38.99	46.07	0.00	14.39	33.05	54.00	-20.95	---	---	Aver
2	PP17475.000	22.51	42.11	46.63	0.00	17.98	35.97	54.00	-18.03	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00045.EMI

Date: 2022-06-08

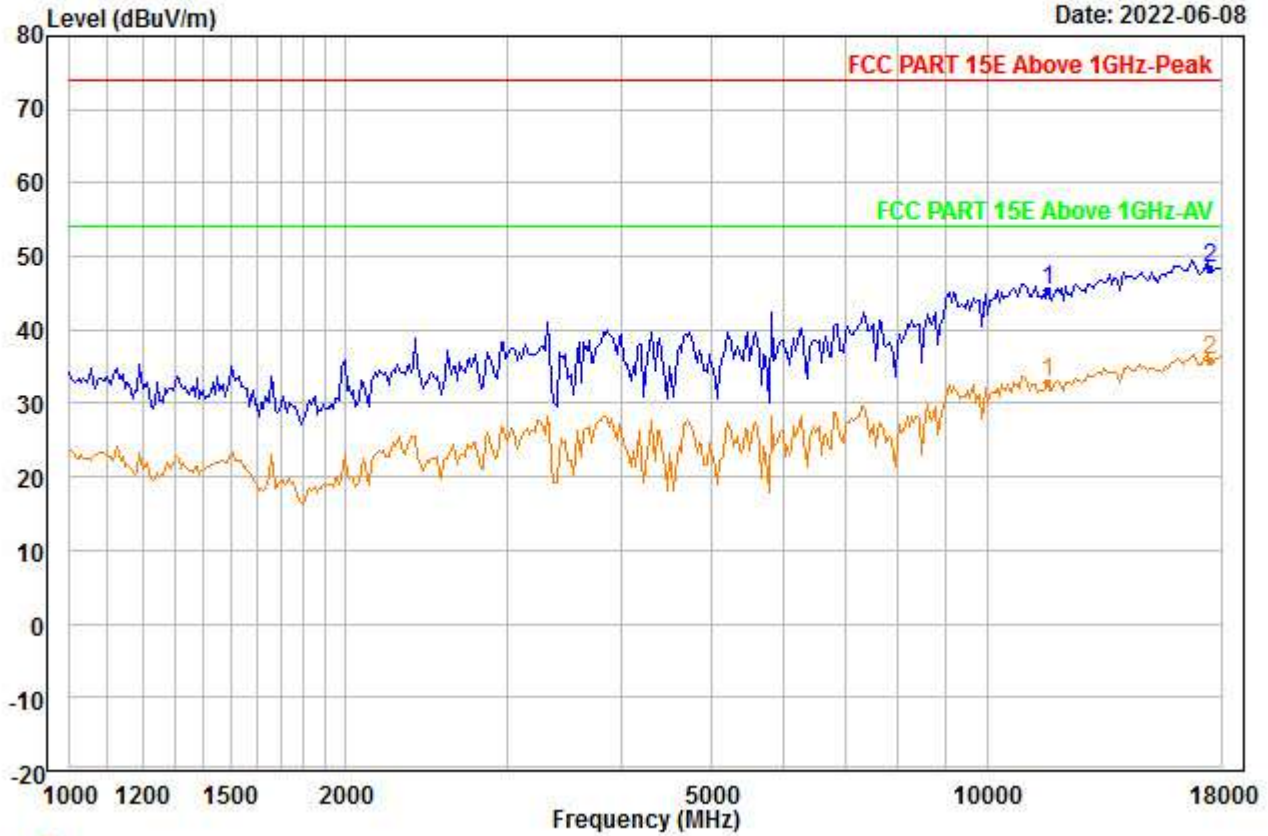


Trace: 1

Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT0\_5825  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 11650.000	38.17	38.99	46.07	0.00	14.39	45.48	74.00	-28.52	---	---	Peak
2 PP17475.000	34.98	42.11	46.63	0.00	17.98	48.44	74.00	-25.56	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00046.EMI

Date: 2022-06-08

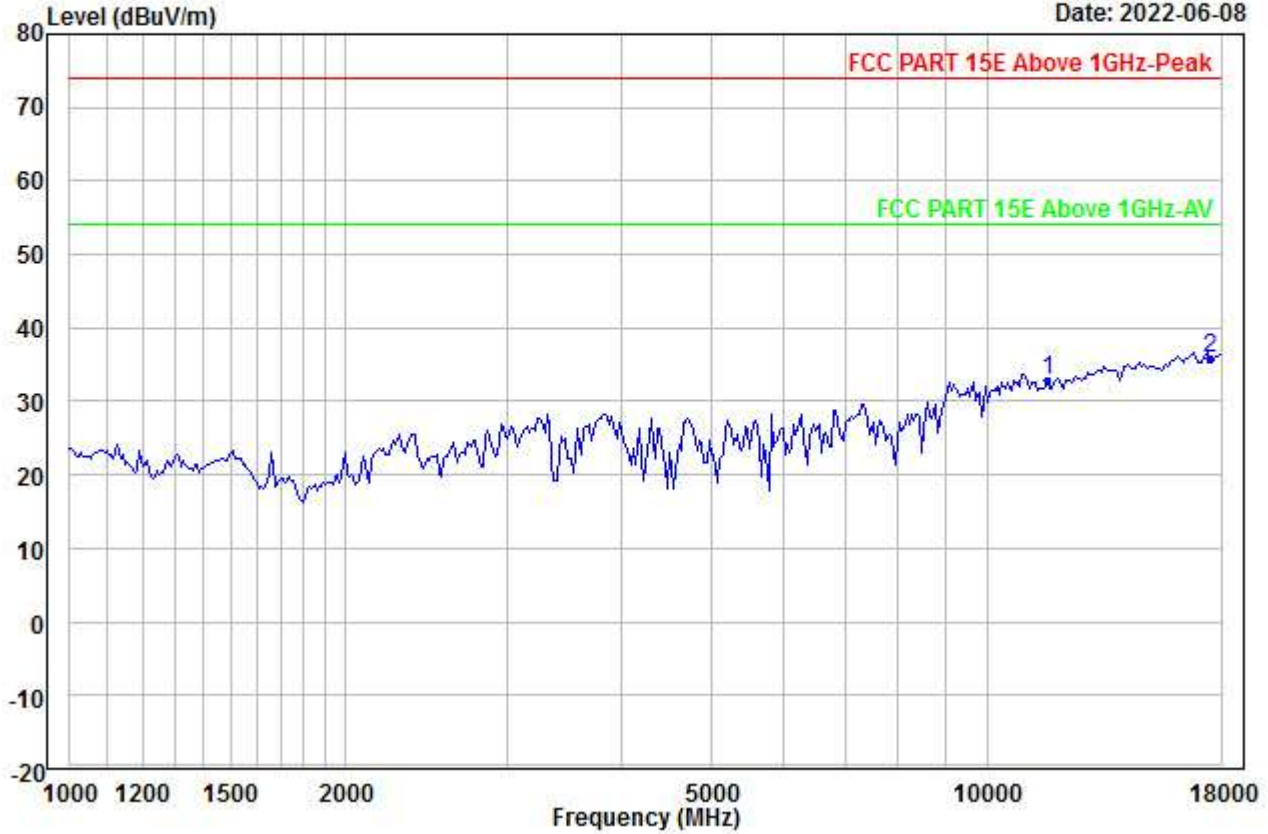


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT0\_5825  
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11650.000	25.59	38.99	46.07	0.00	14.39	32.90	54.00	-21.10	---	---	Aver
2	PP17475.000	22.51	42.11	46.63	0.00	17.98	35.97	54.00	-18.03	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00047.EMI

Date: 2022-06-08

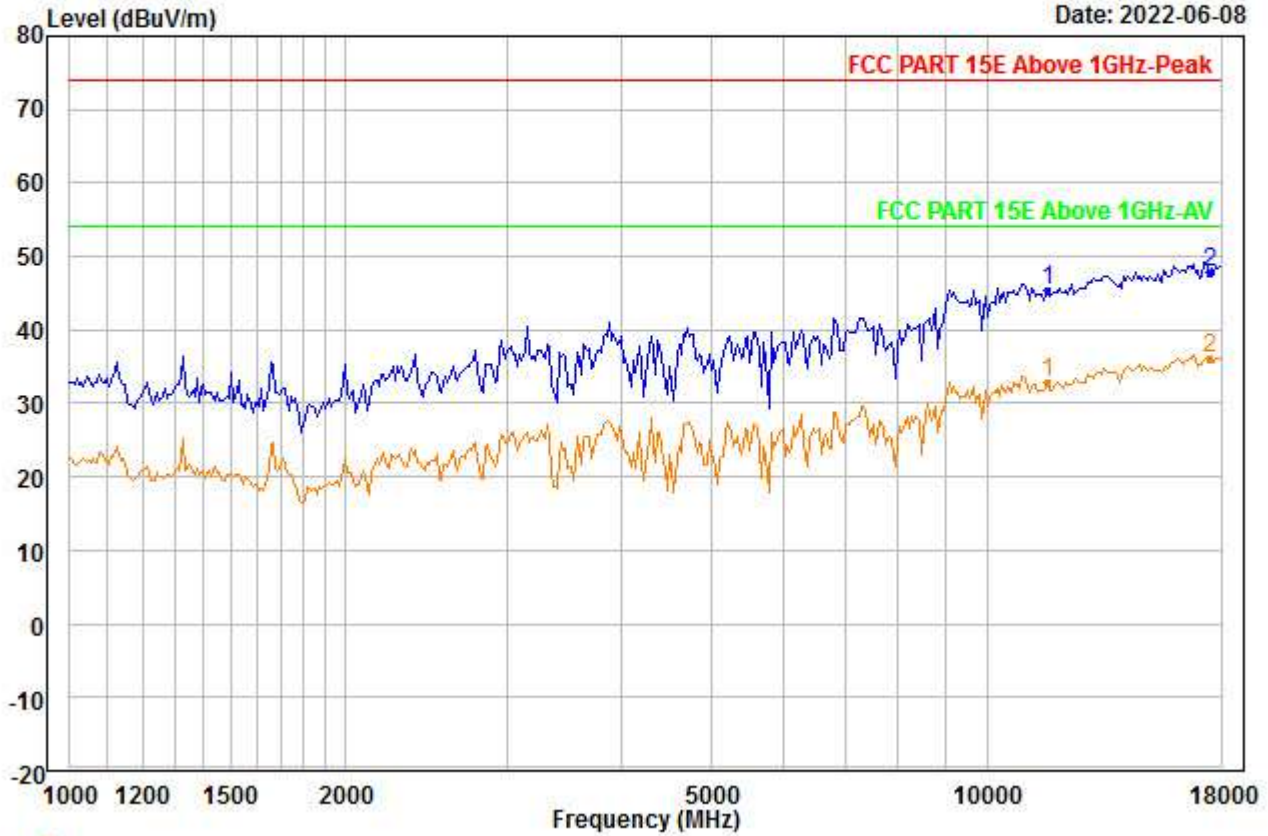


Trace: 1

Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT0\_5825  
 Remark :

	Read Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11650.000	37.97	38.99	46.07	0.00	14.39	45.28	74.00	-28.72	---	---	Peak
2	PP17475.000	34.39	42.11	46.63	0.00	17.98	47.85	74.00	-26.15	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00048.EMI

Date: 2022-06-08

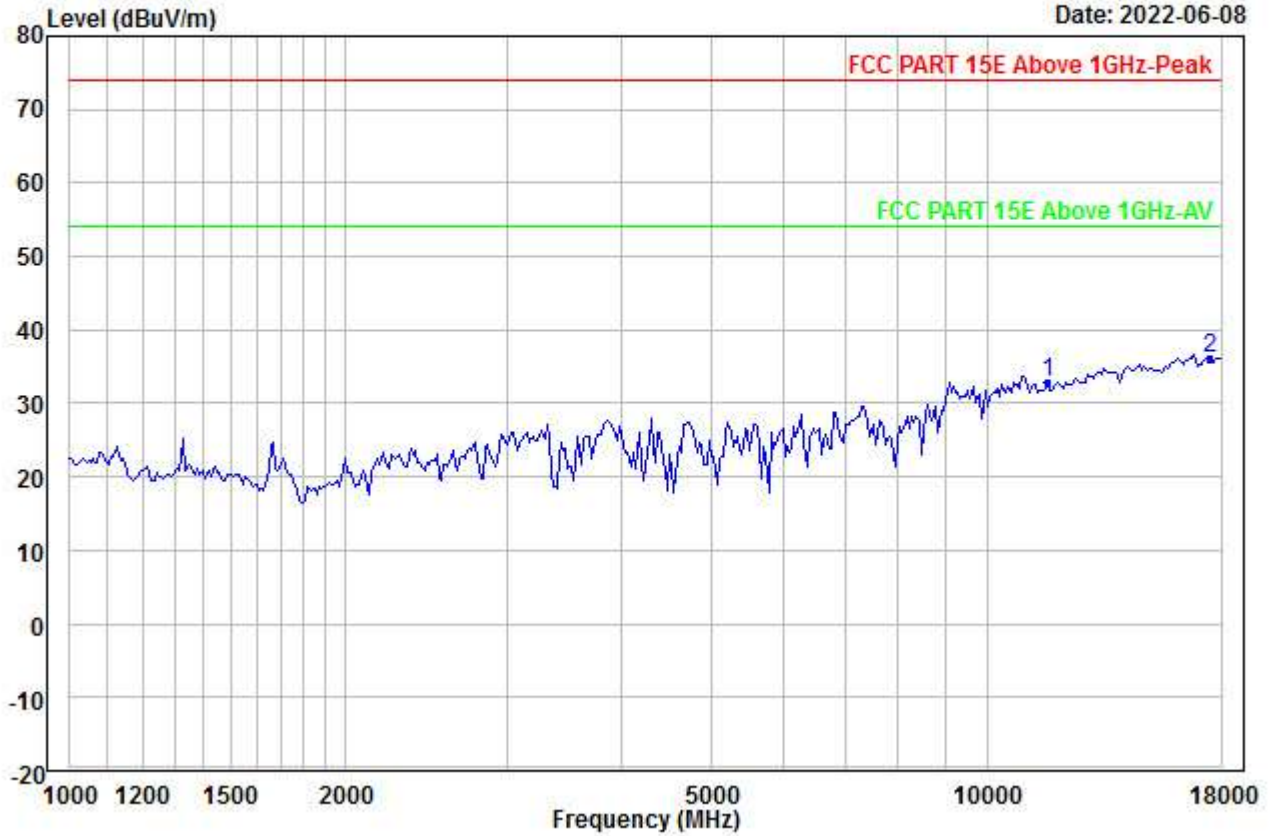


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT0\_5825  
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11650.000	25.59	38.99	46.07	0.00	14.39	32.90	54.00	-21.10	---	---	Aver
2	PP17475.000	22.62	42.11	46.63	0.00	17.98	36.08	54.00	-17.92	---	---	Aver



File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00049.EMI

Date: 2022-06-08

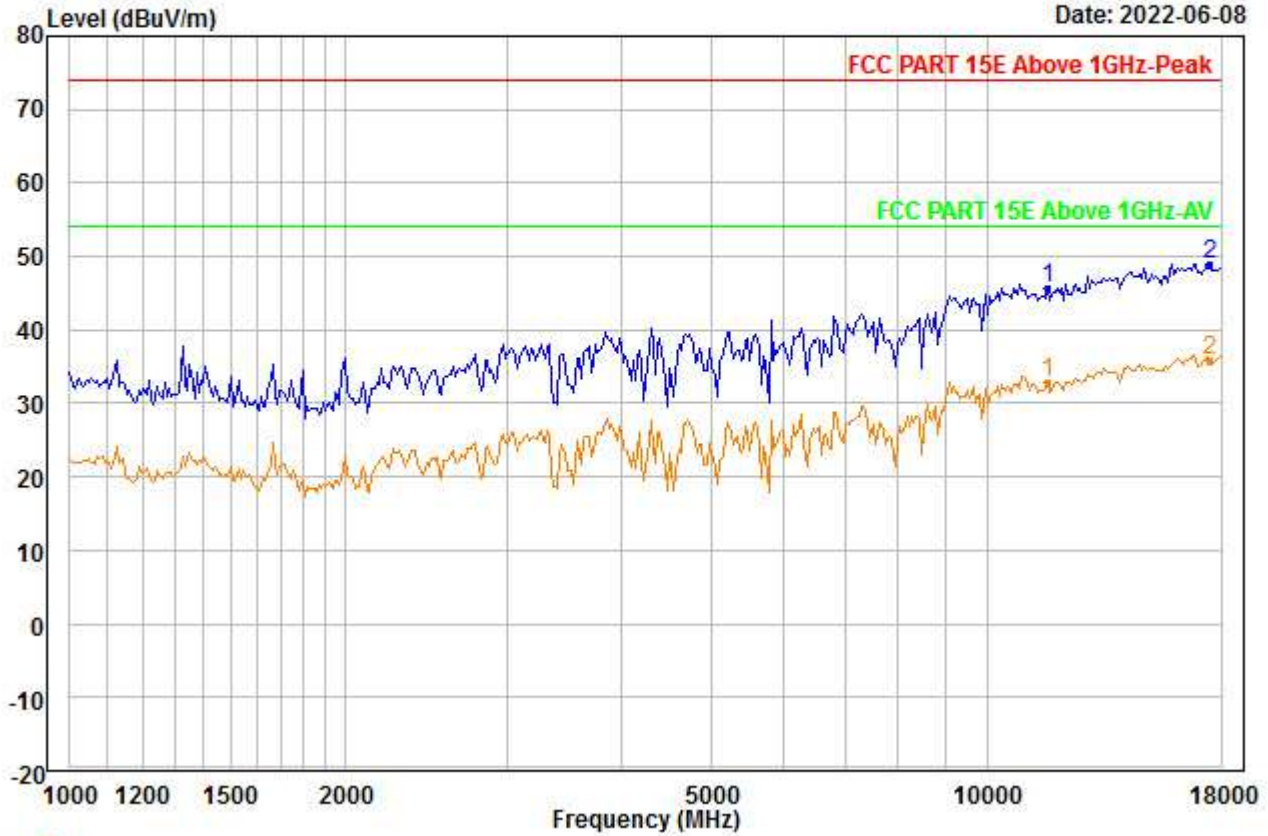


Trace: 1

Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT1\_5825  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 11650.000	38.45	38.99	46.07	0.00	14.39	45.76	74.00	-28.24	---	---	Peak
2 PP17475.000	35.48	42.11	46.63	0.00	17.98	48.94	74.00	-25.06	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00050.EMI

Date: 2022-06-08

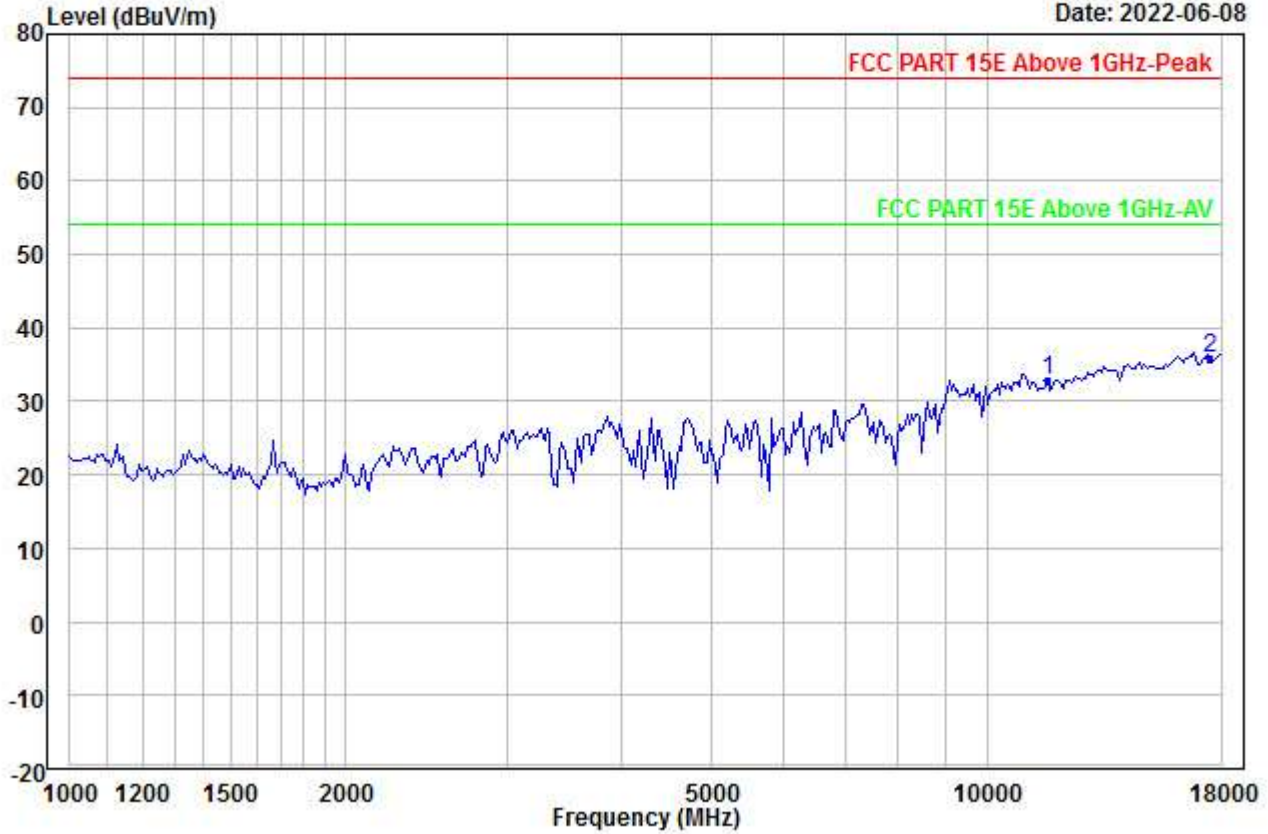


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT1\_5825  
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11650.000	25.59	38.99	46.07	0.00	14.39	32.90	54.00	-21.10	---	---	Aver
2	PP17475.000	22.51	42.11	46.63	0.00	17.98	35.97	54.00	-18.03	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00051.EMI

Date: 2022-06-08

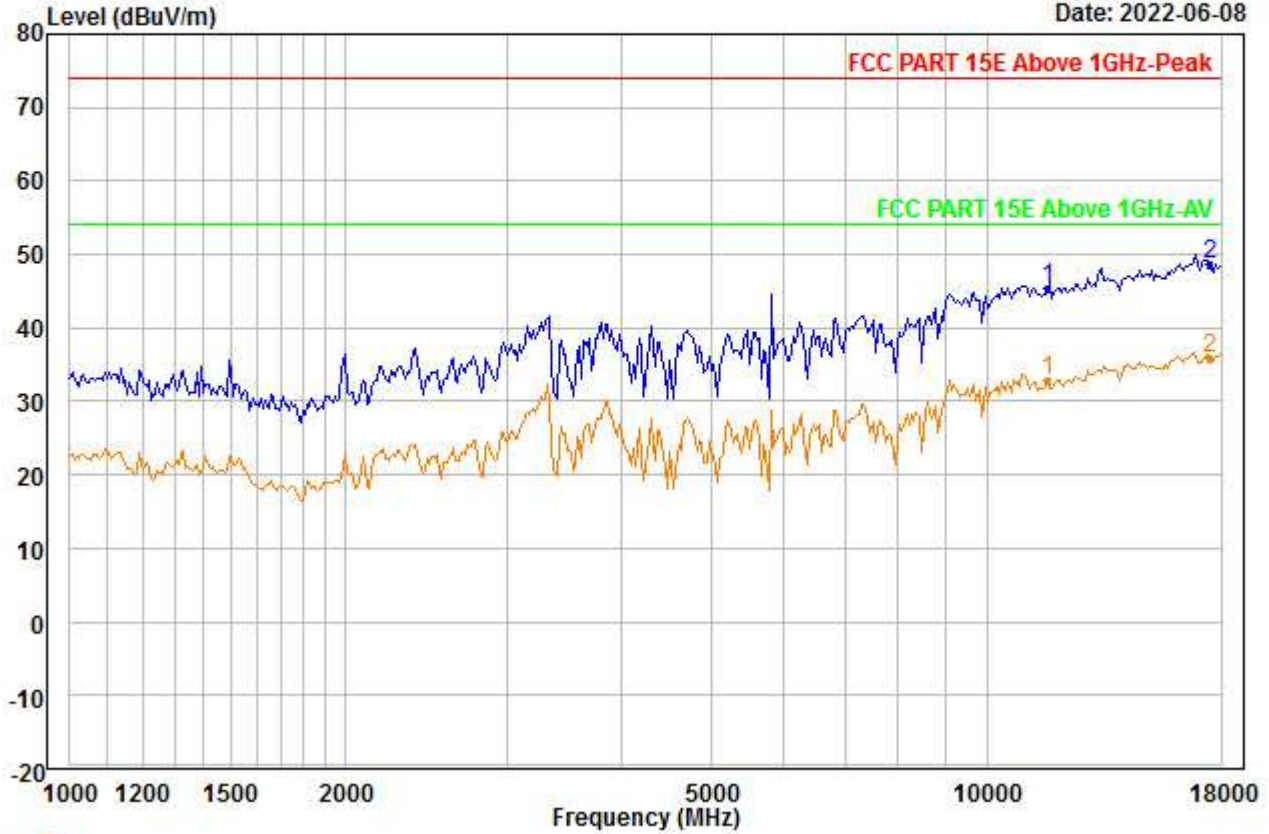


Trace: 1

Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT1\_5825  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 11650.000	38.20	38.99	46.07	0.00	14.39	45.51	74.00	-28.49	---	---	Peak
2 PP17475.000	35.08	42.11	46.63	0.00	17.98	48.54	74.00	-25.46	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00052.EMI

Date: 2022-06-08

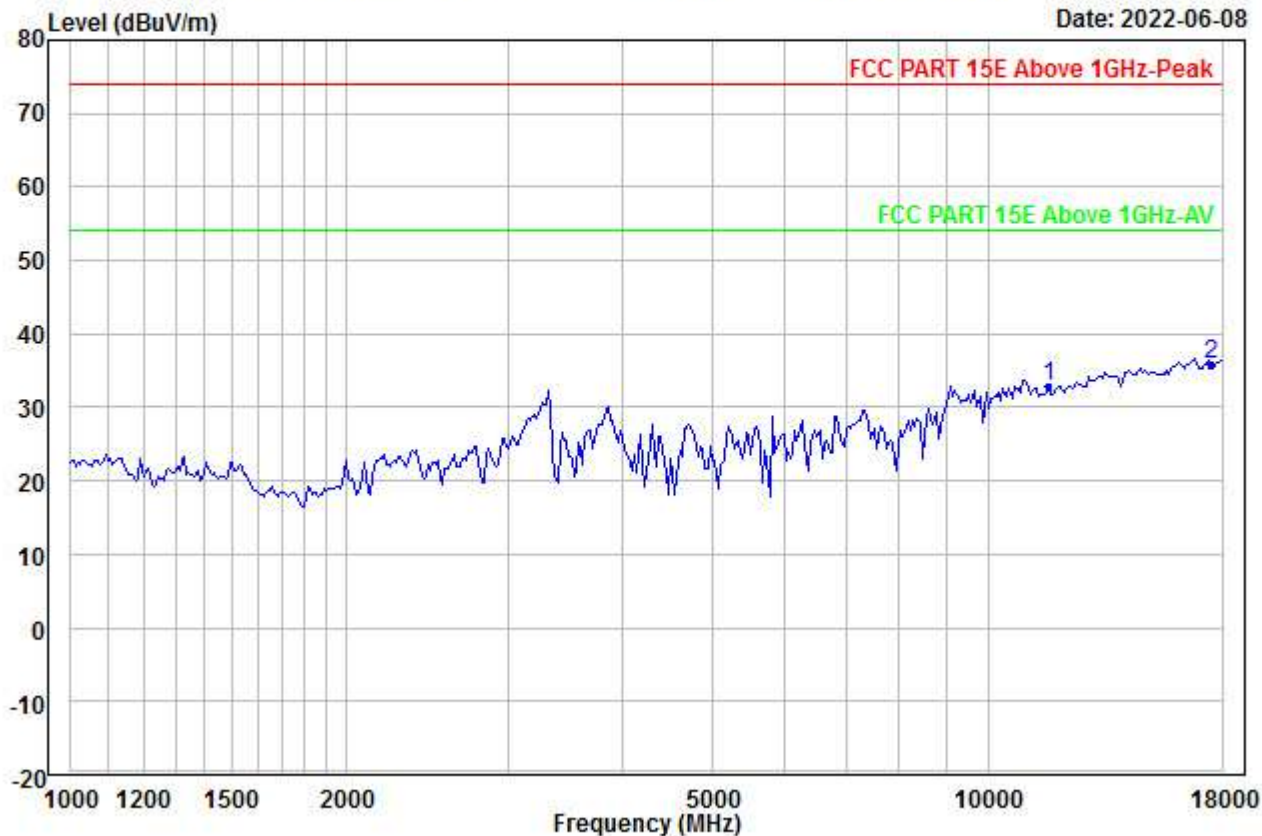


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT1\_5825  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 11650.000	25.59	38.99	46.07	0.00	14.39	32.90	54.00	-21.10	---	---	Aver
2 PP17475.000	22.51	42.11	46.63	0.00	17.98	35.97	54.00	-18.03	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00053.EMI

Date: 2022-06-08

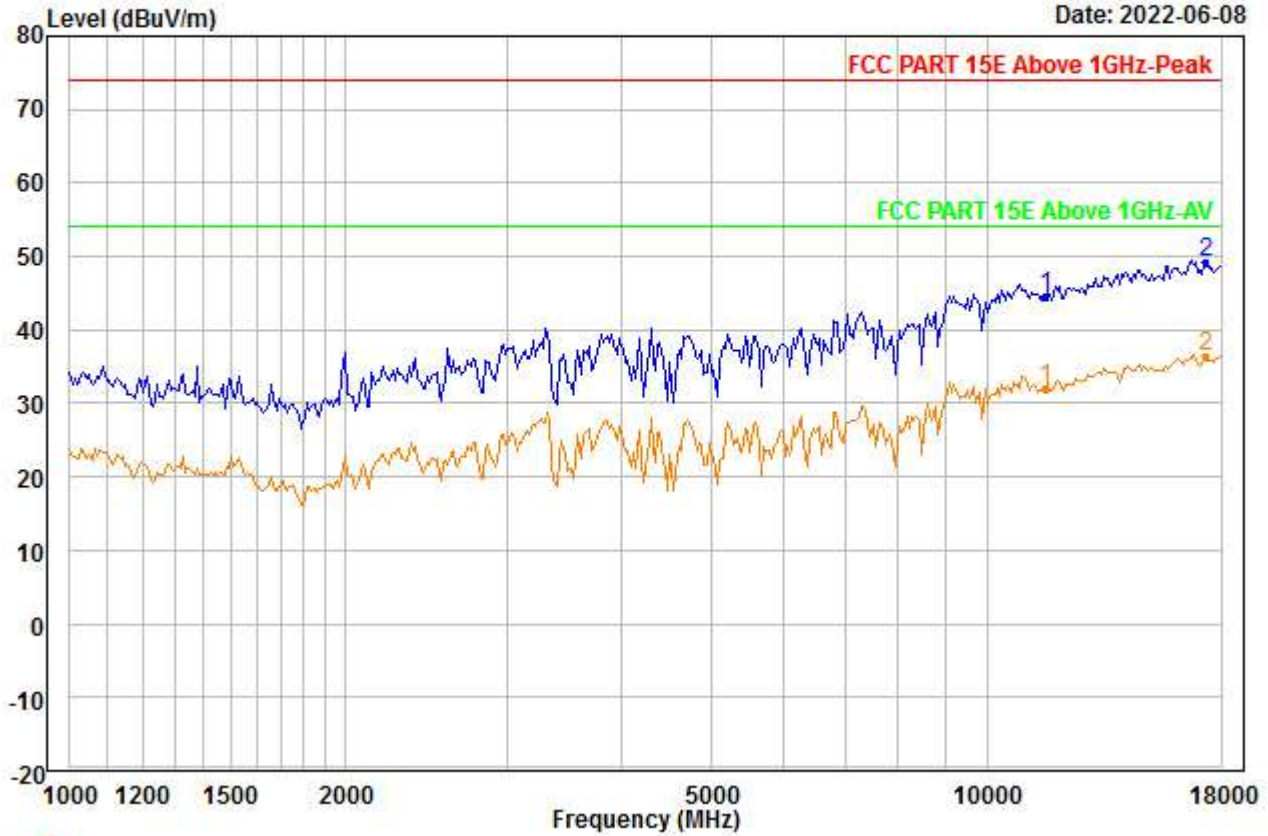


Trace: 1

Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT1\_5785  
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11570.000	37.42	38.94	46.09	0.00	14.34	44.61	74.00	-29.39	---	---	Peak
2	PP17355.000	35.84	42.16	46.77	0.00	17.90	49.13	74.00	-24.87	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00054.EMI

Date: 2022-06-08

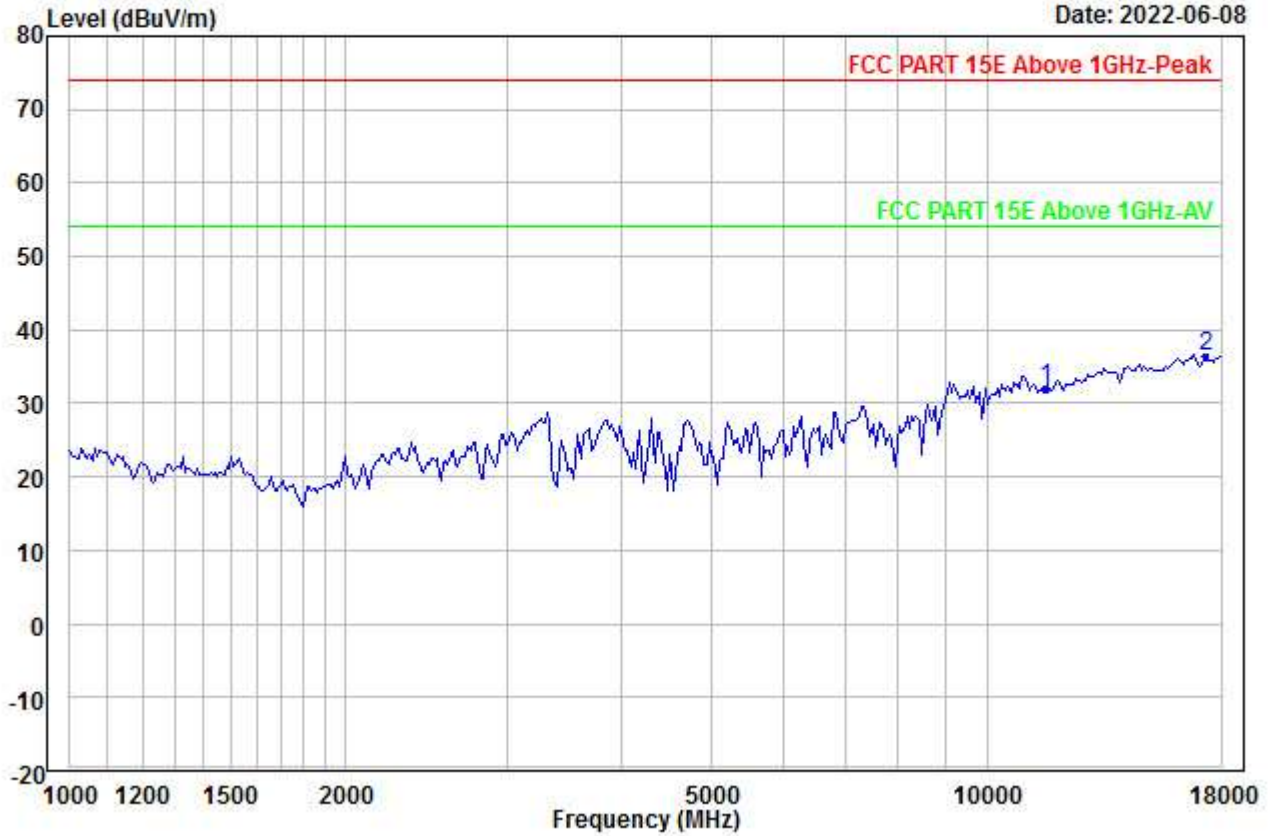


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT1\_5785  
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11570.000	24.81	38.94	46.09	0.00	14.34	32.00	54.00	-22.00	---	---	Aver
2	PP17355.000	23.17	42.16	46.77	0.00	17.90	36.46	54.00	-17.54	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00055.EMI

Date: 2022-06-08

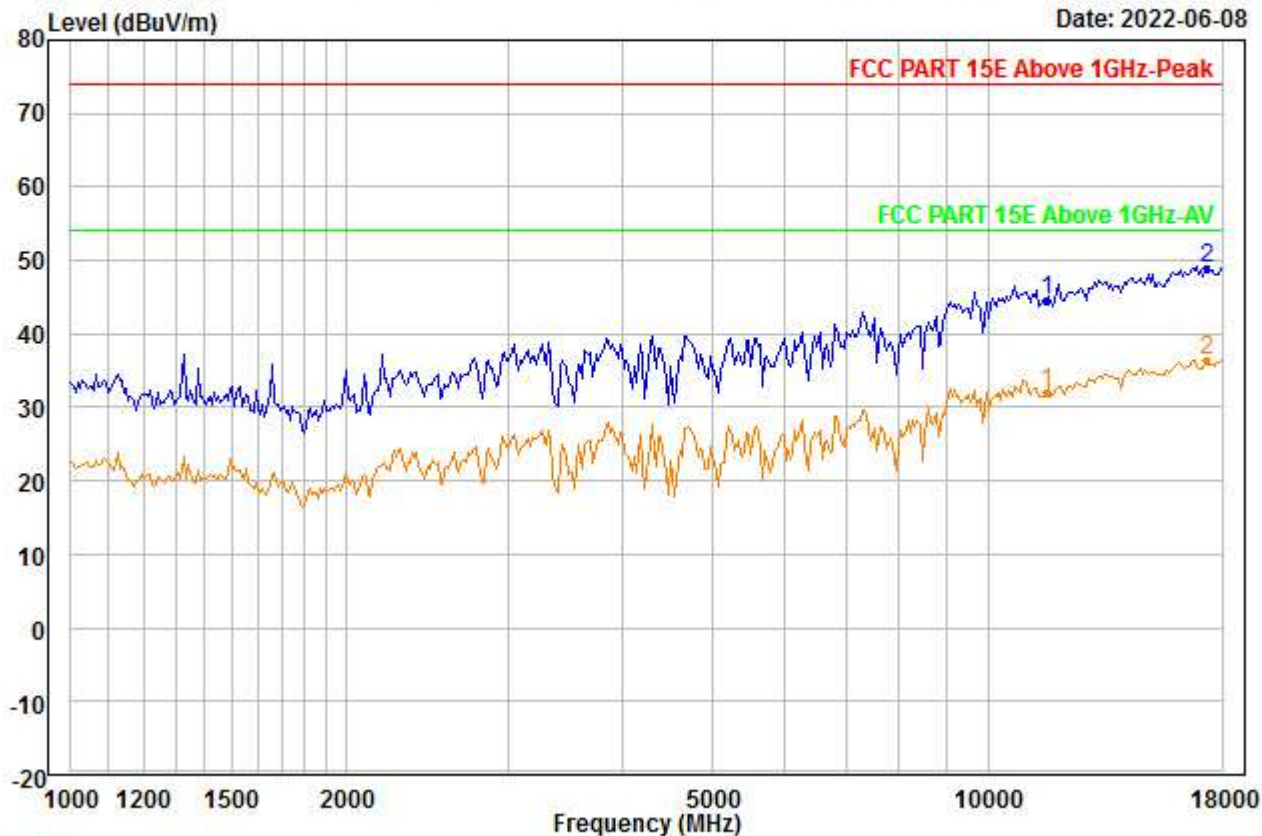


Trace: 1

Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT1\_5785  
 Remark :

	Read Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11570.000	37.30	38.94	46.09	0.00	14.34	44.49	74.00	-29.51	---	---	Peak
2	PP17355.000	35.58	42.16	46.77	0.00	17.90	48.87	74.00	-25.13	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00056.EMI

Date: 2022-06-08

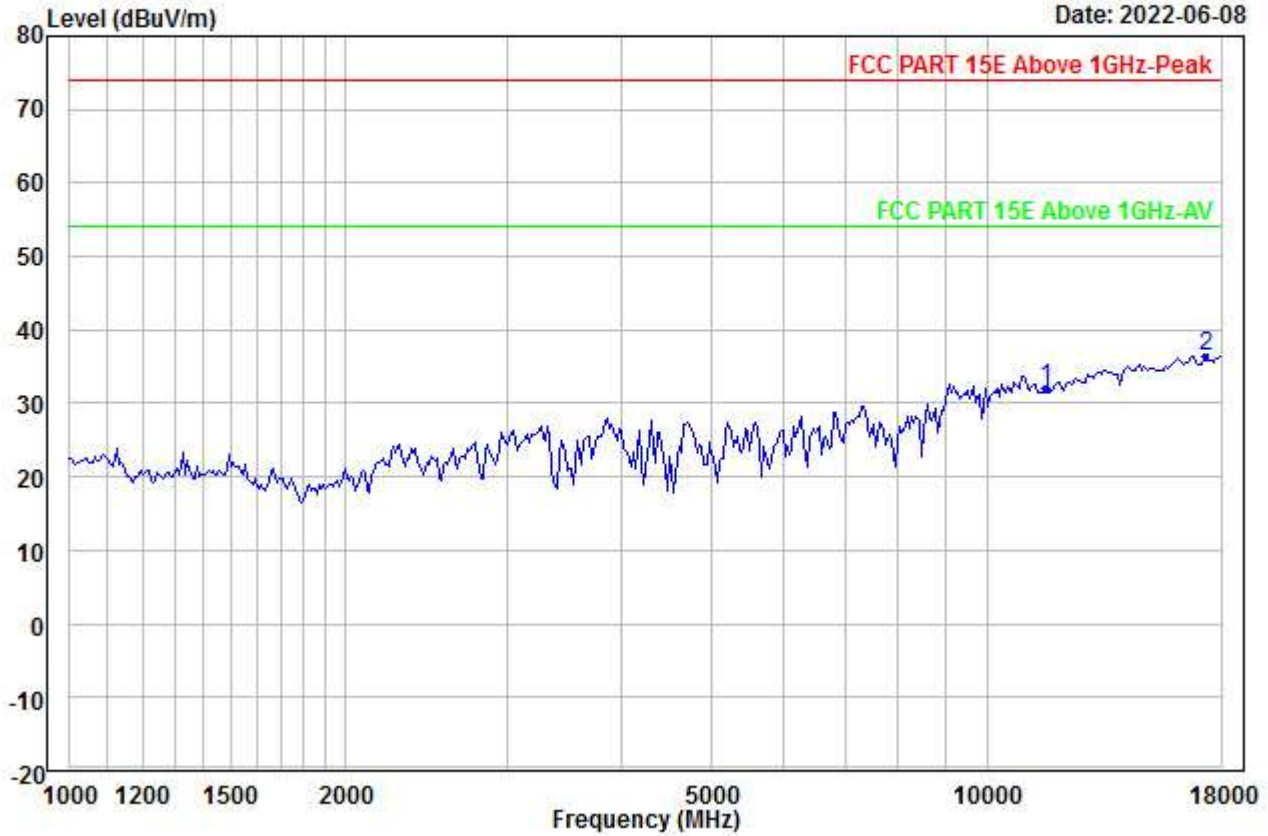


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT1\_5785  
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11570.000	24.89	38.94	46.09	0.00	14.34	32.08	54.00	-21.92	---	---	Aver
2	PP17355.000	23.17	42.16	46.77	0.00	17.90	36.46	54.00	-17.54	---	---	Aver



File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00057.EMI

Date: 2022-06-08

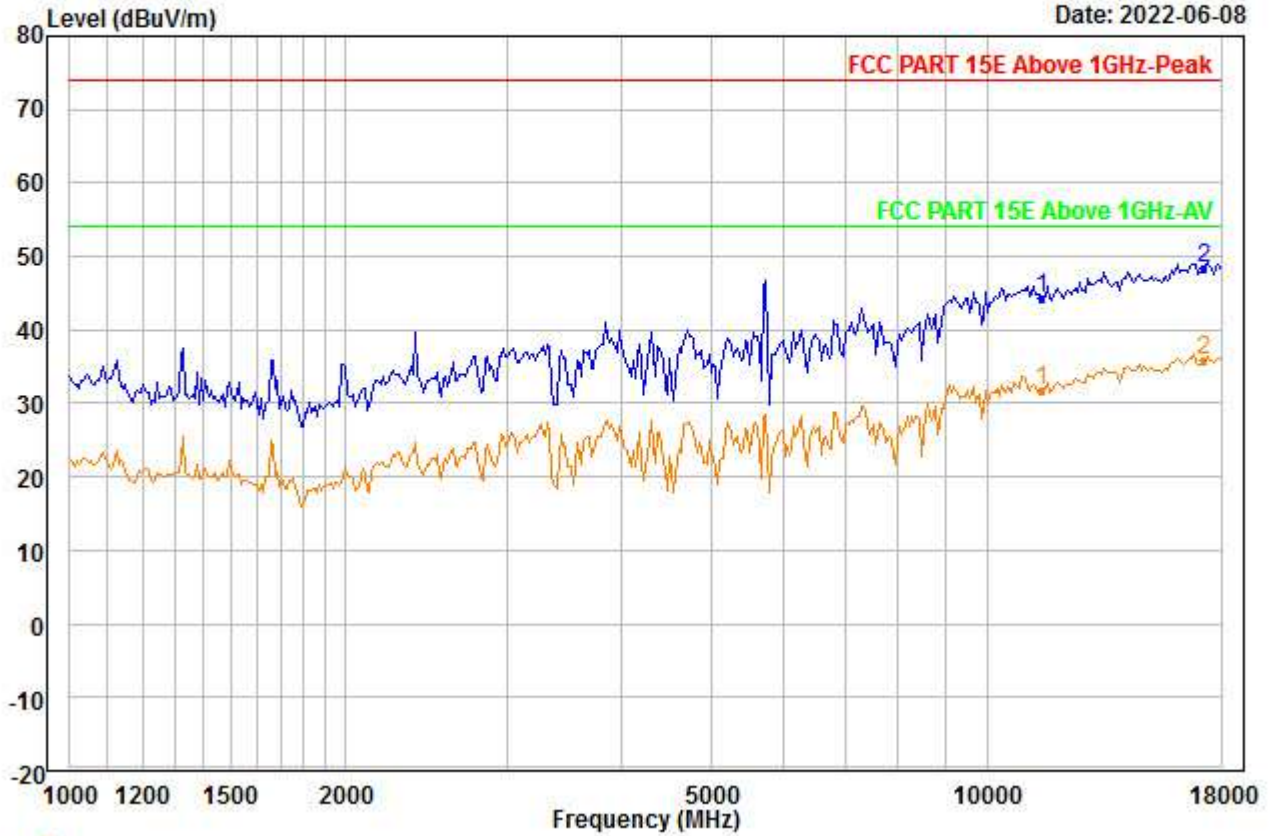


Trace: 1

Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT1\_5745  
 Remark :

	Read Freq	Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11490.000	37.33	38.89	46.08	0.00	14.28	44.42	74.00	-29.58	---	---	Peak
2	PP17235.000	35.28	42.21	46.92	0.00	17.83	48.40	74.00	-25.60	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00058.EMI

Date: 2022-06-08

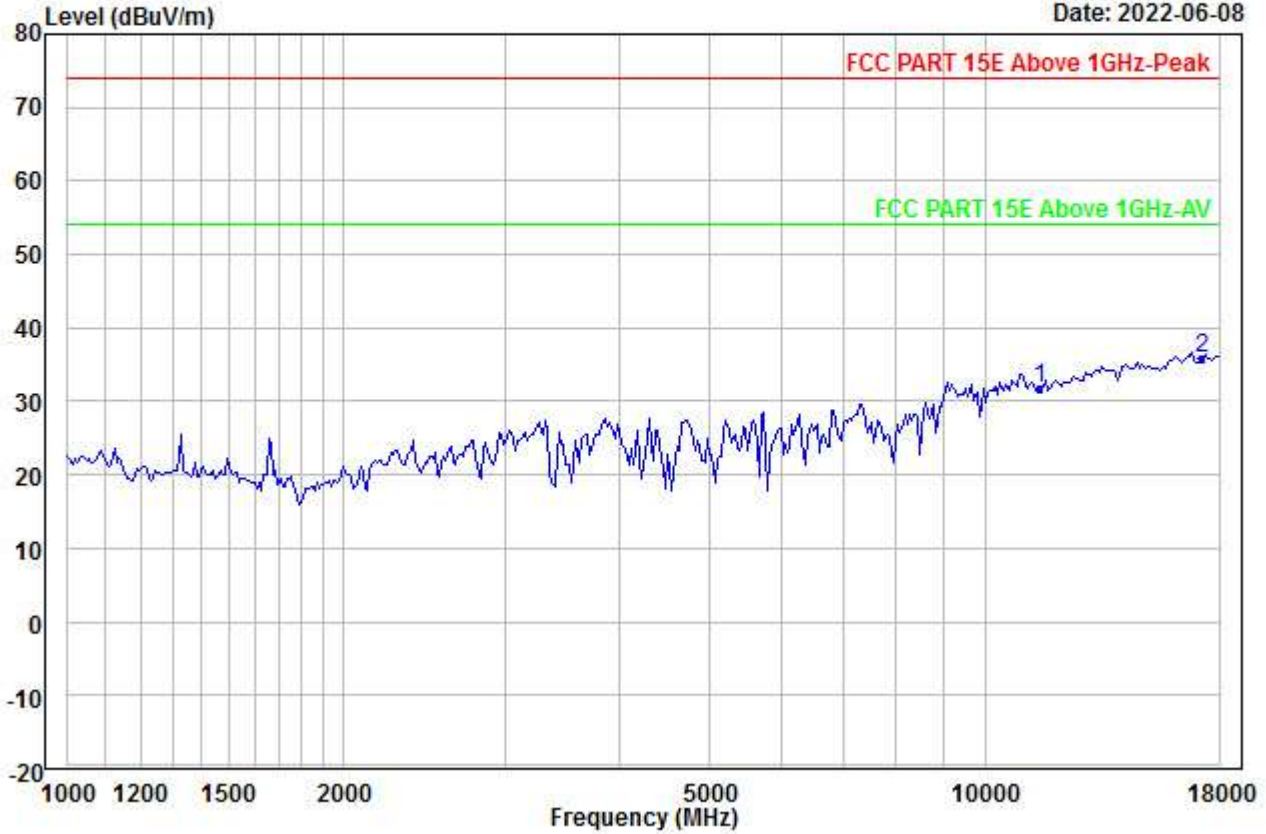


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT1\_5745  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 11490.000	24.81	38.89	46.08	0.00	14.28	31.90	54.00	-22.10	---	---	Aver
2 PP17235.000	22.67	42.21	46.92	0.00	17.83	35.79	54.00	-18.21	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00059.EMI

Date: 2022-06-08

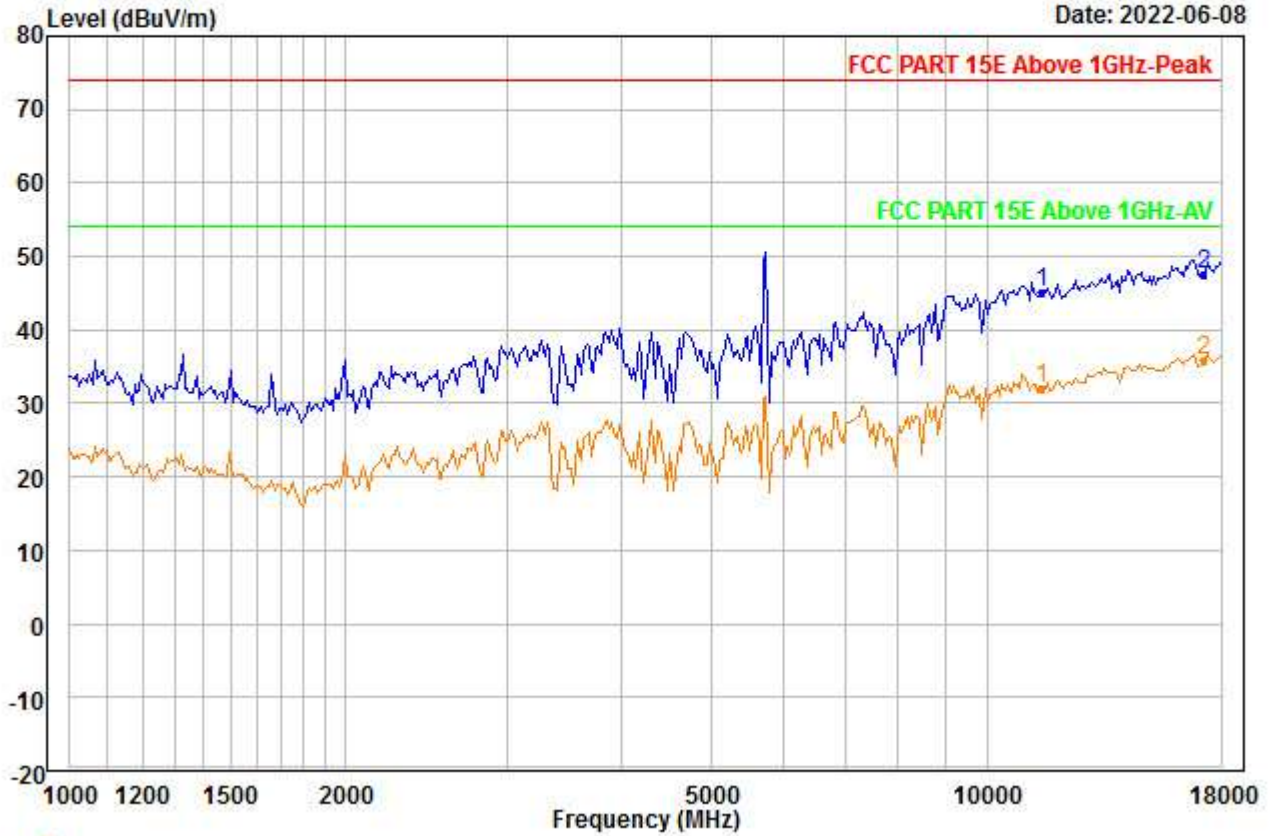


Trace: 1

Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT1\_5745  
 Remark :

	Read Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11490.000	38.13	38.89	46.08	0.00	14.28	45.22	74.00	-28.78	---	---	Peak
2	PP17235.000	34.55	42.21	46.92	0.00	17.83	47.67	74.00	-26.33	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00060.EMI

Date: 2022-06-08

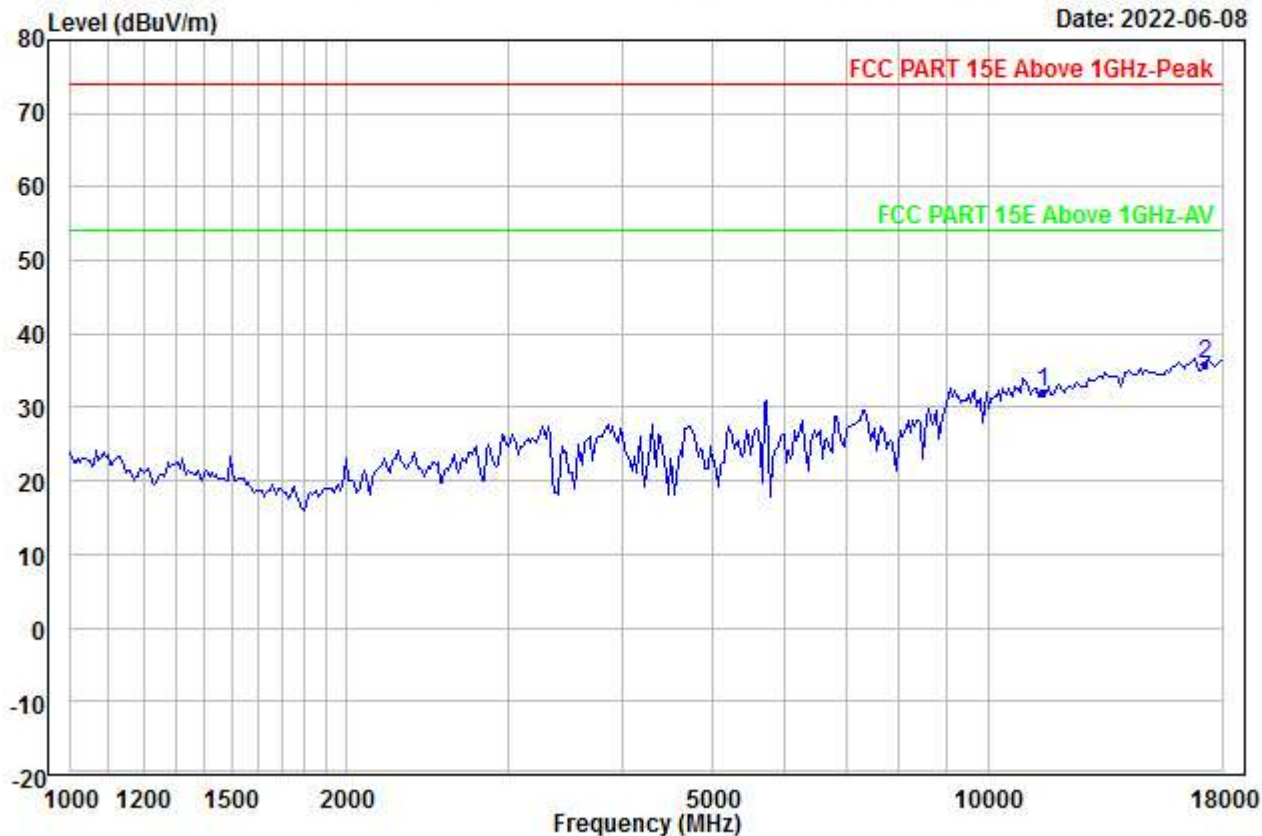


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT1\_5745  
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11490.000	24.89	38.89	46.08	0.00	14.28	31.98	54.00	-22.02	---	---	Aver
2	PP17235.000	22.78	42.21	46.92	0.00	17.83	35.90	54.00	-18.10	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00061.EMI

Date: 2022-06-08

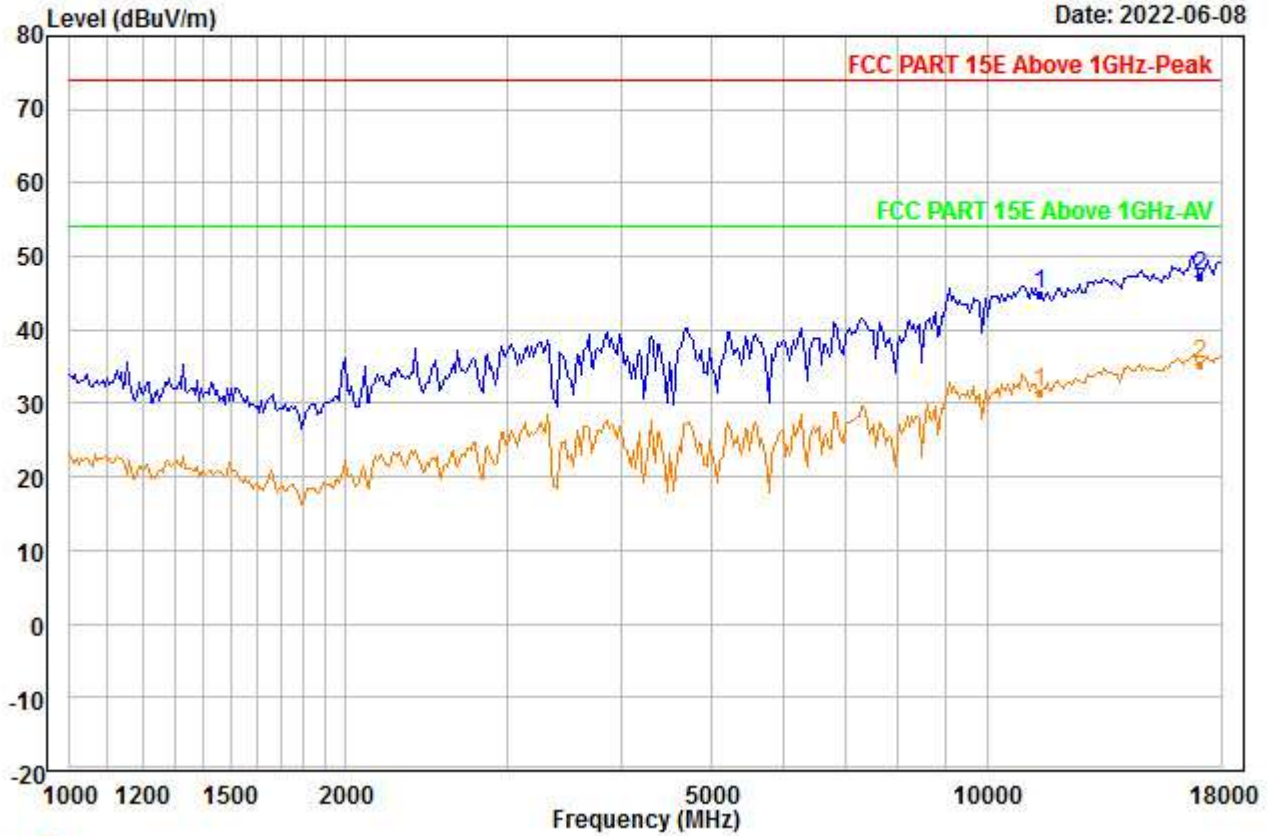


Trace: 1

Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT1\_5700  
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11400.000	37.57	38.82	45.88	0.00	14.21	44.72	74.00	-29.28	---	---	Peak
2	PP17100.000	34.44	42.26	47.08	0.00	17.74	47.36	74.00	-26.64	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00062.EMI

Date: 2022-06-08

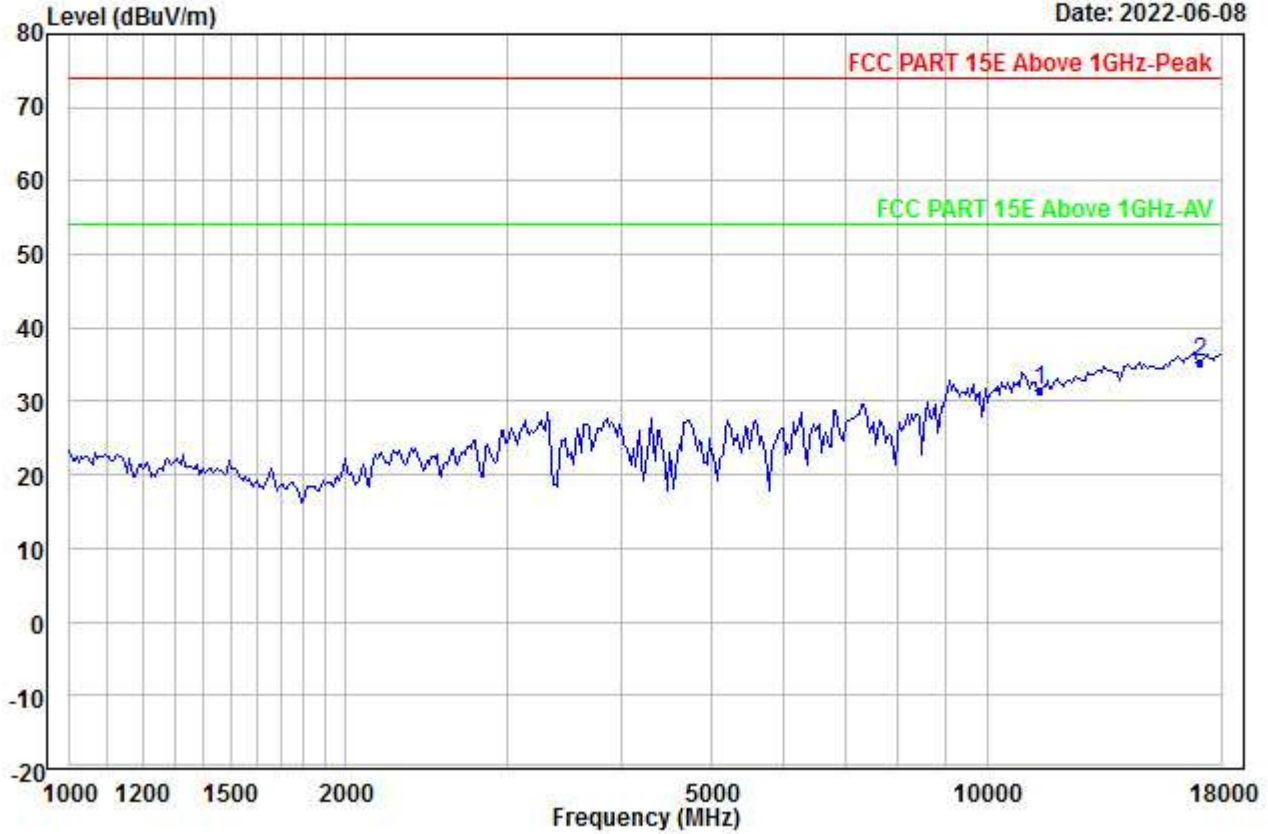


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT1\_5700  
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11400.000	24.44	38.82	45.88	0.00	14.21	31.59	54.00	-22.41	---	---	Aver
2	PP17100.000	22.26	42.26	47.08	0.00	17.74	35.18	54.00	-18.82	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00063.EMI

Date: 2022-06-08

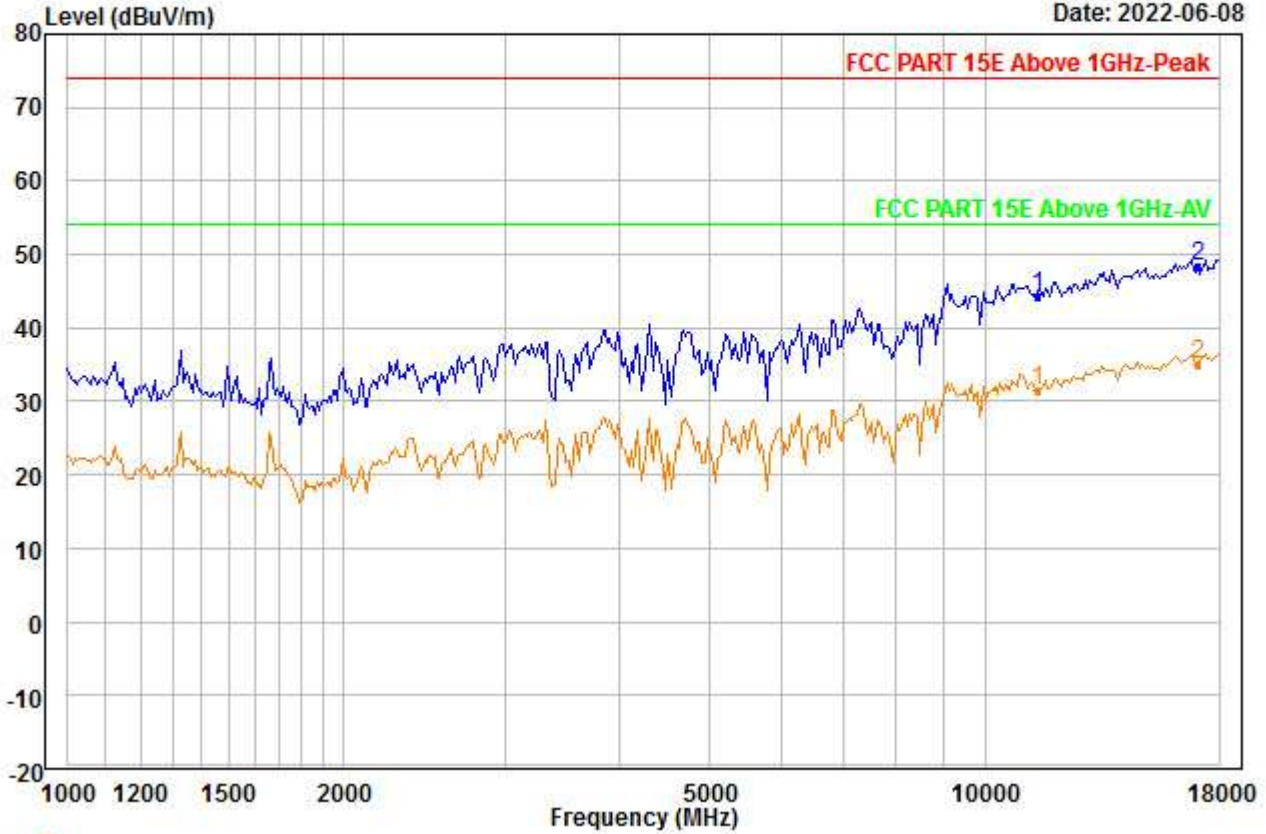


Trace: 1

Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT1\_5700  
 Remark :

	Read Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11400.000	37.07	38.82	45.88	0.00	14.21	44.22	74.00	-29.78	---	---	Peak
2	PP17100.000	35.40	42.26	47.08	0.00	17.74	48.32	74.00	-25.68	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00064.EMI

Date: 2022-06-08

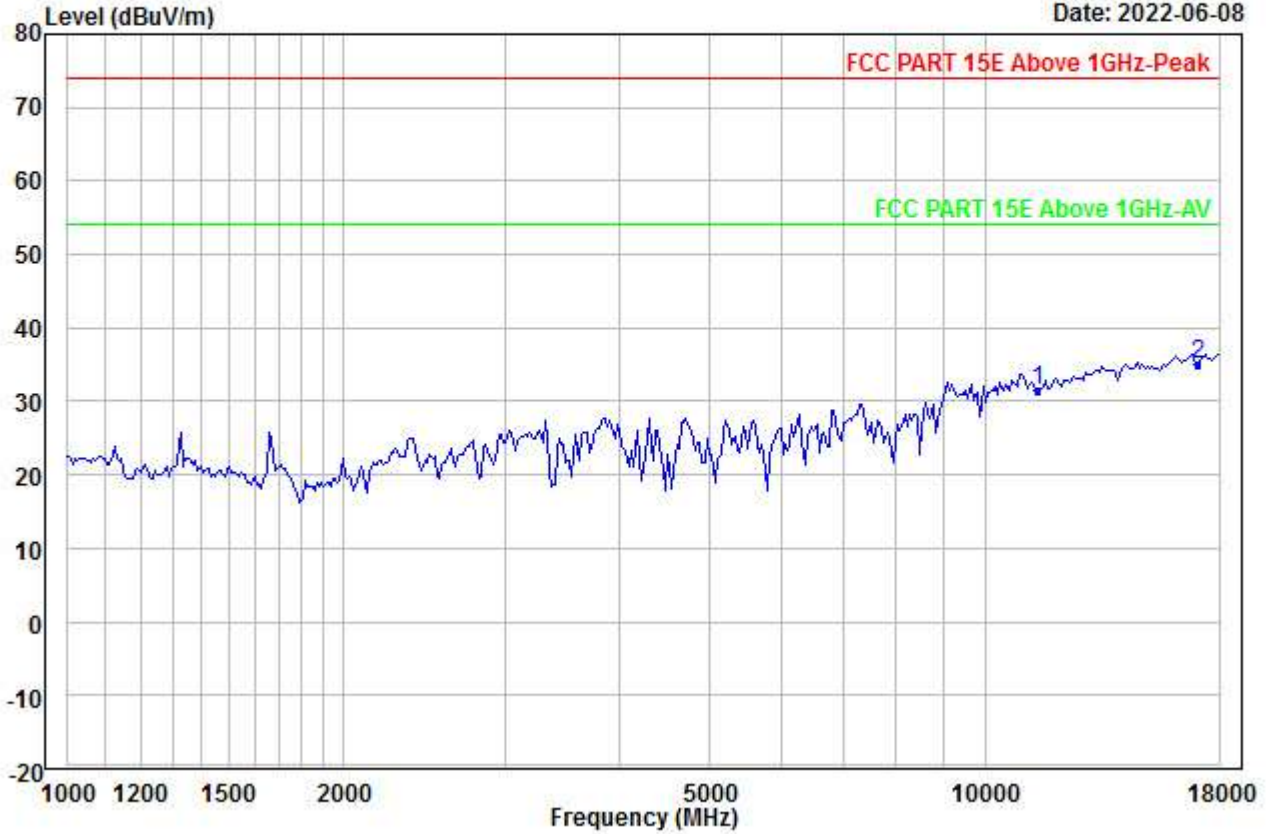


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT1\_5700  
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11400.000	24.27	38.82	45.88	0.00	14.21	31.42	54.00	-22.58	---	---	Aver
2	PP17100.000	22.15	42.26	47.08	0.00	17.74	35.07	54.00	-18.93	---	---	Aver



File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00065.EMI

Date: 2022-06-08

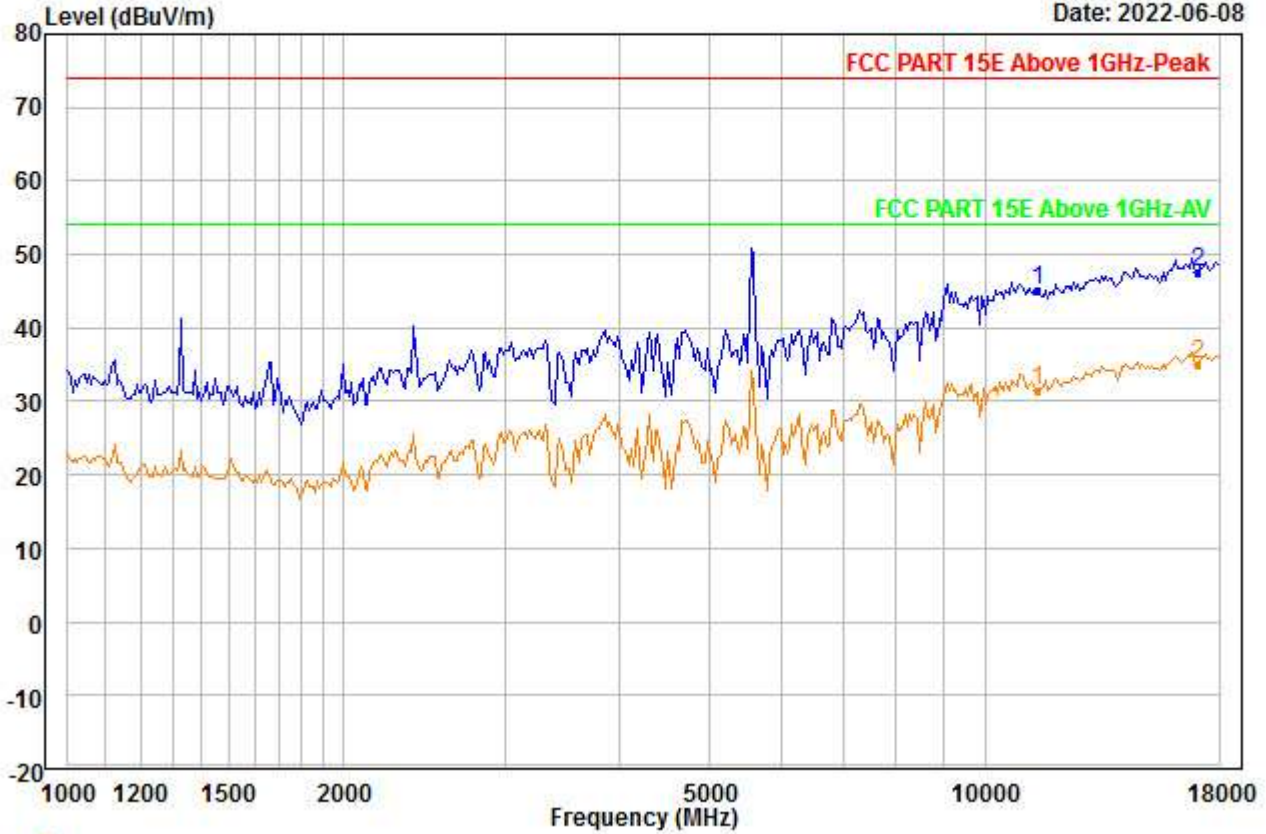


Trace: 1

Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT1\_5580  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 11400.000	38.07	38.82	45.88	0.00	14.21	45.22	74.00	-28.78	---	---	Peak
2 PP17100.000	34.68	42.26	47.08	0.00	17.74	47.60	74.00	-26.40	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\RSE\4\_00066.EMI

Date: 2022-06-08

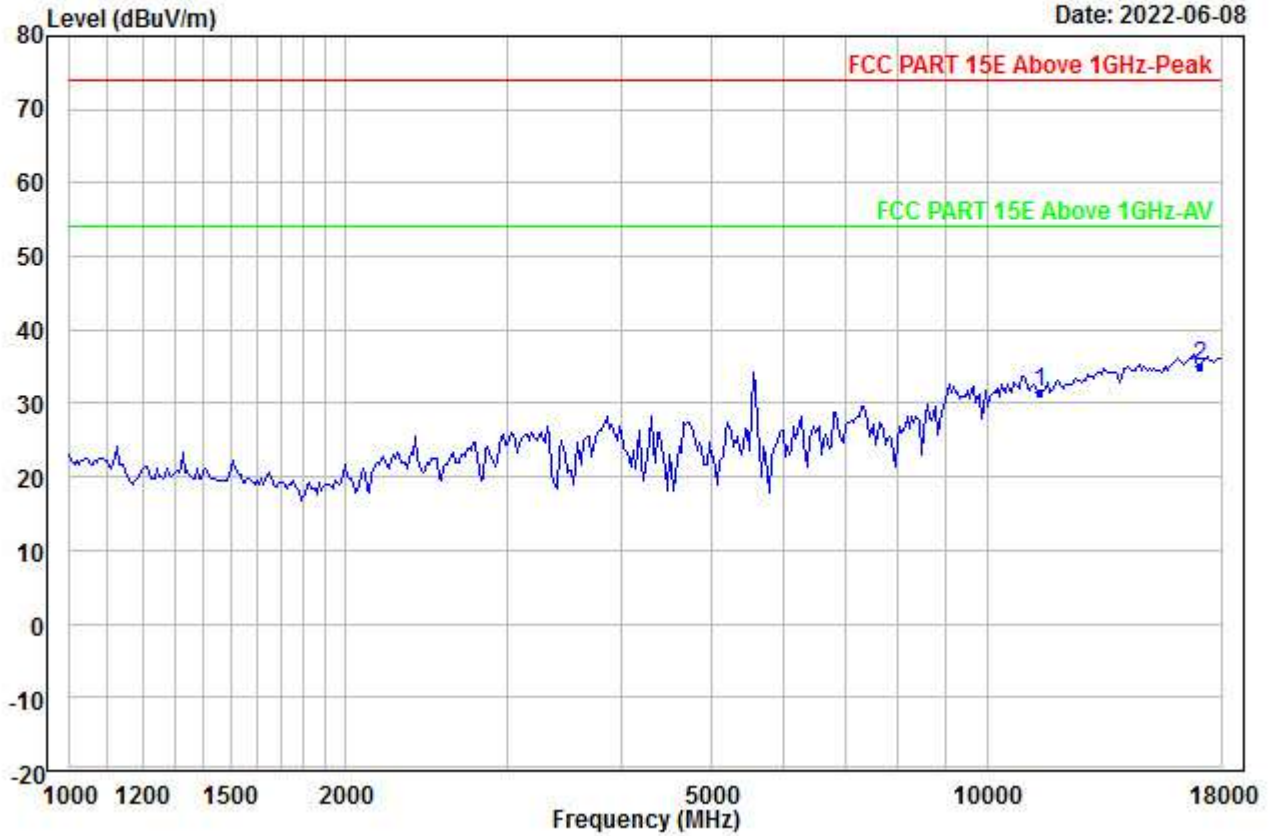


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT1\_5580  
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11400.000	24.27	38.82	45.88	0.00	14.21	31.42	54.00	-22.58	---	---	Aver
2	PP17100.000	22.15	42.26	47.08	0.00	17.74	35.07	54.00	-18.93	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00067.EMI

Date: 2022-06-08

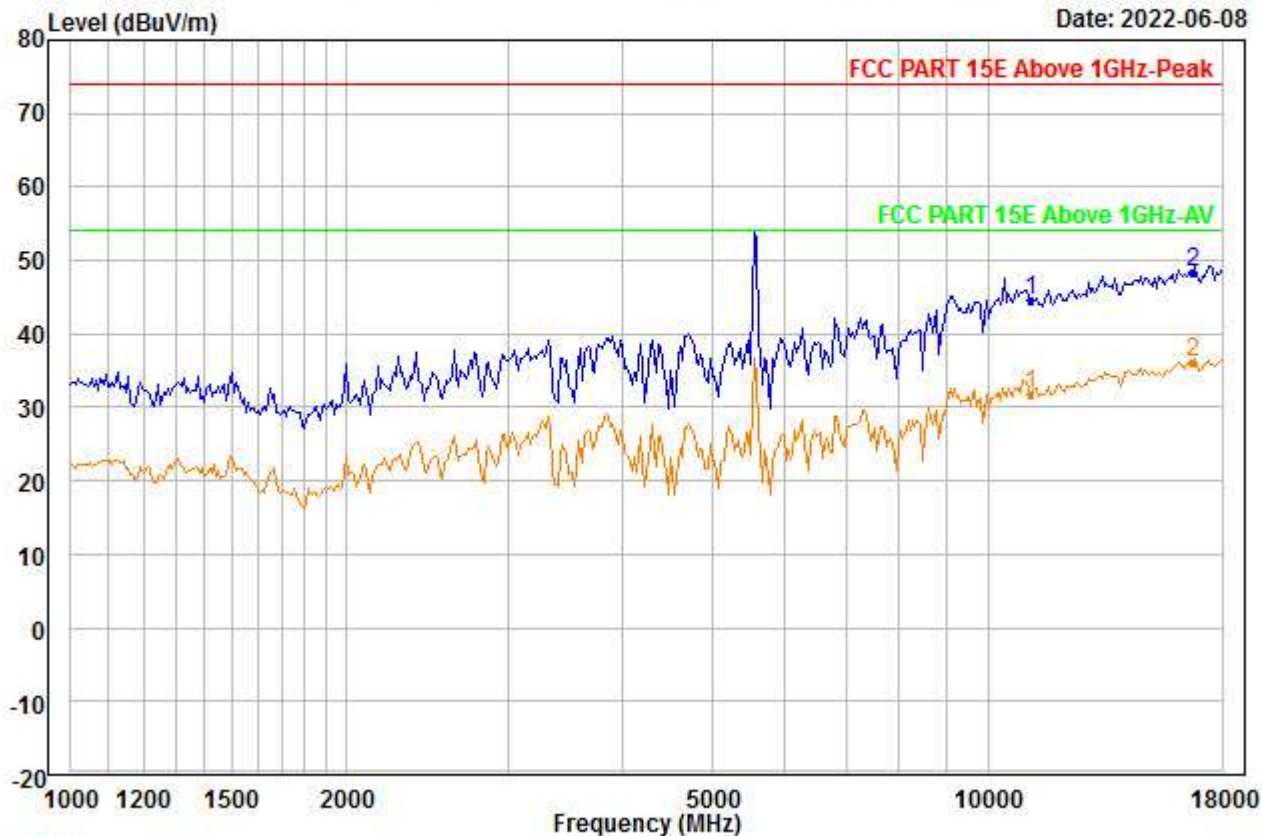


Trace: 1

Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT1\_5580  
 Remark :

	Read Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11160.000	37.30	38.63	45.35	0.00	14.04	44.62	74.00	-29.38	---	---	Peak
2	PP16740.000	35.84	41.88	46.89	0.00	17.56	48.39	74.00	-25.61	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00068.EMI

Date: 2022-06-08

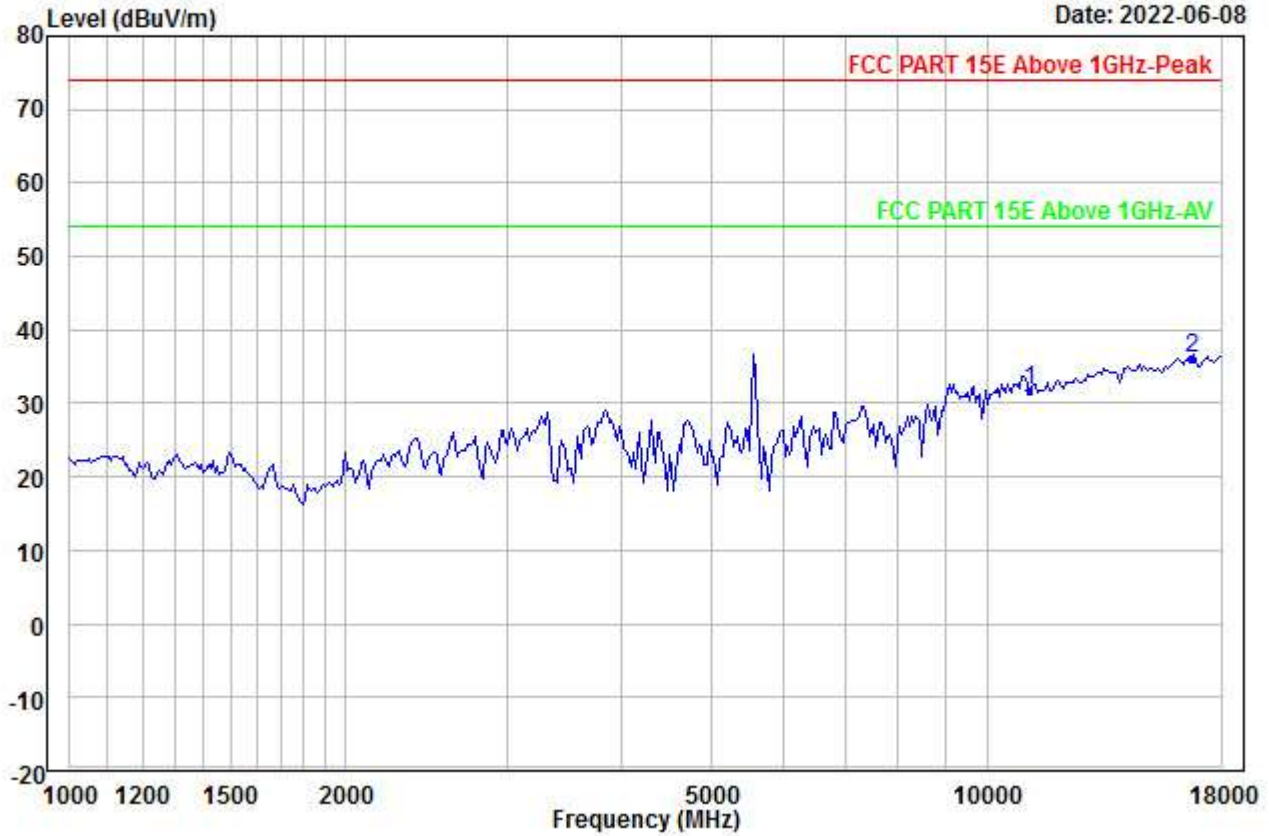


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT1\_5580  
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11160.000	24.36	38.63	45.35	0.00	14.04	31.68	54.00	-22.32	---	---	Aver
2	PP16740.000	23.68	41.88	46.89	0.00	17.56	36.23	54.00	-17.77	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00069.EMI

Date: 2022-06-08

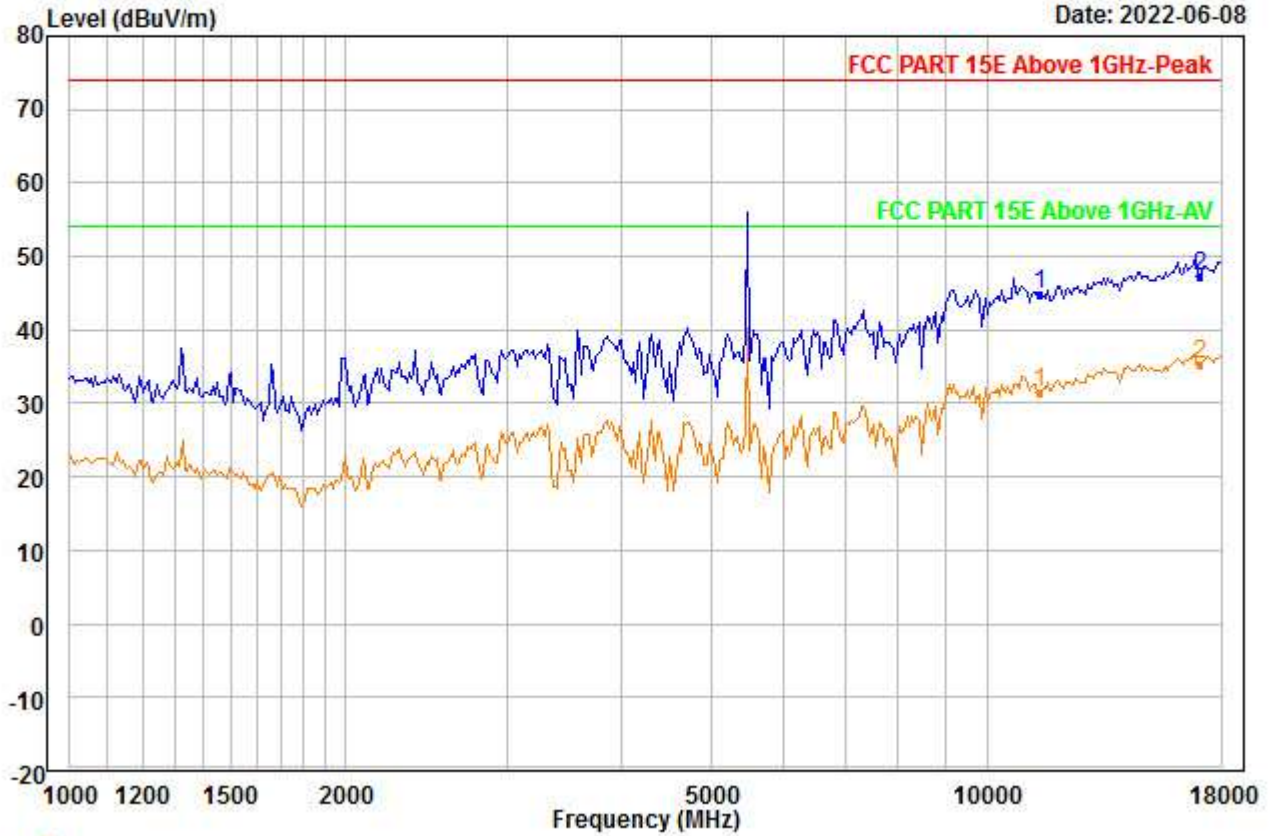


Trace: 1

Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT1\_5500  
 Remark :

	Read Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11400.000	37.66	38.82	45.88	0.00	14.21	44.81	74.00	-29.19	---	---	Peak
2	PP17100.000	34.27	42.26	47.08	0.00	17.74	47.19	74.00	-26.81	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00070.EMI

Date: 2022-06-08

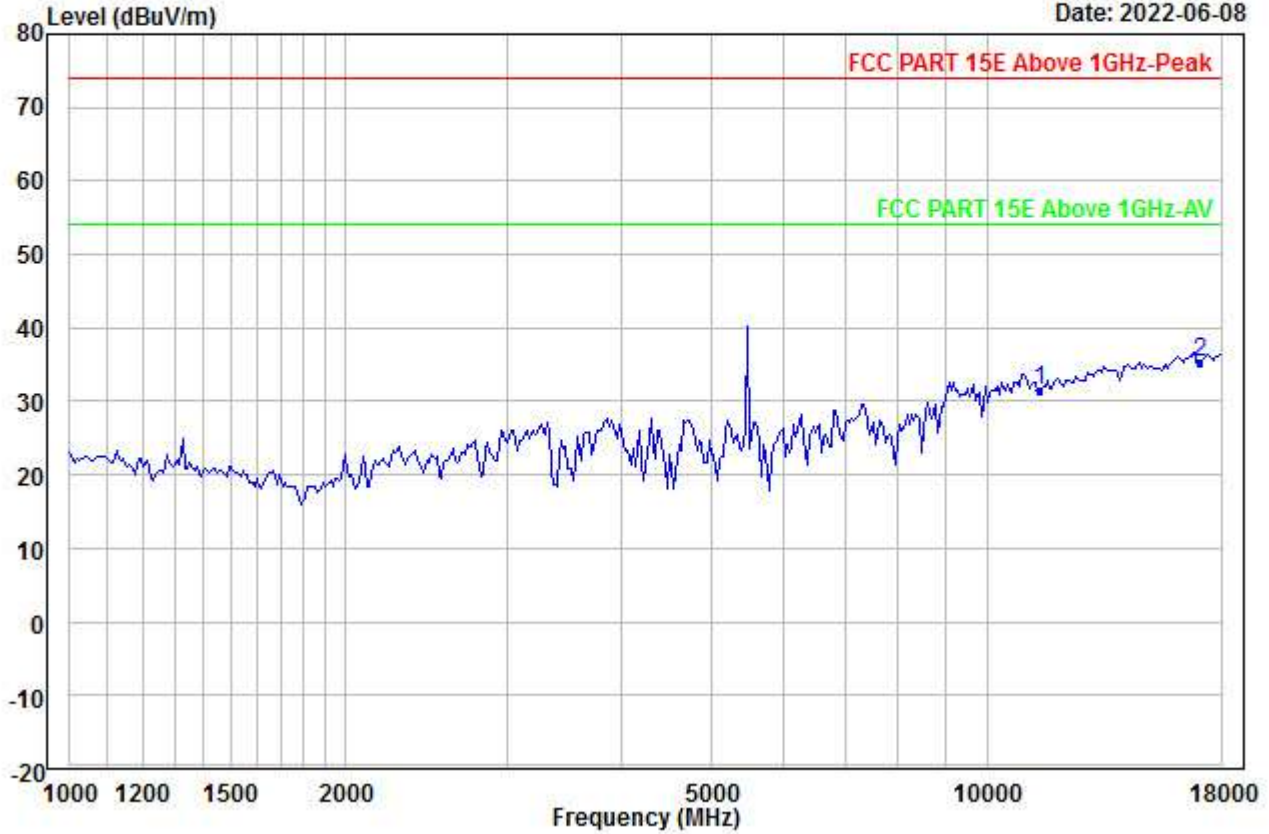


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT1\_5500  
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11400.000	24.36	38.82	45.88	0.00	14.21	31.51	54.00	-22.49	---	---	Aver
2	PP17100.000	22.26	42.26	47.08	0.00	17.74	35.18	54.00	-18.82	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\RSE\4\_00071.EMI

Date: 2022-06-08

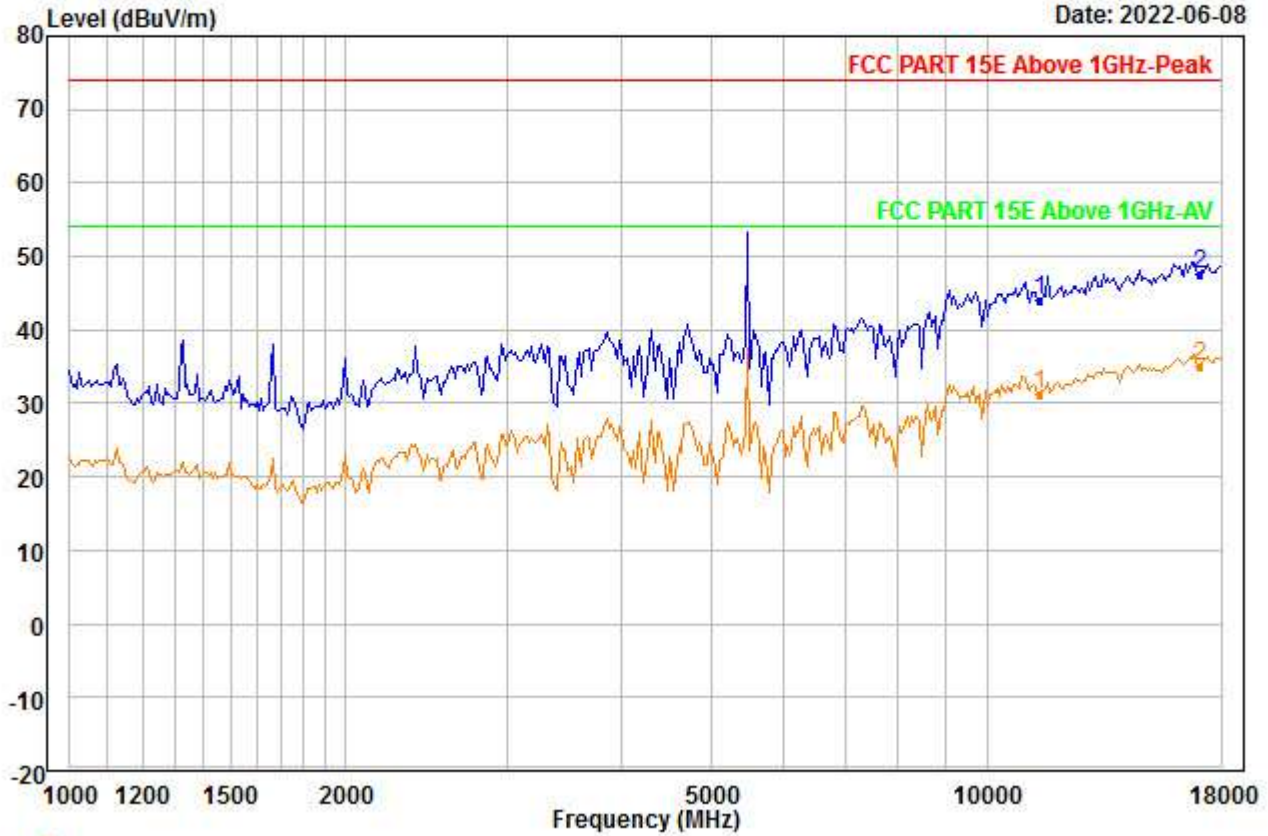


Trace: 1

Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT1\_5500  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 11400.000	36.91	38.82	45.88	0.00	14.21	44.06	74.00	-29.94	---	---	Peak
2 PP17100.000	34.79	42.26	47.08	0.00	17.74	47.71	74.00	-26.29	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00072.EMI

Date: 2022-06-08

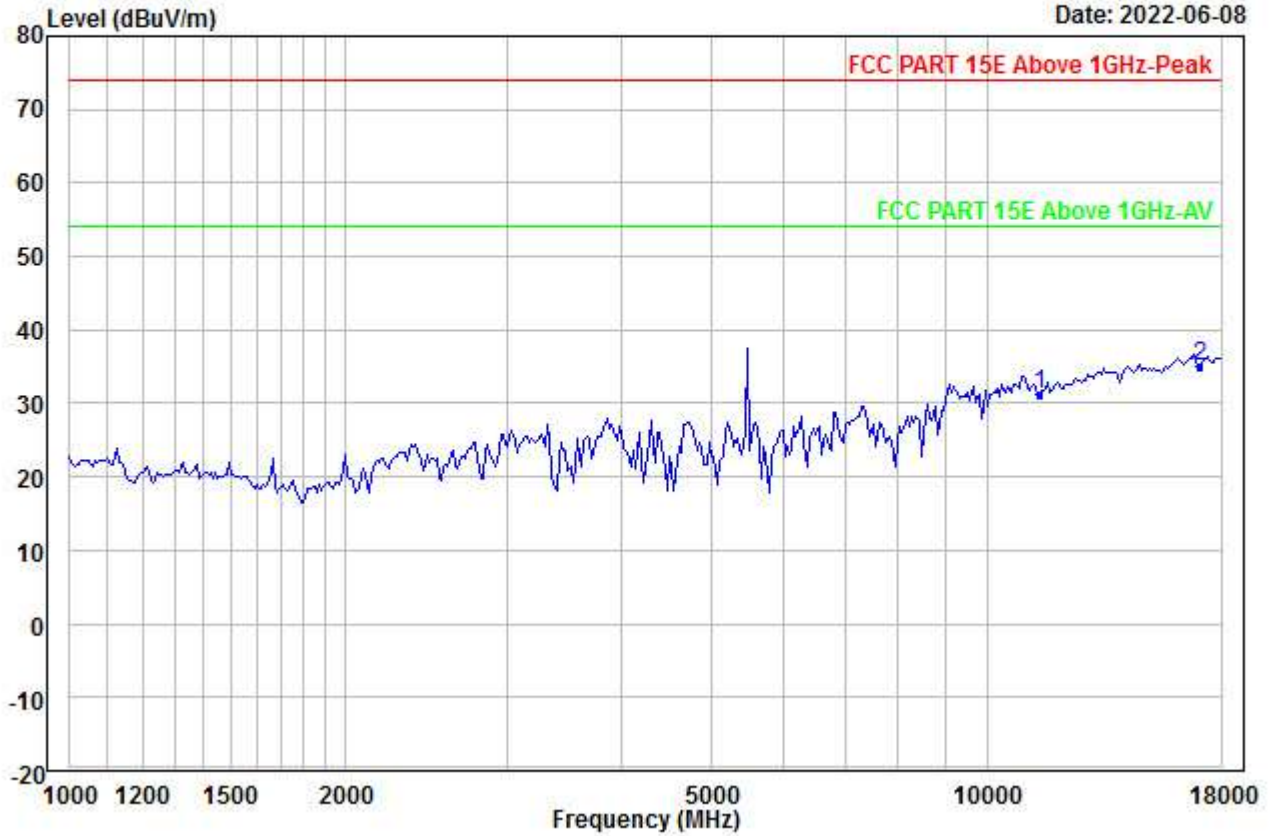


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT1\_5500  
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11400.000	24.18	38.82	45.88	0.00	14.21	31.33	54.00	-22.67	---	---	Aver
2	PP17100.000	22.15	42.26	47.08	0.00	17.74	35.07	54.00	-18.93	---	---	Aver



File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00073.EMI

Date: 2022-06-08

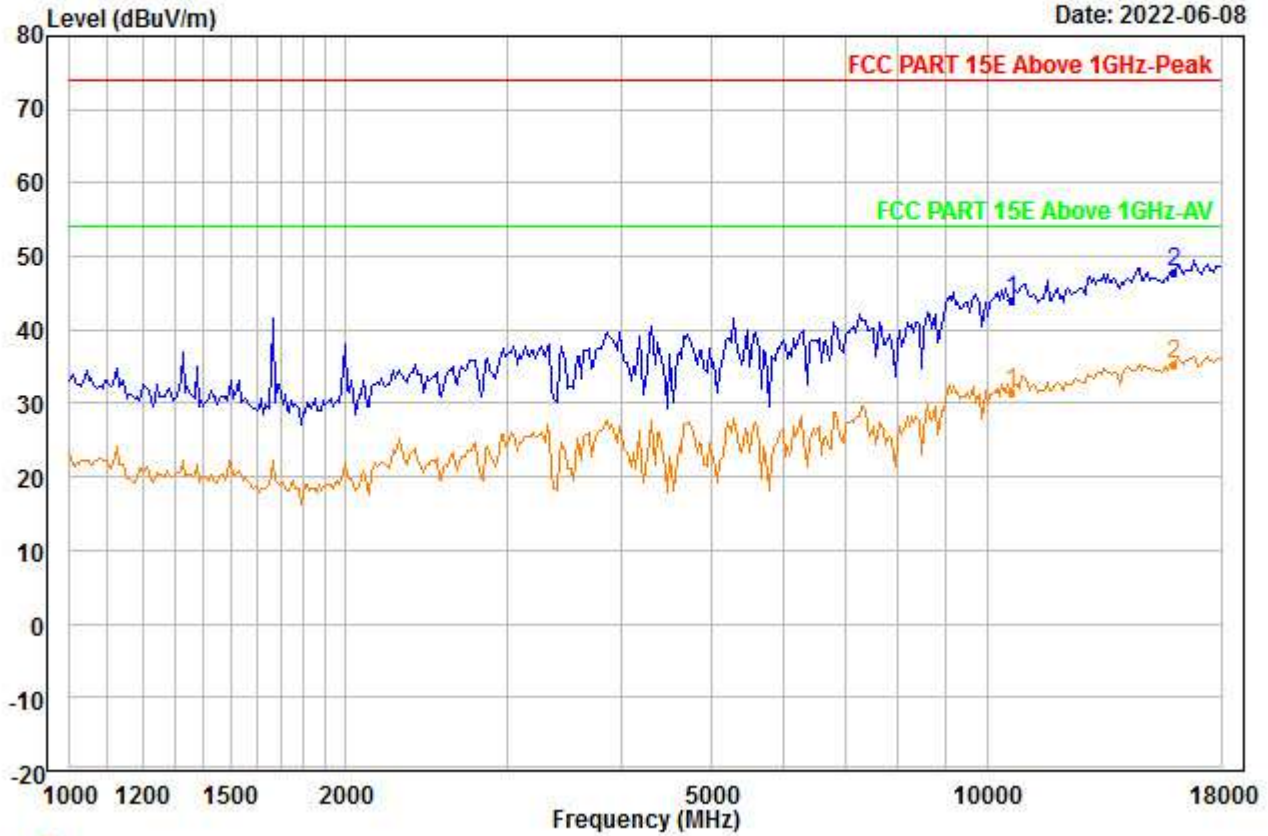


Trace: 1

Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT1\_5320  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10640.000	37.45	38.28	45.65	0.00	14.01	44.09	74.00	-29.91	---	---	Peak
2 PP15960.000	36.08	40.84	46.27	0.00	17.20	47.85	74.00	-26.15	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00074.EMI

Date: 2022-06-08

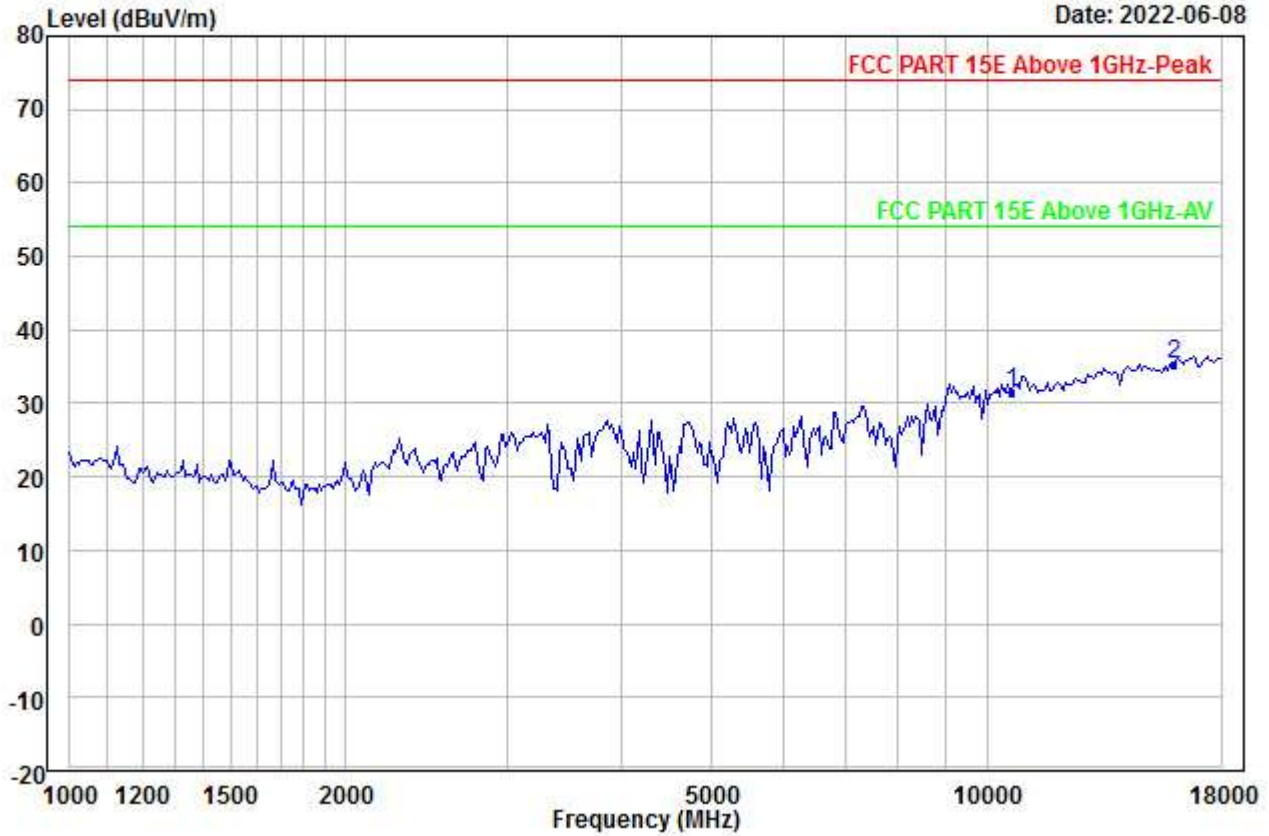


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT1\_5320  
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10640.000	24.83	38.28	45.65	0.00	14.01	31.47	54.00	-22.53	---	---	Aver
2	PP15960.000	23.60	40.84	46.27	0.00	17.20	35.37	54.00	-18.63	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00075.EMI

Date: 2022-06-08

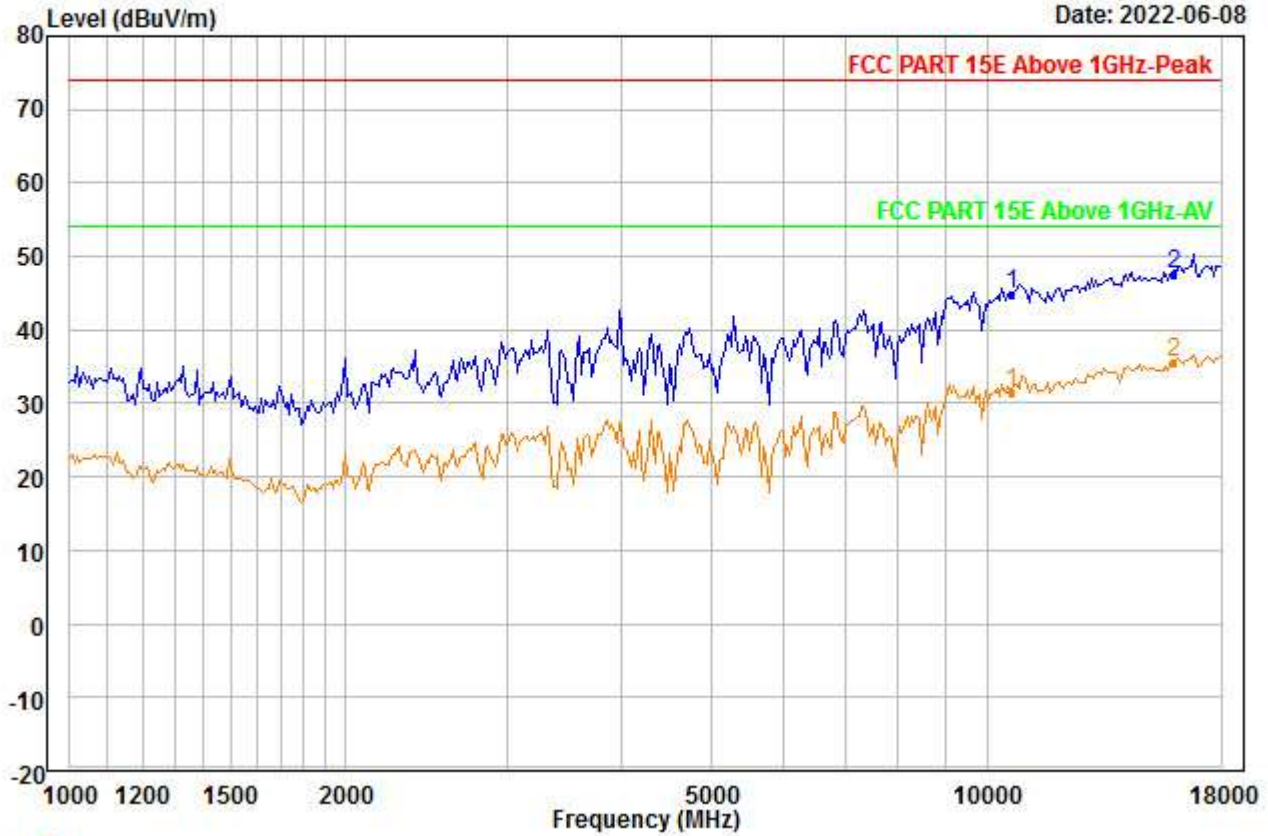


Trace: 1

Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT1\_5320  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10640.000	38.23	38.28	45.65	0.00	14.01	44.87	74.00	-29.13	---	---	Peak
2 PP15960.000	35.92	40.84	46.27	0.00	17.20	47.69	74.00	-26.31	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00076.EMI

Date: 2022-06-08

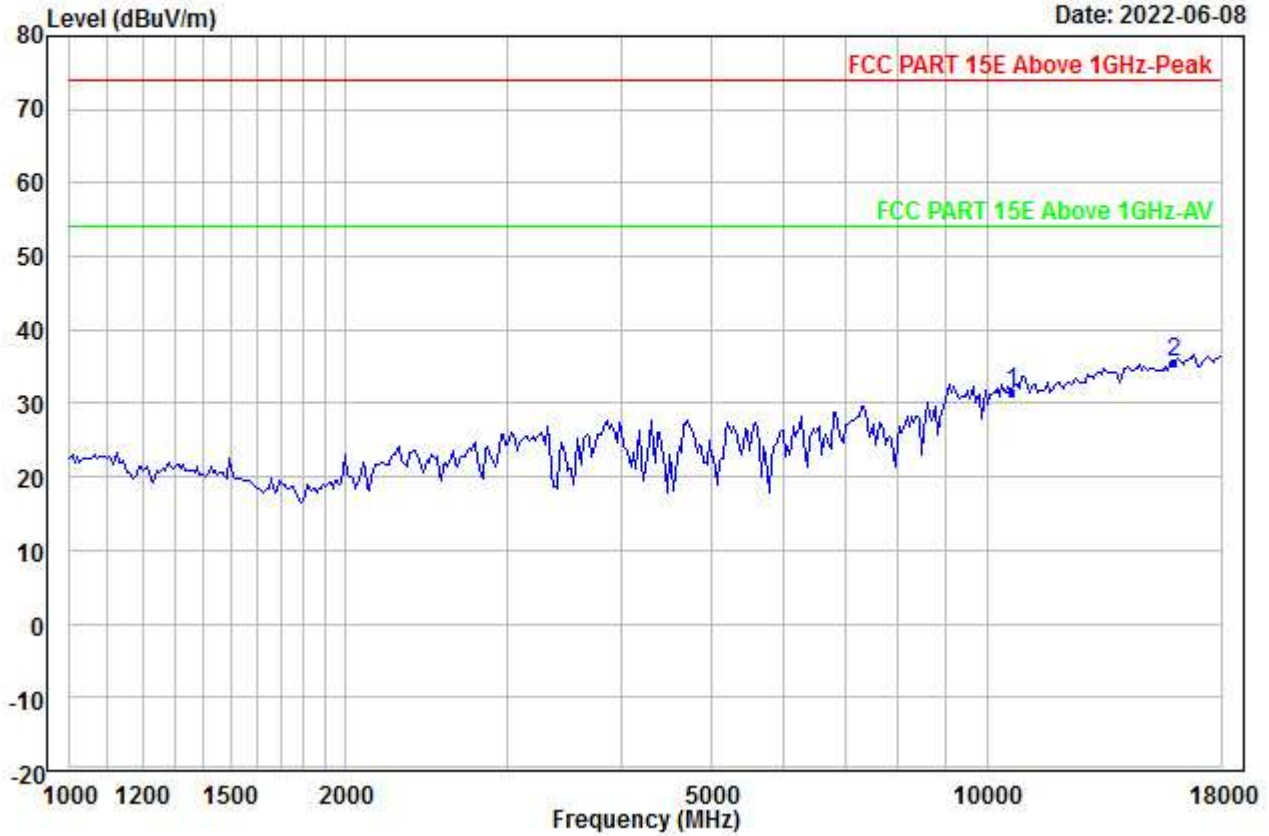


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT1\_5320  
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10640.000	24.83	38.28	45.65	0.00	14.01	31.47	54.00	-22.53	---	---	Aver
2	PP15960.000	23.69	40.84	46.27	0.00	17.20	35.46	54.00	-18.54	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\ISE\4\_00077.EMI

Date: 2022-06-08

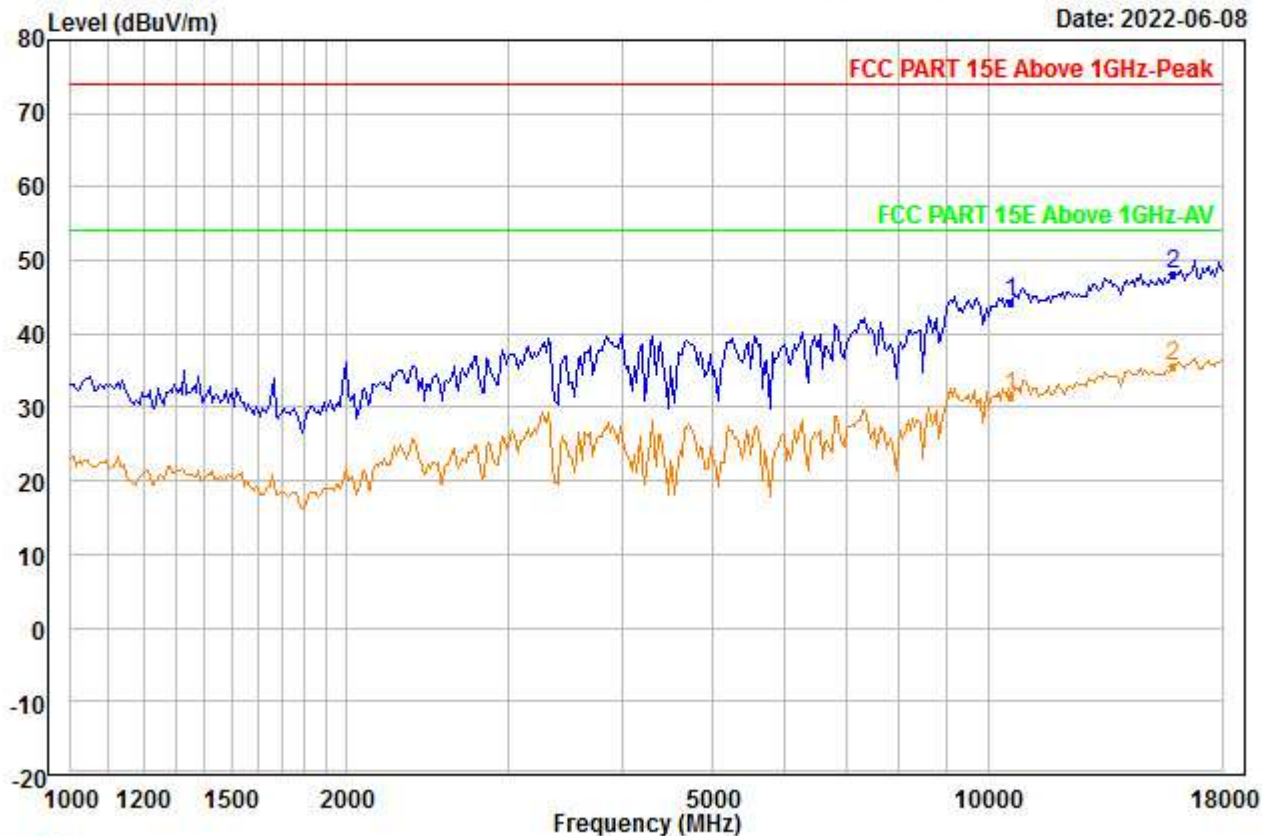


Trace: 1

Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT1\_5300  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10600.000	37.71	38.26	45.72	0.00	14.02	44.27	74.00	-29.73	---	---	Peak
2 PP15900.000	36.37	40.76	46.22	0.00	17.17	48.08	74.00	-25.92	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\RSE\4\_00078.EMI

Date: 2022-06-08

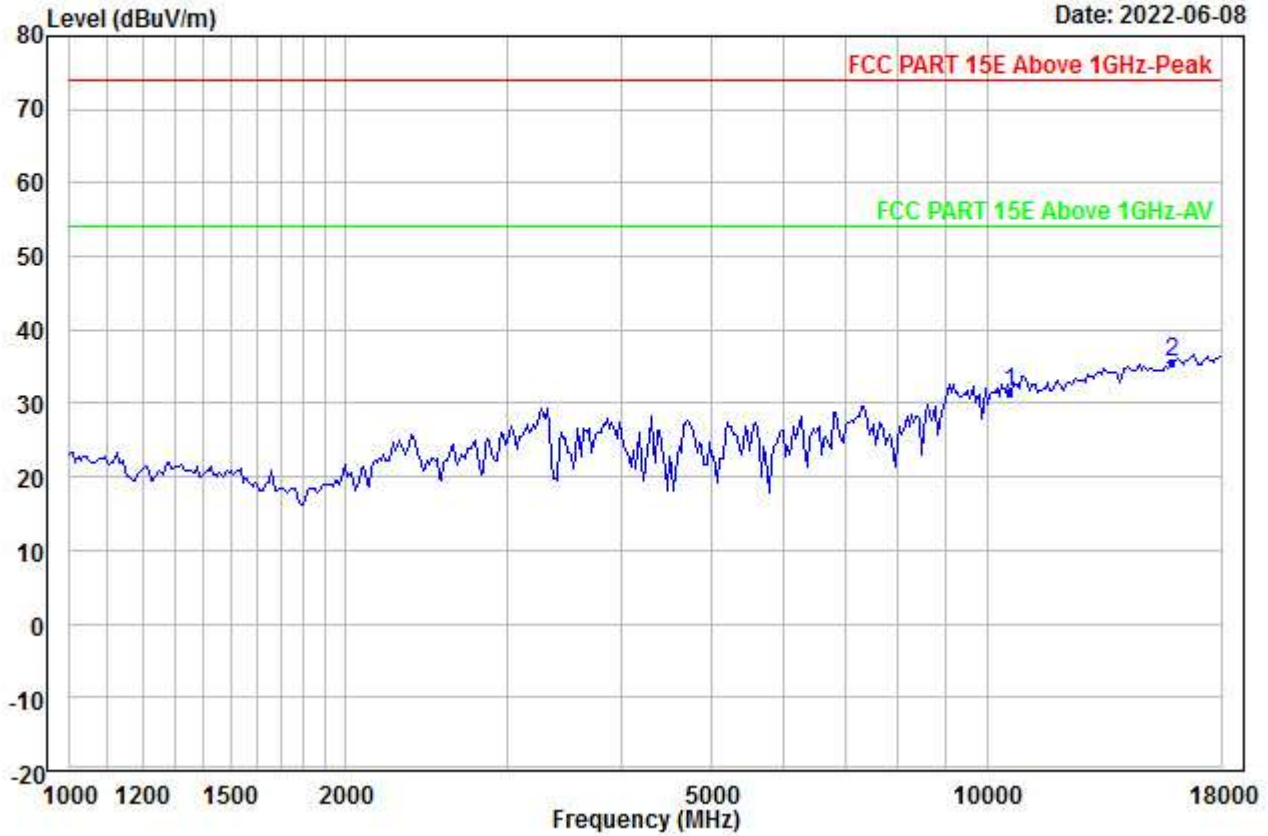


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT1\_5300  
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10600.000	24.91	38.26	45.72	0.00	14.02	31.47	54.00	-22.53	---	---	Aver
2	PP15900.000	23.75	40.76	46.22	0.00	17.17	35.46	54.00	-18.54	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\ISE\4\_00079.EMI

Date: 2022-06-08

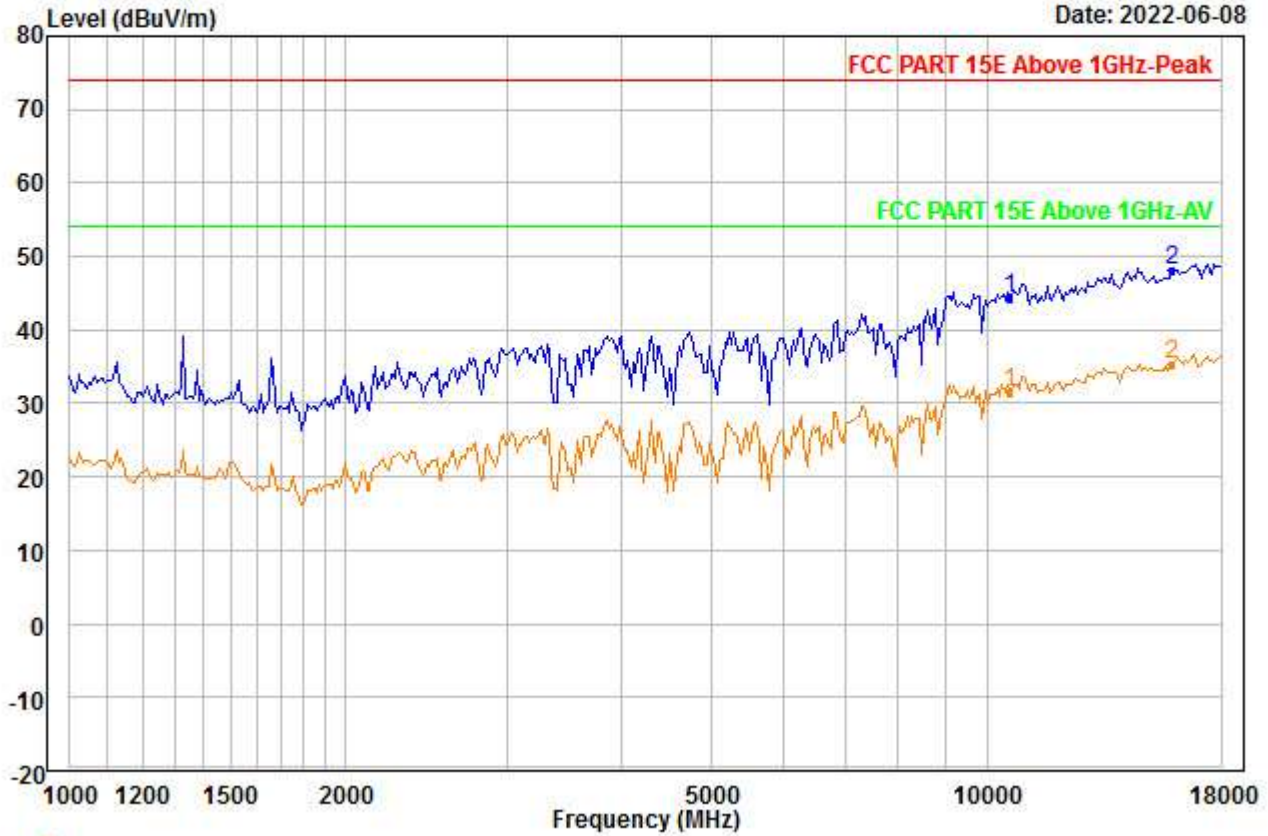


Trace: 1

Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT1\_5300  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10600.000	37.80	38.26	45.72	0.00	14.02	44.36	74.00	-29.64	---	---	Peak
2 PP15900.000	36.28	40.76	46.22	0.00	17.17	47.99	74.00	-26.01	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\RSE\4\_00080.EMI

Date: 2022-06-08

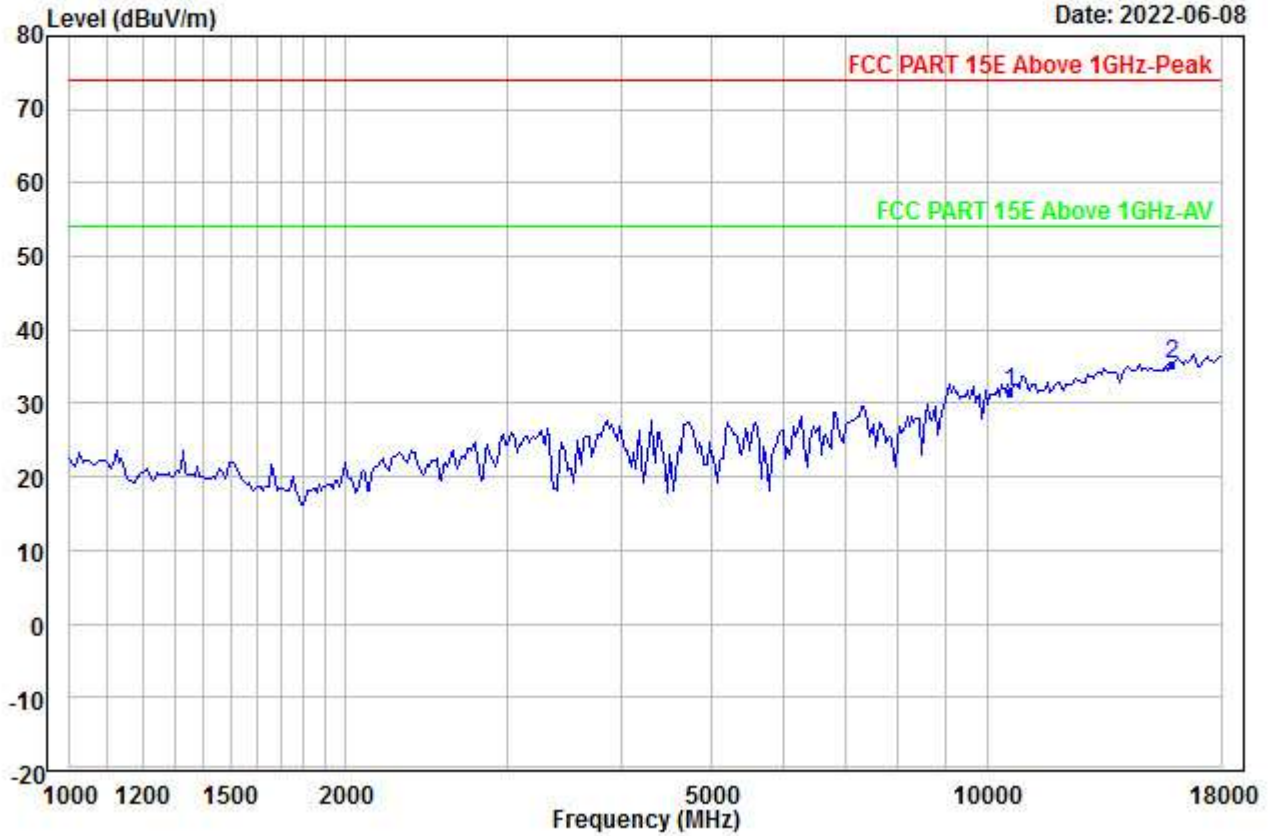


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT1\_5300  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10600.000	24.91	38.26	45.72	0.00	14.02	31.47	54.00	-22.53	---	---	Aver
2 PP15900.000	23.66	40.76	46.22	0.00	17.17	35.37	54.00	-18.63	---	---	Aver



File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00081.EMI

Date: 2022-06-08

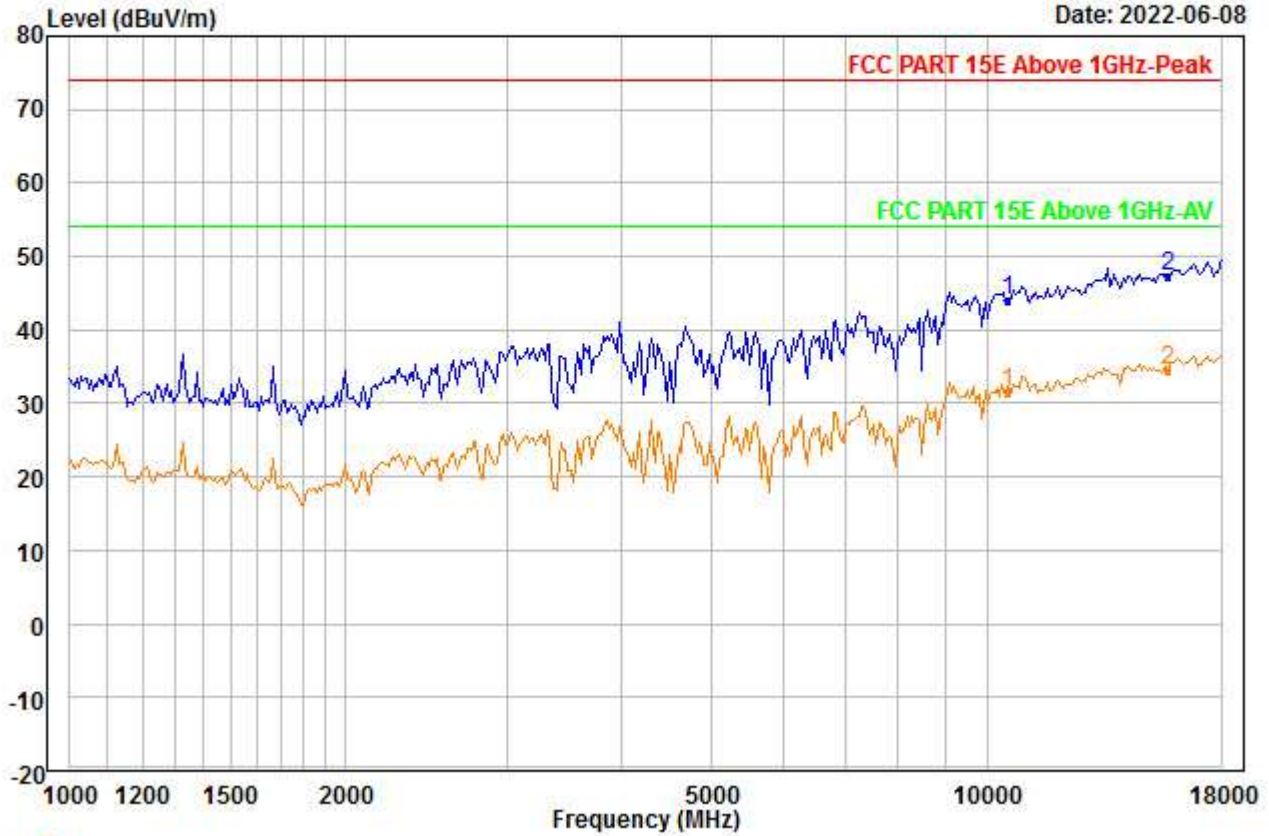


Trace: 1

Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT1\_5260  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10520.000	37.54	38.21	45.86	0.00	14.04	43.93	74.00	-30.07	---	---	Peak
2 PP15780.000	35.67	40.59	46.12	0.00	17.09	47.23	74.00	-26.77	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00082.EMI

Date: 2022-06-08

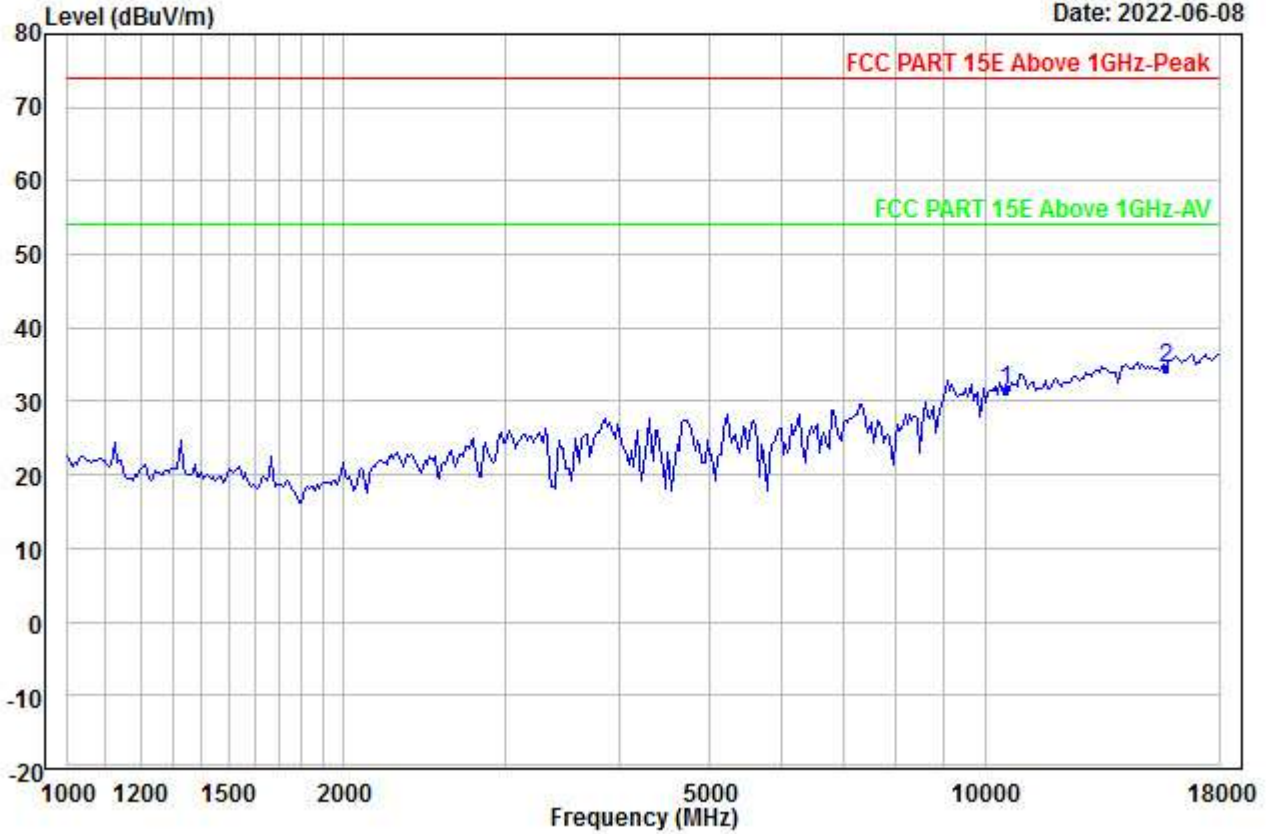


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT1\_5260  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10520.000	25.22	38.21	45.86	0.00	14.04	31.61	54.00	-22.39	---	---	Aver
2 PP15780.000	22.99	40.59	46.12	0.00	17.09	34.55	54.00	-19.45	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00083.EMI

Date: 2022-06-08

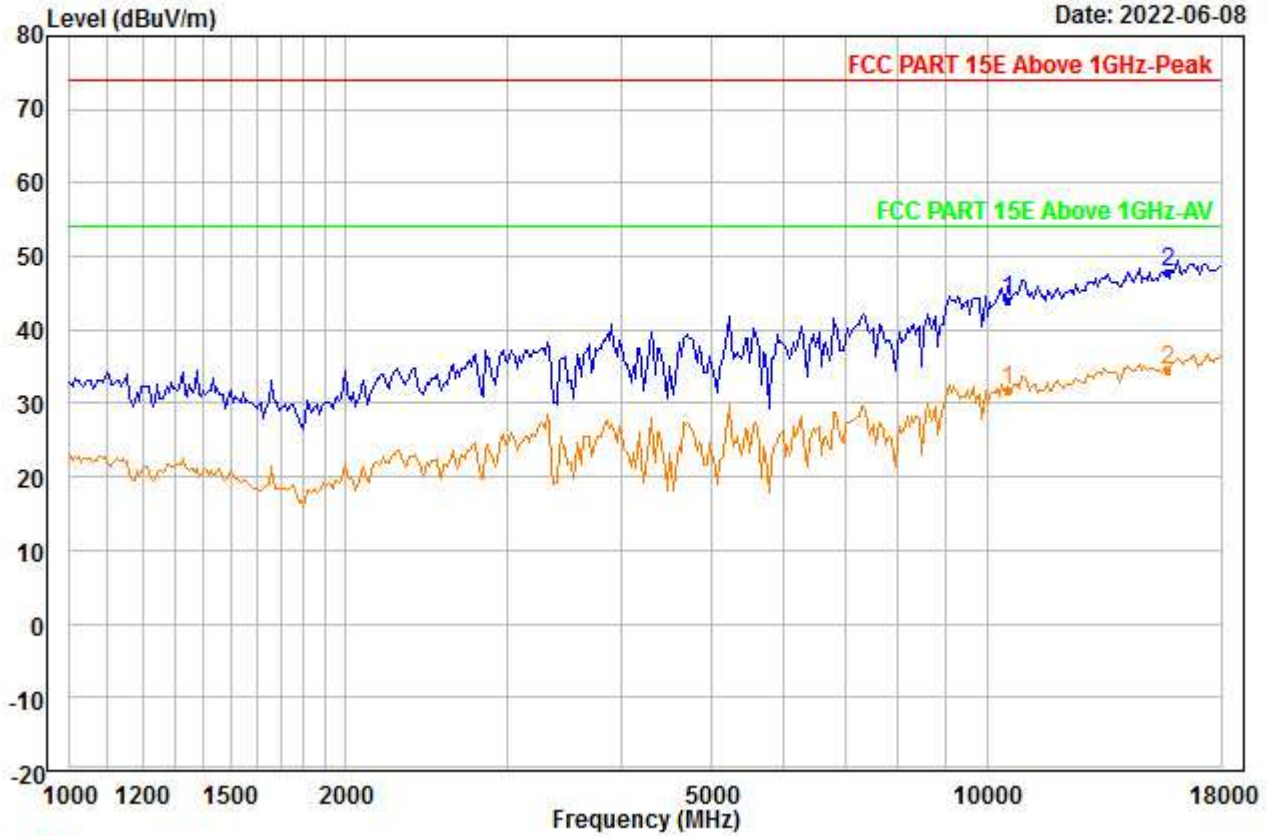


Trace: 1

Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT1\_5260  
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10520.000	37.76	38.21	45.86	0.00	14.04	44.15	74.00	-29.85	---	---	Peak
2	PP15780.000	36.40	40.59	46.12	0.00	17.09	47.96	74.00	-26.04	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00084.EMI

Date: 2022-06-08

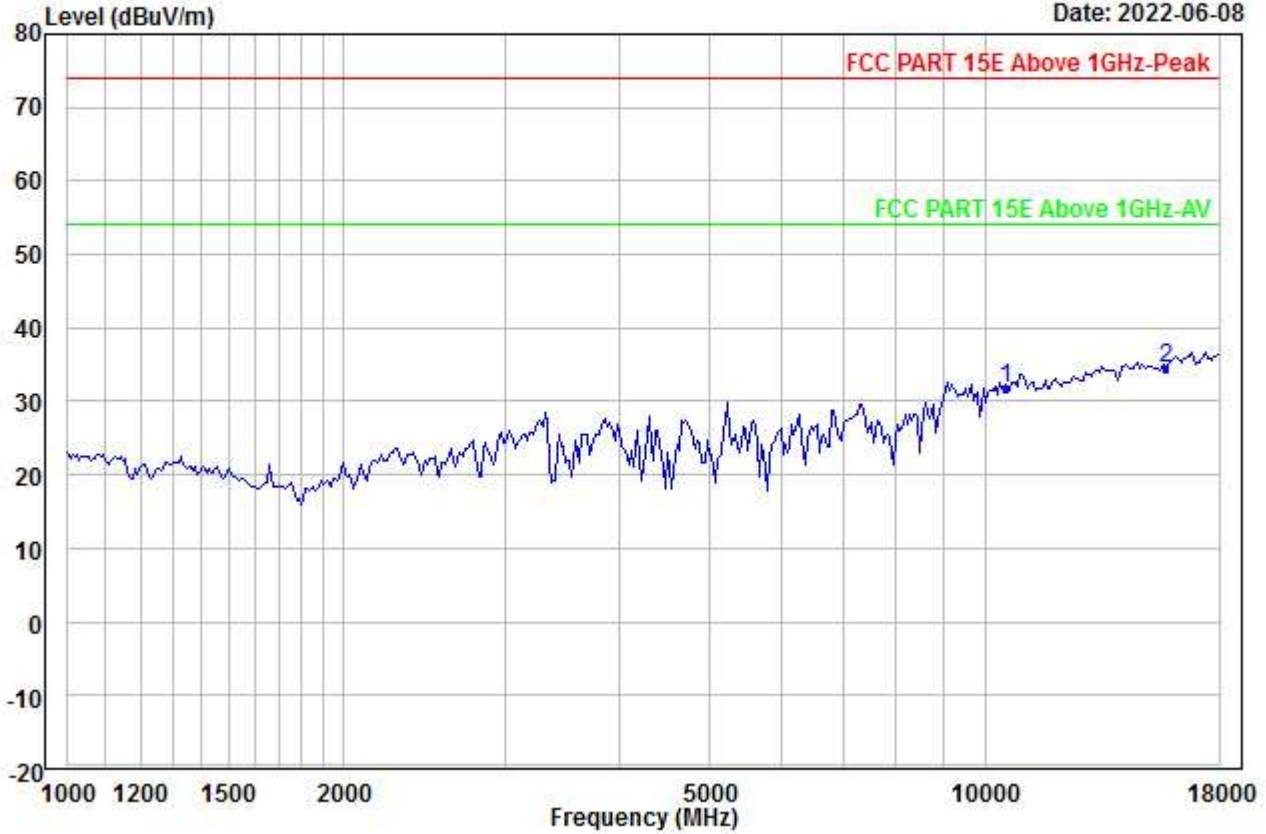


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT1\_5260  
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10520.000	25.30	38.21	45.86	0.00	14.04	31.69	54.00	-22.31	---	---	Aver
2	PP15780.000	22.99	40.59	46.12	0.00	17.09	34.55	54.00	-19.45	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\RSE\4\_00085.EMI

Date: 2022-06-08

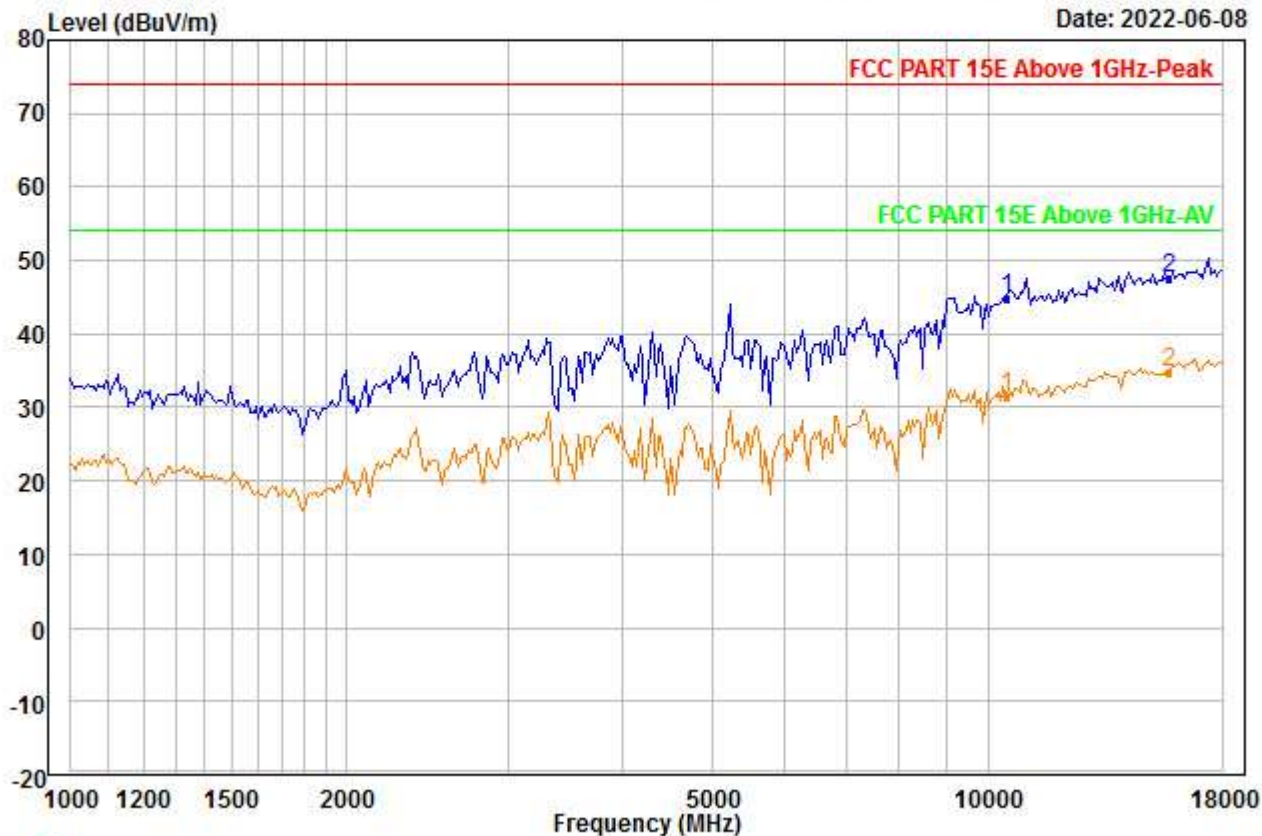


Trace: 1

Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT1\_5240  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10480.000	38.54	38.19	45.91	0.00	14.05	44.87	74.00	-29.13	---	---	Peak
2 PP15720.000	35.96	40.51	46.08	0.00	17.05	47.44	74.00	-26.56	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00086.EMI

Date: 2022-06-08

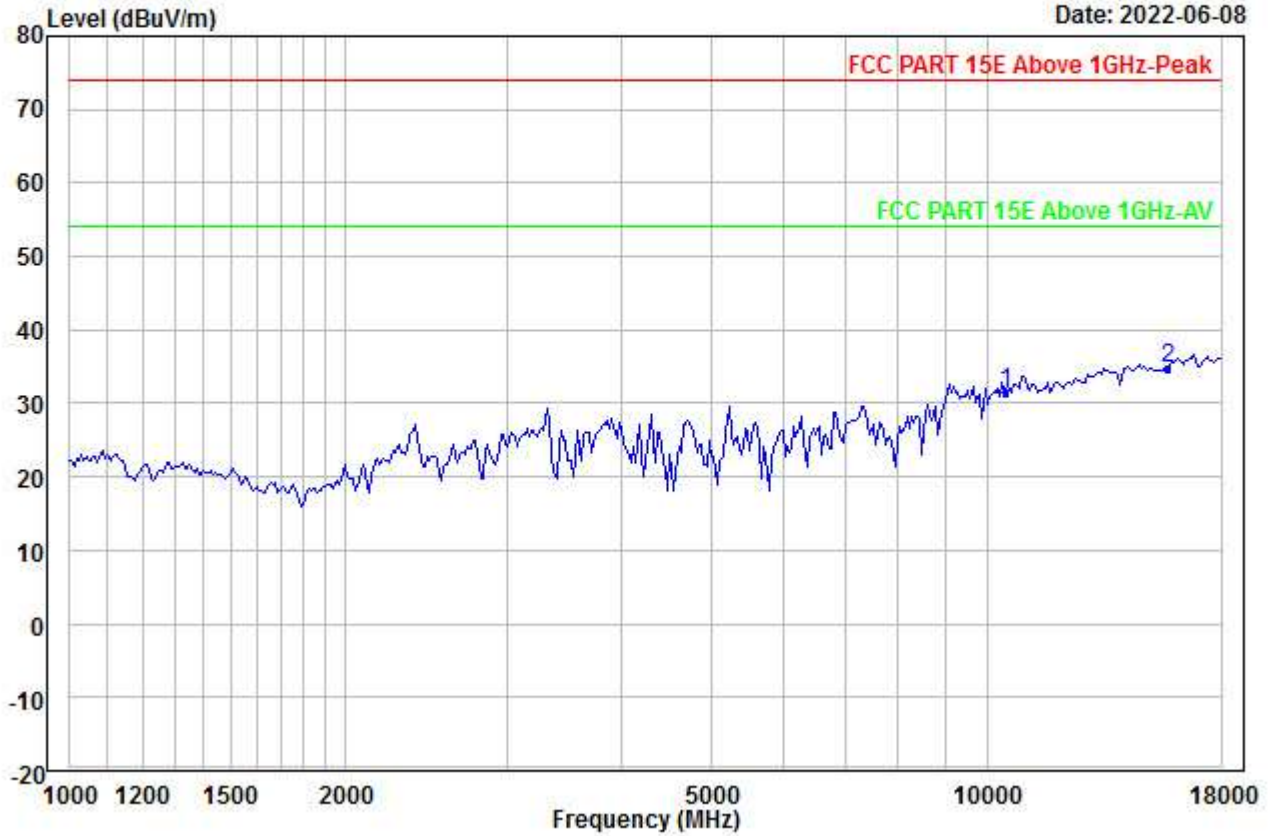


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT1\_5240  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10480.000	25.28	38.19	45.91	0.00	14.05	31.61	54.00	-22.39	---	---	Aver
2 PP15720.000	23.17	40.51	46.08	0.00	17.05	34.65	54.00	-19.35	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00087.EMI

Date: 2022-06-08

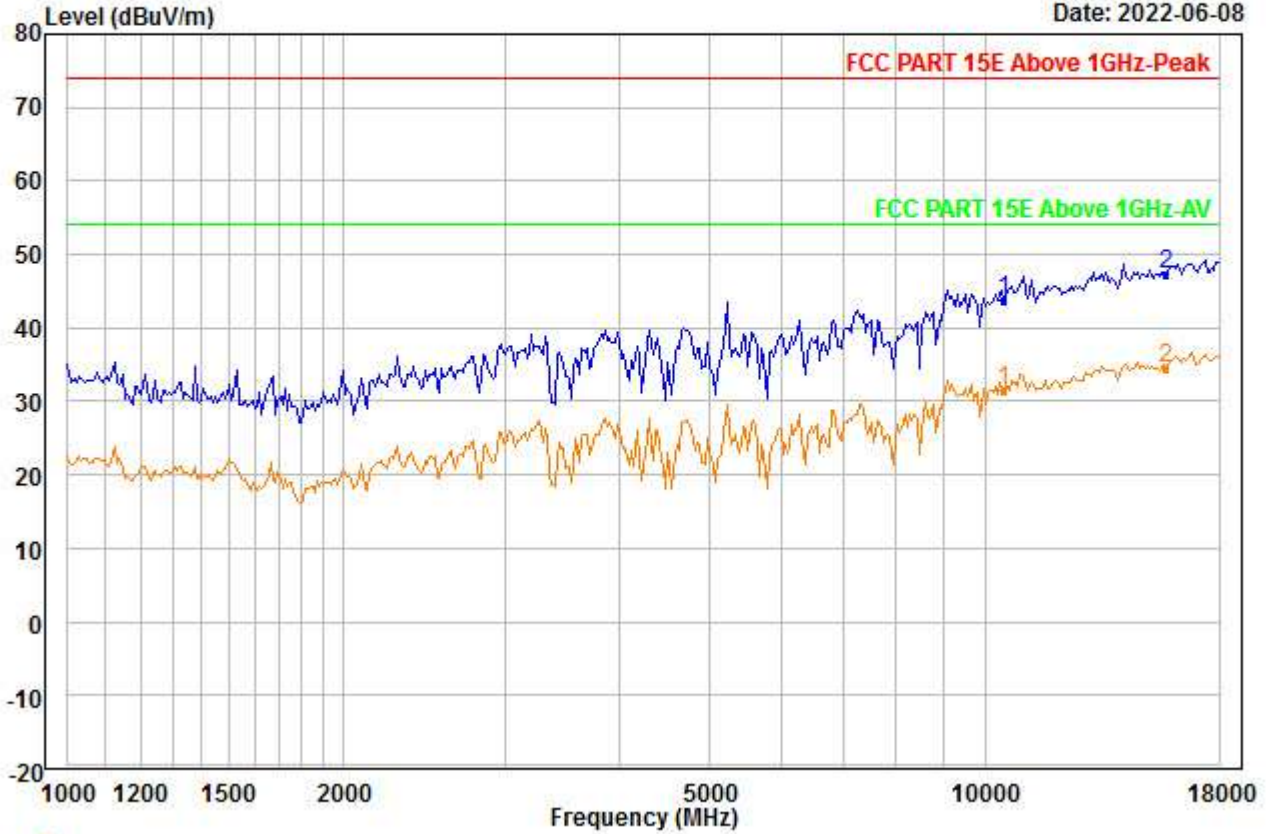


Trace: 1

Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT1\_5240  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10480.000	37.46	38.19	45.91	0.00	14.05	43.79	74.00	-30.21	---	---	Peak
2 PP15720.000	35.94	40.51	46.08	0.00	17.05	47.42	74.00	-26.58	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00088.EMI

Date: 2022-06-08

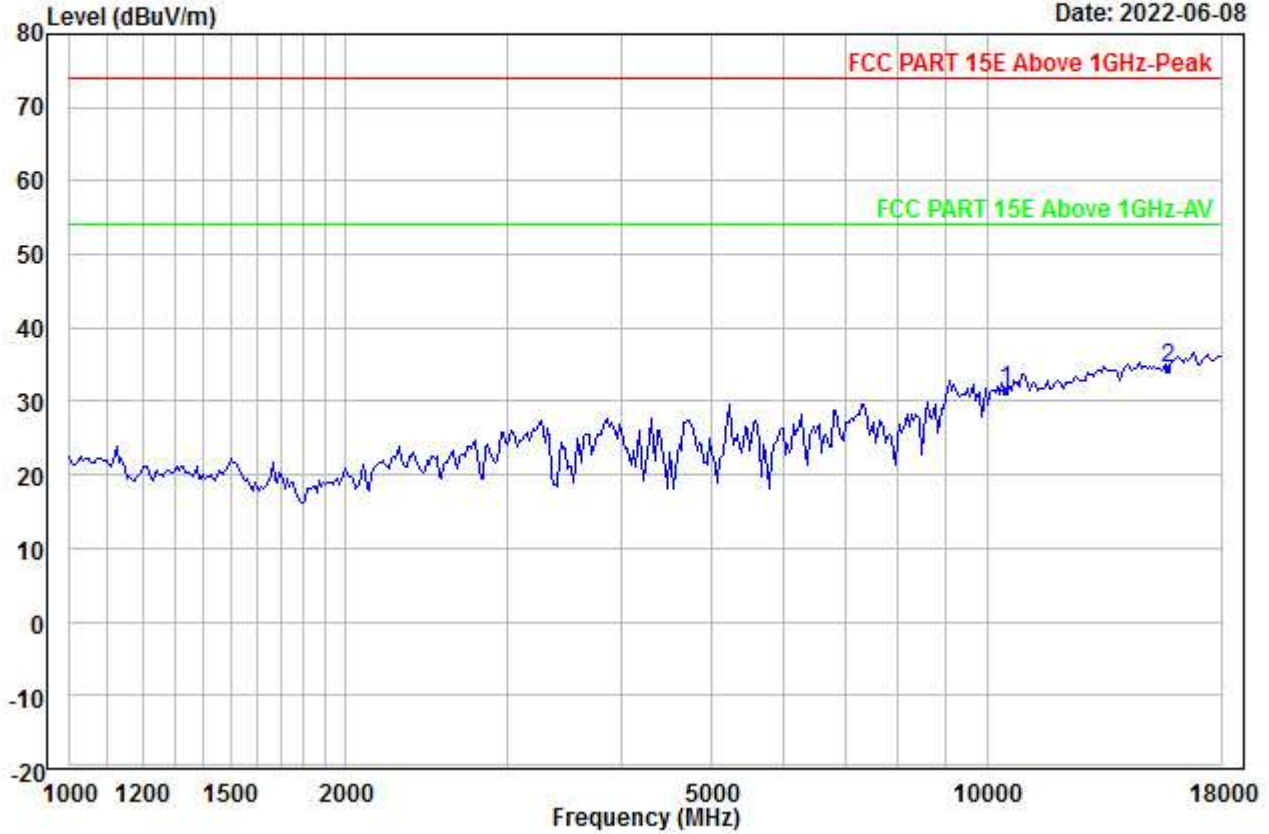


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT1\_5240  
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10480.000	25.21	38.19	45.91	0.00	14.05	31.54	54.00	-22.46	---	---	Aver
2	PP15720.000	23.07	40.51	46.08	0.00	17.05	34.55	54.00	-19.45	---	---	Aver



File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00089.EMI

Date: 2022-06-08

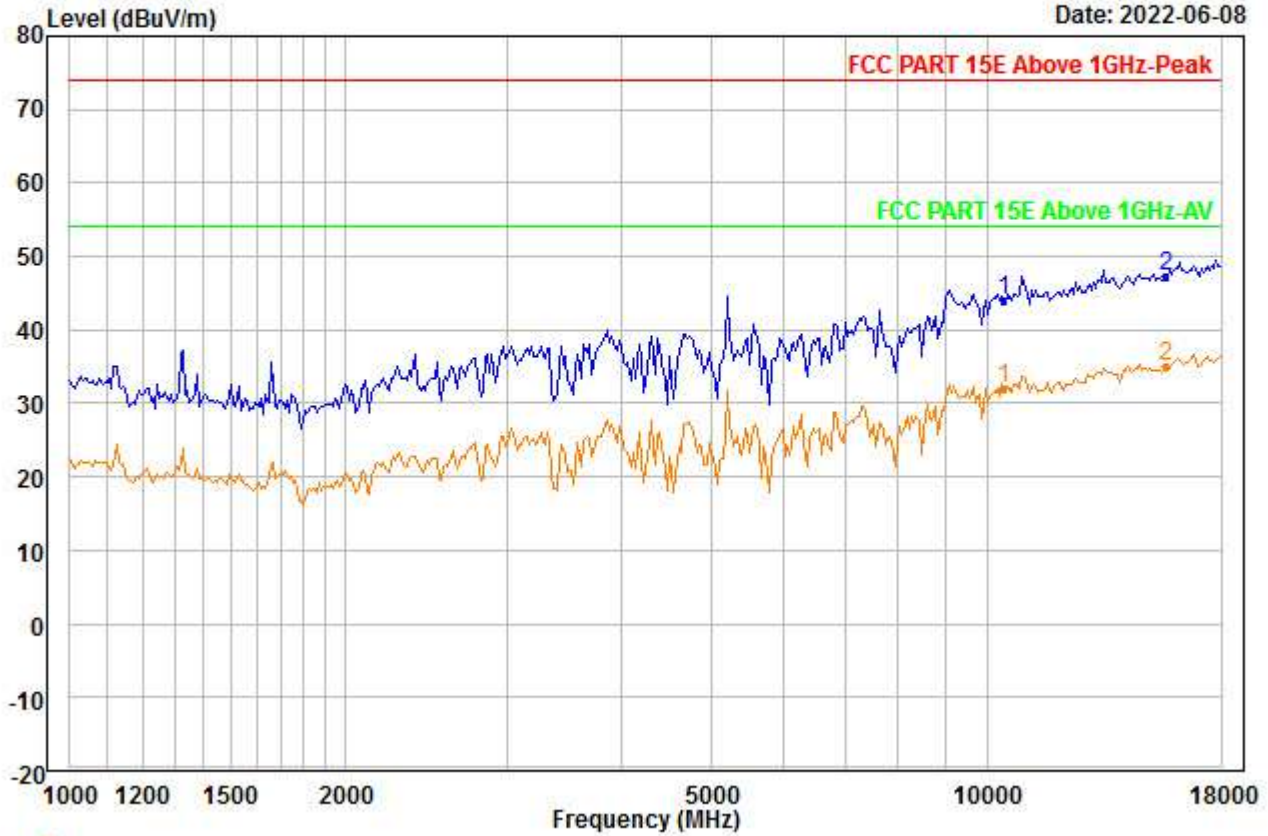


Trace: 1

Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT1\_5220  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10440.000	37.71	38.16	45.92	0.00	14.06	44.01	74.00	-29.99	---	---	Peak
2 PP15660.000	35.88	40.42	46.03	0.00	17.01	47.28	74.00	-26.72	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00090.EMI

Date: 2022-06-08

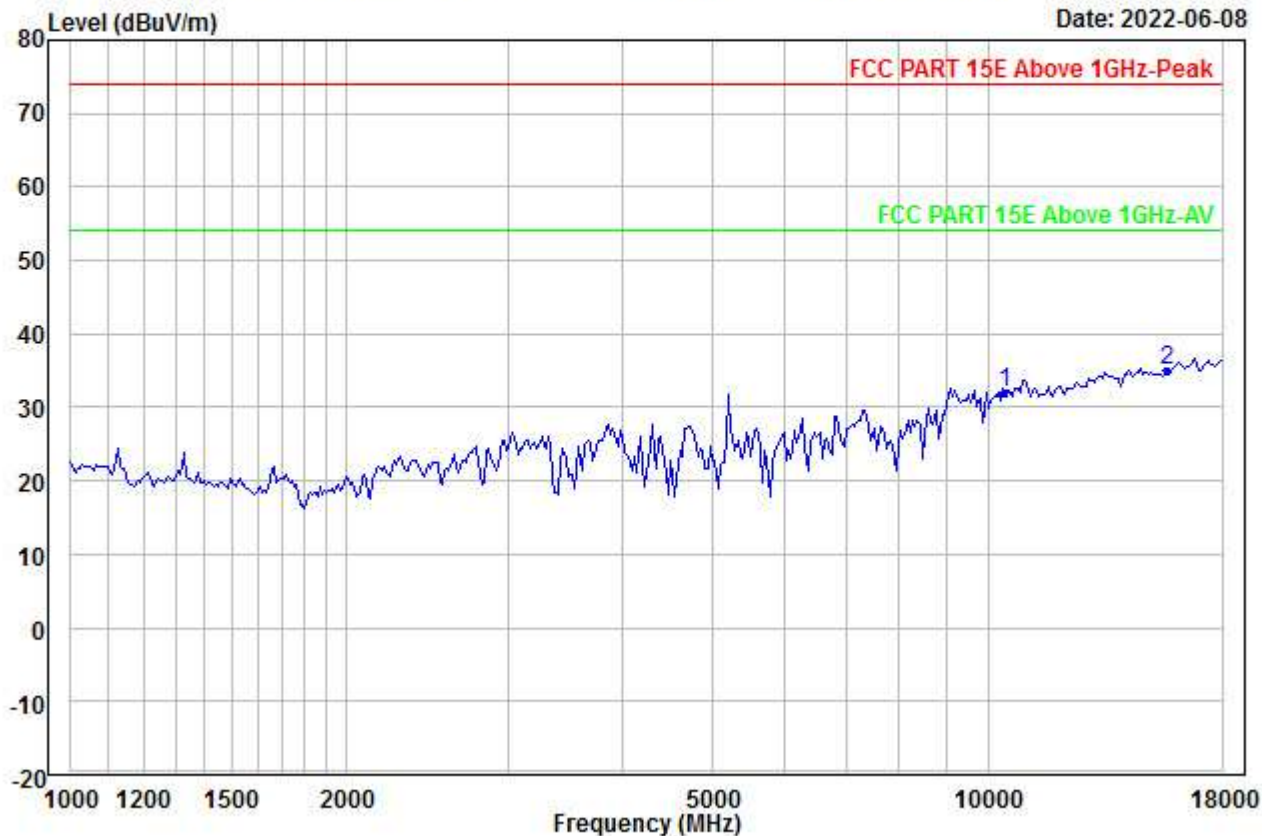


Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT1\_5220  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10440.000	25.65	38.16	45.92	0.00	14.06	31.95	54.00	-22.05	---	---	Aver
2 PP15660.000	23.53	40.42	46.03	0.00	17.01	34.93	54.00	-19.07	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00091.EMI

Date: 2022-06-08

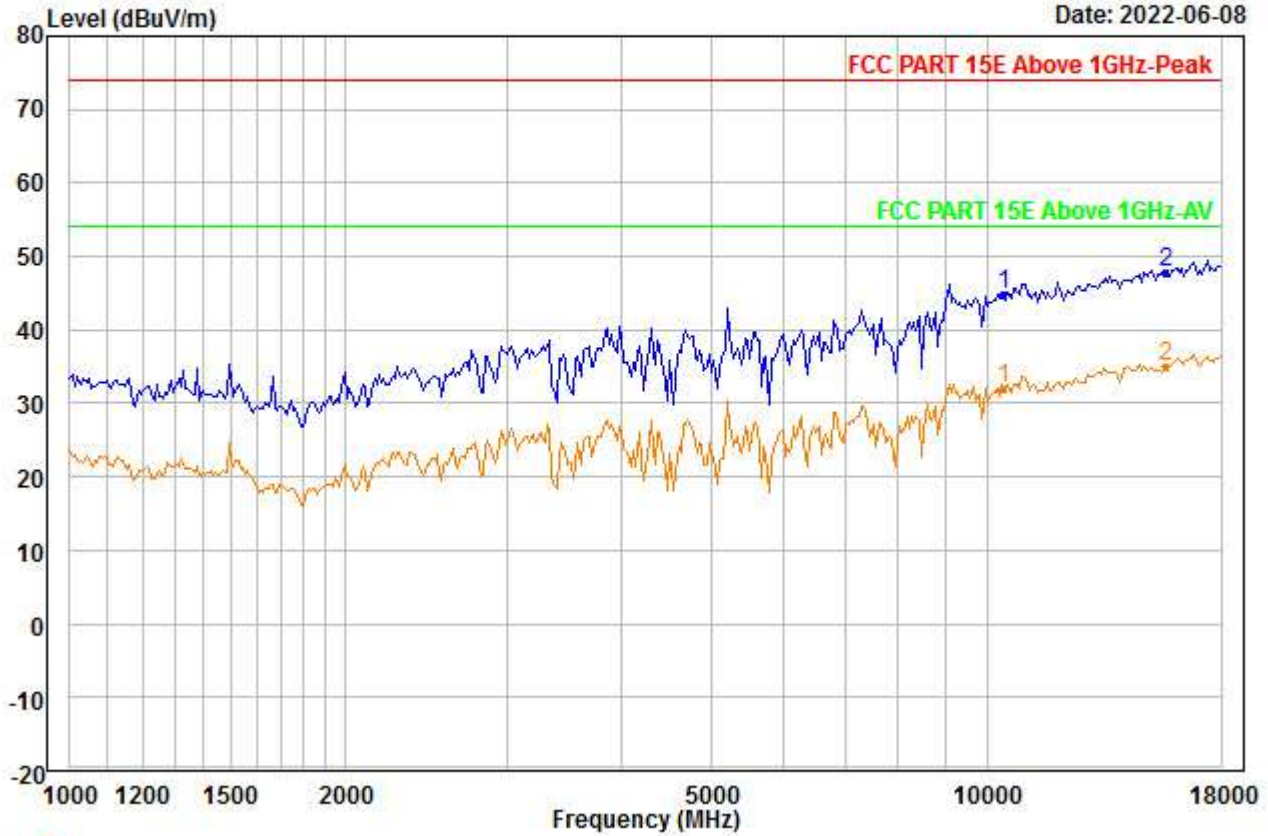


Trace: 1

Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT1\_5220  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10440.000	38.50	38.16	45.92	0.00	14.06	44.80	74.00	-29.20	---	---	Peak
2 PP15660.000	36.58	40.42	46.03	0.00	17.01	47.98	74.00	-26.02	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00092.EMI

Date: 2022-06-08

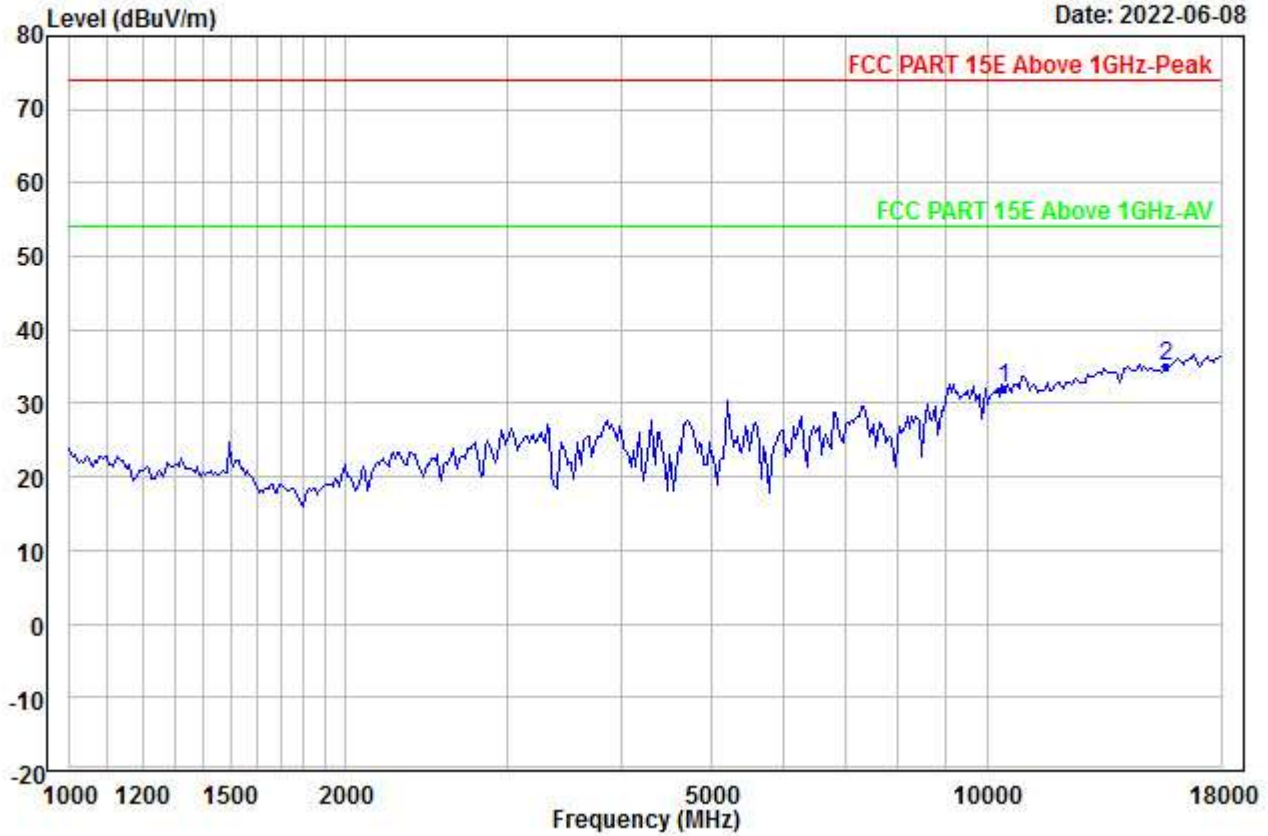


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT1\_5220  
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10440.000	25.73	38.16	45.92	0.00	14.06	32.03	54.00	-21.97	---	---	Aver
2	PP15660.000	23.53	40.42	46.03	0.00	17.01	34.93	54.00	-19.07	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00093.EMI

Date: 2022-06-08

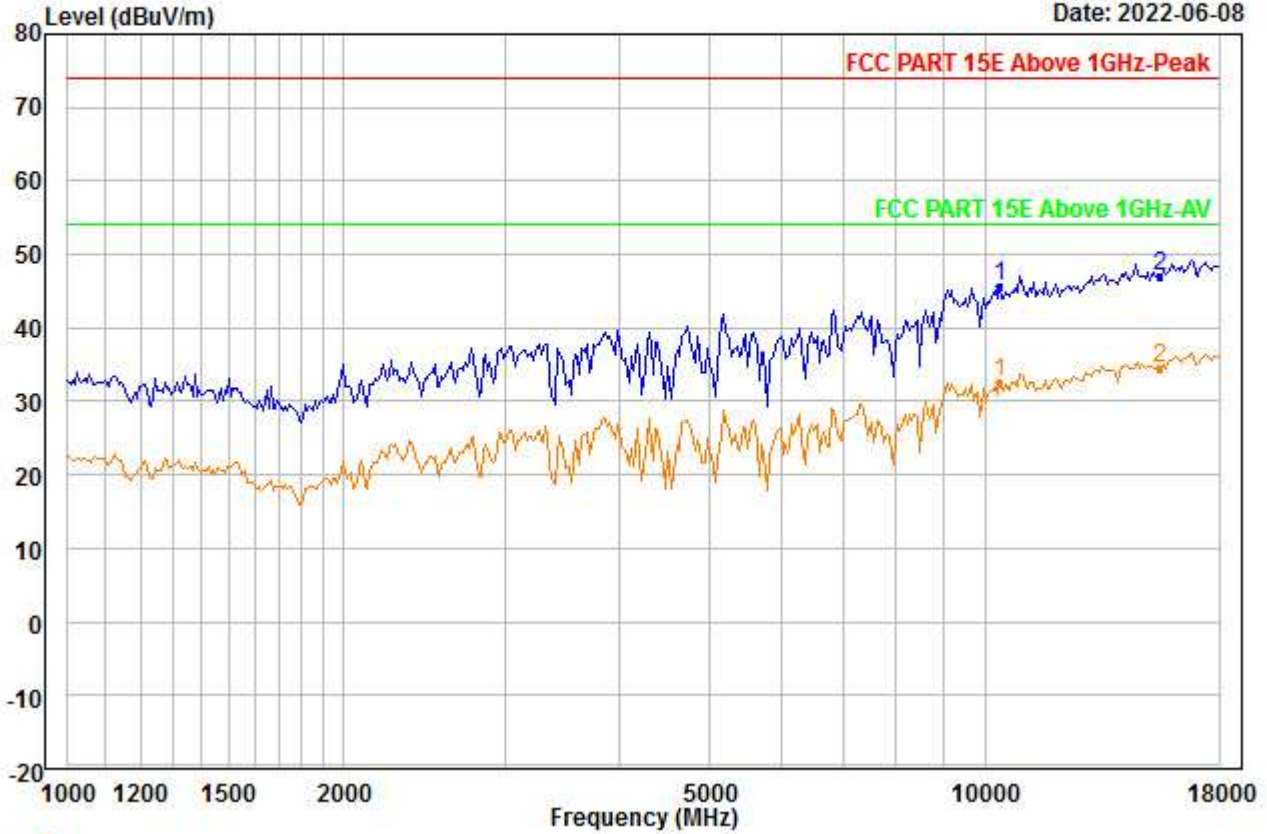


Trace: 1

Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT1\_5180  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10360.000	39.31	38.12	45.96	0.00	14.08	45.55	74.00	-28.45	---	---	Peak
2 PP15540.000	35.85	40.26	45.93	0.00	16.94	47.12	74.00	-26.88	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00094.EMI

Date: 2022-06-08

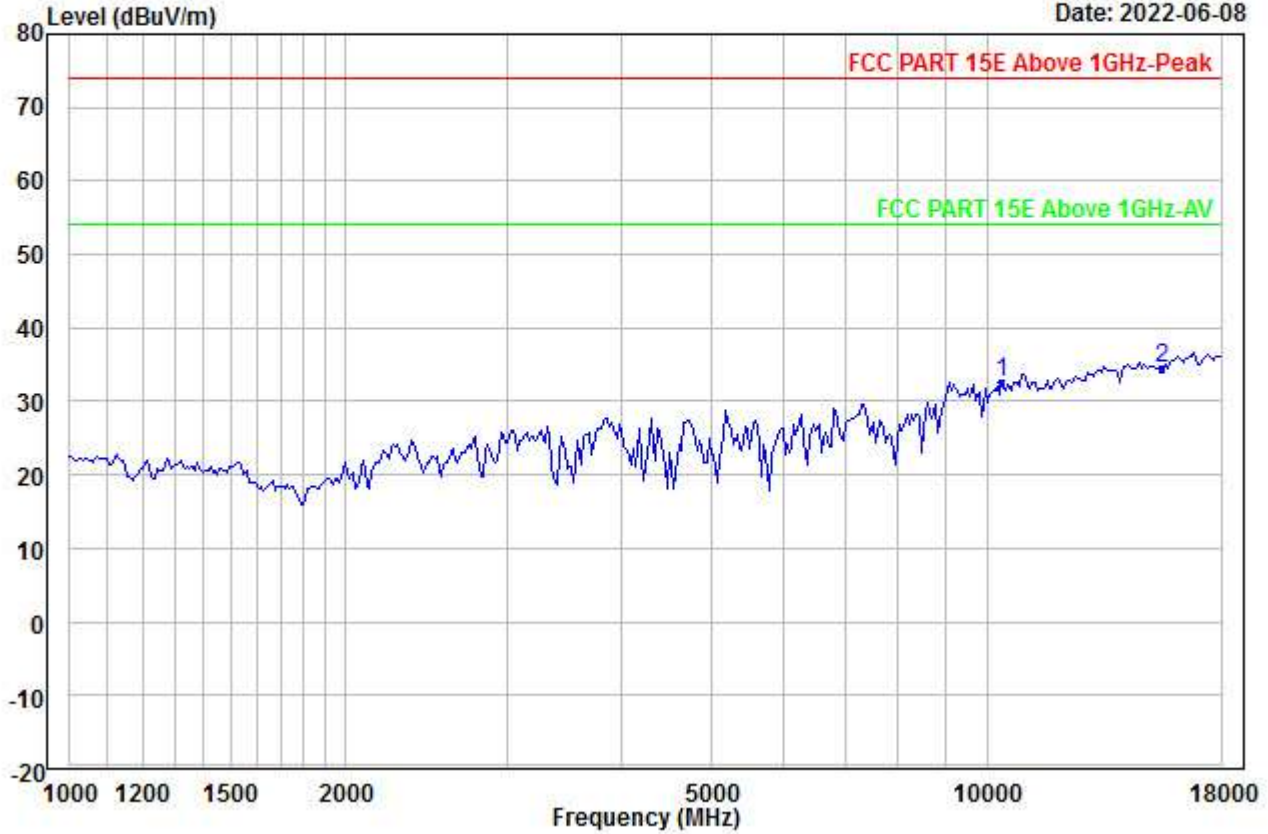


Condition : Vertical  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT1\_5180  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10360.000	26.46	38.12	45.96	0.00	14.08	32.70	54.00	-21.30	---	---	Aver
2 PP15540.000	23.26	40.26	45.93	0.00	16.94	34.53	54.00	-19.47	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00095.EMI

Date: 2022-06-08

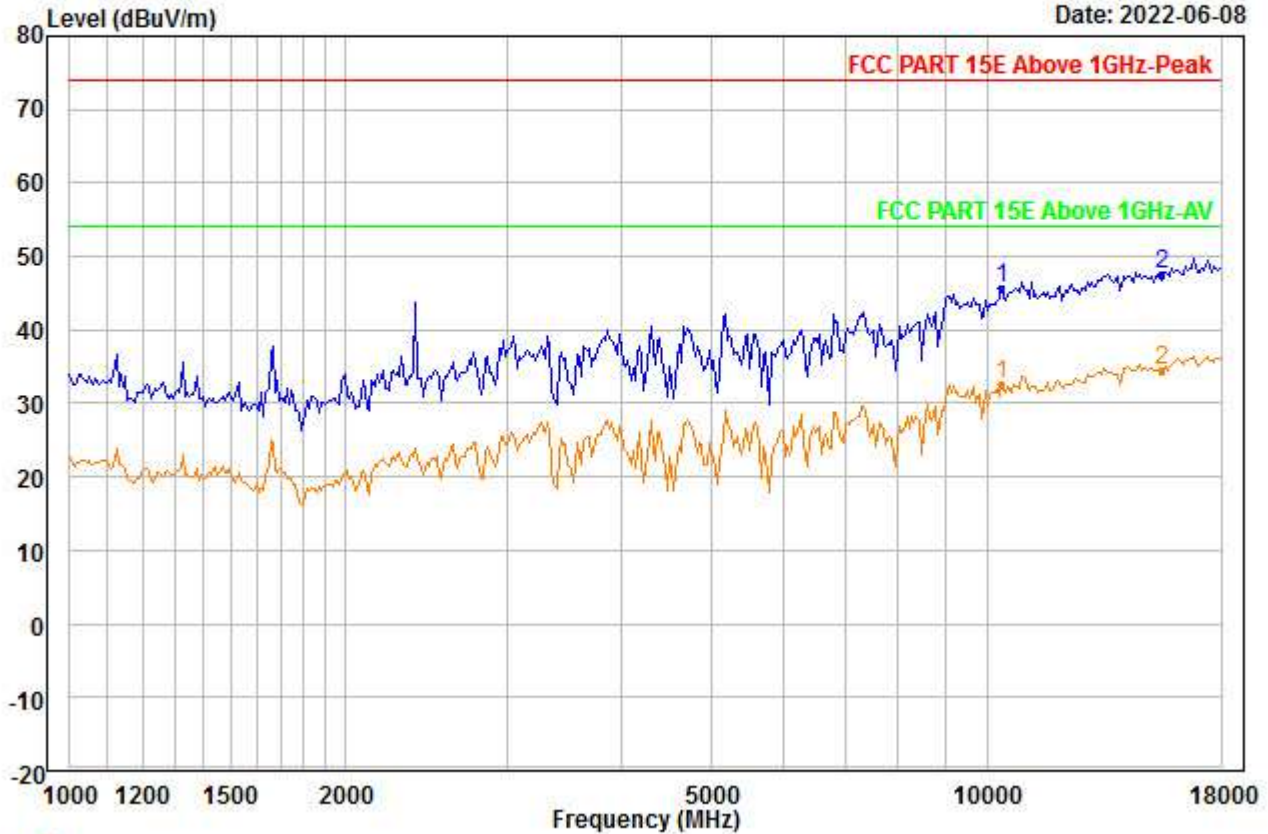


Trace: 1

Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT1\_5180  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10360.000	39.42	38.12	45.96	0.00	14.08	45.66	74.00	-28.34	---	---	Peak
2 PP15540.000	36.24	40.26	45.93	0.00	16.94	47.51	74.00	-26.49	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4\_00096.EMI

Date: 2022-06-08

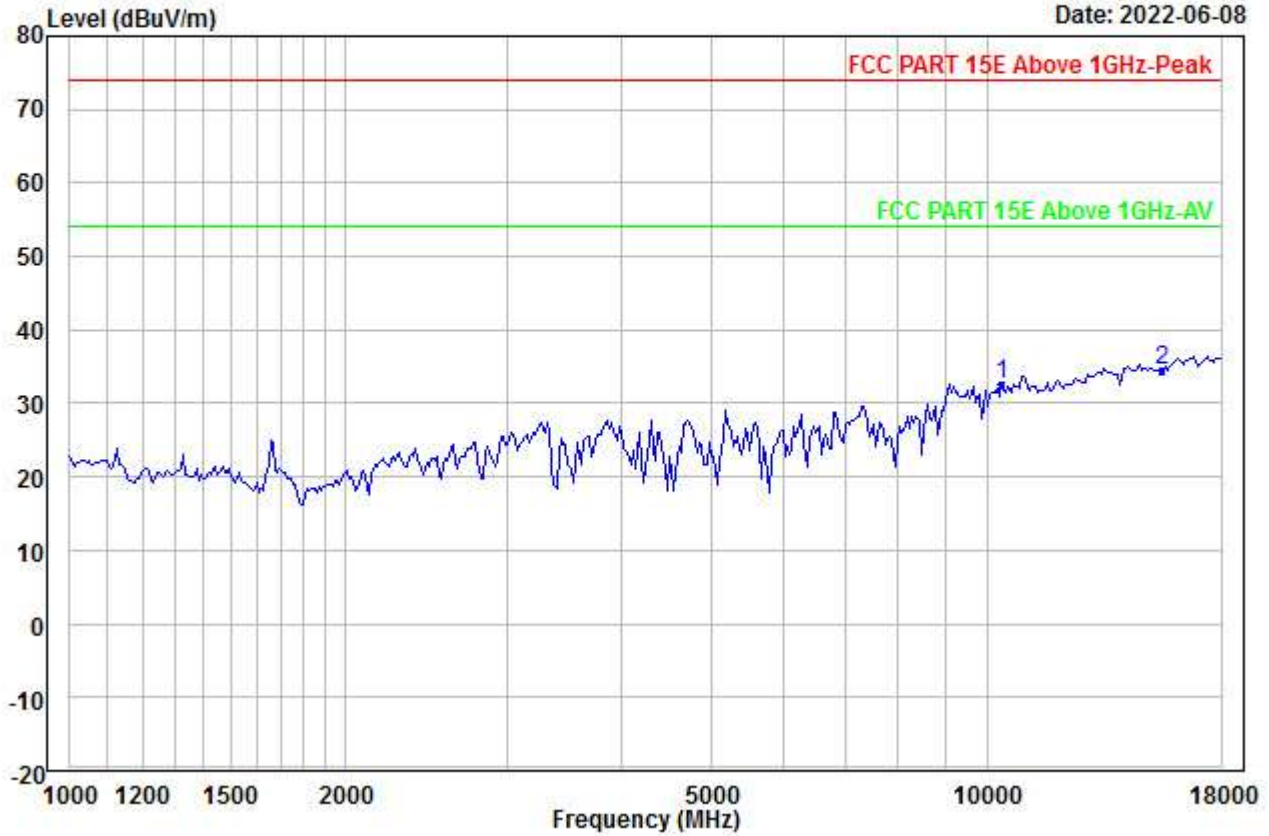

Condition : Horizontal  
 Temp.(C)/Hum.(%): 22.3(C) / 51%  
 Press : 100.4kPa  
 Product : SA750  
 Model No. : SA750  
 Power Rating : AC 120V/60Hz  
 Test Engineer : Lucas  
 Test Mode : A\_ANT1\_5180  
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10360.000	26.32	38.12	45.96	0.00	14.08	32.56	54.00	-21.44	---	---	Aver
2 PP15540.000	23.26	40.26	45.93	0.00	16.94	34.53	54.00	-19.47	---	---	Aver