


File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00097.EMI

Date: 2022-06-08

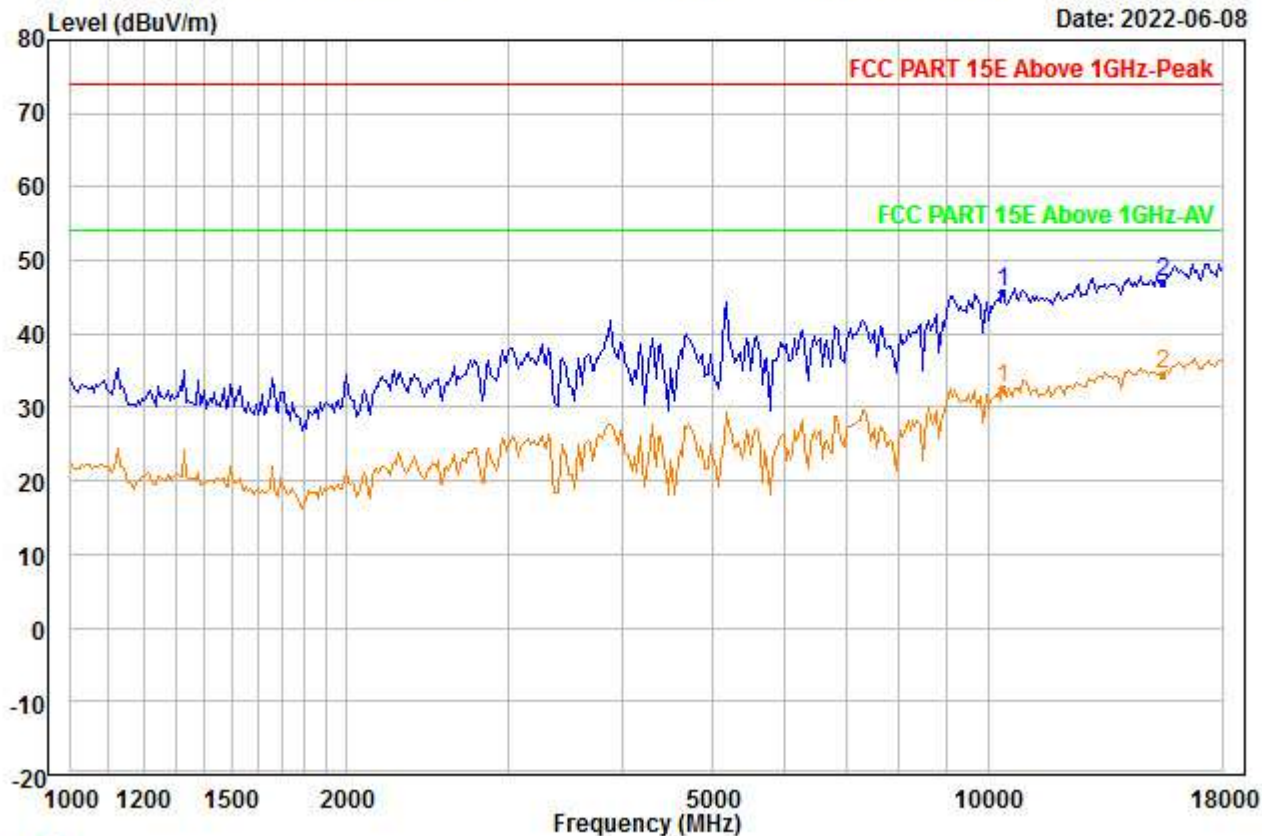


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5180
 Remark :

	Read Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10360.000	39.40	38.12	45.96	0.00	14.08	45.64	74.00	-28.36	---	---	Peak
2	PP15540.000	35.74	40.26	45.93	0.00	16.94	47.01	74.00	-26.99	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00098.EMI

Date: 2022-06-08

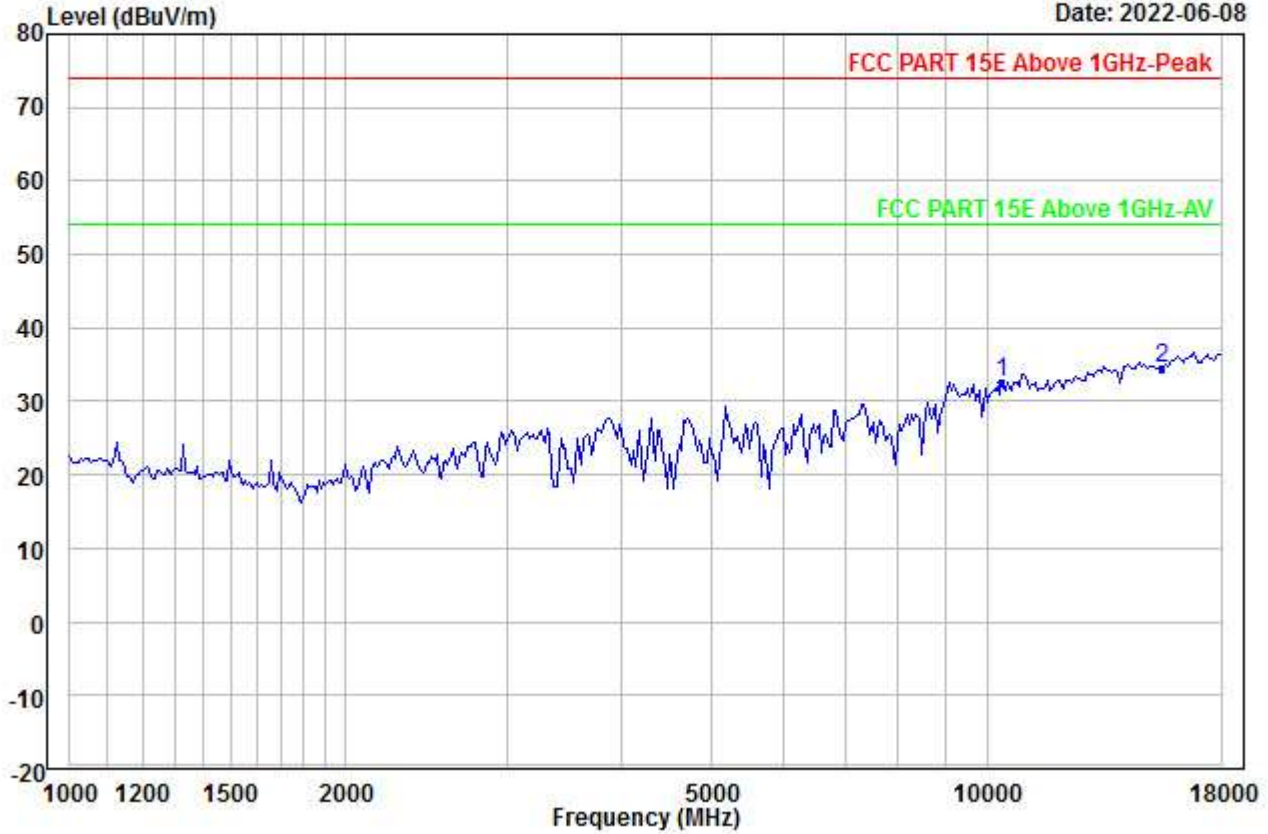


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5180
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rema	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10360.000	26.32	38.12	45.96	0.00	14.08	32.56	54.00	-21.44	---	---	Aver
2 PP15540.000	23.26	40.26	45.93	0.00	16.94	34.53	54.00	-19.47	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00099.EMI

Date: 2022-06-08

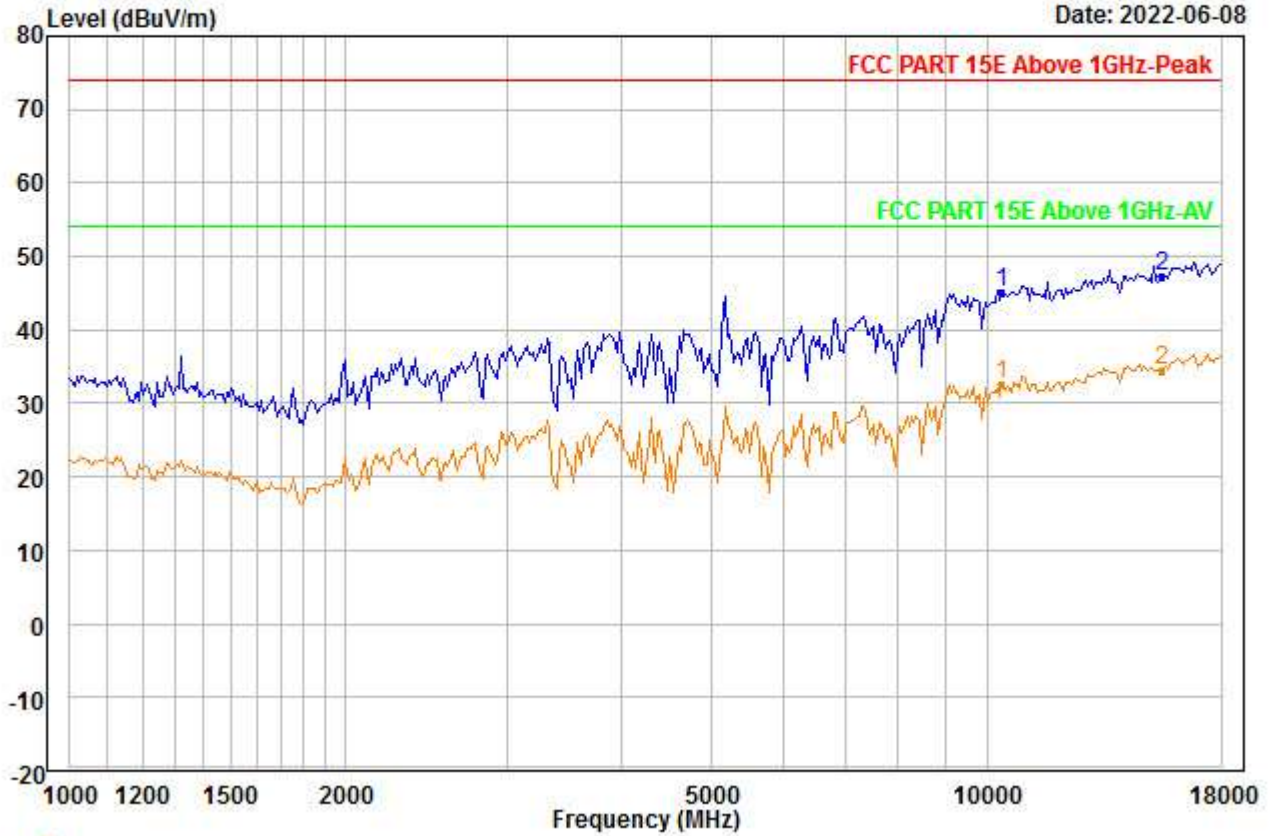


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5180
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10360.000	38.94	38.12	45.96	0.00	14.08	45.18	74.00	-28.82	---	---	Peak
2	PP15540.000	35.90	40.26	45.93	0.00	16.94	47.17	74.00	-26.83	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00100.EMI

Date: 2022-06-08

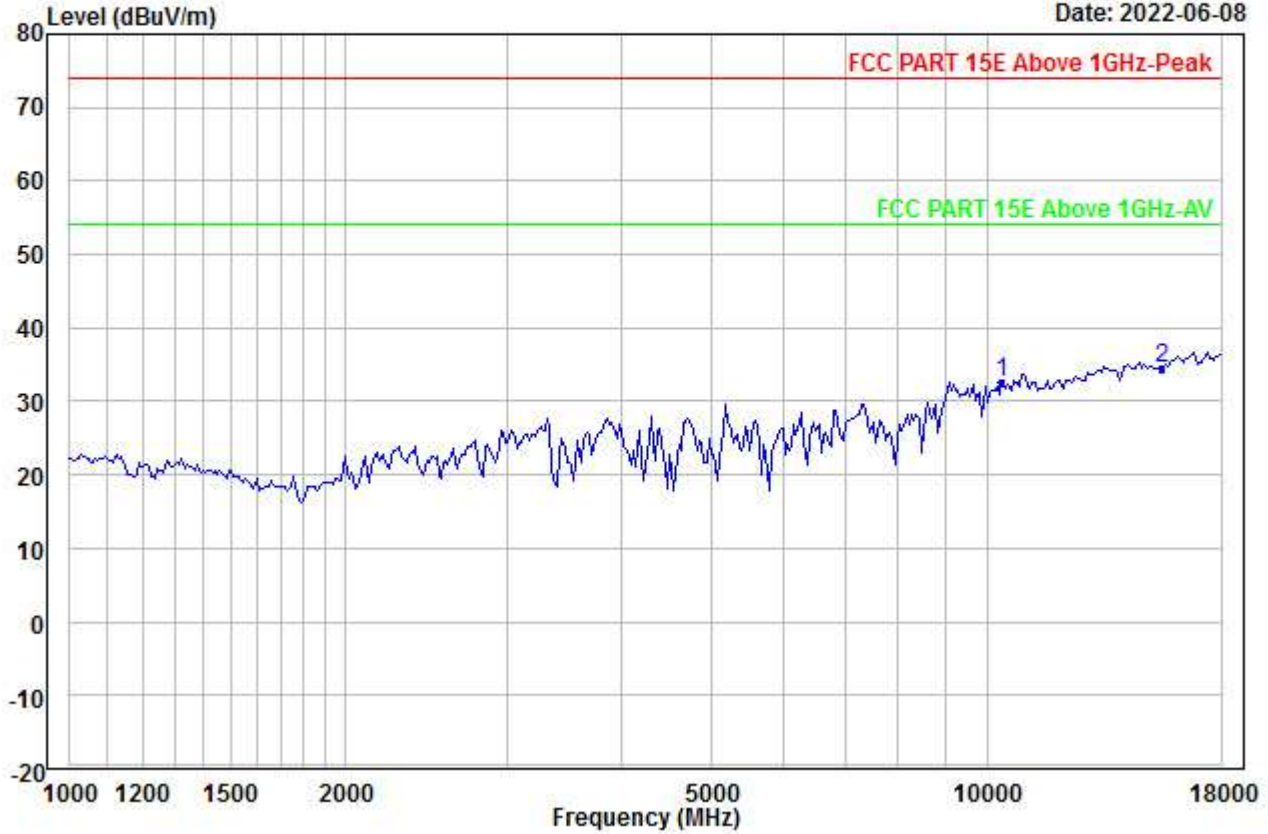


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5180
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10360.000	26.46	38.12	45.96	0.00	14.08	32.70	54.00	-21.30	---	---	Aver
2 PP15540.000	23.26	40.26	45.93	0.00	16.94	34.53	54.00	-19.47	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00101.EMI

Date: 2022-06-08

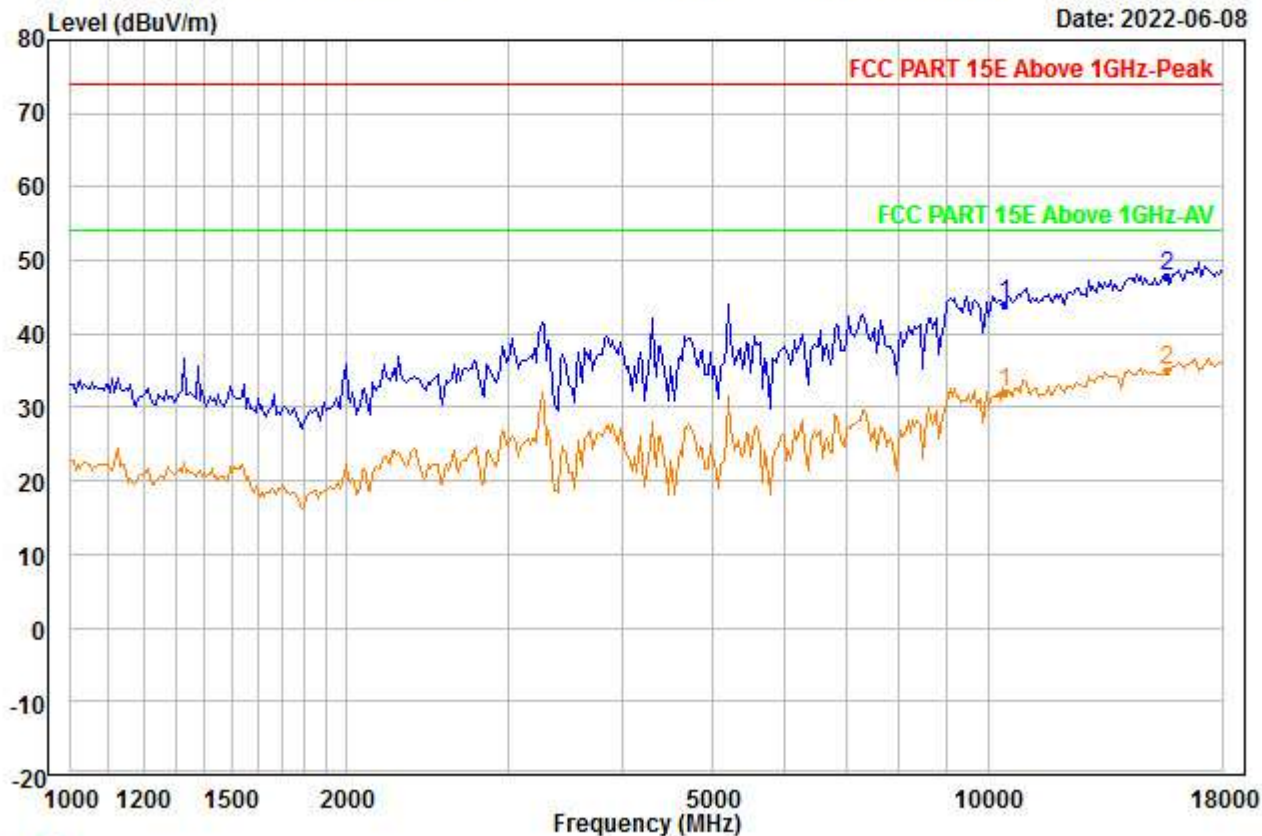


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5220
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10440.000	37.75	38.16	45.92	0.00	14.06	44.05	74.00	-29.95	---	---	Peak
2 PP15660.000	36.42	40.42	46.03	0.00	17.01	47.82	74.00	-26.18	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00102.EMI

Date: 2022-06-08

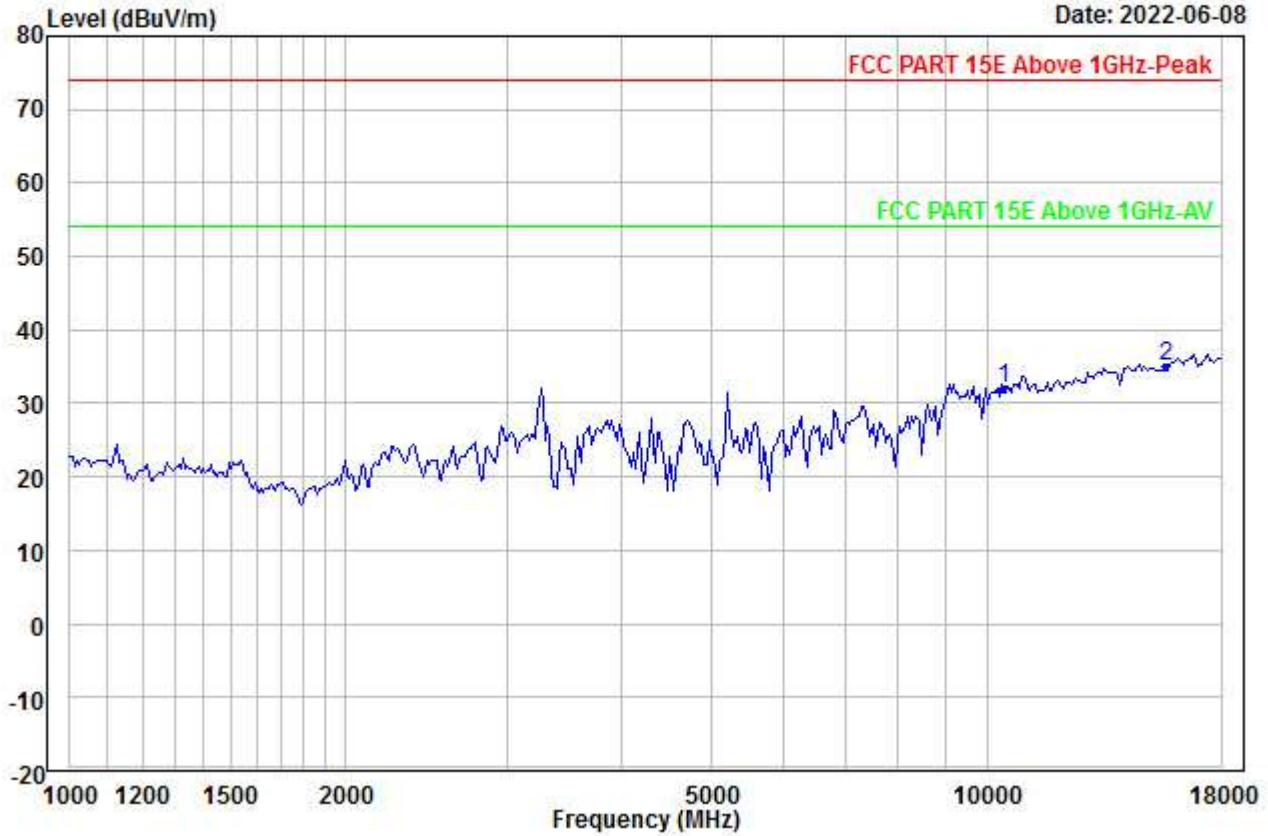


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5220
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10440.000	25.73	38.16	45.92	0.00	14.06	32.03	54.00	-21.97	---	---	Aver
2 PP15660.000	23.63	40.42	46.03	0.00	17.01	35.03	54.00	-18.97	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00103.EMI

Date: 2022-06-08

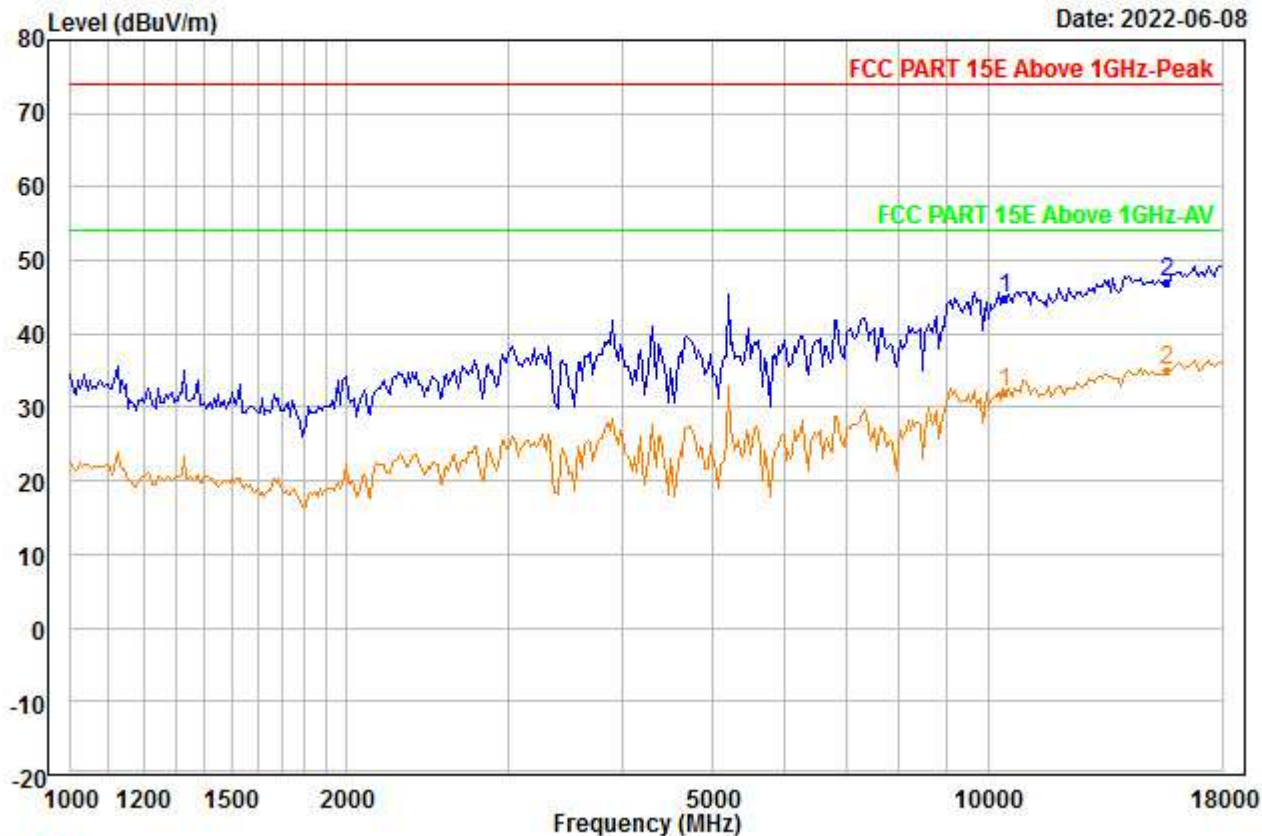


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5220
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10440.000	38.59	38.16	45.92	0.00	14.06	44.89	74.00	-29.11	---	---	Peak
2 PP15660.000	35.69	40.42	46.03	0.00	17.01	47.09	74.00	-26.91	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00104.EMI

Date: 2022-06-08

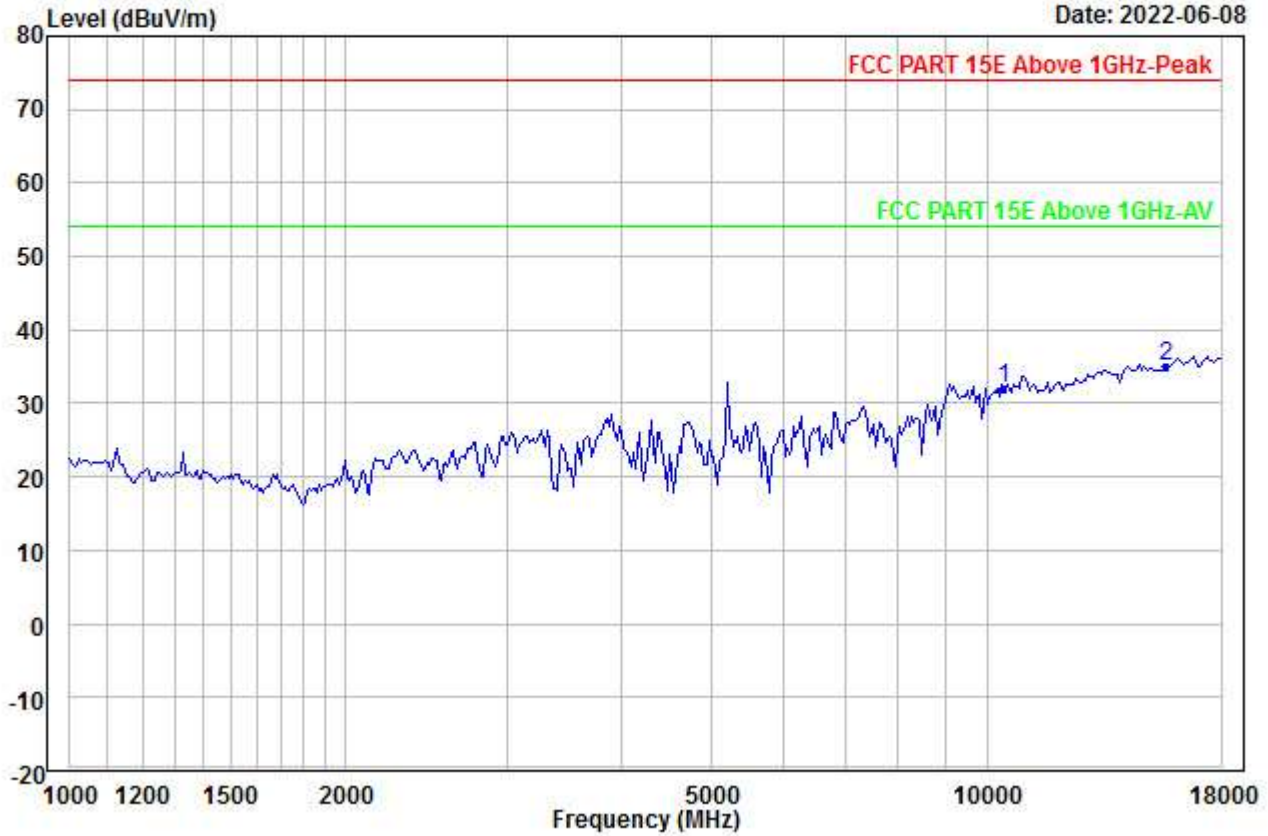


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5220
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10440.000	25.73	38.16	45.92	0.00	14.06	32.03	54.00	-21.97	---	---	Aver
2 PP15660.000	23.63	40.42	46.03	0.00	17.01	35.03	54.00	-18.97	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00105.EMI

Date: 2022-06-08

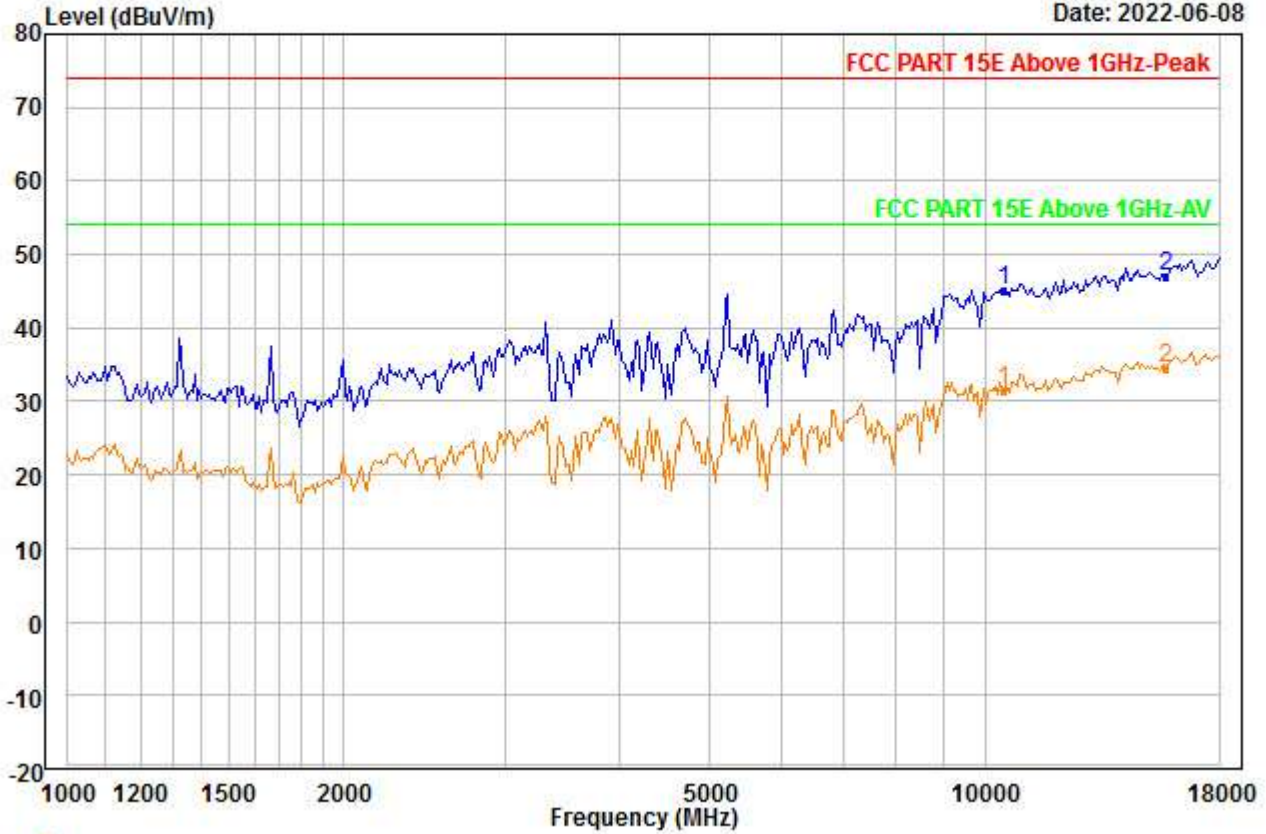


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5240
 Remark :

	Read Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10480.000	38.81	38.19	45.91	0.00	14.05	45.14	74.00	-28.86	---	---	Peak
2	PP15720.000	35.51	40.51	46.08	0.00	17.05	46.99	74.00	-27.01	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00106.EMI

Date: 2022-06-08

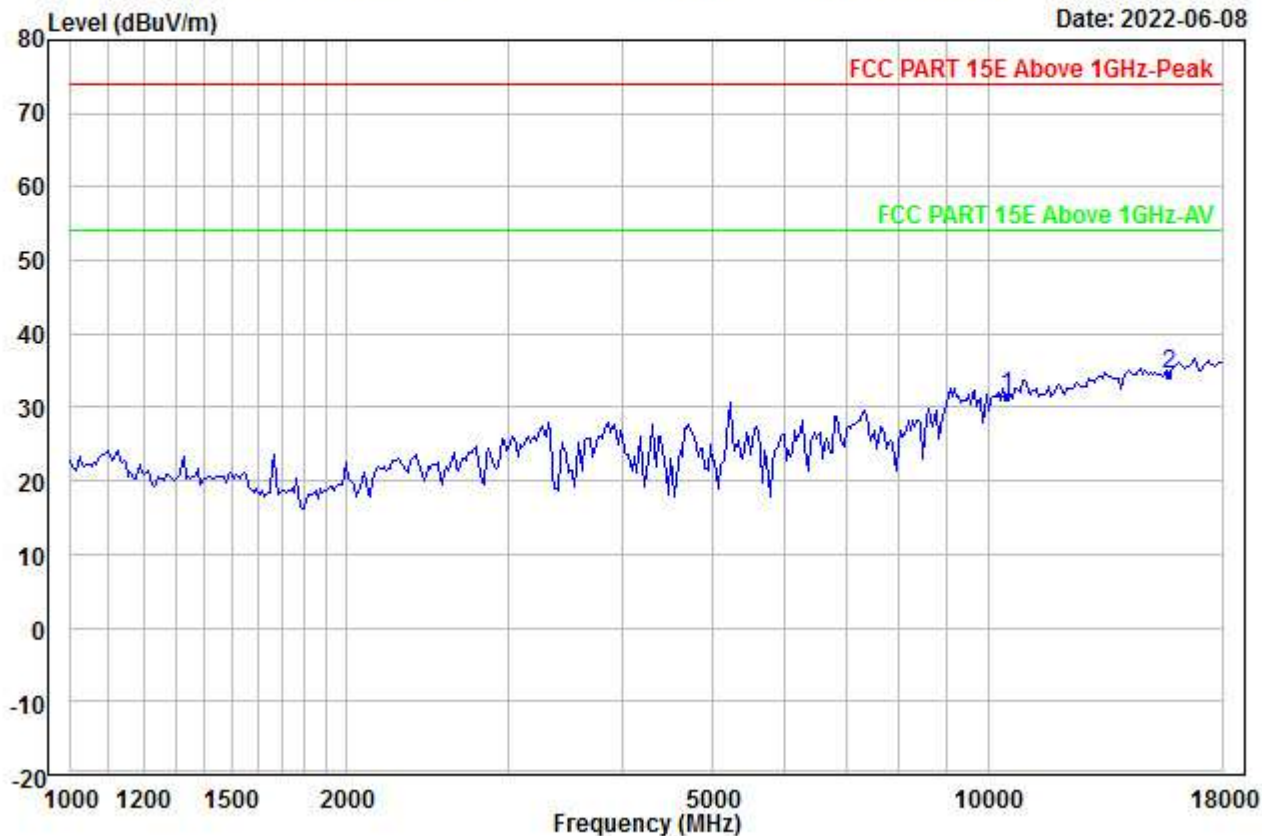


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5240
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10480.000	25.28	38.19	45.91	0.00	14.05	31.61	54.00	-22.39	---	---	Aver
2 PP15720.000	23.07	40.51	46.08	0.00	17.05	34.55	54.00	-19.45	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00107.EMI

Date: 2022-06-08

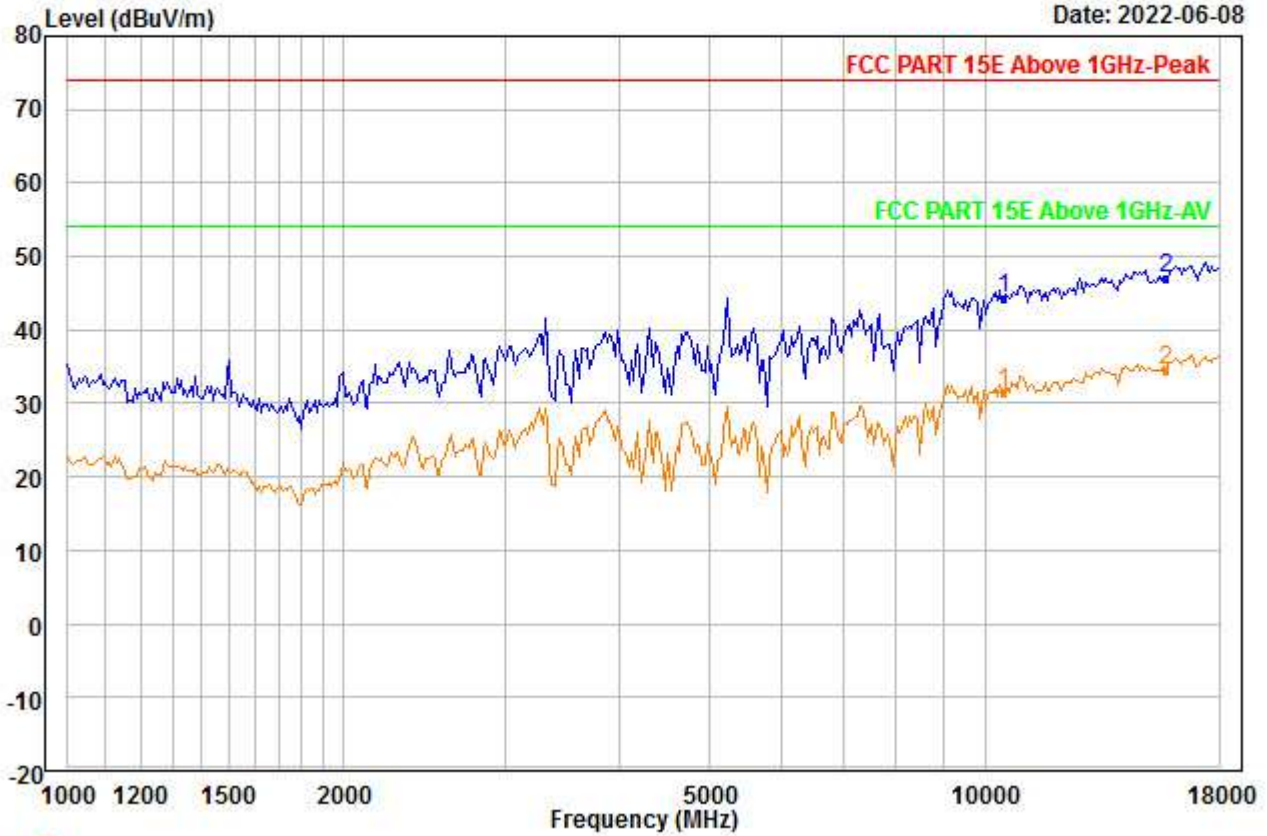


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5240
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10480.000	38.08	38.19	45.91	0.00	14.05	44.41	74.00	-29.59	---	---	Peak
2 PP15720.000	35.46	40.51	46.08	0.00	17.05	46.94	74.00	-27.06	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00108.EMI

Date: 2022-06-08

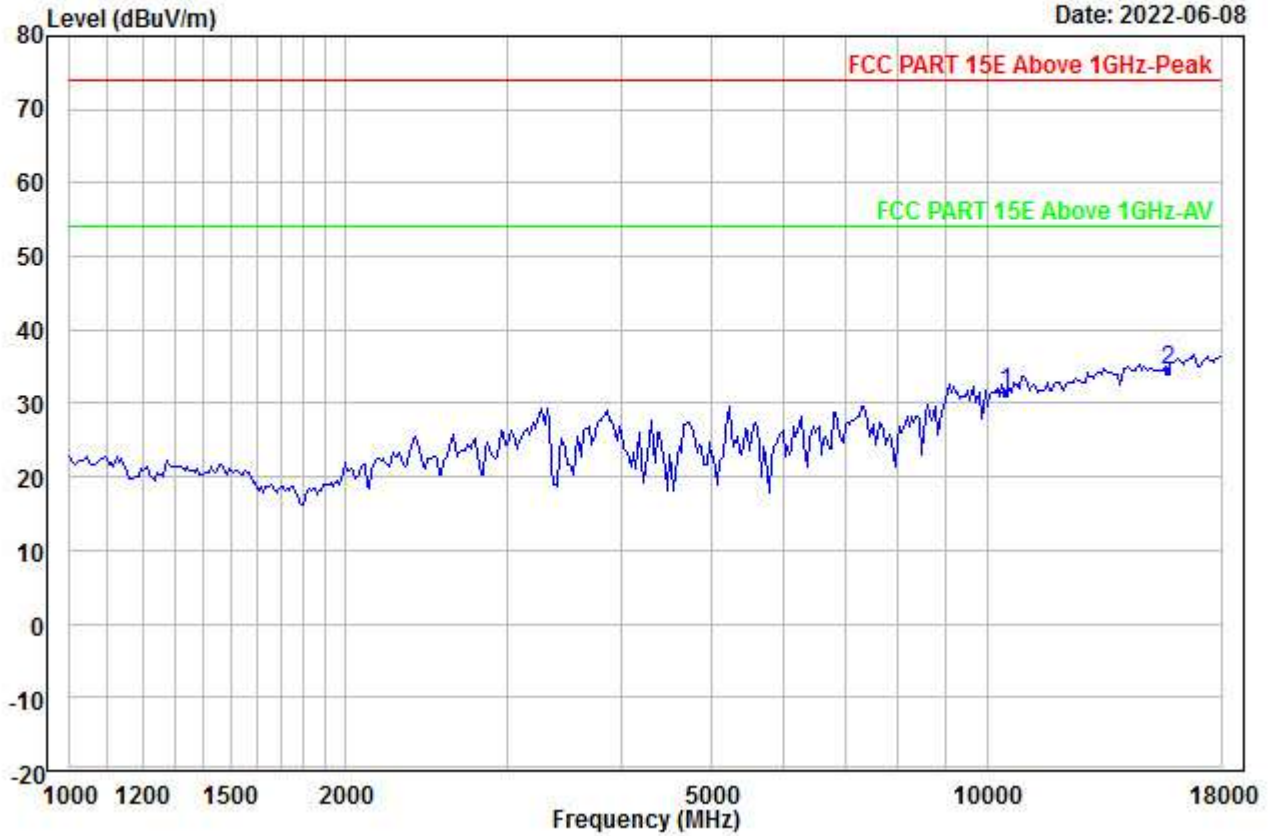


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5240
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10480.000	25.28	38.19	45.91	0.00	14.05	31.61	54.00	-22.39	---	---	Aver
2 PP15720.000	23.07	40.51	46.08	0.00	17.05	34.55	54.00	-19.45	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00109.EMI

Date: 2022-06-08

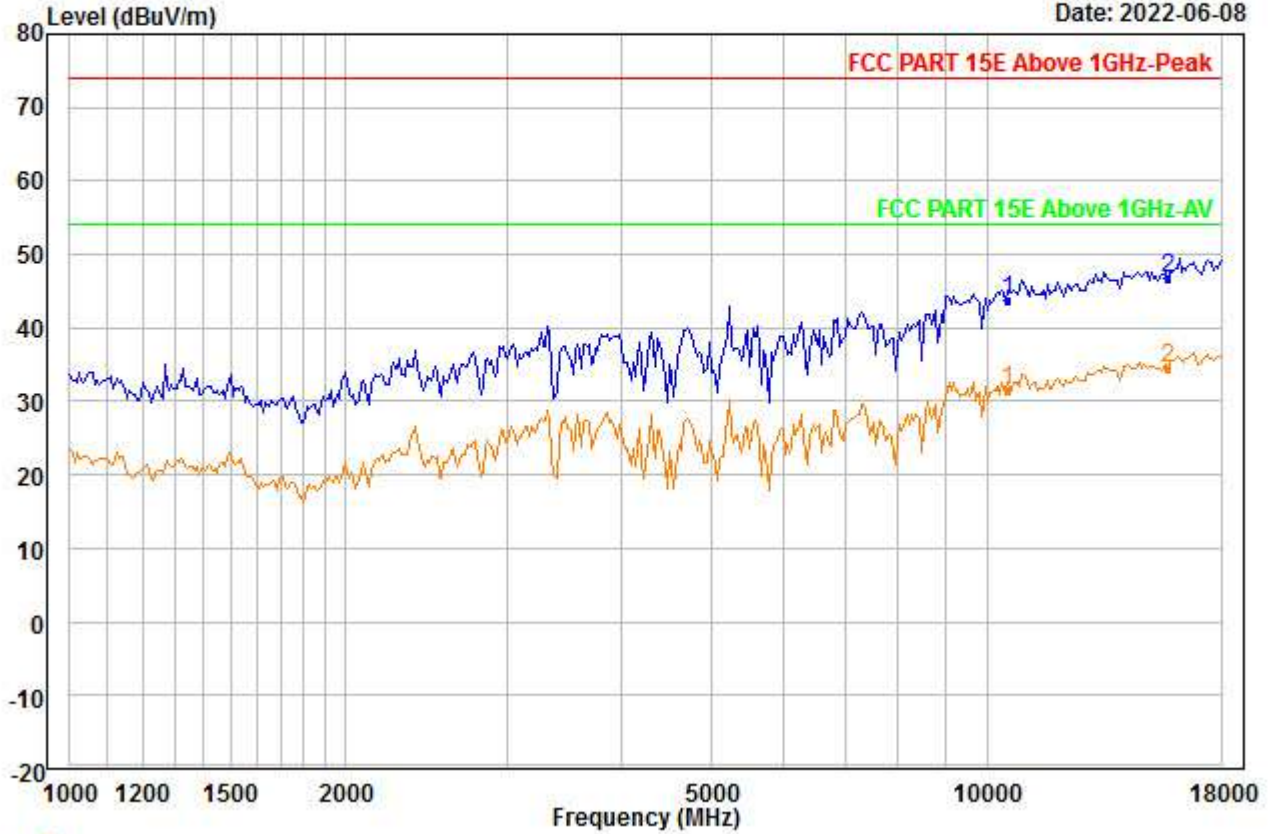


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5260
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10520.000	37.36	38.21	45.86	0.00	14.04	43.75	74.00	-30.25	---	---	Peak
2 PP15780.000	35.21	40.59	46.12	0.00	17.09	46.77	74.00	-27.23	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00110.EMI

Date: 2022-06-08

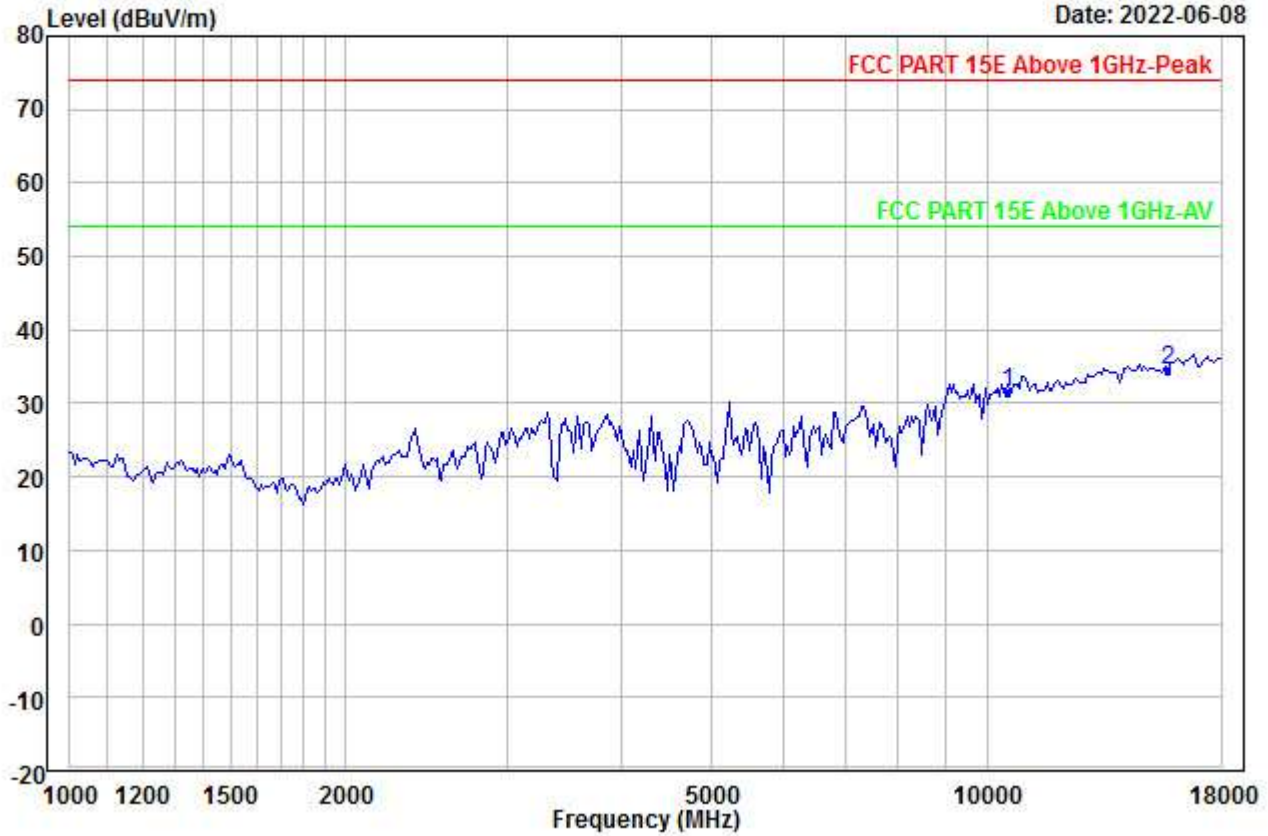


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5260
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10520.000	25.22	38.21	45.86	0.00	14.04	31.61	54.00	-22.39	---	---	Aver
2	PP15780.000	22.99	40.59	46.12	0.00	17.09	34.55	54.00	-19.45	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00111.EMI

Date: 2022-06-08

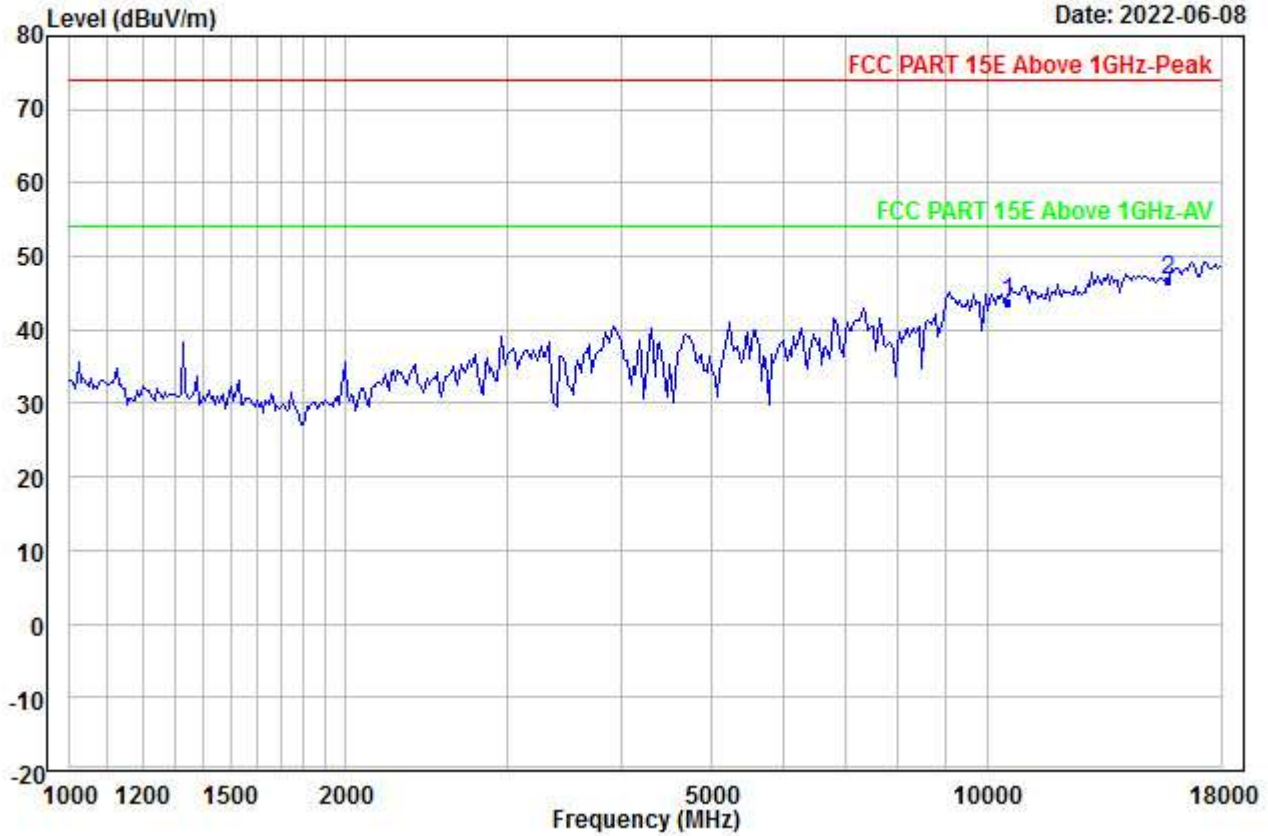


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5260
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10520.000	37.34	38.21	45.86	0.00	14.04	43.73	74.00	-30.27	---	---	Peak
2	PP15780.000	35.18	40.59	46.12	0.00	17.09	46.74	74.00	-27.26	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00112.EMI

Date: 2022-06-08

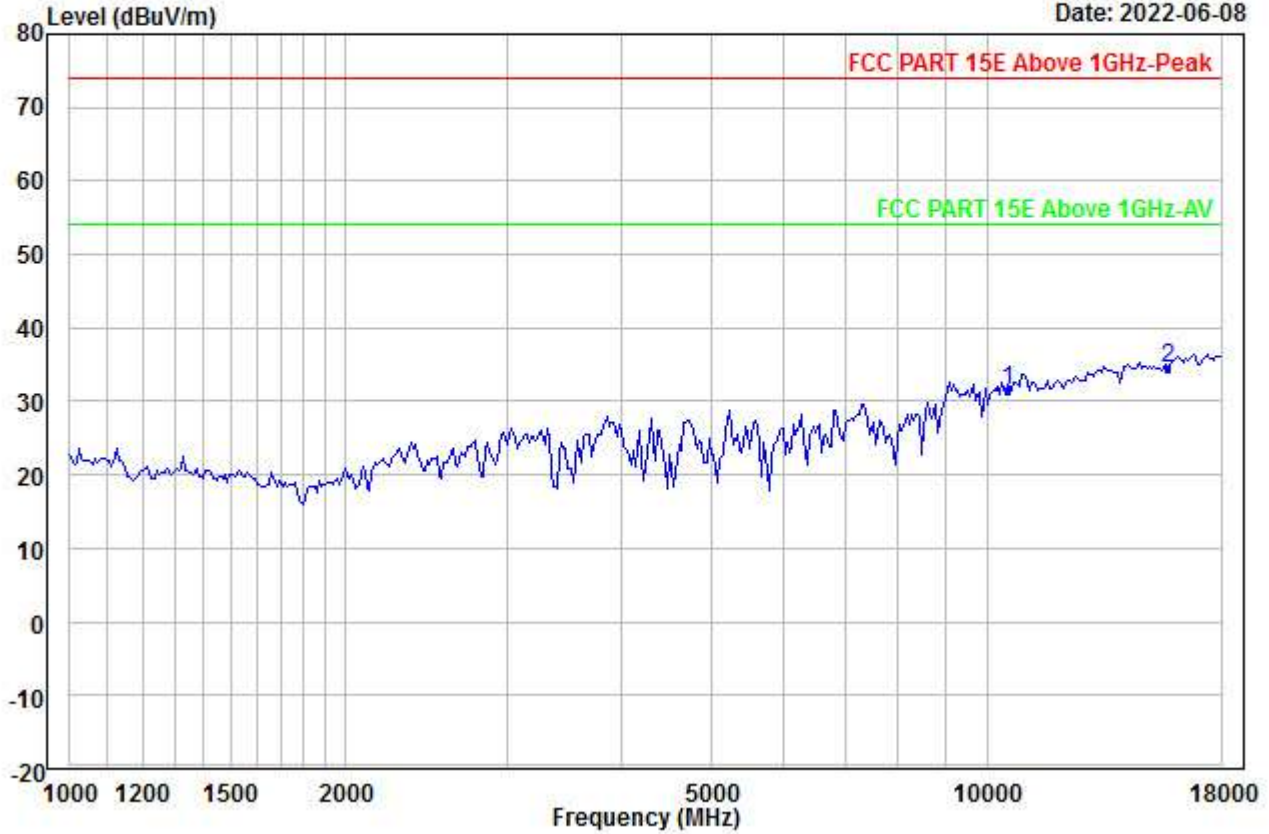


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5260
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10520.000	25.15	38.21	45.86	0.00	14.04	31.54	54.00	-22.46	---	---	Aver
2 PP15780.000	22.99	40.59	46.12	0.00	17.09	34.55	54.00	-19.45	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00113.EMI

Date: 2022-06-08

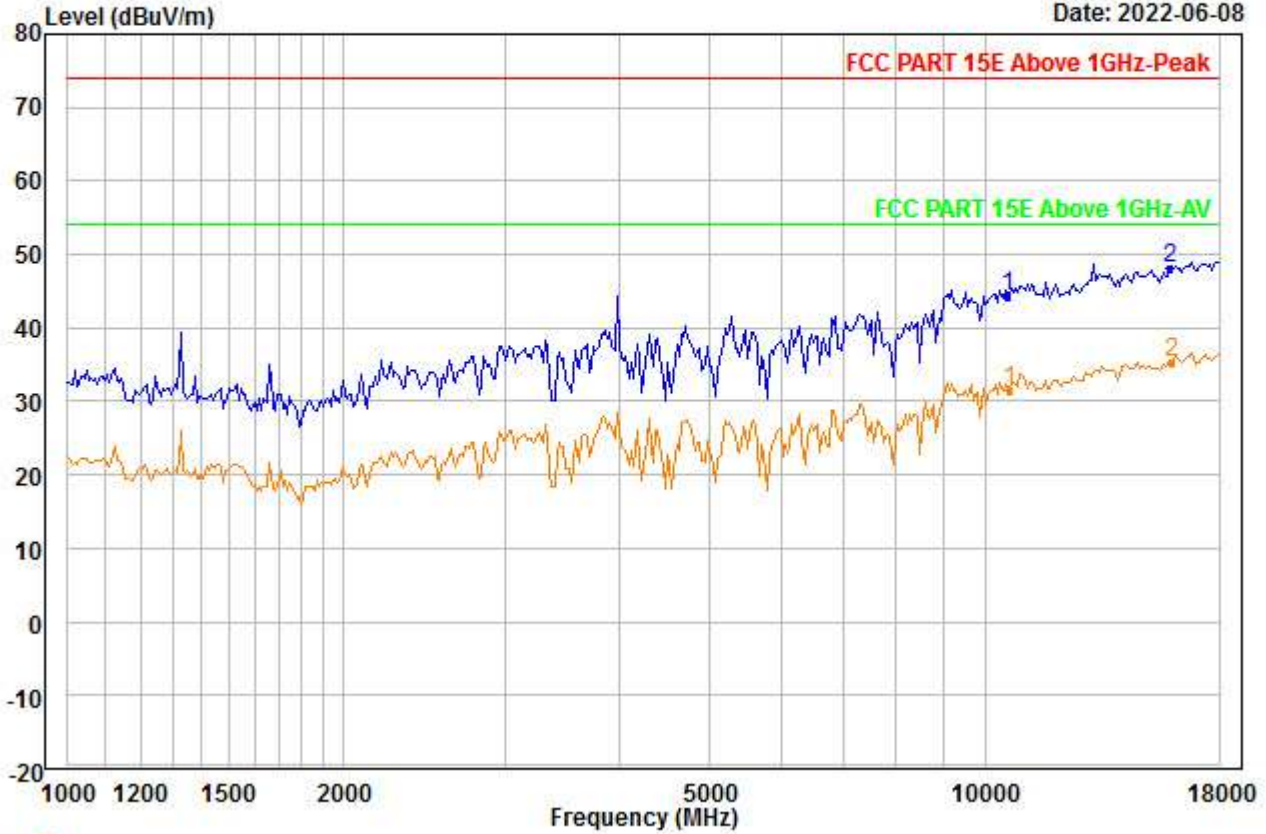


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5300
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10600.000	37.80	38.26	45.72	0.00	14.02	44.36	74.00	-29.64	---	---	Peak
2 PP15900.000	36.30	40.76	46.22	0.00	17.17	48.01	74.00	-25.99	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00114.EMI

Date: 2022-06-08

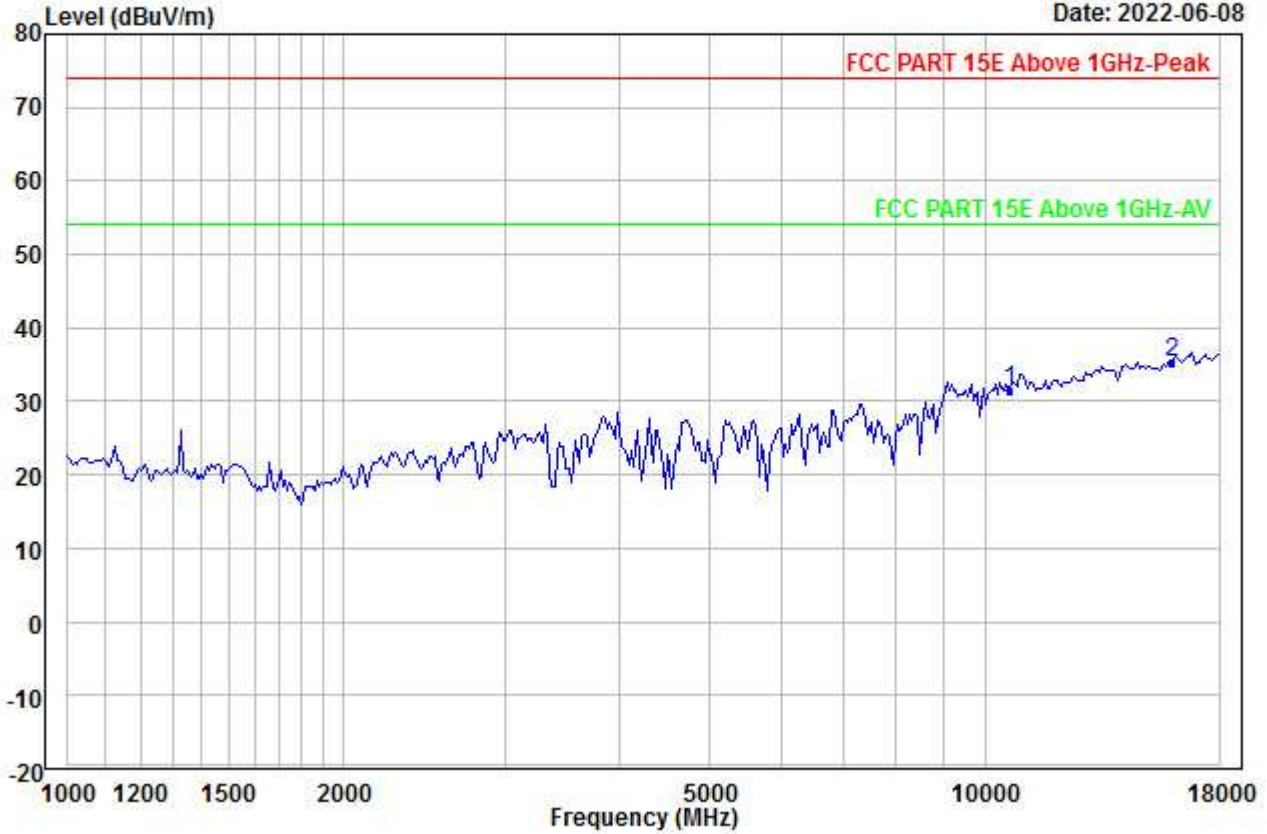


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5300
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10640.000	24.75	38.28	45.65	0.00	14.01	31.39	54.00	-22.61	---	---	Aver
2	PP15960.000	23.60	40.84	46.27	0.00	17.20	35.37	54.00	-18.63	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00115.EMI

Date: 2022-06-08

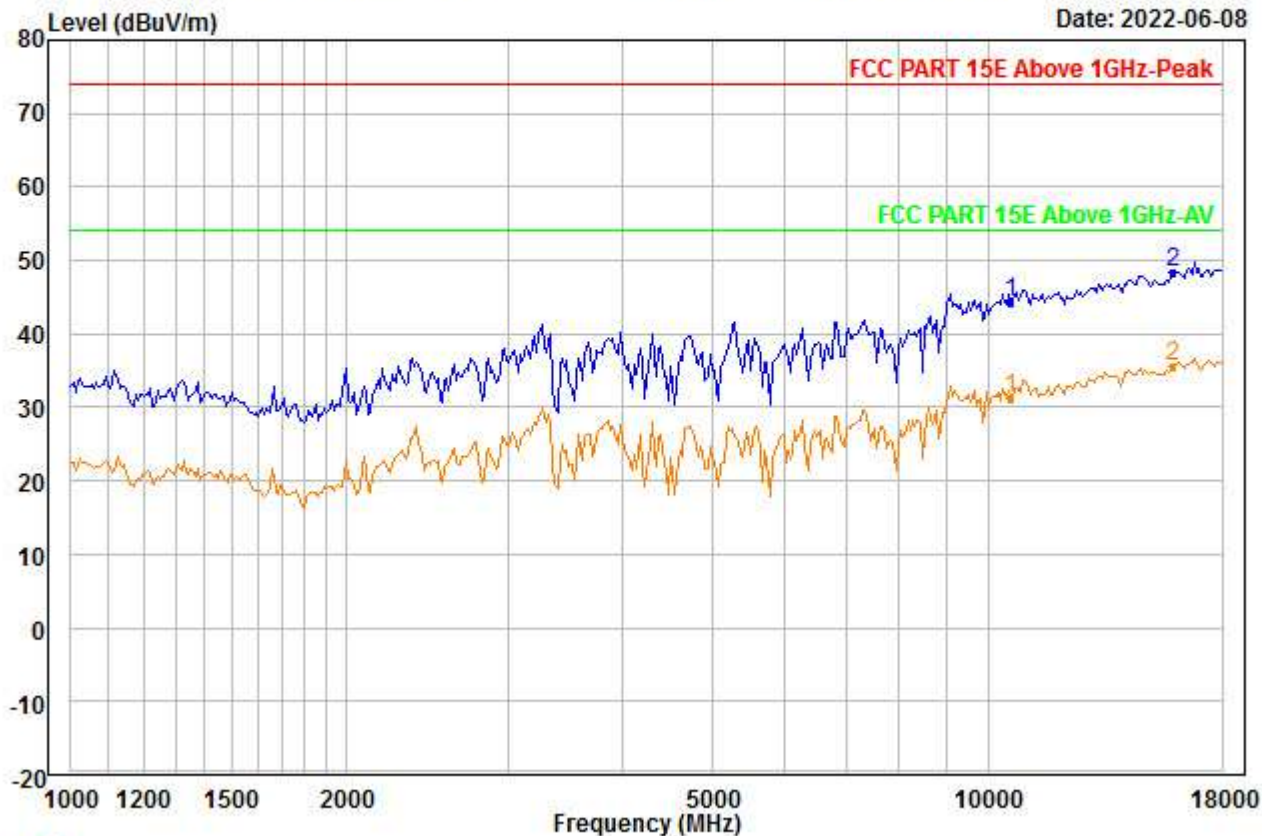


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5300
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10600.000	37.80	38.26	45.72	0.00	14.02	44.36	74.00	-29.64	---	---	Peak
2 PP15900.000	36.71	40.76	46.22	0.00	17.17	48.42	74.00	-25.58	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00116.EMI

Date: 2022-06-08

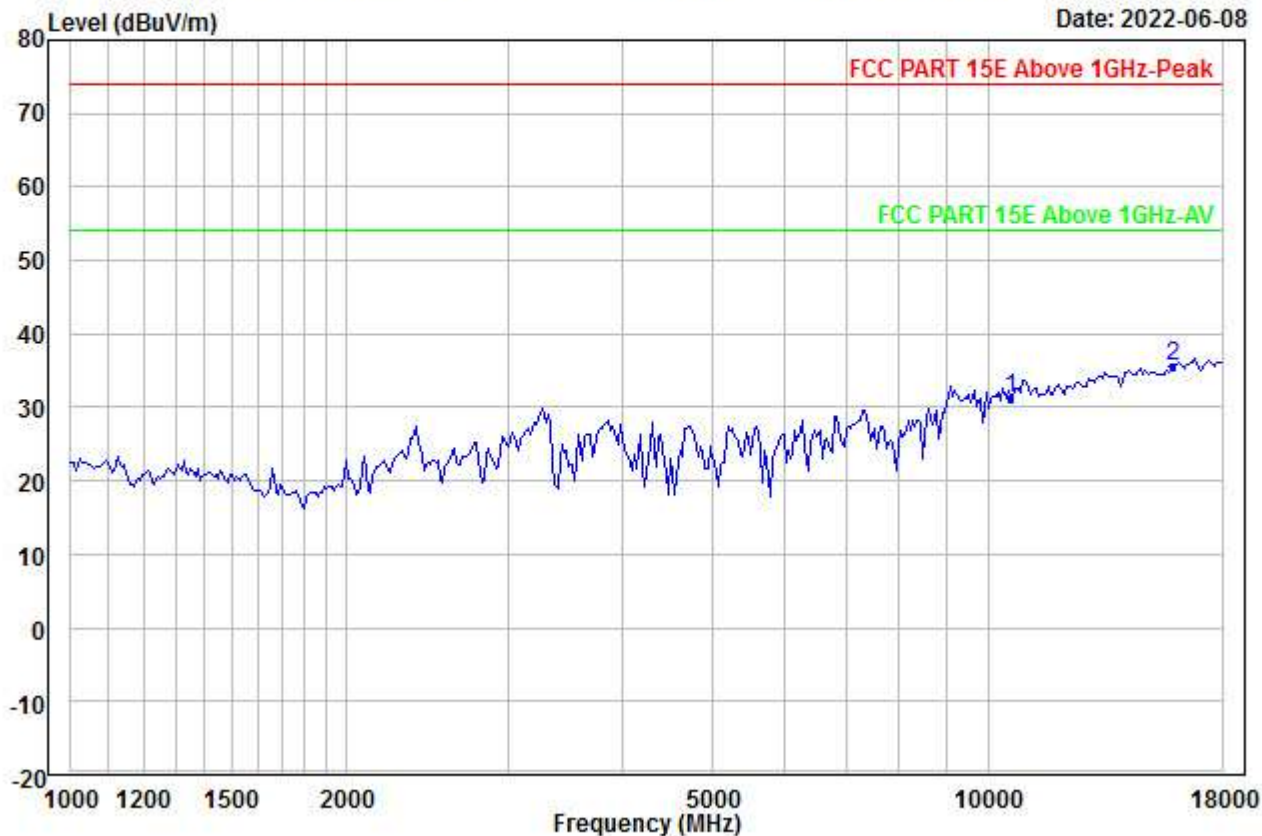


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5300
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10600.000	24.75	38.26	45.72	0.00	14.02	31.31	54.00	-22.69	---	---	Aver
2 PP15900.000	23.75	40.76	46.22	0.00	17.17	35.46	54.00	-18.54	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00117.EMI

Date: 2022-06-09

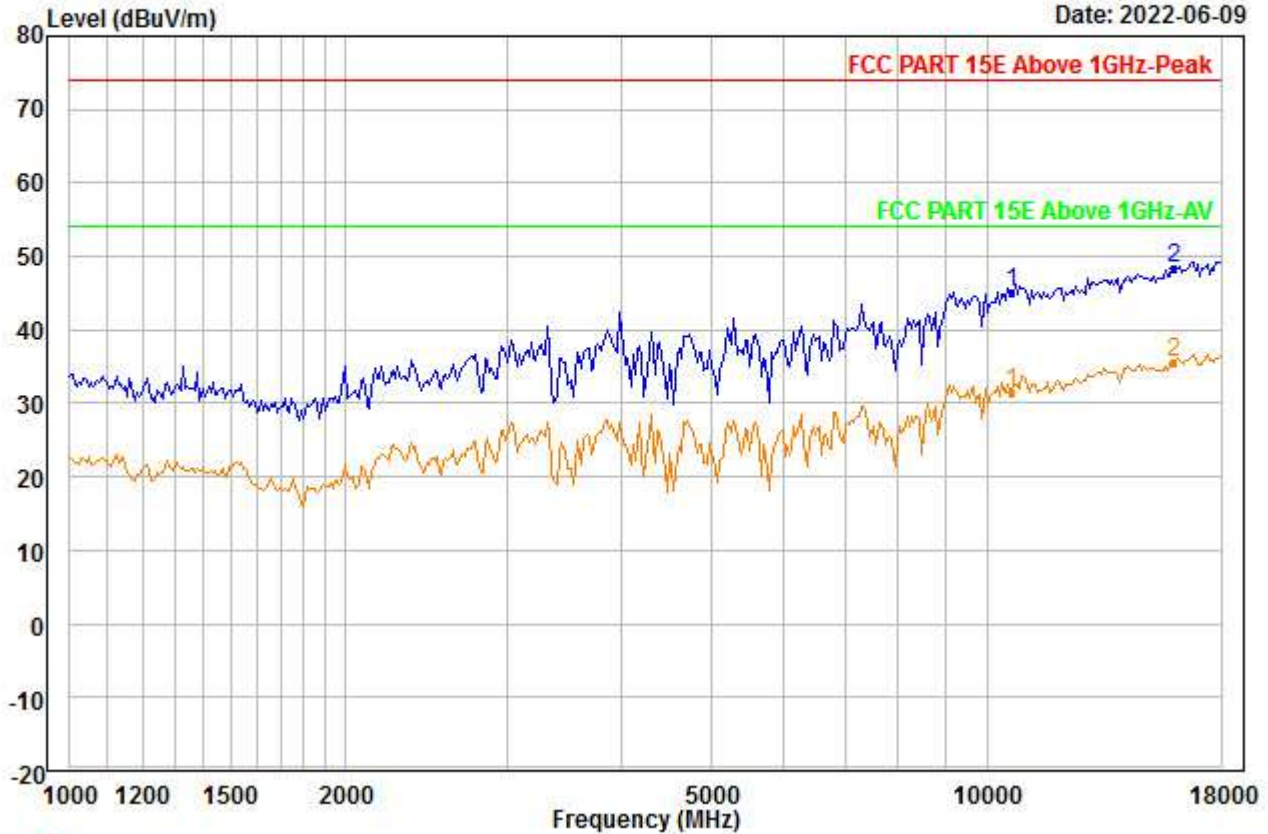


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5320
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10640.000	38.42	38.28	45.65	0.00	14.01	45.06	74.00	-28.94	---	---	Peak
2 PP15960.000	36.63	40.84	46.27	0.00	17.20	48.40	74.00	-25.60	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00118.EMI

Date: 2022-06-09

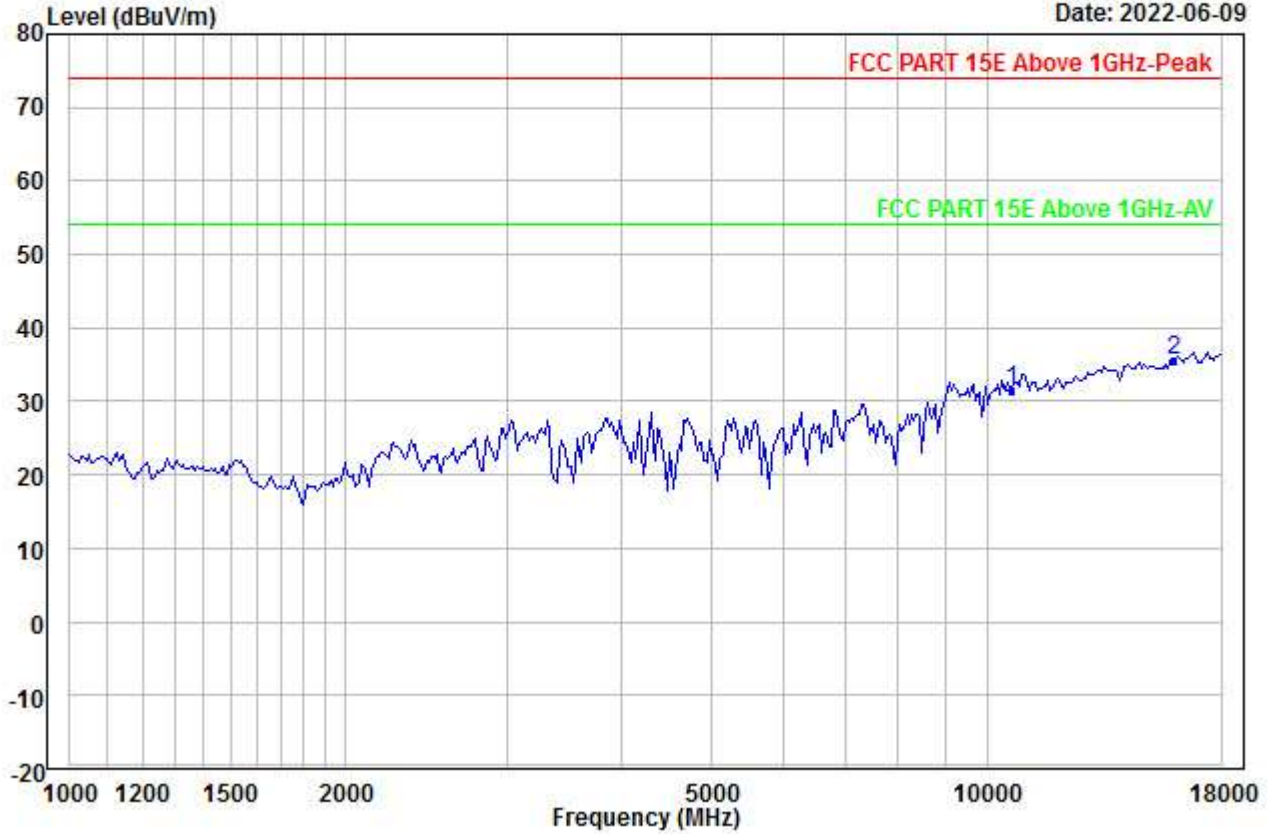


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5320
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10640.000	24.75	38.28	45.65	0.00	14.01	31.39	54.00	-22.61	---	---	Aver
2 PP15960.000	23.69	40.84	46.27	0.00	17.20	35.46	54.00	-18.54	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00119.EMI

Date: 2022-06-09

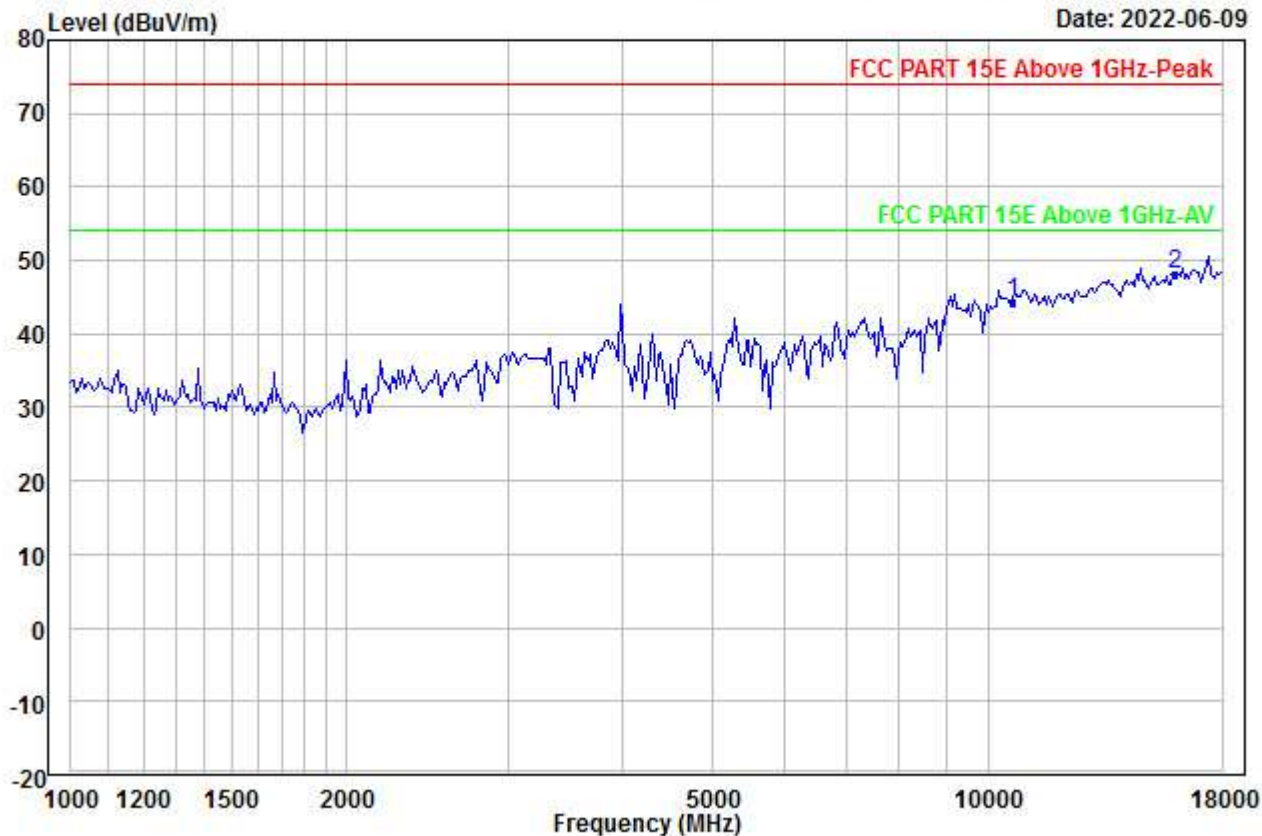


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5320
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10640.000	37.74	38.28	45.65	0.00	14.01	44.38	74.00	-29.62	---	---	Peak
2 PP15960.000	36.42	40.84	46.27	0.00	17.20	48.19	74.00	-25.81	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00120.EMI

Date: 2022-06-09

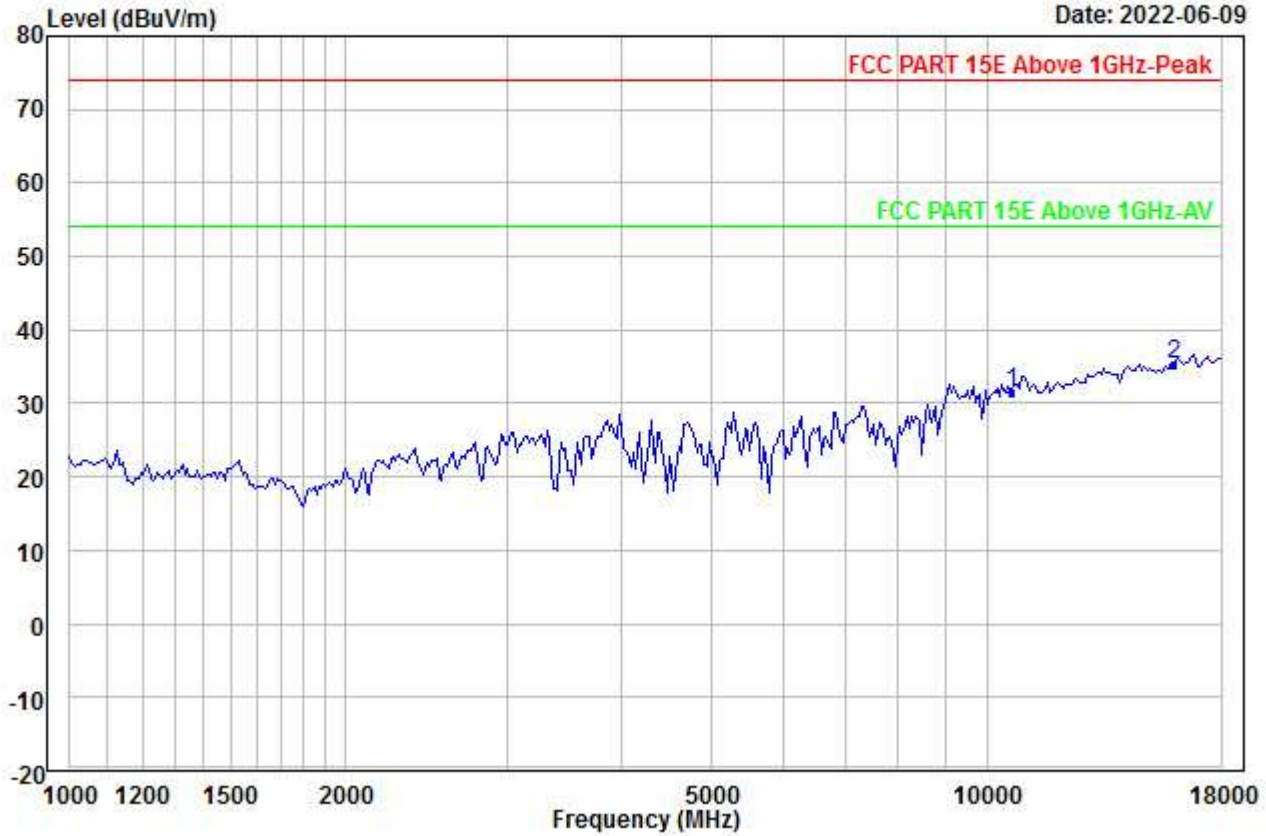


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5320
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10640.000	24.75	38.28	45.65	0.00	14.01	31.39	54.00	-22.61	---	---	Aver
2 PP15960.000	23.60	40.84	46.27	0.00	17.20	35.37	54.00	-18.63	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00121.EMI

Date: 2022-06-09

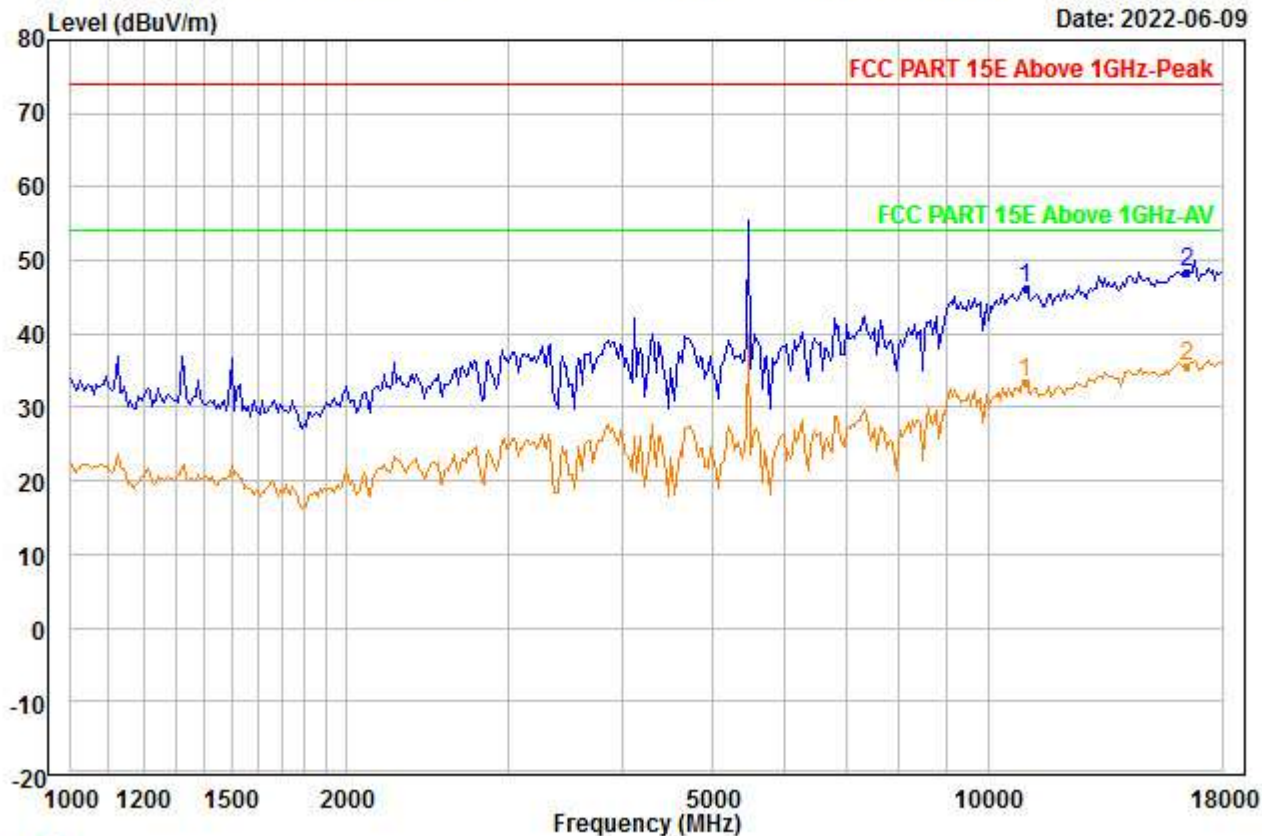


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5500
 Remark :

	Read Freq	Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11000.000	38.80	38.50	45.00	0.00	13.92	46.22	74.00	-27.78	---	---	Peak
2	PP16500.000	36.11	41.50	46.60	0.00	17.45	48.46	74.00	-25.54	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00122.EMI

Date: 2022-06-09

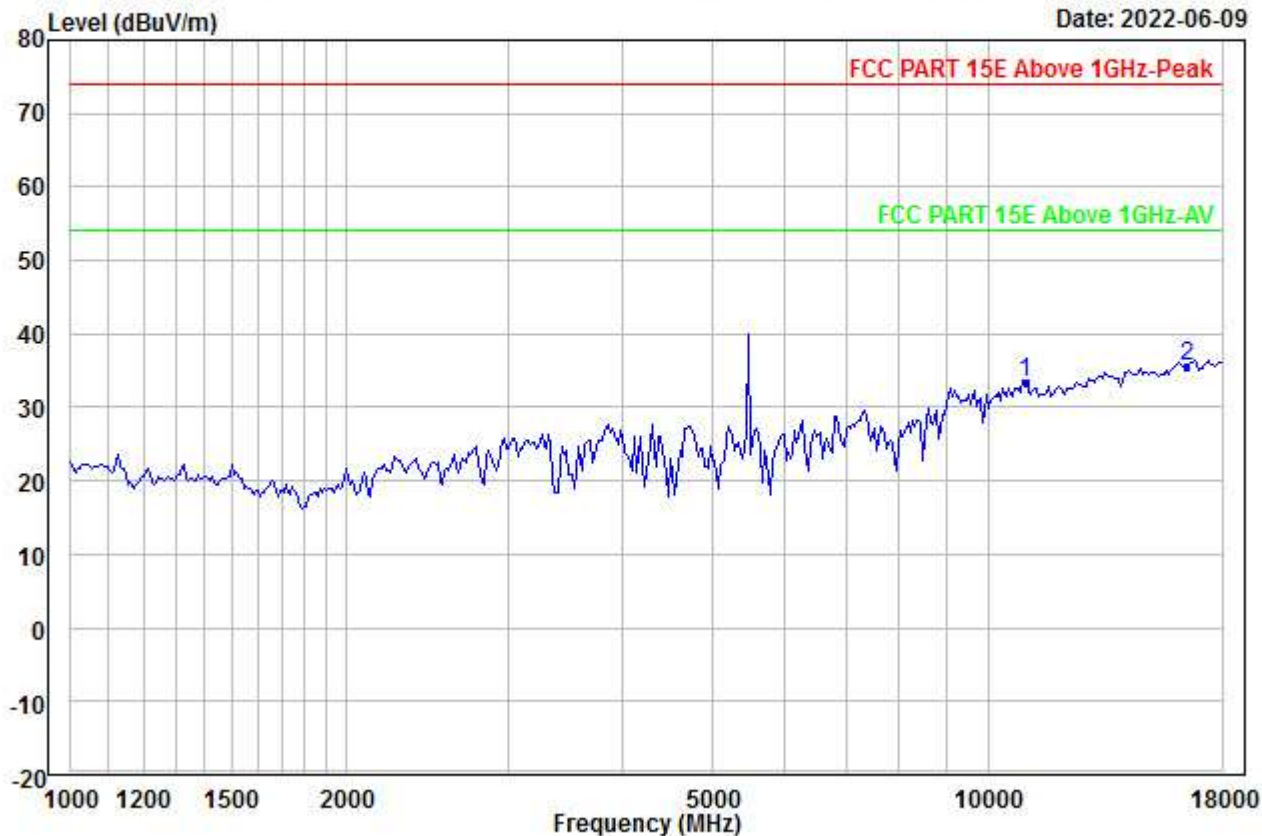


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5500
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 11000.000	25.87	38.50	45.00	0.00	13.92	33.29	54.00	-20.71	---	---	Aver
2 PP16500.000	23.33	41.50	46.60	0.00	17.45	35.68	54.00	-18.32	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00123.EMI

Date: 2022-06-09

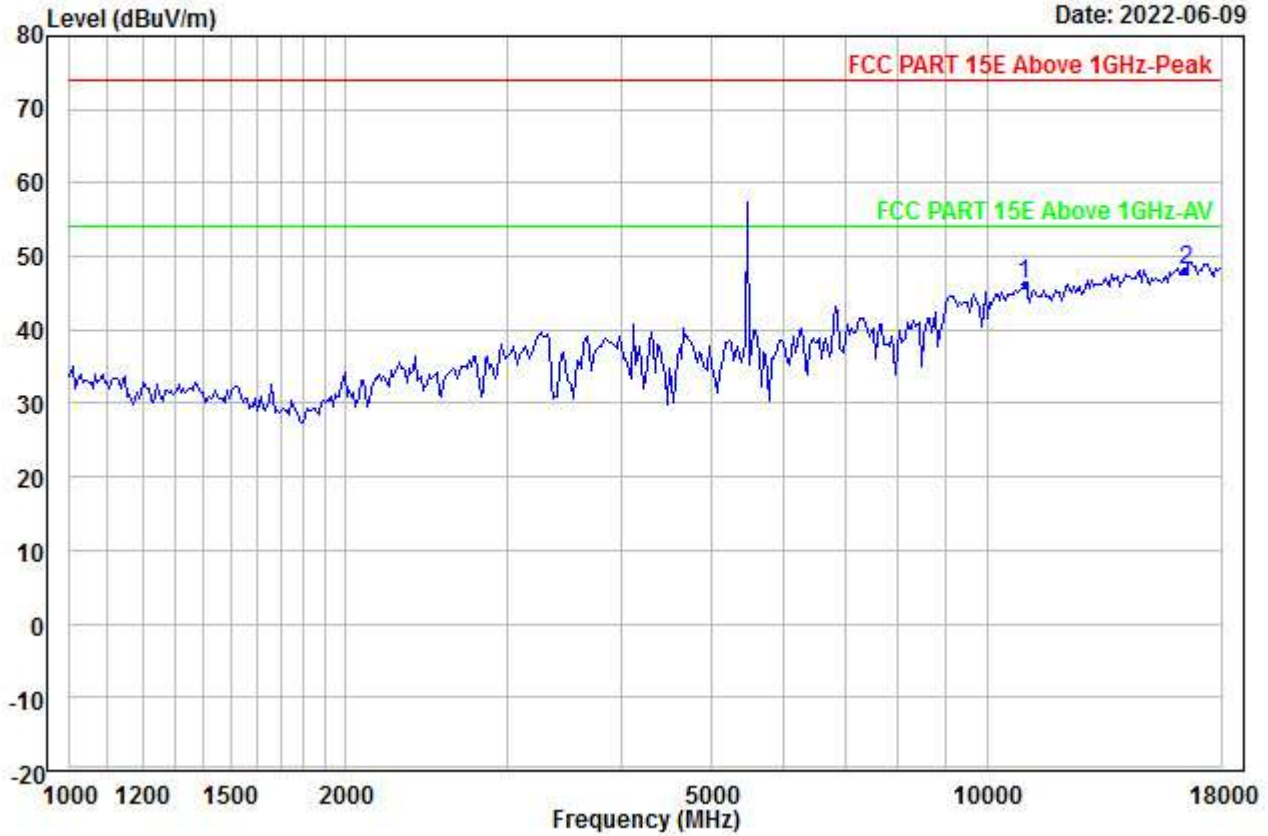


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5500
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11000.000	38.67	38.50	45.00	0.00	13.92	46.09	74.00	-27.91	---	---	Peak
2	PP16500.000	35.85	41.50	46.60	0.00	17.45	48.20	74.00	-25.80	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00124.EMI

Date: 2022-06-09

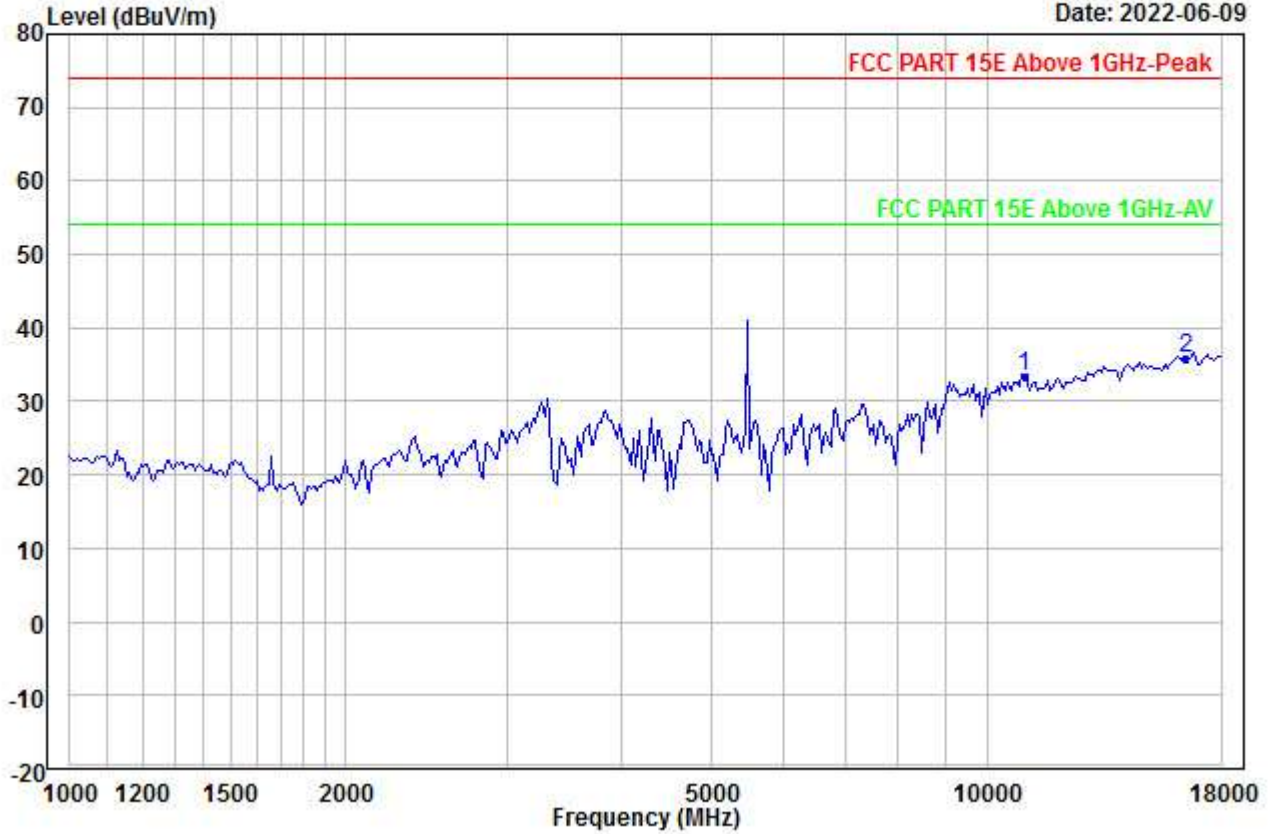


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5500
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 11000.000	26.02	38.50	45.00	0.00	13.92	33.44	54.00	-20.56	---	---	Aver
2 PP16500.000	23.43	41.50	46.60	0.00	17.45	35.78	54.00	-18.22	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00125.EMI

Date: 2022-06-09

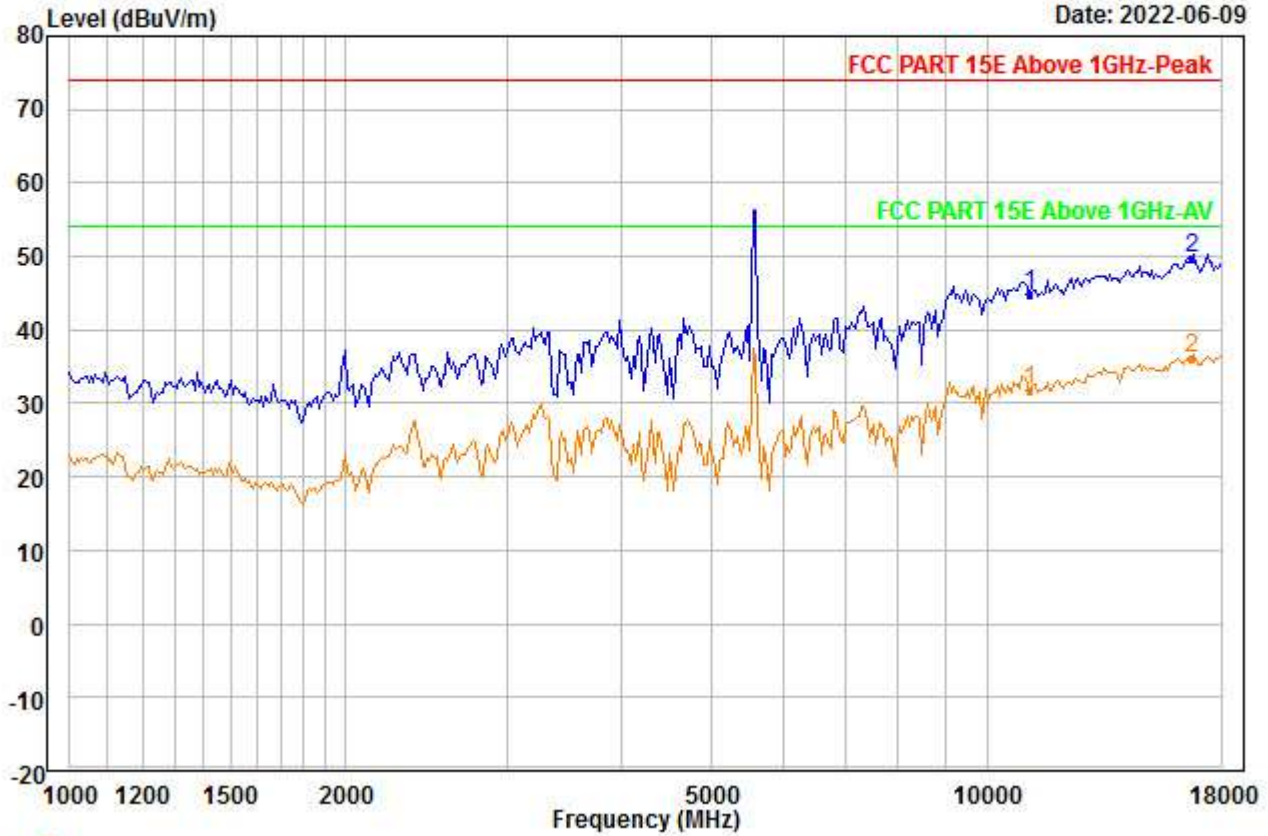


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5580
 Remark :

	Read Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11160.000	37.55	38.63	45.35	0.00	14.04	44.87	74.00	-29.13	---	---	Peak
2	PP16740.000	37.15	41.88	46.89	0.00	17.56	49.70	74.00	-24.30	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00126.EMI

Date: 2022-06-09

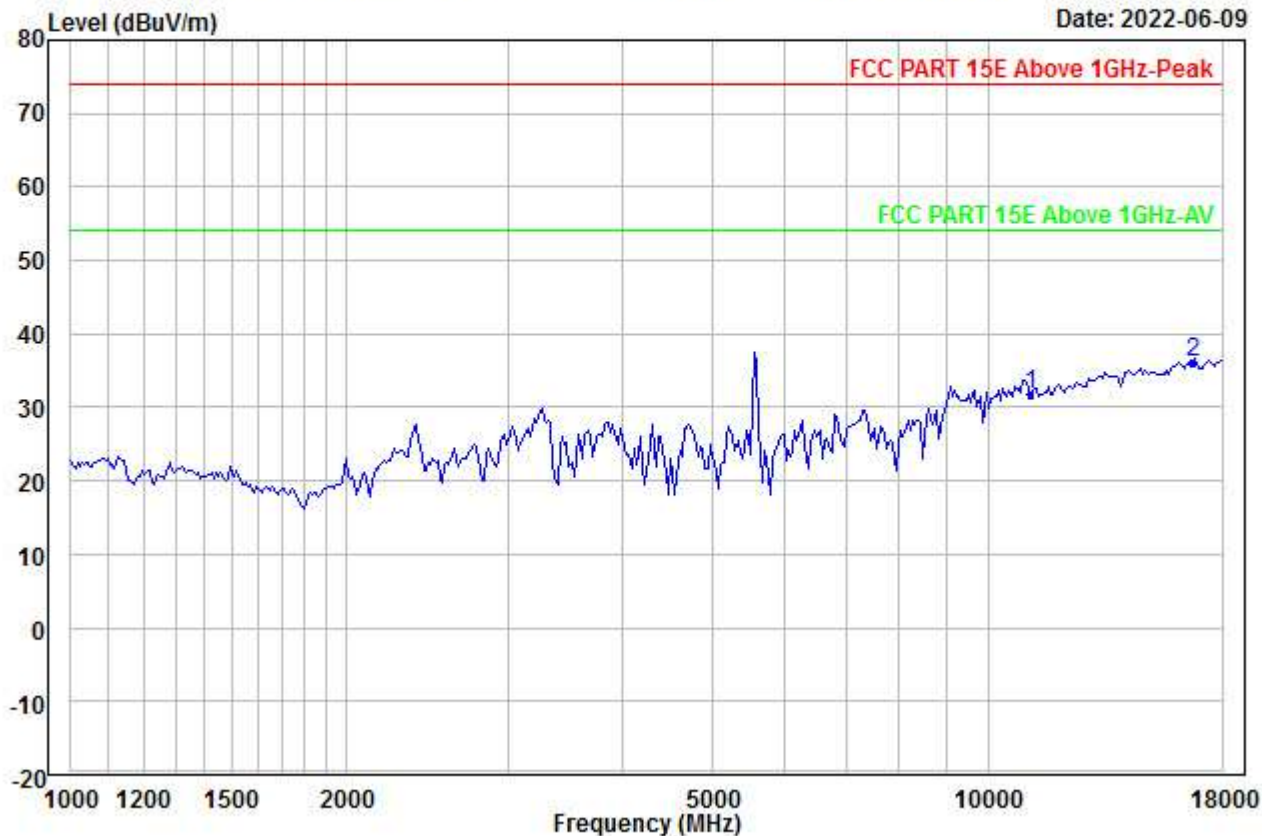


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5580
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11160.000	24.36	38.63	45.35	0.00	14.04	31.68	54.00	-22.32	---	---	Aver
2	PP16740.000	23.68	41.88	46.89	0.00	17.56	36.23	54.00	-17.77	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00127.EMI

Date: 2022-06-09

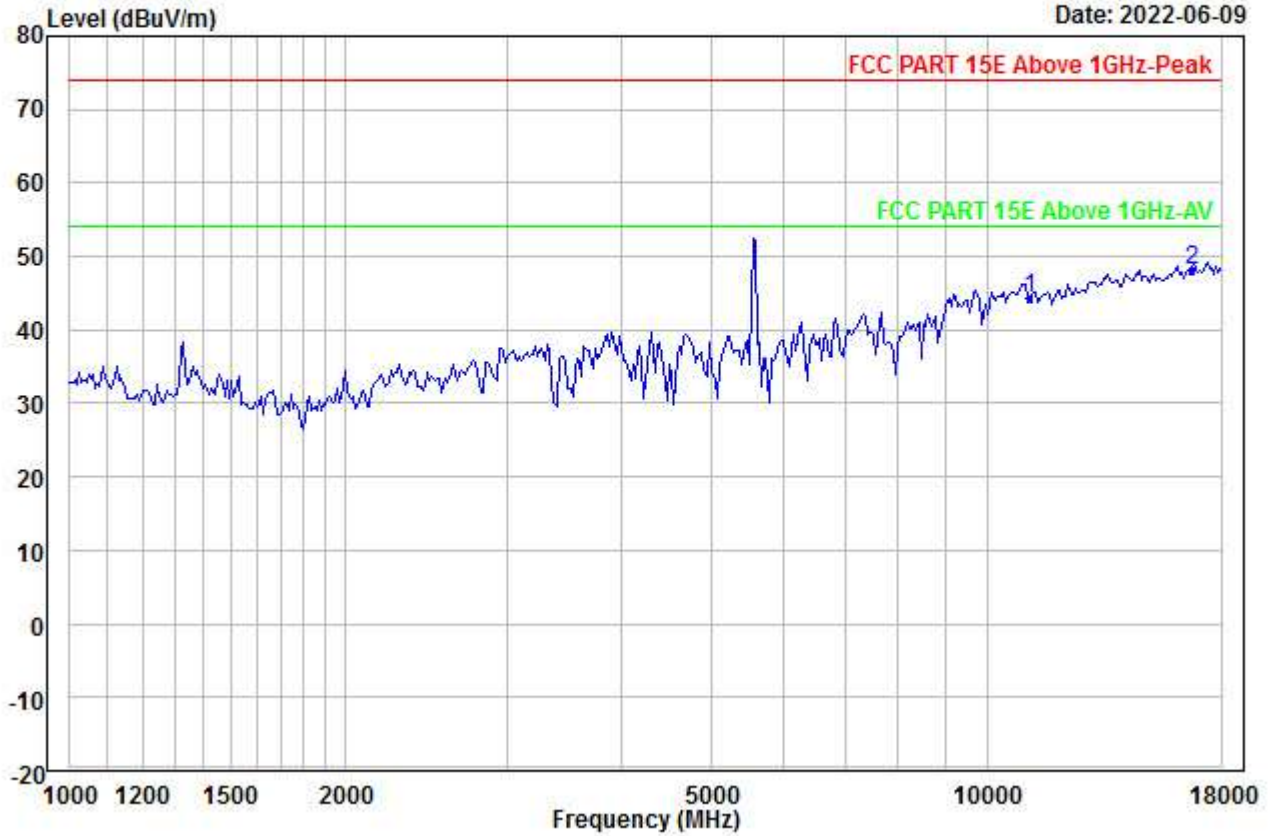


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5580
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 11160.000	36.85	38.63	45.35	0.00	14.04	44.17	74.00	-29.83	---	---	Peak
2 PP16740.000	35.65	41.88	46.89	0.00	17.56	48.20	74.00	-25.80	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00128.EMI

Date: 2022-06-09

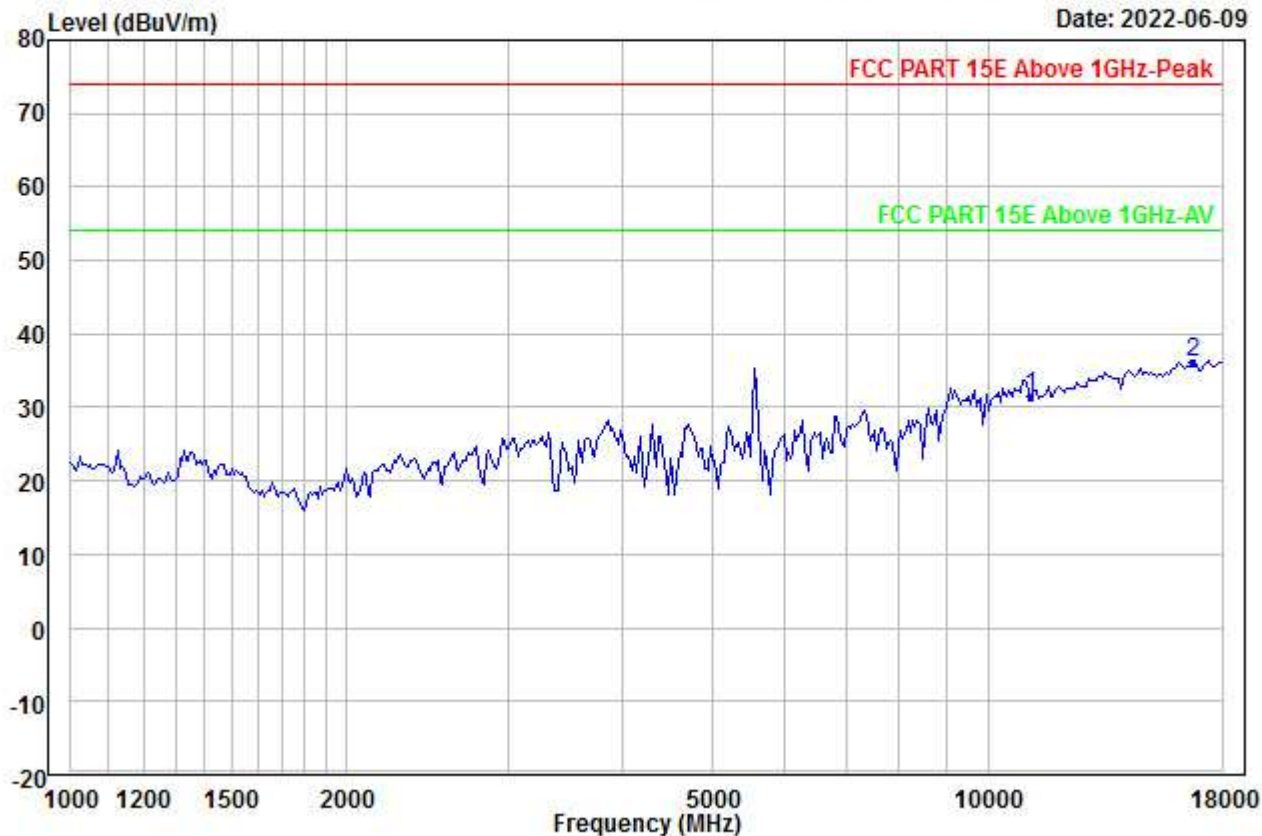


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5580
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 11160.000	24.27	38.63	45.35	0.00	14.04	31.59	54.00	-22.41	---	---	Aver
2 PP16740.000	23.59	41.88	46.89	0.00	17.56	36.14	54.00	-17.86	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00129.EMI

Date: 2022-06-09

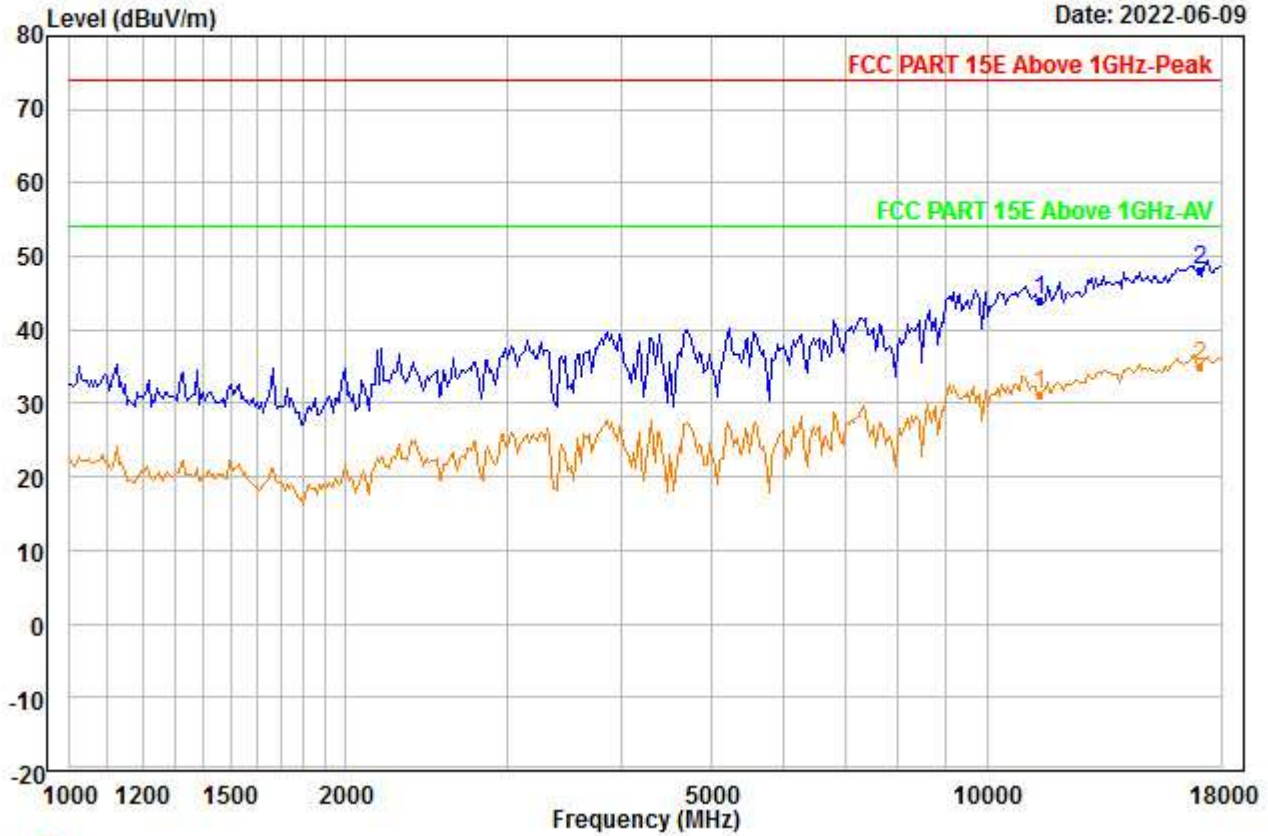


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5700
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 11400.000	36.76	38.82	45.88	0.00	14.21	43.91	74.00	-30.09	---	---	Peak
2 PP17100.000	35.20	42.26	47.08	0.00	17.74	48.12	74.00	-25.88	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00130.EMI

Date: 2022-06-09

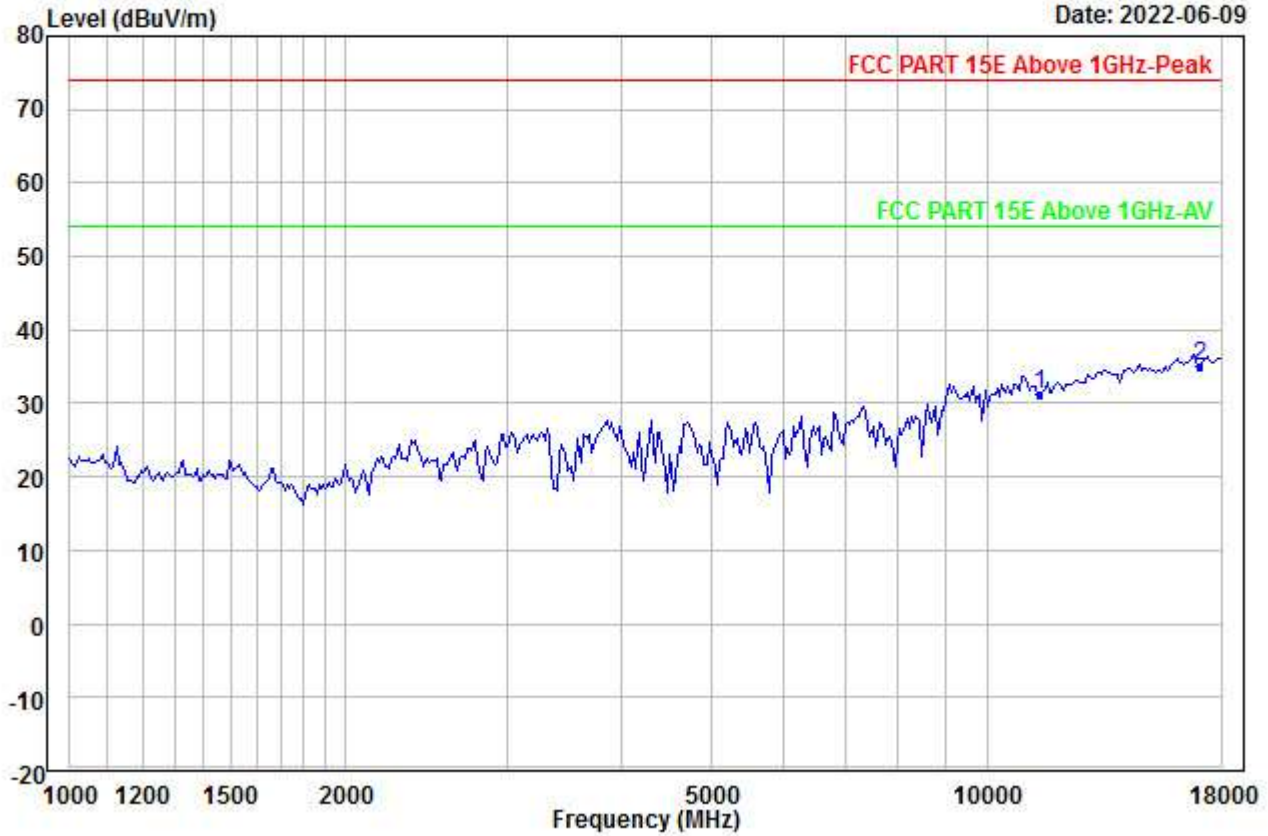


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5700
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11400.000	24.18	38.82	45.88	0.00	14.21	31.33	54.00	-22.67	---	---	Aver
2	PP17100.000	22.15	42.26	47.08	0.00	17.74	35.07	54.00	-18.93	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00131.EMI

Date: 2022-06-09

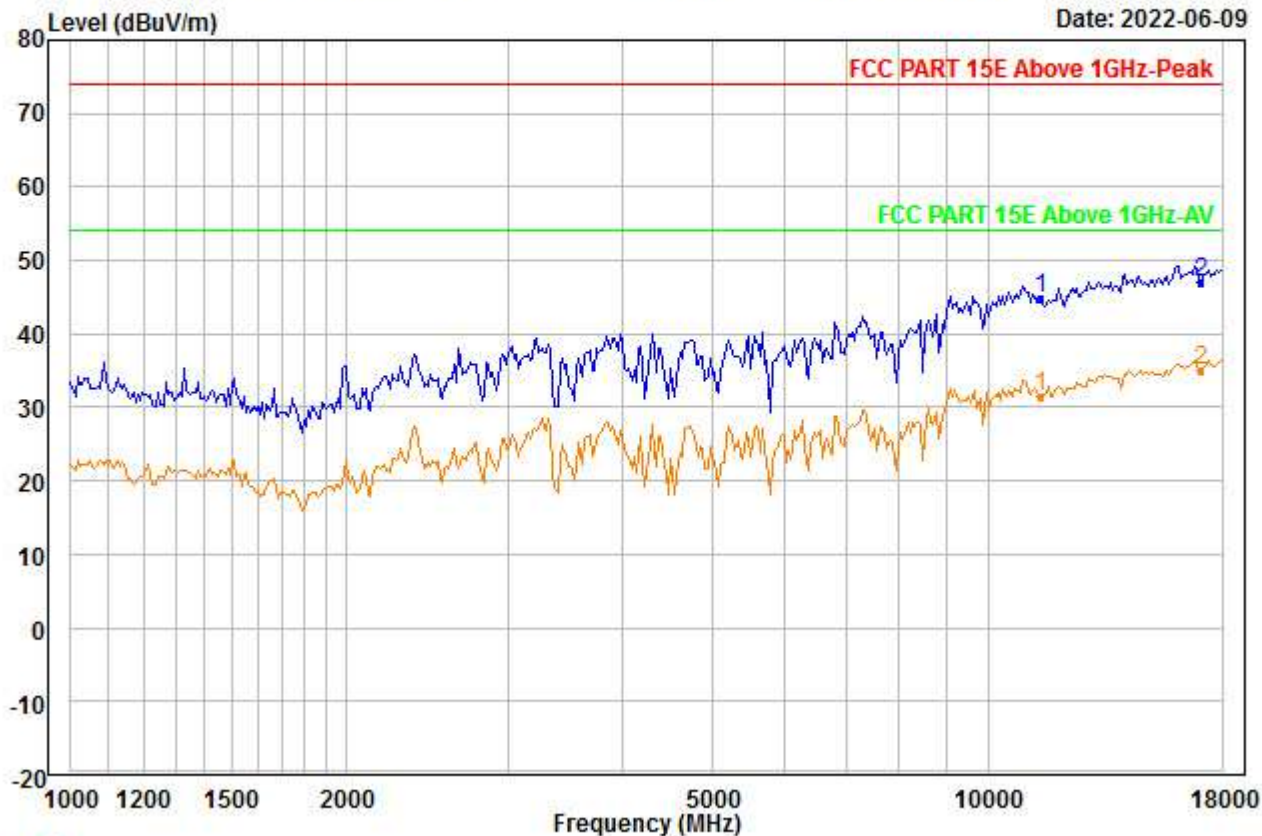


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5700
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 11400.000	37.75	38.82	45.88	0.00	14.21	44.90	74.00	-29.10	---	---	Peak
2 PP17100.000	34.24	42.26	47.08	0.00	17.74	47.16	74.00	-26.84	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00132.EMI

Date: 2022-06-09

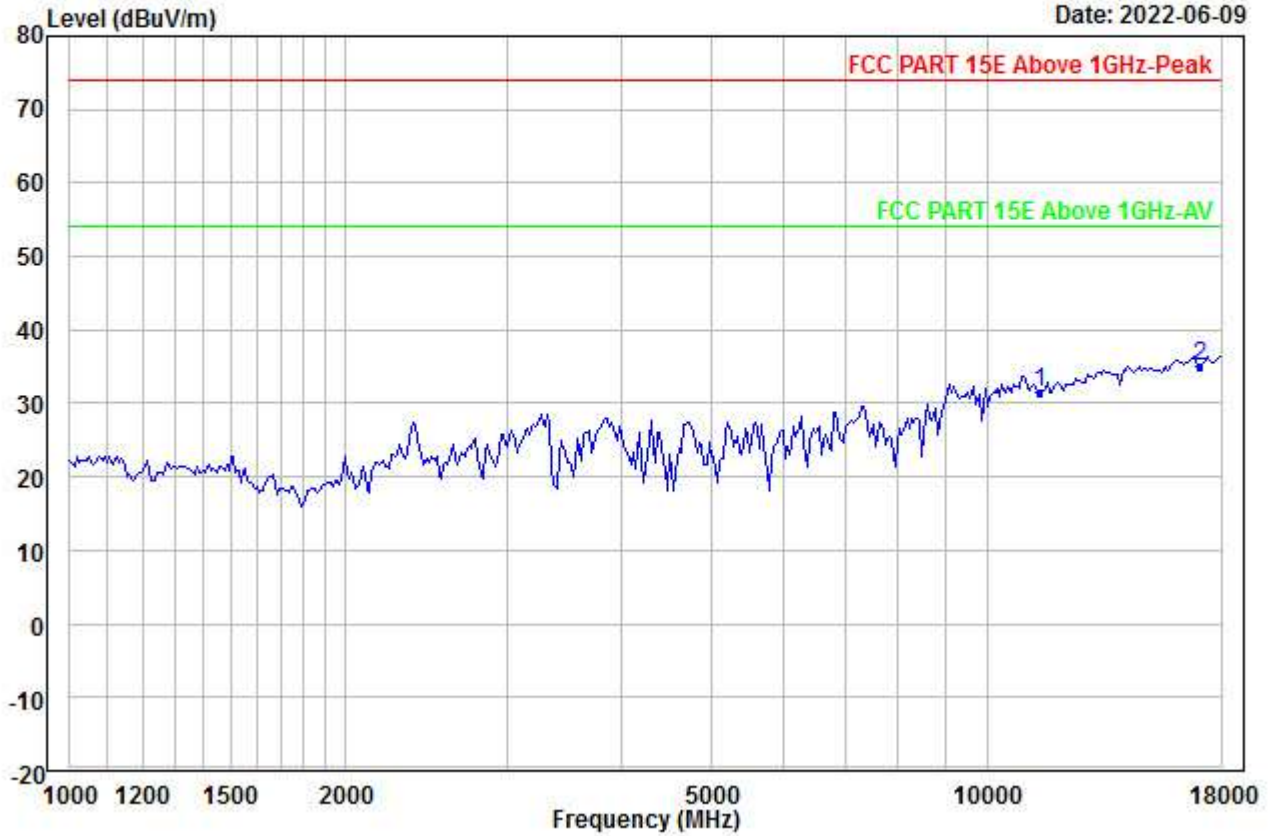


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5700
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 11400.000	24.27	38.82	45.88	0.00	14.21	31.42	54.00	-22.58	---	---	Aver
2 PP17100.000	22.15	42.26	47.08	0.00	17.74	35.07	54.00	-18.93	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00133.EMI

Date: 2022-06-09

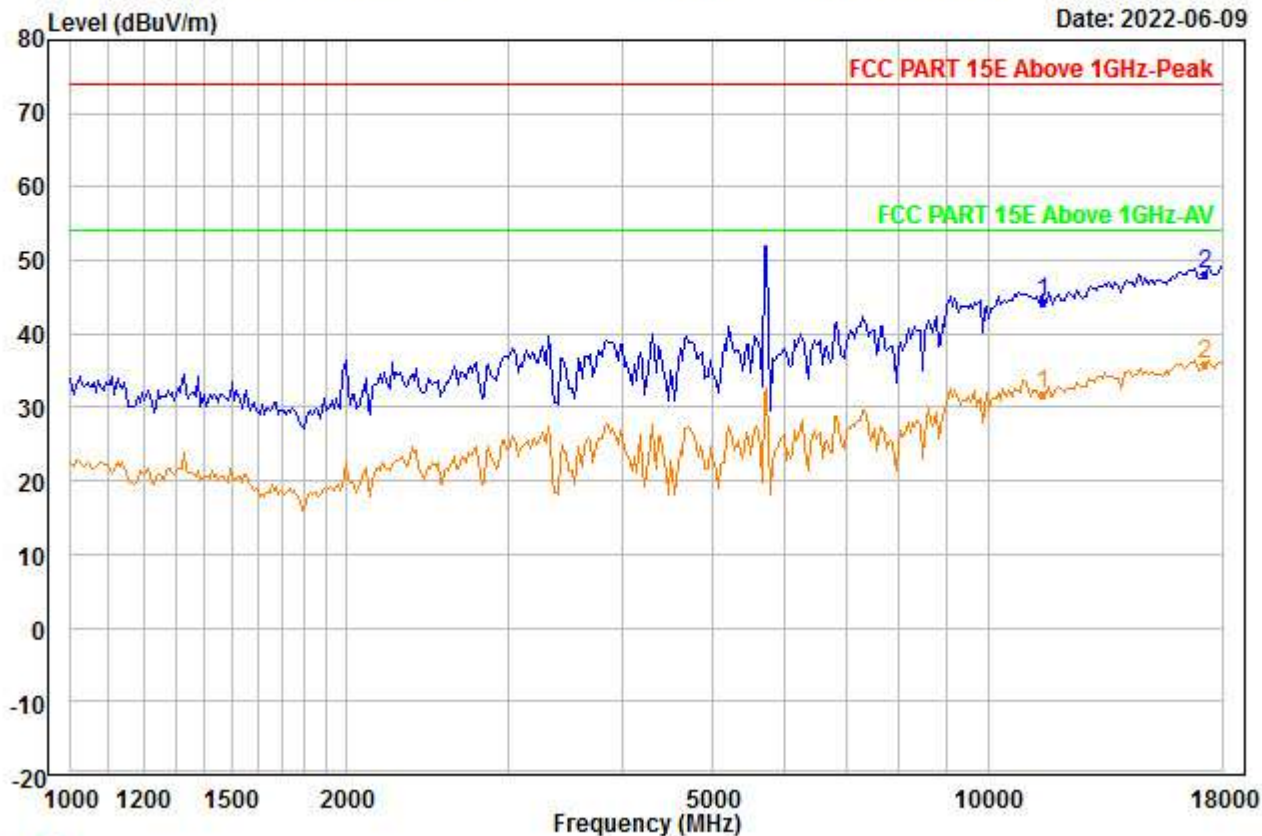


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5745
 Remark :

	Read Freq	Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11490.000	37.23	38.89	46.08	0.00	14.28	44.32	74.00	-29.68	---	---	Peak
2	PP17235.000	35.00	42.21	46.92	0.00	17.83	48.12	74.00	-25.88	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00134.EMI

Date: 2022-06-09

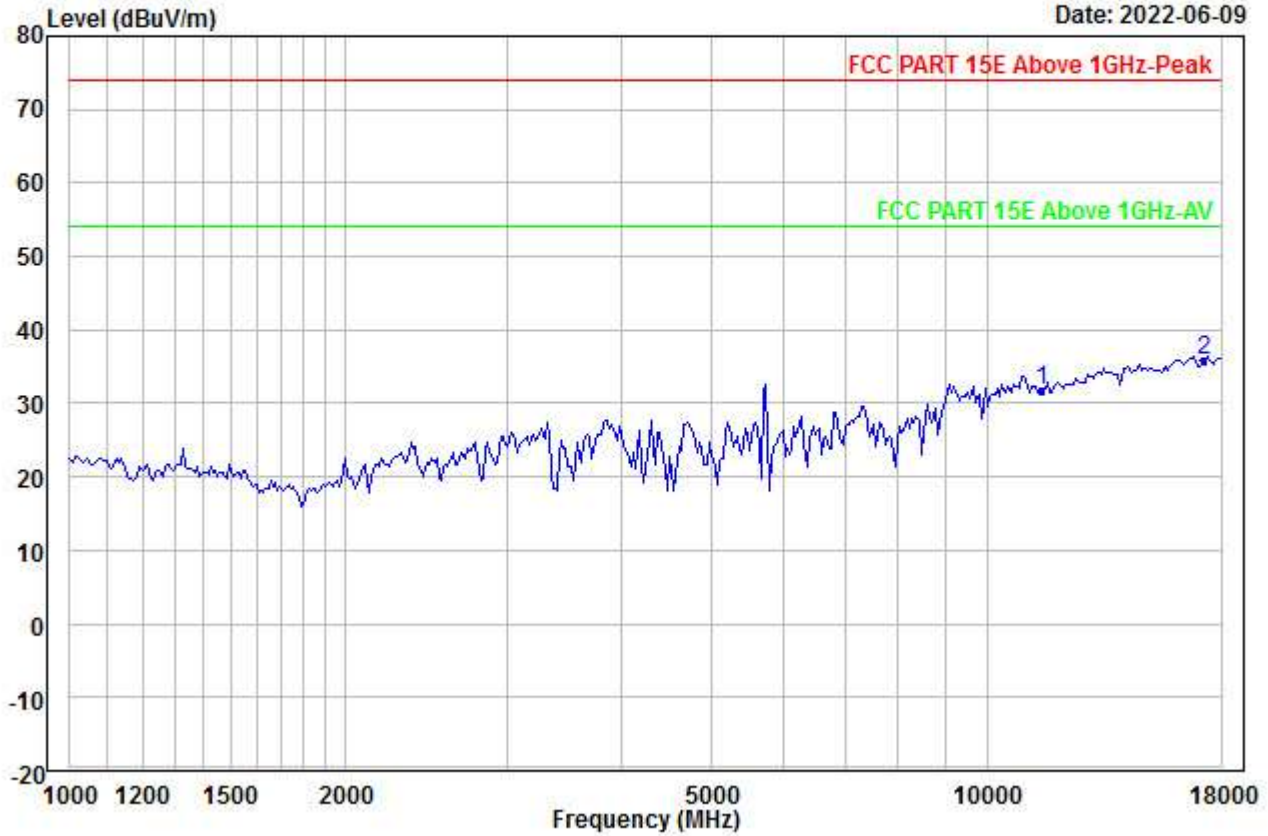


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5745
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11490.000	24.72	38.89	46.08	0.00	14.28	31.81	54.00	-22.19	---	---	Aver
2	PP17235.000	22.67	42.21	46.92	0.00	17.83	35.79	54.00	-18.21	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00135.EMI

Date: 2022-06-09

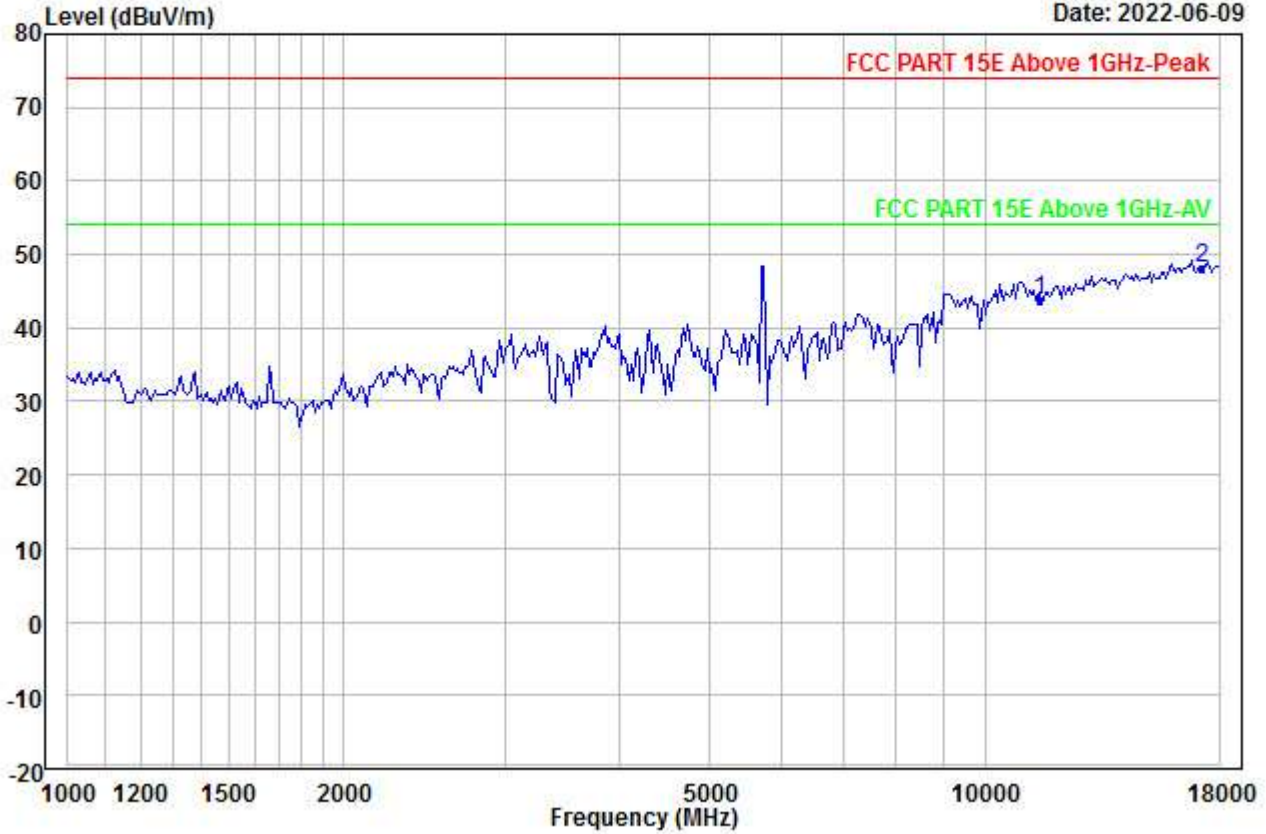


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5745
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 11490.000	36.55	38.89	46.08	0.00	14.28	43.64	74.00	-30.36	---	---	Peak
2 PP17235.000	35.05	42.21	46.92	0.00	17.83	48.17	74.00	-25.83	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00136.EMI

Date: 2022-06-09

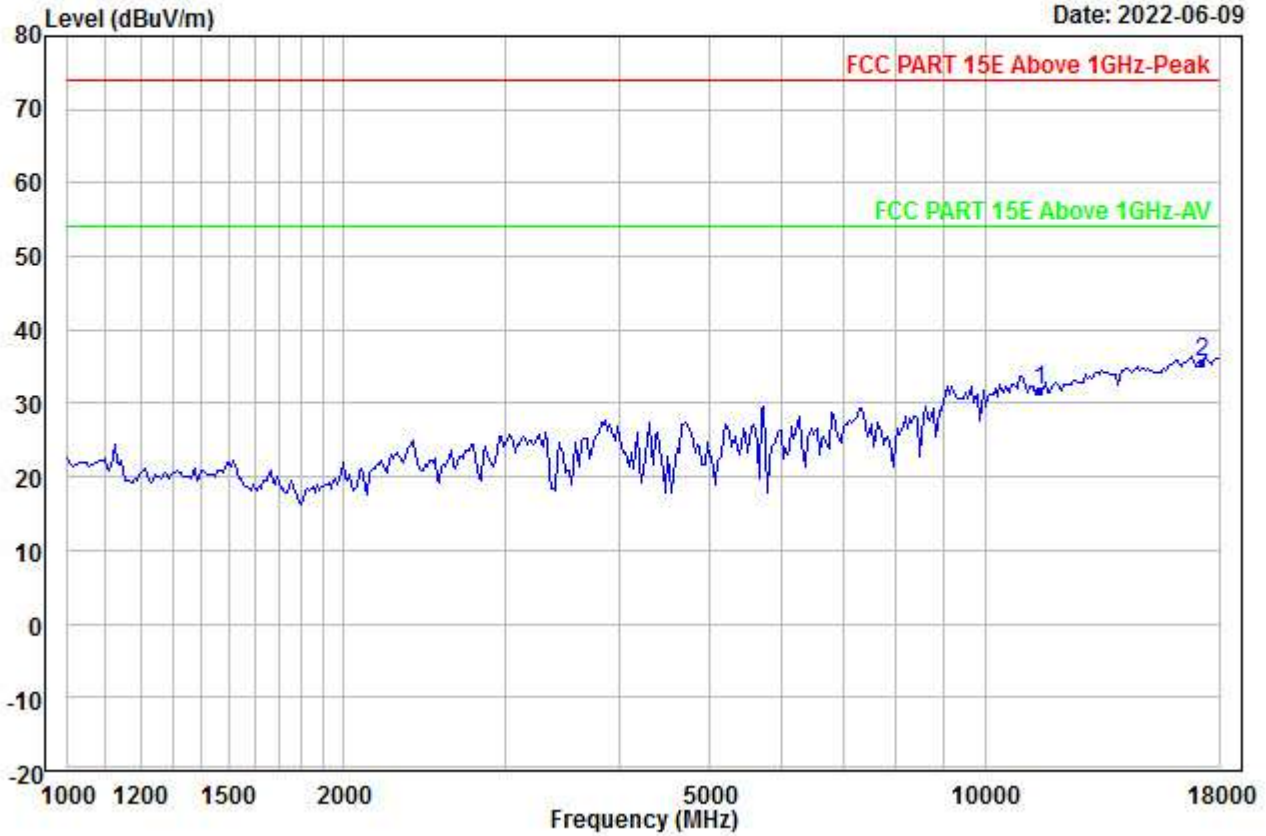


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5745
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 11490.000	24.64	38.89	46.08	0.00	14.28	31.73	54.00	-22.27	---	---	Aver
2 PP17235.000	22.56	42.21	46.92	0.00	17.83	35.68	54.00	-18.32	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00137.EMI

Date: 2022-06-09

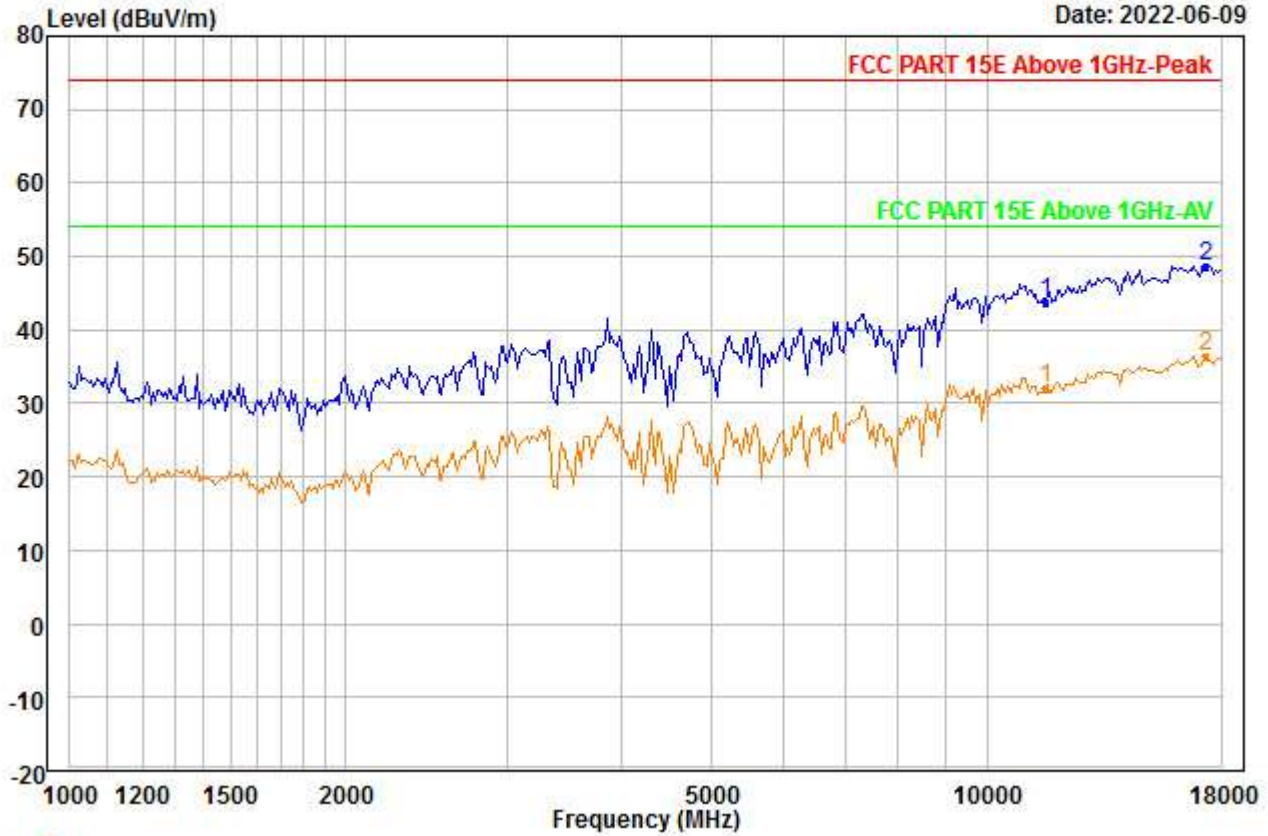


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5785
 Remark :

	Read Freq	Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11570.000	36.62	38.94	46.09	0.00	14.34	43.81	74.00	-30.19	---	---	Peak
2	PP17355.000	35.38	42.16	46.77	0.00	17.90	48.67	74.00	-25.33	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00138.EMI

Date: 2022-06-09

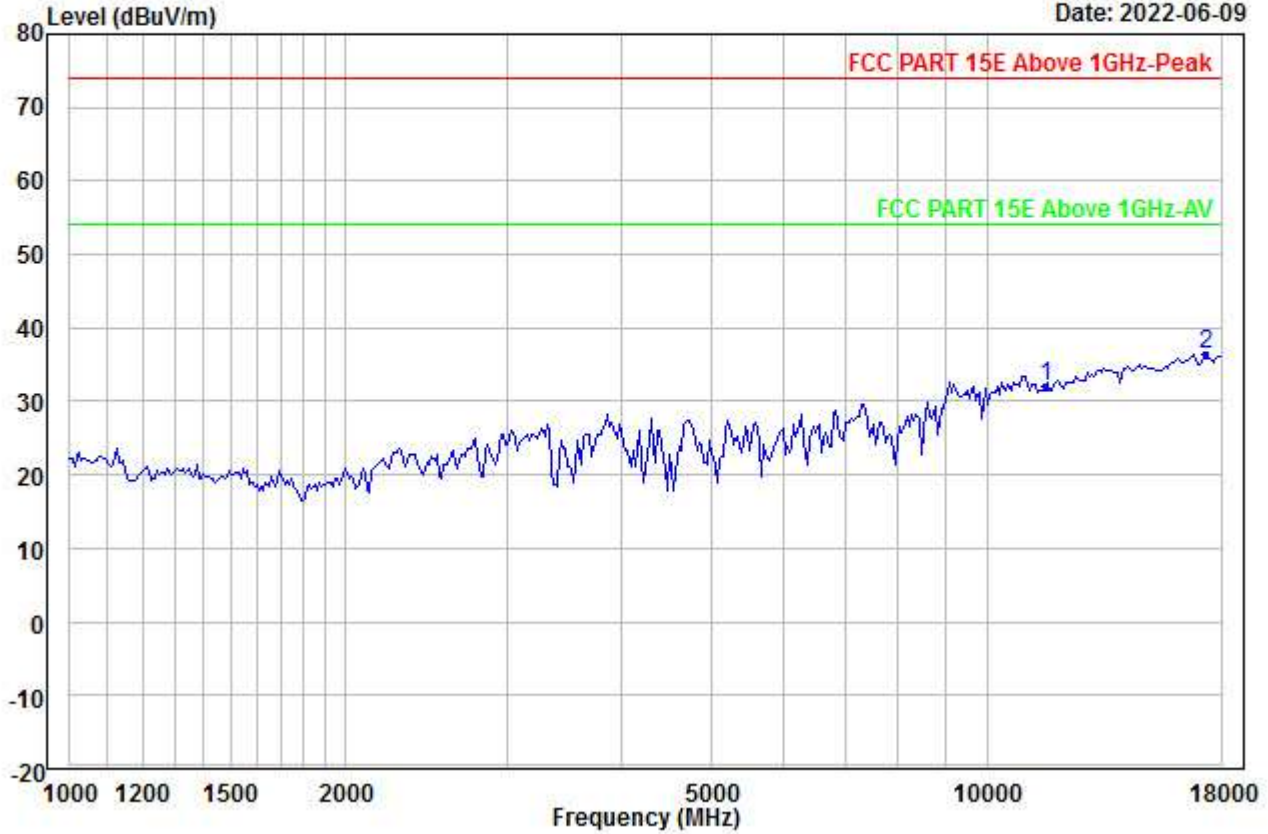


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5785
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 11570.000	24.81	38.94	46.09	0.00	14.34	32.00	54.00	-22.00	---	---	Aver
2 PP17355.000	23.17	42.16	46.77	0.00	17.90	36.46	54.00	-17.54	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00139.EMI

Date: 2022-06-09

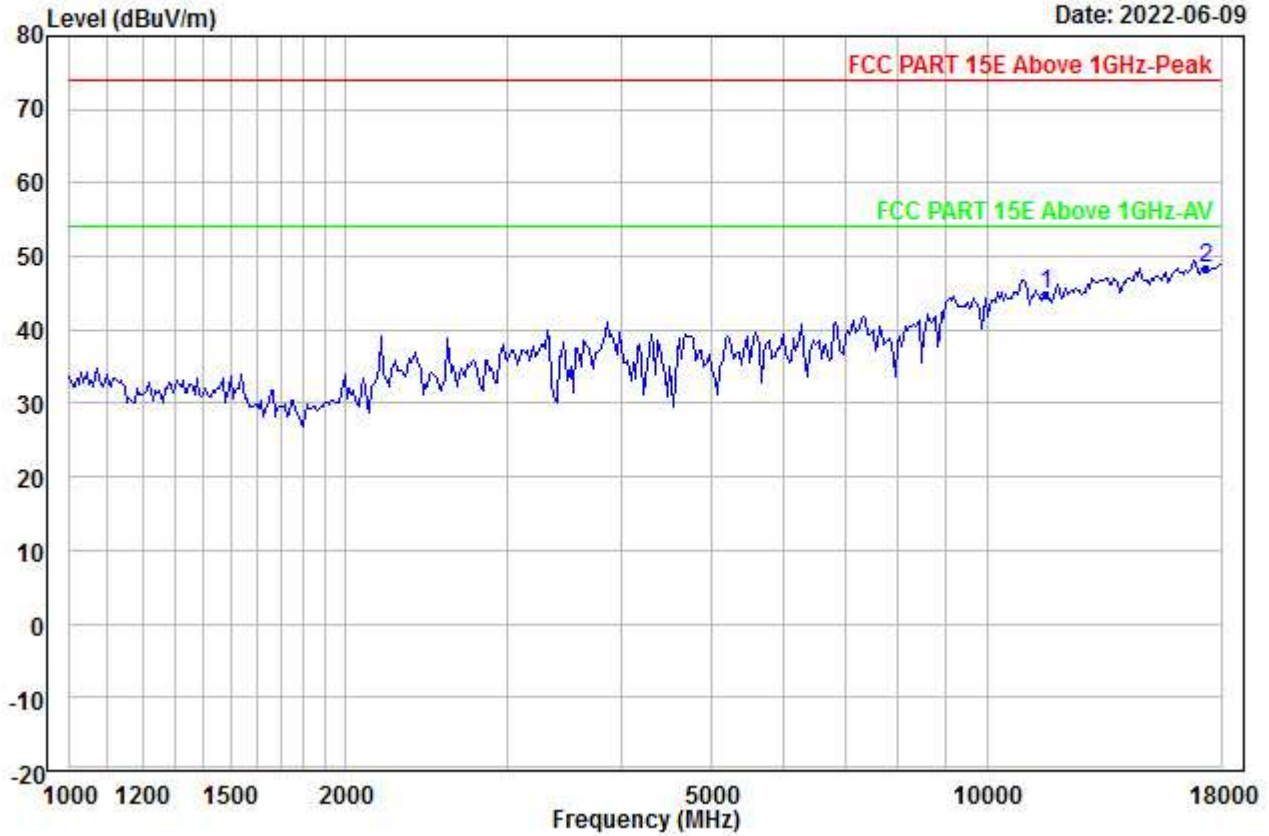


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5785
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11570.000	37.72	38.94	46.09	0.00	14.34	44.91	74.00	-29.09	---	---	Peak
2	PP17355.000	35.21	42.16	46.77	0.00	17.90	48.50	74.00	-25.50	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00140.EMI

Date: 2022-06-09

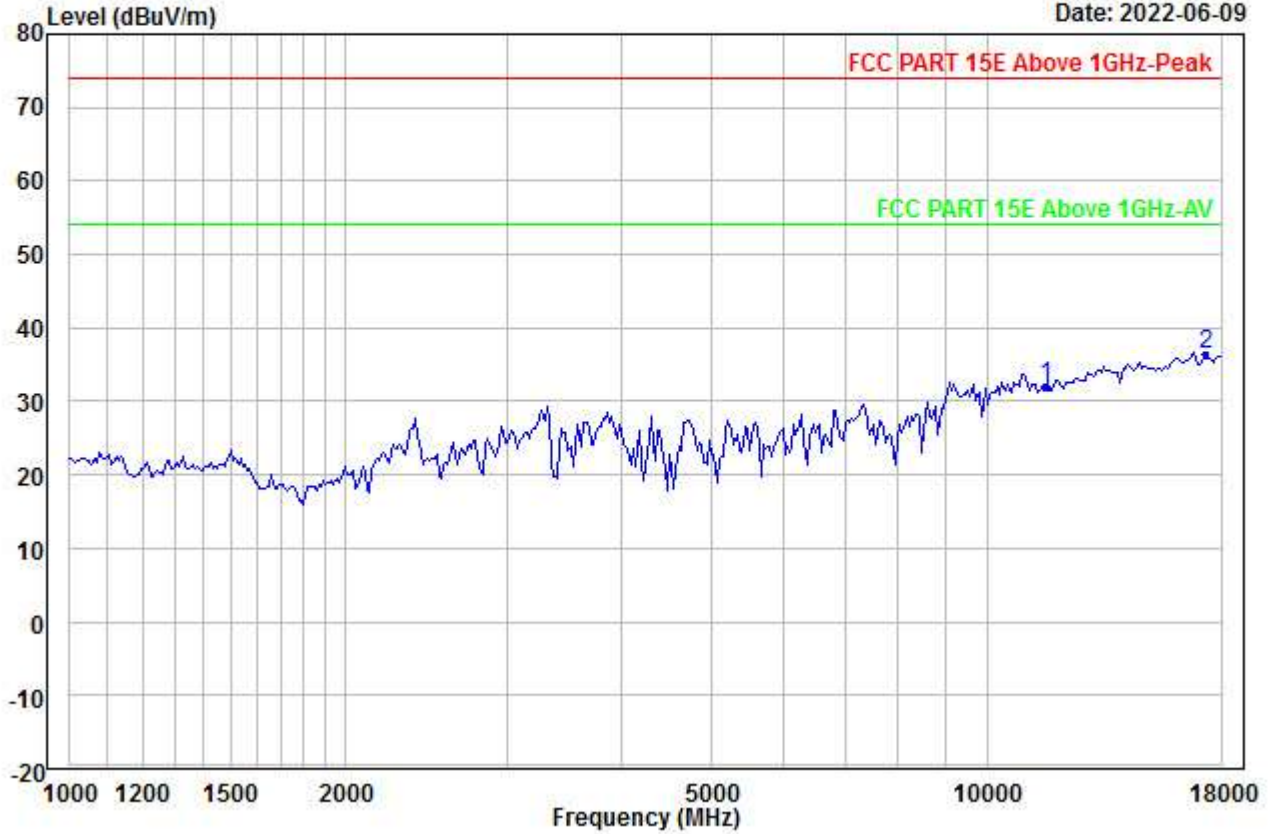


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5785
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 11570.000	24.81	38.94	46.09	0.00	14.34	32.00	54.00	-22.00	---	---	Aver
2 PP17355.000	23.17	42.16	46.77	0.00	17.90	36.46	54.00	-17.54	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00141.EMI

Date: 2022-06-09

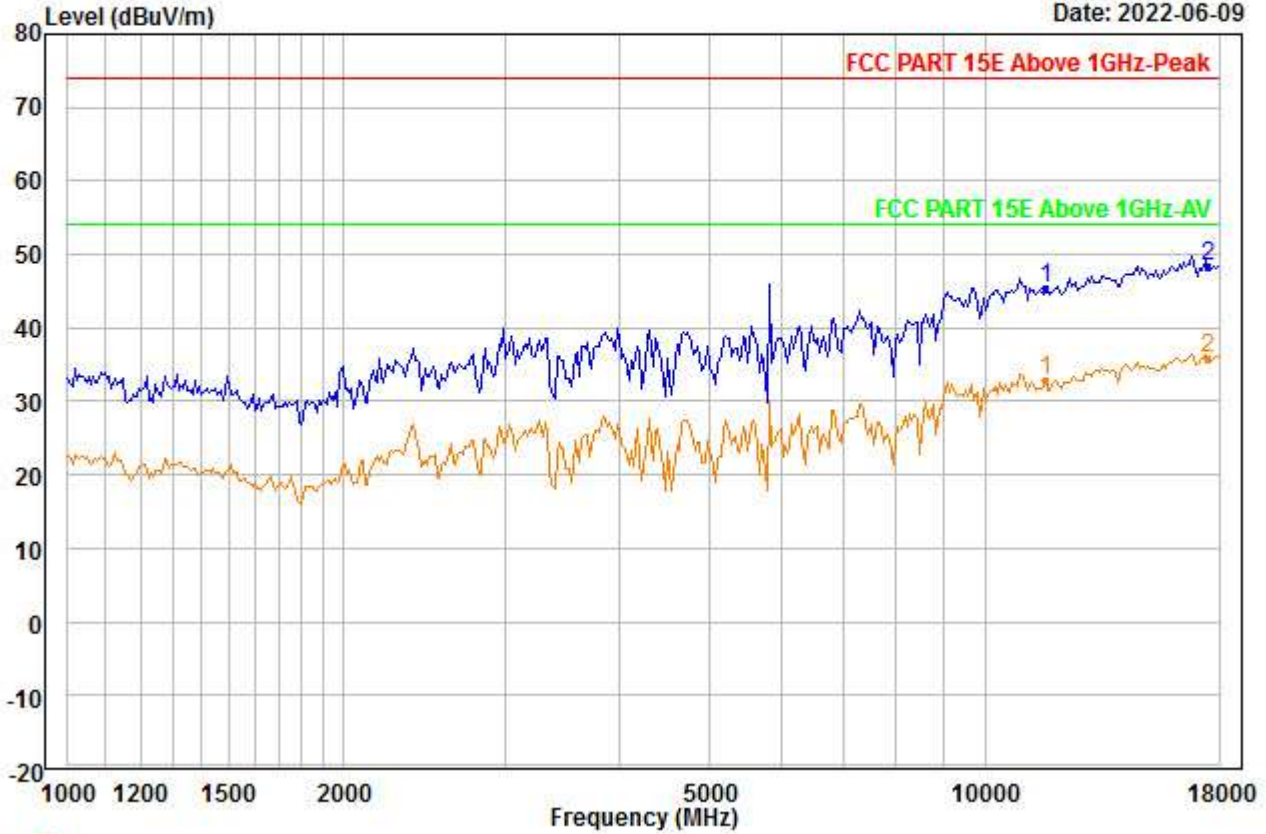


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5825
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 11650.000	37.97	38.99	46.07	0.00	14.39	45.28	74.00	-28.72	---	---	Peak
2 PP17475.000	34.98	42.11	46.63	0.00	17.98	48.44	74.00	-25.56	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00142.EMI

Date: 2022-06-09

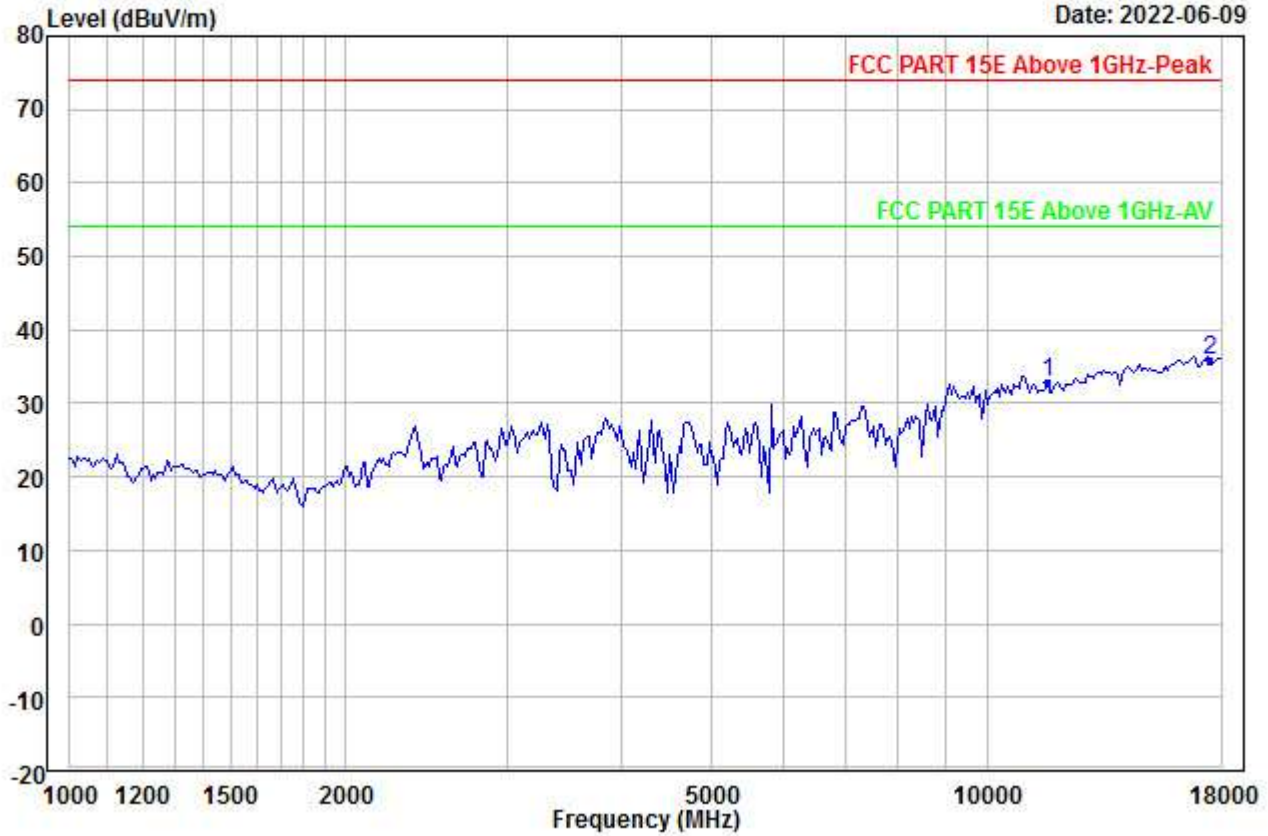


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5825
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 11650.000	25.51	38.99	46.07	0.00	14.39	32.82	54.00	-21.18	---	---	Aver
2 PP17475.000	22.40	42.11	46.63	0.00	17.98	35.86	54.00	-18.14	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00143.EMI

Date: 2022-06-09

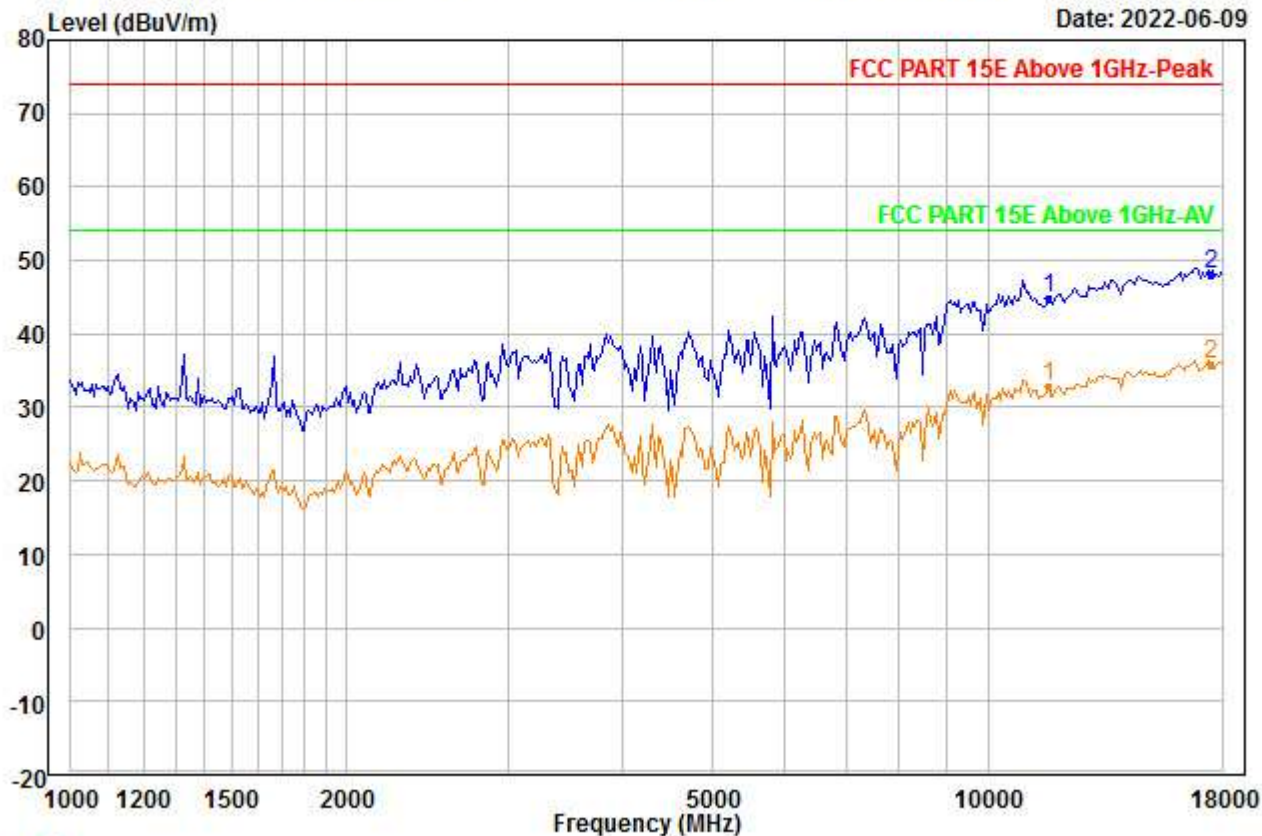


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5825
 Remark :

	Read Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11650.000	37.48	38.99	46.07	0.00	14.39	44.79	74.00	-29.21	---	---	Peak
2	PP17475.000	34.55	42.11	46.63	0.00	17.98	48.01	74.00	-25.99	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00144.EMI

Date: 2022-06-09

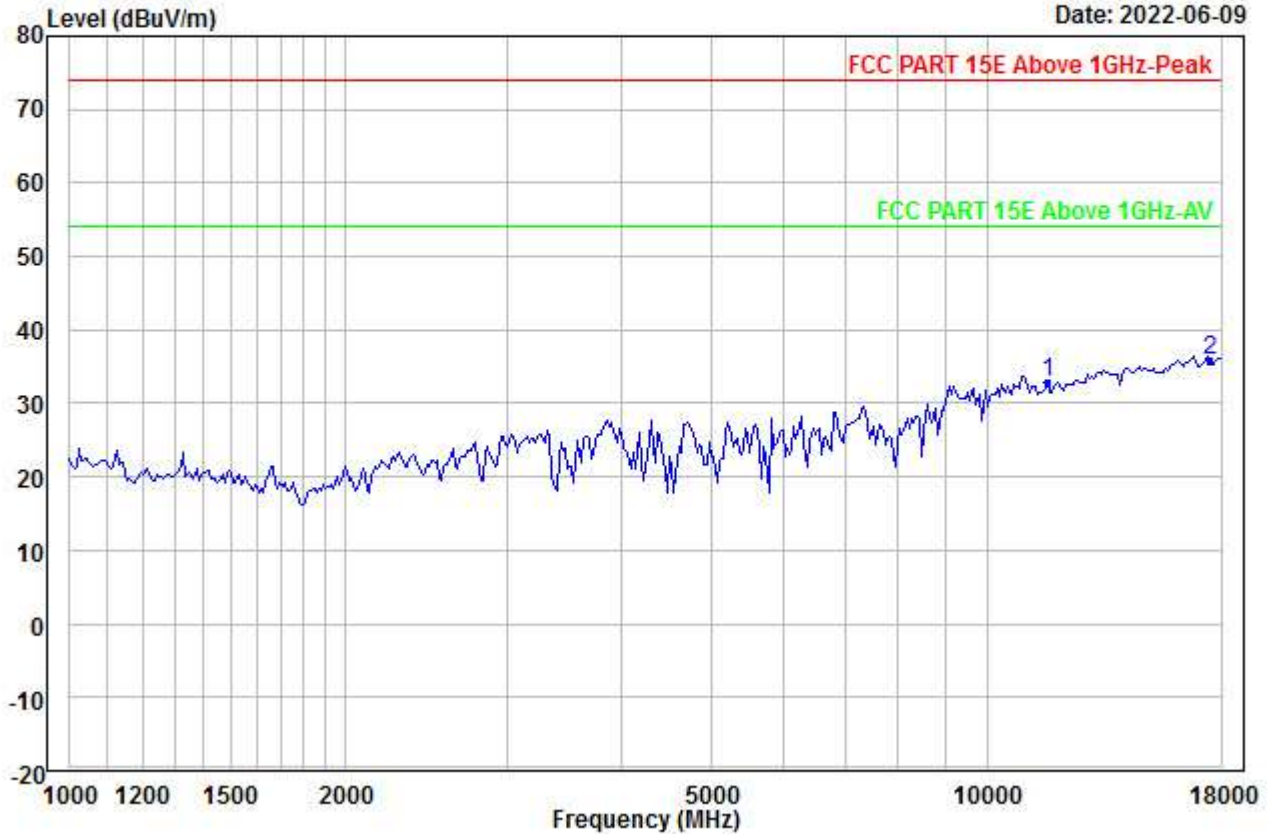


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5825
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 11650.000	25.43	38.99	46.07	0.00	14.39	32.74	54.00	-21.26	---	---	Aver
2 PP17475.000	22.40	42.11	46.63	0.00	17.98	35.86	54.00	-18.14	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00145.EMI

Date: 2022-06-09

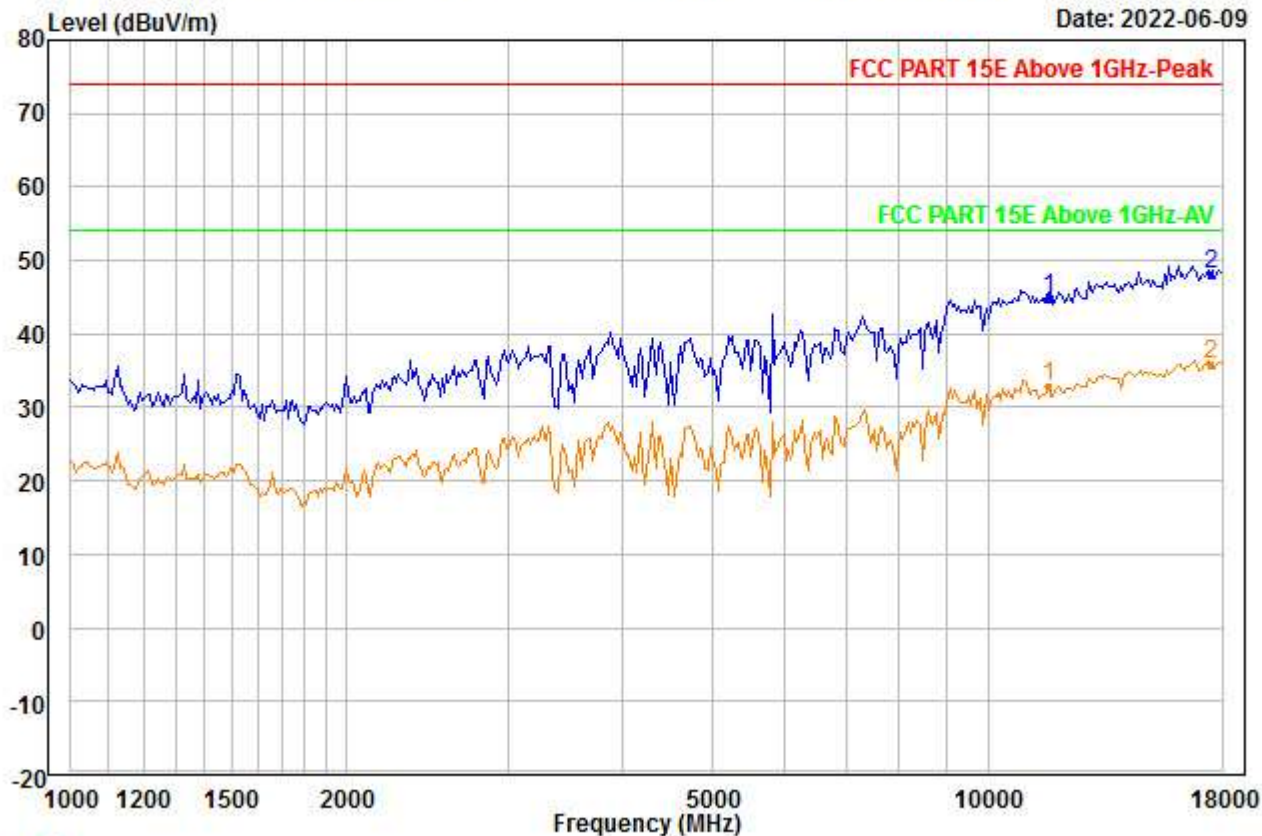


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5825
 Remark :

	Read Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBUV/m	dBUV/m	dB	cm	deg	
1	11650.000	37.63	38.99	46.07	0.00	14.39	44.94	74.00	-29.06	---	---	Peak
2	PP17475.000	34.77	42.11	46.63	0.00	17.98	48.23	74.00	-25.77	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00146.EMI

Date: 2022-06-09

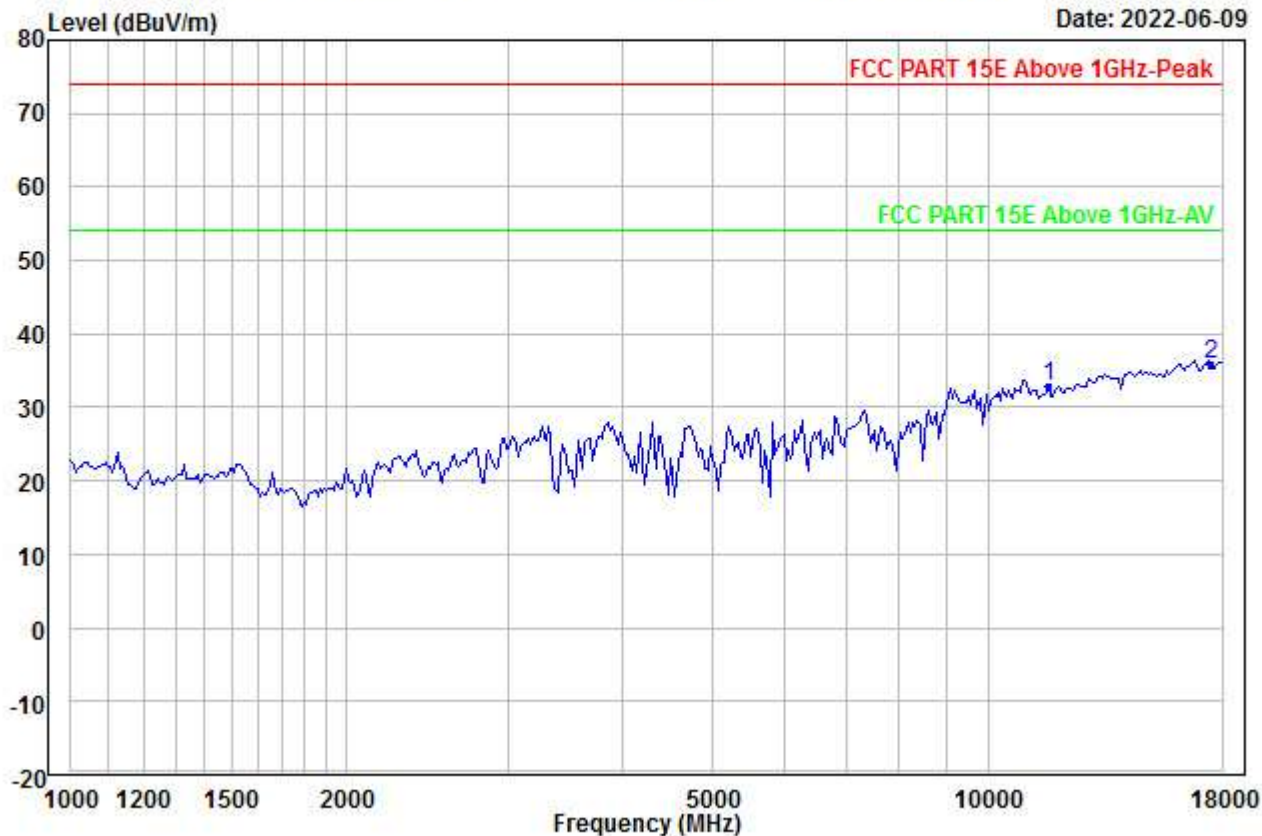


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5825
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 11650.000	25.51	38.99	46.07	0.00	14.39	32.82	54.00	-21.18	---	---	Aver
2 PP17475.000	22.40	42.11	46.63	0.00	17.98	35.86	54.00	-18.14	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00147.EMI

Date: 2022-06-09

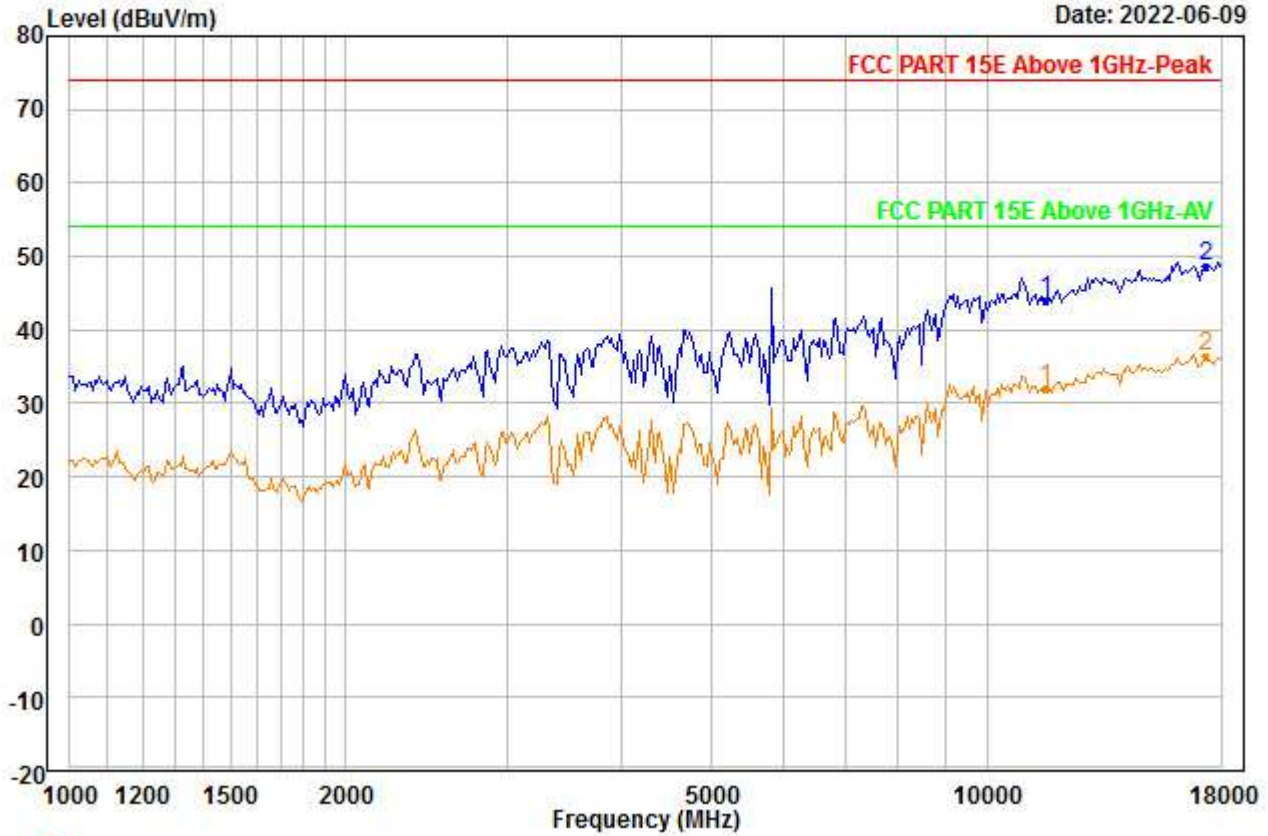


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5825
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 11570.000	36.85	38.94	46.09	0.00	14.34	44.04	74.00	-29.96	---	---	Peak
2 PP17355.000	35.28	42.16	46.77	0.00	17.90	48.57	74.00	-25.43	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00148.EMI

Date: 2022-06-09

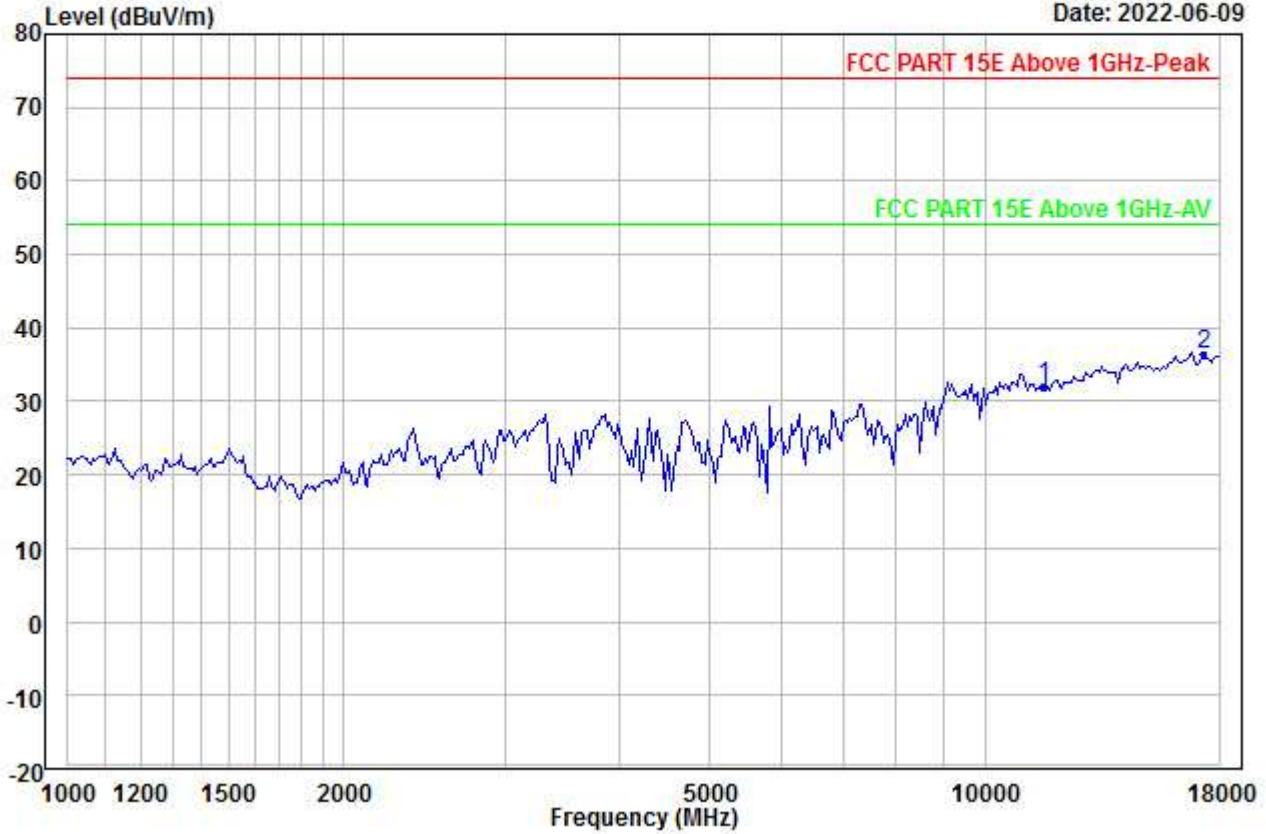


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5825
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 11570.000	24.81	38.94	46.09	0.00	14.34	32.00	54.00	-22.00	---	---	Aver
2 PP17355.000	23.06	42.16	46.77	0.00	17.90	36.35	54.00	-17.65	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00149.EMI

Date: 2022-06-09

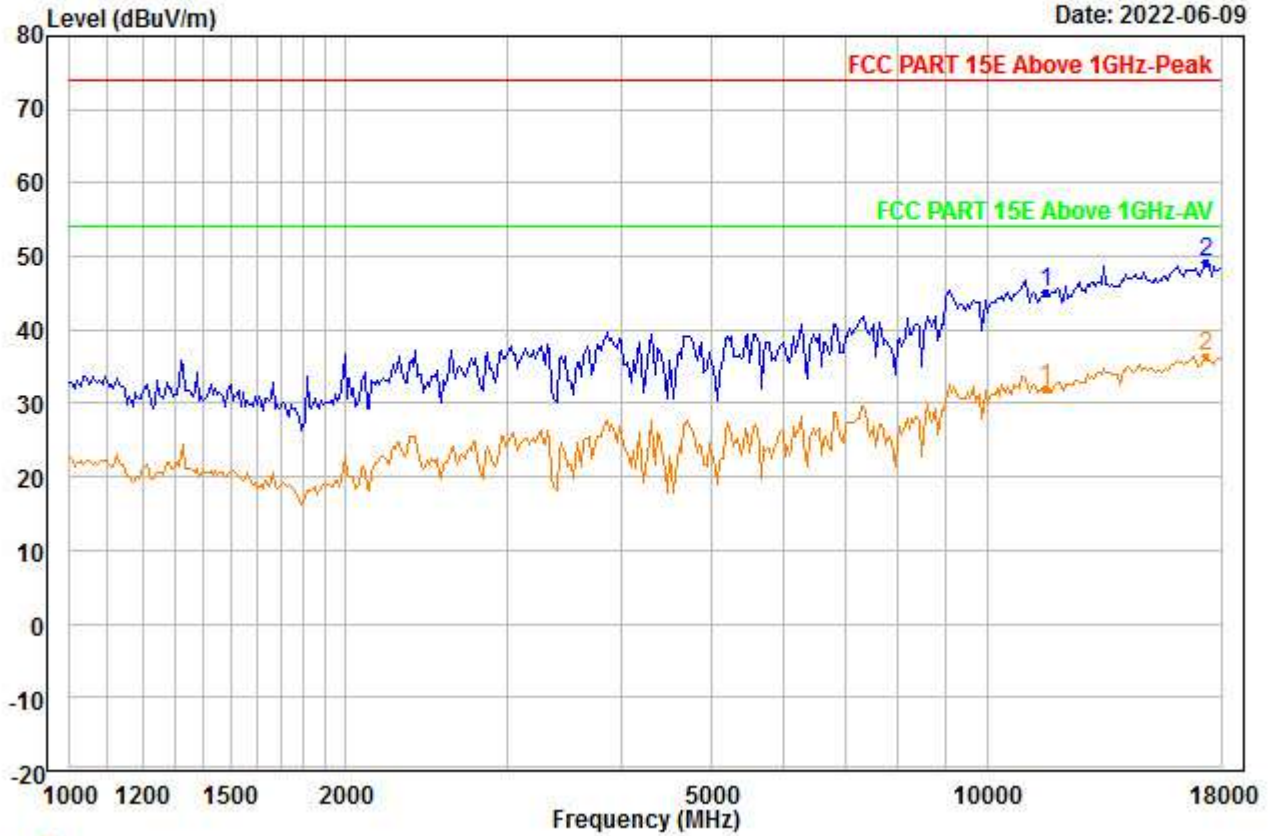


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5785
 Remark :

	Read Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11570.000	37.85	38.94	46.09	0.00	14.34	45.04	74.00	-28.96	---	---	Peak
2	PP17355.000	35.84	42.16	46.77	0.00	17.90	49.13	74.00	-24.87	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00150.EMI

Date: 2022-06-09

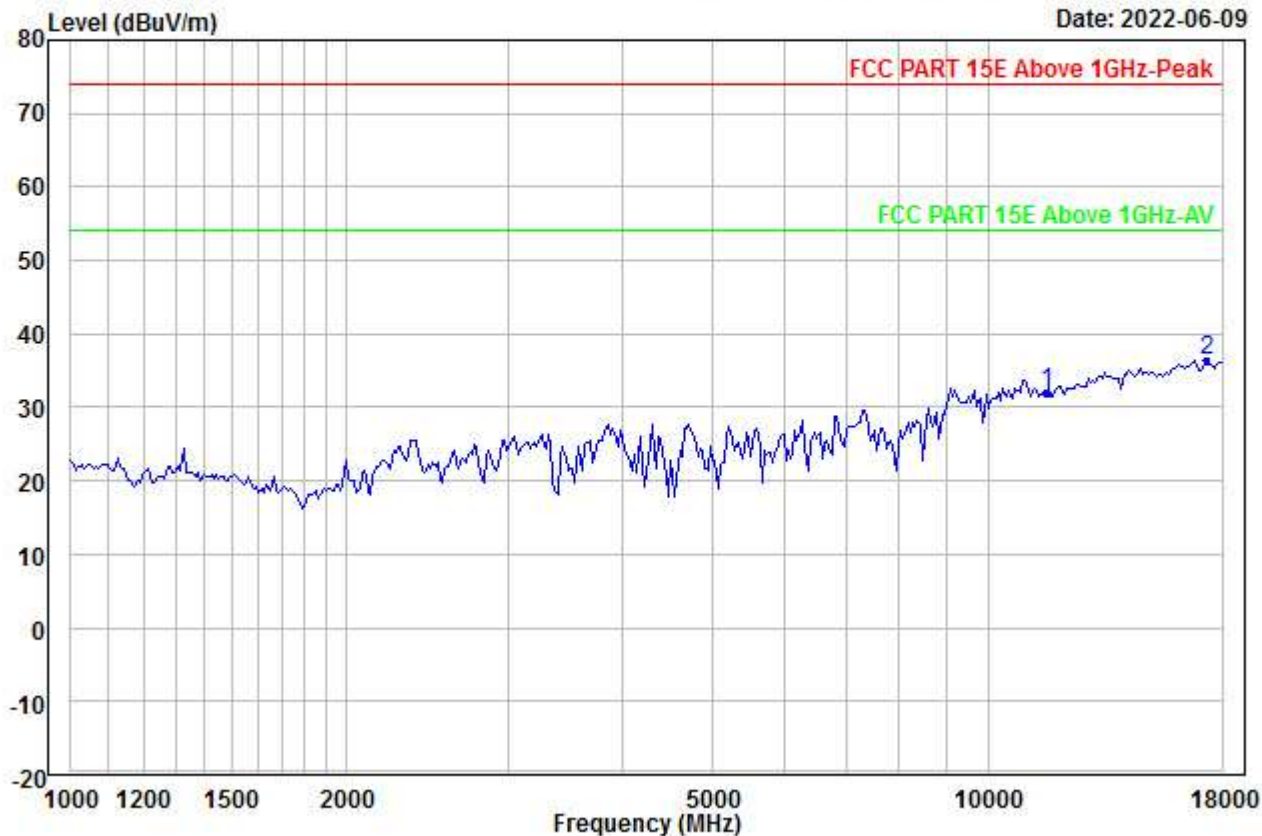


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5785
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11570.000	24.81	38.94	46.09	0.00	14.34	32.00	54.00	-22.00	---	---	Aver
2	PP17355.000	23.17	42.16	46.77	0.00	17.90	36.46	54.00	-17.54	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00151.EMI

Date: 2022-06-09

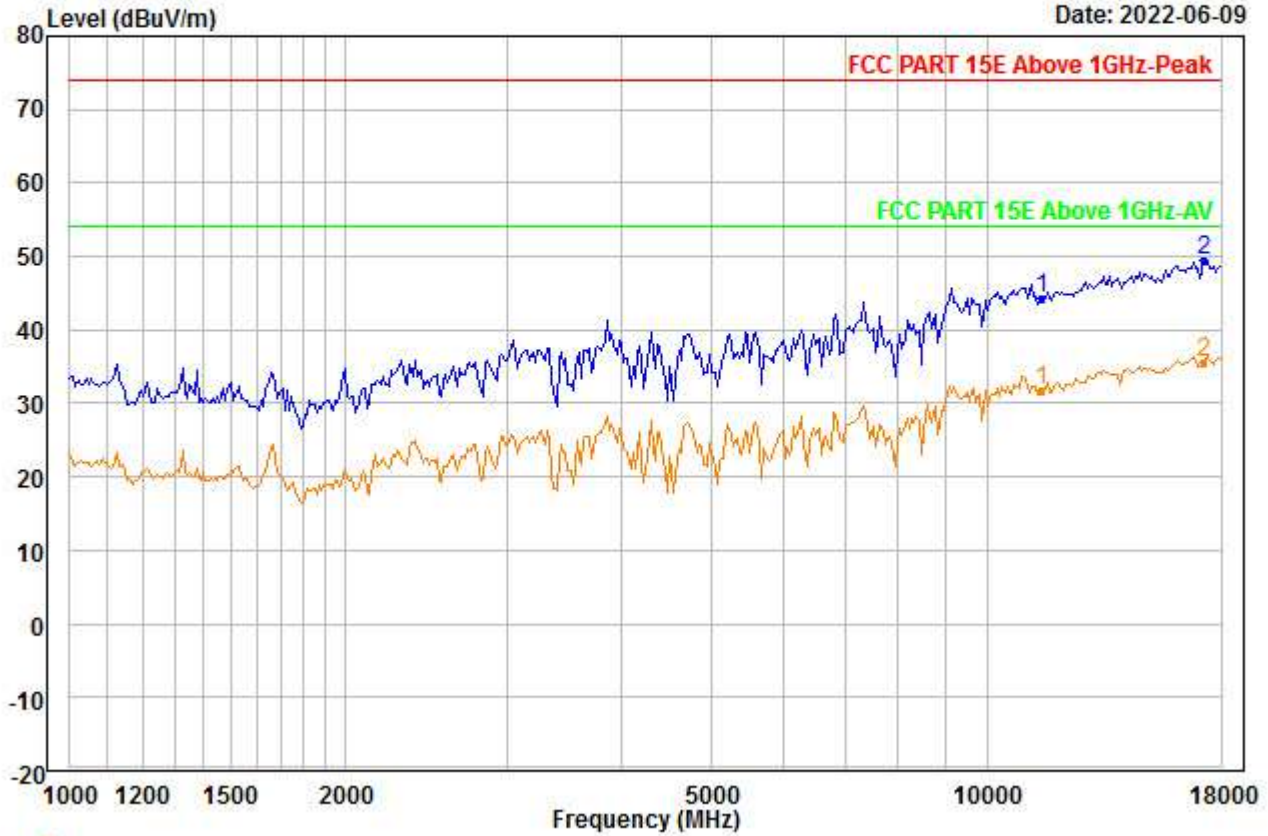


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5785
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 11490.000	37.15	38.89	46.08	0.00	14.28	44.24	74.00	-29.76	---	---	Peak
2 PP17235.000	36.30	42.21	46.92	0.00	17.83	49.42	74.00	-24.58	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00152.EMI

Date: 2022-06-09

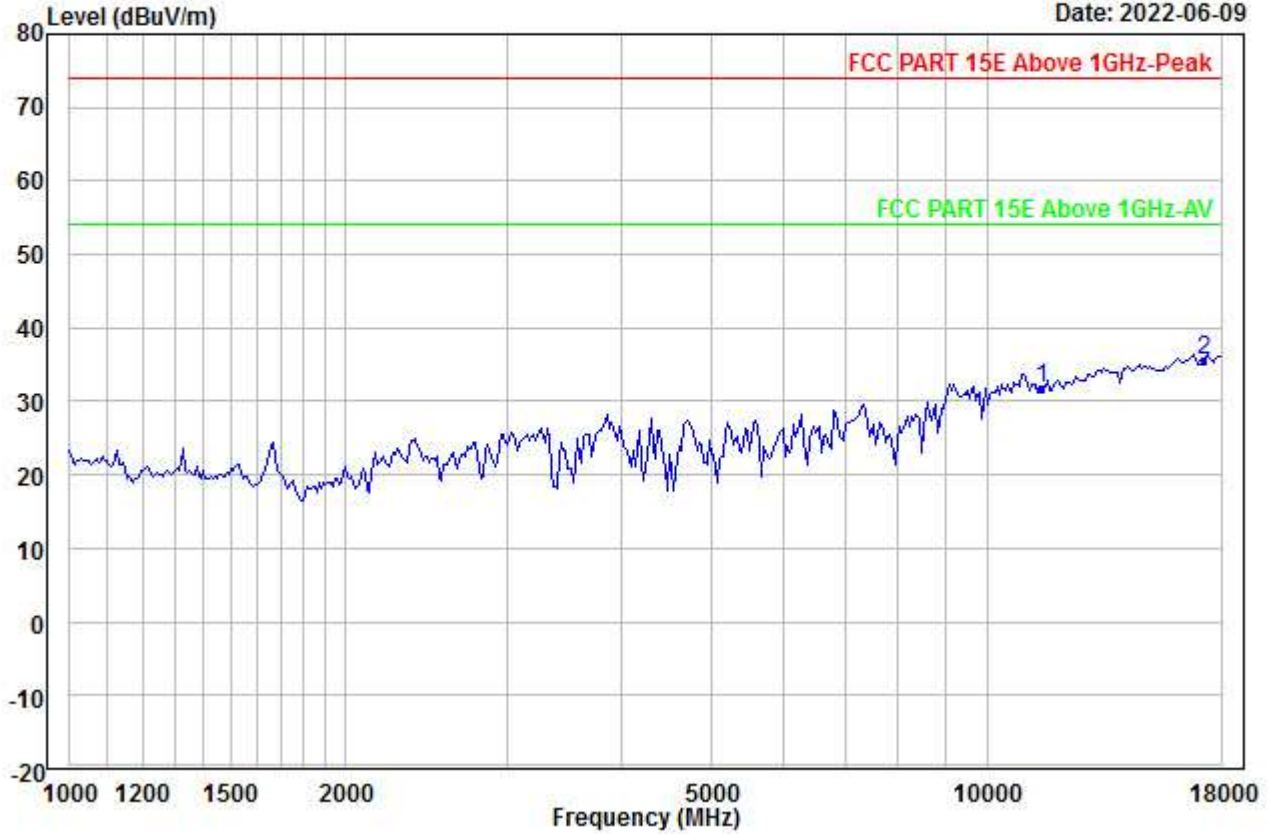


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5785
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11490.000	24.64	38.89	46.08	0.00	14.28	31.73	54.00	-22.27	---	---	Aver
2	PP17235.000	22.56	42.21	46.92	0.00	17.83	35.68	54.00	-18.32	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00153.EMI

Date: 2022-06-09

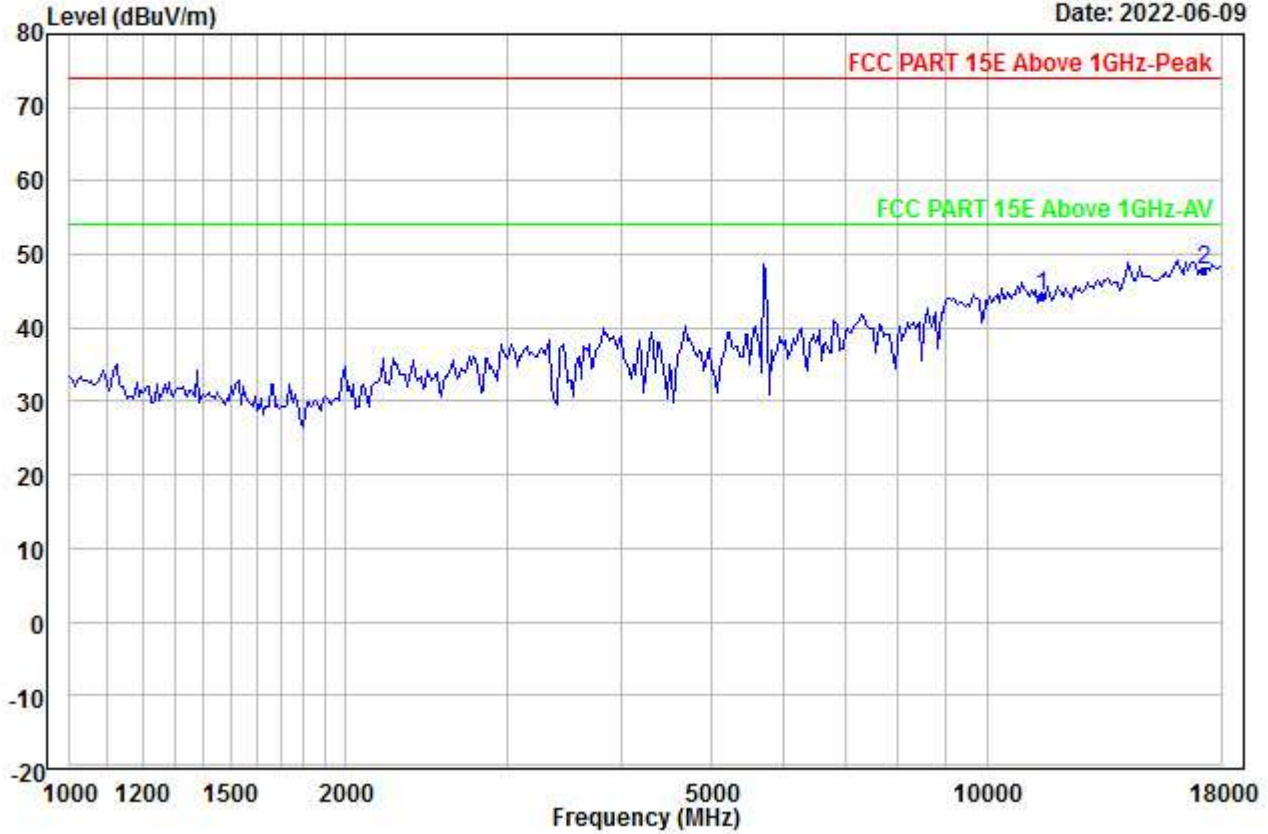


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5745
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 11490.000	37.19	38.89	46.08	0.00	14.28	44.28	74.00	-29.72	---	---	Peak
2 PP17235.000	34.85	42.21	46.92	0.00	17.83	47.97	74.00	-26.03	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00154.EMI

Date: 2022-06-09

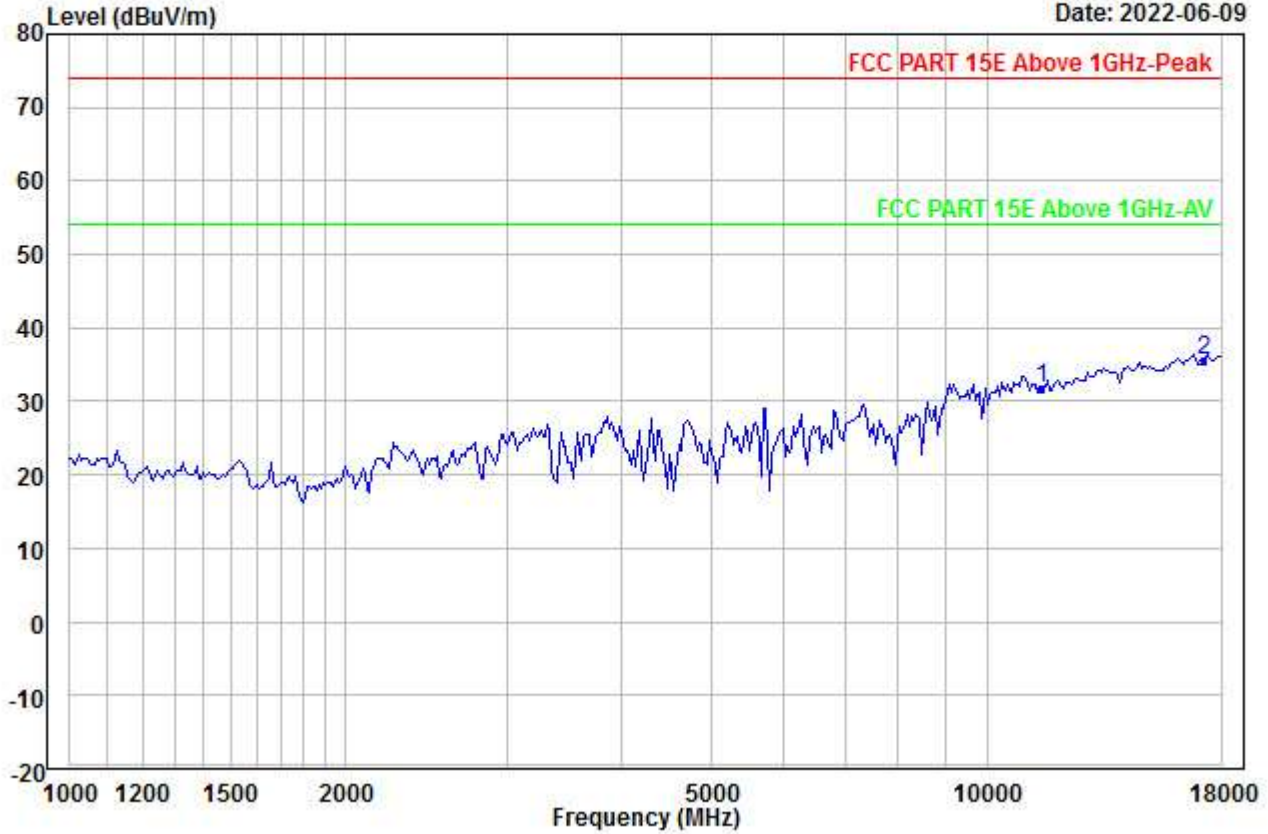


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5745
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 11490.000	24.72	38.89	46.08	0.00	14.28	31.81	54.00	-22.19	---	---	Aver
2 PP17235.000	22.56	42.21	46.92	0.00	17.83	35.68	54.00	-18.32	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00155.EMI

Date: 2022-06-09

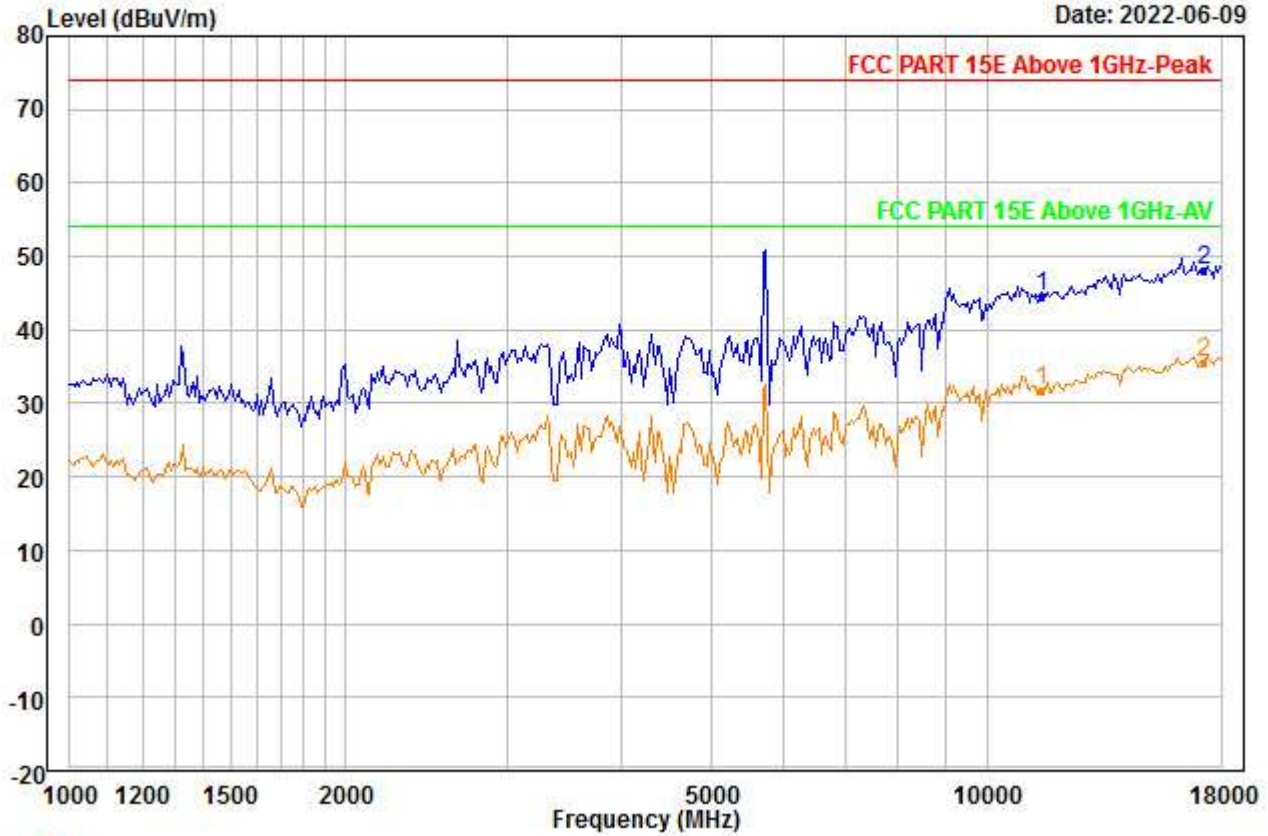


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5745
 Remark :

	Read Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11490.000	37.47	38.89	46.08	0.00	14.28	44.56	74.00	-29.44	---	---	Peak
2	PP17235.000	34.90	42.21	46.92	0.00	17.83	48.02	74.00	-25.98	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00156.EMI

Date: 2022-06-09

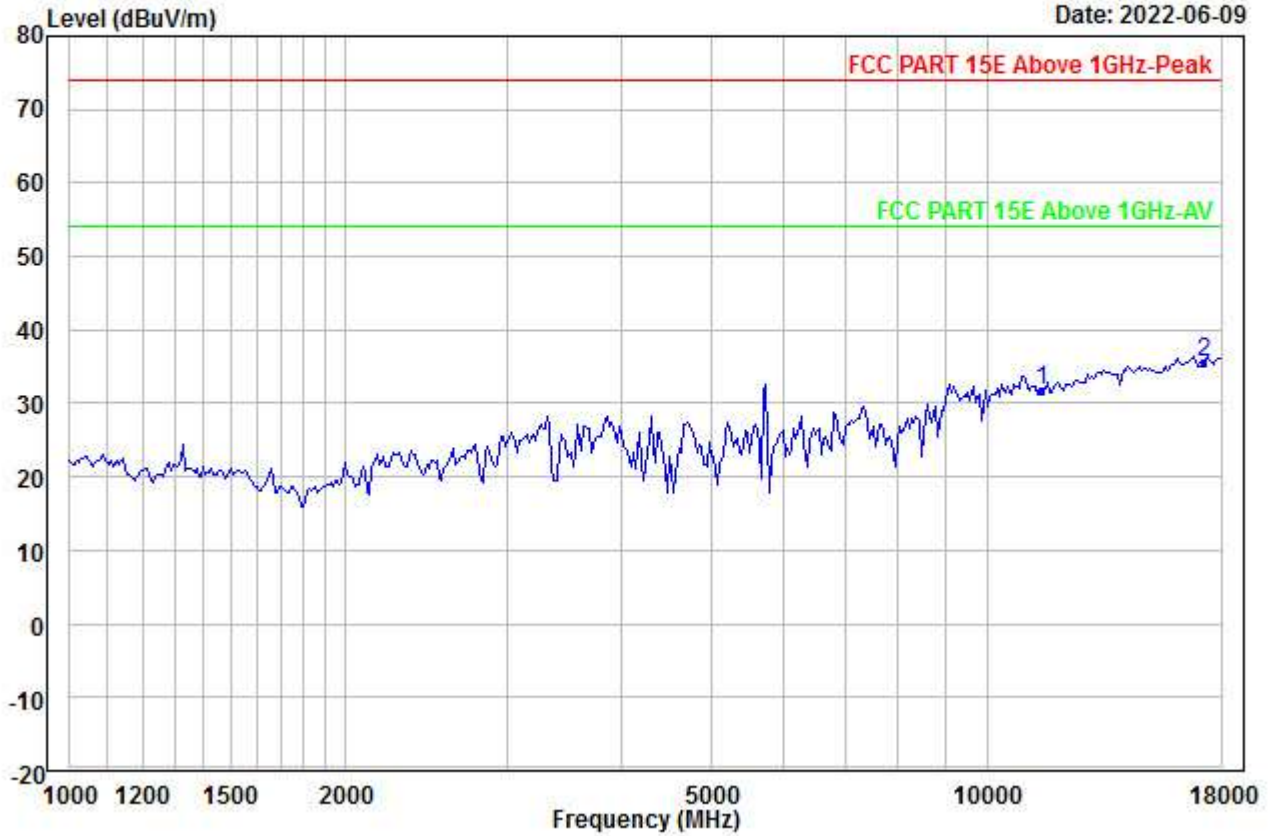


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5745
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rema	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 11490.000	24.64	38.89	46.08	0.00	14.28	31.73	54.00	-22.27	---	---	Aver
2 PP17235.000	22.56	42.21	46.92	0.00	17.83	35.68	54.00	-18.32	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00157.EMI

Date: 2022-06-09

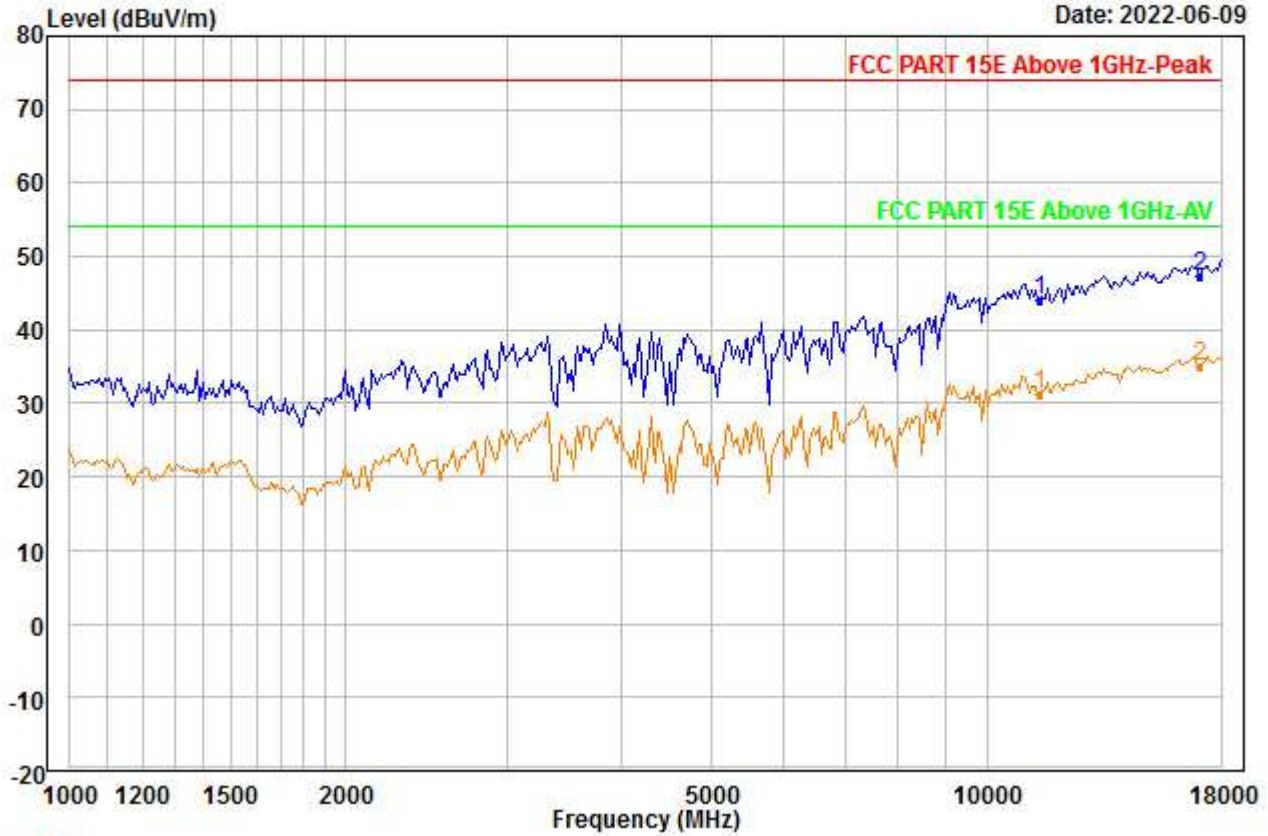


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5700
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 11400.000	36.78	38.82	45.88	0.00	14.21	43.93	74.00	-30.07	---	---	Peak
2 PP17100.000	34.36	42.26	47.08	0.00	17.74	47.28	74.00	-26.72	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00158.EMI

Date: 2022-06-09

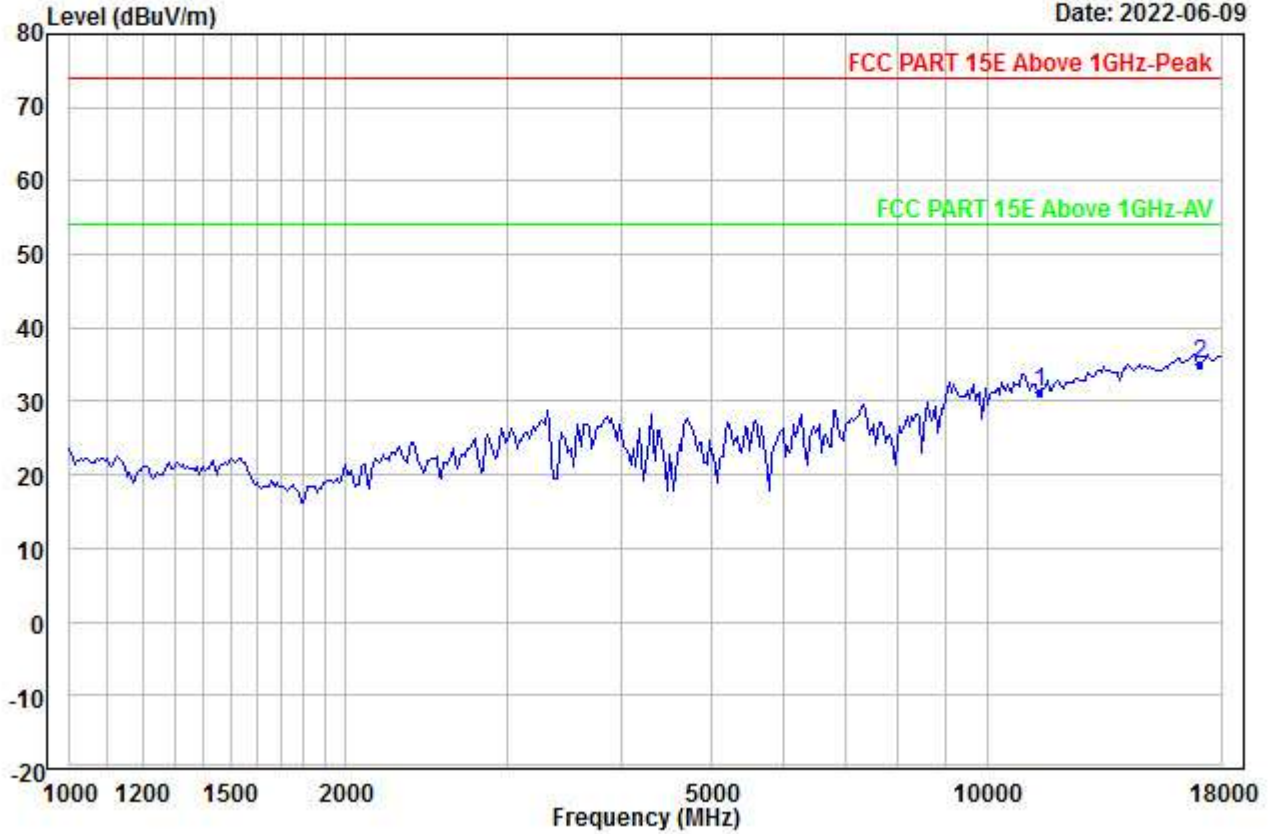


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5700
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11400.000	24.18	38.82	45.88	0.00	14.21	31.33	54.00	-22.67	---	---	Aver
2	PP17100.000	22.03	42.26	47.08	0.00	17.74	34.95	54.00	-19.05	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00159.EMI

Date: 2022-06-09

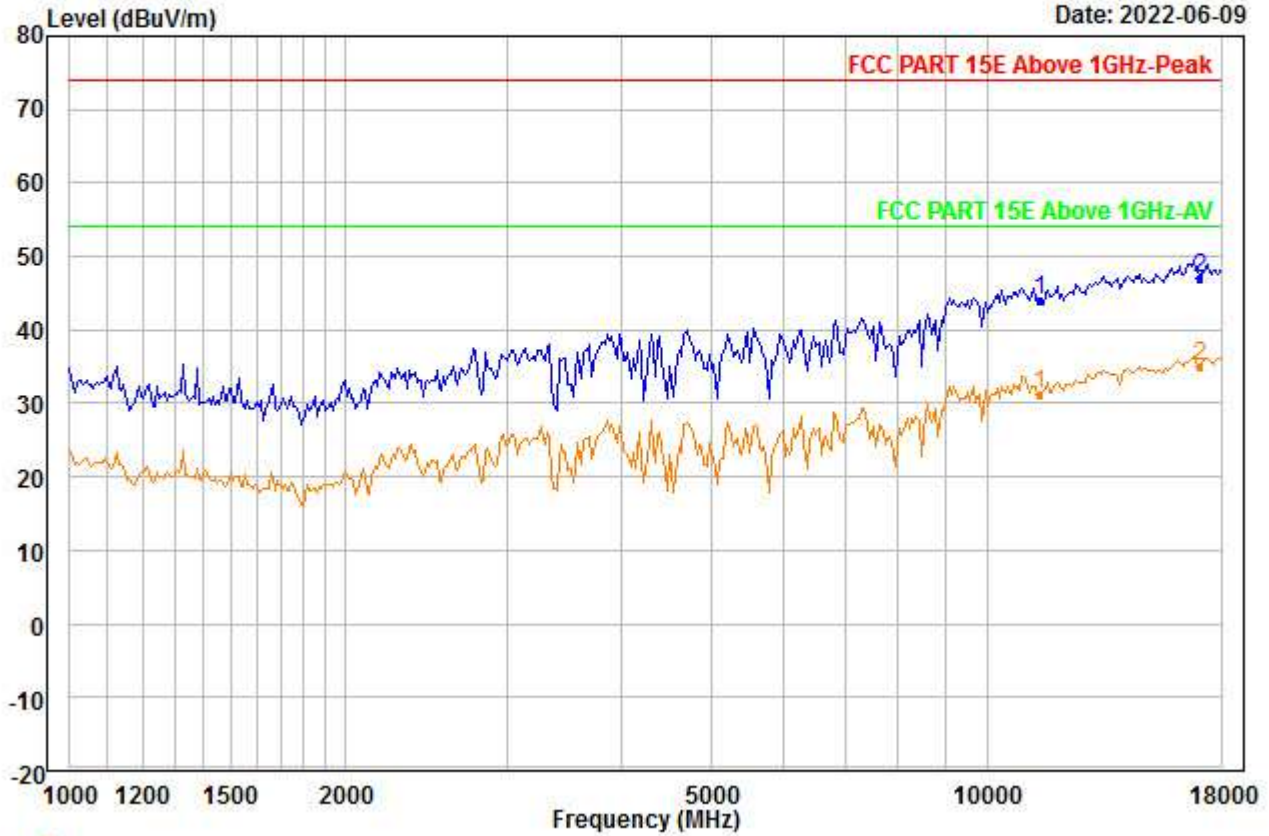


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5700
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 11400.000	36.82	38.82	45.88	0.00	14.21	43.97	74.00	-30.03	---	---	Peak
2 PP17100.000	33.99	42.26	47.08	0.00	17.74	46.91	74.00	-27.09	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00160.EMI

Date: 2022-06-09

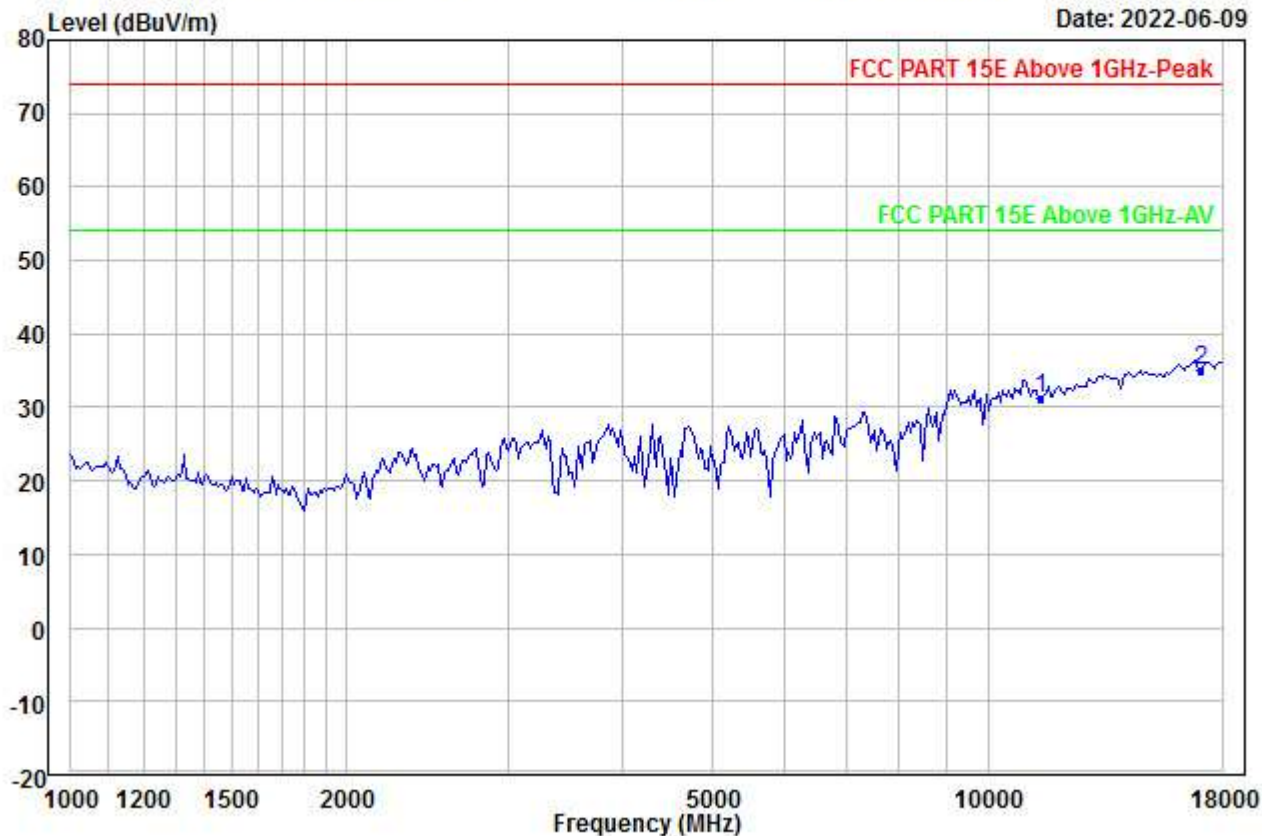


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5700
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 11400.000	24.09	38.82	45.88	0.00	14.21	31.24	54.00	-22.76	---	---	Aver
2 PP17100.000	22.15	42.26	47.08	0.00	17.74	35.07	54.00	-18.93	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00161.EMI

Date: 2022-06-09

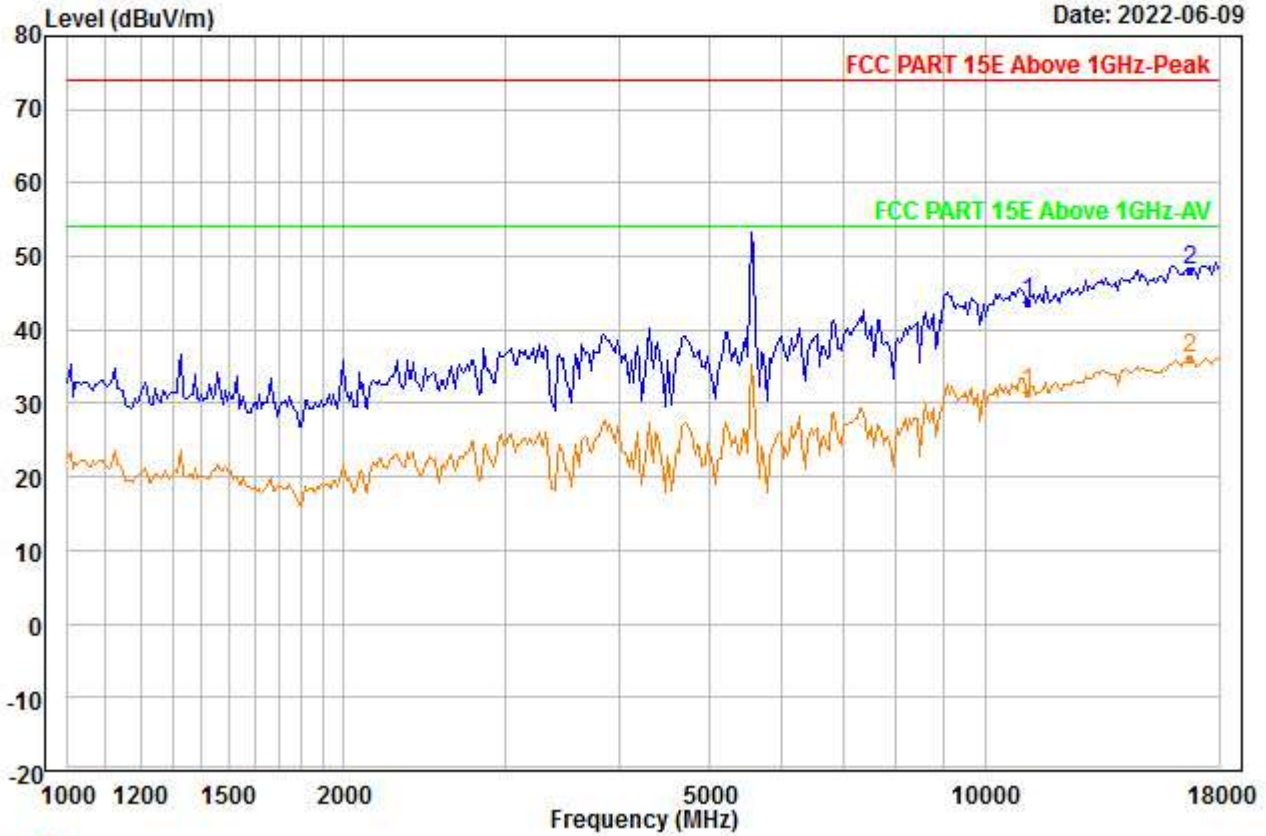


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5580
 Remark :

	Read Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11160.000	36.40	38.63	45.35	0.00	14.04	43.72	74.00	-30.28	---	---	Peak
2	PP16740.000	35.67	41.88	46.89	0.00	17.56	48.22	74.00	-25.78	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00162.EMI

Date: 2022-06-09

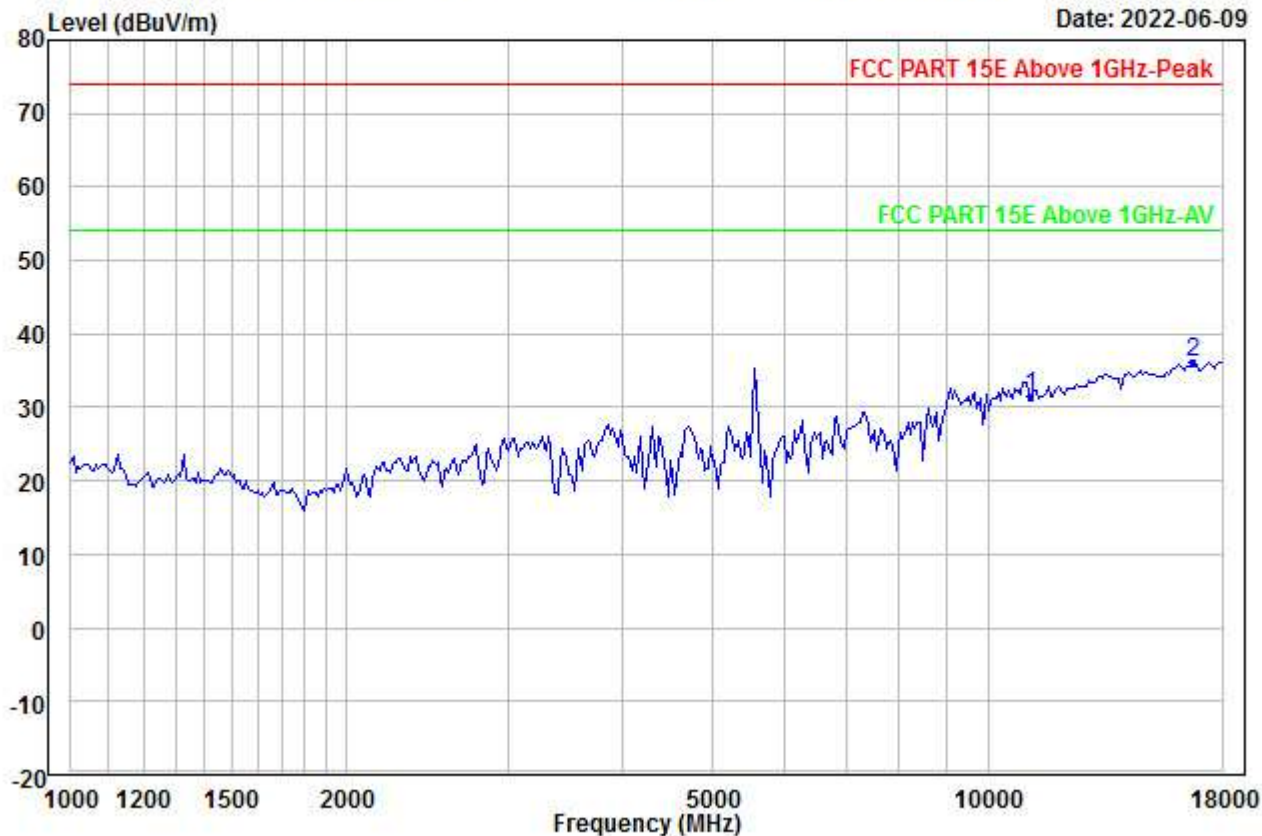


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5580
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 11160.000	24.27	38.63	45.35	0.00	14.04	31.59	54.00	-22.41	---	---	Aver
2 PP16740.000	23.49	41.88	46.89	0.00	17.56	36.04	54.00	-17.96	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00163.EMI

Date: 2022-06-09

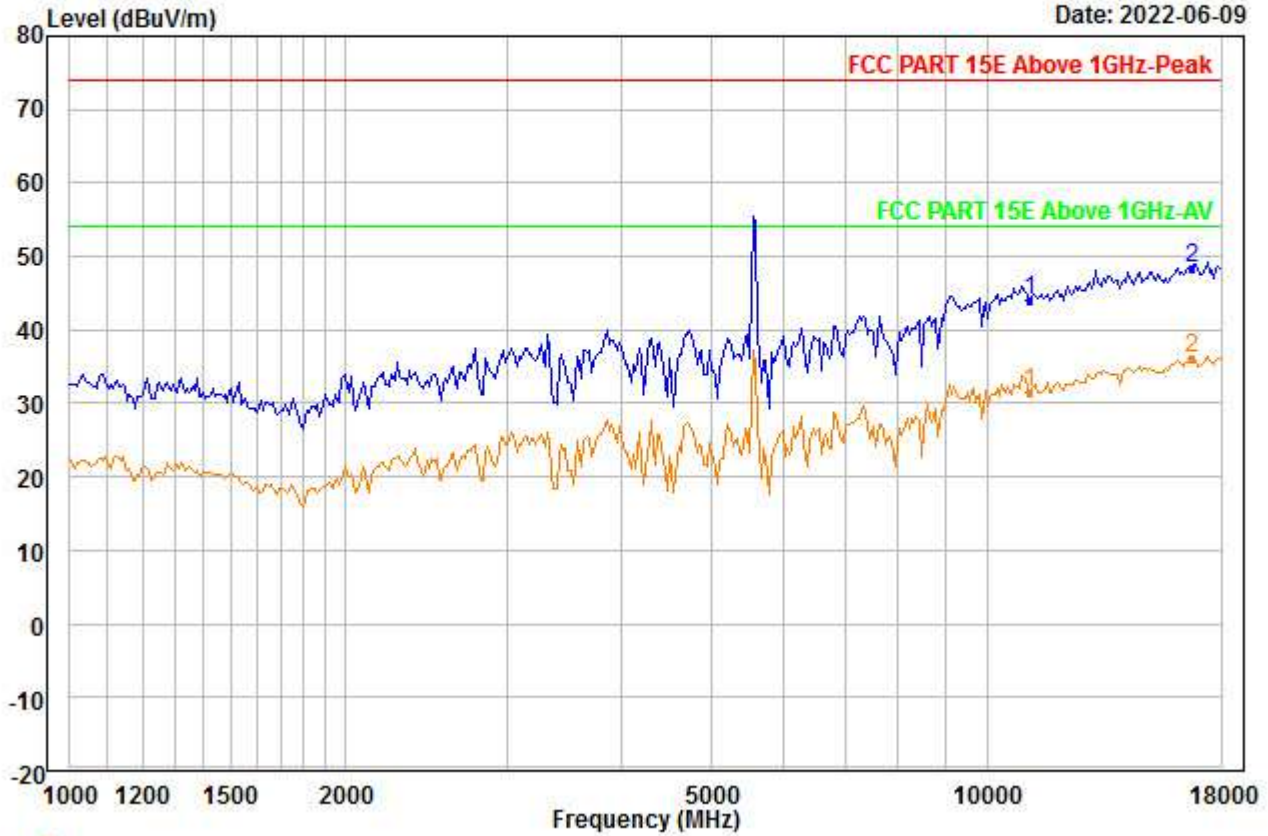


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5580
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 11160.000	36.77	38.63	45.35	0.00	14.04	44.09	74.00	-29.91	---	---	Peak
2 PP16740.000	35.89	41.88	46.89	0.00	17.56	48.44	74.00	-25.56	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00164.EMI

Date: 2022-06-09

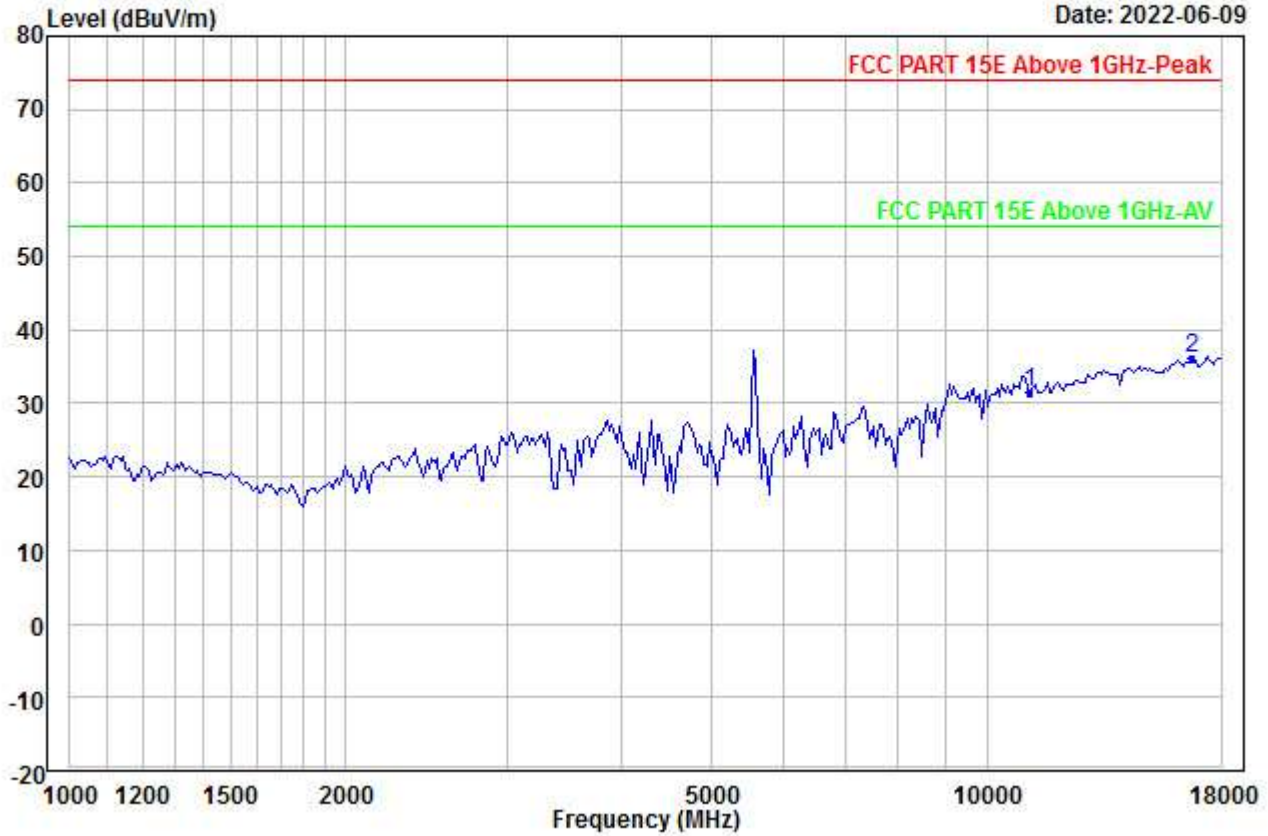


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5580
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11160.000	24.18	38.63	45.35	0.00	14.04	31.50	54.00	-22.50	---	---	Aver
2	PP16740.000	23.49	41.88	46.89	0.00	17.56	36.04	54.00	-17.96	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00165.EMI

Date: 2022-06-09

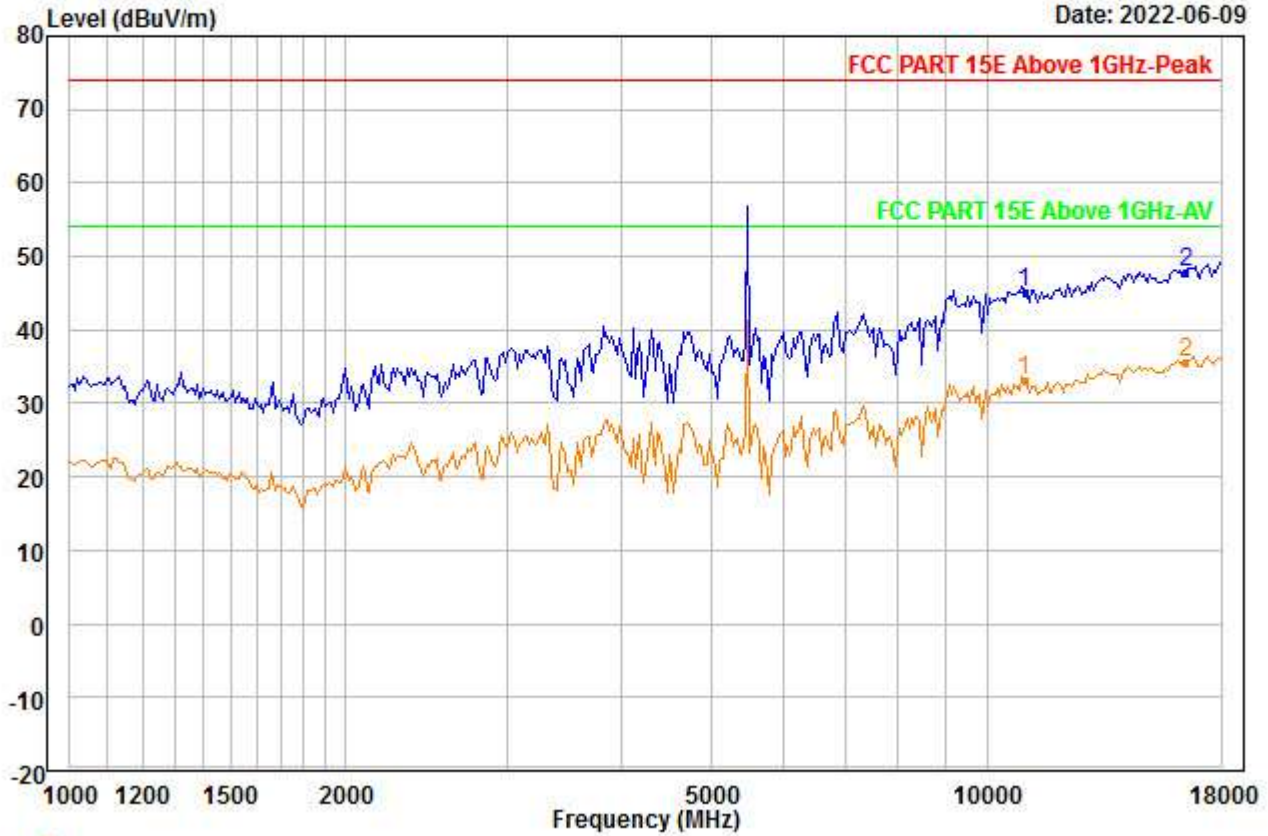


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5500
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 11000.000	37.80	38.50	45.00	0.00	13.92	45.22	74.00	-28.78	---	---	Peak
2 PP16500.000	35.40	41.50	46.60	0.00	17.45	47.75	74.00	-26.25	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00166.EMI

Date: 2022-06-09

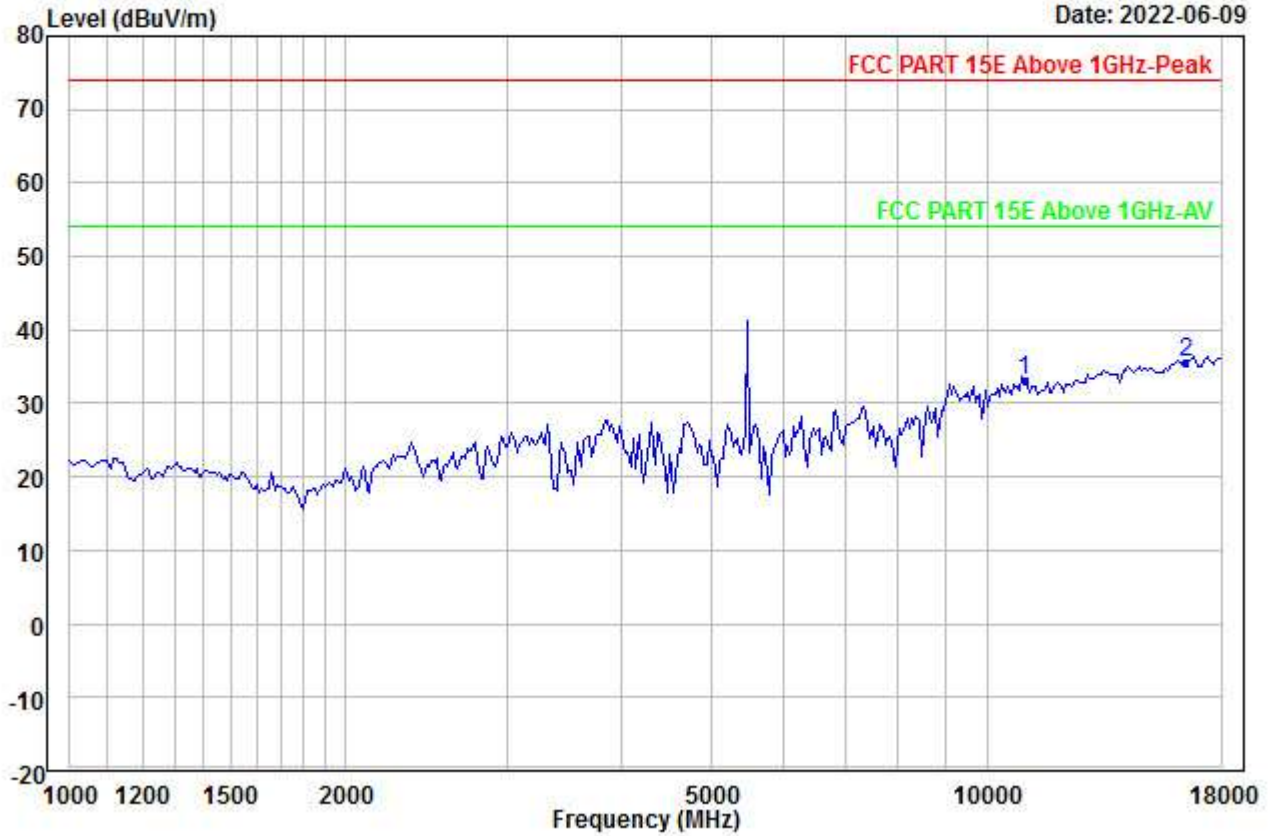


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5500
 Remark :

	Read Freq	Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11000.000	25.80	38.50	45.00	0.00	13.92	33.22	54.00	-20.78	---	---	Aver
2	PP16500.000	23.33	41.50	46.60	0.00	17.45	35.68	54.00	-18.32	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00167.EMI

Date: 2022-06-09

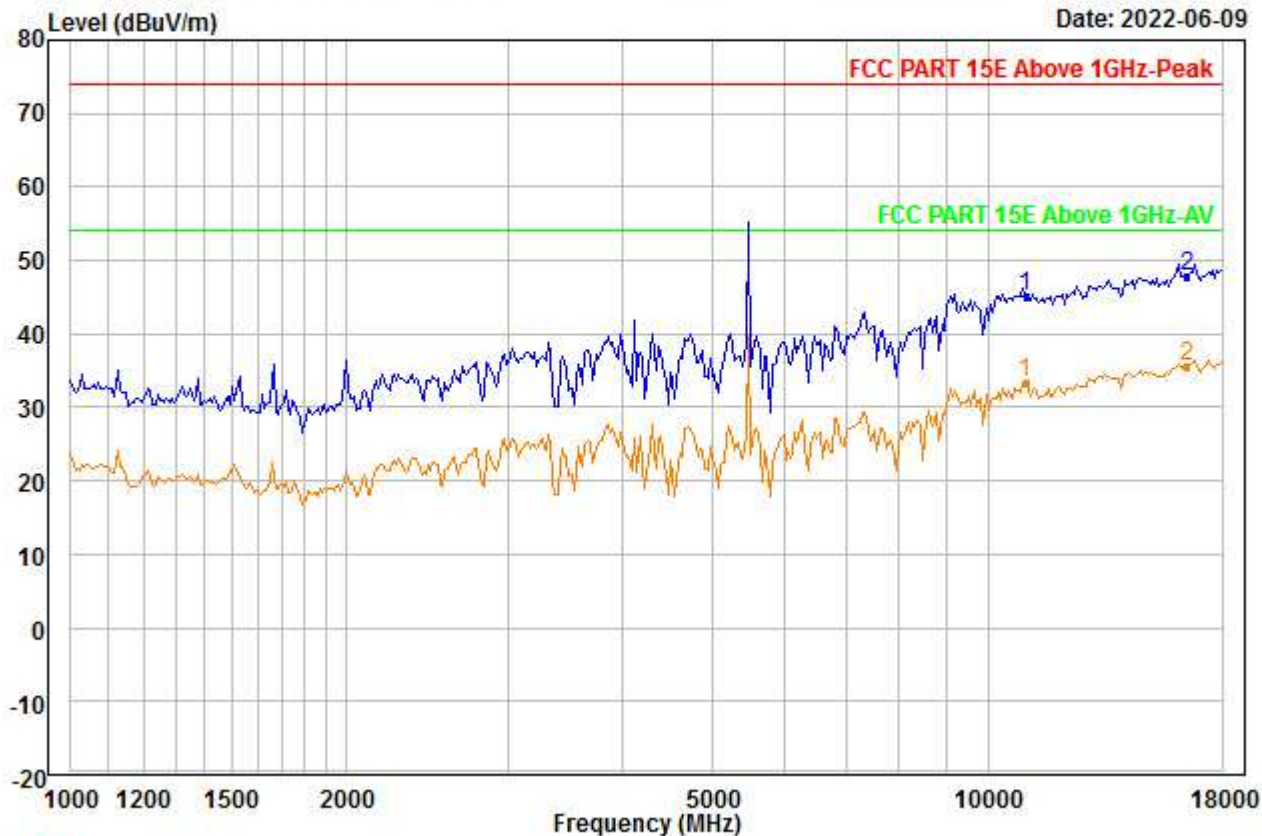


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5500
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 11000.000	37.82	38.50	45.00	0.00	13.92	45.24	74.00	-28.76	---	---	Peak
2 PP16500.000	35.62	41.50	46.60	0.00	17.45	47.97	74.00	-26.03	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00168.EMI

Date: 2022-06-09

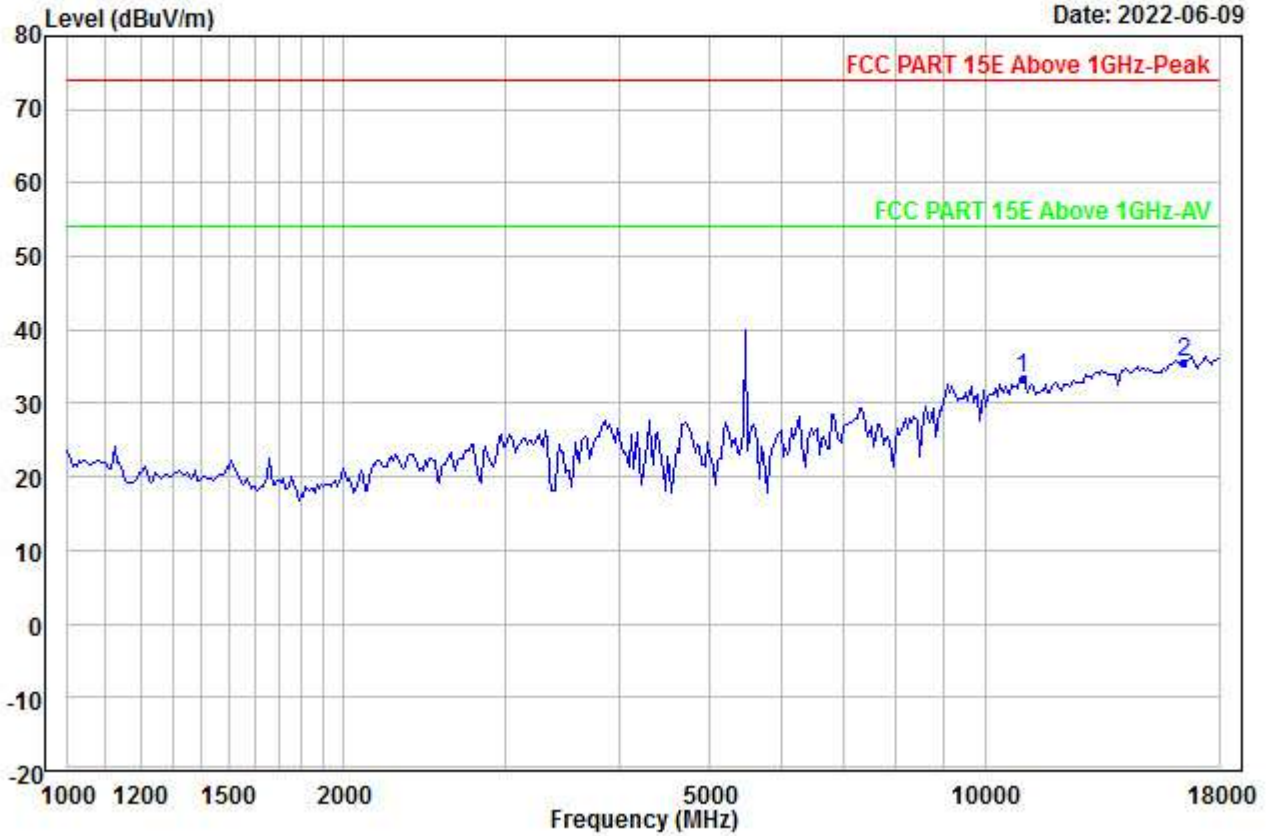


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5500
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 11000.000	25.87	38.50	45.00	0.00	13.92	33.29	54.00	-20.71	---	---	Aver
2 PP16500.000	23.33	41.50	46.60	0.00	17.45	35.68	54.00	-18.32	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\RSE\4_00169.EMI

Date: 2022-06-09

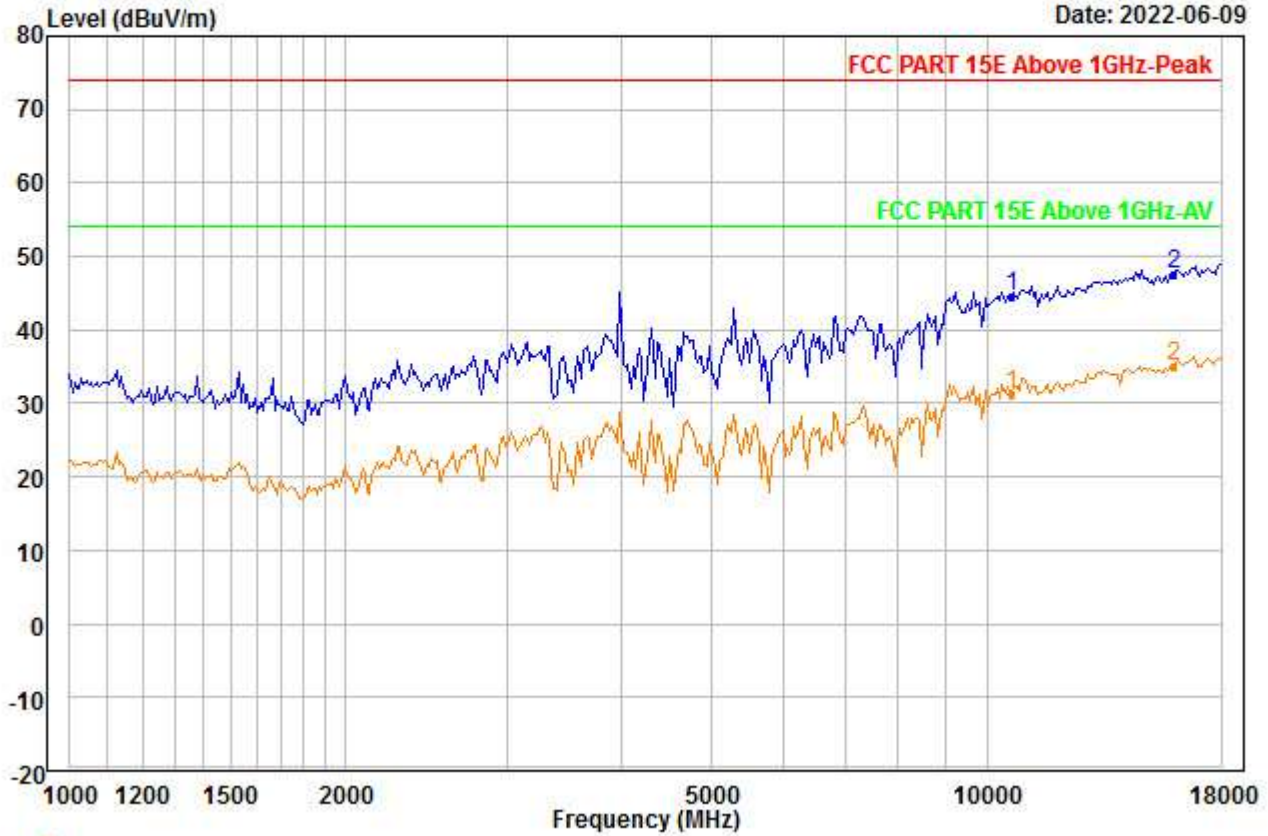


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5320
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10640.000	38.00	38.28	45.65	0.00	14.01	44.64	74.00	-29.36	---	---	Peak
2 PP15960.000	35.71	40.84	46.27	0.00	17.20	47.48	74.00	-26.52	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00170.EMI

Date: 2022-06-09

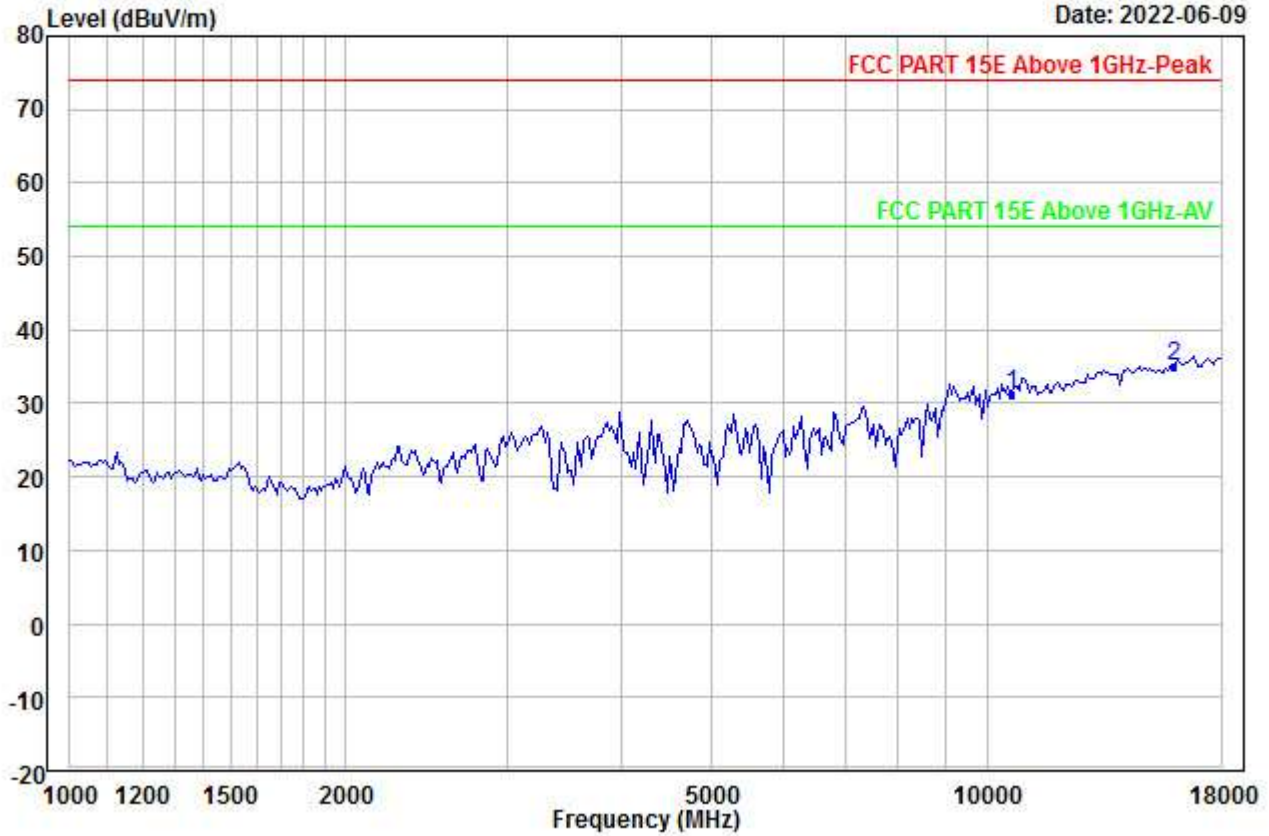


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5320
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10640.000	24.58	38.28	45.65	0.00	14.01	31.22	54.00	-22.78	---	---	Aver
2	PP15960.000	23.41	40.84	46.27	0.00	17.20	35.18	54.00	-18.82	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00171.EMI

Date: 2022-06-09

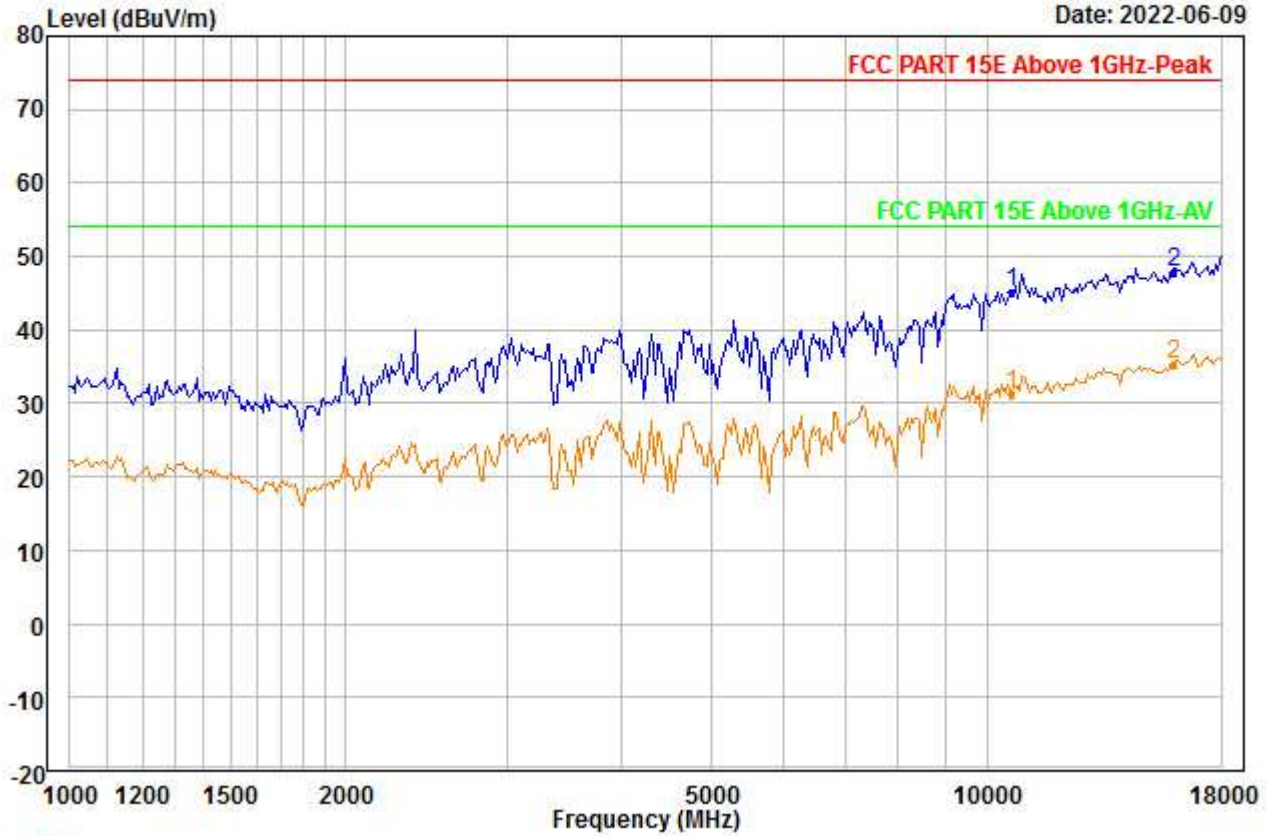


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5320
 Remark :

	Read Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10640.000	38.56	38.28	45.65	0.00	14.01	45.20	74.00	-28.80	---	---	Peak
2	PP15960.000	35.95	40.84	46.27	0.00	17.20	47.72	74.00	-26.28	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00172.EMI

Date: 2022-06-09

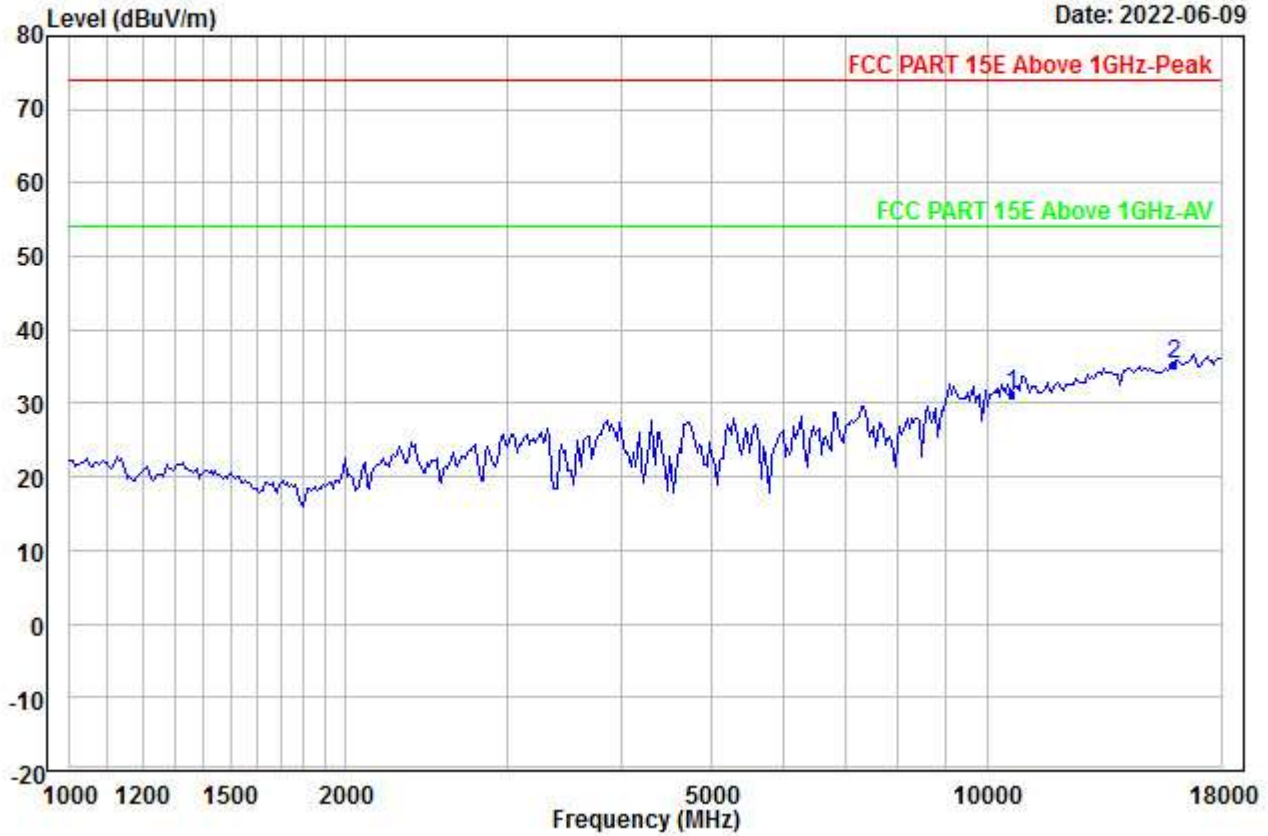


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5320
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10640.000	24.58	38.28	45.65	0.00	14.01	31.22	54.00	-22.78	---	---	Aver
2	PP15960.000	23.50	40.84	46.27	0.00	17.20	35.27	54.00	-18.73	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00173.EMI

Date: 2022-06-09

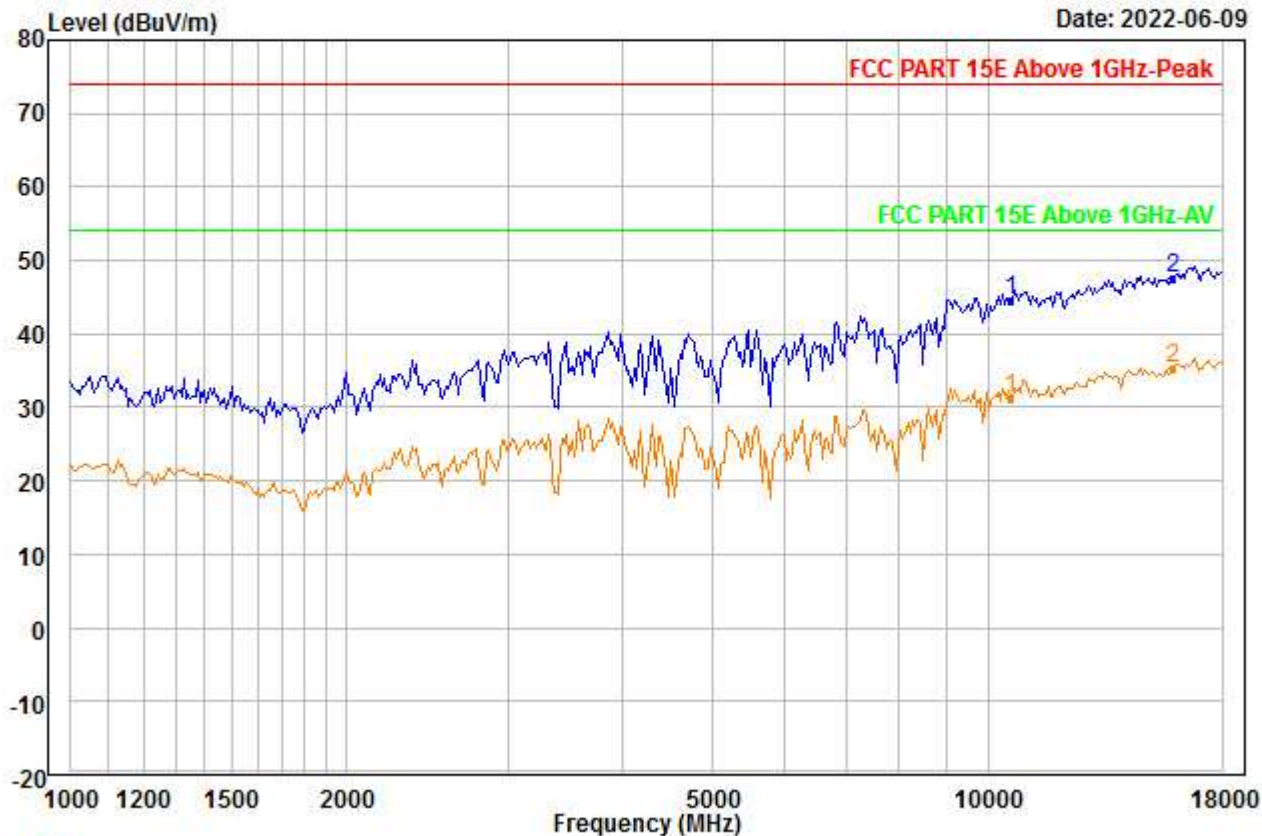


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5300
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10600.000	38.13	38.26	45.72	0.00	14.02	44.69	74.00	-29.31	---	---	Peak
2 PP15900.000	35.80	40.76	46.22	0.00	17.17	47.51	74.00	-26.49	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00174.EMI

Date: 2022-06-09

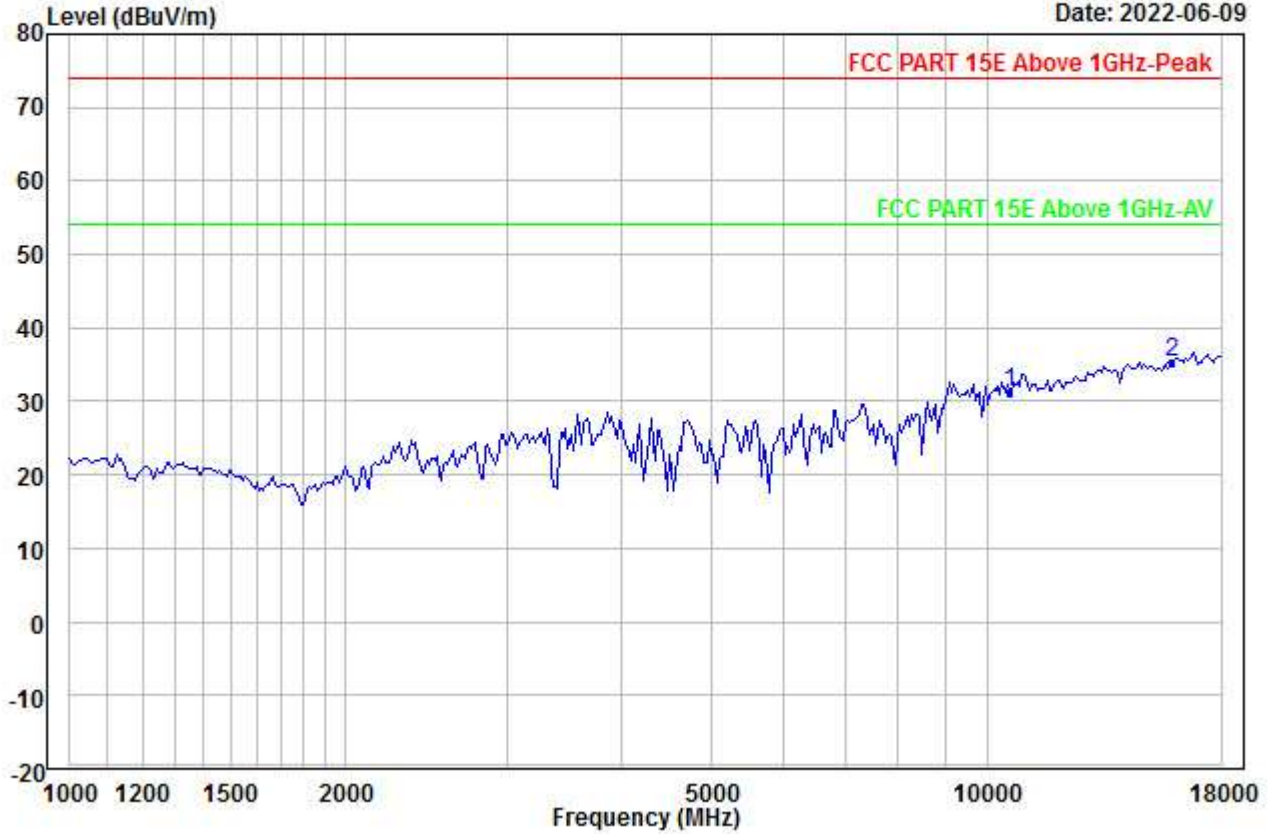


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5300
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10600.000	24.75	38.26	45.72	0.00	14.02	31.31	54.00	-22.69	---	---	Aver
2 PP15900.000	23.56	40.76	46.22	0.00	17.17	35.27	54.00	-18.73	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00175.EMI

Date: 2022-06-09

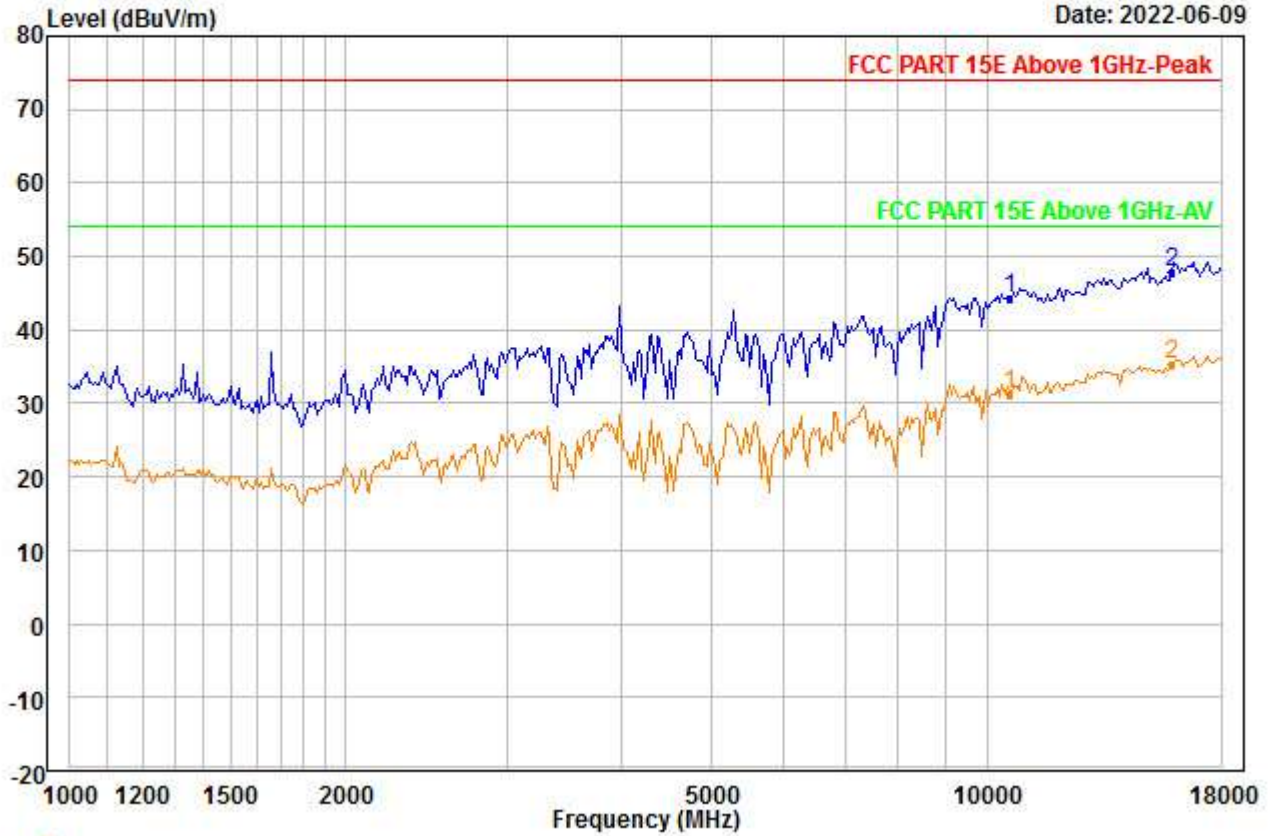


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5300
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10600.000	37.74	38.26	45.72	0.00	14.02	44.30	74.00	-29.70	---	---	Peak
2 PP15900.000	36.19	40.76	46.22	0.00	17.17	47.90	74.00	-26.10	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00176.EMI

Date: 2022-06-09

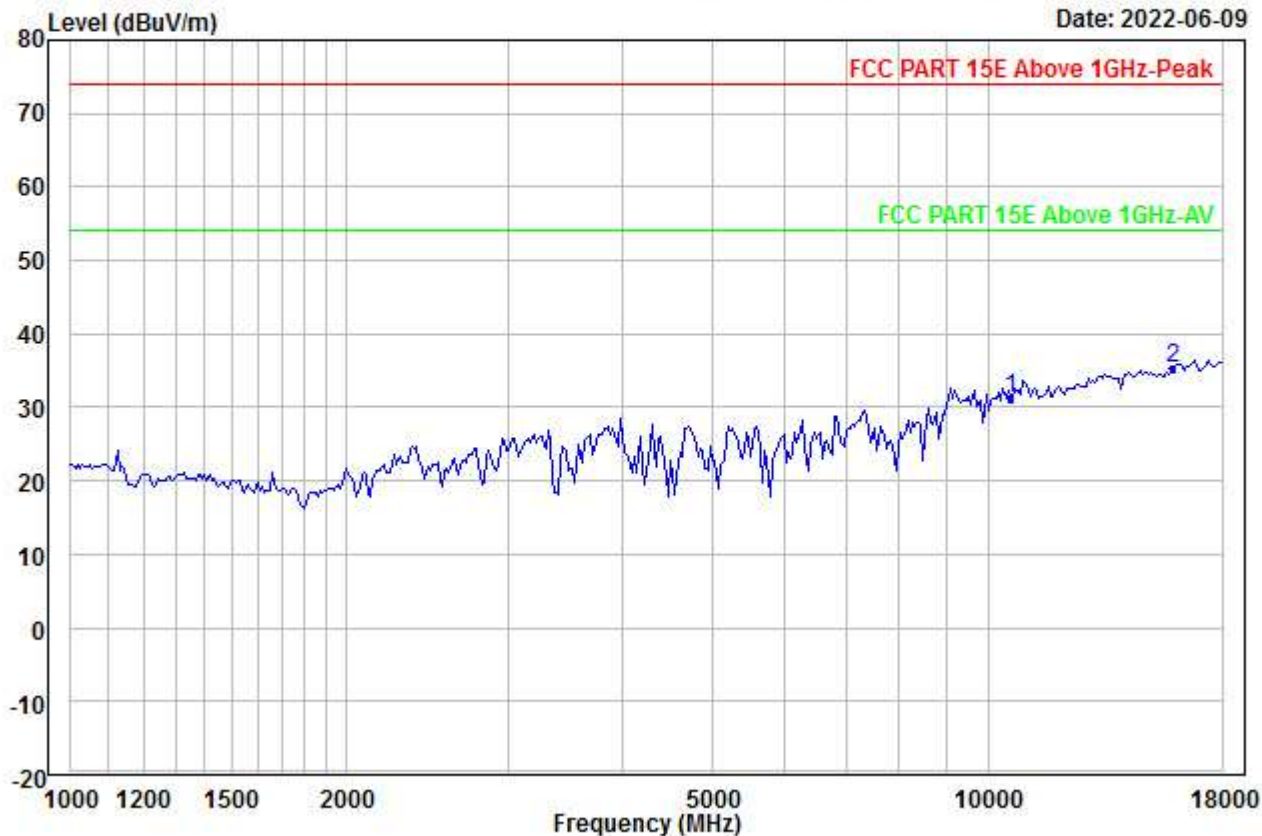


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5300
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10600.000	24.75	38.26	45.72	0.00	14.02	31.31	54.00	-22.69	---	---	Aver
2 PP15900.000	23.56	40.76	46.22	0.00	17.17	35.27	54.00	-18.73	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00177.EMI

Date: 2022-06-09

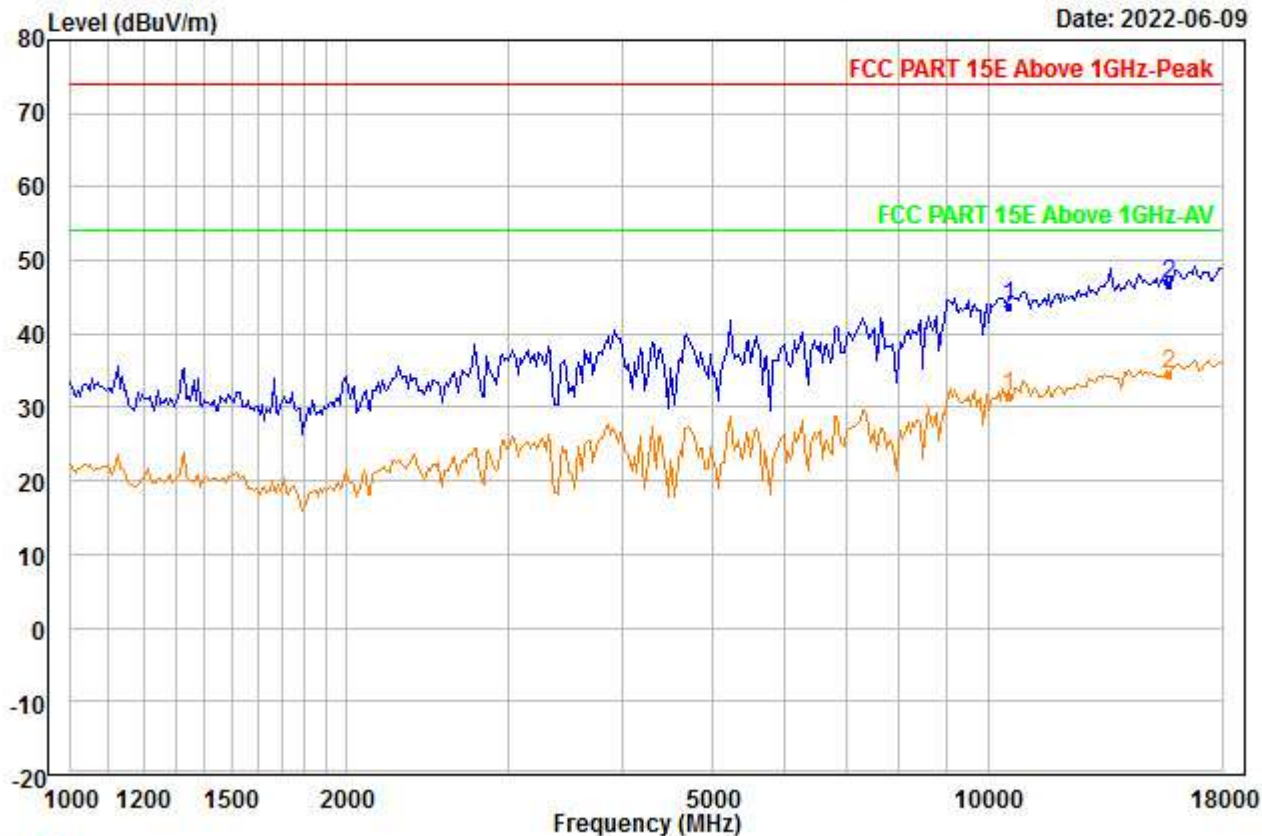


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5260
 Remark :

	Read Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10520.000	37.50	38.21	45.86	0.00	14.04	43.89	74.00	-30.11	---	---	Peak
2	PP15780.000	35.08	40.59	46.12	0.00	17.09	46.64	74.00	-27.36	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00178.EMI

Date: 2022-06-09

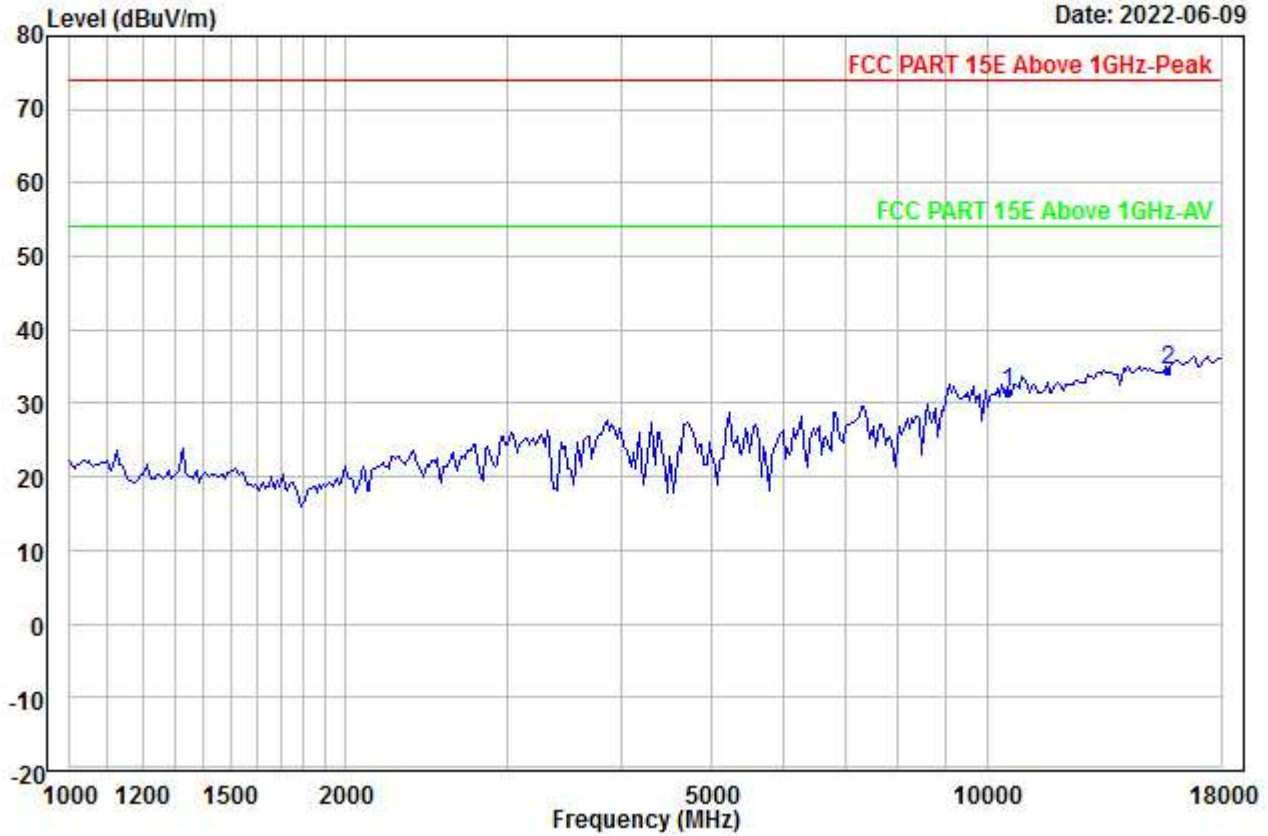


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5260
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10520.000	25.07	38.21	45.86	0.00	14.04	31.46	54.00	-22.54	---	---	Aver
2	PP15780.000	22.99	40.59	46.12	0.00	17.09	34.55	54.00	-19.45	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00179.EMI

Date: 2022-06-09

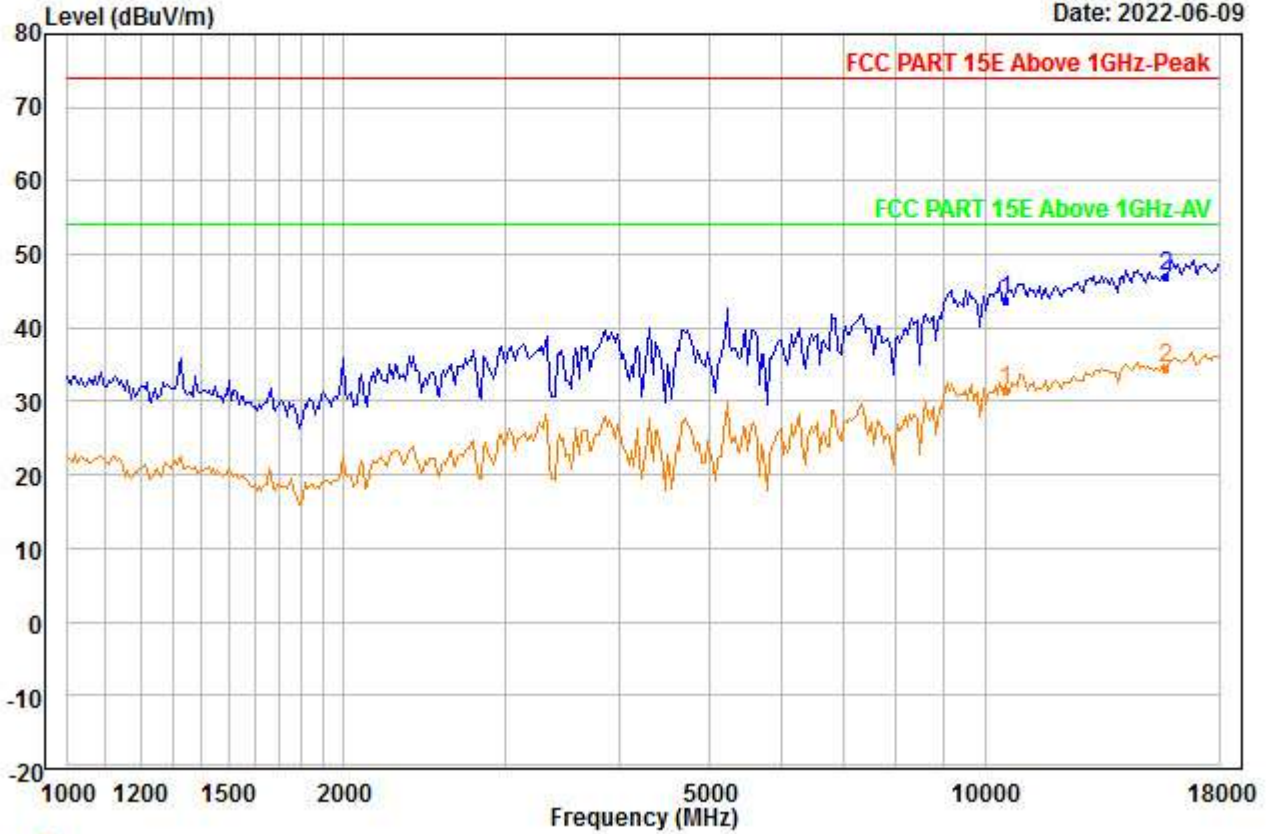


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5260
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10520.000	37.27	38.21	45.86	0.00	14.04	43.66	74.00	-30.34	---	---	Peak
2	PP15780.000	35.36	40.59	46.12	0.00	17.09	46.92	74.00	-27.08	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00180.EMI

Date: 2022-06-09

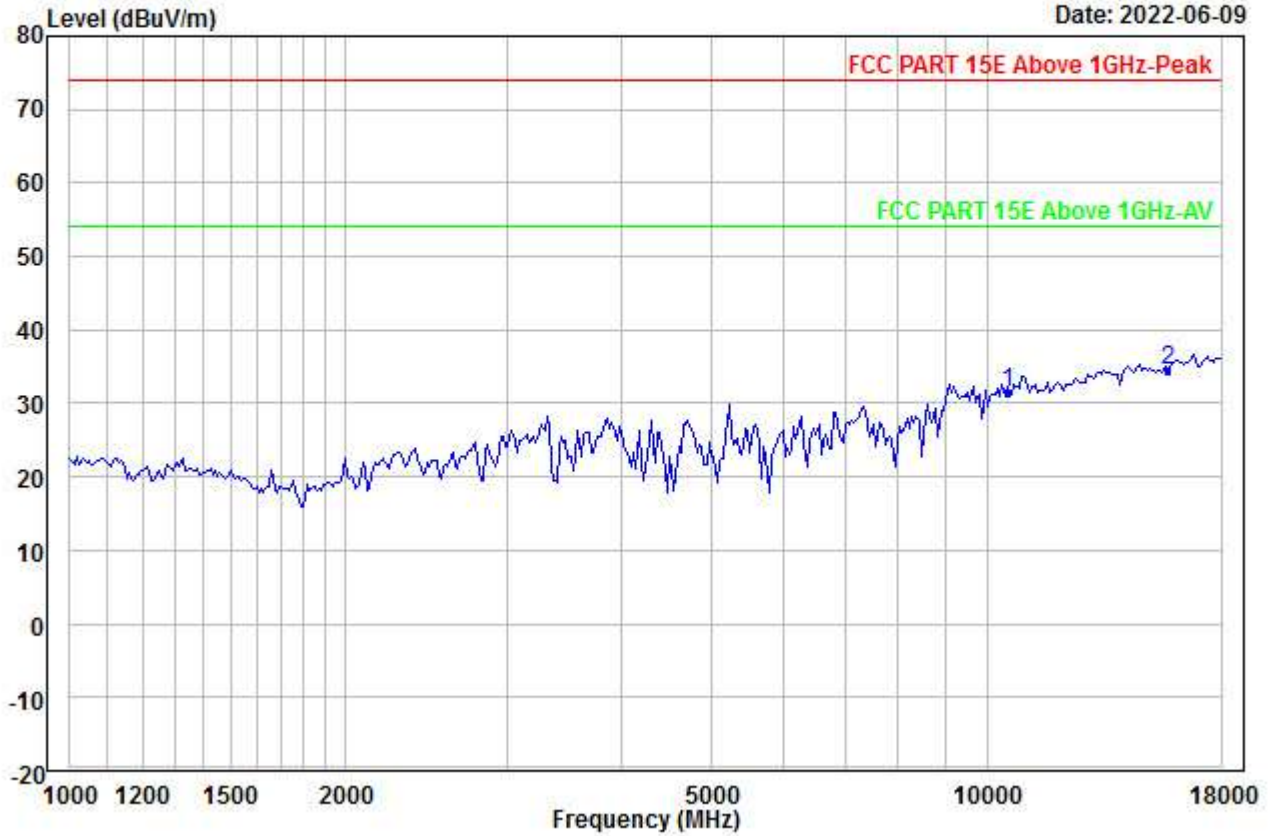


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5260
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10520.000	25.15	38.21	45.86	0.00	14.04	31.54	54.00	-22.46	---	---	Aver
2 PP15780.000	22.99	40.59	46.12	0.00	17.09	34.55	54.00	-19.45	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00181.EMI

Date: 2022-06-09

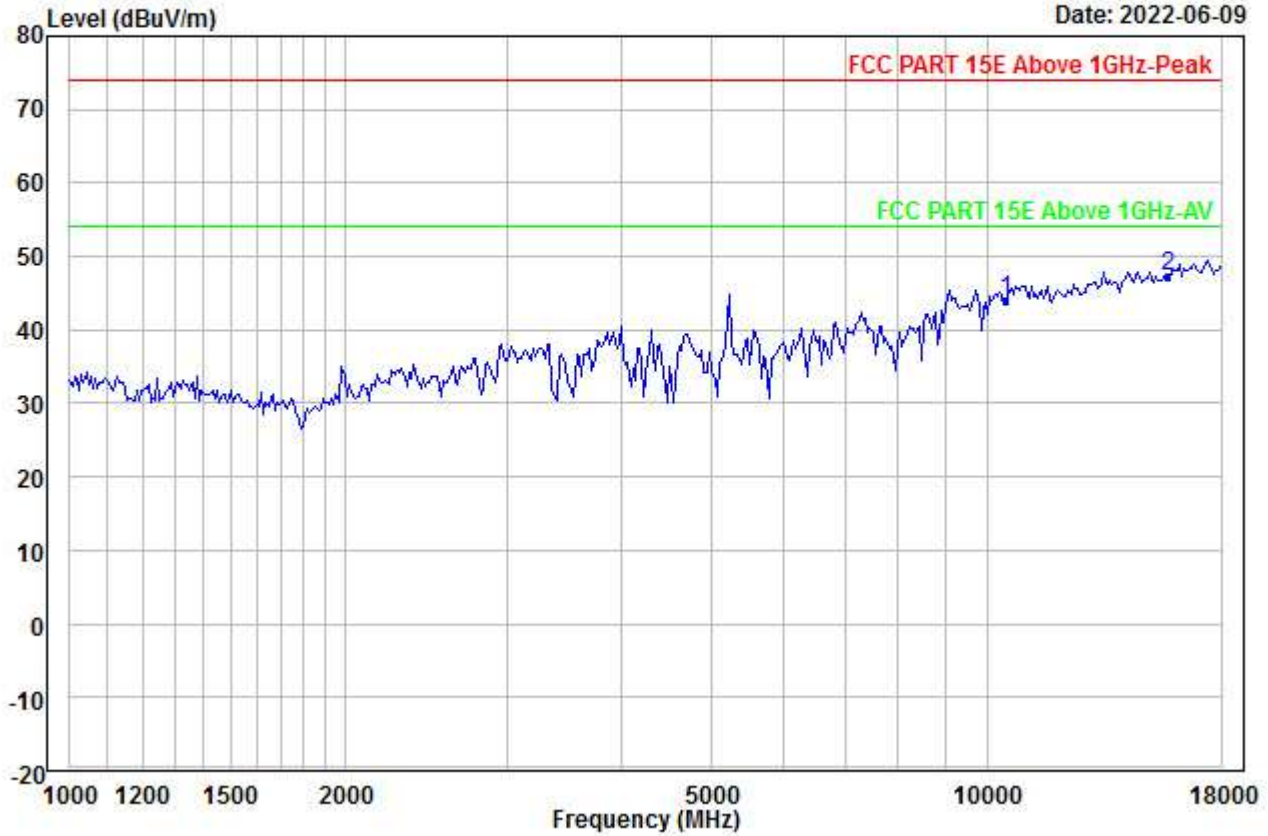


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5240
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10480.000	37.77	38.19	45.91	0.00	14.05	44.10	74.00	-29.90	---	---	Peak
2 PP15720.000	35.84	40.51	46.08	0.00	17.05	47.32	74.00	-26.68	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00182.EMI

Date: 2022-06-09

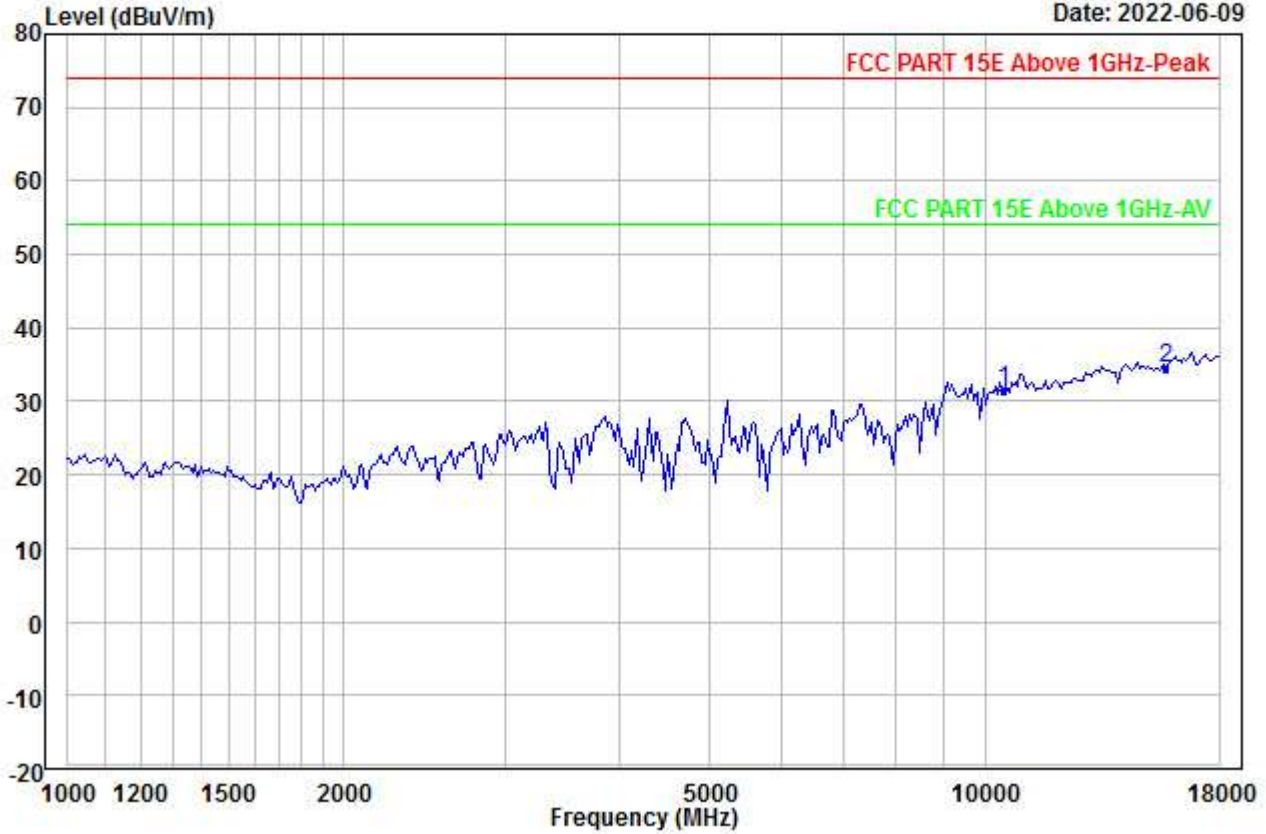


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5240
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10480.000	25.28	38.19	45.91	0.00	14.05	31.61	54.00	-22.39	---	---	Aver
2 PP15720.000	23.07	40.51	46.08	0.00	17.05	34.55	54.00	-19.45	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00183.EMI

Date: 2022-06-09

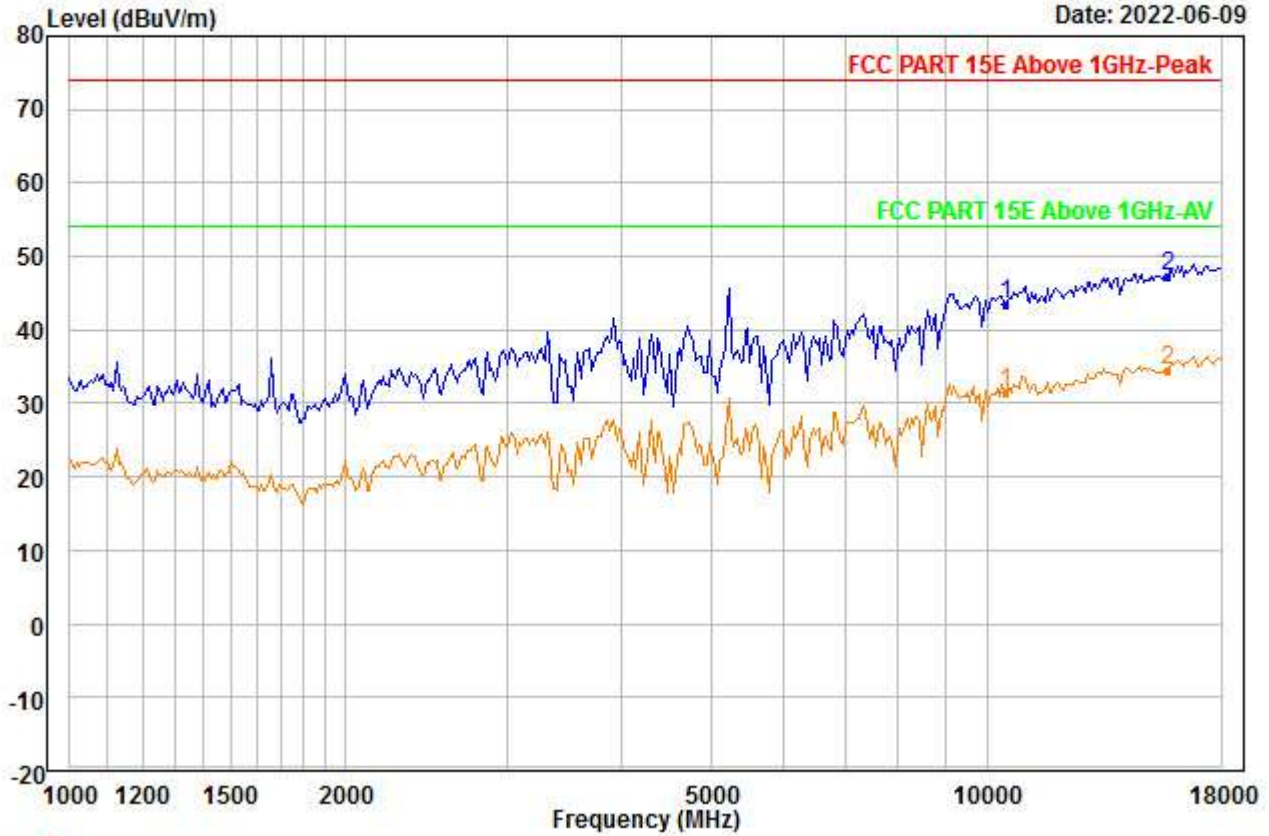


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5240
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10480.000	37.29	38.19	45.91	0.00	14.05	43.62	74.00	-30.38	---	---	Peak
2 PP15720.000	35.70	40.51	46.08	0.00	17.05	47.18	74.00	-26.82	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00184.EMI

Date: 2022-06-09

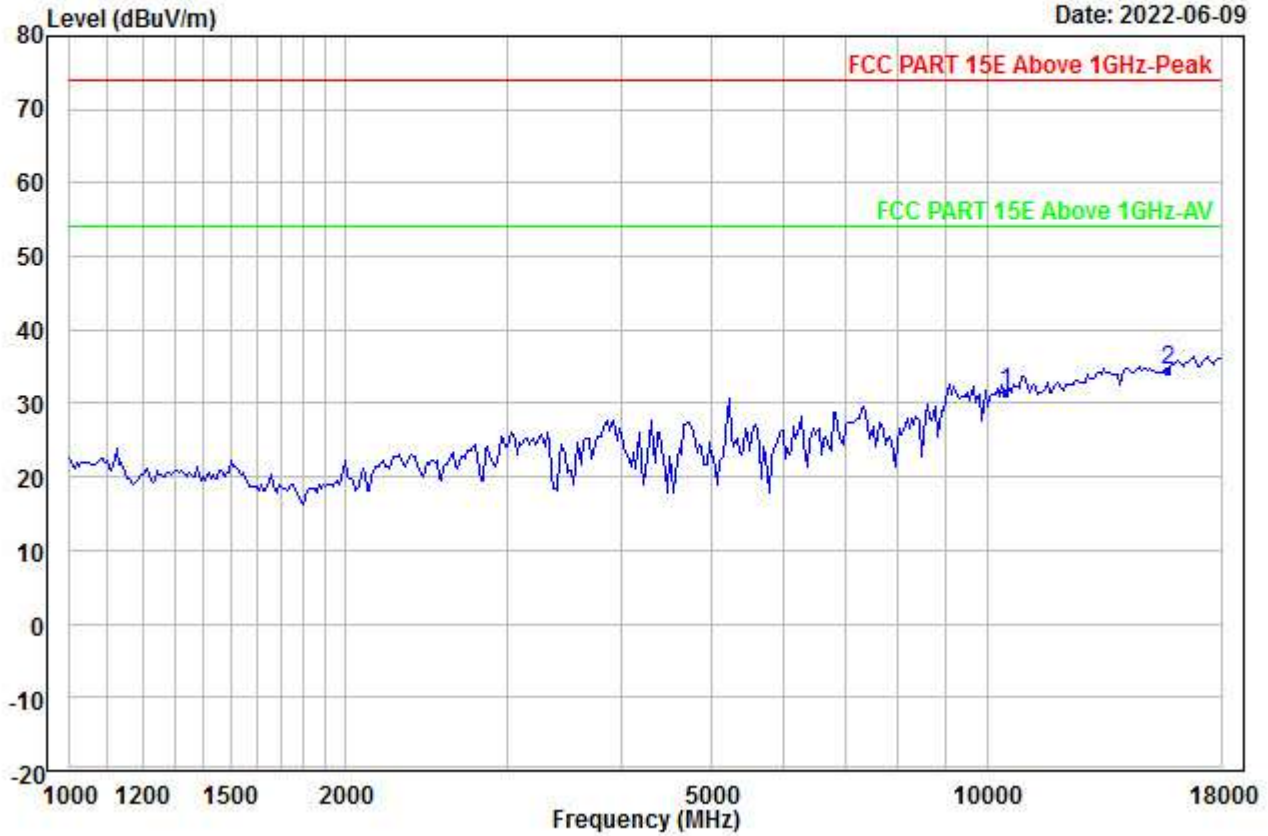


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5240
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10480.000	25.21	38.19	45.91	0.00	14.05	31.54	54.00	-22.46	---	---	Aver
2 PP15720.000	23.07	40.51	46.08	0.00	17.05	34.55	54.00	-19.45	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00185.EMI

Date: 2022-06-09

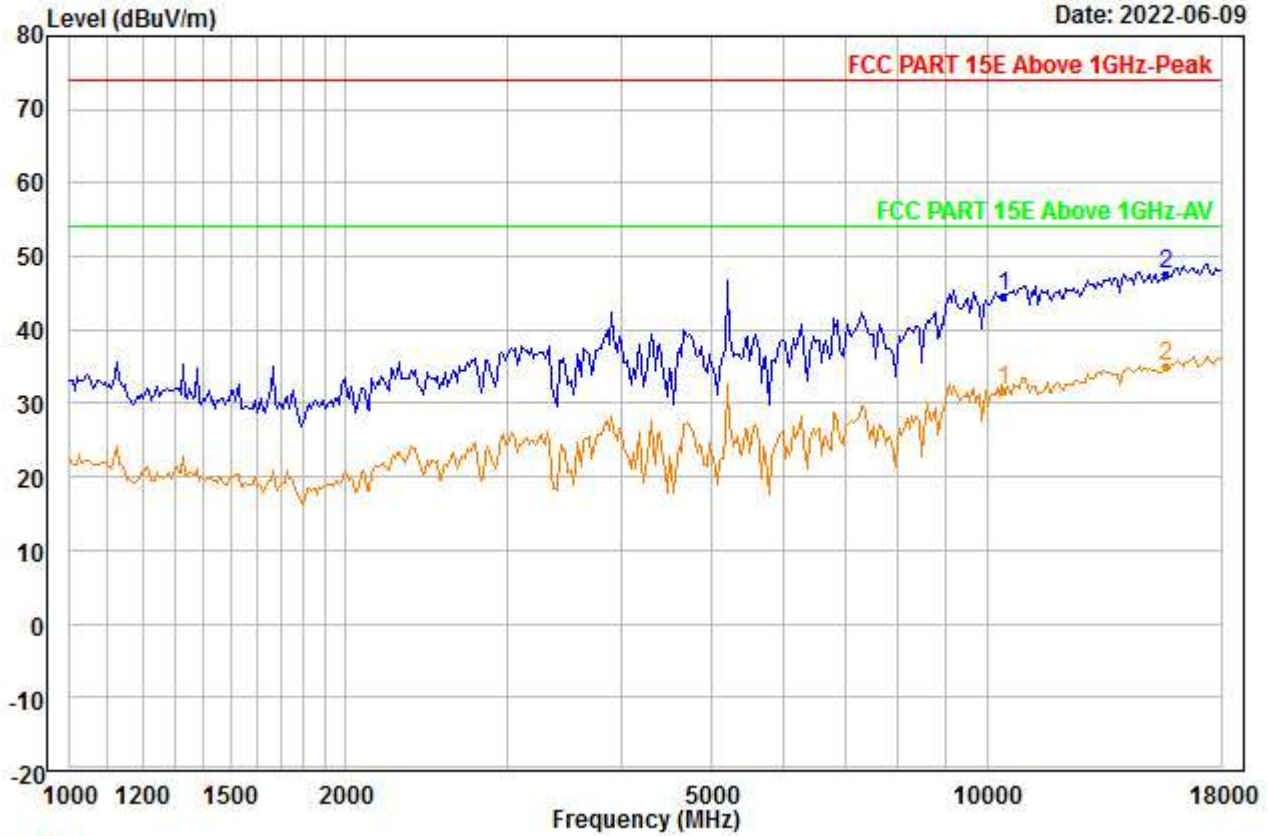


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5220
 Remark :

	Read Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10440.000	38.15	38.16	45.92	0.00	14.06	44.45	74.00	-29.55	---	---	Peak
2	PP15660.000	36.09	40.42	46.03	0.00	17.01	47.49	74.00	-26.51	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00186.EMI

Date: 2022-06-09

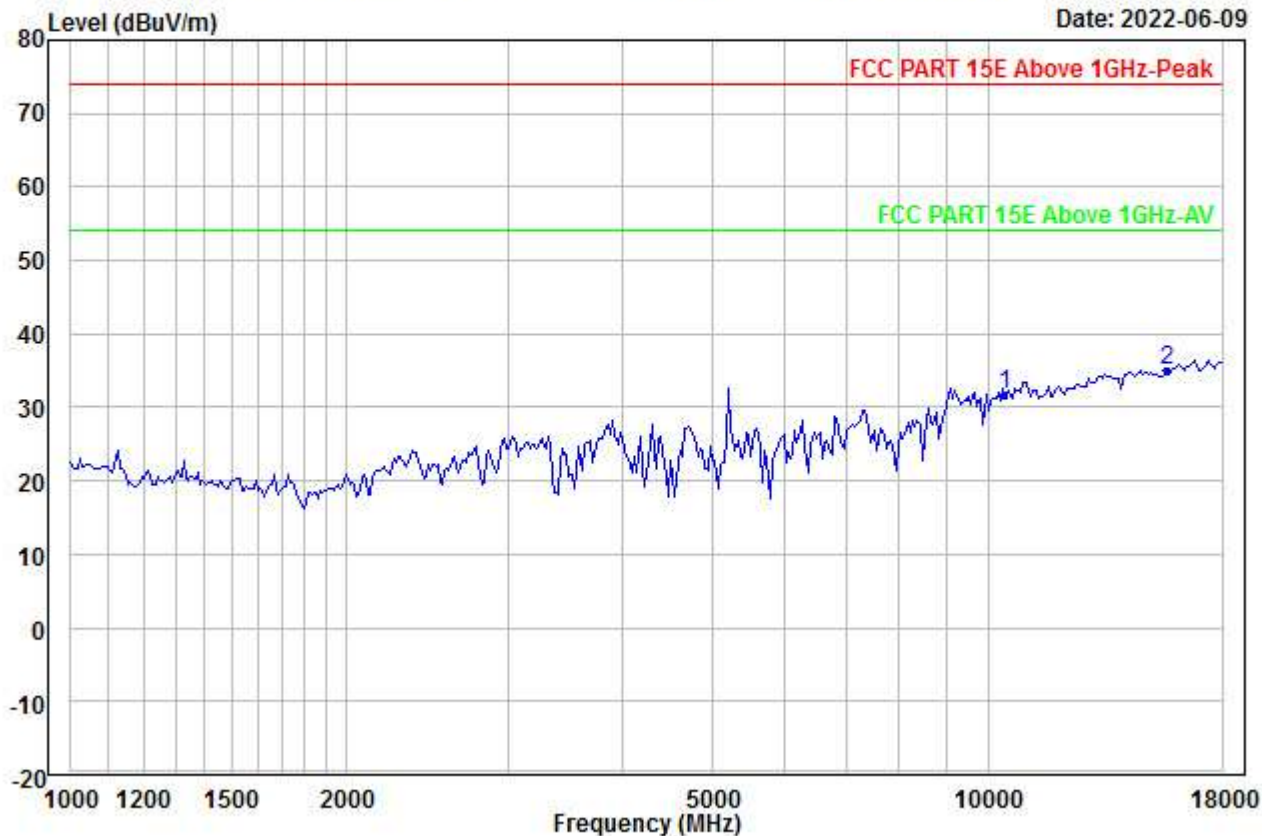


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5220
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10440.000	25.57	38.16	45.92	0.00	14.06	31.87	54.00	-22.13	---	---	Aver
2 PP15660.000	23.53	40.42	46.03	0.00	17.01	34.93	54.00	-19.07	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00187.EMI

Date: 2022-06-09

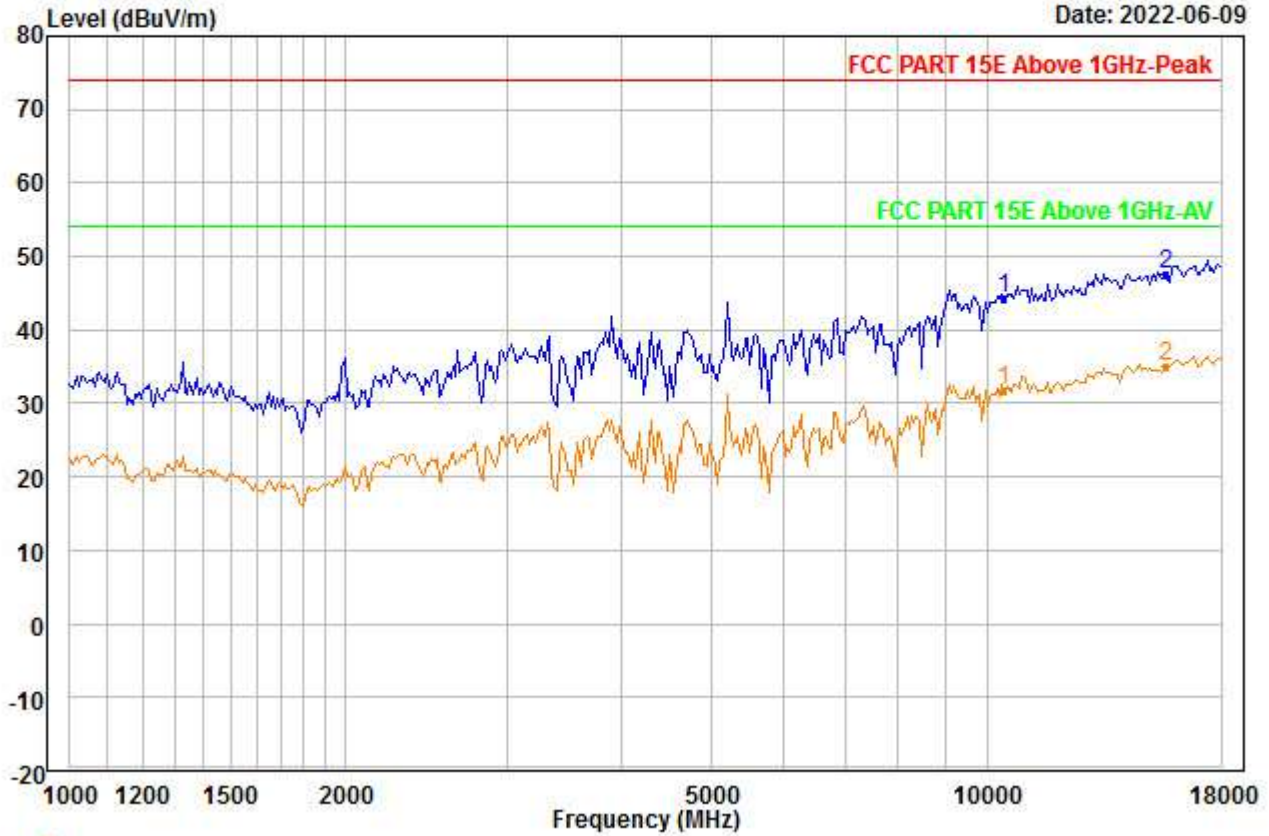


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5220
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10440.000	38.13	38.16	45.92	0.00	14.06	44.43	74.00	-29.57	---	---	Peak
2 PP15660.000	36.22	40.42	46.03	0.00	17.01	47.62	74.00	-26.38	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00188.EMI

Date: 2022-06-09

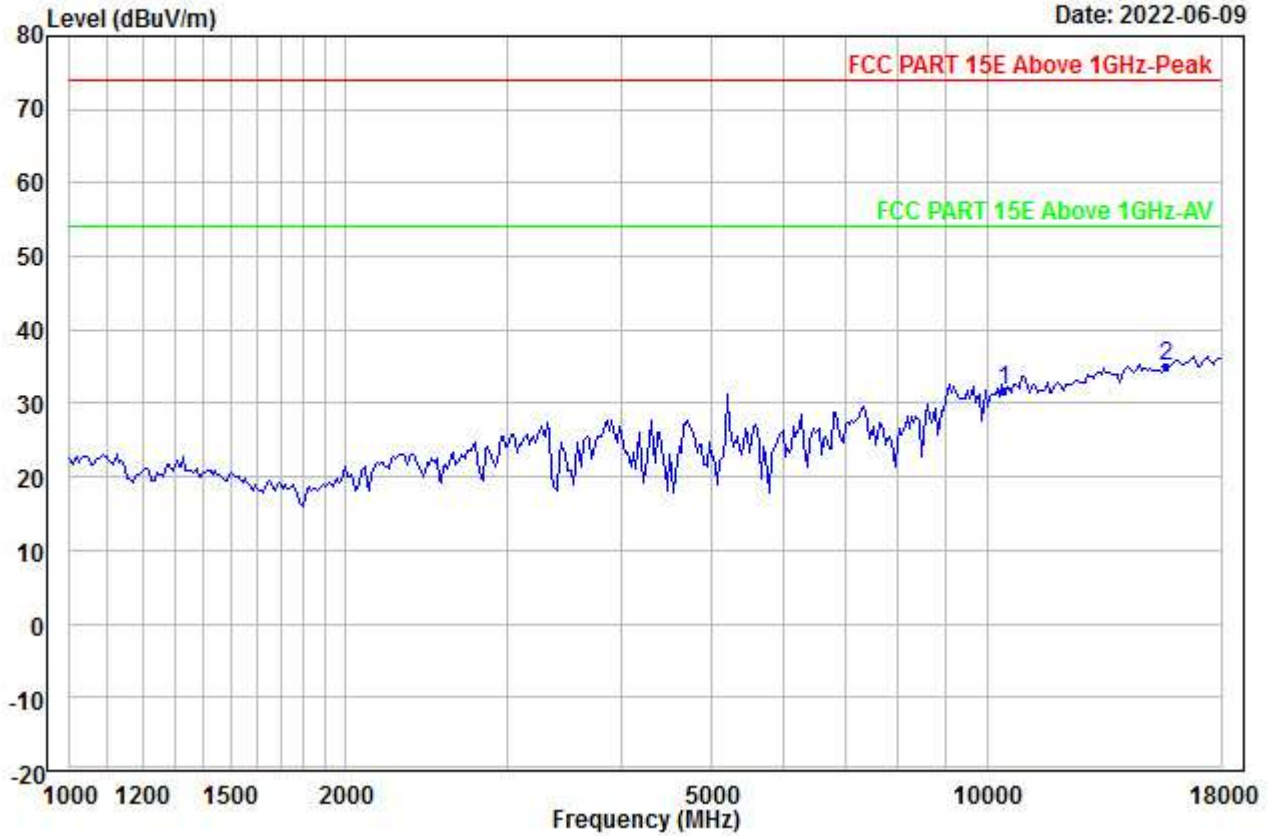


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5220
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10440.000	25.57	38.16	45.92	0.00	14.06	31.87	54.00	-22.13	---	---	Aver
2 PP15660.000	23.53	40.42	46.03	0.00	17.01	34.93	54.00	-19.07	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00189.EMI

Date: 2022-06-09

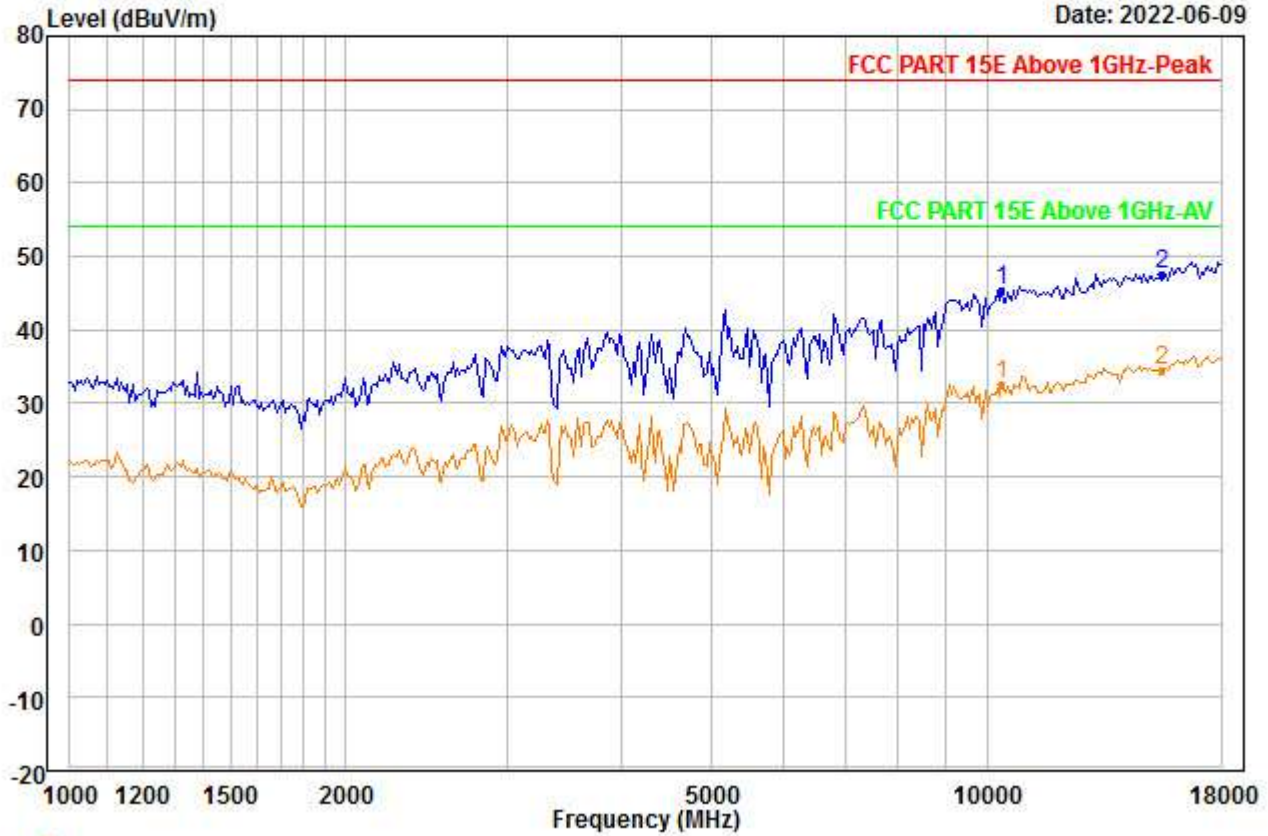


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5180
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10360.000	39.10	38.12	45.96	0.00	14.08	45.34	74.00	-28.66	---	---	Peak
2 PP15540.000	36.38	40.26	45.93	0.00	16.94	47.65	74.00	-26.35	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00190.EMI

Date: 2022-06-09

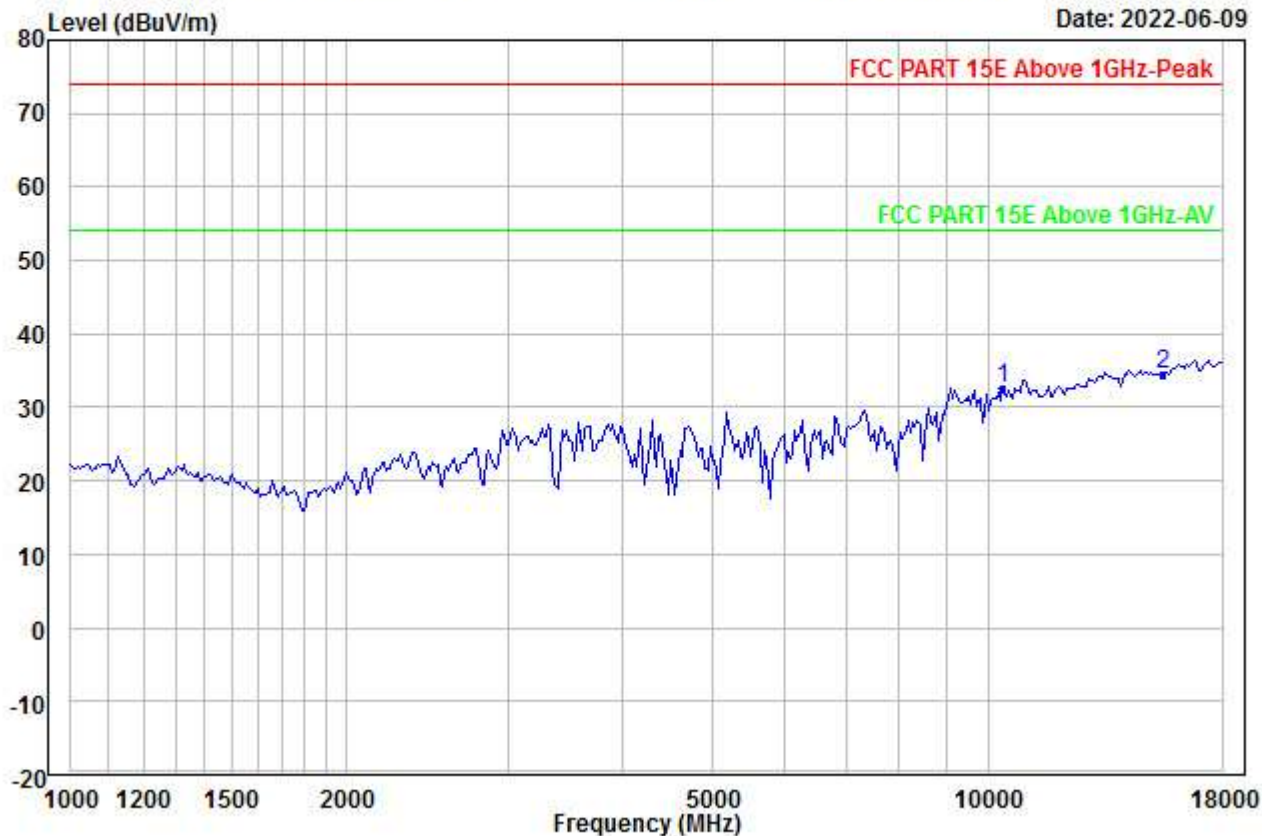


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5180
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10360.000	26.32	38.12	45.96	0.00	14.08	32.56	54.00	-21.44	---	---	Aver
2 PP15540.000	23.16	40.26	45.93	0.00	16.94	34.43	54.00	-19.57	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00191.EMI

Date: 2022-06-09

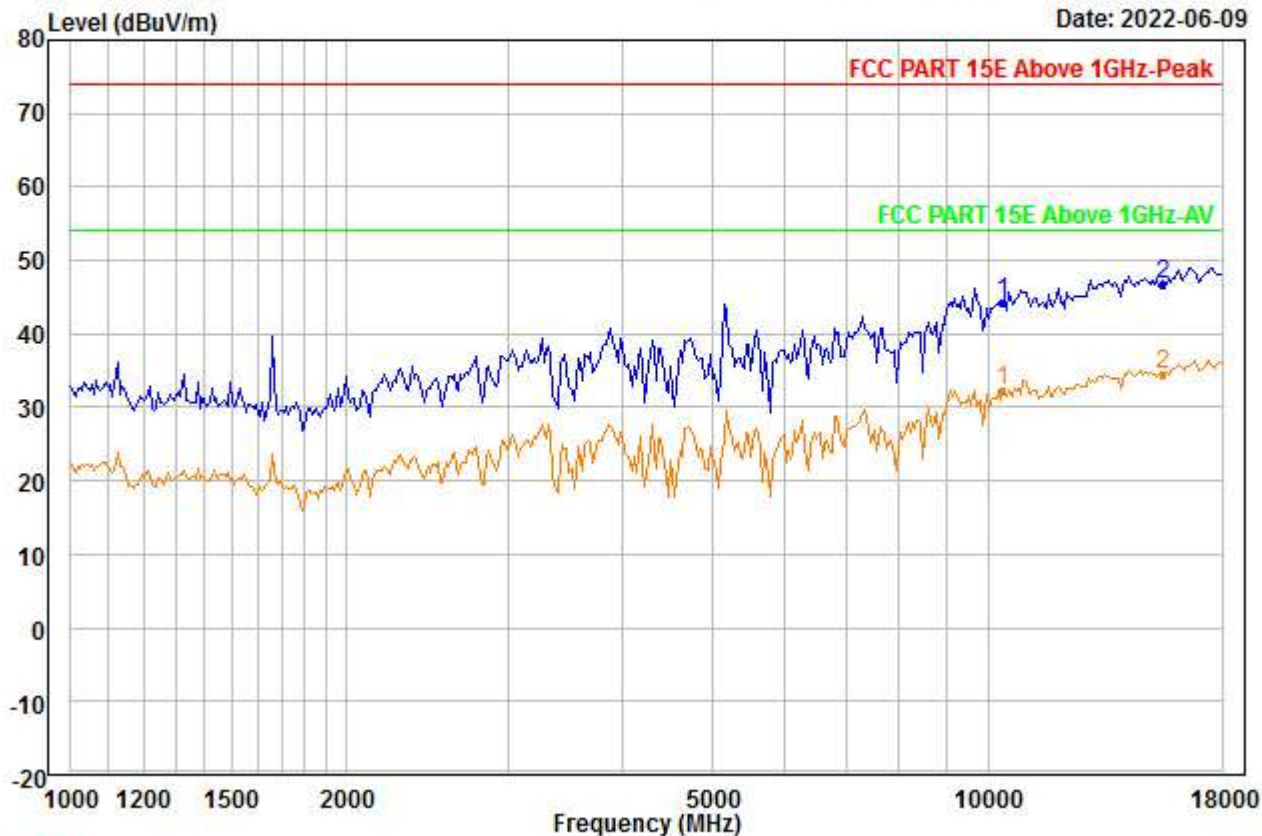


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5180
 Remark :

	Read Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10360.000	38.15	38.12	45.96	0.00	14.08	44.39	74.00	-29.61	---	---	Peak
2	PP15540.000	35.49	40.26	45.93	0.00	16.94	46.76	74.00	-27.24	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00192.EMI

Date: 2022-06-09

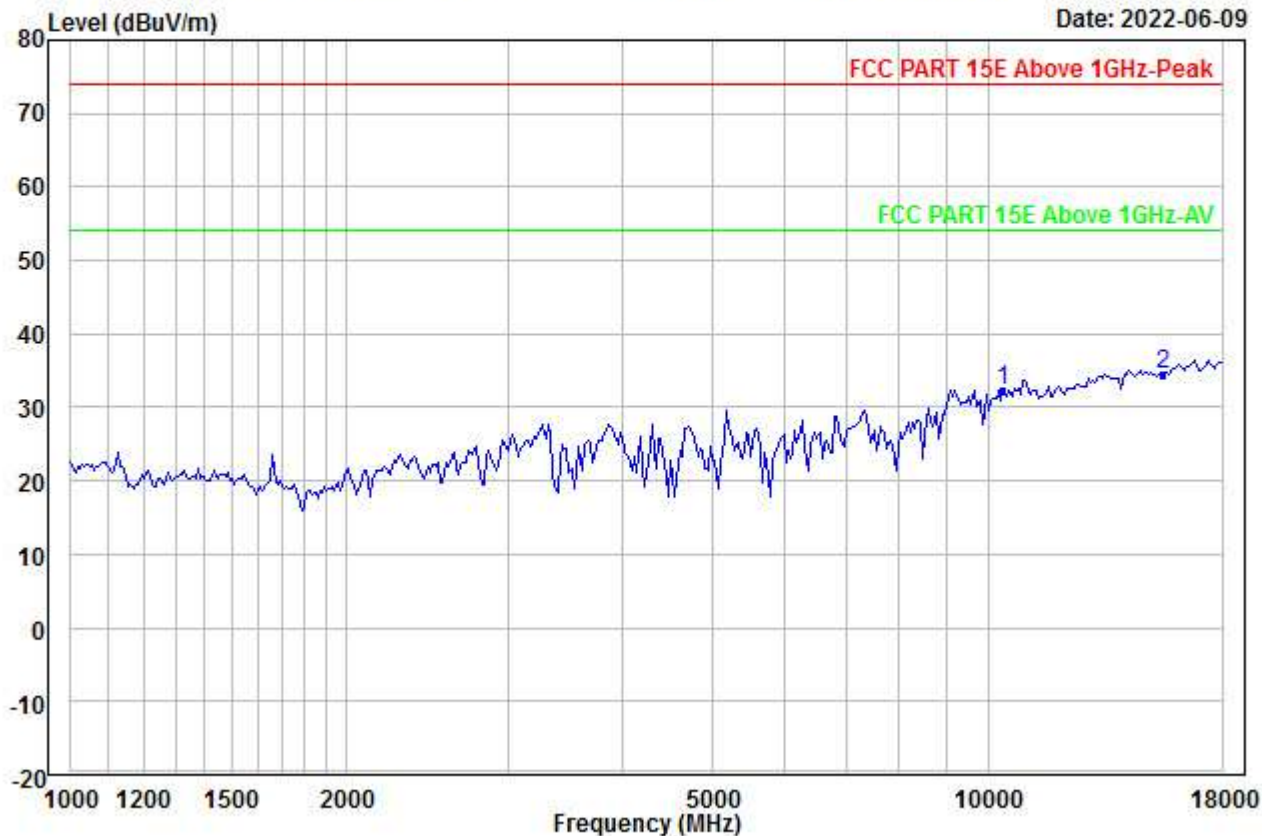


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5180
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10360.000	26.18	38.12	45.96	0.00	14.08	32.42	54.00	-21.58	---	---	Aver
2 PP15540.000	23.16	40.26	45.93	0.00	16.94	34.43	54.00	-19.57	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00193.EMI

Date: 2022-06-09

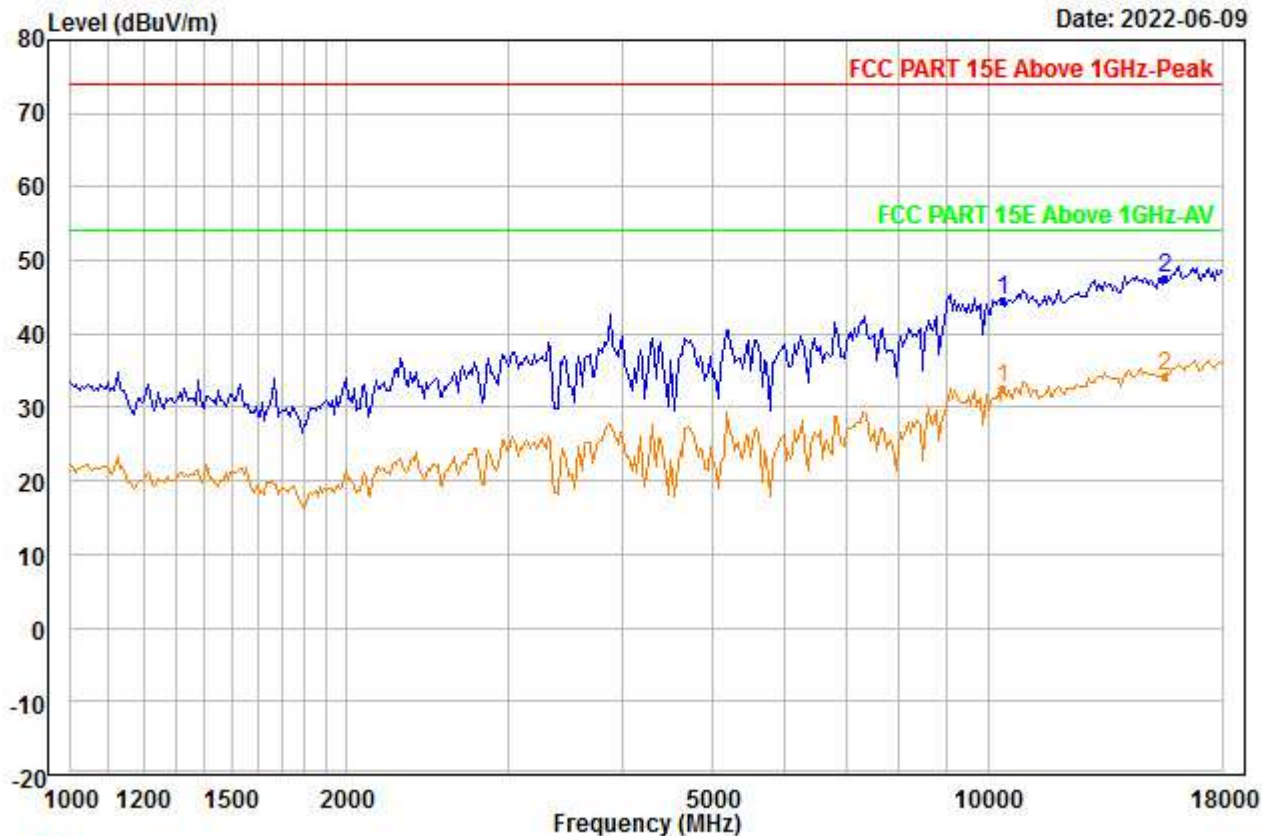

Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5190
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10380.000	38.44	38.13	45.95	0.00	14.07	44.69	74.00	-29.31	---	---	Peak
2 PP15570.000	36.20	40.30	45.96	0.00	16.95	47.49	74.00	-26.51	---	---	Peak