


File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00194.EMI

Date: 2022-06-09

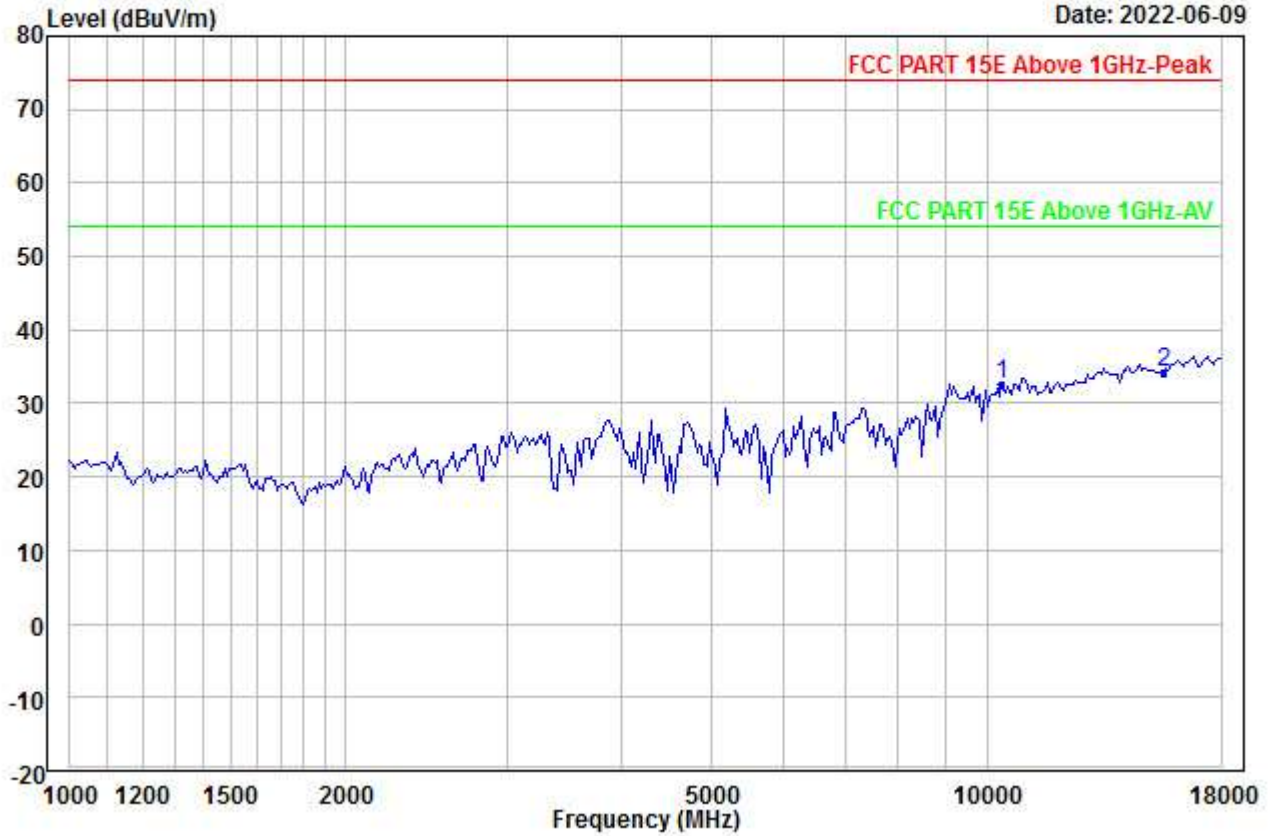


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5190
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 10380.000 | 26.24 | 38.13 | 45.95 | 0.00 | 14.07 | 32.49 | 54.00 | -21.51 | --- | --- | Aver |
| 2 PP15570.000 | 23.03 | 40.30 | 45.96 | 0.00 | 16.95 | 34.32 | 54.00 | -19.68 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00195.EMI

Date: 2022-06-09

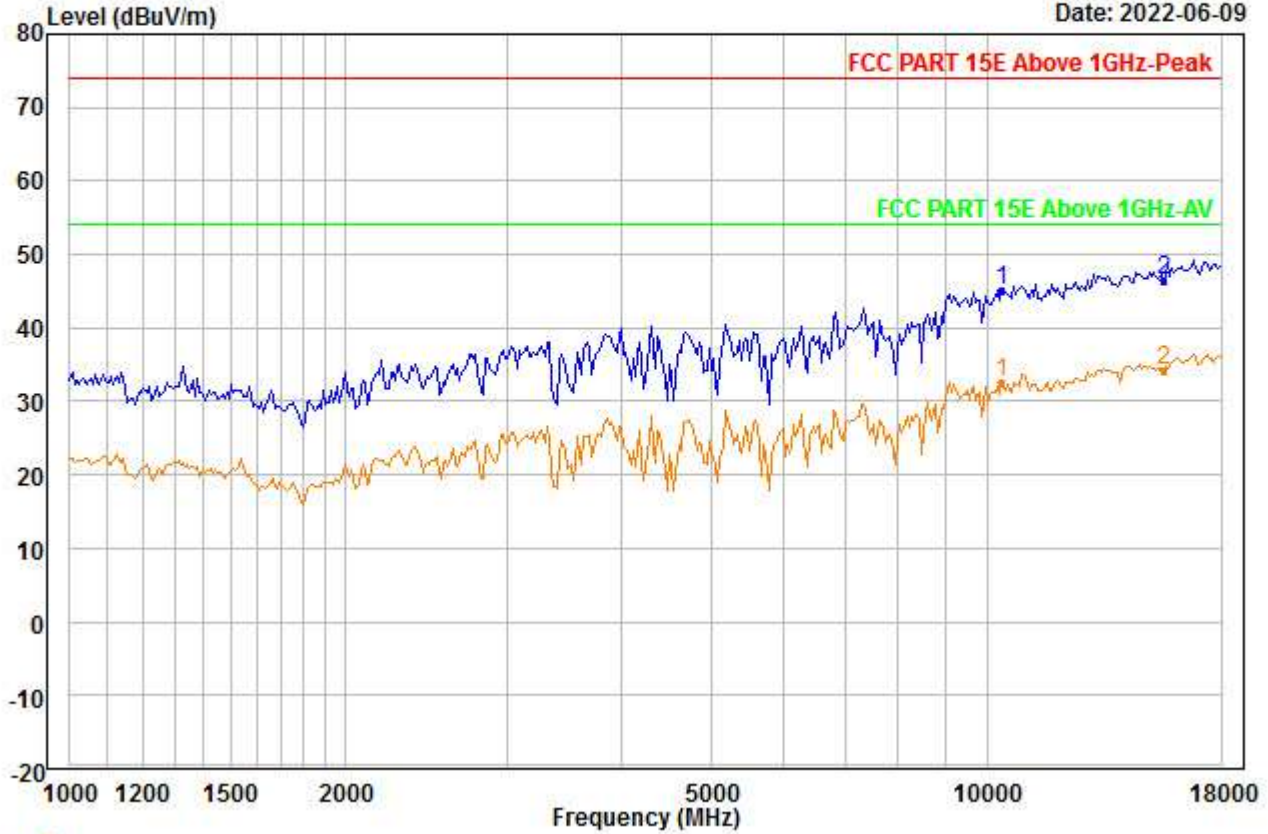


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5190
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 10380.000 | 38.79 | 38.13 | 45.95 | 0.00 | 14.07 | 45.04 | 74.00 | -28.96 | --- | --- | Peak |
| 2 PP15570.000 | 35.33 | 40.30 | 45.96 | 0.00 | 16.95 | 46.62 | 74.00 | -27.38 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00196.EMI

Date: 2022-06-09

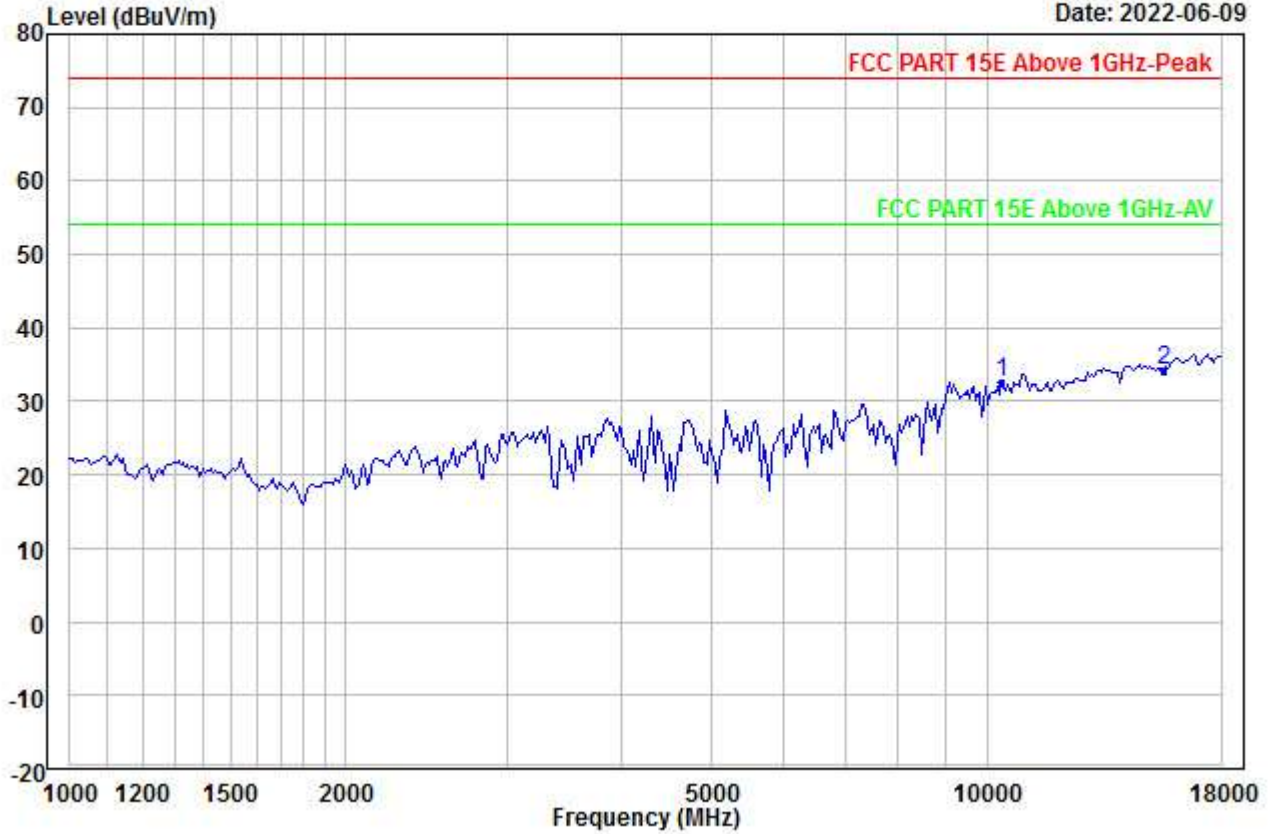


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5190
 Remark :

| | Read Freq | Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Remarks |
|---|-------------|-------|------------|---------------|------------|------------|--------|------------|------------|------|------|---------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 10380.000 | 26.31 | 38.13 | 45.95 | 0.00 | 14.07 | 32.56 | 54.00 | -21.44 | --- | --- | Aver |
| 2 | PP15570.000 | 23.03 | 40.30 | 45.96 | 0.00 | 16.95 | 34.32 | 54.00 | -19.68 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00197.EMI

Date: 2022-06-09

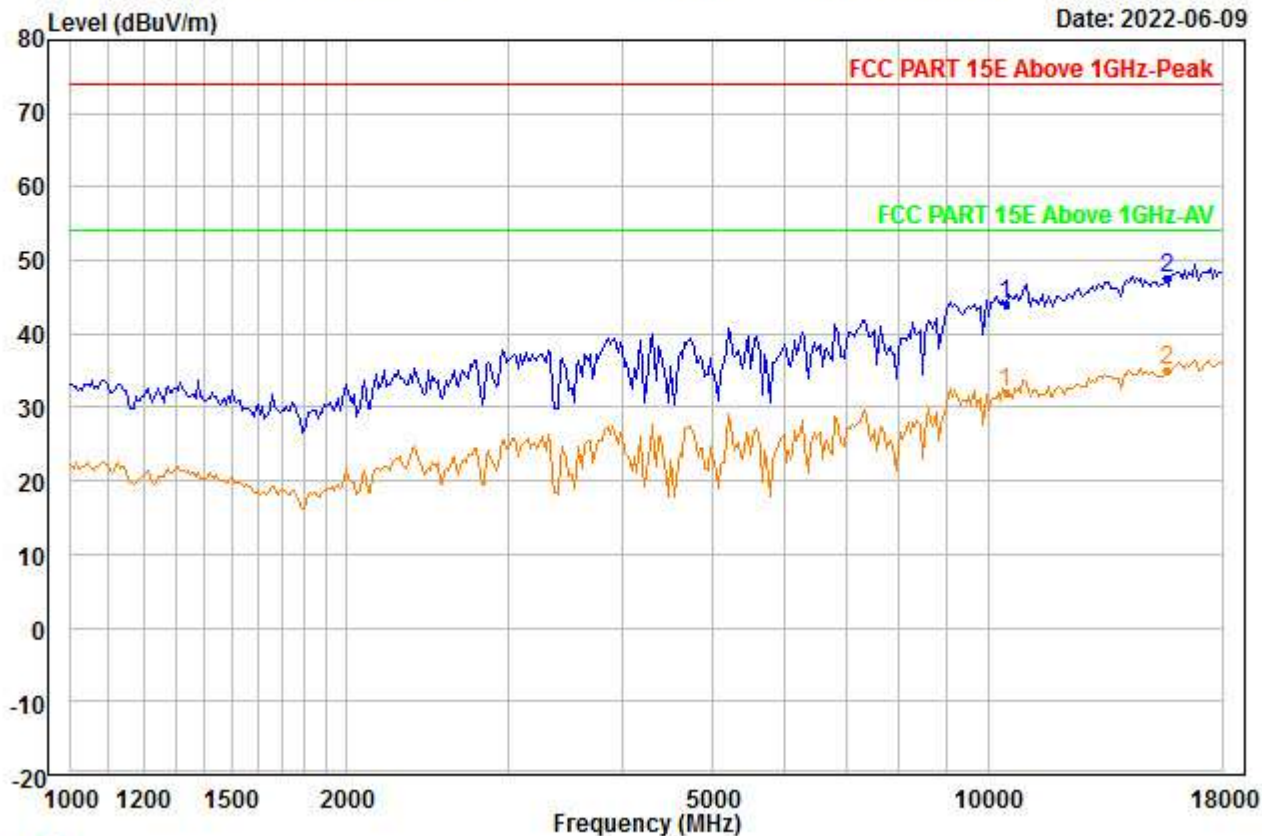


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5230
 Remark :

| | Read Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Rem: |
|---|-------------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 10460.000 | 37.60 | 38.18 | 45.92 | 0.00 | 14.06 | 43.92 | 74.00 | -30.08 | --- | --- | Peak |
| 2 | PP15690.000 | 35.99 | 40.47 | 46.05 | 0.00 | 17.03 | 47.44 | 74.00 | -26.56 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00198.EMI

Date: 2022-06-09

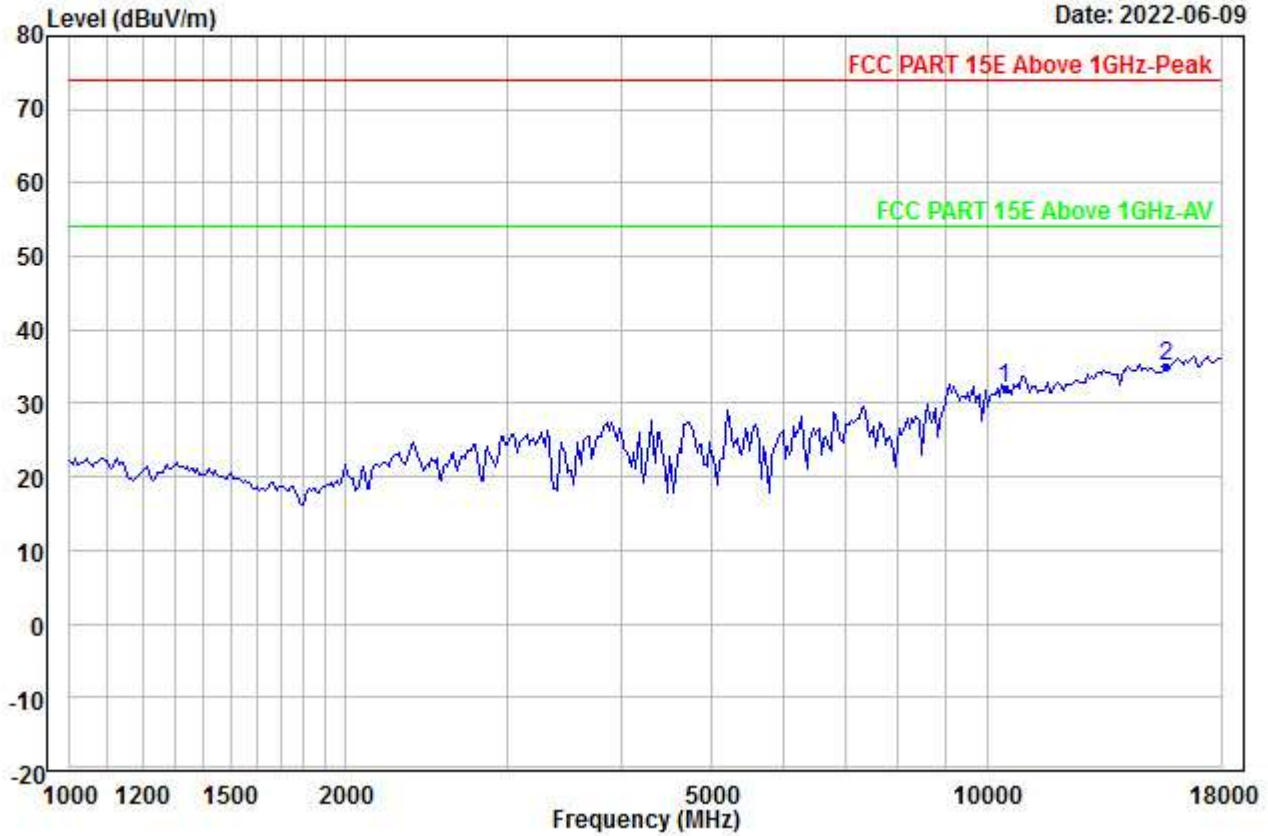


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5230
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 10460.000 | 25.63 | 38.18 | 45.92 | 0.00 | 14.06 | 31.95 | 54.00 | -22.05 | --- | --- | Aver |
| 2 PP15690.000 | 23.48 | 40.47 | 46.05 | 0.00 | 17.03 | 34.93 | 54.00 | -19.07 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00199.EMI

Date: 2022-06-09

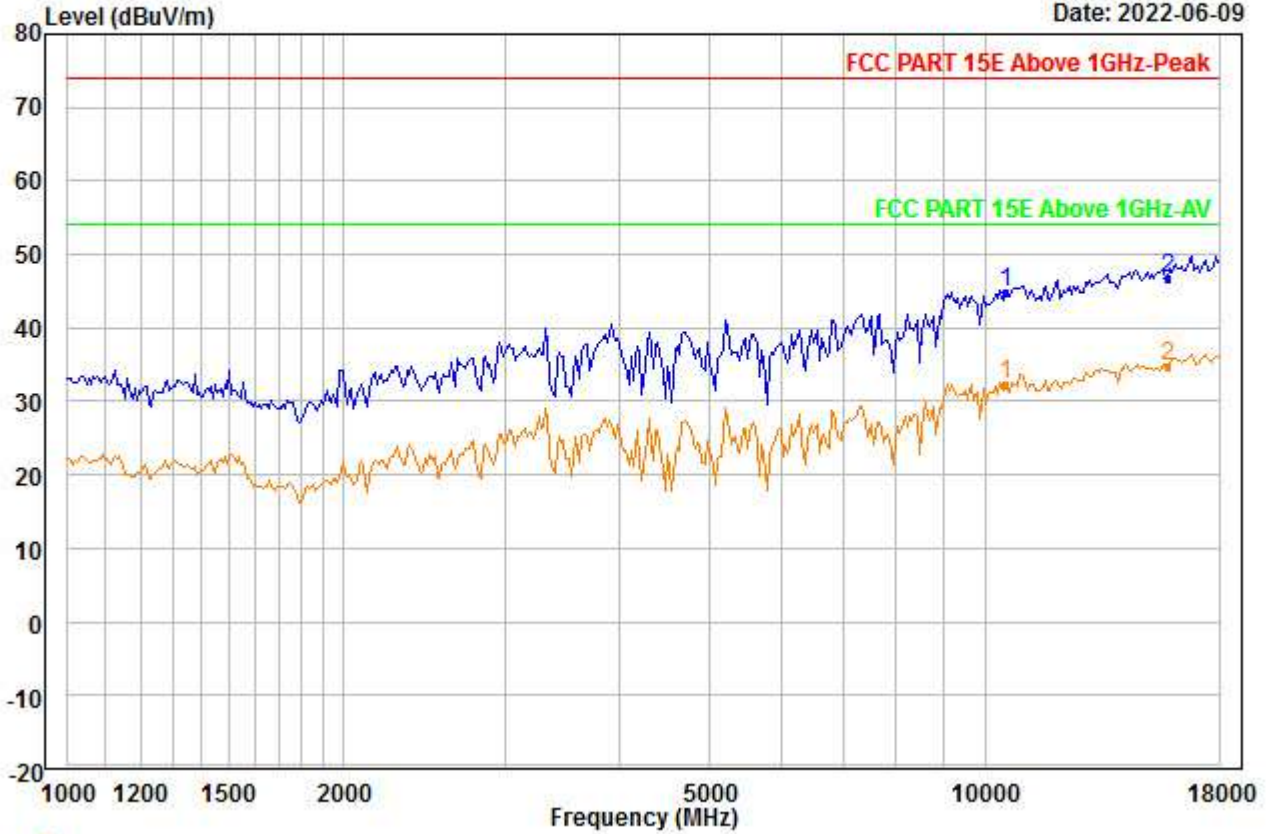


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5270
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 10540.000 | 38.55 | 38.22 | 45.83 | 0.00 | 14.03 | 44.97 | 74.00 | -29.03 | --- | --- | Peak |
| 2 PP15810.000 | 35.29 | 40.63 | 46.15 | 0.00 | 17.11 | 46.88 | 74.00 | -27.12 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00200.EMI

Date: 2022-06-09

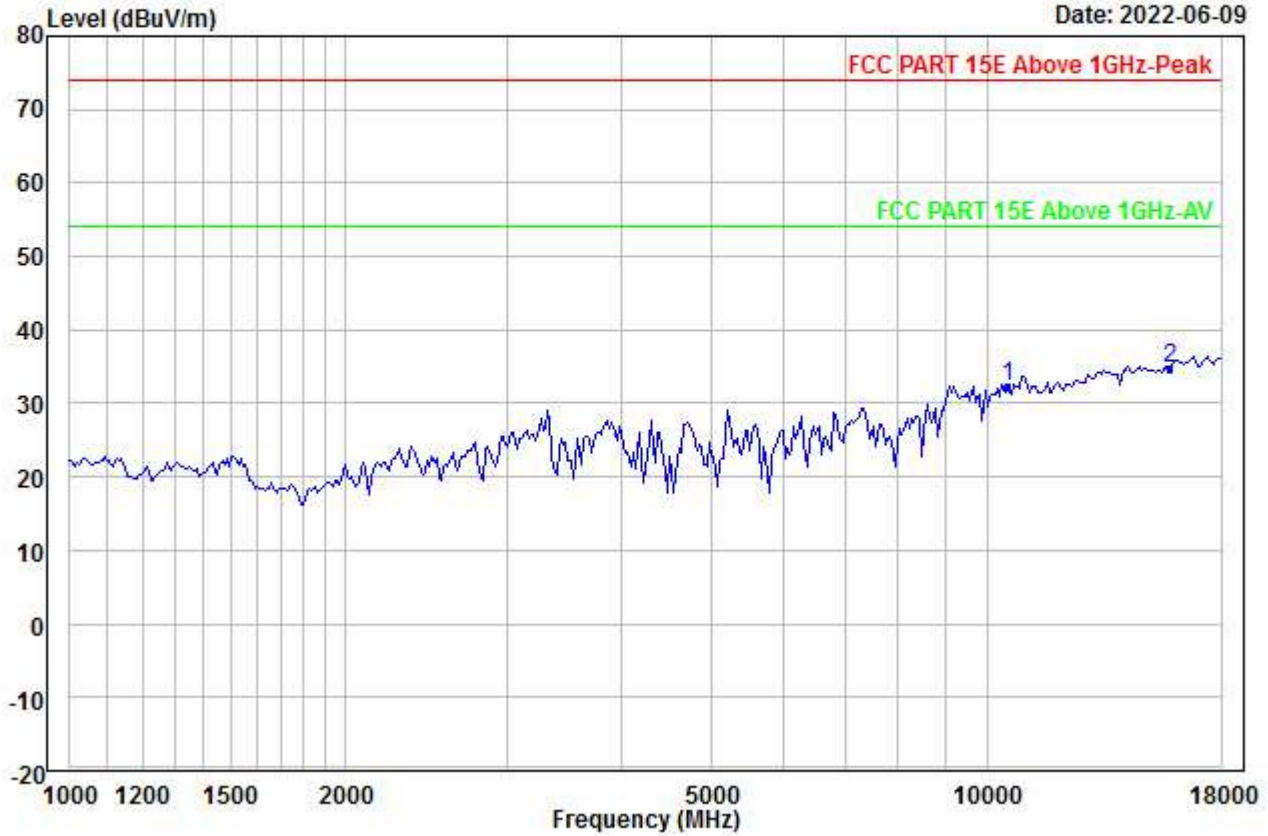


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5270
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 10540.000 | 25.86 | 38.22 | 45.83 | 0.00 | 14.03 | 32.28 | 54.00 | -21.72 | --- | --- | Aver |
| 2 PP15810.000 | 23.27 | 40.63 | 46.15 | 0.00 | 17.11 | 34.86 | 54.00 | -19.14 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00201.EMI

Date: 2022-06-09

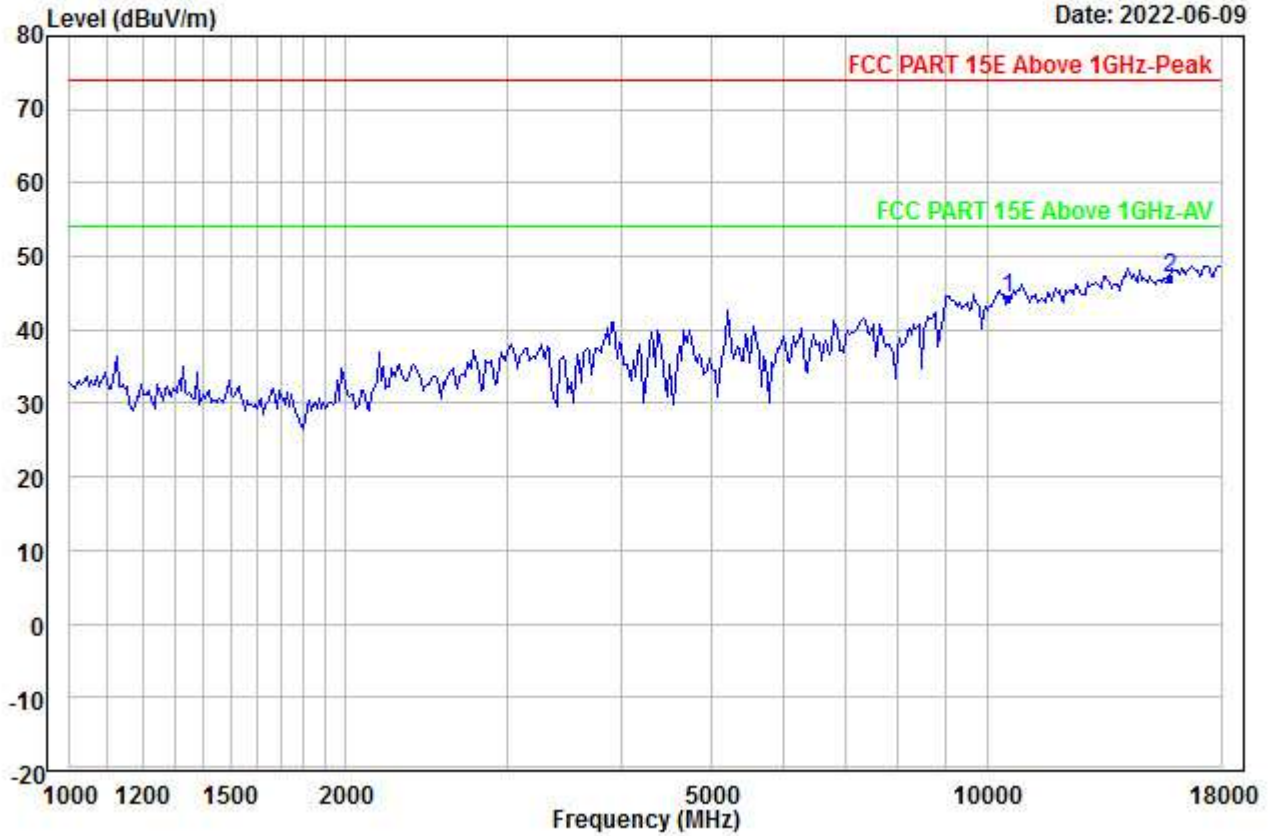


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5270
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 10540.000 | 37.77 | 38.22 | 45.83 | 0.00 | 14.03 | 44.19 | 74.00 | -29.81 | --- | --- | Peak |
| 2 PP15810.000 | 35.51 | 40.63 | 46.15 | 0.00 | 17.11 | 47.10 | 74.00 | -26.90 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00202.EMI

Date: 2022-06-09

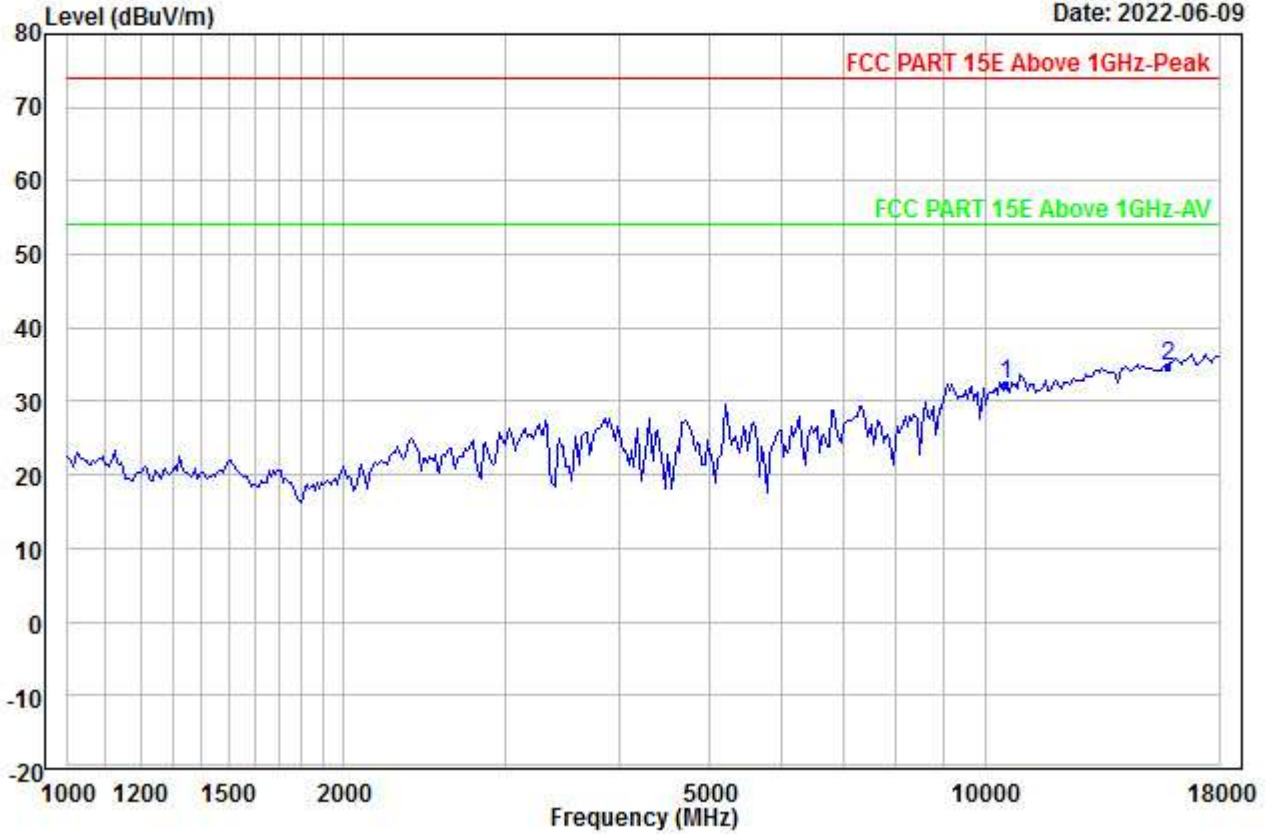


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5270
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 10540.000 | 25.79 | 38.22 | 45.83 | 0.00 | 14.03 | 32.21 | 54.00 | -21.79 | --- | --- | Aver |
| 2 PP15810.000 | 23.27 | 40.63 | 46.15 | 0.00 | 17.11 | 34.86 | 54.00 | -19.14 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00203.EMI

Date: 2022-06-09

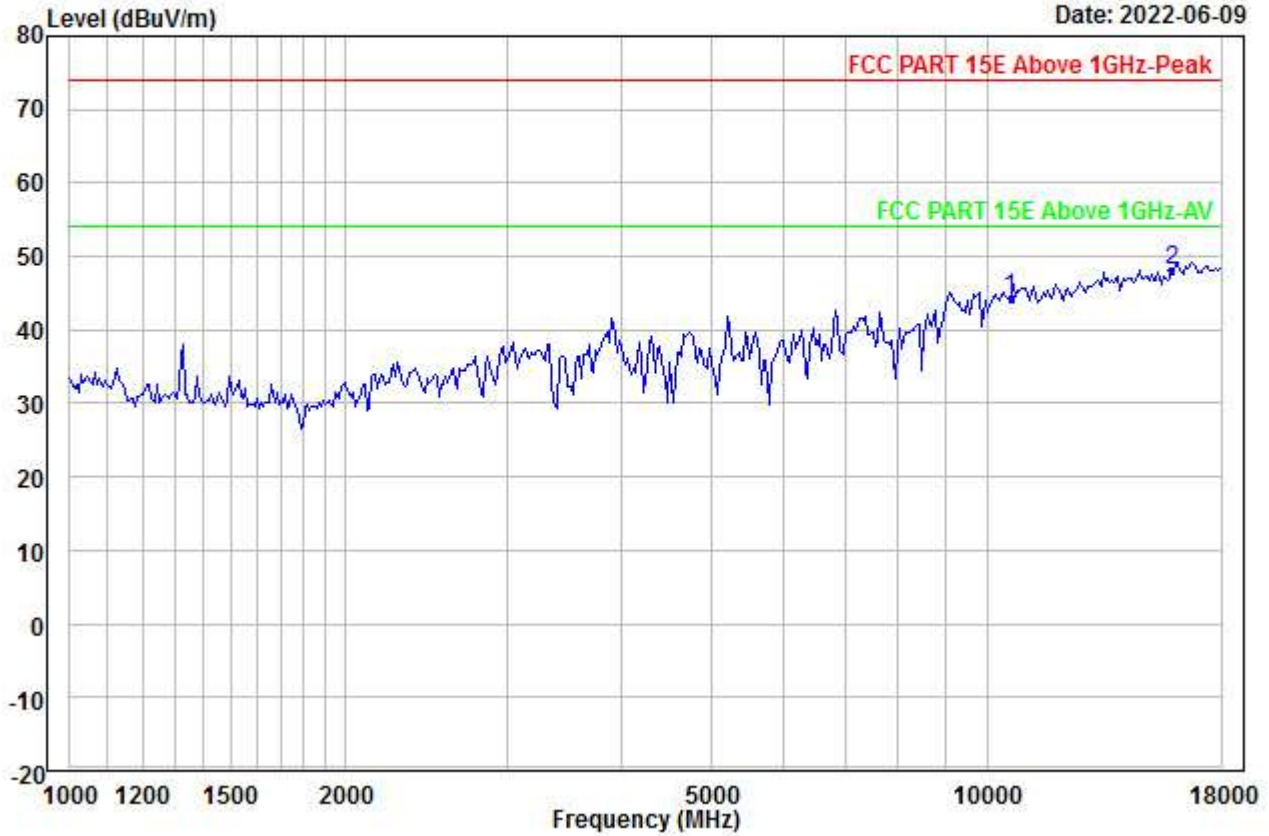


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5310
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 10620.000 | 37.79 | 38.27 | 45.68 | 0.00 | 14.02 | 44.40 | 74.00 | -29.60 | --- | --- | Peak |
| 2 PP15930.000 | 36.41 | 40.80 | 46.24 | 0.00 | 17.19 | 48.16 | 74.00 | -25.84 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00204.EMI

Date: 2022-06-09

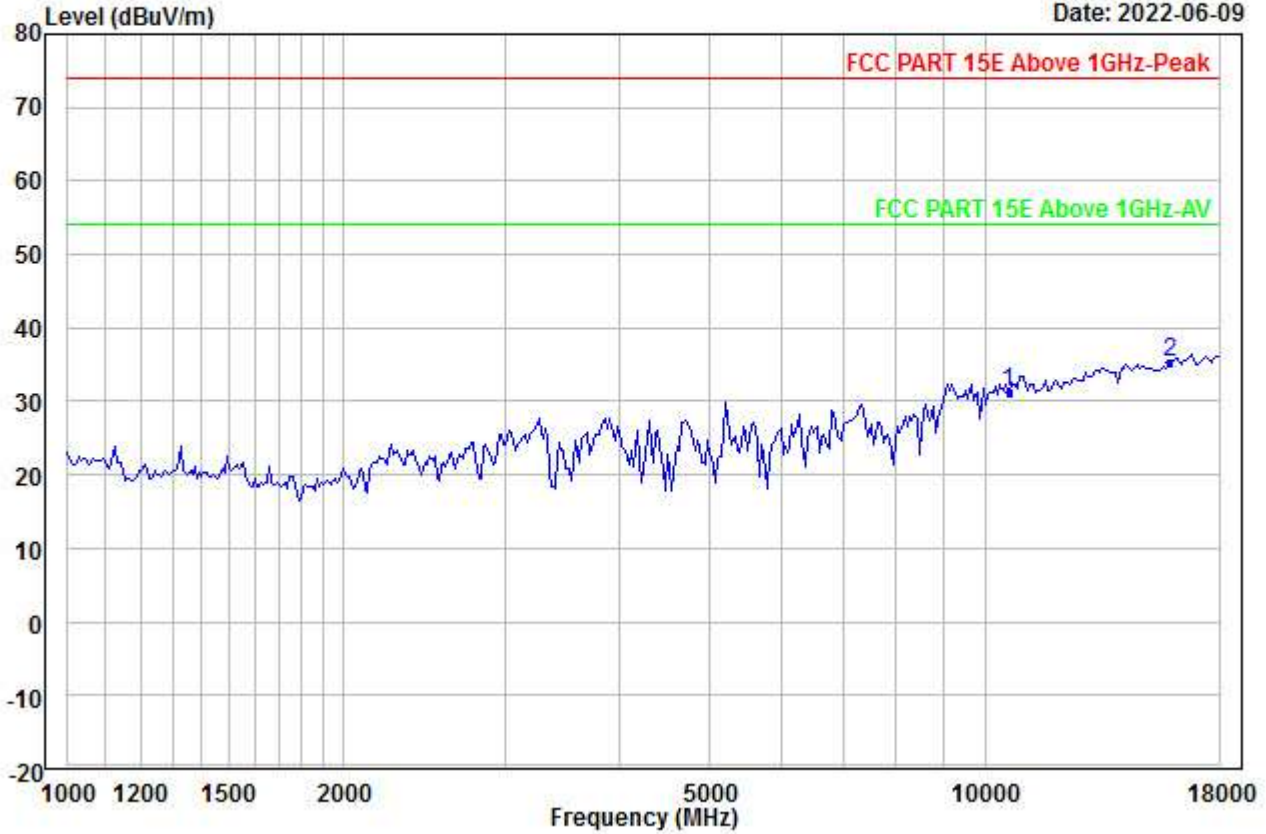


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5310
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 10620.000 | 24.70 | 38.27 | 45.68 | 0.00 | 14.02 | 31.31 | 54.00 | -22.69 | --- | --- | Aver |
| 2 PP15930.000 | 23.52 | 40.80 | 46.24 | 0.00 | 17.19 | 35.27 | 54.00 | -18.73 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00205.EMI

Date: 2022-06-09

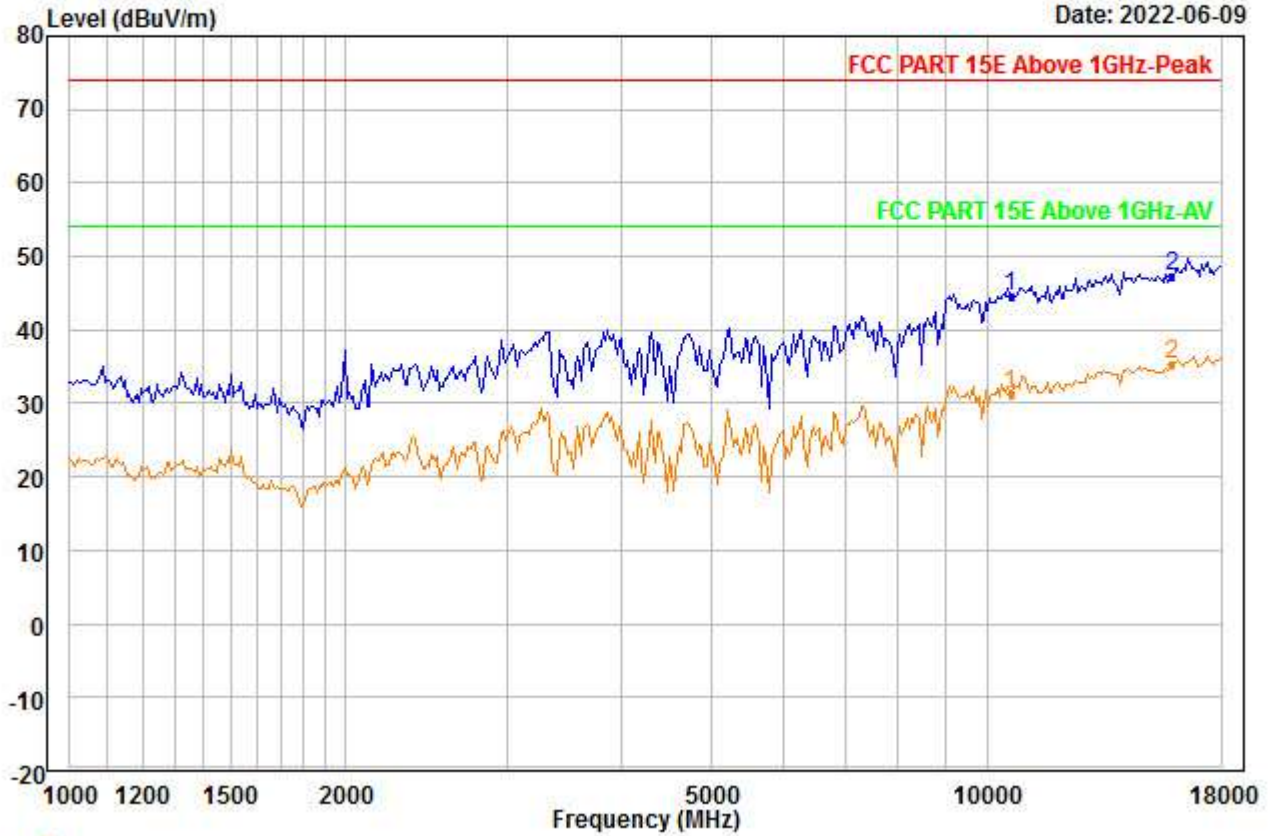


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5310
 Remark :

| | Read Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Rem: |
|---|-------------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 10620.000 | 37.90 | 38.27 | 45.68 | 0.00 | 14.02 | 44.51 | 74.00 | -29.49 | --- | --- | Peak |
| 2 | PP15930.000 | 35.66 | 40.80 | 46.24 | 0.00 | 17.19 | 47.41 | 74.00 | -26.59 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00206.EMI

Date: 2022-06-09

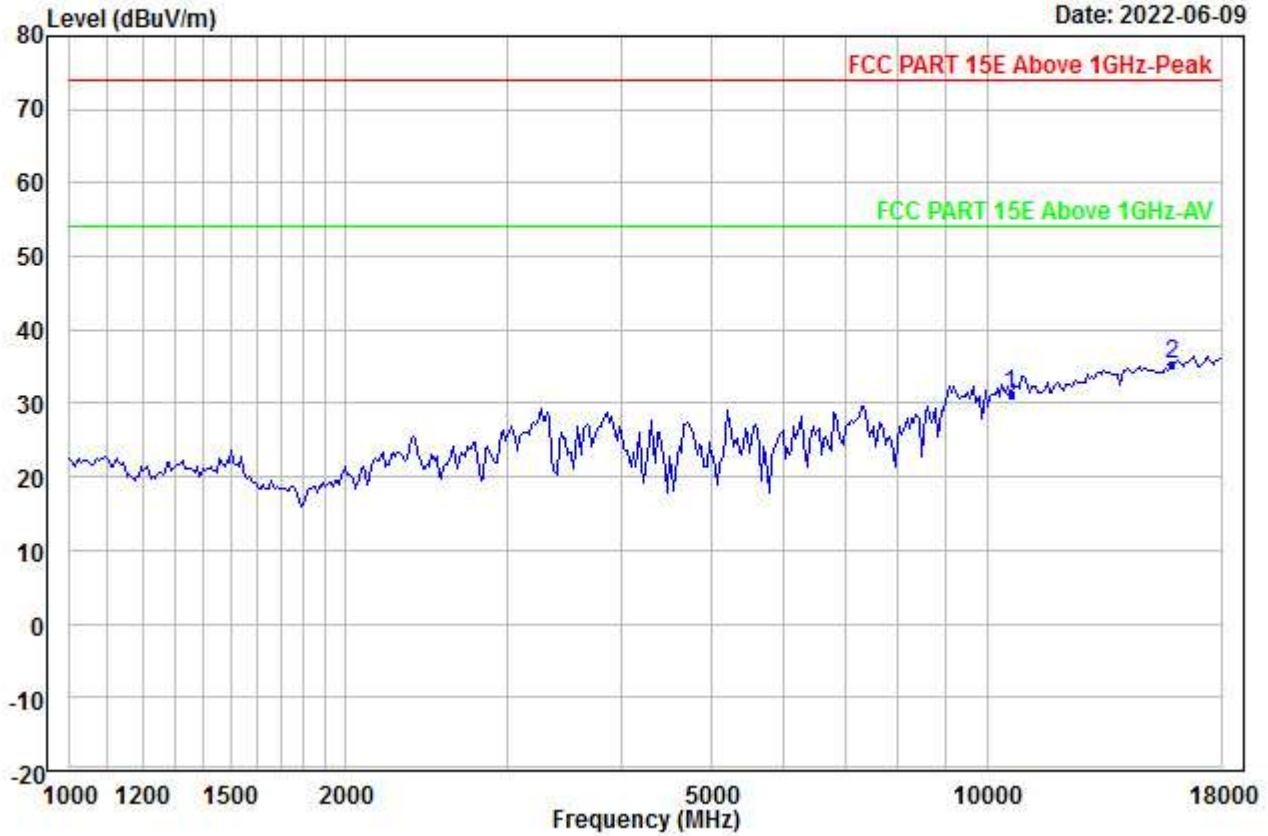


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5310
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 10620.000 | 24.70 | 38.27 | 45.68 | 0.00 | 14.02 | 31.31 | 54.00 | -22.69 | --- | --- | Aver |
| 2 PP15930.000 | 23.52 | 40.80 | 46.24 | 0.00 | 17.19 | 35.27 | 54.00 | -18.73 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00207.EMI

Date: 2022-06-09

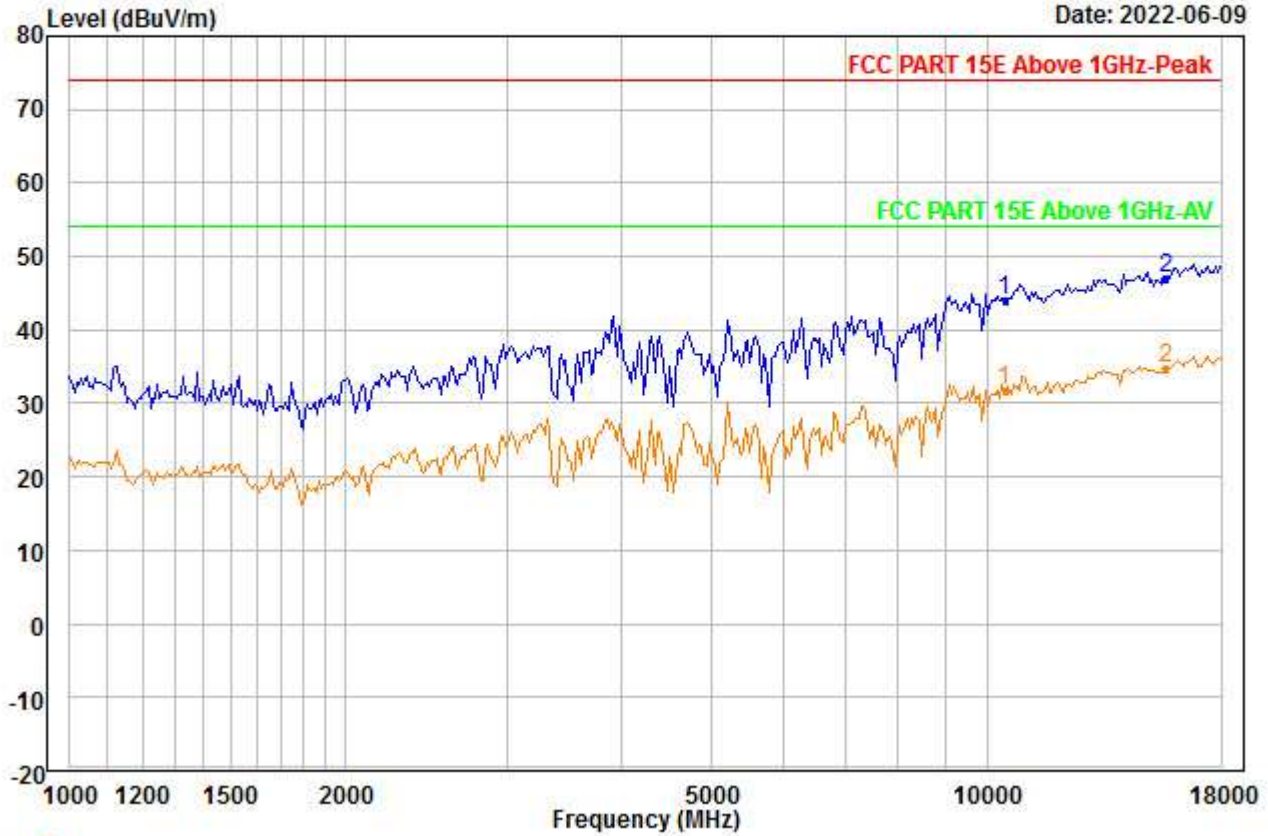


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5230
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 10460.000 | 37.73 | 38.18 | 45.92 | 0.00 | 14.06 | 44.05 | 74.00 | -29.95 | --- | --- | Peak |
| 2 PP15690.000 | 35.60 | 40.47 | 46.05 | 0.00 | 17.03 | 47.05 | 74.00 | -26.95 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00208.EMI

Date: 2022-06-09

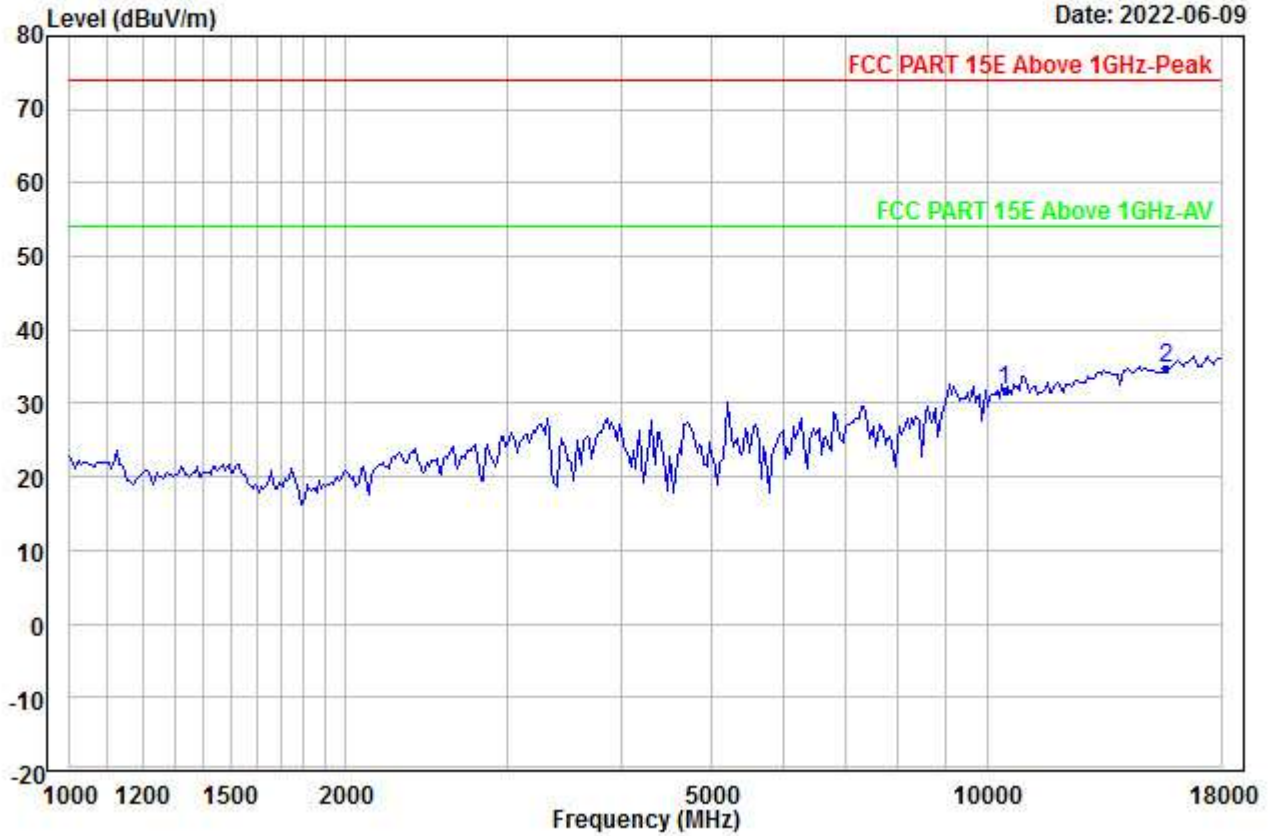


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5230
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 10460.000 | 25.48 | 38.18 | 45.92 | 0.00 | 14.06 | 31.80 | 54.00 | -22.20 | --- | --- | Aver |
| 2 PP15690.000 | 23.39 | 40.47 | 46.05 | 0.00 | 17.03 | 34.84 | 54.00 | -19.16 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00209.EMI

Date: 2022-06-09

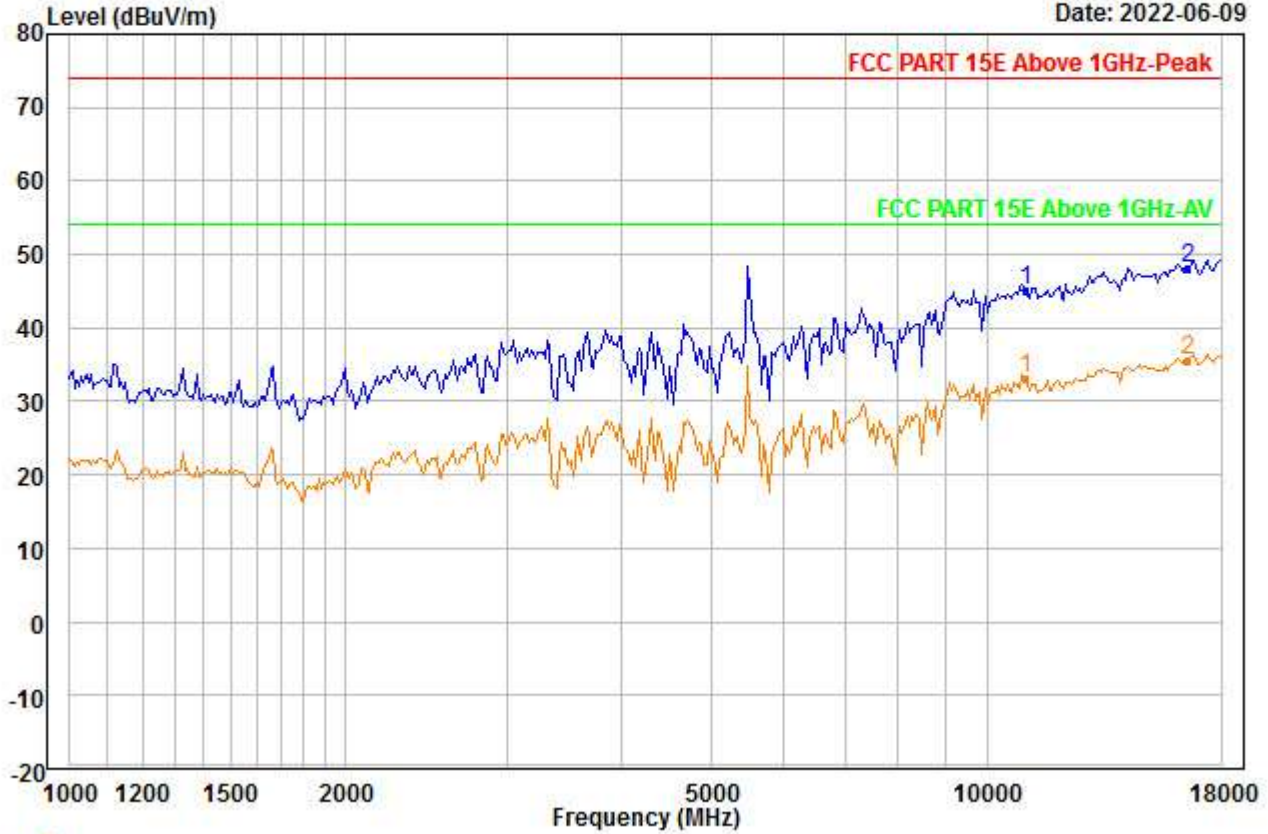


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5510
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 11020.000 | 37.64 | 38.52 | 45.04 | 0.00 | 13.93 | 45.05 | 74.00 | -28.95 | --- | --- | Peak |
| 2 PP16530.000 | 35.66 | 41.55 | 46.64 | 0.00 | 17.47 | 48.04 | 74.00 | -25.96 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00210.EMI

Date: 2022-06-09

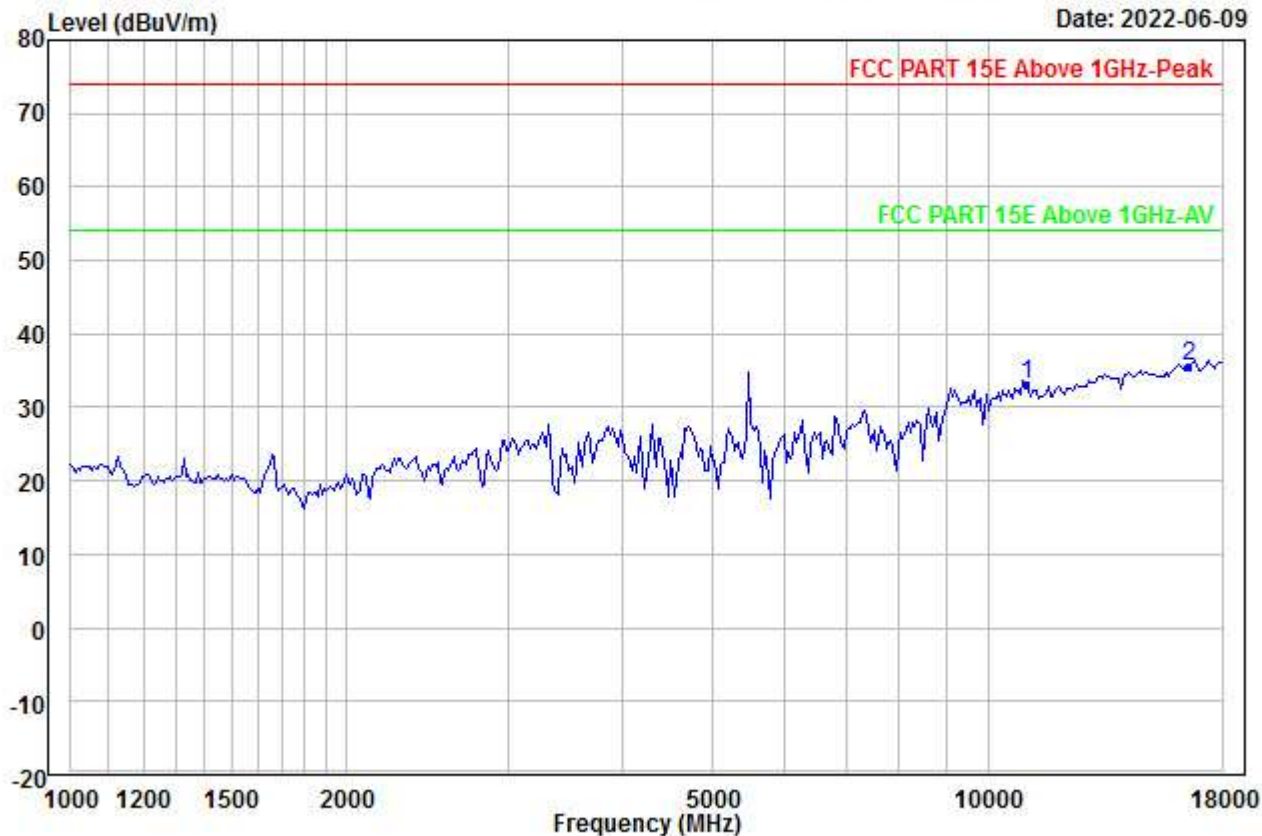


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5510
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 11020.000 | 25.81 | 38.52 | 45.04 | 0.00 | 13.93 | 33.22 | 54.00 | -20.78 | --- | --- | Aver |
| 2 PP16530.000 | 23.20 | 41.55 | 46.64 | 0.00 | 17.47 | 35.58 | 54.00 | -18.42 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00211.EMI

Date: 2022-06-09

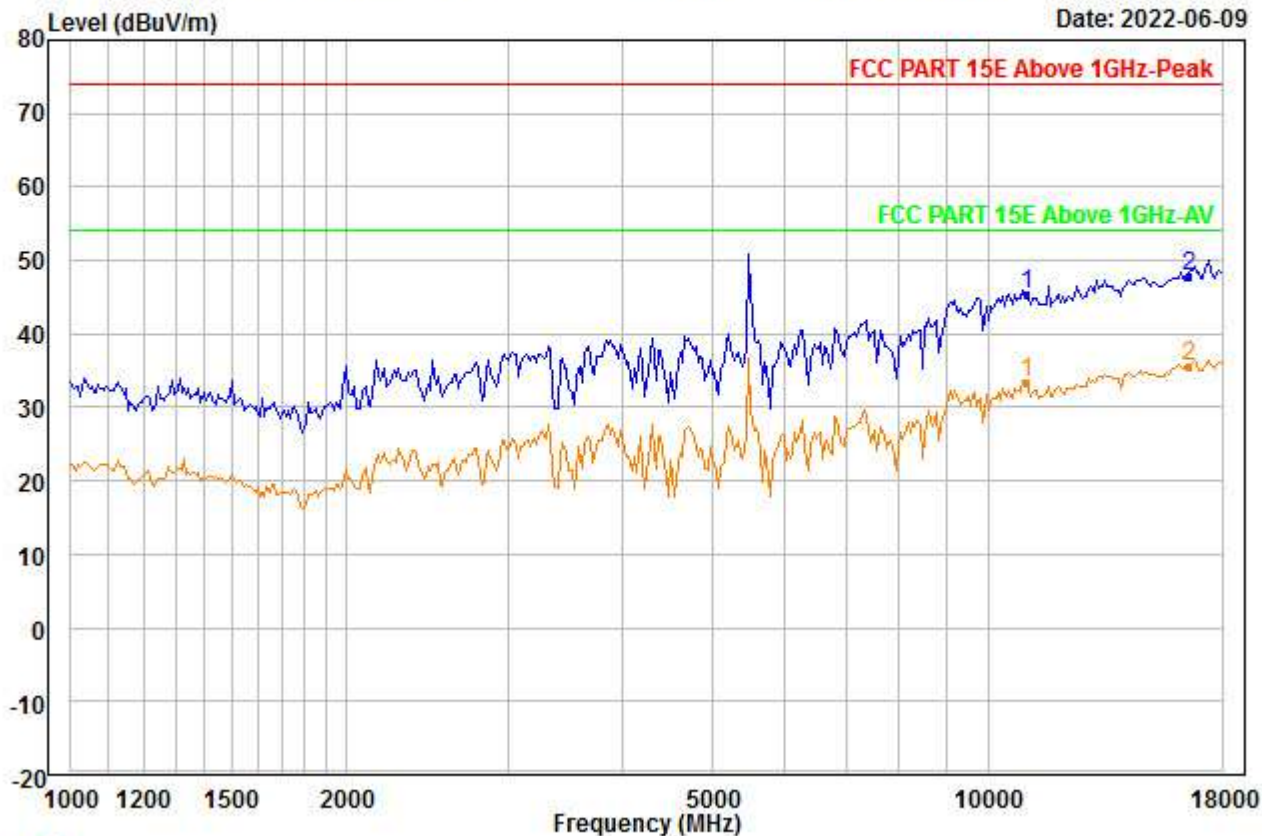


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5510
 Remark :

| | Read Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Rem: |
|---|-------------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 11020.000 | 38.07 | 38.52 | 45.04 | 0.00 | 13.93 | 45.48 | 74.00 | -28.52 | --- | --- | Peak |
| 2 | PP16530.000 | 35.39 | 41.55 | 46.64 | 0.00 | 17.47 | 47.77 | 74.00 | -26.23 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00212.EMI

Date: 2022-06-09

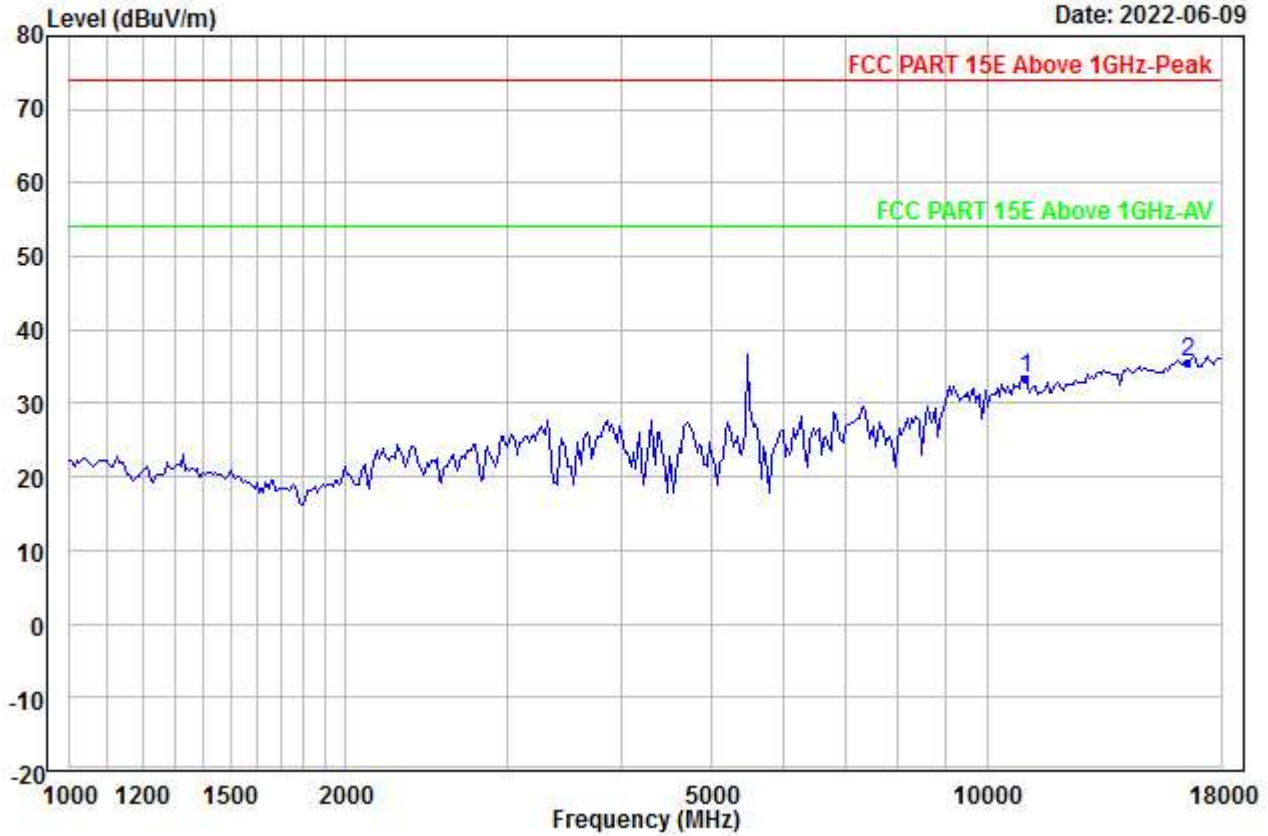


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5510
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 11020.000 | 25.88 | 38.52 | 45.04 | 0.00 | 13.93 | 33.29 | 54.00 | -20.71 | --- | --- | Aver |
| 2 PP16530.000 | 23.20 | 41.55 | 46.64 | 0.00 | 17.47 | 35.58 | 54.00 | -18.42 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00213.EMI

Date: 2022-06-09

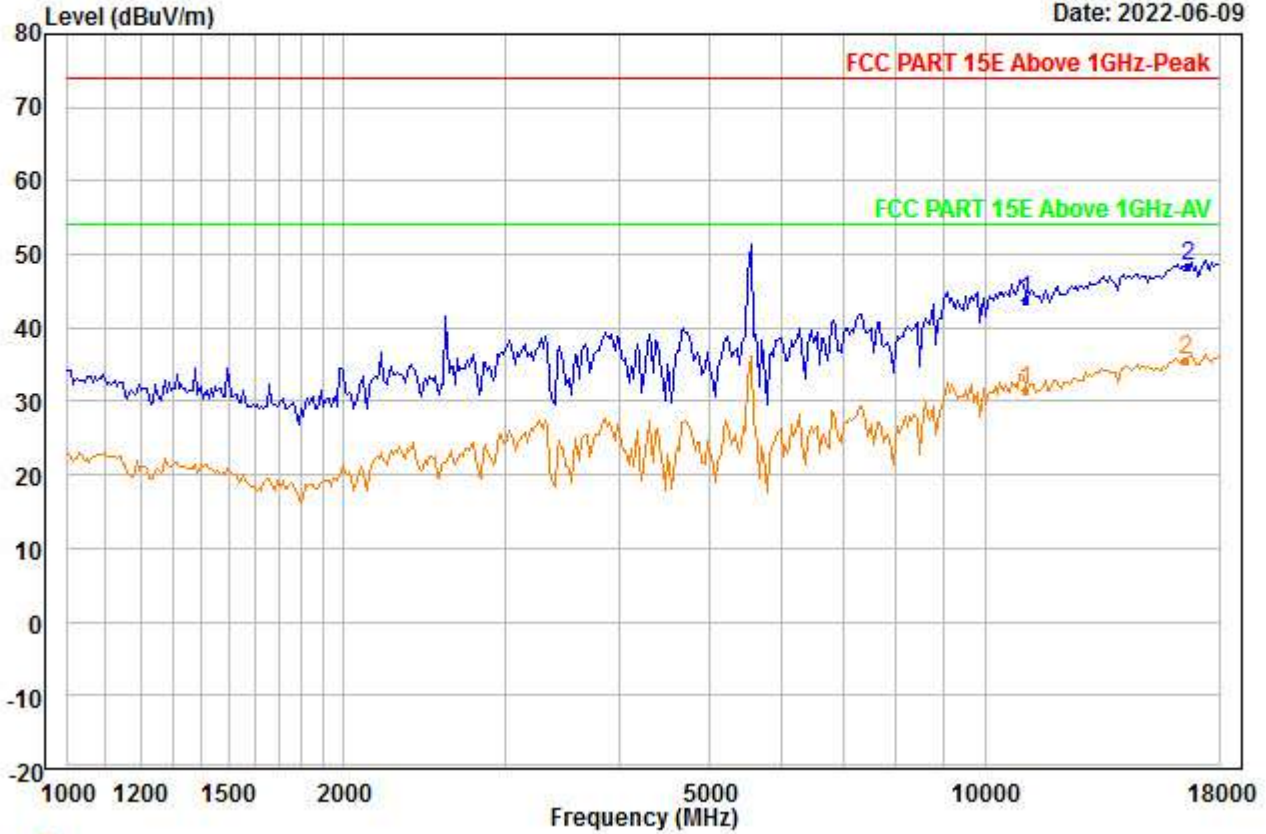


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5550
 Remark :

| | Read Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Rem: |
|---|-------------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 11100.000 | 36.39 | 38.58 | 45.22 | 0.00 | 13.99 | 43.74 | 74.00 | -30.26 | --- | --- | Peak |
| 2 | PP16650.000 | 35.79 | 41.74 | 46.78 | 0.00 | 17.52 | 48.27 | 74.00 | -25.73 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00214.EMI

Date: 2022-06-09

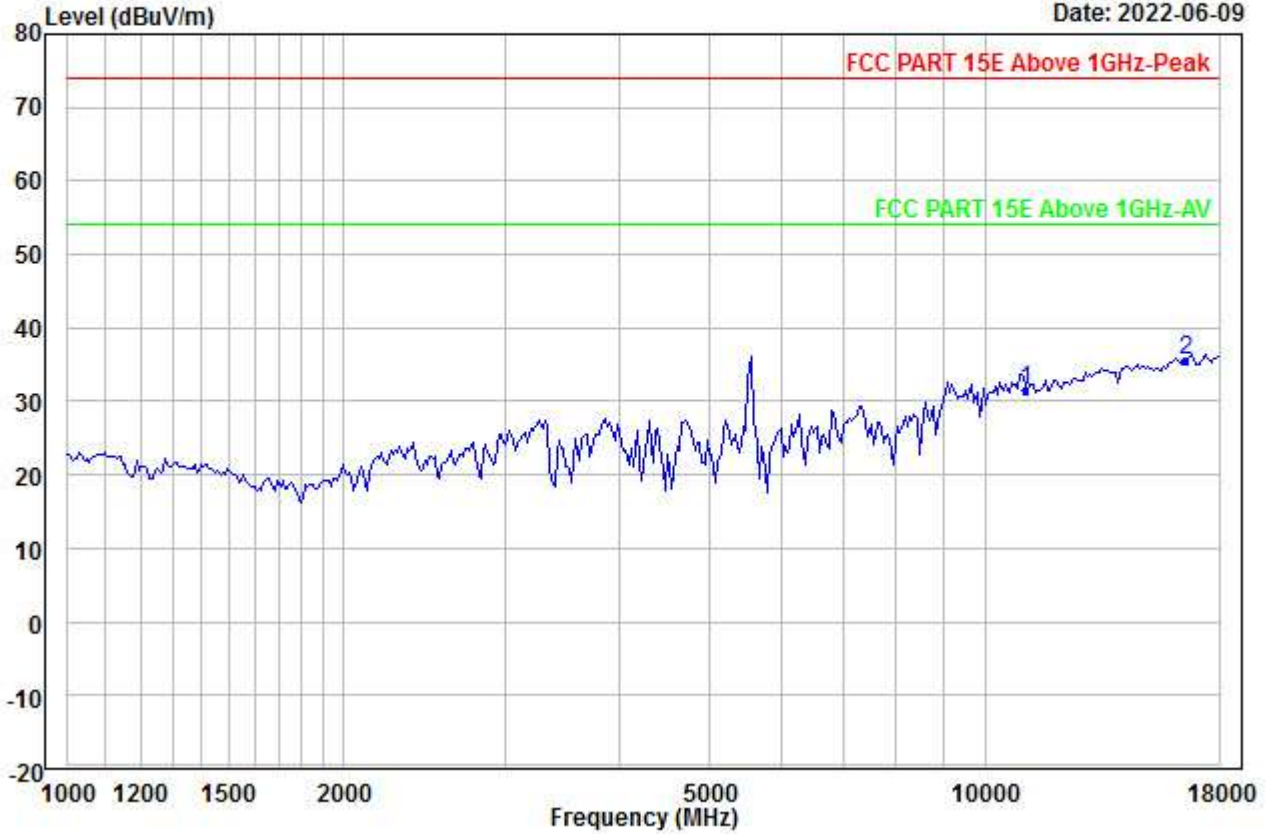


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5550
 Remark :

| | Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Rem: |
|---|-------------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 11100.000 | 24.15 | 38.58 | 45.22 | 0.00 | 13.99 | 31.50 | 54.00 | -22.50 | --- | --- | Aver |
| 2 | PP16550.000 | 23.16 | 41.58 | 46.66 | 0.00 | 17.48 | 35.56 | 54.00 | -18.44 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00215.EMI

Date: 2022-06-09

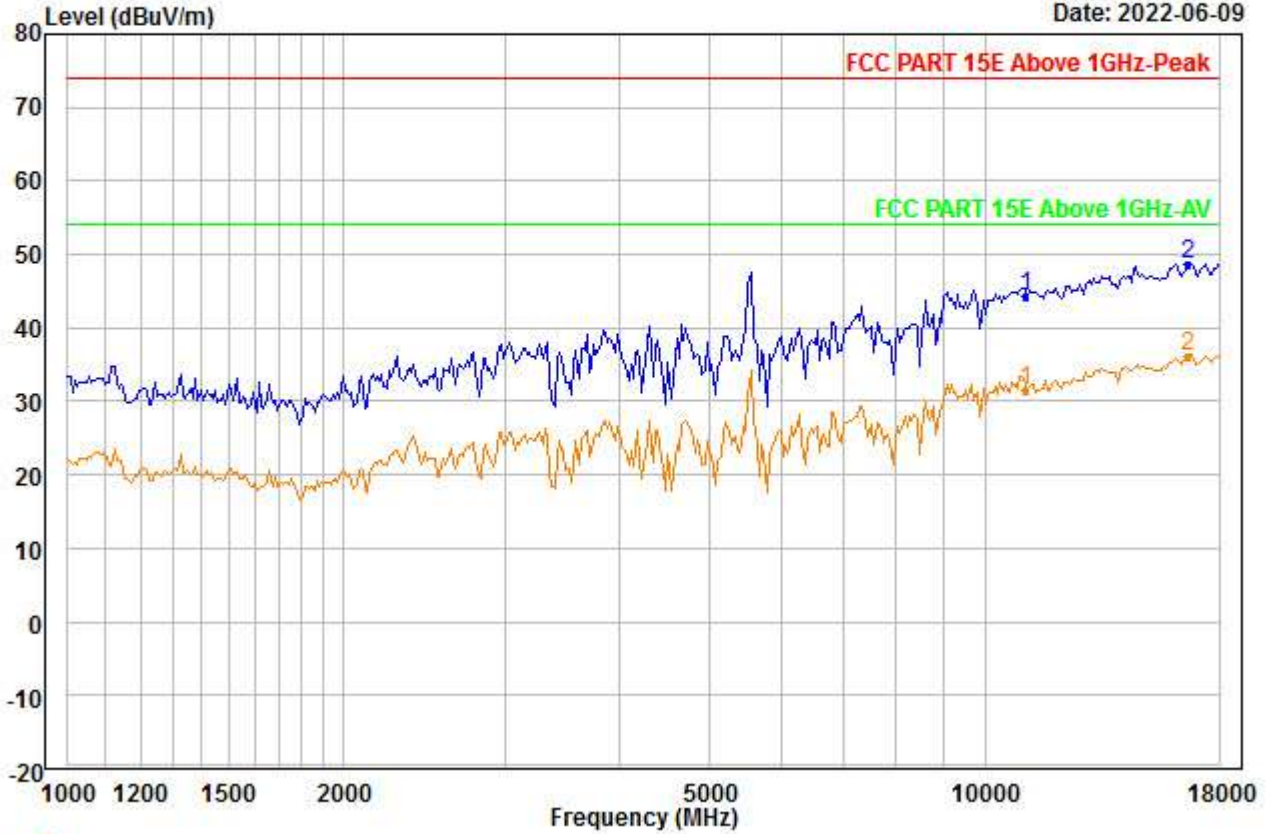


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5550
 Remark :

| | Read Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Rem: |
|---|-------------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 11100.000 | 37.01 | 38.58 | 45.22 | 0.00 | 13.99 | 44.36 | 74.00 | -29.64 | --- | --- | Peak |
| 2 | PP16650.000 | 36.23 | 41.74 | 46.78 | 0.00 | 17.52 | 48.71 | 74.00 | -25.29 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\RSE\4_00216.EMI

Date: 2022-06-09

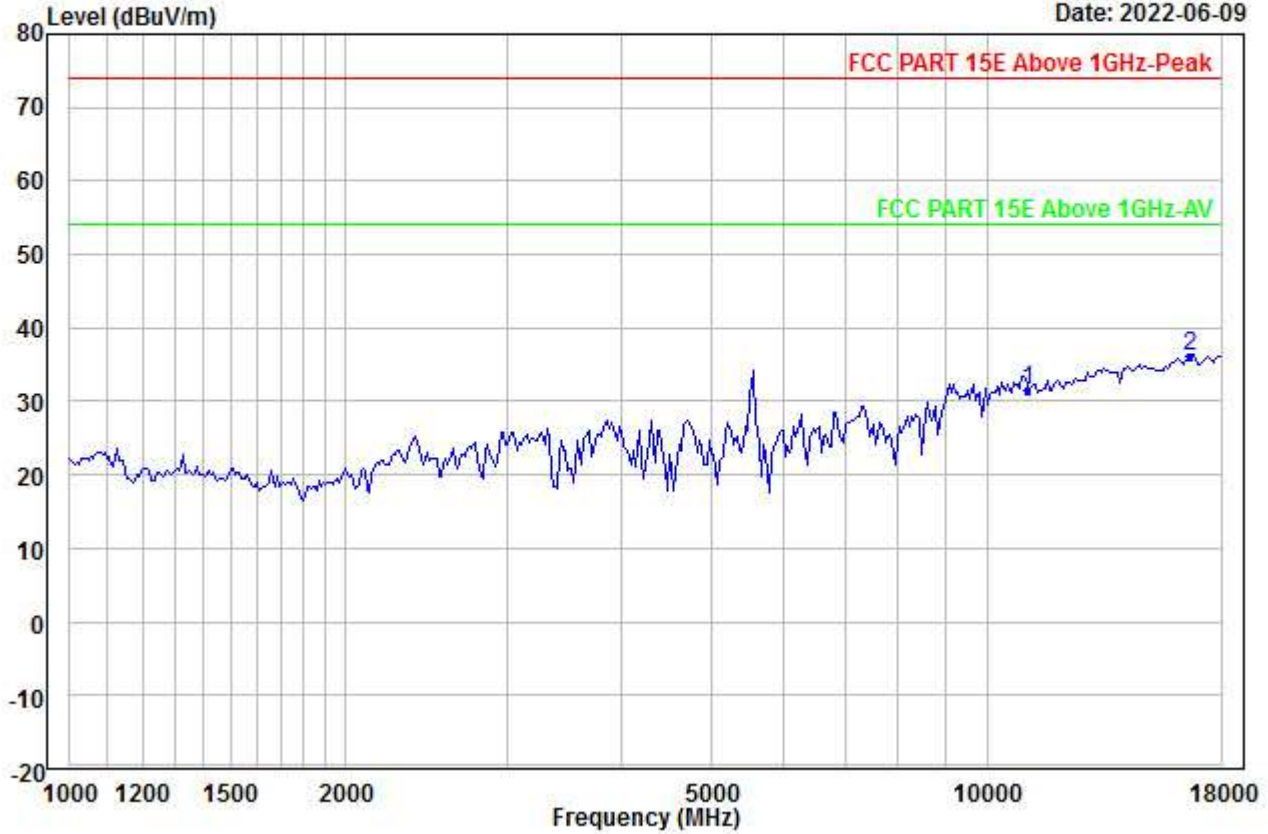


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5550
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 11100.000 | 24.24 | 38.58 | 45.22 | 0.00 | 13.99 | 31.59 | 54.00 | -22.41 | --- | --- | Aver |
| 2 PP16650.000 | 23.56 | 41.74 | 46.78 | 0.00 | 17.52 | 36.04 | 54.00 | -17.96 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00217.EMI

Date: 2022-06-09

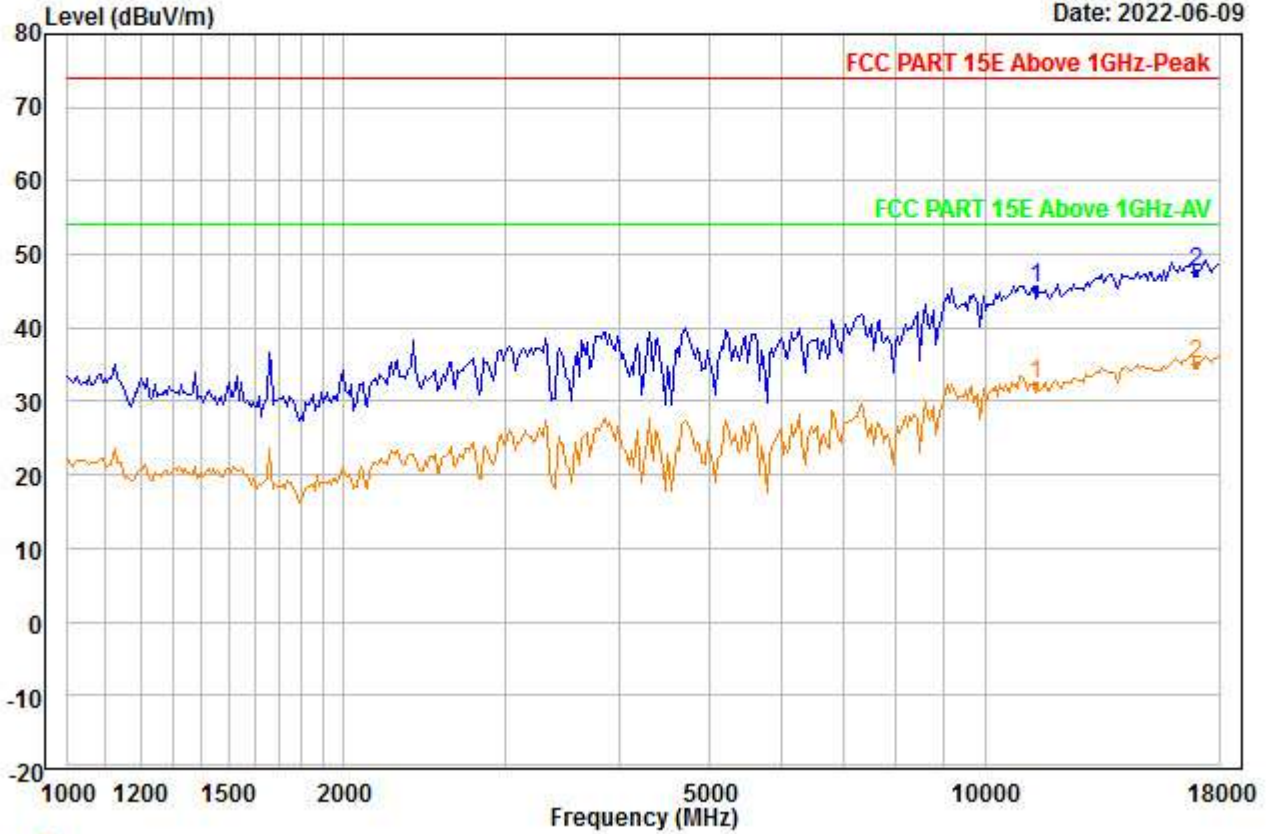


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5670
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 11340.000 | 38.09 | 38.77 | 45.75 | 0.00 | 14.17 | 45.28 | 74.00 | -28.72 | --- | --- | Peak |
| 2 PP17010.000 | 34.69 | 42.30 | 47.19 | 0.00 | 17.69 | 47.49 | 74.00 | -26.51 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00218.EMI

Date: 2022-06-09

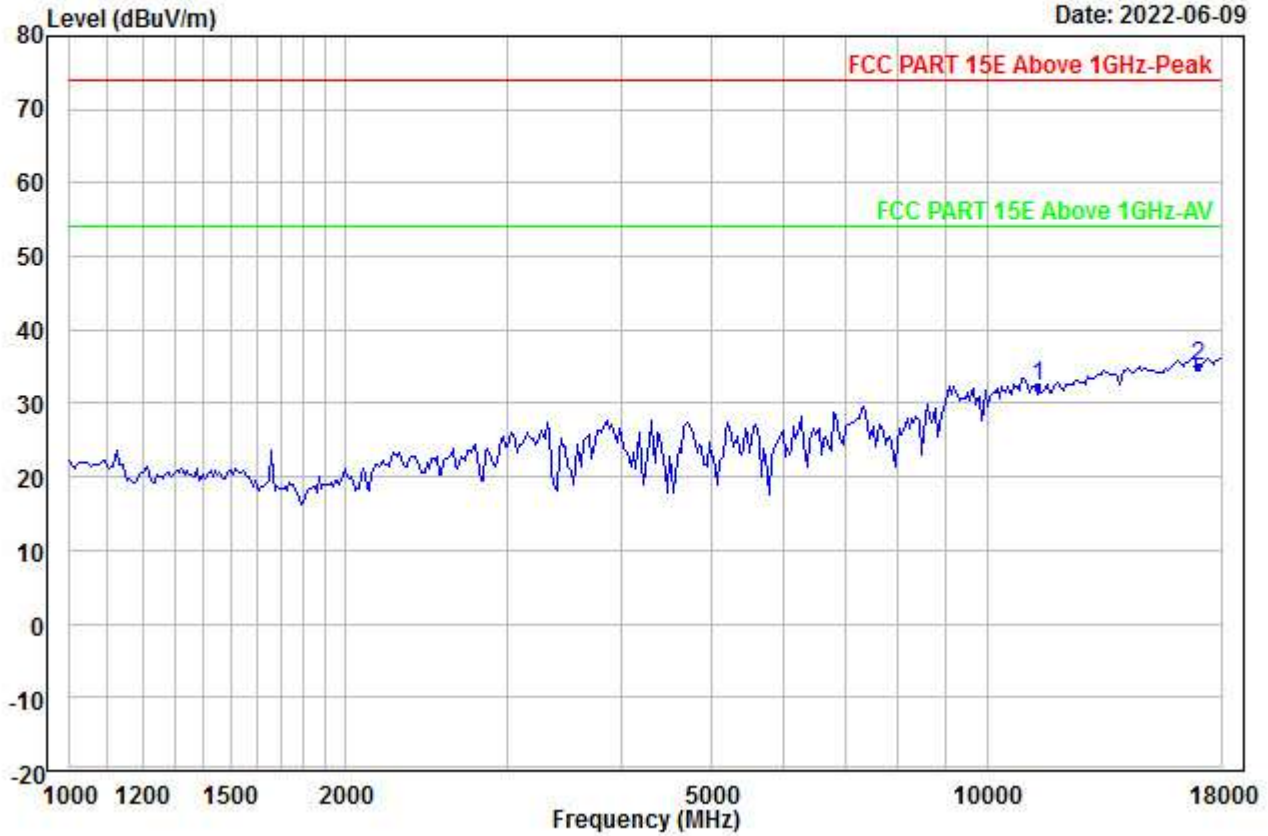


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5670
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 11340.000 | 25.03 | 38.77 | 45.75 | 0.00 | 14.17 | 32.22 | 54.00 | -21.78 | --- | --- | Aver |
| 2 PP17010.000 | 22.25 | 42.30 | 47.19 | 0.00 | 17.69 | 35.05 | 54.00 | -18.95 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00219.EMI

Date: 2022-06-09

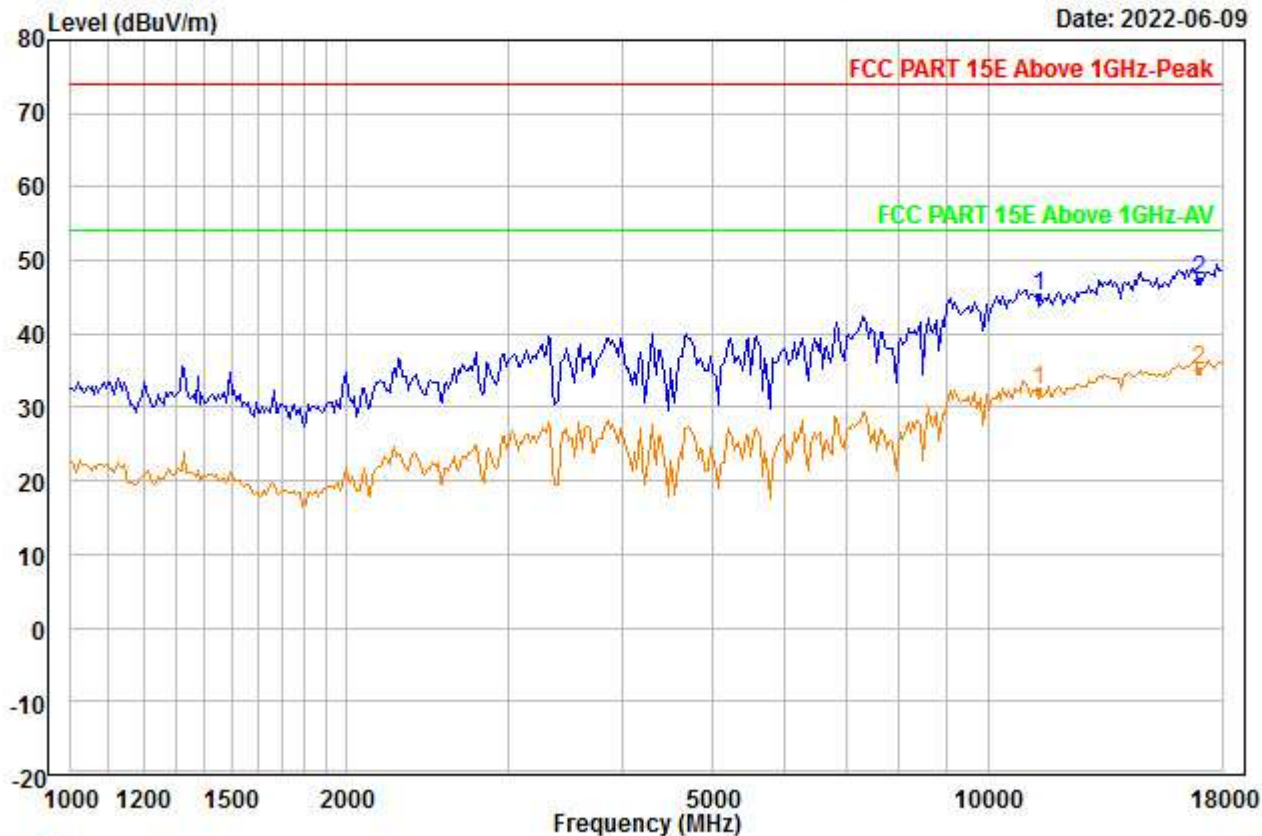


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5670
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 11340.000 | 37.98 | 38.77 | 45.75 | 0.00 | 14.17 | 45.17 | 74.00 | -28.83 | --- | --- | Peak |
| 2 PP17010.000 | 34.61 | 42.30 | 47.19 | 0.00 | 17.69 | 47.41 | 74.00 | -26.59 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00220.EMI

Date: 2022-06-09

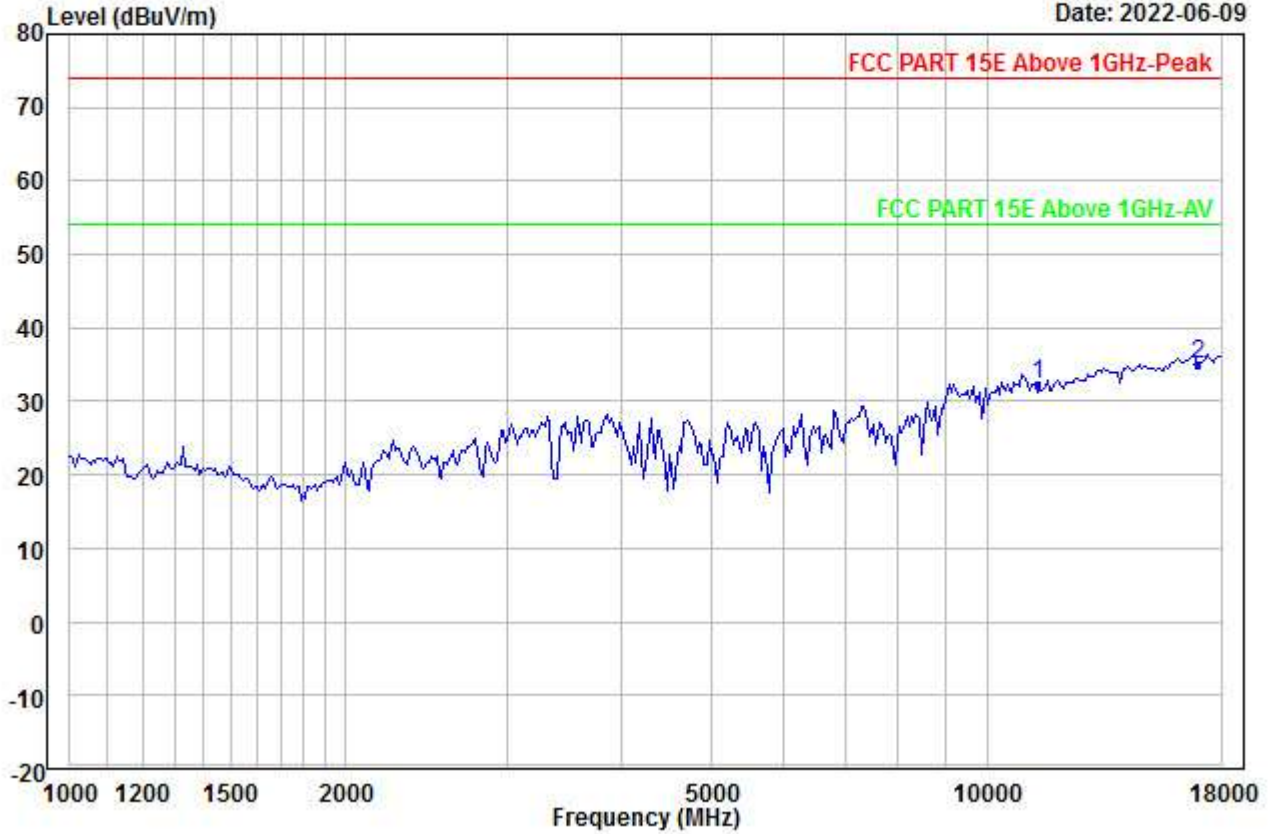


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5670
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 11340.000 | 25.12 | 38.77 | 45.75 | 0.00 | 14.17 | 32.31 | 54.00 | -21.69 | --- | --- | Aver |
| 2 PP17010.000 | 22.25 | 42.30 | 47.19 | 0.00 | 17.69 | 35.05 | 54.00 | -18.95 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00221.EMI

Date: 2022-06-09

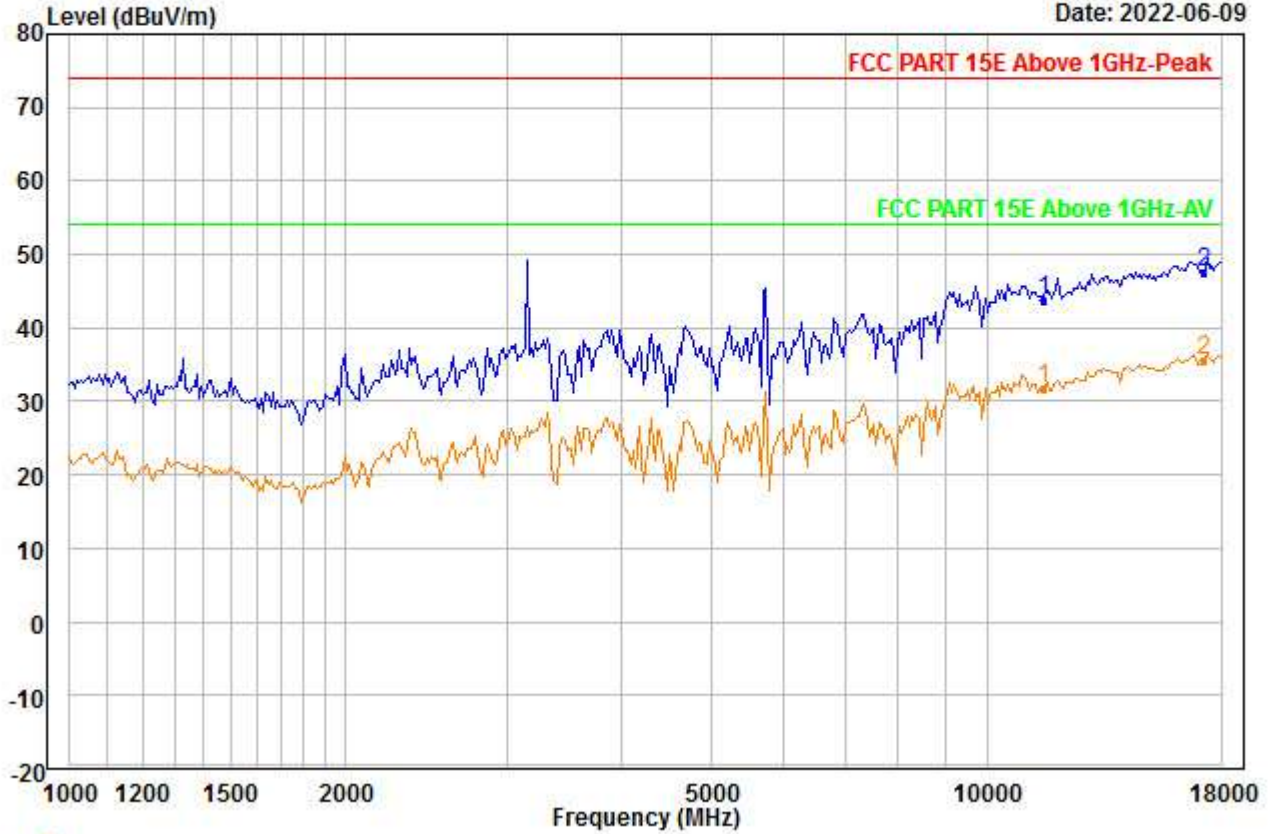


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5755
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 11510.000 | 36.77 | 38.91 | 46.10 | 0.00 | 14.29 | 43.87 | 74.00 | -30.13 | --- | --- | Peak |
| 2 PP17265.000 | 34.40 | 42.19 | 46.88 | 0.00 | 17.85 | 47.56 | 74.00 | -26.44 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00222.EMI

Date: 2022-06-09

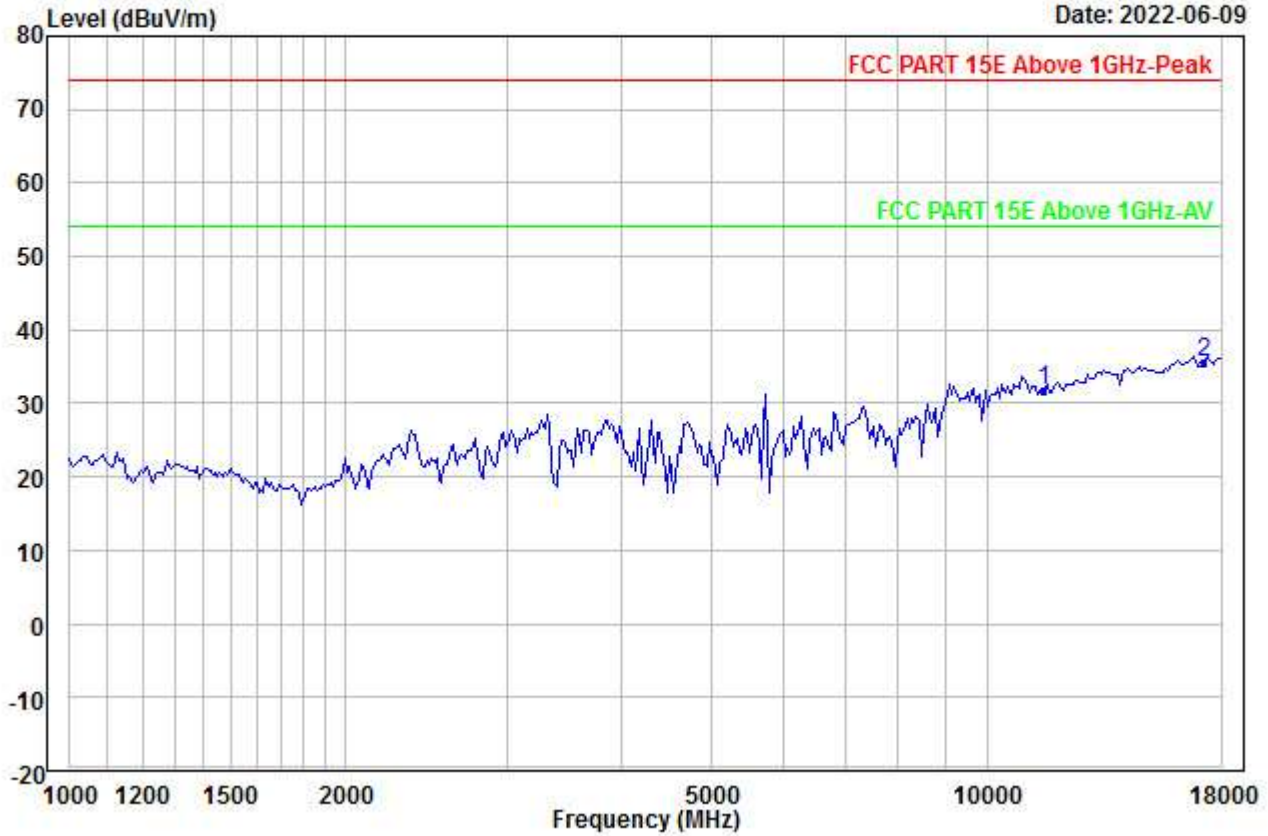


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5755
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 11510.000 | 24.63 | 38.91 | 46.10 | 0.00 | 14.29 | 31.73 | 54.00 | -22.27 | --- | --- | Aver |
| 2 PP17265.000 | 22.52 | 42.19 | 46.88 | 0.00 | 17.85 | 35.68 | 54.00 | -18.32 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00223.EMI

Date: 2022-06-09

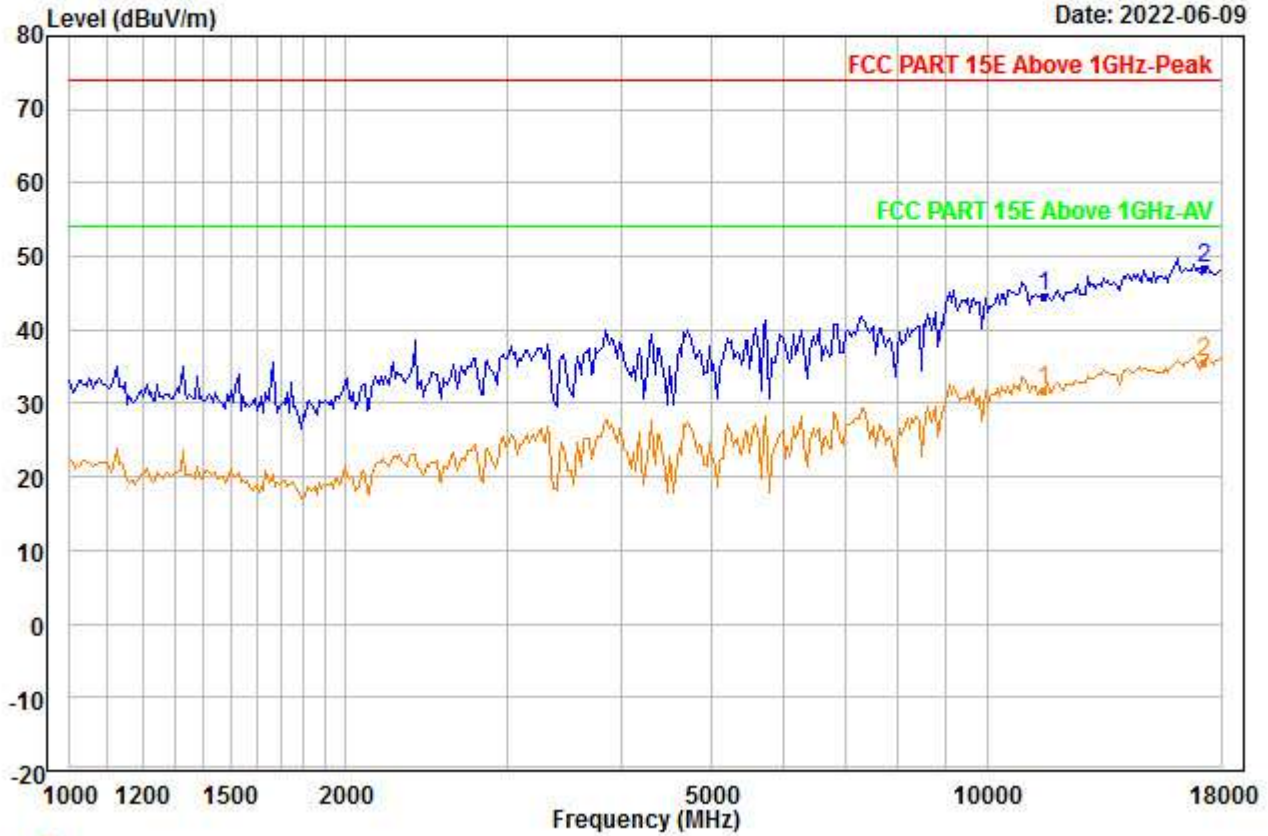


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5755
 Remark :

| | Read Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Remarks |
|---|-------------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|---------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 11510.000 | 37.40 | 38.91 | 46.10 | 0.00 | 14.29 | 44.50 | 74.00 | -29.50 | --- | --- | Peak |
| 2 | PP17265.000 | 35.29 | 42.19 | 46.88 | 0.00 | 17.85 | 48.45 | 74.00 | -25.55 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00224.EMI

Date: 2022-06-09

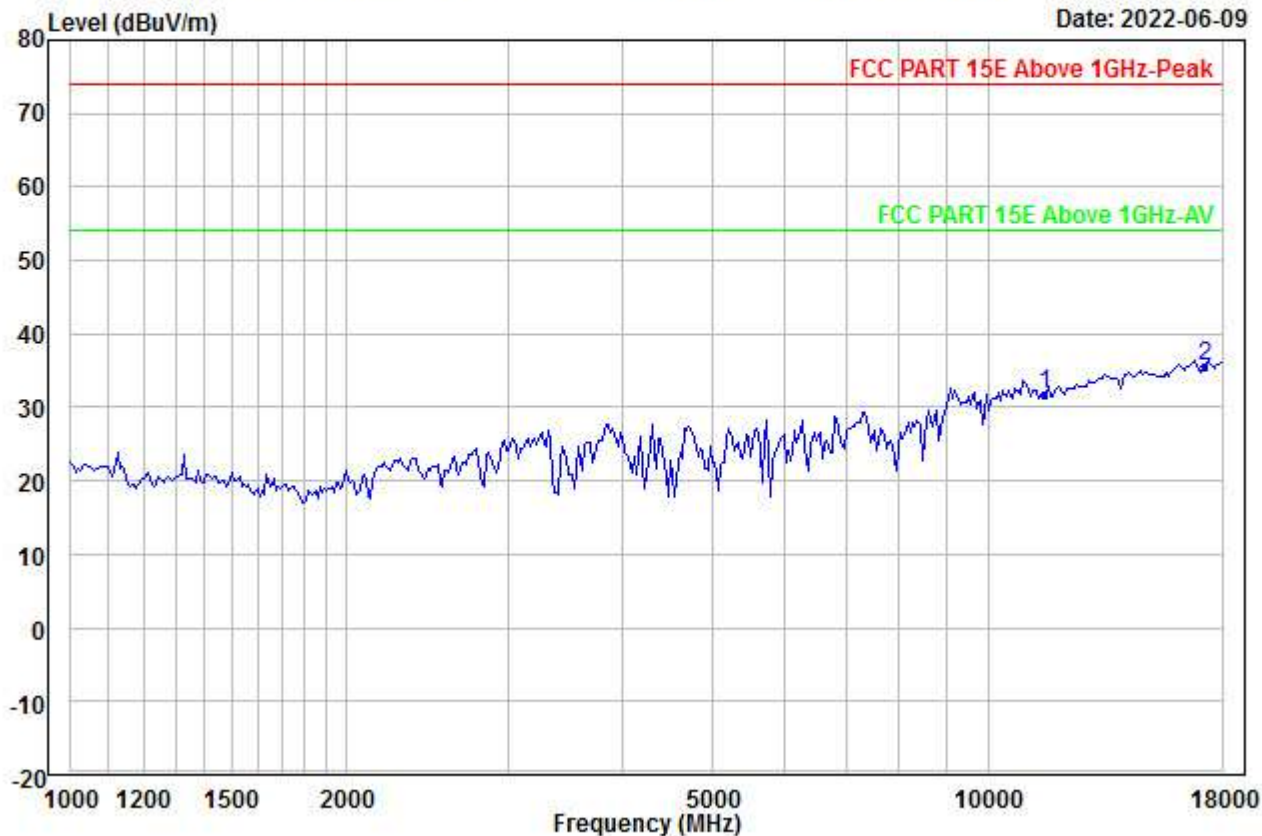


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5755
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 11510.000 | 24.54 | 38.91 | 46.10 | 0.00 | 14.29 | 31.64 | 54.00 | -22.36 | --- | --- | Aver |
| 2 PP17265.000 | 22.41 | 42.19 | 46.88 | 0.00 | 17.85 | 35.57 | 54.00 | -18.43 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00225.EMI

Date: 2022-06-09

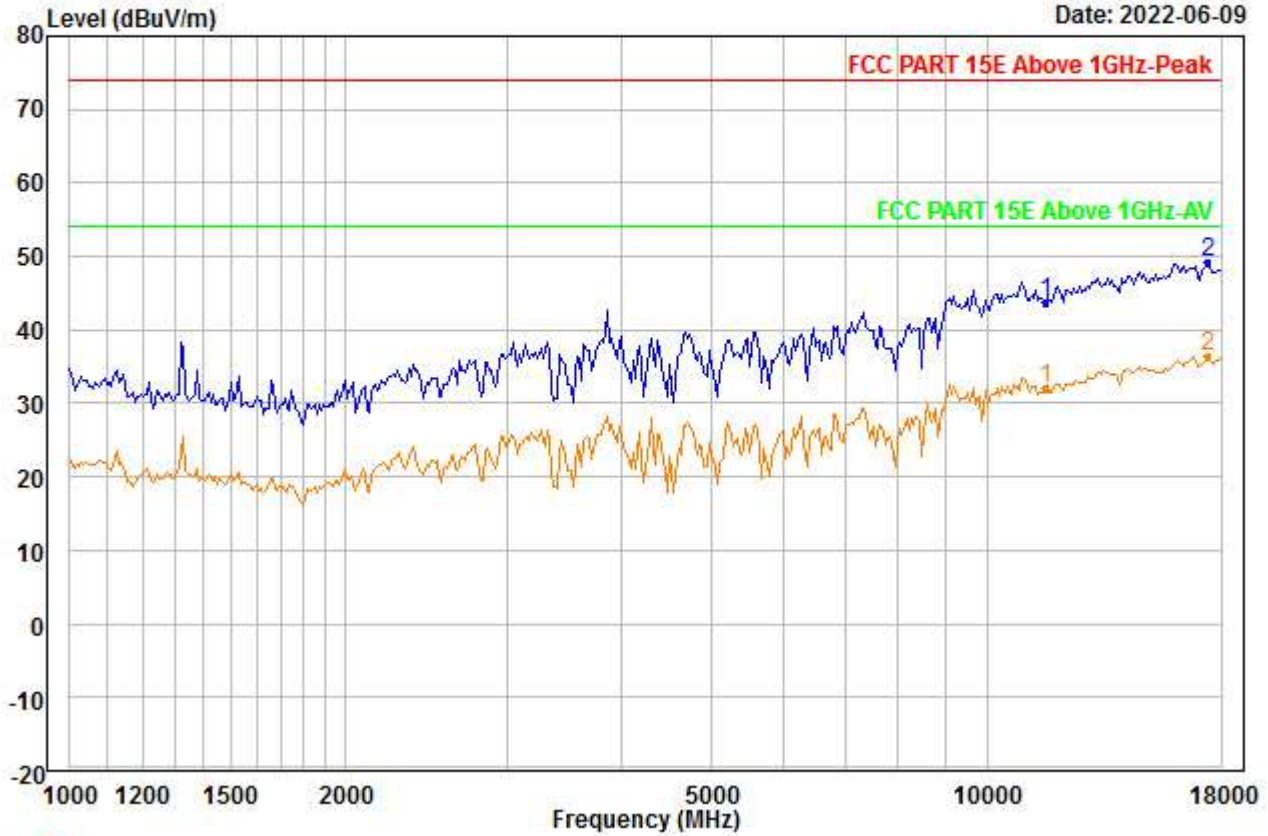


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5795
 Remark :

| | Read Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Rem: |
|---|-------------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 11590.000 | 36.61 | 38.95 | 46.08 | 0.00 | 14.35 | 43.83 | 74.00 | -30.17 | --- | --- | Peak |
| 2 | PP17385.000 | 35.82 | 42.15 | 46.74 | 0.00 | 17.92 | 49.15 | 74.00 | -24.85 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00226.EMI

Date: 2022-06-09

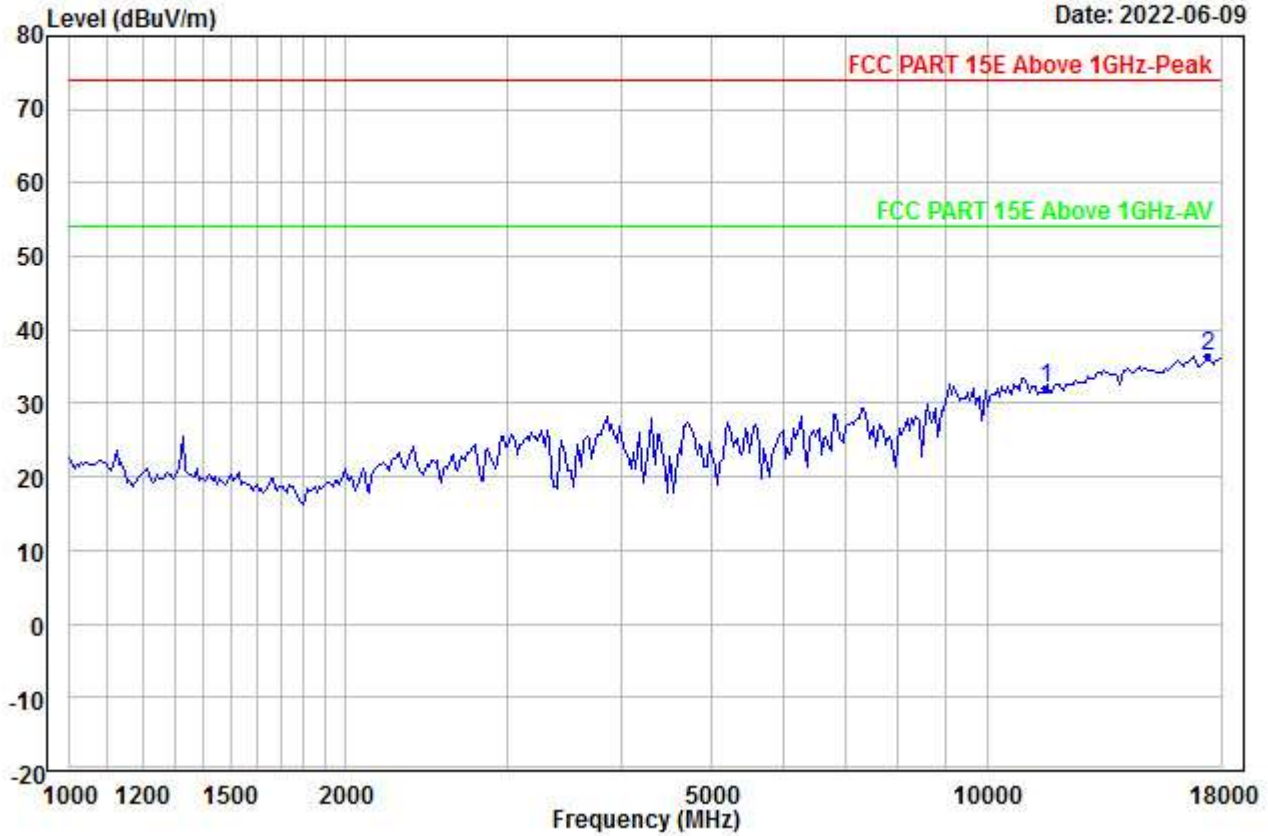


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5795
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 11590.000 | 24.69 | 38.95 | 46.08 | 0.00 | 14.35 | 31.91 | 54.00 | -22.09 | --- | --- | Aver |
| 2 PP17385.000 | 23.02 | 42.15 | 46.74 | 0.00 | 17.92 | 36.35 | 54.00 | -17.65 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00227.EMI

Date: 2022-06-09

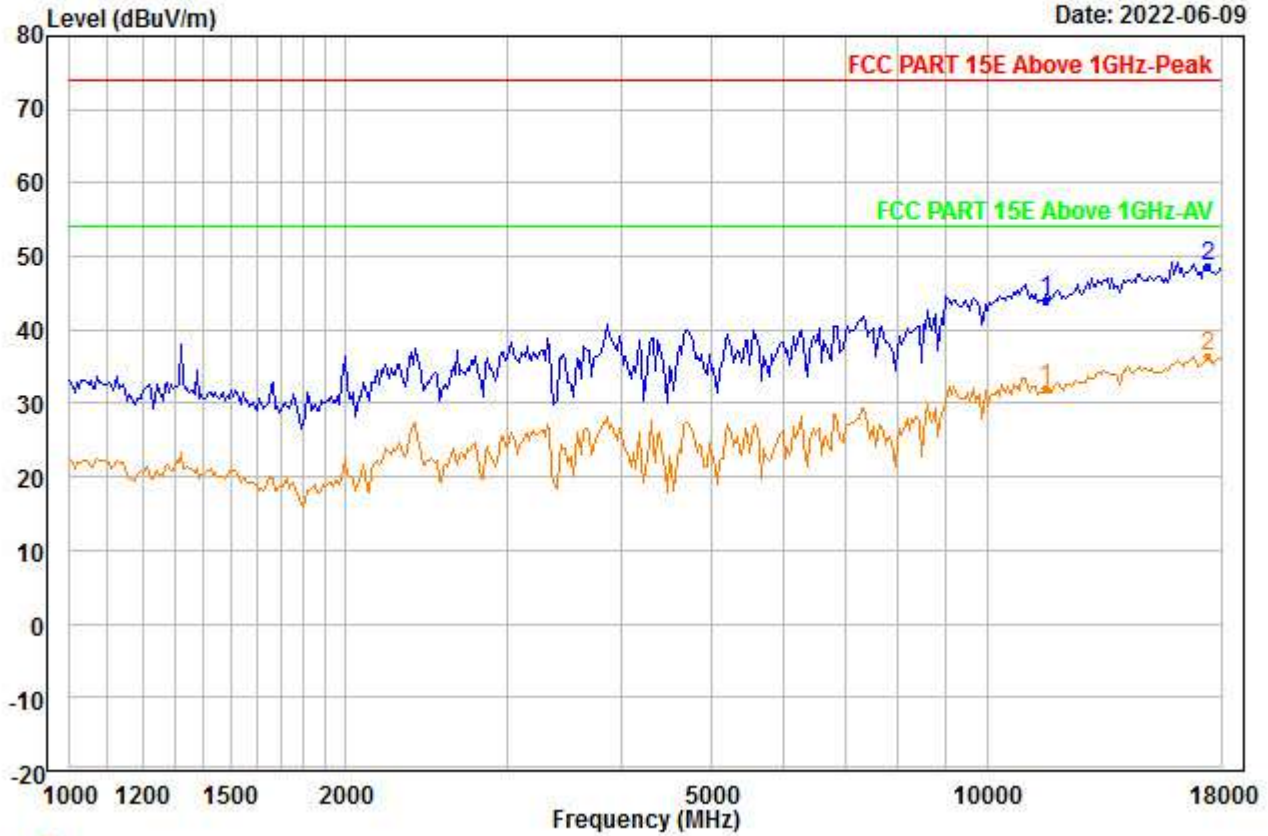


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5795
 Remark :

| | Read Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Remarks |
|---|-------------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|---------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 11590.000 | 36.80 | 38.95 | 46.08 | 0.00 | 14.35 | 44.02 | 74.00 | -29.98 | --- | --- | Peak |
| 2 | PP17385.000 | 35.29 | 42.15 | 46.74 | 0.00 | 17.92 | 48.62 | 74.00 | -25.38 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00228.EMI

Date: 2022-06-09

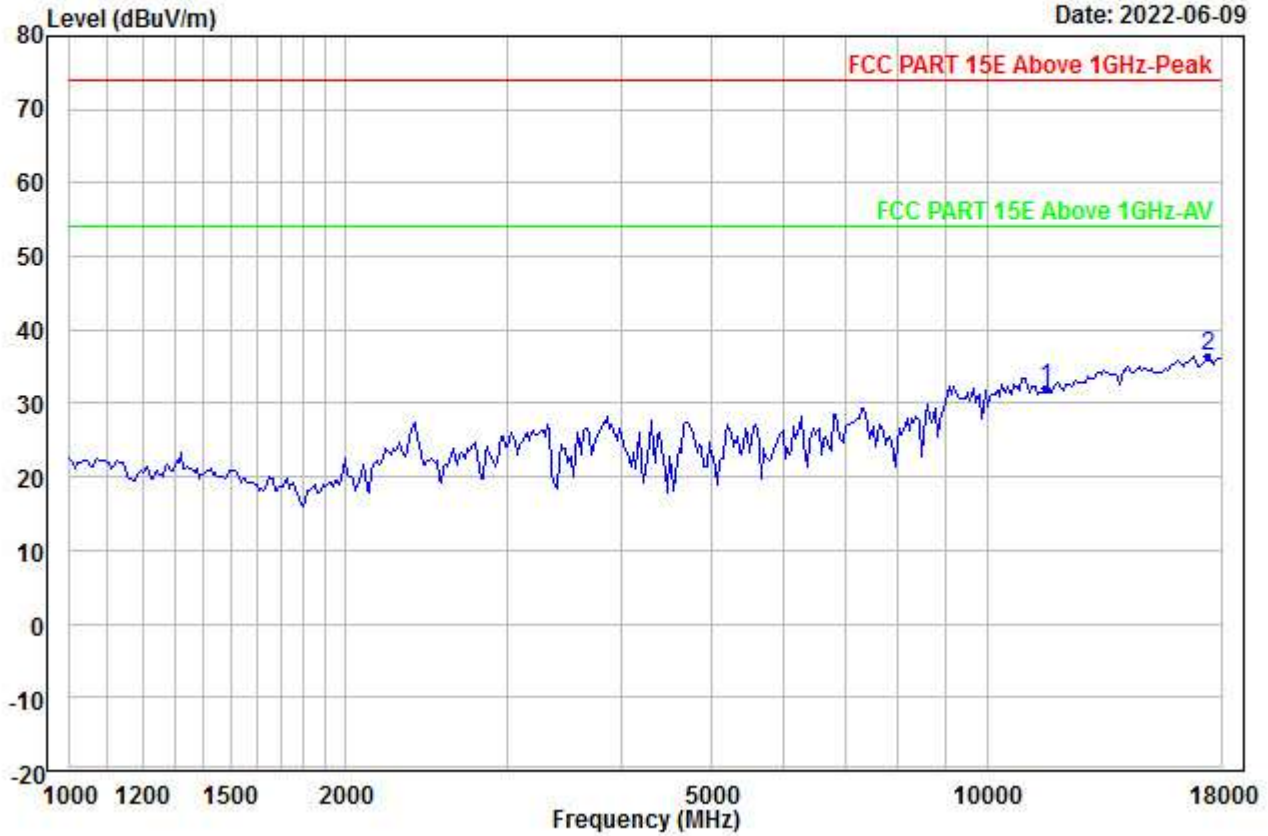


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5795
 Remark :

| | Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Rem: |
|---|-------------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 11590.000 | 24.78 | 38.95 | 46.08 | 0.00 | 14.35 | 32.00 | 54.00 | -22.00 | --- | --- | Aver |
| 2 | PP17385.000 | 23.02 | 42.15 | 46.74 | 0.00 | 17.92 | 36.35 | 54.00 | -17.65 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00229.EMI

Date: 2022-06-09

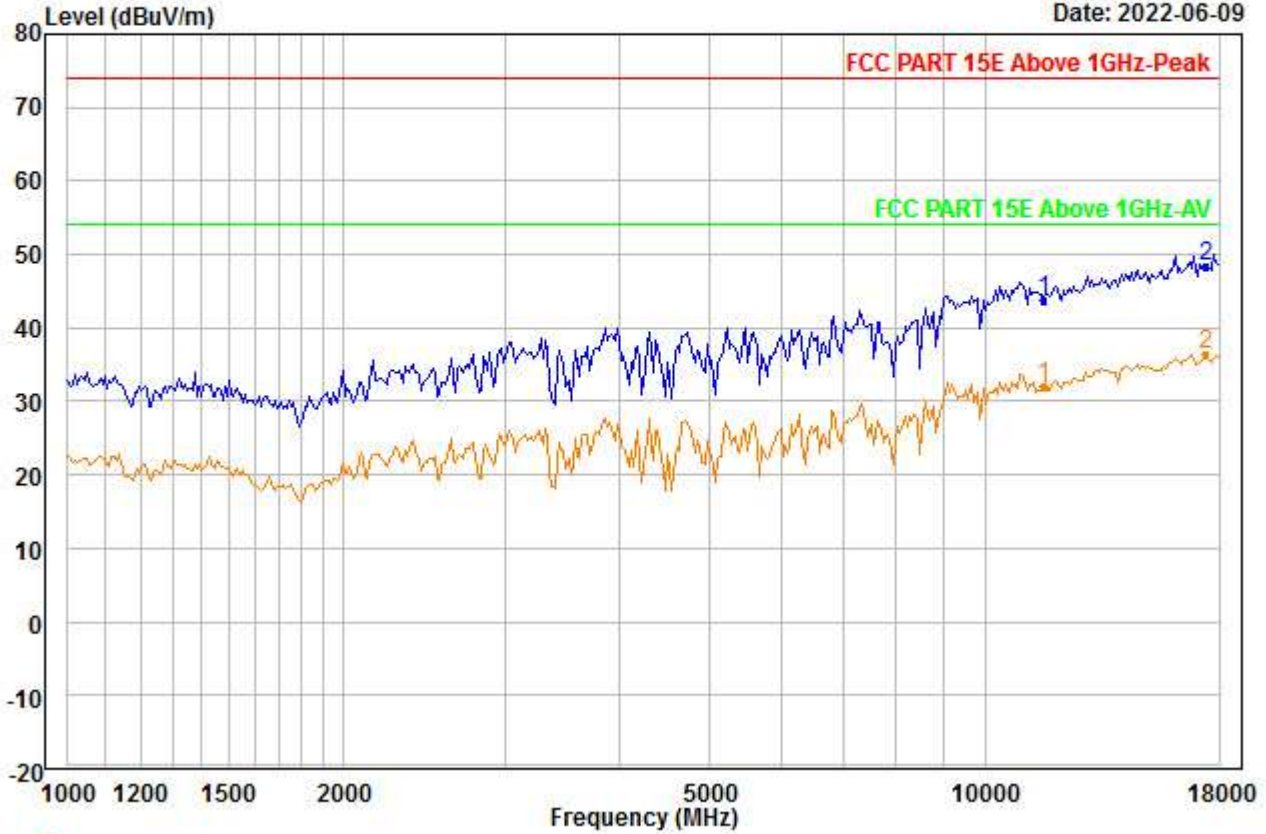


Trace: 1
 Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5795
 Remark :

| | Read Freq | Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Remarks |
|---|-------------|-------|------------|---------------|------------|------------|--------|------------|------------|------|------|---------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 11590.000 | 36.65 | 38.95 | 46.08 | 0.00 | 14.35 | 43.87 | 74.00 | -30.13 | --- | --- | Peak |
| 2 | PP17385.000 | 35.19 | 42.15 | 46.74 | 0.00 | 17.92 | 48.52 | 74.00 | -25.48 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00230.EMI

Date: 2022-06-09

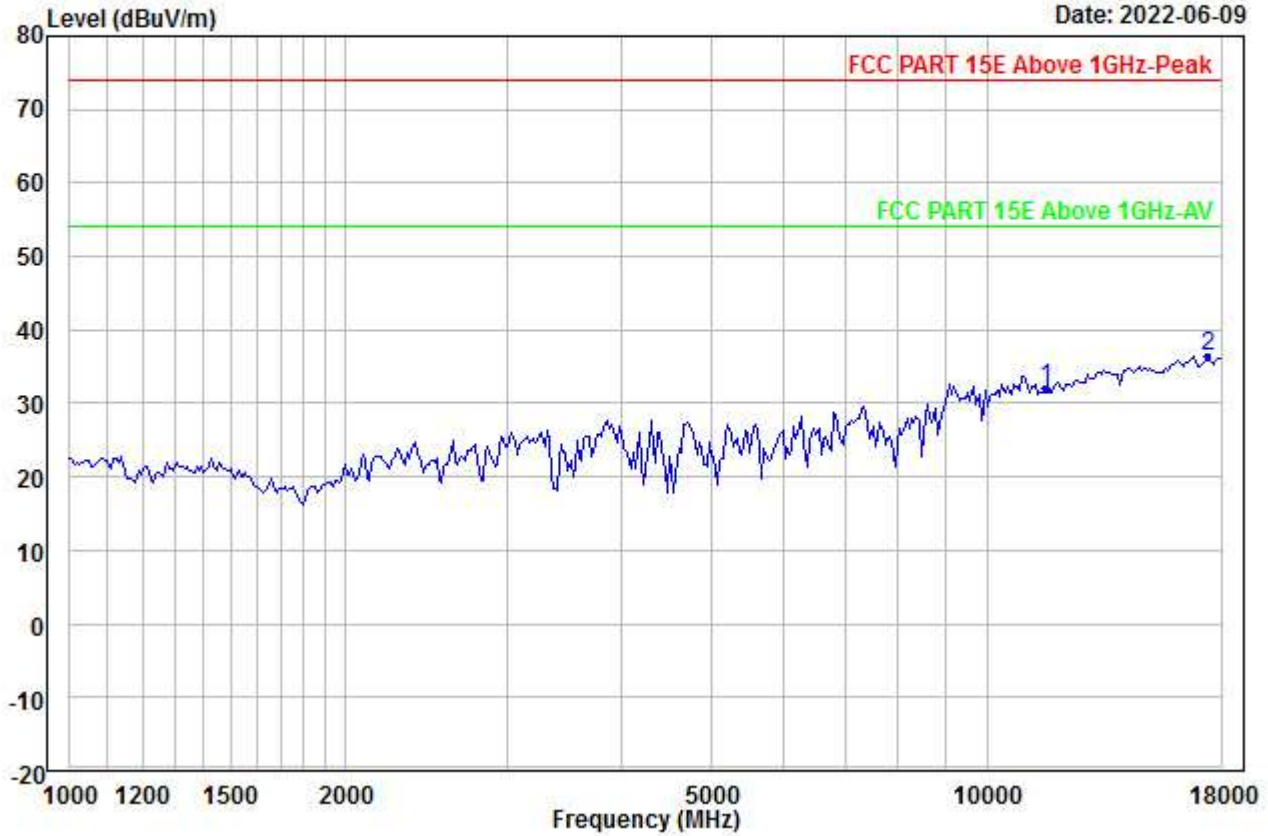


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5795
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 11590.000 | 24.69 | 38.95 | 46.08 | 0.00 | 14.35 | 31.91 | 54.00 | -22.09 | --- | --- | Aver |
| 2 PP17385.000 | 23.02 | 42.15 | 46.74 | 0.00 | 17.92 | 36.35 | 54.00 | -17.65 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00231.EMI

Date: 2022-06-09

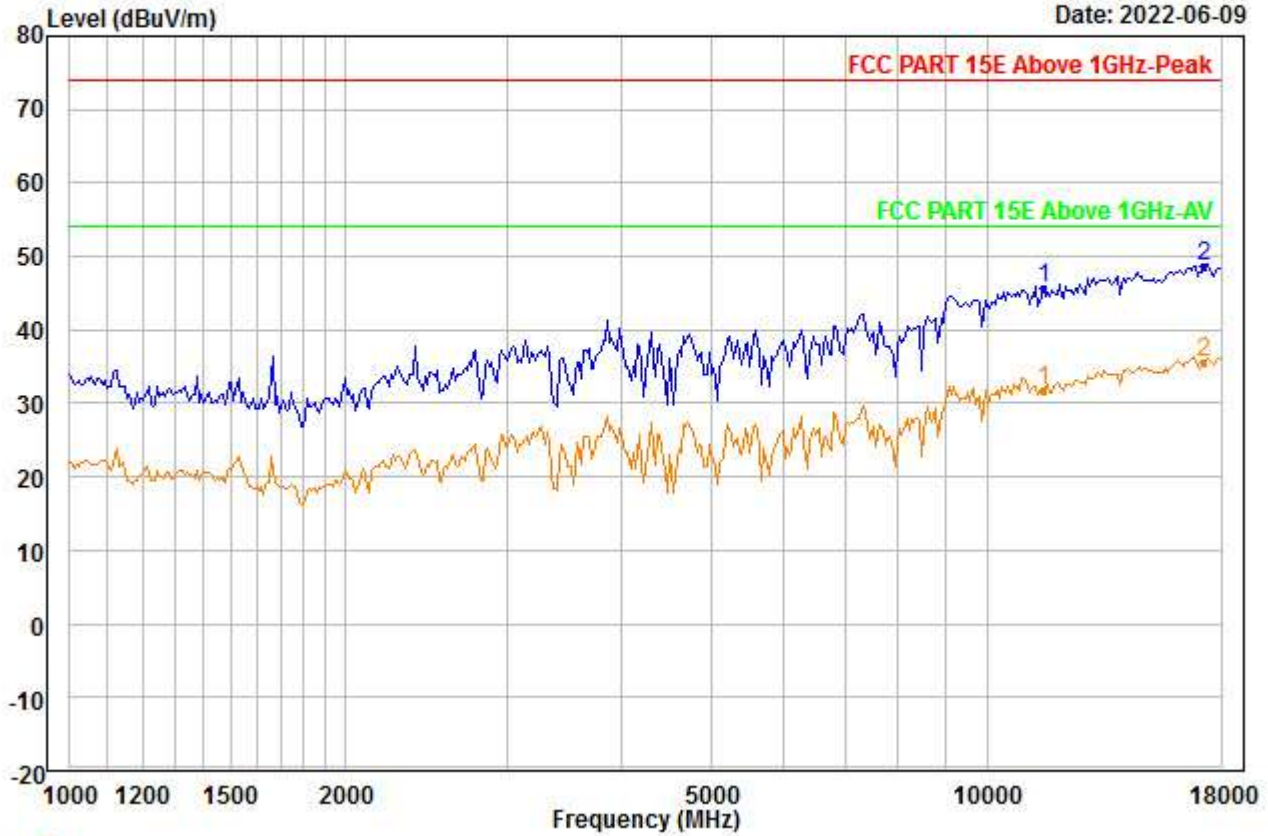


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5795
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 11510.000 | 38.54 | 38.91 | 46.10 | 0.00 | 14.29 | 45.64 | 74.00 | -28.36 | --- | --- | Peak |
| 2 PP17265.000 | 35.54 | 42.19 | 46.88 | 0.00 | 17.85 | 48.70 | 74.00 | -25.30 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00232.EMI

Date: 2022-06-09

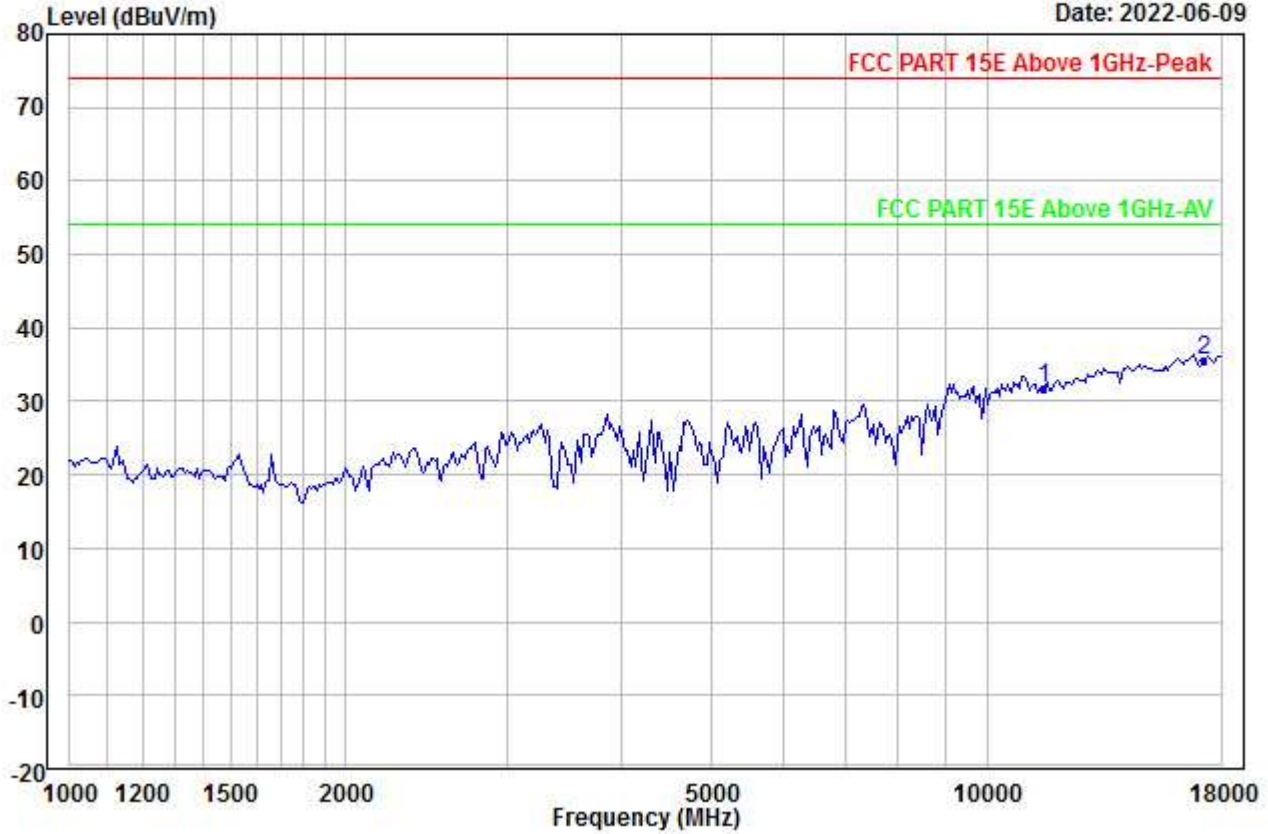


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5795
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 11510.000 | 24.54 | 38.91 | 46.10 | 0.00 | 14.29 | 31.64 | 54.00 | -22.36 | --- | --- | Aver |
| 2 PP17265.000 | 22.52 | 42.19 | 46.88 | 0.00 | 17.85 | 35.68 | 54.00 | -18.32 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00233.EMI

Date: 2022-06-09

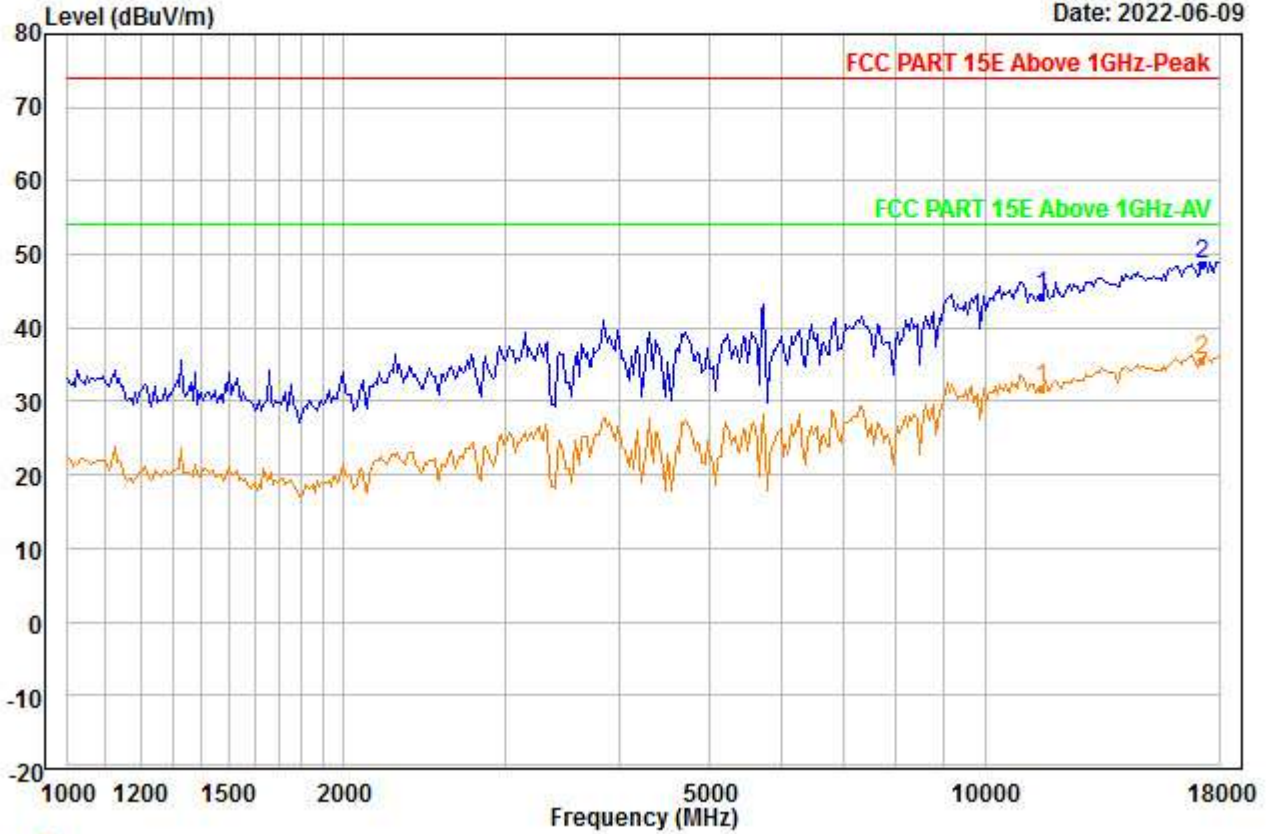


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5755
 Remark :

| | Read Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Remarks |
|---|-------------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|---------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 11510.000 | 37.24 | 38.91 | 46.10 | 0.00 | 14.29 | 44.34 | 74.00 | -29.66 | --- | --- | Peak |
| 2 | PP17265.000 | 35.39 | 42.19 | 46.88 | 0.00 | 17.85 | 48.55 | 74.00 | -25.45 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00234.EMI

Date: 2022-06-09

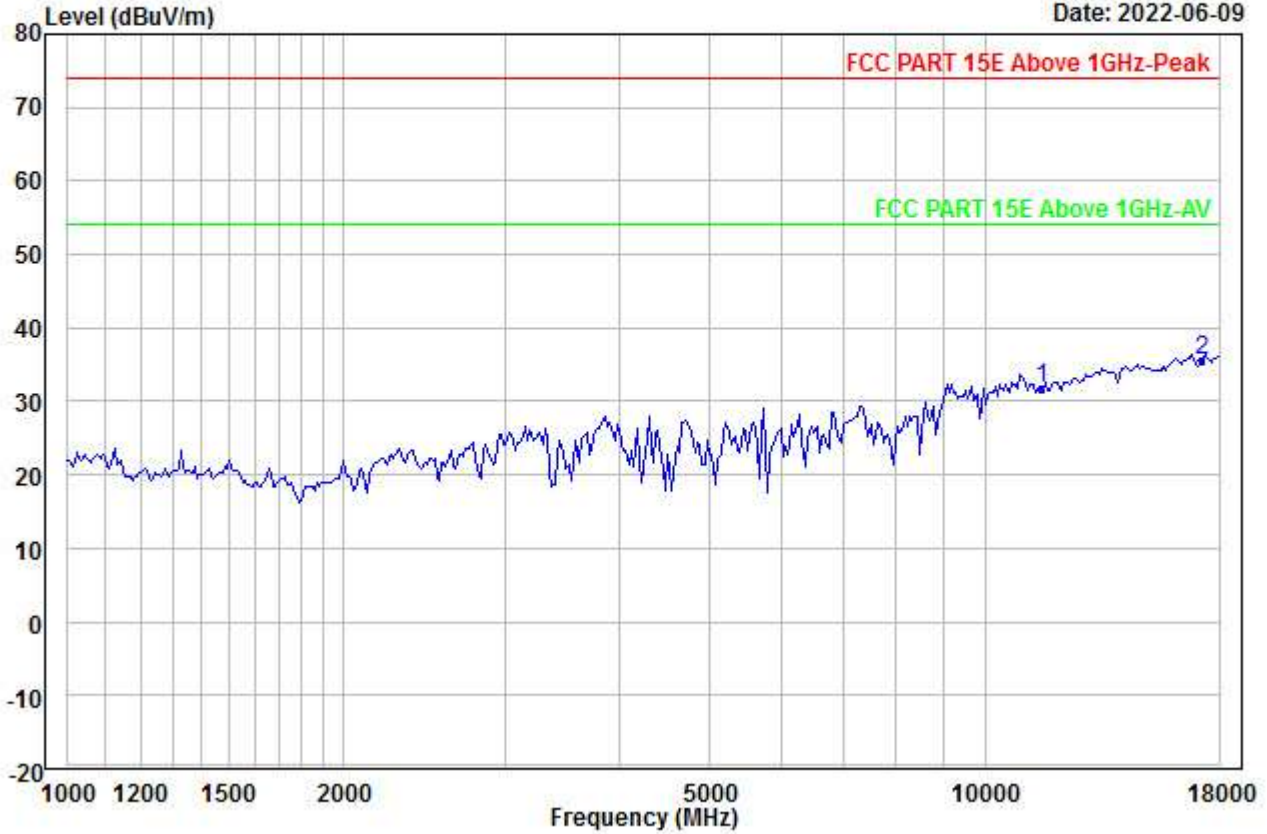


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5755
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 11510.000 | 24.63 | 38.91 | 46.10 | 0.00 | 14.29 | 31.73 | 54.00 | -22.27 | --- | --- | Aver |
| 2 PP17265.000 | 22.52 | 42.19 | 46.88 | 0.00 | 17.85 | 35.68 | 54.00 | -18.32 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00235.EMI

Date: 2022-06-09

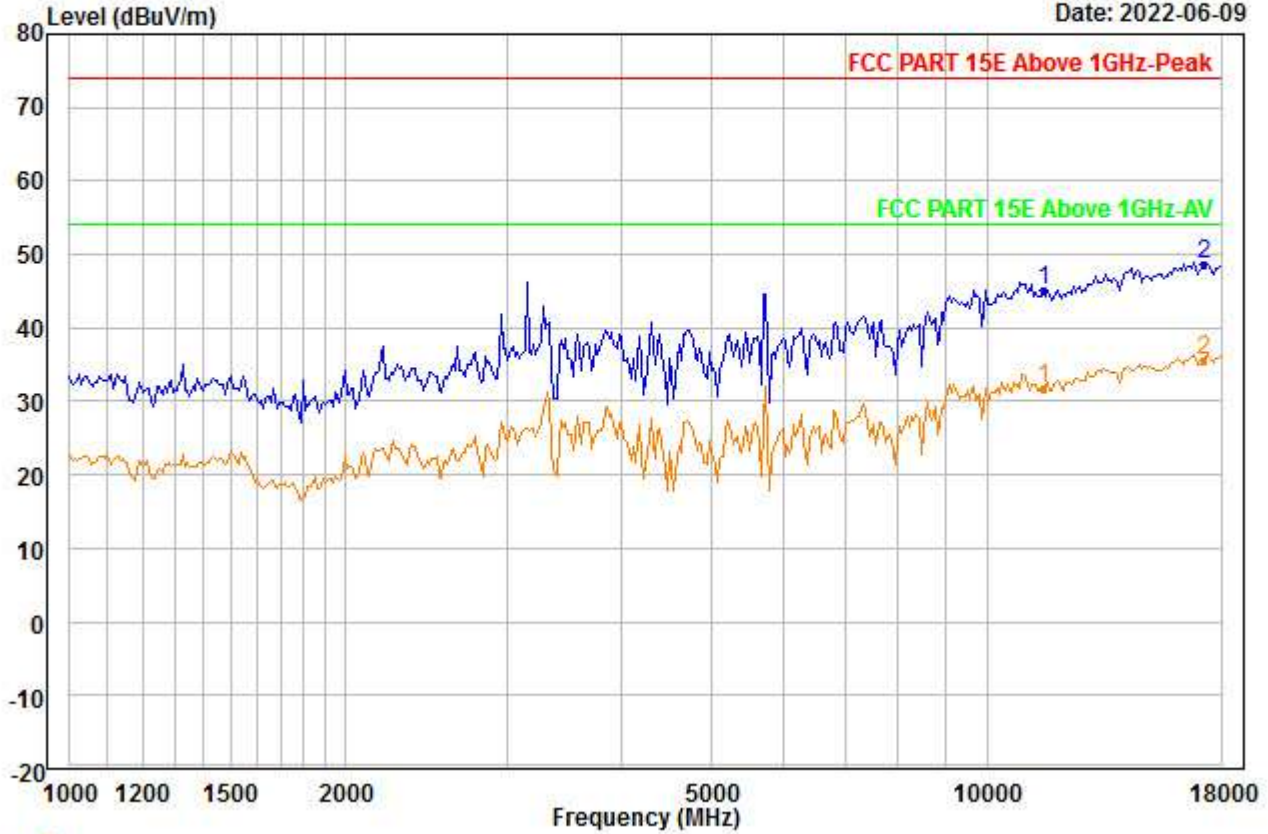


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5755
 Remark :

| | Read Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Remarks |
|---|-------------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|---------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 11510.000 | 38.15 | 38.91 | 46.10 | 0.00 | 14.29 | 45.25 | 74.00 | -28.75 | --- | --- | Peak |
| 2 | PP17265.000 | 35.39 | 42.19 | 46.88 | 0.00 | 17.85 | 48.55 | 74.00 | -25.45 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00236.EMI

Date: 2022-06-09

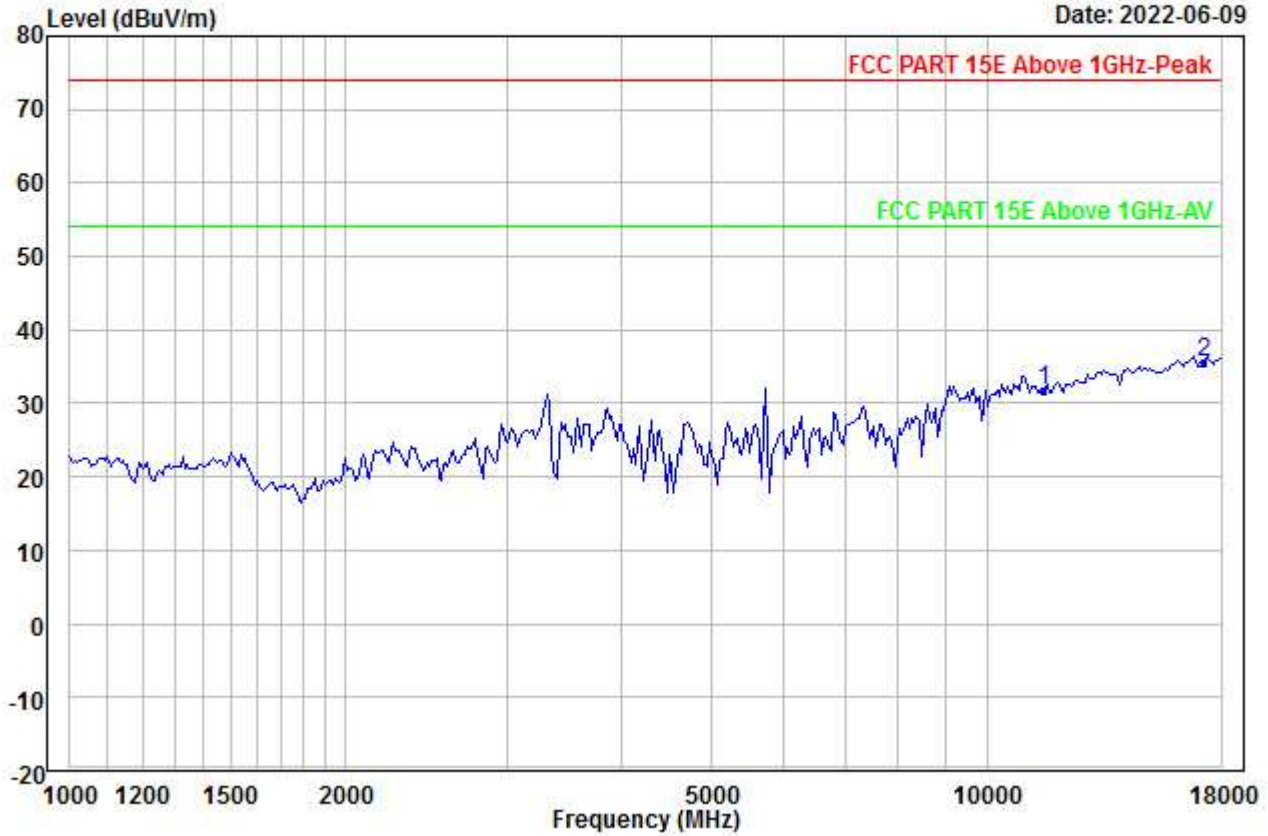


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5755
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rema | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 11510.000 | 24.71 | 38.91 | 46.10 | 0.00 | 14.29 | 31.81 | 54.00 | -22.19 | --- | --- | Aver |
| 2 PP17265.000 | 22.52 | 42.19 | 46.88 | 0.00 | 17.85 | 35.68 | 54.00 | -18.32 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00237.EMI

Date: 2022-06-09

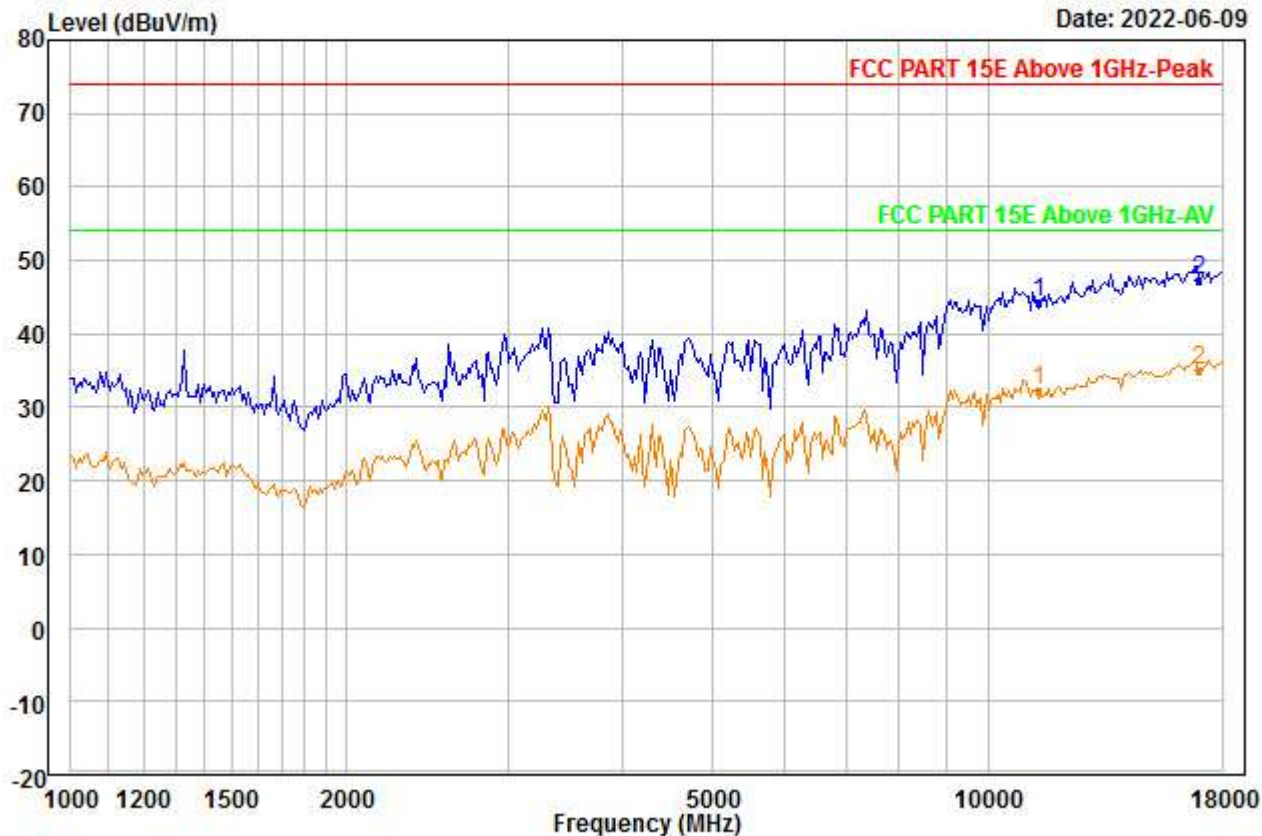


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5670
 Remark :

| | Read Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Remarks |
|---|-------------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|---------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 11340.000 | 37.06 | 38.77 | 45.75 | 0.00 | 14.17 | 44.25 | 74.00 | -29.75 | --- | --- | Peak |
| 2 | PP17010.000 | 34.59 | 42.30 | 47.19 | 0.00 | 17.69 | 47.39 | 74.00 | -26.61 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00238.EMI

Date: 2022-06-09

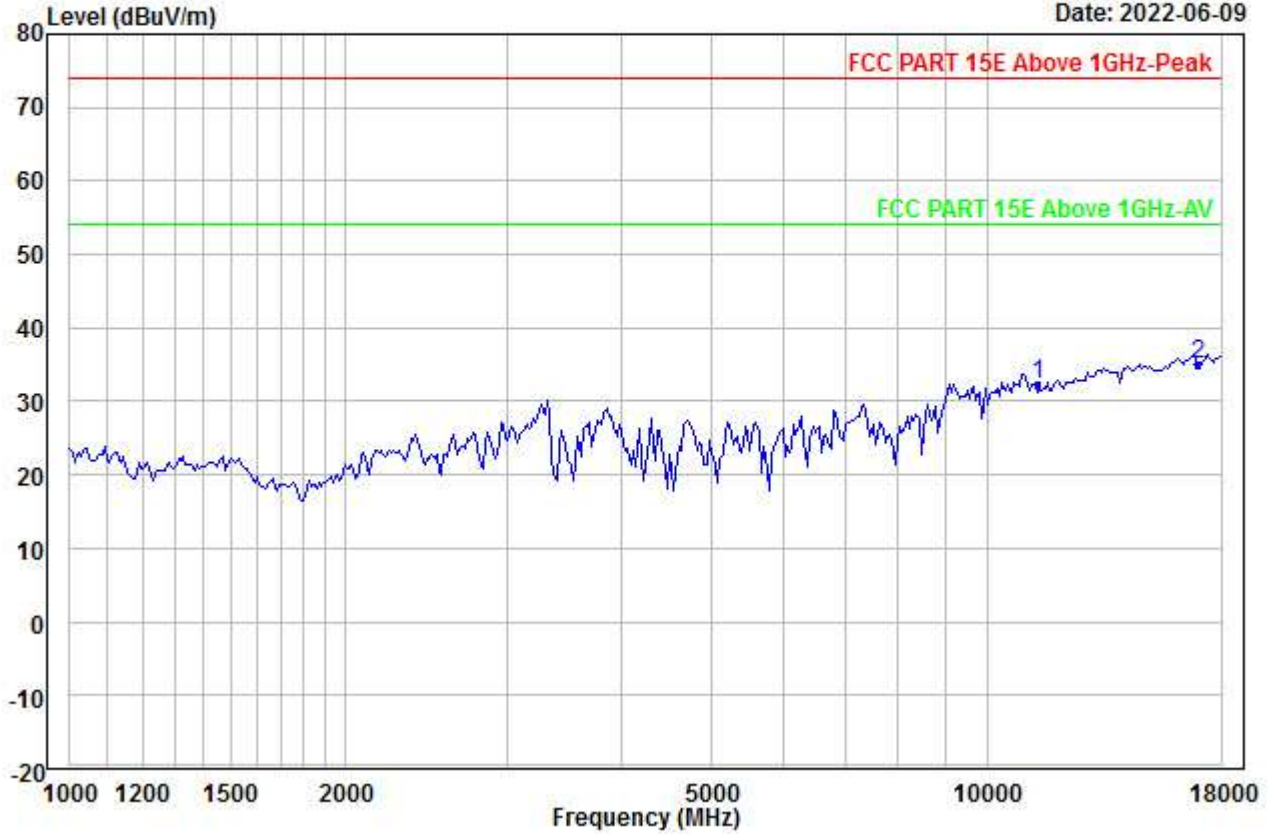


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5670
 Remark :

| | Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Rem: |
|---|-------------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 11340.000 | 25.03 | 38.77 | 45.75 | 0.00 | 14.17 | 32.22 | 54.00 | -21.78 | --- | --- | Aver |
| 2 | PP17010.000 | 22.25 | 42.30 | 47.19 | 0.00 | 17.69 | 35.05 | 54.00 | -18.95 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\RSE\4_00239.EMI

Date: 2022-06-09

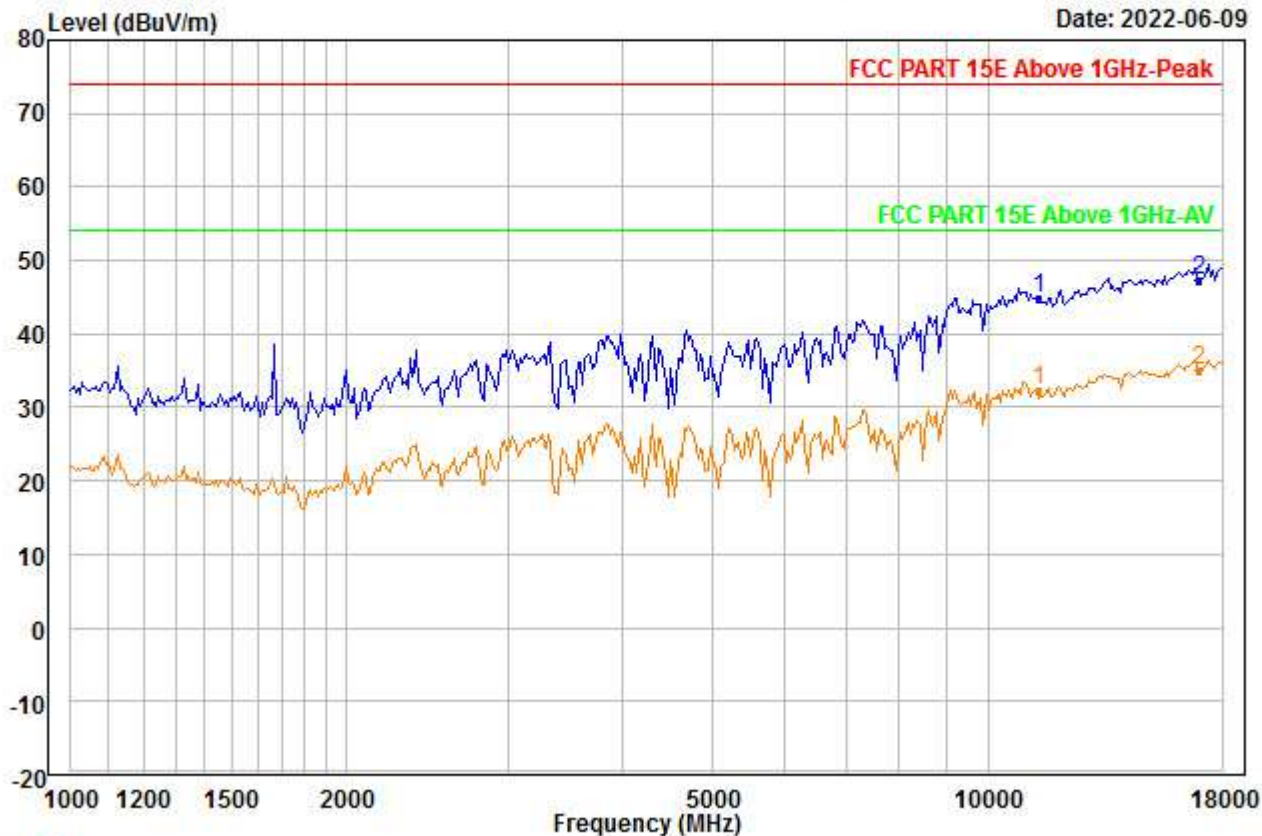


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5670
 Remark :

| | Read Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Remarks |
|---|-------------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|---------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 11340.000 | 37.65 | 38.77 | 45.75 | 0.00 | 14.17 | 44.84 | 74.00 | -29.16 | --- | --- | Peak |
| 2 | PP17010.000 | 34.56 | 42.30 | 47.19 | 0.00 | 17.69 | 47.36 | 74.00 | -26.64 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00240.EMI

Date: 2022-06-09

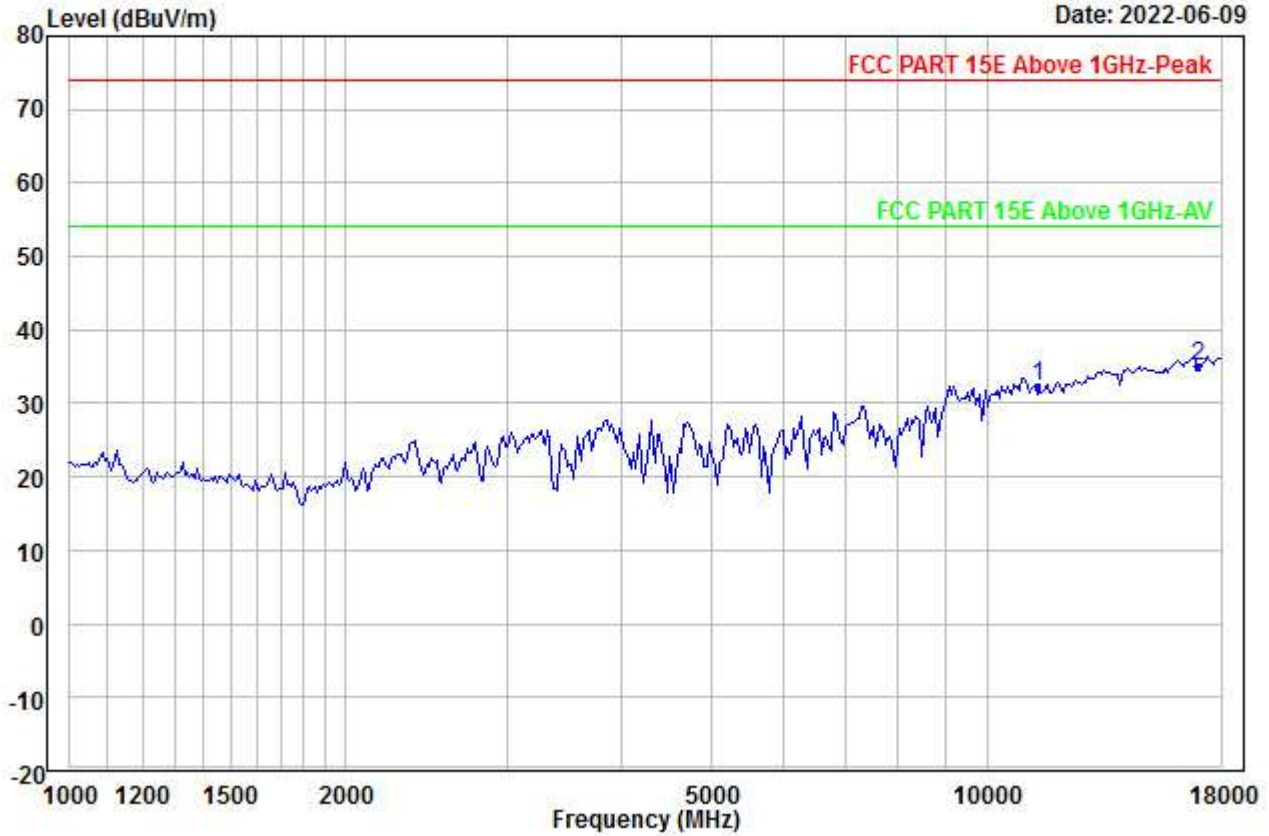


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5670
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 11340.000 | 25.20 | 38.77 | 45.75 | 0.00 | 14.17 | 32.39 | 54.00 | -21.61 | --- | --- | Aver |
| 2 PP17010.000 | 22.25 | 42.30 | 47.19 | 0.00 | 17.69 | 35.05 | 54.00 | -18.95 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00241.EMI

Date: 2022-06-09

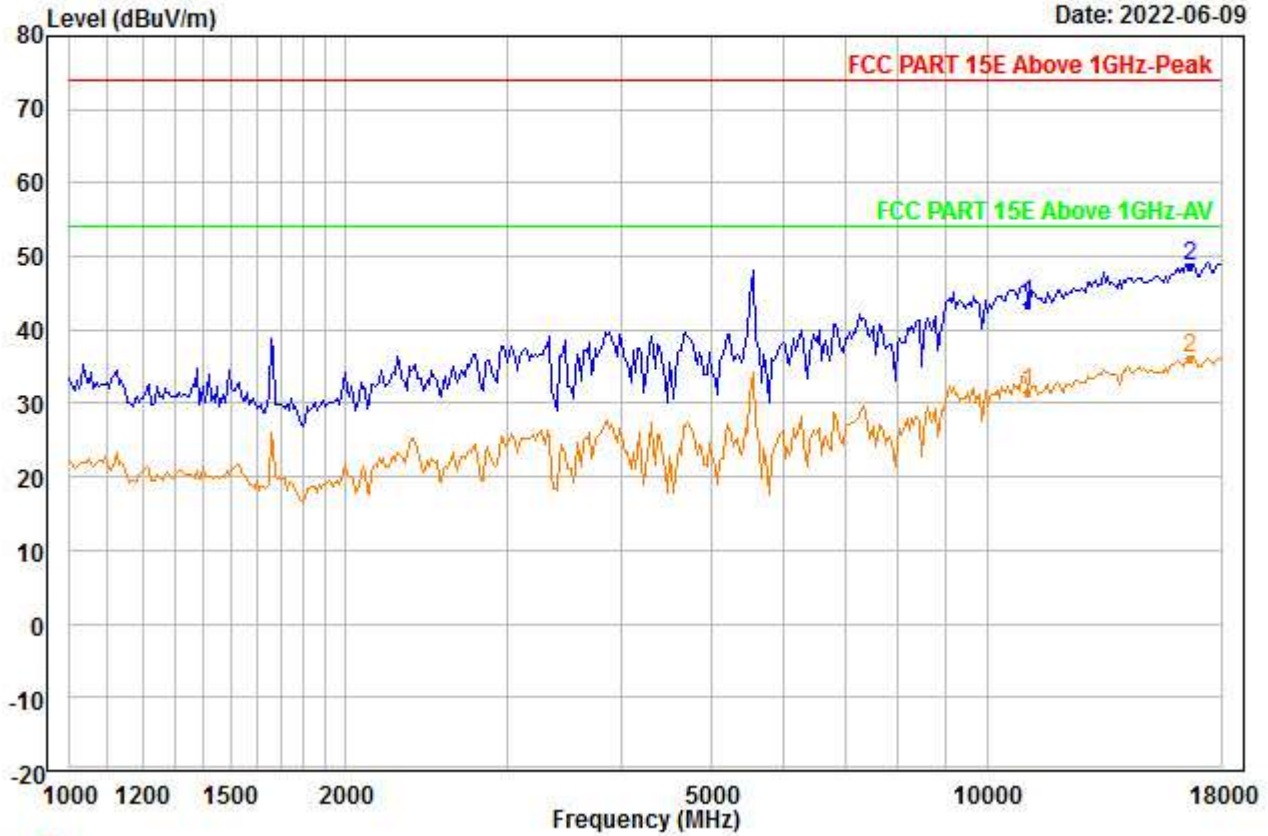


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5550
 Remark :

| | Read Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Remarks |
|---|-------------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|---------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 11100.000 | 36.22 | 38.58 | 45.22 | 0.00 | 13.99 | 43.57 | 74.00 | -30.43 | --- | --- | Peak |
| 2 | PP16650.000 | 36.32 | 41.74 | 46.78 | 0.00 | 17.52 | 48.80 | 74.00 | -25.20 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00242.EMI

Date: 2022-06-09

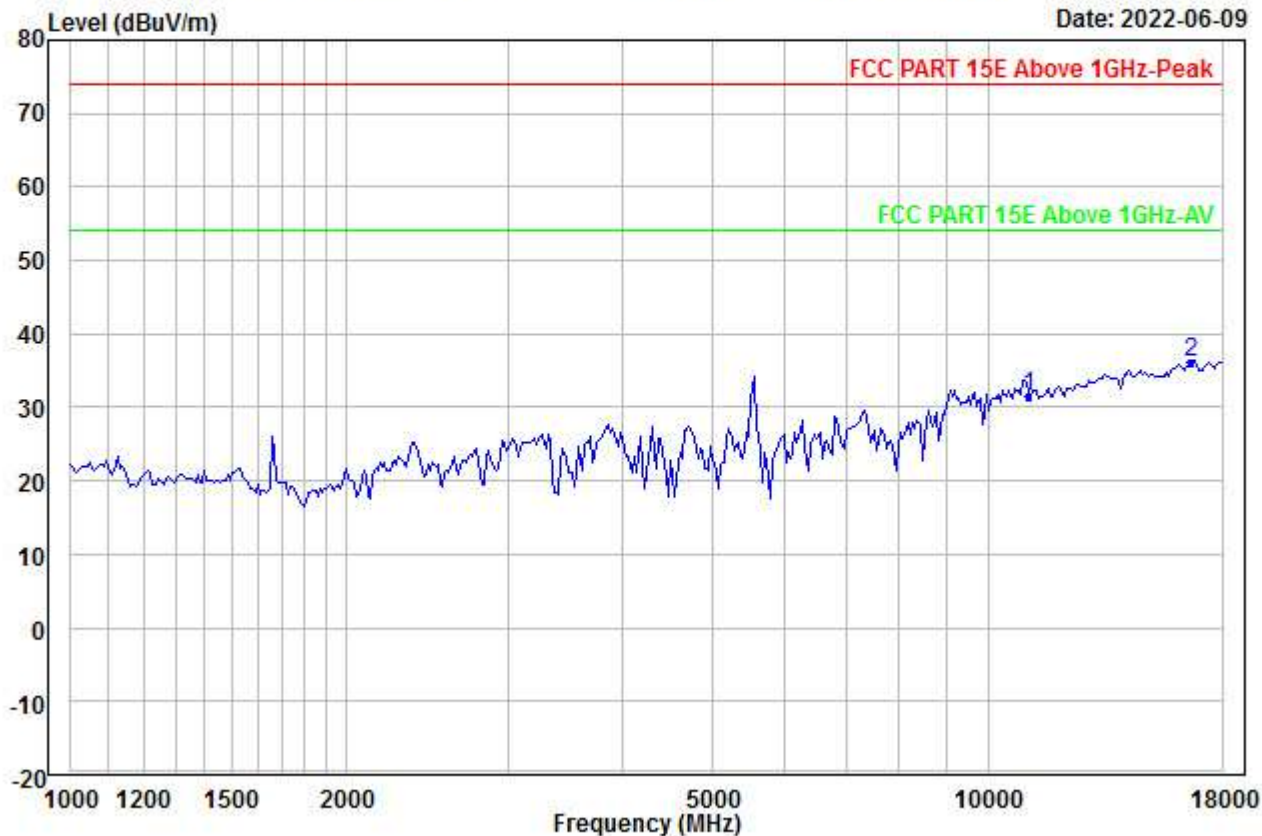


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5550
 Remark :

| | Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Rem: |
|---|-------------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 11100.000 | 24.15 | 38.58 | 45.22 | 0.00 | 13.99 | 31.50 | 54.00 | -22.50 | --- | --- | Aver |
| 2 | PP16650.000 | 23.56 | 41.74 | 46.78 | 0.00 | 17.52 | 36.04 | 54.00 | -17.96 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00243.EMI

Date: 2022-06-09

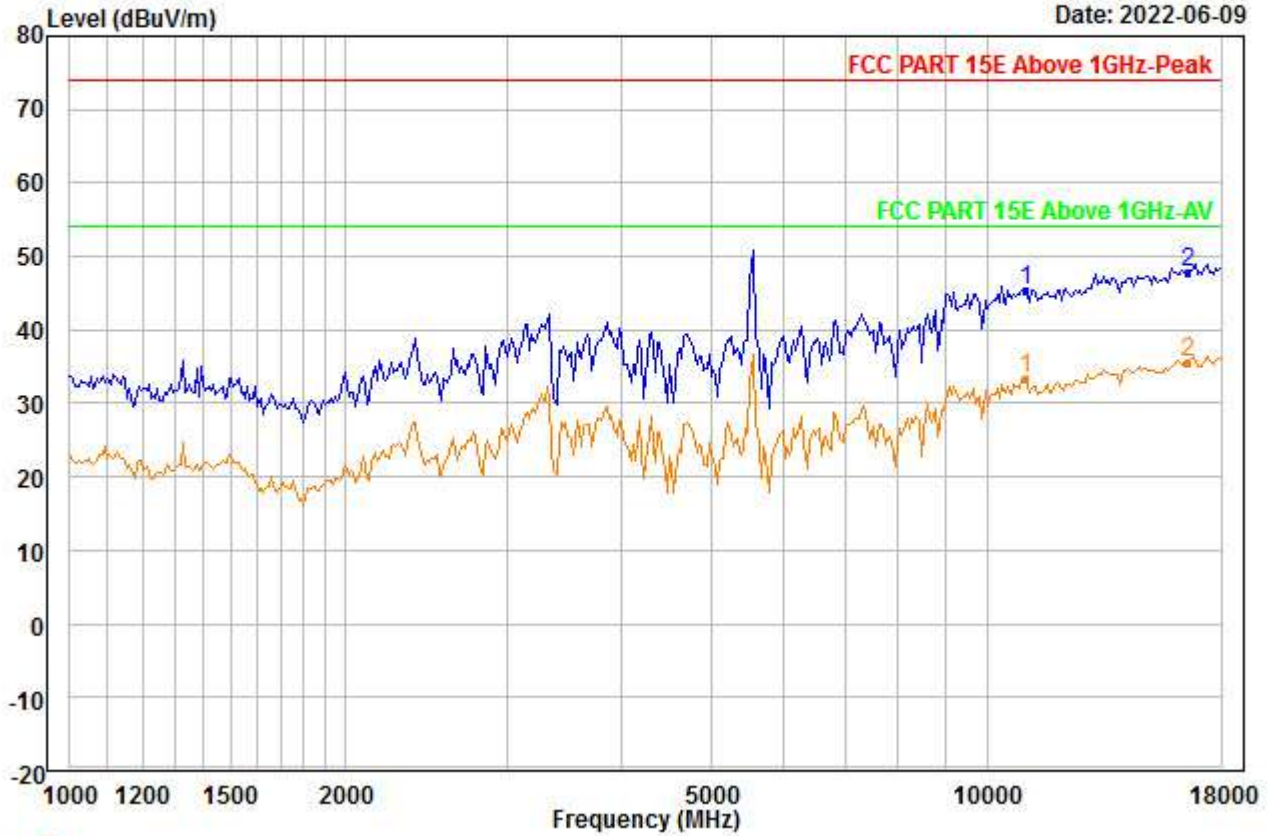


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5550
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 11020.000 | 37.89 | 38.52 | 45.04 | 0.00 | 13.93 | 45.30 | 74.00 | -28.70 | --- | --- | Peak |
| 2 PP16530.000 | 35.37 | 41.55 | 46.64 | 0.00 | 17.47 | 47.75 | 74.00 | -26.25 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00244.EMI

Date: 2022-06-09

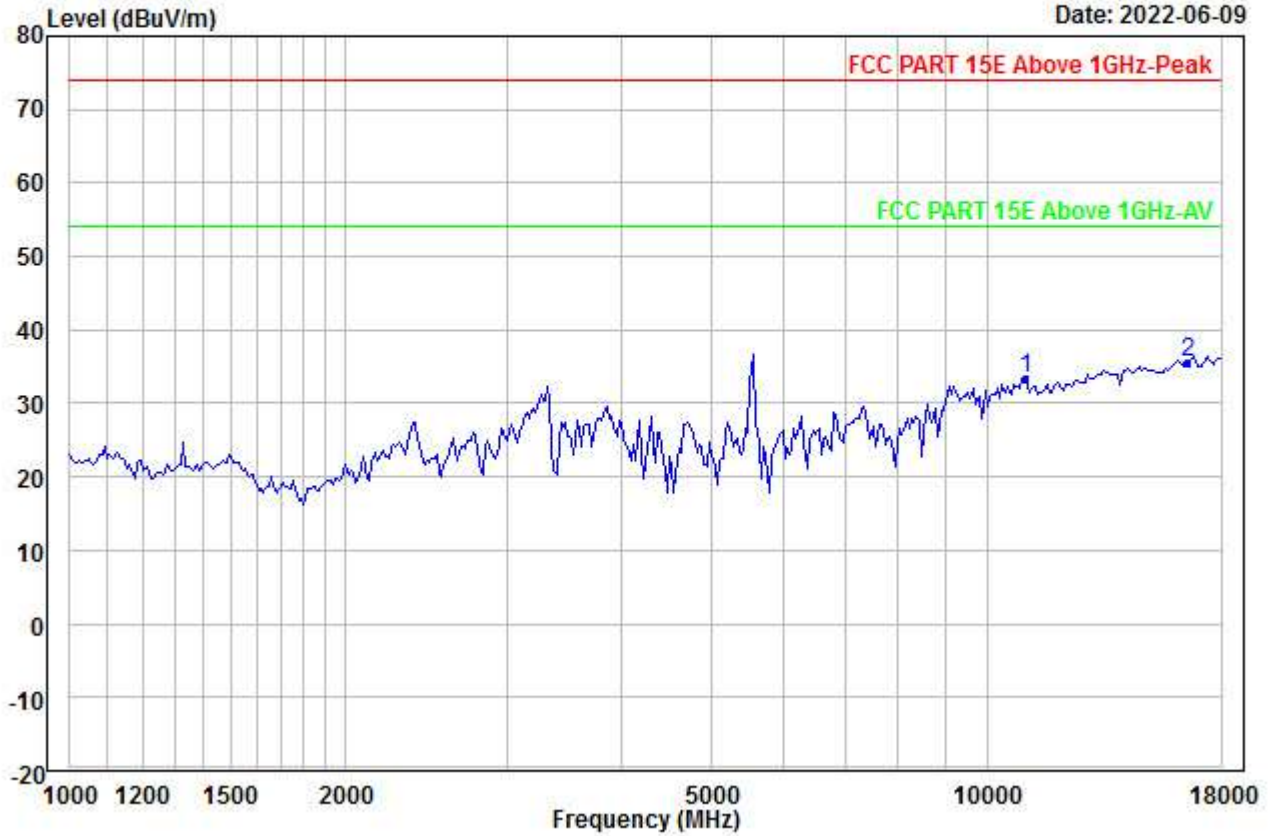


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5550
 Remark :

| | Read Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Remarks |
|---|-------------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|---------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 11020.000 | 25.88 | 38.52 | 45.04 | 0.00 | 13.93 | 33.29 | 54.00 | -20.71 | --- | --- | Aver |
| 2 | PP16530.000 | 23.20 | 41.55 | 46.64 | 0.00 | 17.47 | 35.58 | 54.00 | -18.42 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00245.EMI

Date: 2022-06-09

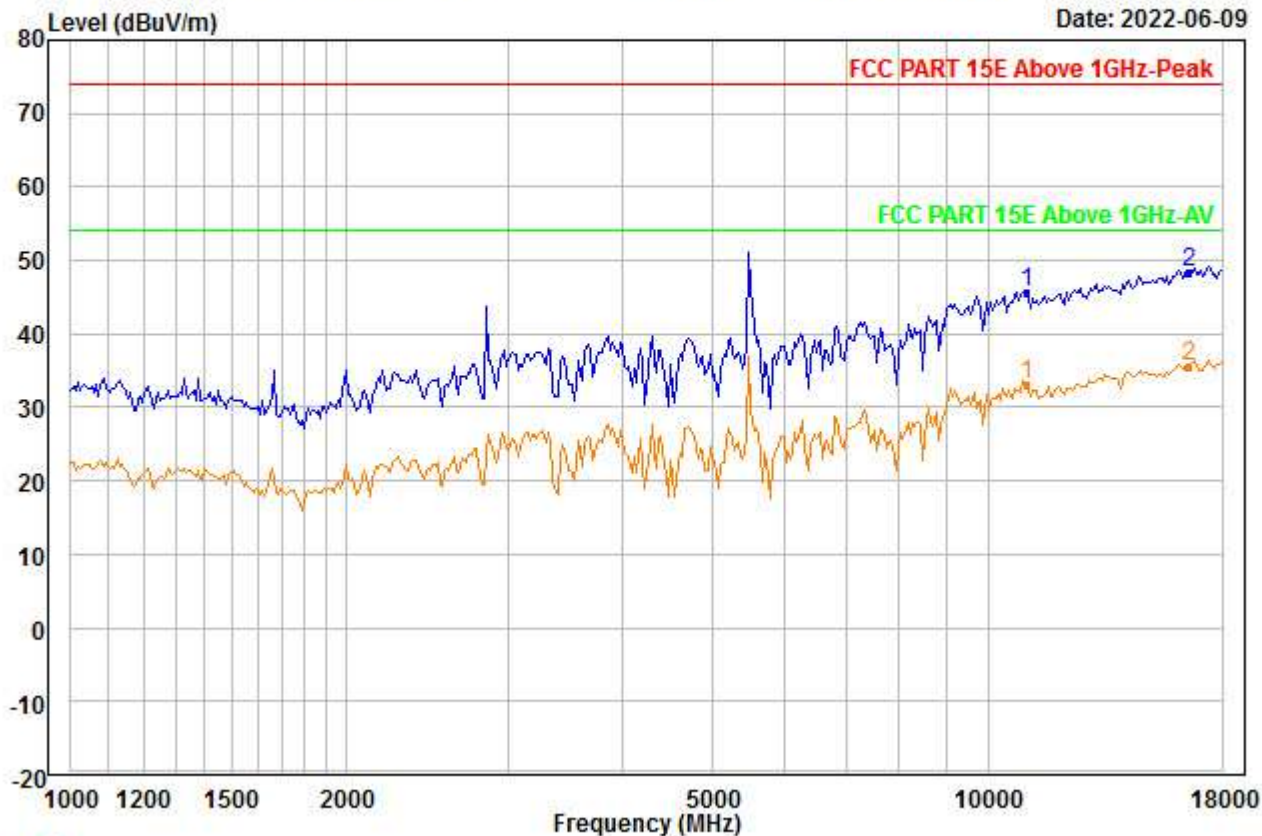


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5510
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 11020.000 | 38.32 | 38.52 | 45.04 | 0.00 | 13.93 | 45.73 | 74.00 | -28.27 | --- | --- | Peak |
| 2 PP16530.000 | 36.14 | 41.55 | 46.64 | 0.00 | 17.47 | 48.52 | 74.00 | -25.48 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00246.EMI

Date: 2022-06-09

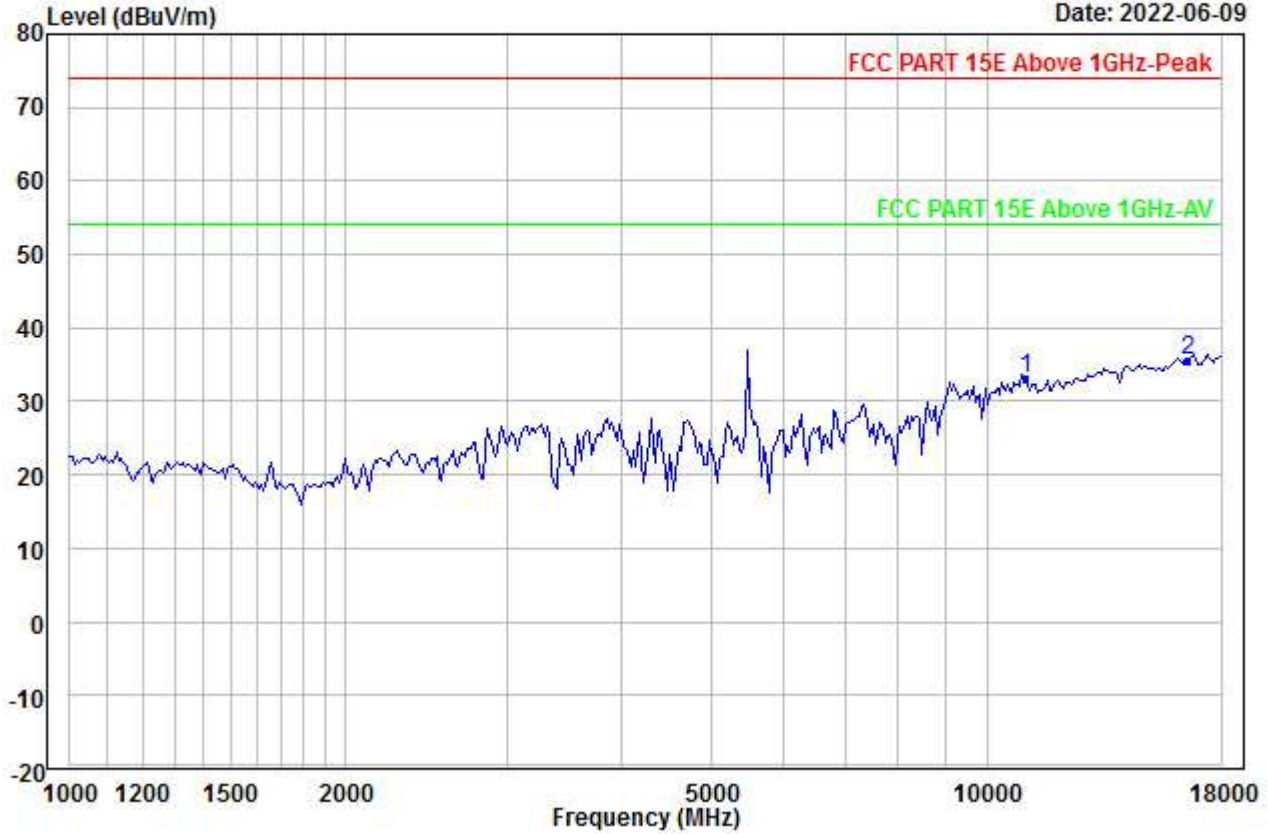


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5510
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 11020.000 | 25.81 | 38.52 | 45.04 | 0.00 | 13.93 | 33.22 | 54.00 | -20.78 | --- | --- | Aver |
| 2 PP16530.000 | 23.20 | 41.55 | 46.64 | 0.00 | 17.47 | 35.58 | 54.00 | -18.42 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00247.EMI

Date: 2022-06-09

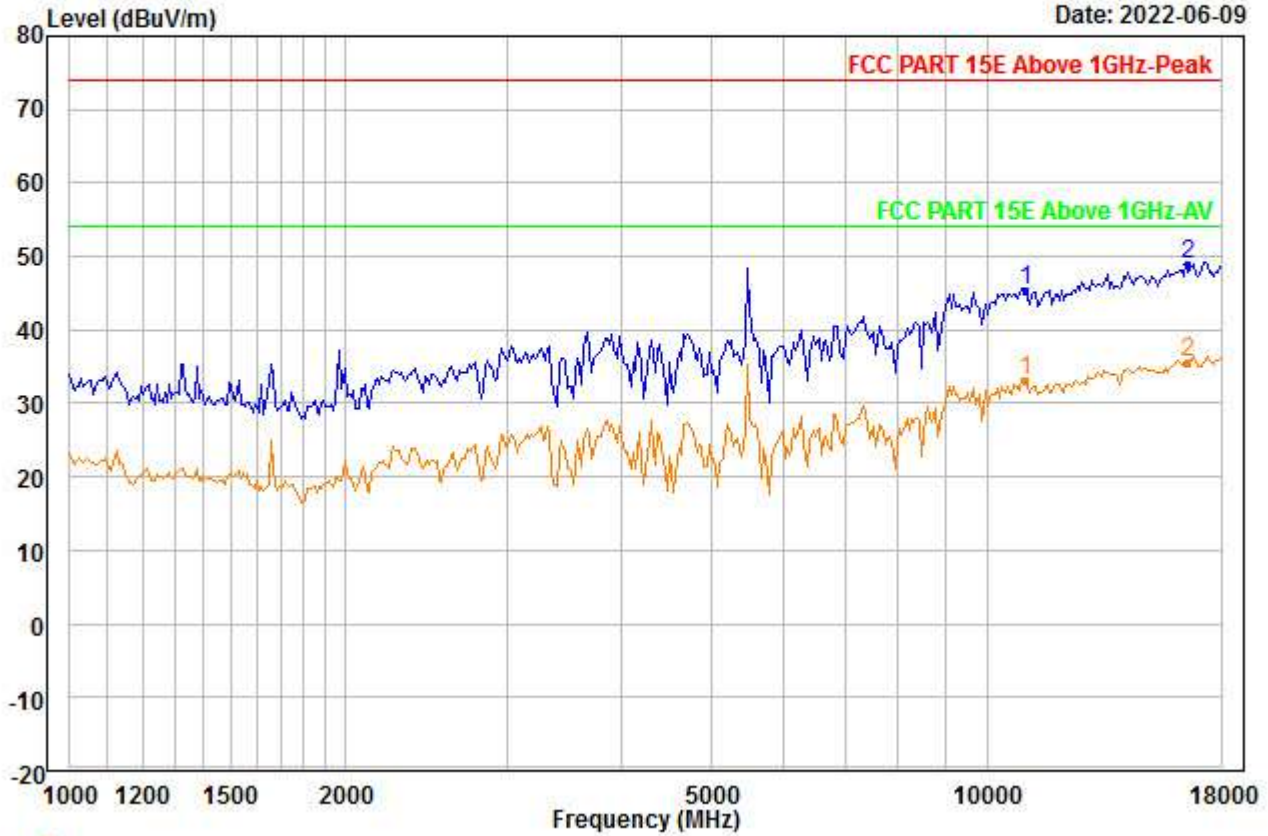


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5510
 Remark :

| | Read Freq | Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Remarks |
|---|-------------|-------|------------|---------------|------------|------------|--------|------------|------------|------|------|---------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 11020.000 | 37.98 | 38.52 | 45.04 | 0.00 | 13.93 | 45.39 | 74.00 | -28.61 | --- | --- | Peak |
| 2 | PP16530.000 | 36.43 | 41.55 | 46.64 | 0.00 | 17.47 | 48.81 | 74.00 | -25.19 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00248.EMI

Date: 2022-06-09

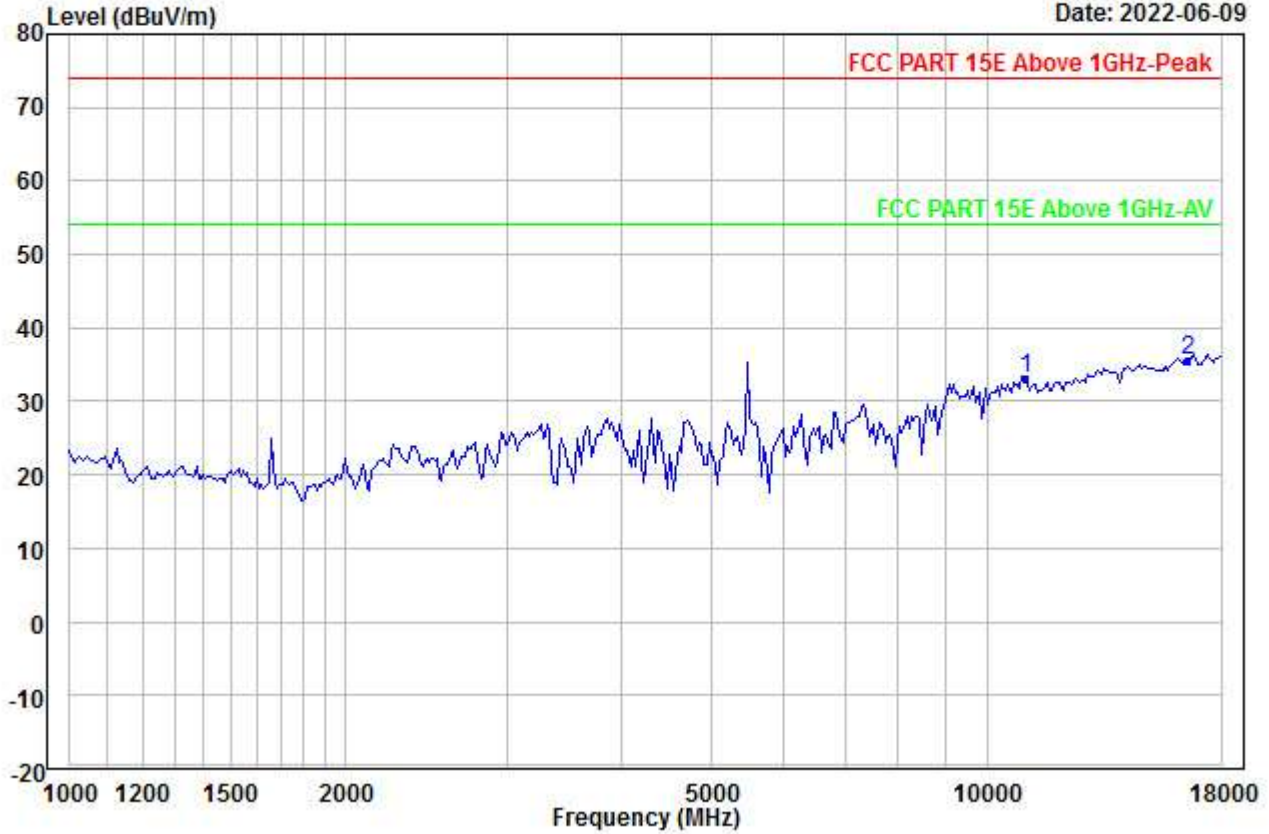


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5510
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 11020.000 | 25.81 | 38.52 | 45.04 | 0.00 | 13.93 | 33.22 | 54.00 | -20.78 | --- | --- | Aver |
| 2 PP16530.000 | 23.20 | 41.55 | 46.64 | 0.00 | 17.47 | 35.58 | 54.00 | -18.42 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00249.EMI

Date: 2022-06-09

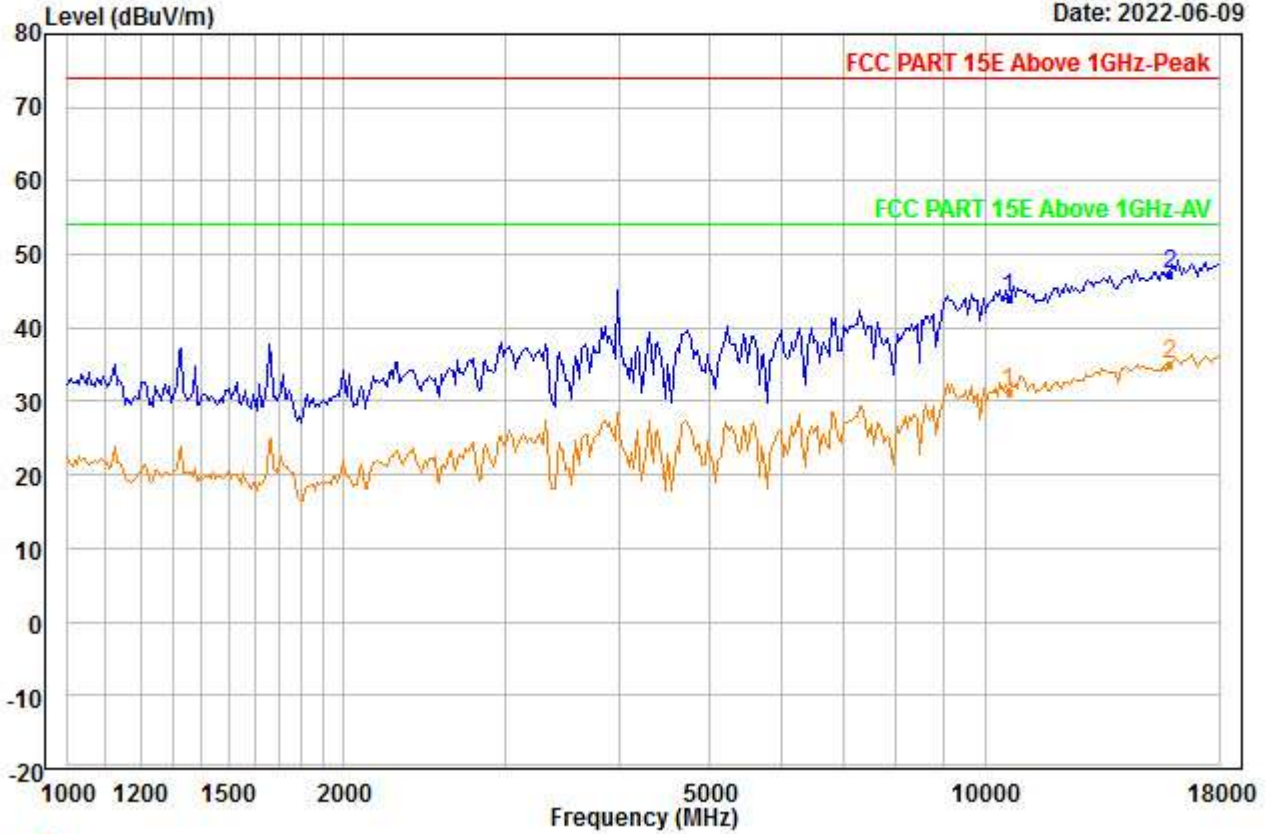


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5310
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 10620.000 | 37.37 | 38.27 | 45.68 | 0.00 | 14.02 | 43.98 | 74.00 | -30.02 | --- | --- | Peak |
| 2 PP15930.000 | 35.52 | 40.80 | 46.24 | 0.00 | 17.19 | 47.27 | 74.00 | -26.73 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00250.EMI

Date: 2022-06-09

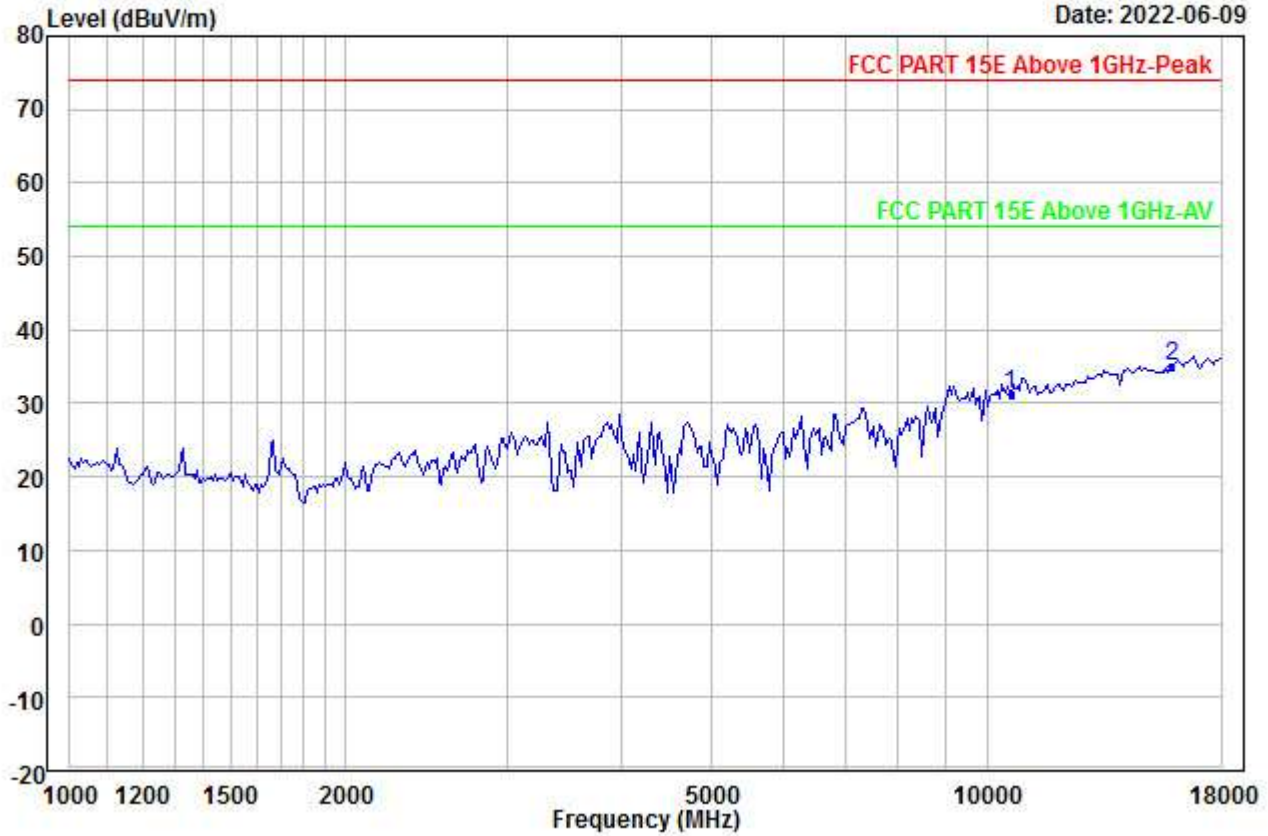


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5310
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 10620.000 | 24.61 | 38.27 | 45.68 | 0.00 | 14.02 | 31.22 | 54.00 | -22.78 | --- | --- | Aver |
| 2 PP15930.000 | 23.43 | 40.80 | 46.24 | 0.00 | 17.19 | 35.18 | 54.00 | -18.82 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00251.EMI

Date: 2022-06-09

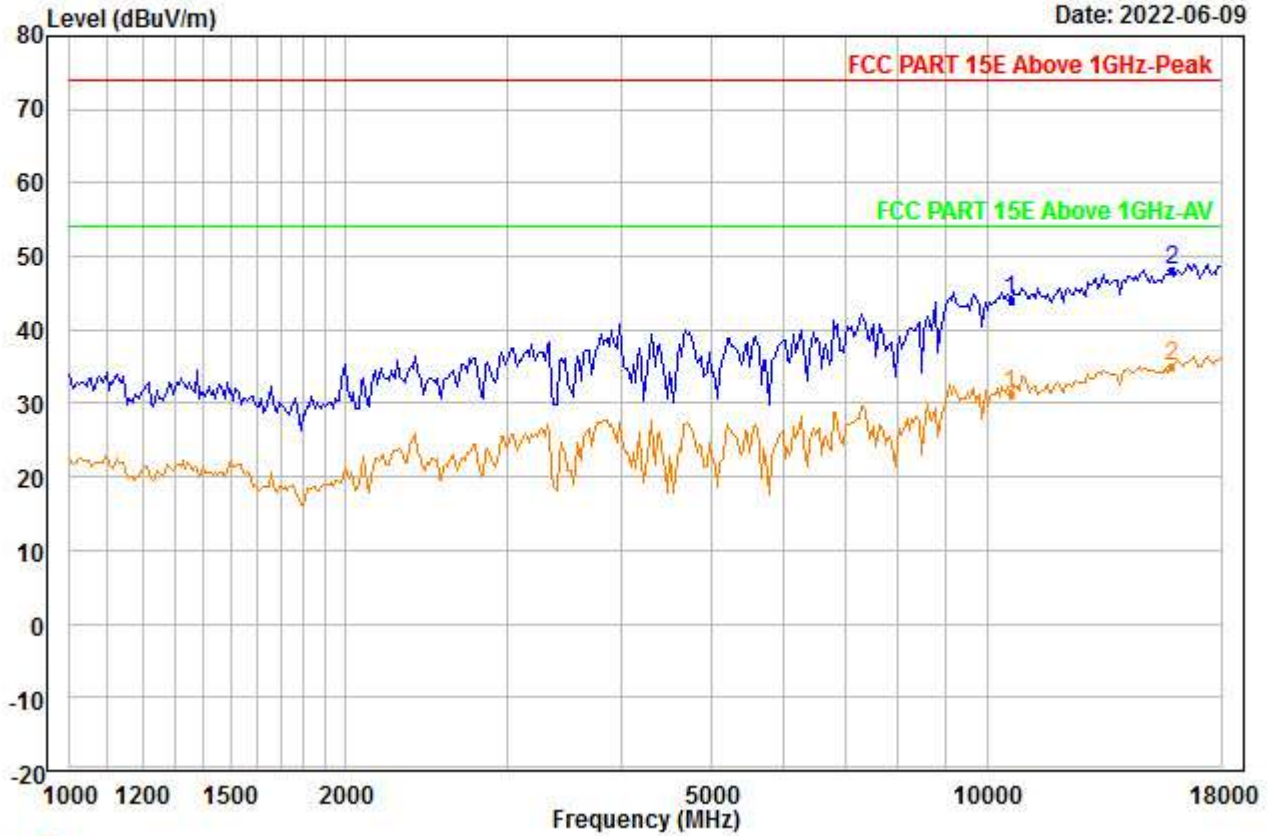


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5310
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 10620.000 | 37.33 | 38.27 | 45.68 | 0.00 | 14.02 | 43.94 | 74.00 | -30.06 | --- | --- | Peak |
| 2 PP15930.000 | 36.26 | 40.80 | 46.24 | 0.00 | 17.19 | 48.01 | 74.00 | -25.99 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00252.EMI

Date: 2022-06-09

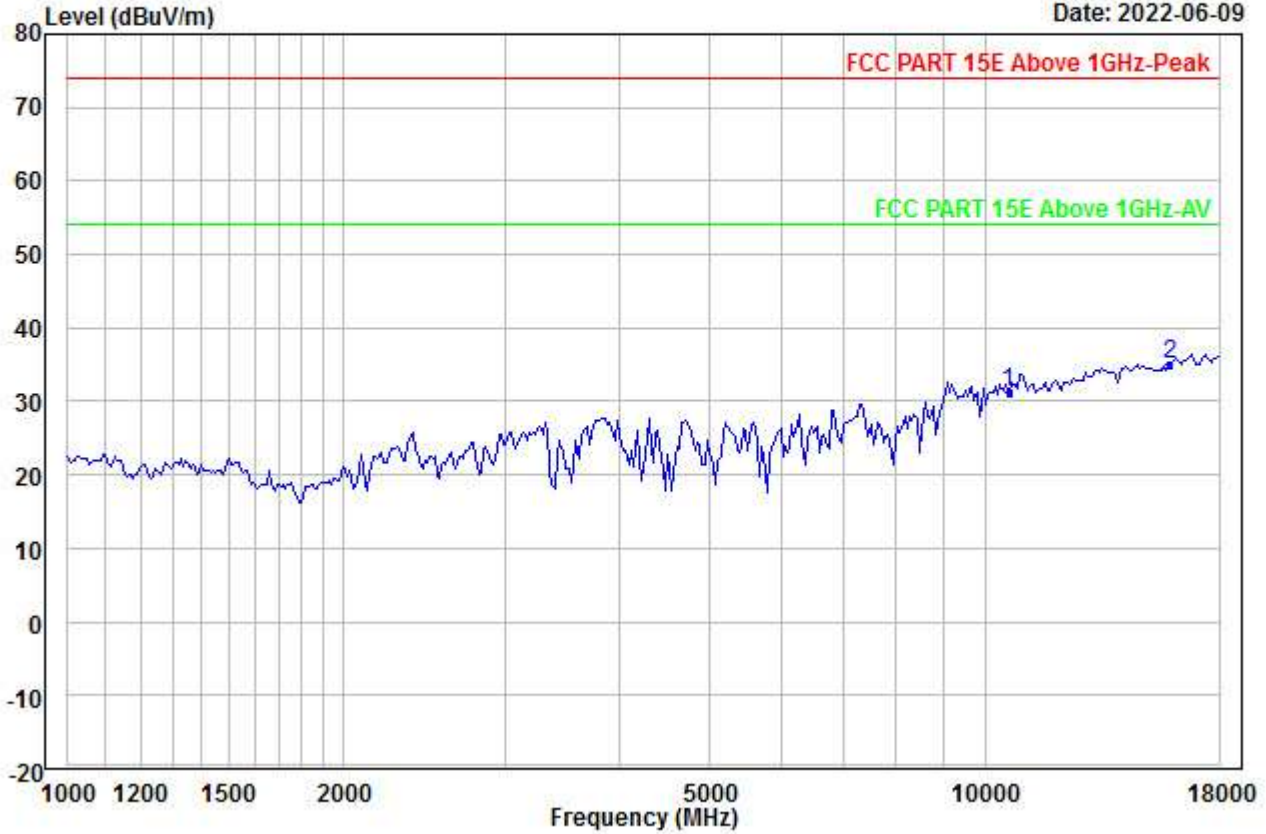


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5310
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 10620.000 | 24.70 | 38.27 | 45.68 | 0.00 | 14.02 | 31.31 | 54.00 | -22.69 | --- | --- | Aver |
| 2 PP15930.000 | 23.43 | 40.80 | 46.24 | 0.00 | 17.19 | 35.18 | 54.00 | -18.82 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00253.EMI

Date: 2022-06-09

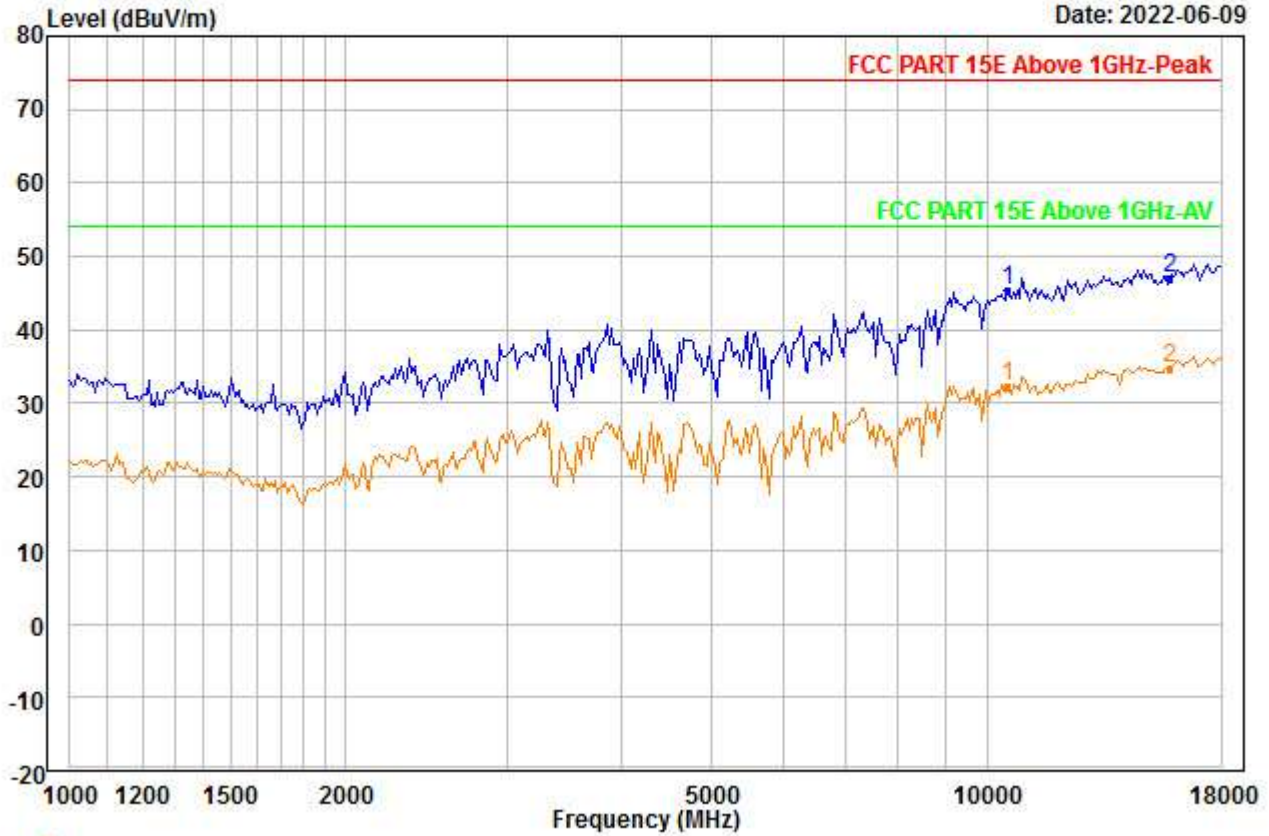


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5270
 Remark :

| | Read Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Rem: |
|---|-------------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 10540.000 | 38.85 | 38.22 | 45.83 | 0.00 | 14.03 | 45.27 | 74.00 | -28.73 | --- | --- | Peak |
| 2 | PP15810.000 | 35.42 | 40.63 | 46.15 | 0.00 | 17.11 | 47.01 | 74.00 | -26.99 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00254.EMI

Date: 2022-06-09

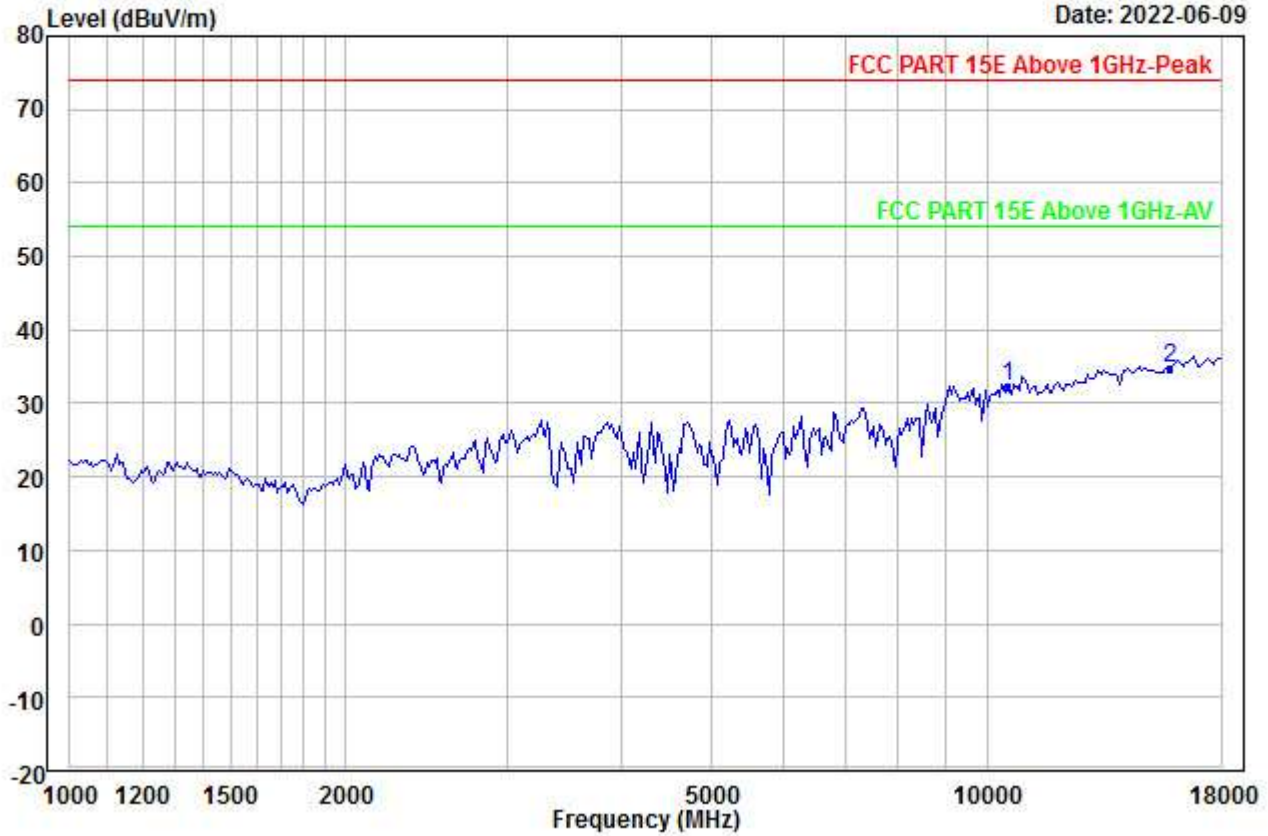


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5270
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 10540.000 | 25.86 | 38.22 | 45.83 | 0.00 | 14.03 | 32.28 | 54.00 | -21.72 | --- | --- | Aver |
| 2 PP15810.000 | 23.27 | 40.63 | 46.15 | 0.00 | 17.11 | 34.86 | 54.00 | -19.14 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00255.EMI

Date: 2022-06-09

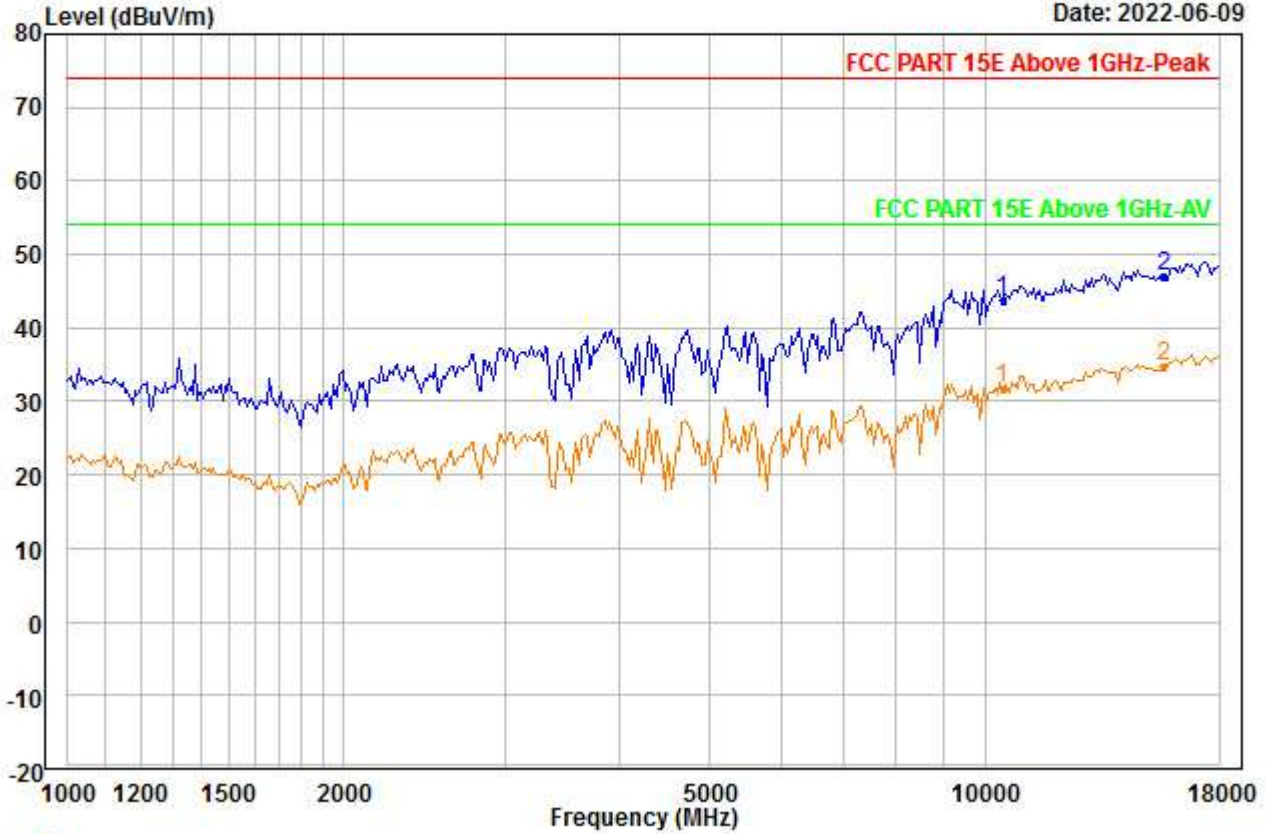


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5230
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 10460.000 | 37.42 | 38.18 | 45.92 | 0.00 | 14.06 | 43.74 | 74.00 | -30.26 | --- | --- | Peak |
| 2 PP15690.000 | 35.52 | 40.47 | 46.05 | 0.00 | 17.03 | 46.97 | 74.00 | -27.03 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00256.EMI

Date: 2022-06-09

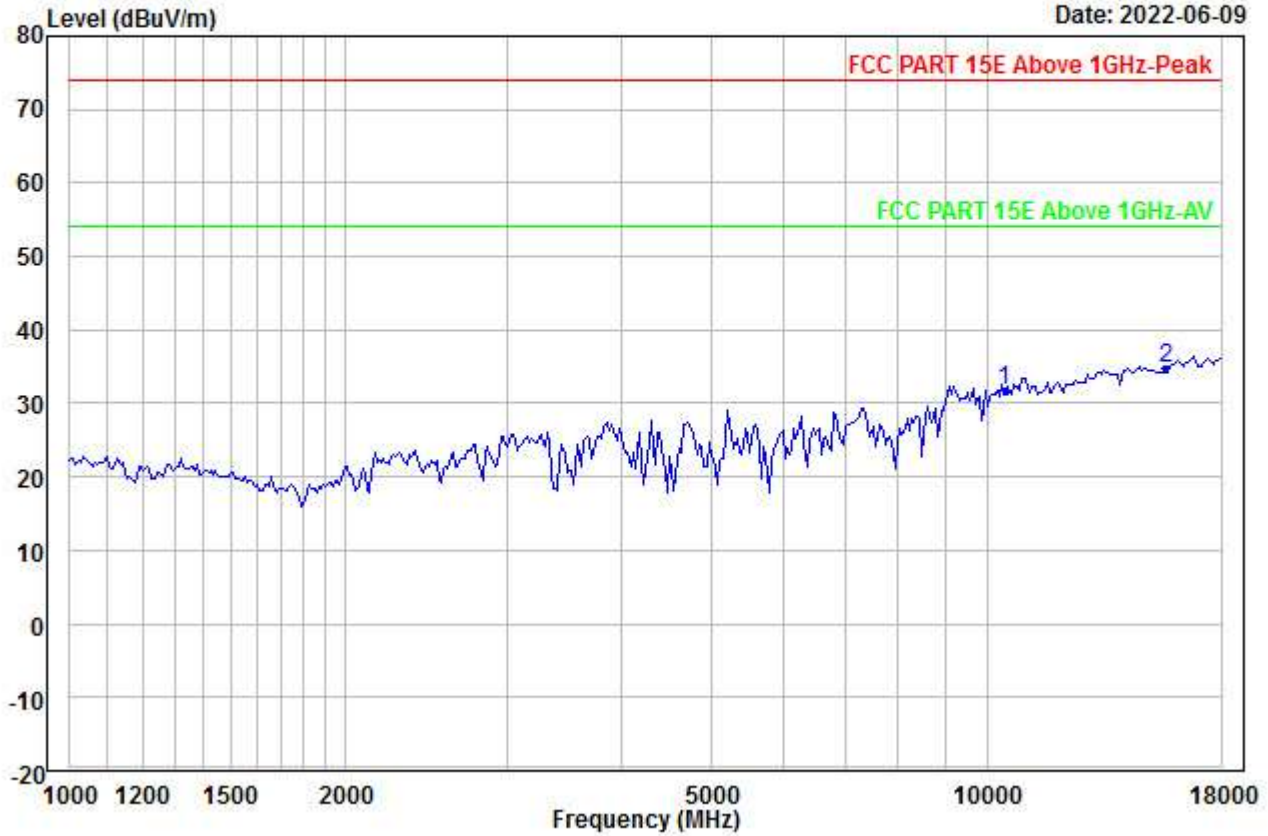


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5230
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 10460.000 | 25.55 | 38.18 | 45.92 | 0.00 | 14.06 | 31.87 | 54.00 | -22.13 | --- | --- | Aver |
| 2 PP15690.000 | 23.39 | 40.47 | 46.05 | 0.00 | 17.03 | 34.84 | 54.00 | -19.16 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00257.EMI

Date: 2022-06-09

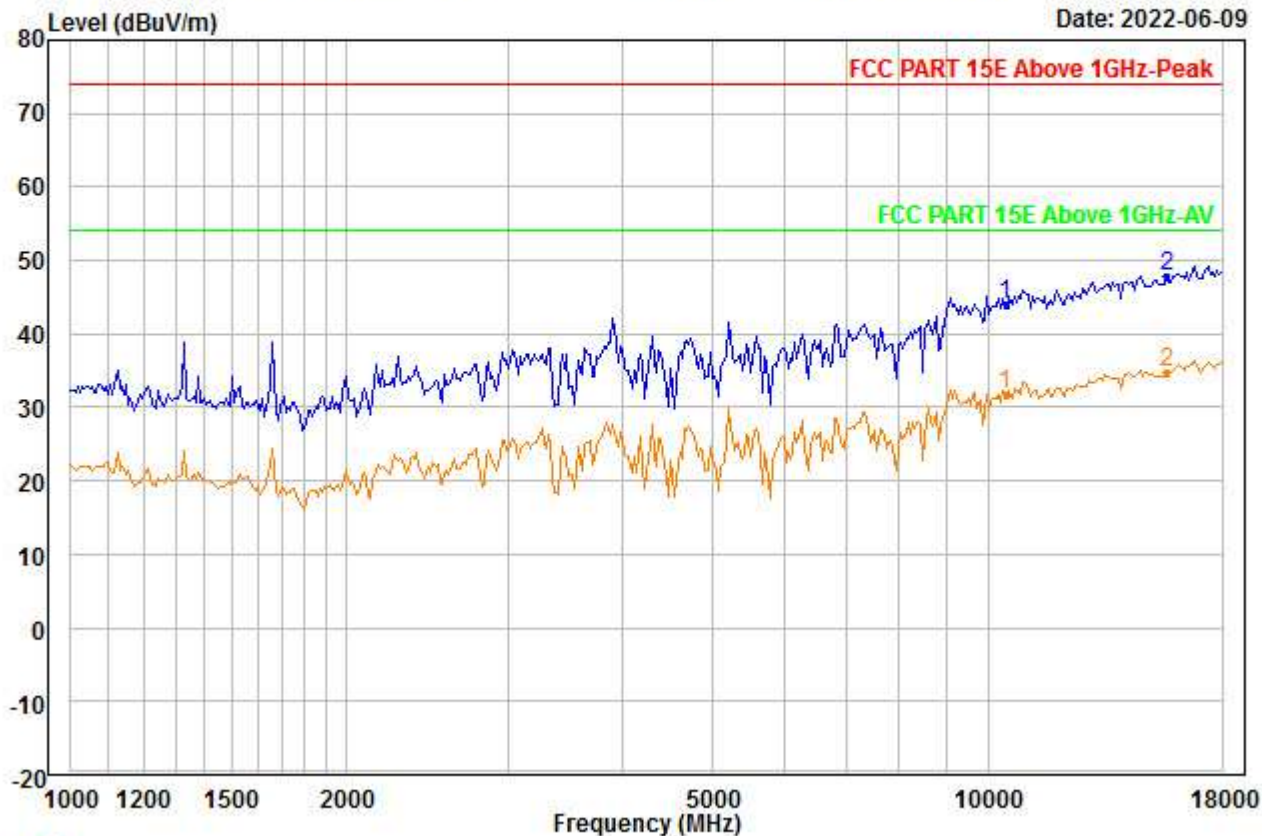


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5230
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 10460.000 | 37.67 | 38.18 | 45.92 | 0.00 | 14.06 | 43.99 | 74.00 | -30.01 | --- | --- | Peak |
| 2 PP15690.000 | 36.37 | 40.47 | 46.05 | 0.00 | 17.03 | 47.82 | 74.00 | -26.18 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00258.EMI

Date: 2022-06-09

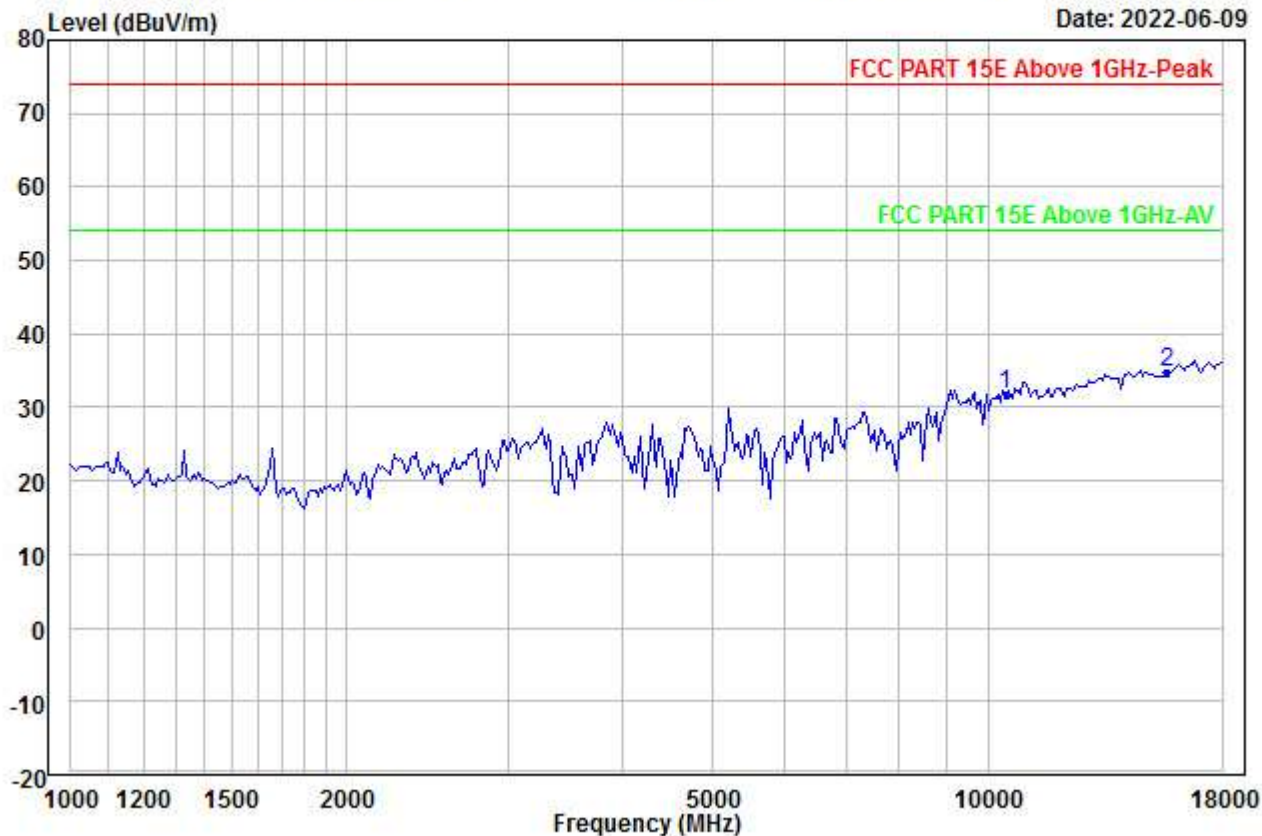


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5230
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 10460.000 | 25.40 | 38.18 | 45.92 | 0.00 | 14.06 | 31.72 | 54.00 | -22.28 | --- | --- | Aver |
| 2 PP15690.000 | 23.19 | 40.47 | 46.05 | 0.00 | 17.03 | 34.64 | 54.00 | -19.36 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00259.EMI

Date: 2022-06-09

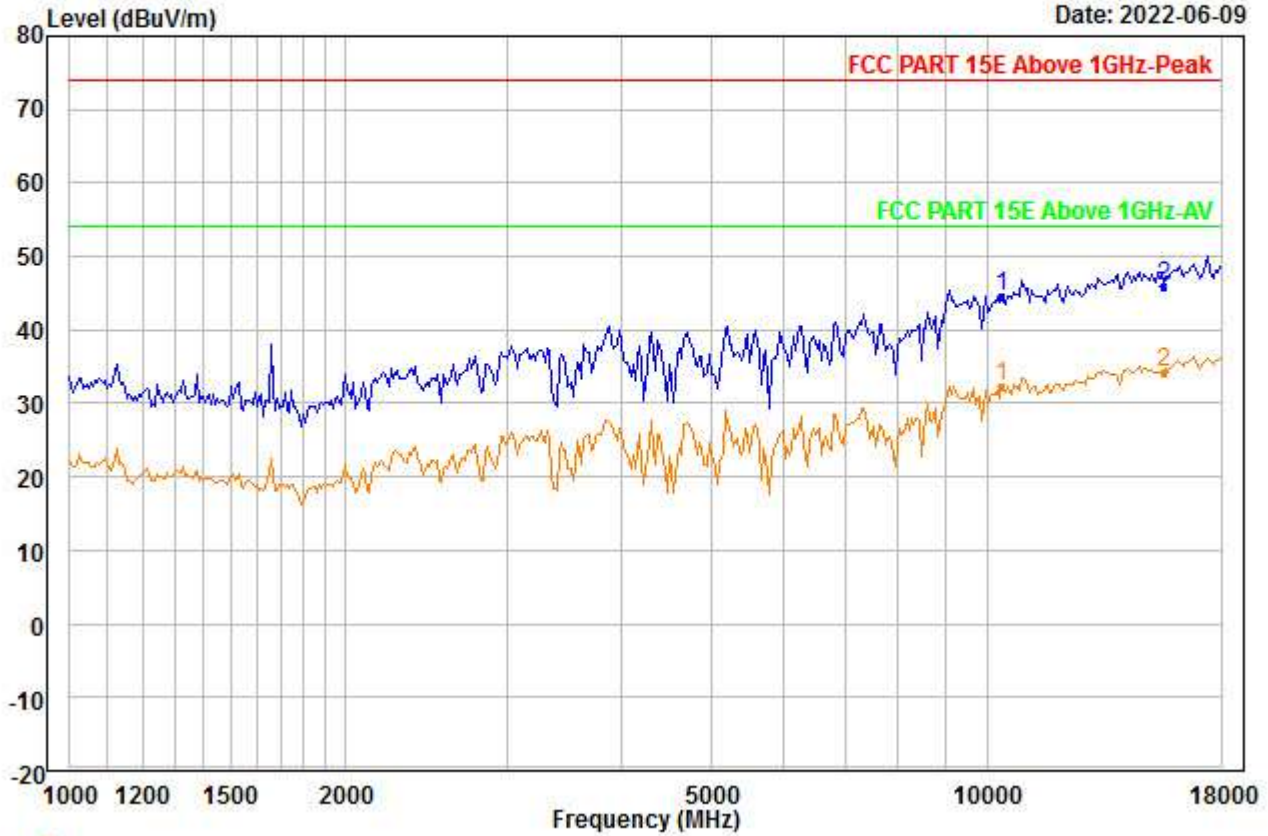


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5190
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 10380.000 | 38.37 | 38.13 | 45.95 | 0.00 | 14.07 | 44.62 | 74.00 | -29.38 | --- | --- | Peak |
| 2 PP15570.000 | 34.68 | 40.30 | 45.96 | 0.00 | 16.95 | 45.97 | 74.00 | -28.03 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00260.EMI

Date: 2022-06-09

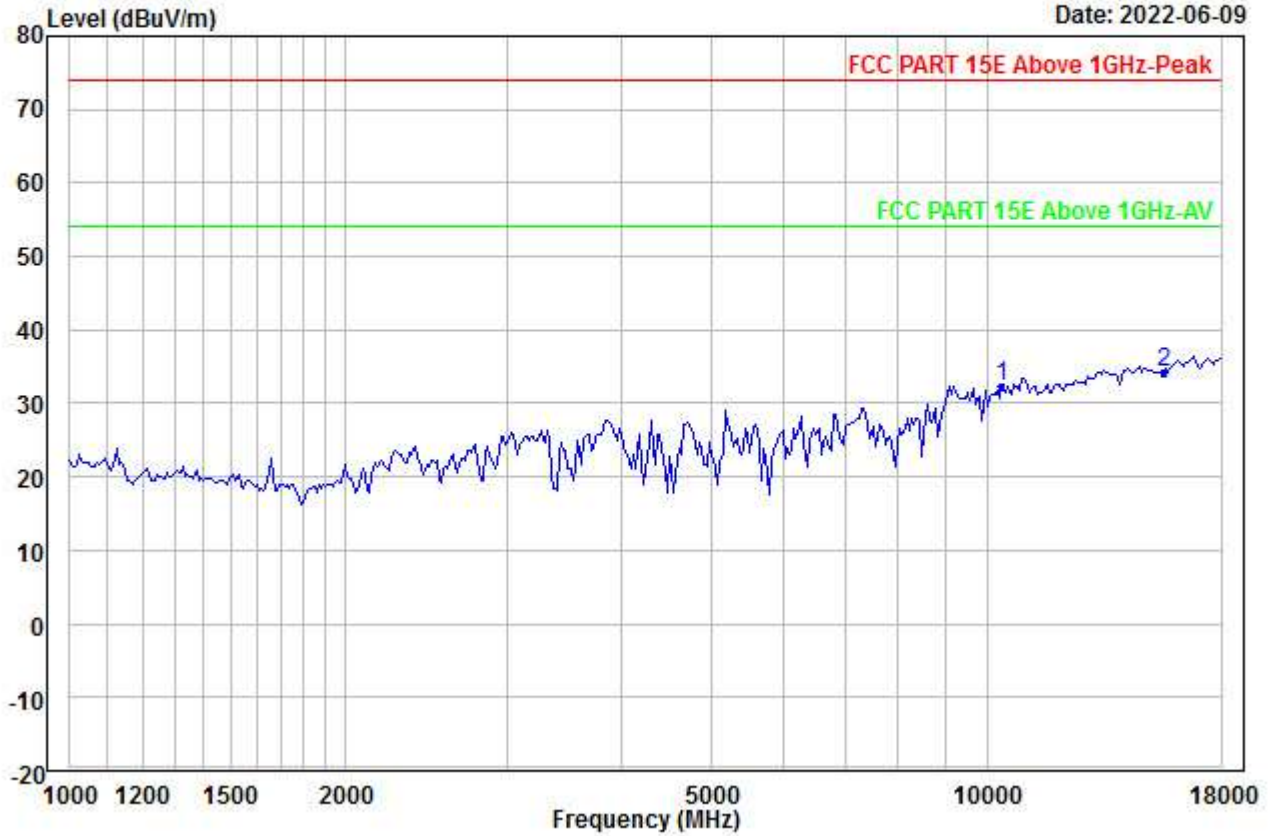


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5190
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 10380.000 | 26.10 | 38.13 | 45.95 | 0.00 | 14.07 | 32.35 | 54.00 | -21.65 | --- | --- | Aver |
| 2 PP15570.000 | 23.03 | 40.30 | 45.96 | 0.00 | 16.95 | 34.32 | 54.00 | -19.68 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00261.EMI

Date: 2022-06-09

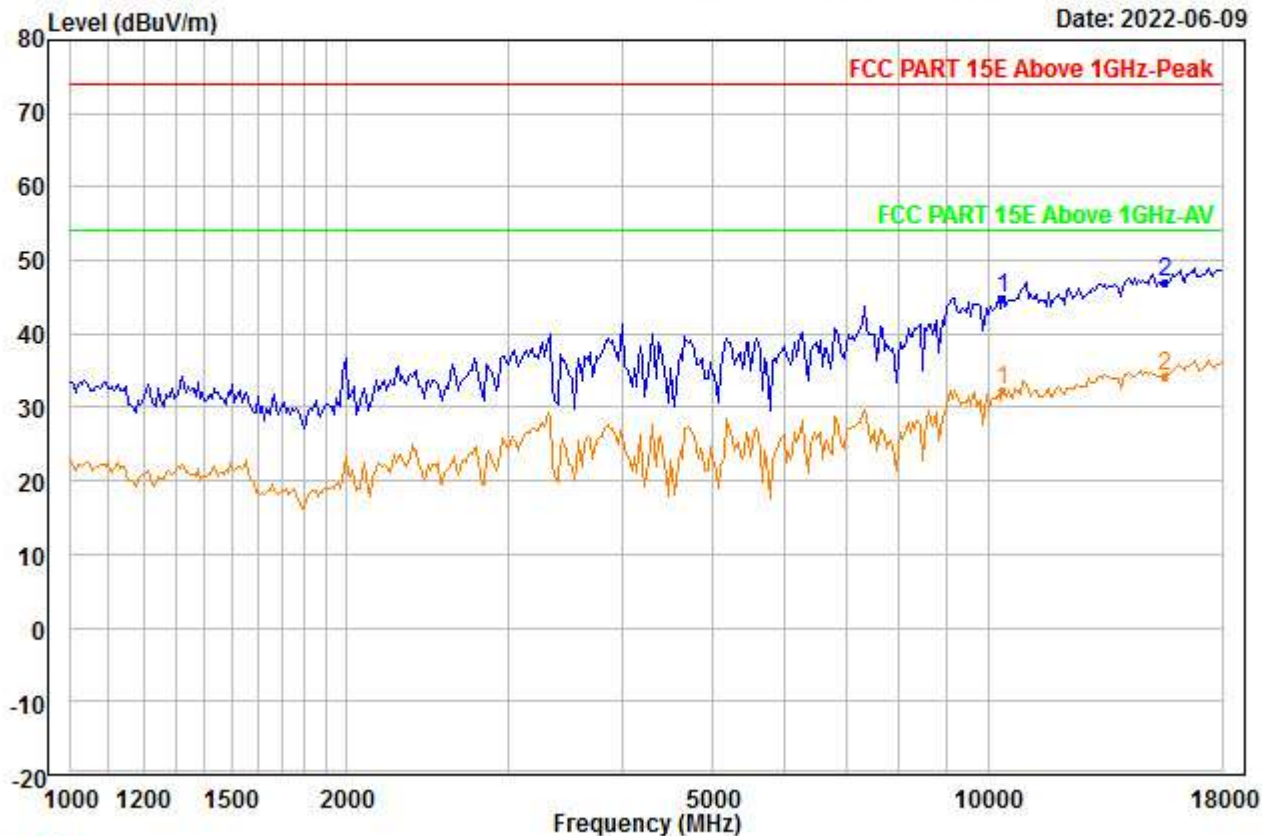


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5190
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 10380.000 | 38.47 | 38.13 | 45.95 | 0.00 | 14.07 | 44.72 | 74.00 | -29.28 | --- | --- | Peak |
| 2 PP15570.000 | 35.64 | 40.30 | 45.96 | 0.00 | 16.95 | 46.93 | 74.00 | -27.07 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00262.EMI

Date: 2022-06-09

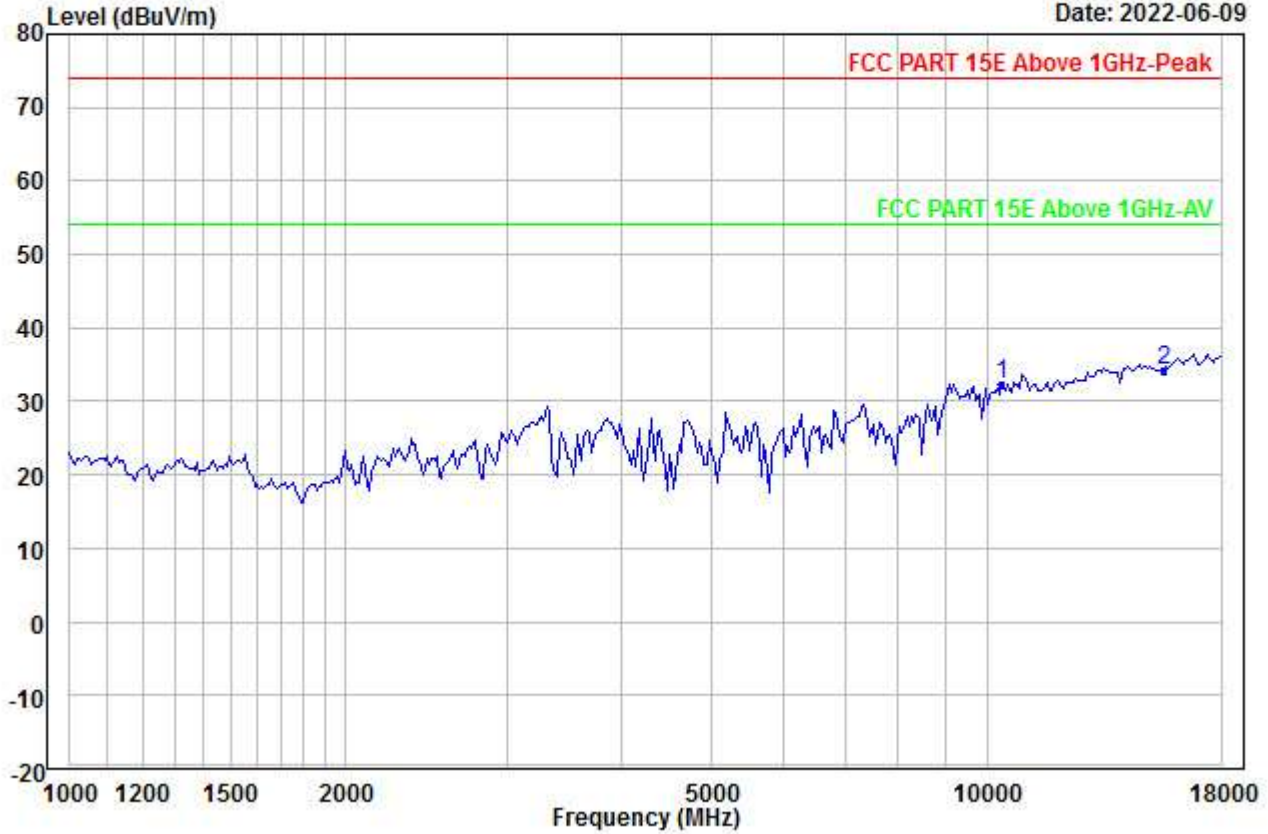


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5190
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 10380.000 | 26.17 | 38.13 | 45.95 | 0.00 | 14.07 | 32.42 | 54.00 | -21.58 | --- | --- | Aver |
| 2 PP15570.000 | 23.03 | 40.30 | 45.96 | 0.00 | 16.95 | 34.32 | 54.00 | -19.68 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00263.EMI

Date: 2022-06-09

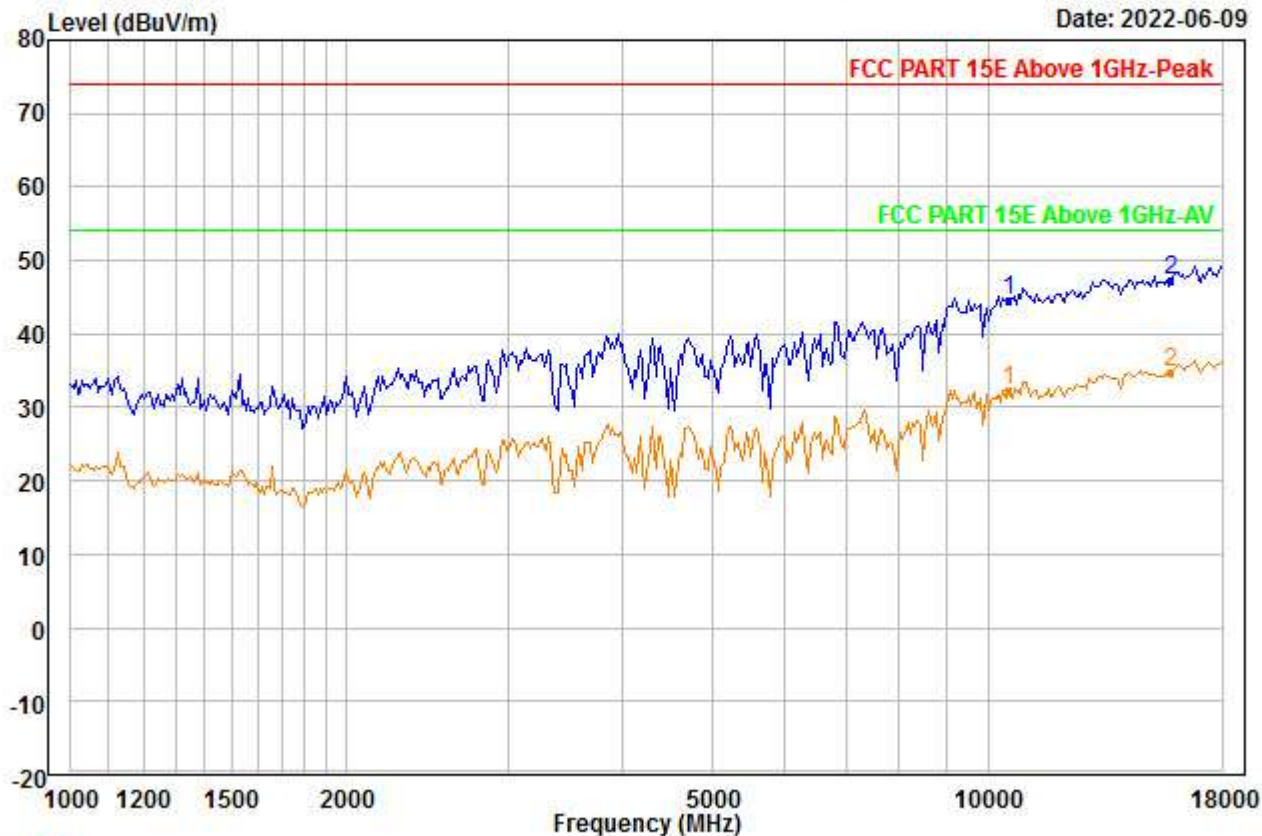


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5270
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 10540.000 | 38.18 | 38.22 | 45.83 | 0.00 | 14.03 | 44.60 | 74.00 | -29.40 | --- | --- | Peak |
| 2 PP15810.000 | 35.82 | 40.63 | 46.15 | 0.00 | 17.11 | 47.41 | 74.00 | -26.59 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00264.EMI

Date: 2022-06-09

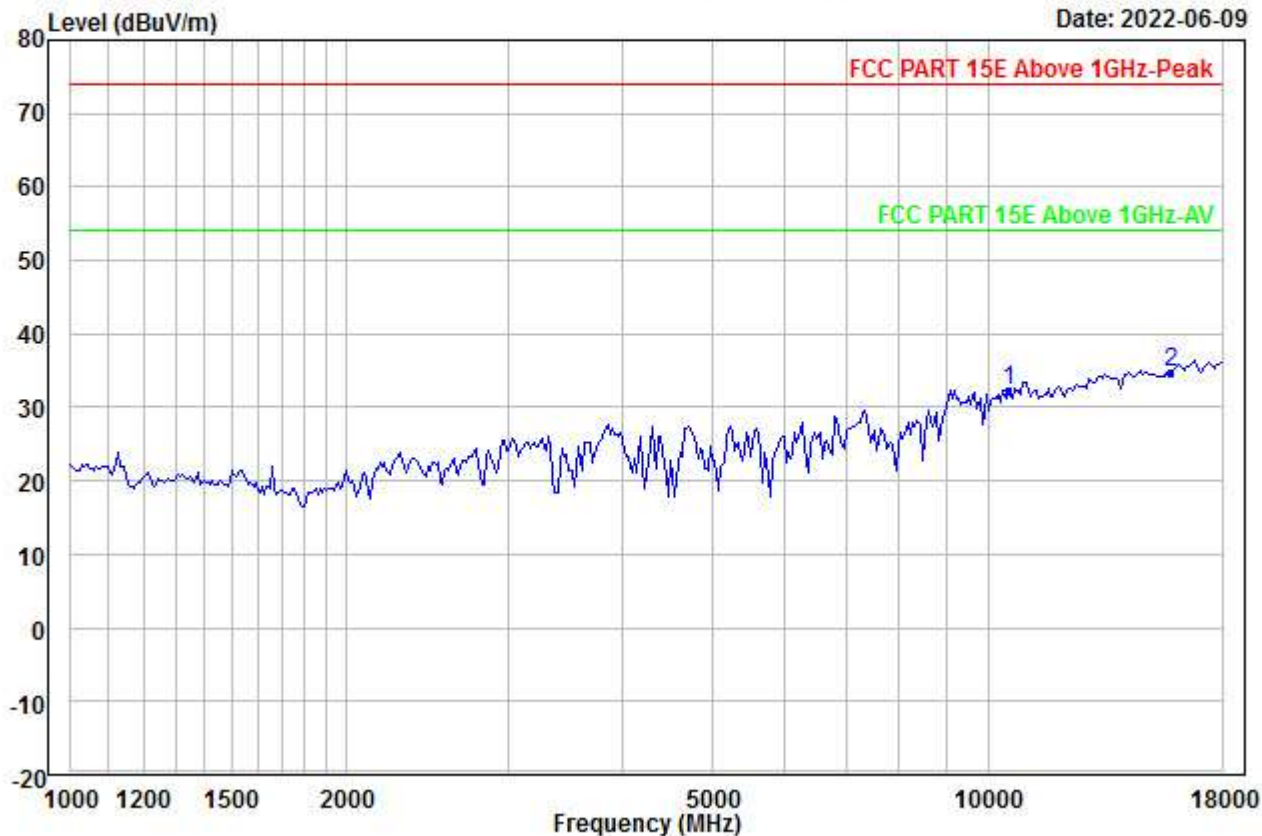


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5270
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 10540.000 | 25.86 | 38.22 | 45.83 | 0.00 | 14.03 | 32.28 | 54.00 | -21.72 | --- | --- | Aver |
| 2 PP15810.000 | 23.17 | 40.63 | 46.15 | 0.00 | 17.11 | 34.76 | 54.00 | -19.24 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00265.EMI

Date: 2022-06-09

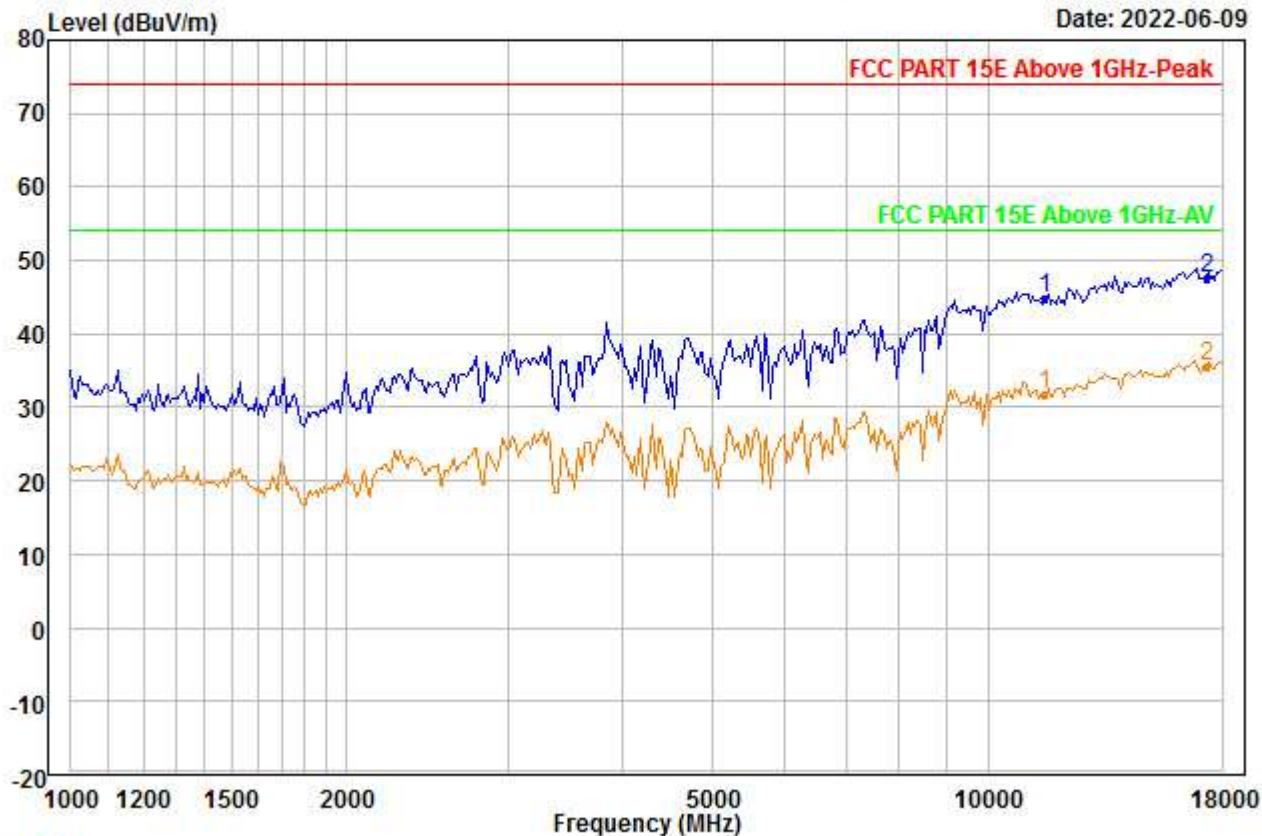


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC80_ANT0+1_5775
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 11550.000 | 37.56 | 38.93 | 46.09 | 0.00 | 14.32 | 44.72 | 74.00 | -29.28 | --- | --- | Peak |
| 2 PP17325.000 | 34.40 | 42.17 | 46.81 | 0.00 | 17.88 | 47.64 | 74.00 | -26.36 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00266.EMI

Date: 2022-06-09

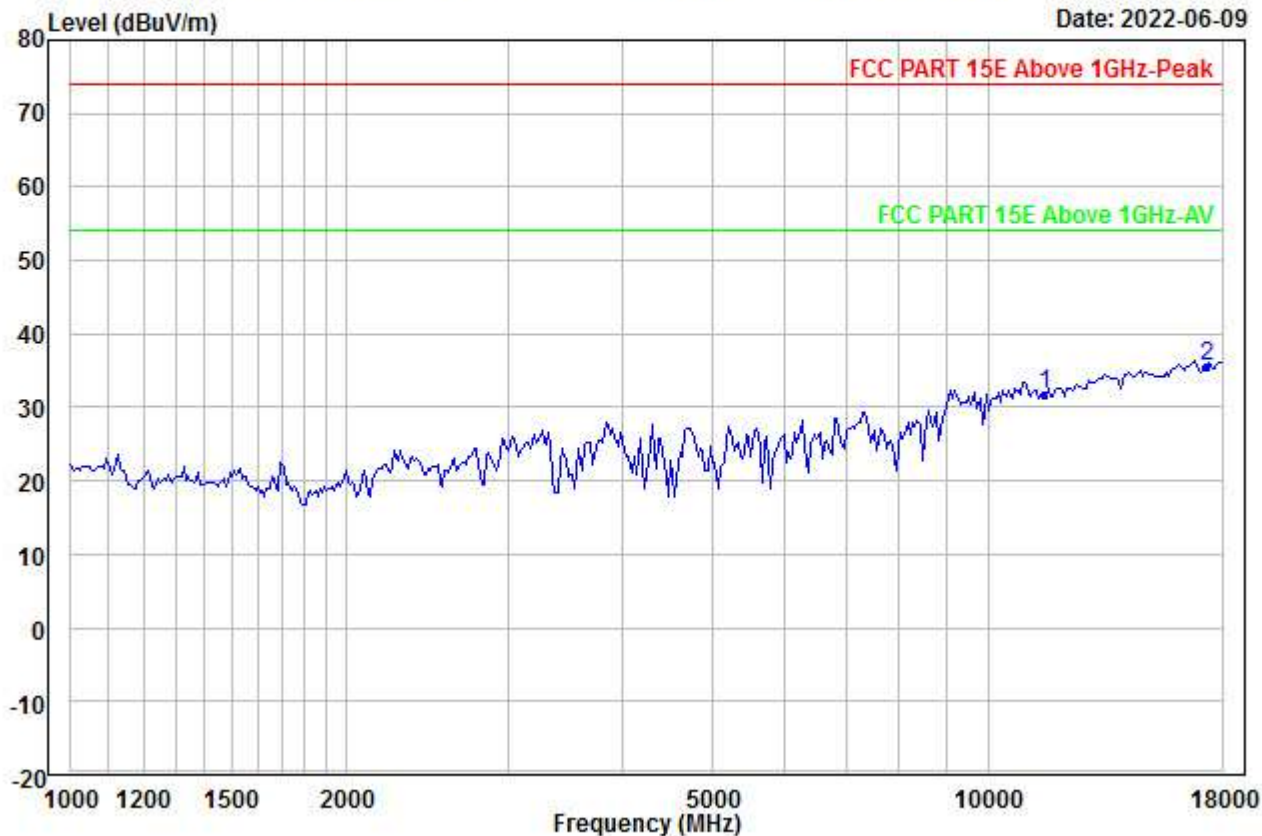


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC80_ANT0+1_5775
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 11550.000 | 24.48 | 38.93 | 46.09 | 0.00 | 14.32 | 31.64 | 54.00 | -22.36 | --- | --- | Aver |
| 2 PP17325.000 | 22.44 | 42.17 | 46.81 | 0.00 | 17.88 | 35.68 | 54.00 | -18.32 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00267.EMI

Date: 2022-06-09

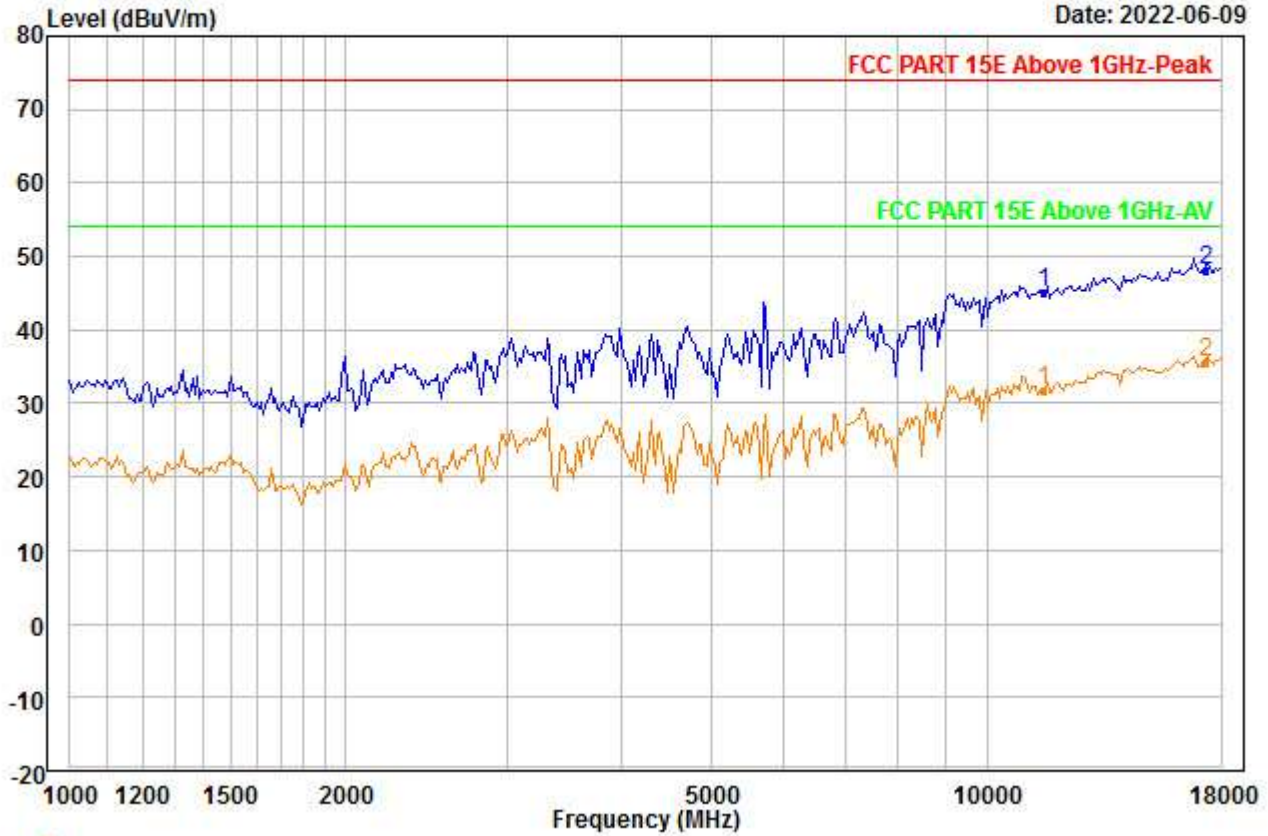


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC80_ANT0+1_5775
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 11550.000 | 38.04 | 38.93 | 46.09 | 0.00 | 14.32 | 45.20 | 74.00 | -28.80 | --- | --- | Peak |
| 2 PP17325.000 | 34.80 | 42.17 | 46.81 | 0.00 | 17.88 | 48.04 | 74.00 | -25.96 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00268.EMI

Date: 2022-06-09

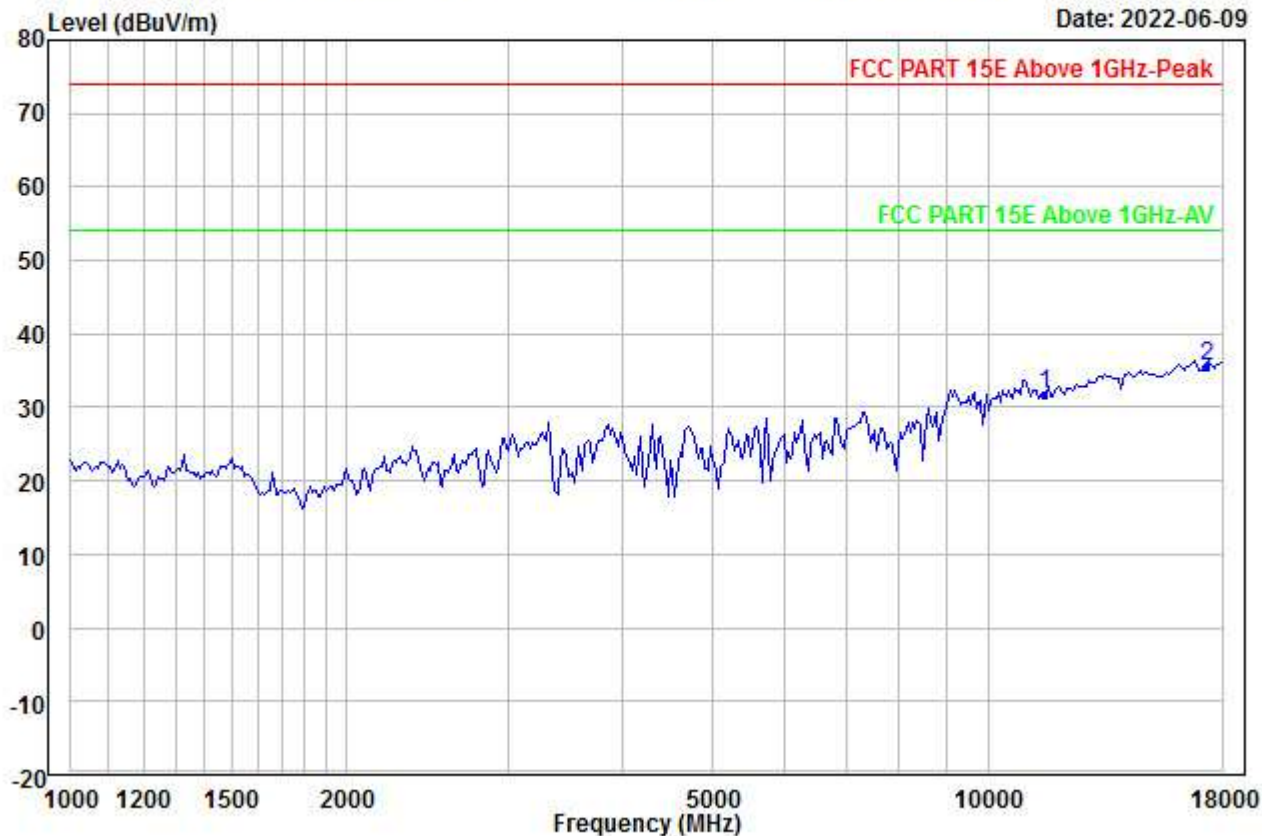


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC80_ANT0+1_5775
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 11550.000 | 24.57 | 38.93 | 46.09 | 0.00 | 14.32 | 31.73 | 54.00 | -22.27 | --- | --- | Aver |
| 2 PP17325.000 | 22.44 | 42.17 | 46.81 | 0.00 | 17.88 | 35.68 | 54.00 | -18.32 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00269.EMI

Date: 2022-06-09

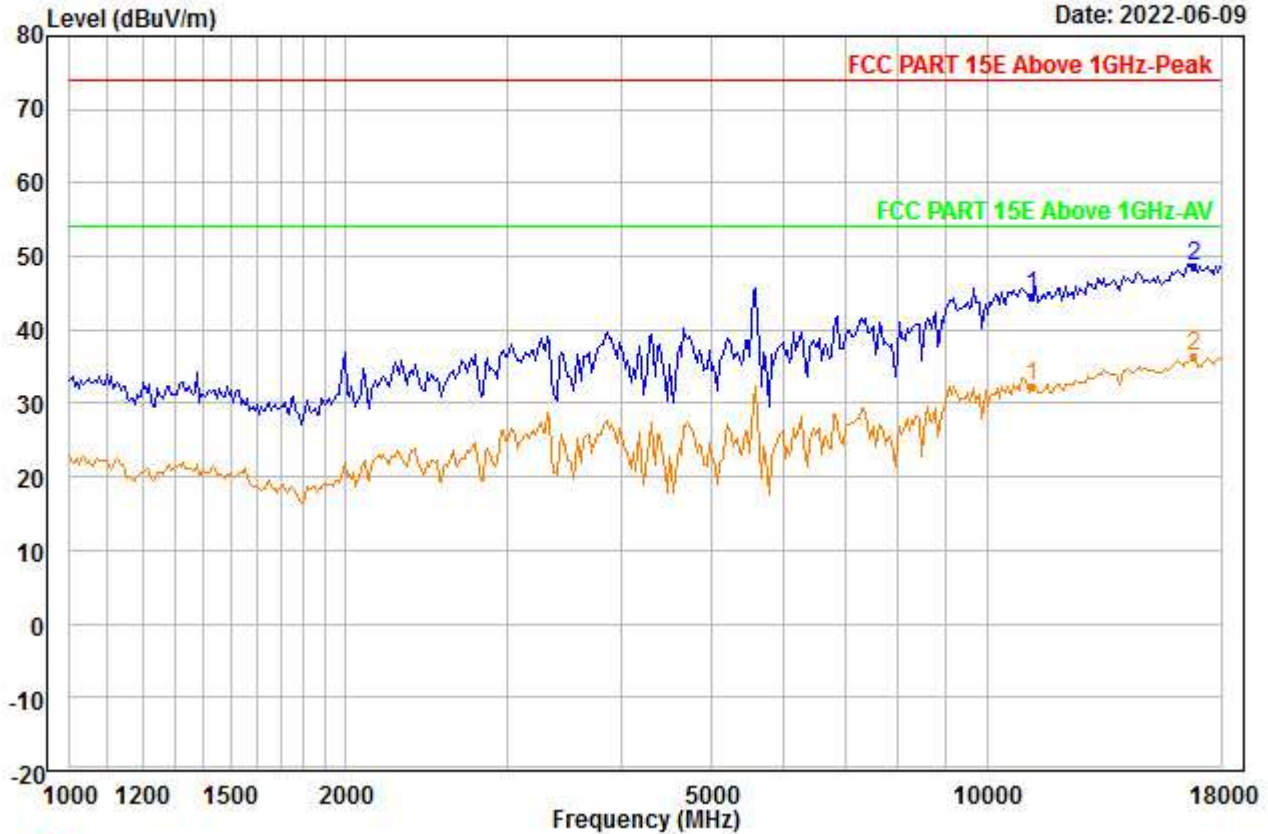


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC80_ANT0+1_5610
 Remark :

| | Read Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Rem: |
|---|-------------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 11220.000 | 37.35 | 38.68 | 45.48 | 0.00 | 14.08 | 44.63 | 74.00 | -29.37 | --- | --- | Peak |
| 2 | PP16830.000 | 36.00 | 42.03 | 47.00 | 0.00 | 17.60 | 48.63 | 74.00 | -25.37 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00270.EMI

Date: 2022-06-09

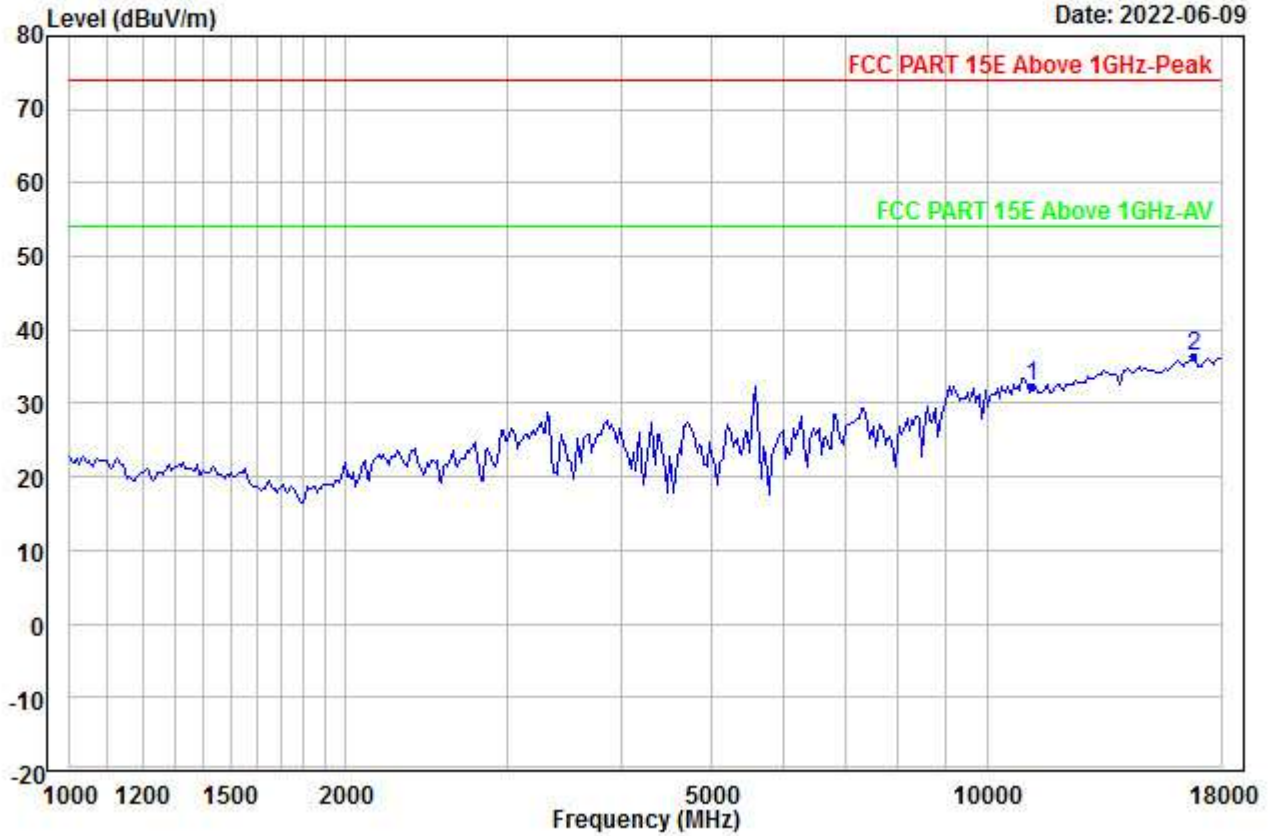


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC80_ANT0+1_5610
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 11220.000 | 24.95 | 38.68 | 45.48 | 0.00 | 14.08 | 32.23 | 54.00 | -21.77 | --- | --- | Aver |
| 2 PP16830.000 | 23.78 | 42.03 | 47.00 | 0.00 | 17.60 | 36.41 | 54.00 | -17.59 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00271.EMI

Date: 2022-06-09

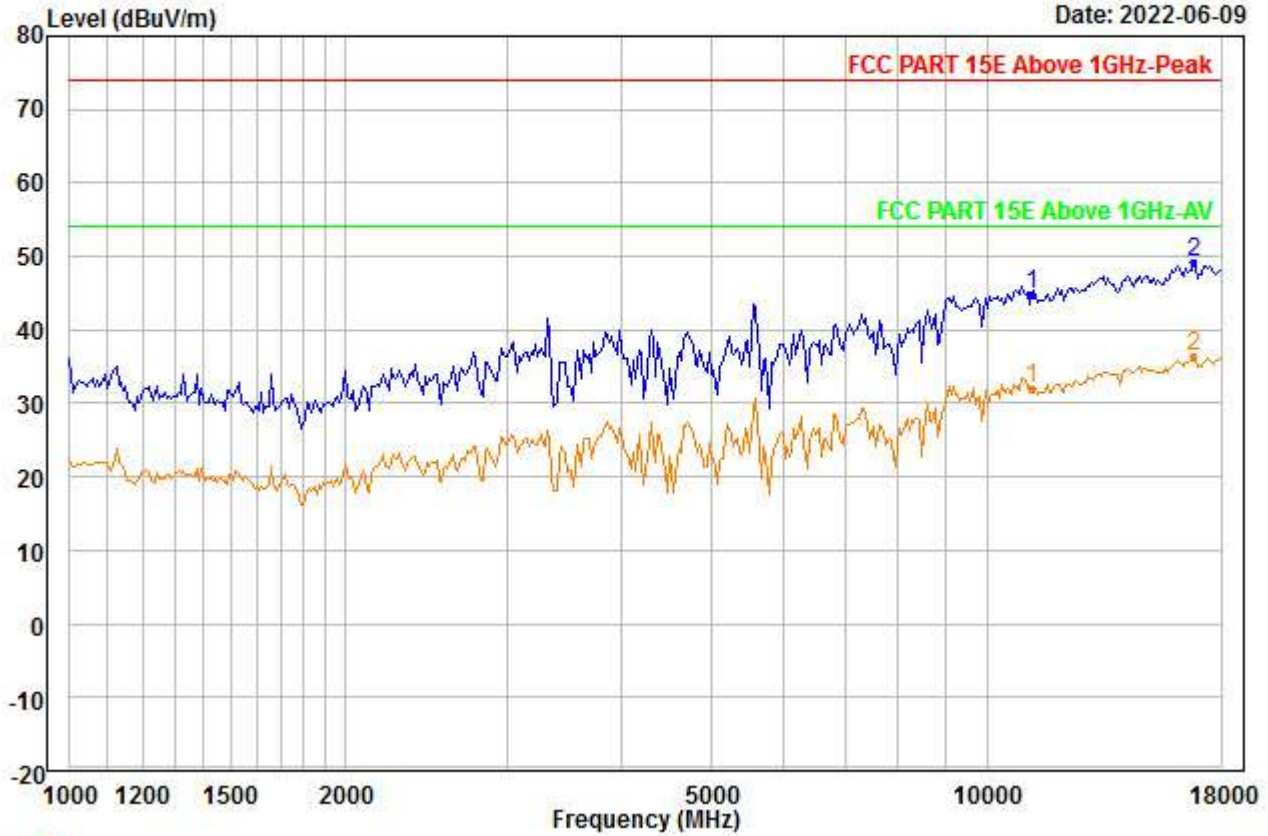


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC80_ANT0+1_5610
 Remark :

| | Read Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Remarks |
|---|-------------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|---------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 11220.000 | 37.47 | 38.68 | 45.48 | 0.00 | 14.08 | 44.75 | 74.00 | -29.25 | --- | --- | Peak |
| 2 | PP16830.000 | 36.60 | 42.03 | 47.00 | 0.00 | 17.60 | 49.23 | 74.00 | -24.77 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00272.EMI

Date: 2022-06-09

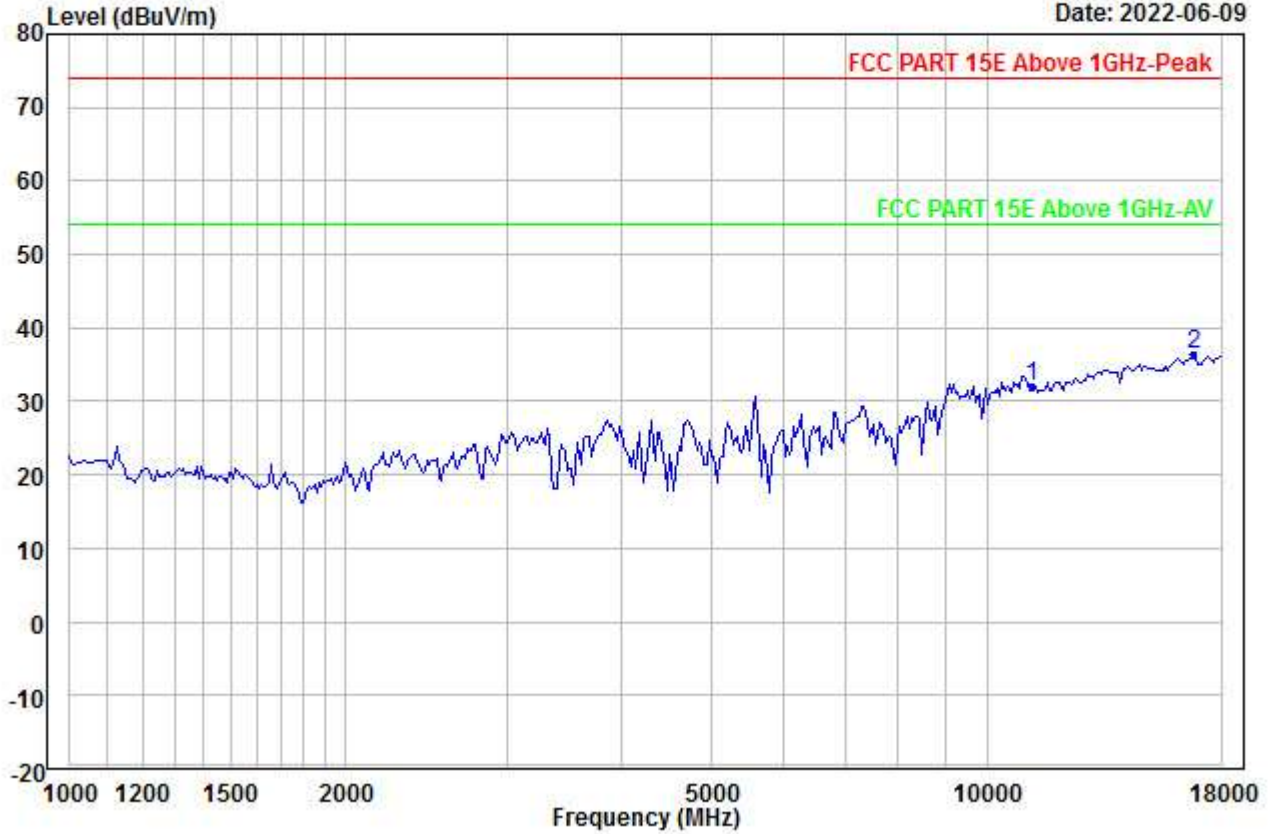


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC80_ANT0+1_5610
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 11220.000 | 24.87 | 38.68 | 45.48 | 0.00 | 14.08 | 32.15 | 54.00 | -21.85 | --- | --- | Aver |
| 2 PP16830.000 | 23.68 | 42.03 | 47.00 | 0.00 | 17.60 | 36.31 | 54.00 | -17.69 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00273.EMI

Date: 2022-06-09

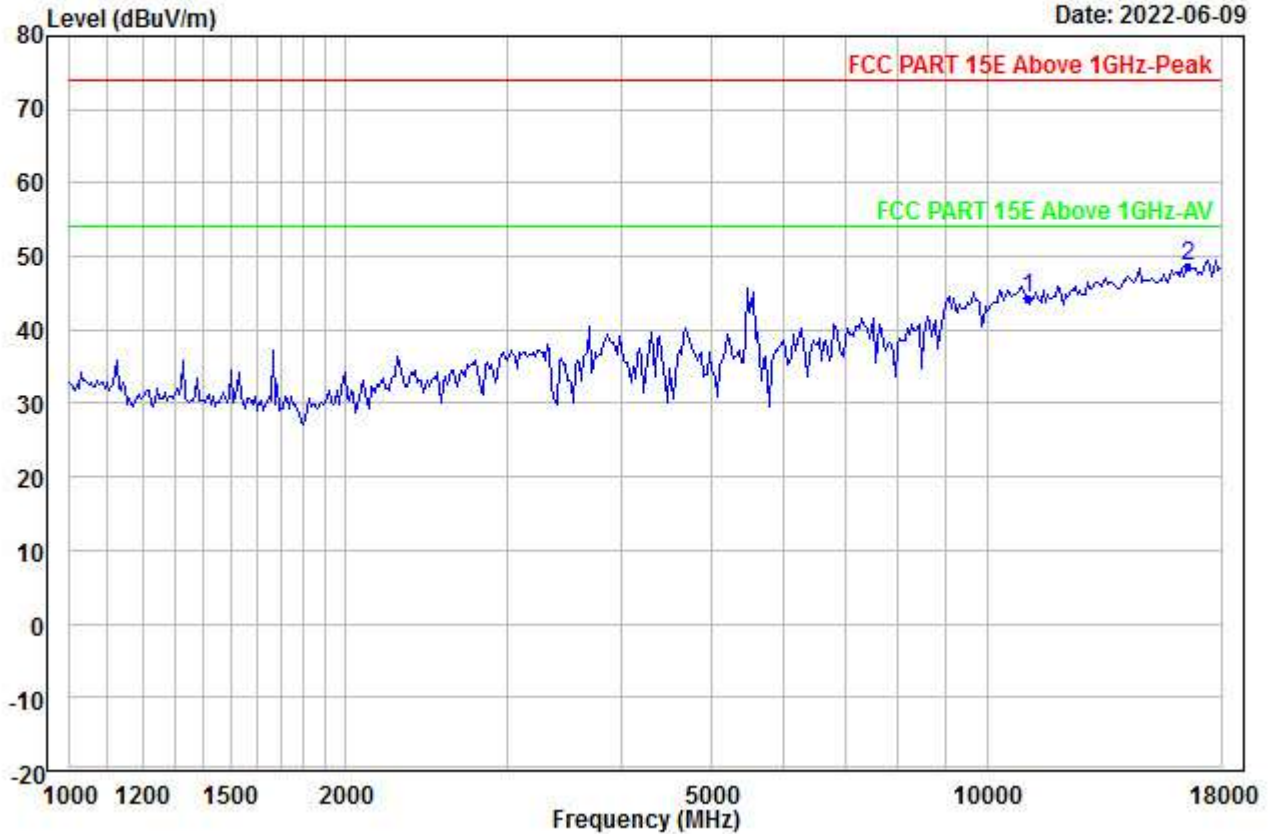


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC80_ANT0+1_5530
 Remark :

| | Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Rem: |
|---|-------------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 11060.000 | 37.06 | 38.55 | 45.13 | 0.00 | 13.96 | 44.44 | 74.00 | -29.56 | --- | --- | Peak |
| 2 | PP16590.000 | 36.22 | 41.64 | 46.71 | 0.00 | 17.50 | 48.65 | 74.00 | -25.35 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00274.EMI

Date: 2022-06-09

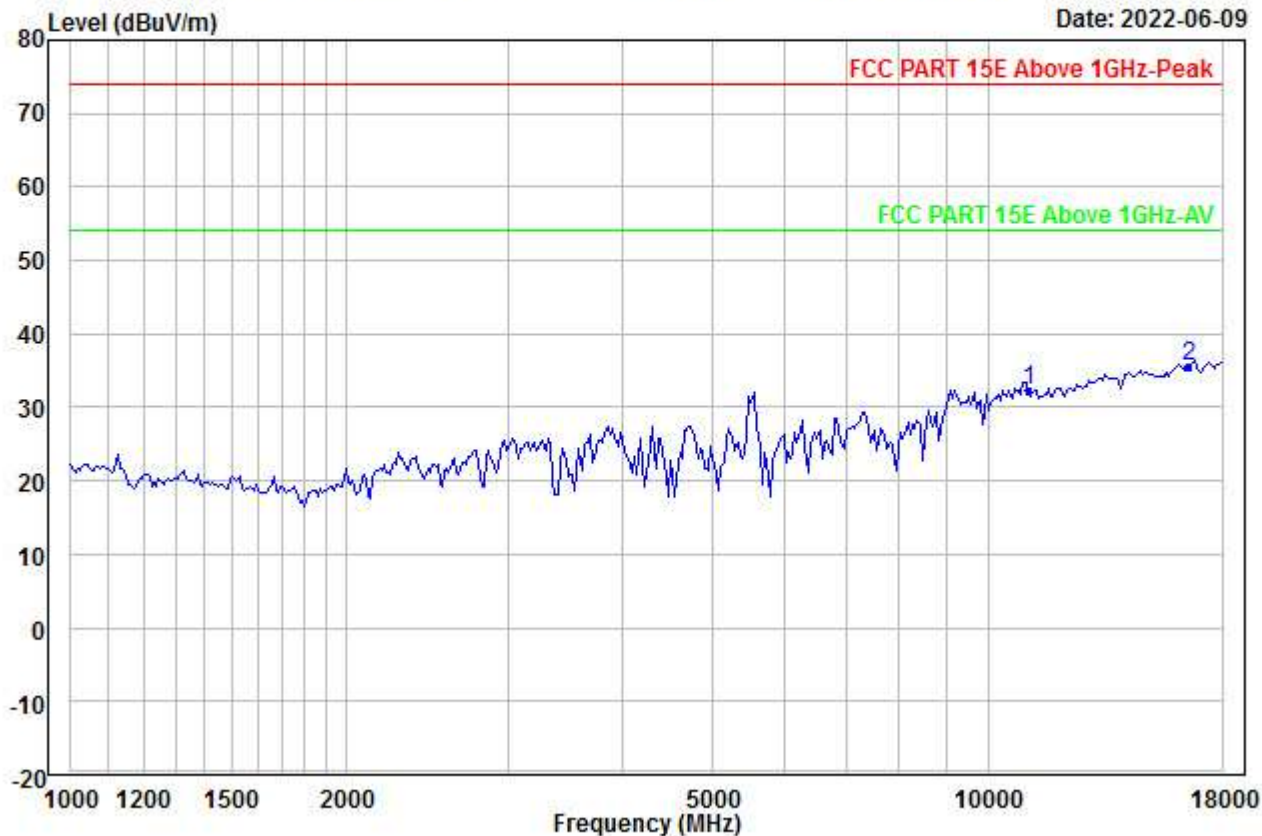


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC80_ANT0+1_5530
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 11060.000 | 24.85 | 38.55 | 45.13 | 0.00 | 13.96 | 32.23 | 54.00 | -21.77 | --- | --- | Aver |
| 2 PP16590.000 | 23.03 | 41.64 | 46.71 | 0.00 | 17.50 | 35.46 | 54.00 | -18.54 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00275.EMI

Date: 2022-06-09

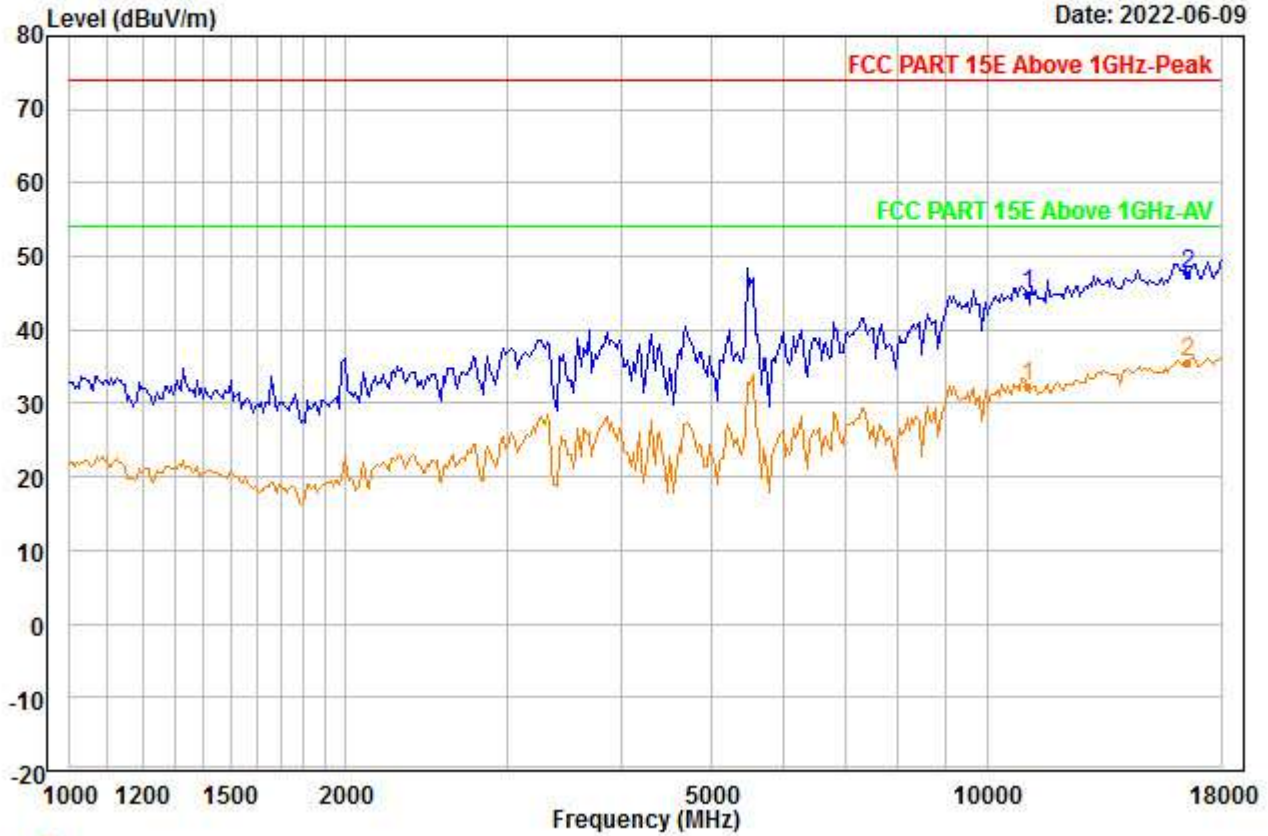


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC80_ANT0+1_5530
 Remark :

| | Read Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Remarks |
|---|-------------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|---------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 11060.000 | 37.57 | 38.55 | 45.13 | 0.00 | 13.96 | 44.95 | 74.00 | -29.05 | --- | --- | Peak |
| 2 | PP16590.000 | 35.25 | 41.64 | 46.71 | 0.00 | 17.50 | 47.68 | 74.00 | -26.32 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00276.EMI

Date: 2022-06-09

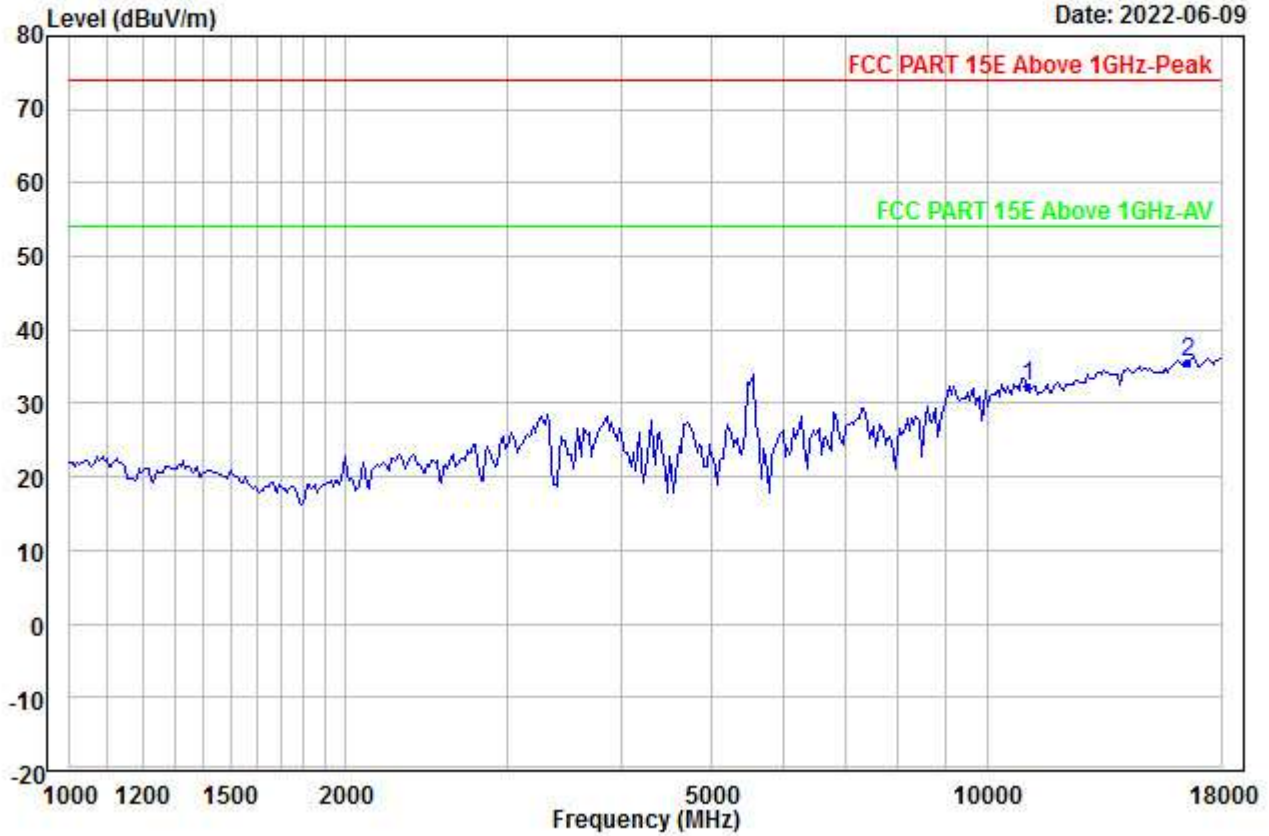


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC80_ANT0+1_5530
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 11060.000 | 24.94 | 38.55 | 45.13 | 0.00 | 13.96 | 32.32 | 54.00 | -21.68 | --- | --- | Aver |
| 2 PP16590.000 | 23.13 | 41.64 | 46.71 | 0.00 | 17.50 | 35.56 | 54.00 | -18.44 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00277.EMI

Date: 2022-06-09

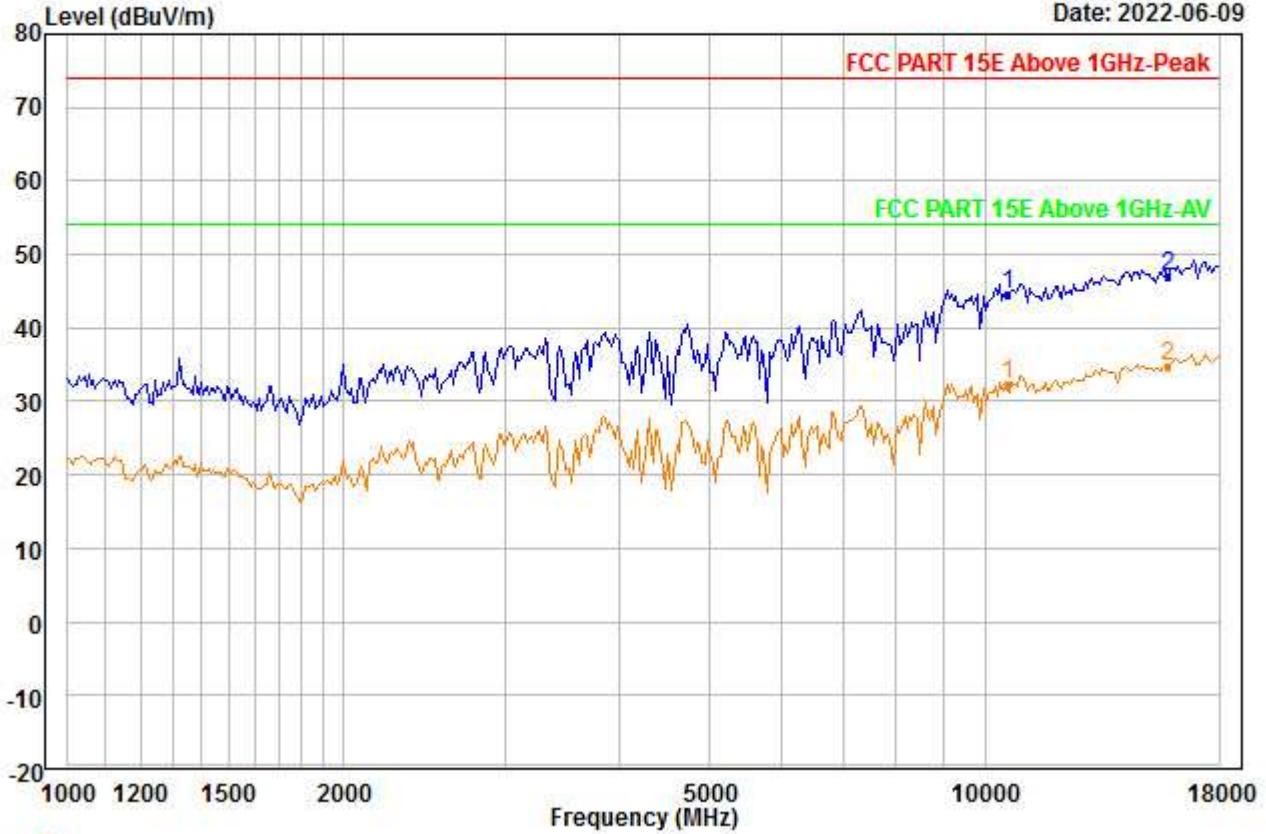


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC80_ANT0+1_5290
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 10580.000 | 38.16 | 38.25 | 45.76 | 0.00 | 14.02 | 44.67 | 74.00 | -29.33 | --- | --- | Peak |
| 2 PP15870.000 | 35.34 | 40.72 | 46.20 | 0.00 | 17.15 | 47.01 | 74.00 | -26.99 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00278.EMI

Date: 2022-06-09

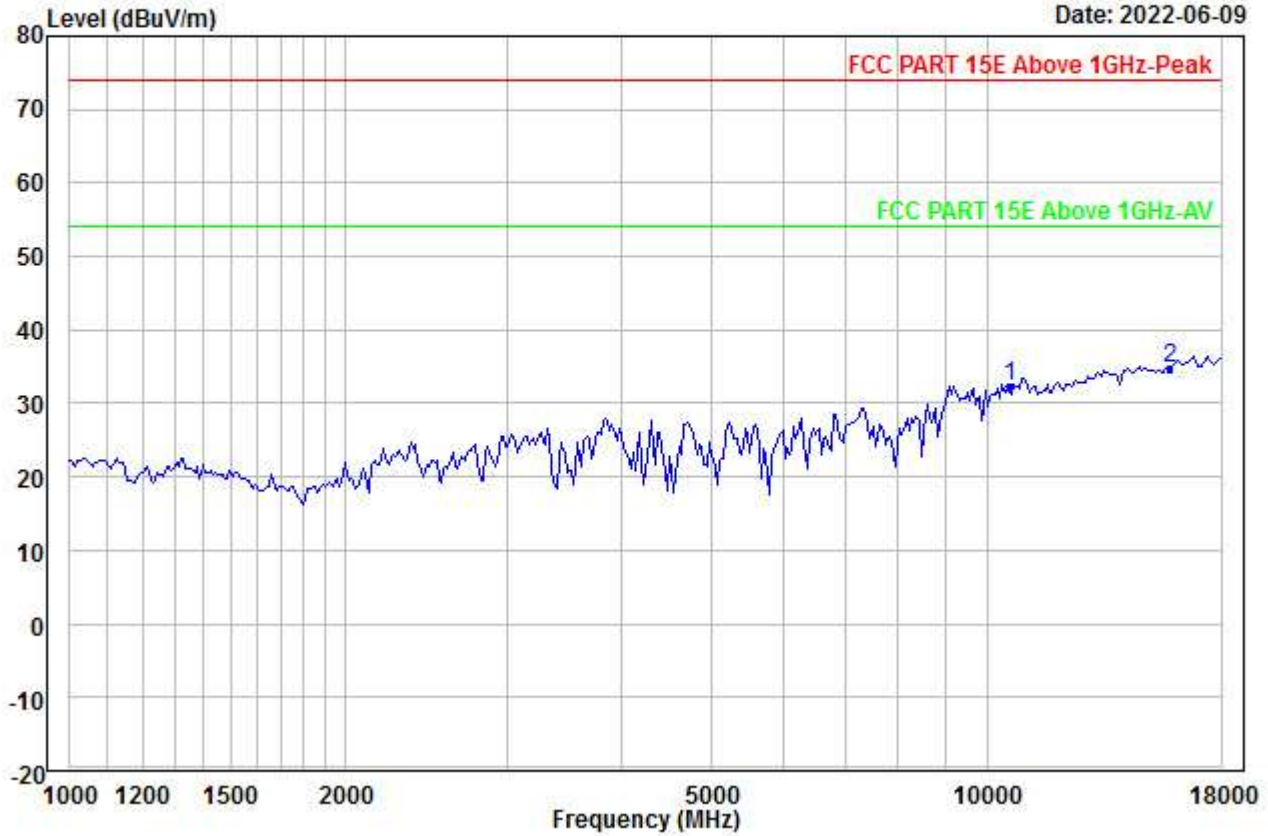


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC80_ANT0+1_5290
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 10580.000 | 25.77 | 38.25 | 45.76 | 0.00 | 14.02 | 32.28 | 54.00 | -21.72 | --- | --- | Aver |
| 2 PP15870.000 | 23.09 | 40.72 | 46.20 | 0.00 | 17.15 | 34.76 | 54.00 | -19.24 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00279.EMI

Date: 2022-06-09

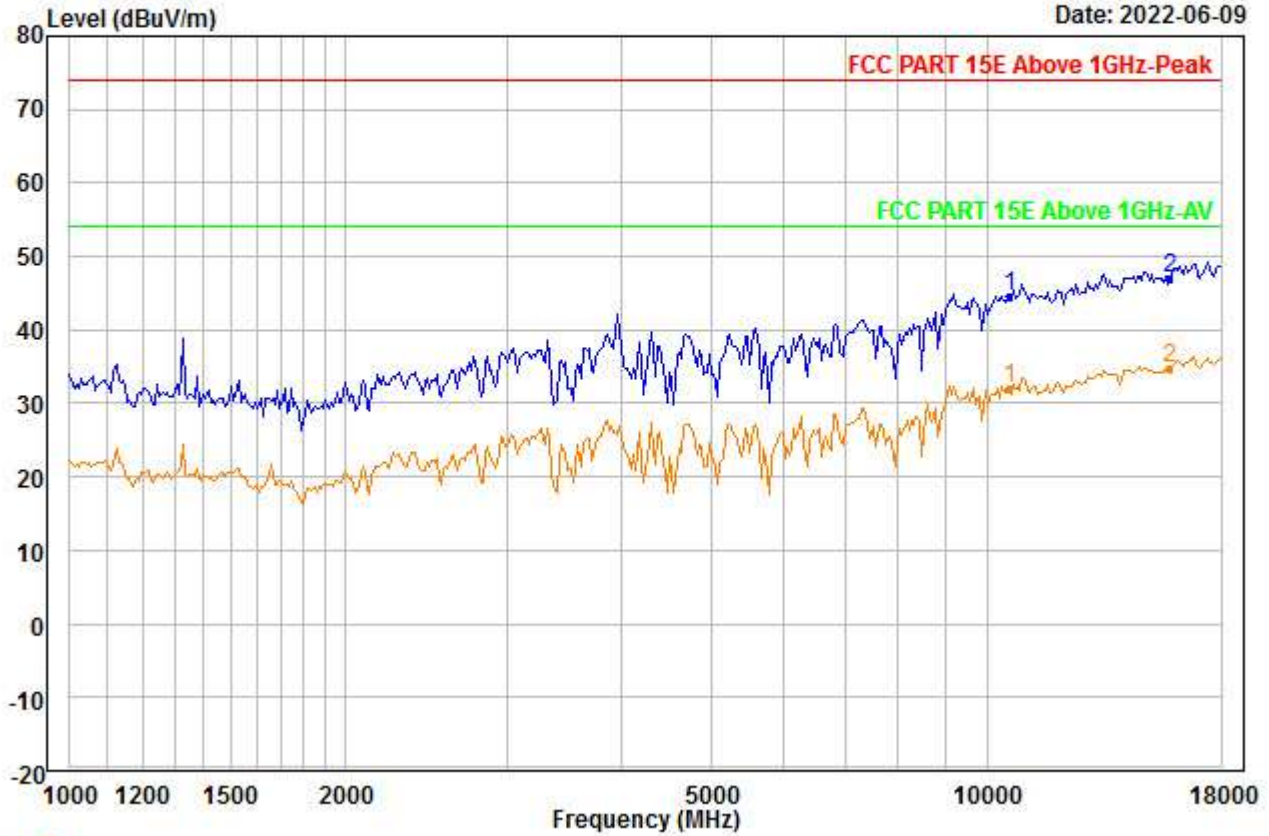


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC80_ANT0+1_5290
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 10580.000 | 38.19 | 38.25 | 45.76 | 0.00 | 14.02 | 44.70 | 74.00 | -29.30 | --- | --- | Peak |
| 2 PP15870.000 | 35.26 | 40.72 | 46.20 | 0.00 | 17.15 | 46.93 | 74.00 | -27.07 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00280.EMI

Date: 2022-06-09

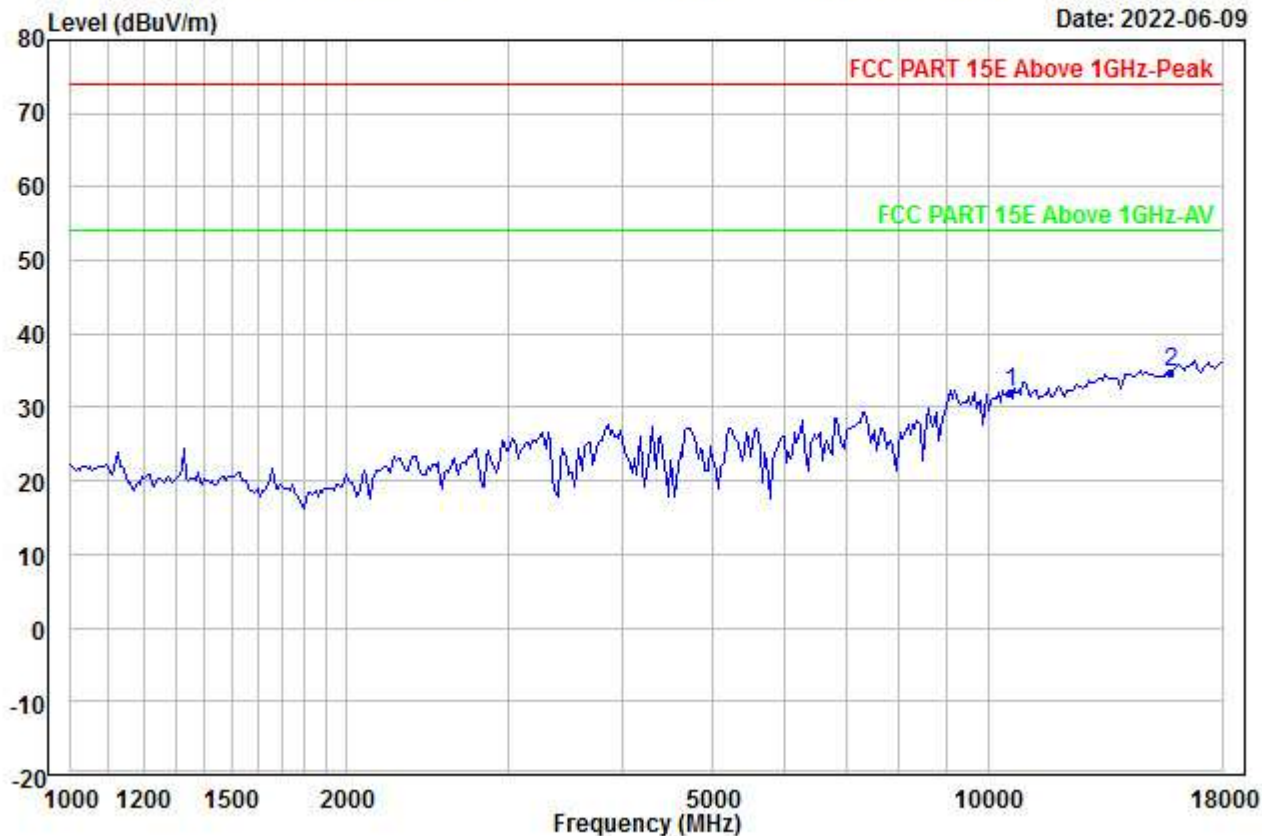


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC80_ANT0+1_5290
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 10580.000 | 25.62 | 38.25 | 45.76 | 0.00 | 14.02 | 32.13 | 54.00 | -21.87 | --- | --- | Aver |
| 2 PP15870.000 | 22.99 | 40.72 | 46.20 | 0.00 | 17.15 | 34.66 | 54.00 | -19.34 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00281.EMI

Date: 2022-06-09

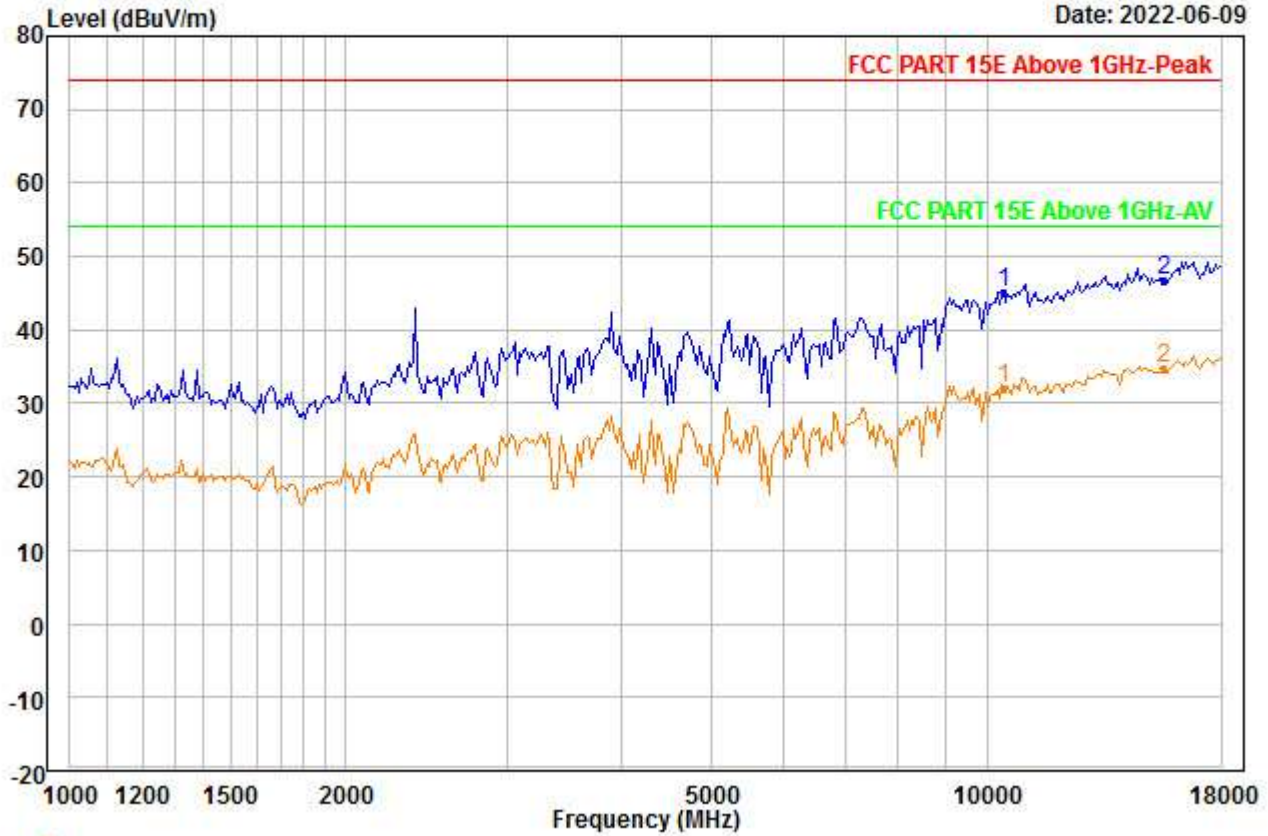


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC80_ANT0+1_5210
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 10420.000 | 38.83 | 38.15 | 45.93 | 0.00 | 14.07 | 45.12 | 74.00 | -28.88 | --- | --- | Peak |
| 2 PP15630.000 | 35.48 | 40.38 | 46.00 | 0.00 | 16.99 | 46.85 | 74.00 | -27.15 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00282.EMI

Date: 2022-06-09

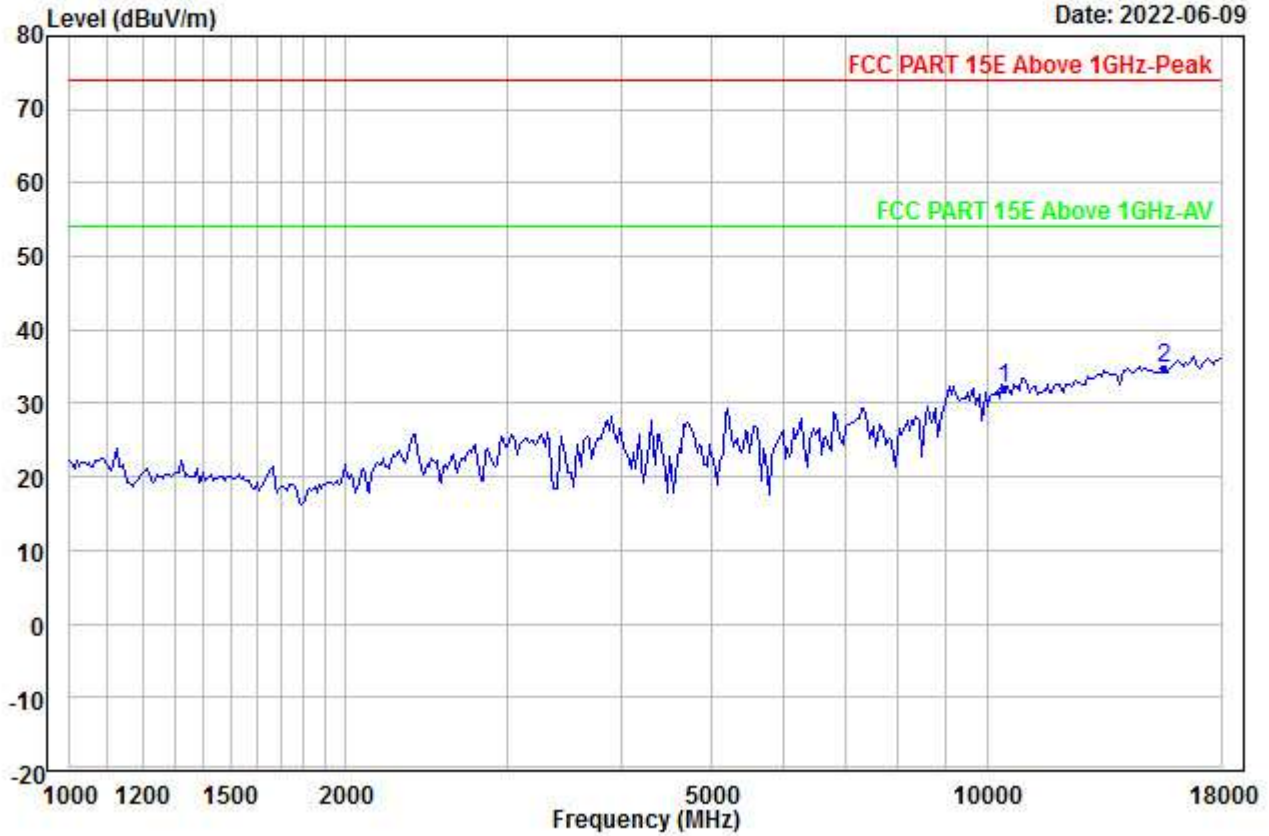


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC80_ANT0+1_5210
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 10420.000 | 25.66 | 38.15 | 45.93 | 0.00 | 14.07 | 31.95 | 54.00 | -22.05 | --- | --- | Aver |
| 2 PP15630.000 | 23.37 | 40.38 | 46.00 | 0.00 | 16.99 | 34.74 | 54.00 | -19.26 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00283.EMI

Date: 2022-06-09

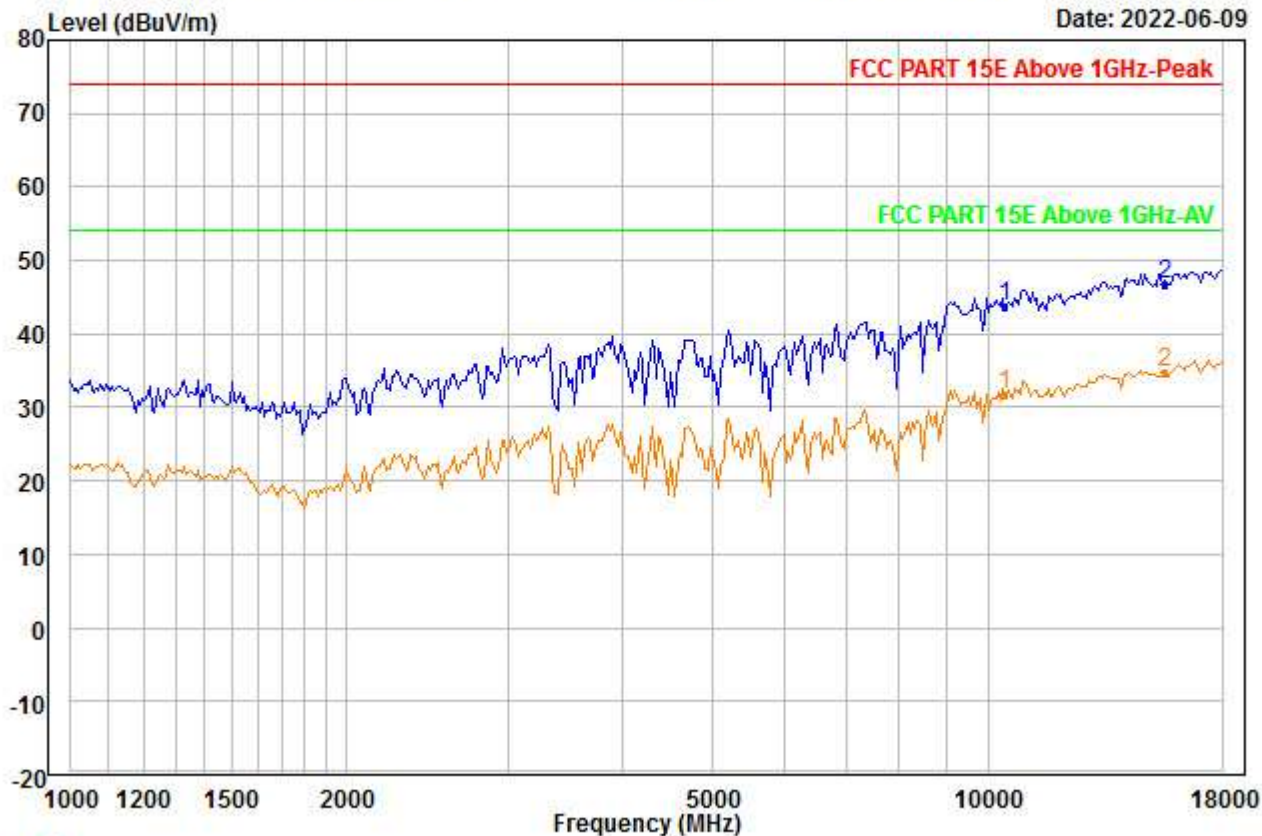


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC80_ANT0+1_5210
 Remark :

| | Read Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Rem: |
|---|-------------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 10420.000 | 37.41 | 38.15 | 45.93 | 0.00 | 14.07 | 43.70 | 74.00 | -30.30 | --- | --- | Peak |
| 2 | PP15630.000 | 35.43 | 40.38 | 46.00 | 0.00 | 16.99 | 46.80 | 74.00 | -27.20 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\A\5G\IRSE\4_00284.EMI

Date: 2022-06-09

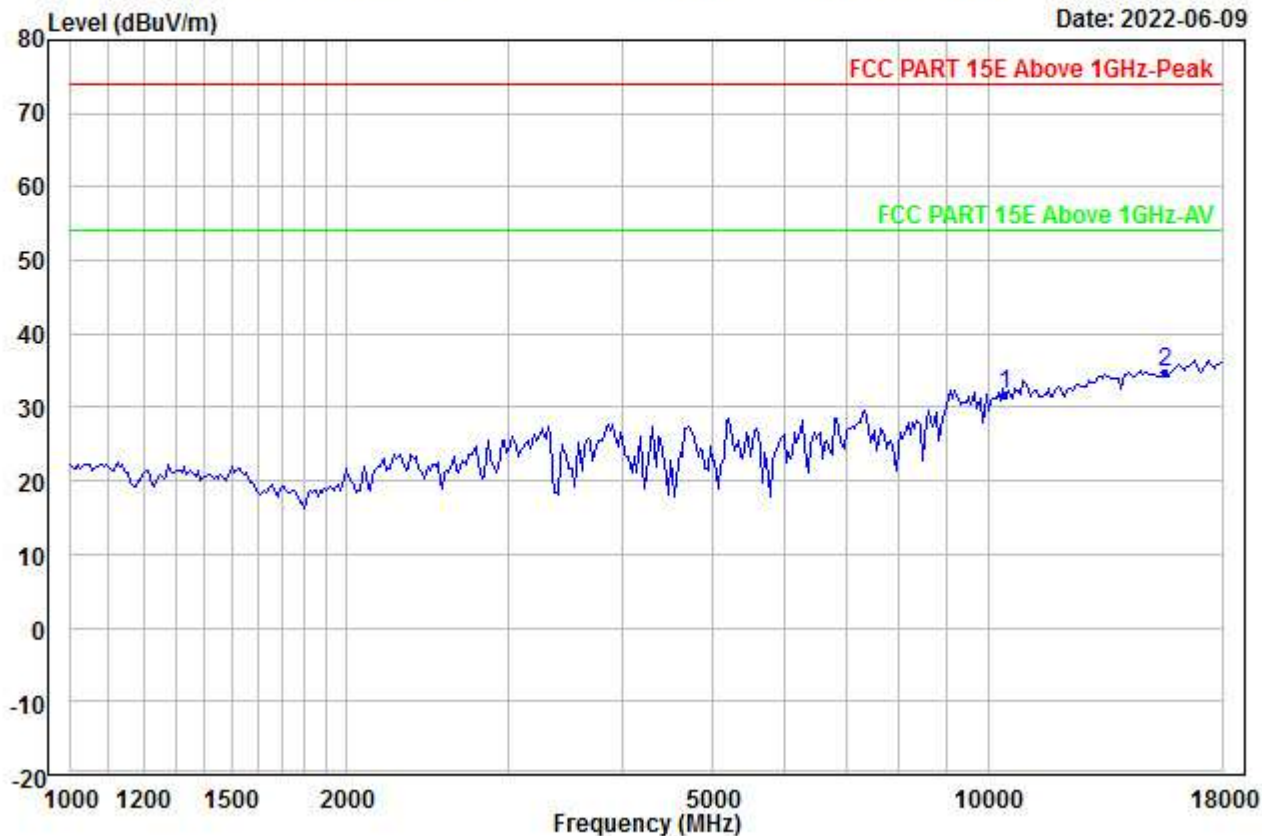

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC80_ANT0+1_5210
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 10420.000 | 25.58 | 38.15 | 45.93 | 0.00 | 14.07 | 31.87 | 54.00 | -22.13 | --- | --- | Aver |
| 2 PP15630.000 | 23.37 | 40.38 | 46.00 | 0.00 | 16.99 | 34.74 | 54.00 | -19.26 | --- | --- | Aver |