


File: F:\Test Template\上海ITSI\2022\220523032 SA750\B\5G\BE\4_00001.EMI

Date: 2022-06-06

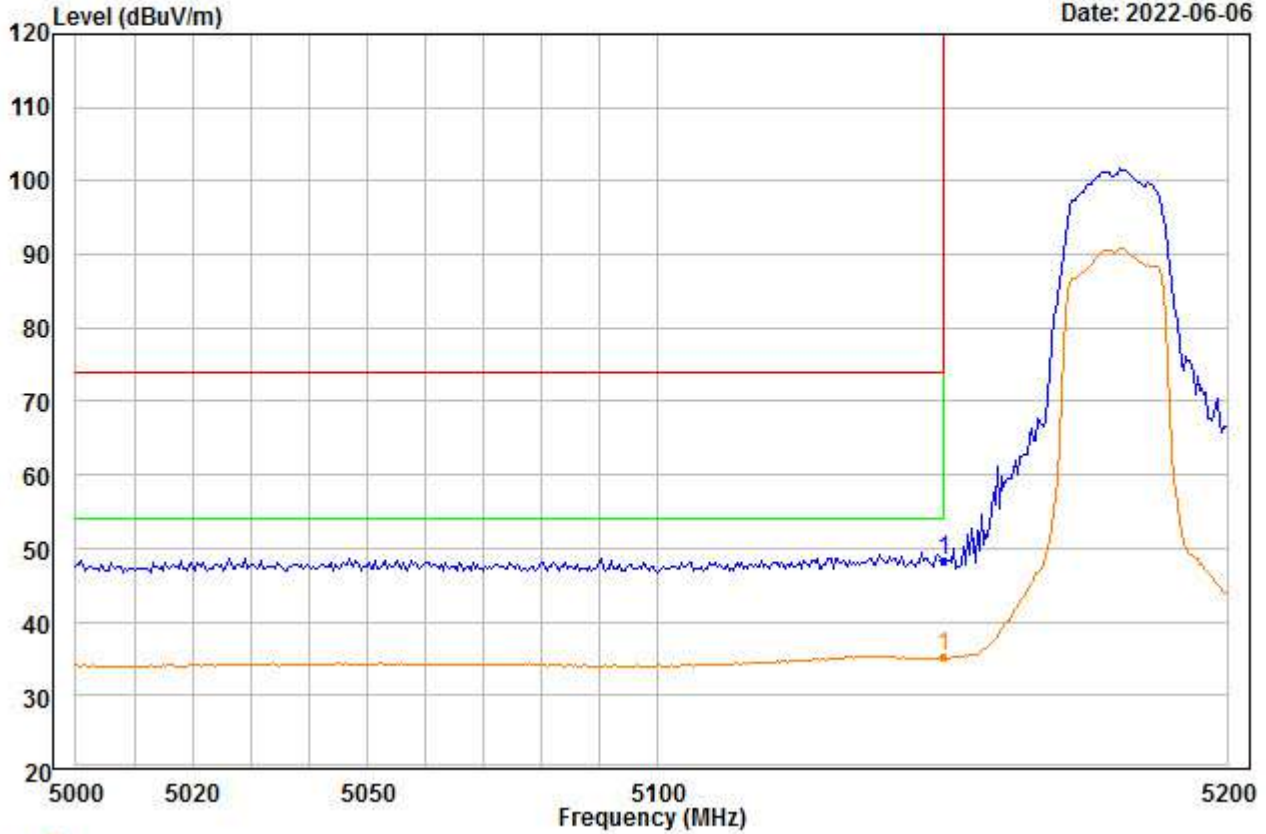


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5180
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 PP 5150.000 | 49.99 | 34.88 | 46.33 | 0.00 | 9.78 | 48.32 | 74.00 | -25.68 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00002.EMI

Date: 2022-06-06

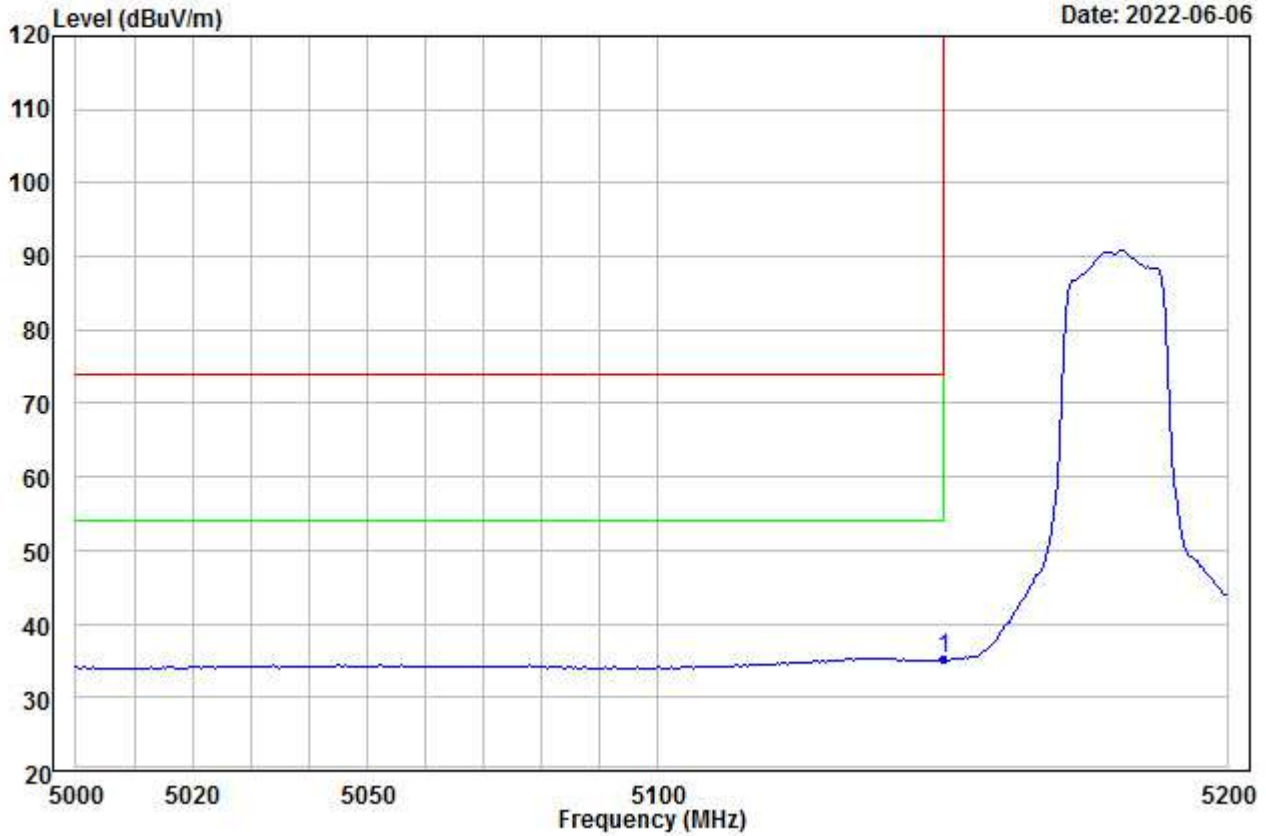


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5180
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 PP 5150.000 | 36.81 | 34.88 | 46.33 | 0.00 | 9.78 | 35.14 | 54.00 | -18.86 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00003.EMI

Date: 2022-06-06

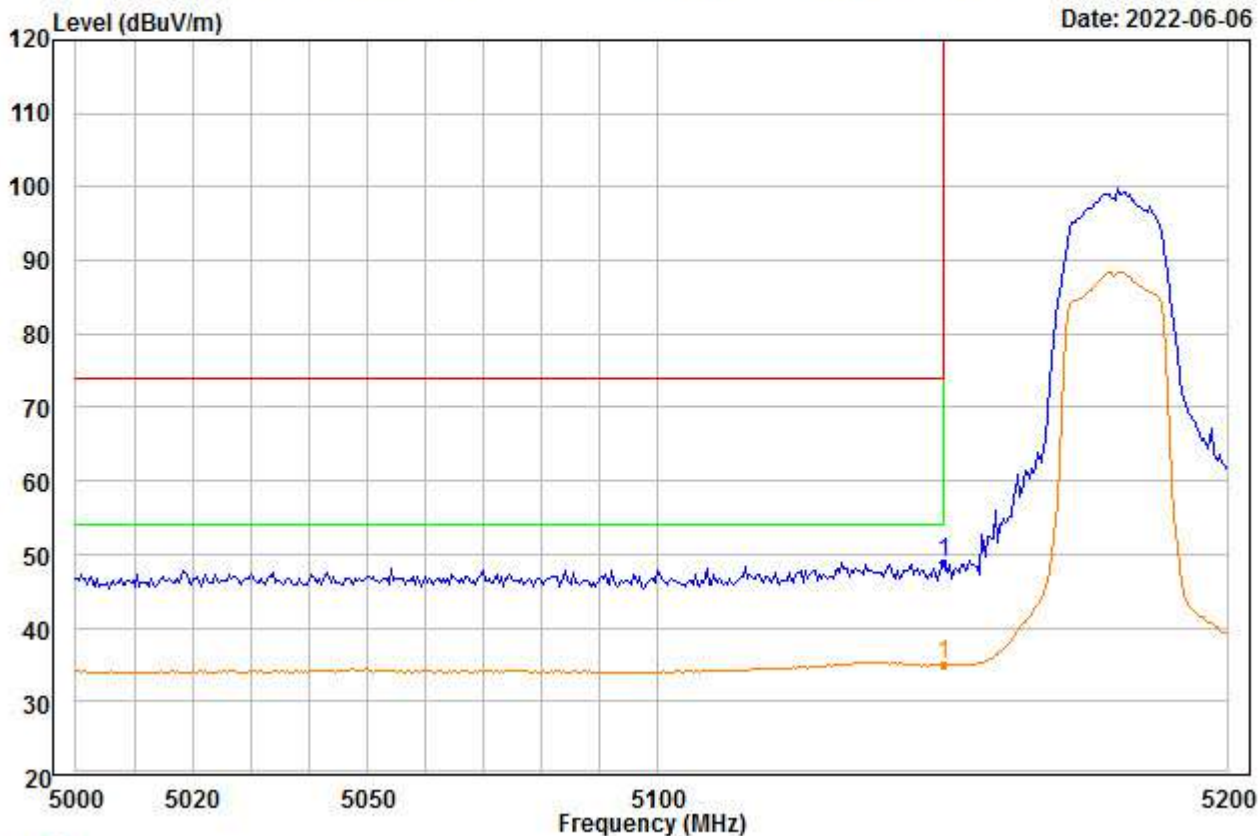


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5180
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 PP 5150.000 | 50.51 | 34.88 | 46.33 | 0.00 | 9.78 | 48.84 | 74.00 | -25.16 | --- | --- | Peak |

File: F:\Test Template\上海ITSI\2022\220523032 SA750\B\5G\BE\4_00004.EMI

Date: 2022-06-06

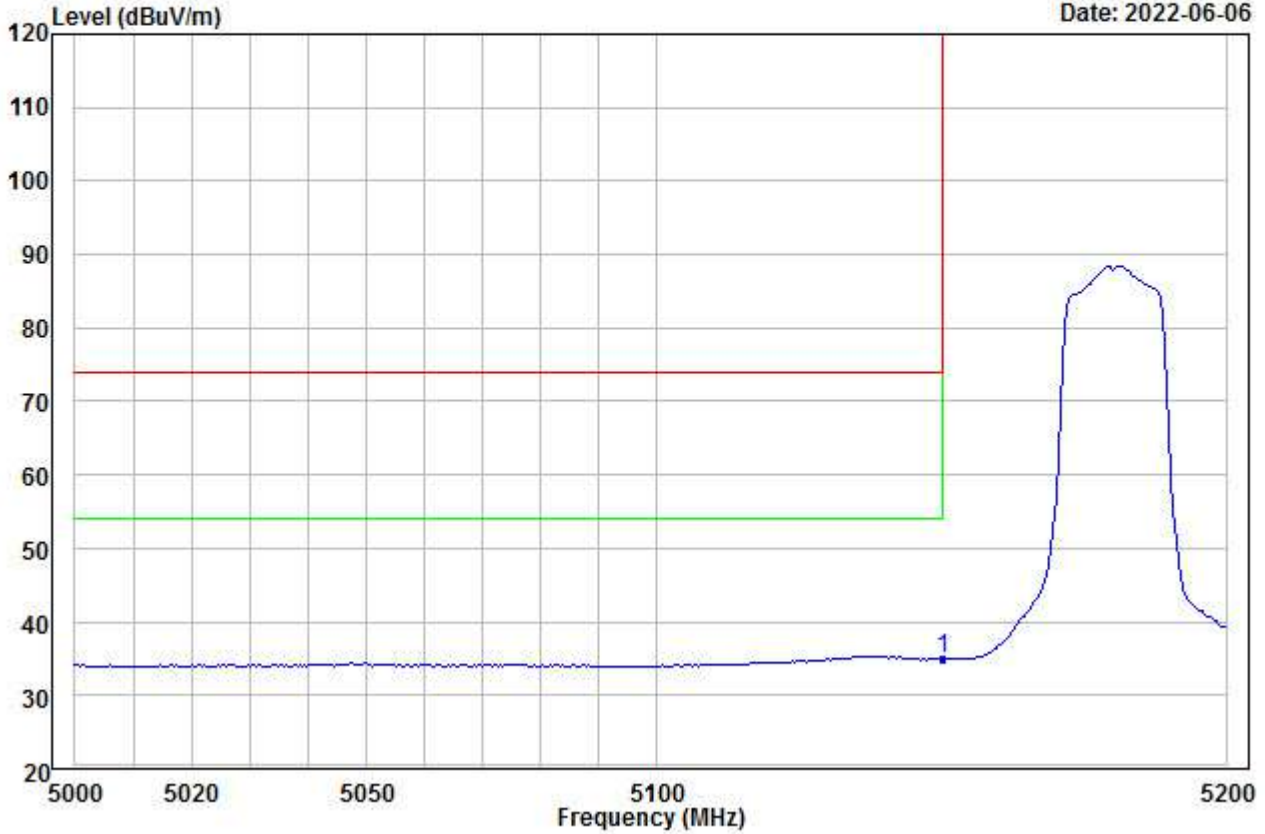


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5180
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 PP 5150.000 | 36.56 | 34.88 | 46.33 | 0.00 | 9.78 | 34.89 | 54.00 | -19.11 | --- | --- | Aver |

File: F:\Test Template\上海ITSI\2022\220523032 SA750\B\5G\BE\4_00005.EMI

Date: 2022-06-06

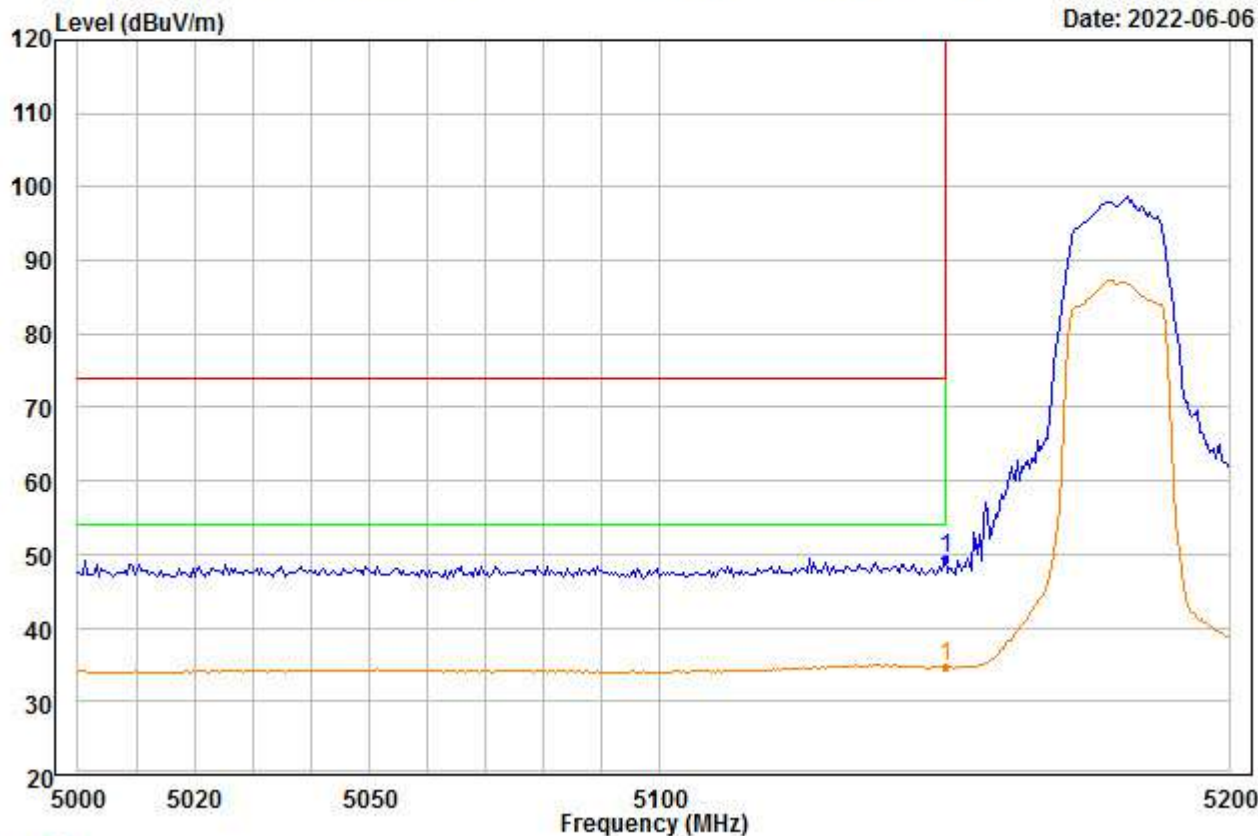


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5180
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 PP 5150.000 | 51.19 | 34.88 | 46.33 | 0.00 | 9.78 | 49.52 | 74.00 | -24.48 | --- | --- | Peak |

File: F:\Test Template\上海ITSI\2022\220523032 SA750\B\5G\BE\4_00006.EMI

Date: 2022-06-06

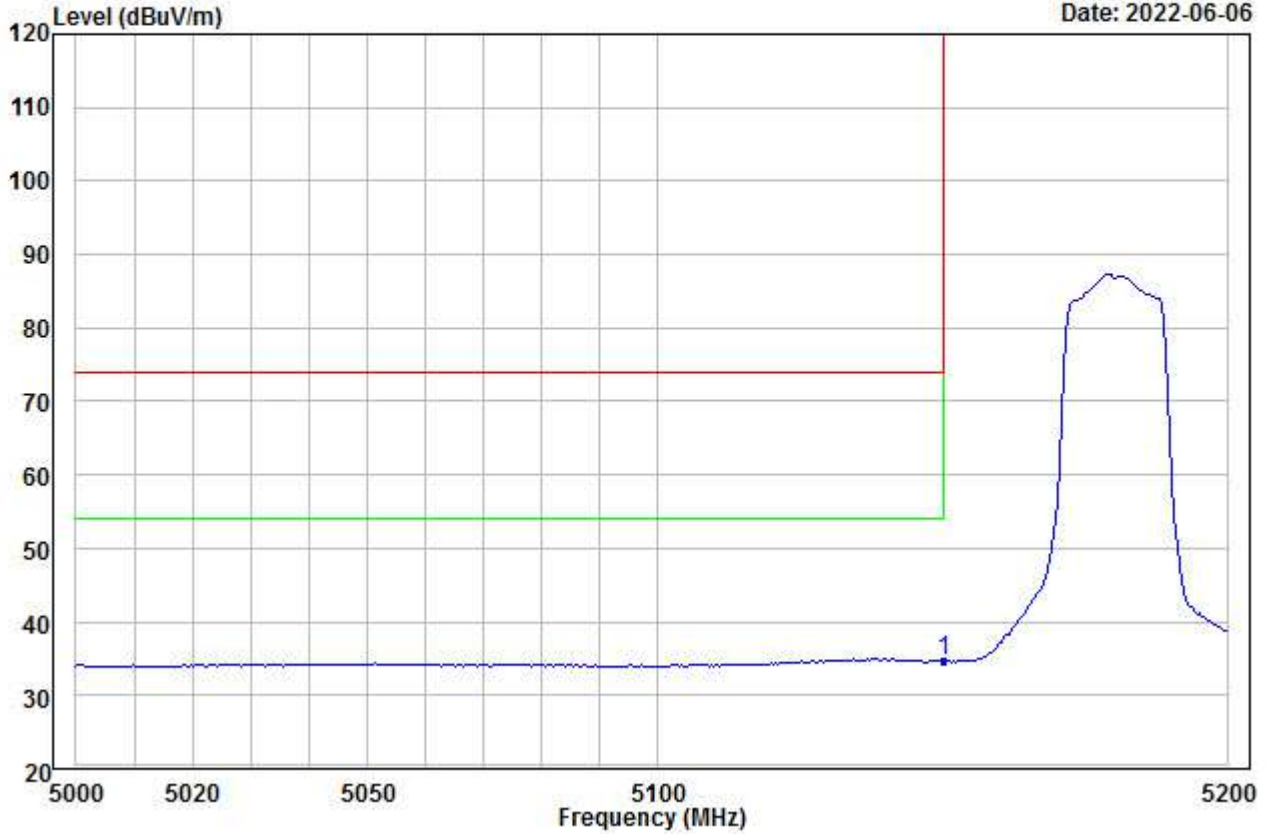


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5180
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 PP 5150.000 | 36.30 | 34.88 | 46.33 | 0.00 | 9.78 | 34.63 | 54.00 | -19.37 | --- | --- | Aver |

File: F:\Test Template\上海ITSI\2022\220523032 SA750\B\5G\BE\4_00007.EMI

Date: 2022-06-06

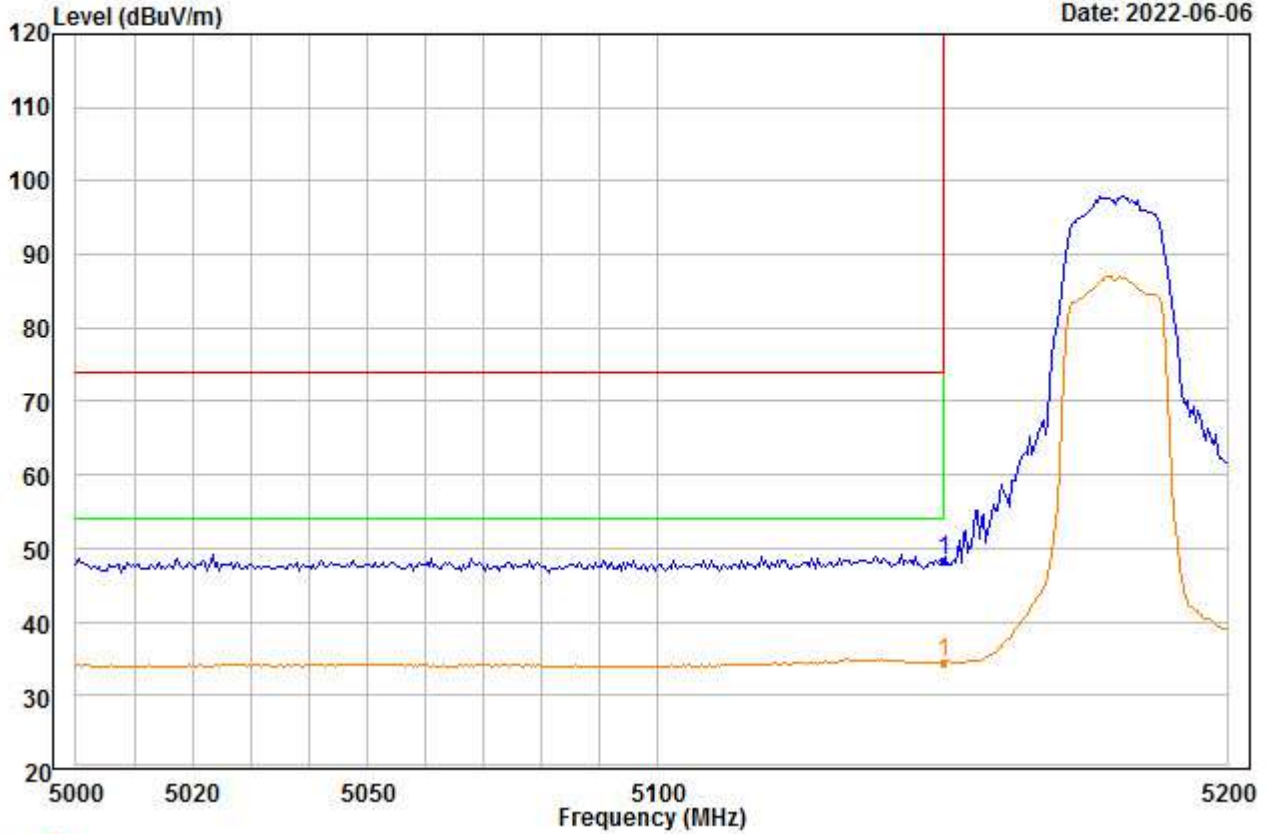


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5180
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Level | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 PP 5150.000 | 49.91 | 34.88 | 46.33 | 0.00 | 9.78 | 48.24 | 74.00 | -25.76 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00008.EMI

Date: 2022-06-06

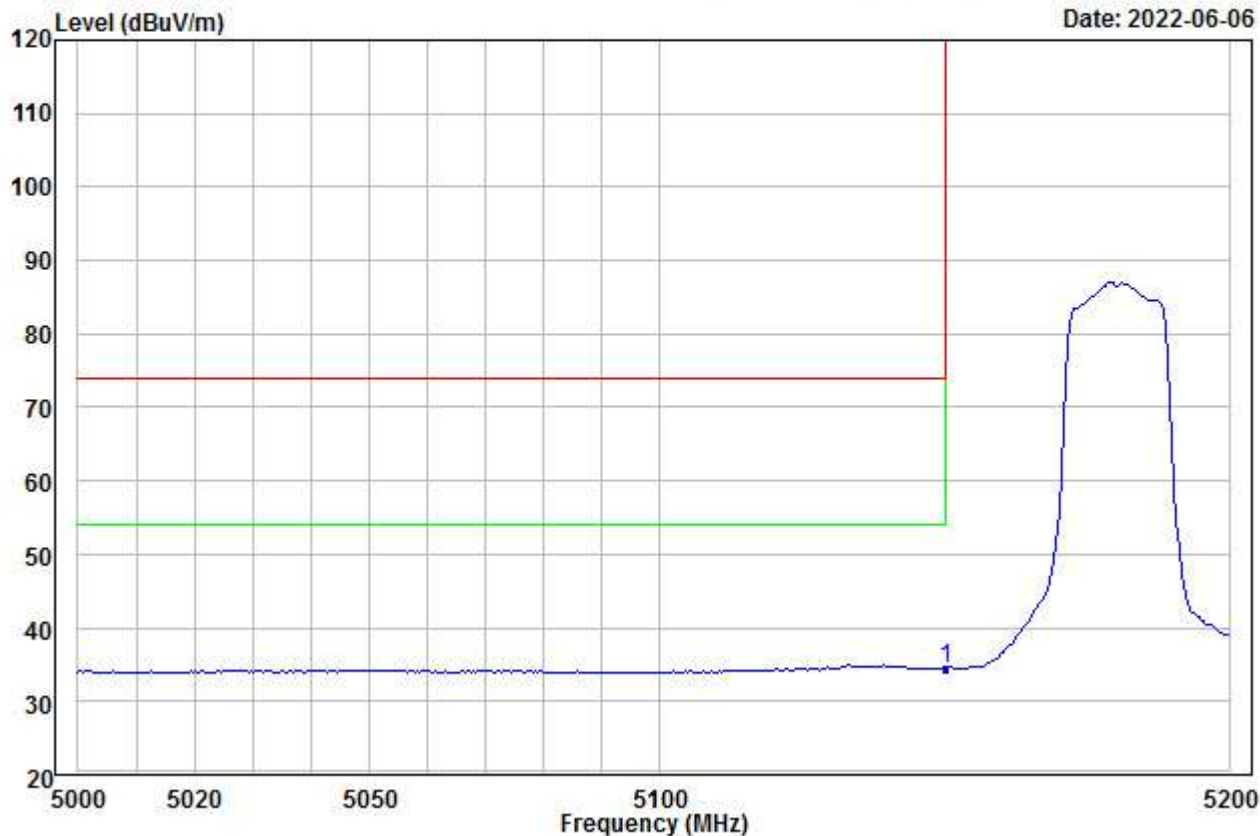


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5180
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Level | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 PP 5150.000 | 36.15 | 34.88 | 46.33 | 0.00 | 9.78 | 34.48 | 54.00 | -19.52 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00009.EMI

Date: 2022-06-06

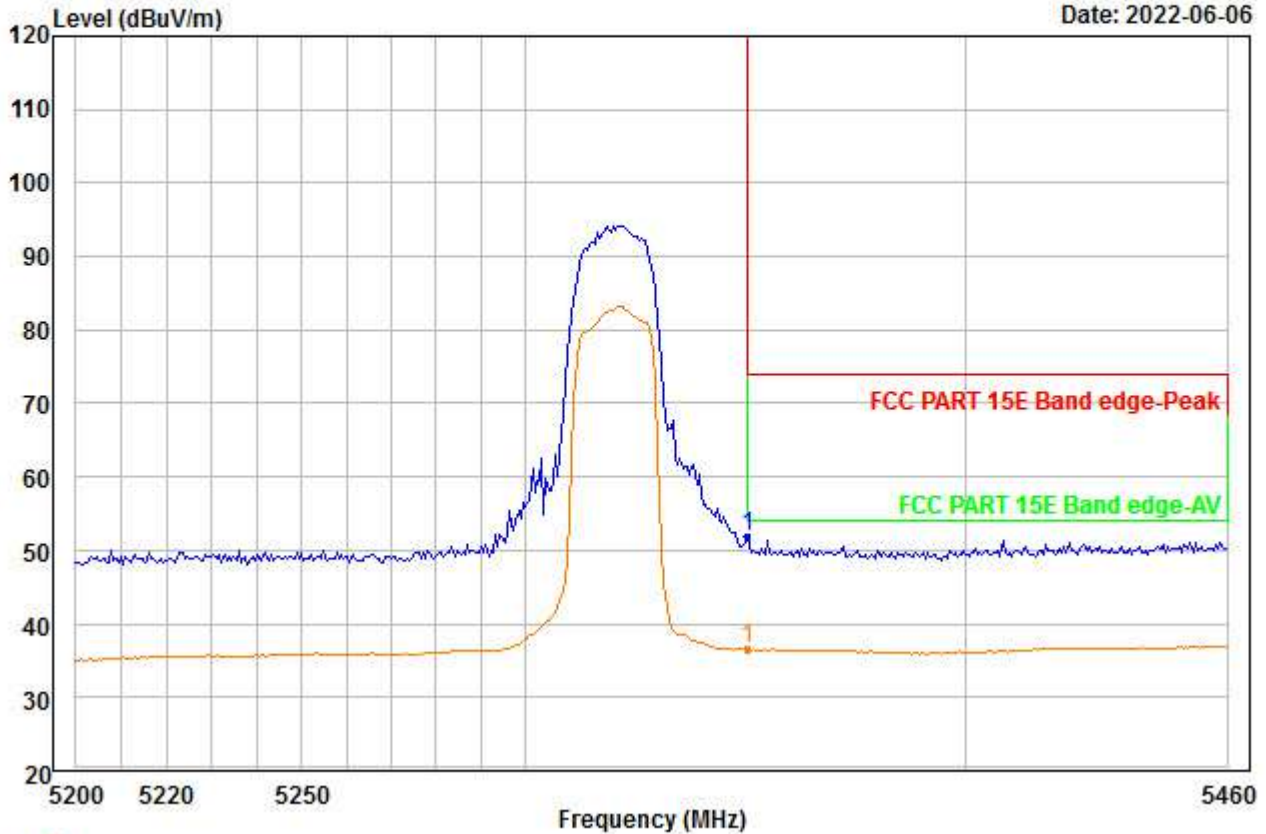


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5320
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 PP 5350.000 | 52.67 | 35.12 | 45.97 | 0.00 | 10.18 | 52.00 | 74.00 | -22.00 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00010.EMI

Date: 2022-06-06

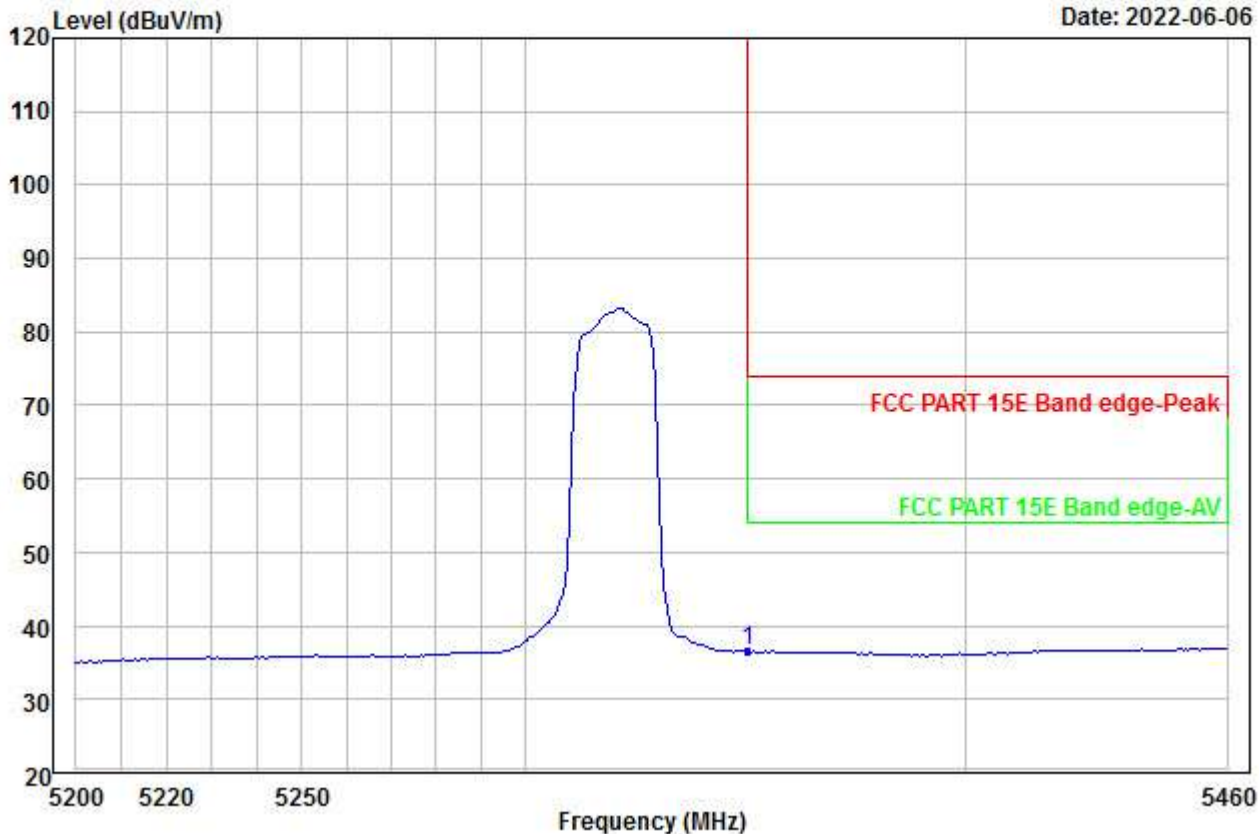


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5320
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 PP 5350.000 | 37.20 | 35.12 | 45.97 | 0.00 | 10.18 | 36.53 | 54.00 | -17.47 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00011.EMI

Date: 2022-06-06

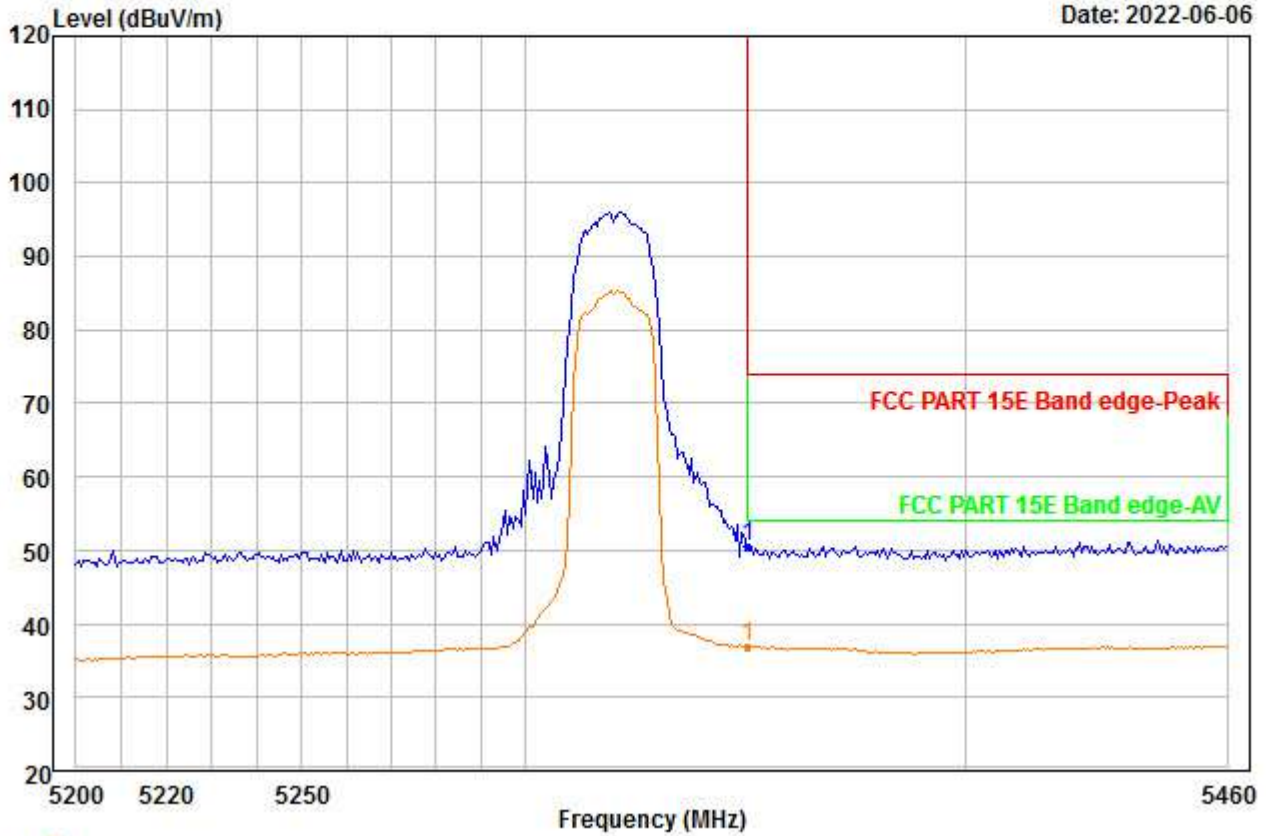


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5320
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 PP 5350.000 | 51.21 | 35.12 | 45.97 | 0.00 | 10.18 | 50.54 | 74.00 | -23.46 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00012.EMI

Date: 2022-06-06

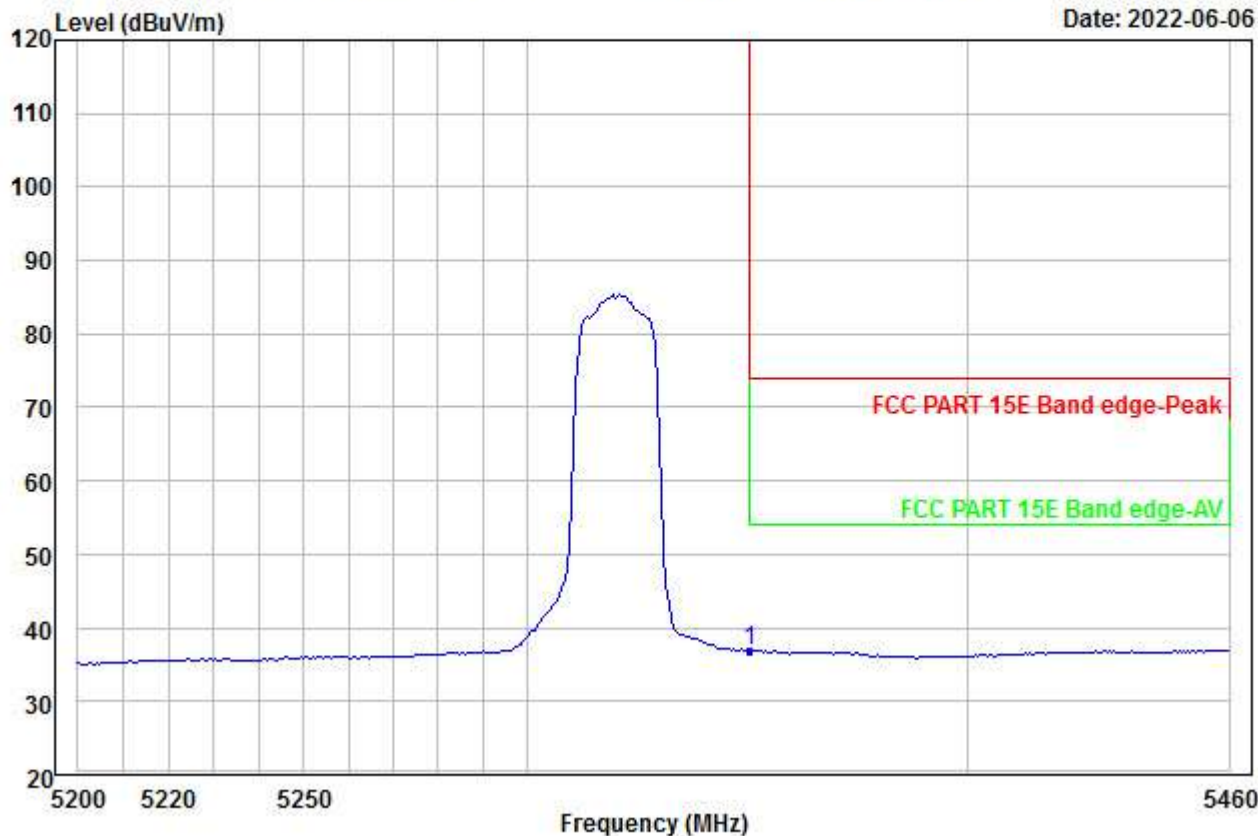


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5320
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 PP 5350.000 | 37.50 | 35.12 | 45.97 | 0.00 | 10.18 | 36.83 | 54.00 | -17.17 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00013.EMI

Date: 2022-06-06

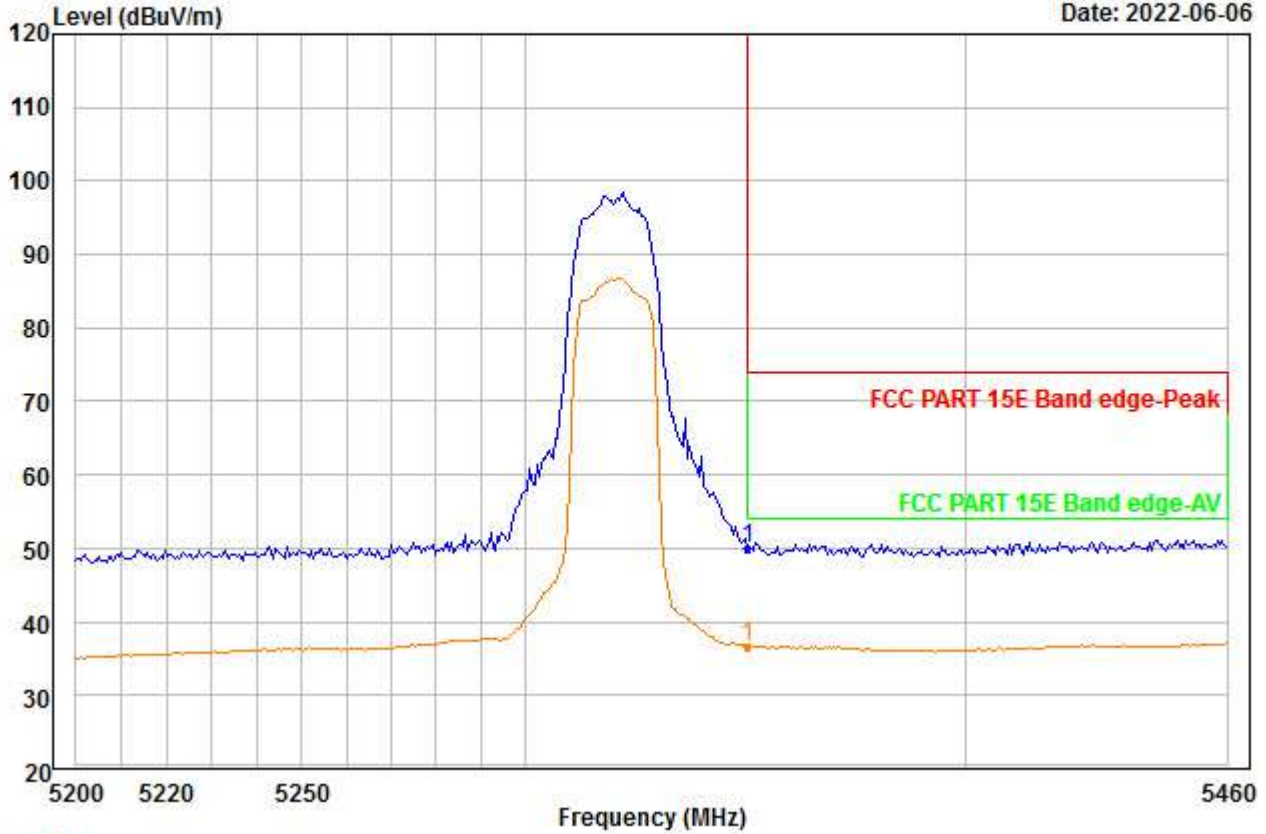


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5320
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 PP 5350.000 | 50.59 | 35.12 | 45.97 | 0.00 | 10.18 | 49.92 | 74.00 | -24.08 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00014.EMI

Date: 2022-06-06

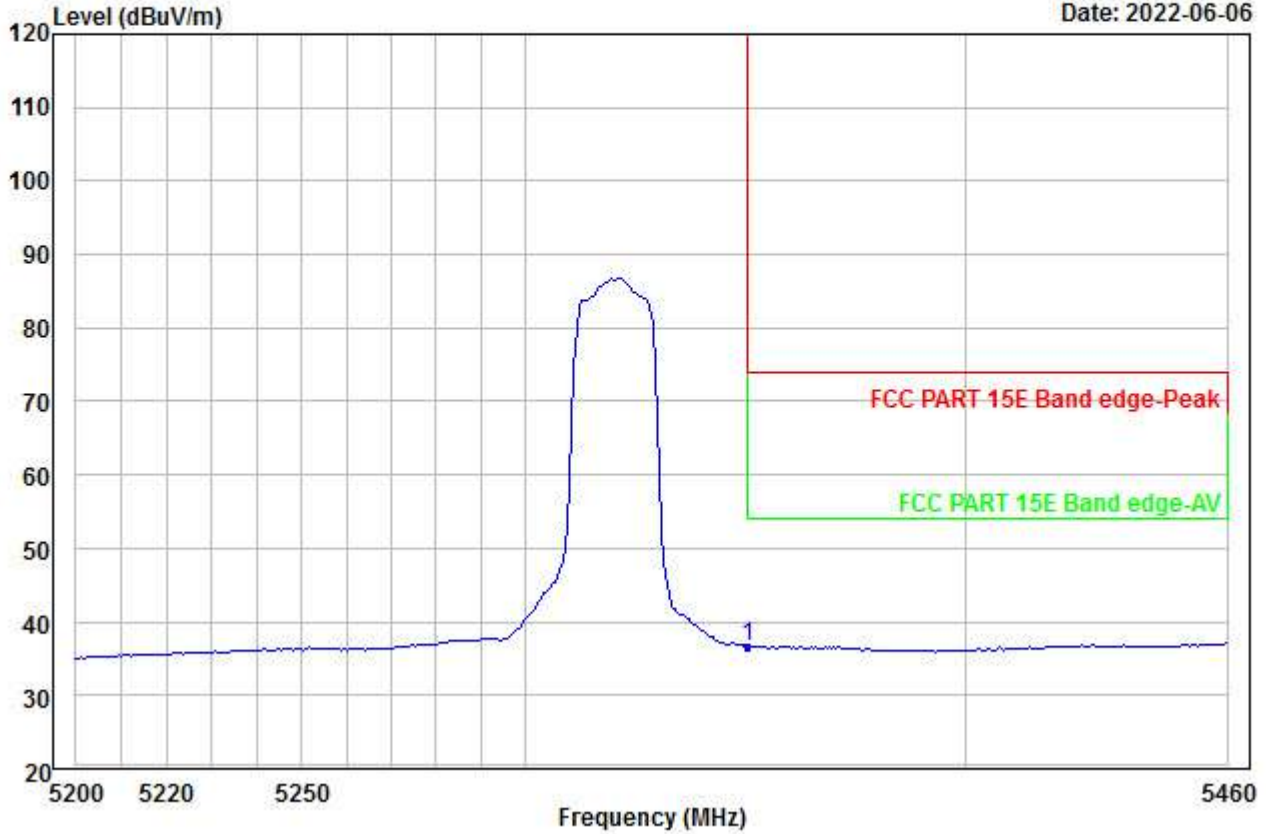


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5320
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 PP 5350.000 | 37.41 | 35.12 | 45.97 | 0.00 | 10.18 | 36.74 | 54.00 | -17.26 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00015.EMI

Date: 2022-06-06

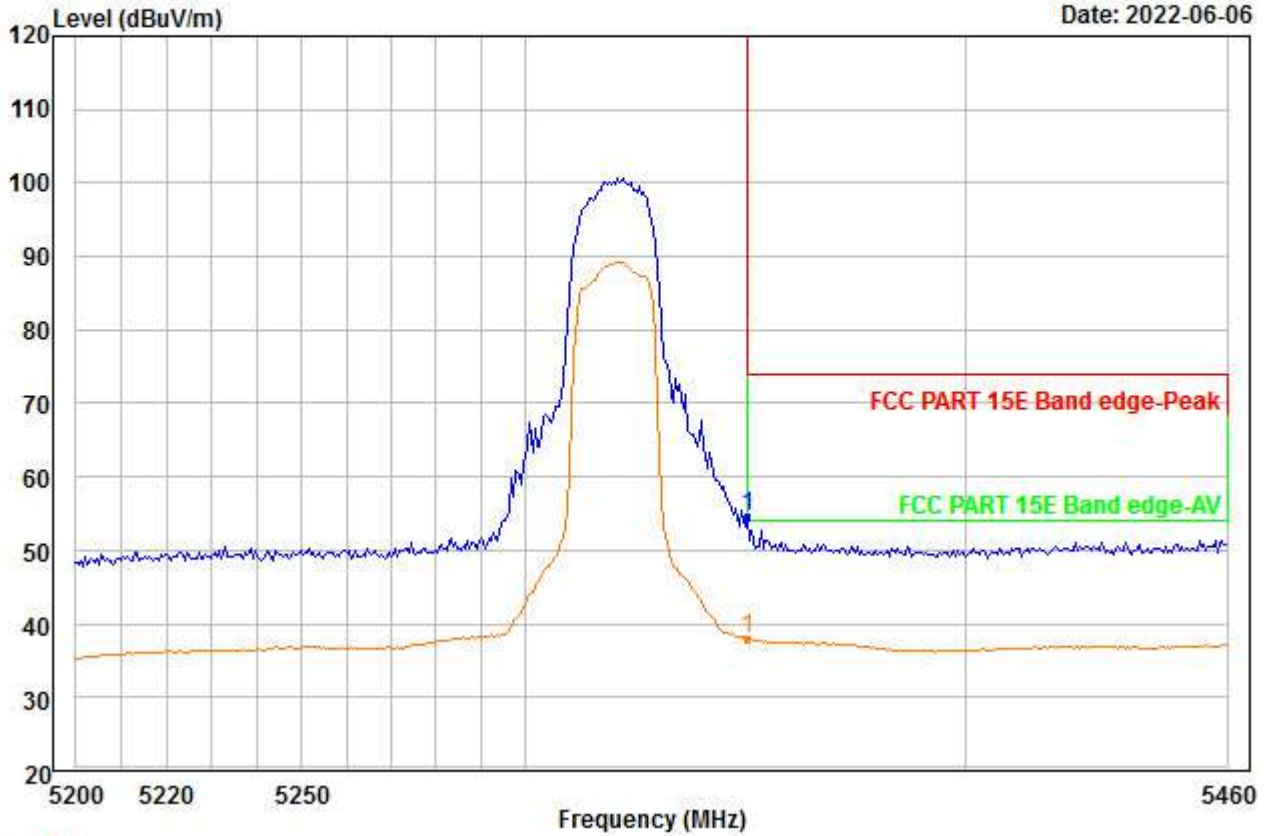


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5320
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 PP 5350.000 | 55.20 | 35.12 | 45.97 | 0.00 | 10.18 | 54.53 | 74.00 | -19.47 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00016.EMI

Date: 2022-06-06

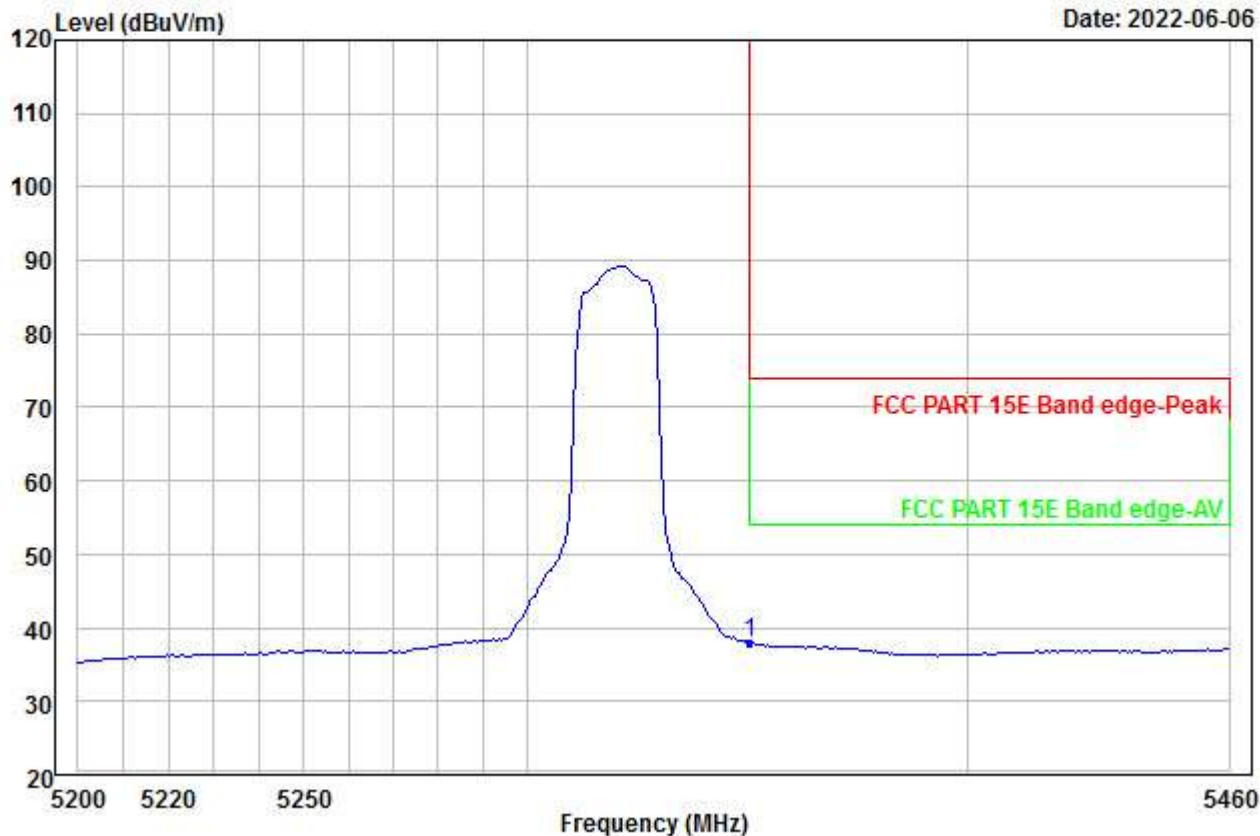


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5320
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 PP 5350.000 | 38.73 | 35.12 | 45.97 | 0.00 | 10.18 | 38.06 | 54.00 | -15.94 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00017.EMI

Date: 2022-06-06

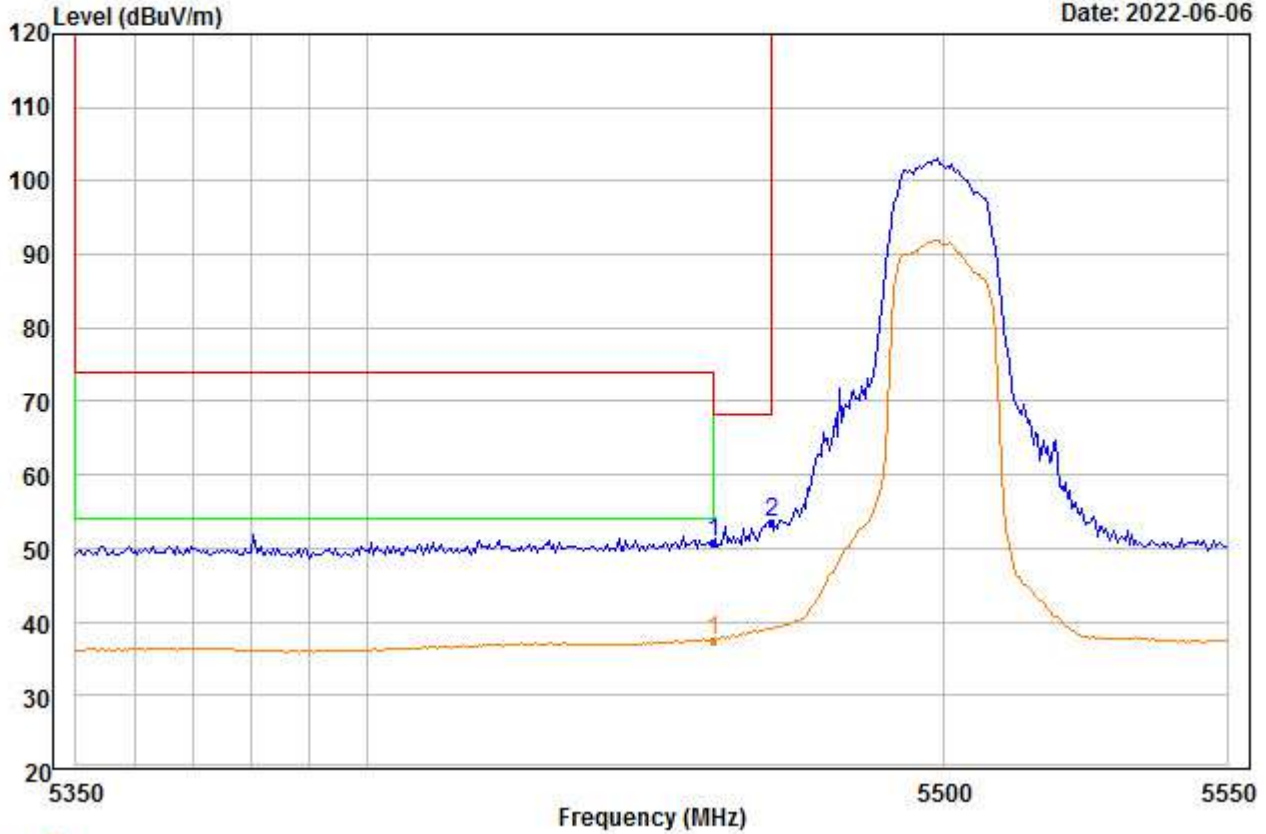


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5500
 Remark :

| | Read Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Remarks |
|------|-----------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|---------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 5460.000 | 50.96 | 35.25 | 45.77 | 0.00 | 10.44 | 50.88 | 68.20 | -17.32 | --- | --- | Peak |
| 2 PP | 5470.000 | 53.42 | 35.26 | 45.75 | 0.00 | 10.47 | 53.40 | 68.20 | -14.80 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00018.EMI

Date: 2022-06-06

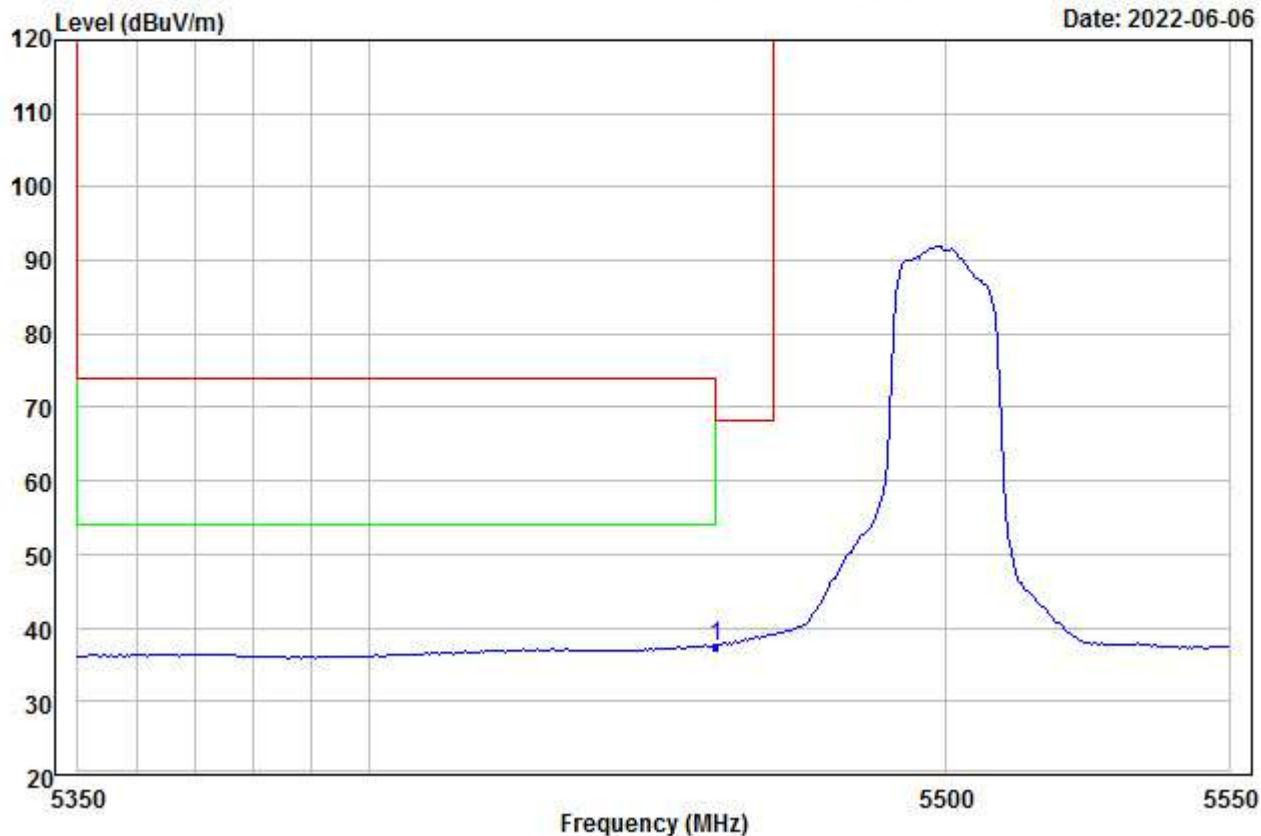


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5500
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 PP 5460.000 | 37.62 | 35.25 | 45.77 | 0.00 | 10.44 | 37.54 | 54.00 | -16.46 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00019.EMI

Date: 2022-06-06

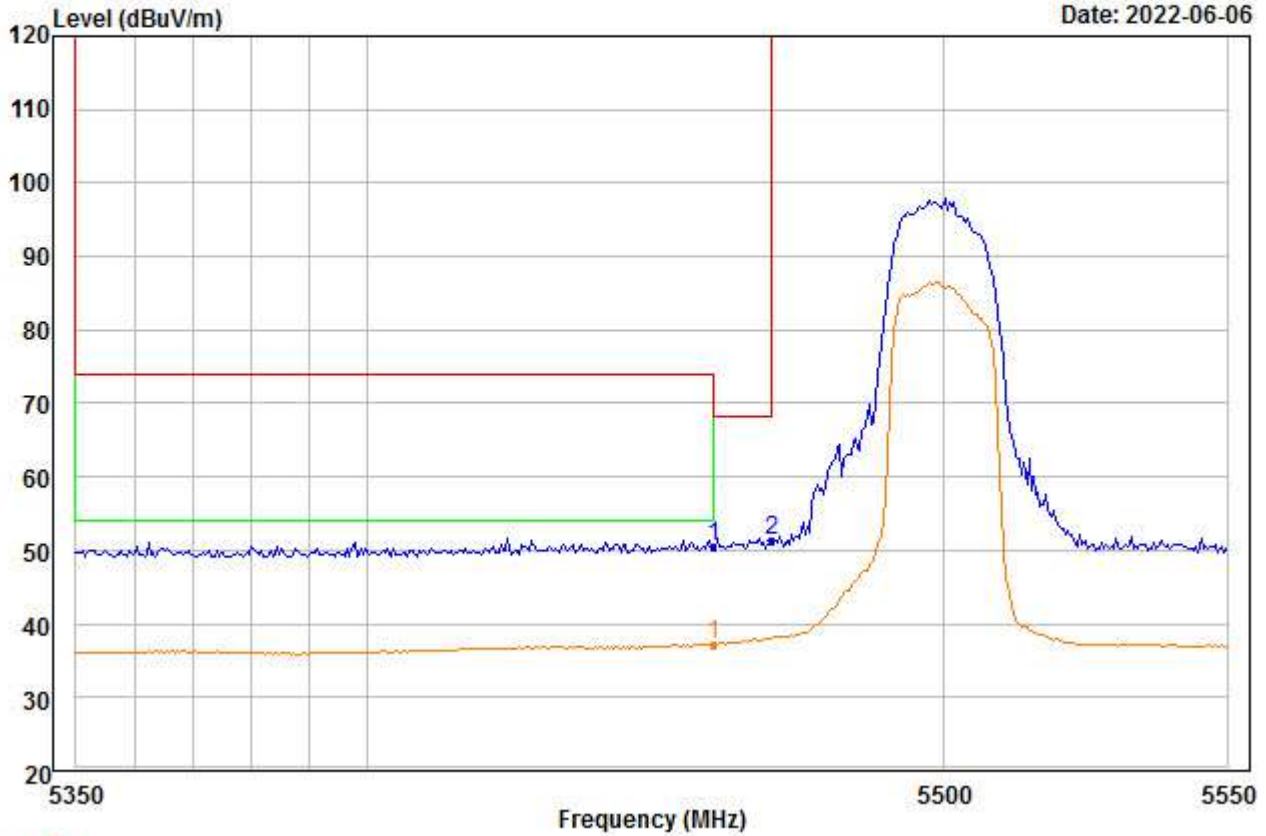


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5500
 Remark :

| | Read Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Remarks |
|------|-----------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|---------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 5460.000 | 50.70 | 35.25 | 45.77 | 0.00 | 10.44 | 50.62 | 68.20 | -17.58 | --- | --- | Peak |
| 2 PP | 5470.000 | 51.25 | 35.26 | 45.75 | 0.00 | 10.47 | 51.23 | 68.20 | -16.97 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00020.EMI

Date: 2022-06-06

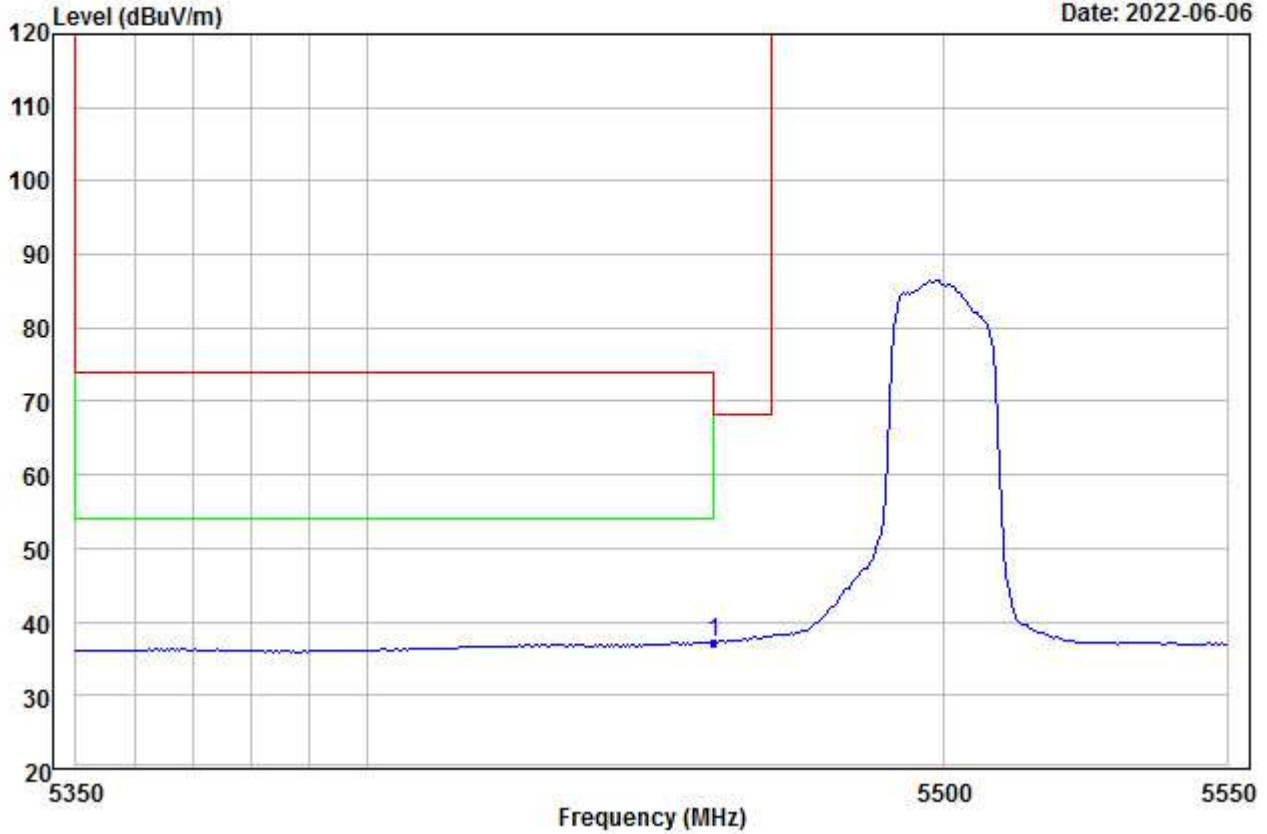


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5500
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 PP 5460.000 | 37.25 | 35.25 | 45.77 | 0.00 | 10.44 | 37.17 | 54.00 | -16.83 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00021.EMI

Date: 2022-06-06

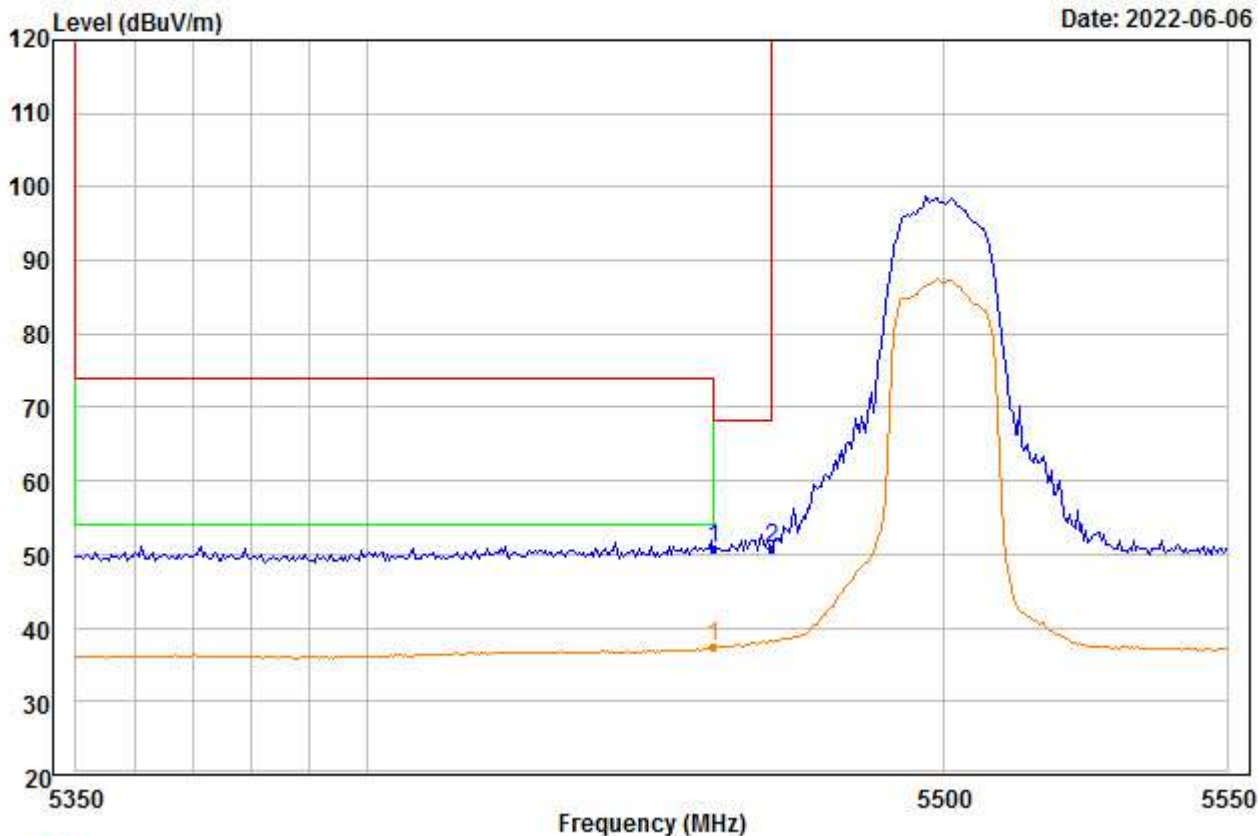


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5500
 Remark :

| | Read Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Remarks |
|------|-----------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|---------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 5460.000 | 50.87 | 35.25 | 45.77 | 0.00 | 10.44 | 50.79 | 68.20 | -17.41 | --- | --- | Peak |
| 2 PP | 5470.000 | 50.89 | 35.26 | 45.75 | 0.00 | 10.47 | 50.87 | 68.20 | -17.33 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00022.EMI

Date: 2022-06-06

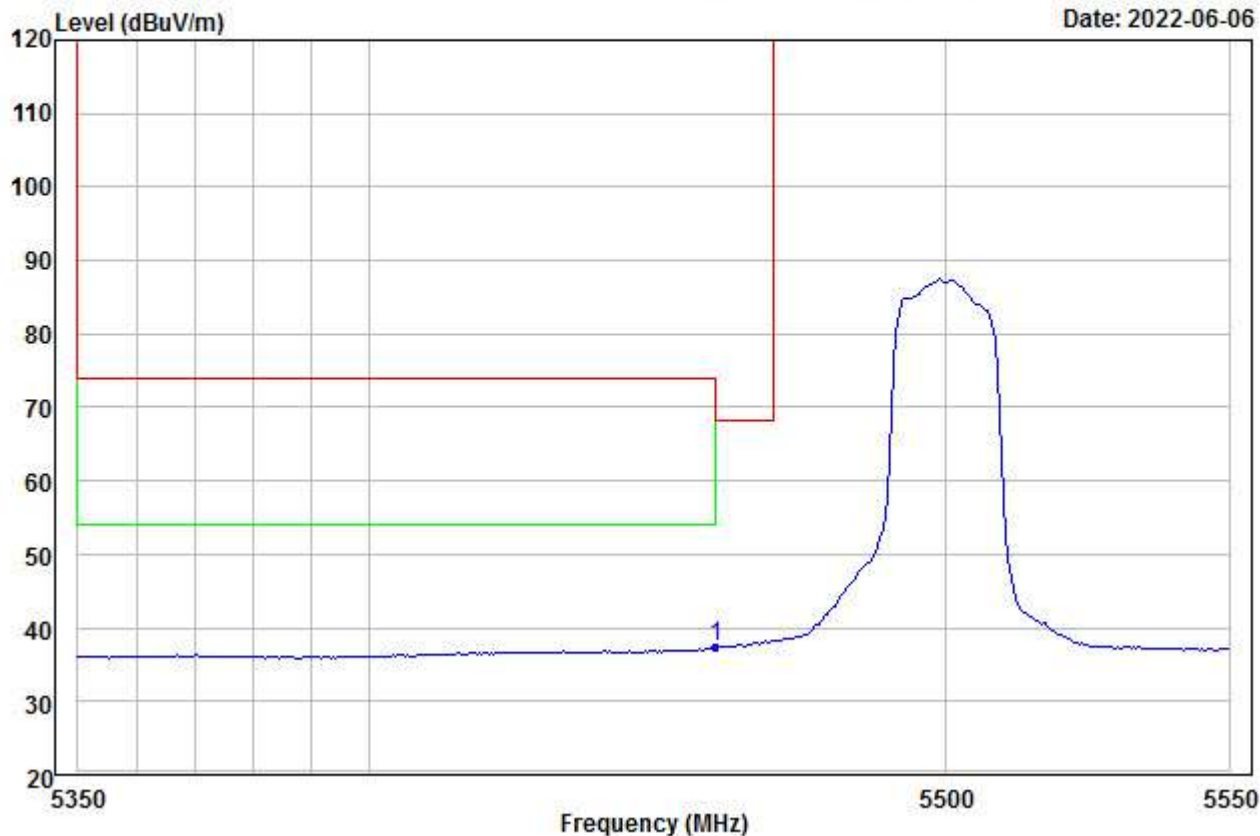


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5500
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 PP 5460.000 | 37.45 | 35.25 | 45.77 | 0.00 | 10.44 | 37.37 | 54.00 | -16.63 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00023.EMI

Date: 2022-06-06

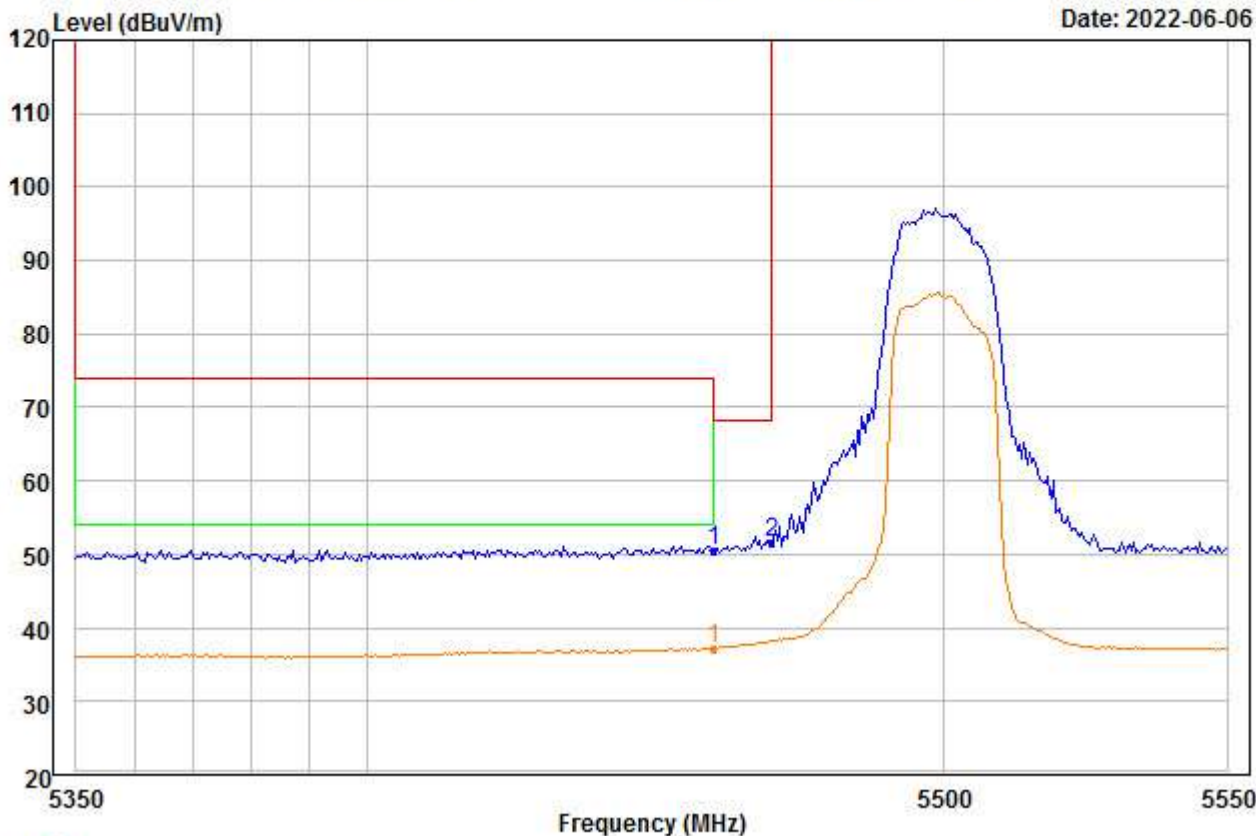


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5500
 Remark :

| | Read Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Remarks |
|------|-----------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|---------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 5460.000 | 50.55 | 35.25 | 45.77 | 0.00 | 10.44 | 50.47 | 68.20 | -17.73 | --- | --- | Peak |
| 2 PP | 5470.000 | 51.53 | 35.26 | 45.75 | 0.00 | 10.47 | 51.51 | 68.20 | -16.69 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00024.EMI

Date: 2022-06-06

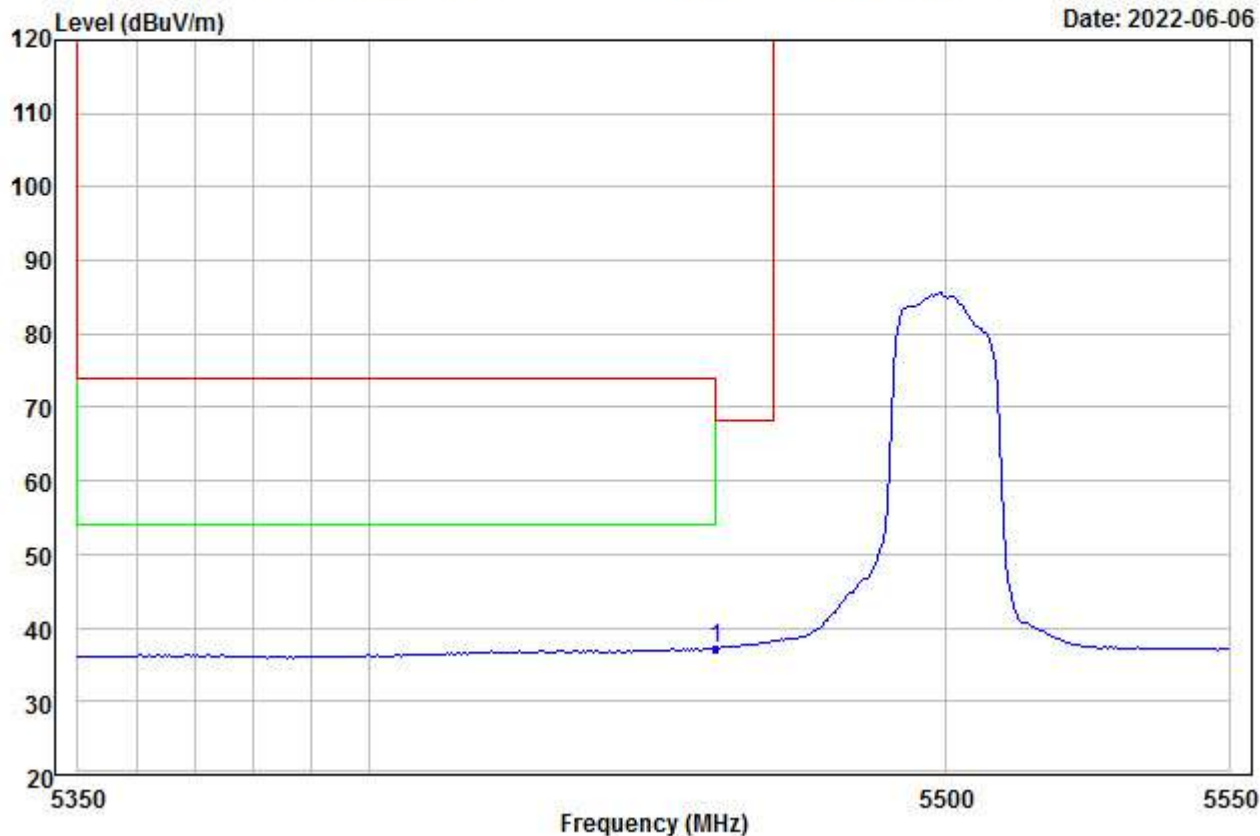


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5500
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 PP 5460.000 | 37.25 | 35.25 | 45.77 | 0.00 | 10.44 | 37.17 | 54.00 | -16.83 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00025.EMI

Date: 2022-06-06

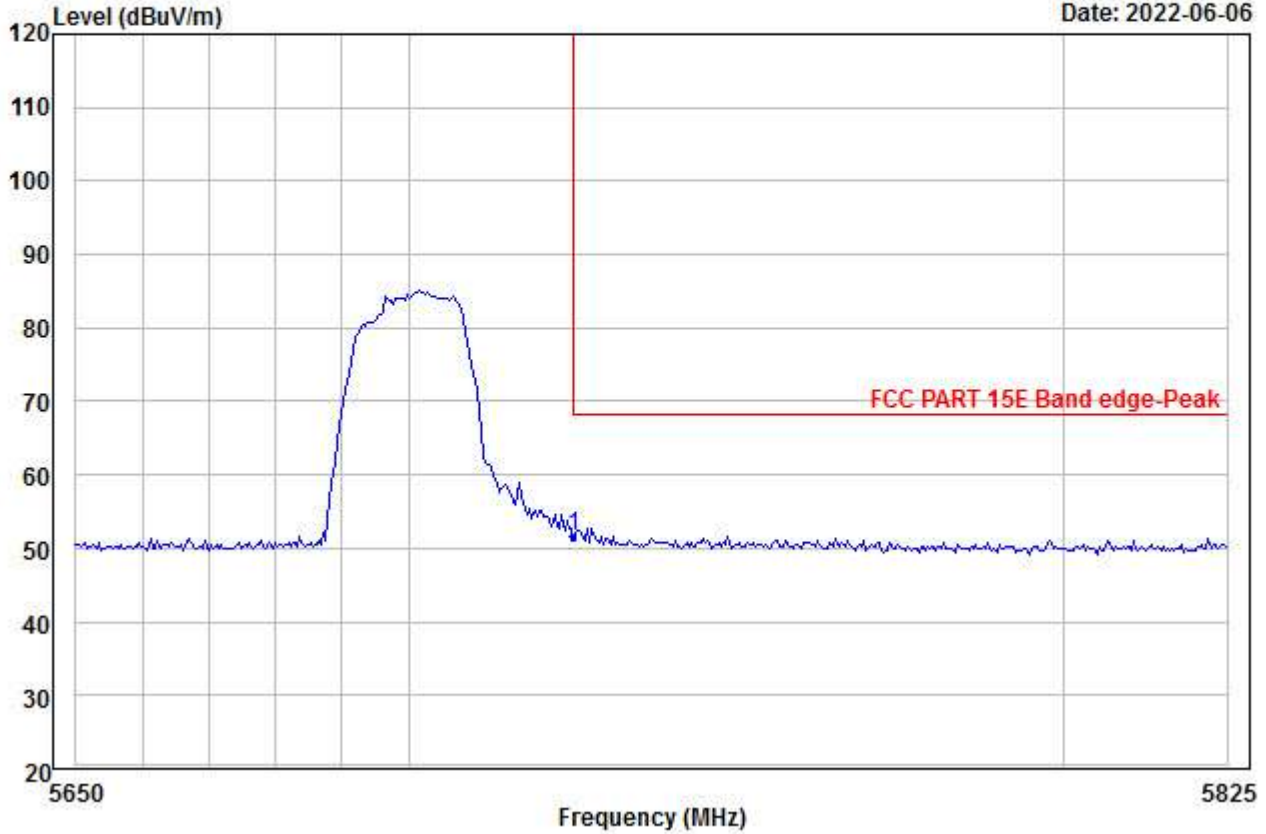


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5700
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 PP 5725.000 | 51.95 | 35.26 | 45.57 | 0.00 | 9.94 | 51.58 | 68.20 | -16.62 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00026.EMI

Date: 2022-06-06

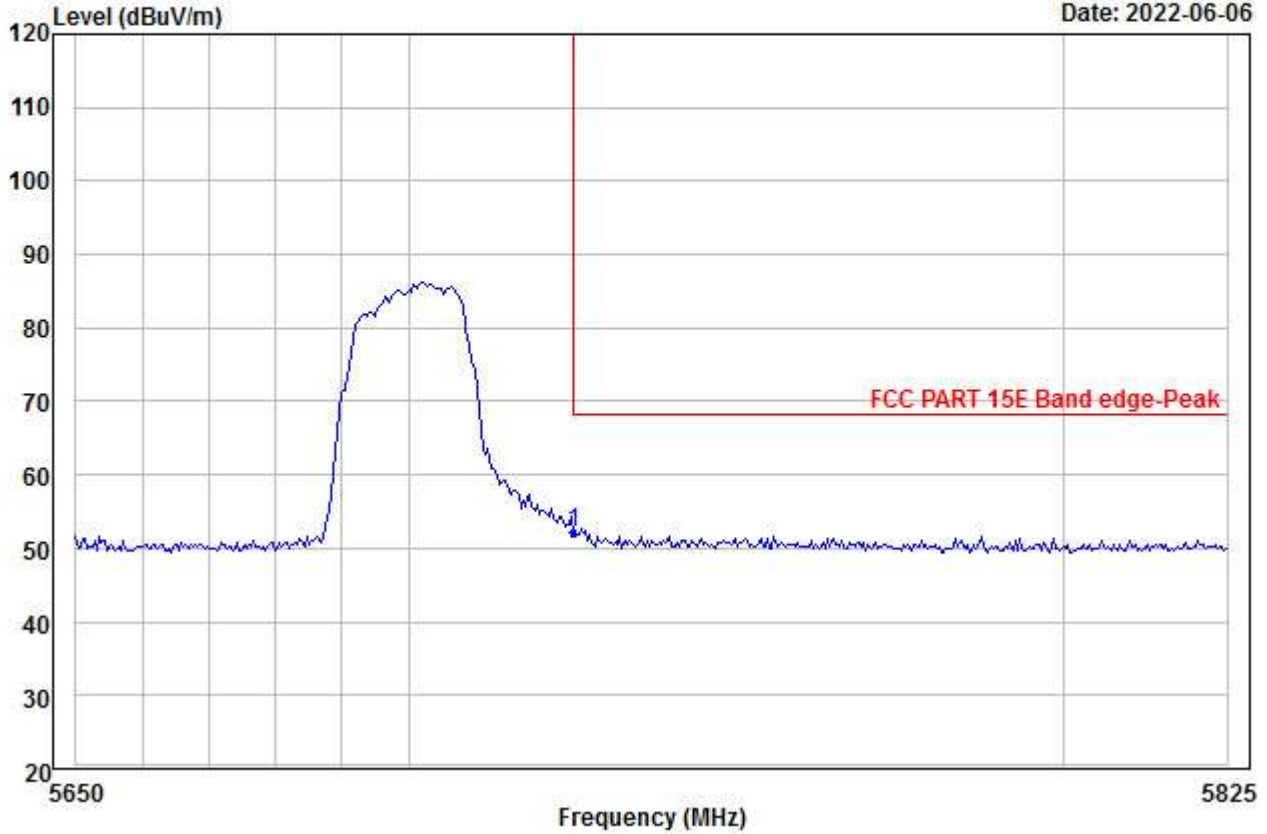


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5700
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 PP 5725.000 | 52.61 | 35.26 | 45.57 | 0.00 | 9.94 | 52.24 | 68.20 | -15.96 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00027.EMI

Date: 2022-06-06

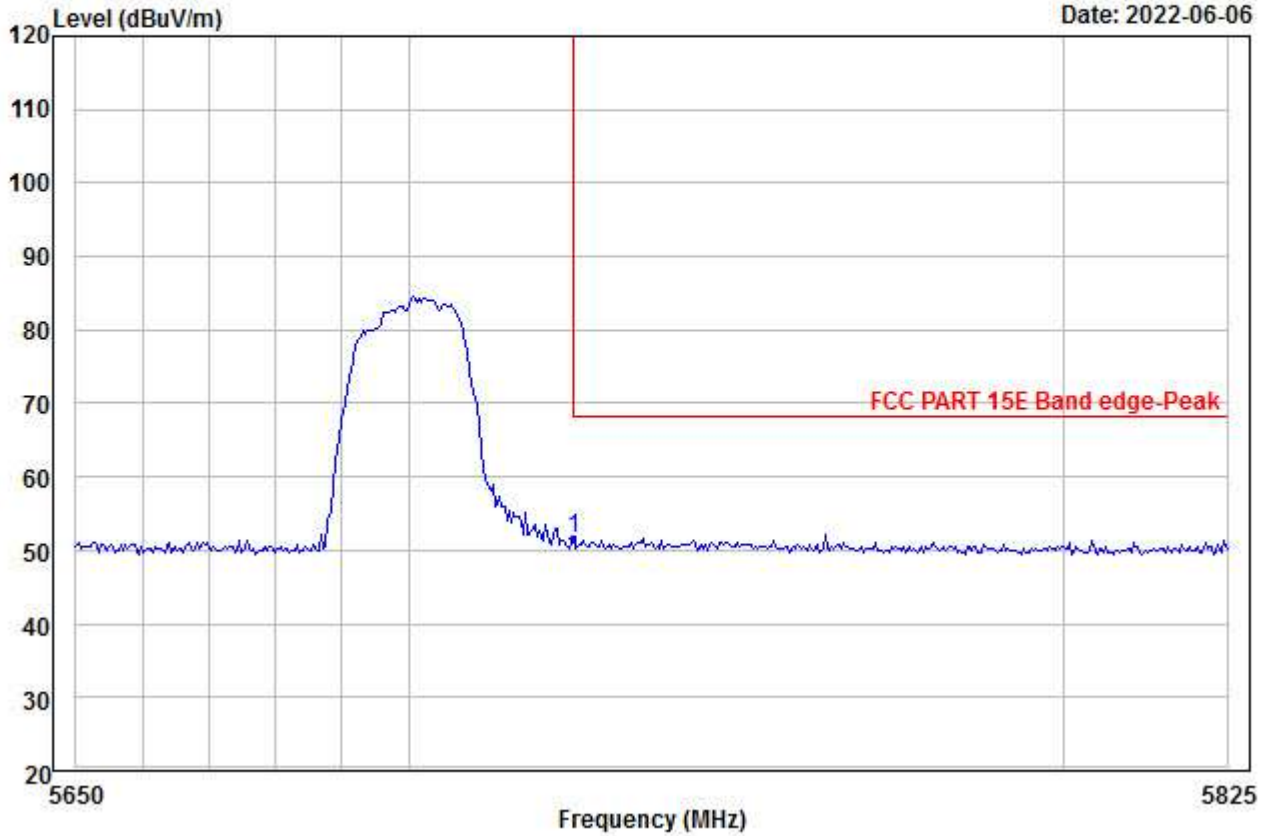


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5700
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 PP 5725.000 | 52.07 | 35.26 | 45.57 | 0.00 | 9.94 | 51.70 | 68.20 | -16.50 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00028.EMI

Date: 2022-06-06

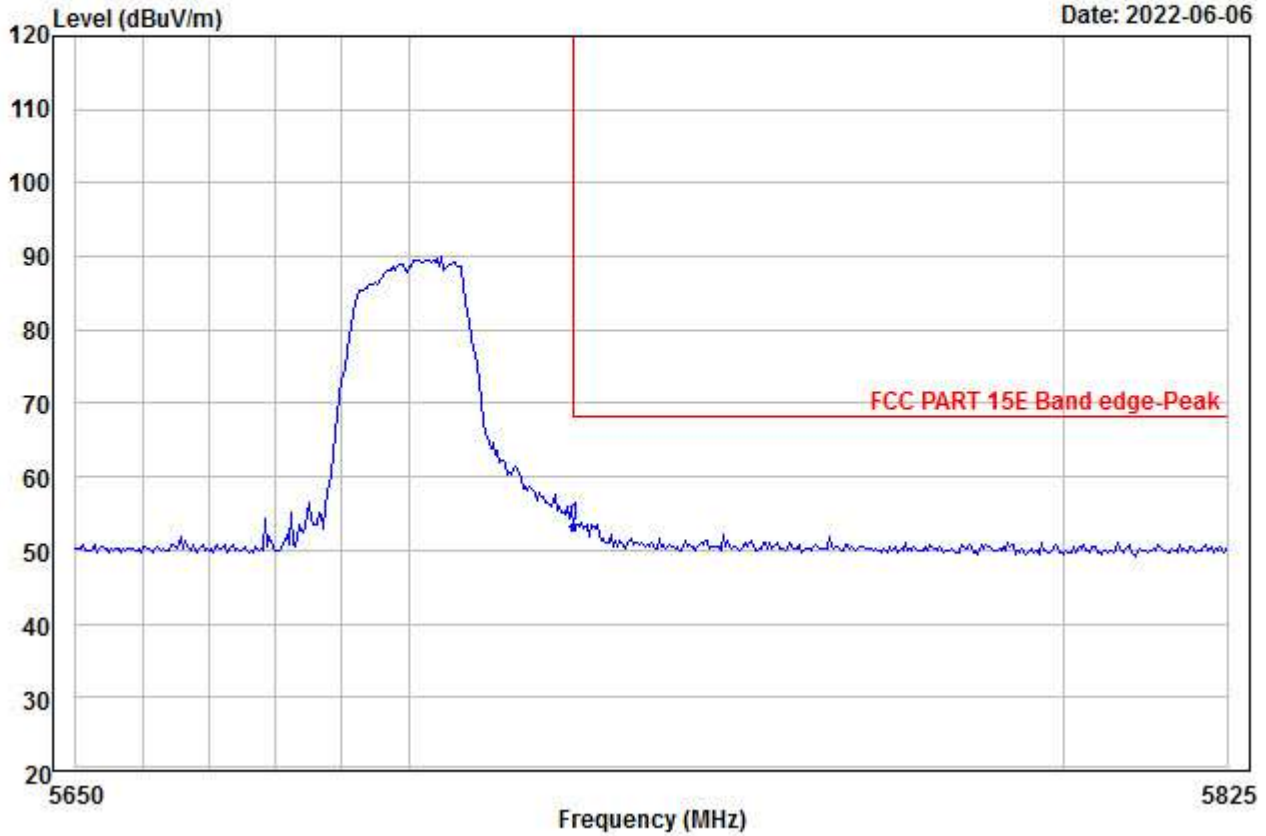


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5700
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 PP 5725.000 | 53.66 | 35.26 | 45.57 | 0.00 | 9.94 | 53.29 | 68.20 | -14.91 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00029.EMI

Date: 2022-06-06

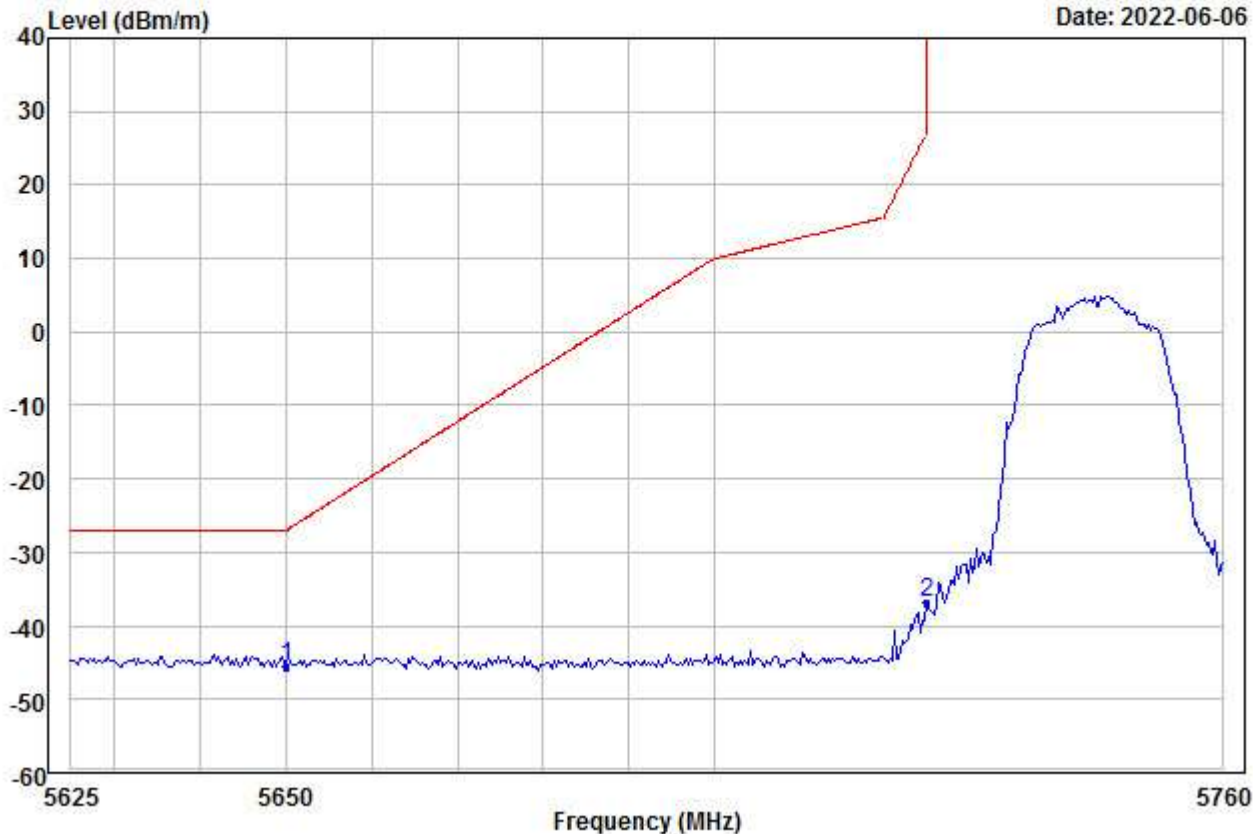


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5745
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|--------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBm | dB/m | dB | dB | dB | dBm/m | dBm/m | dB | cm | deg | |
| 1 PP 5650.000 | -57.02 | 35.27 | 45.61 | 0.00 | 21.88 | -45.48 | -27.00 | -18.48 | --- | --- | Peak |
| 2 5725.000 | -48.13 | 35.26 | 45.57 | 0.00 | 21.68 | -36.76 | 27.00 | -63.76 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00030.EMI

Date: 2022-06-06

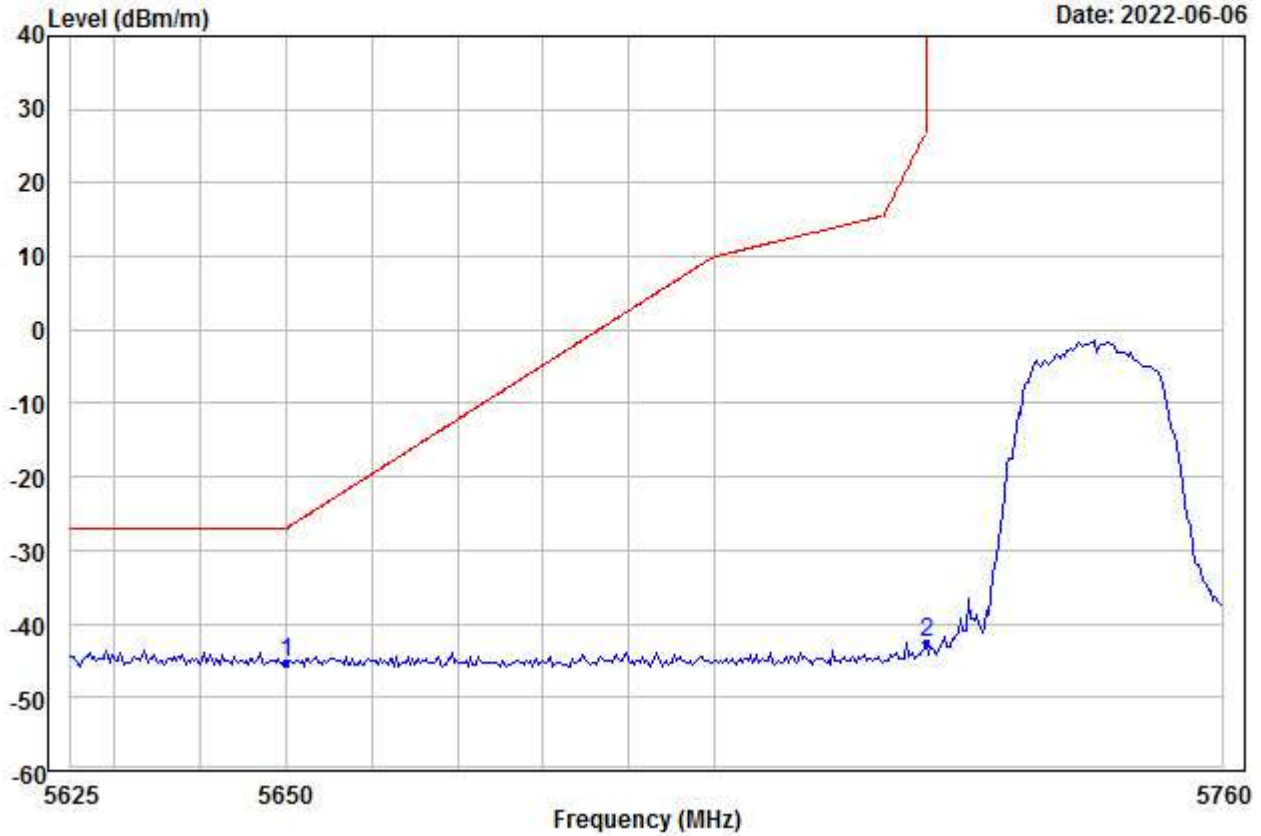


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5745
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|--------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBm | dB/m | dB | dB | dB | dBm/m | dBm/m | dB | cm | deg | |
| 1 PP 5650.000 | -56.81 | 35.27 | 45.61 | 0.00 | 21.88 | -45.27 | -27.00 | -18.27 | --- | --- | Peak |
| 2 5725.000 | -53.99 | 35.26 | 45.57 | 0.00 | 21.68 | -42.62 | 27.00 | -69.62 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00031.EMI

Date: 2022-06-06

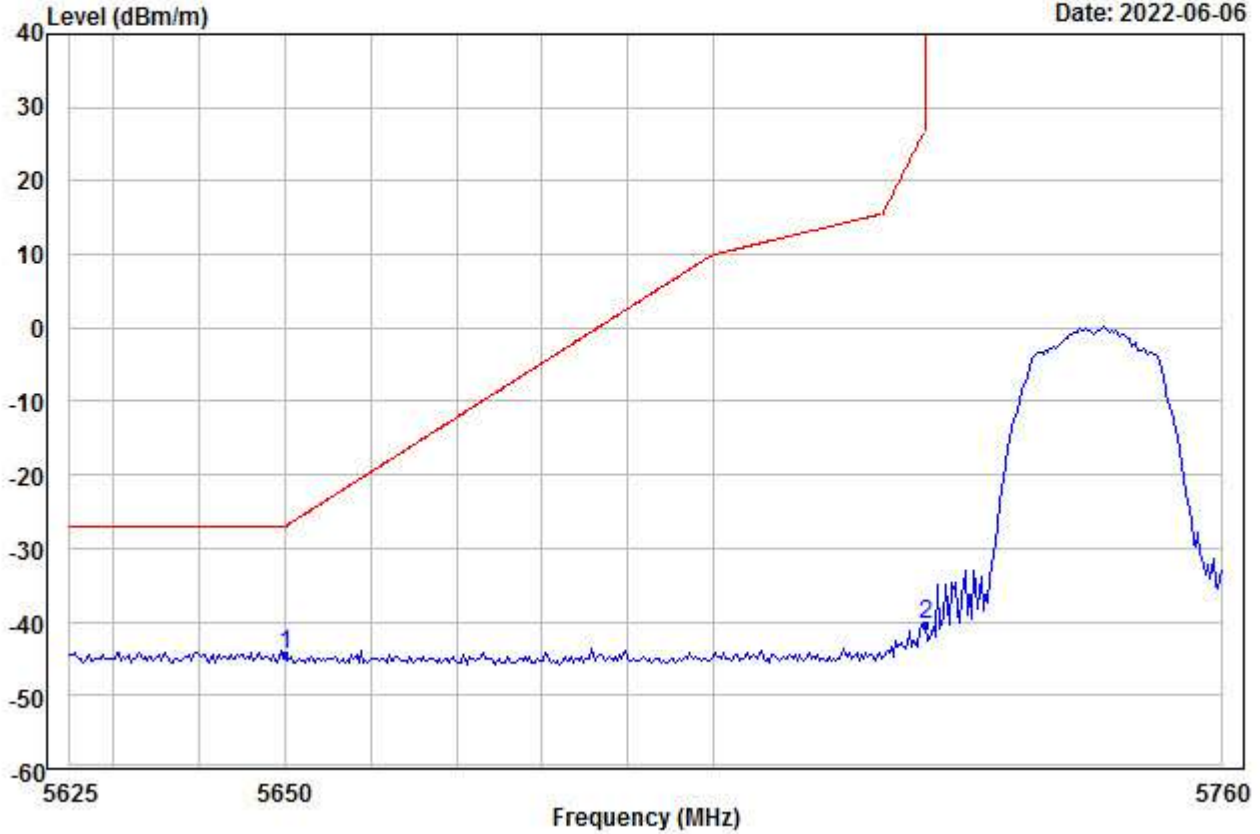


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5745
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|--------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBm | dB/m | dB | dB | dB | dBm/m | dBm/m | dB | cm | deg | |
| 1 PP 5650.000 | -56.08 | 35.27 | 45.61 | 0.00 | 21.88 | -44.54 | -27.00 | -17.54 | --- | --- | Peak |
| 2 5725.000 | -51.81 | 35.26 | 45.57 | 0.00 | 21.68 | -40.44 | 27.00 | -67.44 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00032.EMI

Date: 2022-06-06

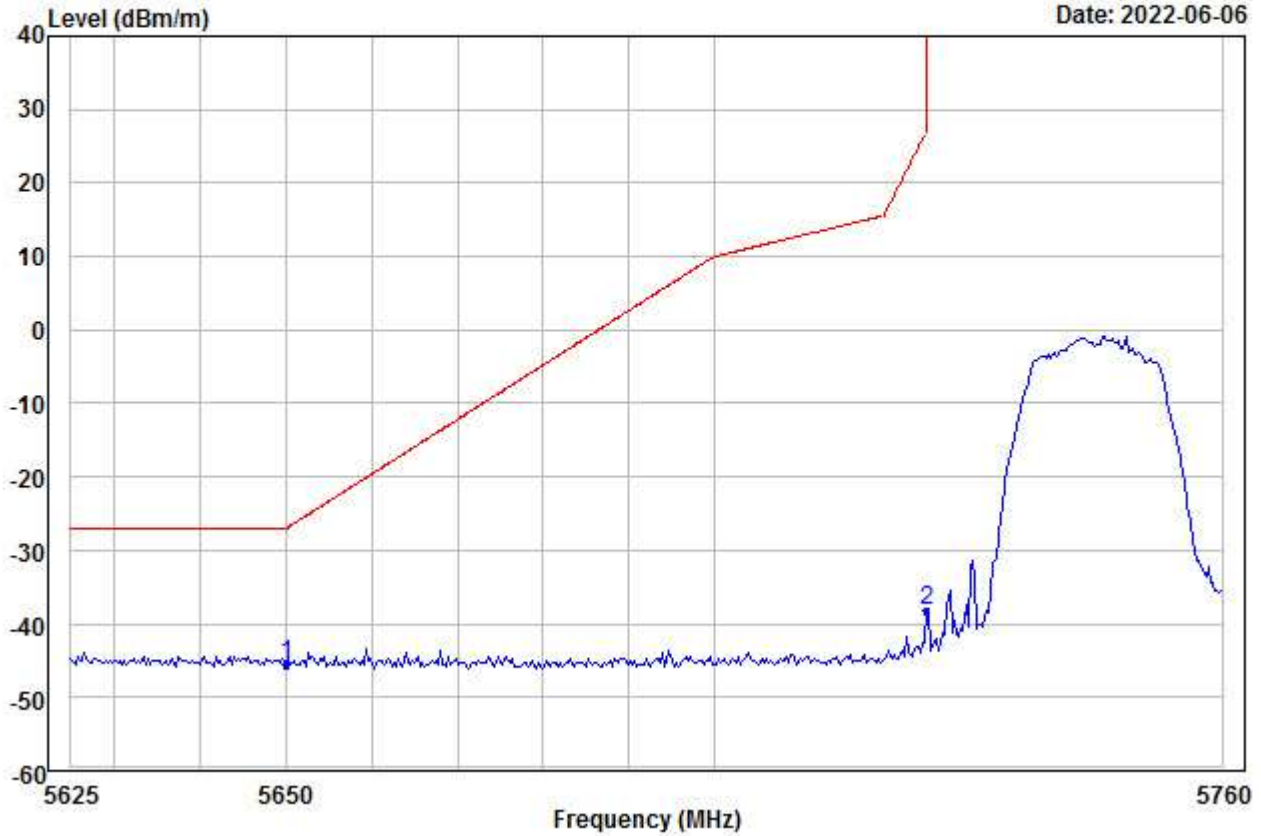


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5745
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|--------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBm | dB/m | dB | dB | dB | dBm/m | dB | cm | deg | | |
| 1 PP 5650.000 | -57.17 | 35.27 | 45.61 | 0.00 | 21.88 | -45.63 | -27.00 | -18.63 | --- | --- | Peak |
| 2 5725.000 | -49.62 | 35.26 | 45.57 | 0.00 | 21.68 | -38.25 | 27.00 | -65.25 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00033.EMI

Date: 2022-06-06

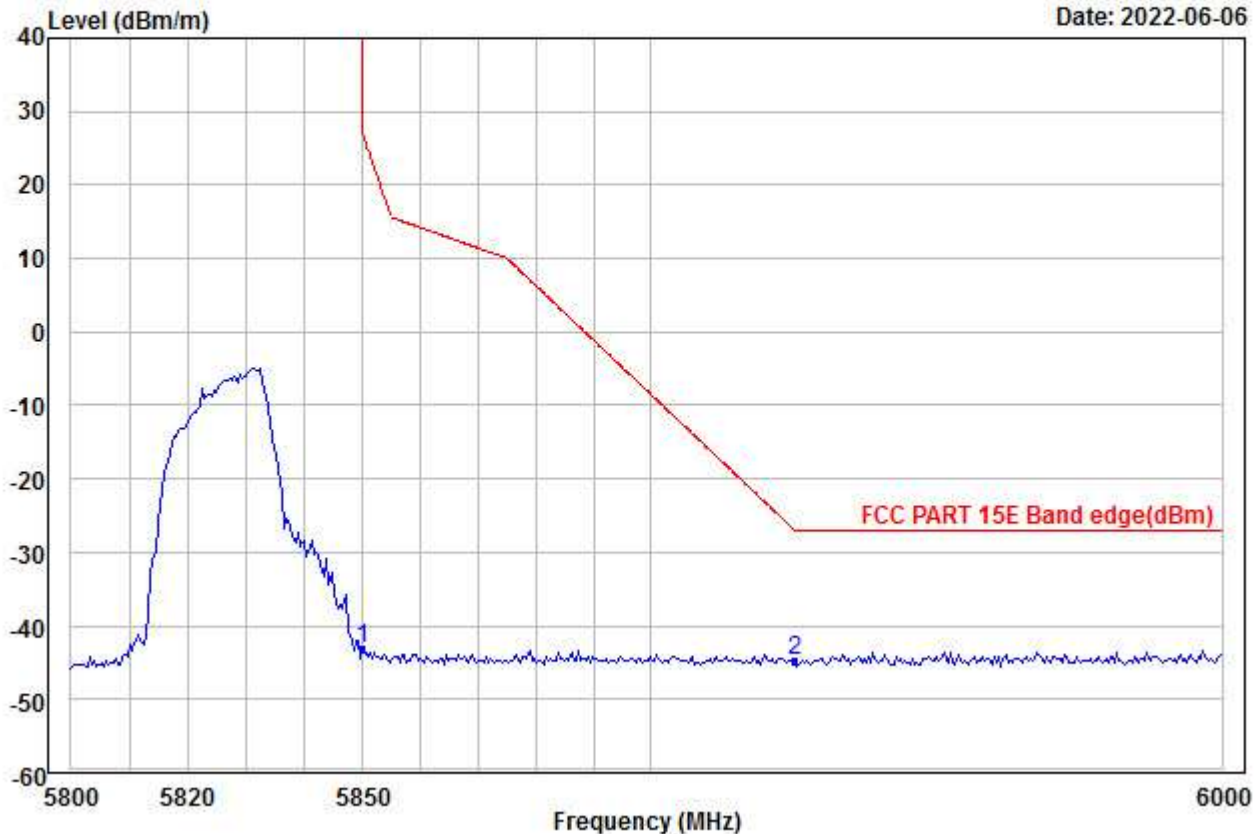


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5825
 Remark :

| | Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Remarks |
|------|----------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|---------|
| | MHz | dBm | dB/m | dB | dB | dB | dBm/m | dBm/m | dB | cm | deg | |
| 1 | 5850.000 | -54.28 | 35.23 | 45.49 | 0.00 | 21.47 | -43.07 | 27.00 | -70.07 | --- | --- | Peak |
| 2 PP | 5925.000 | -55.85 | 35.22 | 45.44 | 0.00 | 21.44 | -44.63 | -27.00 | -17.63 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00034.EMI

Date: 2022-06-06

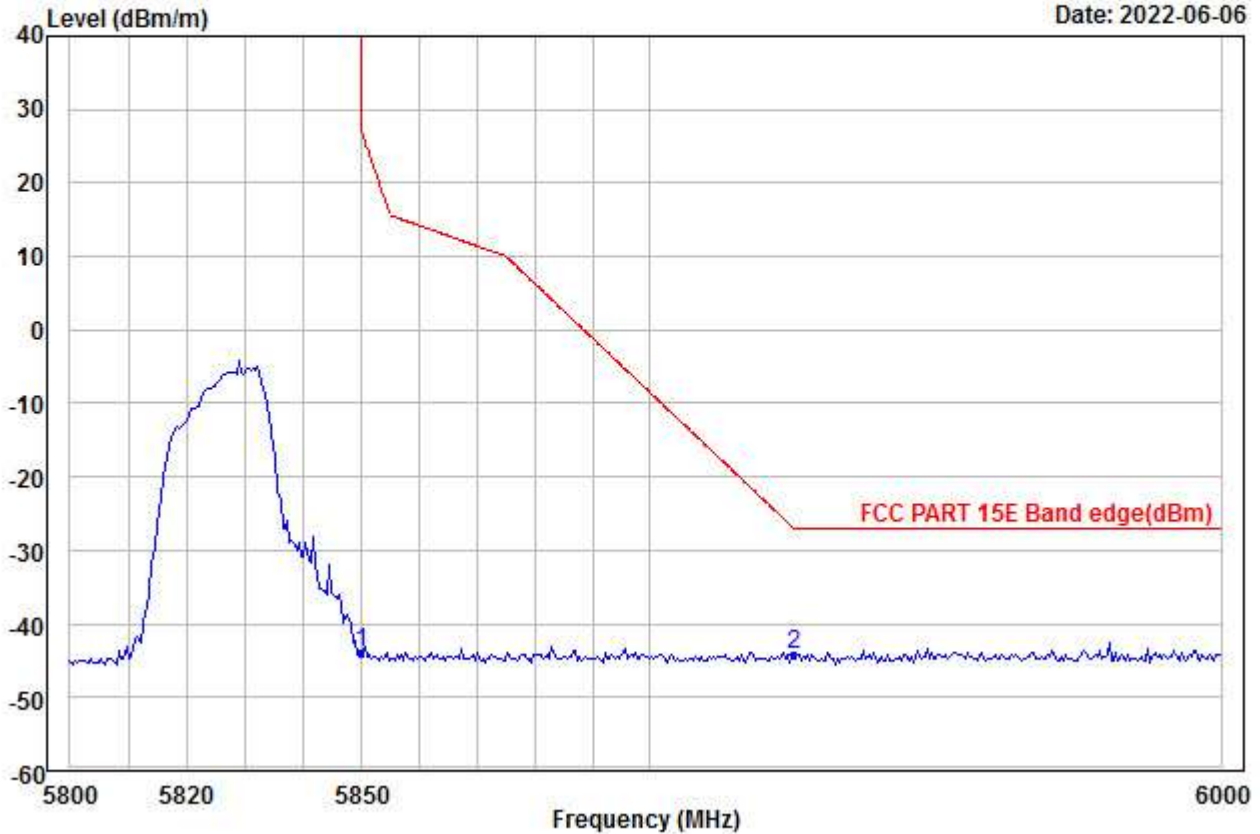


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5825
 Remark :

| | Read Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Remarks |
|------|-----------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|---------|
| | MHz | dBm | dB/m | dB | dB | dB | dBm/m | dBm/m | dB | cm | deg | |
| 1 | 5850.000 | -55.04 | 35.23 | 45.49 | 0.00 | 21.47 | -43.83 | 27.00 | -70.83 | --- | --- | Peak |
| 2 PP | 5925.000 | -55.43 | 35.22 | 45.44 | 0.00 | 21.44 | -44.21 | -27.00 | -17.21 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00035.EMI

Date: 2022-06-06

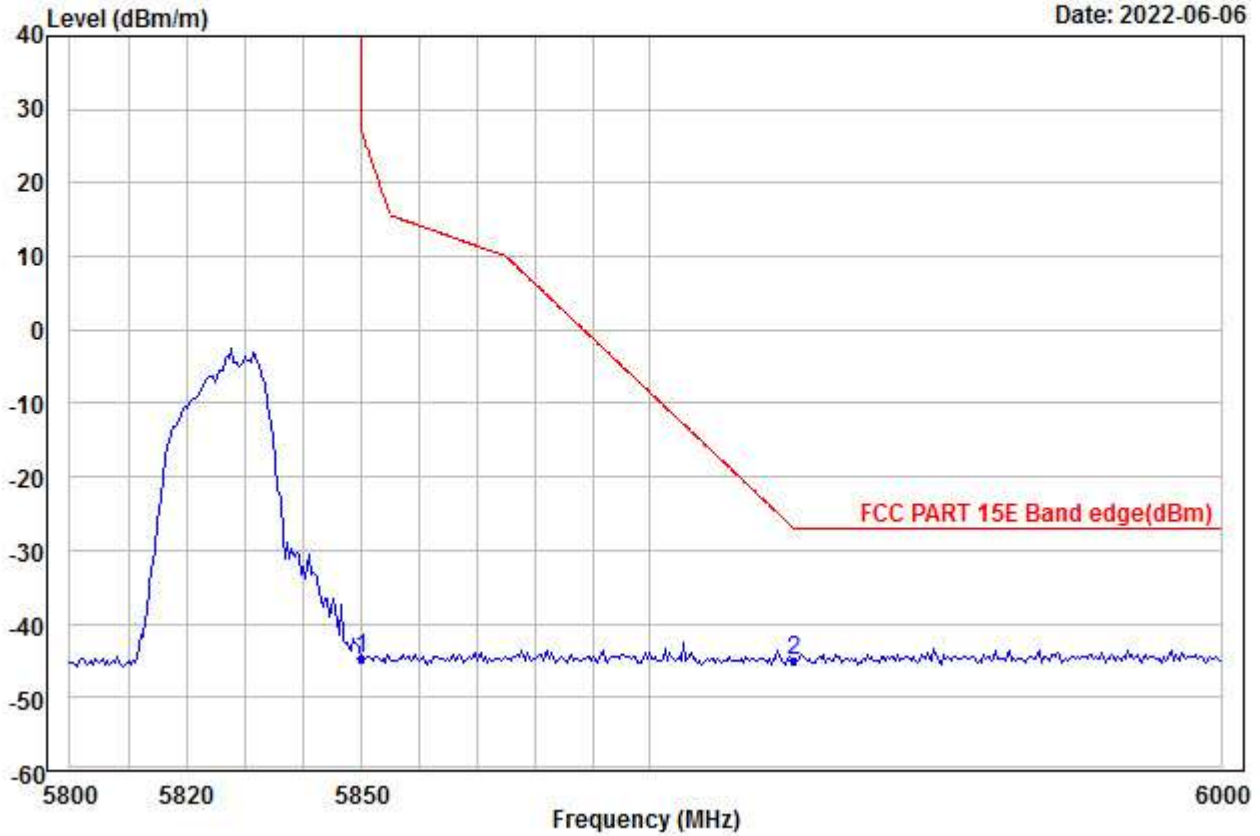


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5825
 Remark :

| | Read Freq | Ant Level | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Remarks | |
|------|-----------|-----------|---------------|------------|------------|-------|------------|------------|--------|------|---------|------|
| | MHz | dBm | dB/m | dB | dB | dBm/m | dBm/m | dB | cm | deg | | |
| 1 | 5850.000 | -55.96 | 35.23 | 45.49 | 0.00 | 21.47 | -44.75 | 27.00 | -71.75 | --- | --- | Peak |
| 2 PP | 5925.000 | -56.25 | 35.22 | 45.44 | 0.00 | 21.44 | -45.03 | -27.00 | -18.03 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00036.EMI

Date: 2022-06-06

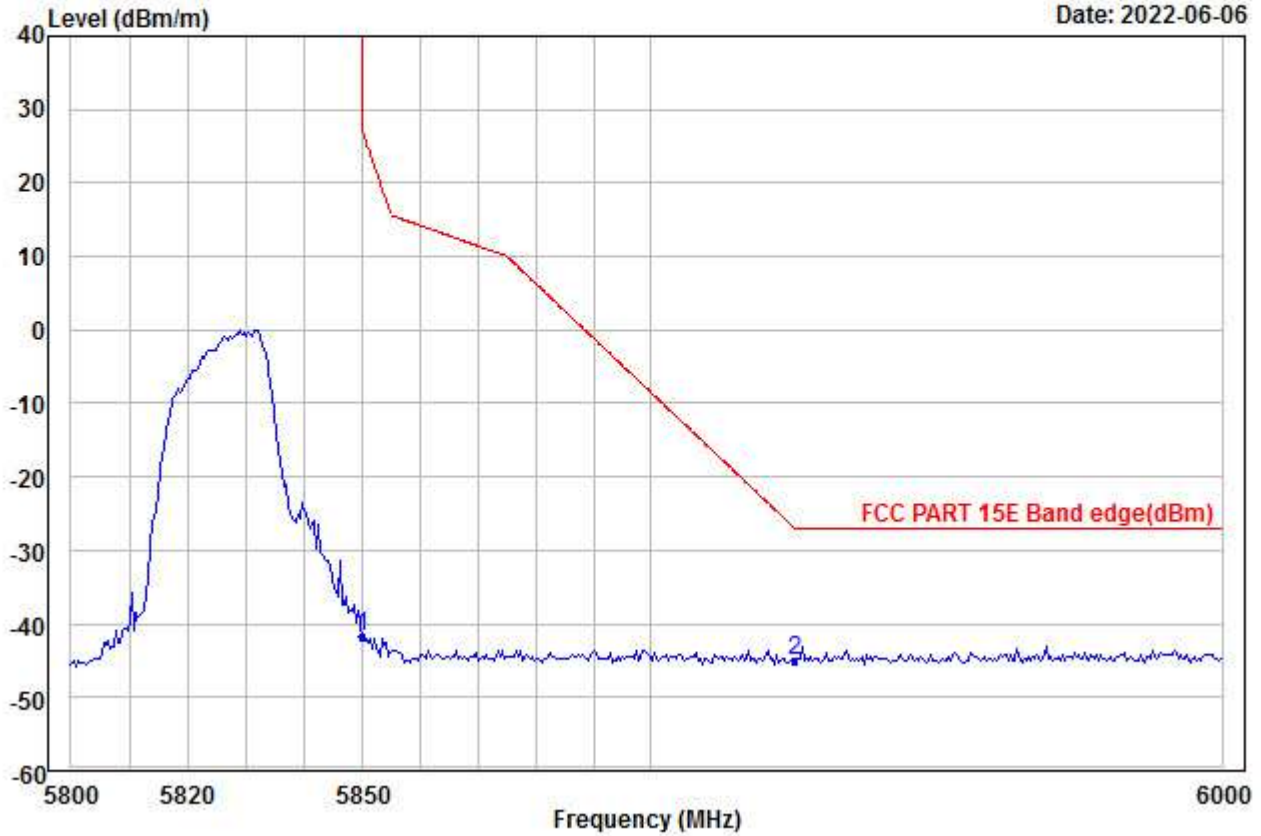


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5825
 Remark :

| | Read Freq | Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Remarks |
|------|-----------|--------|------------|---------------|------------|------------|--------|------------|------------|------|------|---------|
| | MHz | dBm | dB/m | dB | dB | dB | dBm/m | dBm/m | dB | cm | deg | |
| 1 | 5850.000 | -53.05 | 35.23 | 45.49 | 0.00 | 21.47 | -41.84 | 27.00 | -68.84 | --- | --- | Peak |
| 2 PP | 5925.000 | -56.23 | 35.22 | 45.44 | 0.00 | 21.44 | -45.01 | -27.00 | -18.01 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00037.EMI

Date: 2022-06-06

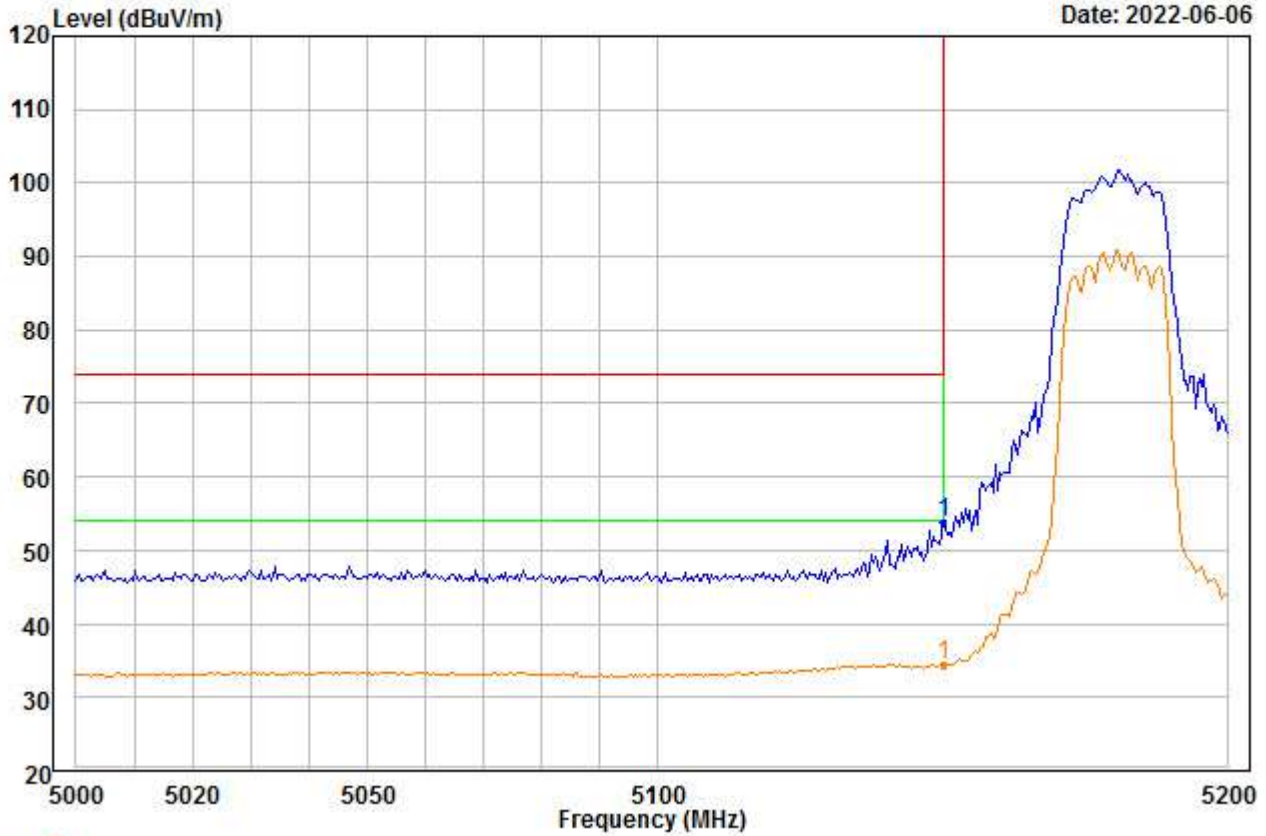


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5180
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 PP 5150.000 | 55.46 | 34.88 | 46.33 | 0.00 | 9.78 | 53.79 | 74.00 | -20.21 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00038.EMI

Date: 2022-06-06

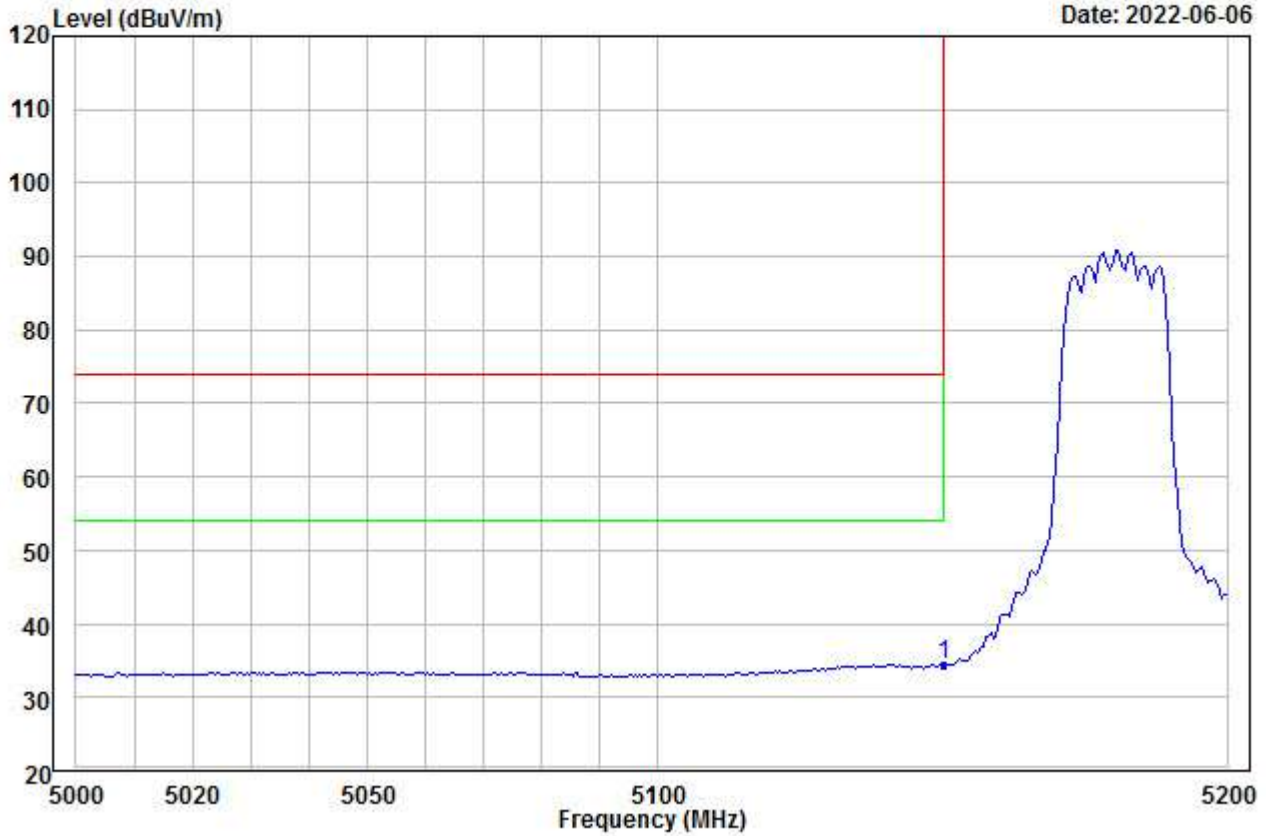


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5180
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Level | Line | Limit | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 PP 5150.000 | 36.24 | 34.88 | 46.33 | 0.00 | 9.78 | 34.57 | 54.00 | -19.43 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00039.EMI

Date: 2022-06-06

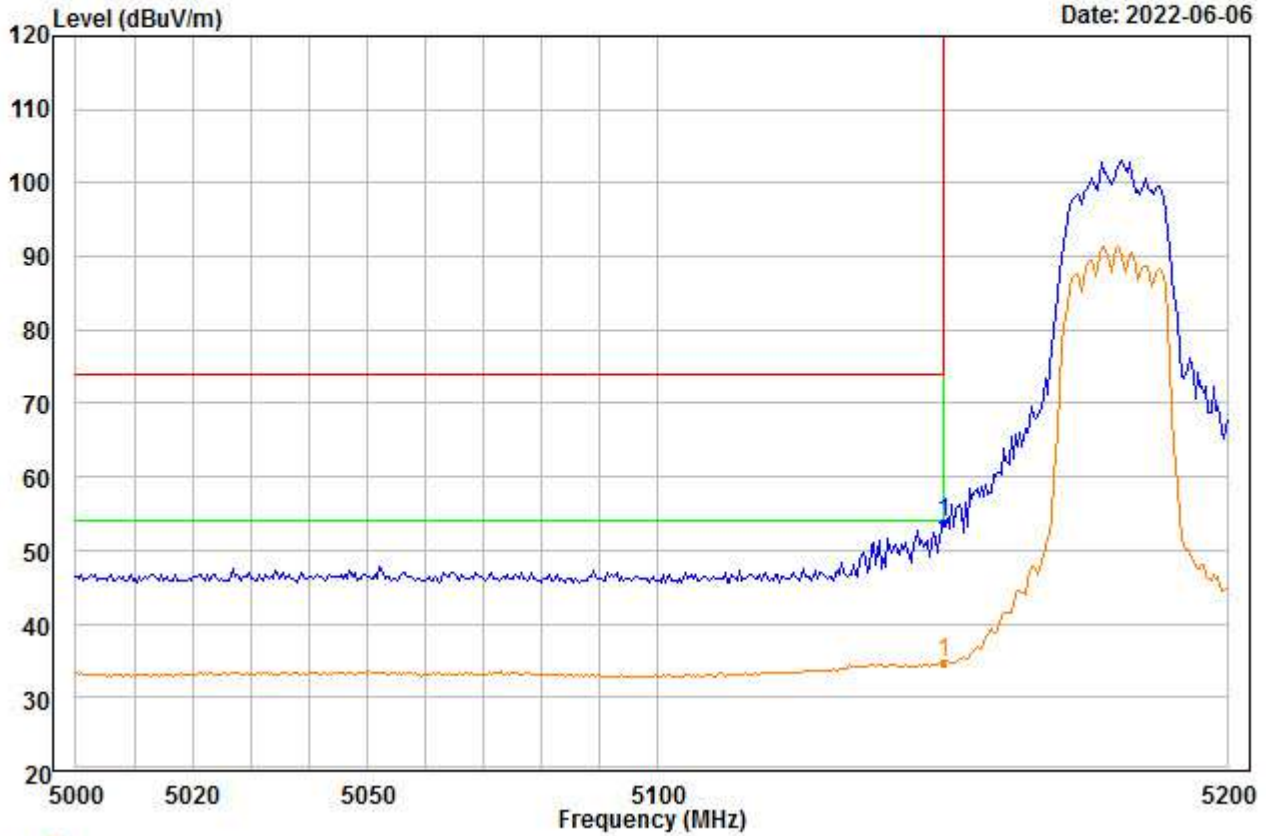


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5180
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 PP 5150.000 | 55.59 | 34.88 | 46.33 | 0.00 | 9.78 | 53.92 | 74.00 | -20.08 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00040.EMI

Date: 2022-06-06

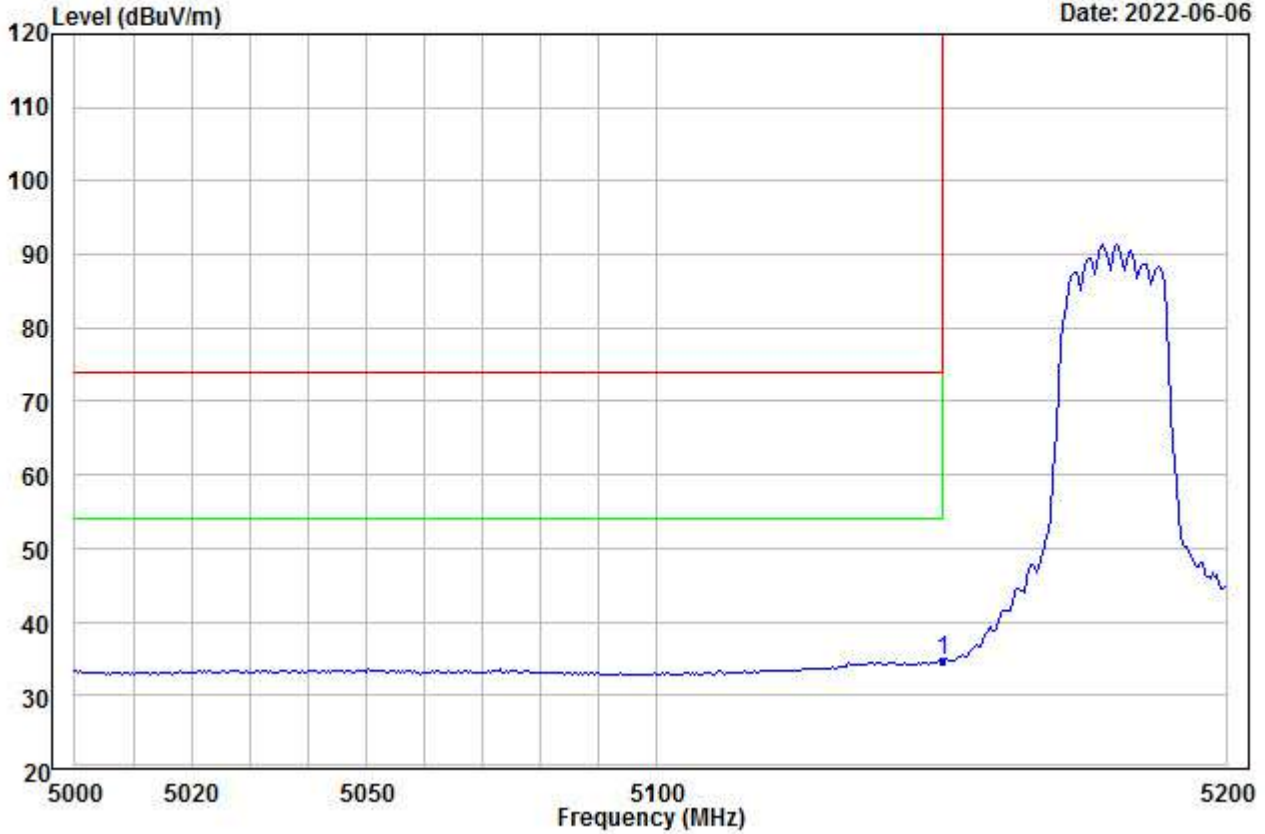


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5180
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 PP 5150.000 | 36.36 | 34.88 | 46.33 | 0.00 | 9.78 | 34.69 | 54.00 | -19.31 | --- | --- | Aver |

File: F:\Test Template\上海\ITS\2022\220523032 SA750\B\5G\BE\4_00041.EMI

Date: 2022-06-06

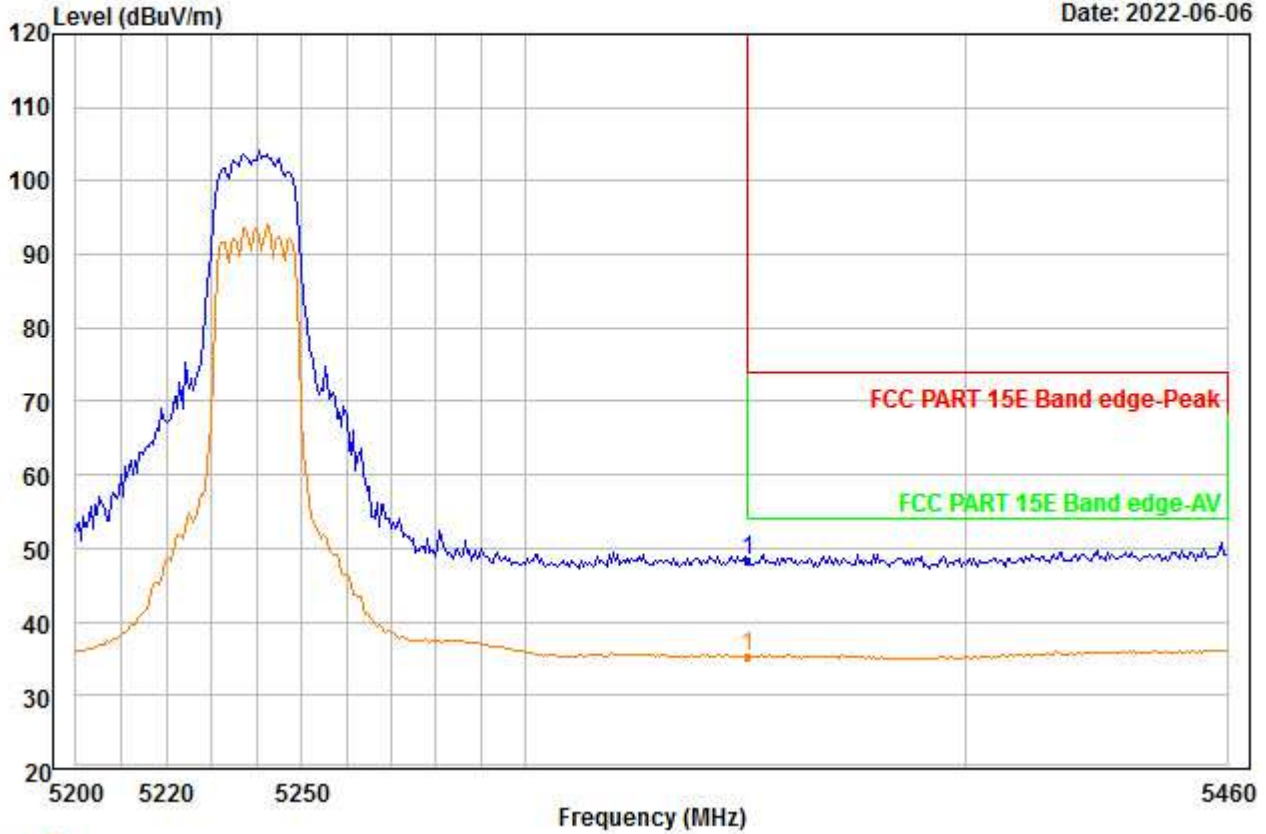


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5240
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|----------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg |
| 1 PP 5350.000 | 48.98 | 35.12 | 45.97 | 0.00 | 10.18 | 48.31 | 74.00 | -25.69 | --- | --- Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00042.EMI

Date: 2022-06-06

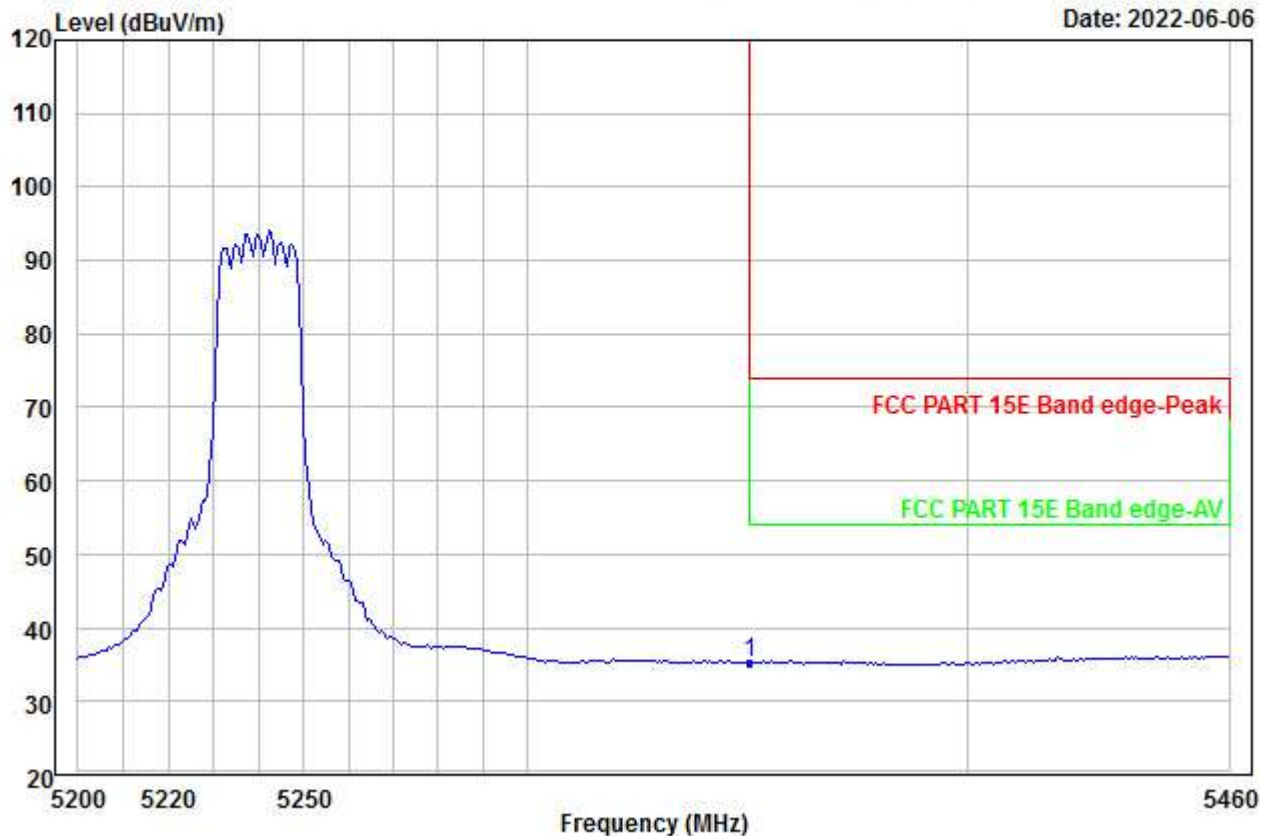


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5240
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 PP 5350.000 | 36.01 | 35.12 | 45.97 | 0.00 | 10.18 | 35.34 | 54.00 | -18.66 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00043.EMI

Date: 2022-06-06

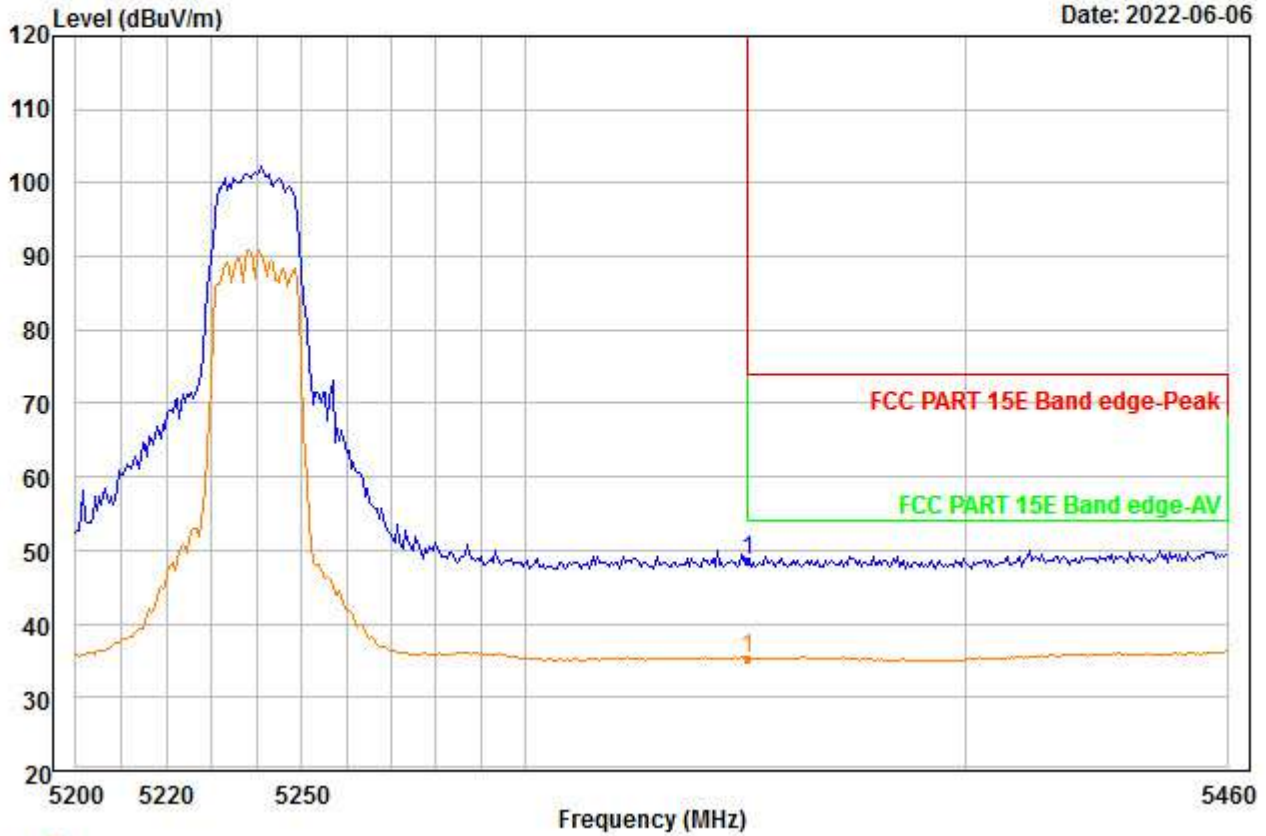


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5240
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|----------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg |
| 1 PP 5350.000 | 49.31 | 35.12 | 45.97 | 0.00 | 10.18 | 48.64 | 74.00 | -25.36 | --- | --- Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00044.EMI

Date: 2022-06-06

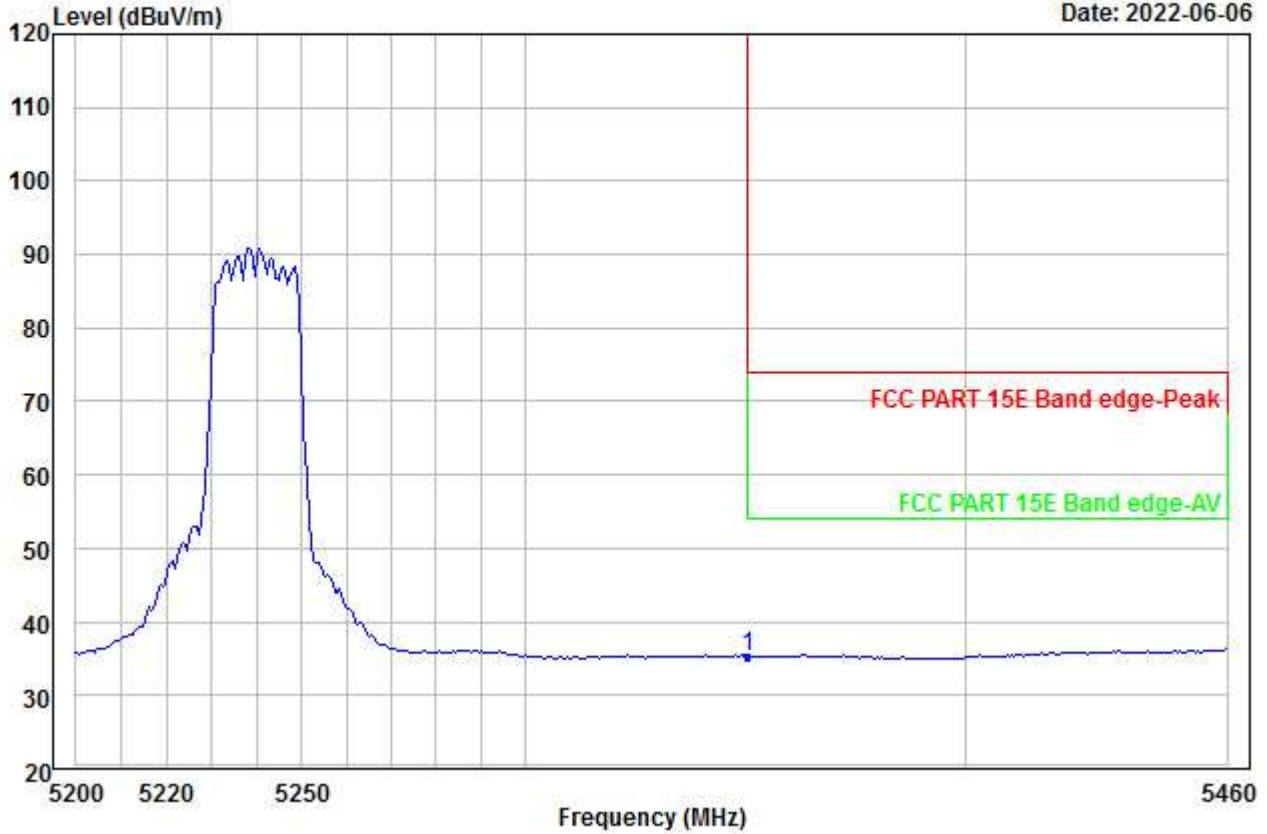


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5240
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|----------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg |
| 1 PP 5350.000 | 36.05 | 35.12 | 45.97 | 0.00 | 10.18 | 35.38 | 54.00 | -18.62 | --- | --- Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00045.EMI

Date: 2022-06-06

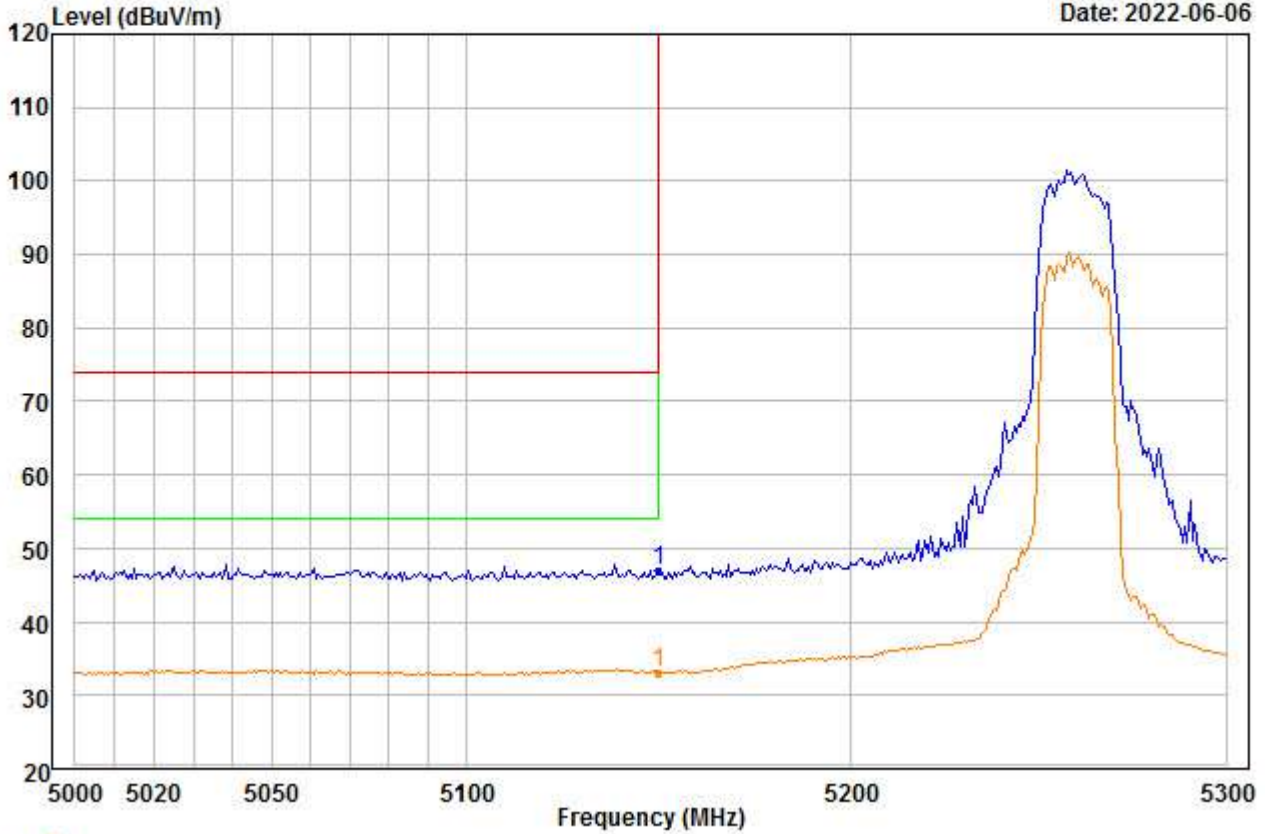


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5260
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 PP 5150.000 | 48.51 | 34.88 | 46.33 | 0.00 | 9.78 | 46.84 | 74.00 | -27.16 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00046.EMI

Date: 2022-06-06

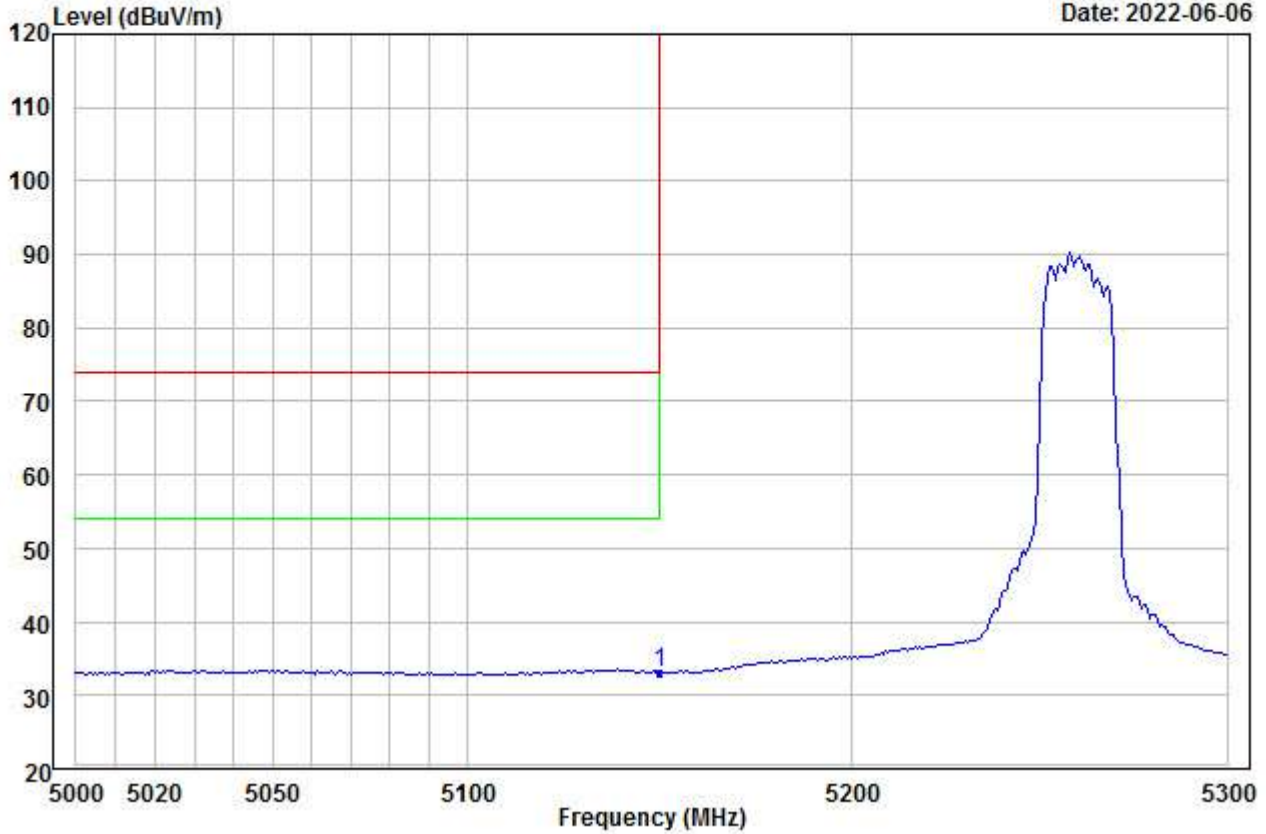


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5260
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 PP 5150.000 | 34.71 | 34.88 | 46.33 | 0.00 | 9.78 | 33.04 | 54.00 | -20.96 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00047.EMI

Date: 2022-06-06

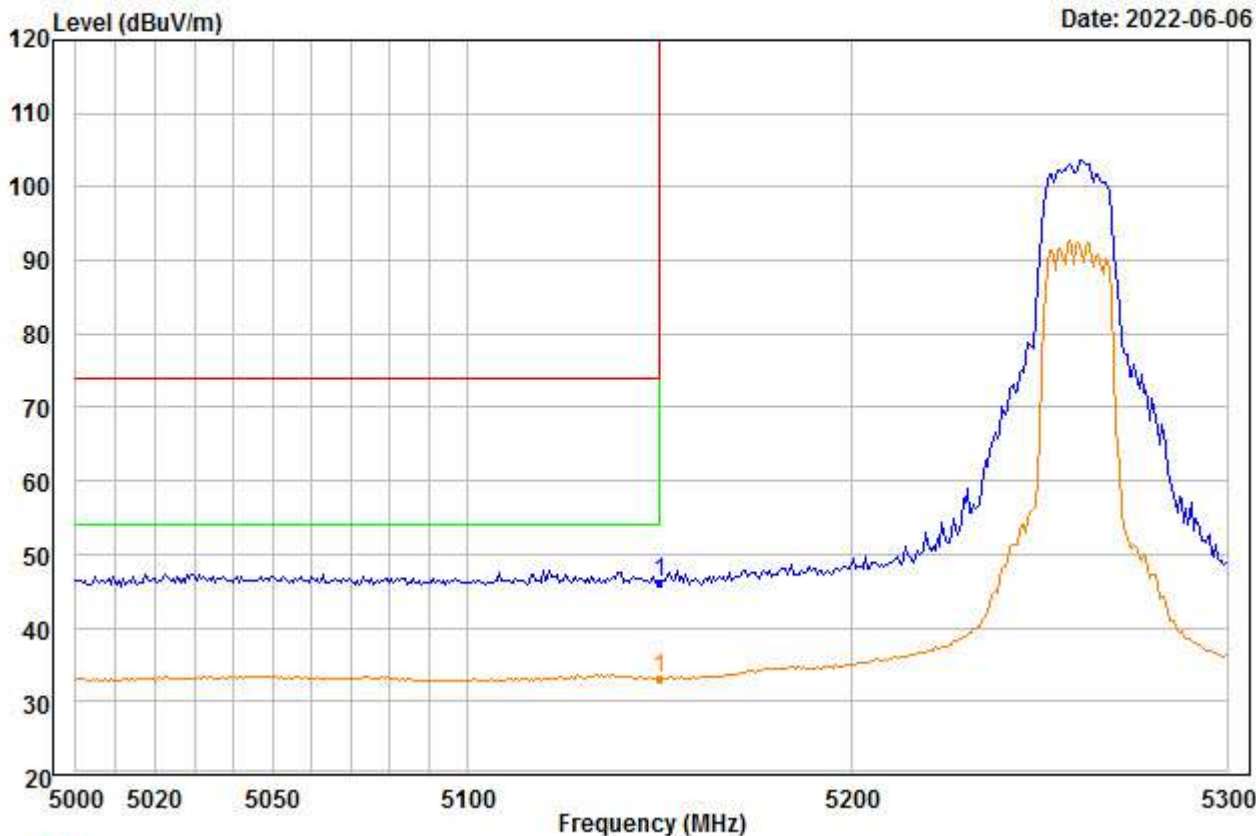


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5260
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 PP 5150.000 | 47.89 | 34.88 | 46.33 | 0.00 | 9.78 | 46.22 | 74.00 | -27.78 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00048.EMI

Date: 2022-06-06

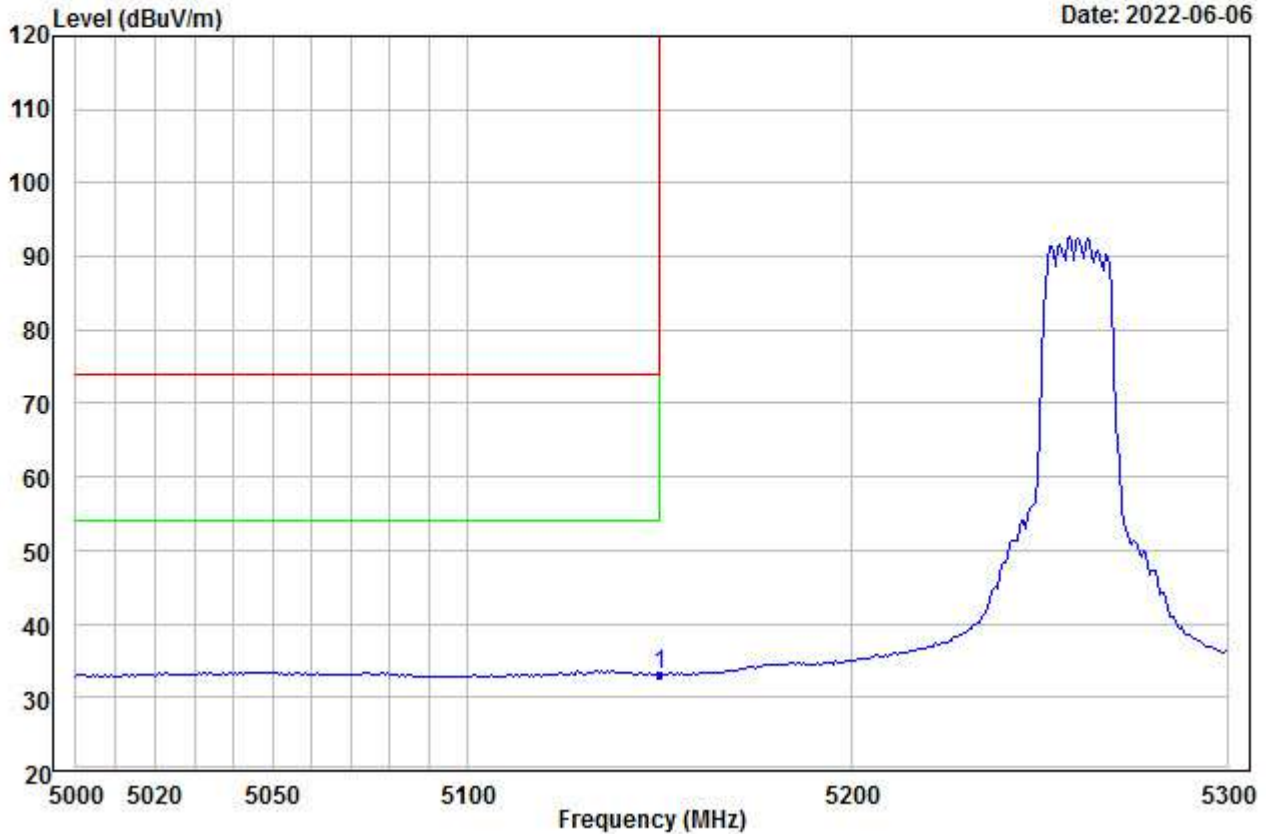


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5260
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 PP 5150.000 | 34.79 | 34.88 | 46.33 | 0.00 | 9.78 | 33.12 | 54.00 | -20.88 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00049.EMI

Date: 2022-06-06

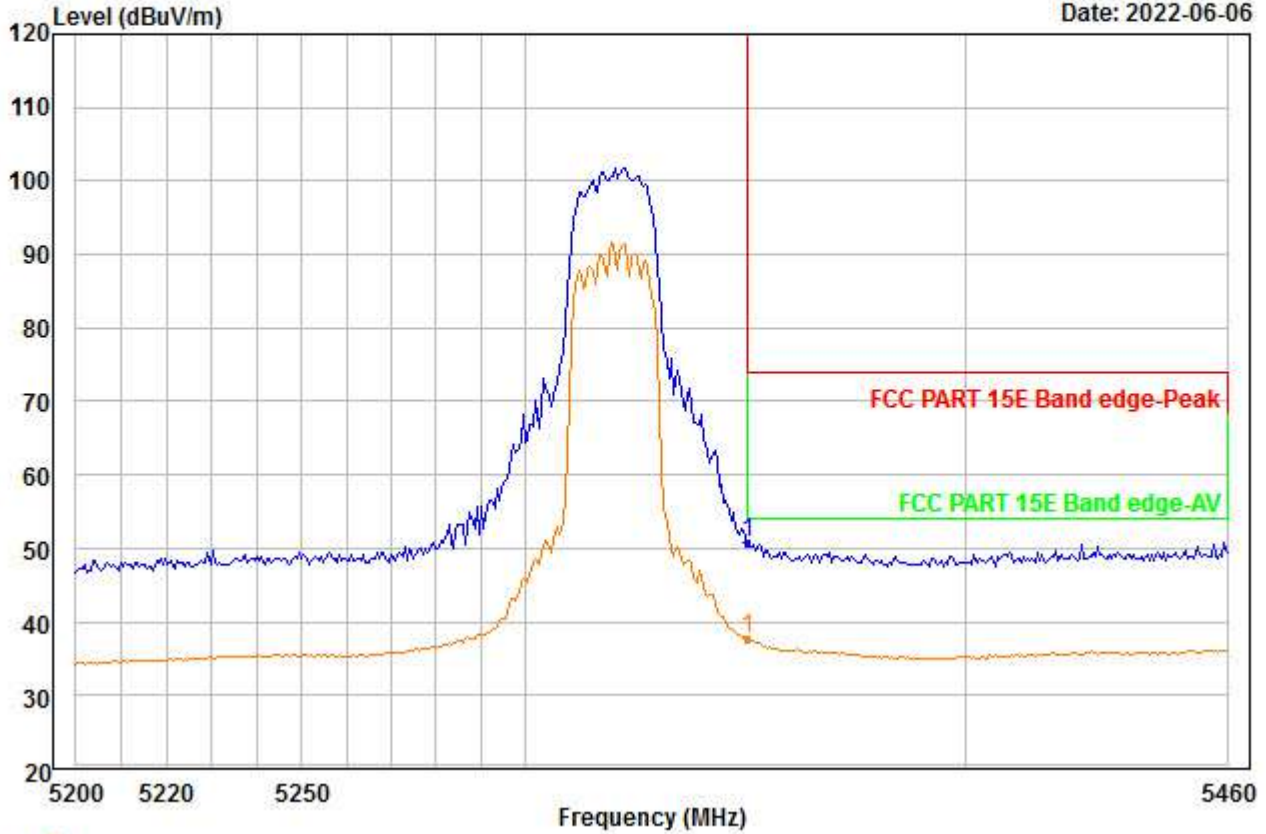


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5320
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 PP 5350.000 | 51.38 | 35.12 | 45.97 | 0.00 | 10.18 | 50.71 | 74.00 | -23.29 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00050.EMI

Date: 2022-06-06

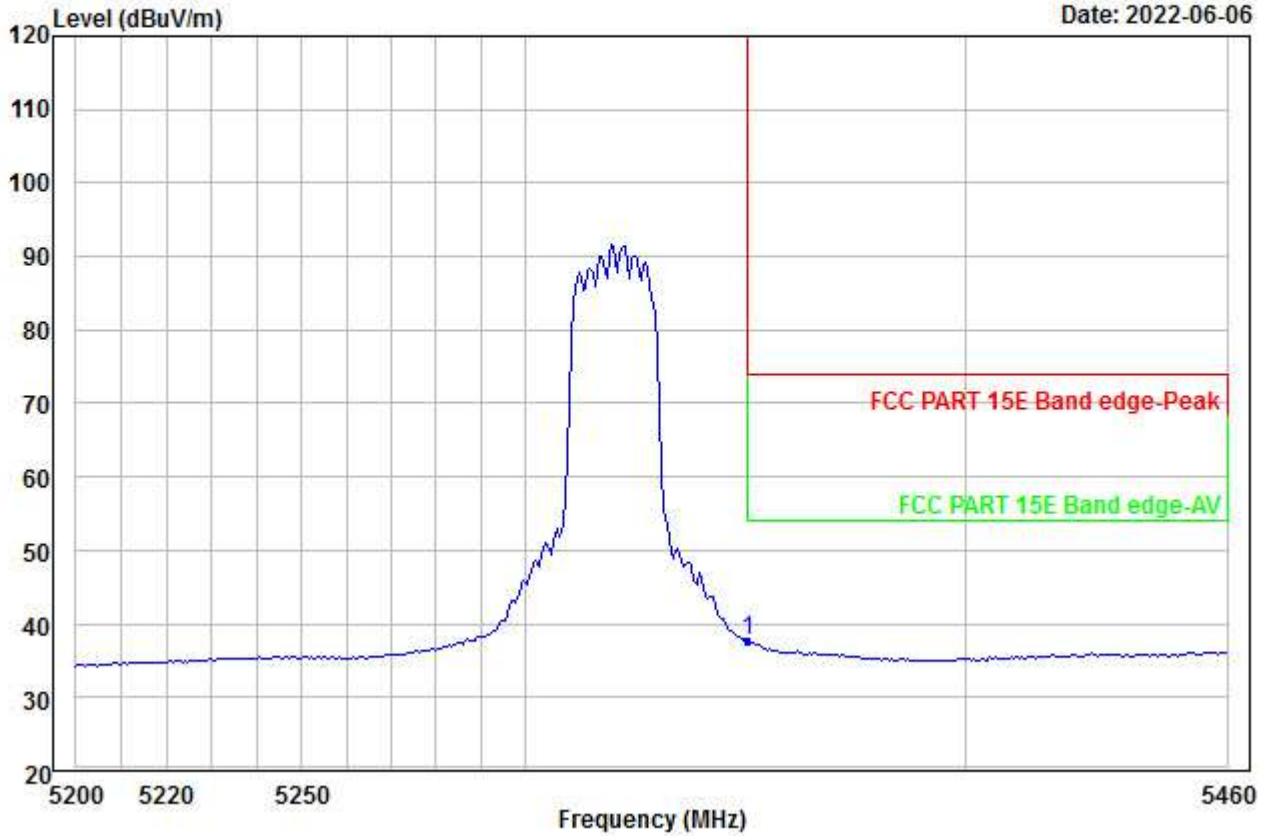


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5320
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 PP 5350.000 | 38.27 | 35.12 | 45.97 | 0.00 | 10.18 | 37.60 | 54.00 | -16.40 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00051.EMI

Date: 2022-06-06

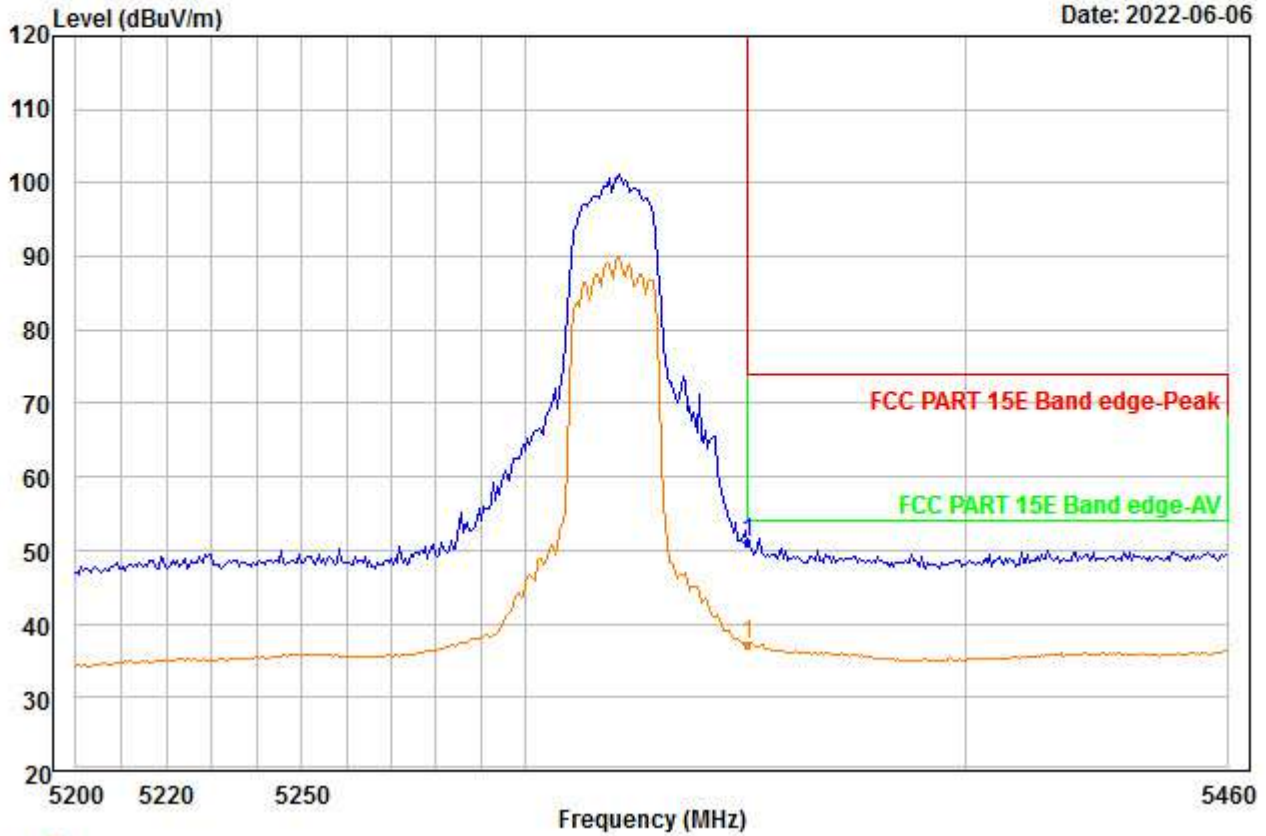


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5320
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 PP 5350.000 | 51.71 | 35.12 | 45.97 | 0.00 | 10.18 | 51.04 | 74.00 | -22.96 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00052.EMI

Date: 2022-06-06

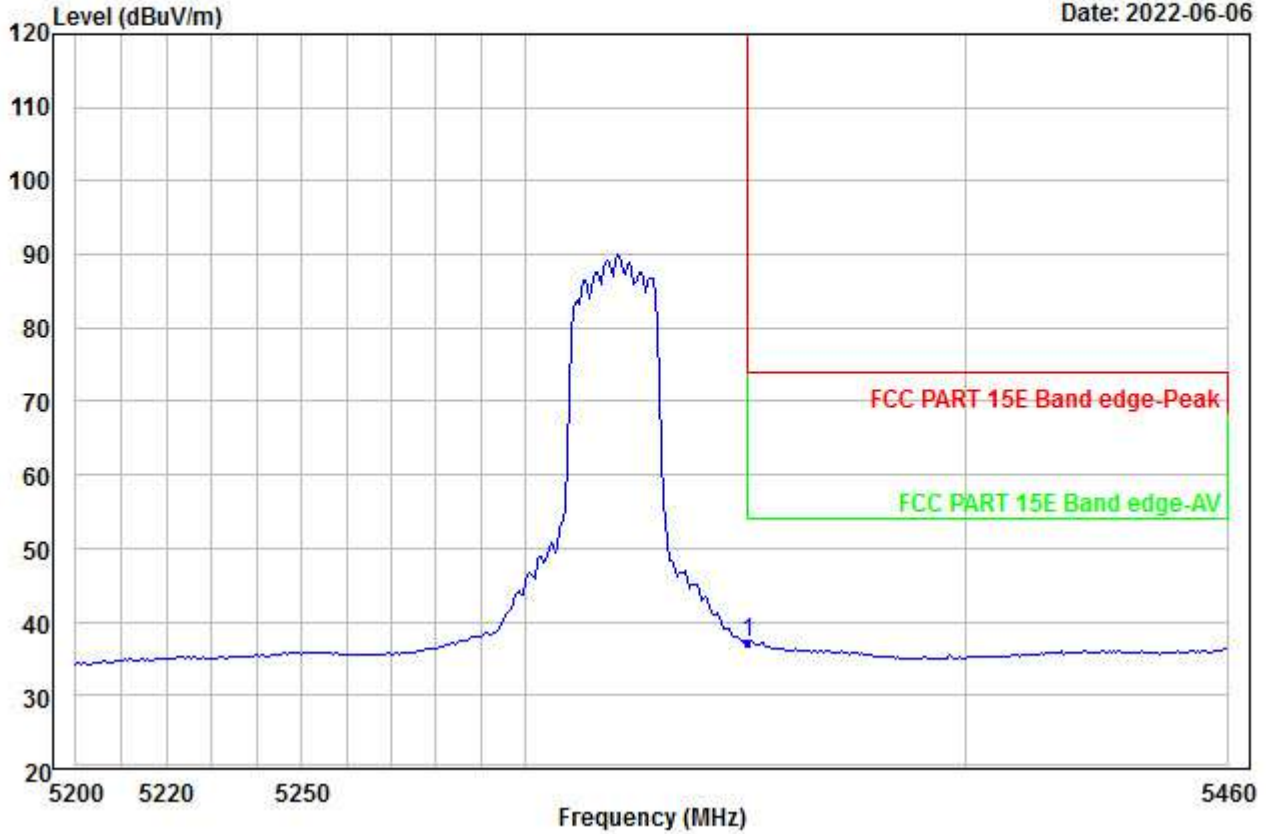


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5320
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 PP 5350.000 | 37.92 | 35.12 | 45.97 | 0.00 | 10.18 | 37.25 | 54.00 | -16.75 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00053.EMI

Date: 2022-06-06

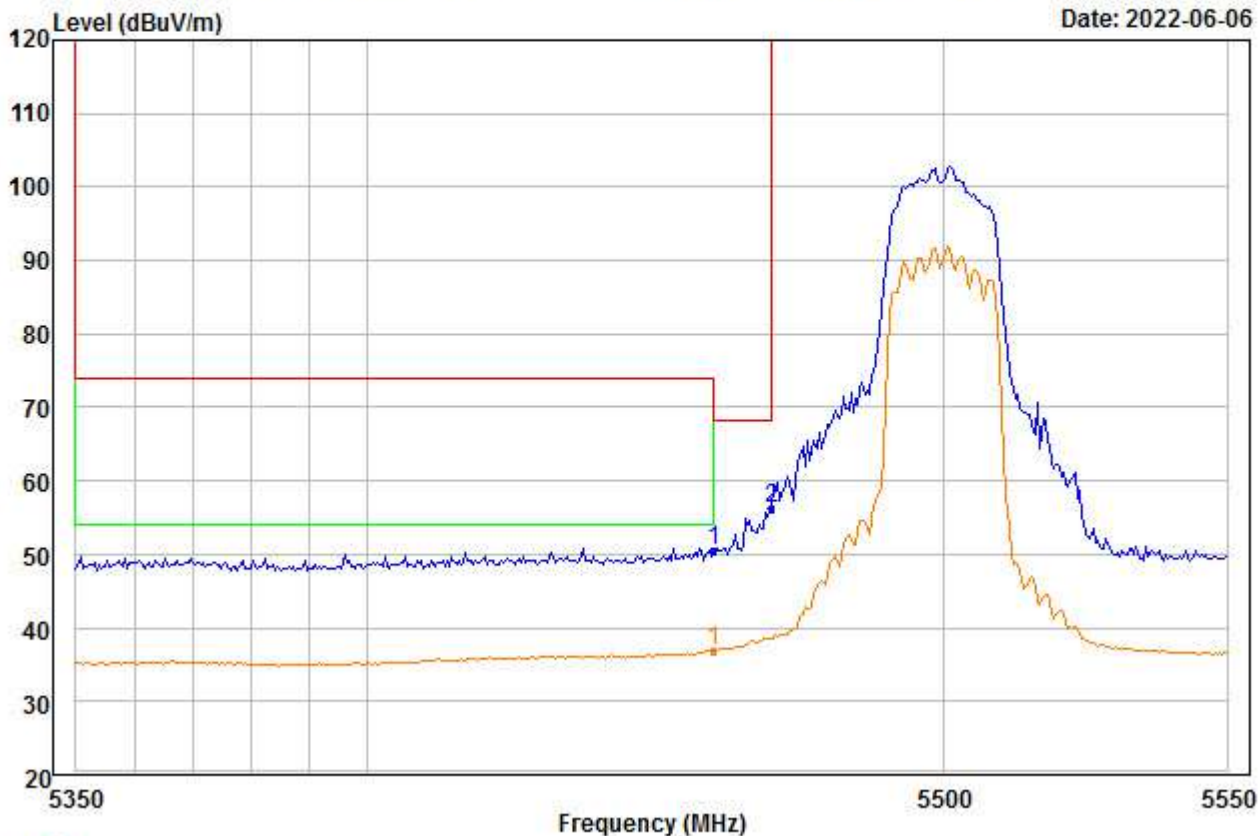


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5500
 Remark :

| | Read Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Remarks |
|------|-----------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|---------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 5460.000 | 50.59 | 35.25 | 45.77 | 0.00 | 10.44 | 50.51 | 68.20 | -17.69 | --- | --- | Peak |
| 2 PP | 5470.000 | 56.29 | 35.26 | 45.75 | 0.00 | 10.47 | 56.27 | 68.20 | -11.93 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00054.EMI

Date: 2022-06-06

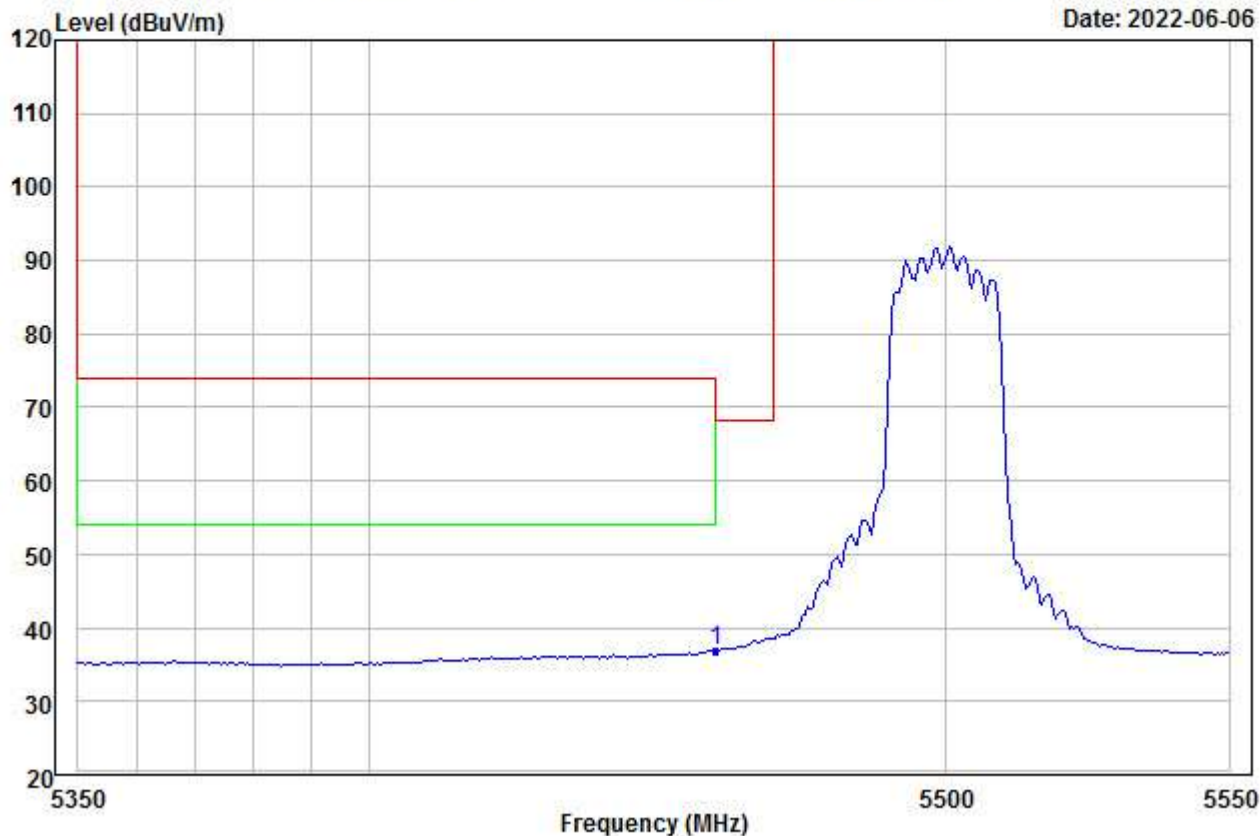


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5500
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 PP 5460.000 | 36.96 | 35.25 | 45.77 | 0.00 | 10.44 | 36.88 | 54.00 | -17.12 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00055.EMI

Date: 2022-06-06

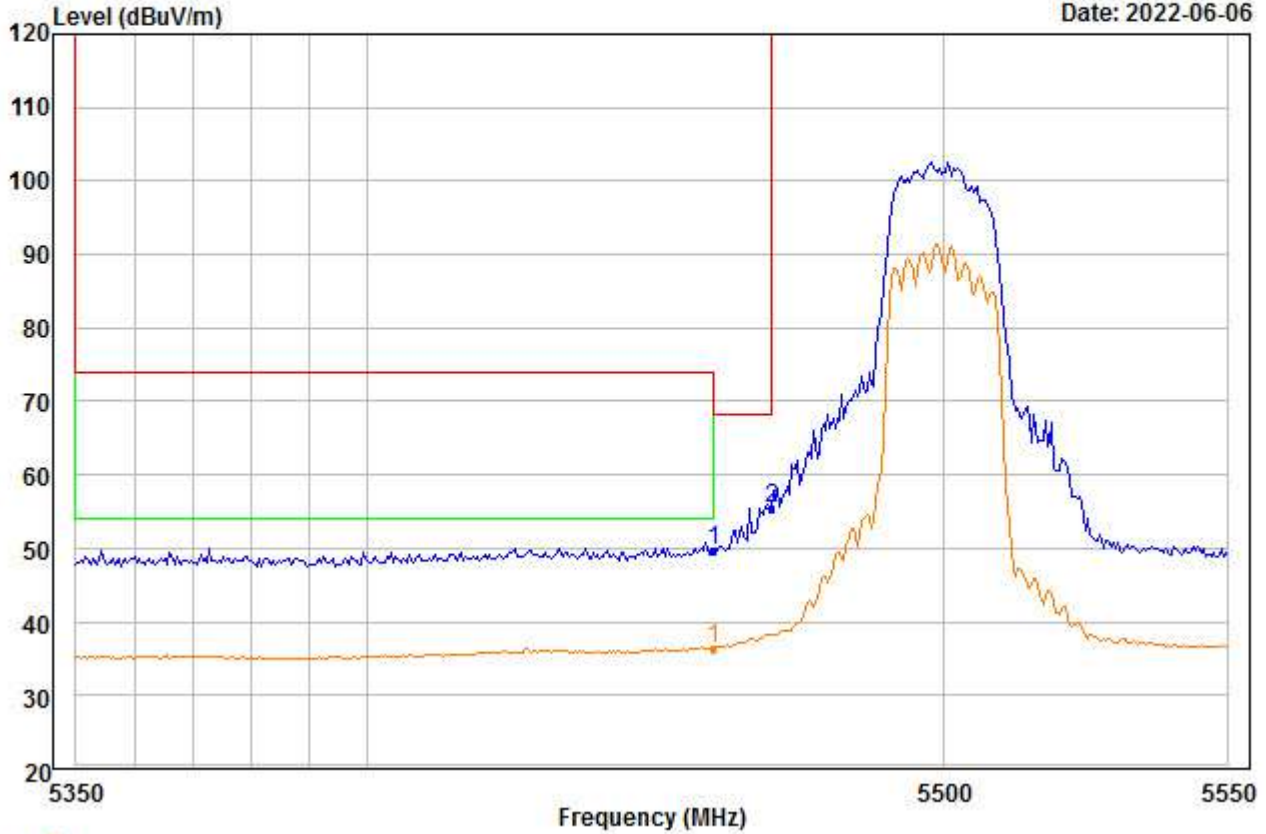


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5500
 Remark :

| | Read Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Remarks |
|------|-----------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|---------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 5460.000 | 49.79 | 35.25 | 45.77 | 0.00 | 10.44 | 49.71 | 68.20 | -18.49 | --- | --- | Peak |
| 2 PP | 5470.000 | 55.33 | 35.26 | 45.75 | 0.00 | 10.47 | 55.31 | 68.20 | -12.89 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00056.EMI

Date: 2022-06-06

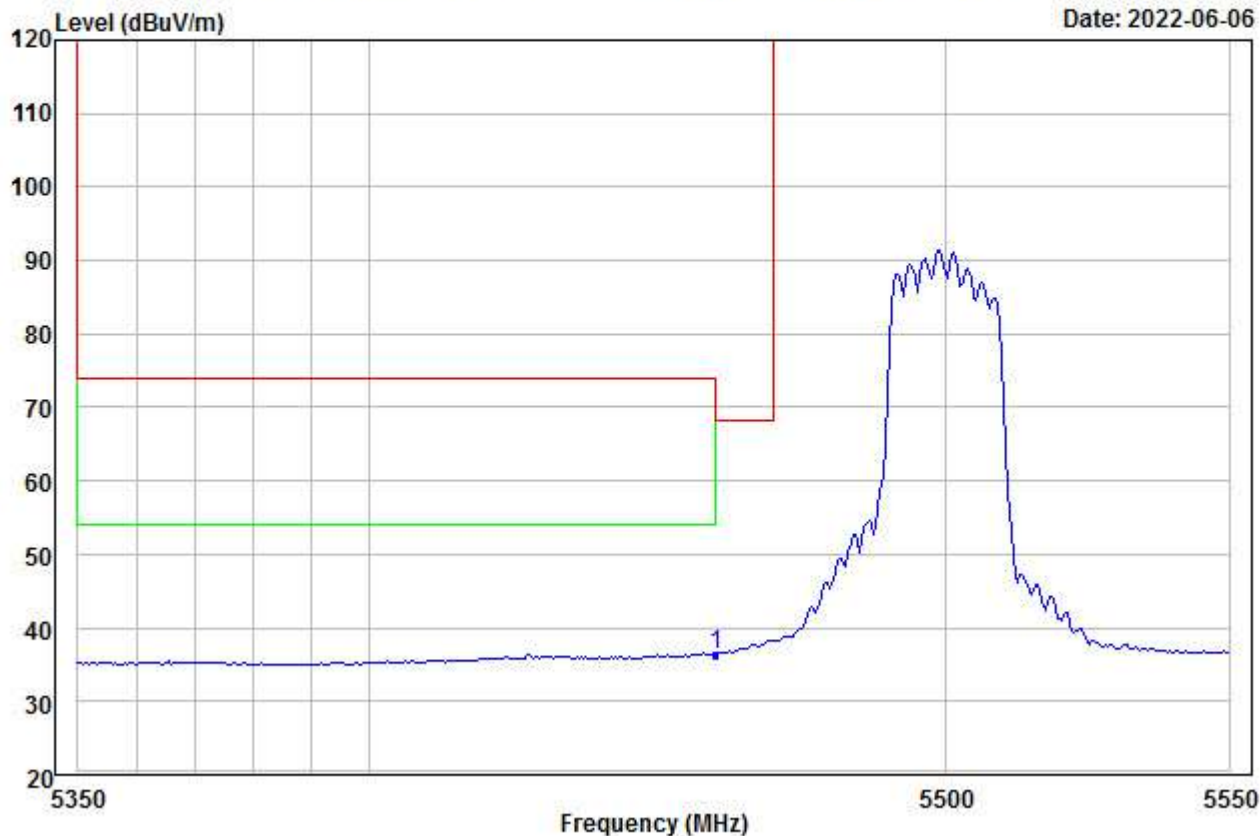


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5500
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|----------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg |
| 1 PP 5459.820 | 36.55 | 35.25 | 45.77 | 0.00 | 10.44 | 36.47 | 54.00 | -17.53 | --- | --- Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00057.EMI

Date: 2022-06-06

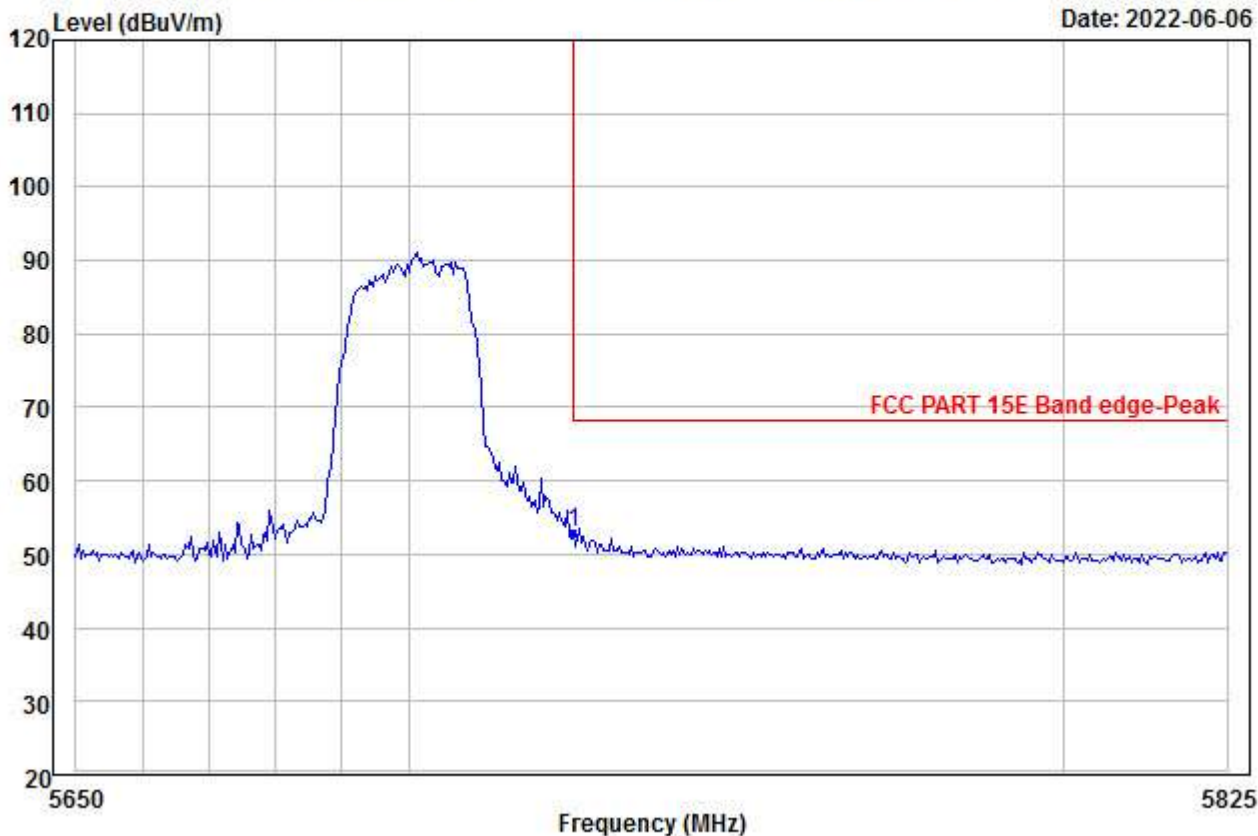


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5700
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 PP 5725.000 | 53.45 | 35.26 | 45.57 | 0.00 | 9.94 | 53.08 | 68.20 | -15.12 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00058.EMI

Date: 2022-06-06

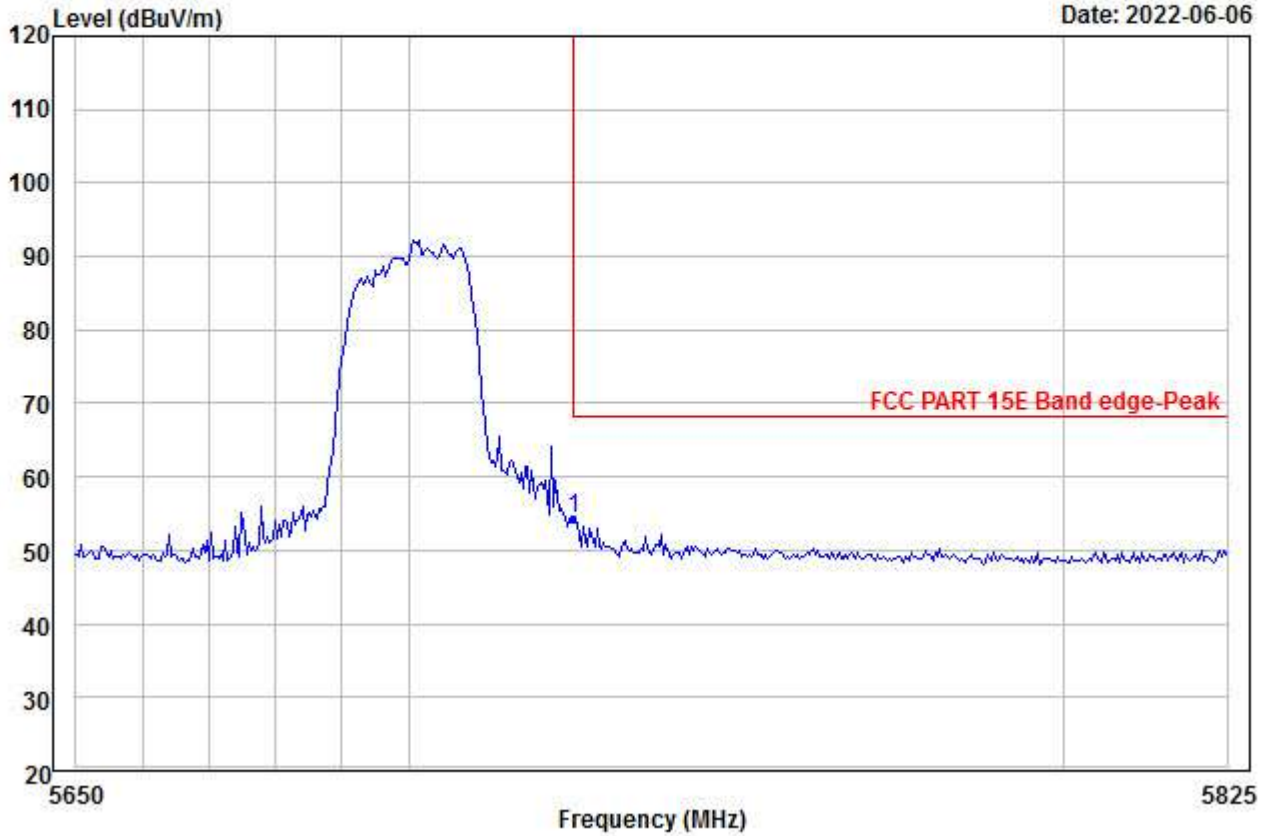


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5700
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 PP 5725.000 | 54.64 | 35.26 | 45.57 | 0.00 | 9.94 | 54.27 | 68.20 | -13.93 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00059.EMI

Date: 2022-06-06

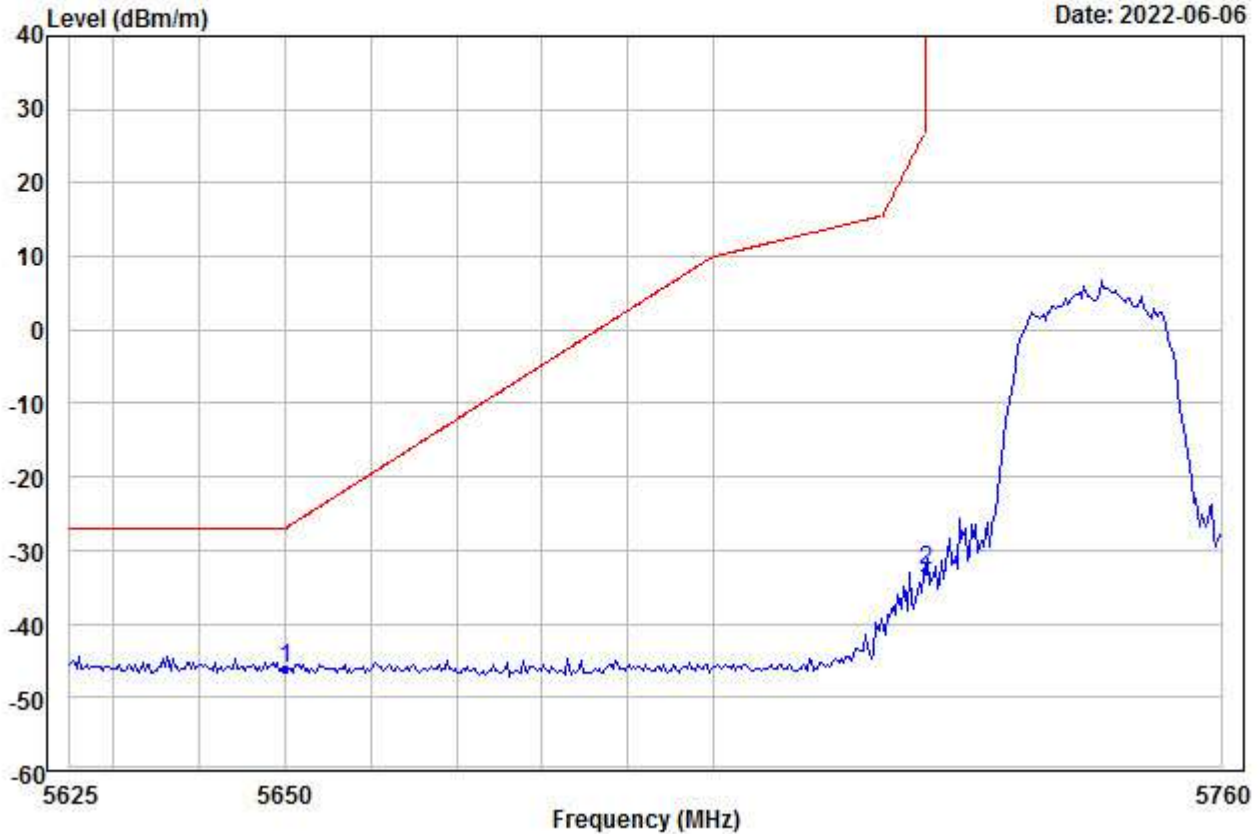


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5745
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|--------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBm | dB/m | dB | dB | dB | dBm/m | dB | cm | deg | | |
| 1 PP 5650.000 | -57.77 | 35.27 | 45.61 | 0.00 | 21.88 | -46.23 | -27.00 | -19.23 | --- | --- | Peak |
| 2 5725.000 | -44.10 | 35.26 | 45.57 | 0.00 | 21.68 | -32.73 | 27.00 | -59.73 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00060.EMI

Date: 2022-06-06

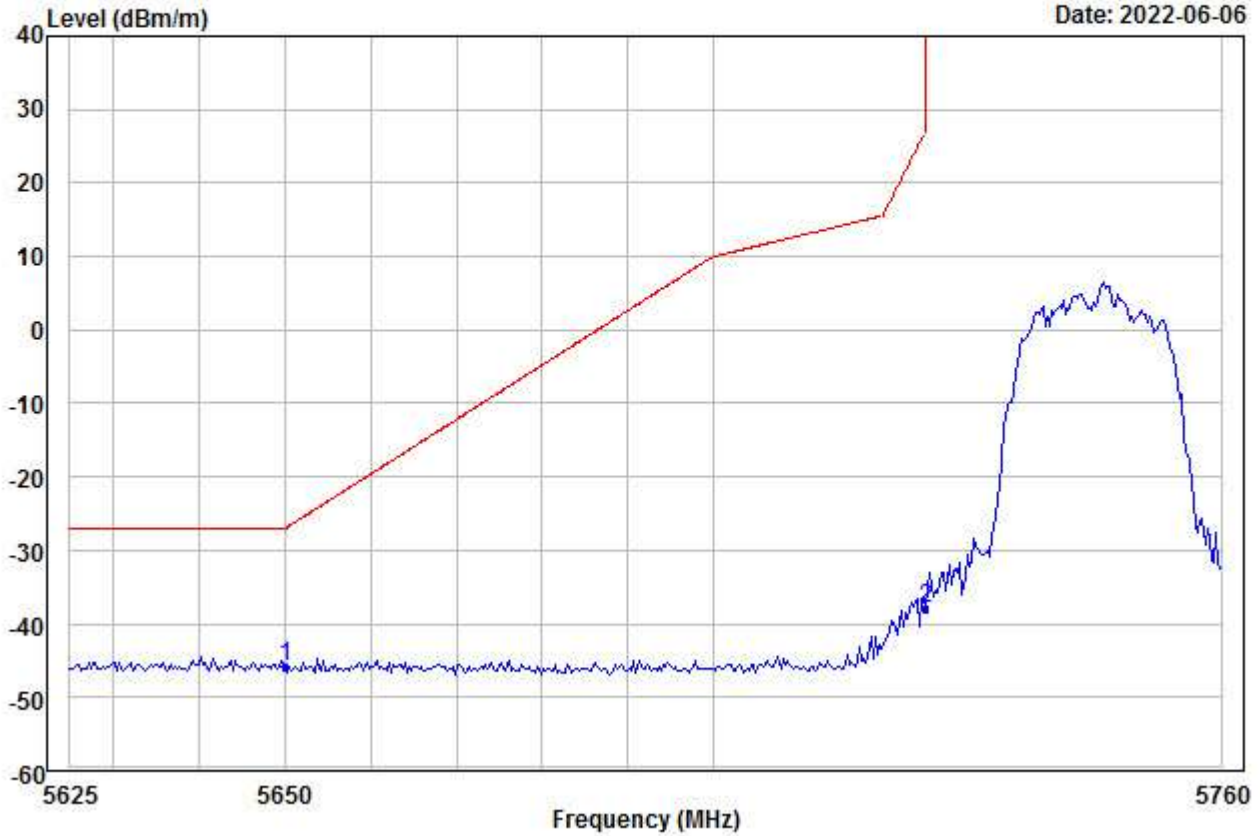


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5745
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|--------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBm | dB/m | dB | dB | dB | dBm/m | dBm/m | dB | cm | deg | |
| 1 PP 5650.000 | -57.42 | 35.27 | 45.61 | 0.00 | 21.88 | -45.88 | -27.00 | -18.88 | --- | --- | Peak |
| 2 5725.000 | -49.17 | 35.26 | 45.57 | 0.00 | 21.68 | -37.80 | 27.00 | -64.80 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00061.EMI

Date: 2022-06-06

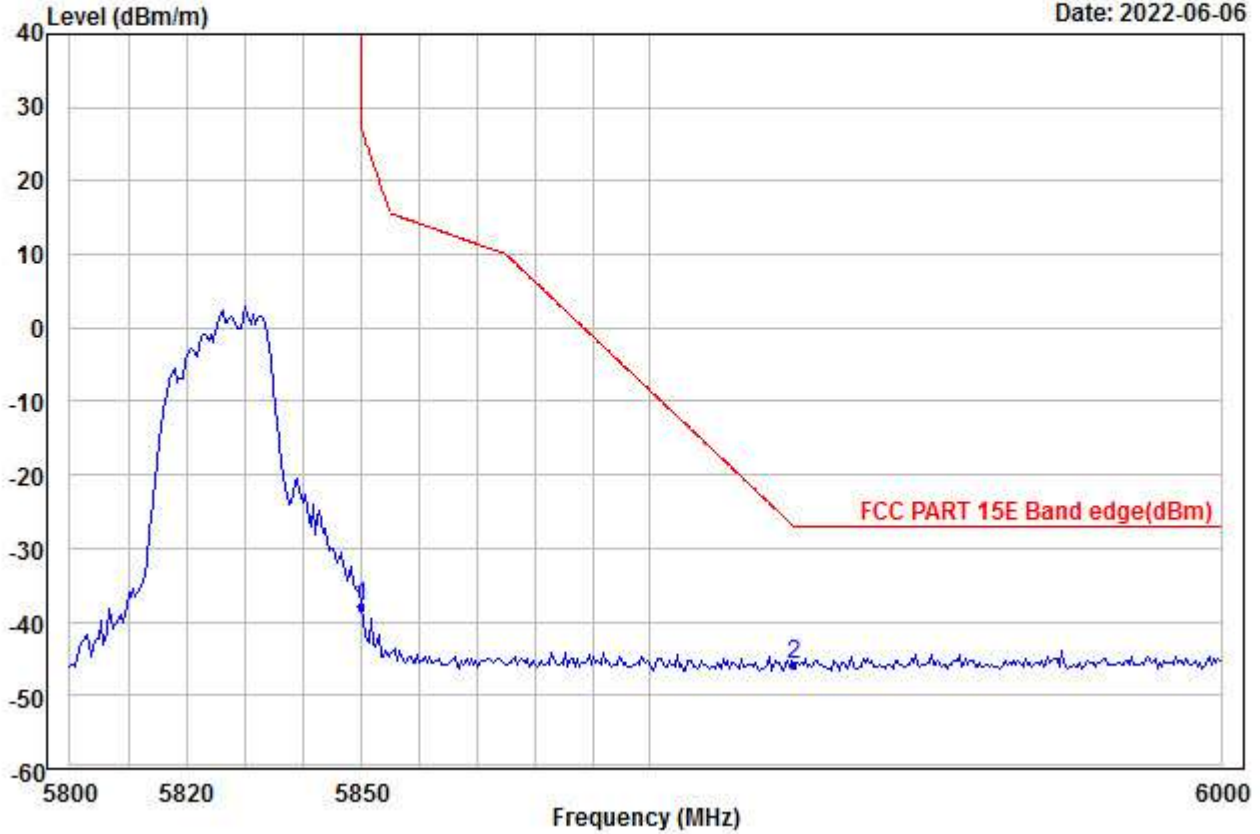


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5825
 Remark :

| | Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Remarks |
|------|----------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|---------|
| | MHz | dBm | dB/m | dB | dB | dB | dBm/m | dBm/m | dB | cm | deg | |
| 1 | 5850.000 | -49.00 | 35.23 | 45.49 | 0.00 | 21.47 | -37.79 | 27.00 | -64.79 | --- | --- | Peak |
| 2 PP | 5925.000 | -57.17 | 35.22 | 45.44 | 0.00 | 21.44 | -45.95 | -27.00 | -18.95 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00062.EMI

Date: 2022-06-06

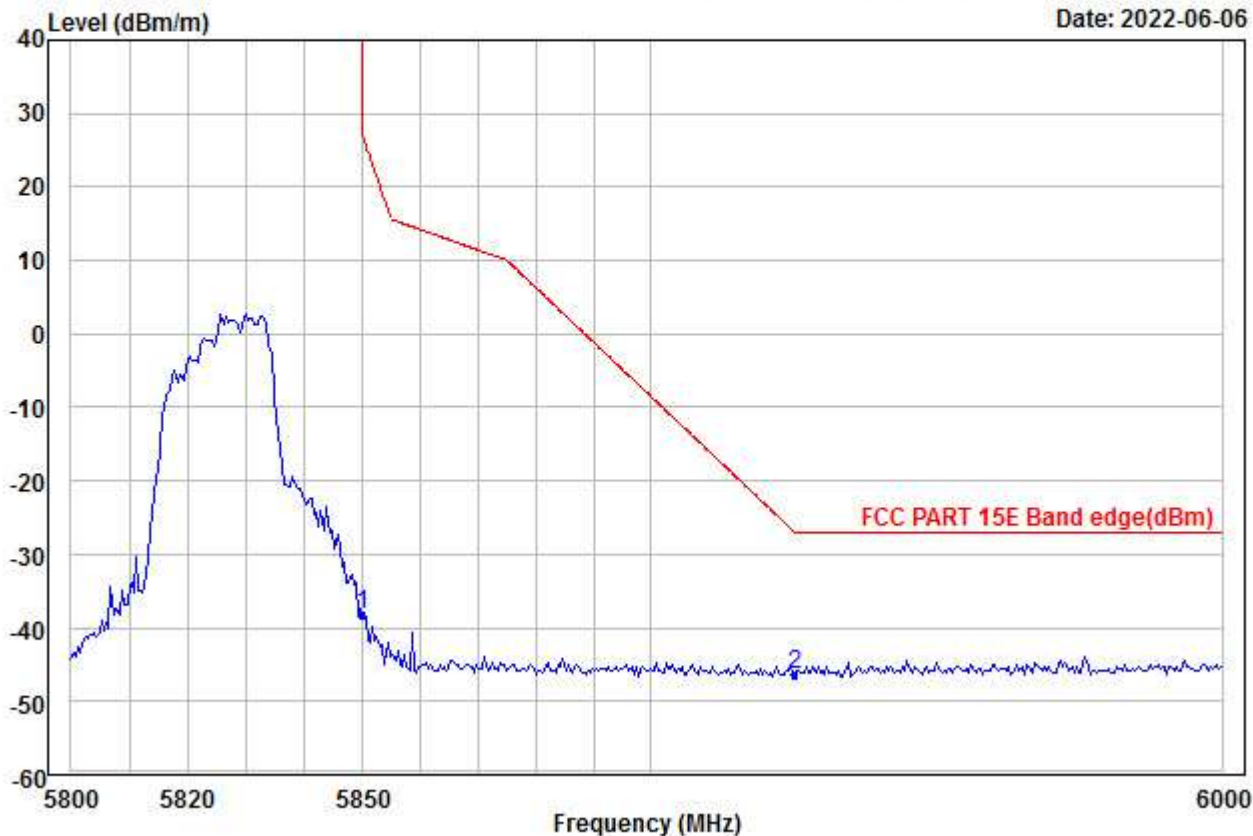


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N20_ANT0+1_5825
 Remark :

| | Read Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Remarks |
|------|-----------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|---------|
| | MHz | dBm | dB/m | dB | dB | dB | dBm/m | dBm/m | dB | cm | deg | |
| 1 | 5850.000 | -49.45 | 35.23 | 45.49 | 0.00 | 21.47 | -38.24 | 27.00 | -65.24 | --- | --- | Peak |
| 2 PP | 5925.000 | -57.60 | 35.22 | 45.44 | 0.00 | 21.44 | -46.38 | -27.00 | -19.38 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00063.EMI

Date: 2022-06-06

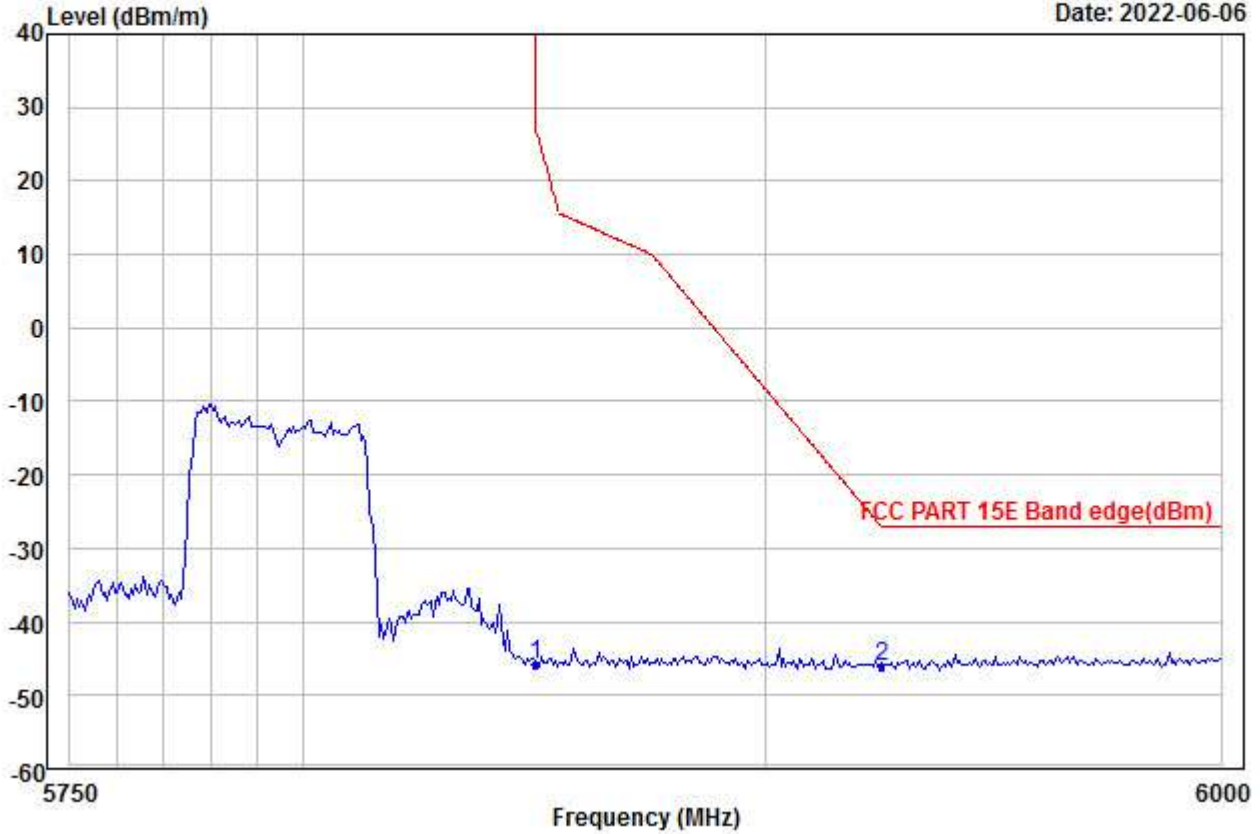


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5795
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | | |
|------|----------|--------|--------|--------|-------|-------|--------|--------|--------|------|-----|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | | |
| MHz | dBm | dB/m | dB | dB | dB | dBm/m | dBm/m | dB | cm | deg | | |
| 1 | 5850.000 | -57.00 | 35.23 | 45.49 | 0.00 | 21.47 | -45.79 | 27.00 | -72.79 | --- | --- | Peak |
| 2 PP | 5925.000 | -57.29 | 35.22 | 45.44 | 0.00 | 21.44 | -46.07 | -27.00 | -19.07 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00064.EMI

Date: 2022-06-06

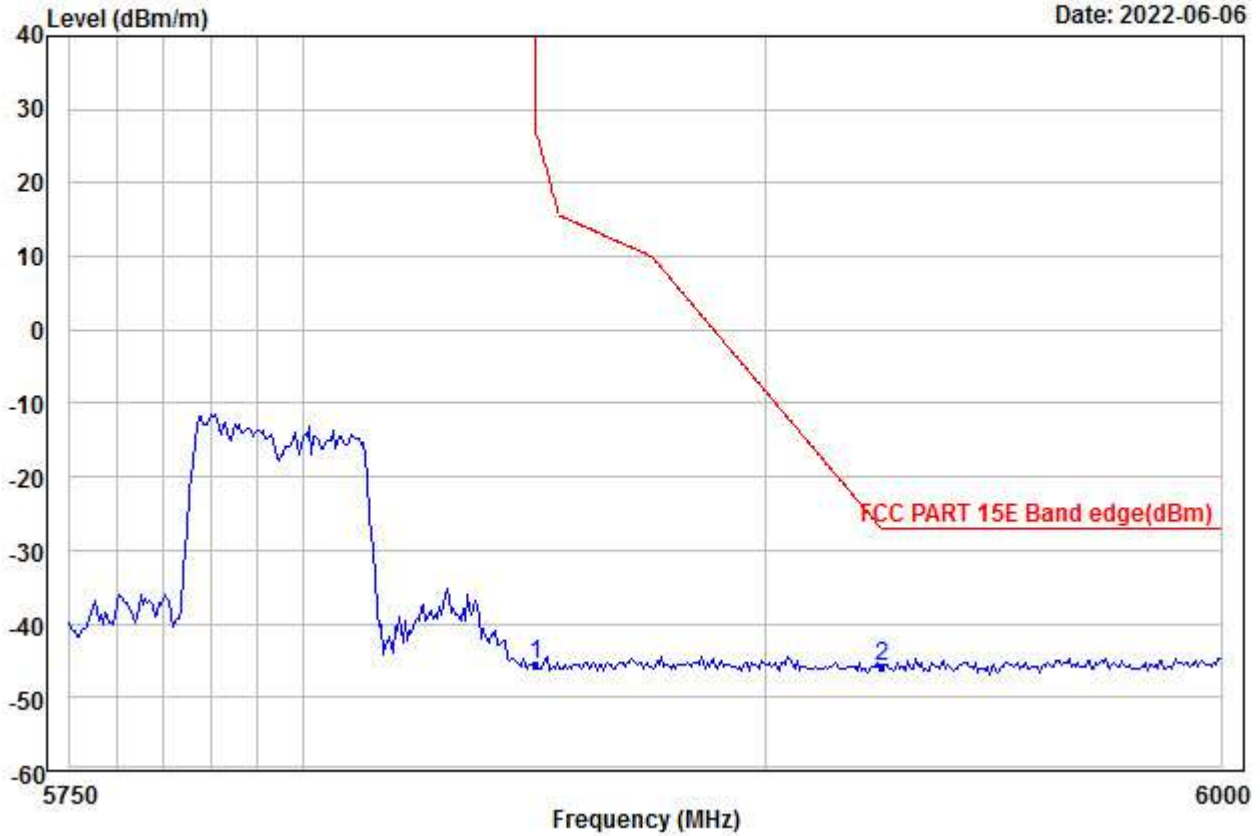


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5795
 Remark :

| | Read Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Remarks |
|------|-----------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|---------|
| | MHz | dBm | dB/m | dB | dB | dB | dBm/m | dBm/m | dB | cm | deg | |
| 1 | 5850.000 | -56.71 | 35.23 | 45.49 | 0.00 | 21.47 | -45.50 | 27.00 | -72.50 | --- | --- | Peak |
| 2 PP | 5925.000 | -56.95 | 35.22 | 45.44 | 0.00 | 21.44 | -45.73 | -27.00 | -18.73 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00065.EMI

Date: 2022-06-06

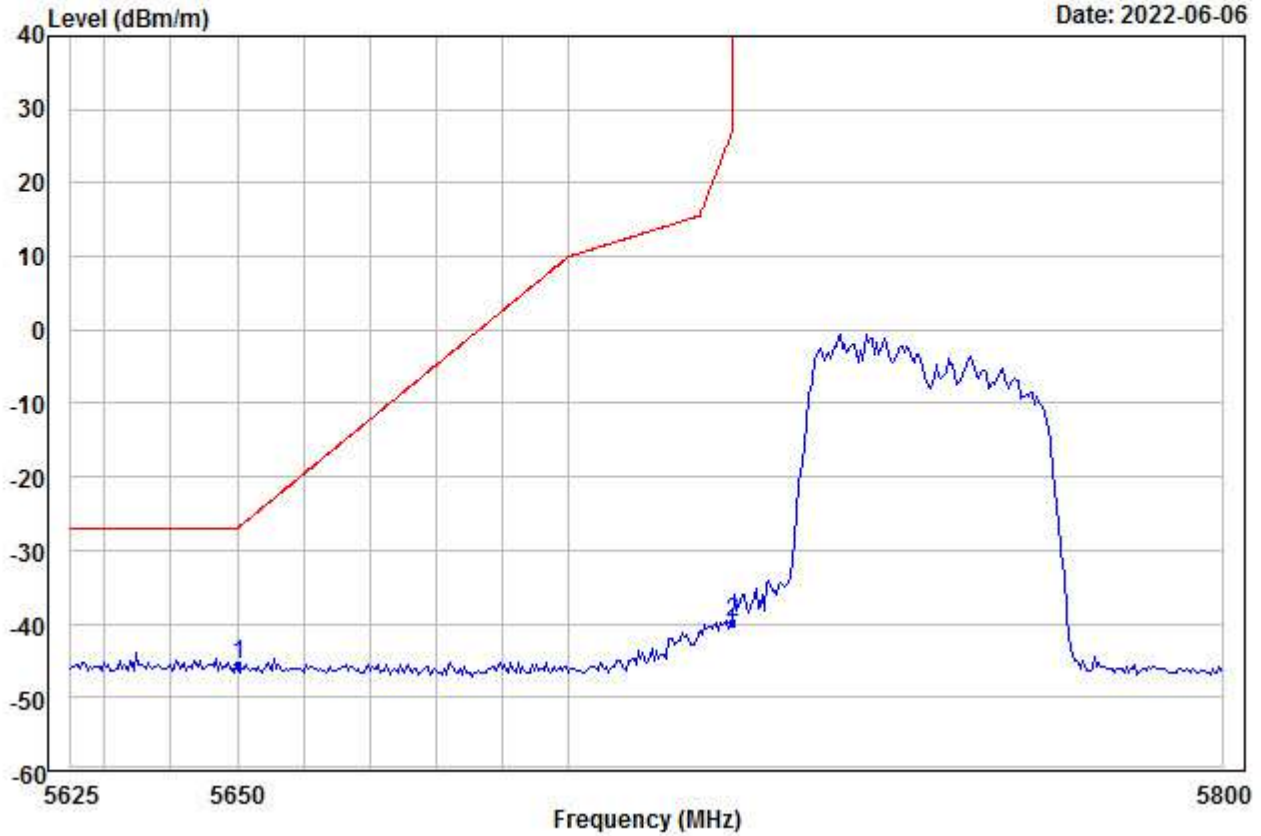


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5755
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|--------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBm | dB/m | dB | dB | dB | dBm/m | dB | cm | deg | | |
| 1 PP 5650.000 | -57.00 | 35.27 | 45.61 | 0.00 | 21.88 | -45.46 | -27.00 | -18.46 | --- | --- | Peak |
| 2 5725.000 | -51.25 | 35.26 | 45.57 | 0.00 | 21.68 | -39.88 | 27.00 | -66.88 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00066.EMI

Date: 2022-06-06

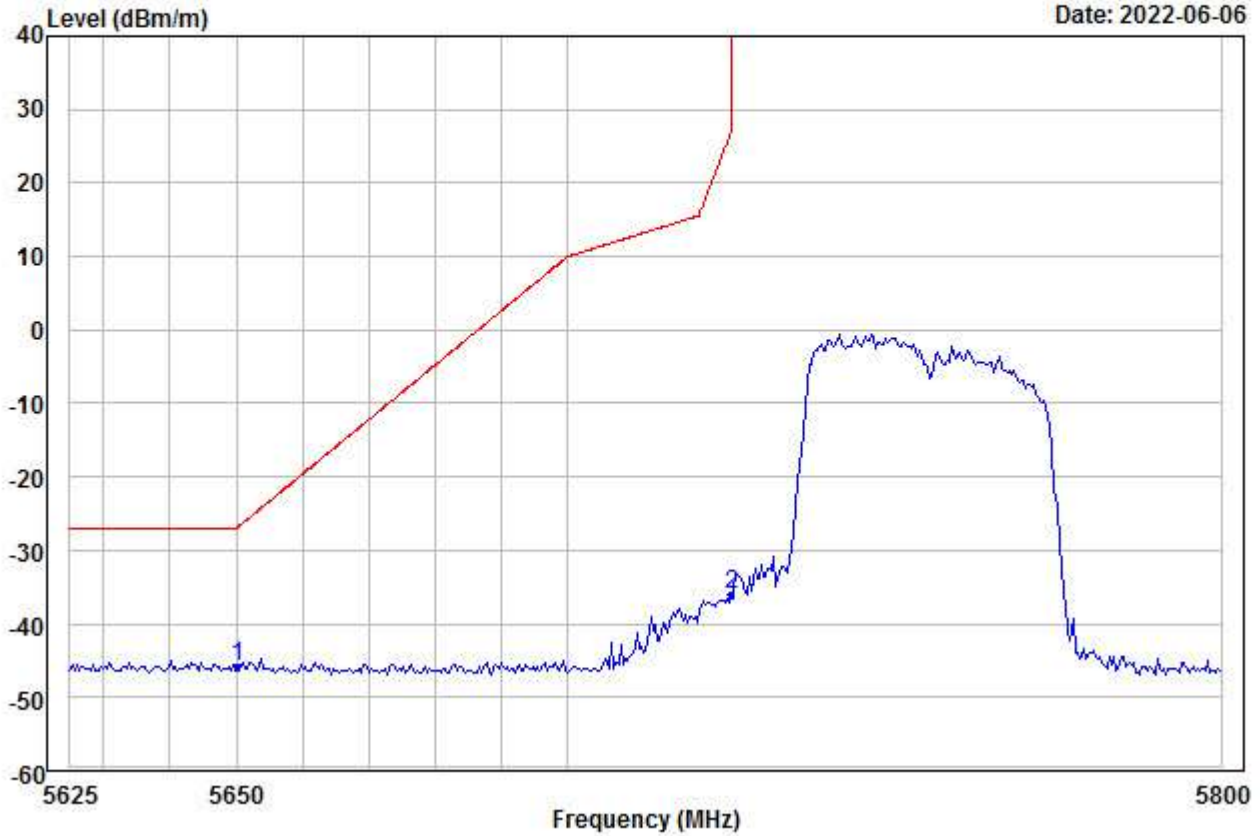


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5755
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|--------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBm | dB/m | dB | dB | dB | dBm/m | dB | cm | deg | | |
| 1 PP 5650.000 | -57.35 | 35.27 | 45.61 | 0.00 | 21.88 | -45.81 | -27.00 | -18.81 | --- | --- | Peak |
| 2 5725.000 | -47.40 | 35.26 | 45.57 | 0.00 | 21.68 | -36.03 | 27.00 | -63.03 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00067.EMI

Date: 2022-06-06

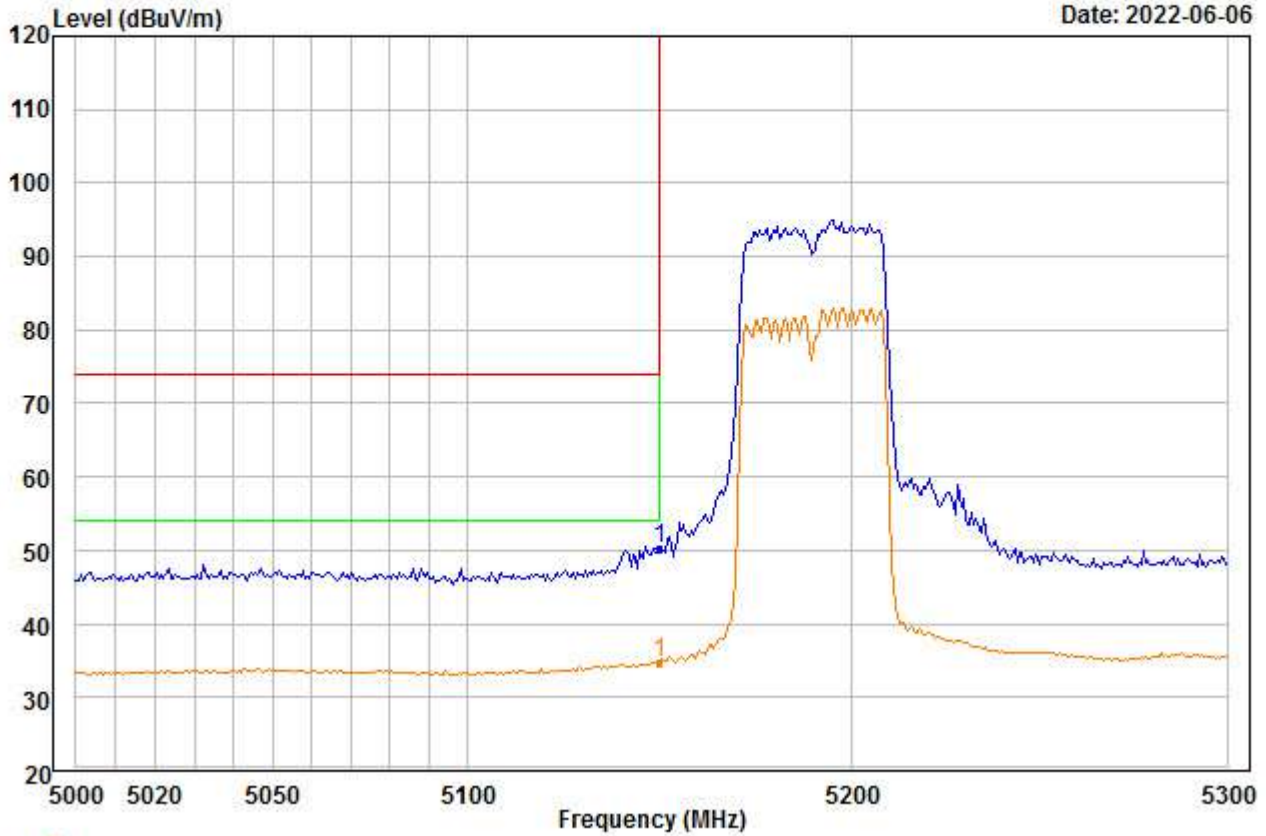


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5190
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 PP 5150.000 | 52.01 | 34.88 | 46.33 | 0.00 | 9.78 | 50.34 | 74.00 | -23.66 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00068.EMI

Date: 2022-06-06

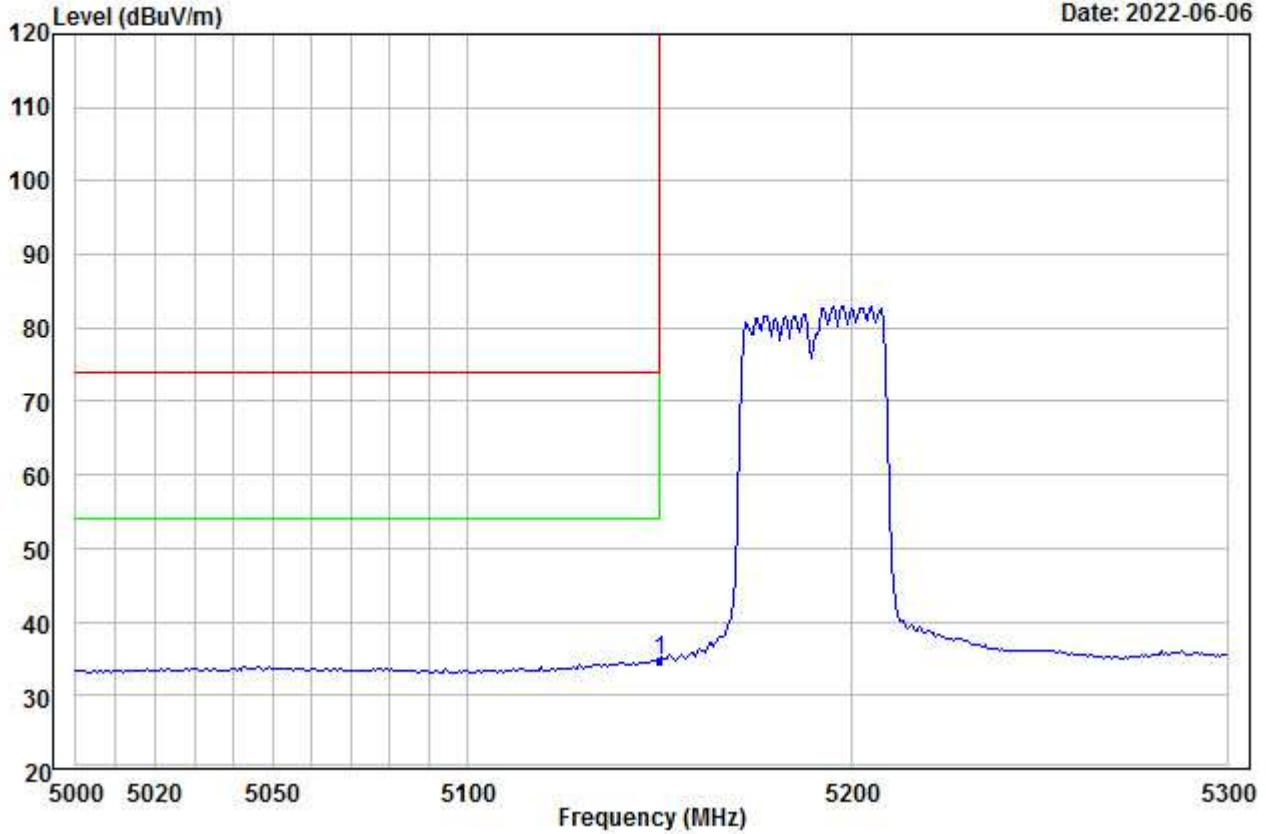


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5190
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 PP 5150.000 | 36.43 | 34.88 | 46.33 | 0.00 | 9.78 | 34.76 | 54.00 | -19.24 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00069.EMI

Date: 2022-06-06

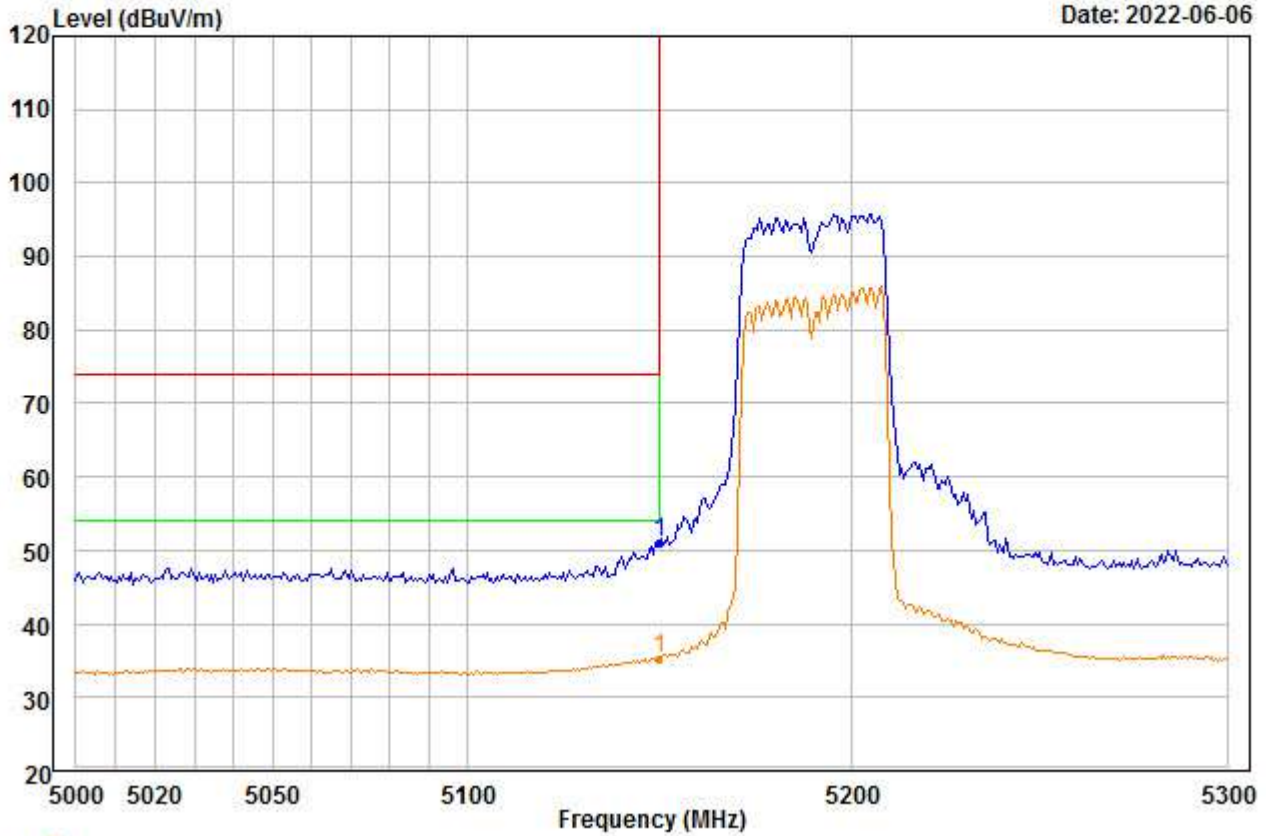


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5190
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 PP 5150.000 | 52.80 | 34.88 | 46.33 | 0.00 | 9.78 | 51.13 | 74.00 | -22.87 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00070.EMI

Date: 2022-06-06

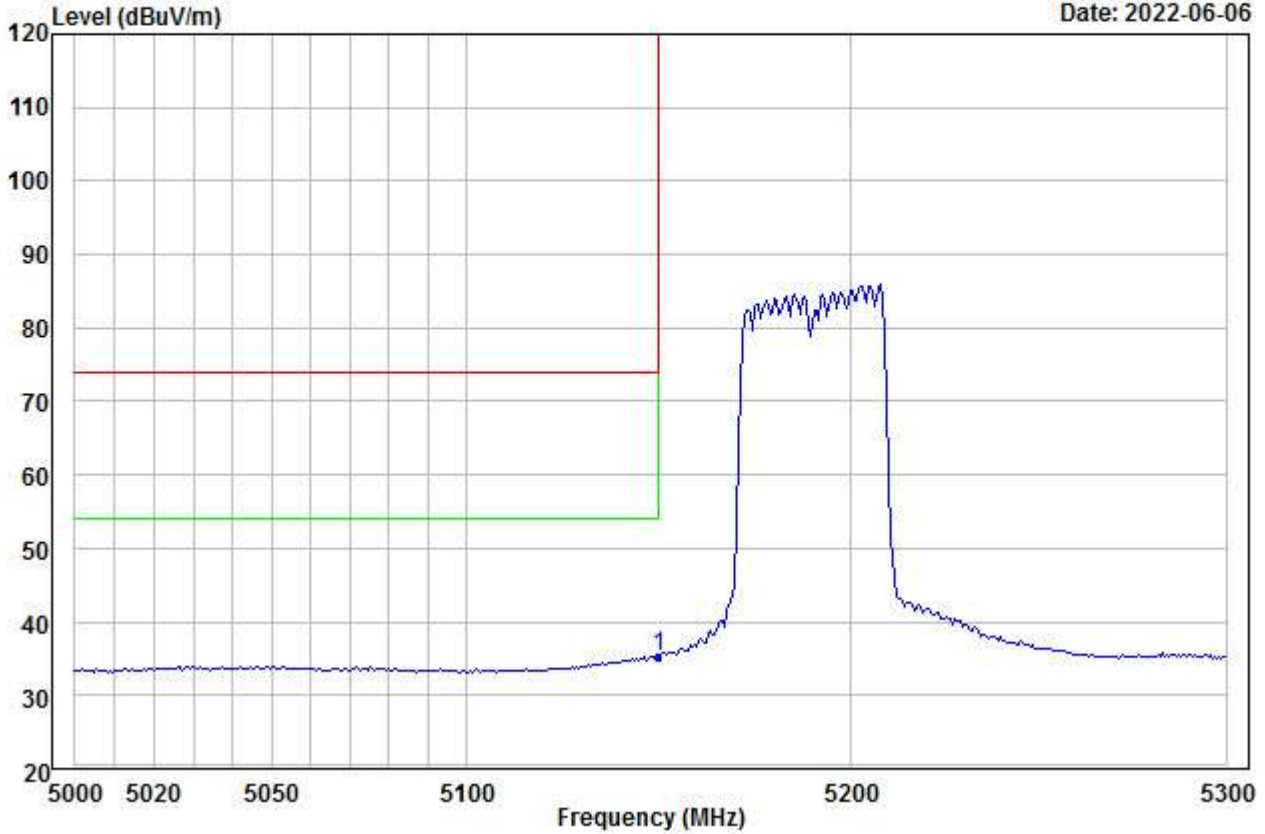


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5190
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 PP 5150.000 | 36.80 | 34.88 | 46.33 | 0.00 | 9.78 | 35.13 | 54.00 | -18.87 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00071.EMI

Date: 2022-06-06

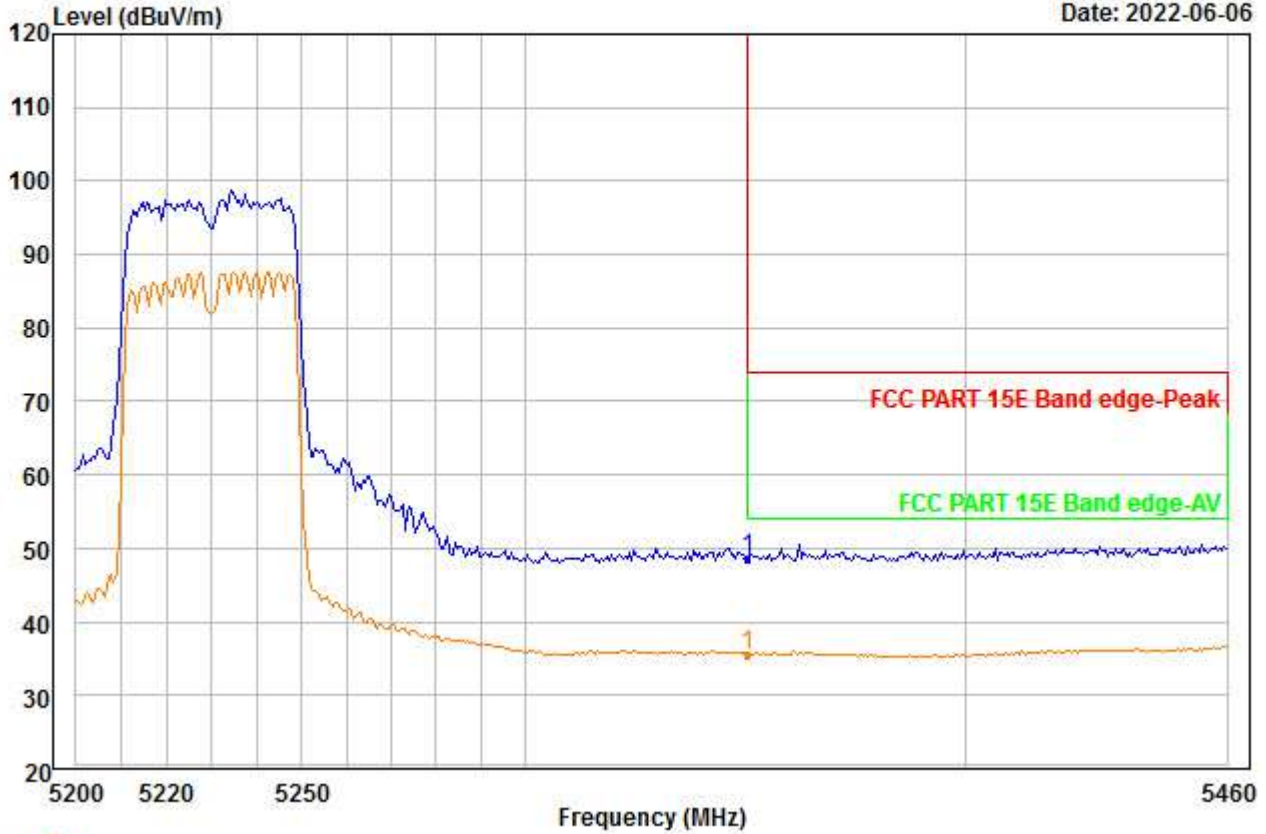


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5230
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 PP 5350.000 | 49.22 | 35.12 | 45.97 | 0.00 | 10.18 | 48.55 | 74.00 | -25.45 | --- | --- | Peak |

File: F:\Test Template\上海\ITS\2022\220523032 SA750\B\5G\BE\4_00072.EMI

Date: 2022-06-06

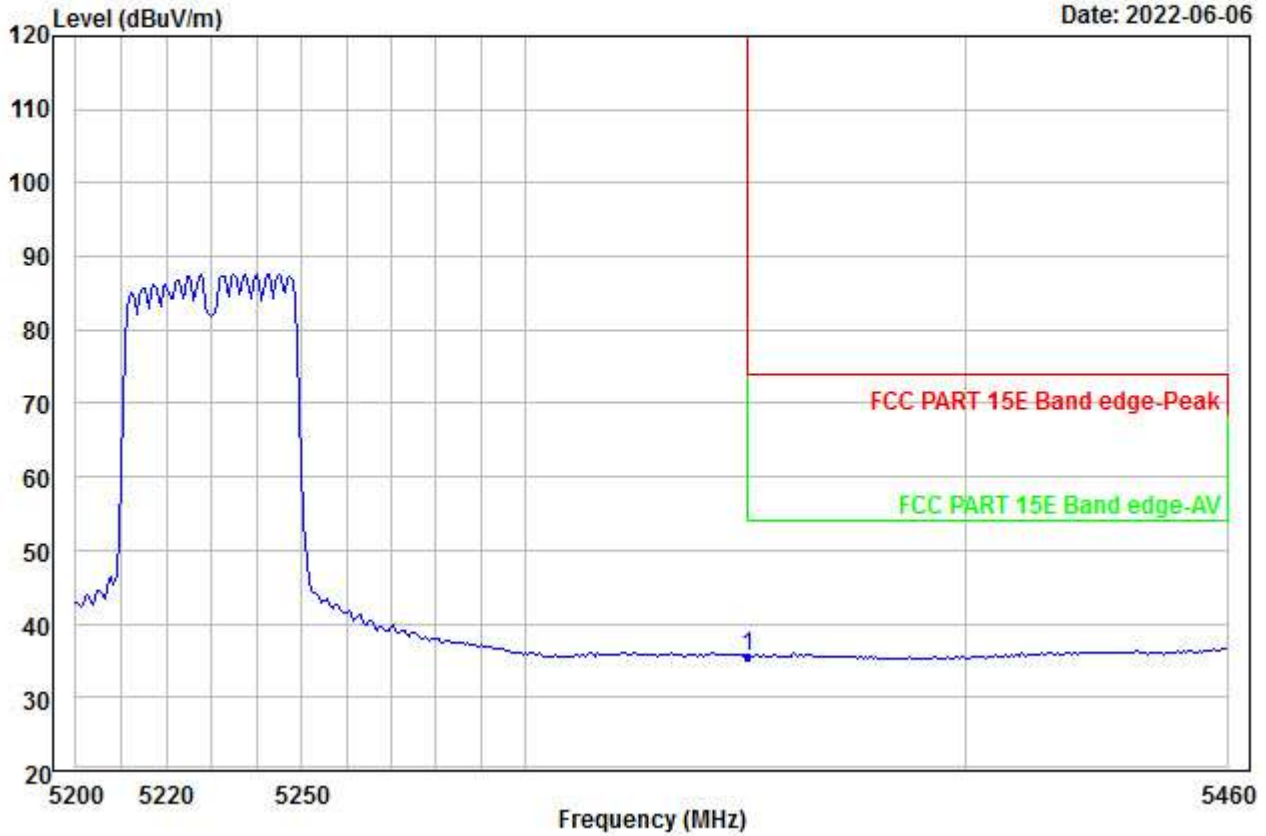


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5230
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|----------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg |
| 1 PP 5350.000 | 36.28 | 35.12 | 45.97 | 0.00 | 10.18 | 35.61 | 54.00 | -18.39 | --- | --- Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00073.EMI

Date: 2022-06-06

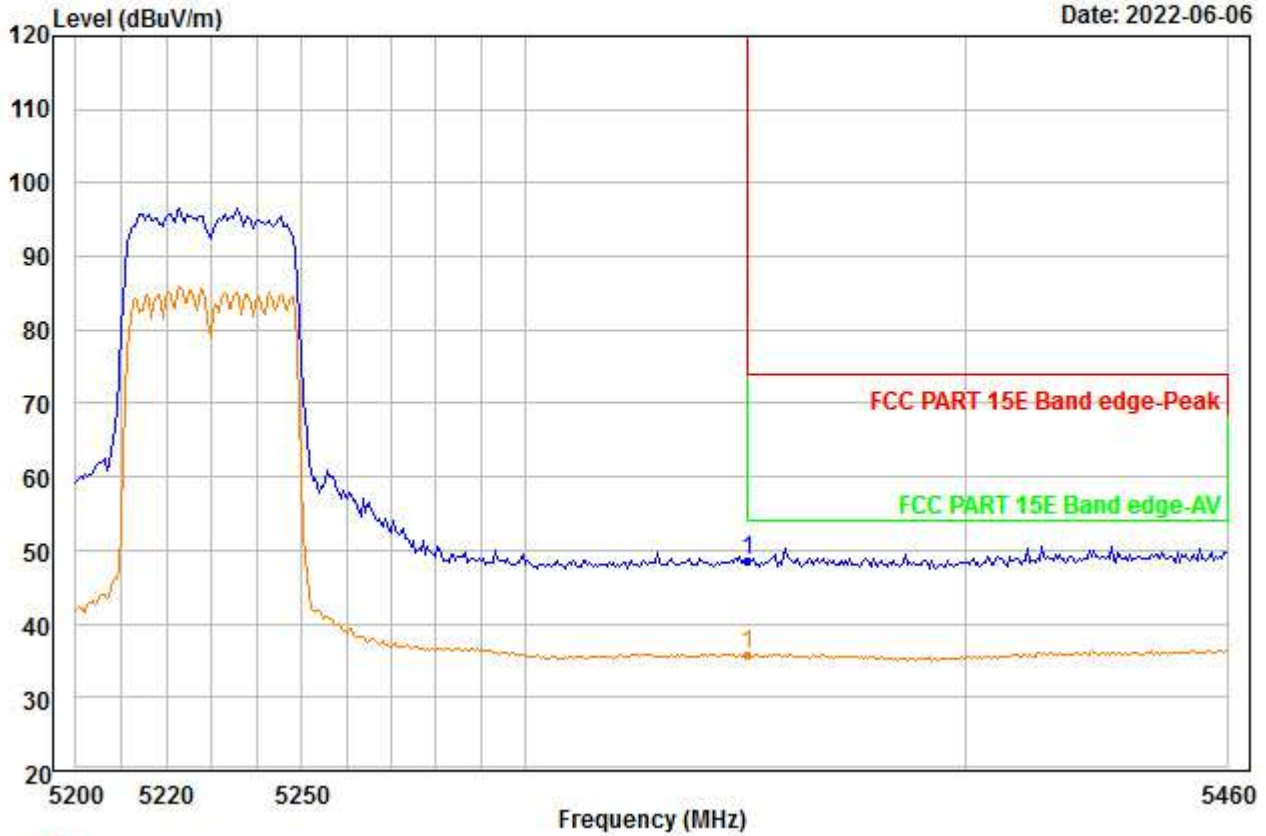


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5230
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 PP 5350.000 | 49.31 | 35.12 | 45.97 | 0.00 | 10.18 | 48.64 | 74.00 | -25.36 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00074.EMI

Date: 2022-06-06

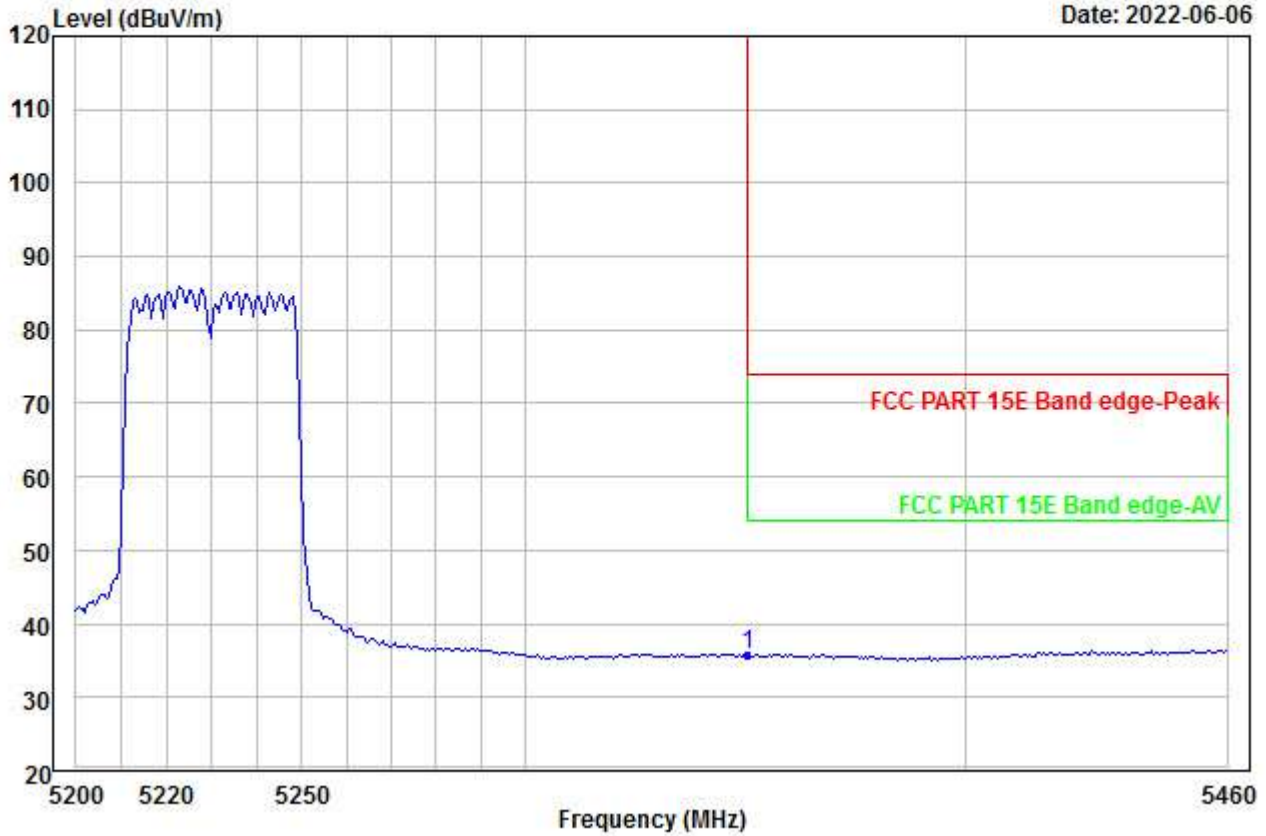


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5230
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 PP 5350.000 | 36.58 | 35.12 | 45.97 | 0.00 | 10.18 | 35.91 | 54.00 | -18.09 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00075.EMI

Date: 2022-06-06

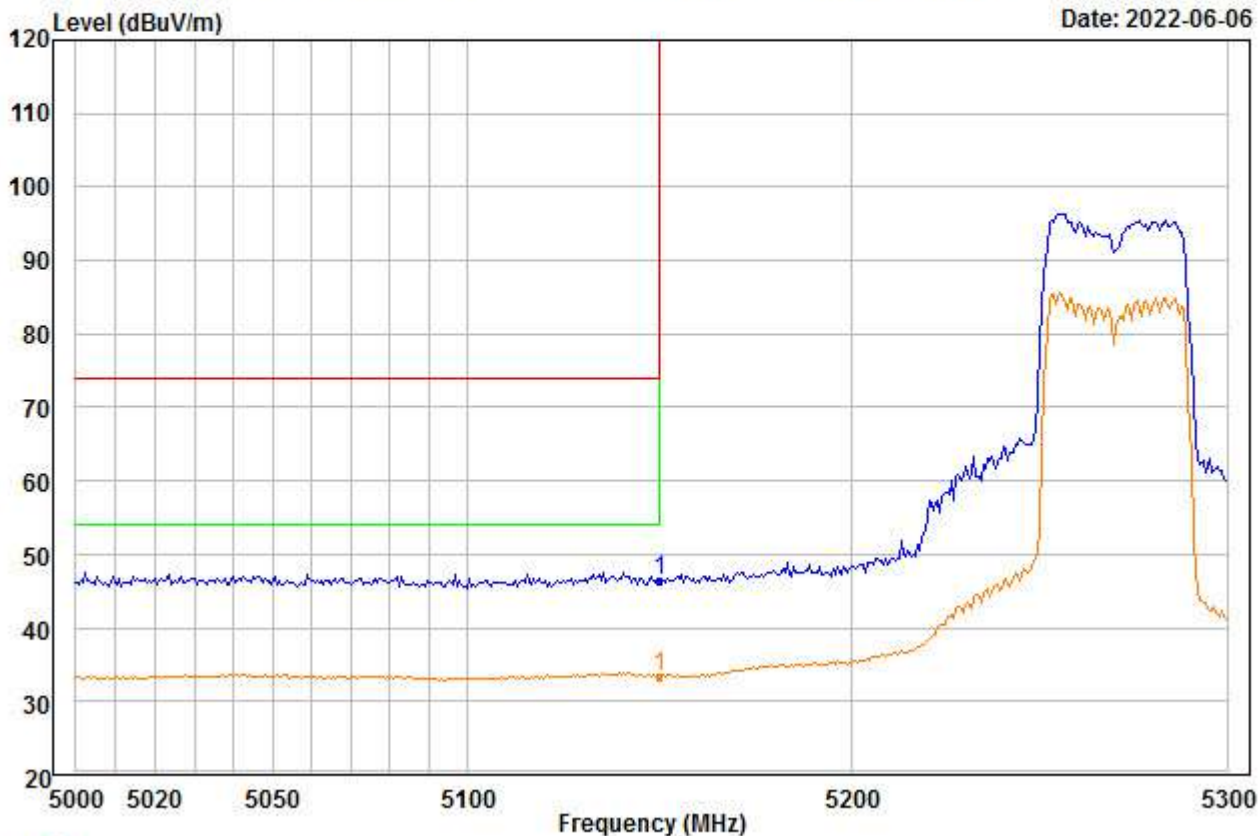


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5270
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 PP 5150.000 | 48.13 | 34.88 | 46.33 | 0.00 | 9.78 | 46.46 | 74.00 | -27.54 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00076.EMI

Date: 2022-06-06

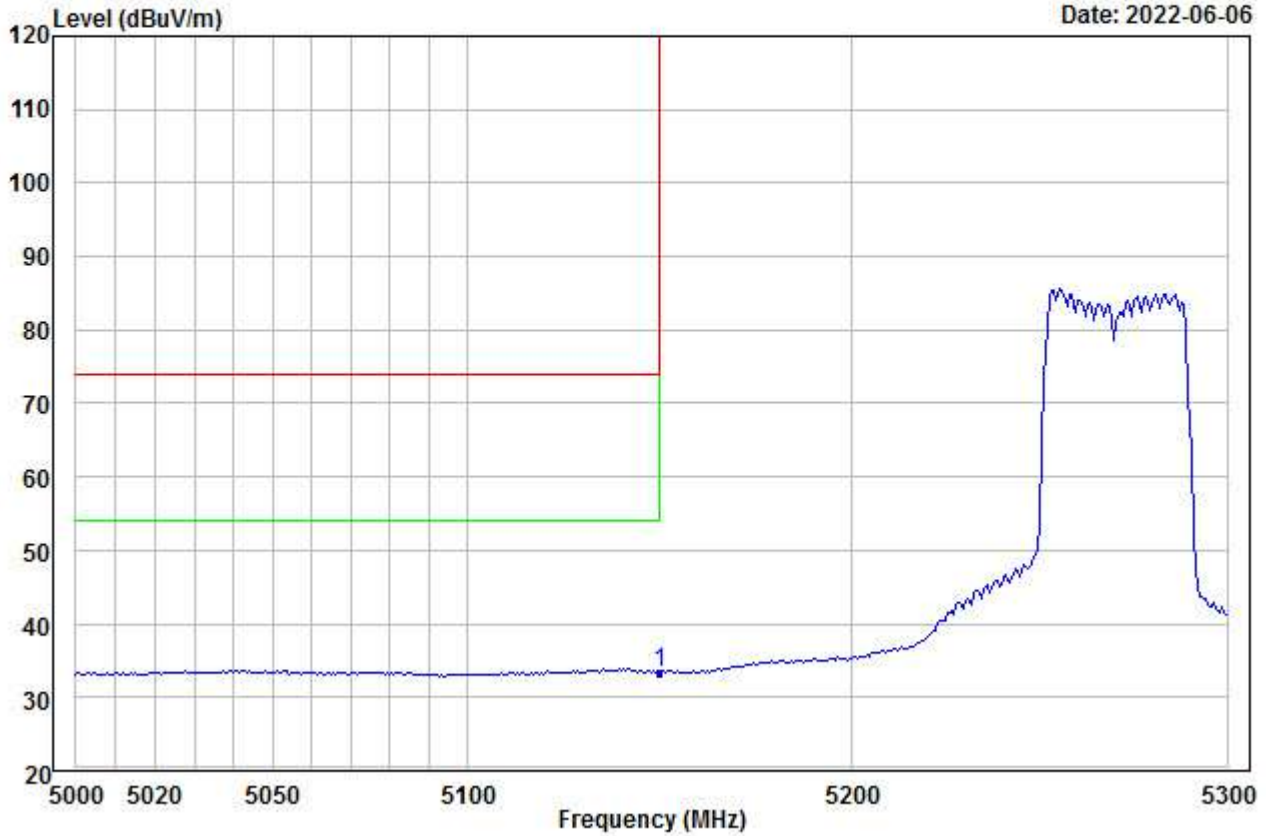


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5270
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 PP 5150.000 | 35.15 | 34.88 | 46.33 | 0.00 | 9.78 | 33.48 | 54.00 | -20.52 | --- | --- | Aver |

File: F:\Test Template\上海ITSI\2022\220523032 SA750\B\5G\BE\4_00077.EMI

Date: 2022-06-06

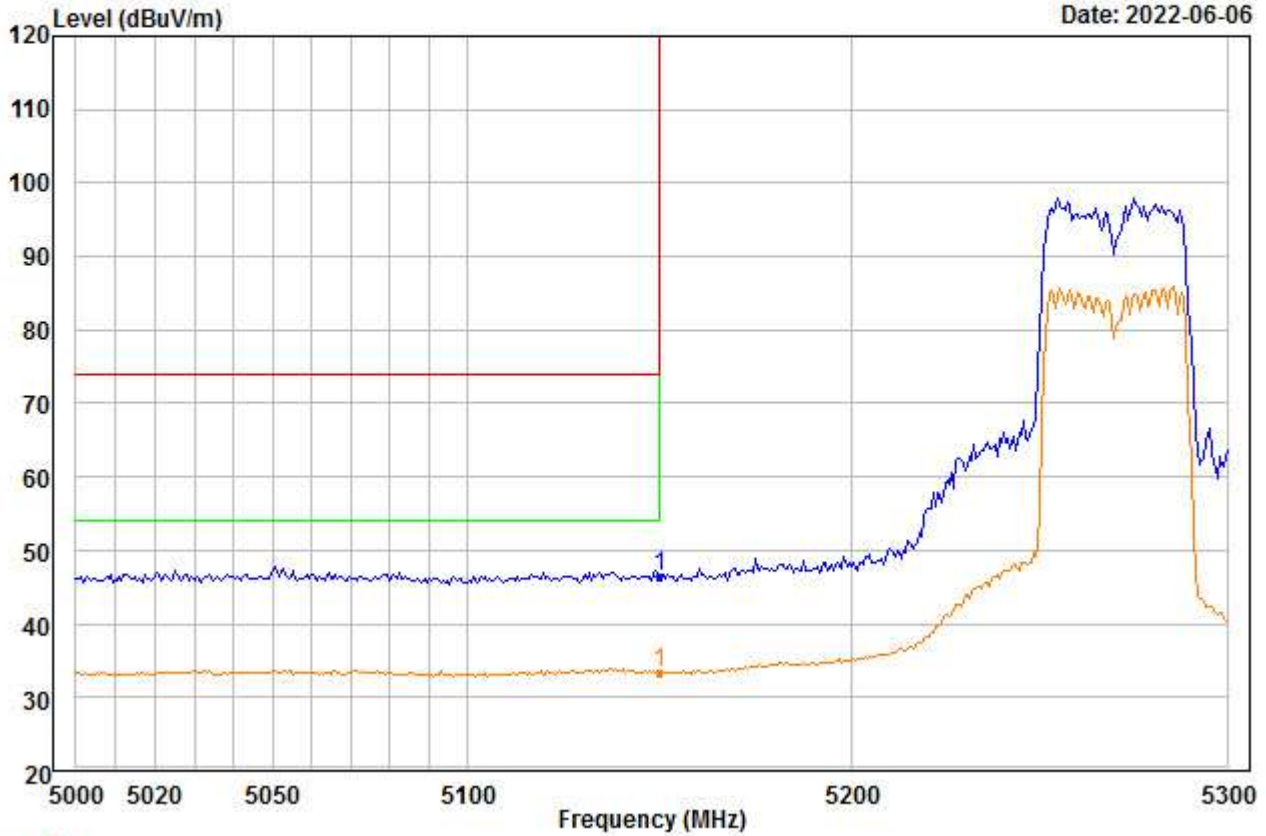


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5270
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 PP 5150.000 | 48.14 | 34.88 | 46.33 | 0.00 | 9.78 | 46.47 | 74.00 | -27.53 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00078.EMI

Date: 2022-06-06

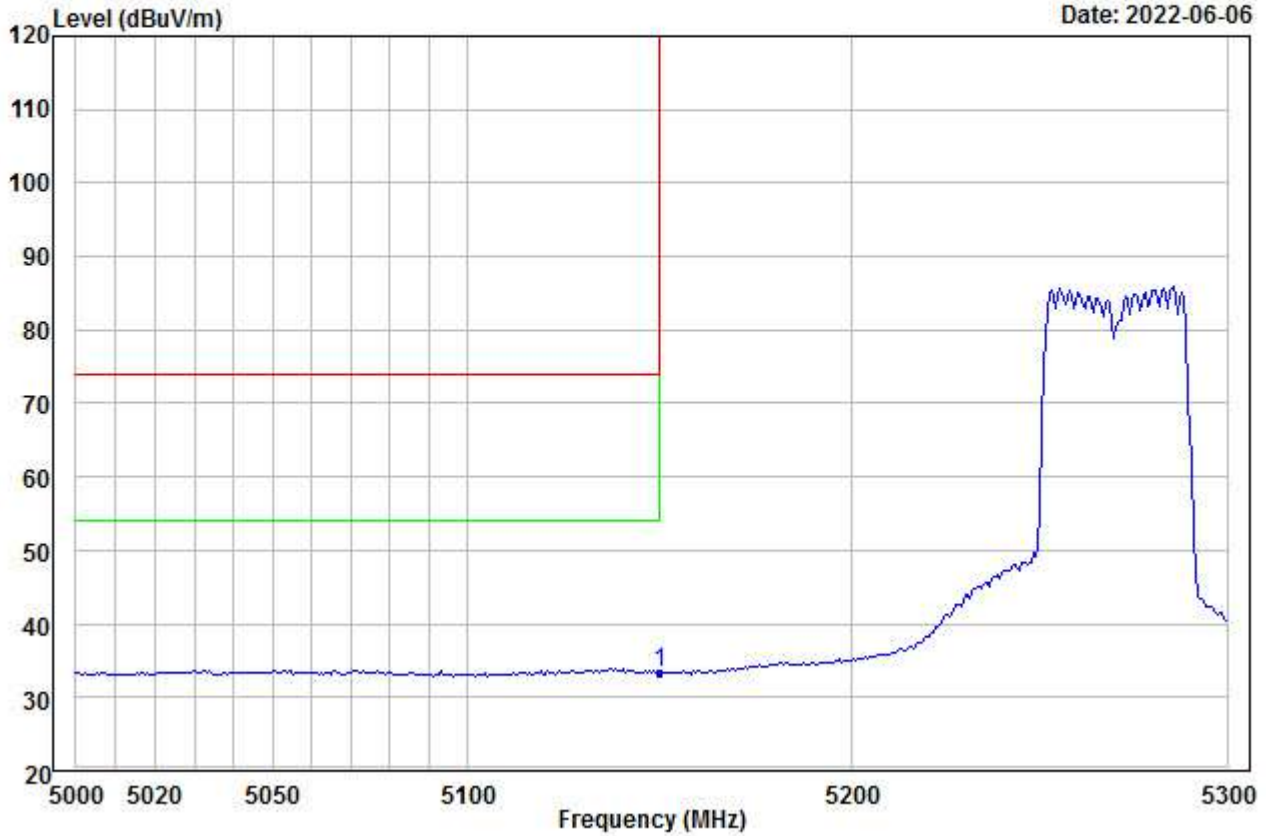


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5270
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 PP 5150.000 | 35.04 | 34.88 | 46.33 | 0.00 | 9.78 | 33.37 | 54.00 | -20.63 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00079.EMI

Date: 2022-06-06

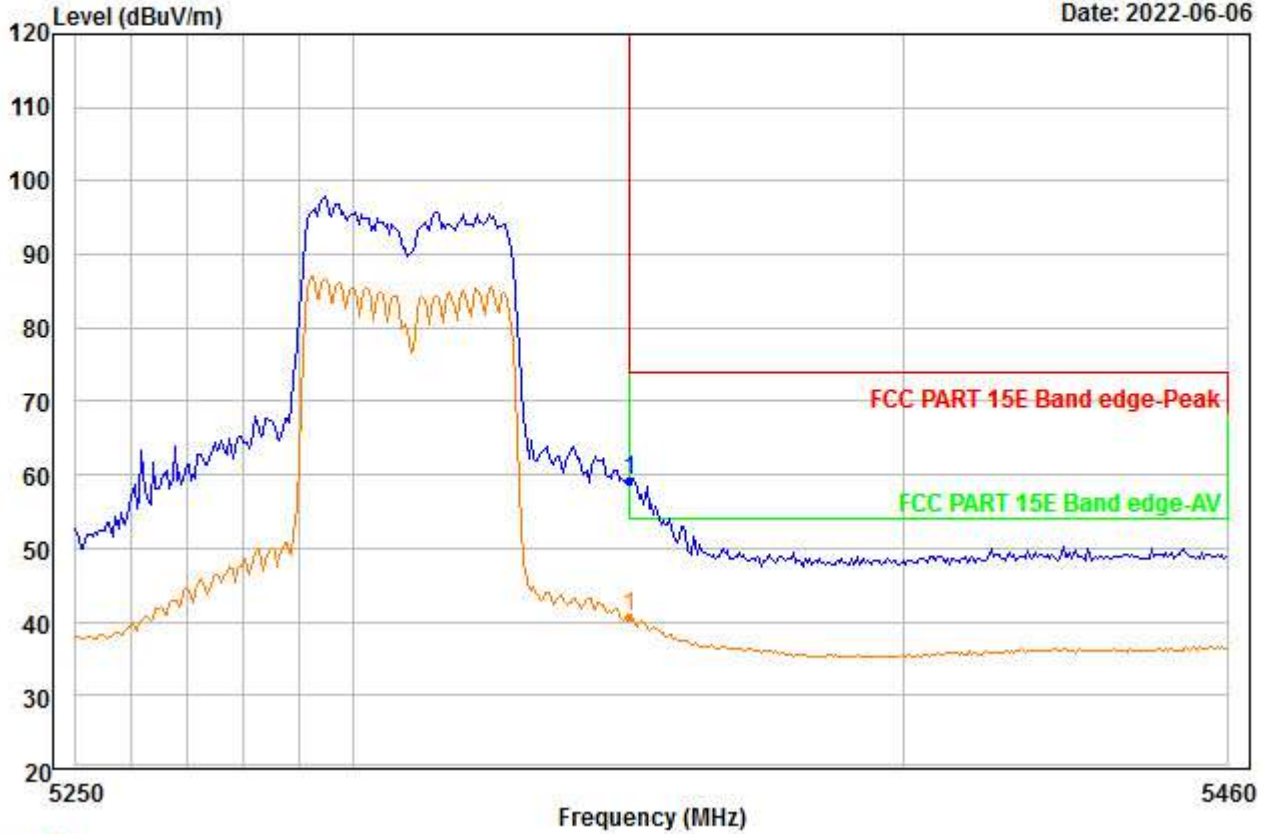


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5310
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 PP 5350.000 | 59.80 | 35.12 | 45.97 | 0.00 | 10.18 | 59.13 | 74.00 | -14.87 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00080.EMI

Date: 2022-06-06

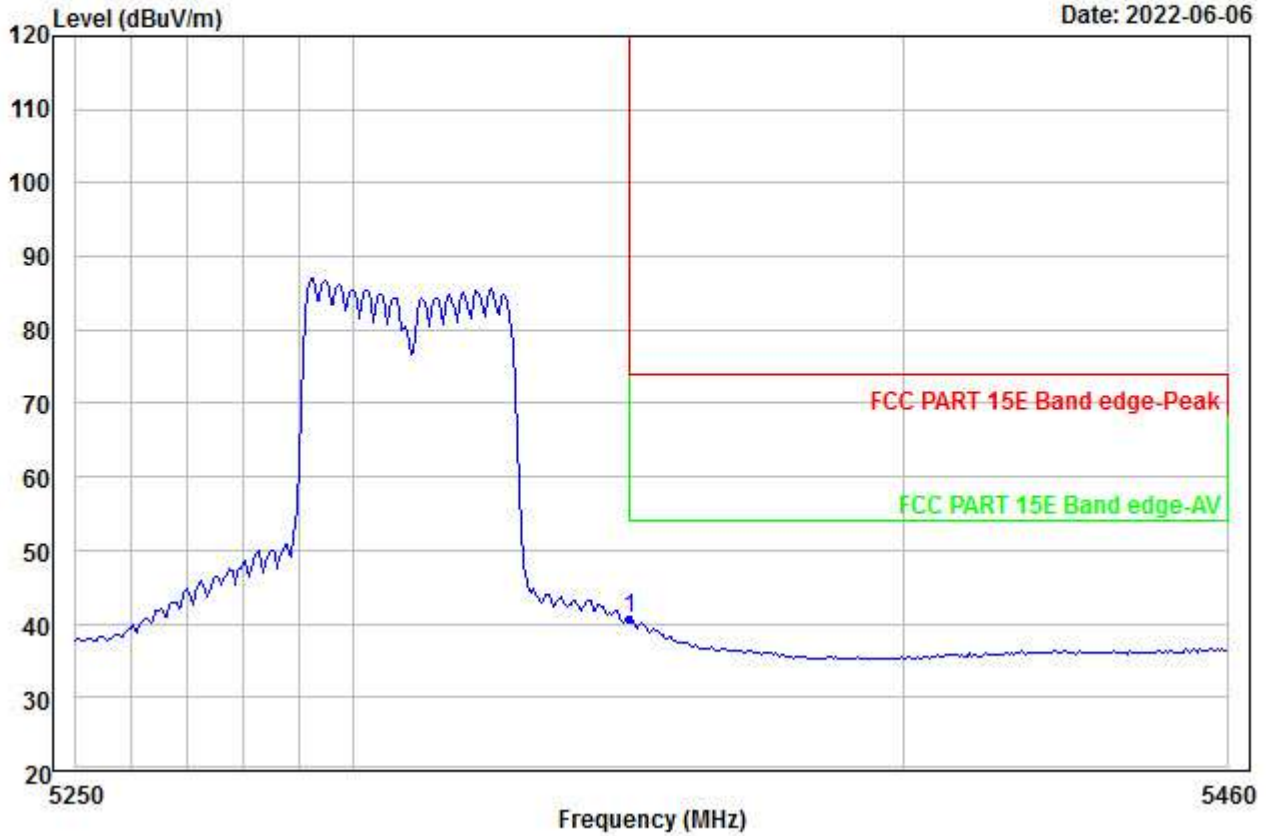


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5310
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 PP 5350.000 | 41.48 | 35.12 | 45.97 | 0.00 | 10.18 | 40.81 | 54.00 | -13.19 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00081.EMI

Date: 2022-06-06

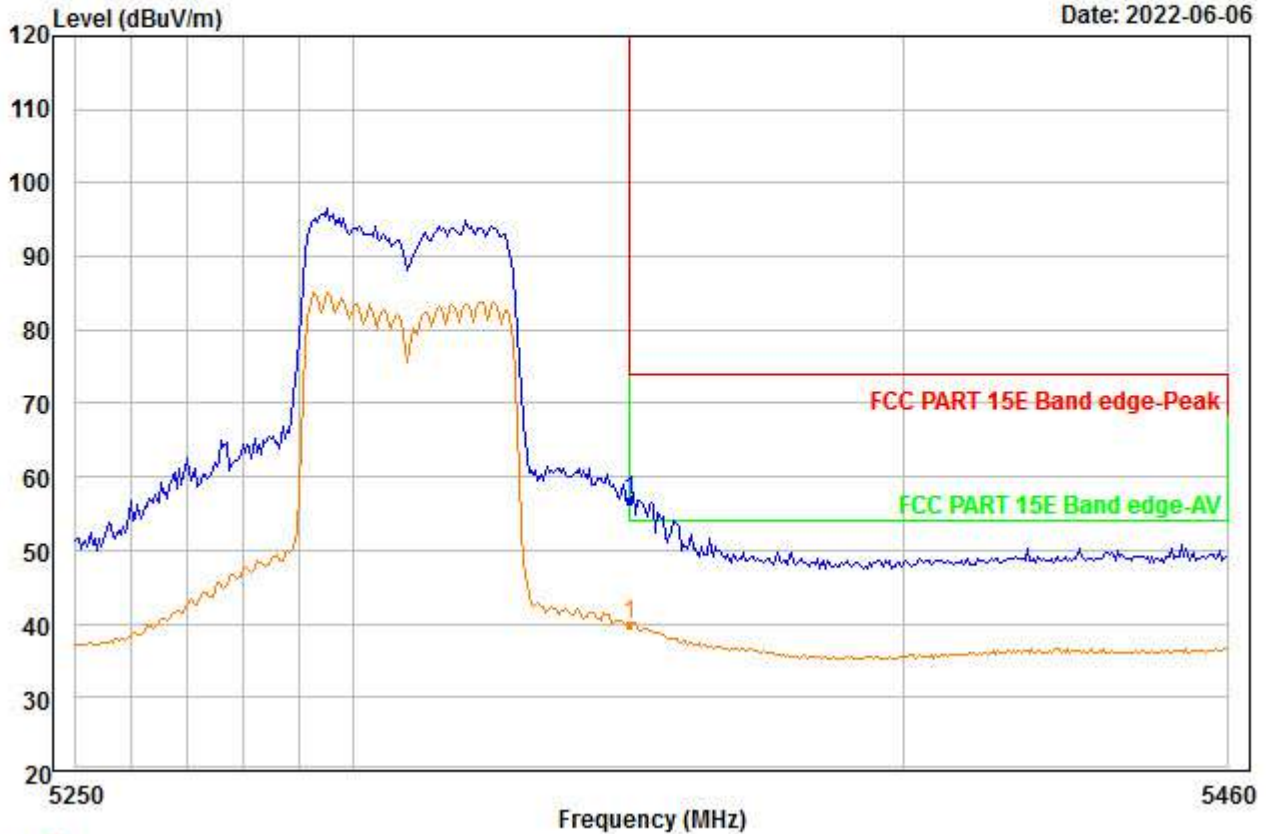


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5310
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 PP 5350.000 | 57.51 | 35.12 | 45.97 | 0.00 | 10.18 | 56.84 | 74.00 | -17.16 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00082.EMI

Date: 2022-06-06

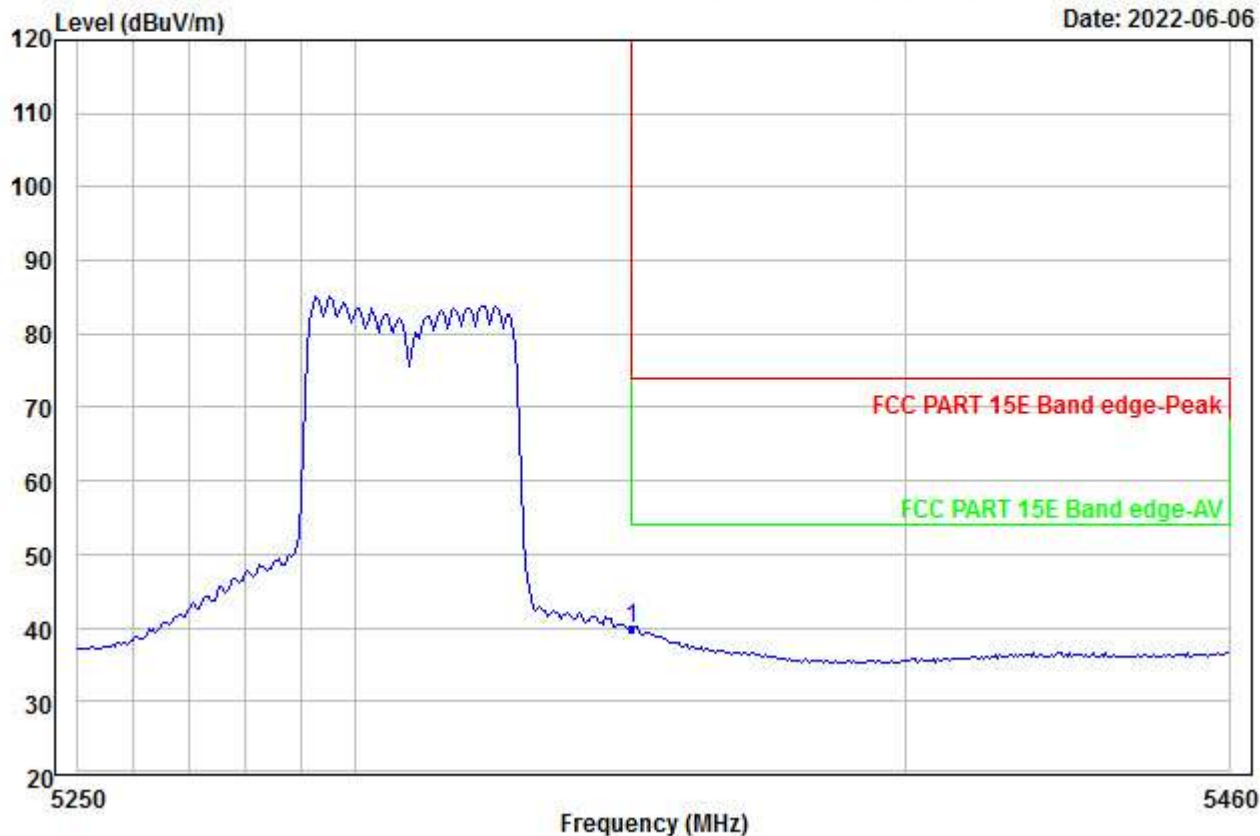


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5310
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 PP 5350.000 | 40.58 | 35.12 | 45.97 | 0.00 | 10.18 | 39.91 | 54.00 | -14.09 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00083.EMI

Date: 2022-06-06

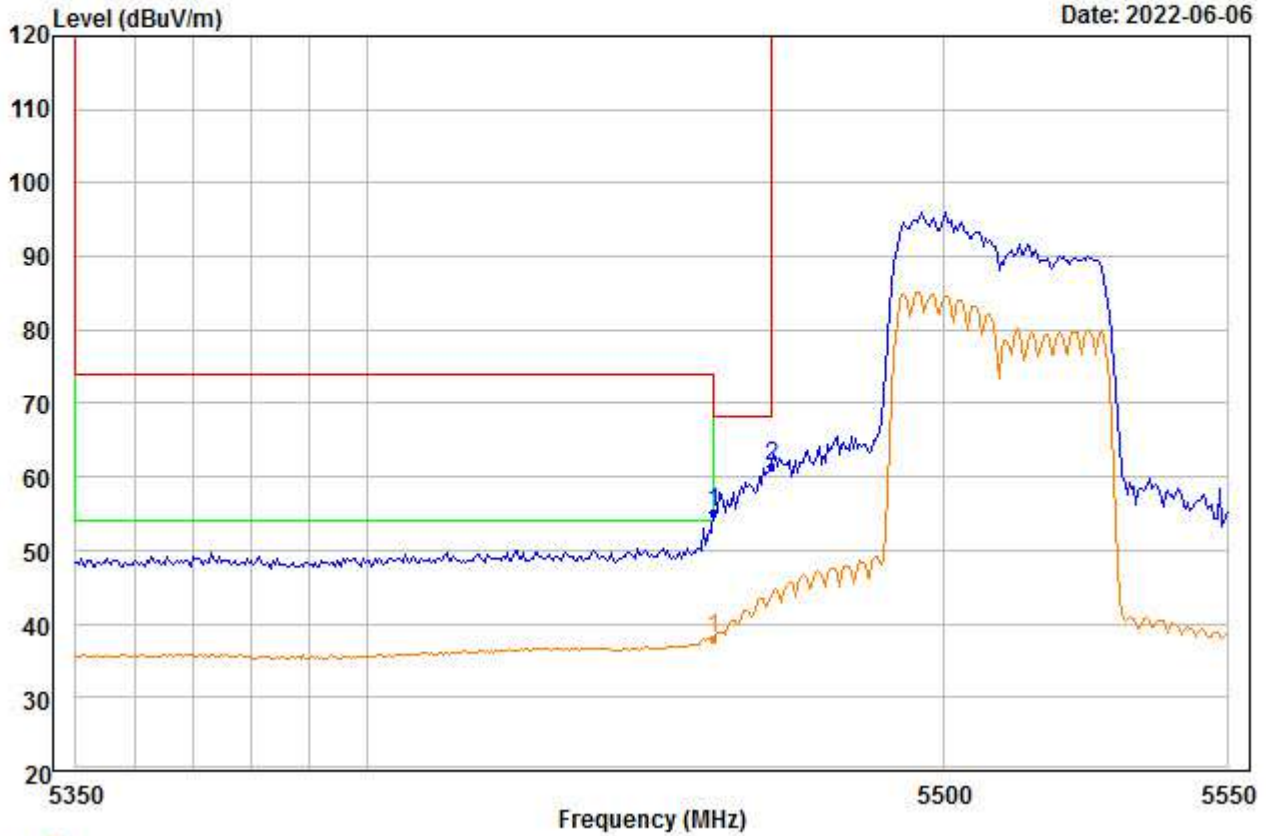


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5510
 Remark :

| | Read Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Remarks |
|------|-----------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|---------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 5460.000 | 55.35 | 35.25 | 45.77 | 0.00 | 10.44 | 55.27 | 68.20 | -12.93 | --- | --- | Peak |
| 2 PP | 5470.000 | 61.49 | 35.26 | 45.75 | 0.00 | 10.47 | 61.47 | 68.20 | -6.73 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00084.EMI

Date: 2022-06-06

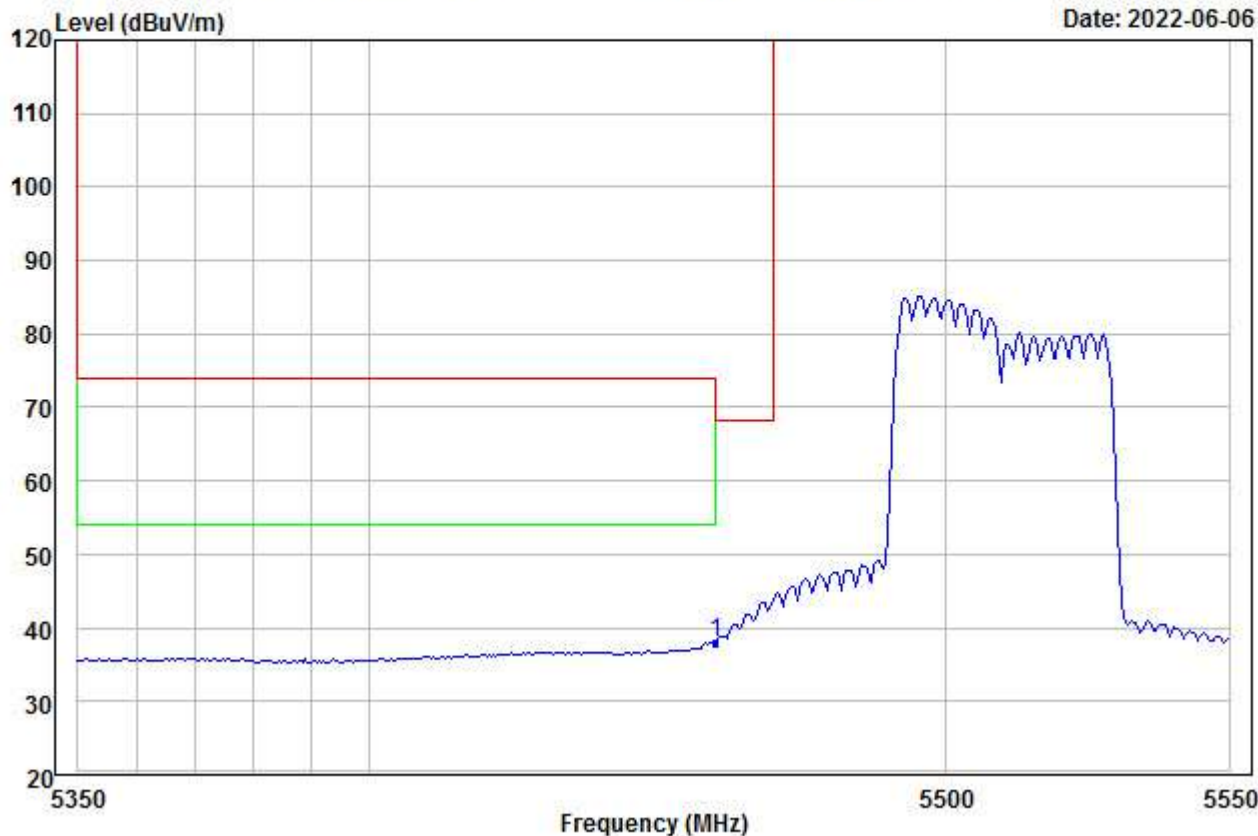


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5510
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 PP 5460.000 | 38.17 | 35.25 | 45.77 | 0.00 | 10.44 | 38.09 | 54.00 | -15.91 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00085.EMI

Date: 2022-06-06

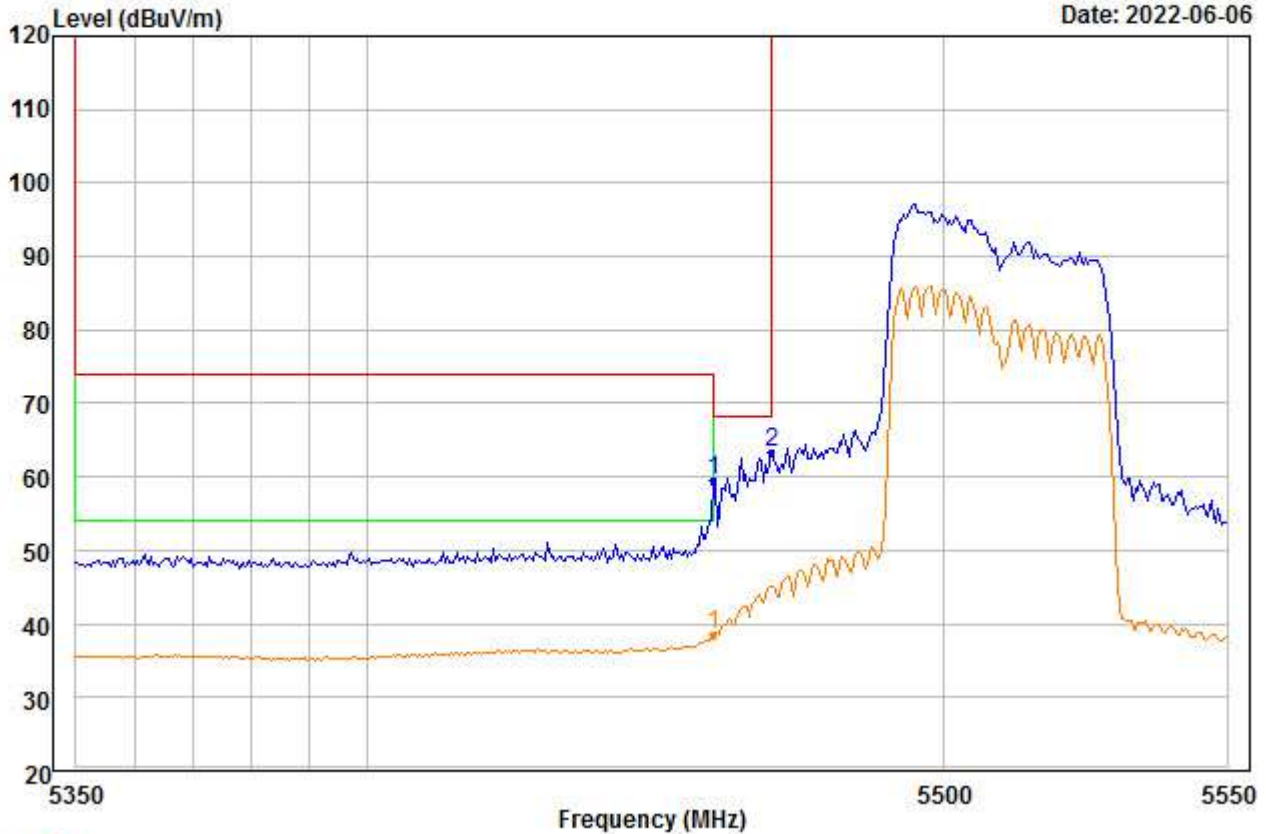


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5510
 Remark :

| | Read Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Remarks |
|------|-----------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|---------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 5460.000 | 59.56 | 35.25 | 45.77 | 0.00 | 10.44 | 59.48 | 68.20 | -8.72 | --- | --- | Peak |
| 2 PP | 5470.000 | 63.28 | 35.26 | 45.75 | 0.00 | 10.47 | 63.26 | 68.20 | -4.94 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00086.EMI

Date: 2022-06-06

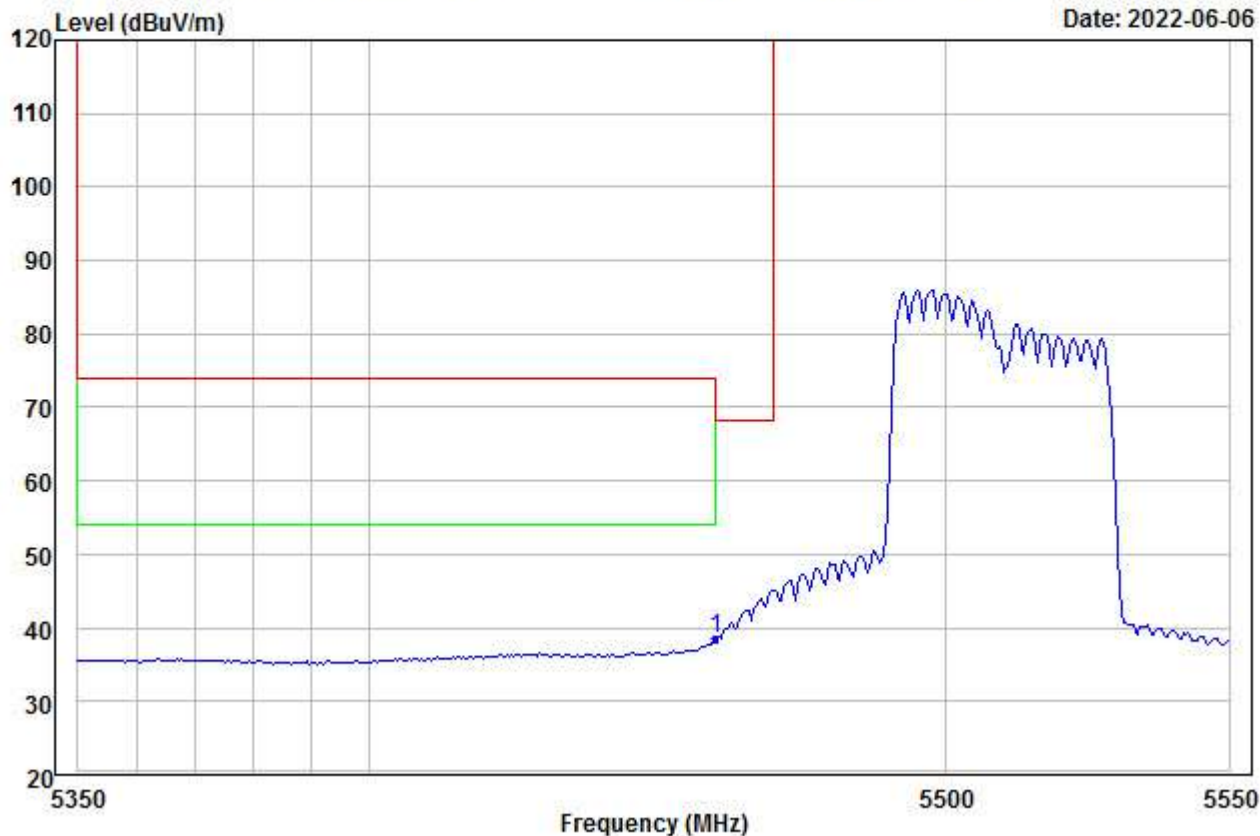


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5510
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 PP 5460.000 | 38.62 | 35.25 | 45.77 | 0.00 | 10.44 | 38.54 | 54.00 | -15.46 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00087.EMI

Date: 2022-06-06

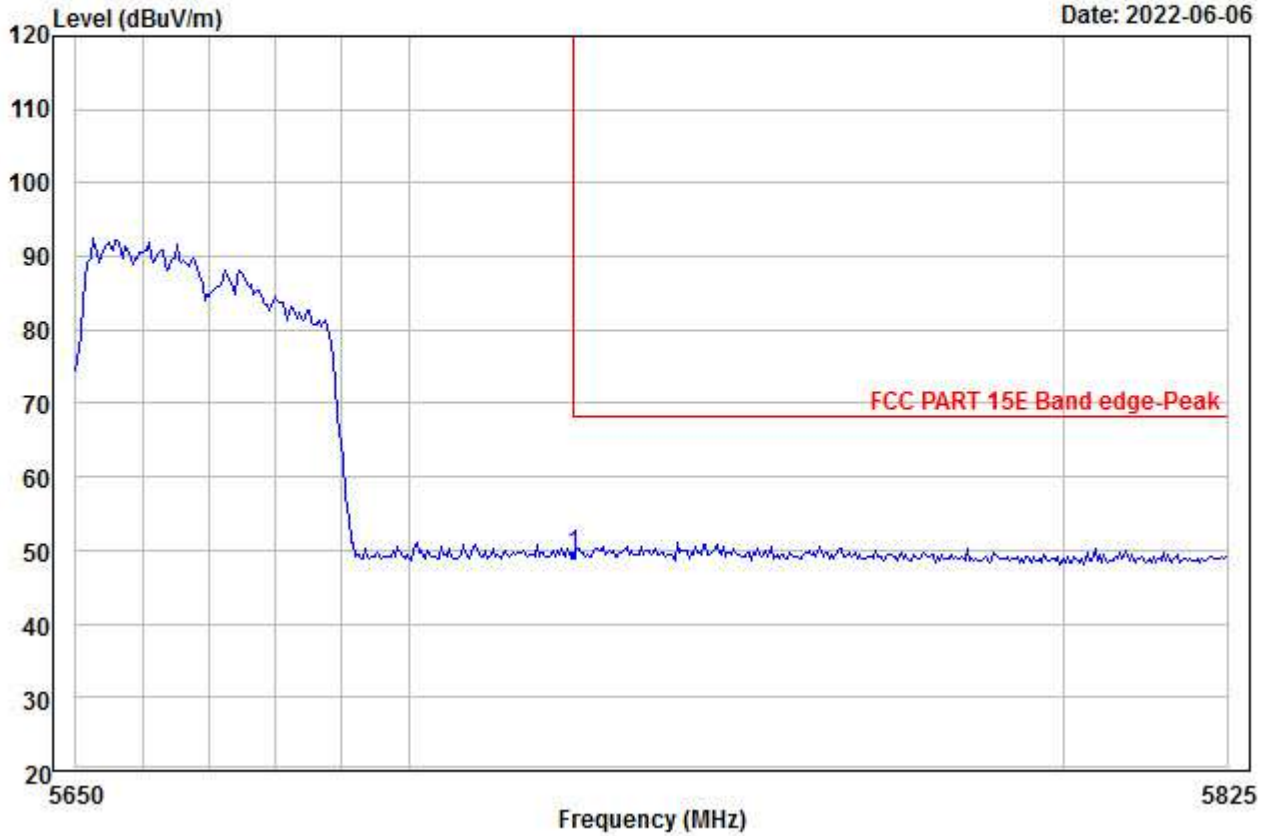


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5670
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 PP 5725.000 | 49.89 | 35.26 | 45.57 | 0.00 | 9.94 | 49.52 | 68.20 | -18.68 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00088.EMI

Date: 2022-06-06

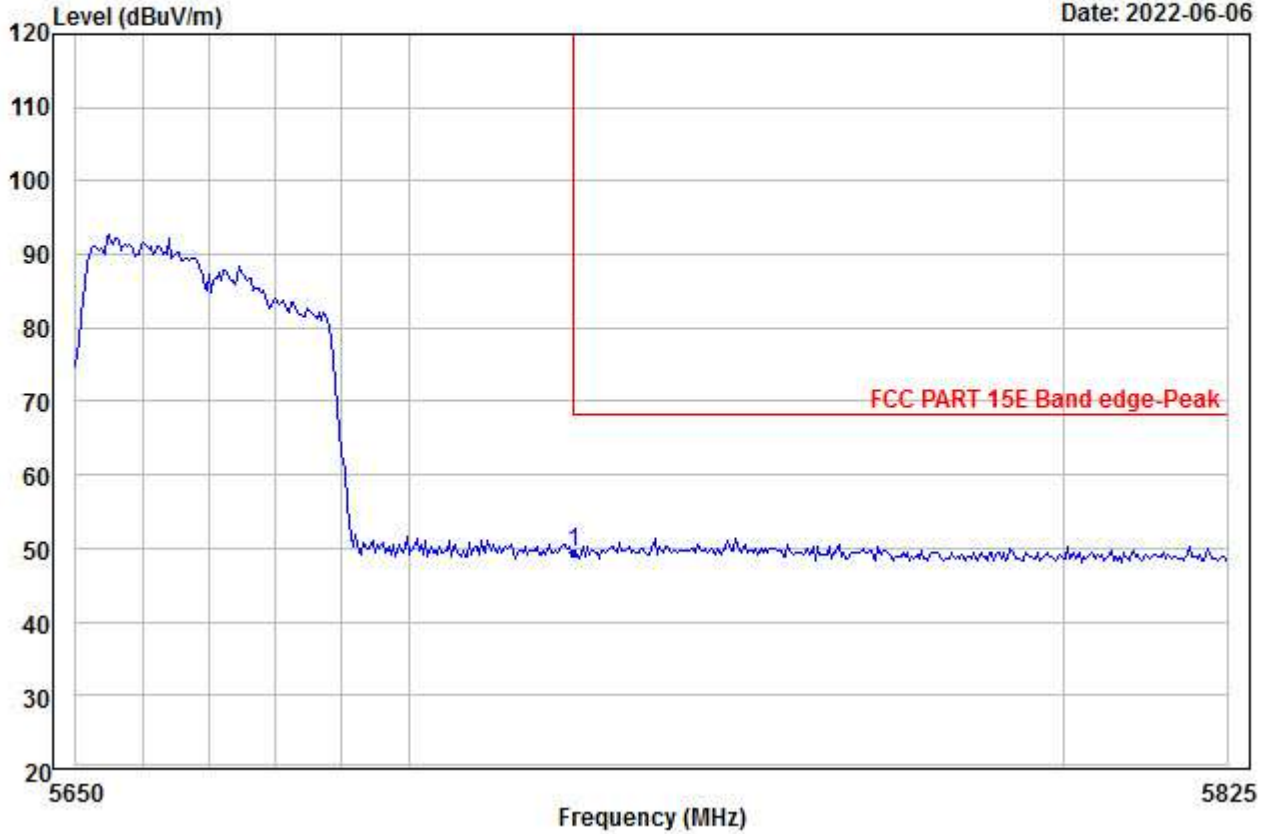


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5670
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 PP 5725.000 | 49.81 | 35.26 | 45.57 | 0.00 | 9.94 | 49.44 | 68.20 | -18.76 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00089.EMI

Date: 2022-06-06

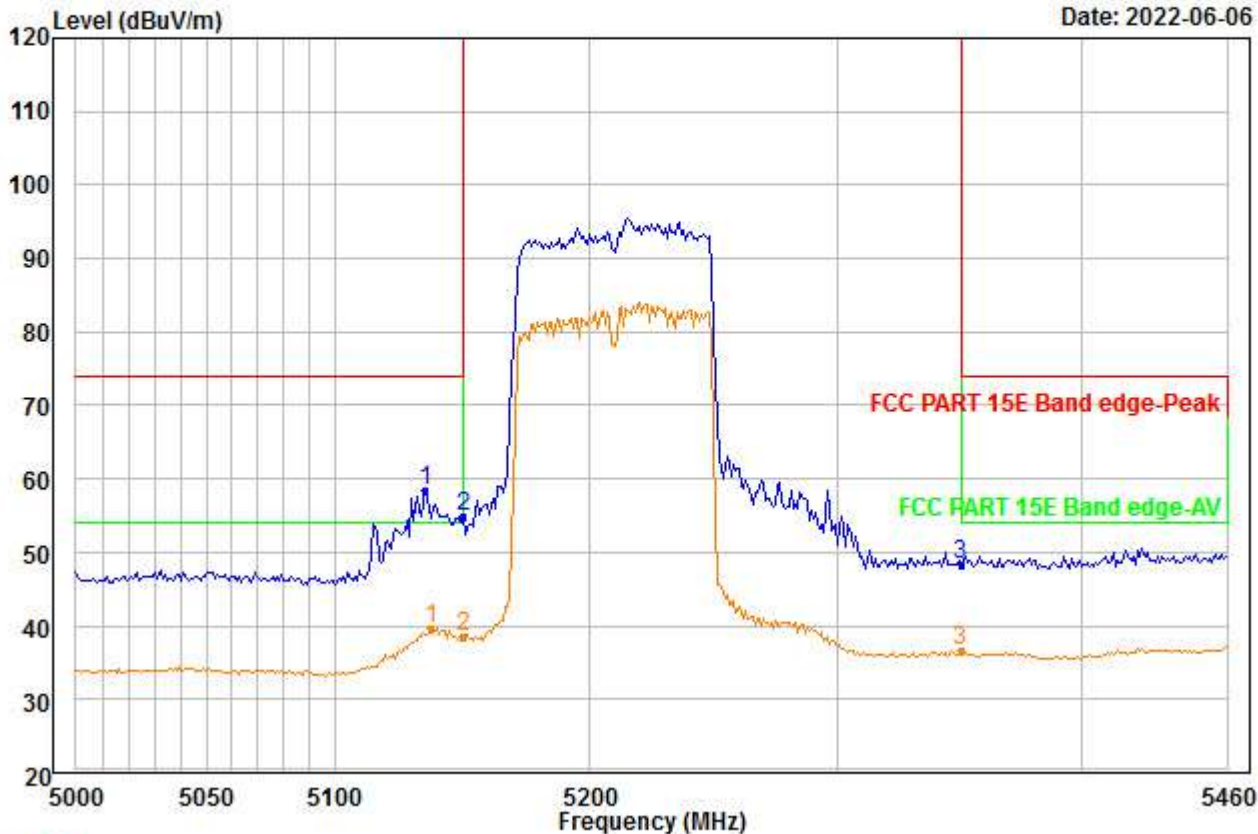


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC80_ANT0+1_5210
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 PP 5135.511 | 60.28 | 34.86 | 46.36 | 0.00 | 9.76 | 58.54 | 74.00 | -15.46 | --- | --- | Peak |
| 2 5150.000 | 56.61 | 34.88 | 46.33 | 0.00 | 9.78 | 54.94 | 74.00 | -19.06 | --- | --- | Peak |
| 3 5350.000 | 48.97 | 35.12 | 45.97 | 0.00 | 10.18 | 48.30 | 74.00 | -25.70 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00090.EMI

Date: 2022-06-06

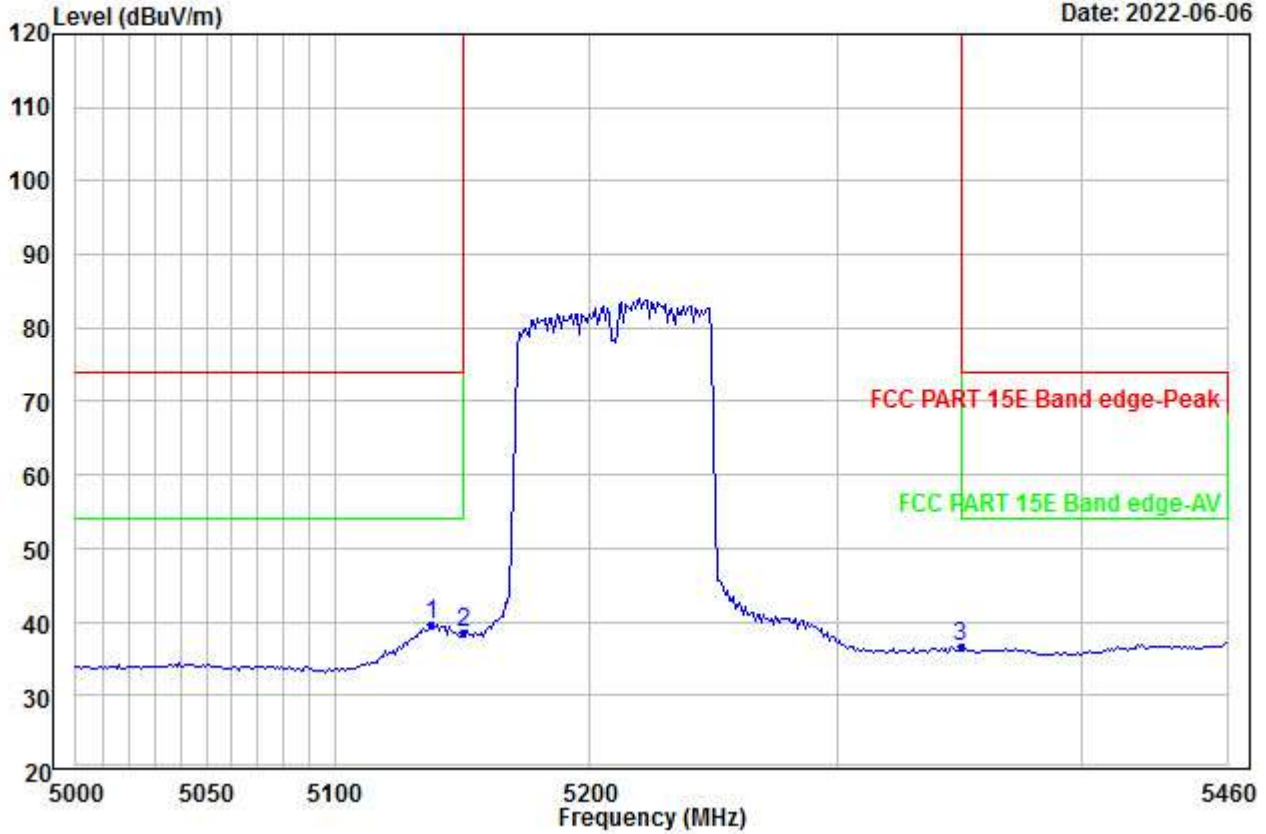


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC80_ANT0+1_5210
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 PP 5137.354 | 41.32 | 34.86 | 46.35 | 0.00 | 9.77 | 39.60 | 54.00 | -14.40 | --- | --- | Aver |
| 2 5150.000 | 40.30 | 34.88 | 46.33 | 0.00 | 9.78 | 38.63 | 54.00 | -15.37 | --- | --- | Aver |
| 3 5350.000 | 37.31 | 35.12 | 45.97 | 0.00 | 10.18 | 36.64 | 54.00 | -17.36 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00091.EMI

Date: 2022-06-06

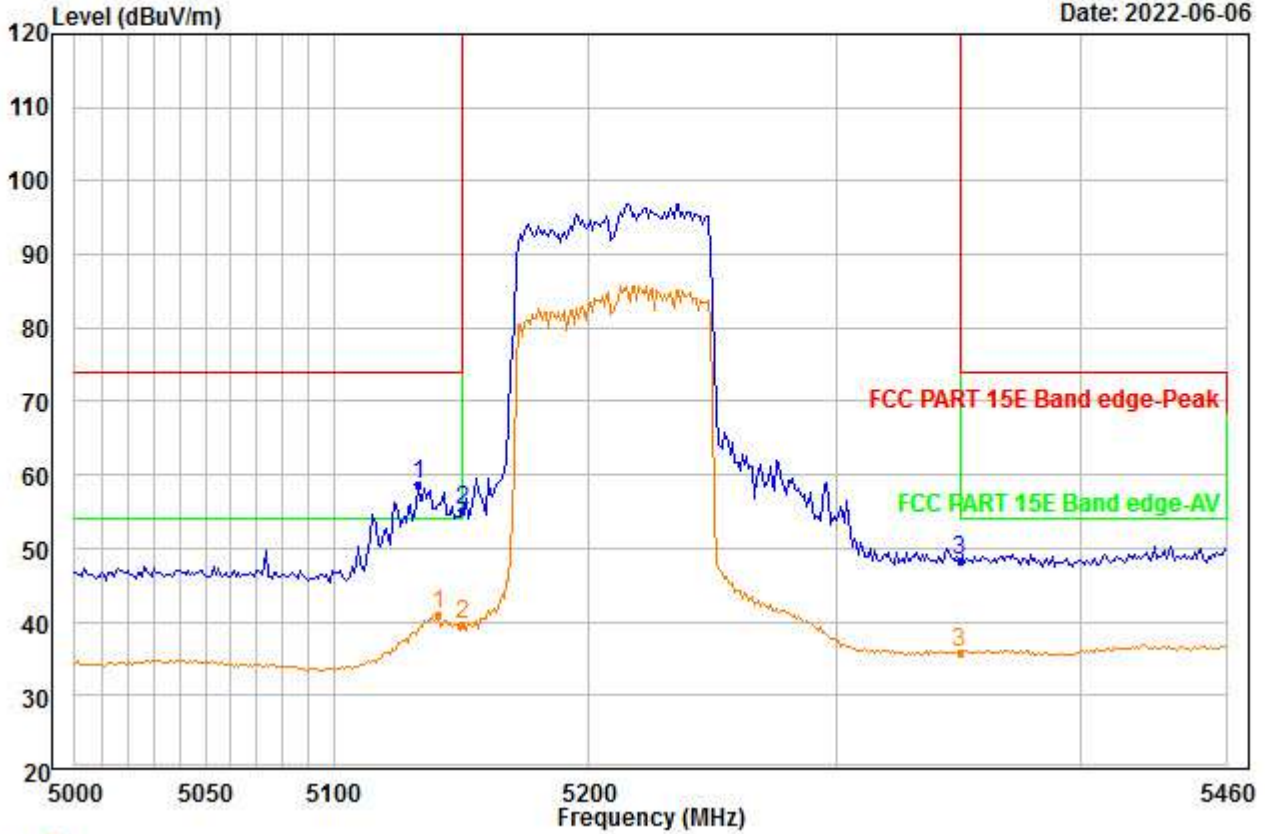


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC80_ANT0+1_5210
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 PP 5132.746 | 60.54 | 34.86 | 46.36 | 0.00 | 9.76 | 58.80 | 74.00 | -15.20 | --- | --- | Peak |
| 2 5150.000 | 56.88 | 34.88 | 46.33 | 0.00 | 9.78 | 55.21 | 74.00 | -18.79 | --- | --- | Peak |
| 3 5350.000 | 49.10 | 35.12 | 45.97 | 0.00 | 10.18 | 48.43 | 74.00 | -25.57 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00092.EMI

Date: 2022-06-06

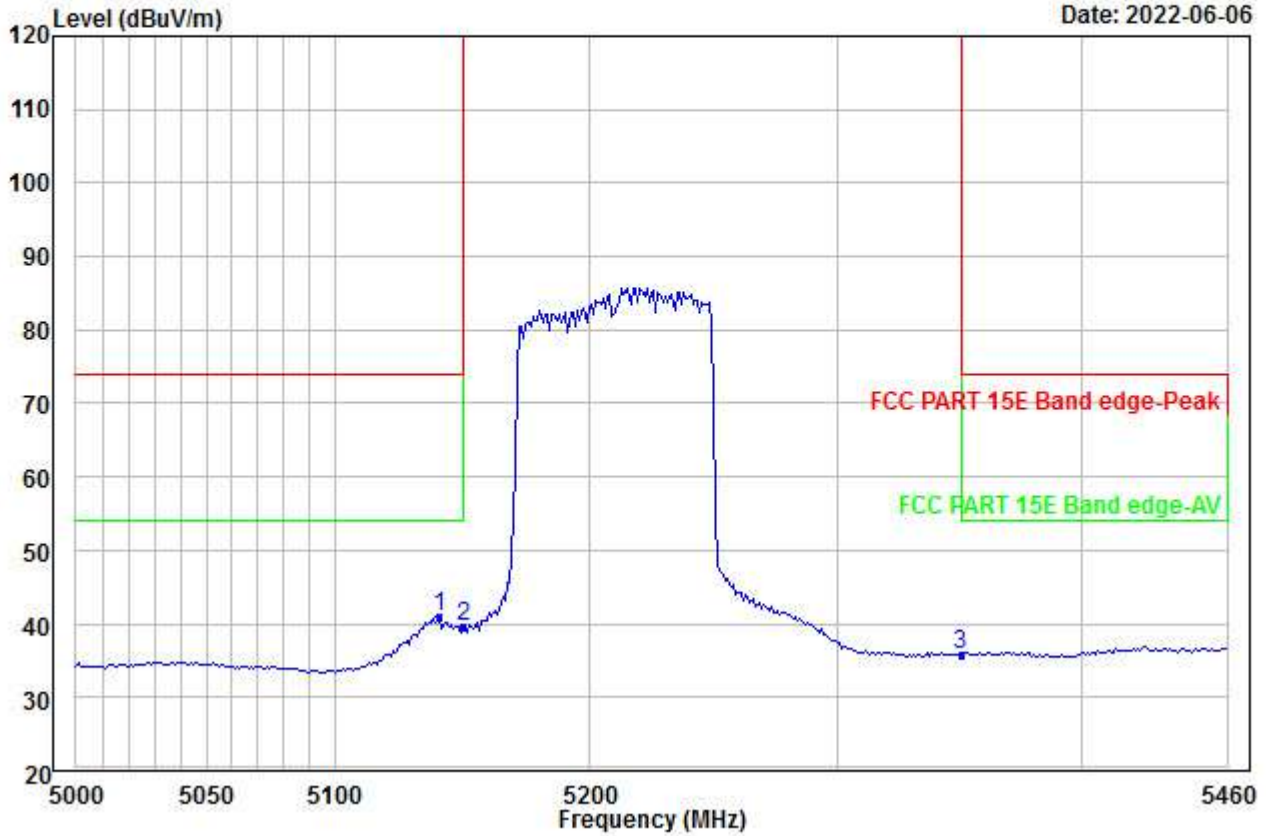


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC80_ANT0+1_5210
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rema | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 PP 5141.042 | 42.73 | 34.87 | 46.35 | 0.00 | 9.77 | 41.02 | 54.00 | -12.98 | --- | --- | Aver |
| 2 5150.000 | 41.31 | 34.88 | 46.33 | 0.00 | 9.78 | 39.64 | 54.00 | -14.36 | --- | --- | Aver |
| 3 5350.000 | 36.45 | 35.12 | 45.97 | 0.00 | 10.18 | 35.78 | 54.00 | -18.22 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00093.EMI

Date: 2022-06-06

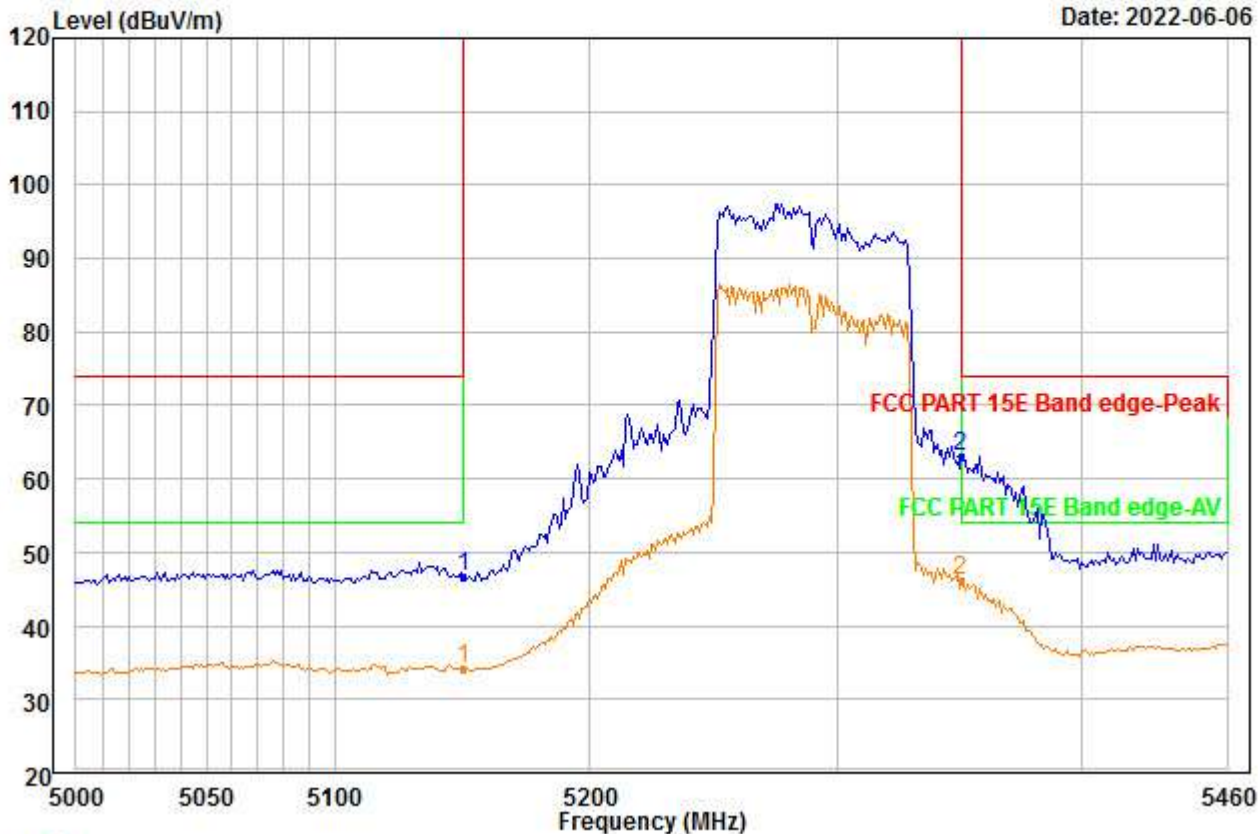


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC80_ANT0+1_5290
 Remark :

| | Read Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Remarks |
|------|-----------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|---------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 5150.000 | 48.30 | 34.88 | 46.33 | 0.00 | 9.78 | 46.63 | 74.00 | -27.37 | --- | --- | Peak |
| 2 PP | 5350.000 | 63.68 | 35.12 | 45.97 | 0.00 | 10.18 | 63.01 | 74.00 | -10.99 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00094.EMI

Date: 2022-06-06

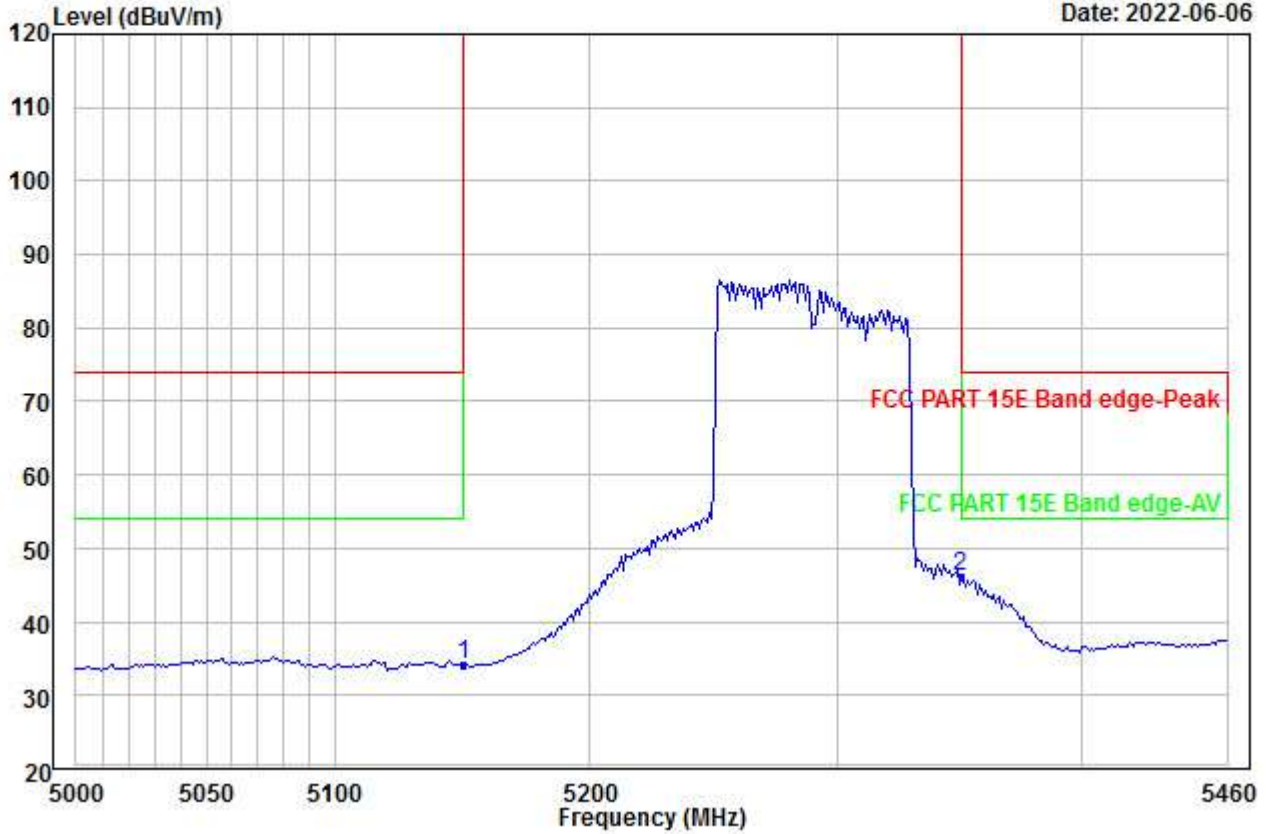


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC80_ANT0+1_5290
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | | |
|------|----------|--------|--------|--------|-------|--------|--------|-------|--------|------|-----|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | | |
| 1 | 5150.000 | 35.88 | 34.88 | 46.33 | 0.00 | 9.78 | 34.21 | 54.00 | -19.79 | --- | --- | Aver |
| 2 PP | 5350.000 | 46.83 | 35.12 | 45.97 | 0.00 | 10.18 | 46.16 | 54.00 | -7.84 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00095.EMI

Date: 2022-06-06

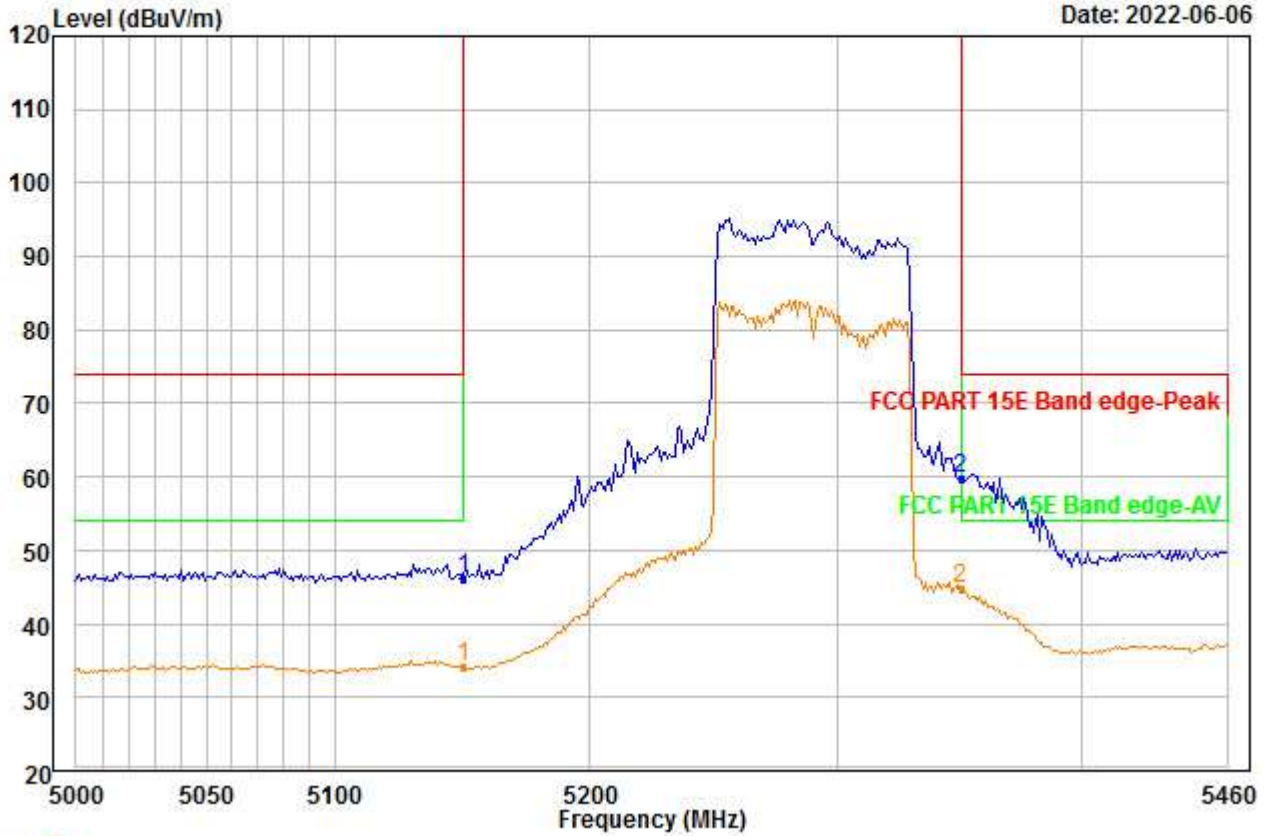


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC80_ANT0+1_5290
 Remark :

| | Read Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Remarks |
|------|-----------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|---------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 5150.000 | 47.91 | 34.88 | 46.33 | 0.00 | 9.78 | 46.24 | 74.00 | -27.76 | --- | --- | Peak |
| 2 PP | 5350.000 | 60.38 | 35.12 | 45.97 | 0.00 | 10.18 | 59.71 | 74.00 | -14.29 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00096.EMI

Date: 2022-06-06

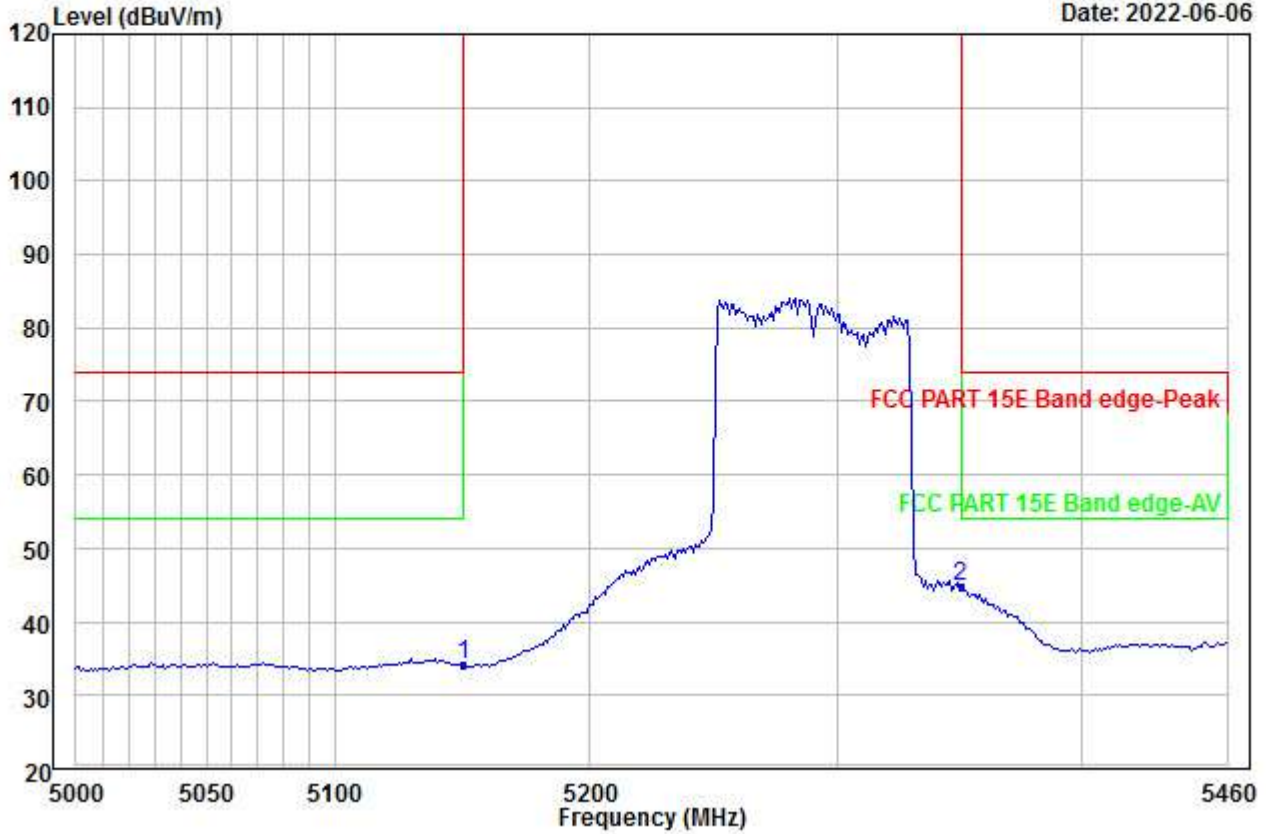


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC80_ANT0+1_5290
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | | |
|------|----------|--------|--------|--------|-------|--------|--------|-------|--------|------|-----|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | | |
| 1 | 5150.000 | 35.77 | 34.88 | 46.33 | 0.00 | 9.78 | 34.10 | 74.00 | -39.90 | --- | --- | Peak |
| 2 PP | 5350.000 | 45.51 | 35.12 | 45.97 | 0.00 | 10.18 | 44.84 | 74.00 | -29.16 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00097.EMI

Date: 2022-06-06

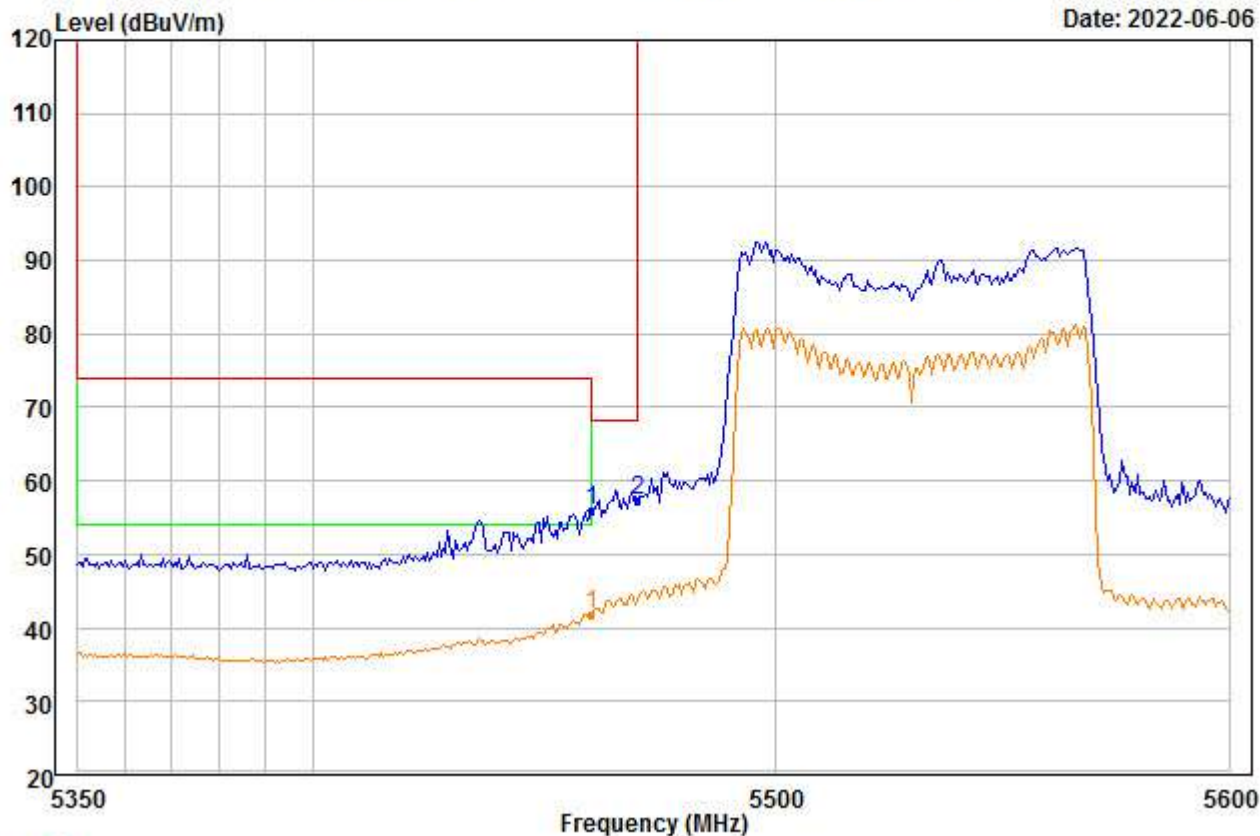


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC80_ANT0+1_5530
 Remark :

| | Read Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Remarks |
|------|-----------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|---------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 5460.000 | 55.93 | 35.25 | 45.77 | 0.00 | 10.44 | 55.85 | 68.20 | -12.35 | --- | --- | Peak |
| 2 PP | 5470.000 | 57.31 | 35.26 | 45.75 | 0.00 | 10.47 | 57.29 | 68.20 | -10.91 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00098.EMI

Date: 2022-06-06

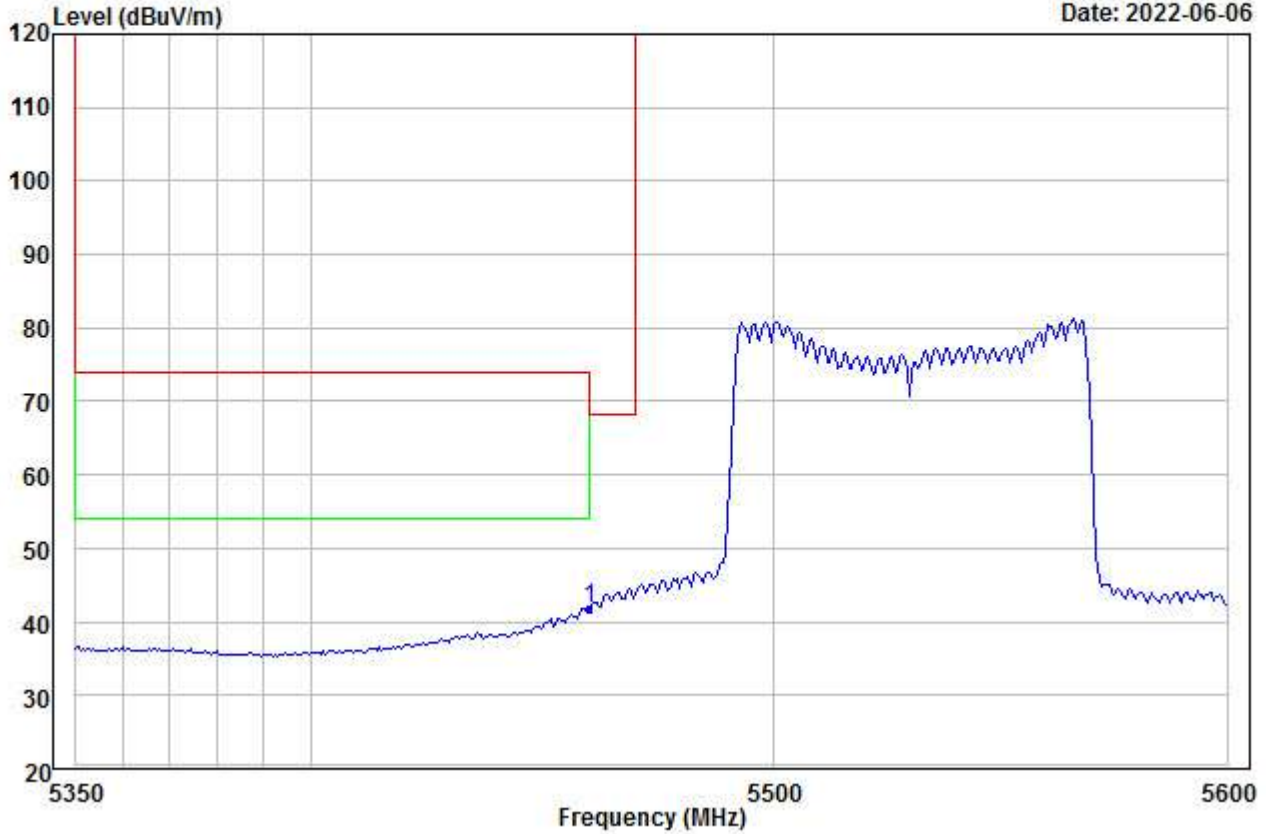


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC80_ANT0+1_5530
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 PP 5460.000 | 41.88 | 35.25 | 45.77 | 0.00 | 10.44 | 41.80 | 54.00 | -12.20 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00099.EMI

Date: 2022-06-06

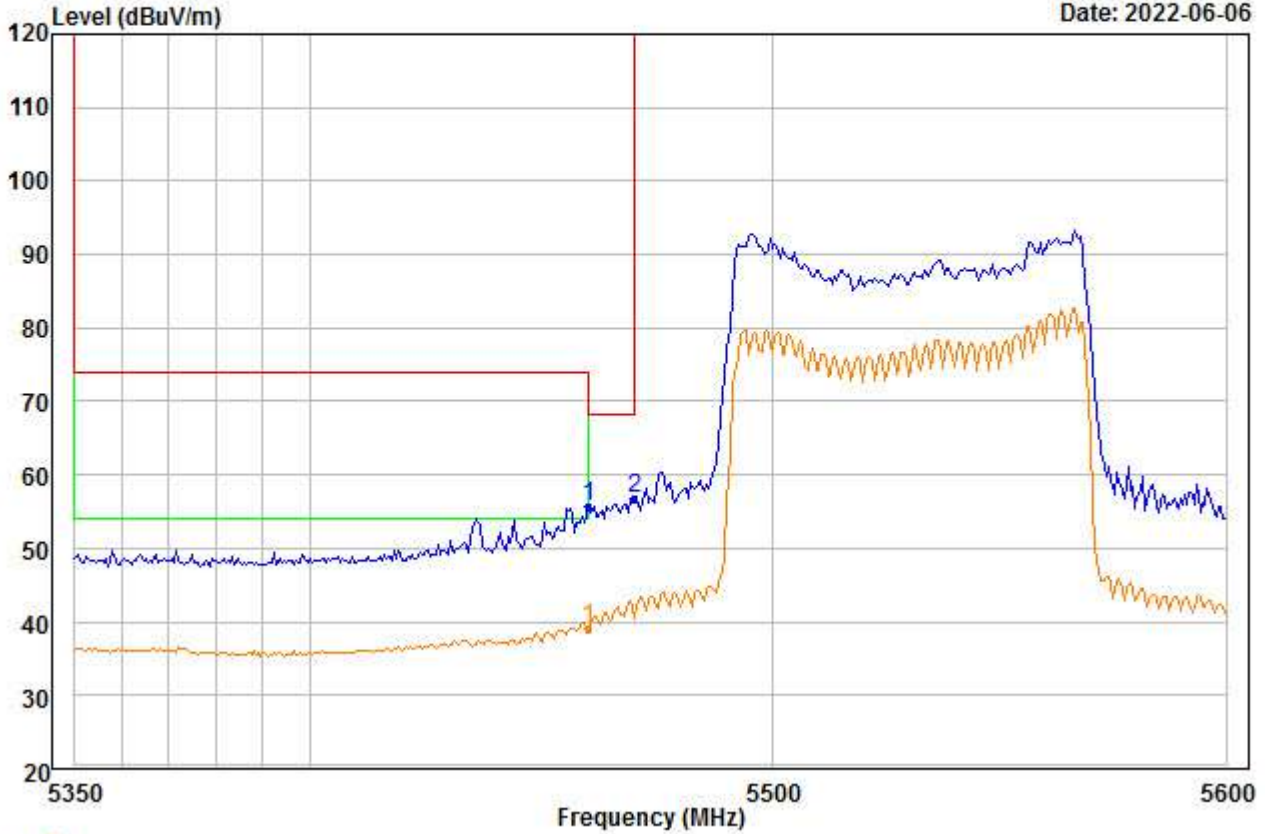


Trace: 1
 Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC80_ANT0+1_5530
 Remark :

| | Read Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Remarks |
|------|-----------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|---------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 5460.000 | 55.85 | 35.25 | 45.77 | 0.00 | 10.44 | 55.77 | 68.20 | -12.43 | --- | --- | Peak |
| 2 PP | 5470.000 | 56.85 | 35.26 | 45.75 | 0.00 | 10.47 | 56.83 | 68.20 | -11.37 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00100.EMI

Date: 2022-06-06

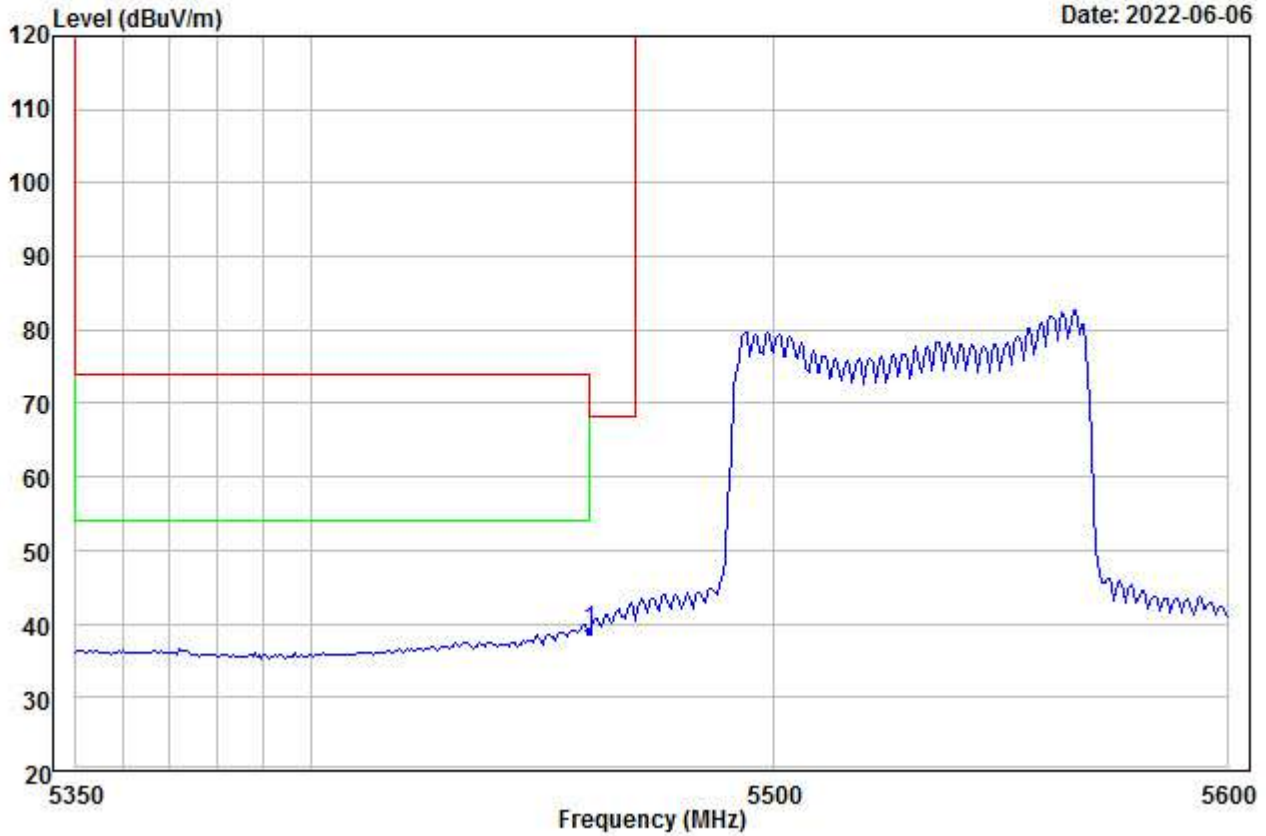


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC80_ANT0+1_5530
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|----------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg |
| 1 PP 5460.000 | 39.19 | 35.25 | 45.77 | 0.00 | 10.44 | 39.11 | 54.00 | -14.89 | --- | --- Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00101.EMI

Date: 2022-06-06

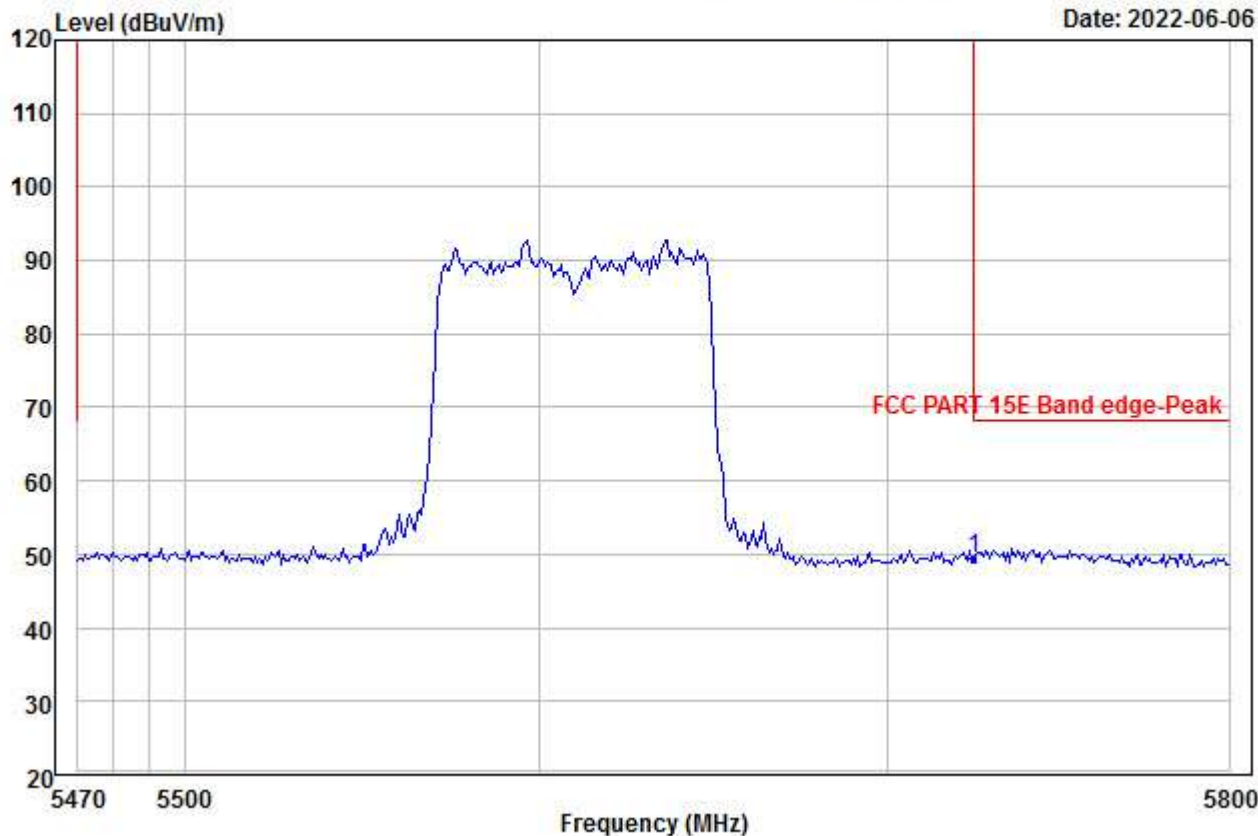


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC80_ANT0+1_5610
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 PP 5725.000 | 49.93 | 35.26 | 45.57 | 0.00 | 9.94 | 49.56 | 68.20 | -18.64 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00102.EMI

Date: 2022-06-06

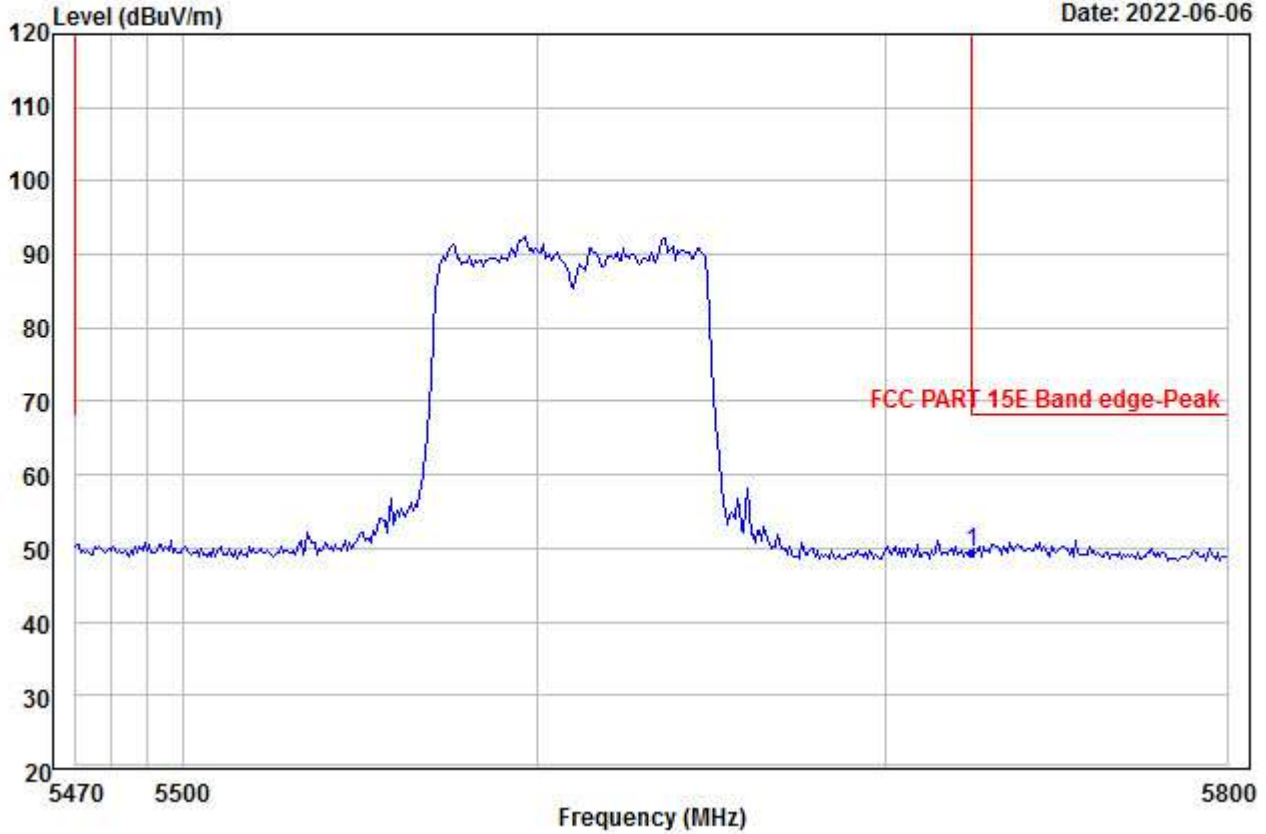


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC80_ANT0+1_5610
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 PP 5725.000 | 49.90 | 35.26 | 45.57 | 0.00 | 9.94 | 49.53 | 68.20 | -18.67 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00103.EMI

Date: 2022-06-06

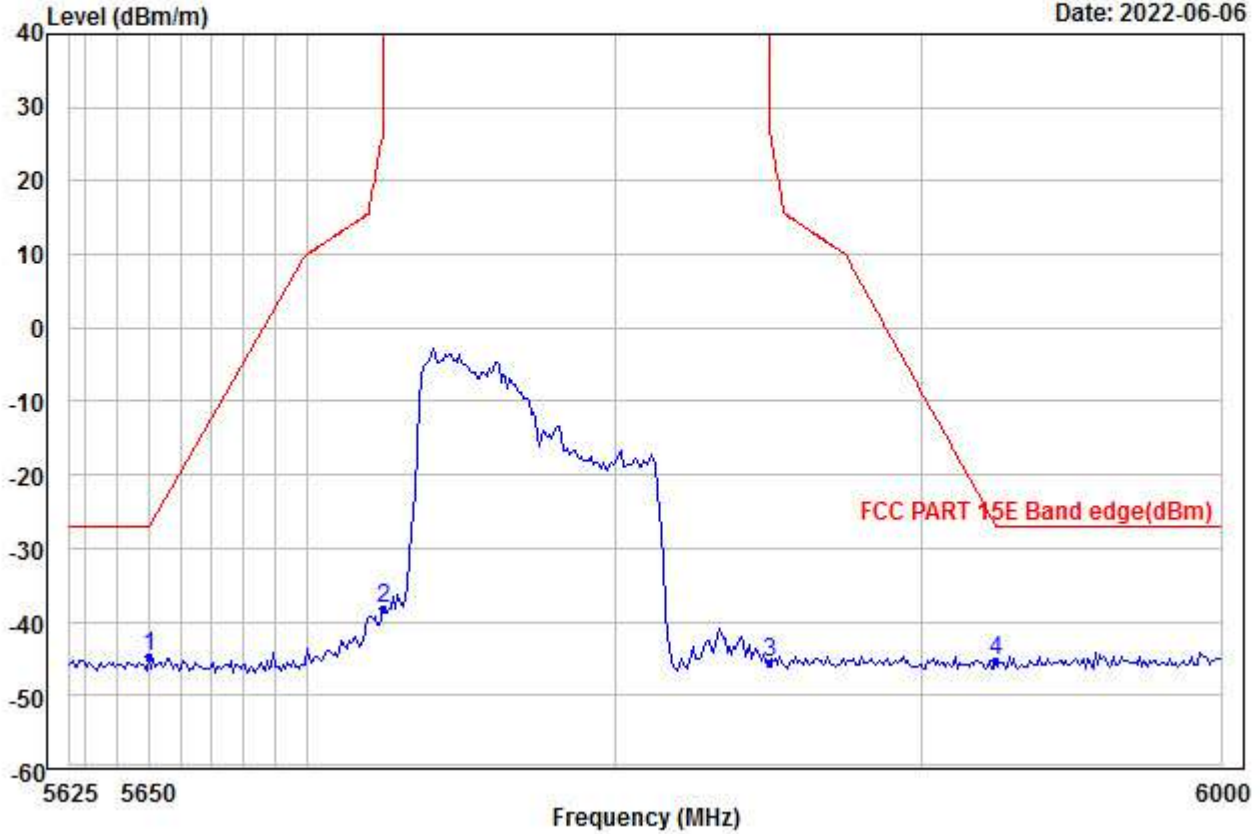


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC80_ANT0+1_5775
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rema | |
|---------------|--------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBm | dB/m | dB | dB | dB | dBm/m | dBm/m | dB | cm | deg | |
| 1 PP 5650.000 | -56.38 | 35.27 | 45.61 | 0.00 | 21.88 | -44.84 | -27.00 | -17.84 | --- | --- | Peak |
| 2 5725.000 | -49.70 | 35.26 | 45.57 | 0.00 | 21.68 | -38.33 | 27.00 | -65.33 | --- | --- | Peak |
| 3 5850.000 | -56.66 | 35.23 | 45.49 | 0.00 | 21.47 | -45.45 | 27.00 | -72.45 | --- | --- | Peak |
| 4 5925.000 | -56.52 | 35.22 | 45.44 | 0.00 | 21.44 | -45.30 | -27.00 | -18.30 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00104.EMI

Date: 2022-06-06

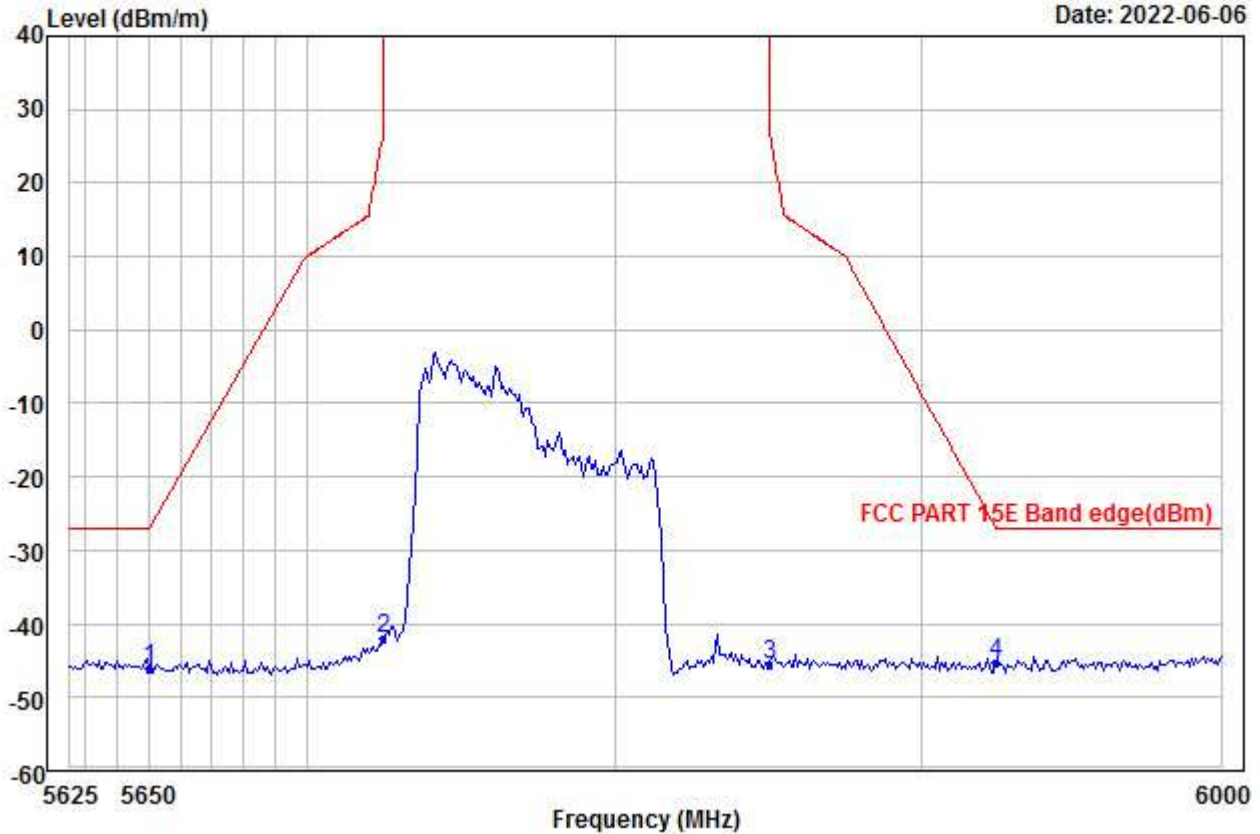


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC80_ANT0+1_5775
 Remark :

| | Read Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Remarks |
|------|-----------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|---------|
| | MHz | dBm | dB/m | dB | dB | dB | dBm/m | dBm/m | dB | cm | deg | |
| 1 | 5650.000 | -57.56 | 35.27 | 45.61 | 0.00 | 21.88 | -46.02 | -27.00 | -19.02 | --- | --- | Peak |
| 2 | 5725.000 | -53.29 | 35.26 | 45.57 | 0.00 | 21.68 | -41.92 | 27.00 | -68.92 | --- | --- | Peak |
| 3 | 5850.000 | -56.87 | 35.23 | 45.49 | 0.00 | 21.47 | -45.66 | 27.00 | -72.66 | --- | --- | Peak |
| 4 PP | 5925.000 | -56.52 | 35.22 | 45.44 | 0.00 | 21.44 | -45.30 | -27.00 | -18.30 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00105.EMI

Date: 2022-06-06

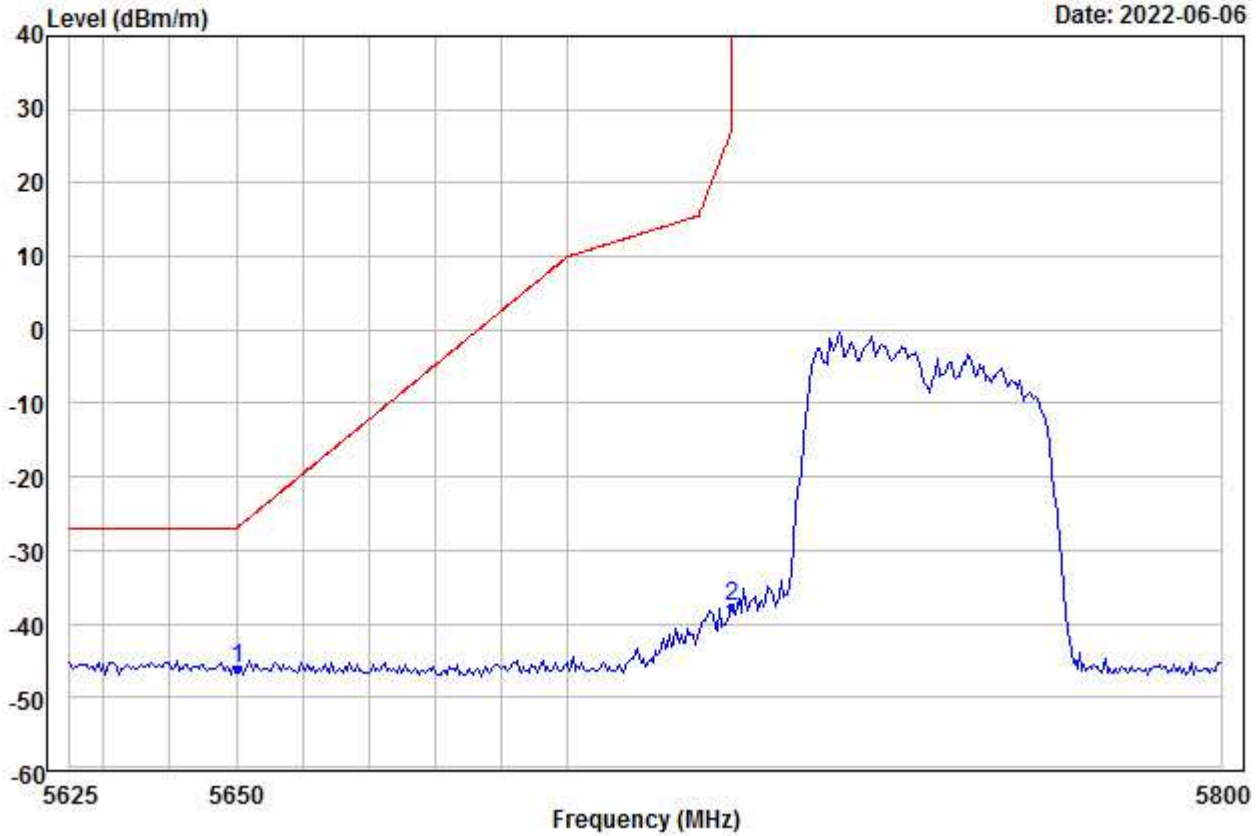


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5775
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|--------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBm | dB/m | dB | dB | dB | dBm/m | dB | cm | deg | | |
| 1 PP 5650.000 | -57.51 | 35.27 | 45.61 | 0.00 | 21.88 | -45.97 | -27.00 | -18.97 | --- | --- | Peak |
| 2 5725.000 | -49.00 | 35.26 | 45.57 | 0.00 | 21.68 | -37.63 | 27.00 | -64.63 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00106.EMI

Date: 2022-06-06

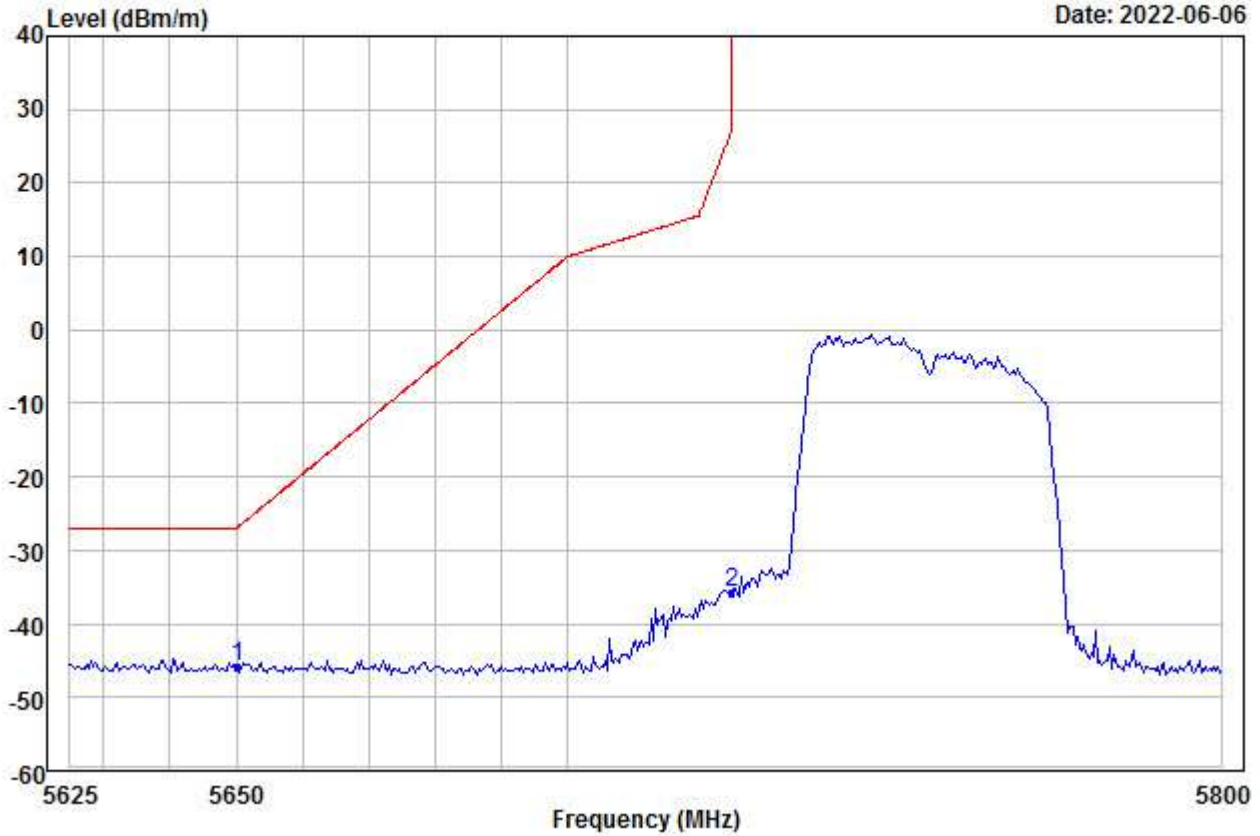


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5775
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|--------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBm | dB/m | dB | dB | dB | dBm/m | dB | cm | deg | | |
| 1 PP 5650.000 | -57.31 | 35.27 | 45.61 | 0.00 | 21.88 | -45.77 | -27.00 | -18.77 | --- | --- | Peak |
| 2 5725.000 | -47.09 | 35.26 | 45.57 | 0.00 | 21.68 | -35.72 | 27.00 | -62.72 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00107.EMI

Date: 2022-06-06

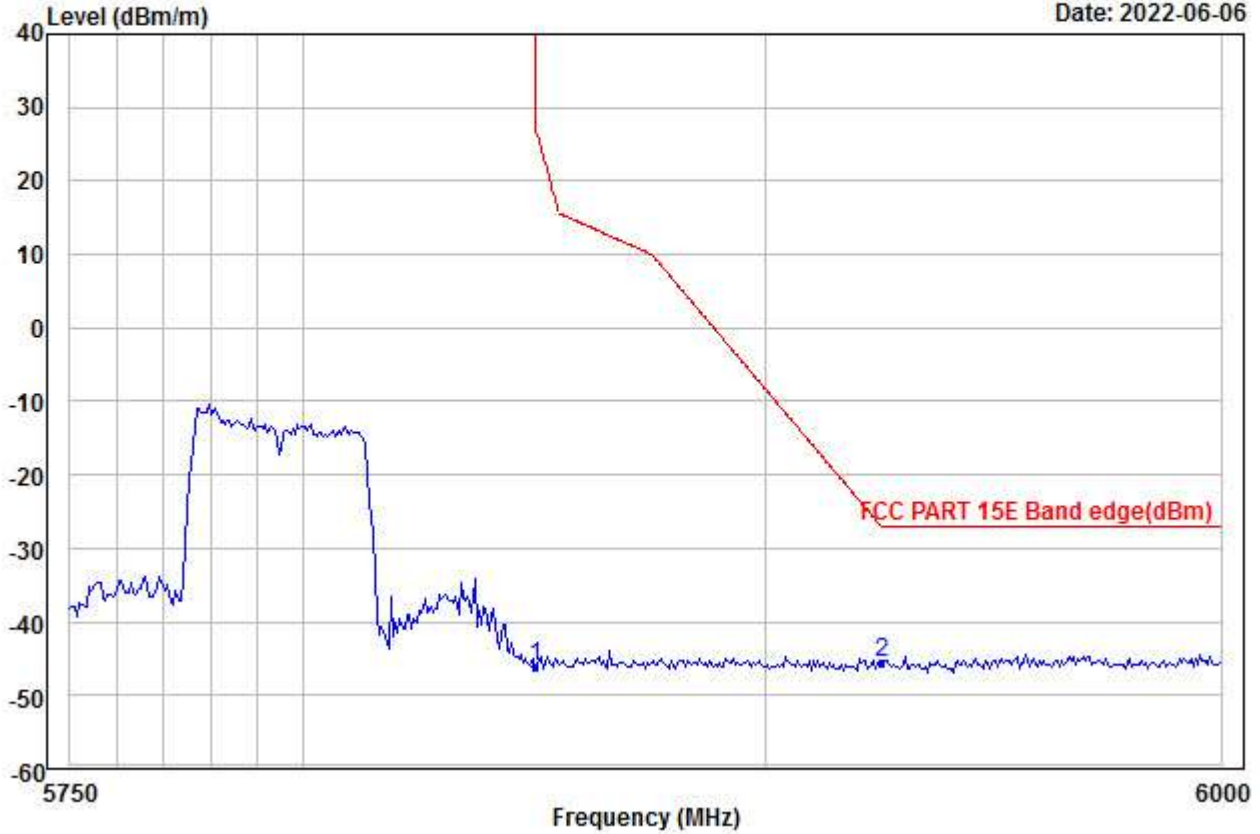


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5795
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | | |
|------|----------|--------|--------|--------|-------|-------|--------|--------|--------|------|-----|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | | |
| MHz | dBm | dB/m | dB | dB | dB | dBm/m | dBm/m | dB | cm | deg | | |
| 1 | 5850.000 | -57.22 | 35.23 | 45.49 | 0.00 | 21.47 | -46.01 | 27.00 | -73.01 | --- | --- | Peak |
| 2 PP | 5925.000 | -56.88 | 35.22 | 45.44 | 0.00 | 21.44 | -45.66 | -27.00 | -18.66 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00108.EMI

Date: 2022-06-06

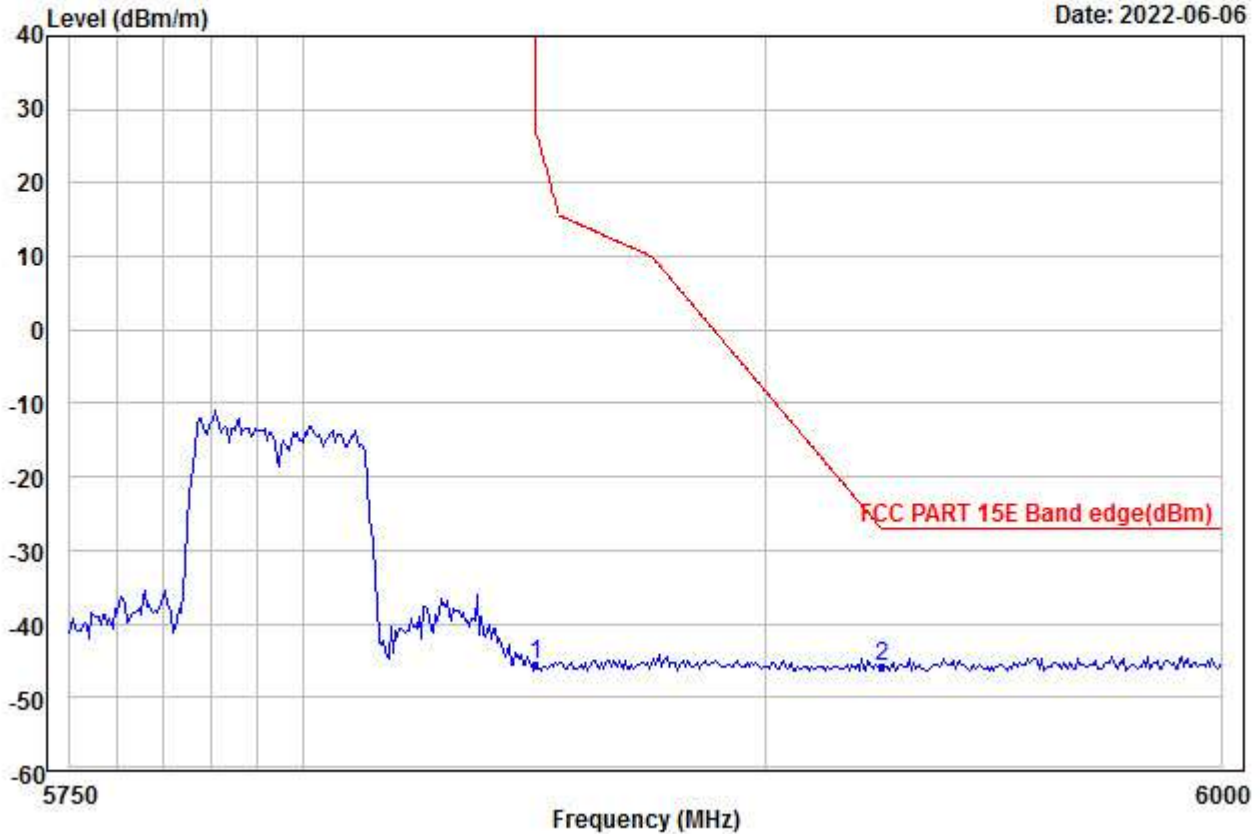


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5795
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | | |
|------|-------------|--------|--------|--------|-------|-------|--------|--------|--------|------|-----|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | | |
| MHz | dBm | dB/m | dB | dB | dB | dBm/m | dBm/m | dB | cm | deg | | |
| 1 | 5850.000 | -56.73 | 35.23 | 45.49 | 0.00 | 21.47 | -45.52 | 27.00 | -72.52 | --- | --- | Peak |
| 2 | PP 5925.000 | -56.93 | 35.22 | 45.44 | 0.00 | 21.44 | -45.71 | -27.00 | -18.71 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00109.EMI

Date: 2022-06-06

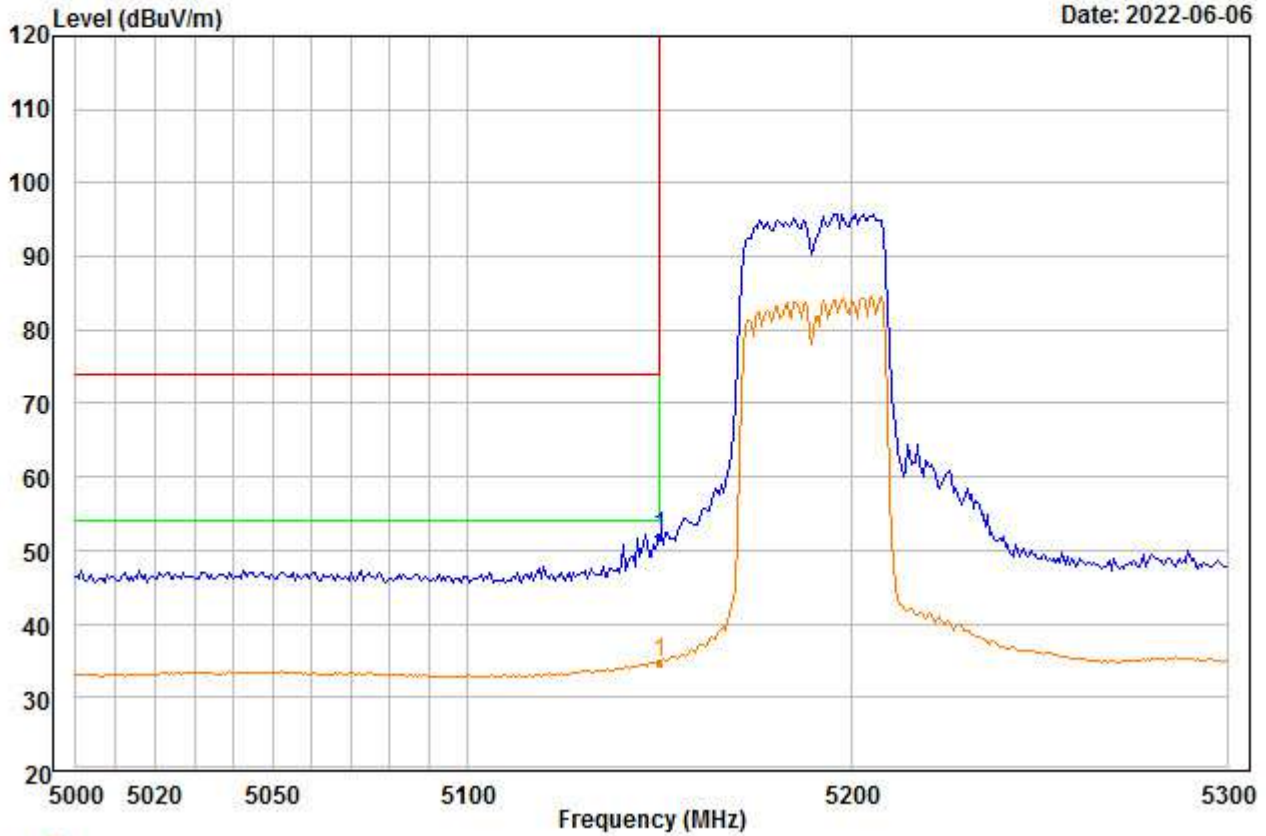


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5190
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 PP 5150.000 | 53.48 | 34.88 | 46.33 | 0.00 | 9.78 | 51.81 | 74.00 | -22.19 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00110.EMI

Date: 2022-06-06

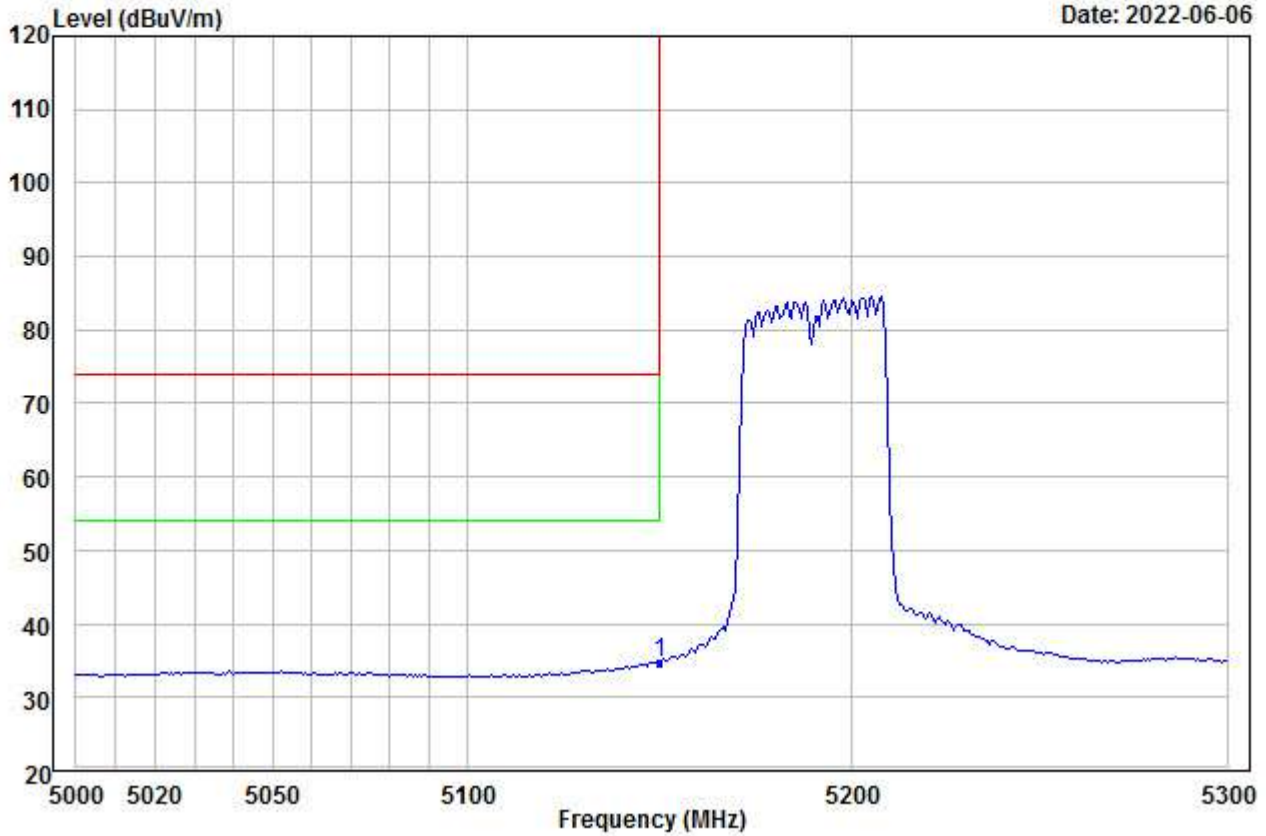


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5190
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 PP 5150.000 | 36.25 | 34.88 | 46.33 | 0.00 | 9.78 | 34.58 | 54.00 | -19.42 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00111.EMI

Date: 2022-06-06

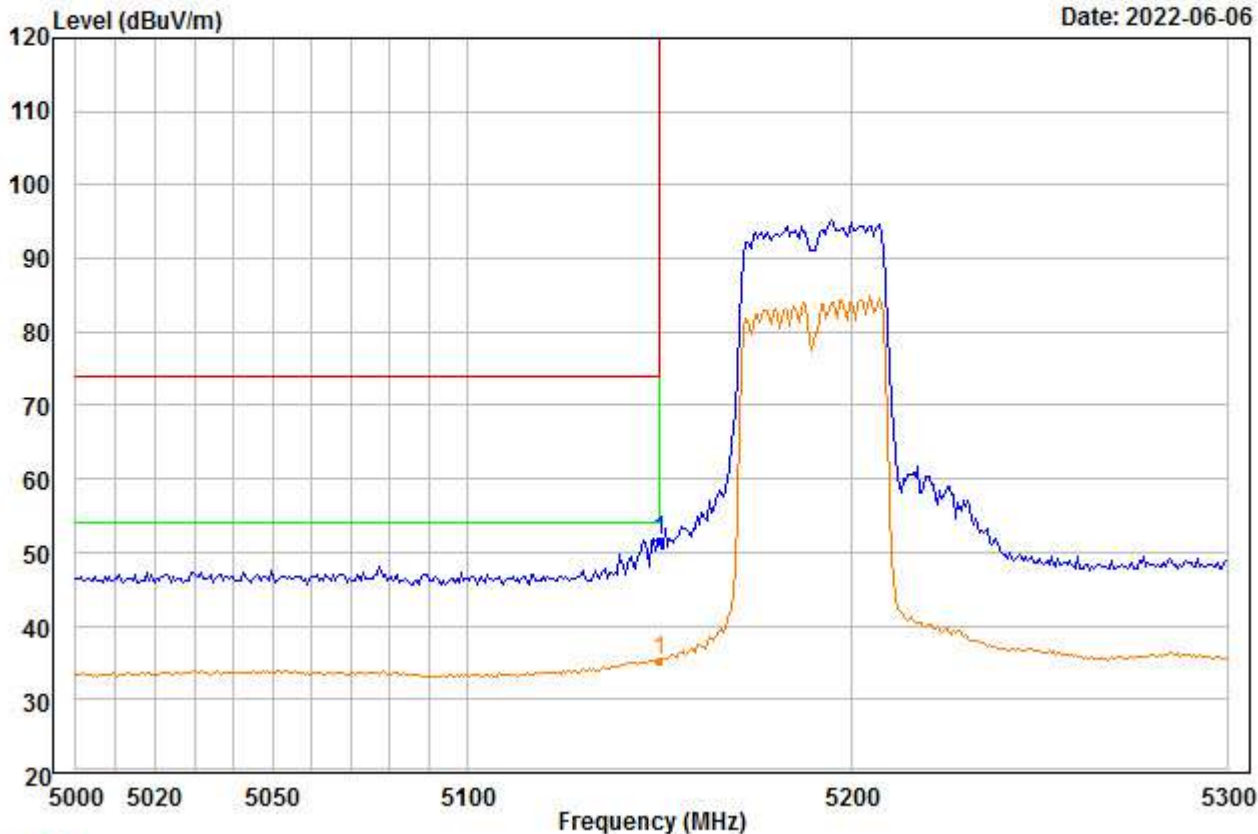


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5190
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 PP 5150.000 | 53.16 | 34.88 | 46.33 | 0.00 | 9.78 | 51.49 | 74.00 | -22.51 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00112.EMI

Date: 2022-06-06

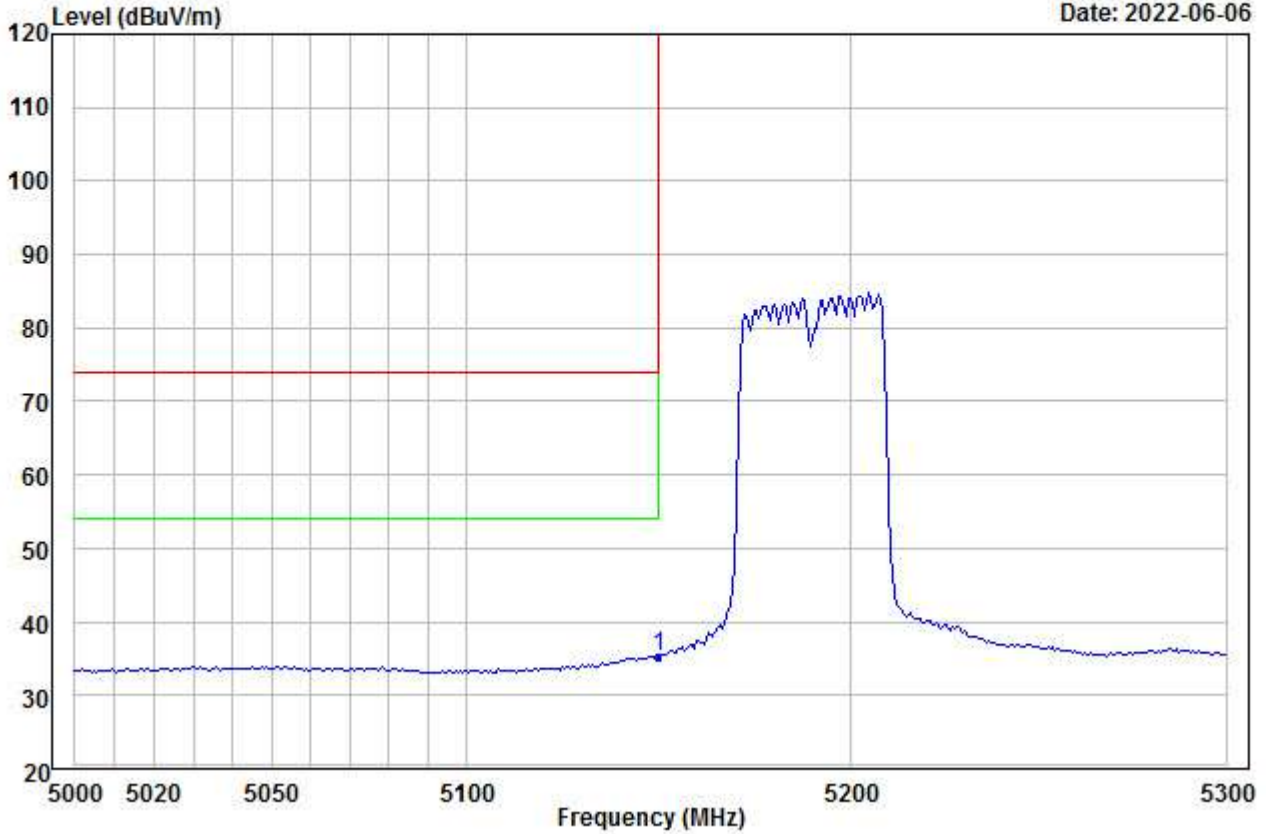

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5190
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|----------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg |
| 1 PP 5150.000 | 36.93 | 34.88 | 46.33 | 0.00 | 9.78 | 35.26 | 54.00 | -18.74 | --- | --- Aver |