


File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00113.EMI

Date: 2022-06-06

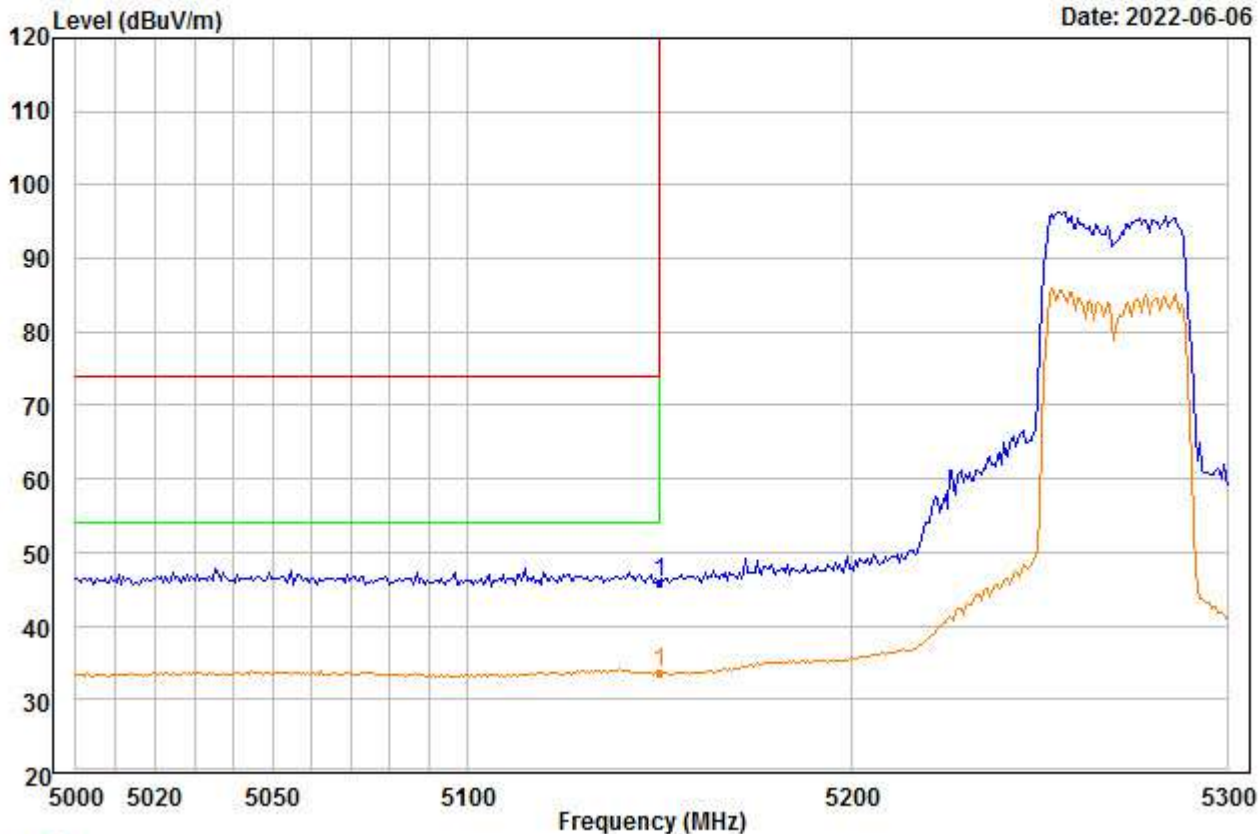


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5270
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5150.000	47.65	34.88	46.33	0.00	9.78	45.98	74.00	-28.02	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00114.EMI

Date: 2022-06-06

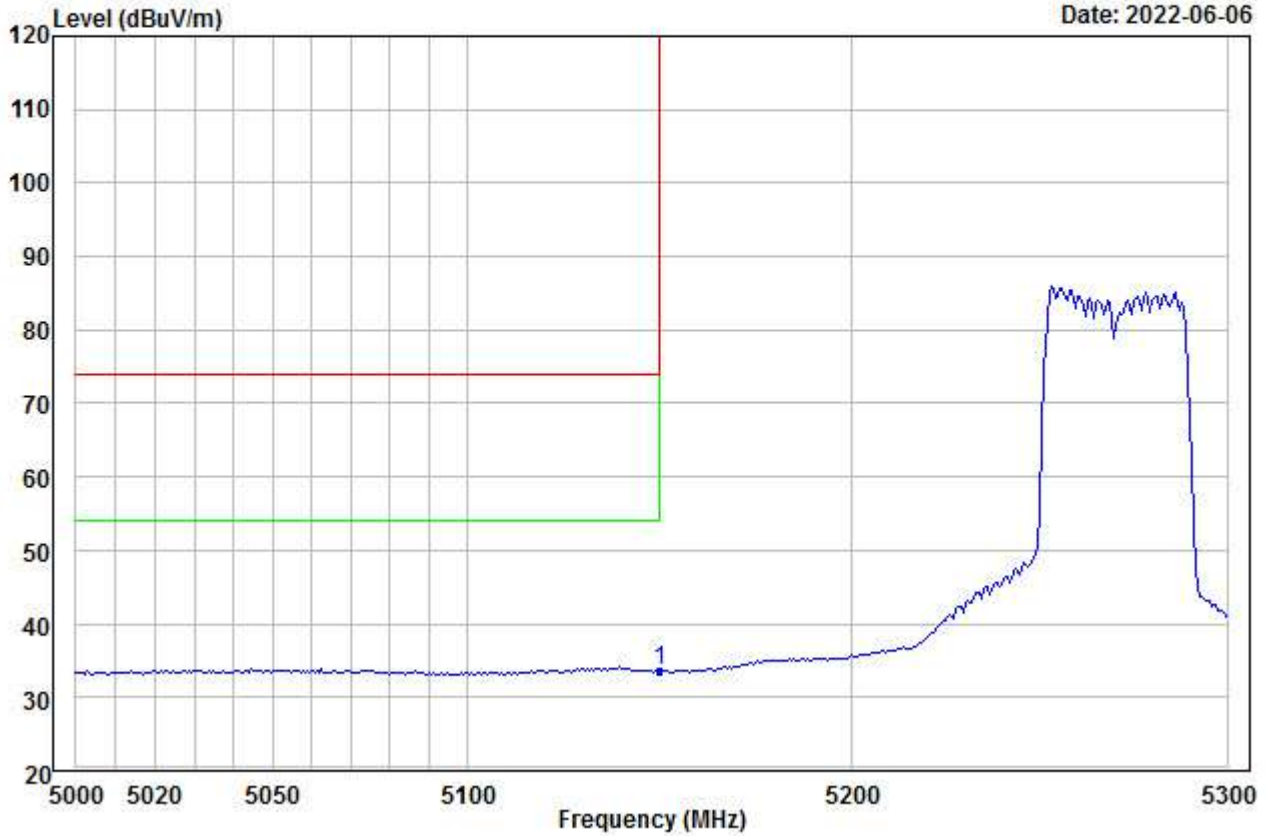


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5270
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5150.000	35.27	34.88	46.33	0.00	9.78	33.60	54.00	-20.40	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00115.EMI

Date: 2022-06-06

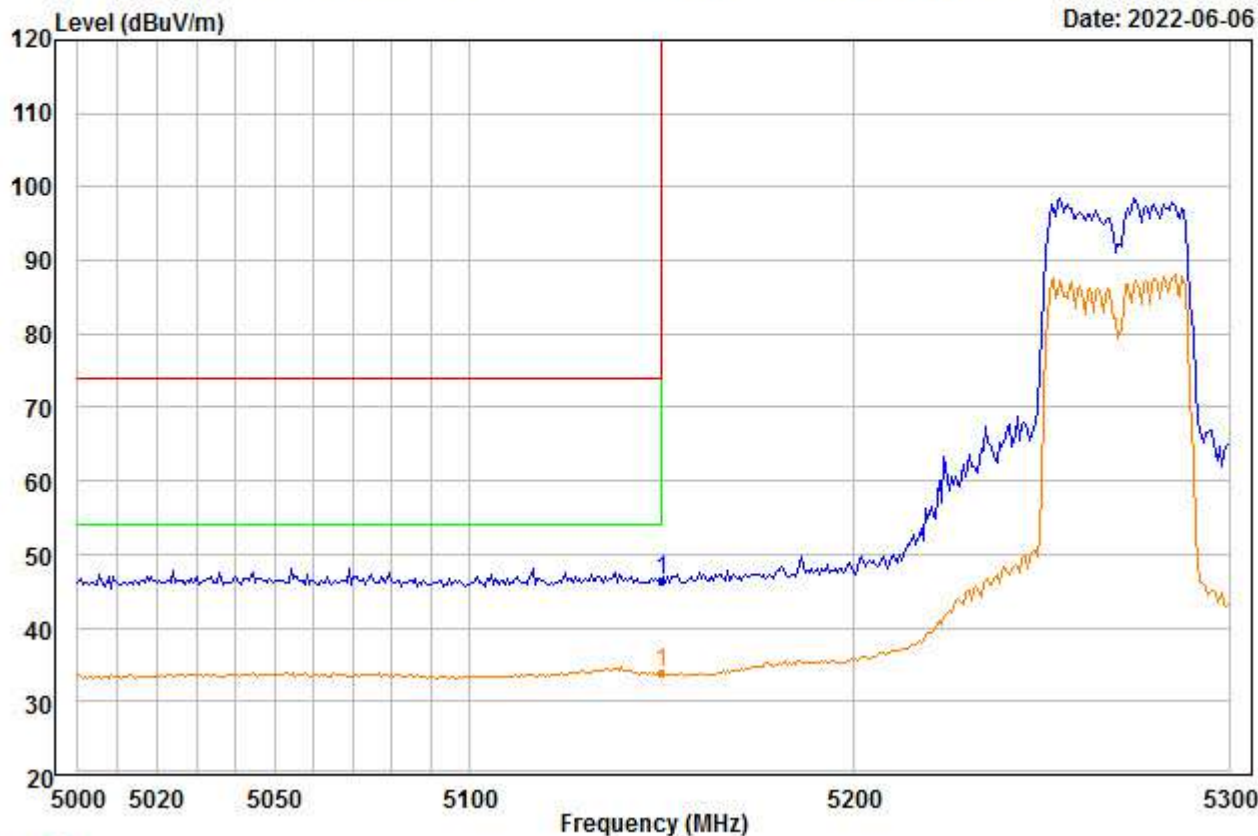


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5270
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5150.000	47.98	34.88	46.33	0.00	9.78	46.31	74.00	-27.69	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00116.EMI

Date: 2022-06-06

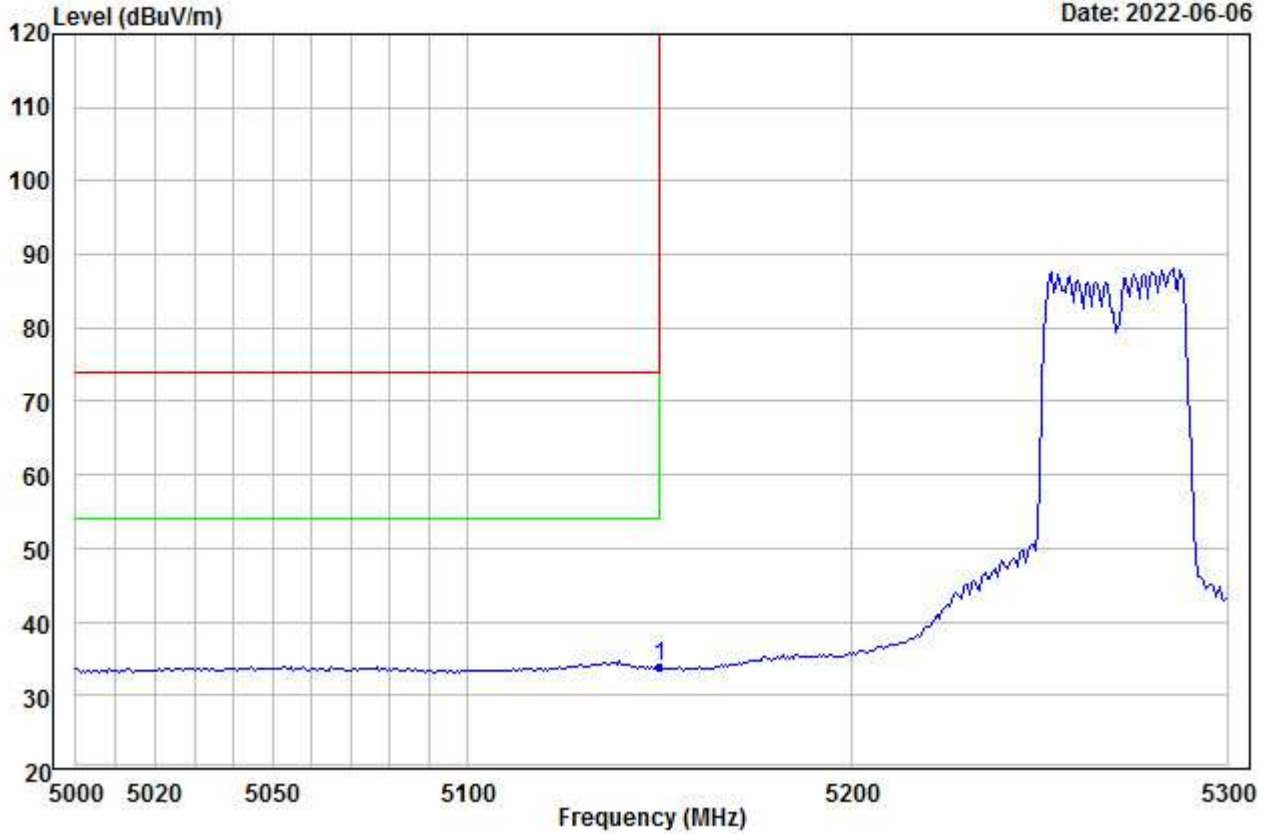


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5270
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5150.000	35.55	34.88	46.33	0.00	9.78	33.88	54.00	-20.12	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00117.EMI

Date: 2022-06-06

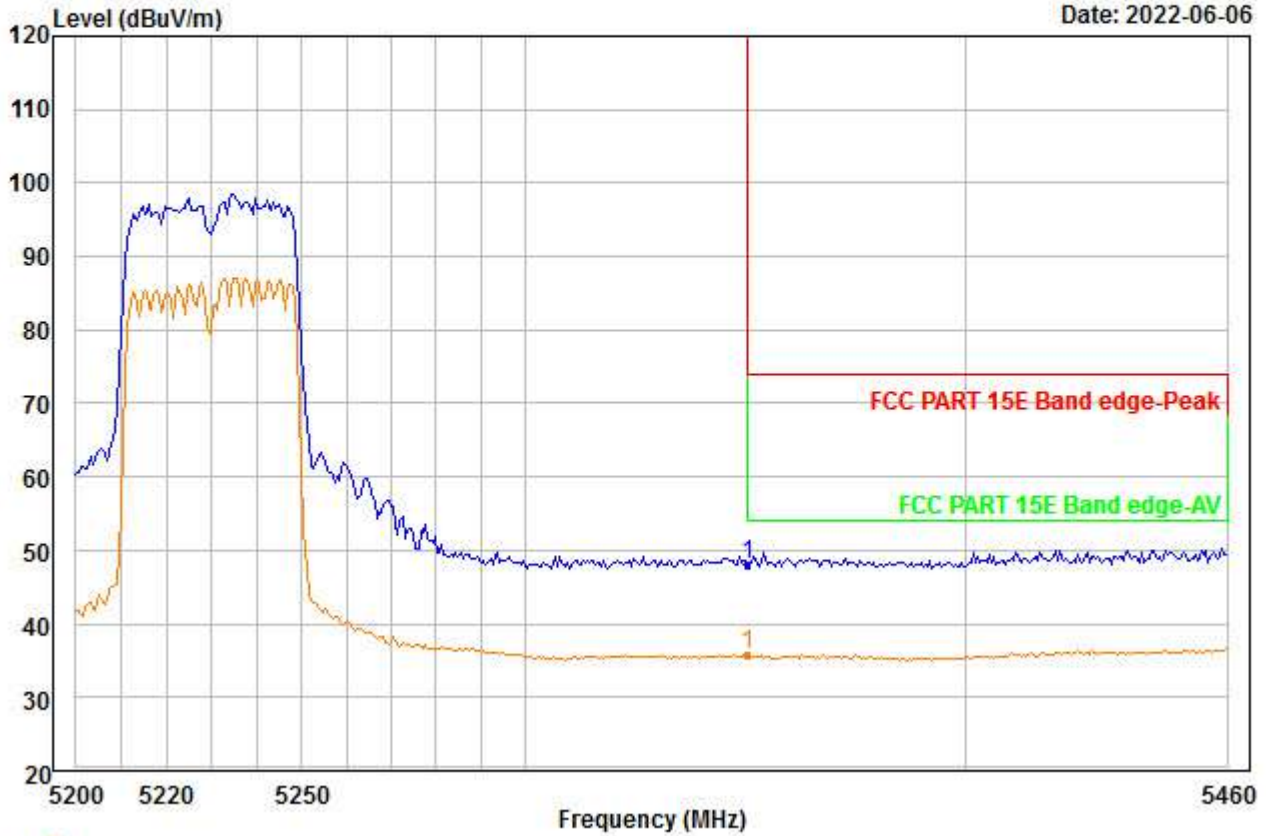


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5230
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5350.000	48.74	35.12	45.97	0.00	10.18	48.07	74.00	-25.93	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00118.EMI

Date: 2022-06-06

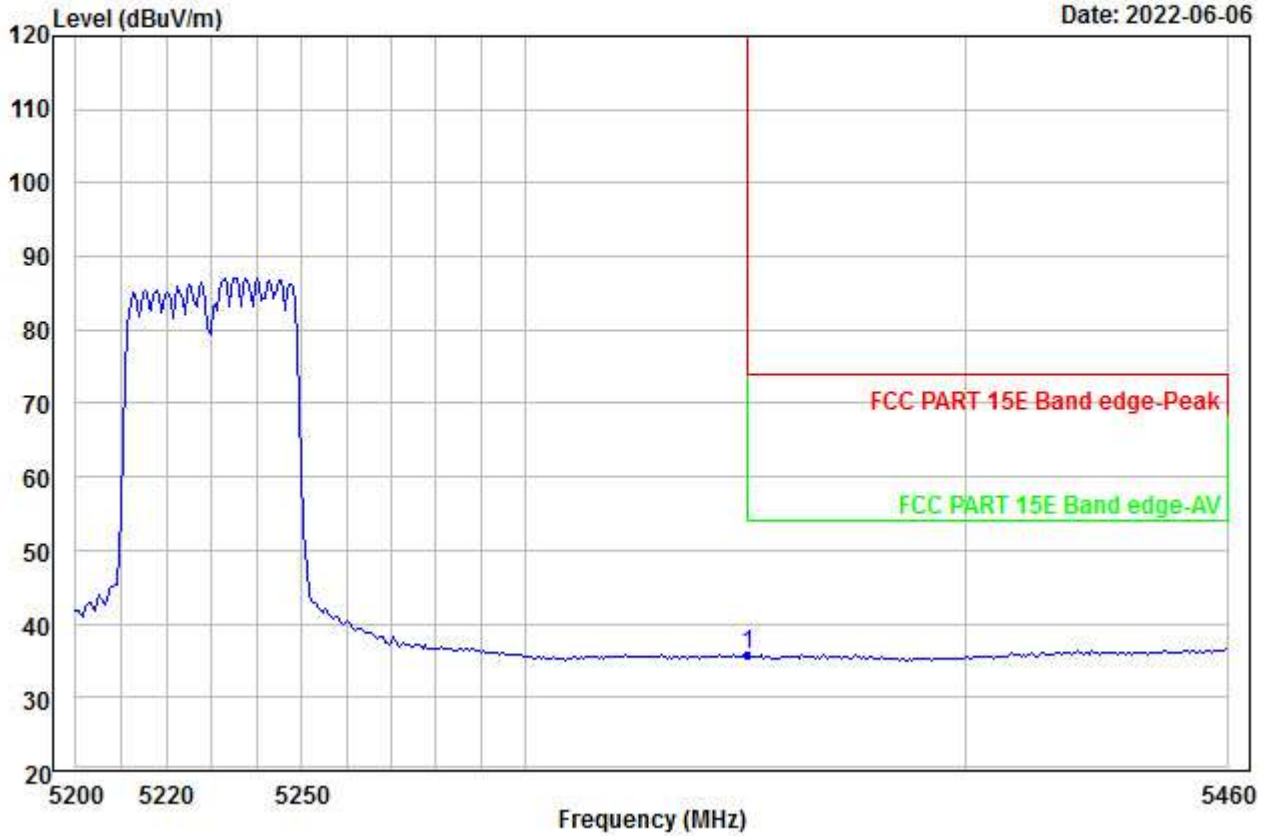


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5230
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5350.000	36.43	35.12	45.97	0.00	10.18	35.76	54.00	-18.24	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00119.EMI

Date: 2022-06-06

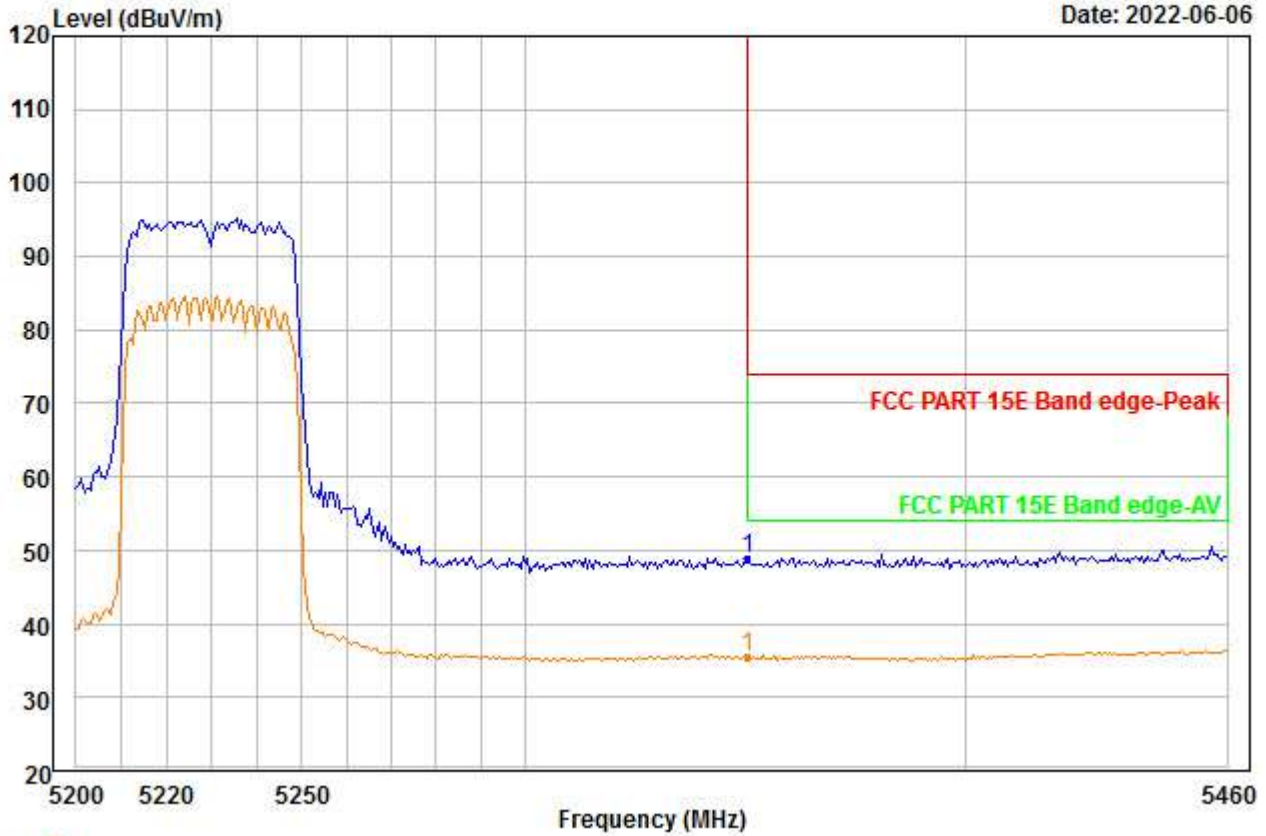


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5230
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit			
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 5350.000	49.65	35.12	45.97	0.00	10.18	48.98	74.00	-25.02	---	--- Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00120.EMI

Date: 2022-06-06

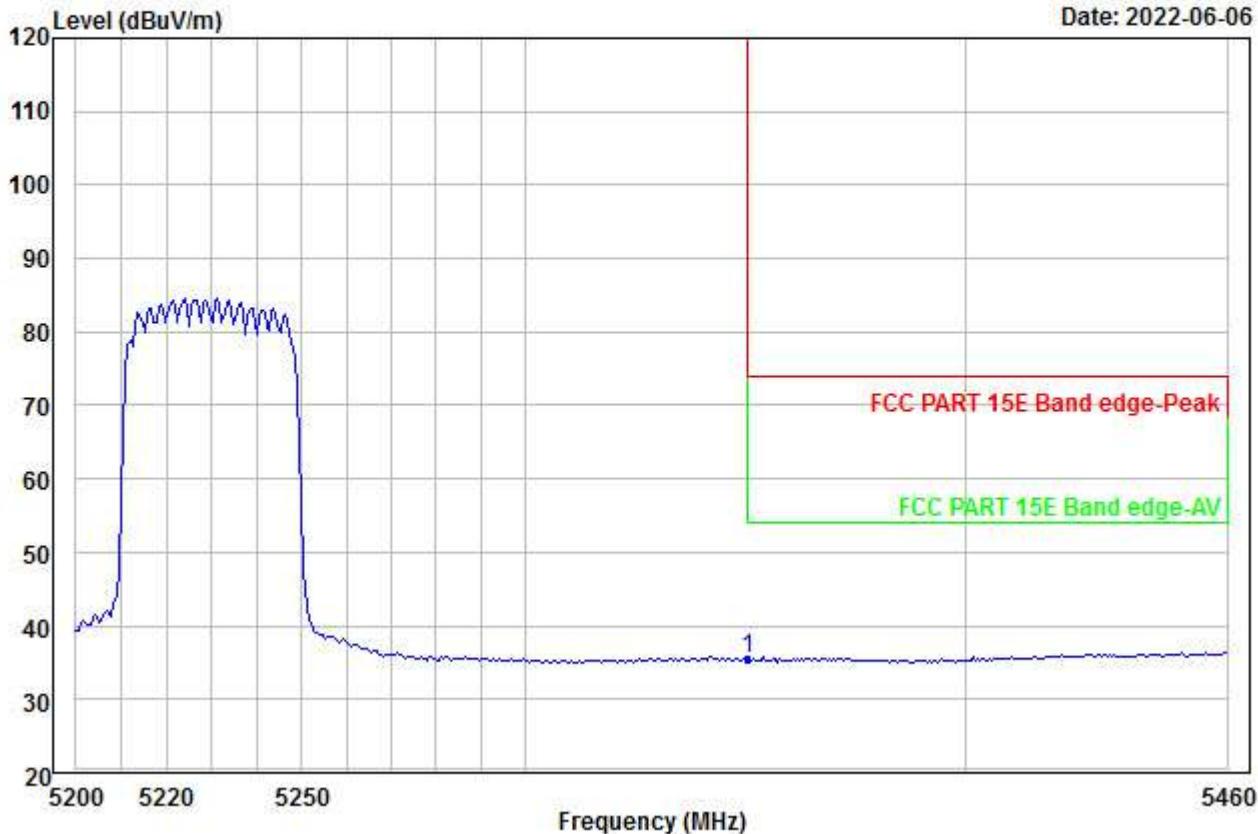


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5230
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5350.000	36.10	35.12	45.97	0.00	10.18	35.43	54.00	-18.57	---	---	Aver

File: F:\Test Template\上海\ITS\2022\220523032 SA750\B\5G\BE\4_00121.EMI

Date: 2022-06-06

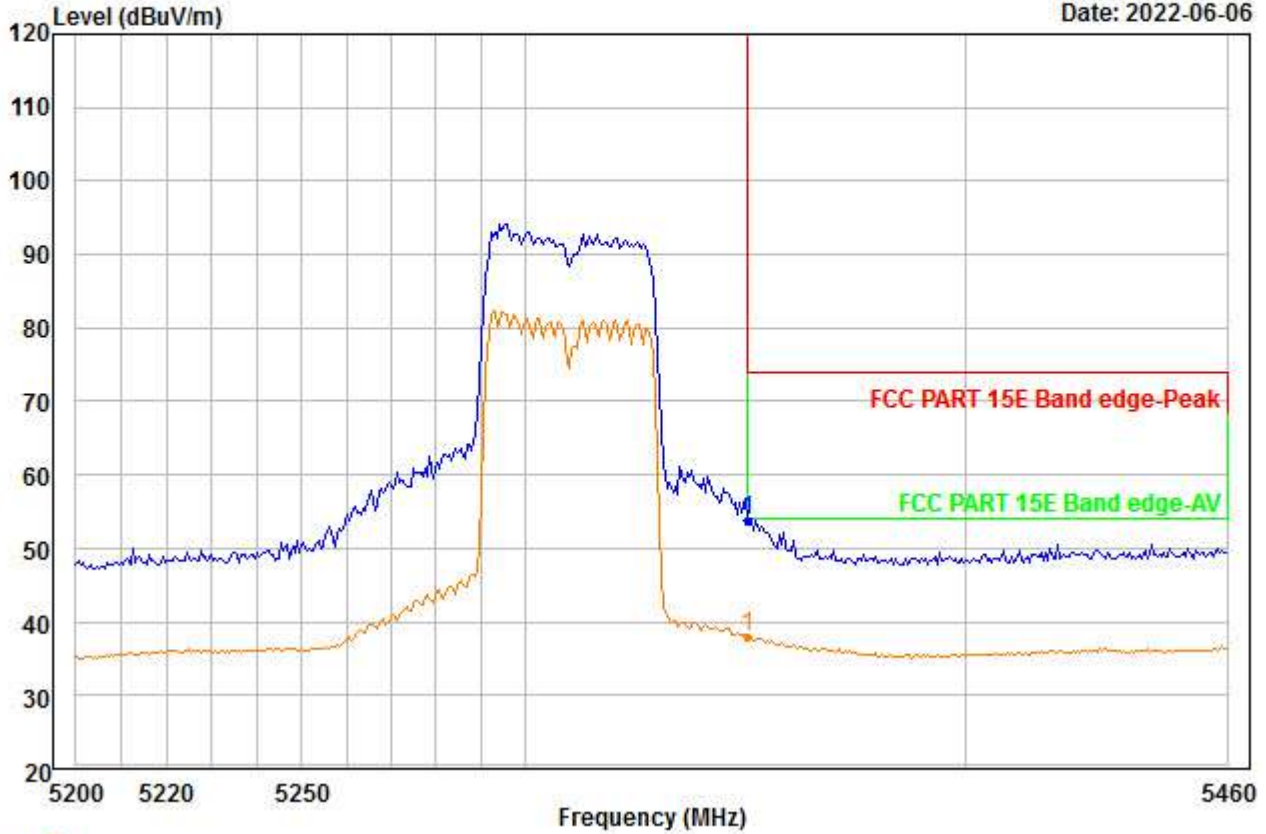


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5310
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5350.000	54.59	35.12	45.97	0.00	10.18	53.92	74.00	-20.08	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00122.EMI

Date: 2022-06-06

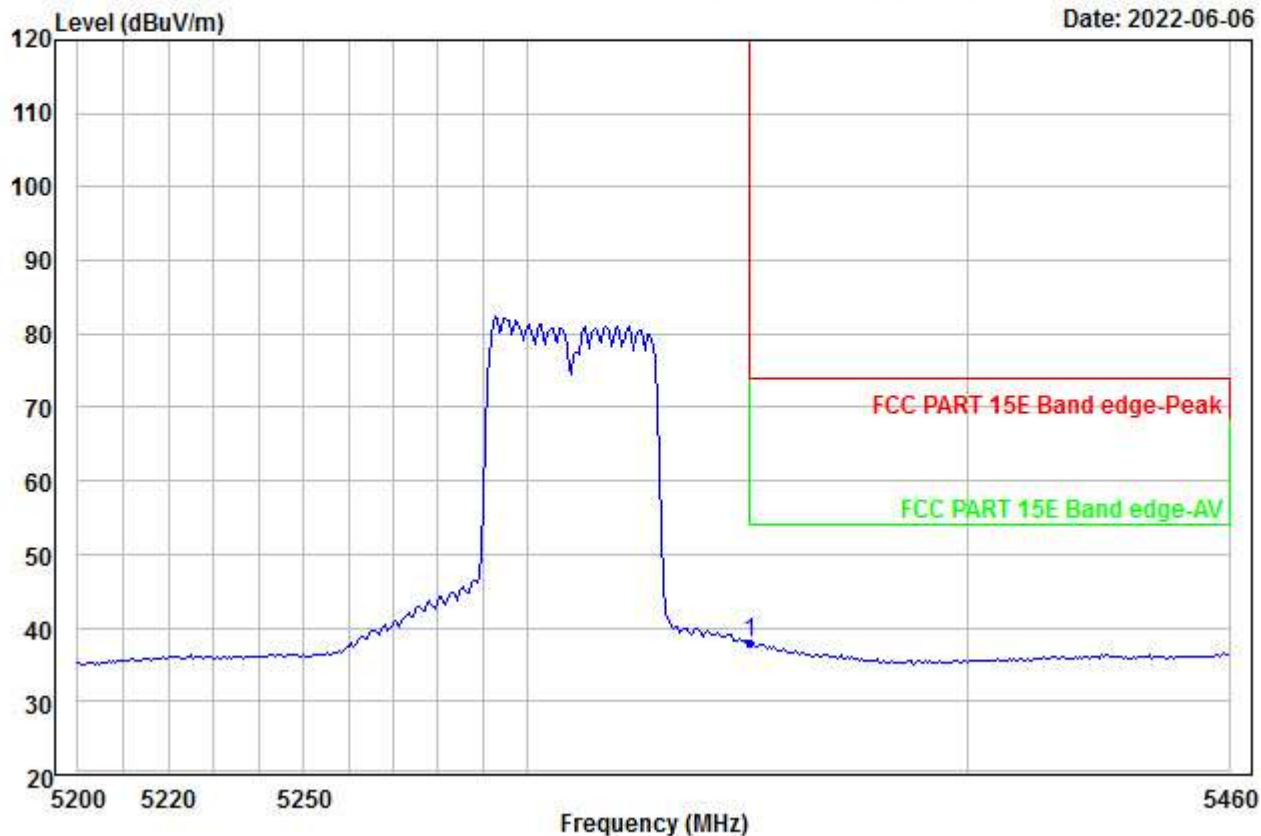


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5310
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5350.000	38.75	35.12	45.97	0.00	10.18	38.08	54.00	-15.92	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00123.EMI

Date: 2022-06-06

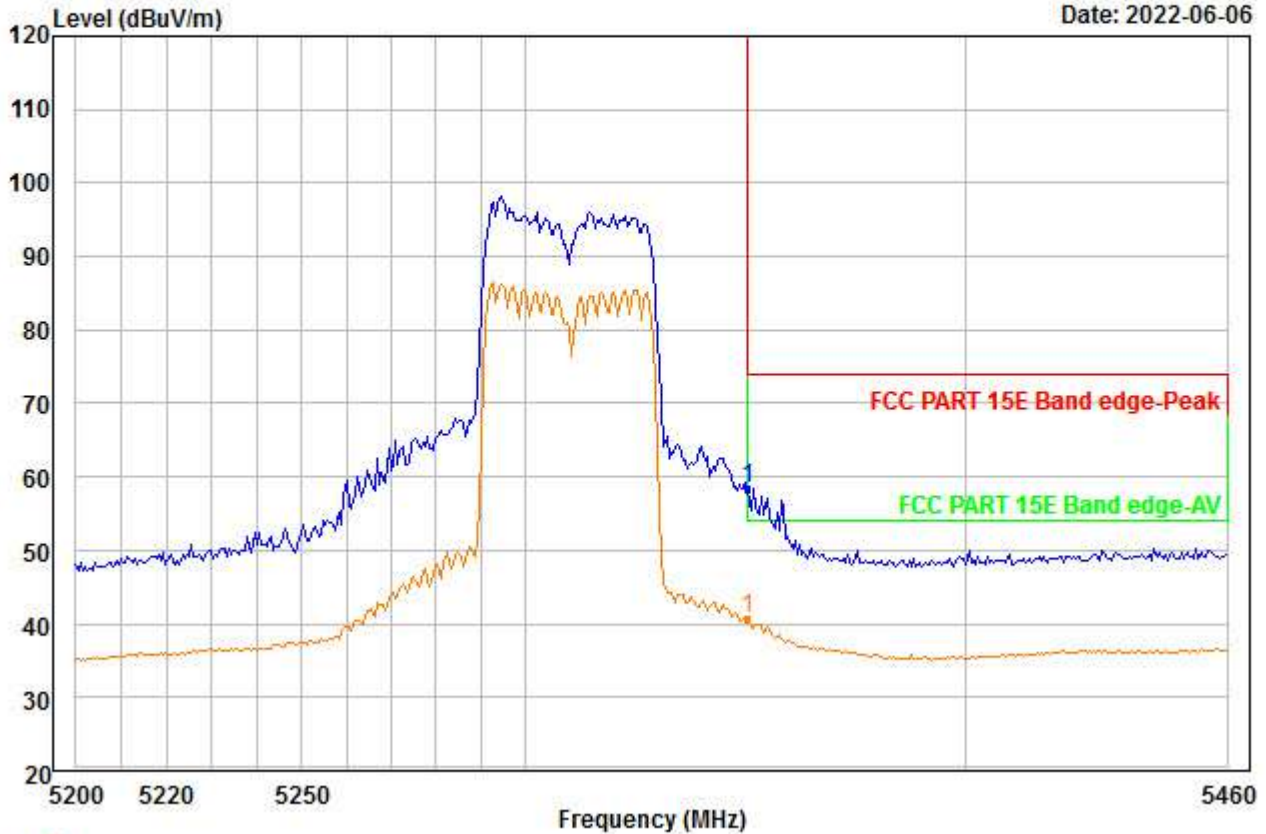


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5310
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5350.000	58.99	35.12	45.97	0.00	10.18	58.32	74.00	-15.68	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00124.EMI

Date: 2022-06-06

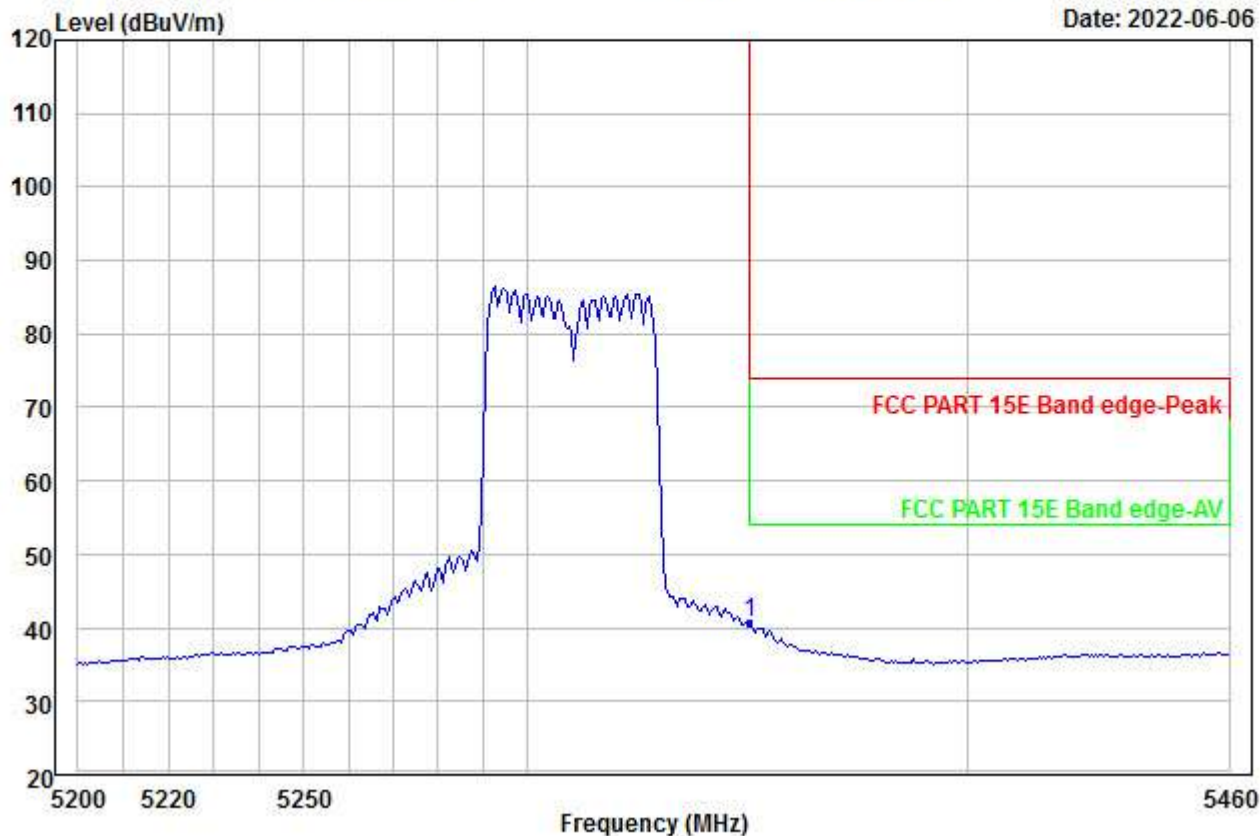


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5310
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5350.000	41.47	35.12	45.97	0.00	10.18	40.80	54.00	-13.20	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00125.EMI

Date: 2022-06-06

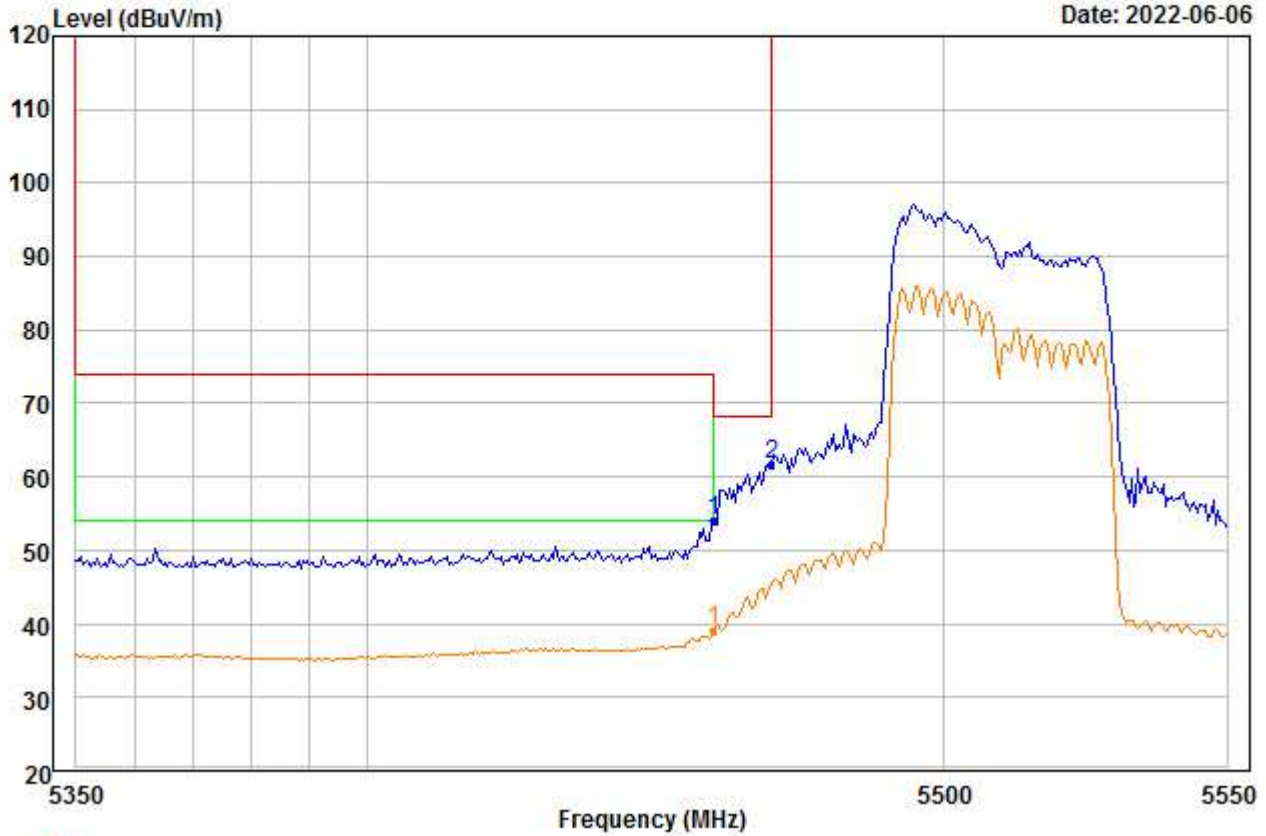


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5510
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:		
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit					
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg		
1	5460.000	54.03	35.25	45.77	0.00	10.44	53.95	68.20	-14.25	---	---	Peak
2 PP	5470.000	61.62	35.26	45.75	0.00	10.47	61.60	68.20	-6.60	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00126.EMI

Date: 2022-06-06

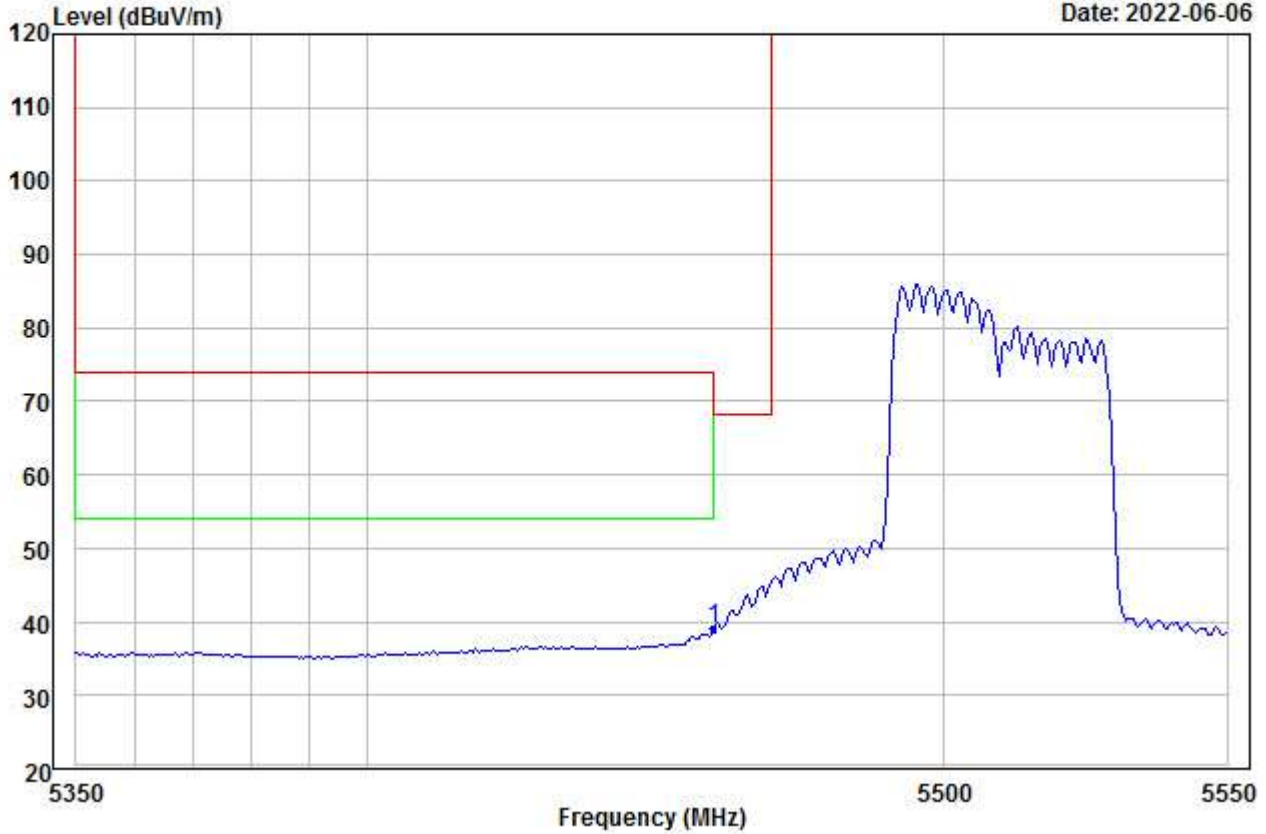


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5510
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5460.000	39.22	35.25	45.77	0.00	10.44	39.14	54.00	-14.86	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00127.EMI

Date: 2022-06-06

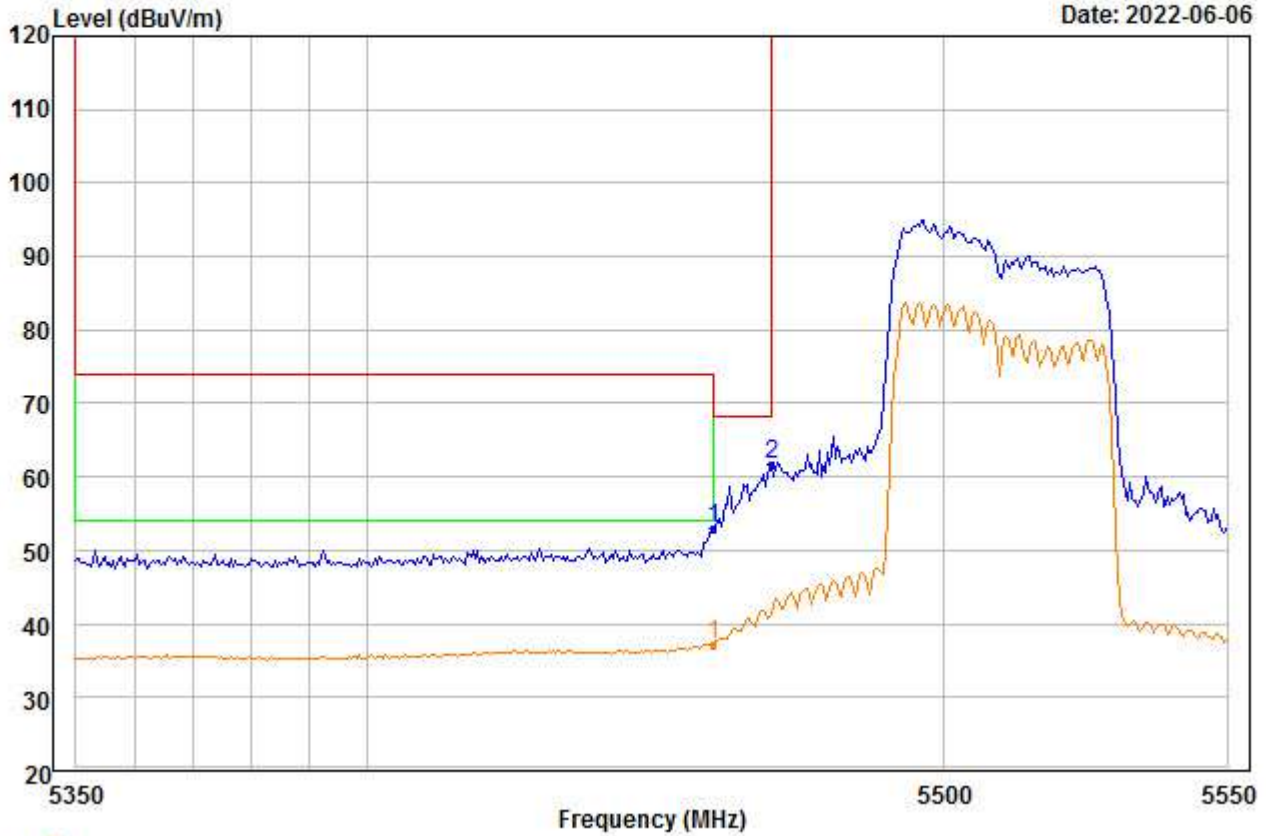


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5510
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:		
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit					
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg		
1	5460.000	53.18	35.25	45.77	0.00	10.44	53.10	68.20	-15.10	---	---	Peak
2 PP	5470.000	61.83	35.26	45.75	0.00	10.47	61.81	68.20	-6.39	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00128.EMI

Date: 2022-06-06

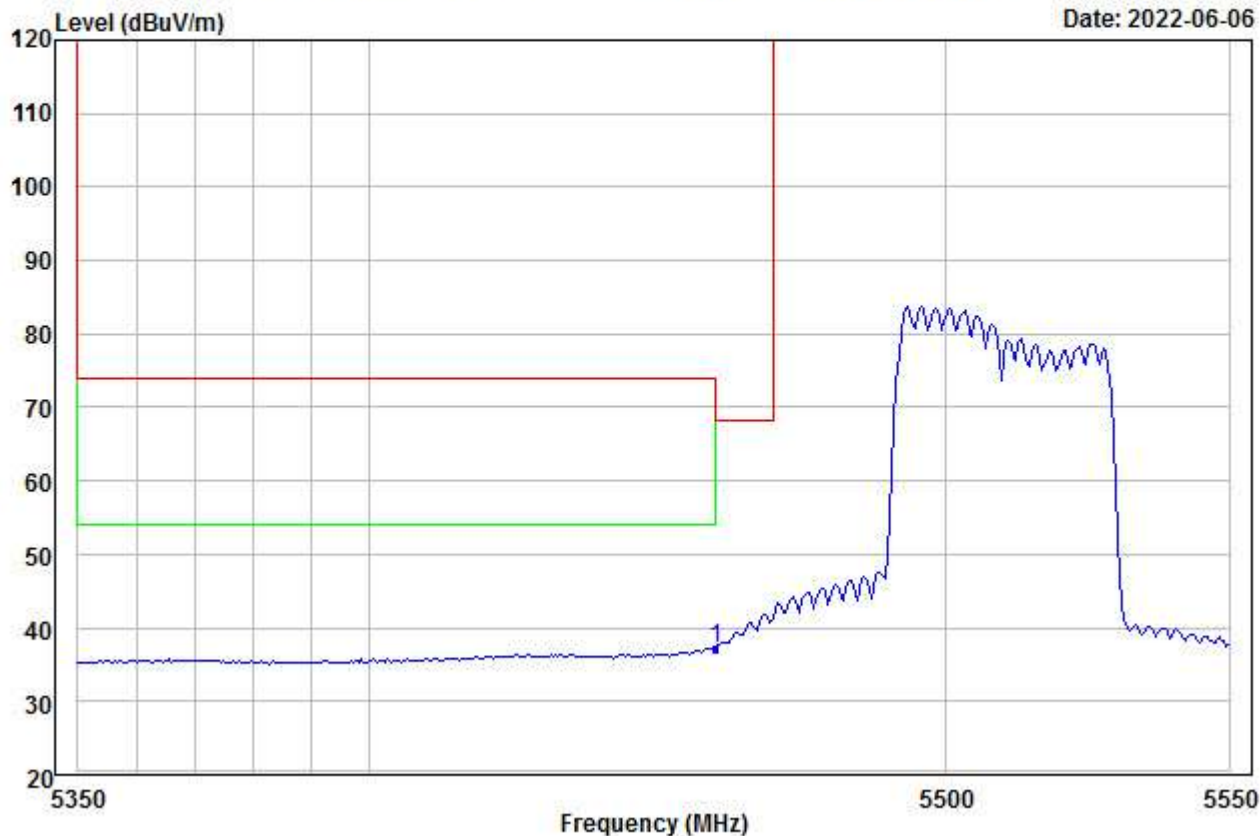


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5510
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit			
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 5460.000	37.27	35.25	45.77	0.00	10.44	37.19	54.00	-16.81	---	--- Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00129.EMI

Date: 2022-06-06

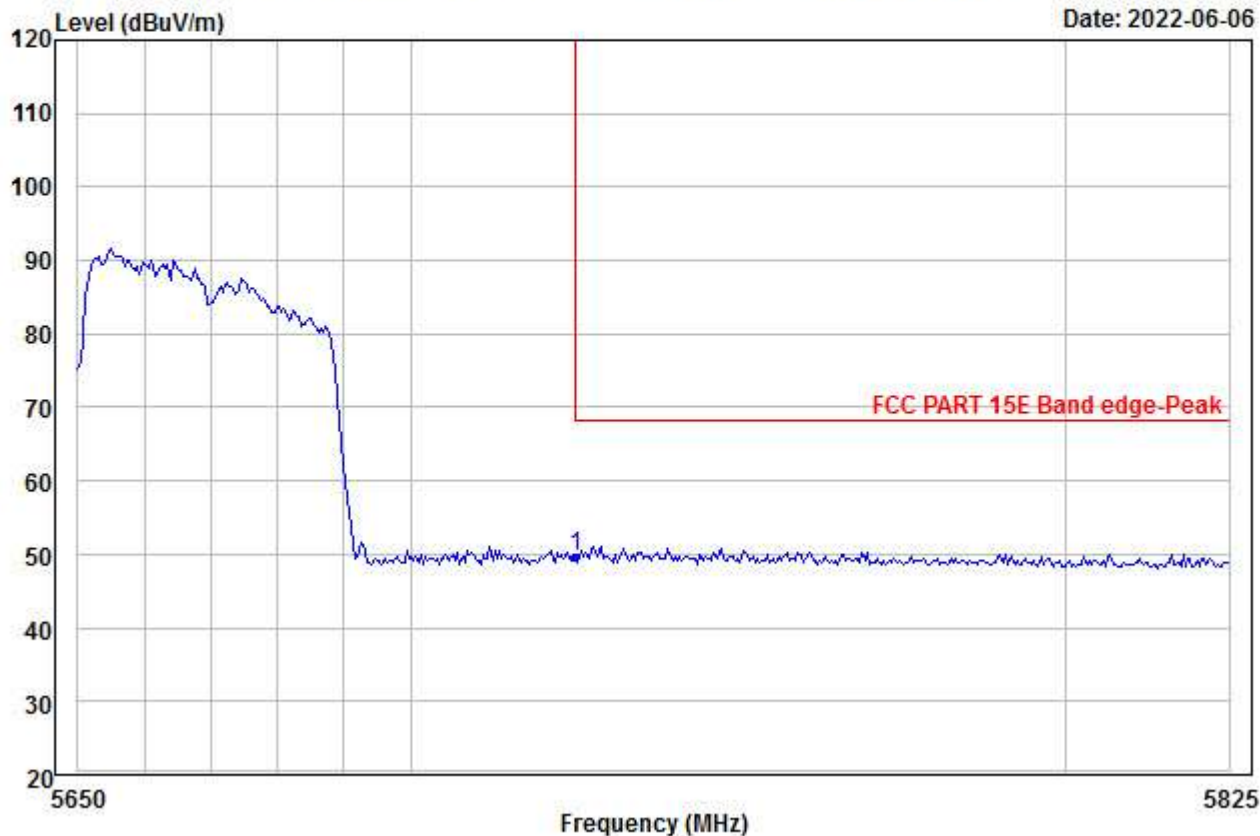


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5670
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5725.000	50.06	35.26	45.57	0.00	9.94	49.69	68.20	-18.51	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00130.EMI

Date: 2022-06-06

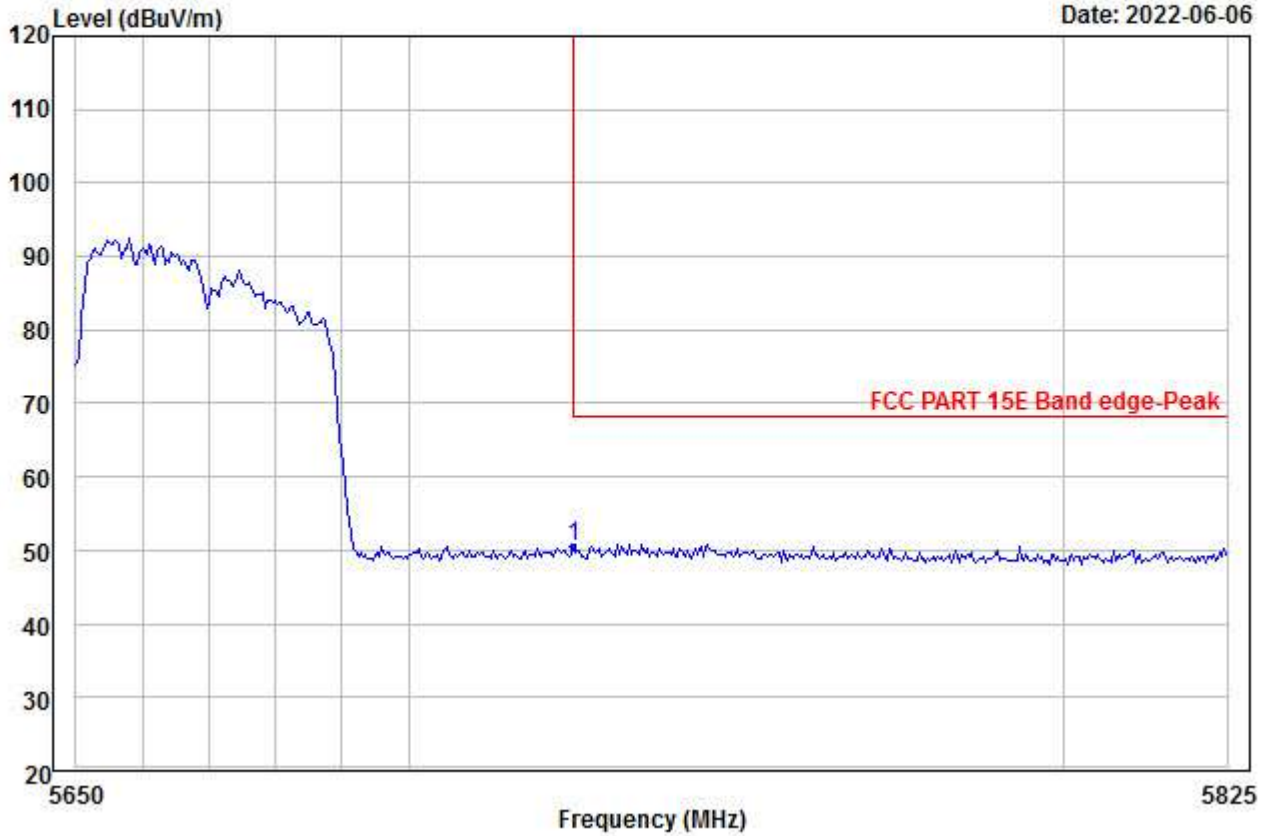


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5670
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5725.000	50.91	35.26	45.57	0.00	9.94	50.54	68.20	-17.66	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00131.EMI

Date: 2022-06-06

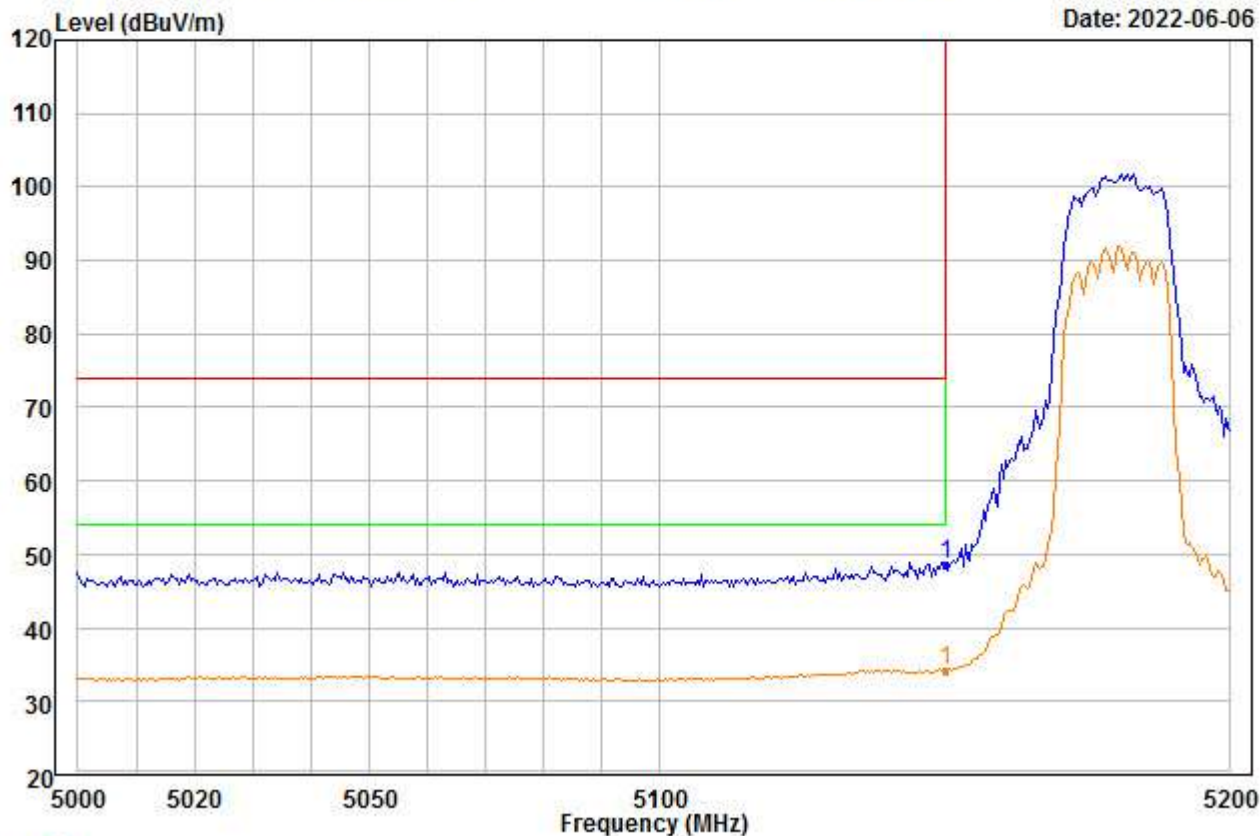


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5180
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5150.000	50.17	34.88	46.33	0.00	9.78	48.50	74.00	-25.50	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00132.EMI

Date: 2022-06-06

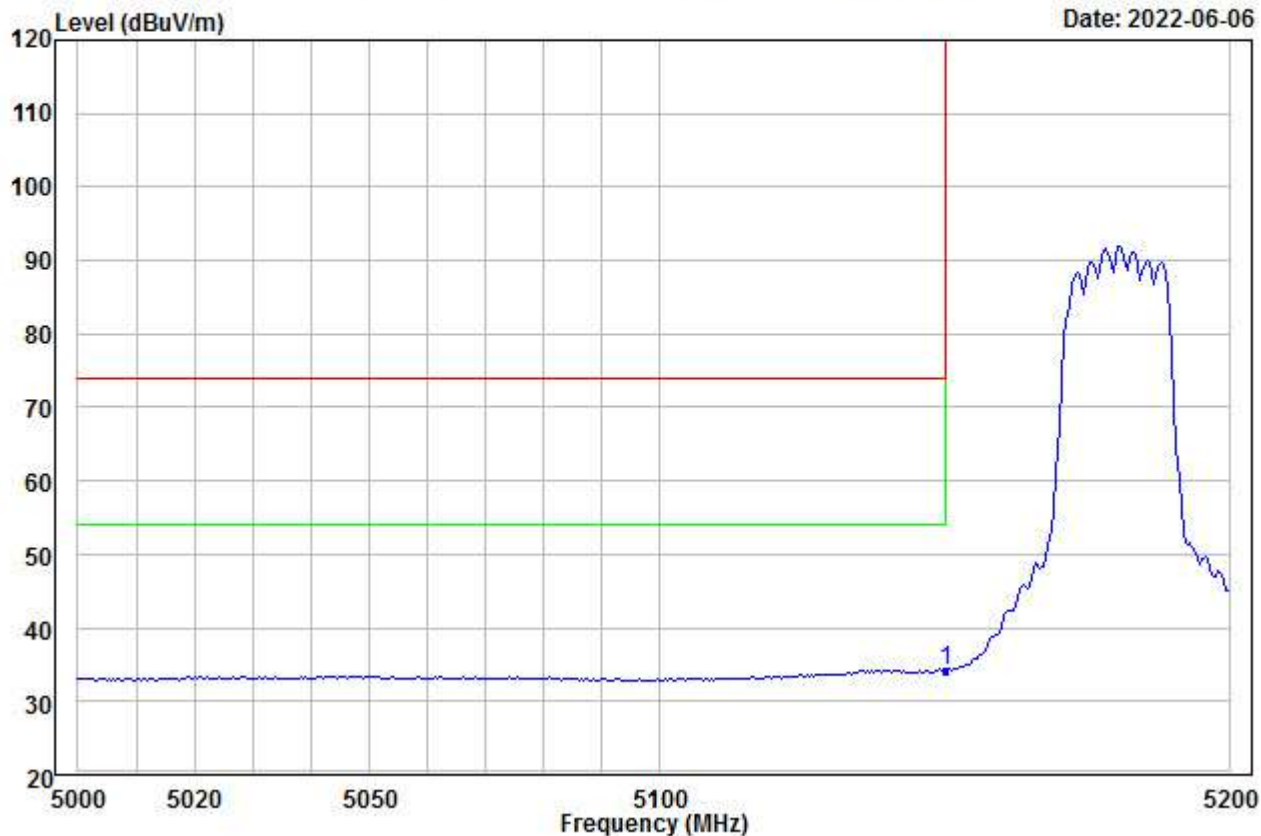


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5180
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5150.000	35.94	34.88	46.33	0.00	9.78	34.27	54.00	-19.73	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00133.EMI

Date: 2022-06-06

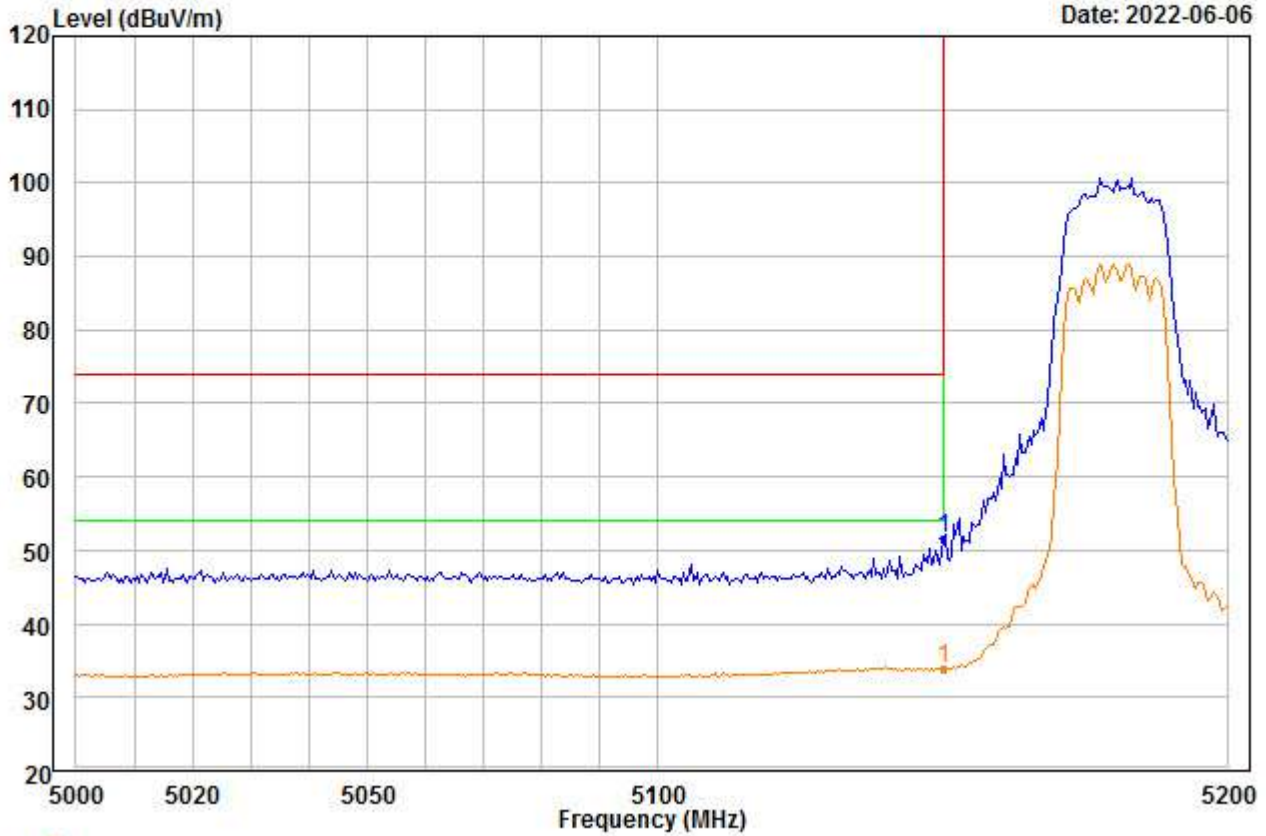


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5180
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5150.000	53.14	34.88	46.33	0.00	9.78	51.47	74.00	-22.53	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00134.EMI

Date: 2022-06-06

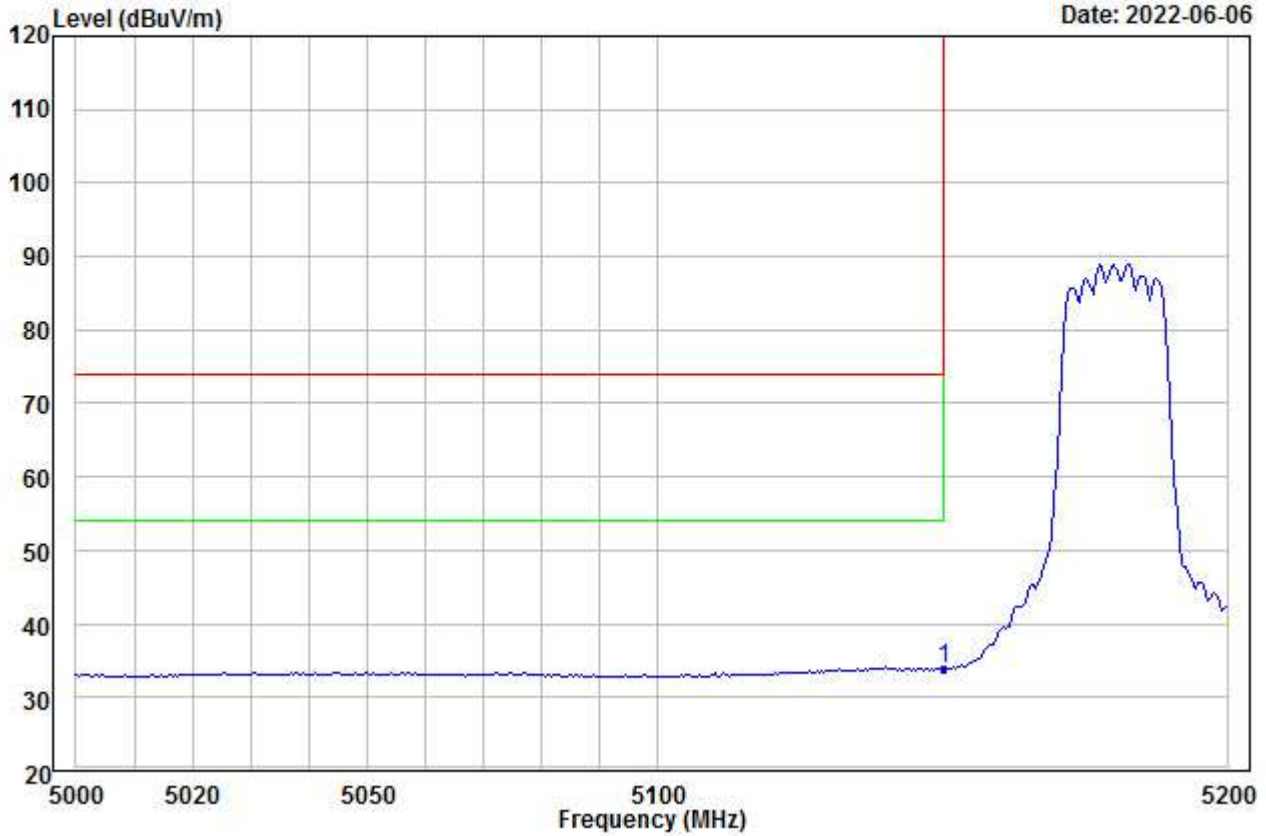


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5180
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5150.000	35.56	34.88	46.33	0.00	9.78	33.89	54.00	-20.11	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00135.EMI

Date: 2022-06-06

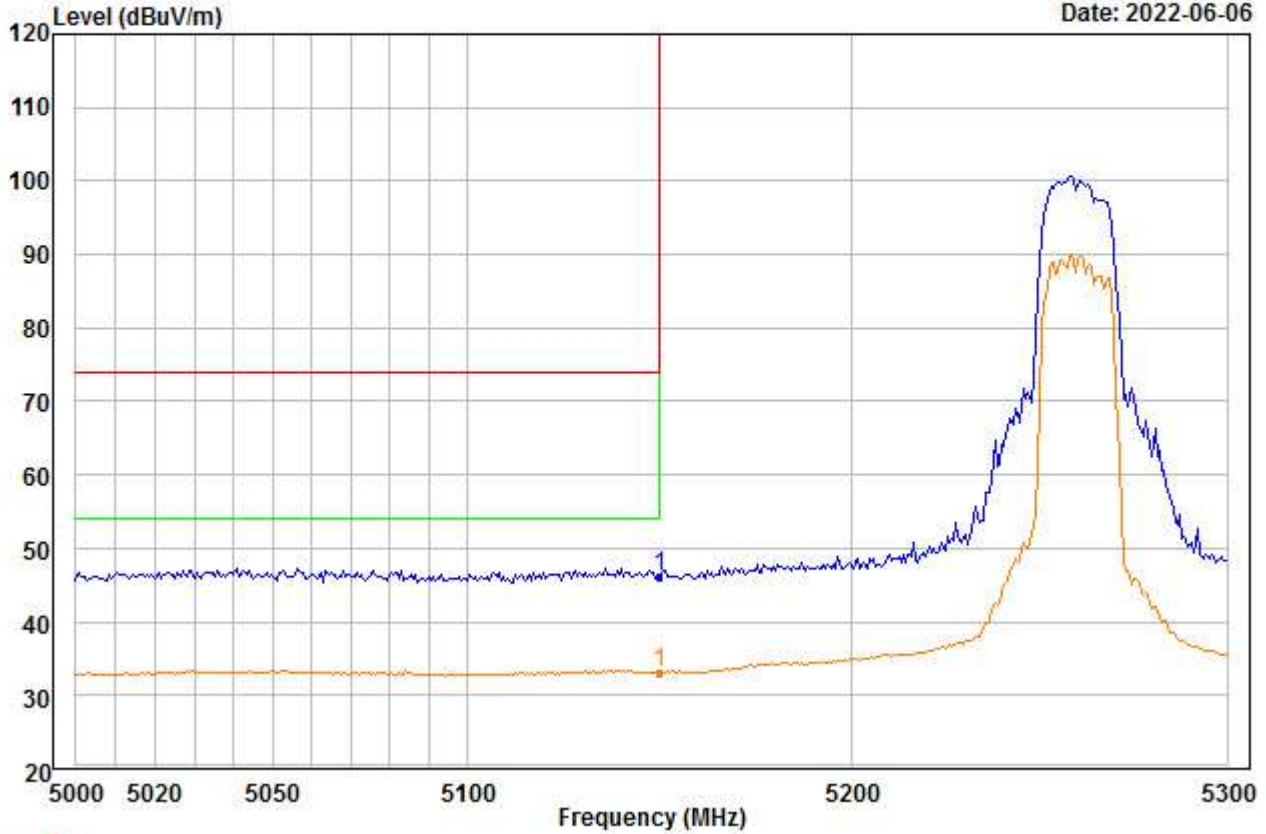


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5260
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5150.000	47.85	34.88	46.33	0.00	9.78	46.18	74.00	-27.82	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00136.EMI

Date: 2022-06-06

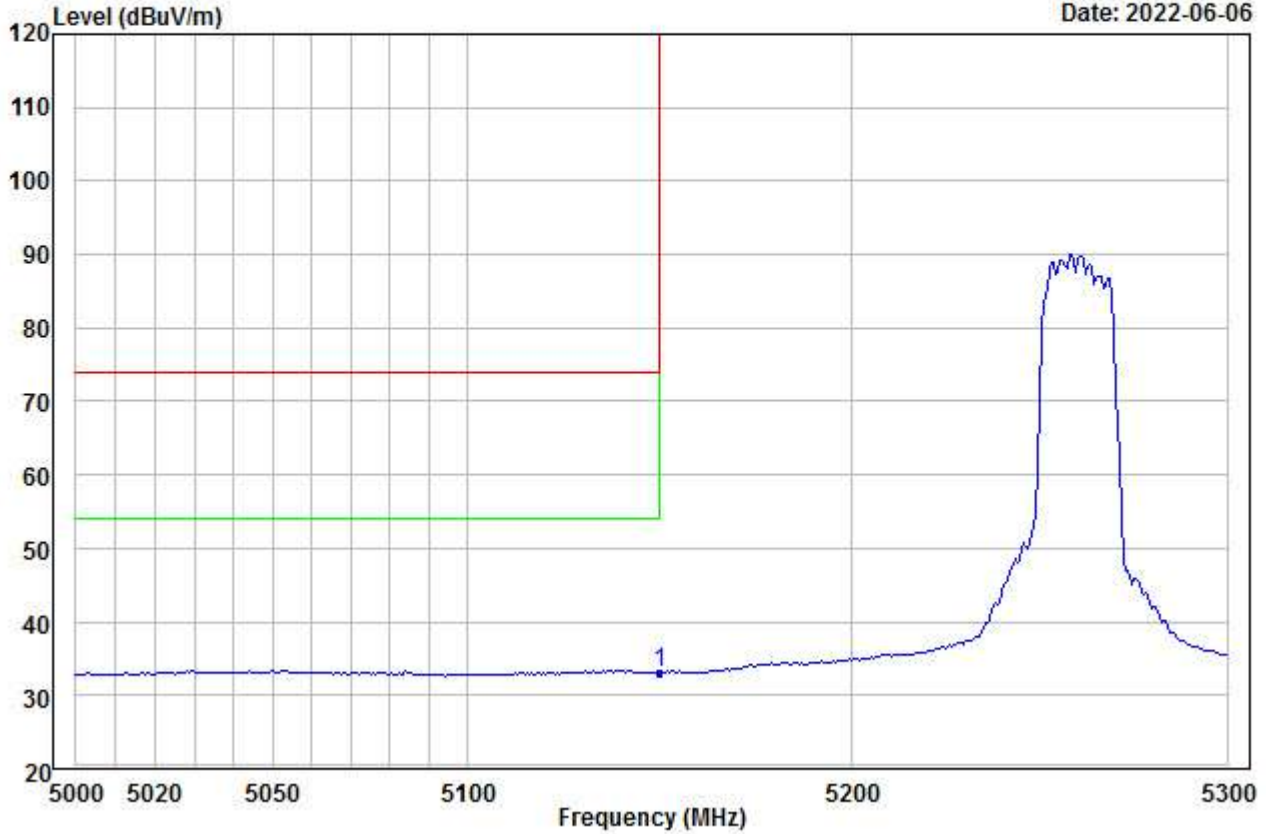


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5260
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5150.000	34.74	34.88	46.33	0.00	9.78	33.07	54.00	-20.93	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00137.EMI

Date: 2022-06-06

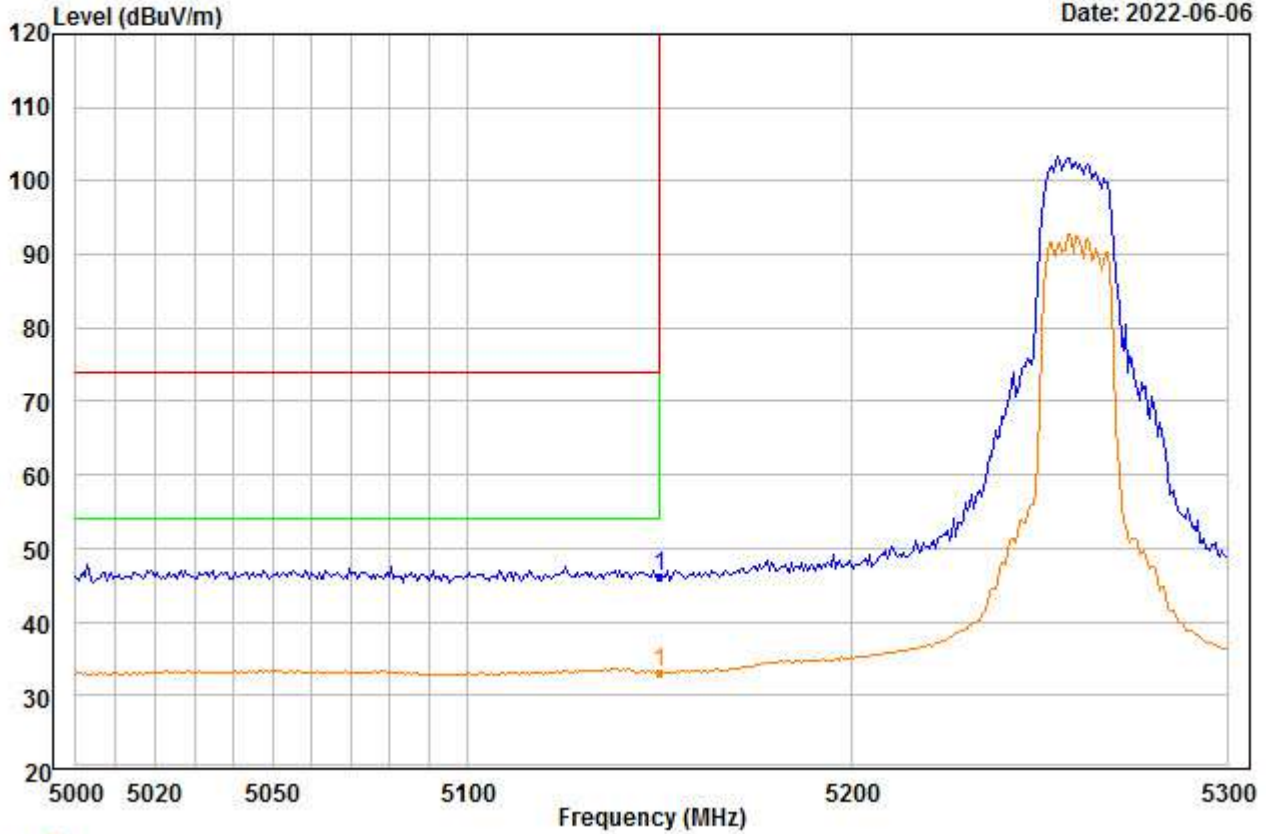


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5260
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5150.000	47.71	34.88	46.33	0.00	9.78	46.04	74.00	-27.96	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00138.EMI

Date: 2022-06-06

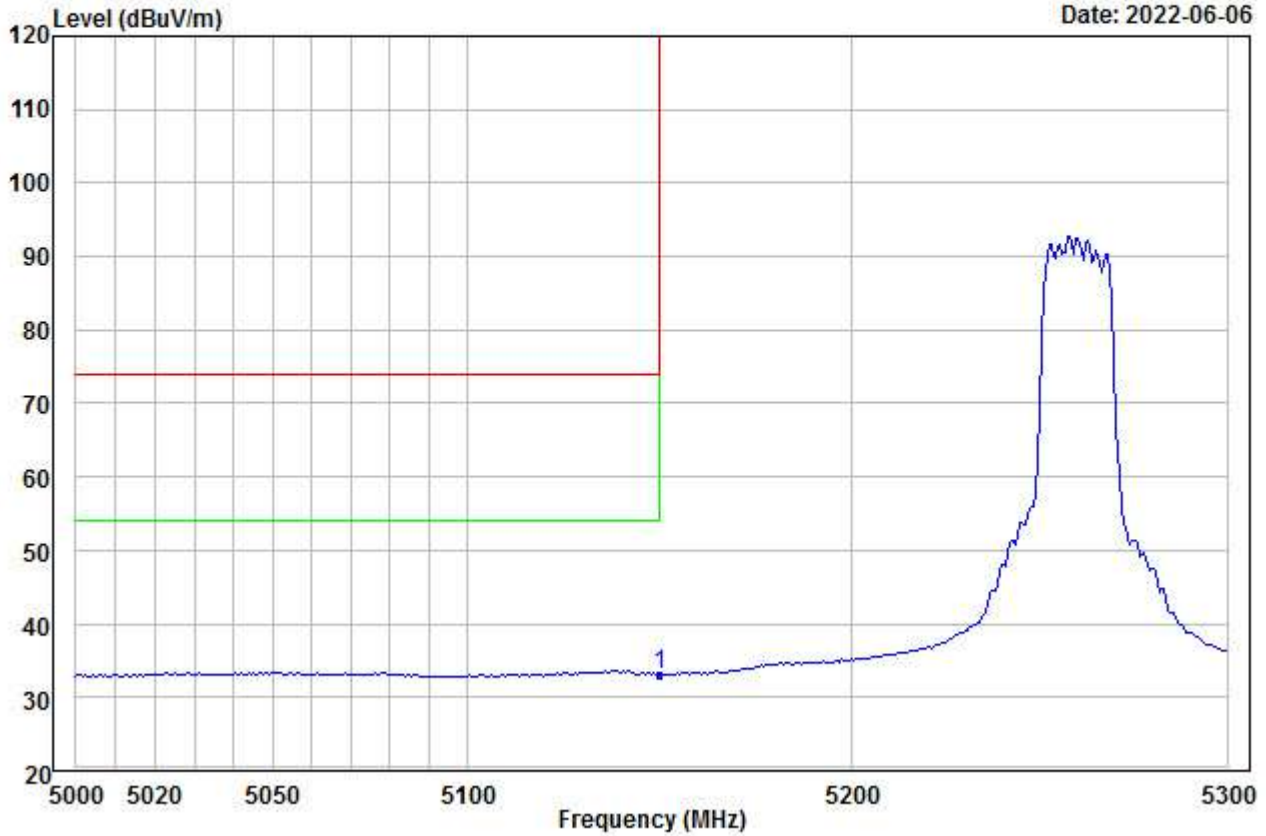


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5260
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5150.000	34.80	34.88	46.33	0.00	9.78	33.13	54.00	-20.87	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00139.EMI

Date: 2022-06-06

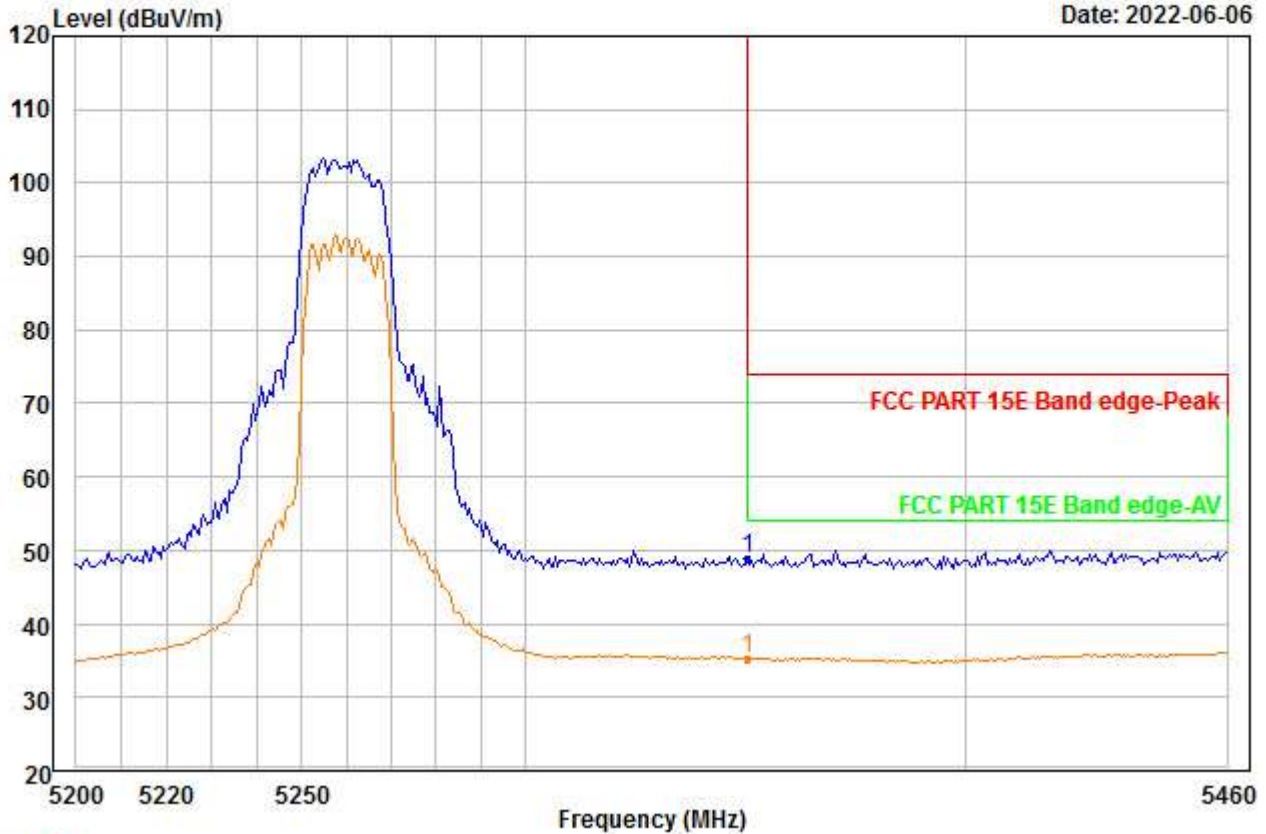


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5240
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5350.000	49.55	35.12	45.97	0.00	10.18	48.88	74.00	-25.12	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00140.EMI

Date: 2022-06-06

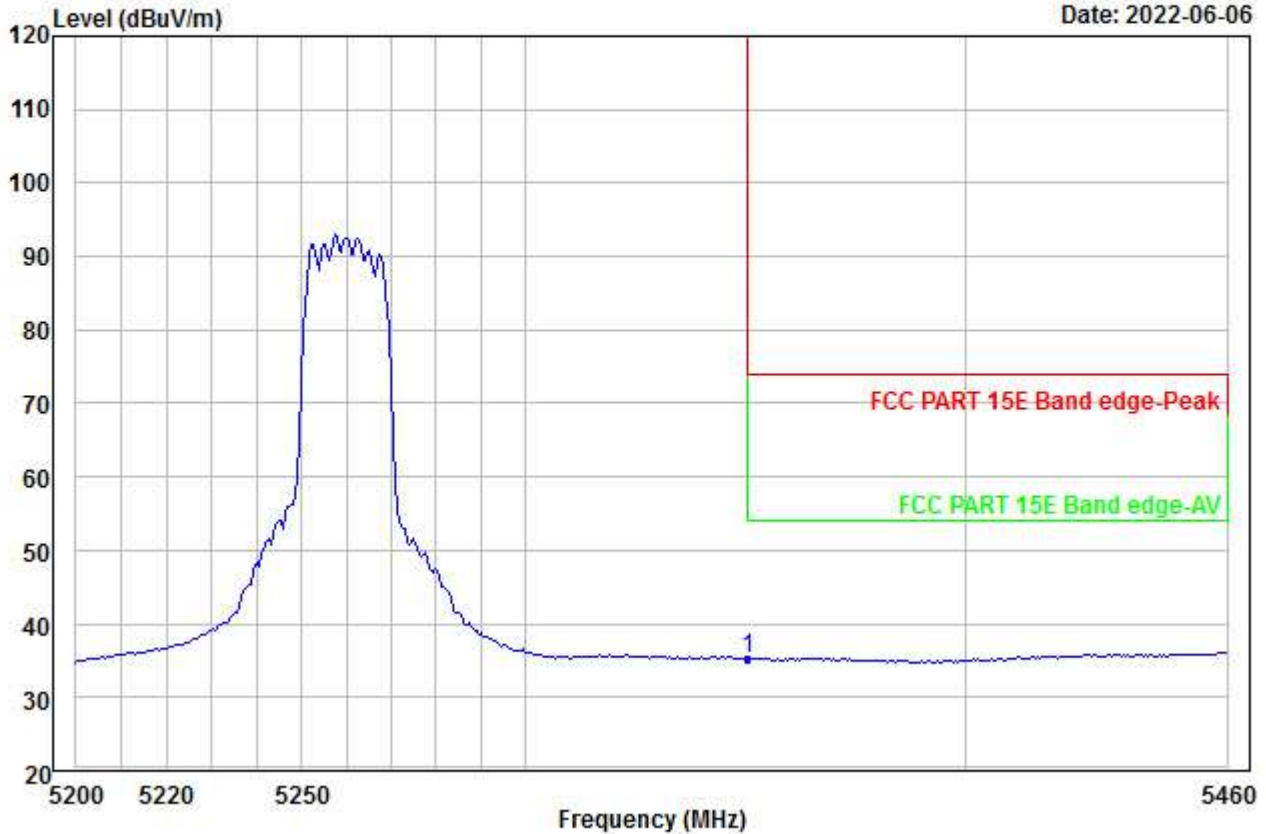


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5240
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5350.000	36.02	35.12	45.97	0.00	10.18	35.35	54.00	-18.65	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00141.EMI

Date: 2022-06-06

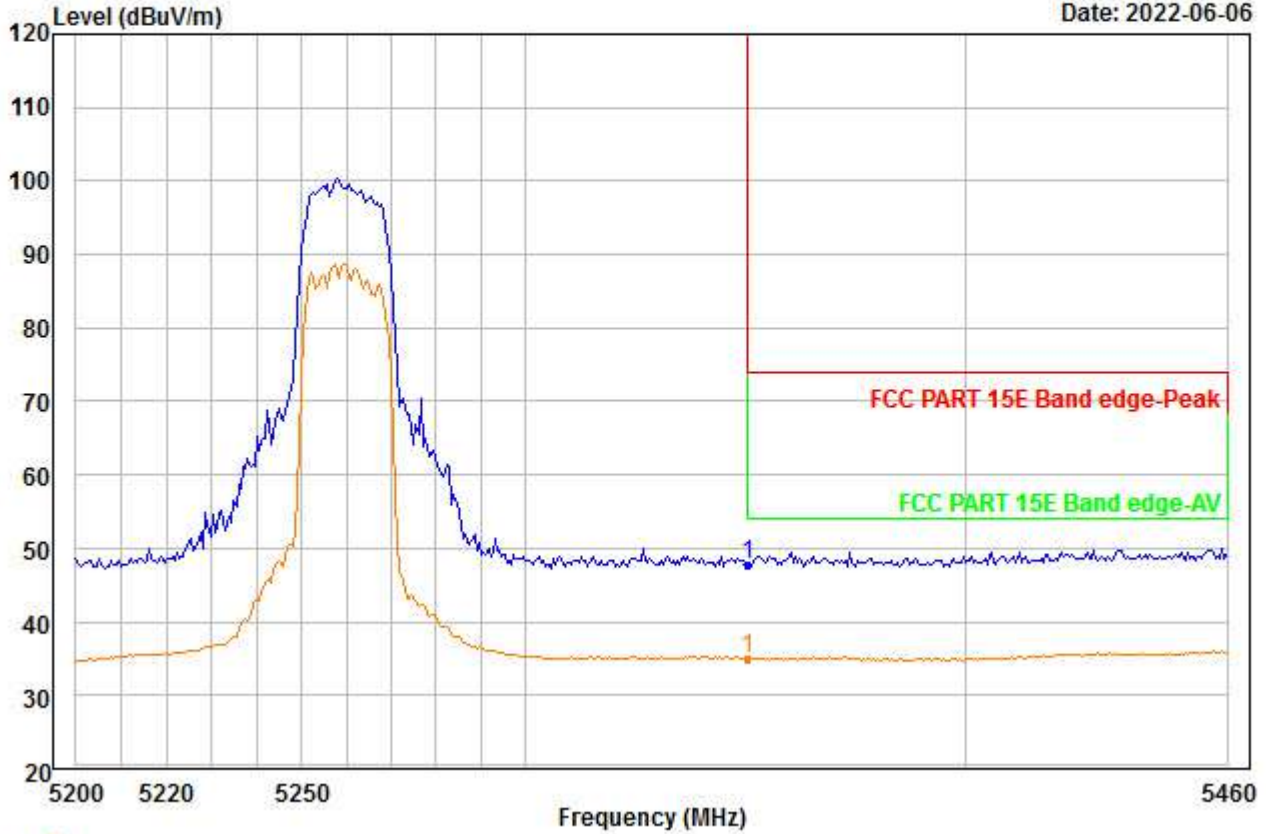


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5240
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit			
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 5350.000	48.44	35.12	45.97	0.00	10.18	47.77	74.00	-26.23	---	--- Peak

File: F:\Test Template\上海\ITS\2022\220523032 SA750\B\5G\BE\4_00142.EMI

Date: 2022-06-06

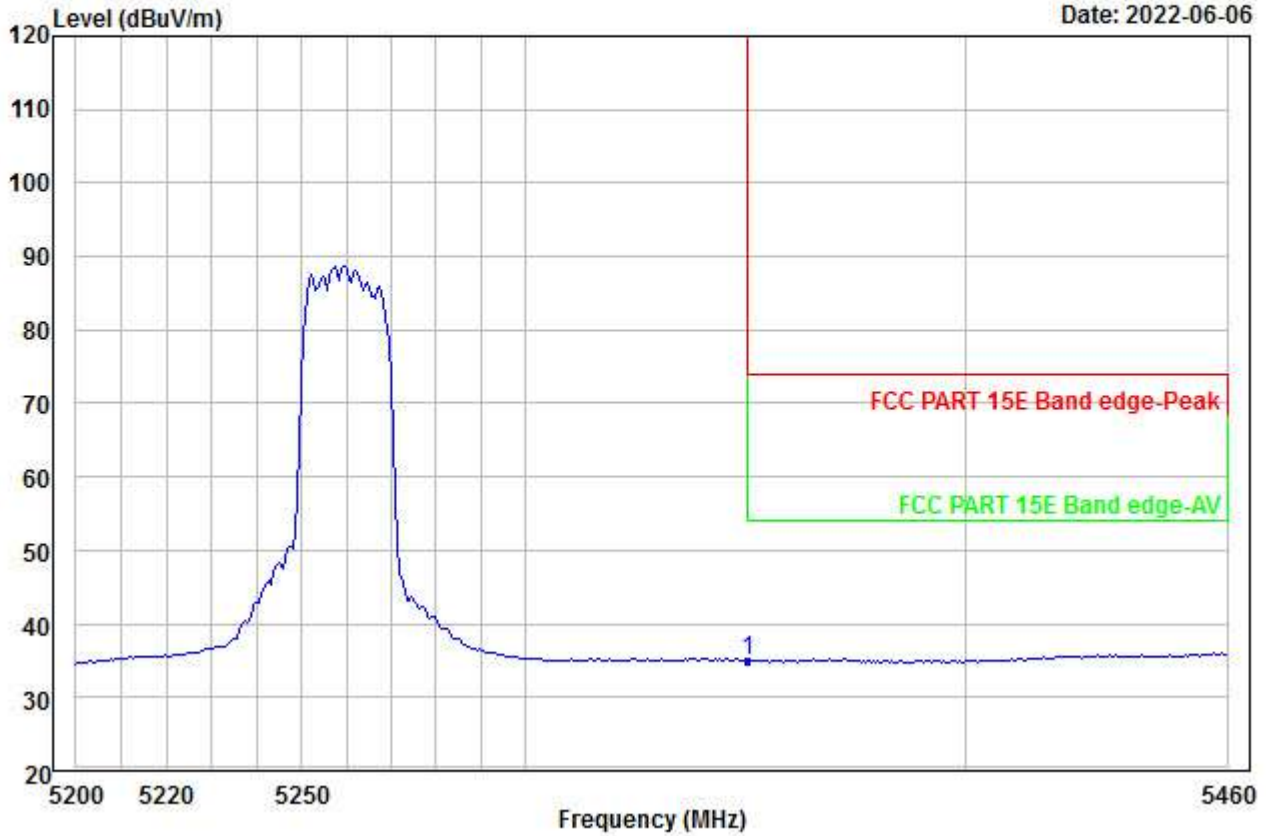


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5240
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5350.000	35.61	35.12	45.97	0.00	10.18	34.94	54.00	-19.06	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00143.EMI

Date: 2022-06-06

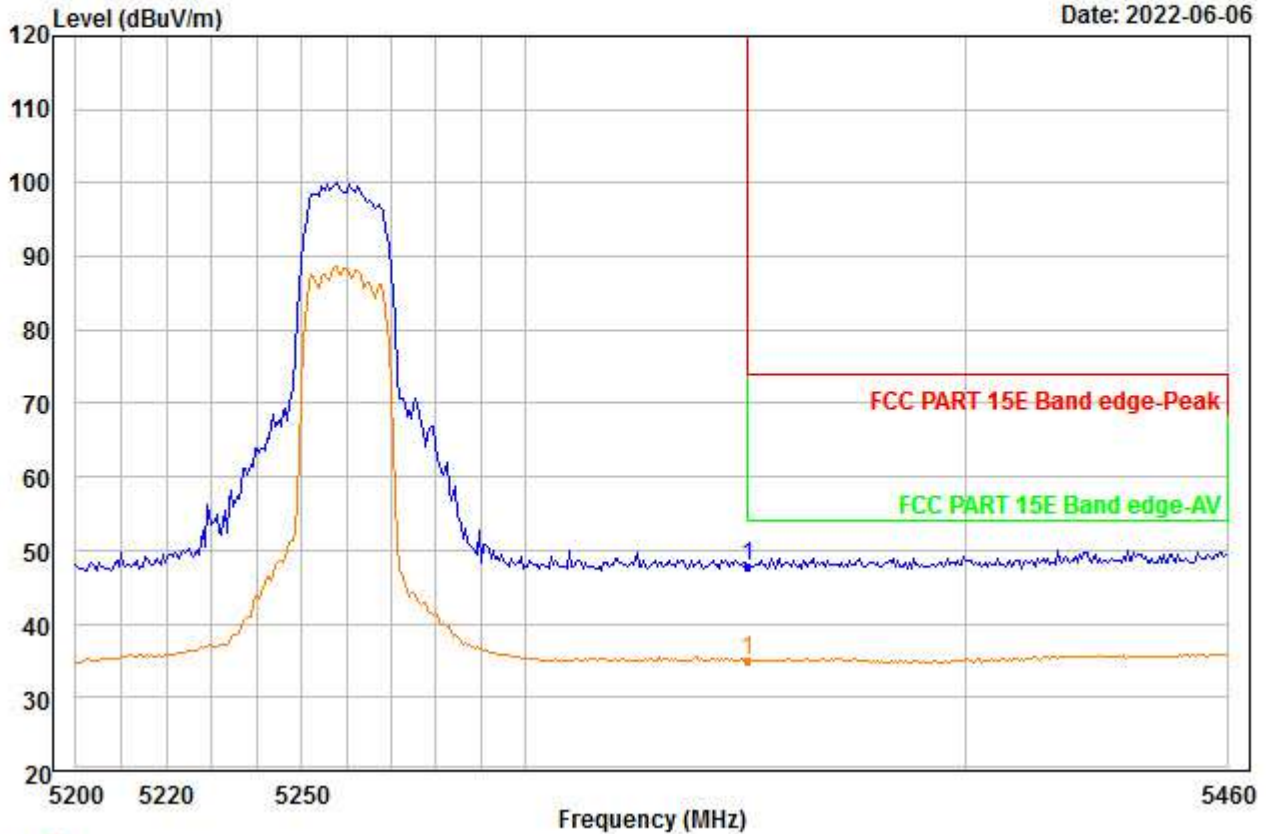


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5320
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5350.000	48.39	35.12	45.97	0.00	10.18	47.72	74.00	-26.28	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00144.EMI

Date: 2022-06-06

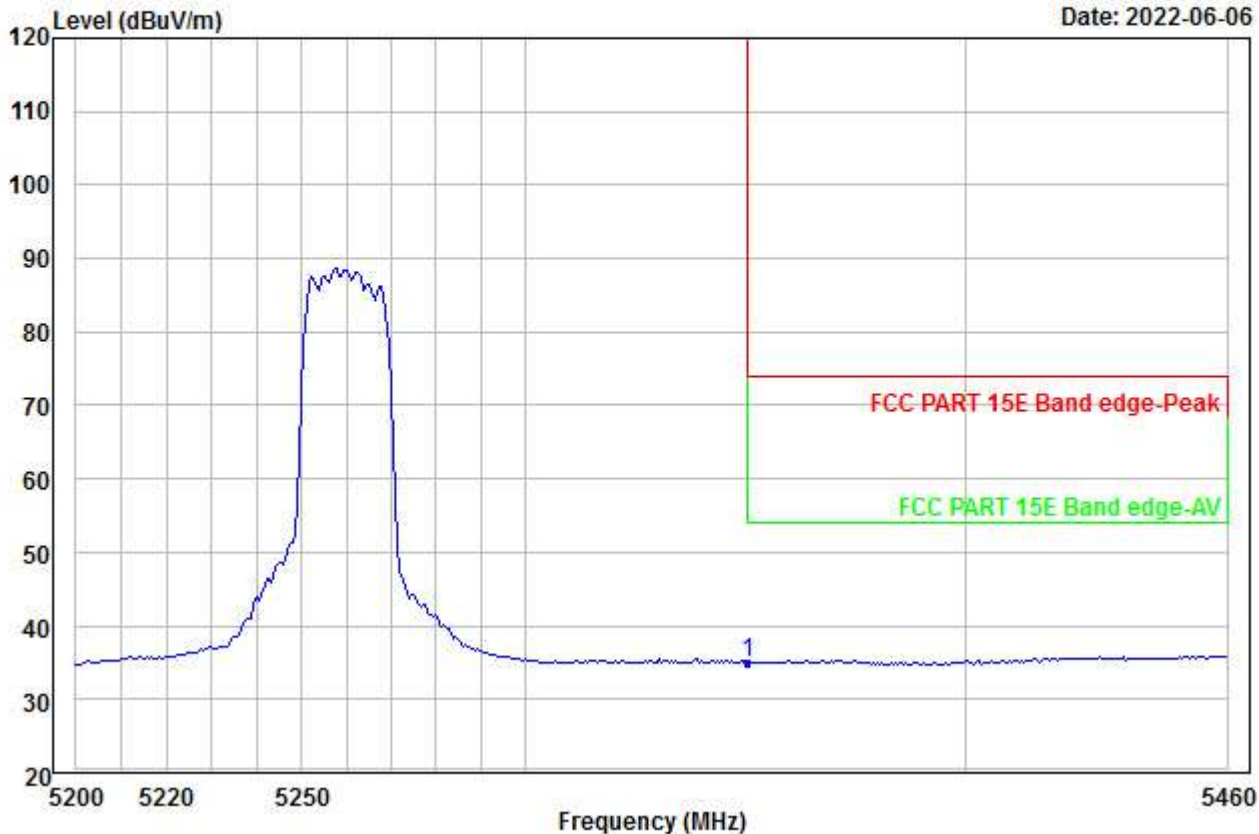


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5320
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5350.000	35.71	35.12	45.97	0.00	10.18	35.04	54.00	-18.96	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00145.EMI

Date: 2022-06-06

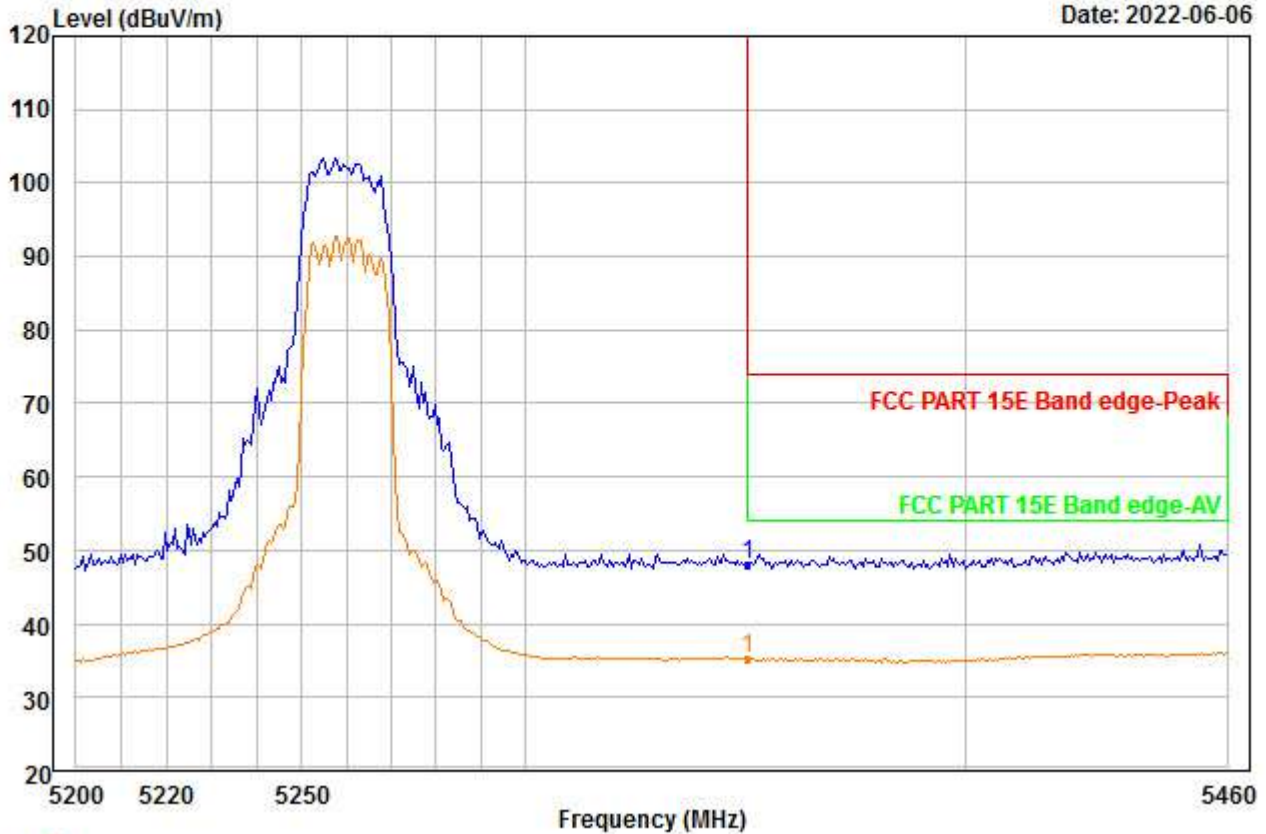


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5320
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5350.000	48.61	35.12	45.97	0.00	10.18	47.94	74.00	-26.06	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00146.EMI

Date: 2022-06-06

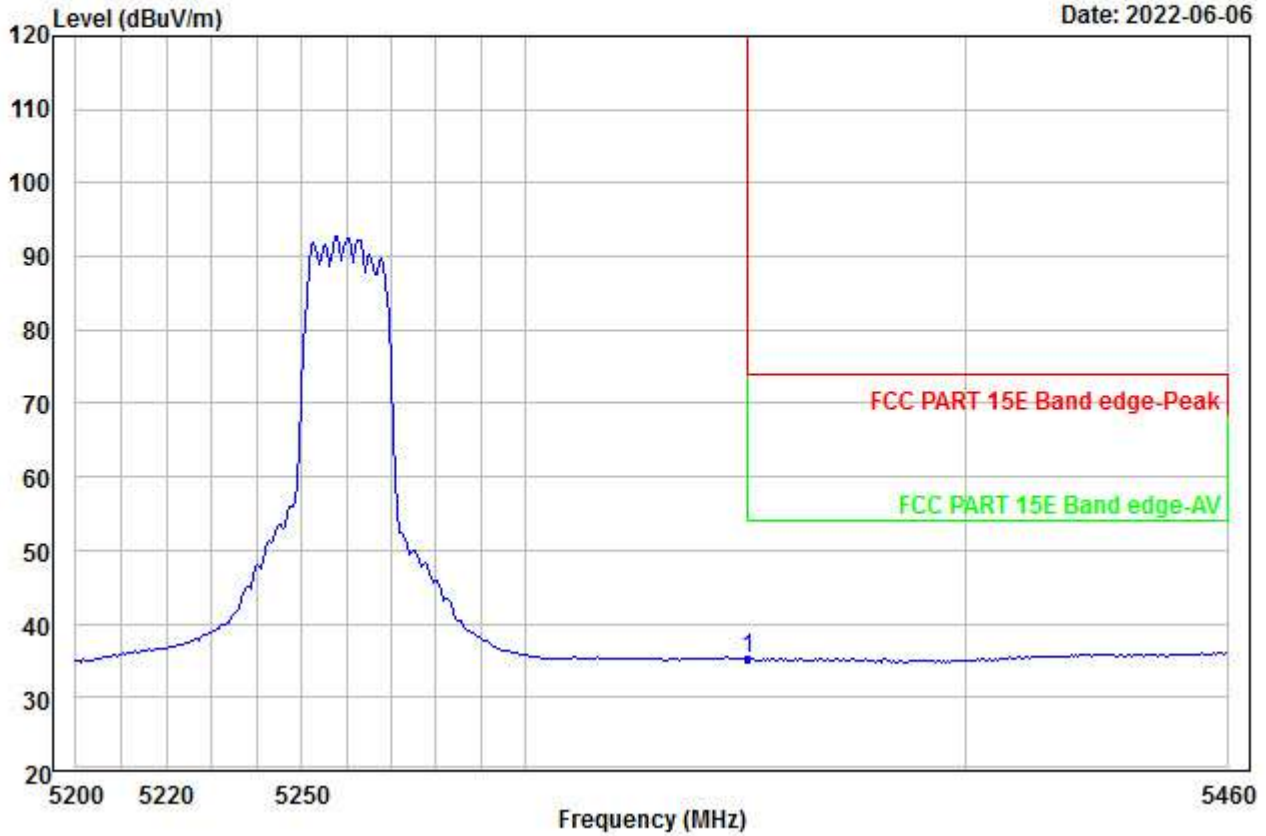


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5320
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5350.000	36.00	35.12	45.97	0.00	10.18	35.33	54.00	-18.67	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00147.EMI

Date: 2022-06-06

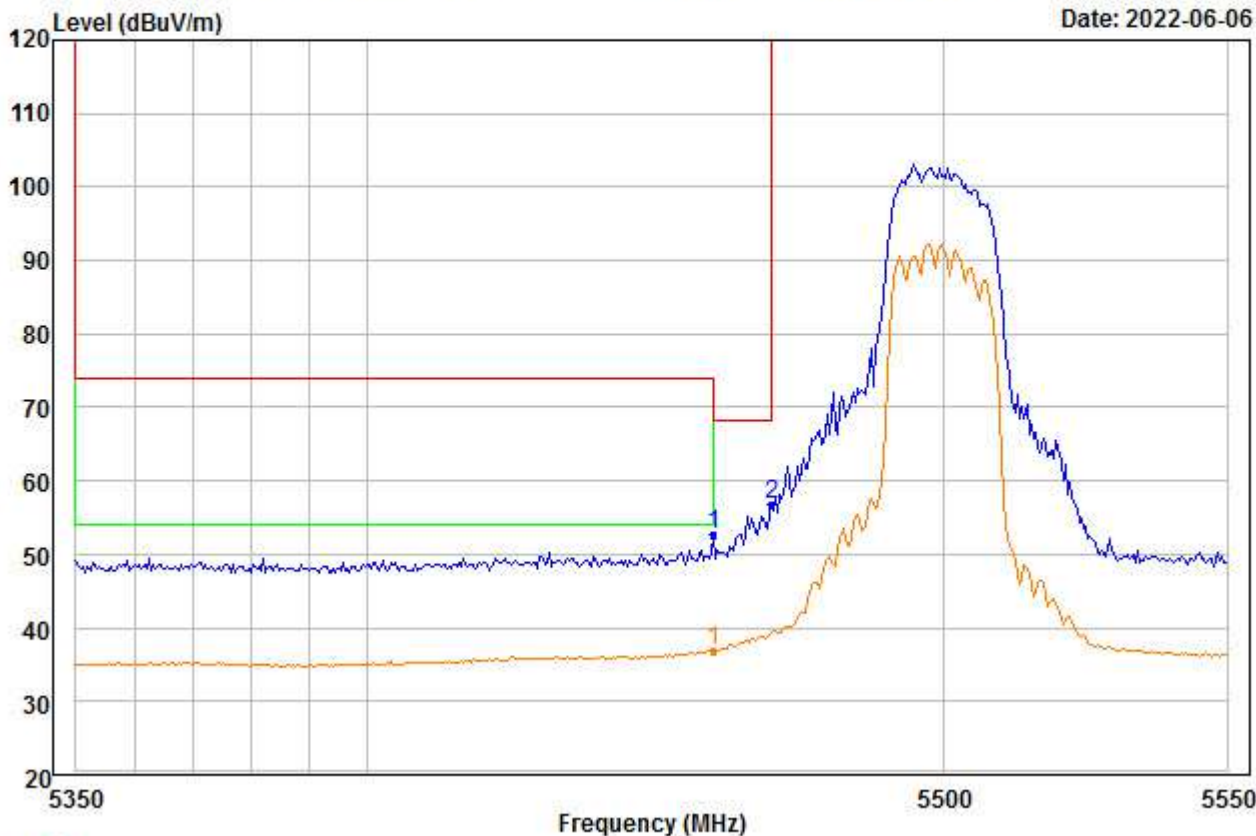


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5500
 Remark :

	Read Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	5460.000	52.79	35.25	45.77	0.00	10.44	52.71	68.20	-15.49	---	---	Peak
2 PP	5470.000	56.67	35.26	45.75	0.00	10.47	56.65	68.20	-11.55	---	---	Peak

File: F:\Test Template\上海ITSI\2022\220523032 SA750\B\5G\BE\4_00148.EMI

Date: 2022-06-06

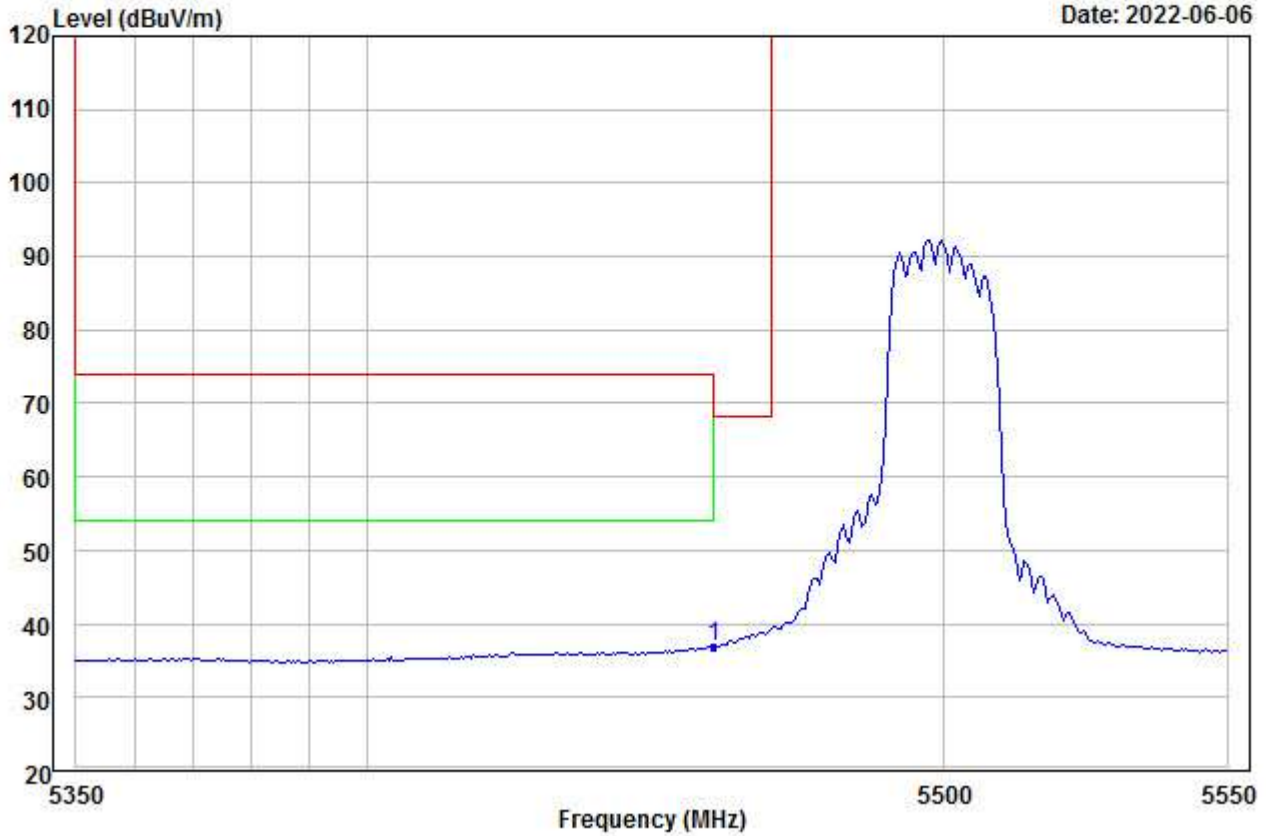


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5500
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5460.000	37.01	35.25	45.77	0.00	10.44	36.93	54.00	-17.07	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00149.EMI

Date: 2022-06-06

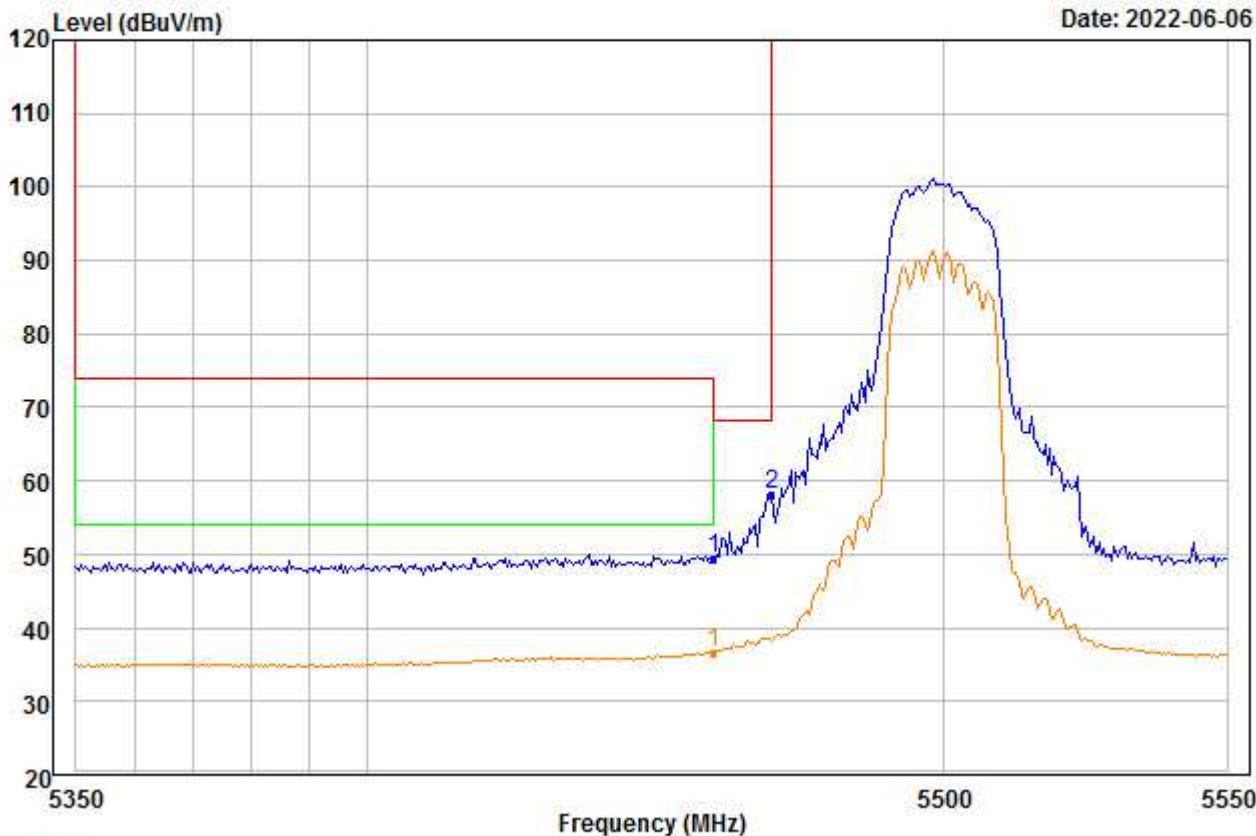


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5500
 Remark :

	Read Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	5460.000	49.59	35.25	45.77	0.00	10.44	49.51	68.20	-18.69	---	---	Peak
2 PP	5470.000	58.15	35.26	45.75	0.00	10.47	58.13	68.20	-10.07	---	---	Peak

File: F:\Test Template\上海\ITS\2022\220523032 SA750\B\5G\BE\4_00150.EMI

Date: 2022-06-06

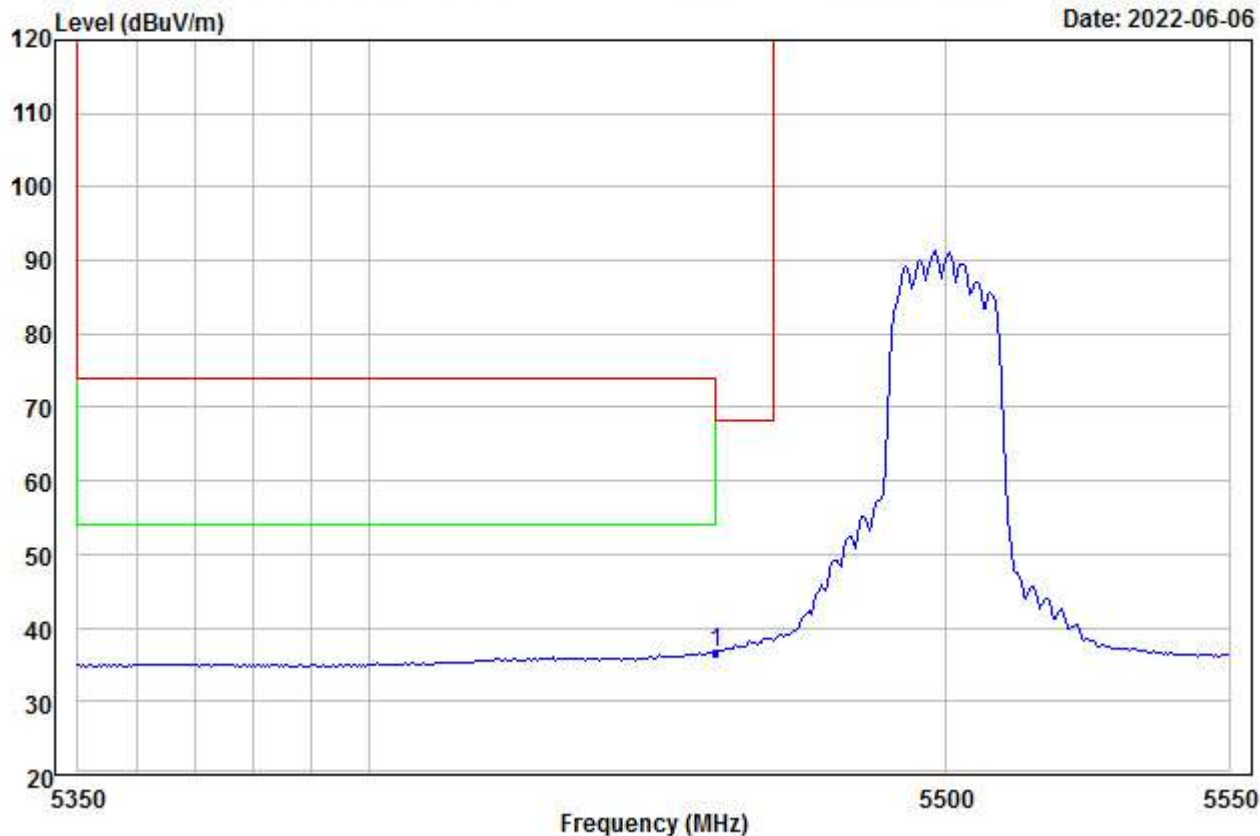


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5500
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5460.000	36.75	35.25	45.77	0.00	10.44	36.67	54.00	-17.33	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00151.EMI

Date: 2022-06-06

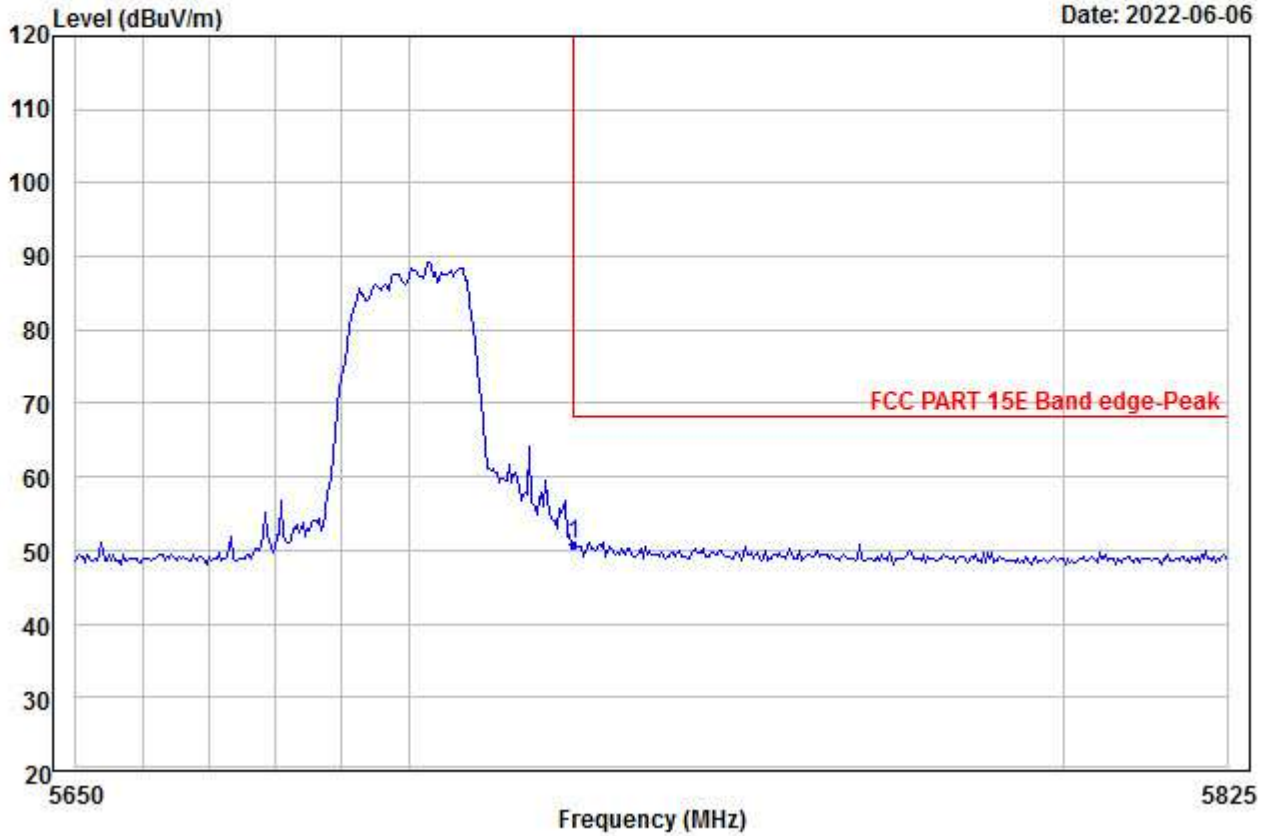


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5700
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5725.000	51.17	35.26	45.57	0.00	9.94	50.80	68.20	-17.40	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00152.EMI

Date: 2022-06-06

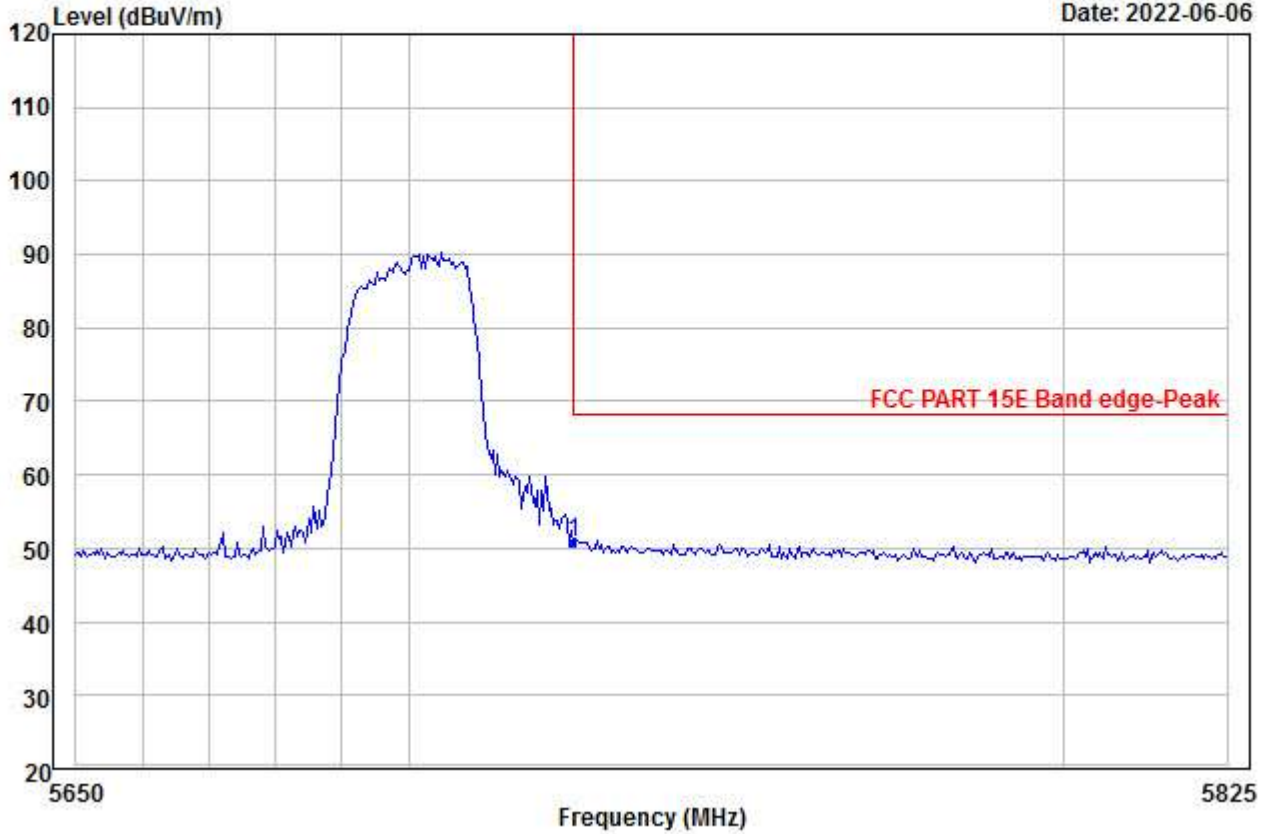


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5700
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5725.000	51.04	35.26	45.57	0.00	9.94	50.67	68.20	-17.53	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00153.EMI

Date: 2022-06-07

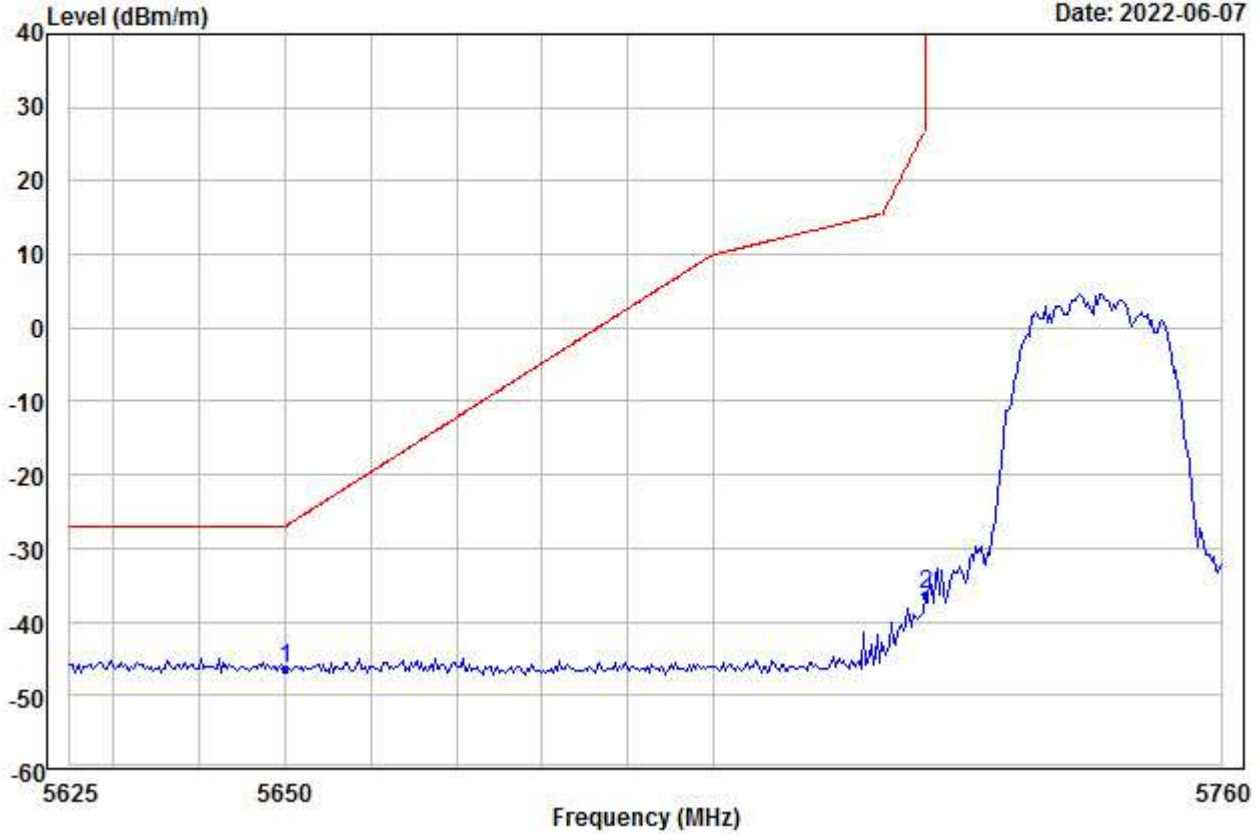


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5745
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBm	dB/m	dB	dB	dB	dBm/m	dBm/m	dB	cm	deg	
1 PP 5650.000	-57.90	35.27	45.61	0.00	21.88	-46.36	-27.00	-19.36	---	---	Peak
2 5725.000	-47.70	35.26	45.57	0.00	21.68	-36.33	27.00	-63.33	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00154.EMI

Date: 2022-06-07

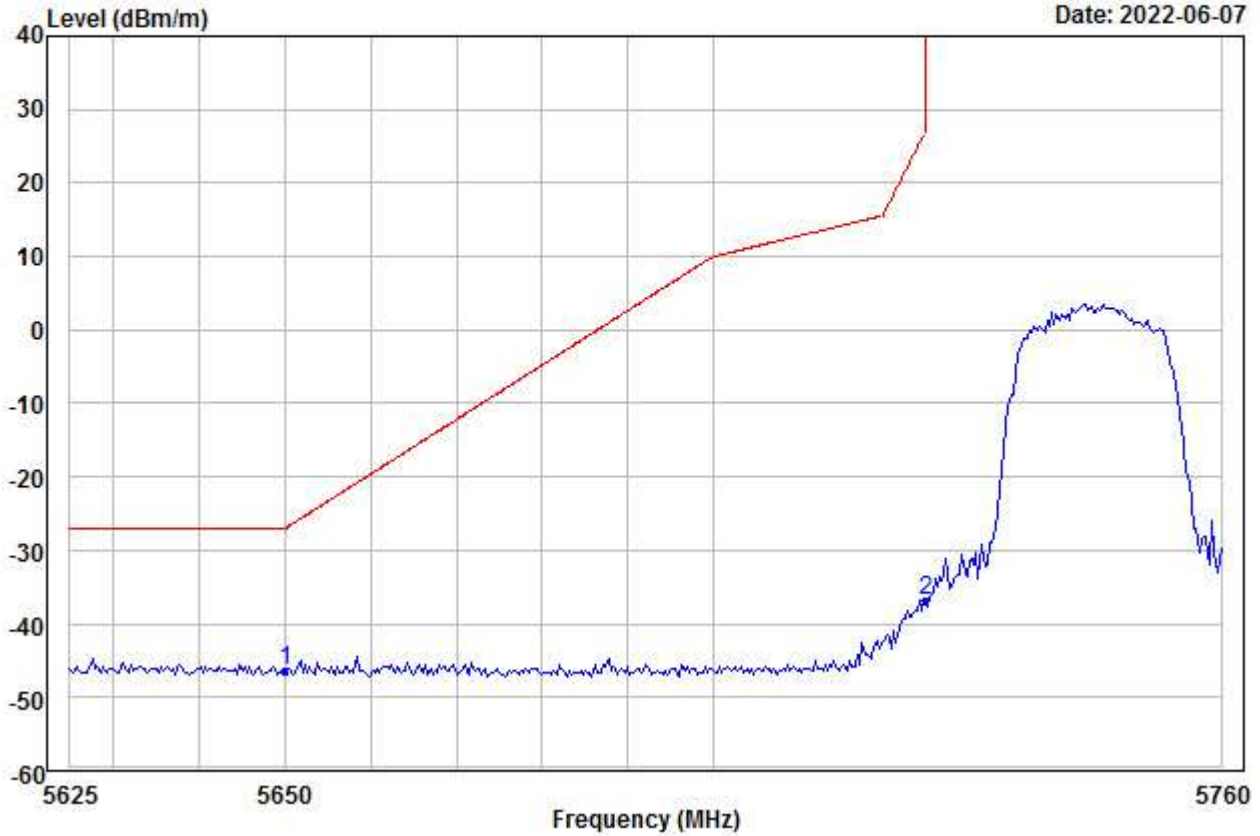


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5745
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBm	dB/m	dB	dB	dB	dBm/m	dBm/m	dB	cm	deg	
1 PP 5650.000	-58.04	35.27	45.61	0.00	21.88	-46.50	-27.00	-19.50	---	---	Peak
2 5725.000	-48.22	35.26	45.57	0.00	21.68	-36.85	27.00	-63.85	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00155.EMI

Date: 2022-06-07

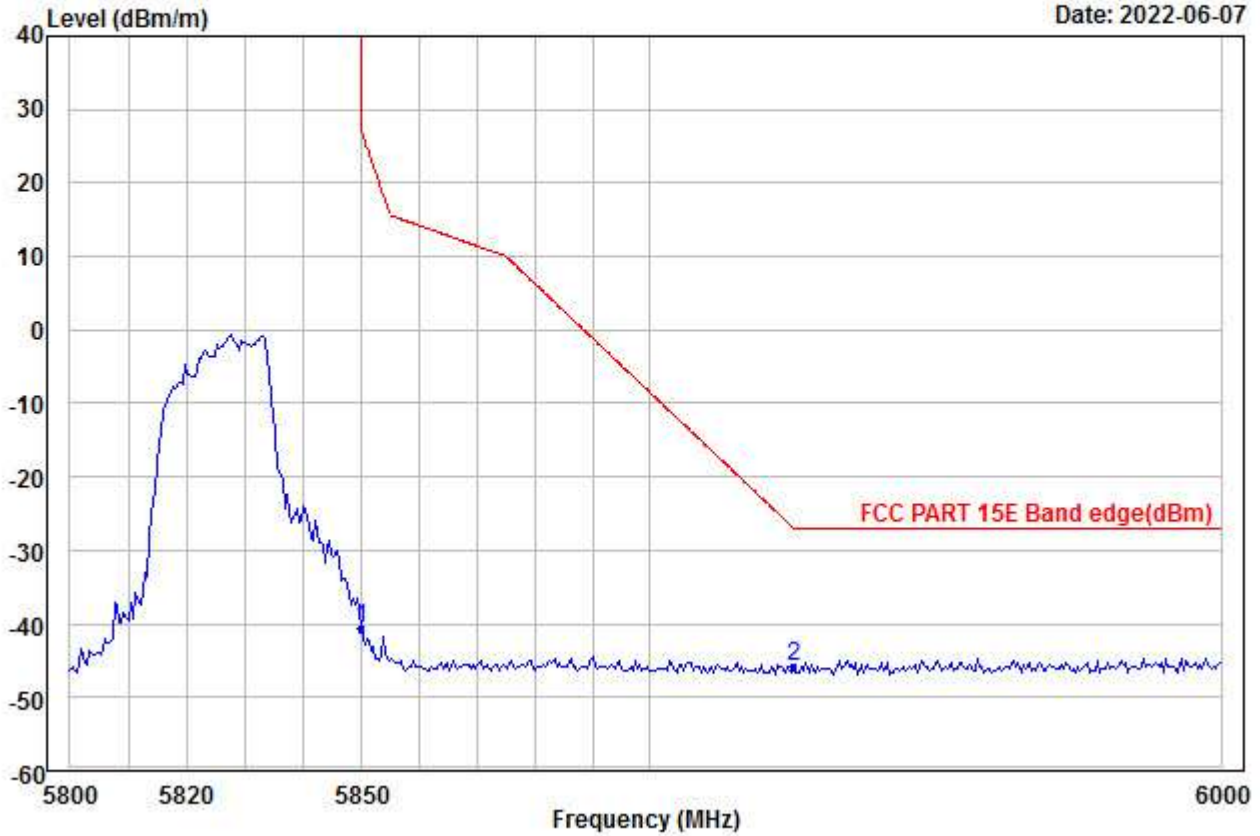


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5825
 Remark :

	Read Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBm	dB/m	dB	dB	dB	dBm/m	dBm/m	dB	cm	deg	
1	5850.000	-51.77	35.23	45.49	0.00	21.47	-40.56	27.00	-67.56	---	---	Peak
2 PP	5925.000	-56.92	35.22	45.44	0.00	21.44	-45.70	-27.00	-18.70	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00156.EMI

Date: 2022-06-07

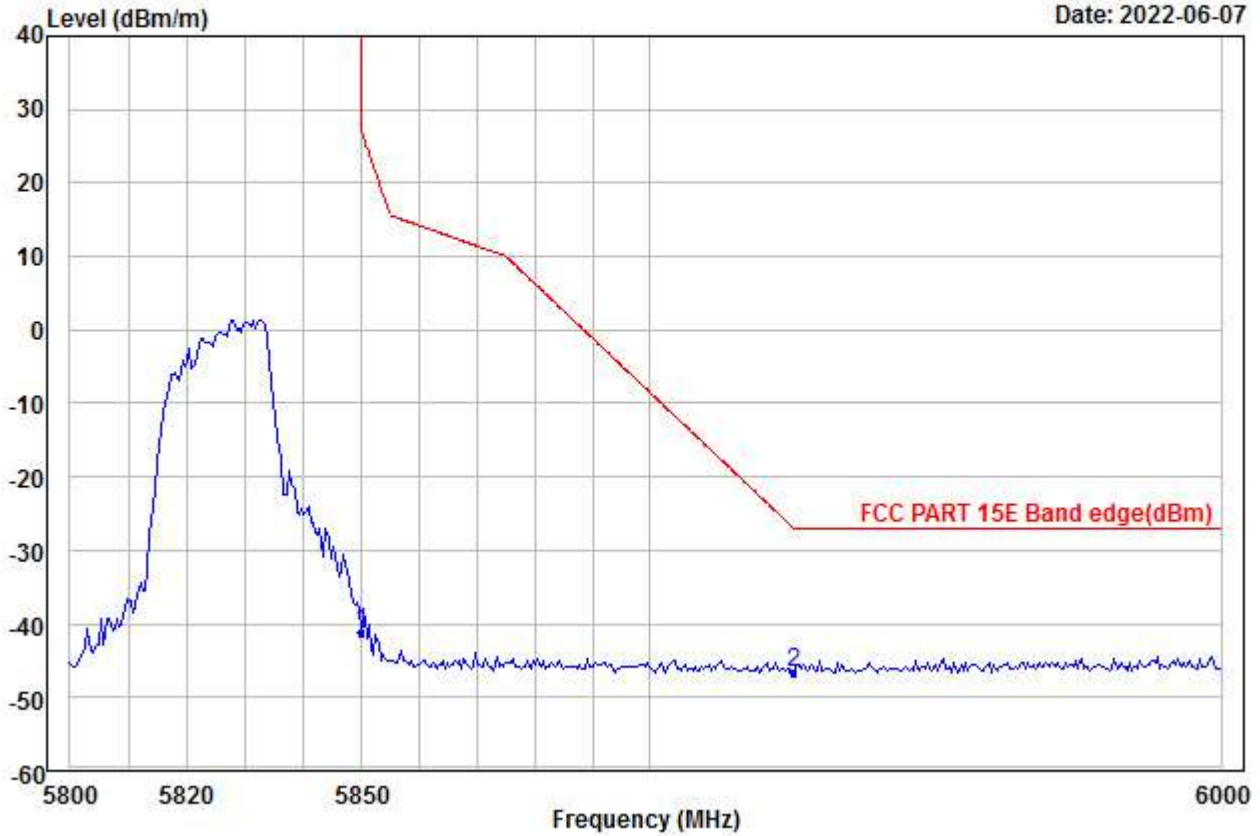


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC20_ANT0+1_5825
 Remark :

	Read Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBm	dB/m	dB	dB	dB	dBm/m	dBm/m	dB	cm	deg	
1	5850.000	-52.54	35.23	45.49	0.00	21.47	-41.33	27.00	-68.33	---	---	Peak
2 PP	5925.000	-57.86	35.22	45.44	0.00	21.44	-46.64	-27.00	-19.64	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00157.EMI

Date: 2022-06-07

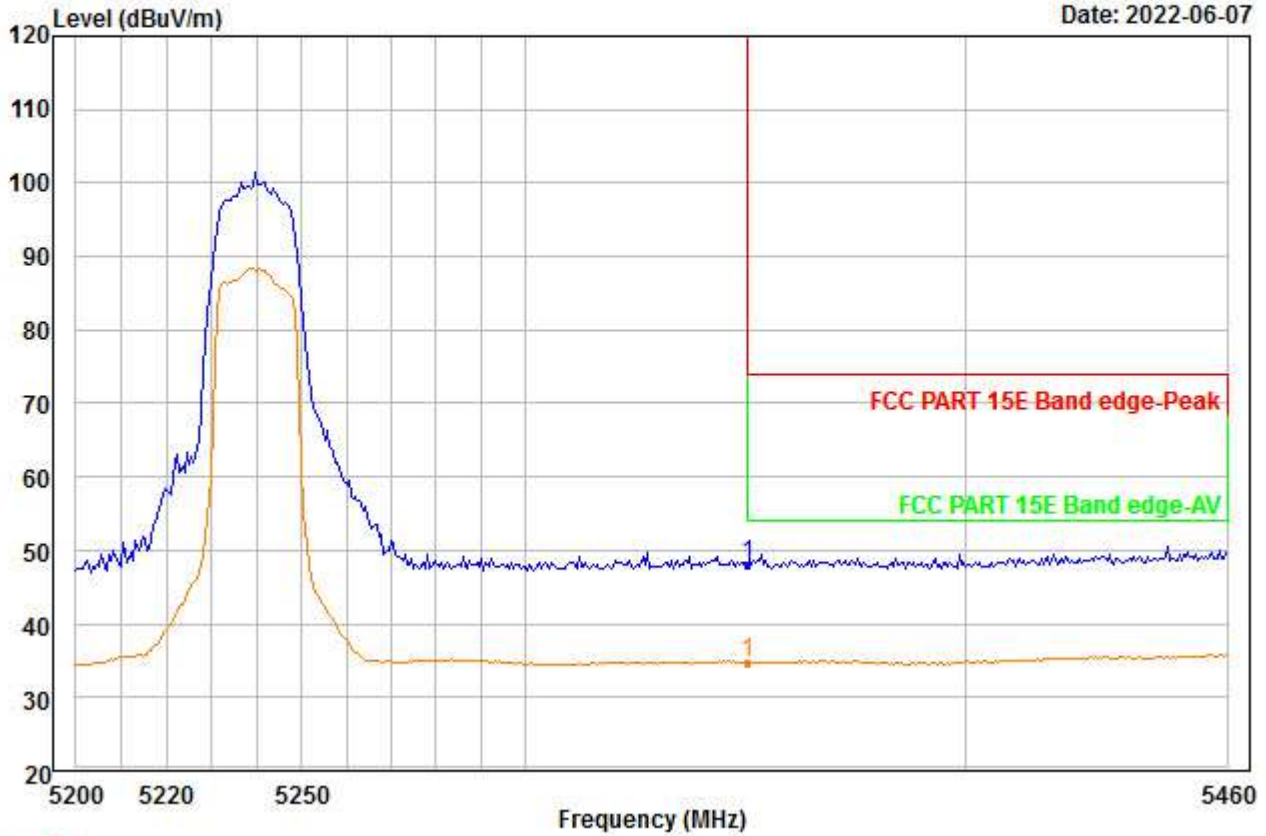


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5240
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5350.000	48.86	35.12	45.97	0.00	10.18	48.19	74.00	-25.81	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00158.EMI

Date: 2022-06-07

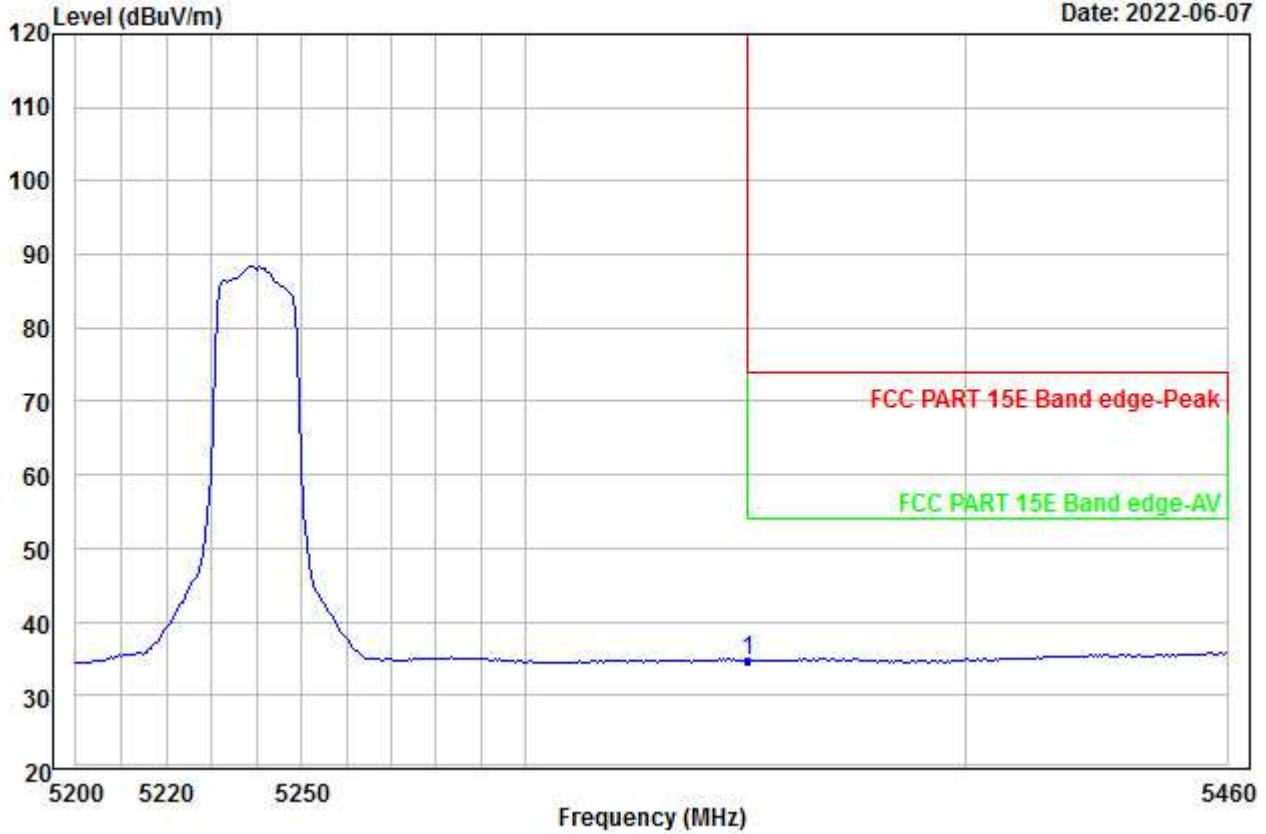


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5240
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5350.000	35.32	35.12	45.97	0.00	10.18	34.65	54.00	-19.35	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00159.EMI

Date: 2022-06-07

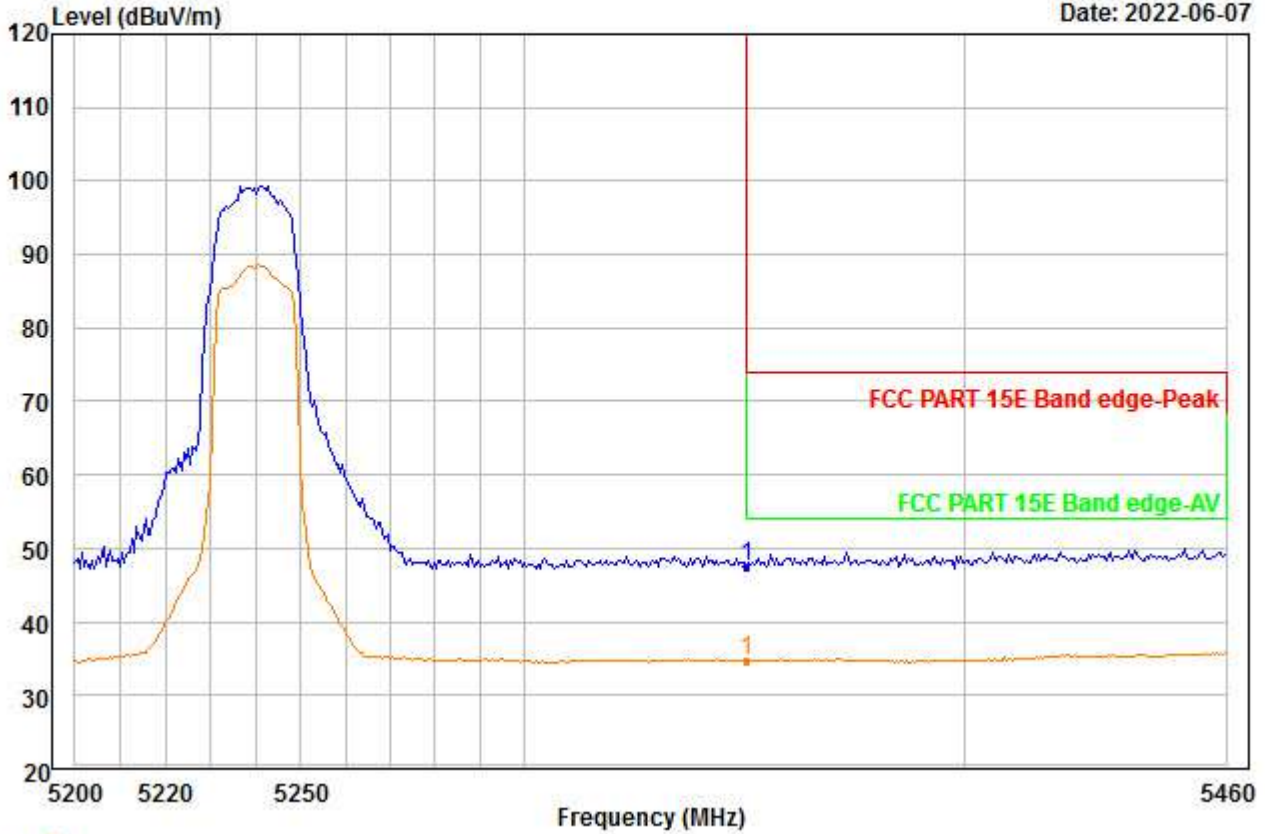


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5240
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit			
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 5350.000	48.11	35.12	45.97	0.00	10.18	47.44	74.00	-26.56	---	--- Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00160.EMI

Date: 2022-06-07

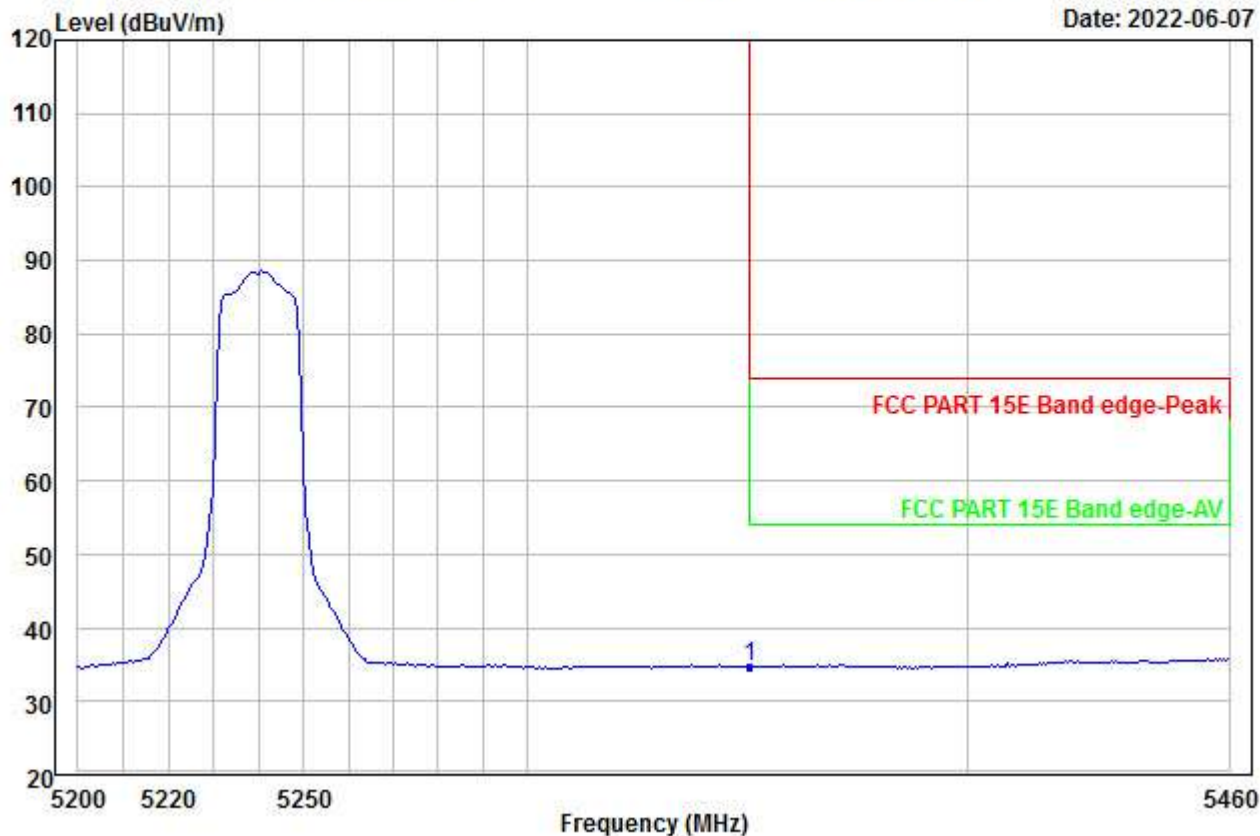


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5240
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5350.000	35.41	35.12	45.97	0.00	10.18	34.74	54.00	-19.26	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00161.EMI

Date: 2022-06-07

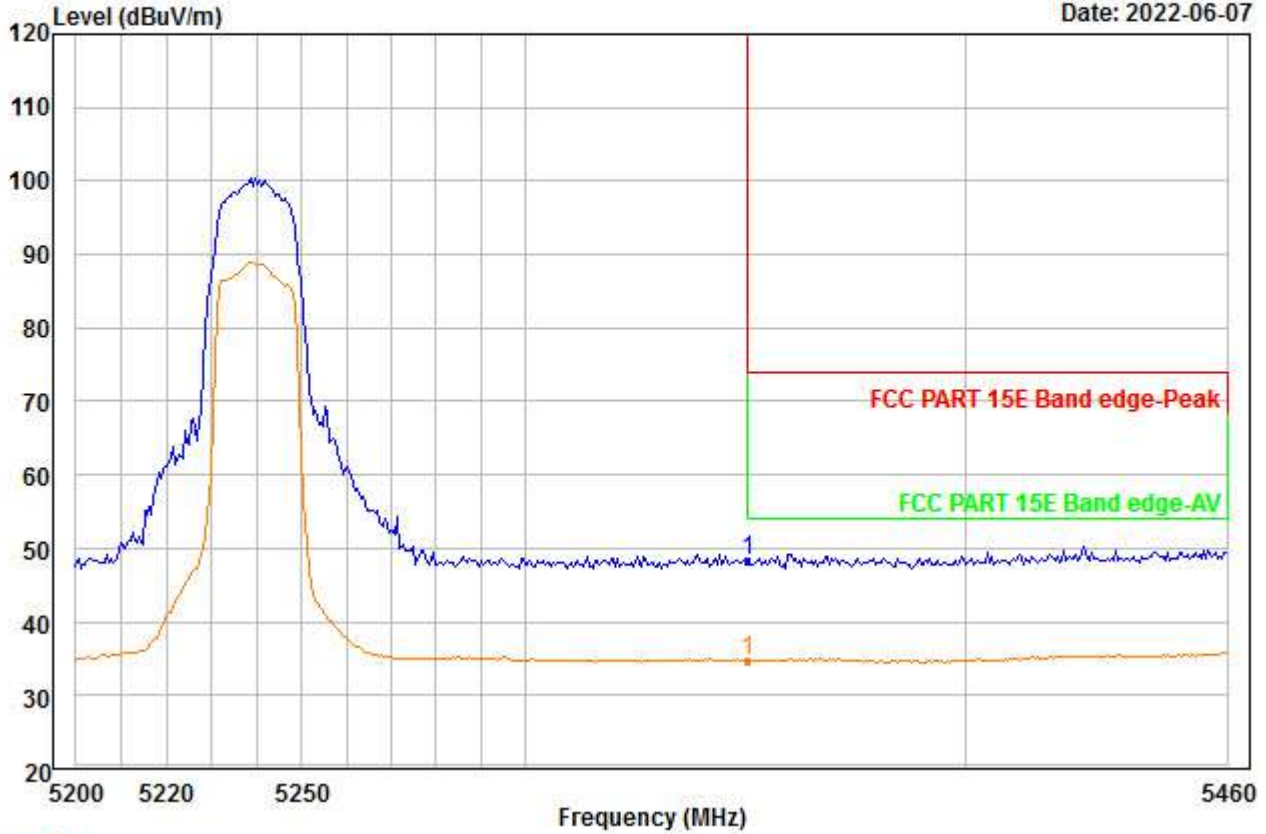


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5240
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit			
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg
1 PP 5350.000	48.93	35.12	45.97	0.00	10.18	48.26	74.00	-25.74	---	--- Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00162.EMI

Date: 2022-06-07

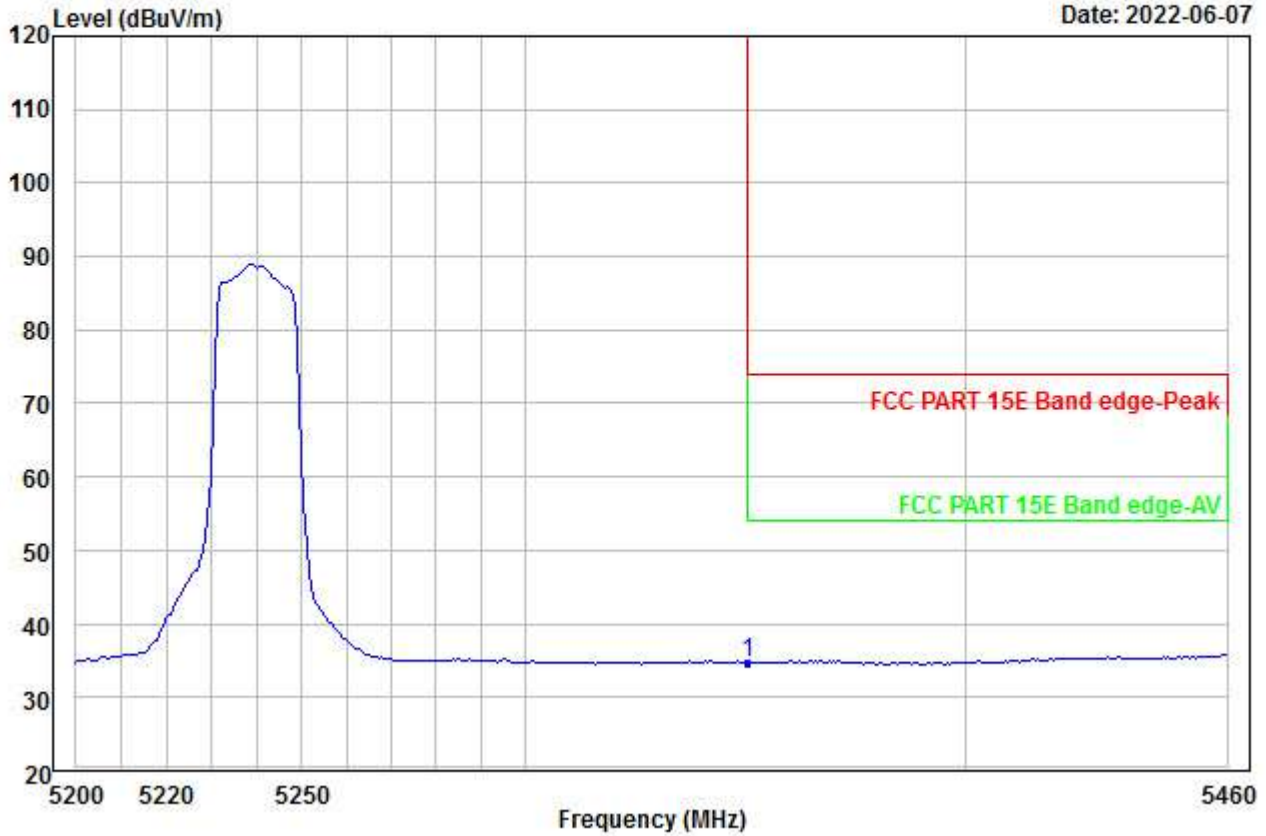


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5240
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5350.000	35.31	35.12	45.97	0.00	10.18	34.64	54.00	-19.36	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00163.EMI

Date: 2022-06-07

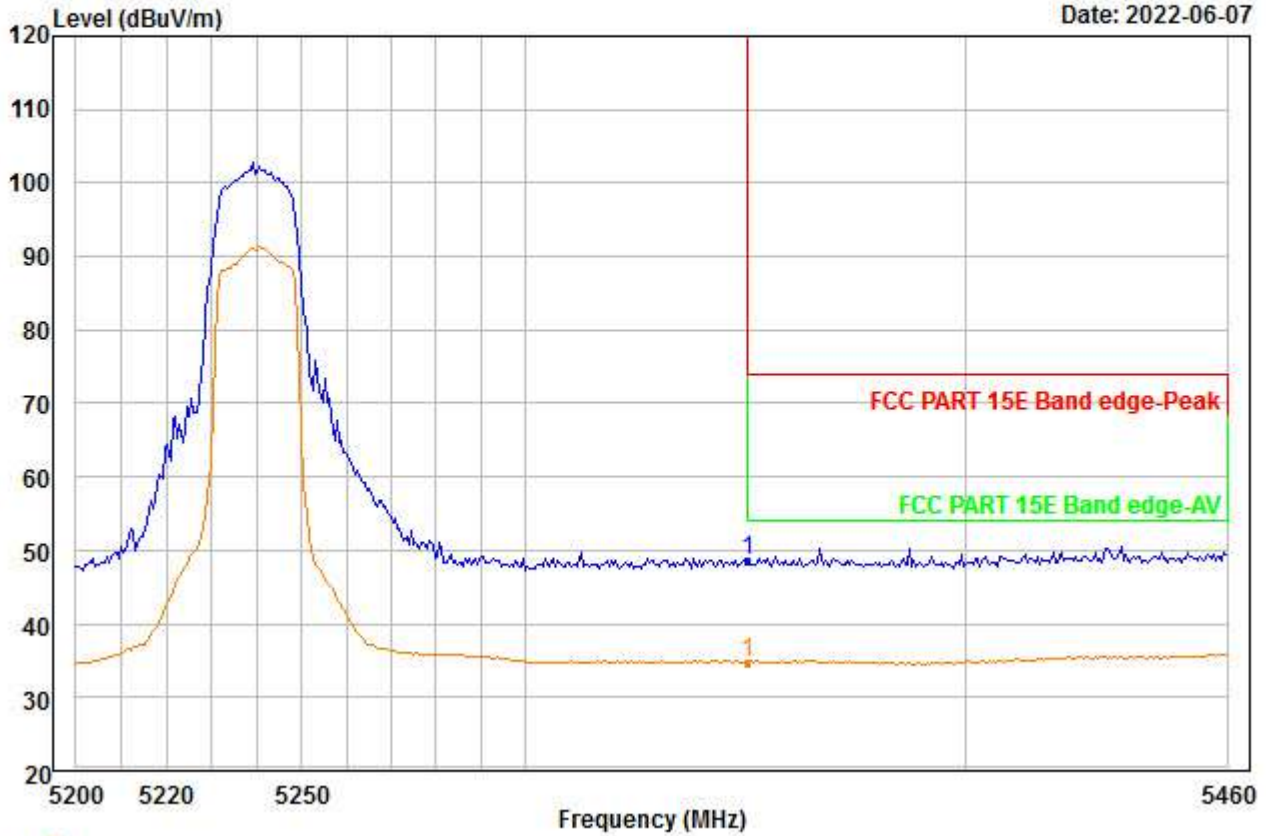


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5240
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5350.000	49.29	35.12	45.97	0.00	10.18	48.62	74.00	-25.38	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00164.EMI

Date: 2022-06-07

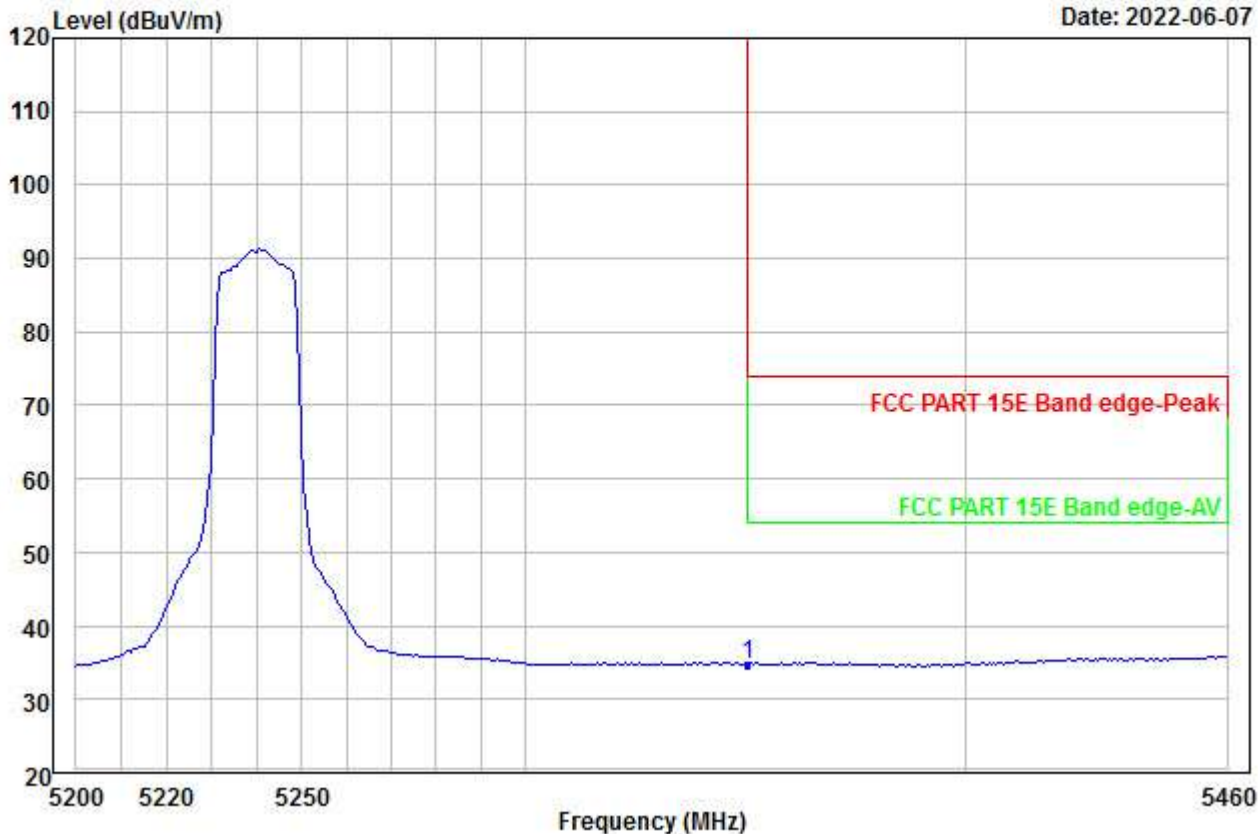


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5240
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5350.000	35.49	35.12	45.97	0.00	10.18	34.82	54.00	-19.18	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00165.EMI

Date: 2022-06-07

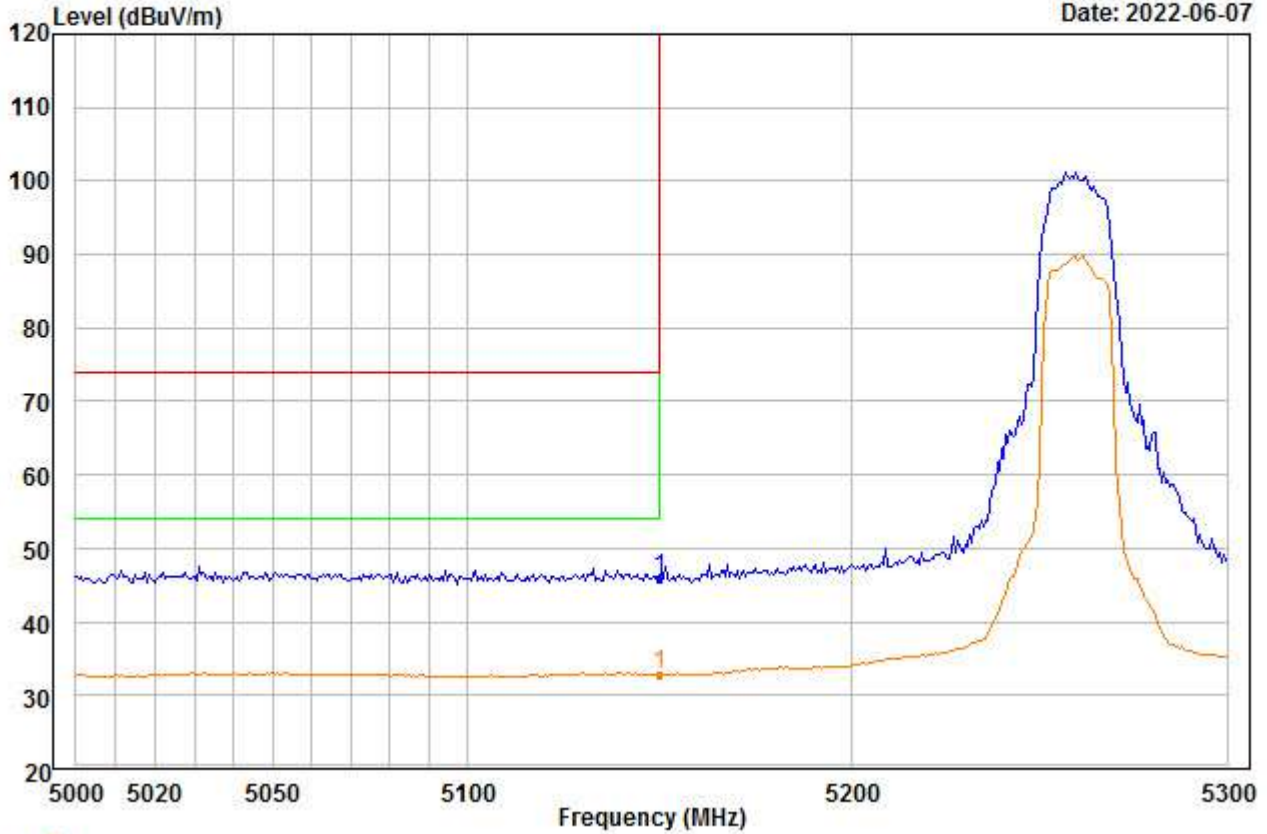


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5260
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5150.000	47.47	34.88	46.33	0.00	9.78	45.80	74.00	-28.20	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00166.EMI

Date: 2022-06-07

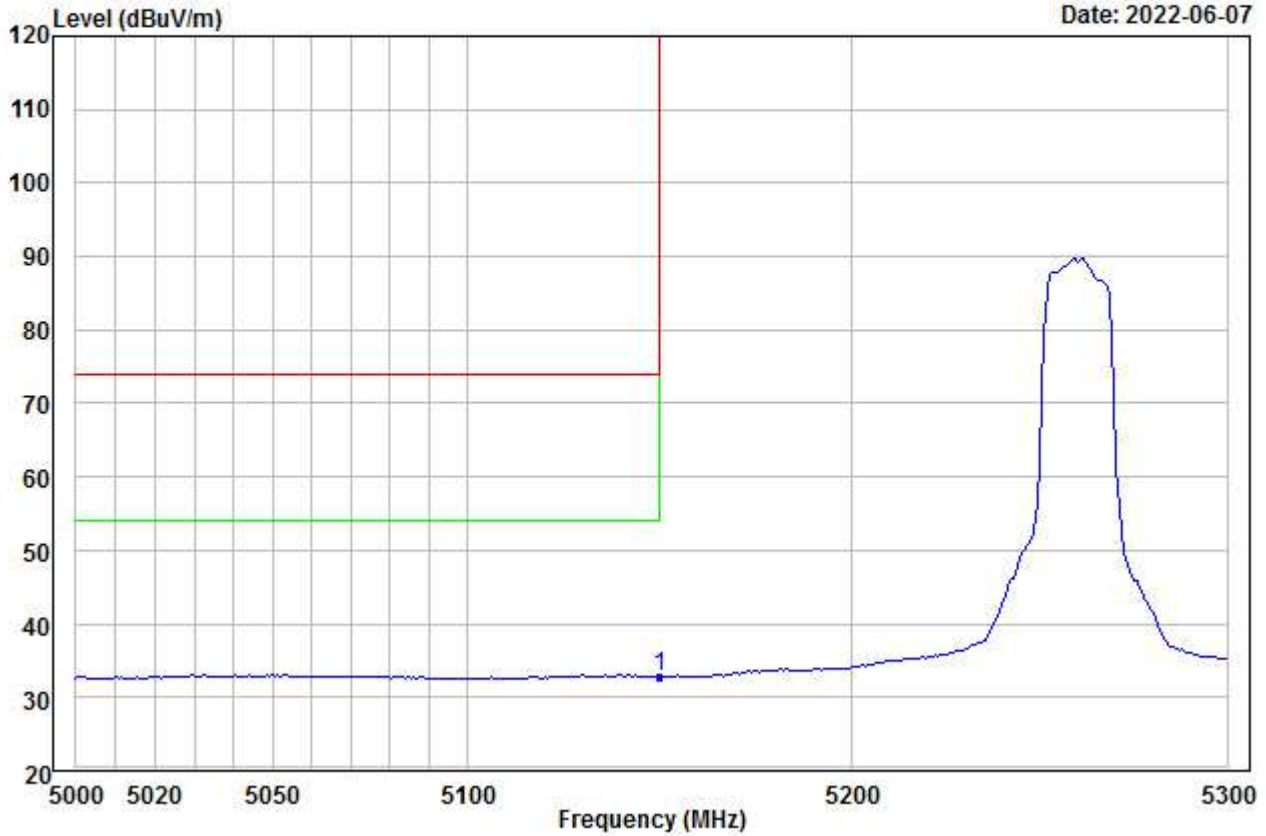


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5260
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5150.000	34.50	34.88	46.33	0.00	9.78	32.83	54.00	-21.17	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00167.EMI

Date: 2022-06-07

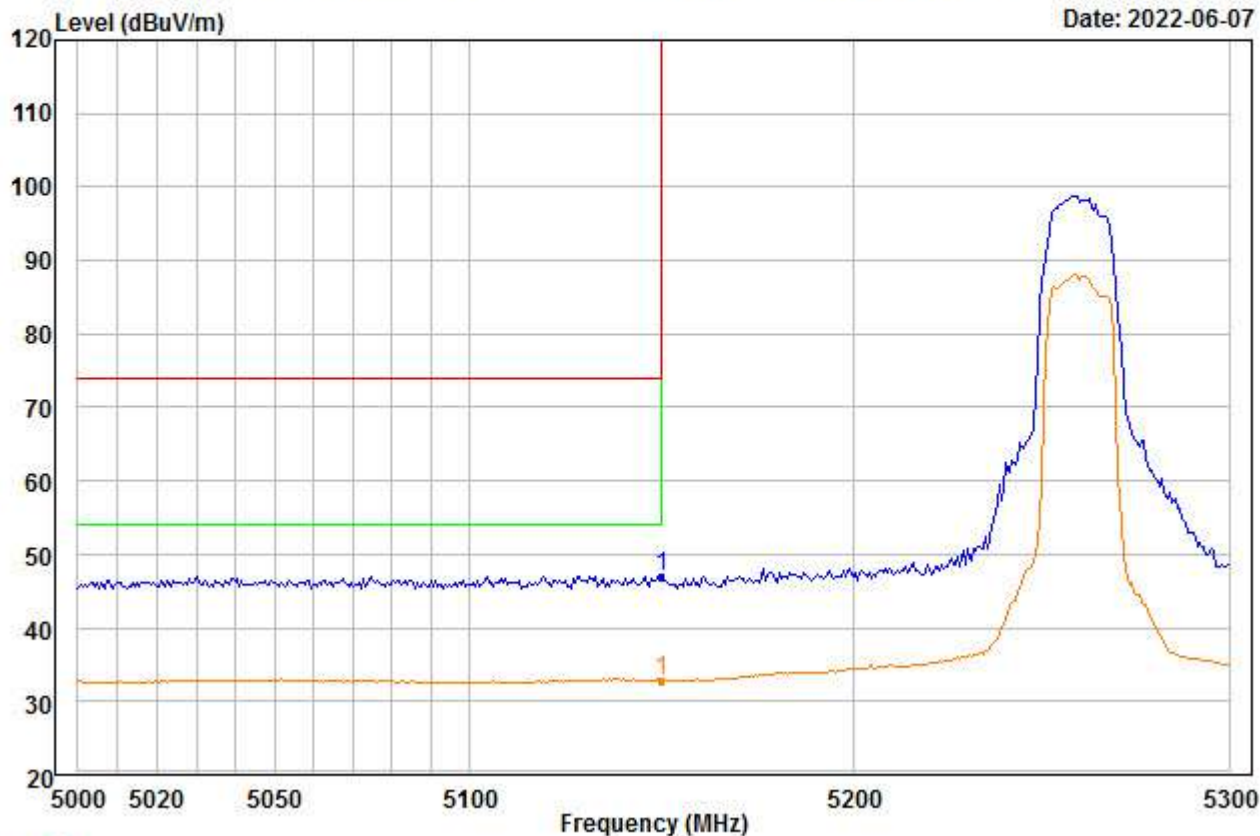


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5260
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5150.000	48.76	34.88	46.33	0.00	9.78	47.09	74.00	-26.91	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00168.EMI

Date: 2022-06-07

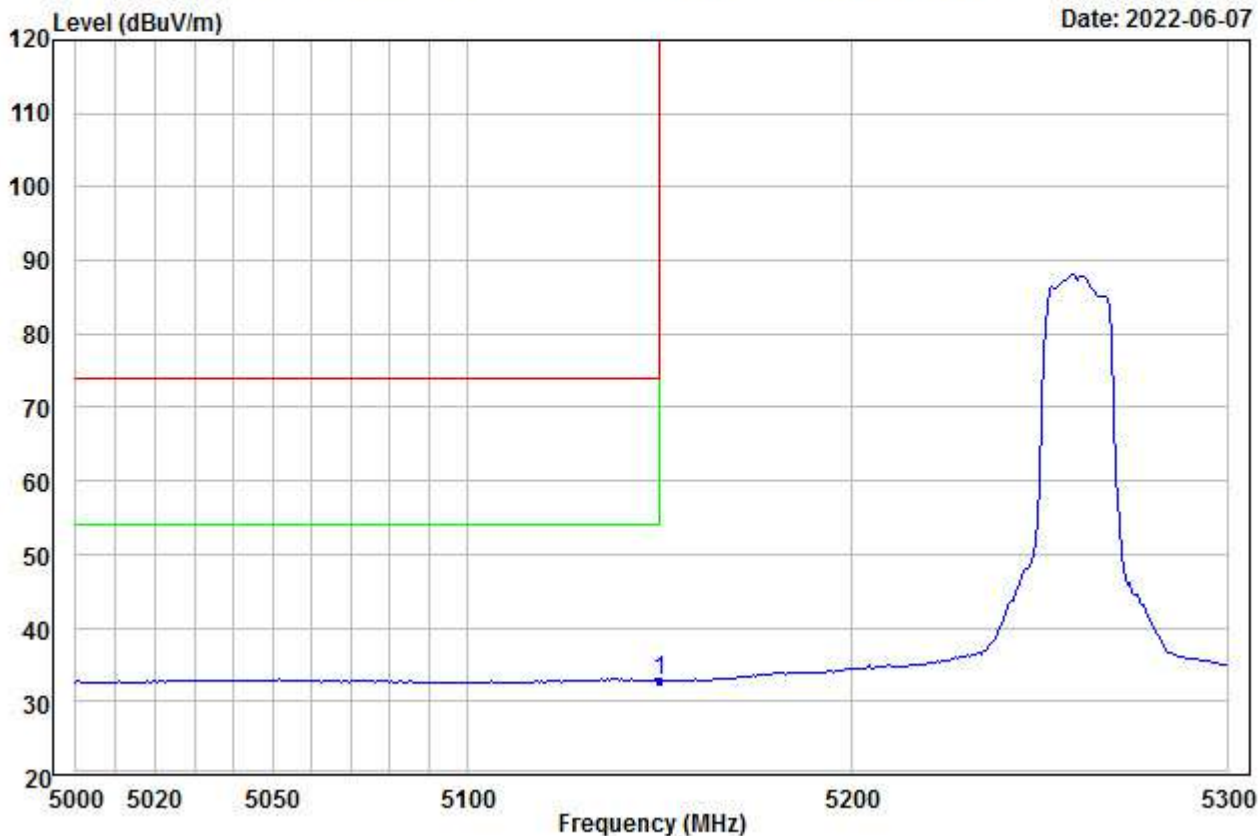


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5260
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5150.000	34.53	34.88	46.33	0.00	9.78	32.86	54.00	-21.14	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00169.EMI

Date: 2022-06-07

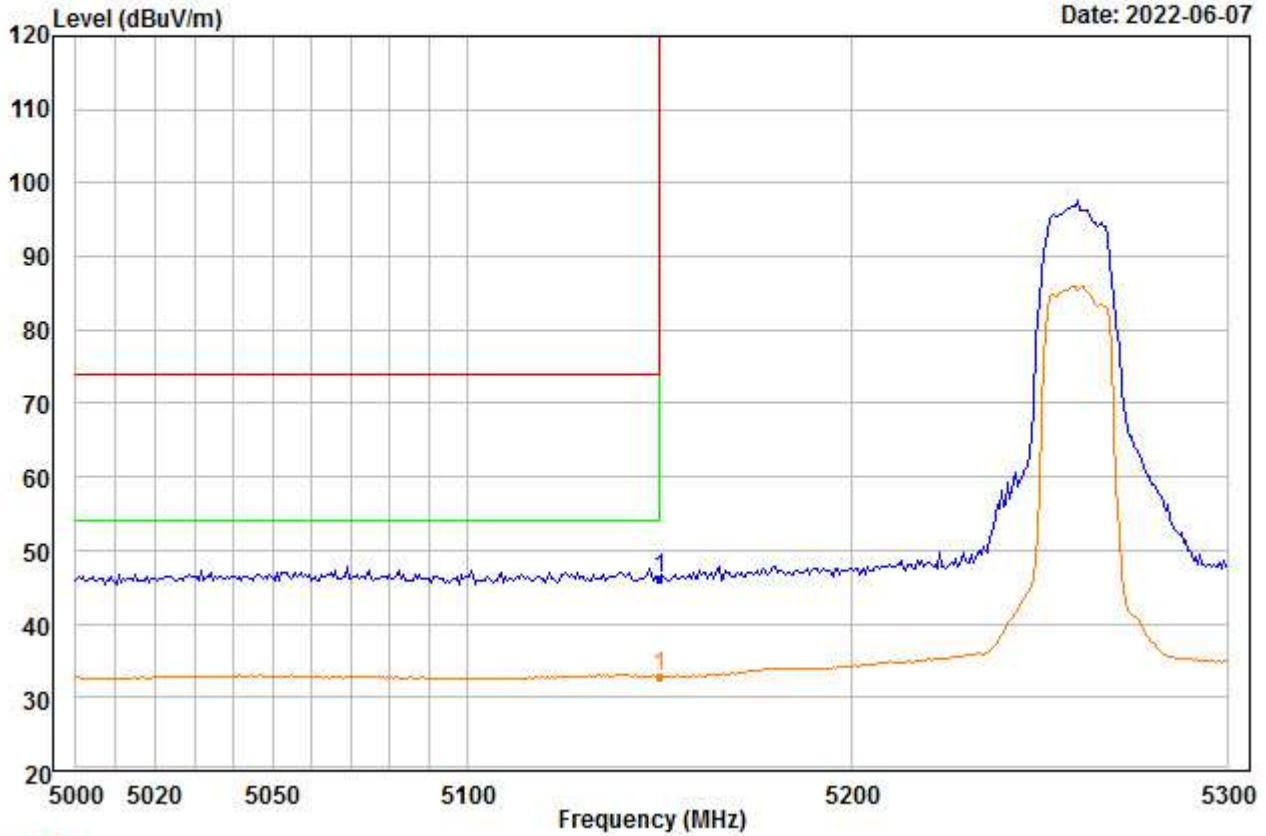


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5260
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5150.000	47.85	34.88	46.33	0.00	9.78	46.18	74.00	-27.82	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00170.EMI

Date: 2022-06-07

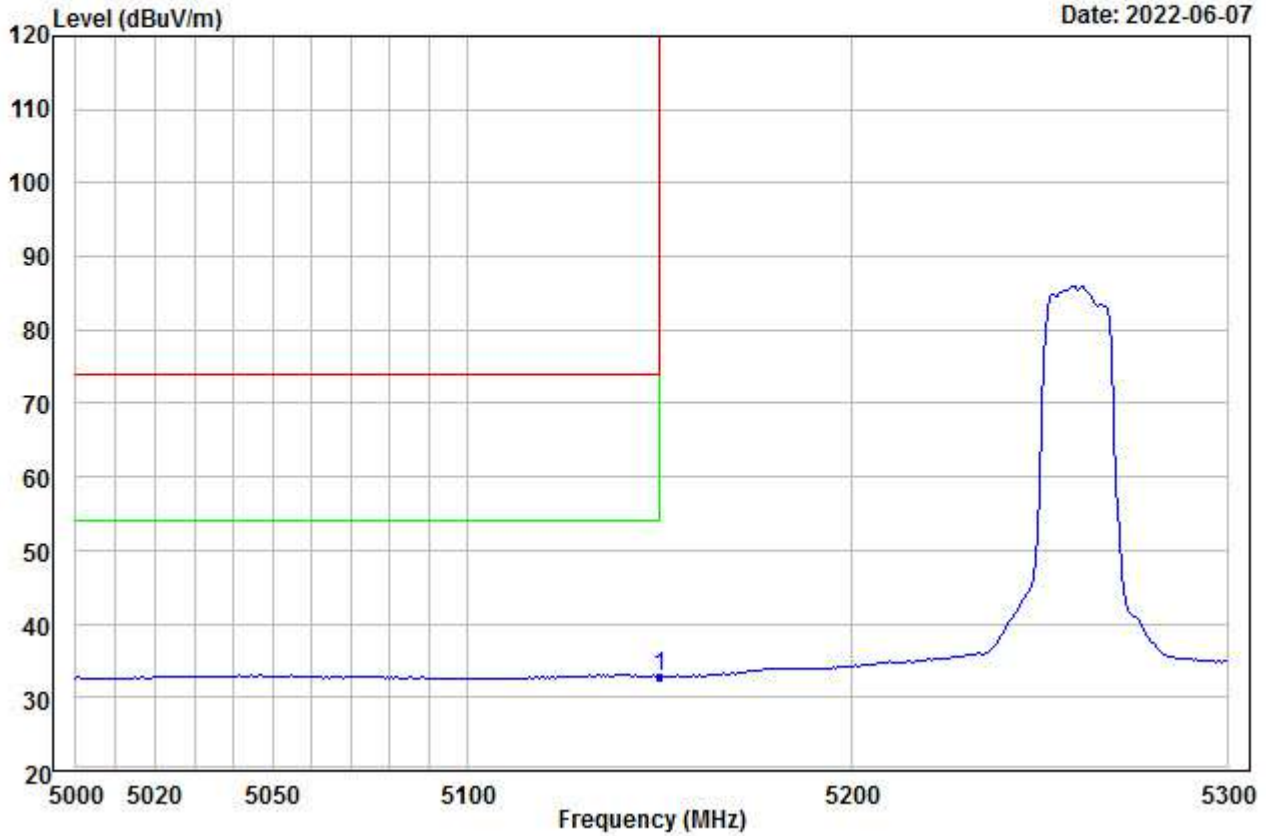


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5260
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5150.000	34.55	34.88	46.33	0.00	9.78	32.88	54.00	-21.12	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00171.EMI

Date: 2022-06-07

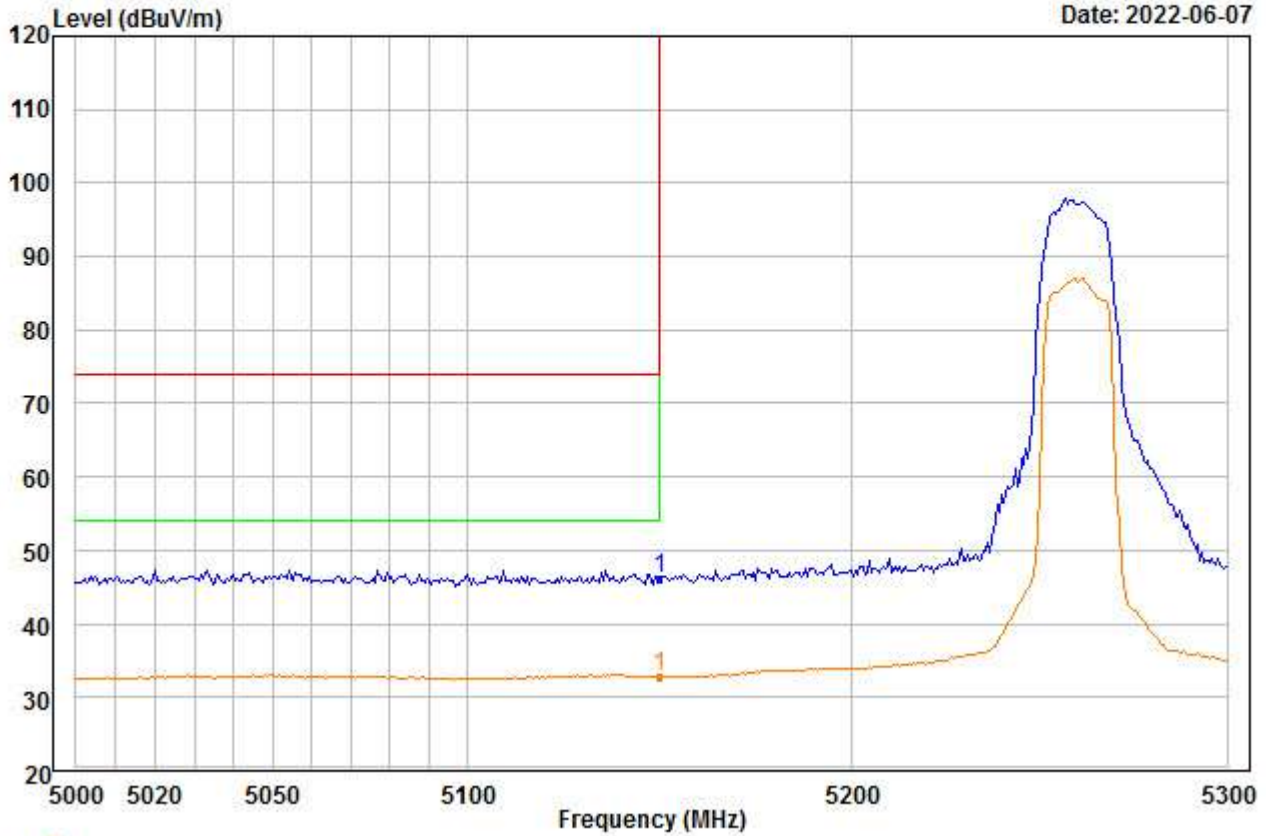


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5260
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5150.000	47.89	34.88	46.33	0.00	9.78	46.22	74.00	-27.78	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\BE\4_00172.EMI

Date: 2022-06-07

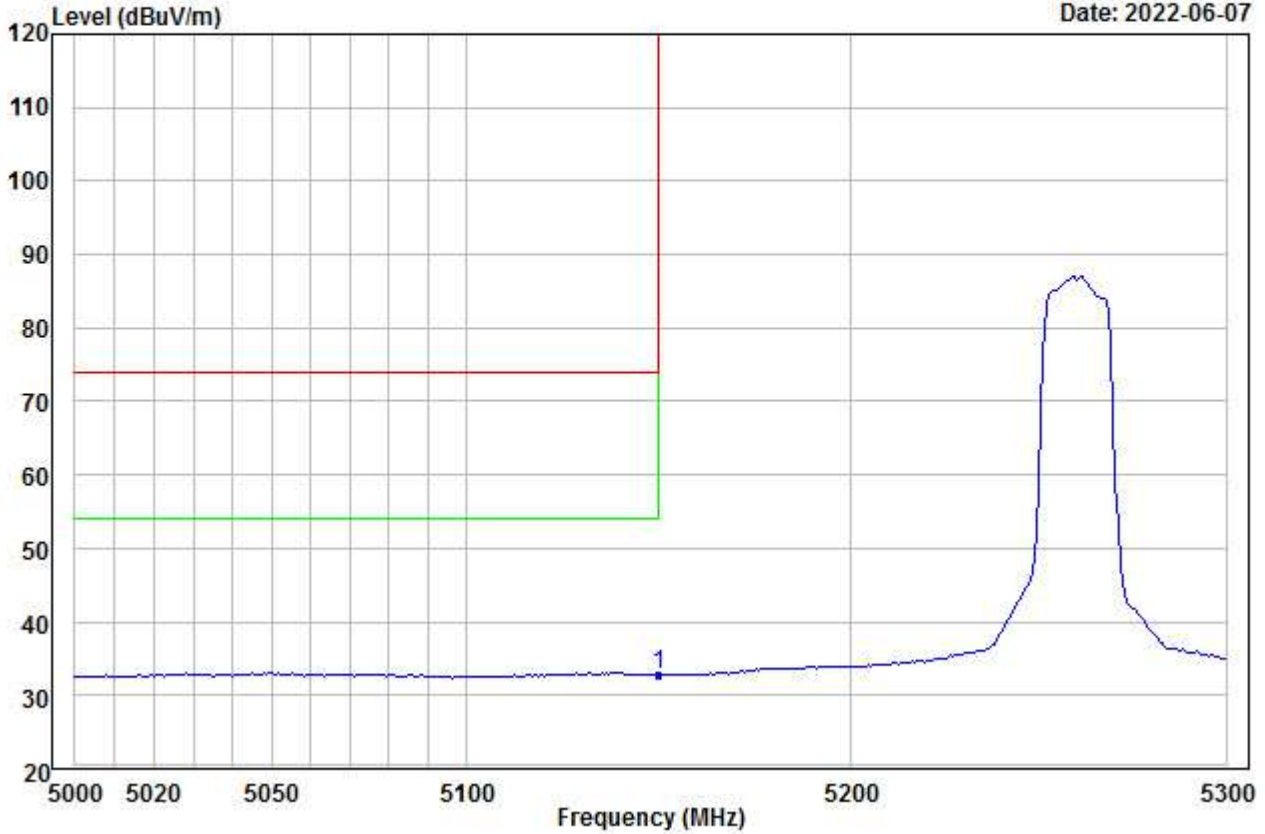

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5260
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 PP 5150.000	34.42	34.88	46.33	0.00	9.78	32.75	54.00	-21.25	---	---	Aver