


File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00001.EMI

Date: 2022-06-09

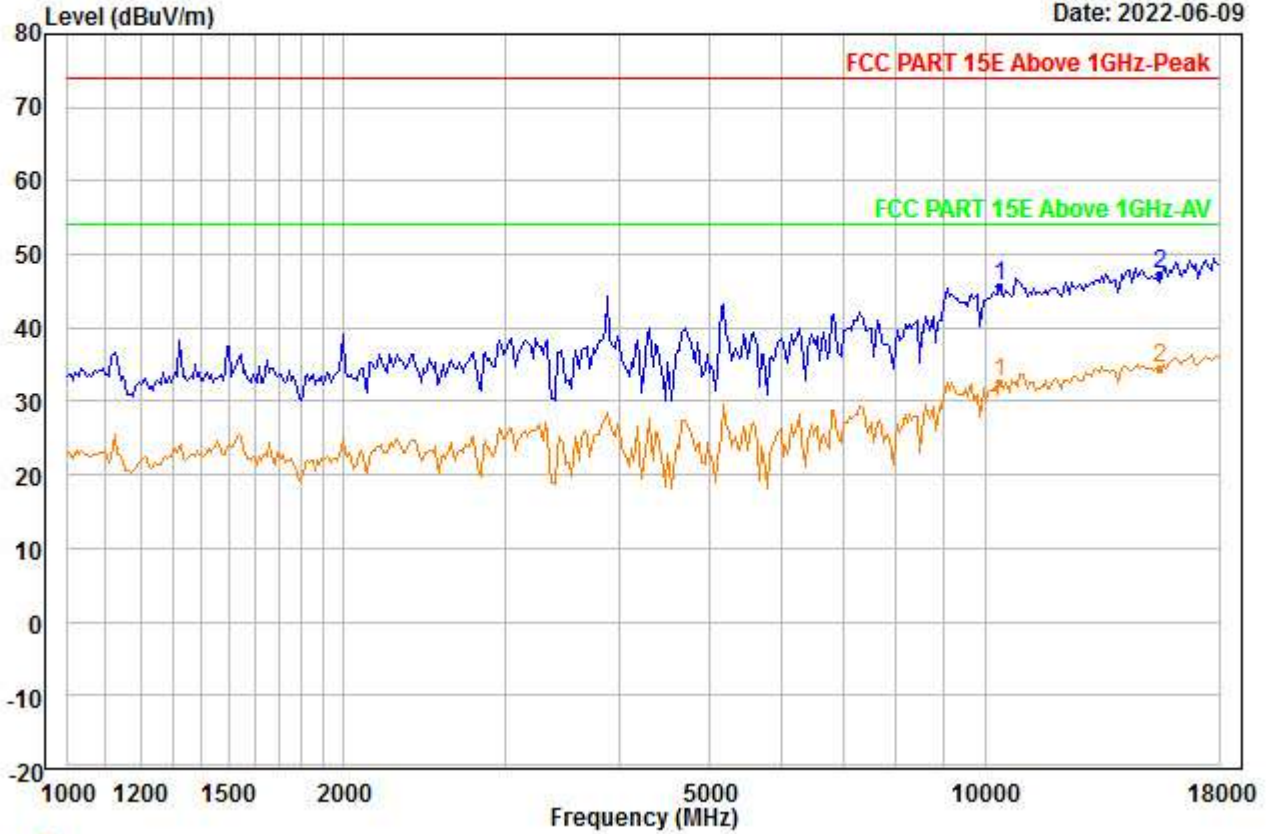


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5180
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 10360.000 | 39.38 | 38.12 | 45.96 | 0.00 | 14.08 | 45.62 | 74.00 | -28.38 | --- | --- | Peak |
| 2 PP15540.000 | 36.04 | 40.26 | 45.93 | 0.00 | 16.94 | 47.31 | 74.00 | -26.69 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00002.EMI

Date: 2022-06-09

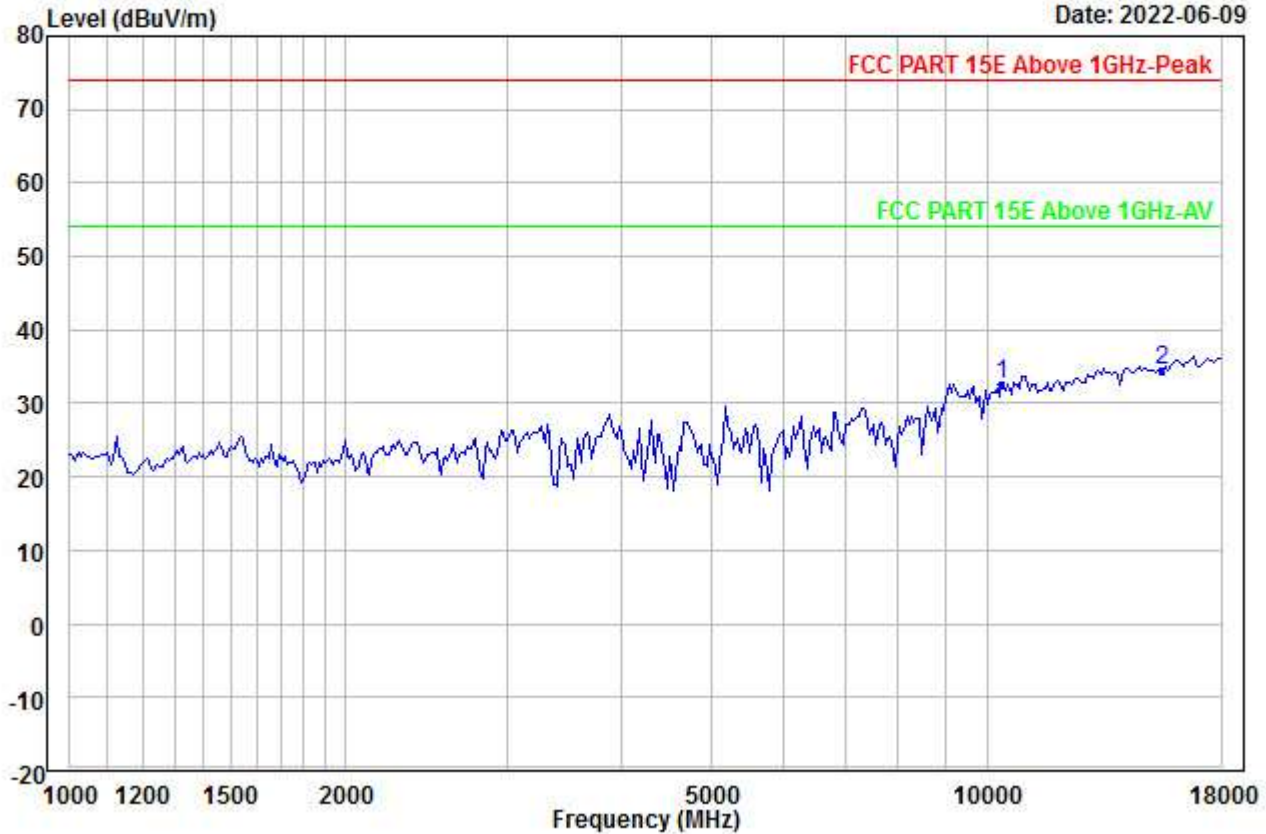


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5180
 Remark :

| | Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Remarks |
|---|-------------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|---------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 10360.000 | 26.46 | 38.12 | 45.96 | 0.00 | 14.08 | 32.70 | 54.00 | -21.30 | --- | --- | Aver |
| 2 | PP15540.000 | 23.16 | 40.26 | 45.93 | 0.00 | 16.94 | 34.43 | 54.00 | -19.57 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00003.EMI

Date: 2022-06-09

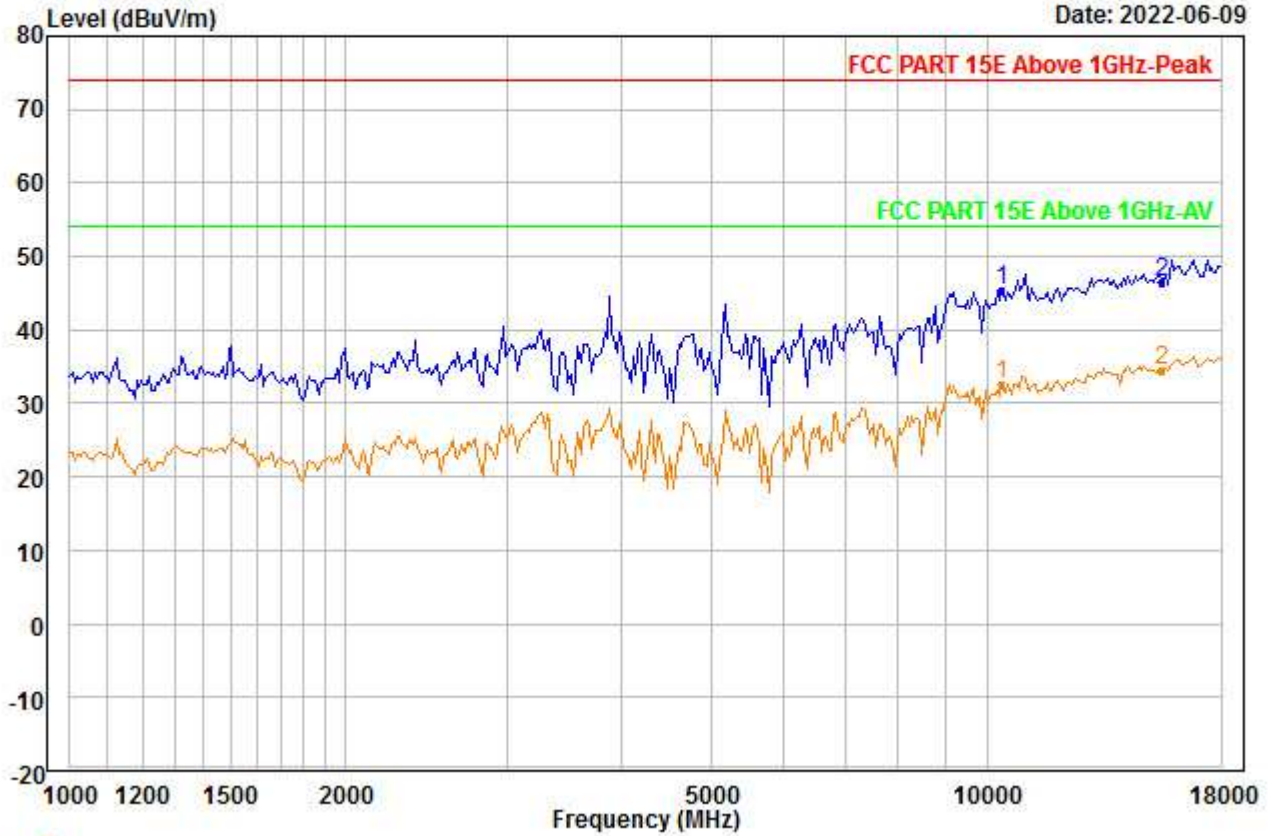


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5180
 Remark :

| | Read Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Rem: |
|---|-------------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 10360.000 | 39.23 | 38.12 | 45.96 | 0.00 | 14.08 | 45.47 | 74.00 | -28.53 | --- | --- | Peak |
| 2 | PP15540.000 | 35.22 | 40.26 | 45.93 | 0.00 | 16.94 | 46.49 | 74.00 | -27.51 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00004.EMI

Date: 2022-06-09

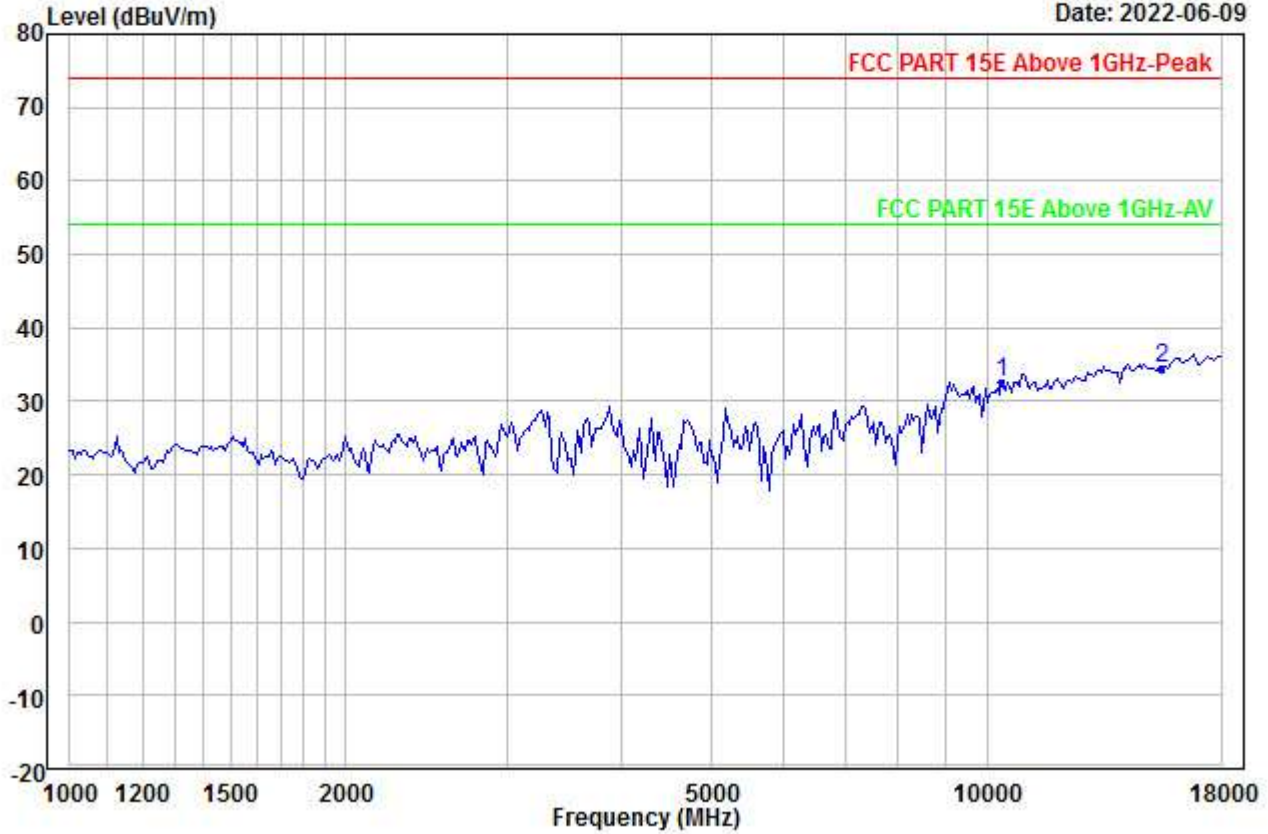


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5180
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 10360.000 | 26.39 | 38.12 | 45.96 | 0.00 | 14.08 | 32.63 | 54.00 | -21.37 | --- | --- | Aver |
| 2 PP15540.000 | 23.16 | 40.26 | 45.93 | 0.00 | 16.94 | 34.43 | 54.00 | -19.57 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00005.EMI

Date: 2022-06-09

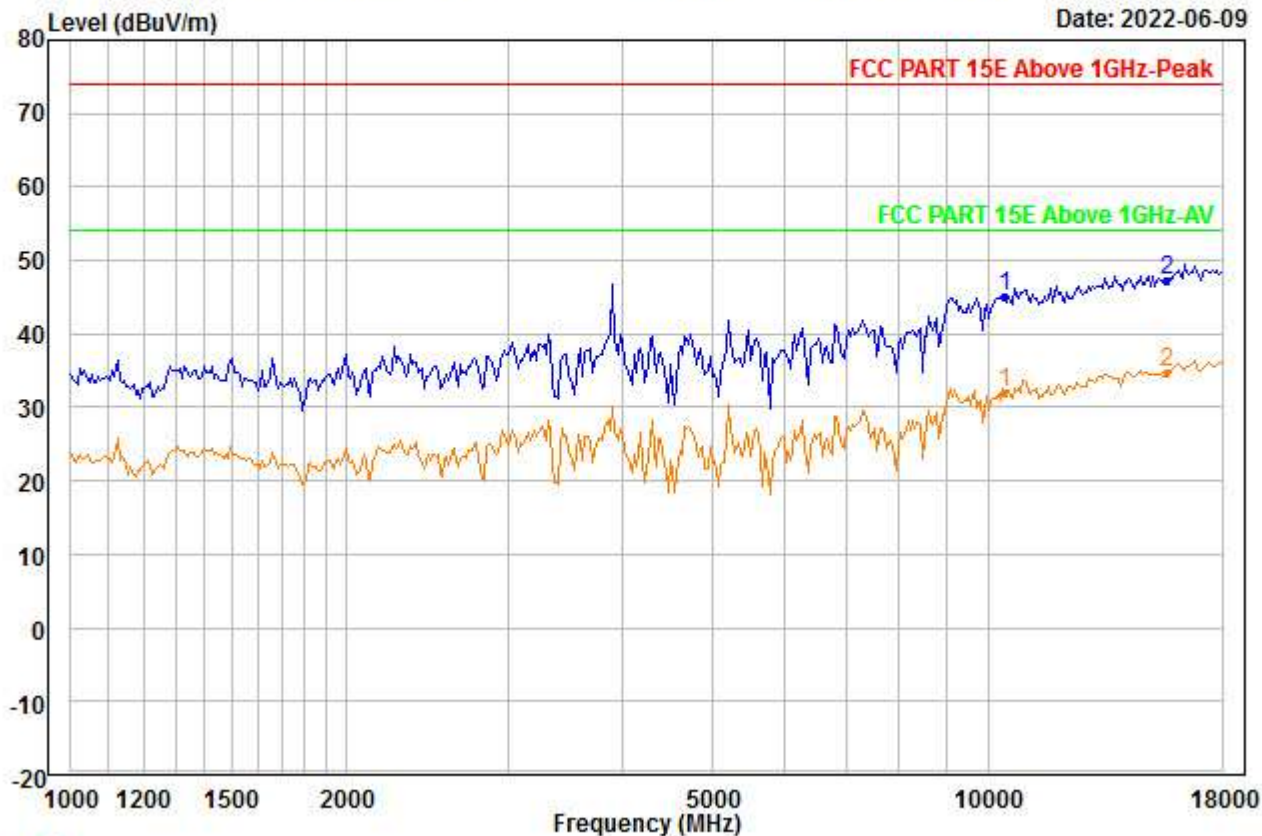


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5220
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 10440.000 | 38.81 | 38.16 | 45.92 | 0.00 | 14.06 | 45.11 | 74.00 | -28.89 | --- | --- | Peak |
| 2 PP15660.000 | 35.97 | 40.42 | 46.03 | 0.00 | 17.01 | 47.37 | 74.00 | -26.63 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00006.EMI

Date: 2022-06-09

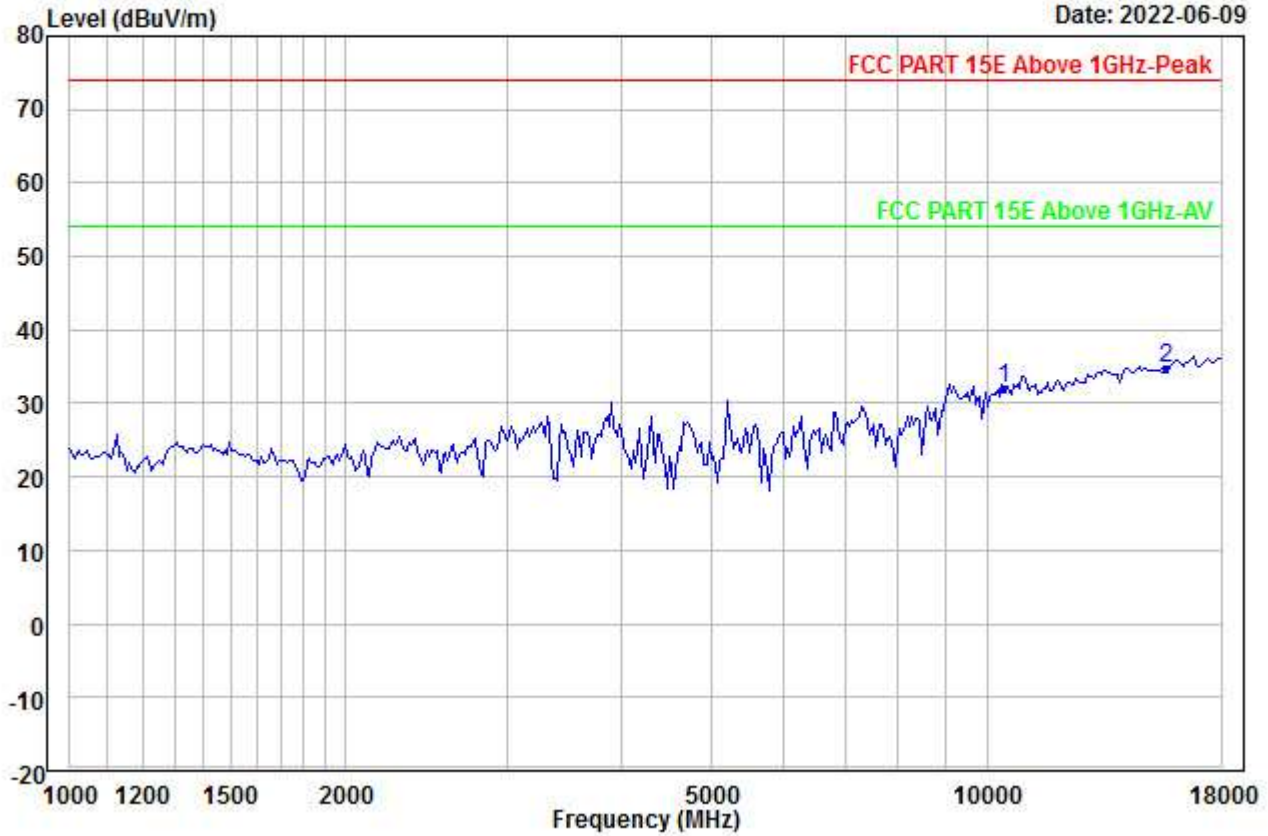


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5220
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rema | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 10440.000 | 25.87 | 38.16 | 45.92 | 0.00 | 14.06 | 32.17 | 54.00 | -21.83 | --- | --- | Aver |
| 2 PP15660.000 | 23.44 | 40.42 | 46.03 | 0.00 | 17.01 | 34.84 | 54.00 | -19.16 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00007.EMI

Date: 2022-06-09

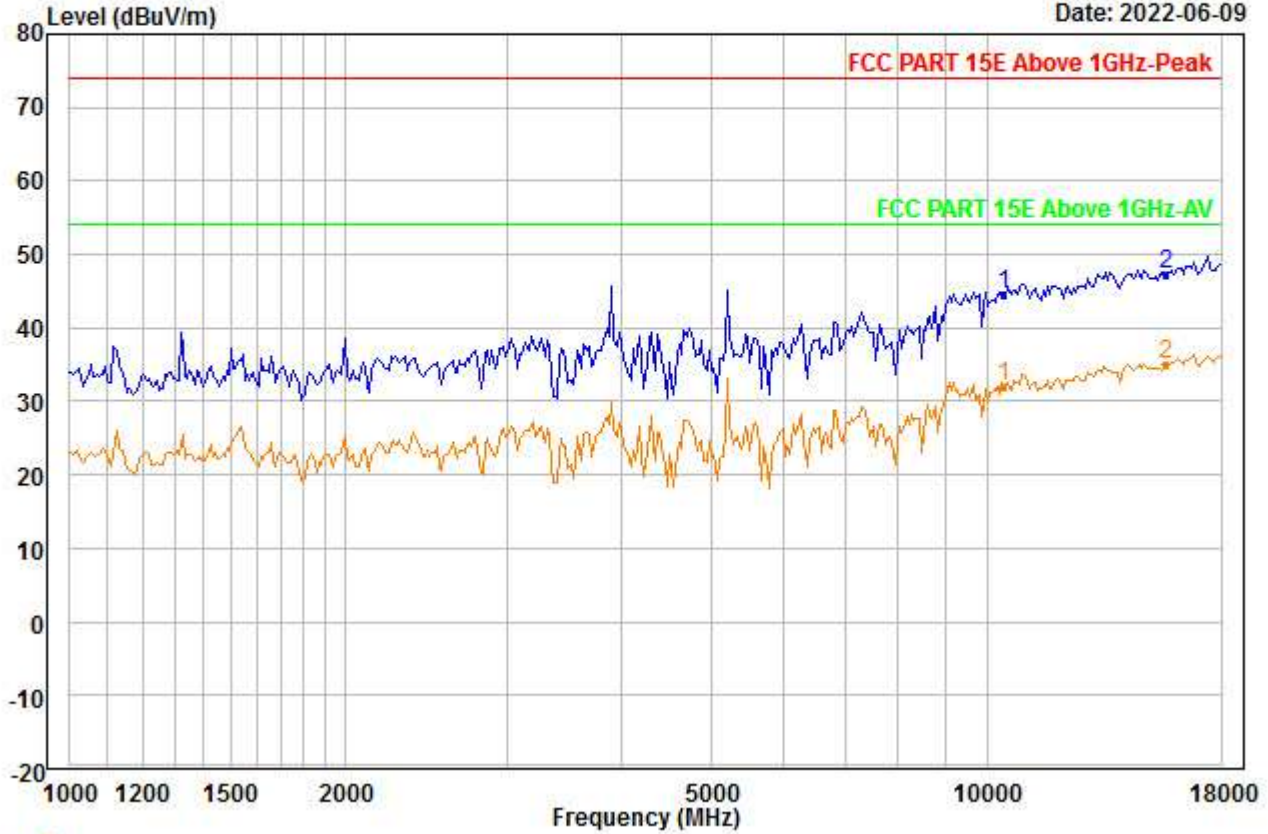


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5220
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 10440.000 | 38.15 | 38.16 | 45.92 | 0.00 | 14.06 | 44.45 | 74.00 | -29.55 | --- | --- | Peak |
| 2 PP15660.000 | 35.95 | 40.42 | 46.03 | 0.00 | 17.01 | 47.35 | 74.00 | -26.65 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00008.EMI

Date: 2022-06-09

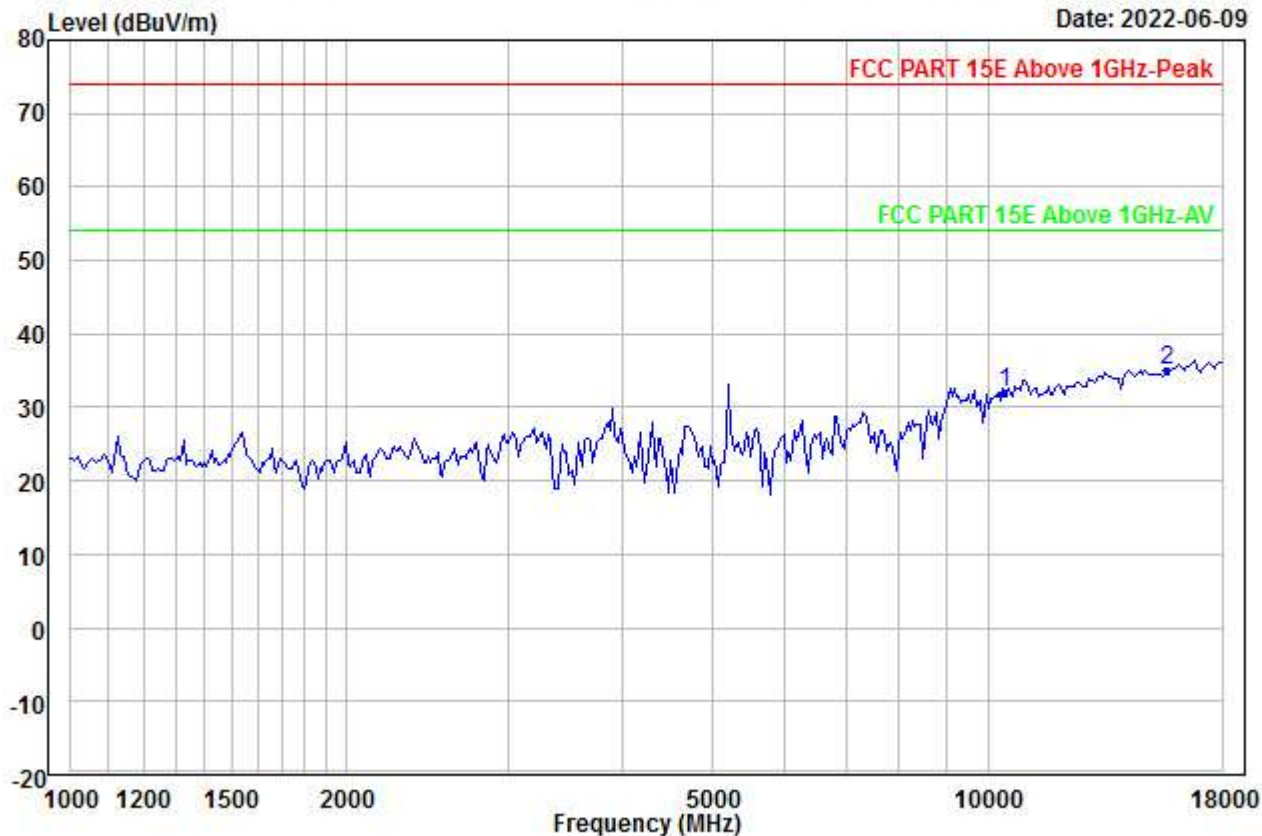


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5220
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 10440.000 | 25.87 | 38.16 | 45.92 | 0.00 | 14.06 | 32.17 | 54.00 | -21.83 | --- | --- | Aver |
| 2 PP15660.000 | 23.53 | 40.42 | 46.03 | 0.00 | 17.01 | 34.93 | 54.00 | -19.07 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00009.EMI

Date: 2022-06-09

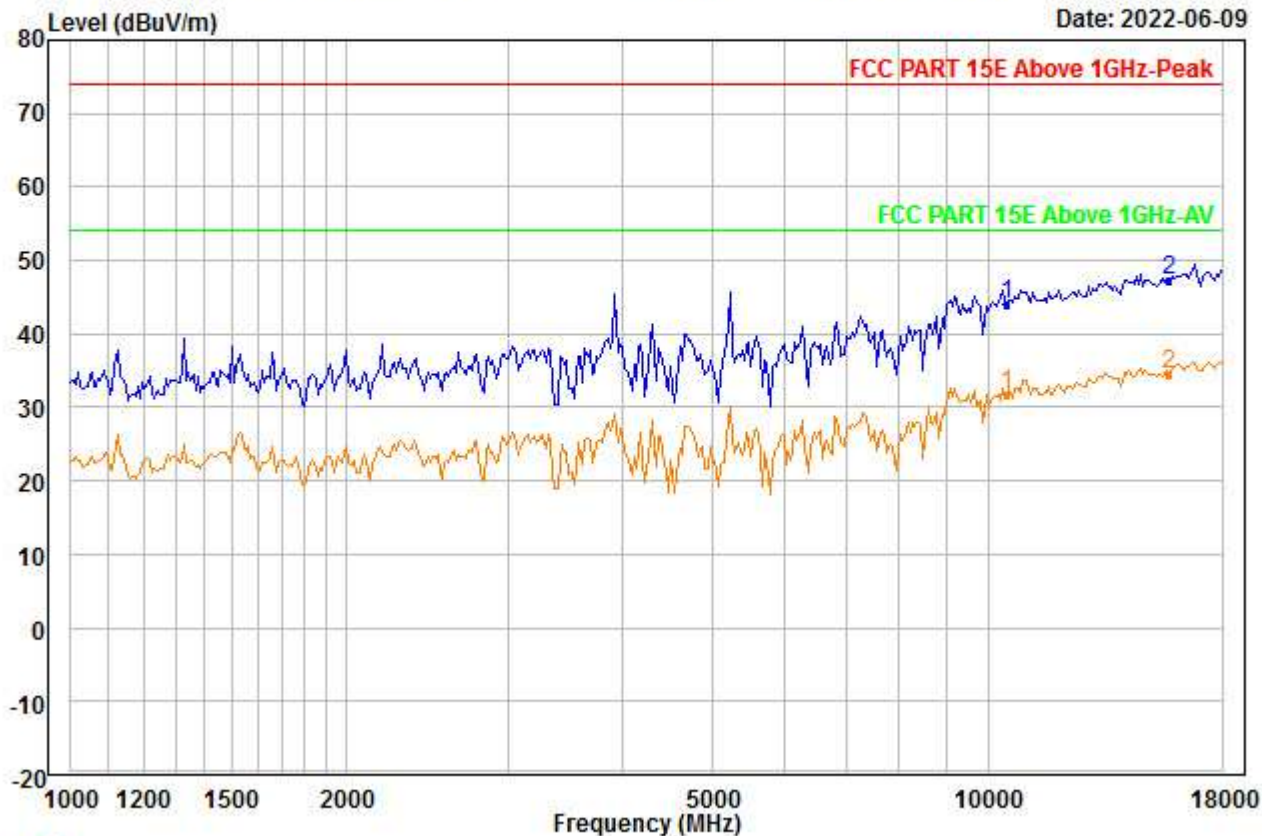


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5240
 Remark :

| | Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Rem: |
|---|-------------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 10480.000 | 37.67 | 38.19 | 45.91 | 0.00 | 14.05 | 44.00 | 74.00 | -30.00 | --- | --- | Peak |
| 2 | PP15720.000 | 35.73 | 40.51 | 46.08 | 0.00 | 17.05 | 47.21 | 74.00 | -26.79 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00010.EMI

Date: 2022-06-09

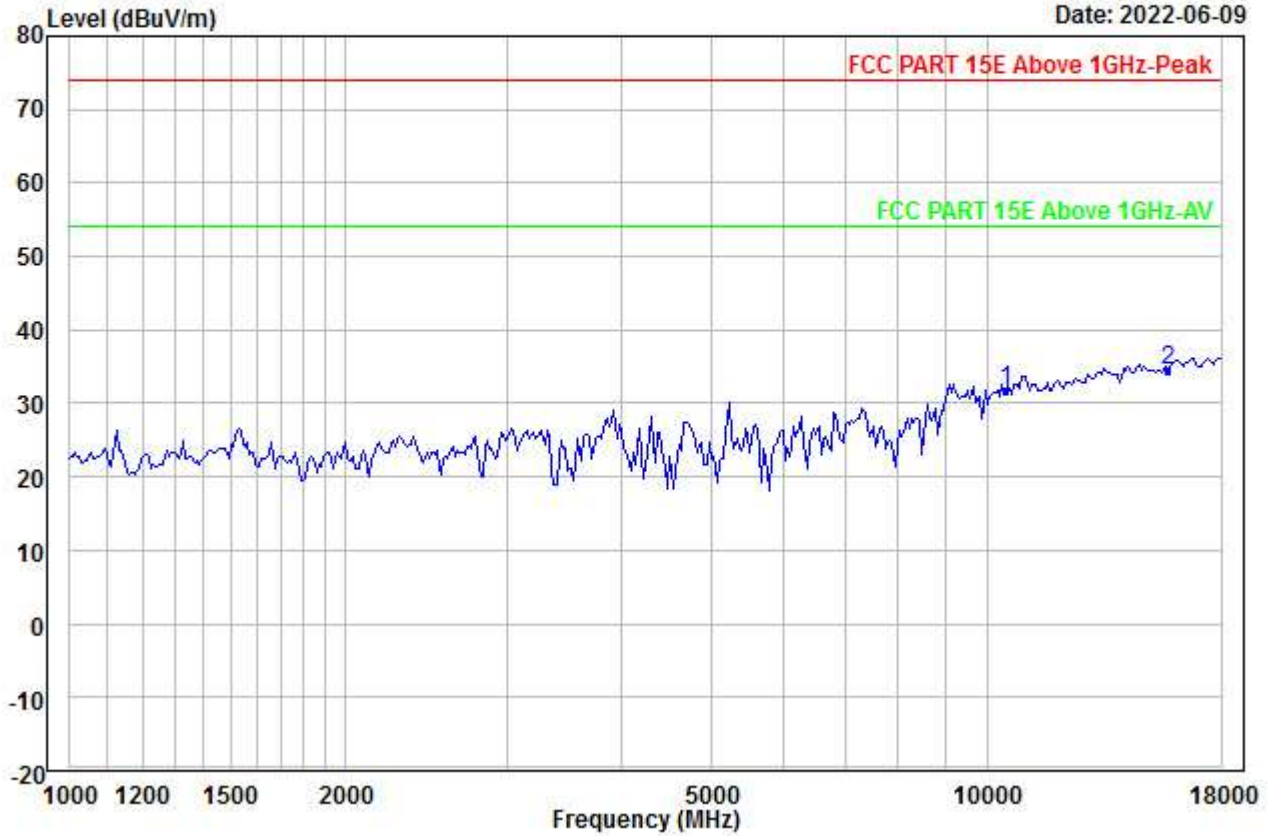


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5240
 Remark :

| | Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Remarks |
|---|-------------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|---------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 10480.000 | 25.44 | 38.19 | 45.91 | 0.00 | 14.05 | 31.77 | 54.00 | -22.23 | --- | --- | Aver |
| 2 | PP15720.000 | 23.07 | 40.51 | 46.08 | 0.00 | 17.05 | 34.55 | 54.00 | -19.45 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00011.EMI

Date: 2022-06-09

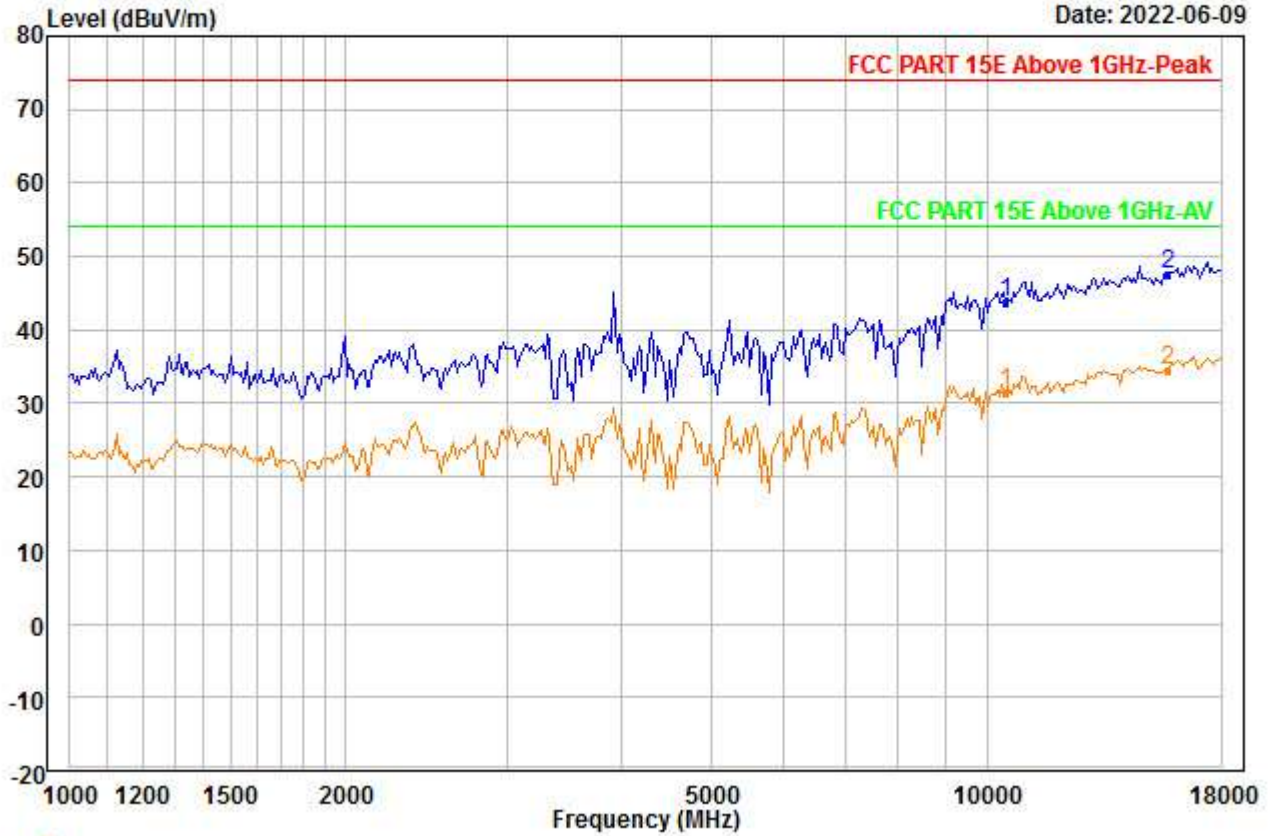


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5240
 Remark :

| | Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Rem: |
|---|-------------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 10480.000 | 37.54 | 38.19 | 45.91 | 0.00 | 14.05 | 43.87 | 74.00 | -30.13 | --- | --- | Peak |
| 2 | PP15720.000 | 36.21 | 40.51 | 46.08 | 0.00 | 17.05 | 47.69 | 74.00 | -26.31 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00012.EMI

Date: 2022-06-09

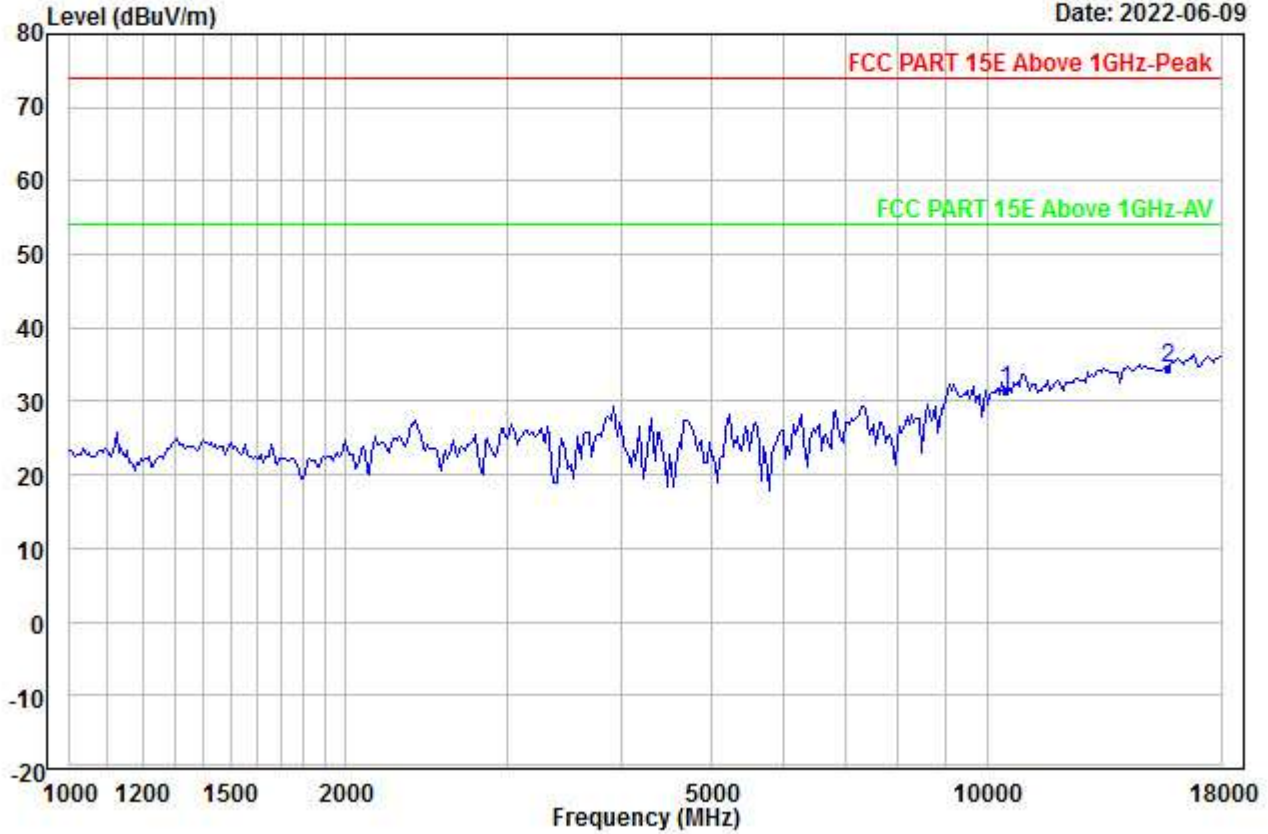


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5240
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 10480.000 | 25.13 | 38.19 | 45.91 | 0.00 | 14.05 | 31.46 | 54.00 | -22.54 | --- | --- | Aver |
| 2 PP15720.000 | 23.07 | 40.51 | 46.08 | 0.00 | 17.05 | 34.55 | 54.00 | -19.45 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00013.EMI

Date: 2022-06-09

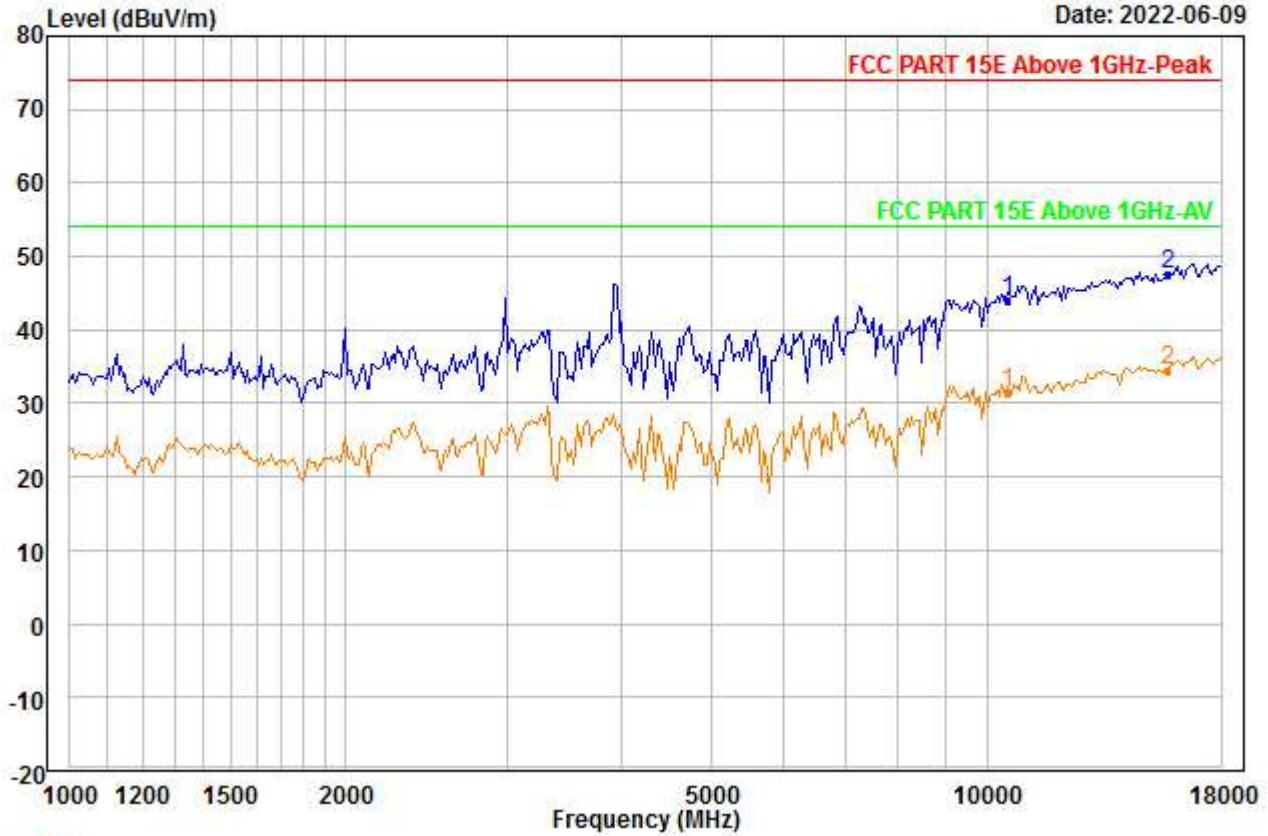


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5260
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 10520.000 | 37.54 | 38.21 | 45.86 | 0.00 | 14.04 | 43.93 | 74.00 | -30.07 | --- | --- | Peak |
| 2 PP15780.000 | 35.88 | 40.59 | 46.12 | 0.00 | 17.09 | 47.44 | 74.00 | -26.56 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00014.EMI

Date: 2022-06-09

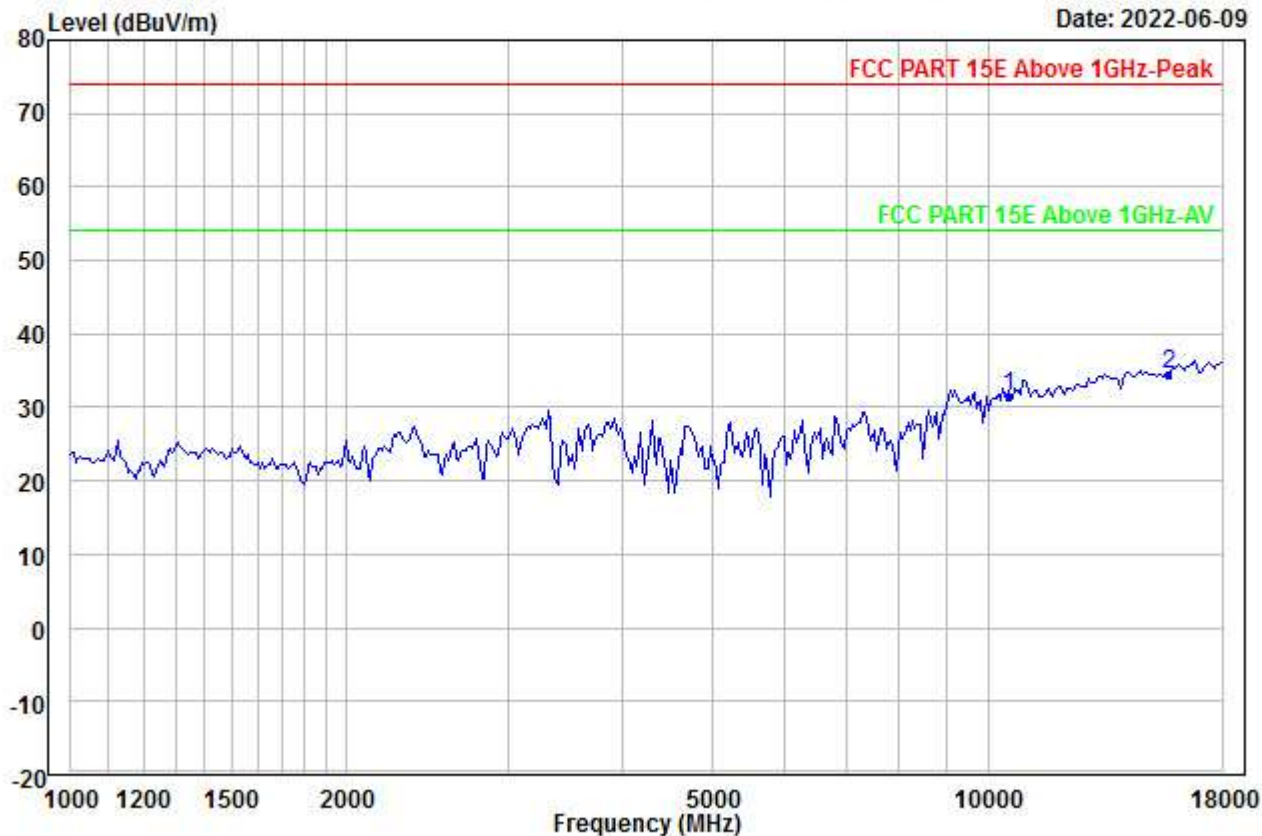


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5260
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 10520.000 | 25.15 | 38.21 | 45.86 | 0.00 | 14.04 | 31.54 | 54.00 | -22.46 | --- | --- | Aver |
| 2 PP15780.000 | 22.99 | 40.59 | 46.12 | 0.00 | 17.09 | 34.55 | 54.00 | -19.45 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00015.EMI

Date: 2022-06-09

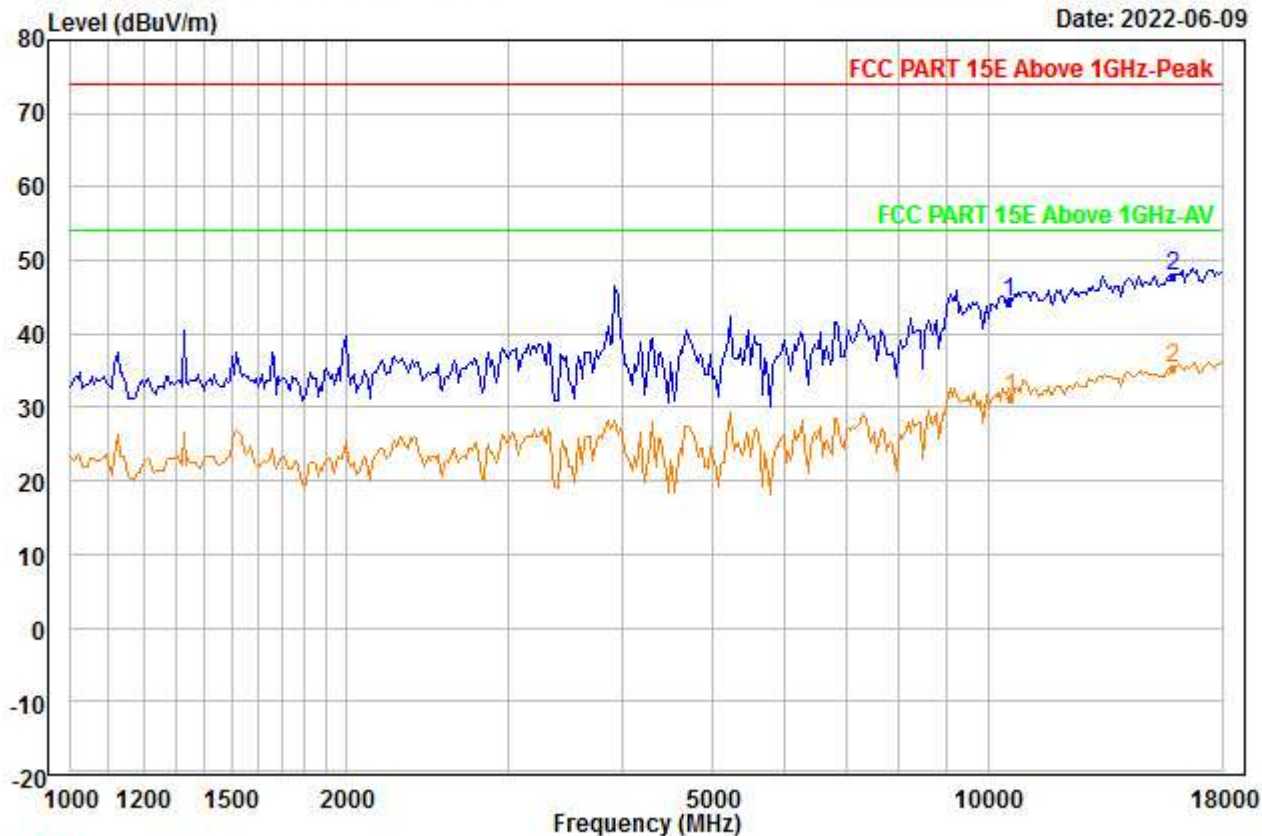


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5260
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 10520.000 | 38.00 | 38.21 | 45.86 | 0.00 | 14.04 | 44.39 | 74.00 | -29.61 | --- | --- | Peak |
| 2 PP15900.000 | 36.25 | 40.76 | 46.22 | 0.00 | 17.17 | 47.96 | 74.00 | -26.04 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00016.EMI

Date: 2022-06-09

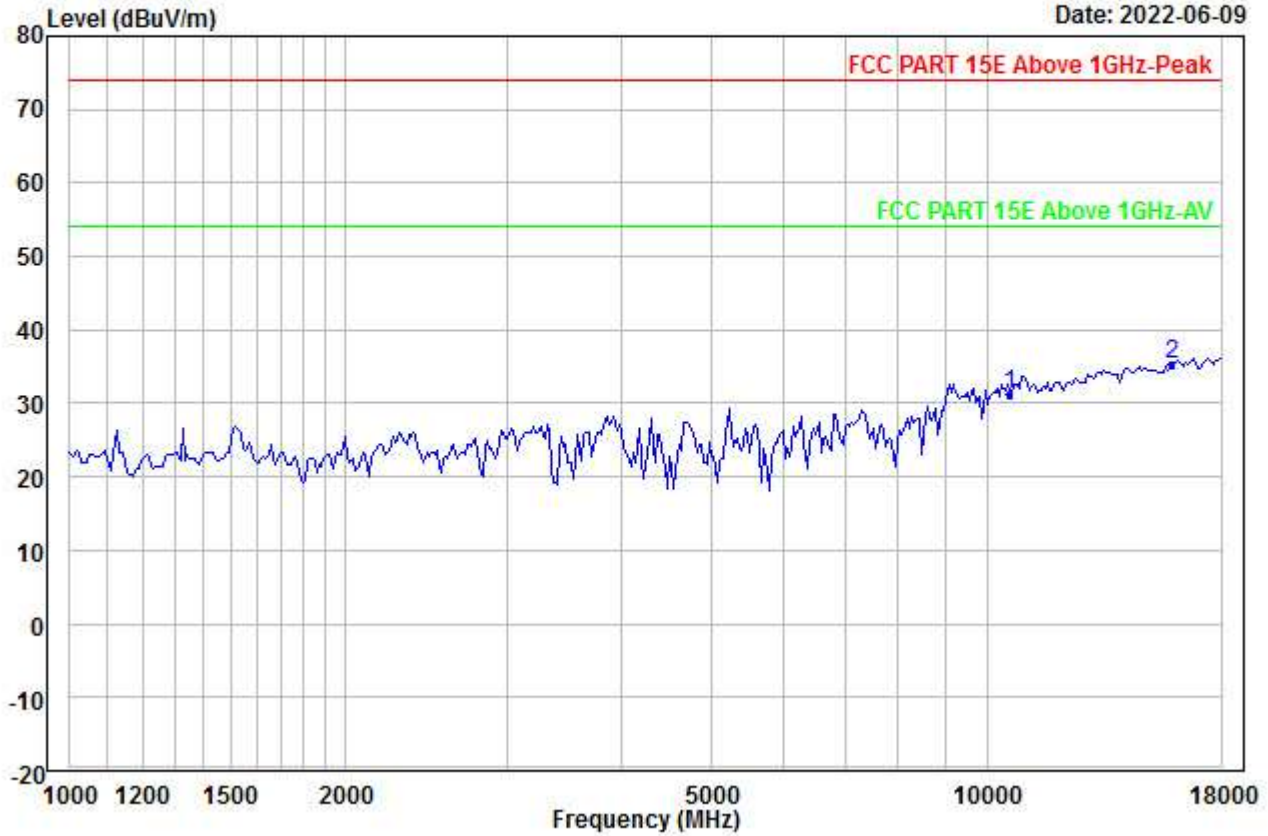


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5260
 Remark :

| | Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Rem: |
|---|-------------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 10600.000 | 24.75 | 38.26 | 45.72 | 0.00 | 14.02 | 31.31 | 54.00 | -22.69 | --- | --- | Aver |
| 2 | PP15900.000 | 23.56 | 40.76 | 46.22 | 0.00 | 17.17 | 35.27 | 54.00 | -18.73 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00017.EMI

Date: 2022-06-09

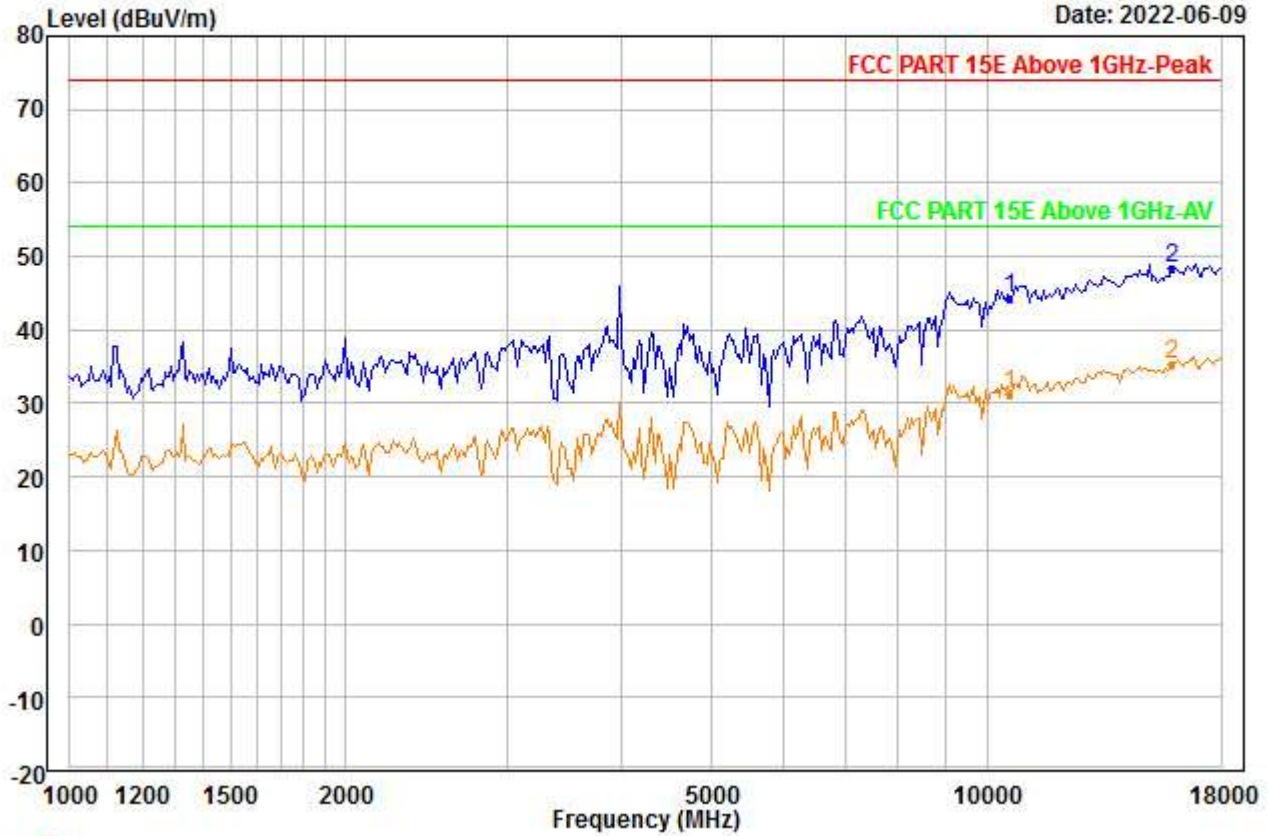


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5300
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 10600.000 | 37.61 | 38.26 | 45.72 | 0.00 | 14.02 | 44.17 | 74.00 | -29.83 | --- | --- | Peak |
| 2 PP15900.000 | 36.82 | 40.76 | 46.22 | 0.00 | 17.17 | 48.53 | 74.00 | -25.47 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00018.EMI

Date: 2022-06-09

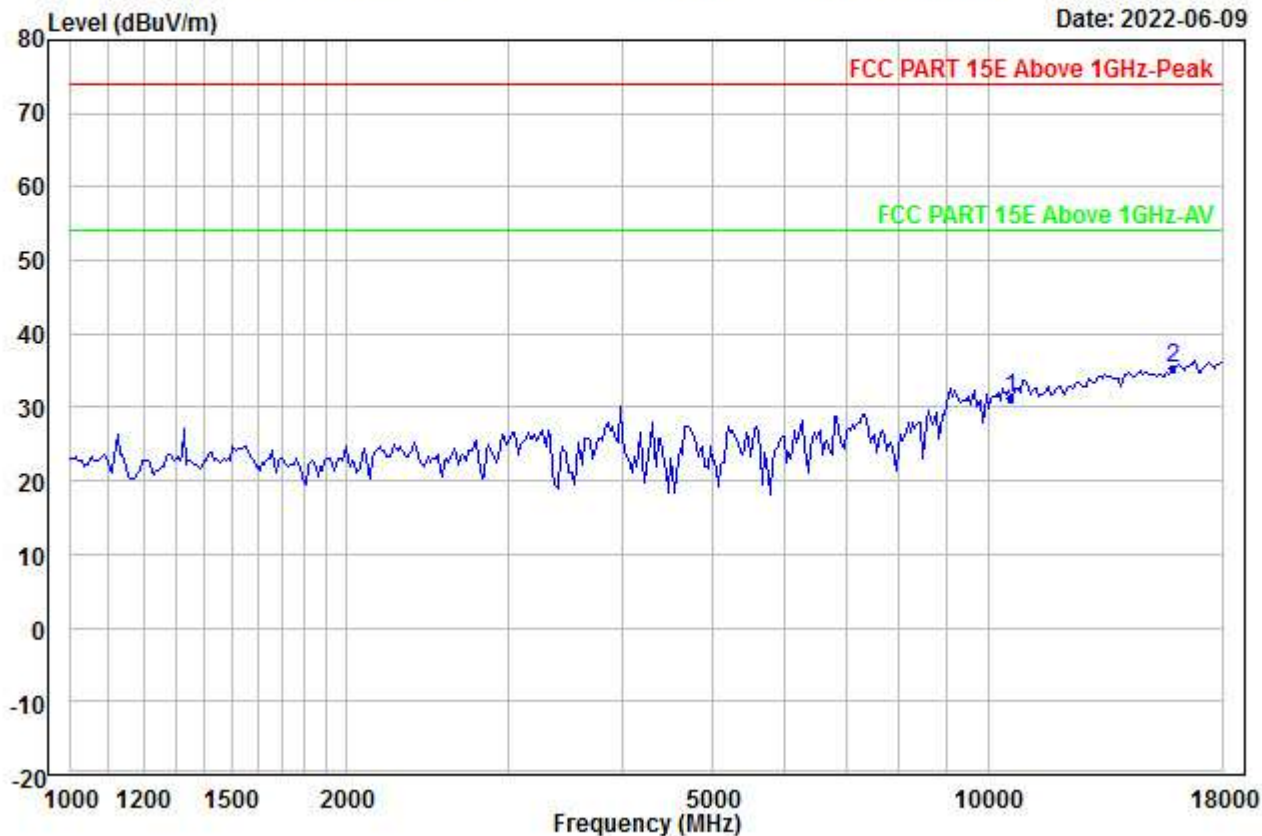


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5300
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 10600.000 | 24.75 | 38.26 | 45.72 | 0.00 | 14.02 | 31.31 | 54.00 | -22.69 | --- | --- | Aver |
| 2 PP15900.000 | 23.56 | 40.76 | 46.22 | 0.00 | 17.17 | 35.27 | 54.00 | -18.73 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00019.EMI

Date: 2022-06-09

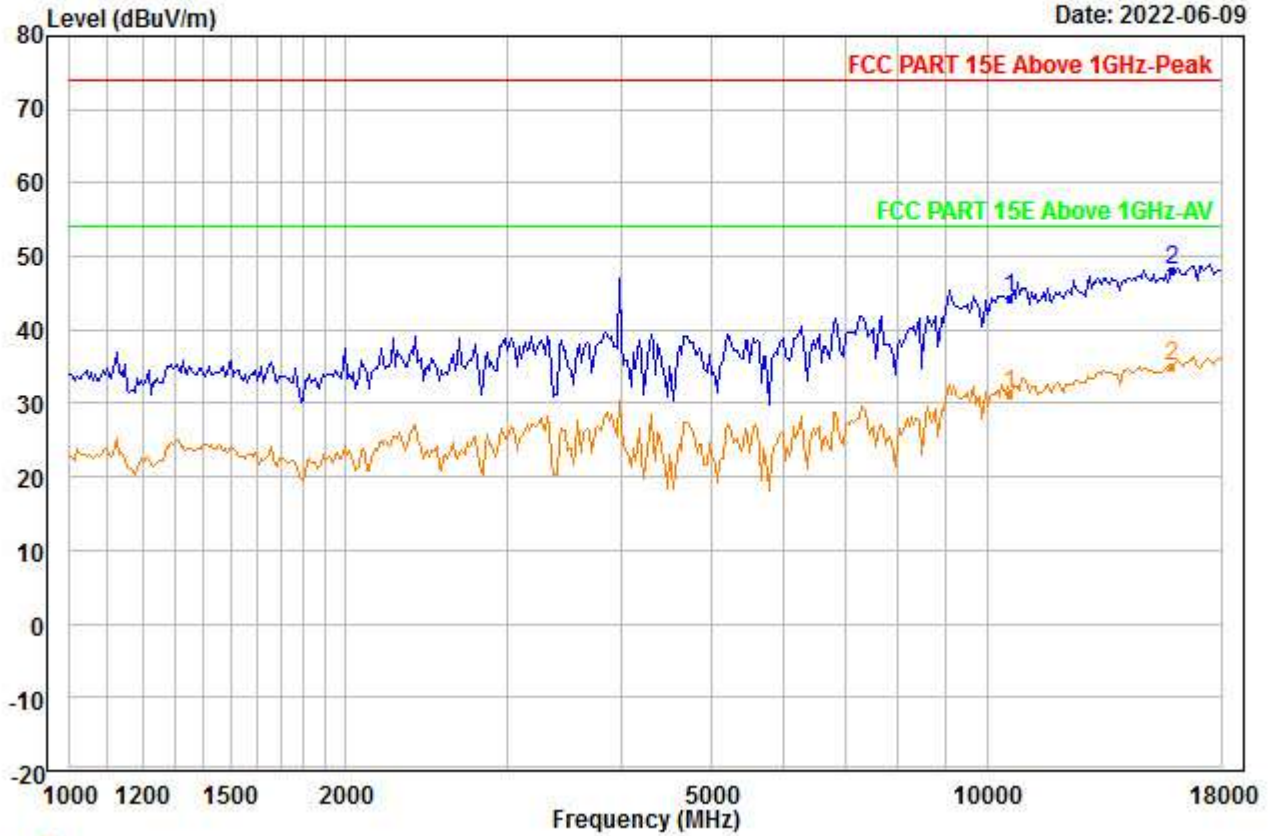


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5300
 Remark :

| | Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Rem: |
|---|-------------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 10600.000 | 37.74 | 38.26 | 45.72 | 0.00 | 14.02 | 44.30 | 74.00 | -29.70 | --- | --- | Peak |
| 2 | PP15900.000 | 36.52 | 40.76 | 46.22 | 0.00 | 17.17 | 48.23 | 74.00 | -25.77 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00020.EMI

Date: 2022-06-09

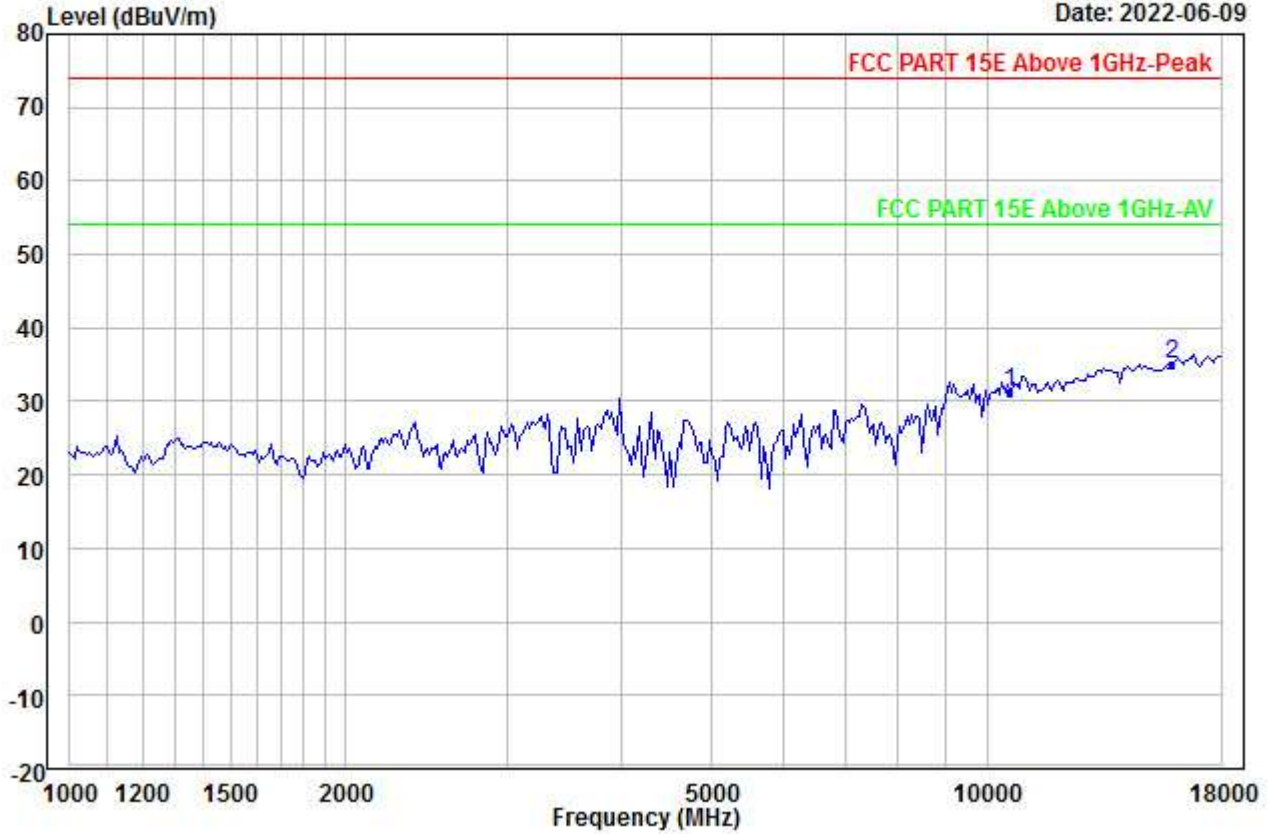


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5300
 Remark :

| | Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Remarks |
|---|-------------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|---------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 10600.000 | 24.58 | 38.26 | 45.72 | 0.00 | 14.02 | 31.14 | 54.00 | -22.86 | --- | --- | Aver |
| 2 | PP15900.000 | 23.47 | 40.76 | 46.22 | 0.00 | 17.17 | 35.18 | 54.00 | -18.82 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00021.EMI

Date: 2022-06-09

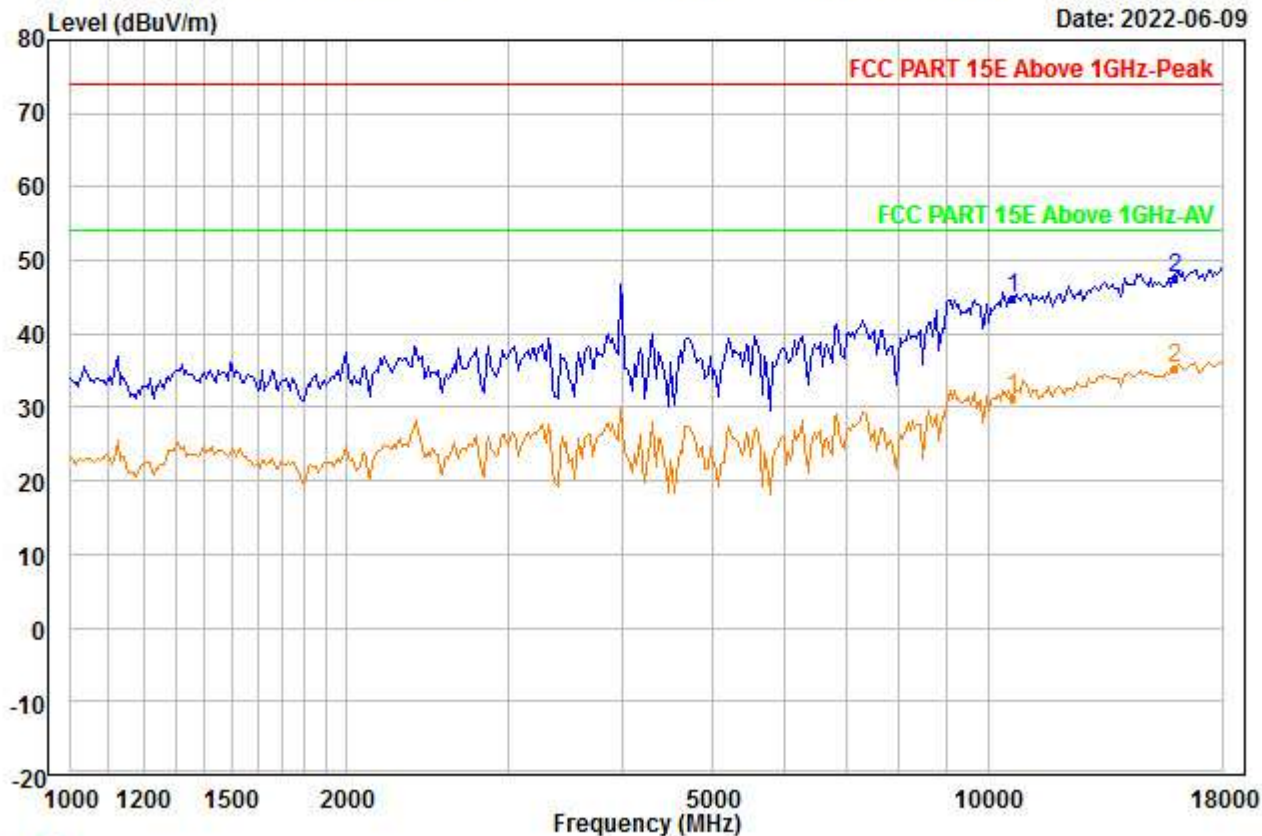


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5320
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 10640.000 | 38.28 | 38.28 | 45.65 | 0.00 | 14.01 | 44.92 | 74.00 | -29.08 | --- | --- | Peak |
| 2 PP15960.000 | 35.78 | 40.84 | 46.27 | 0.00 | 17.20 | 47.55 | 74.00 | -26.45 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00022.EMI

Date: 2022-06-09

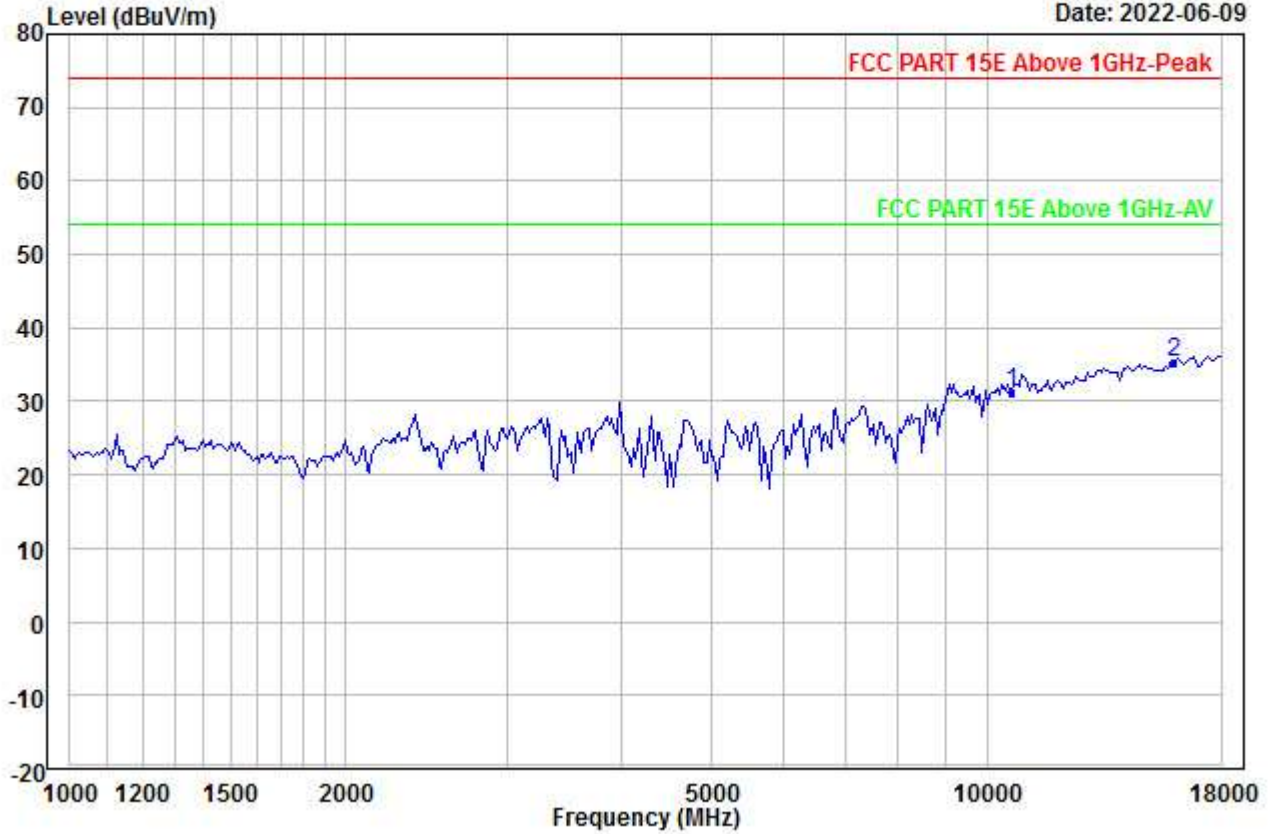


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5320
 Remark :

| | Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Rem: |
|---|-------------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 10640.000 | 24.50 | 38.28 | 45.65 | 0.00 | 14.01 | 31.14 | 54.00 | -22.86 | --- | --- | Aver |
| 2 | PP15960.000 | 23.50 | 40.84 | 46.27 | 0.00 | 17.20 | 35.27 | 54.00 | -18.73 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00023.EMI

Date: 2022-06-09

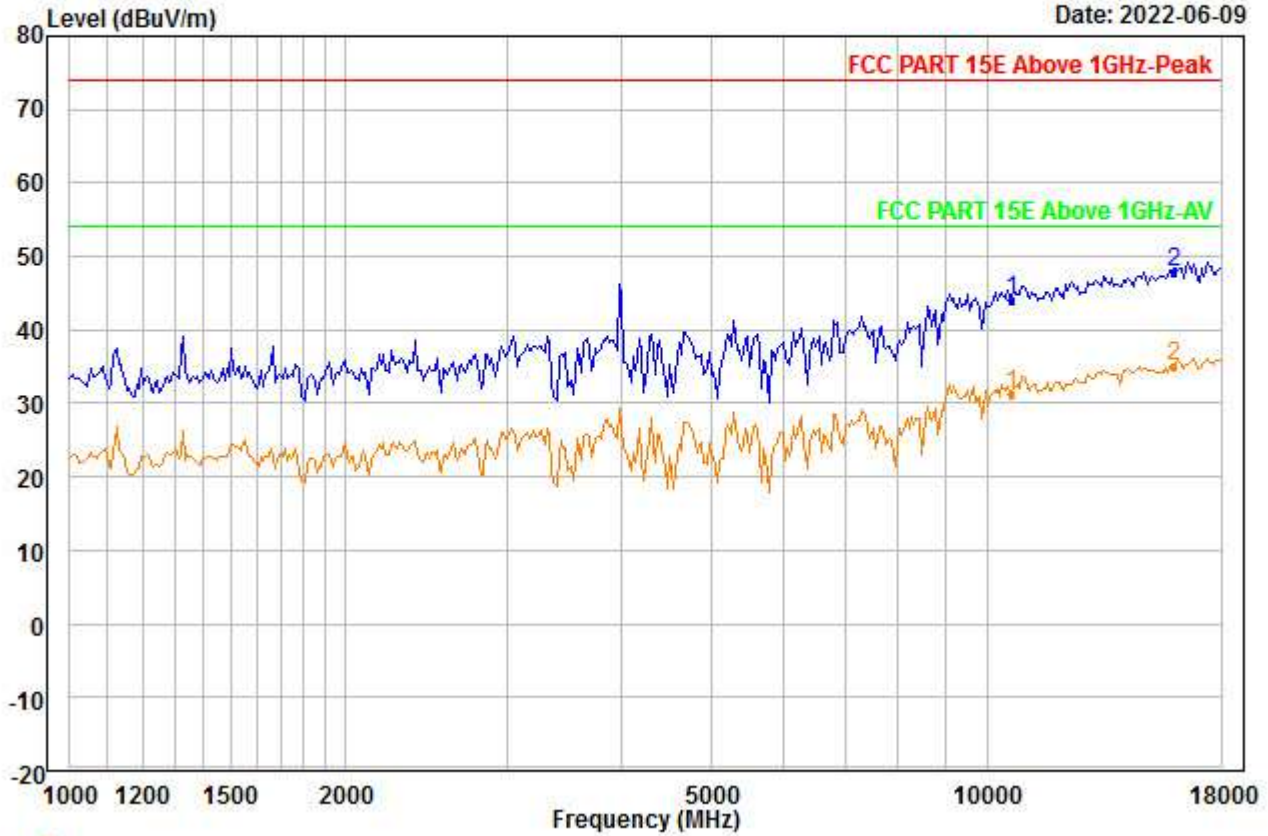


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5320
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 10640.000 | 37.38 | 38.28 | 45.65 | 0.00 | 14.01 | 44.02 | 74.00 | -29.98 | --- | --- | Peak |
| 2 PP15960.000 | 35.95 | 40.84 | 46.27 | 0.00 | 17.20 | 47.72 | 74.00 | -26.28 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00024.EMI

Date: 2022-06-09

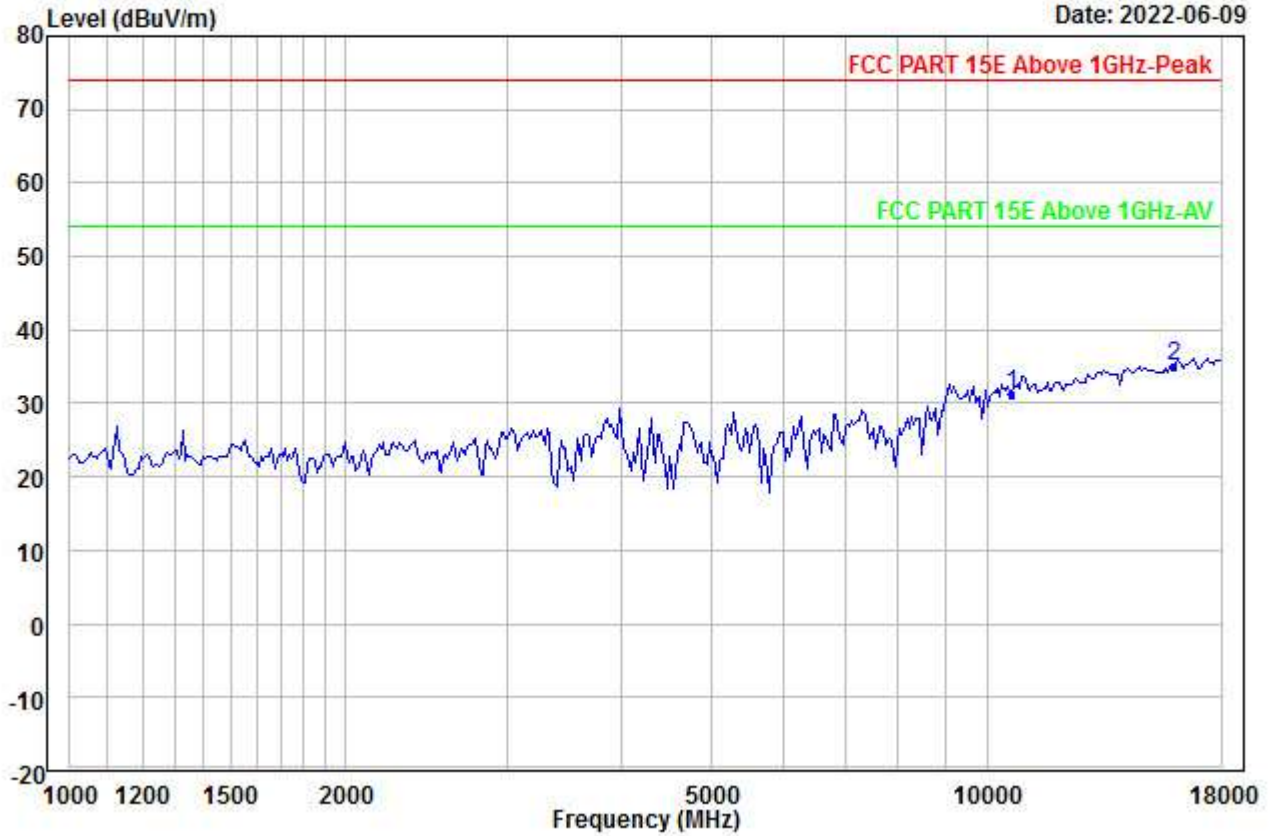


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5320
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 10640.000 | 24.58 | 38.28 | 45.65 | 0.00 | 14.01 | 31.22 | 54.00 | -22.78 | --- | --- | Aver |
| 2 PP15960.000 | 23.41 | 40.84 | 46.27 | 0.00 | 17.20 | 35.18 | 54.00 | -18.82 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00025.EMI

Date: 2022-06-09

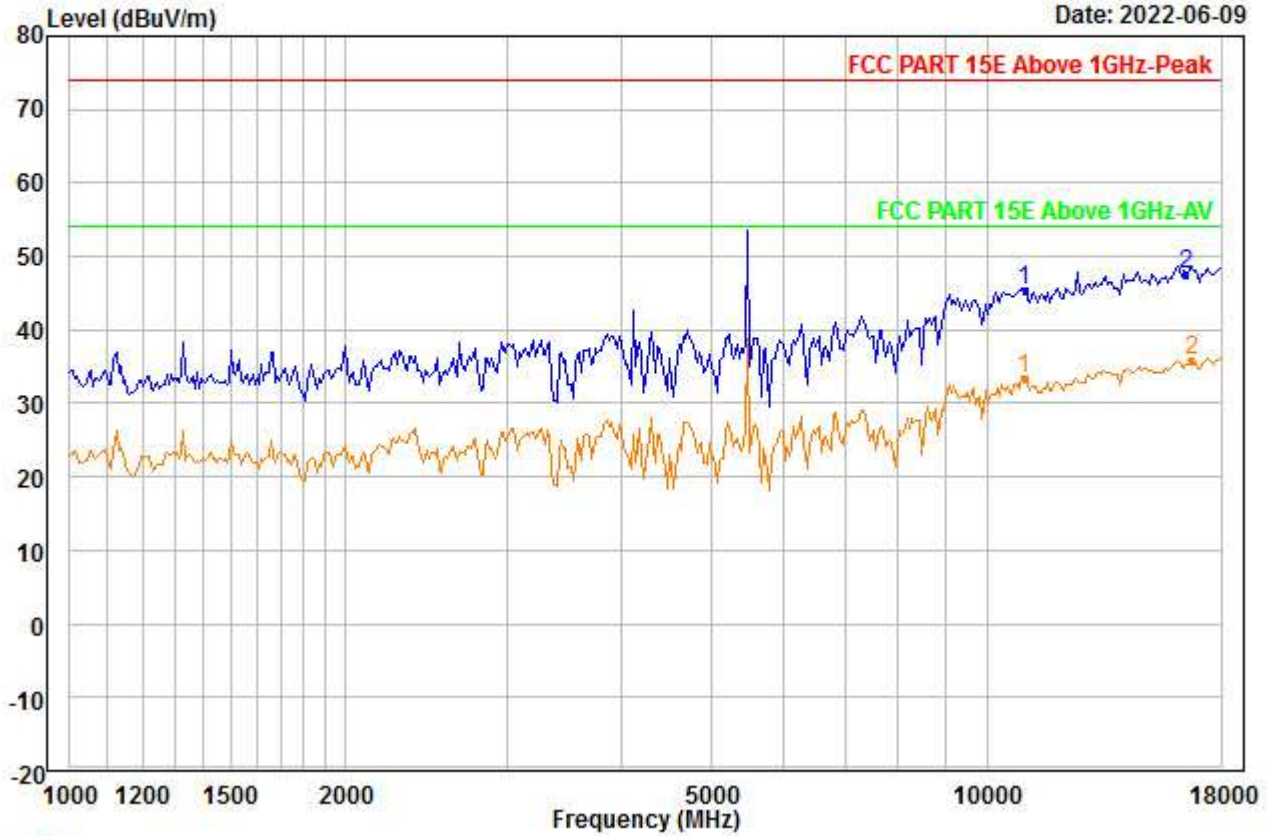


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5500
 Remark :

| | Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Remarks |
|---|-------------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|---------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 11000.000 | 38.00 | 38.50 | 45.00 | 0.00 | 13.92 | 45.42 | 74.00 | -28.58 | --- | --- | Peak |
| 2 | PP16500.000 | 35.25 | 41.50 | 46.60 | 0.00 | 17.45 | 47.60 | 74.00 | -26.40 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00026.EMI

Date: 2022-06-09

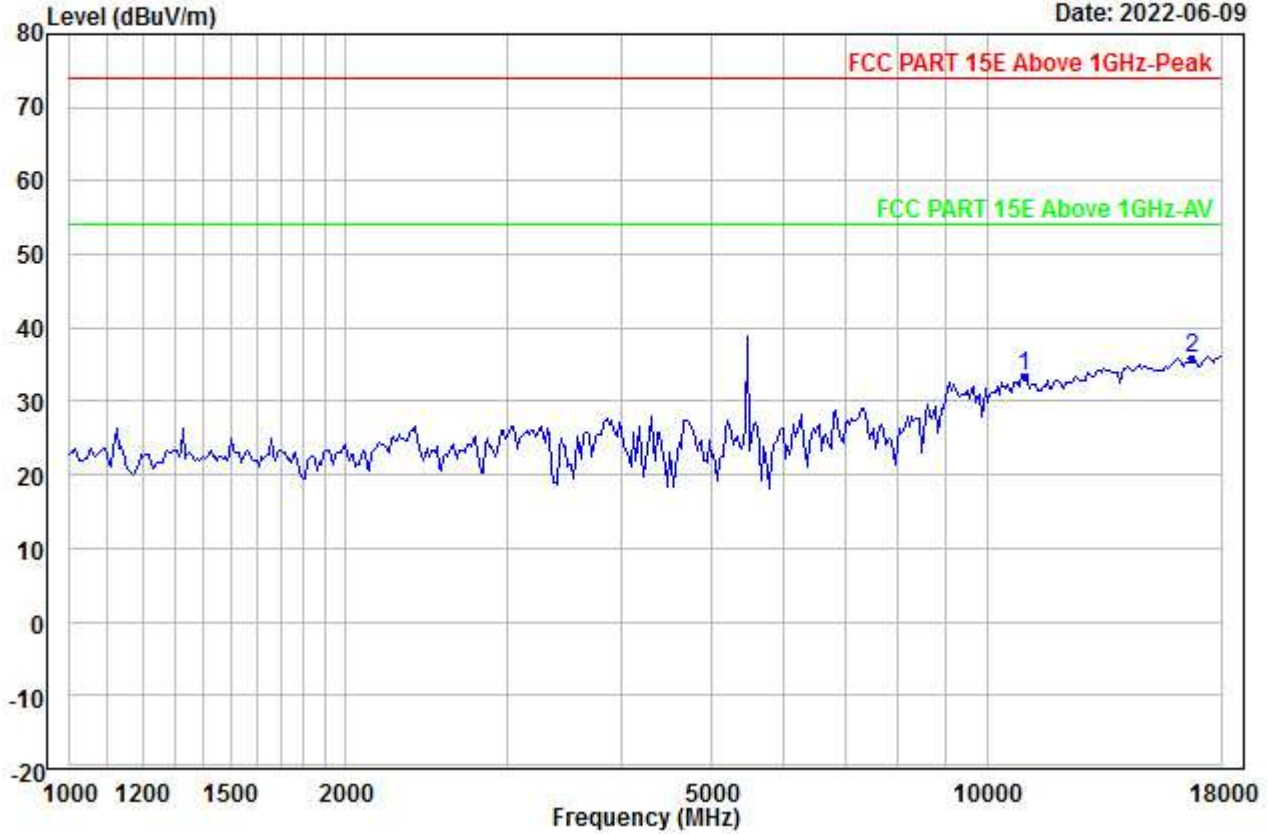


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5500
 Remark :

| | Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Rem: |
|---|-------------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 11000.000 | 25.94 | 38.50 | 45.00 | 0.00 | 13.92 | 33.36 | 54.00 | -20.64 | --- | --- | Aver |
| 2 | PP16740.000 | 23.20 | 41.88 | 46.89 | 0.00 | 17.56 | 35.75 | 54.00 | -18.25 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00027.EMI

Date: 2022-06-09

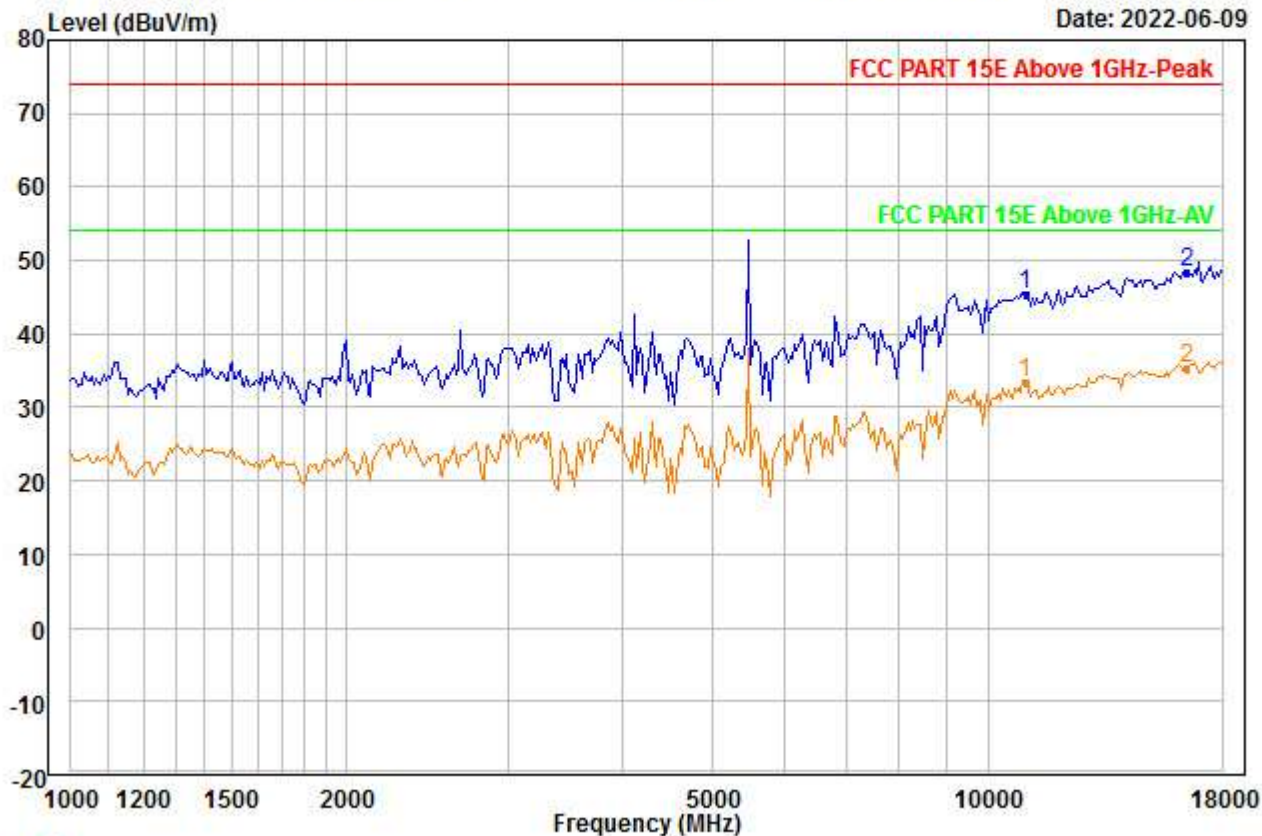


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5500
 Remark :

| | Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Rem: |
|---|-------------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 11000.000 | 37.99 | 38.50 | 45.00 | 0.00 | 13.92 | 45.41 | 74.00 | -28.59 | --- | --- | Peak |
| 2 | PP16500.000 | 35.92 | 41.50 | 46.60 | 0.00 | 17.45 | 48.27 | 74.00 | -25.73 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00028.EMI

Date: 2022-06-09

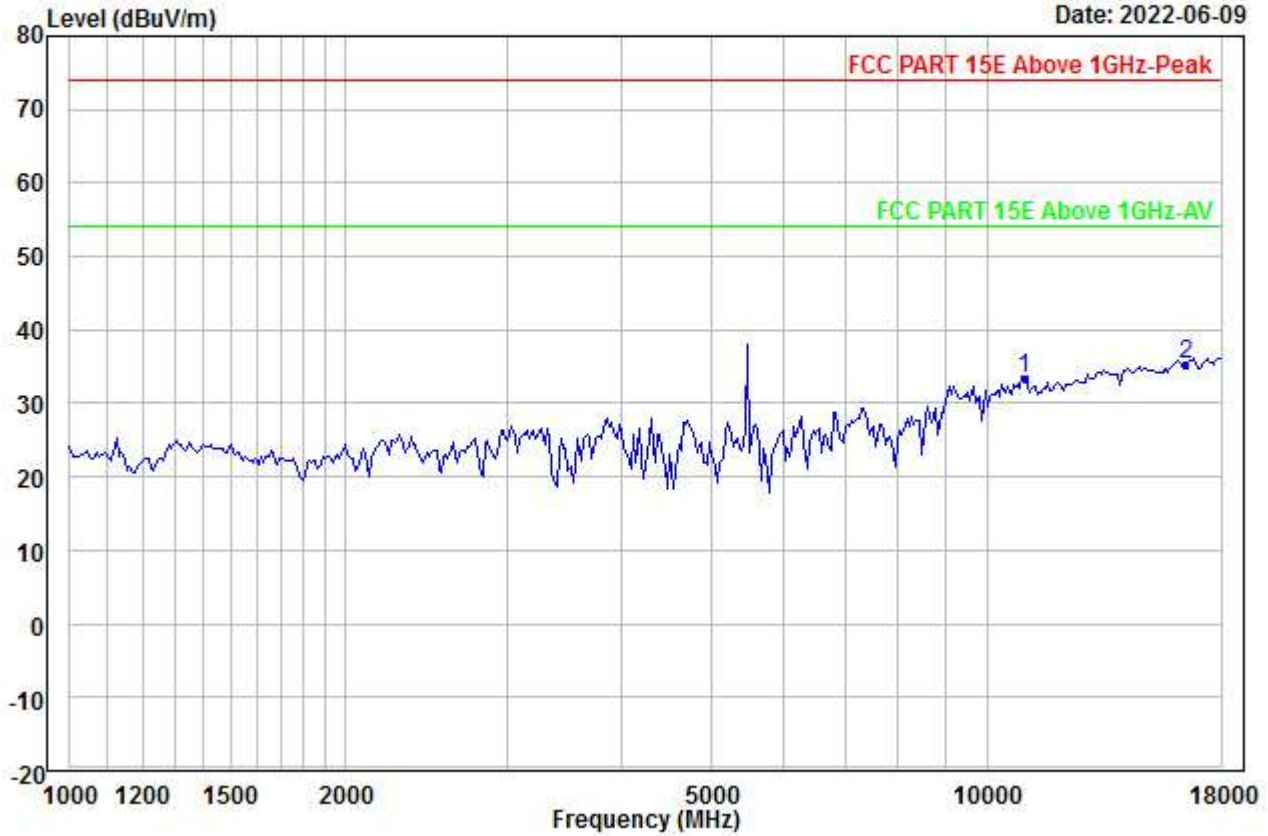


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5500
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 11000.000 | 26.02 | 38.50 | 45.00 | 0.00 | 13.92 | 33.44 | 54.00 | -20.56 | --- | --- | Aver |
| 2 PP16500.000 | 23.03 | 41.50 | 46.60 | 0.00 | 17.45 | 35.38 | 54.00 | -18.62 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00029.EMI

Date: 2022-06-09

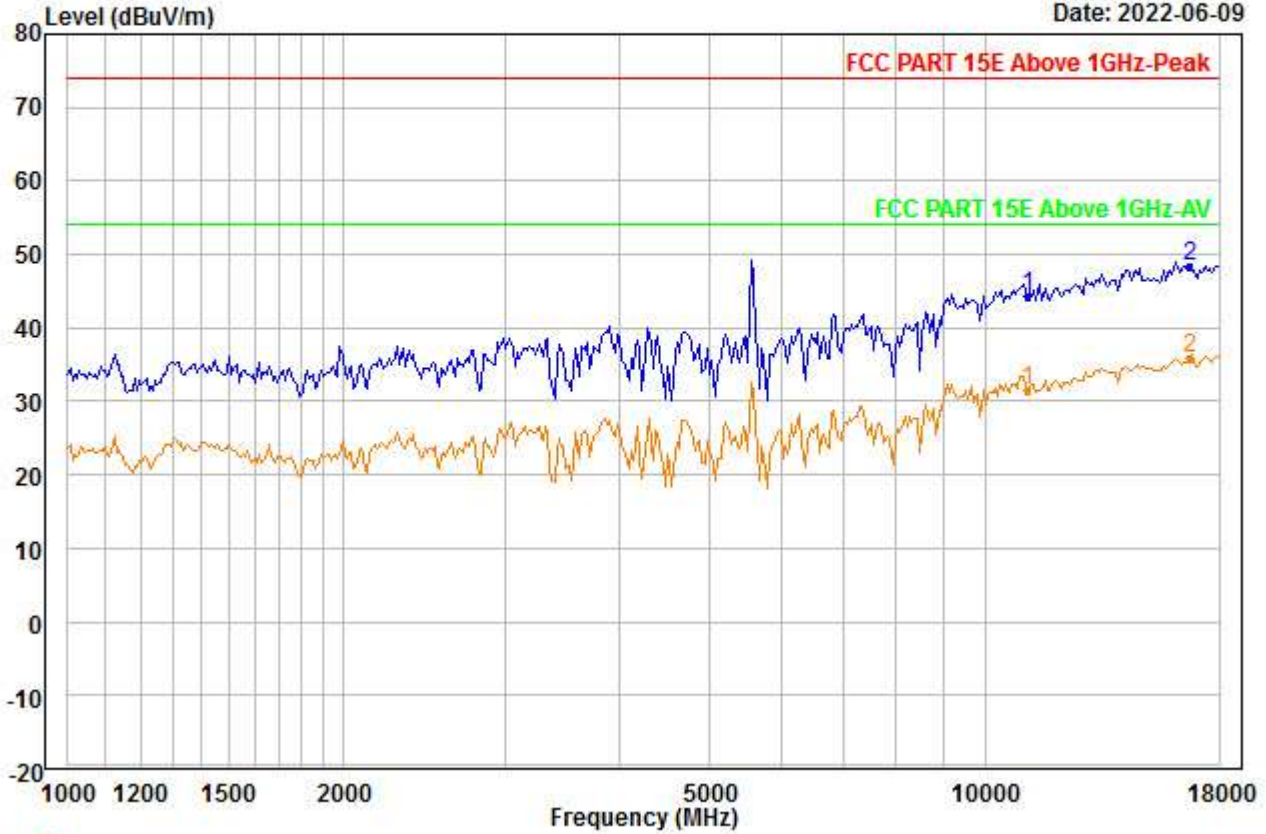


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5580
 Remark :

| | Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Rem: |
|---|-------------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 11160.000 | 37.07 | 38.63 | 45.35 | 0.00 | 14.04 | 44.39 | 74.00 | -29.61 | --- | --- | Peak |
| 2 | PP16740.000 | 35.82 | 41.88 | 46.89 | 0.00 | 17.56 | 48.37 | 74.00 | -25.63 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00030.EMI

Date: 2022-06-09

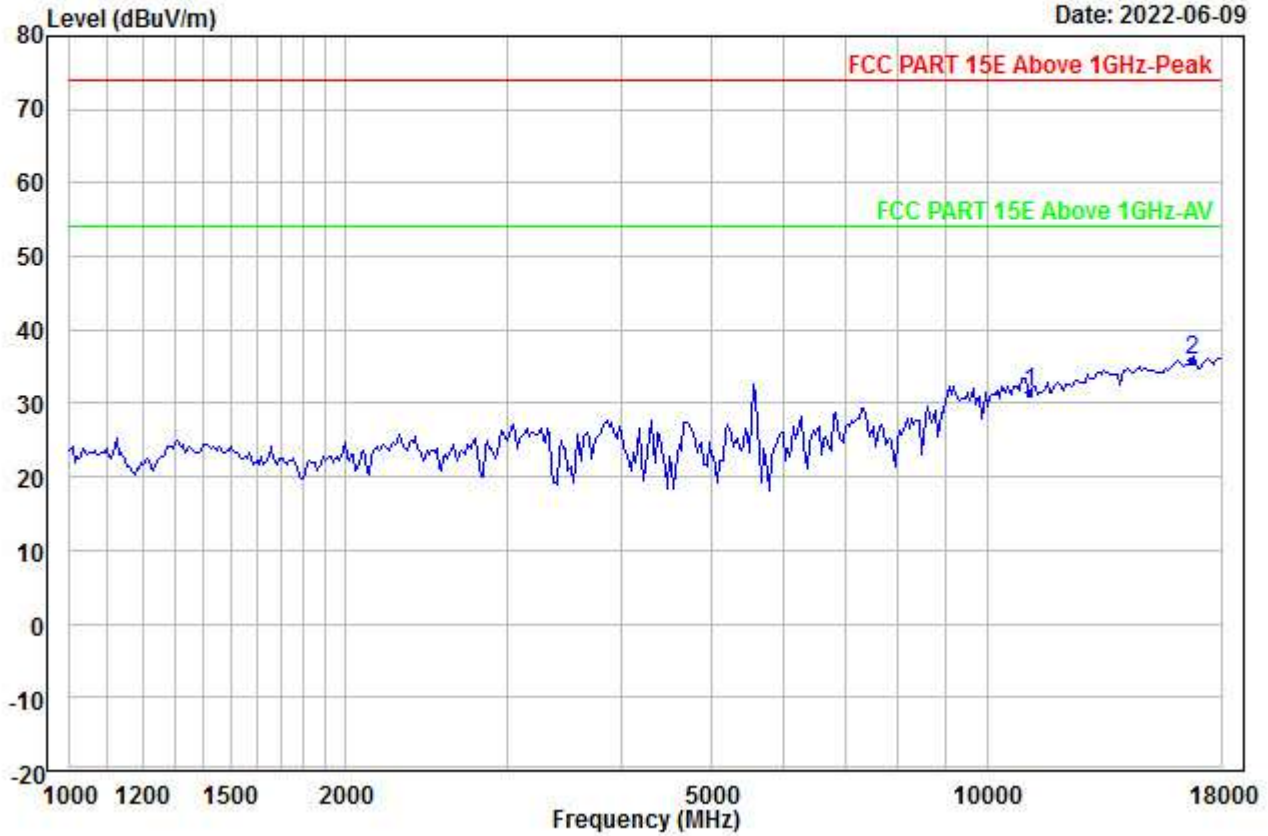


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5580
 Remark :

| | Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Rem: |
|---|-------------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 11160.000 | 24.18 | 38.63 | 45.35 | 0.00 | 14.04 | 31.50 | 54.00 | -22.50 | --- | --- | Aver |
| 2 | PP16740.000 | 23.29 | 41.88 | 46.89 | 0.00 | 17.56 | 35.84 | 54.00 | -18.16 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00031.EMI

Date: 2022-06-09

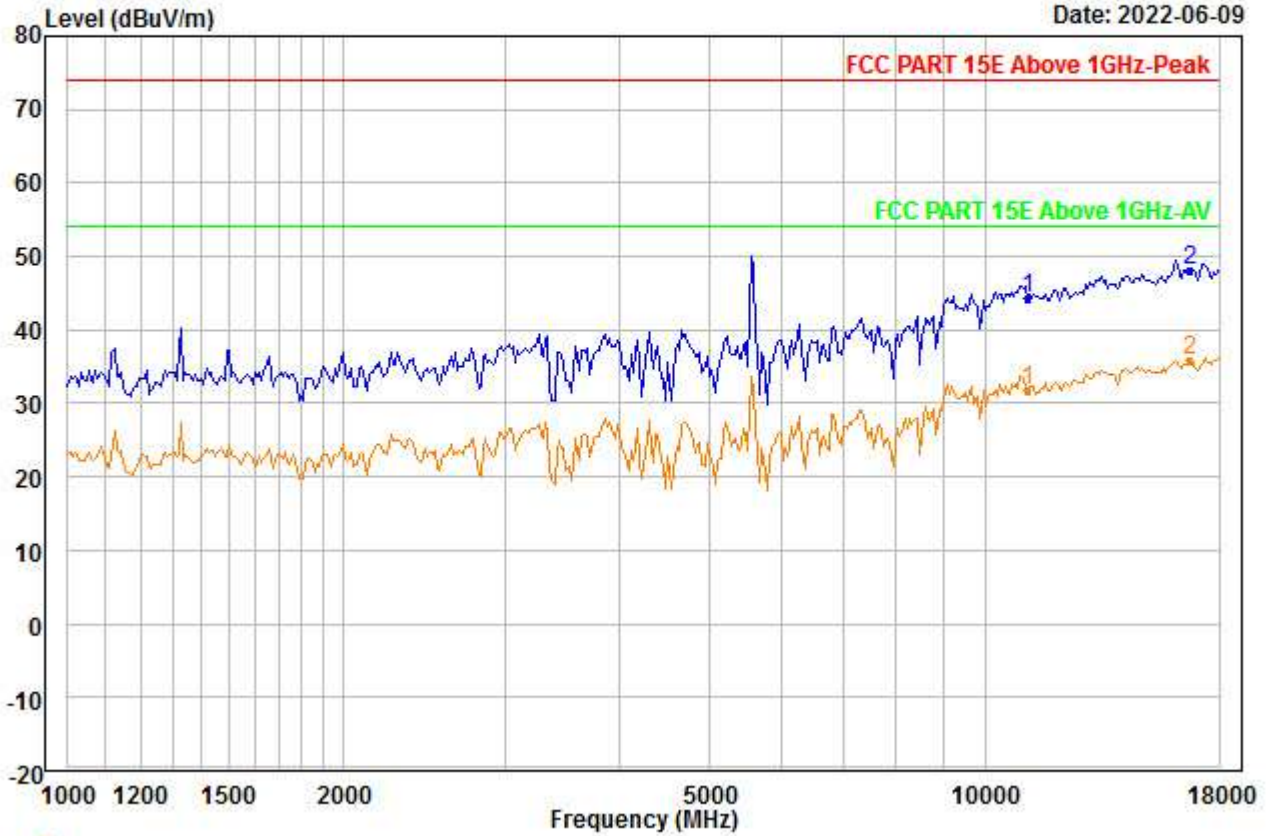


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5580
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 11160.000 | 37.12 | 38.63 | 45.35 | 0.00 | 14.04 | 44.44 | 74.00 | -29.56 | --- | --- | Peak |
| 2 PP16740.000 | 35.70 | 41.88 | 46.89 | 0.00 | 17.56 | 48.25 | 74.00 | -25.75 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00032.EMI

Date: 2022-06-09

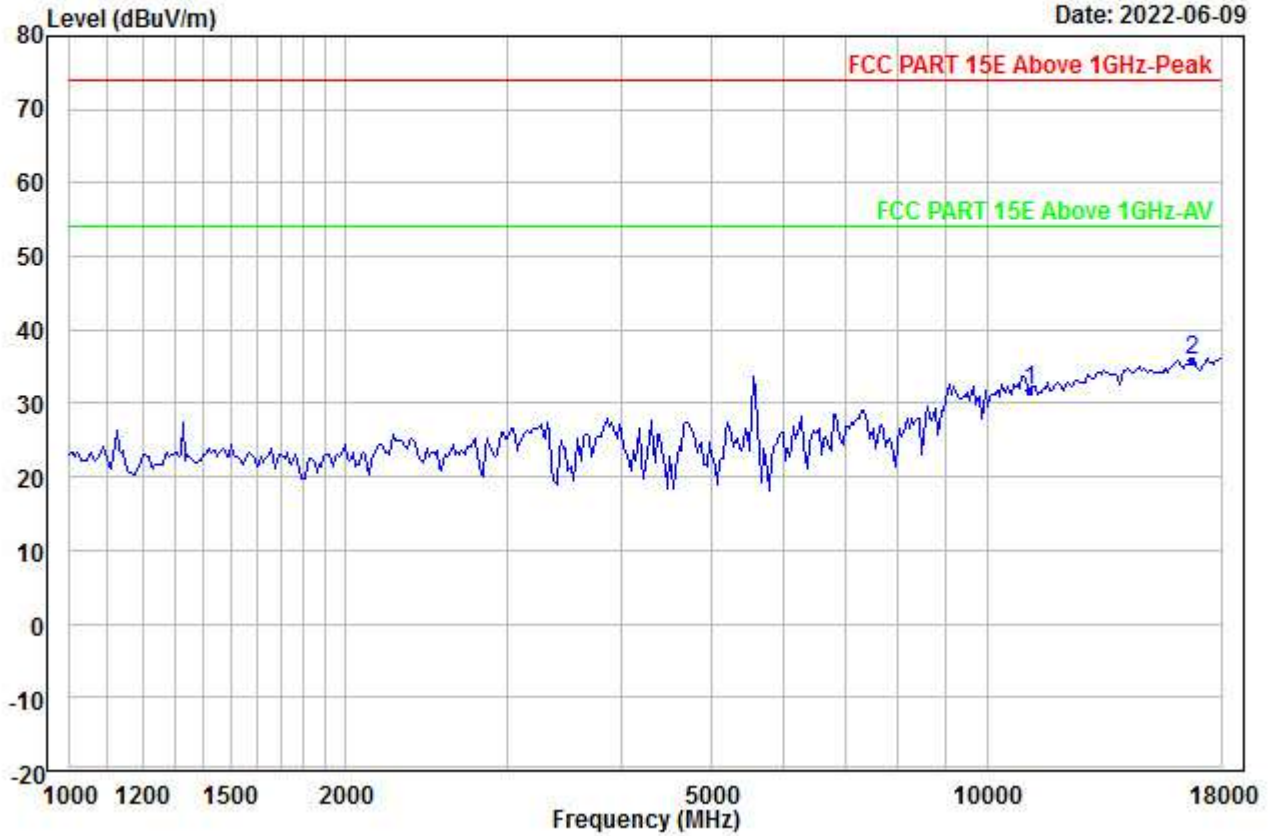


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5580
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 11160.000 | 24.36 | 38.63 | 45.35 | 0.00 | 14.04 | 31.68 | 54.00 | -22.32 | --- | --- | Aver |
| 2 PP16740.000 | 23.20 | 41.88 | 46.89 | 0.00 | 17.56 | 35.75 | 54.00 | -18.25 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00033.EMI

Date: 2022-06-09

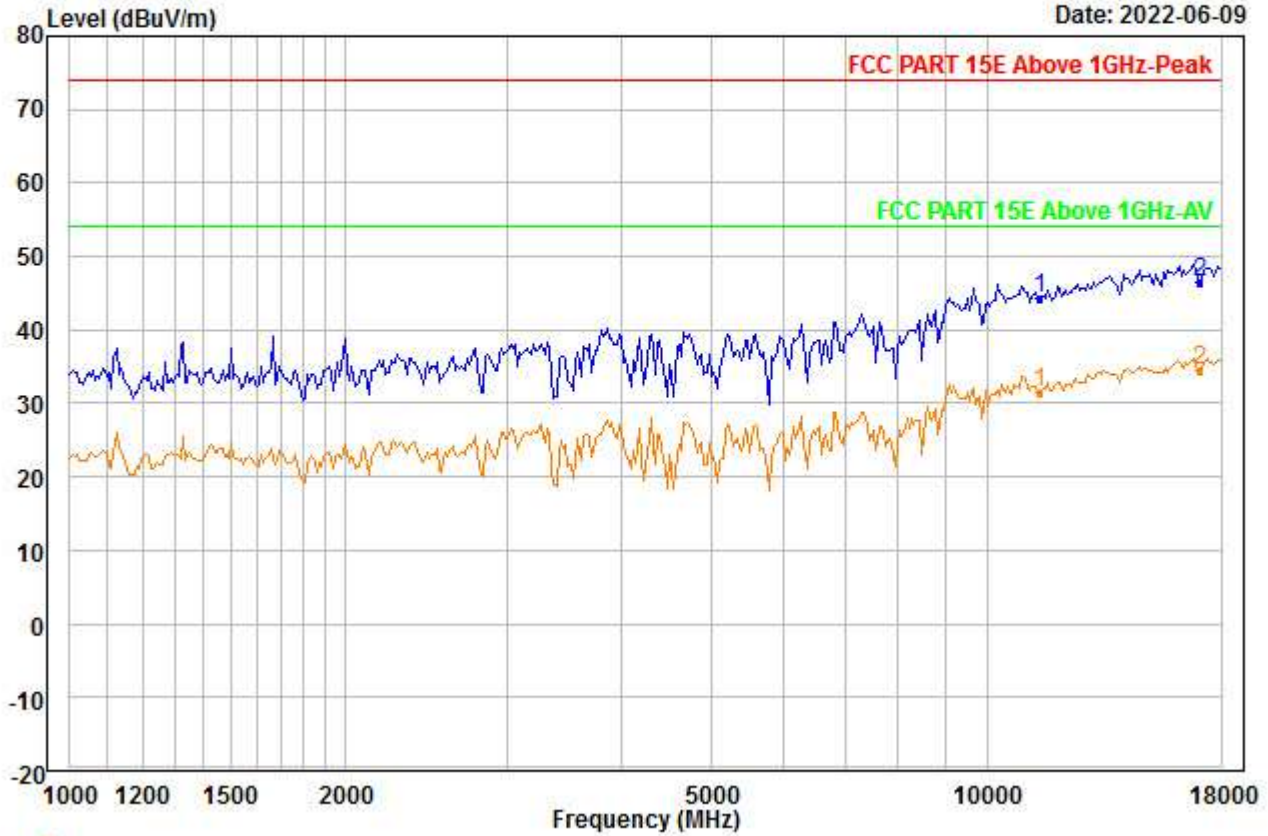


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5700
 Remark :

| | Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Rem: |
|---|-------------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 11400.000 | 37.13 | 38.82 | 45.88 | 0.00 | 14.21 | 44.28 | 74.00 | -29.72 | --- | --- | Peak |
| 2 | PP17100.000 | 33.45 | 42.26 | 47.08 | 0.00 | 17.74 | 46.37 | 74.00 | -27.63 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00034.EMI

Date: 2022-06-09

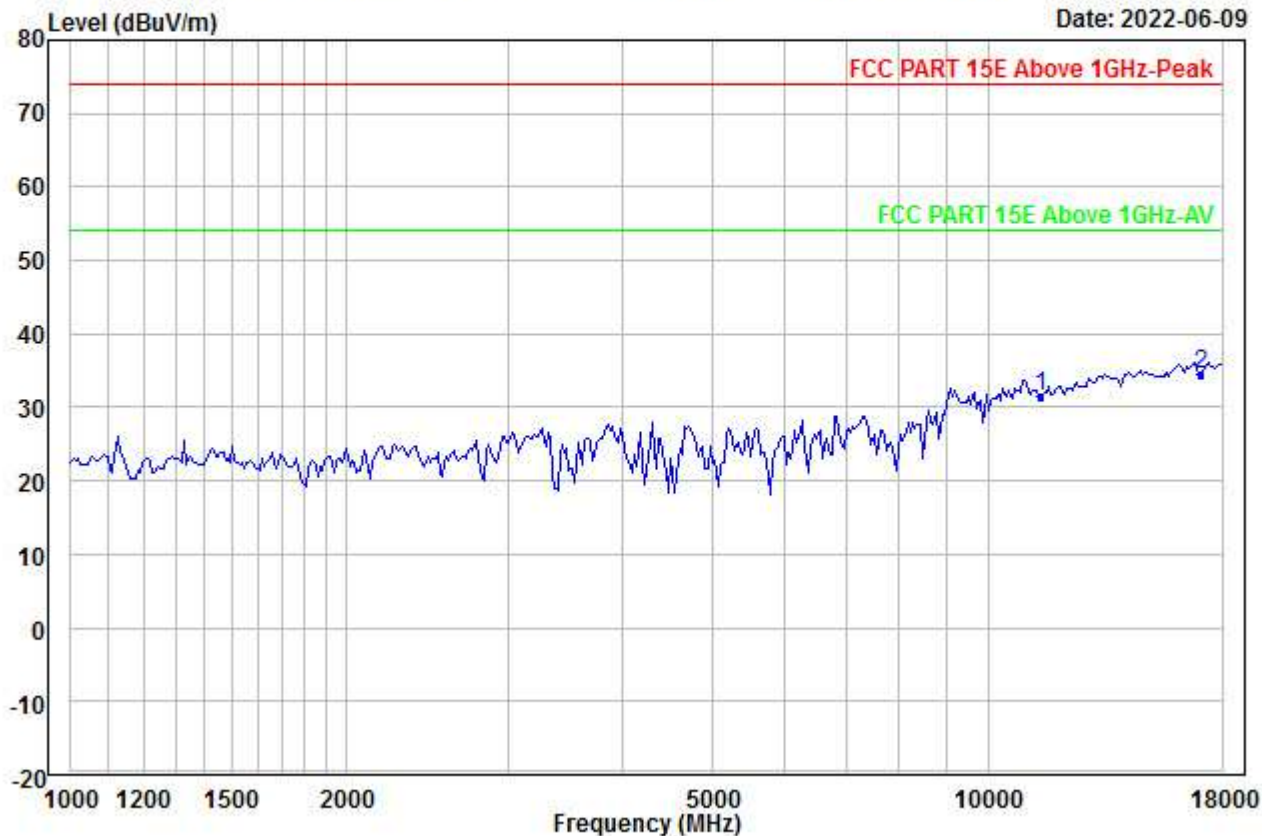


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5700
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rema | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 11400.000 | 24.27 | 38.82 | 45.88 | 0.00 | 14.21 | 31.42 | 54.00 | -22.58 | --- | --- | Aver |
| 2 PP17100.000 | 21.68 | 42.26 | 47.08 | 0.00 | 17.74 | 34.60 | 54.00 | -19.40 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00035.EMI

Date: 2022-06-09

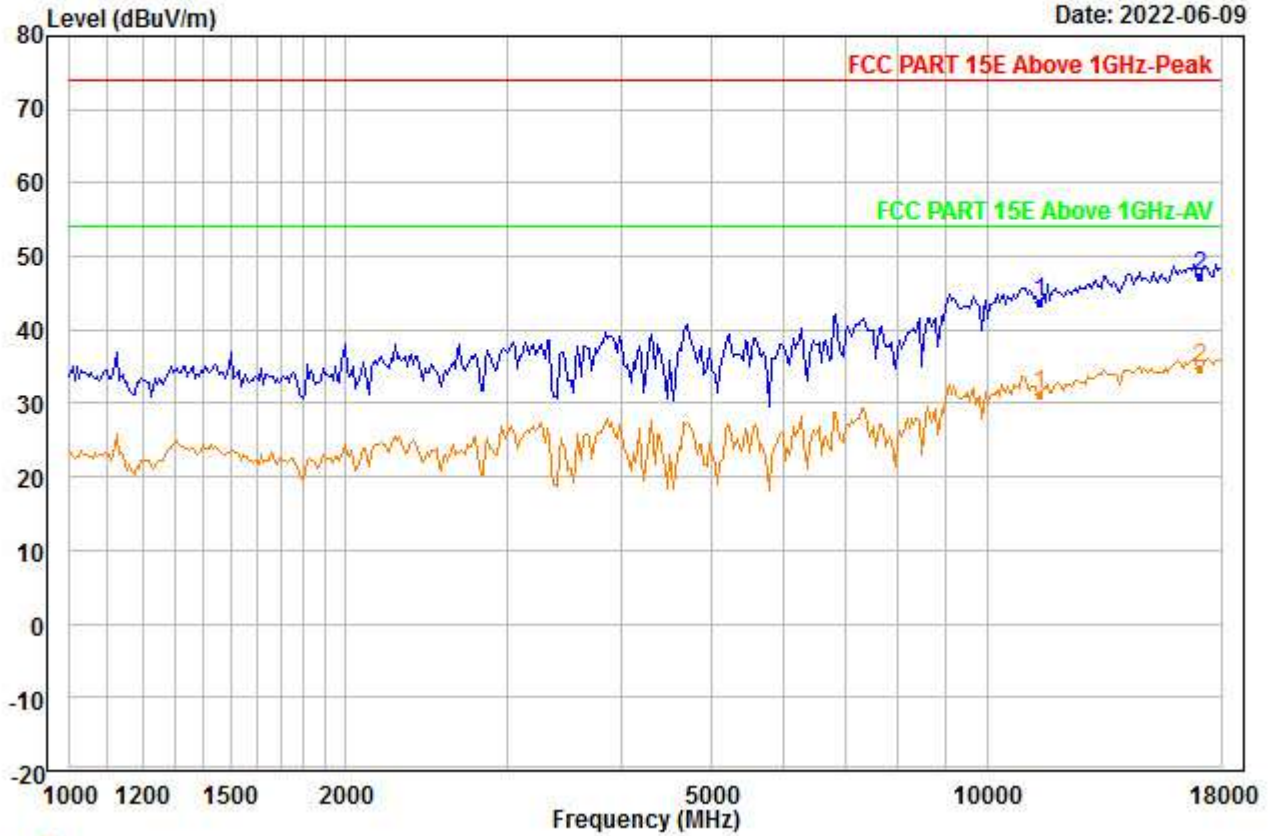


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5700
 Remark :

| | Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Remarks |
|---|-------------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|---------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 11400.000 | 36.70 | 38.82 | 45.88 | 0.00 | 14.21 | 43.85 | 74.00 | -30.15 | --- | --- | Peak |
| 2 | PP17100.000 | 34.36 | 42.26 | 47.08 | 0.00 | 17.74 | 47.28 | 74.00 | -26.72 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00036.EMI

Date: 2022-06-09

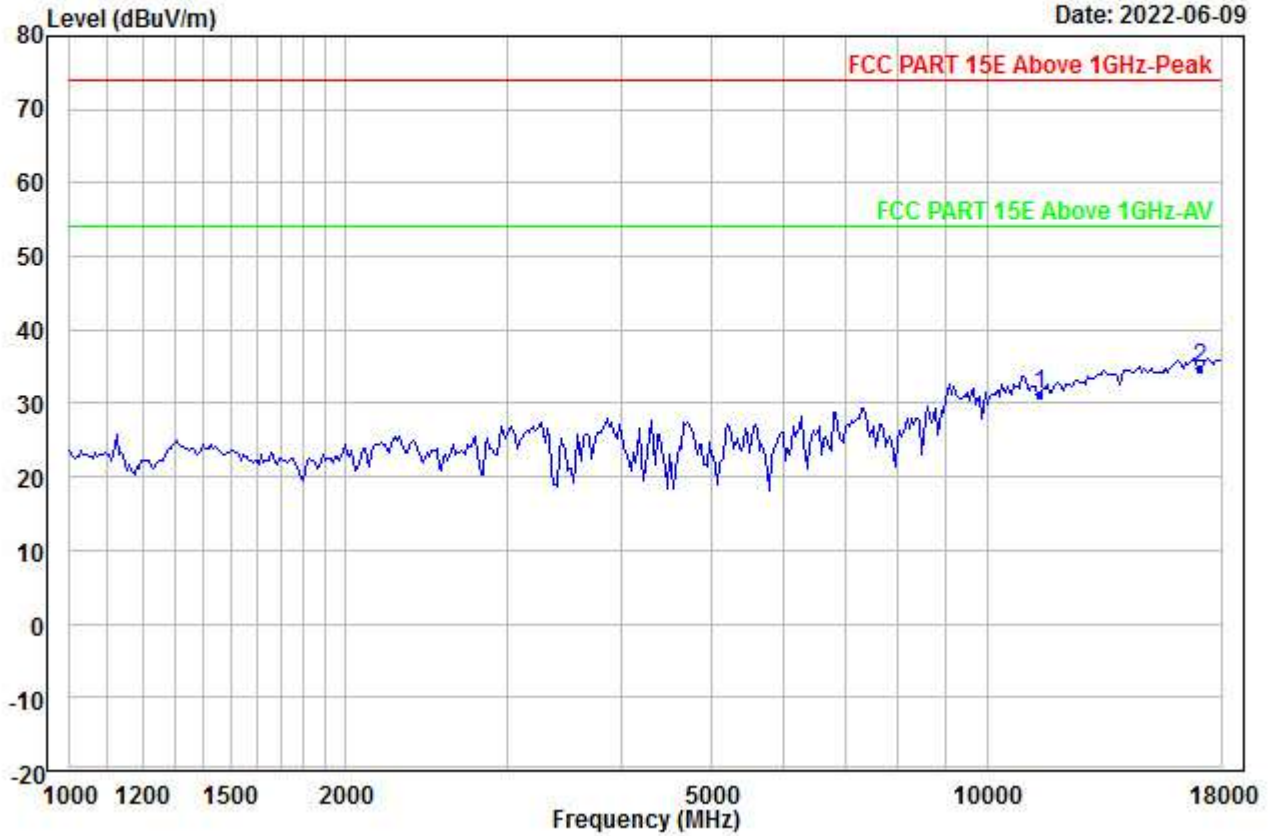


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5700
 Remark :

| | Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Remarks |
|---|-------------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|---------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 11400.000 | 24.18 | 38.82 | 45.88 | 0.00 | 14.21 | 31.33 | 54.00 | -22.67 | --- | --- | Aver |
| 2 | PP17100.000 | 21.80 | 42.26 | 47.08 | 0.00 | 17.74 | 34.72 | 54.00 | -19.28 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00037.EMI

Date: 2022-06-09

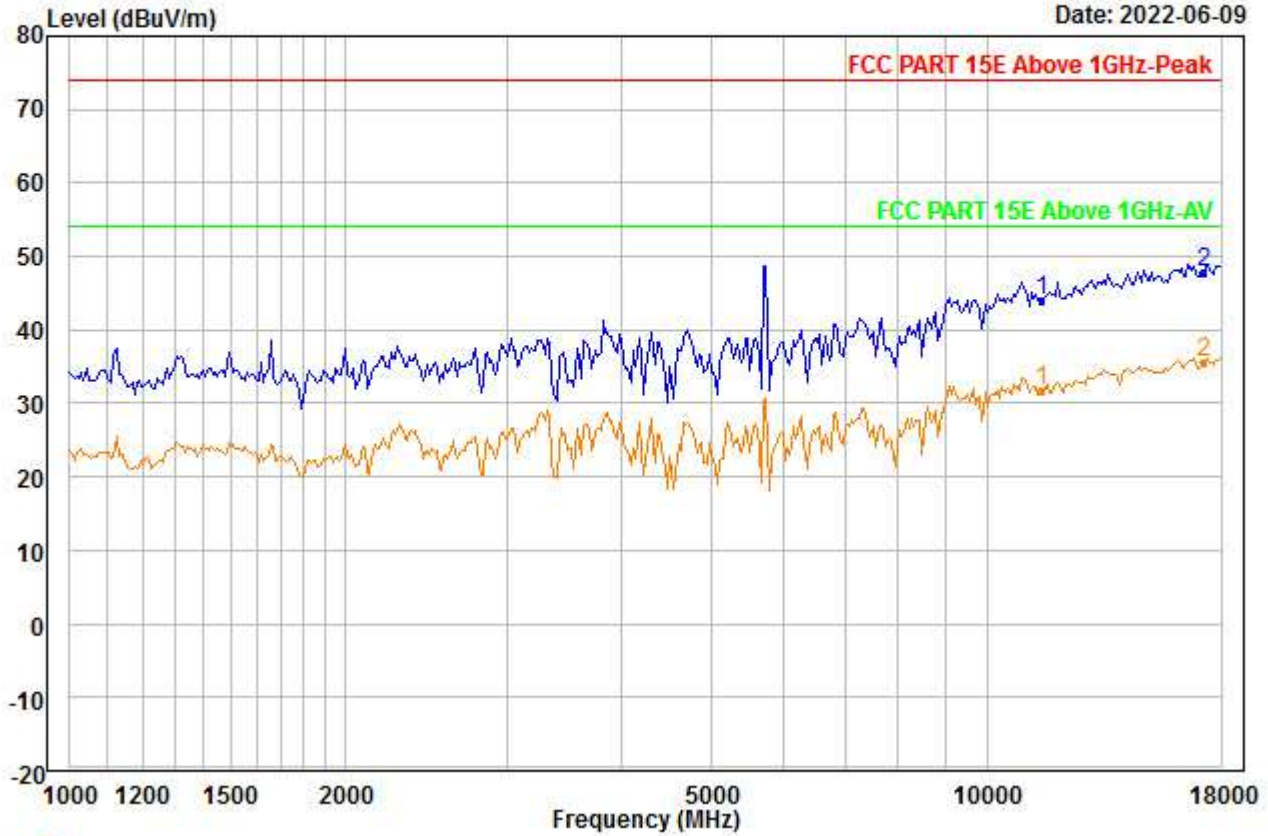


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5745
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 11490.000 | 37.01 | 38.89 | 46.08 | 0.00 | 14.28 | 44.10 | 74.00 | -29.90 | --- | --- | Peak |
| 2 PP17235.000 | 34.74 | 42.21 | 46.92 | 0.00 | 17.83 | 47.86 | 74.00 | -26.14 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00038.EMI

Date: 2022-06-09

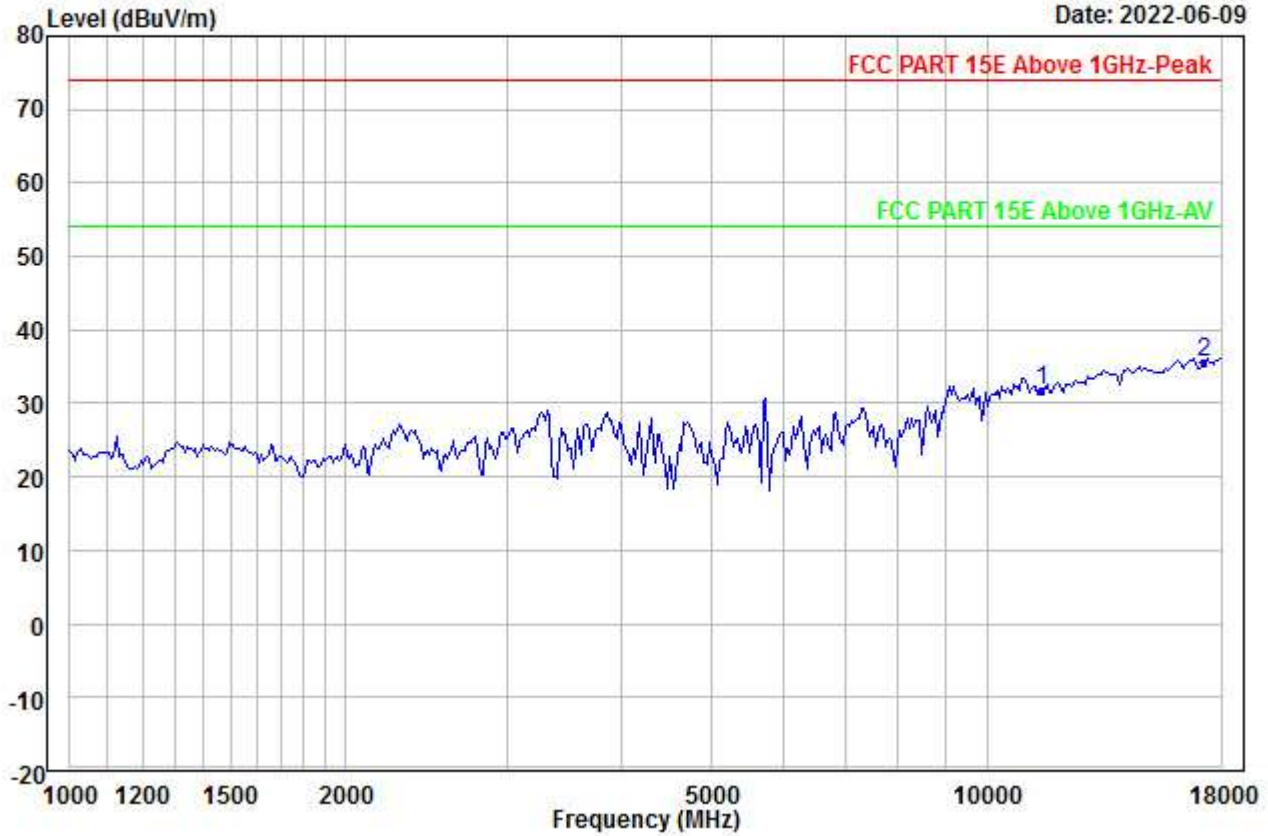


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5745
 Remark :

| | Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Remarks |
|---|-------------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|---------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 11490.000 | 24.72 | 38.89 | 46.08 | 0.00 | 14.28 | 31.81 | 54.00 | -22.19 | --- | --- | Aver |
| 2 | PP17235.000 | 22.45 | 42.21 | 46.92 | 0.00 | 17.83 | 35.57 | 54.00 | -18.43 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00039.EMI

Date: 2022-06-09

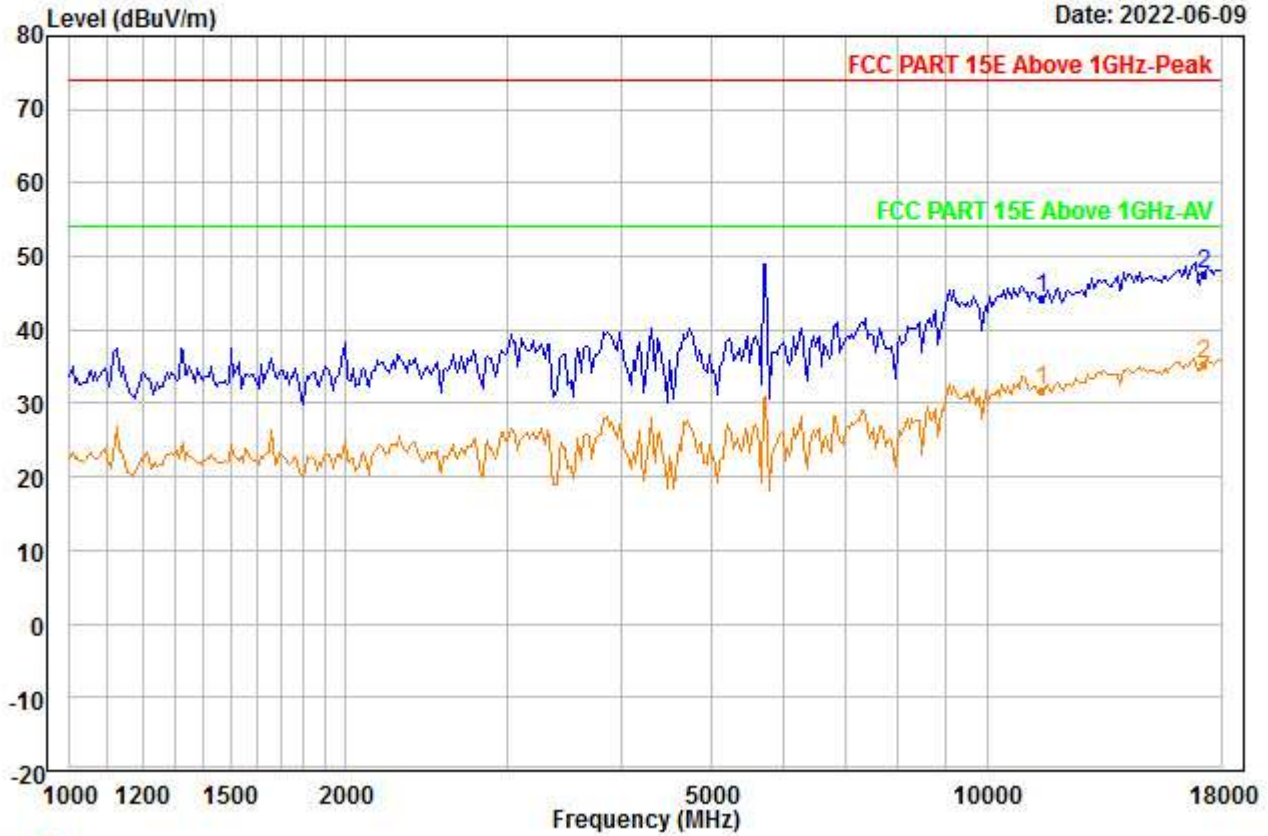


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5745
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 11490.000 | 37.29 | 38.89 | 46.08 | 0.00 | 14.28 | 44.38 | 74.00 | -29.62 | --- | --- | Peak |
| 2 PP17235.000 | 34.44 | 42.21 | 46.92 | 0.00 | 17.83 | 47.56 | 74.00 | -26.44 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00040.EMI

Date: 2022-06-09

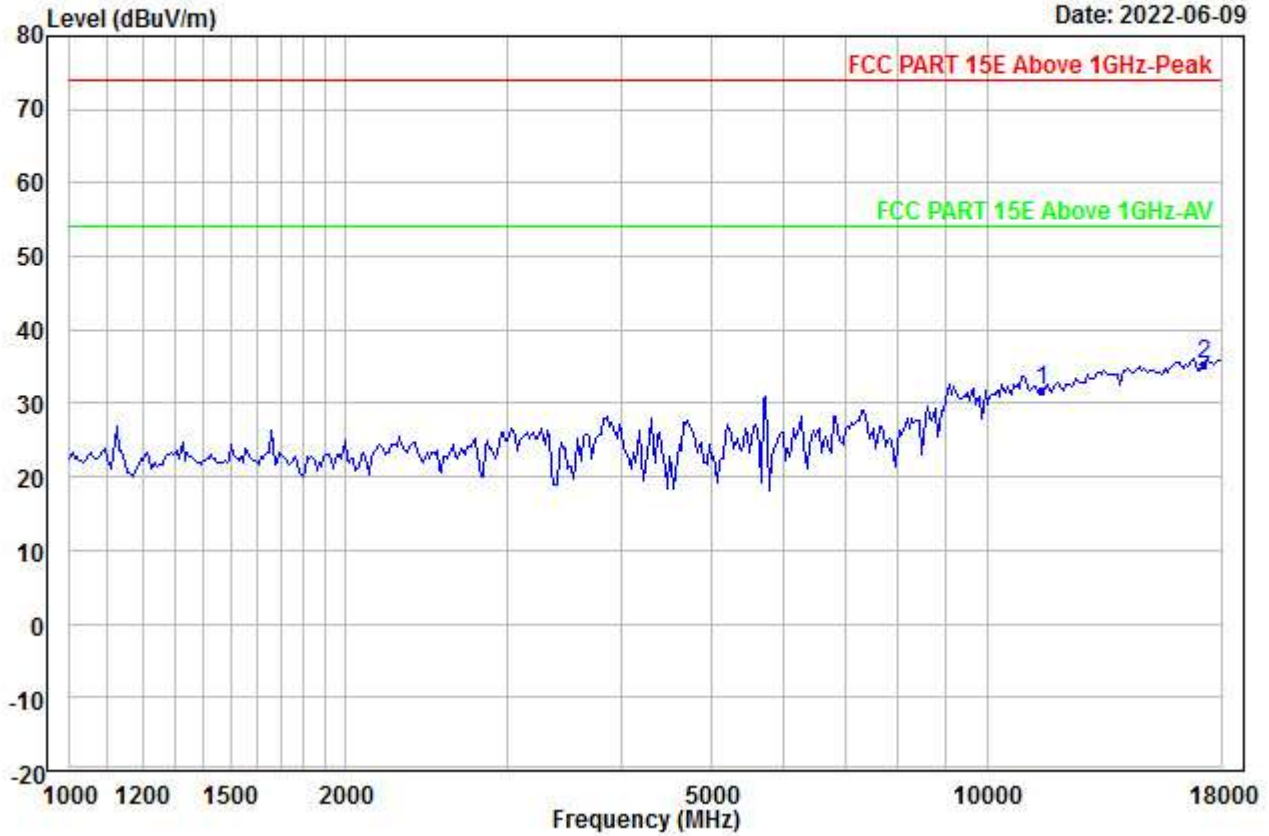


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5745
 Remark :

| | Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Remarks |
|---|-------------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|---------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 11490.000 | 24.81 | 38.89 | 46.08 | 0.00 | 14.28 | 31.90 | 54.00 | -22.10 | --- | --- | Aver |
| 2 | PP17235.000 | 22.23 | 42.21 | 46.92 | 0.00 | 17.83 | 35.35 | 54.00 | -18.65 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00041.EMI

Date: 2022-06-09

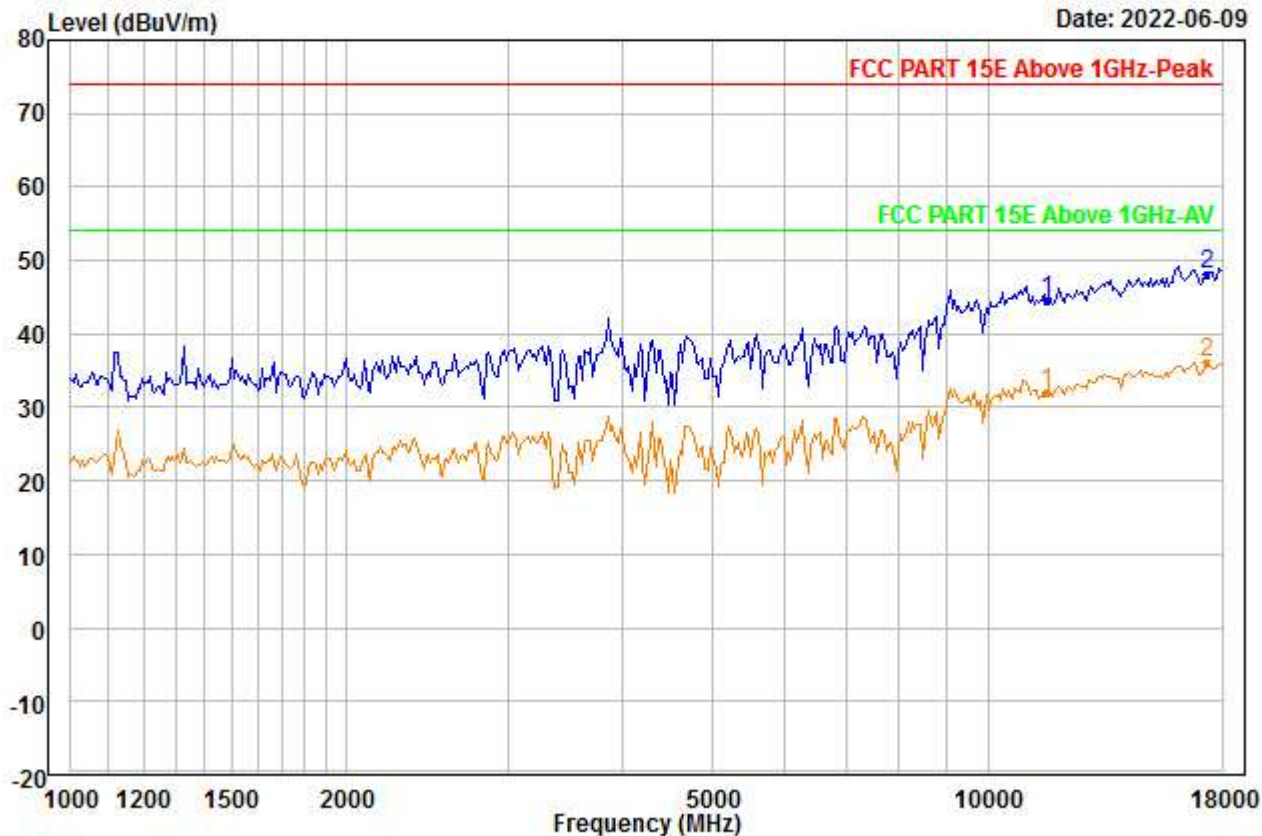


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5785
 Remark :

| | Read Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Remarks |
|---|-------------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|---------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 11570.000 | 37.32 | 38.94 | 46.09 | 0.00 | 14.34 | 44.51 | 74.00 | -29.49 | --- | --- | Peak |
| 2 | PP17355.000 | 34.79 | 42.16 | 46.77 | 0.00 | 17.90 | 48.08 | 74.00 | -25.92 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00042.EMI

Date: 2022-06-09

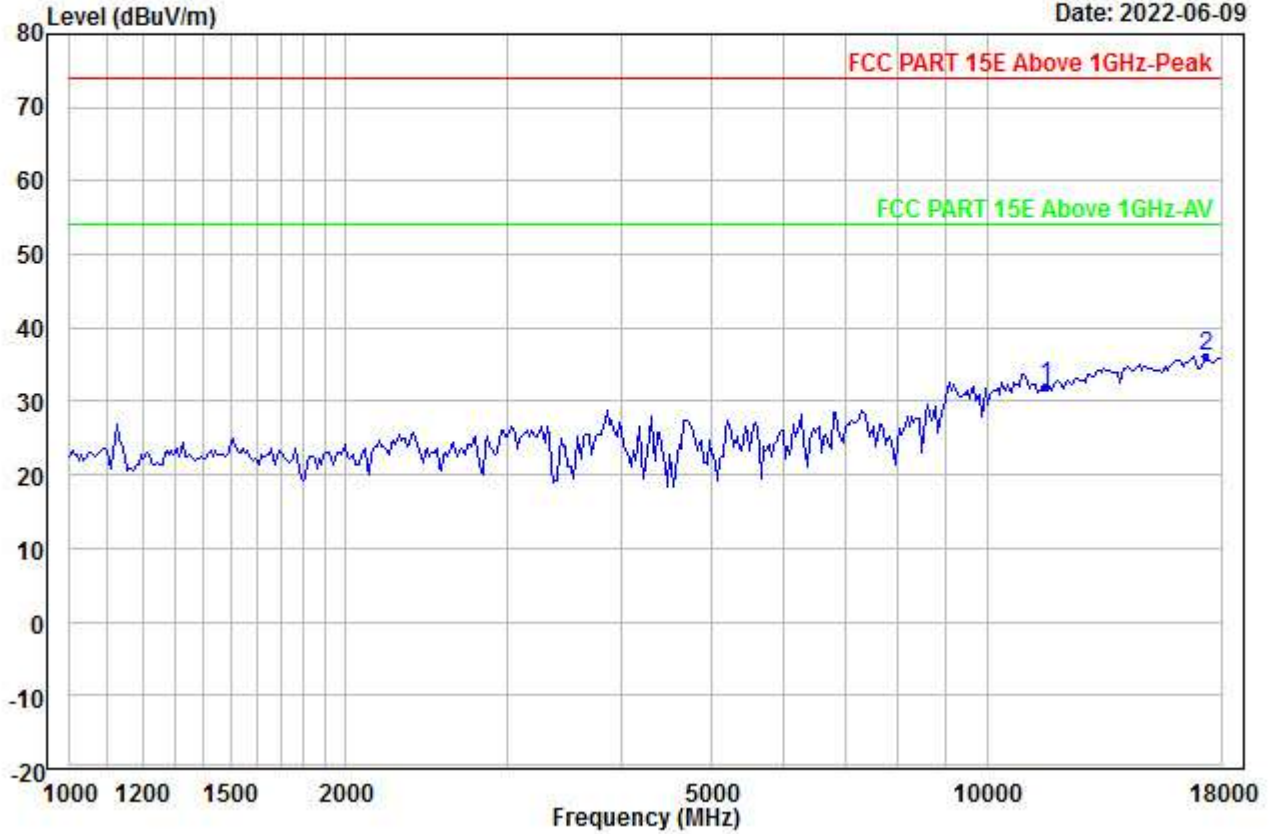


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5785
 Remark :

| | Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Rem: |
|---|-------------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 11570.000 | 24.81 | 38.94 | 46.09 | 0.00 | 14.34 | 32.00 | 54.00 | -22.00 | --- | --- | Aver |
| 2 | PP17355.000 | 22.75 | 42.16 | 46.77 | 0.00 | 17.90 | 36.04 | 54.00 | -17.96 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00043.EMI

Date: 2022-06-09

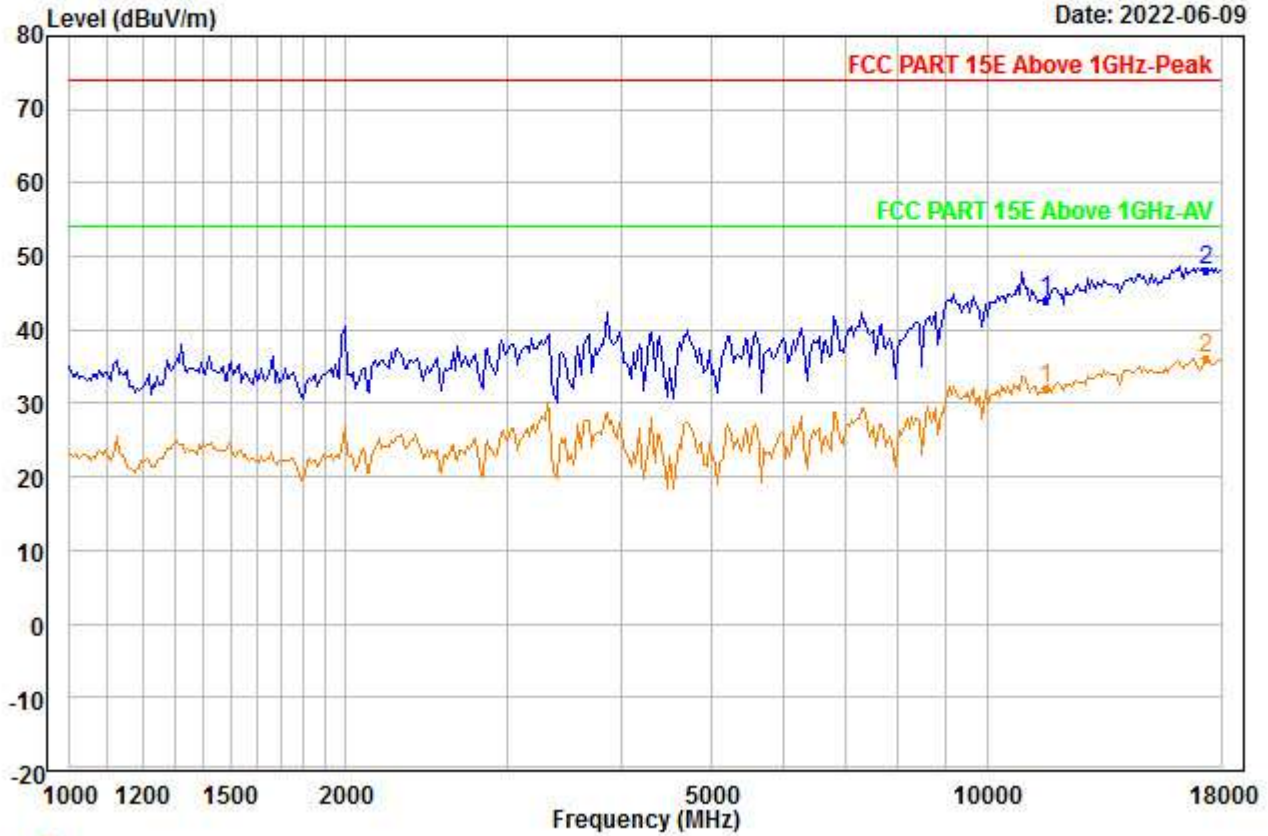


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5785
 Remark :

| | Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Rem: |
|---|-------------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 11570.000 | 36.74 | 38.94 | 46.09 | 0.00 | 14.34 | 43.93 | 74.00 | -30.07 | --- | --- | Peak |
| 2 | PP17355.000 | 34.82 | 42.16 | 46.77 | 0.00 | 17.90 | 48.11 | 74.00 | -25.89 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00044.EMI

Date: 2022-06-09

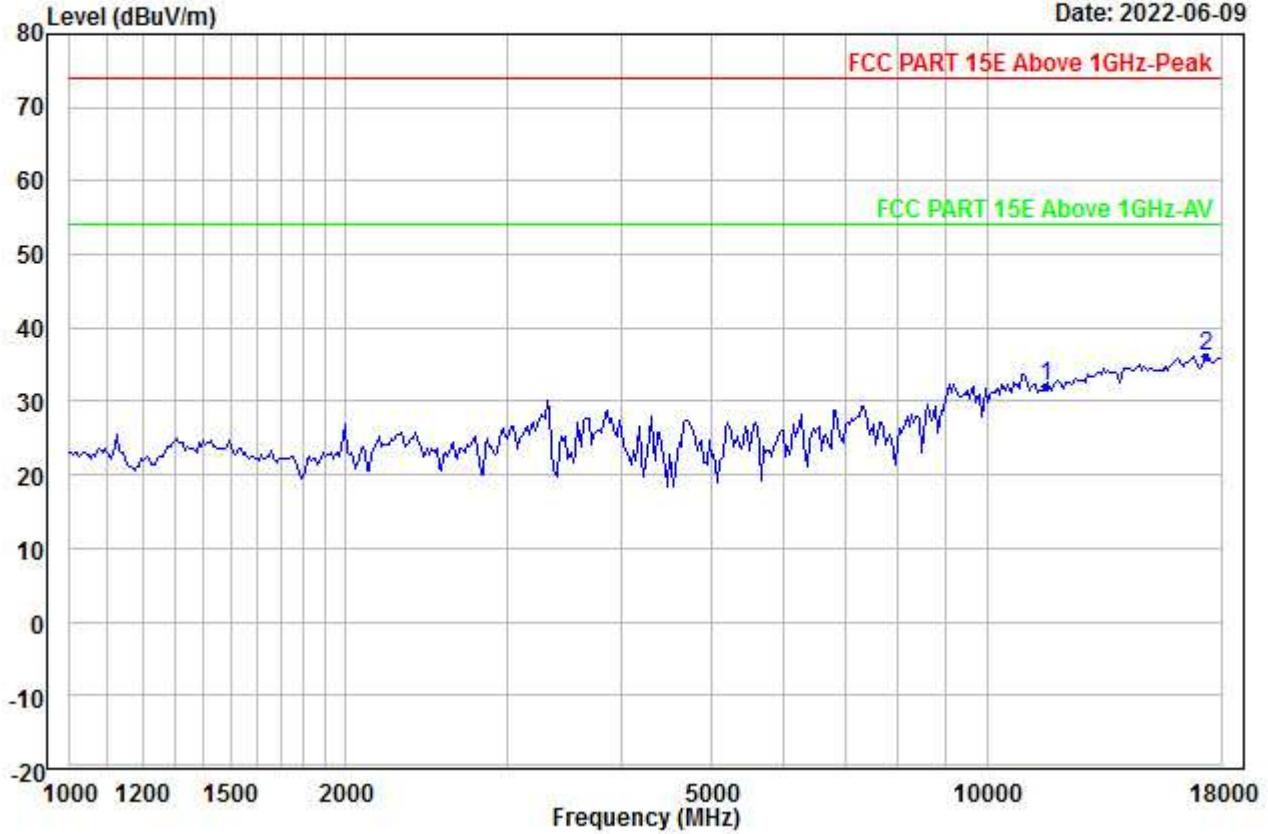


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5785
 Remark :

| | Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Remarks |
|---|-------------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|---------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 11570.000 | 24.81 | 38.94 | 46.09 | 0.00 | 14.34 | 32.00 | 54.00 | -22.00 | --- | --- | Aver |
| 2 | PP17355.000 | 22.86 | 42.16 | 46.77 | 0.00 | 17.90 | 36.15 | 54.00 | -17.85 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00045.EMI

Date: 2022-06-09

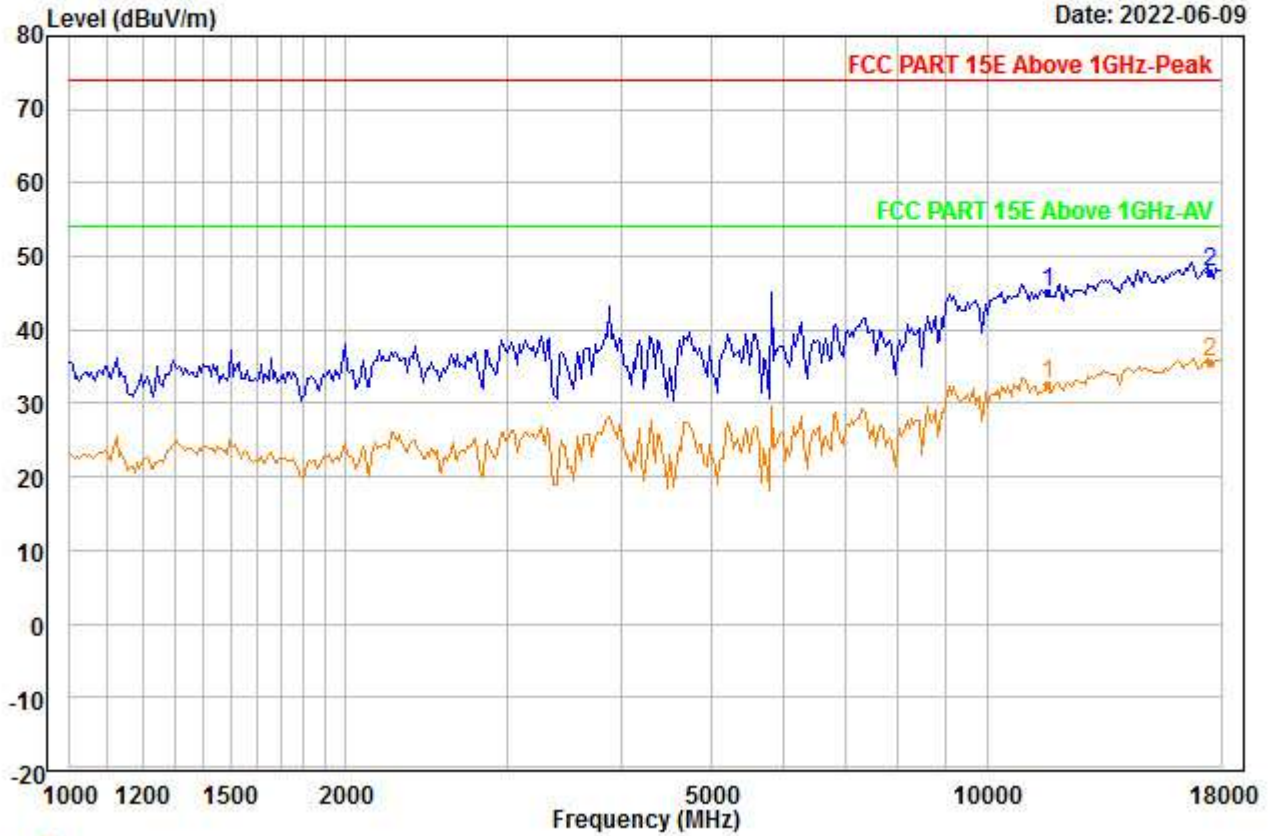


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5825
 Remark :

| | Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Rem: |
|---|-------------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 11650.000 | 37.69 | 38.99 | 46.07 | 0.00 | 14.39 | 45.00 | 74.00 | -29.00 | --- | --- | Peak |
| 2 | PP17475.000 | 34.47 | 42.11 | 46.63 | 0.00 | 17.98 | 47.93 | 74.00 | -26.07 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00046.EMI

Date: 2022-06-09

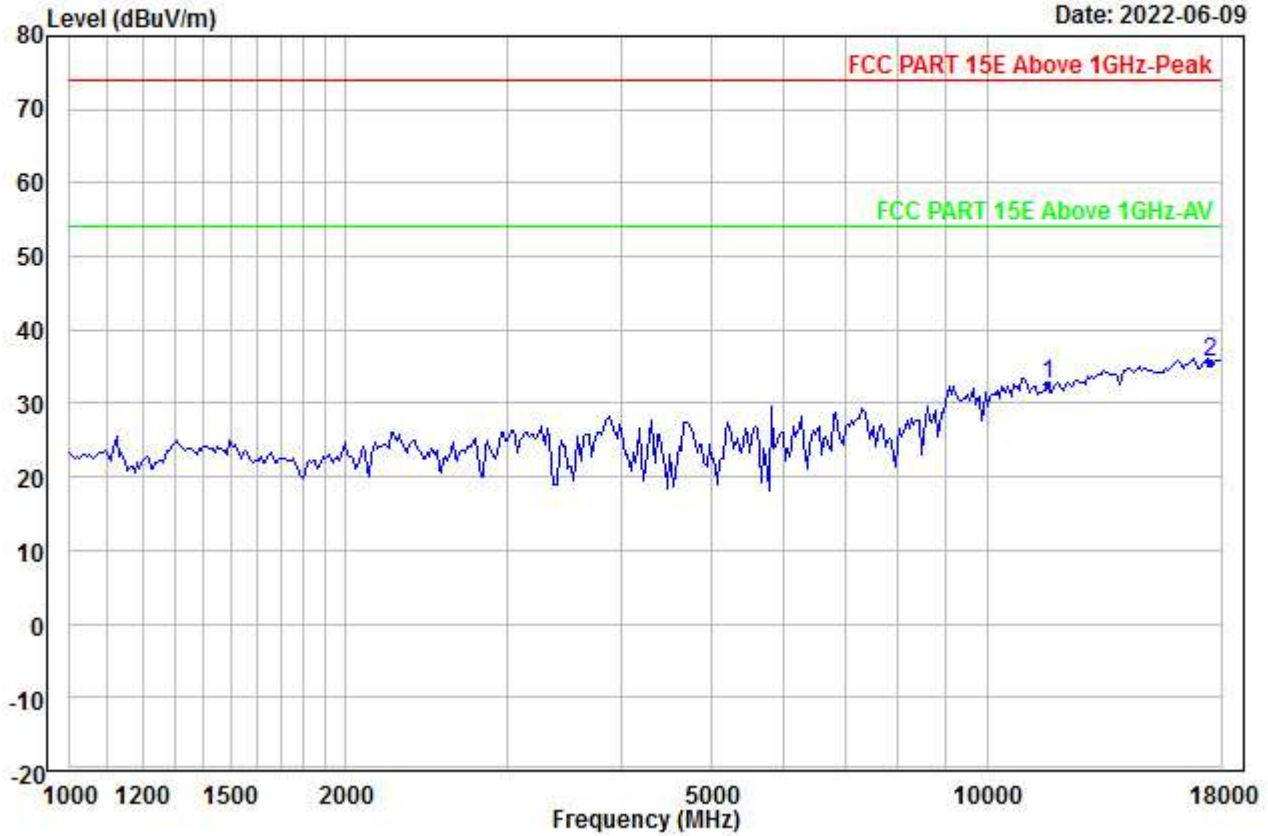


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5825
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 11650.000 | 25.28 | 38.99 | 46.07 | 0.00 | 14.39 | 32.59 | 54.00 | -21.41 | --- | --- | Aver |
| 2 PP17475.000 | 22.18 | 42.11 | 46.63 | 0.00 | 17.98 | 35.64 | 54.00 | -18.36 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00047.EMI

Date: 2022-06-09

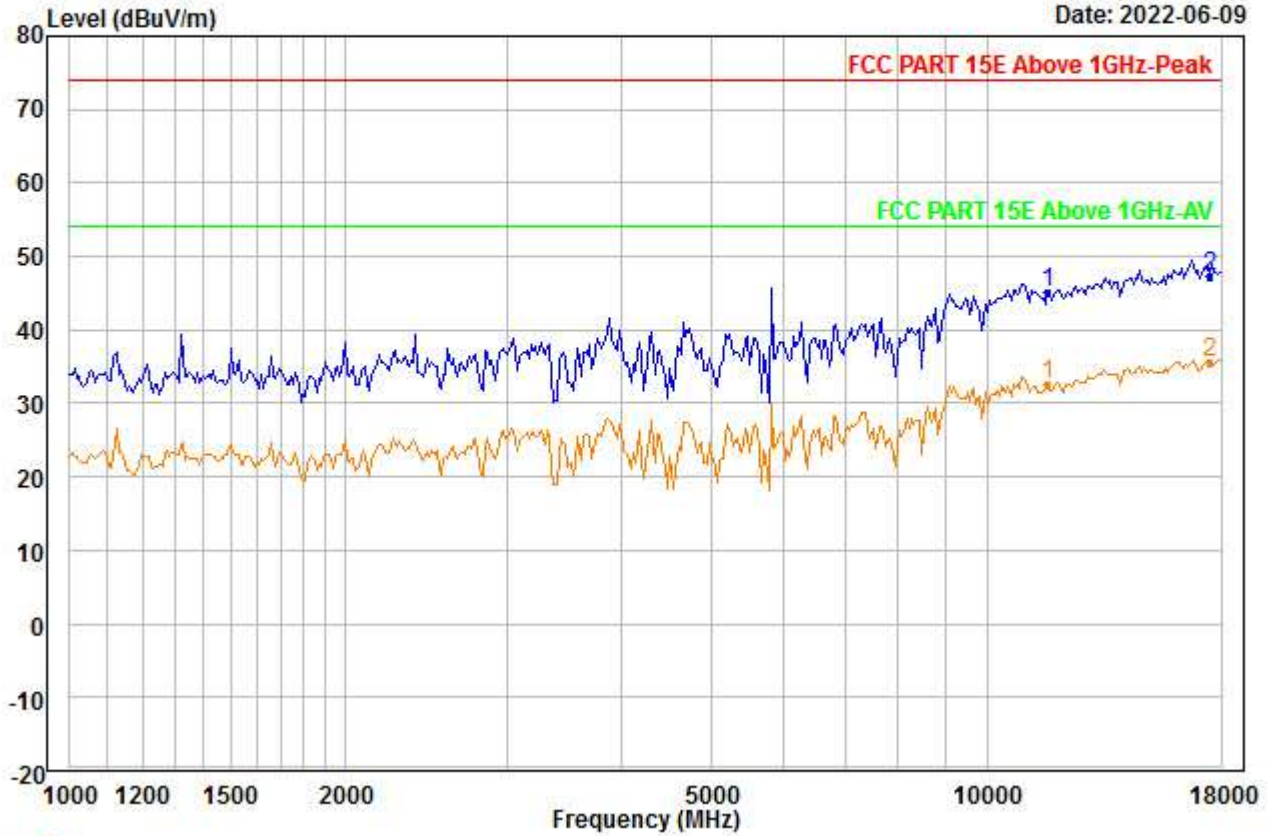


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5825
 Remark :

| | Read Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Rem: |
|---|-------------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 11650.000 | 37.95 | 38.99 | 46.07 | 0.00 | 14.39 | 45.26 | 74.00 | -28.74 | --- | --- | Peak |
| 2 | PP17475.000 | 33.93 | 42.11 | 46.63 | 0.00 | 17.98 | 47.39 | 74.00 | -26.61 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00048.EMI

Date: 2022-06-09

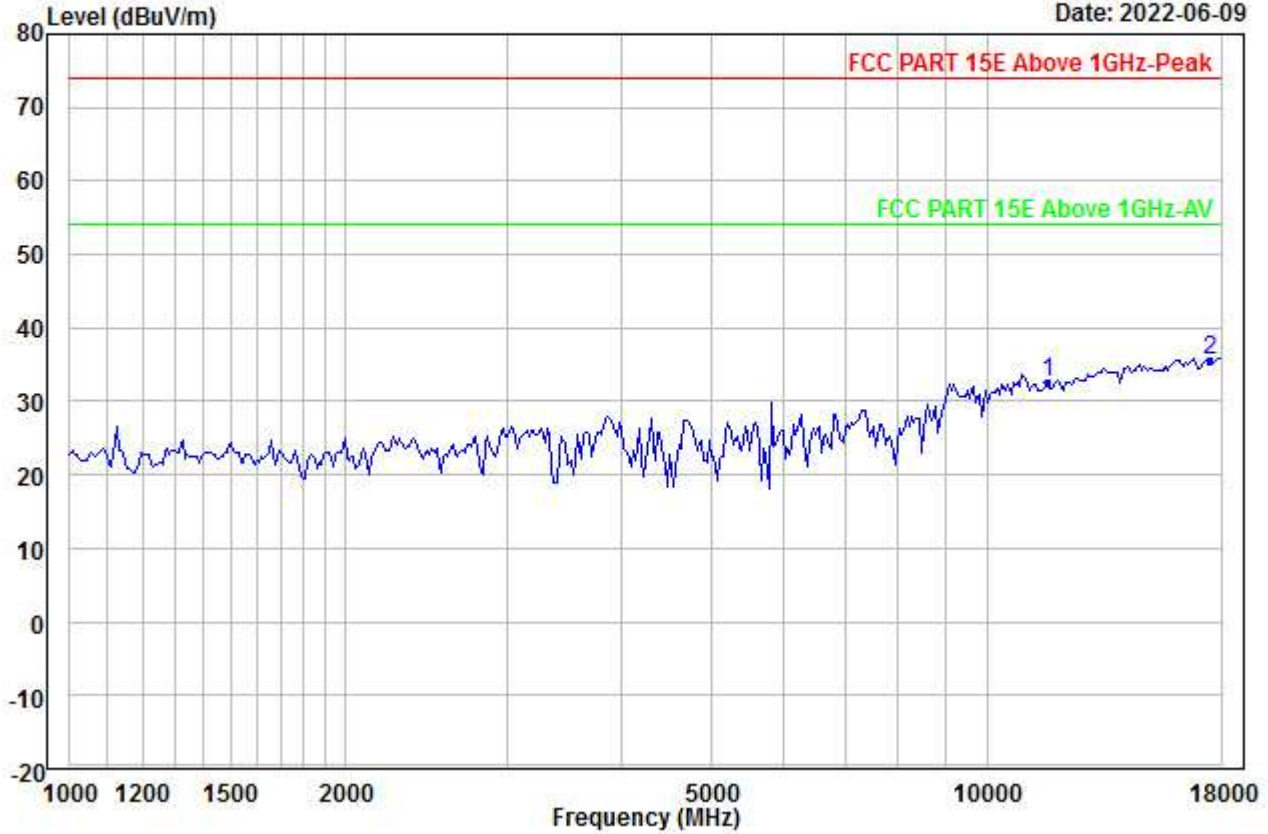


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT0_5825
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 11650.000 | 25.36 | 38.99 | 46.07 | 0.00 | 14.39 | 32.67 | 54.00 | -21.33 | --- | --- | Aver |
| 2 PP17475.000 | 22.07 | 42.11 | 46.63 | 0.00 | 17.98 | 35.53 | 54.00 | -18.47 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00049.EMI

Date: 2022-06-09

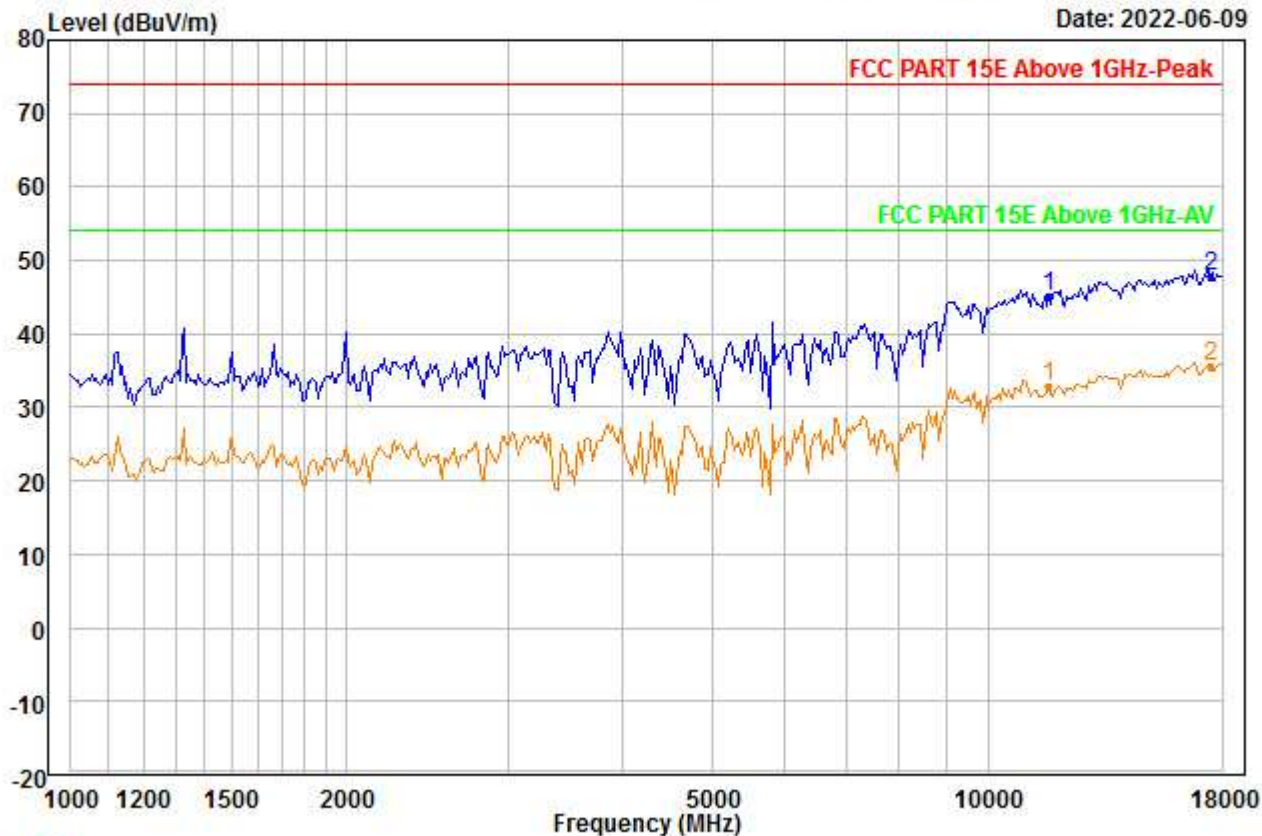


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5825
 Remark :

| | Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Rem: |
|---|-------------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 11650.000 | 37.84 | 38.99 | 46.07 | 0.00 | 14.39 | 45.15 | 74.00 | -28.85 | --- | --- | Peak |
| 2 | PP17475.000 | 34.31 | 42.11 | 46.63 | 0.00 | 17.98 | 47.77 | 74.00 | -26.23 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00050.EMI

Date: 2022-06-09

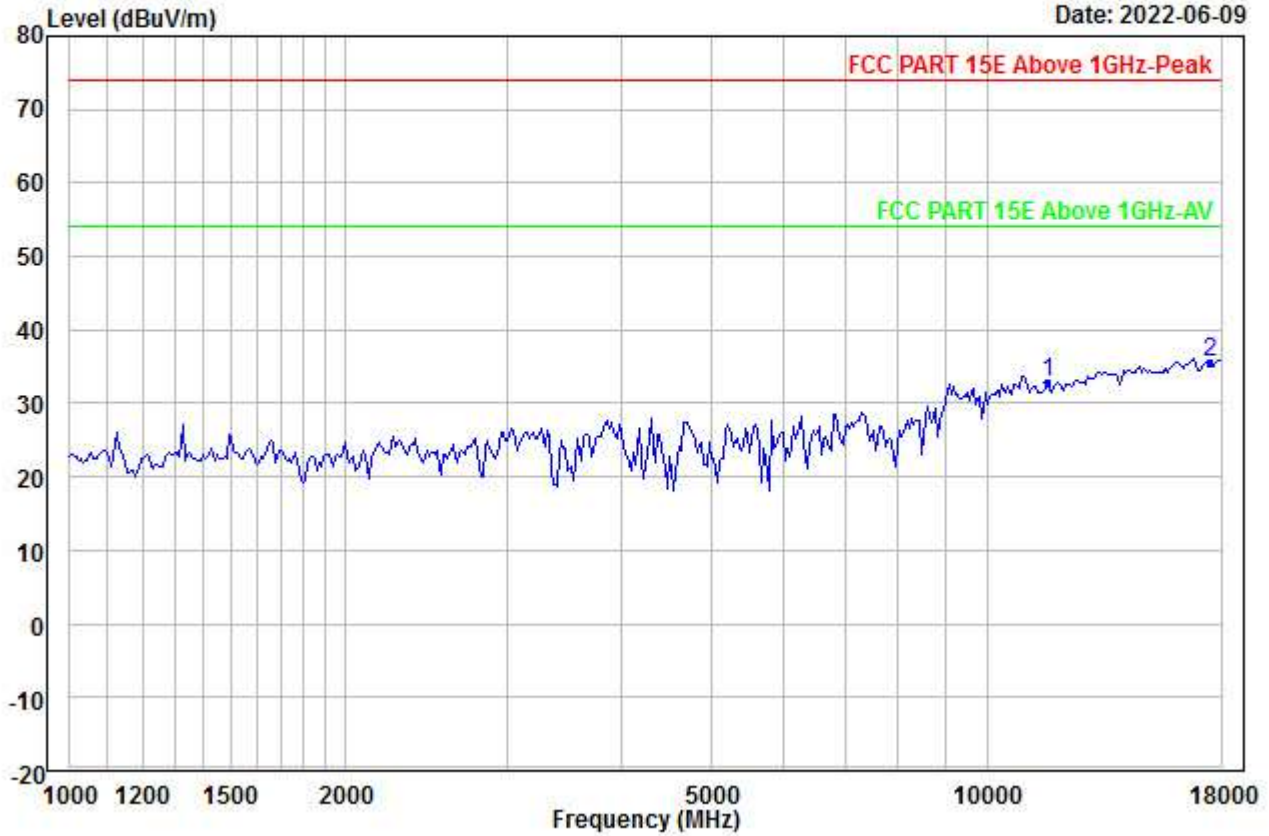


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5825
 Remark :

| | Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Remarks |
|---|-------------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|---------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 11650.000 | 25.43 | 38.99 | 46.07 | 0.00 | 14.39 | 32.74 | 54.00 | -21.26 | --- | --- | Aver |
| 2 | PP17475.000 | 22.07 | 42.11 | 46.63 | 0.00 | 17.98 | 35.53 | 54.00 | -18.47 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00051.EMI

Date: 2022-06-09

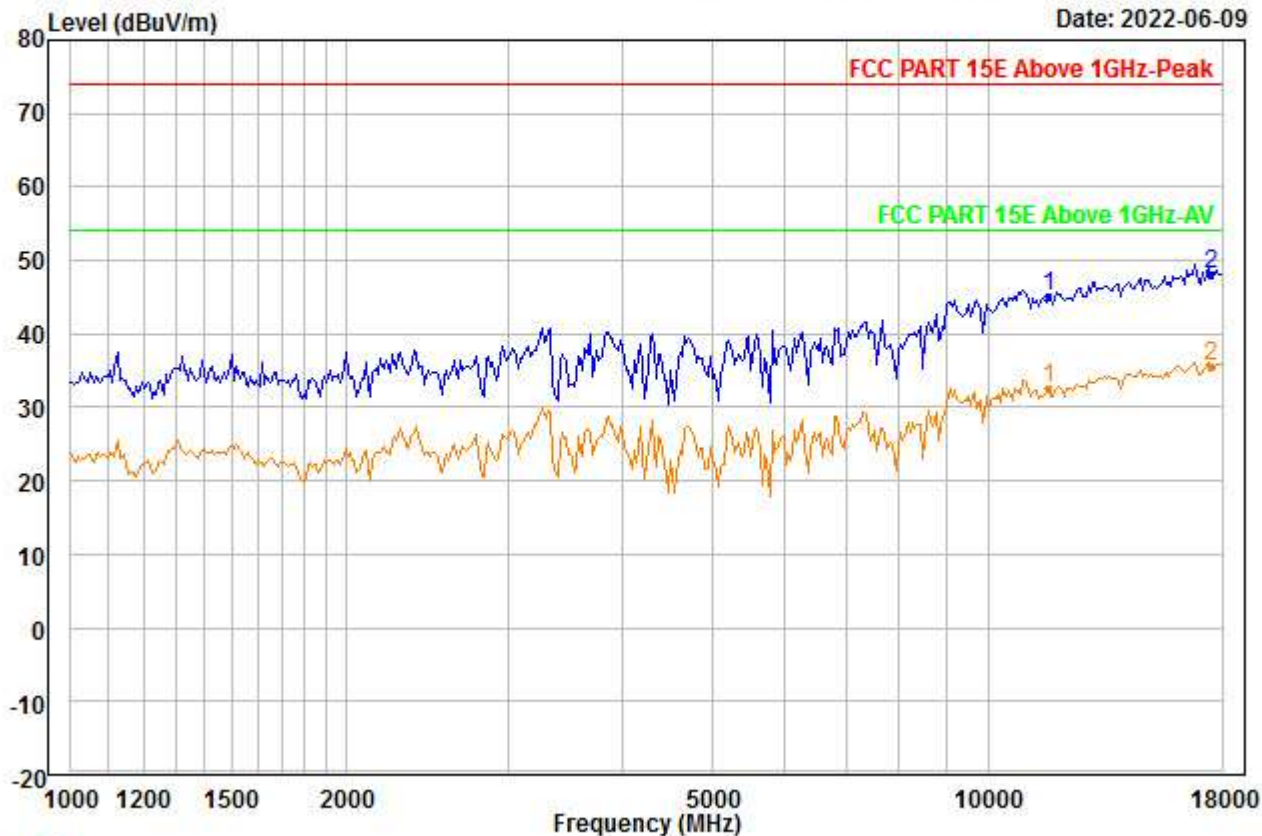


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5825
 Remark :

| | Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Rem: |
|---|-------------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 11650.000 | 37.78 | 38.99 | 46.07 | 0.00 | 14.39 | 45.09 | 74.00 | -28.91 | --- | --- | Peak |
| 2 | PP17475.000 | 34.58 | 42.11 | 46.63 | 0.00 | 17.98 | 48.04 | 74.00 | -25.96 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00052.EMI

Date: 2022-06-09

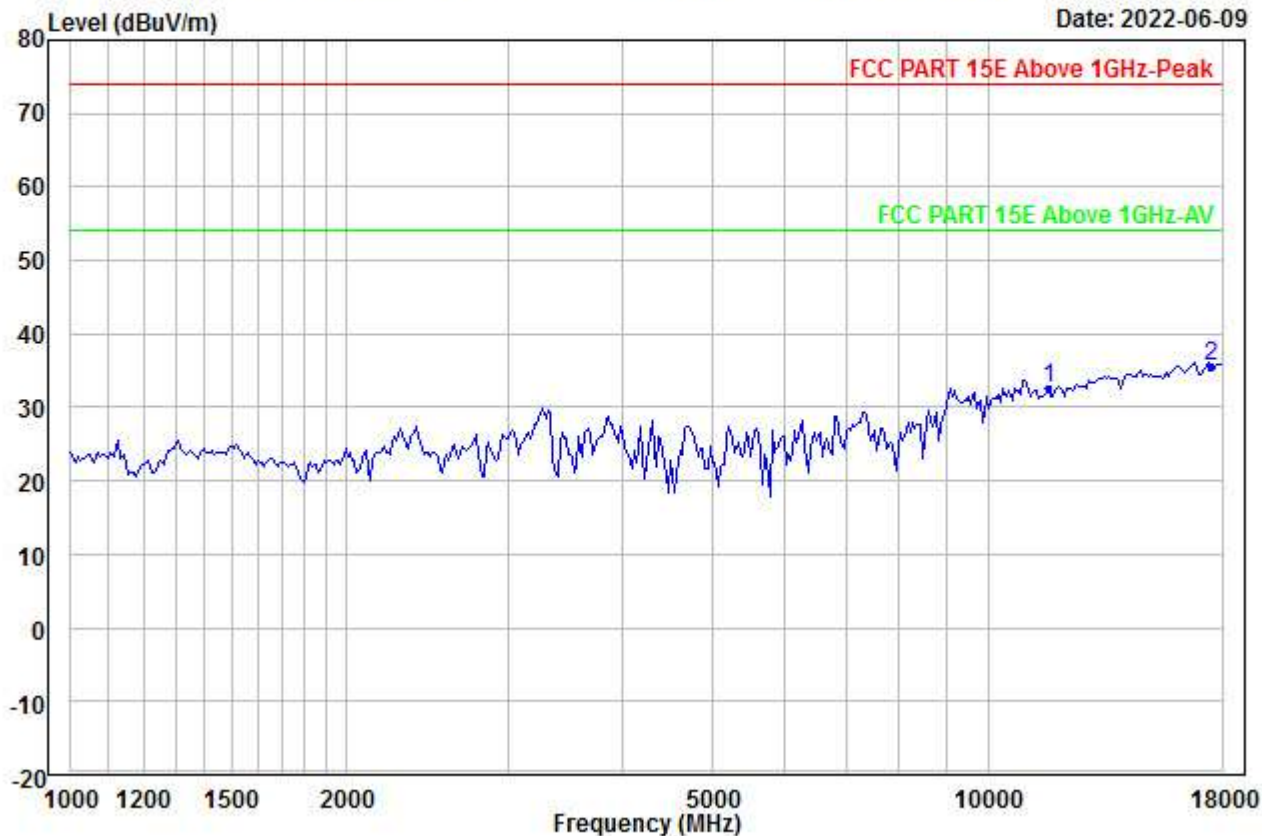


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5825
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rema | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 11650.000 | 25.28 | 38.99 | 46.07 | 0.00 | 14.39 | 32.59 | 54.00 | -21.41 | --- | --- | Aver |
| 2 PP17475.000 | 22.07 | 42.11 | 46.63 | 0.00 | 17.98 | 35.53 | 54.00 | -18.47 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00053.EMI

Date: 2022-06-09

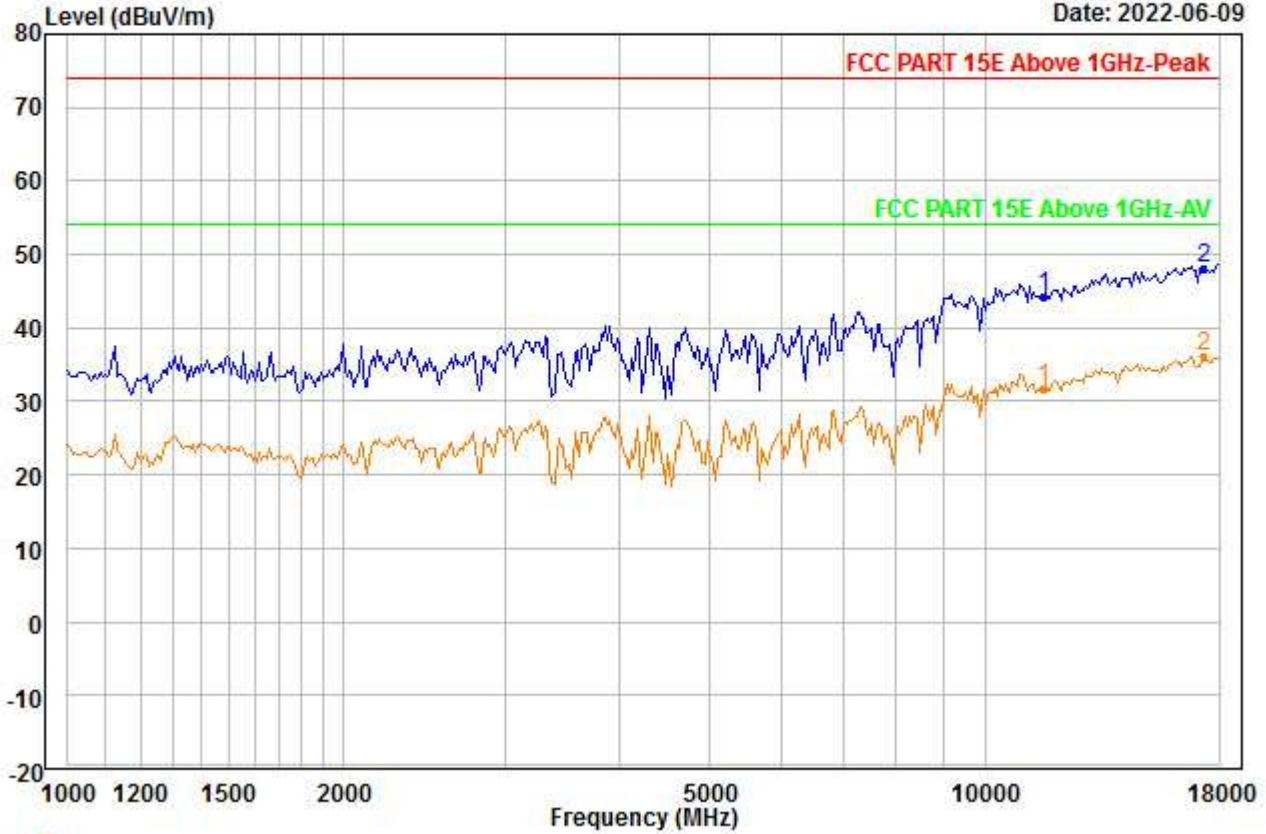


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5785
 Remark :

| | Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Remarks |
|---|-------------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|---------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 11570.000 | 37.18 | 38.94 | 46.09 | 0.00 | 14.34 | 44.37 | 74.00 | -29.63 | --- | --- | Peak |
| 2 | PP17355.000 | 34.82 | 42.16 | 46.77 | 0.00 | 17.90 | 48.11 | 74.00 | -25.89 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00054.EMI

Date: 2022-06-09

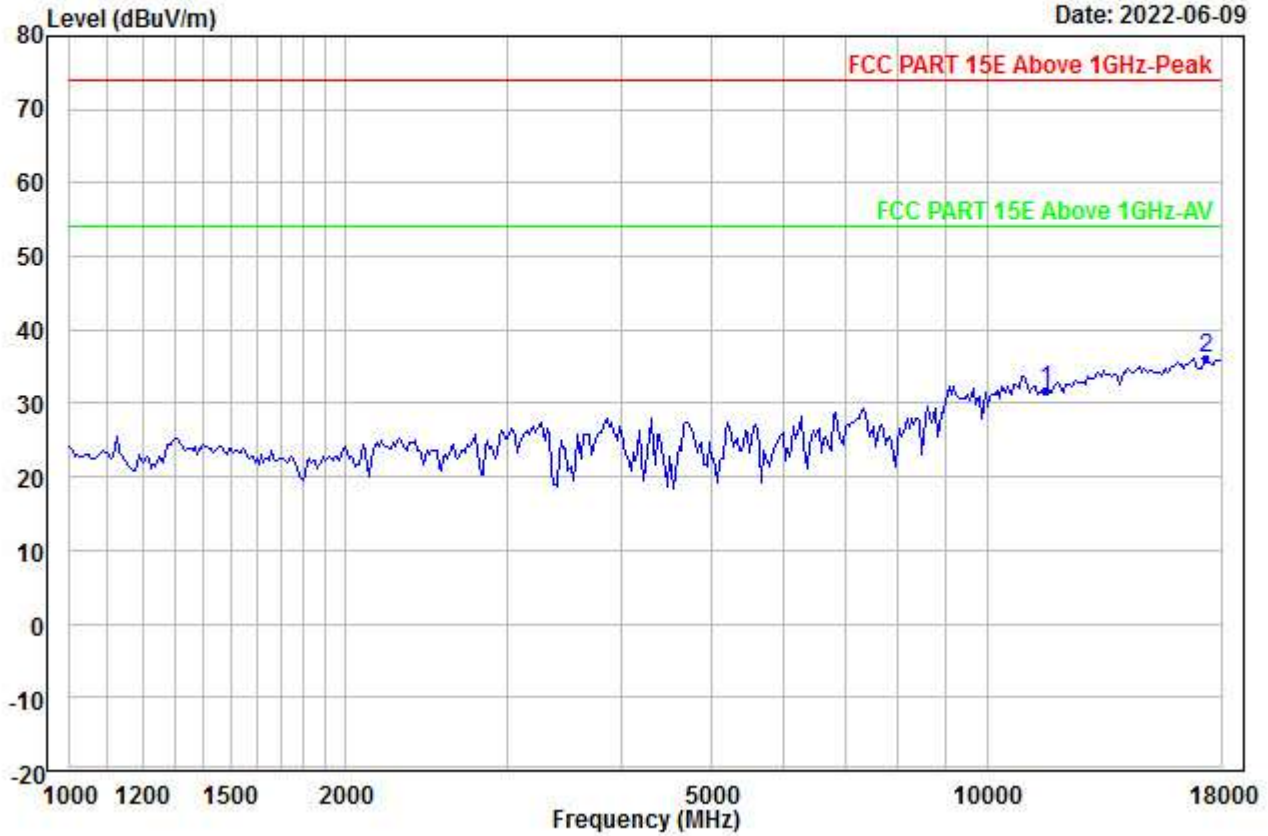


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5785
 Remark :

| | Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Rem: |
|---|-------------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 11570.000 | 24.64 | 38.94 | 46.09 | 0.00 | 14.34 | 31.83 | 54.00 | -22.17 | --- | --- | Aver |
| 2 | PP17355.000 | 22.86 | 42.16 | 46.77 | 0.00 | 17.90 | 36.15 | 54.00 | -17.85 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00055.EMI

Date: 2022-06-09

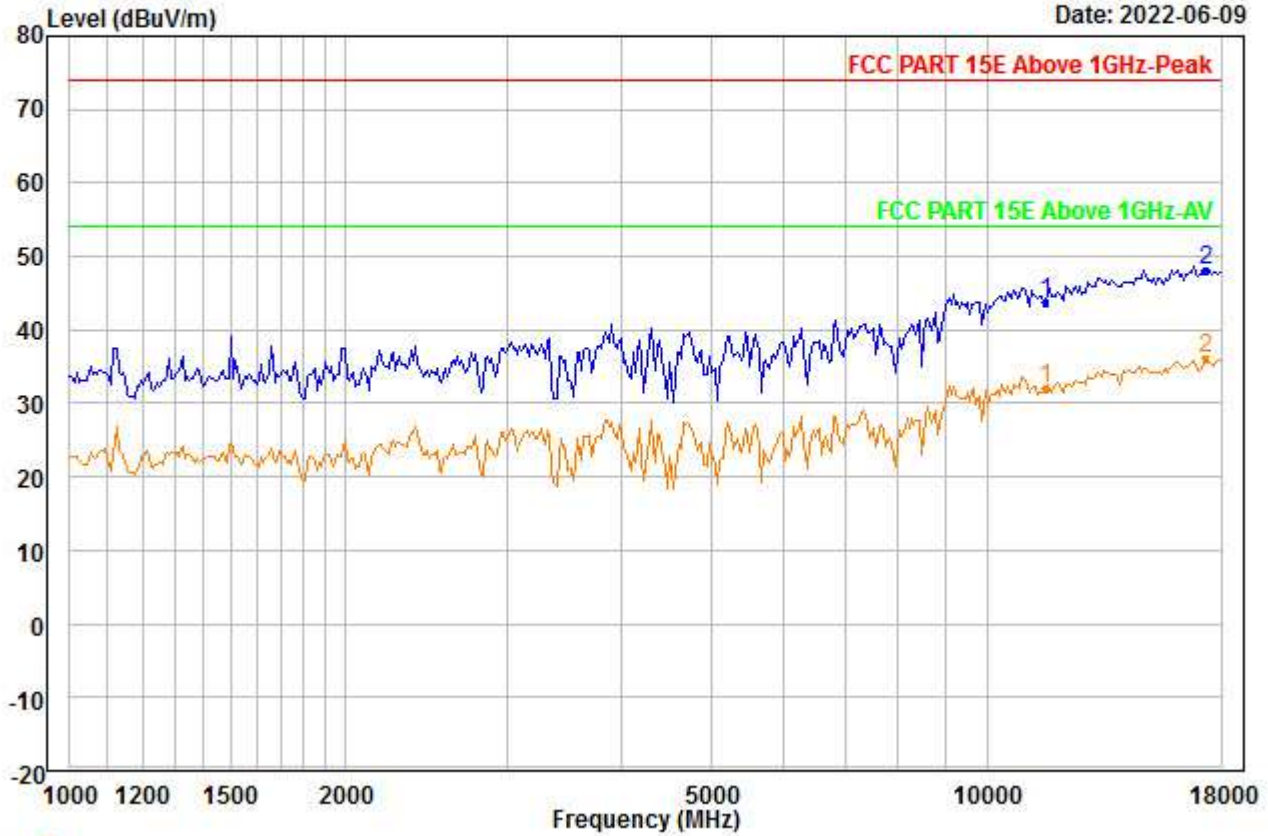


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5785
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 11570.000 | 36.55 | 38.94 | 46.09 | 0.00 | 14.34 | 43.74 | 74.00 | -30.26 | --- | --- | Peak |
| 2 PP17355.000 | 34.92 | 42.16 | 46.77 | 0.00 | 17.90 | 48.21 | 74.00 | -25.79 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00056.EMI

Date: 2022-06-09

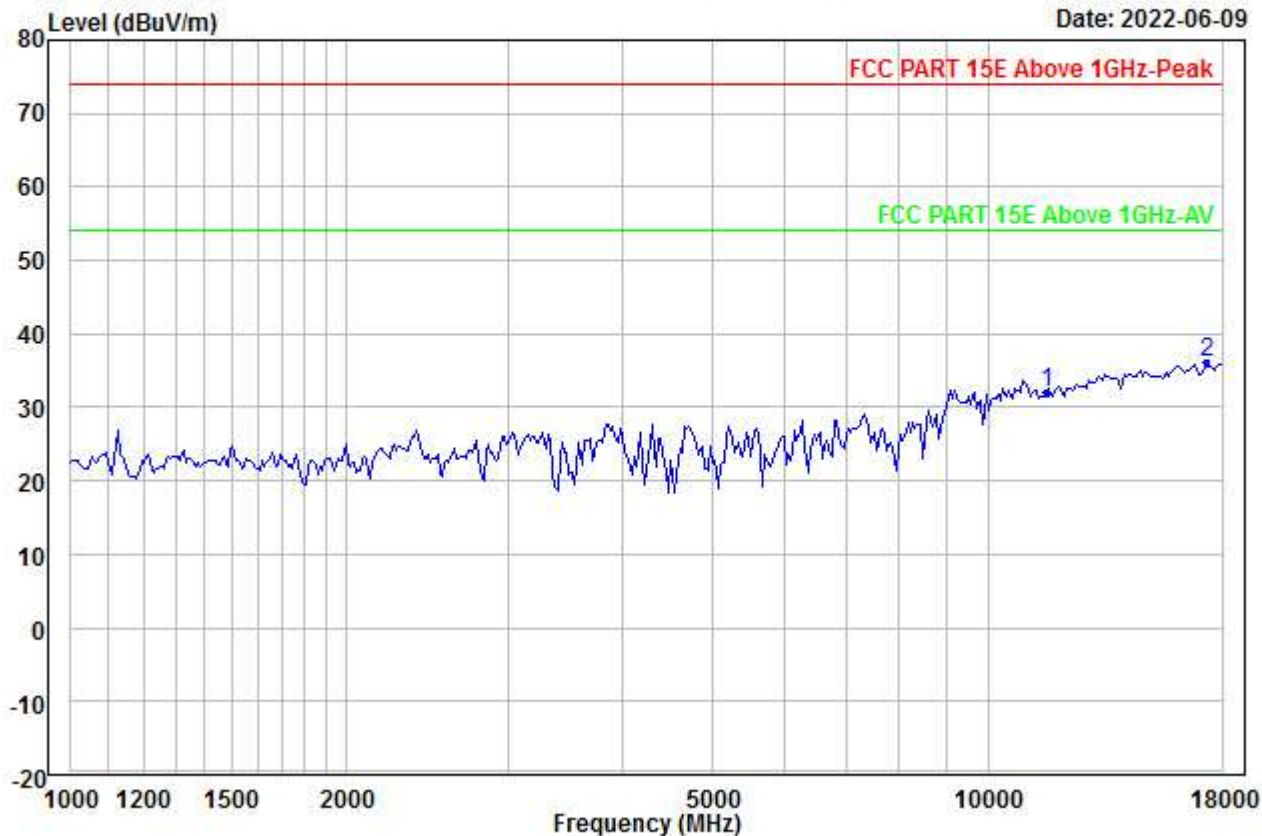


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5785
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 11570.000 | 24.72 | 38.94 | 46.09 | 0.00 | 14.34 | 31.91 | 54.00 | -22.09 | --- | --- | Aver |
| 2 PP17355.000 | 22.75 | 42.16 | 46.77 | 0.00 | 17.90 | 36.04 | 54.00 | -17.96 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00057.EMI

Date: 2022-06-09

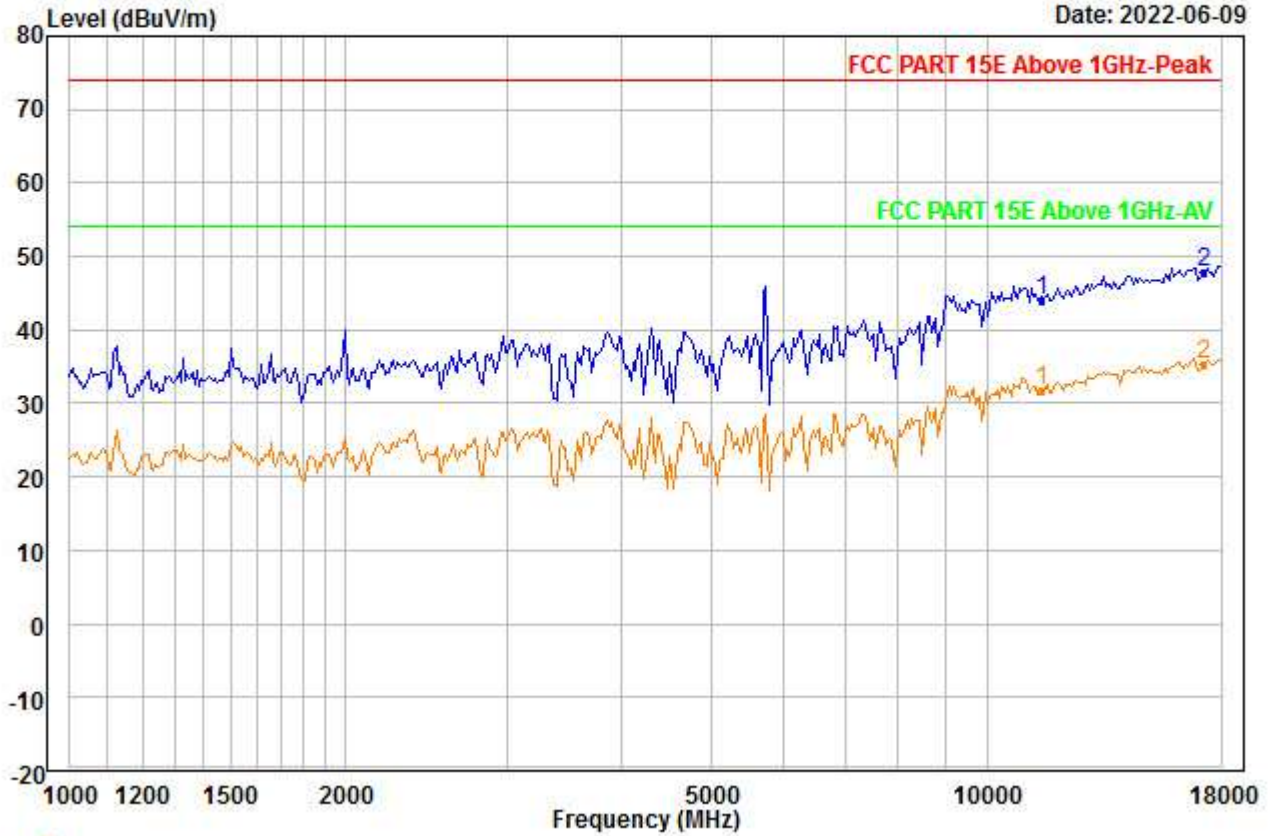


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5745
 Remark :

| | Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Rem: |
|---|-------------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 11490.000 | 37.05 | 38.89 | 46.08 | 0.00 | 14.28 | 44.14 | 74.00 | -29.86 | --- | --- | Peak |
| 2 | PP17235.000 | 34.77 | 42.21 | 46.92 | 0.00 | 17.83 | 47.89 | 74.00 | -26.11 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00058.EMI

Date: 2022-06-09

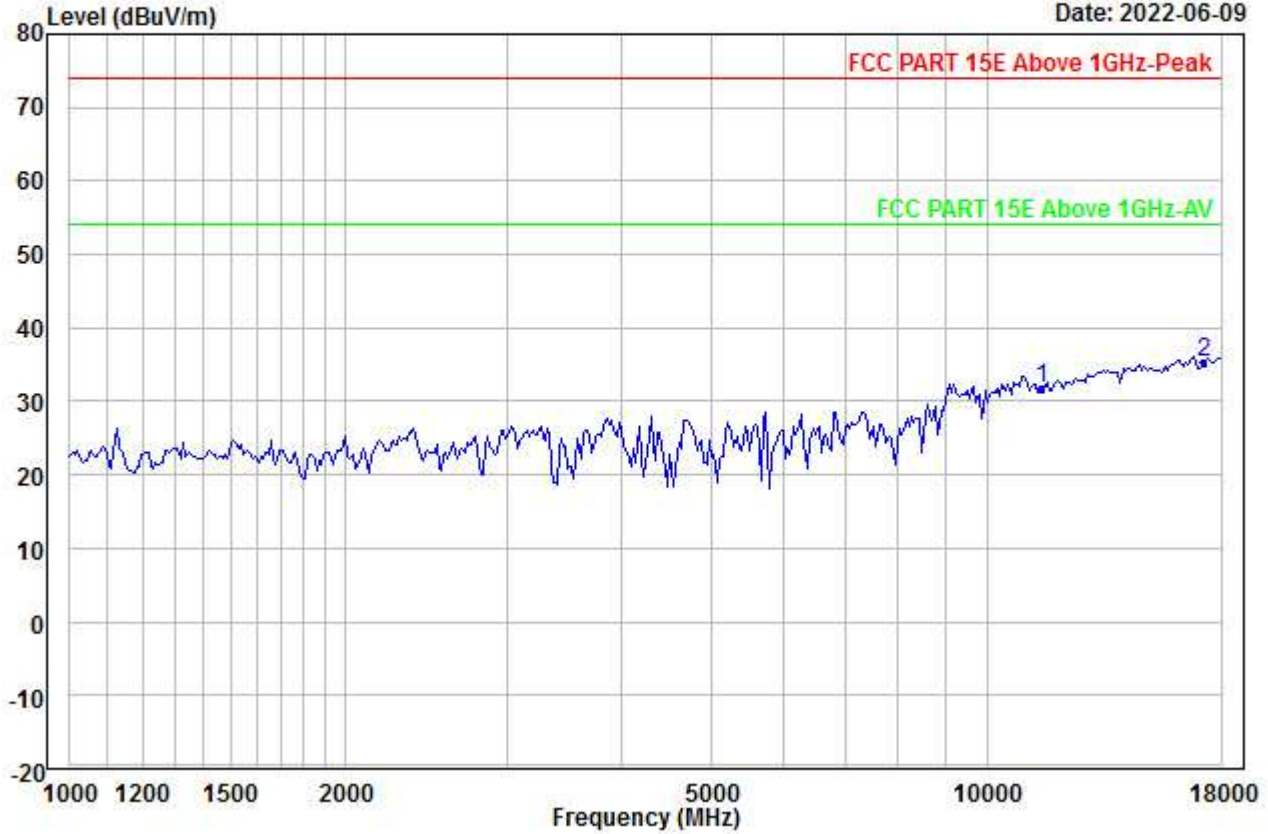


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5745
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 11490.000 | 24.81 | 38.89 | 46.08 | 0.00 | 14.28 | 31.90 | 54.00 | -22.10 | --- | --- | Aver |
| 2 PP17235.000 | 22.12 | 42.21 | 46.92 | 0.00 | 17.83 | 35.24 | 54.00 | -18.76 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00059.EMI

Date: 2022-06-09

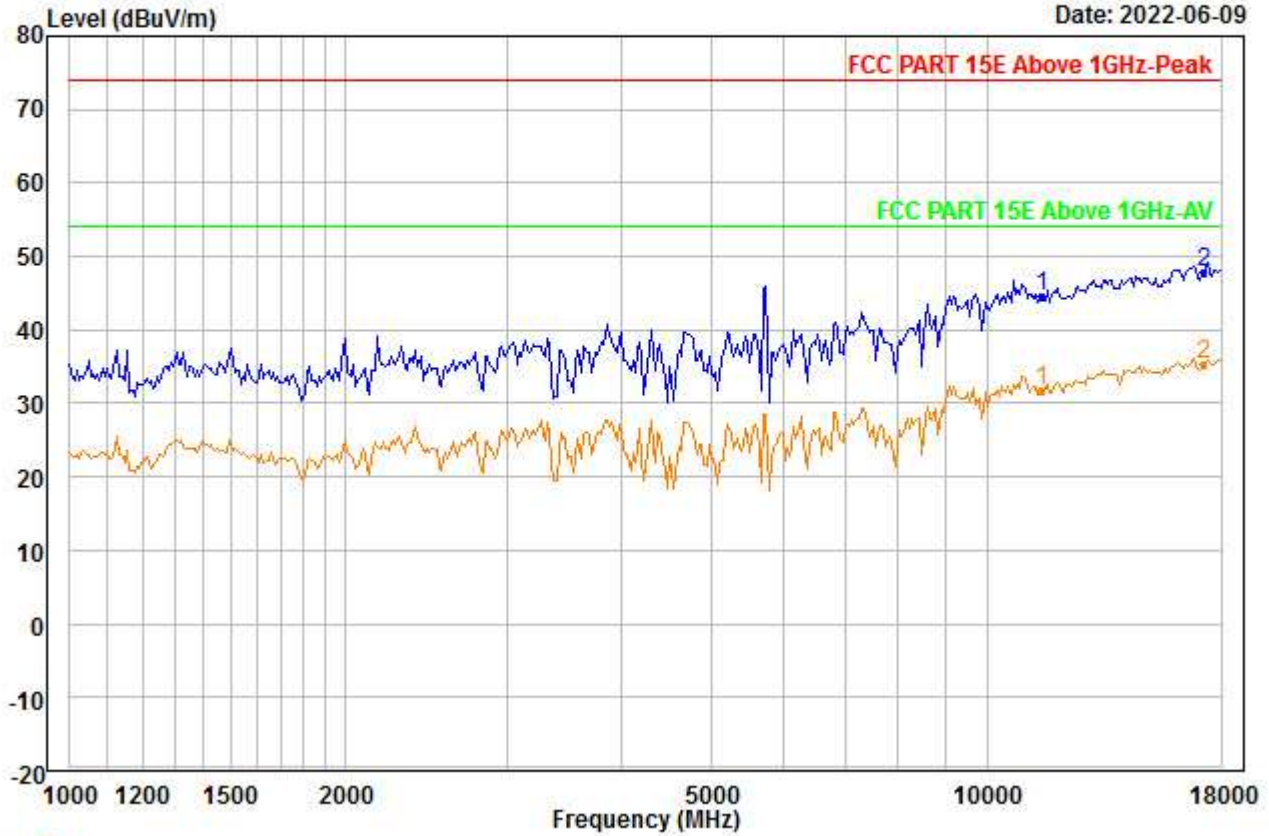


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5745
 Remark :

| | Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Rem: |
|---|-------------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 11490.000 | 37.35 | 38.89 | 46.08 | 0.00 | 14.28 | 44.44 | 74.00 | -29.56 | --- | --- | Peak |
| 2 | PP17235.000 | 34.71 | 42.21 | 46.92 | 0.00 | 17.83 | 47.83 | 74.00 | -26.17 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00060.EMI

Date: 2022-06-09

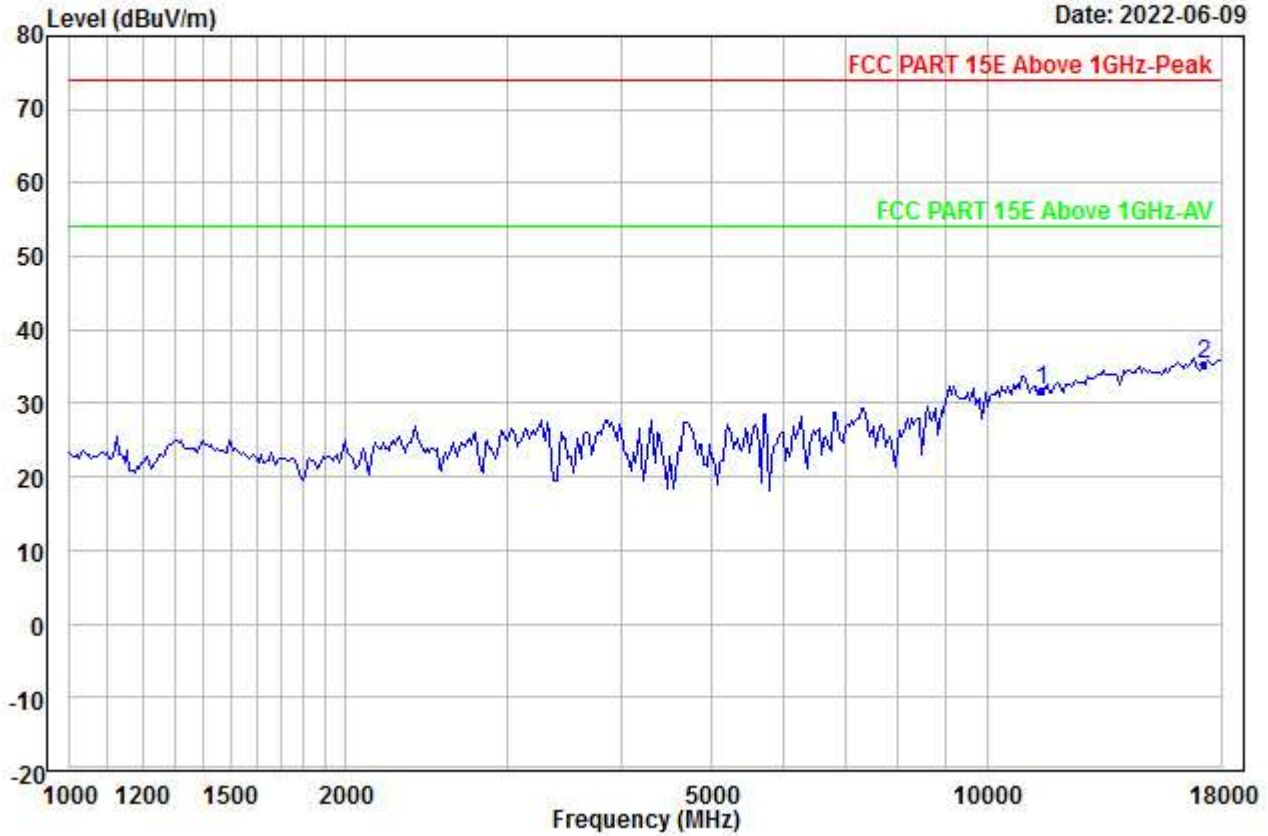


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5745
 Remark :

| | Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Rem: |
|---|-------------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 11490.000 | 24.72 | 38.89 | 46.08 | 0.00 | 14.28 | 31.81 | 54.00 | -22.19 | --- | --- | Aver |
| 2 | PP17235.000 | 22.23 | 42.21 | 46.92 | 0.00 | 17.83 | 35.35 | 54.00 | -18.65 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00061.EMI

Date: 2022-06-09

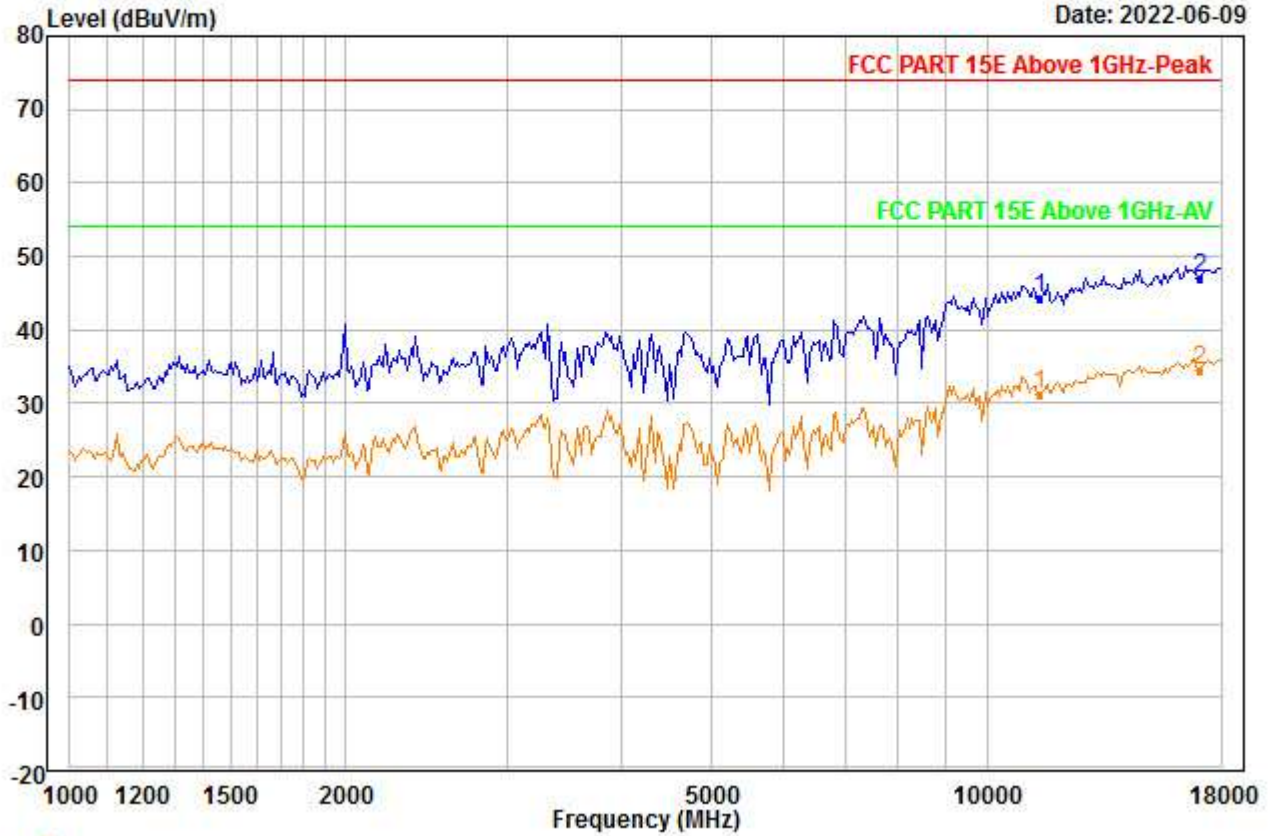


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5700
 Remark :

| | Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Rem: |
|---|-------------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 11400.000 | 37.15 | 38.82 | 45.88 | 0.00 | 14.21 | 44.30 | 74.00 | -29.70 | --- | --- | Peak |
| 2 | PP17100.000 | 34.24 | 42.26 | 47.08 | 0.00 | 17.74 | 47.16 | 74.00 | -26.84 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00062.EMI

Date: 2022-06-09

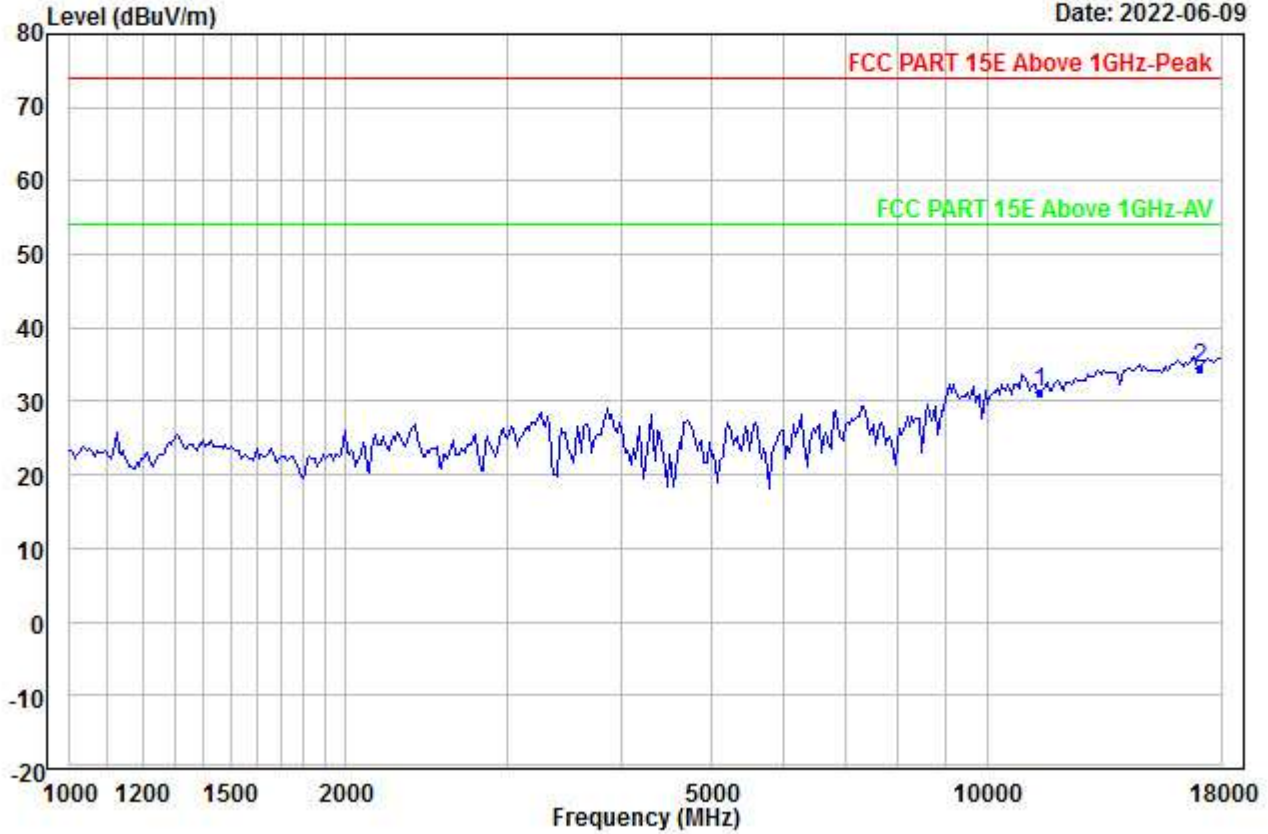


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5700
 Remark :

| | Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Remarks |
|---|-------------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|---------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 11400.000 | 24.18 | 38.82 | 45.88 | 0.00 | 14.21 | 31.33 | 54.00 | -22.67 | --- | --- | Aver |
| 2 | PP17100.000 | 21.68 | 42.26 | 47.08 | 0.00 | 17.74 | 34.60 | 54.00 | -19.40 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00063.EMI

Date: 2022-06-09

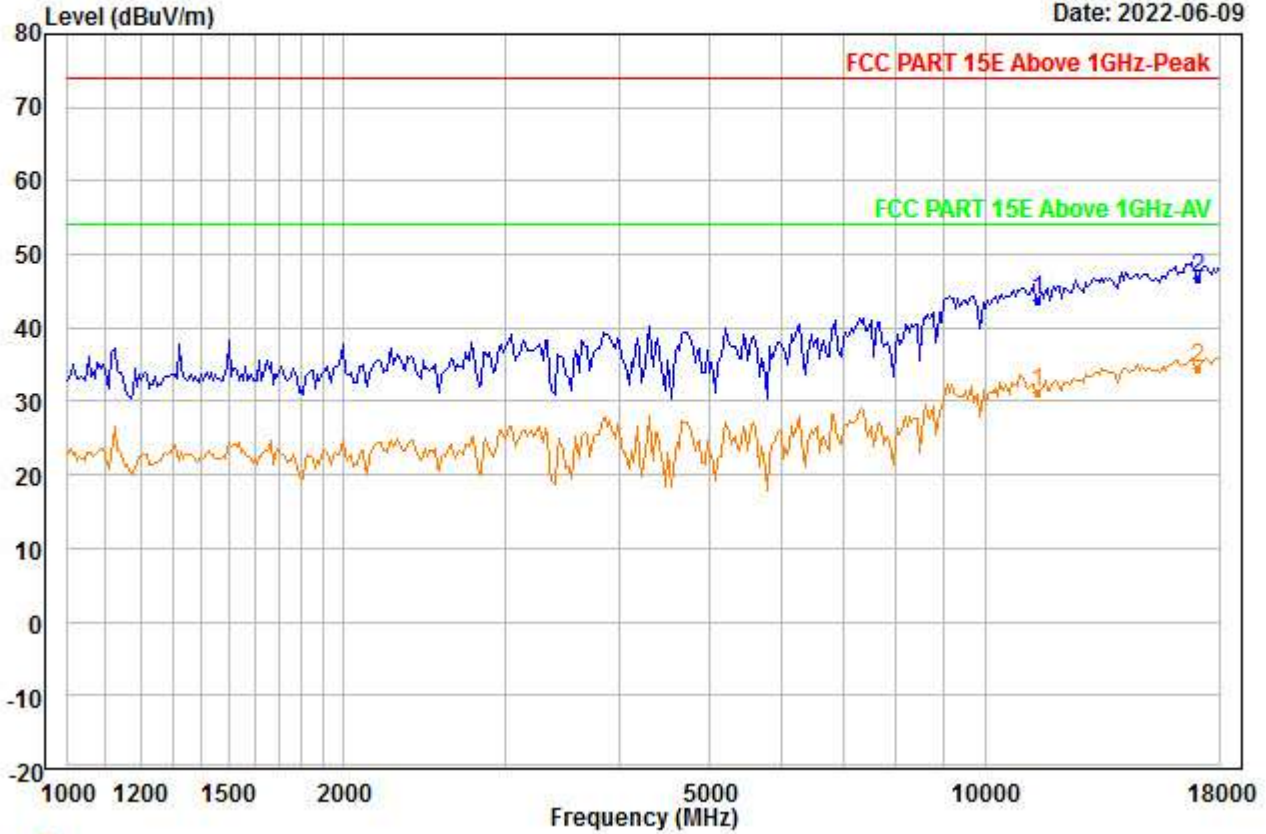


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5700
 Remark :

| | Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Rem: |
|---|-------------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 11400.000 | 36.61 | 38.82 | 45.88 | 0.00 | 14.21 | 43.76 | 74.00 | -30.24 | --- | --- | Peak |
| 2 | PP17100.000 | 33.81 | 42.26 | 47.08 | 0.00 | 17.74 | 46.73 | 74.00 | -27.27 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00064.EMI

Date: 2022-06-09

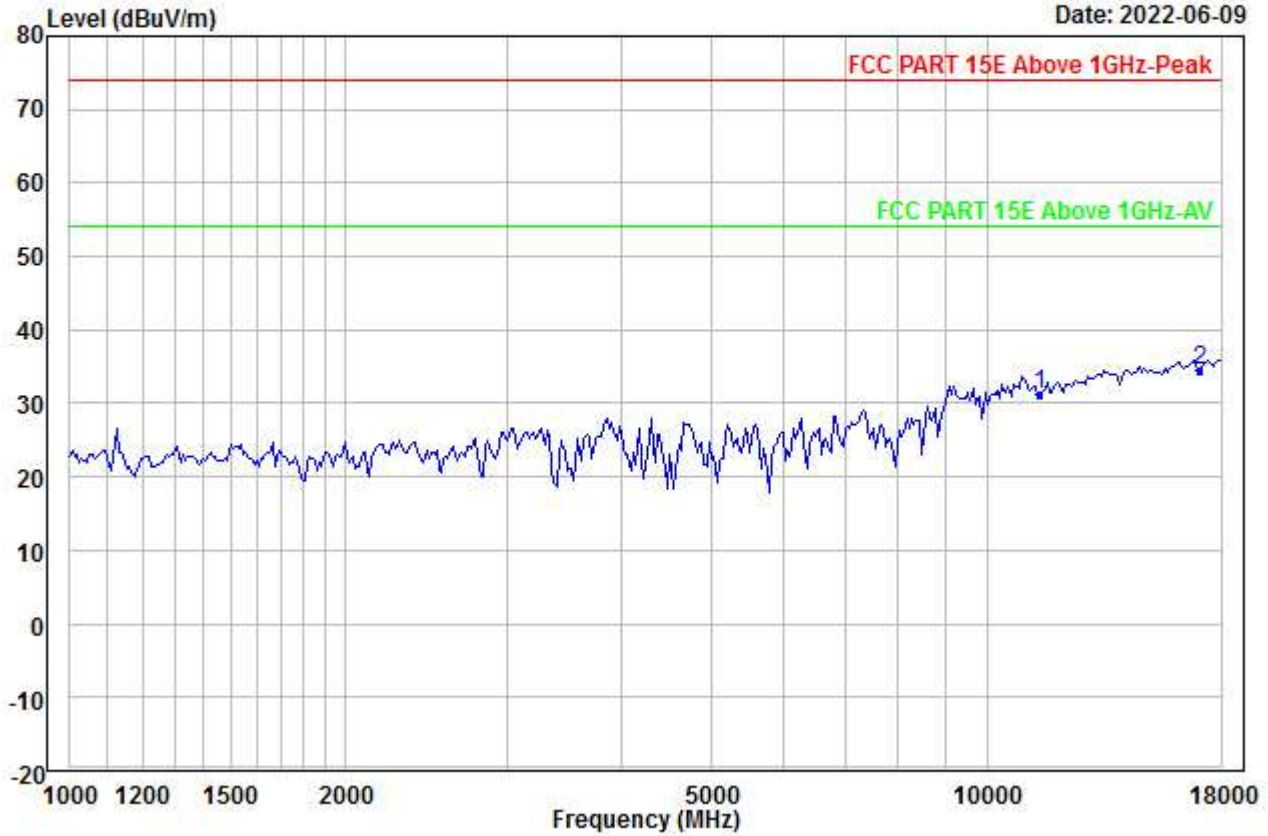


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5700
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 11400.000 | 24.18 | 38.82 | 45.88 | 0.00 | 14.21 | 31.33 | 54.00 | -22.67 | --- | --- | Aver |
| 2 PP17100.000 | 21.68 | 42.26 | 47.08 | 0.00 | 17.74 | 34.60 | 54.00 | -19.40 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00065.EMI

Date: 2022-06-09

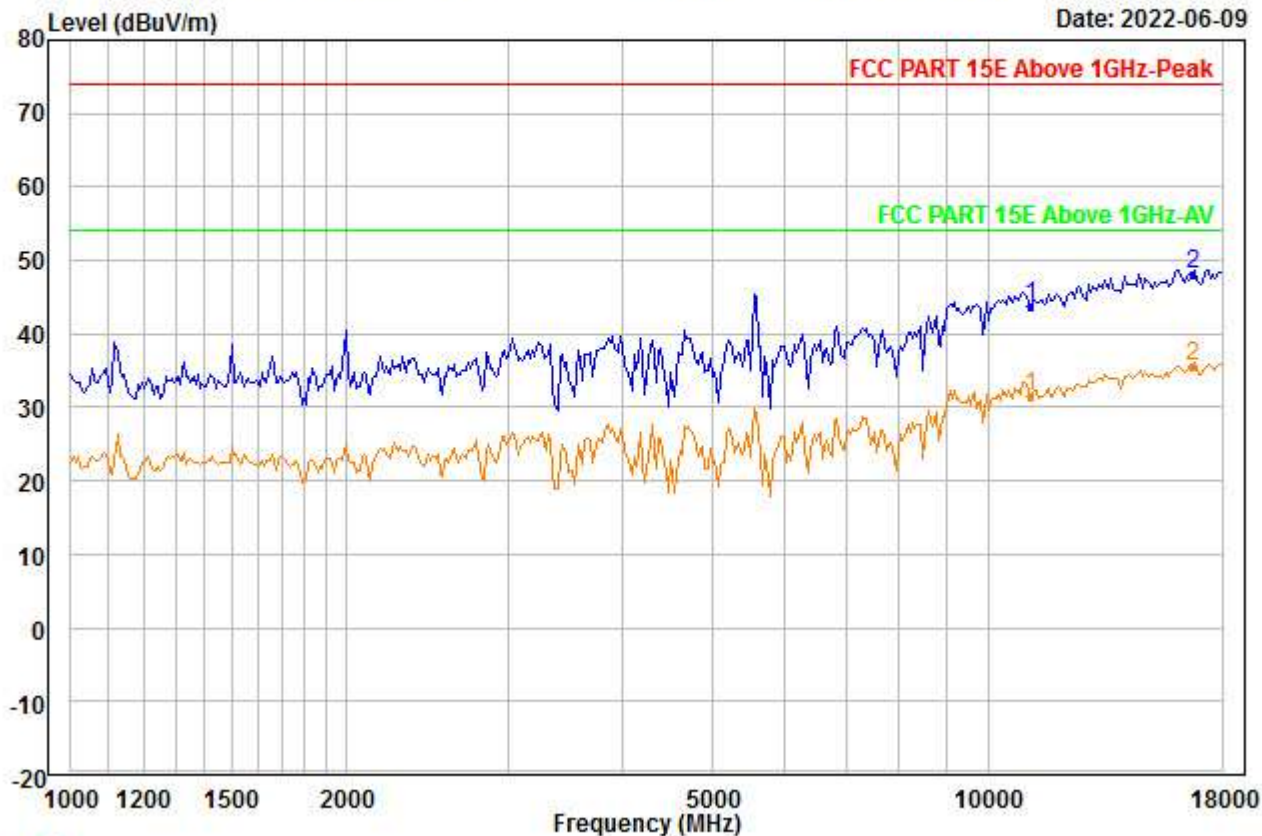


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5580
 Remark :

| | Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Rem: |
|---|-------------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 11160.000 | 36.58 | 38.63 | 45.35 | 0.00 | 14.04 | 43.90 | 74.00 | -30.10 | --- | --- | Peak |
| 2 | PP16740.000 | 35.51 | 41.88 | 46.89 | 0.00 | 17.56 | 48.06 | 74.00 | -25.94 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00066.EMI

Date: 2022-06-09

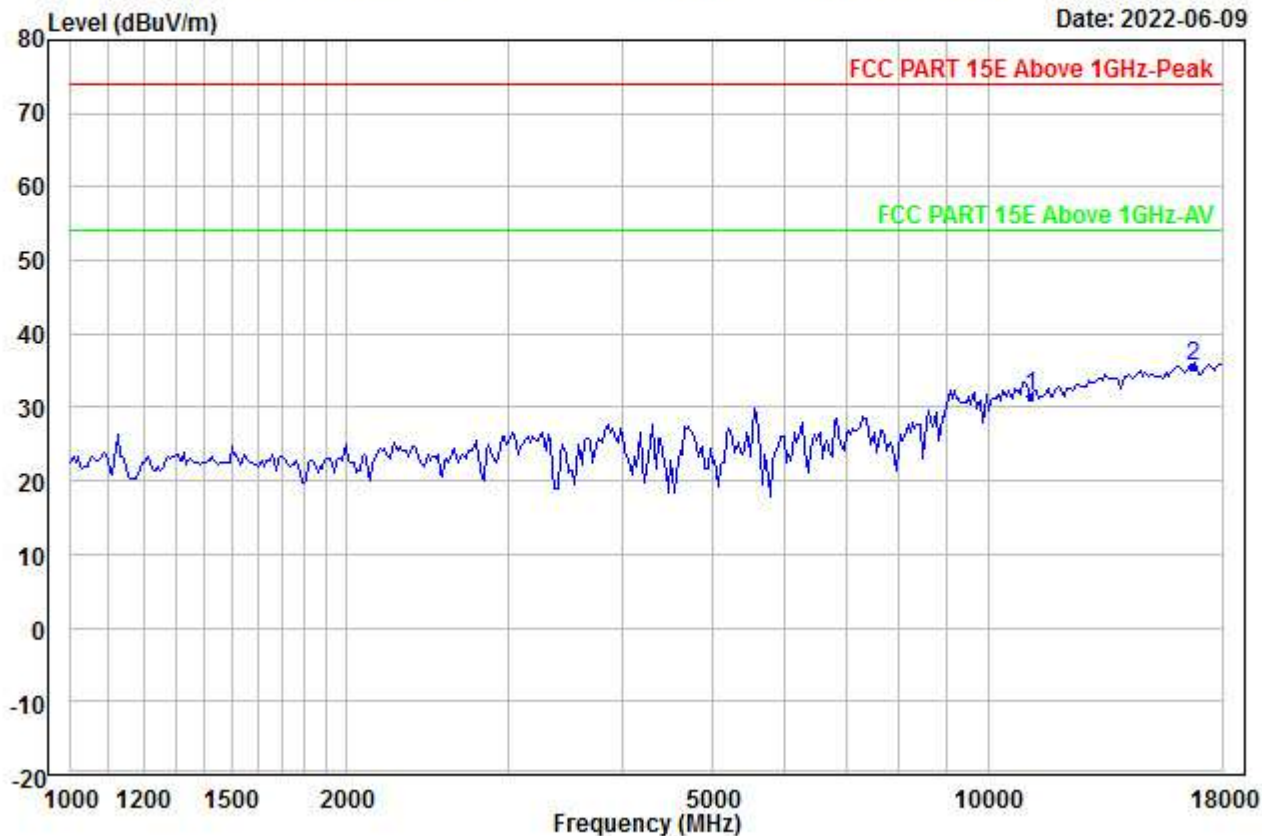


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5580
 Remark :

| | Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Remarks |
|---|-------------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|---------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 11160.000 | 24.18 | 38.63 | 45.35 | 0.00 | 14.04 | 31.50 | 54.00 | -22.50 | --- | --- | Aver |
| 2 | PP16740.000 | 23.09 | 41.88 | 46.89 | 0.00 | 17.56 | 35.64 | 54.00 | -18.36 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00067.EMI

Date: 2022-06-09

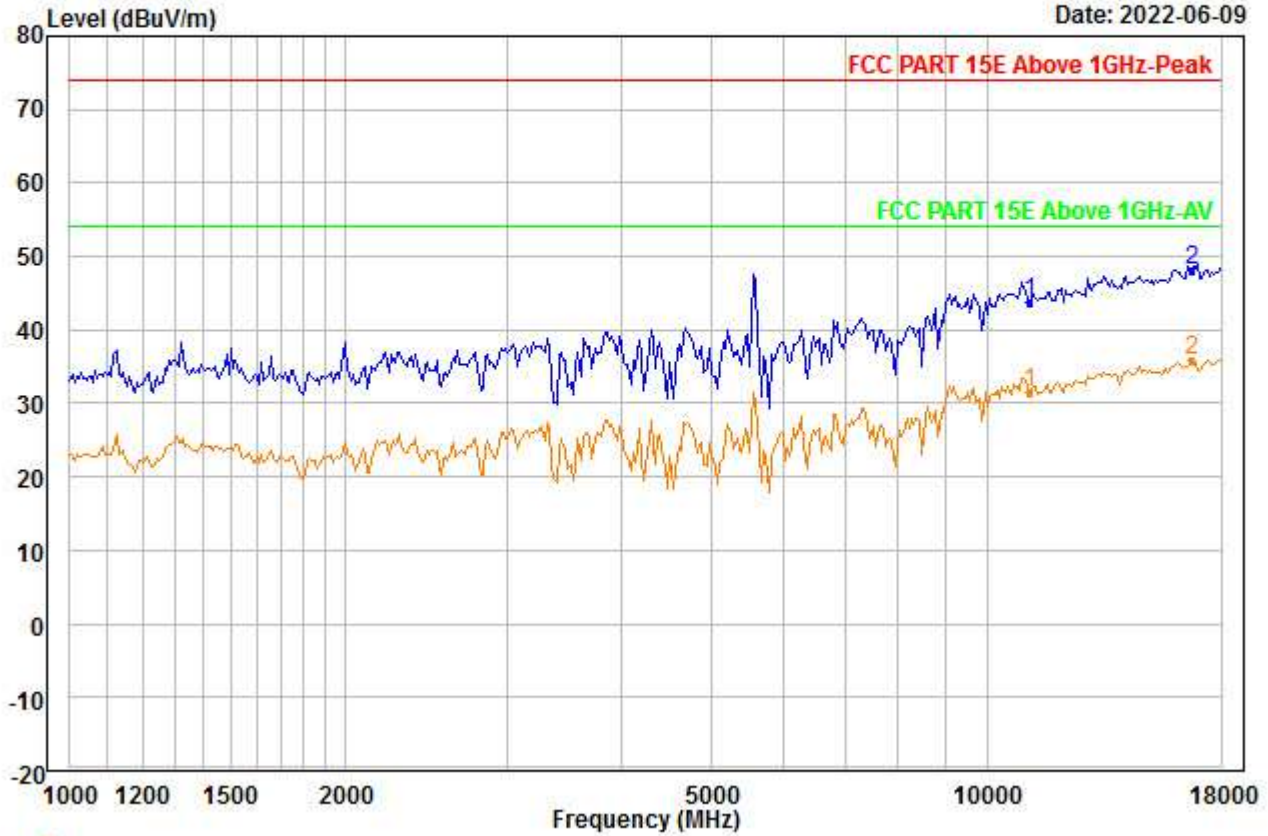


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5580
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 11160.000 | 36.51 | 38.63 | 45.35 | 0.00 | 14.04 | 43.83 | 74.00 | -30.17 | --- | --- | Peak |
| 2 PP16740.000 | 35.63 | 41.88 | 46.89 | 0.00 | 17.56 | 48.18 | 74.00 | -25.82 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00068.EMI

Date: 2022-06-09

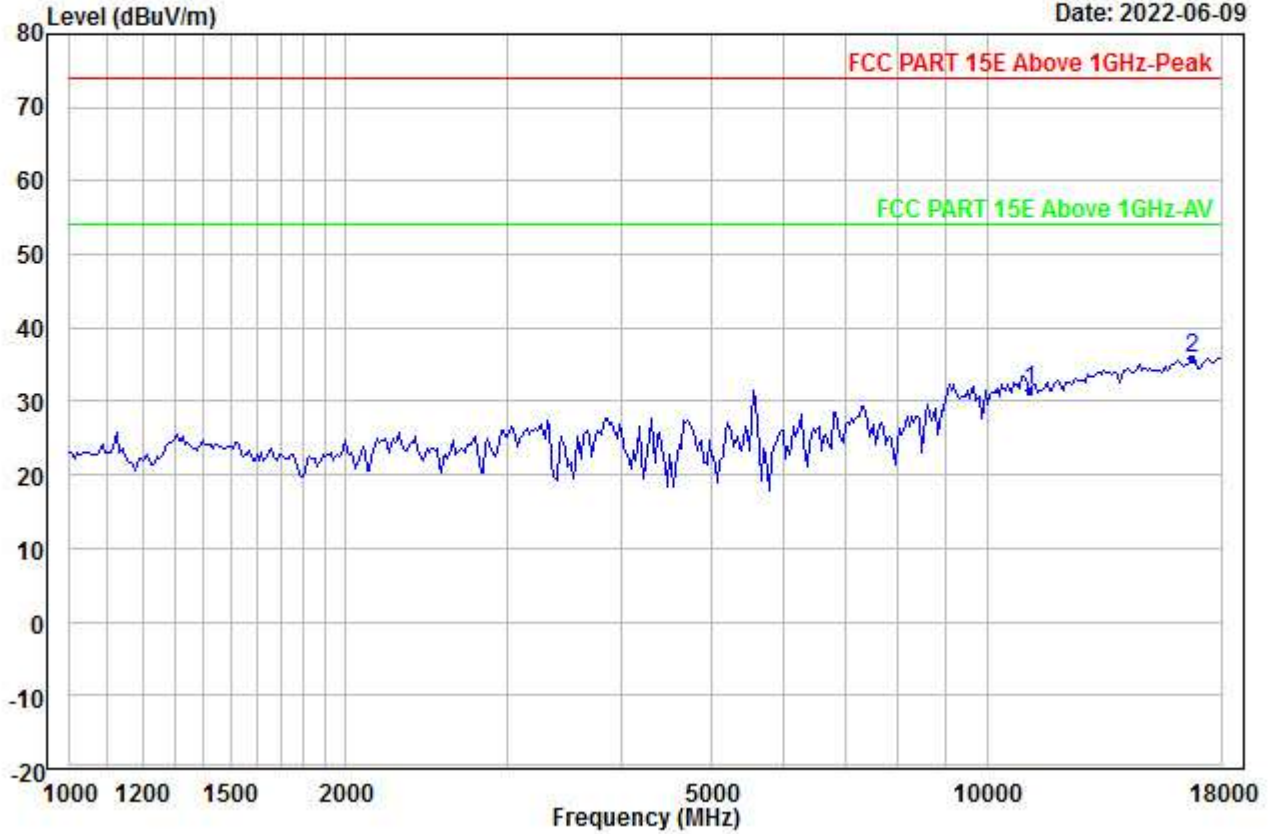


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5580
 Remark :

| | Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Remarks |
|---|-------------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|---------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 11160.000 | 24.18 | 38.63 | 45.35 | 0.00 | 14.04 | 31.50 | 54.00 | -22.50 | --- | --- | Aver |
| 2 | PP16740.000 | 23.20 | 41.88 | 46.89 | 0.00 | 17.56 | 35.75 | 54.00 | -18.25 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00069.EMI

Date: 2022-06-09

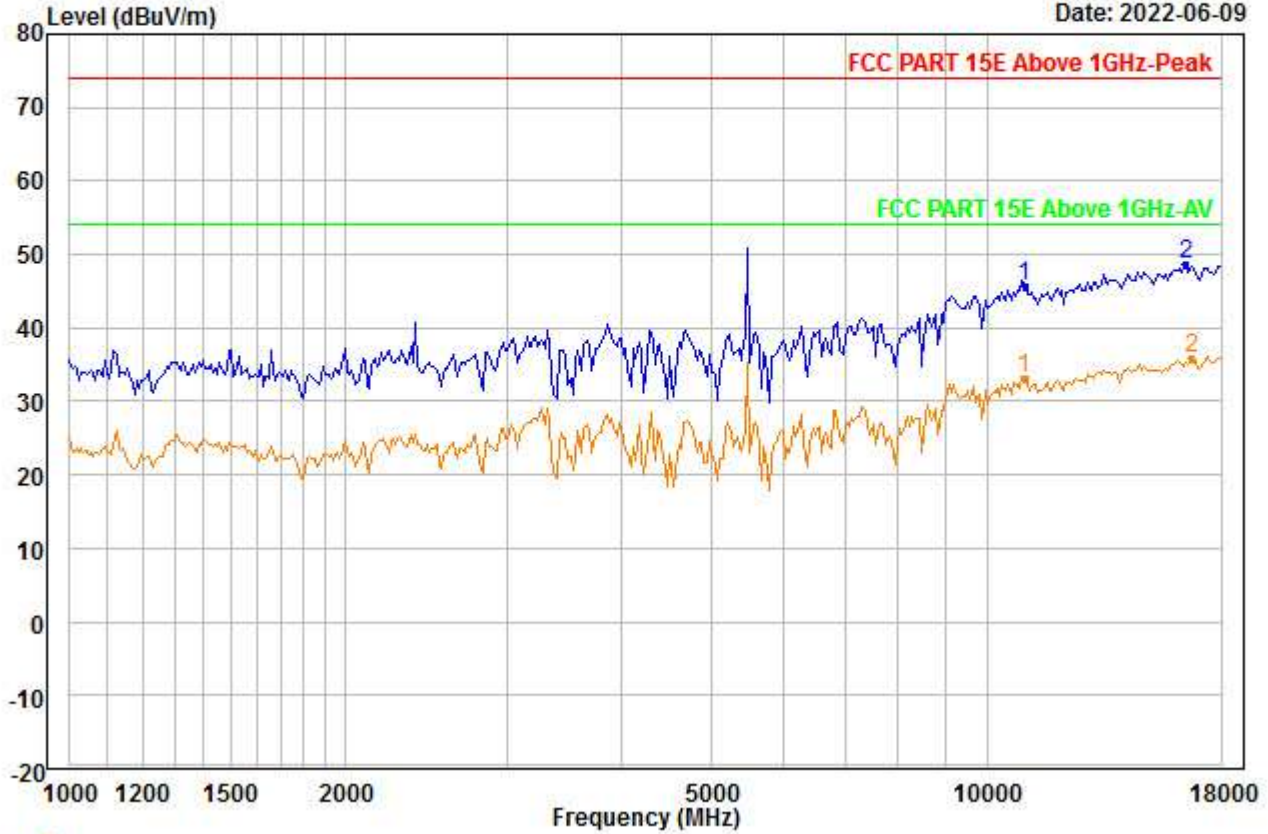


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5500
 Remark :

| | Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Rem: |
|---|-------------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 11000.000 | 38.18 | 38.50 | 45.00 | 0.00 | 13.92 | 45.60 | 74.00 | -28.40 | --- | --- | Peak |
| 2 | PP16500.000 | 36.28 | 41.50 | 46.60 | 0.00 | 17.45 | 48.63 | 74.00 | -25.37 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00070.EMI

Date: 2022-06-09

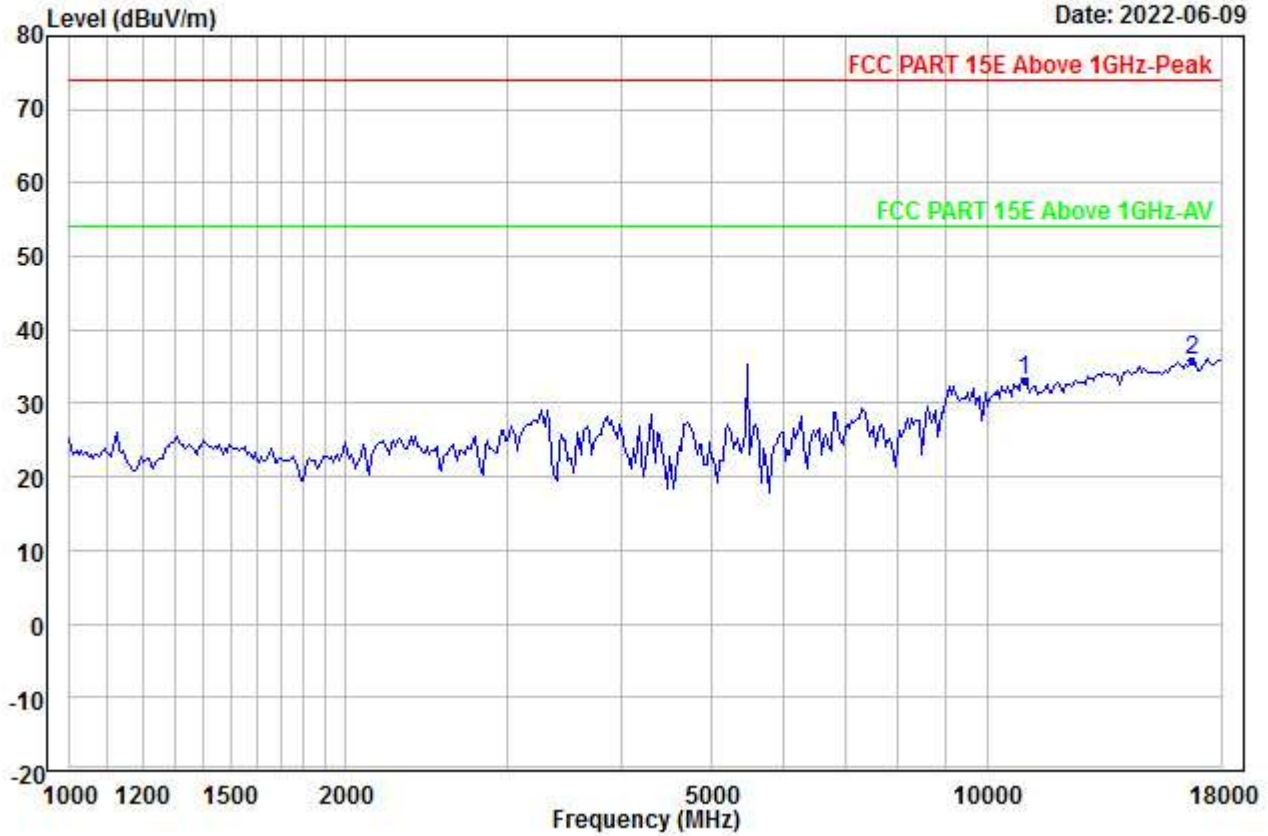


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5500
 Remark :

| | Read Freq | Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Remarks |
|---|-------------|-------|------------|---------------|------------|------------|--------|------------|------------|------|------|---------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 11000.000 | 25.80 | 38.50 | 45.00 | 0.00 | 13.92 | 33.22 | 54.00 | -20.78 | --- | --- | Aver |
| 2 | PP16740.000 | 23.20 | 41.88 | 46.89 | 0.00 | 17.56 | 35.75 | 54.00 | -18.25 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00071.EMI

Date: 2022-06-09

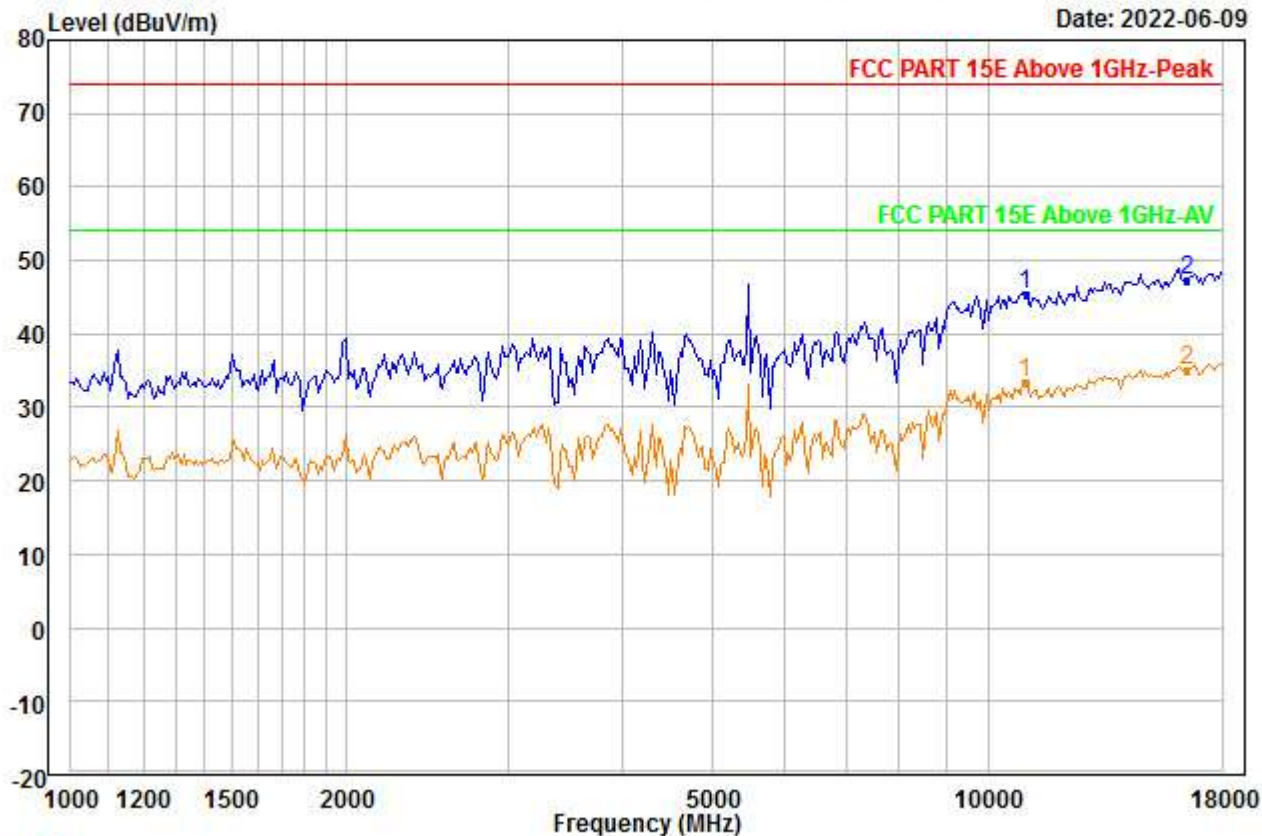


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5500
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 11000.000 | 37.95 | 38.50 | 45.00 | 0.00 | 13.92 | 45.37 | 74.00 | -28.63 | --- | --- | Peak |
| 2 PP16500.000 | 34.94 | 41.50 | 46.60 | 0.00 | 17.45 | 47.29 | 74.00 | -26.71 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00072.EMI

Date: 2022-06-09

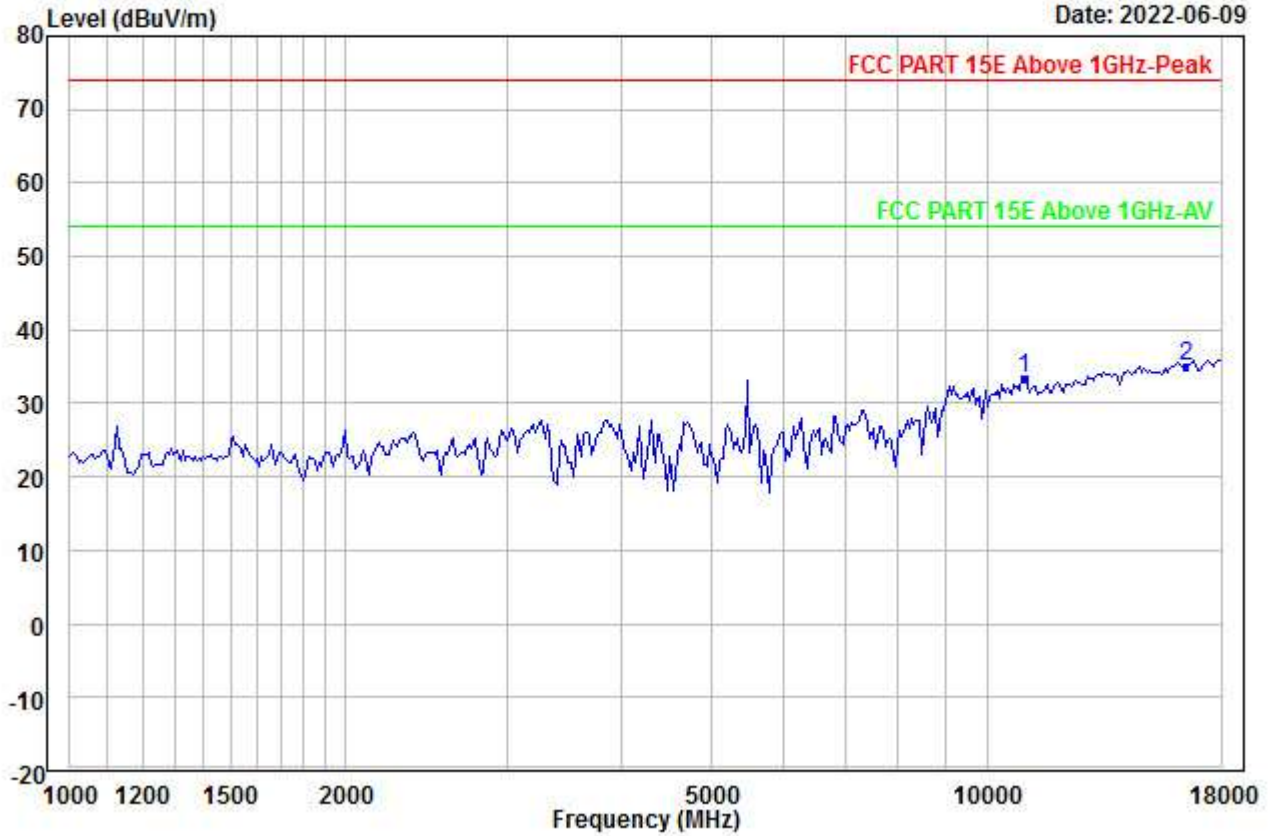


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5500
 Remark :

| | Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Remarks |
|---|-------------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|---------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 11000.000 | 25.87 | 38.50 | 45.00 | 0.00 | 13.92 | 33.29 | 54.00 | -20.71 | --- | --- | Aver |
| 2 | PP16500.000 | 22.82 | 41.50 | 46.60 | 0.00 | 17.45 | 35.17 | 54.00 | -18.83 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00073.EMI

Date: 2022-06-09

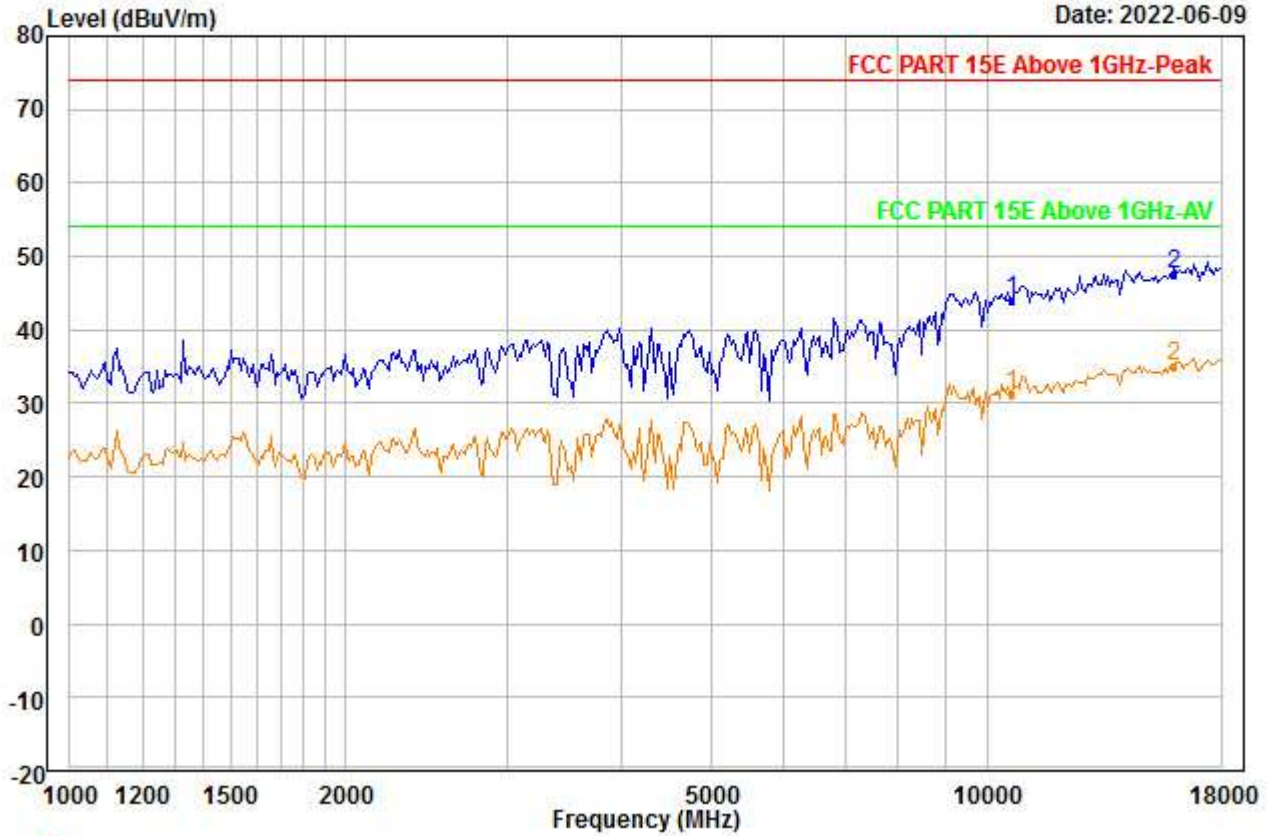


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5320
 Remark :

| | Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Rem: |
|---|-------------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 10640.000 | 37.44 | 38.28 | 45.65 | 0.00 | 14.01 | 44.08 | 74.00 | -29.92 | --- | --- | Peak |
| 2 | PP15960.000 | 35.83 | 40.84 | 46.27 | 0.00 | 17.20 | 47.60 | 74.00 | -26.40 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00074.EMI

Date: 2022-06-09

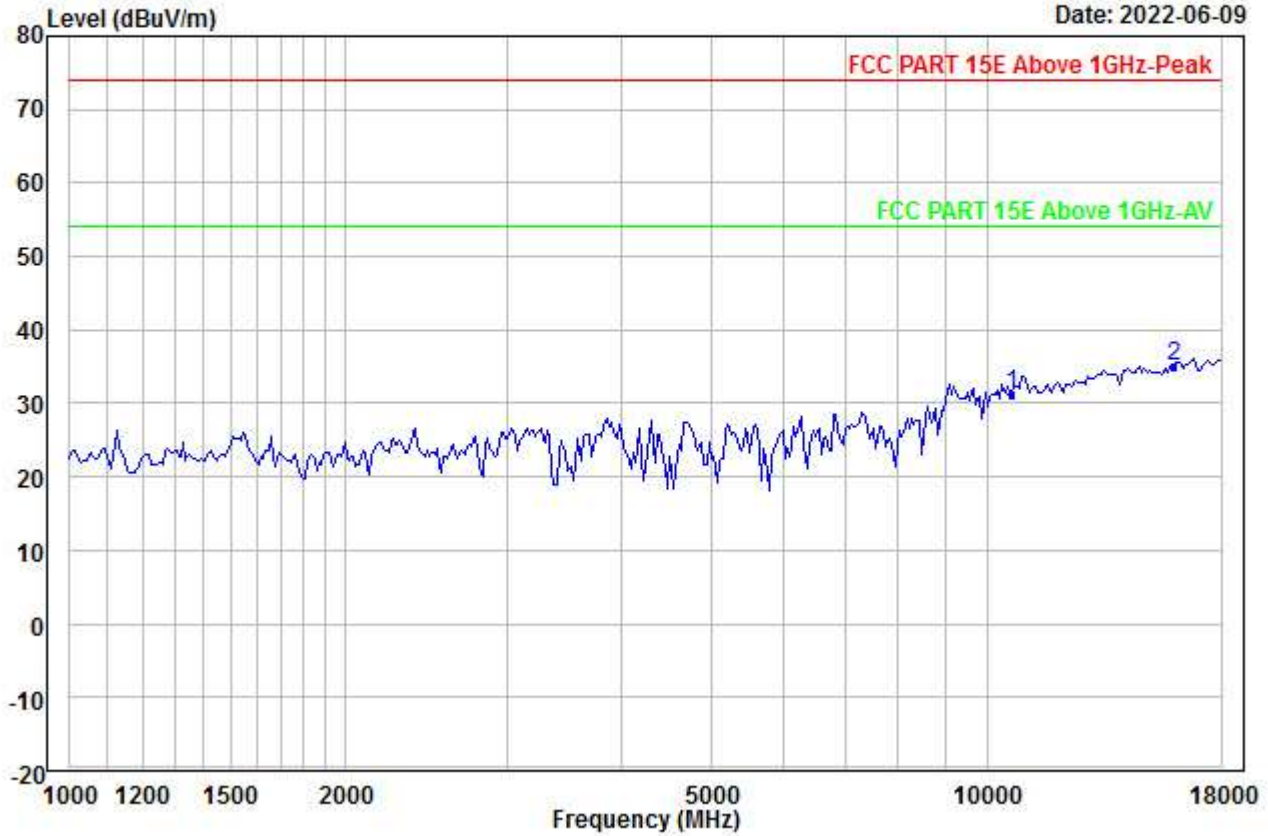


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5320
 Remark :

| | Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Rem: |
|---|-------------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 10640.000 | 24.58 | 38.28 | 45.65 | 0.00 | 14.01 | 31.22 | 54.00 | -22.78 | --- | --- | Aver |
| 2 | PP15960.000 | 23.31 | 40.84 | 46.27 | 0.00 | 17.20 | 35.08 | 54.00 | -18.92 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00075.EMI

Date: 2022-06-09

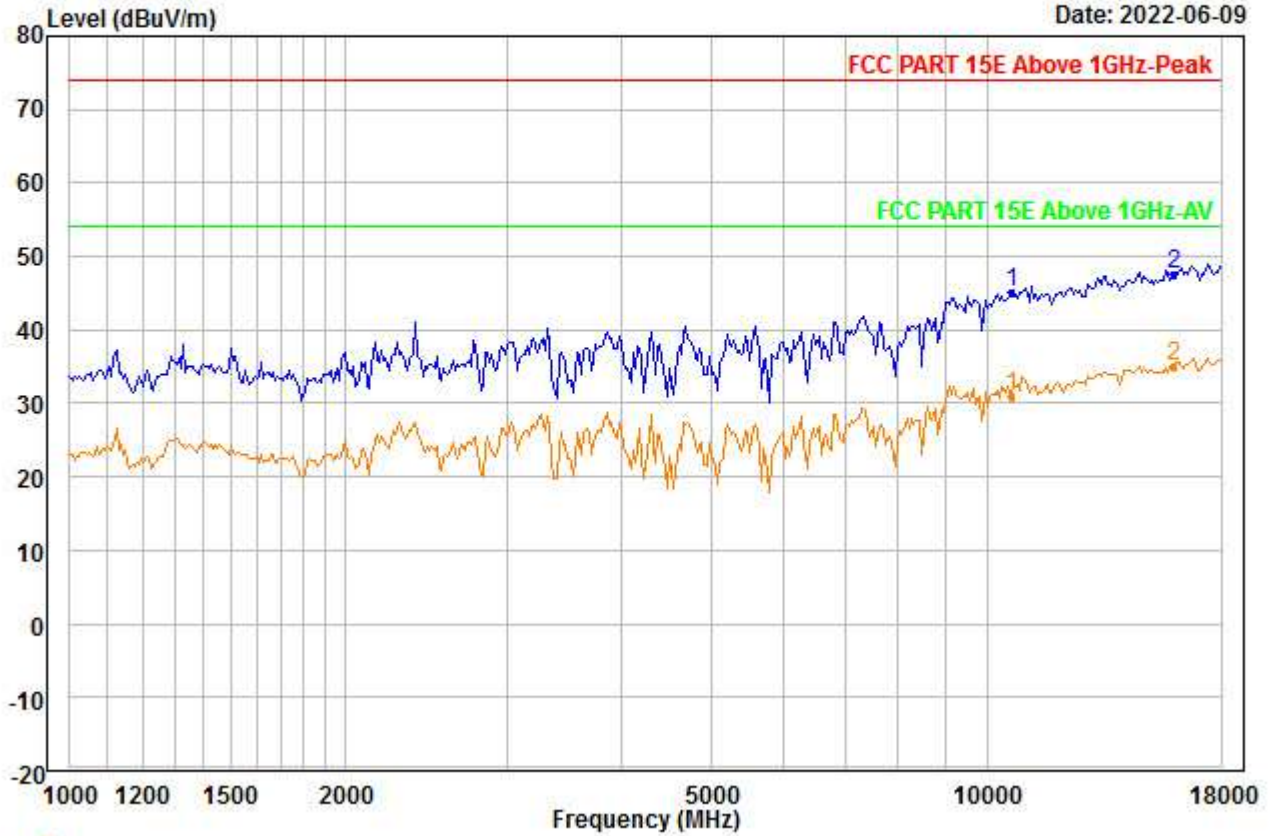


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5320
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 10640.000 | 38.41 | 38.28 | 45.65 | 0.00 | 14.01 | 45.05 | 74.00 | -28.95 | --- | --- | Peak |
| 2 PP15960.000 | 35.74 | 40.84 | 46.27 | 0.00 | 17.20 | 47.51 | 74.00 | -26.49 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00076.EMI

Date: 2022-06-09

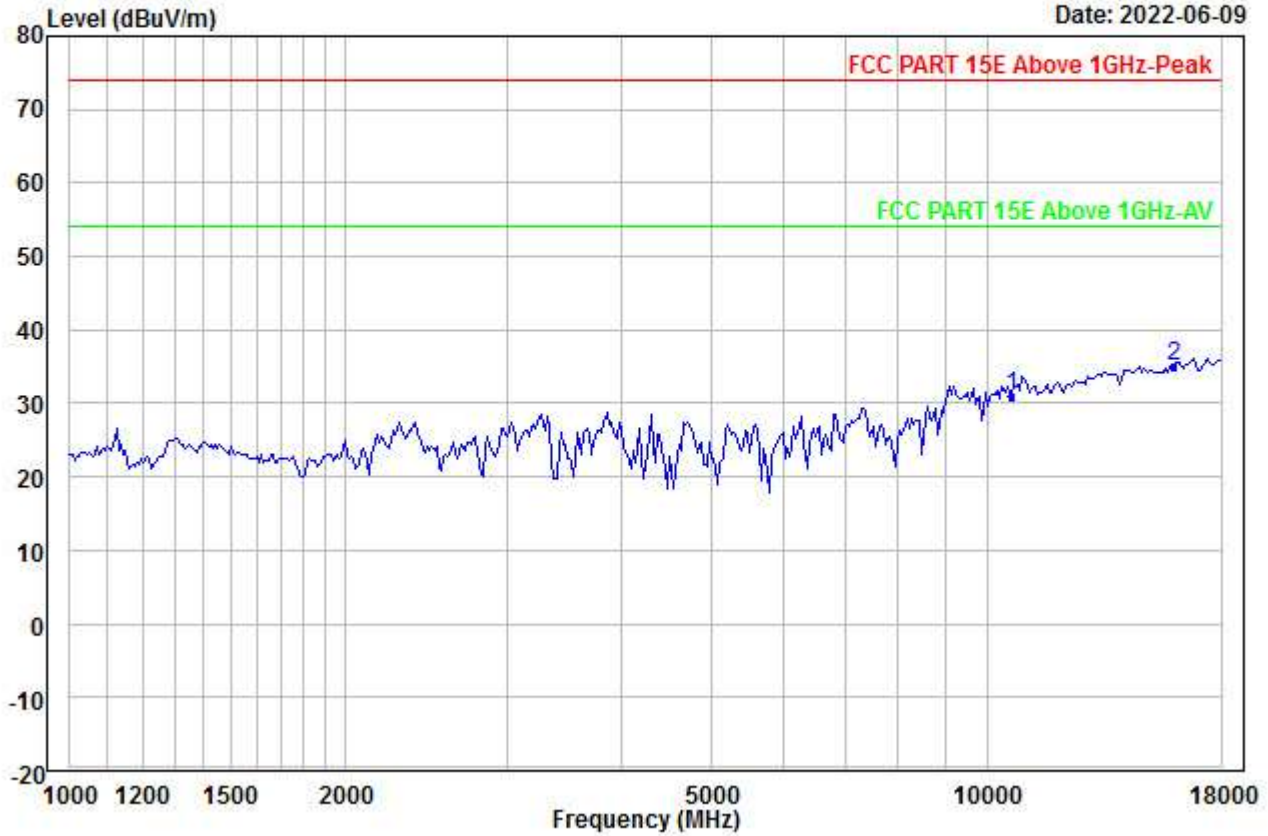


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5320
 Remark :

| | Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Remarks |
|---|-------------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|---------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 10640.000 | 24.41 | 38.28 | 45.65 | 0.00 | 14.01 | 31.05 | 54.00 | -22.95 | --- | --- | Aver |
| 2 | PP15960.000 | 23.31 | 40.84 | 46.27 | 0.00 | 17.20 | 35.08 | 54.00 | -18.92 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00077.EMI

Date: 2022-06-09

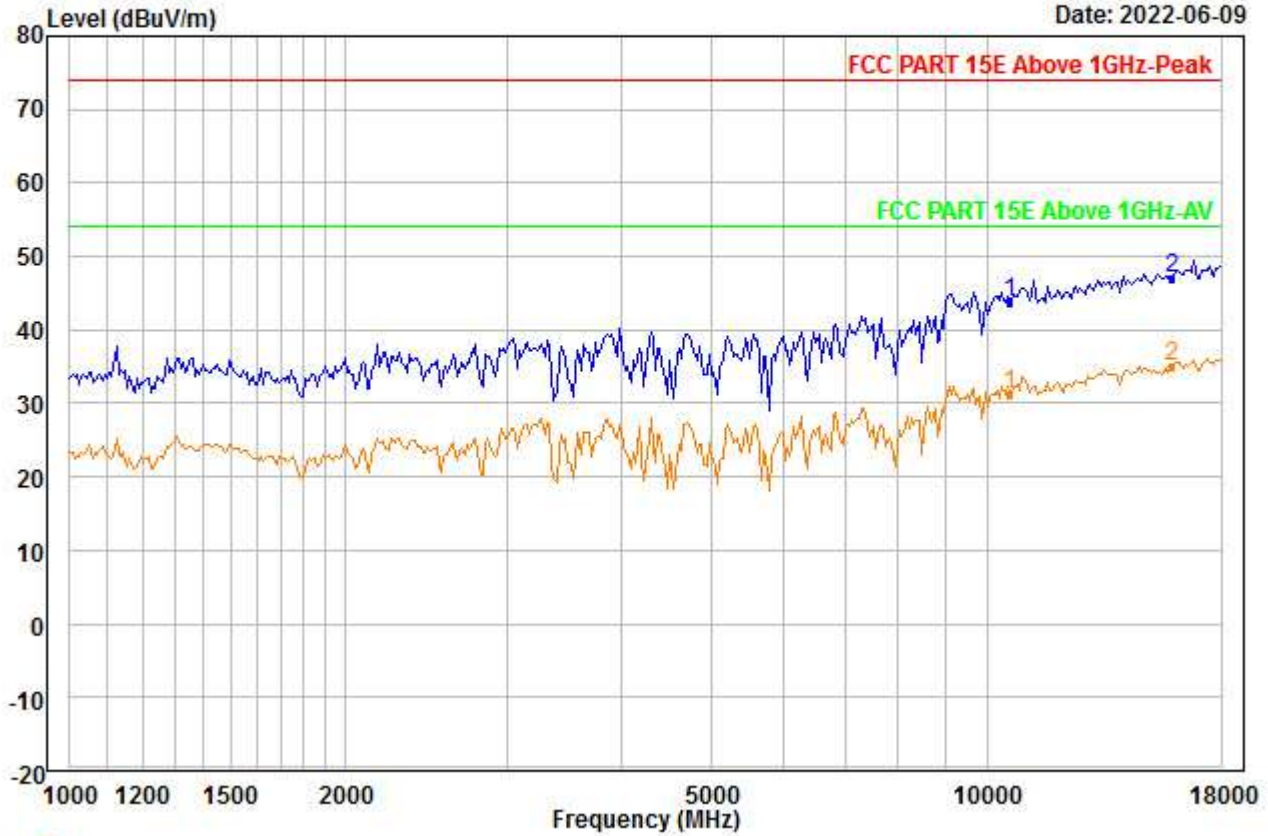


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5300
 Remark :

| | Read Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Remarks |
|---|-------------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|---------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 10600.000 | 37.24 | 38.26 | 45.72 | 0.00 | 14.02 | 43.80 | 74.00 | -30.20 | --- | --- | Peak |
| 2 | PP15900.000 | 35.18 | 40.76 | 46.22 | 0.00 | 17.17 | 46.89 | 74.00 | -27.11 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00078.EMI

Date: 2022-06-09

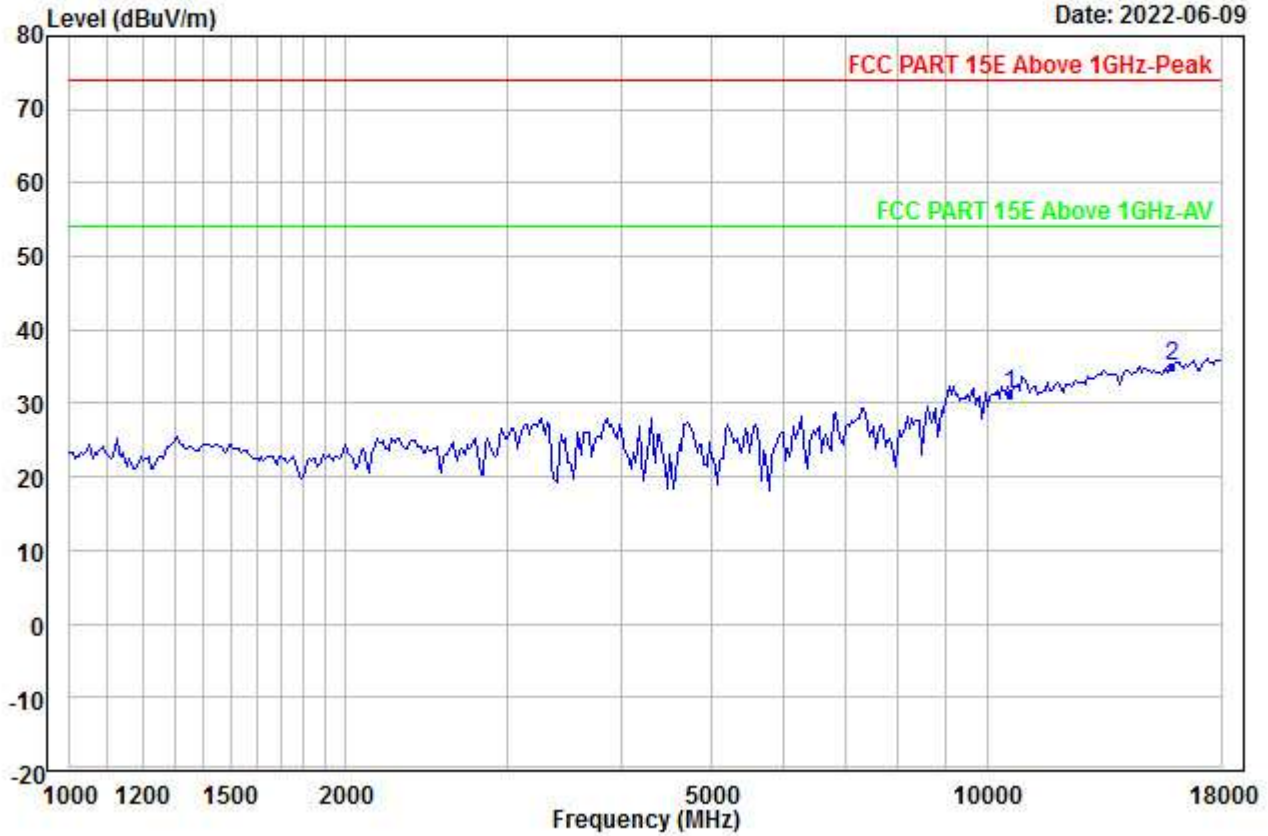


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5300
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 10600.000 | 24.58 | 38.26 | 45.72 | 0.00 | 14.02 | 31.14 | 54.00 | -22.86 | --- | --- | Aver |
| 2 PP15900.000 | 23.27 | 40.76 | 46.22 | 0.00 | 17.17 | 34.98 | 54.00 | -19.02 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00079.EMI

Date: 2022-06-09

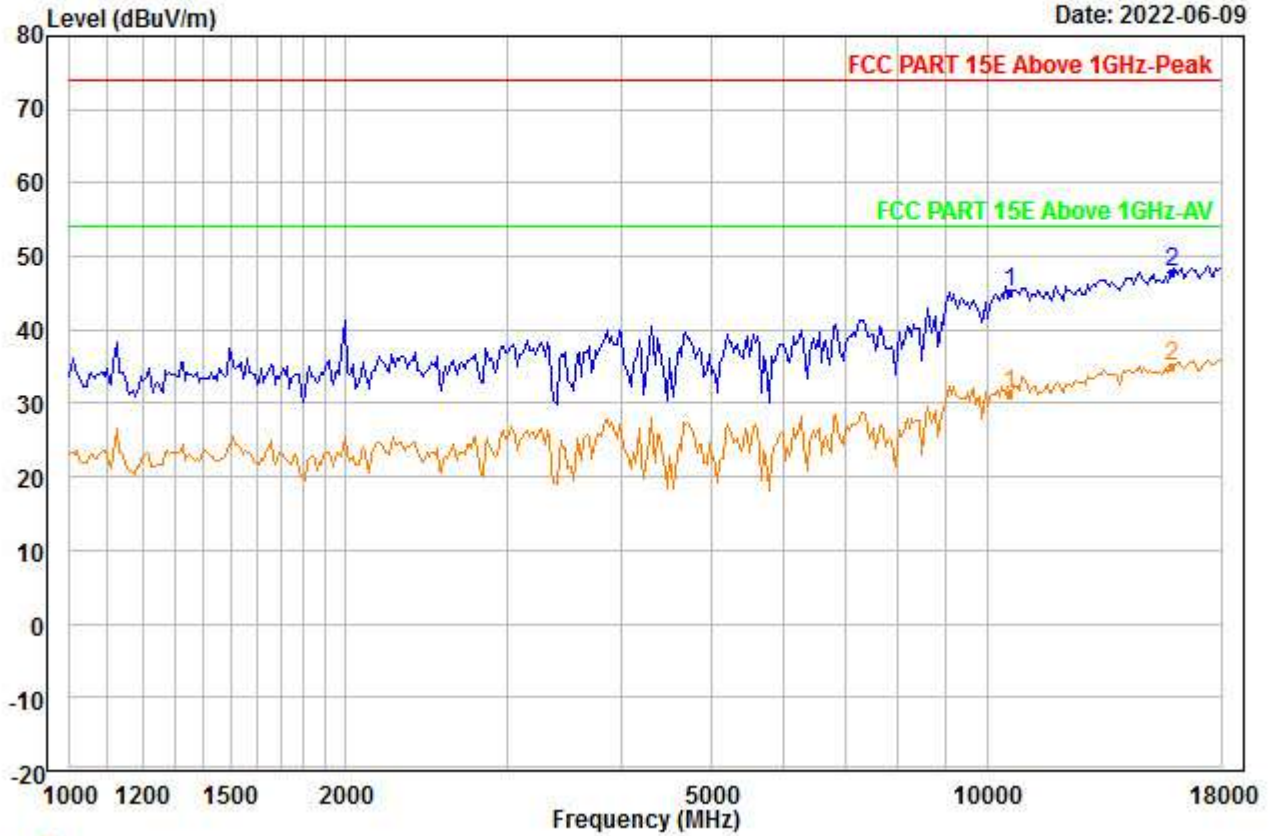


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5300
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 10600.000 | 38.56 | 38.26 | 45.72 | 0.00 | 14.02 | 45.12 | 74.00 | -28.88 | --- | --- | Peak |
| 2 PP15900.000 | 36.03 | 40.76 | 46.22 | 0.00 | 17.17 | 47.74 | 74.00 | -26.26 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00080.EMI

Date: 2022-06-09

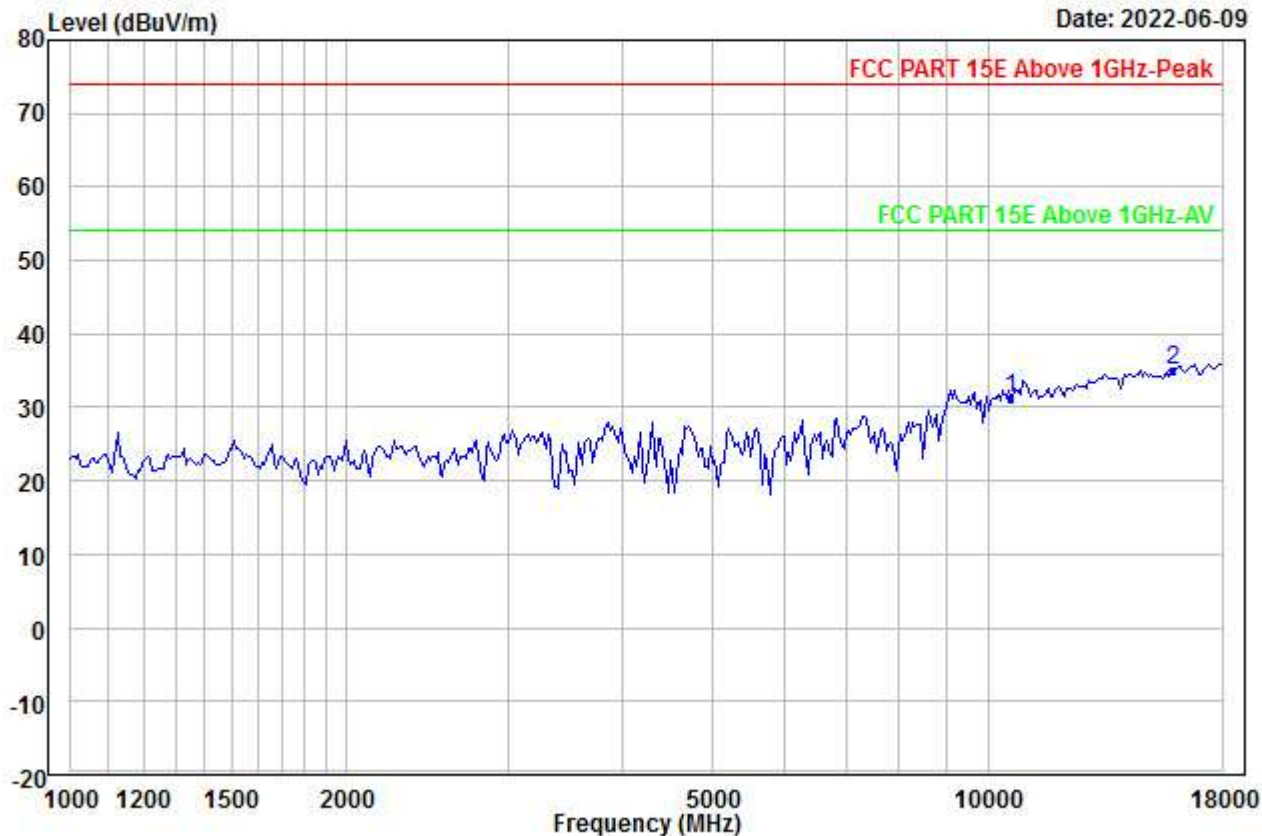


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5300
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 10600.000 | 24.66 | 38.26 | 45.72 | 0.00 | 14.02 | 31.22 | 54.00 | -22.78 | --- | --- | Aver |
| 2 PP15900.000 | 23.37 | 40.76 | 46.22 | 0.00 | 17.17 | 35.08 | 54.00 | -18.92 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00081.EMI

Date: 2022-06-09

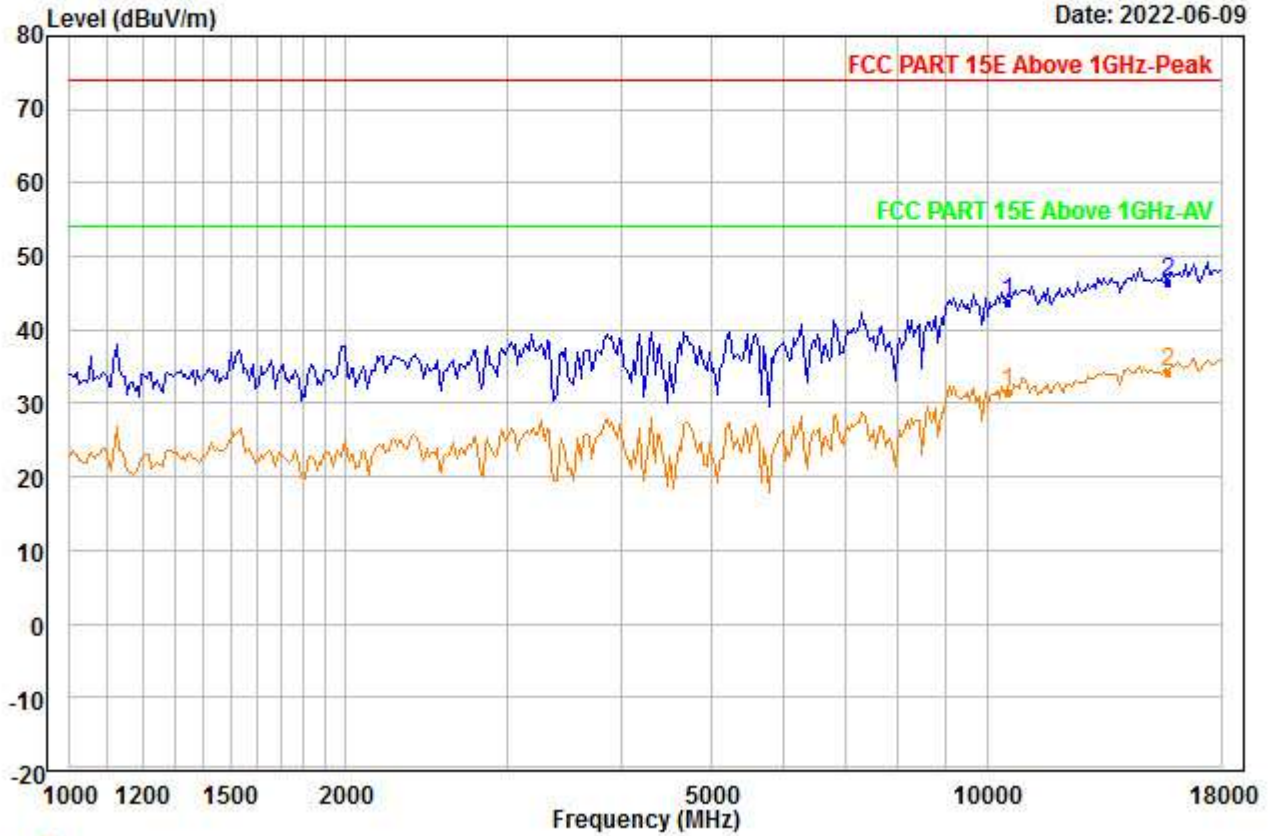


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5260
 Remark :

| | Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Rem: |
|---|-------------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 10520.000 | 37.29 | 38.21 | 45.86 | 0.00 | 14.04 | 43.68 | 74.00 | -30.32 | --- | --- | Peak |
| 2 | PP15780.000 | 34.90 | 40.59 | 46.12 | 0.00 | 17.09 | 46.46 | 74.00 | -27.54 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00082.EMI

Date: 2022-06-09

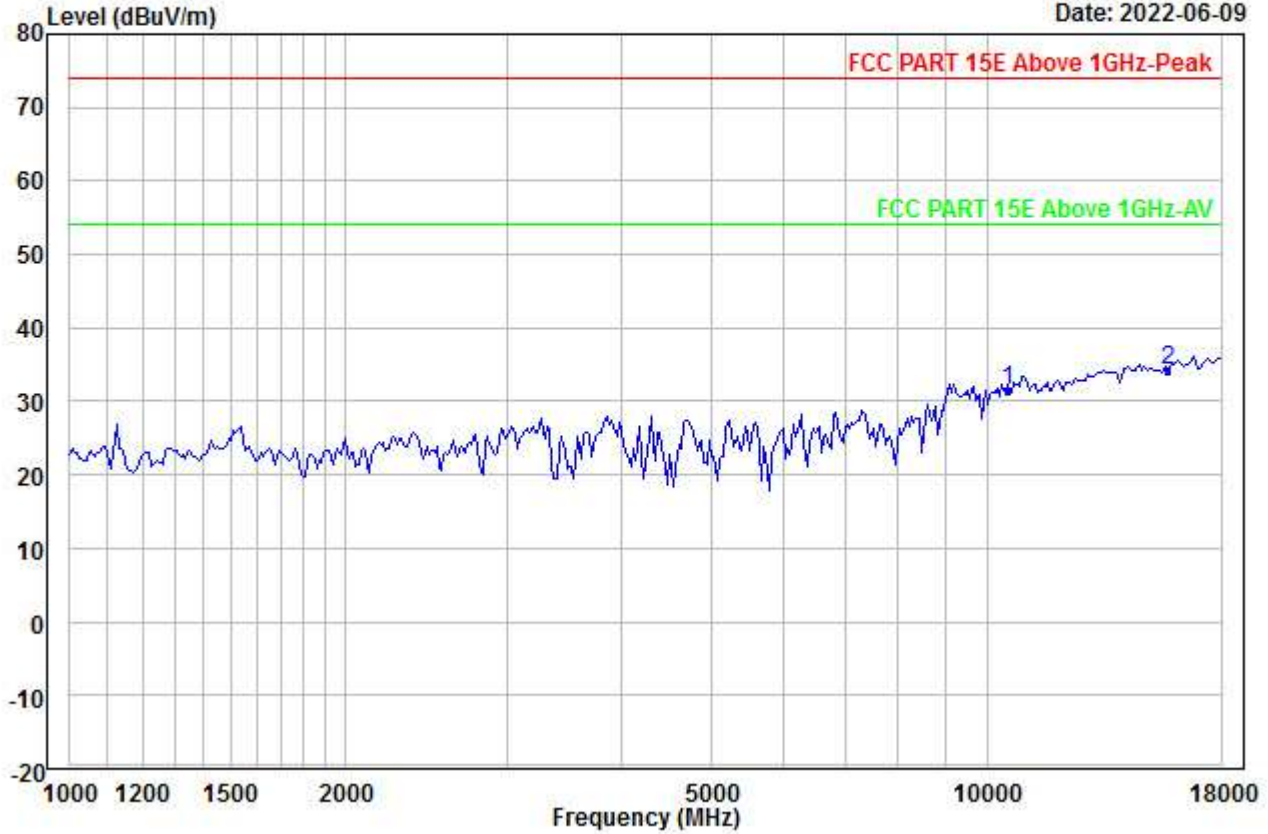


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5260
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 10520.000 | 25.07 | 38.21 | 45.86 | 0.00 | 14.04 | 31.46 | 54.00 | -22.54 | --- | --- | Aver |
| 2 PP15780.000 | 22.78 | 40.59 | 46.12 | 0.00 | 17.09 | 34.34 | 54.00 | -19.66 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00083.EMI

Date: 2022-06-09

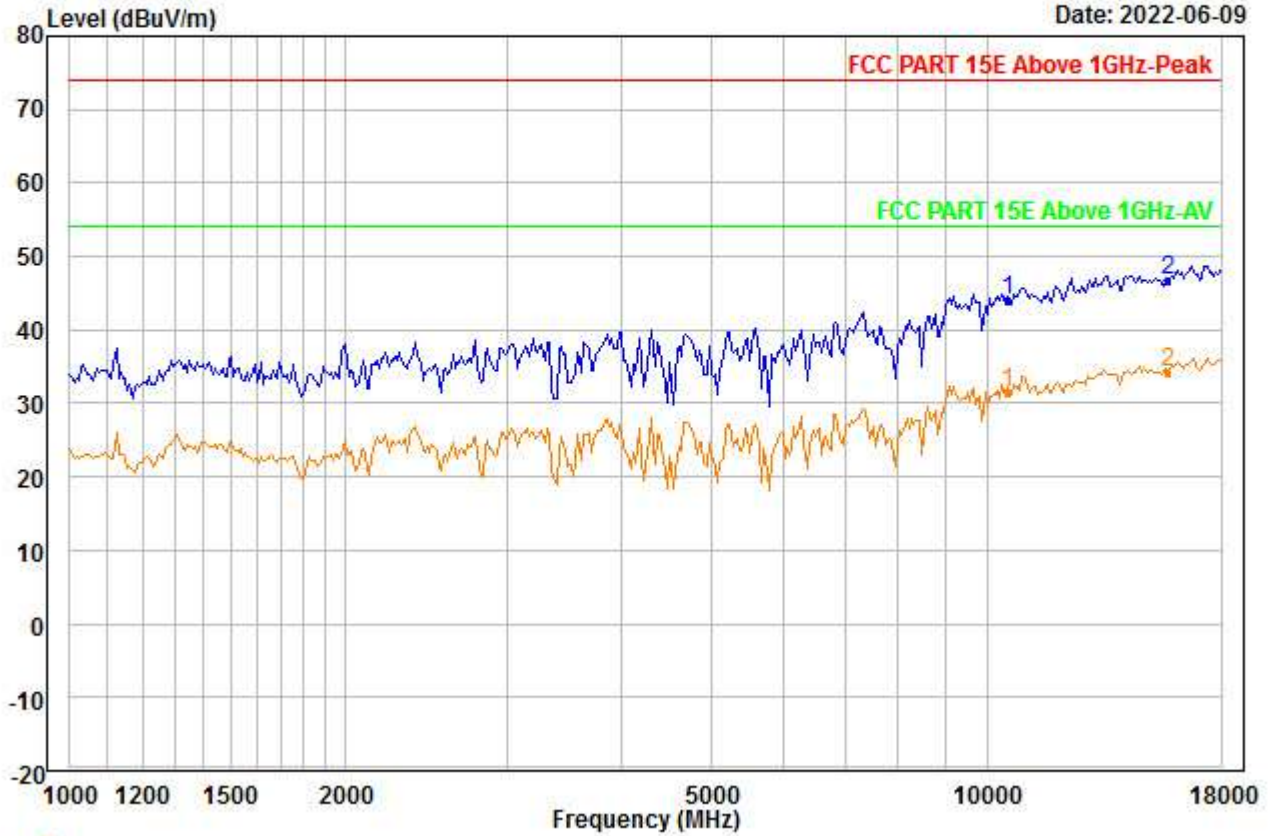


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5260
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 10520.000 | 37.73 | 38.21 | 45.86 | 0.00 | 14.04 | 44.12 | 74.00 | -29.88 | --- | --- | Peak |
| 2 PP15780.000 | 35.31 | 40.59 | 46.12 | 0.00 | 17.09 | 46.87 | 74.00 | -27.13 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00084.EMI

Date: 2022-06-09

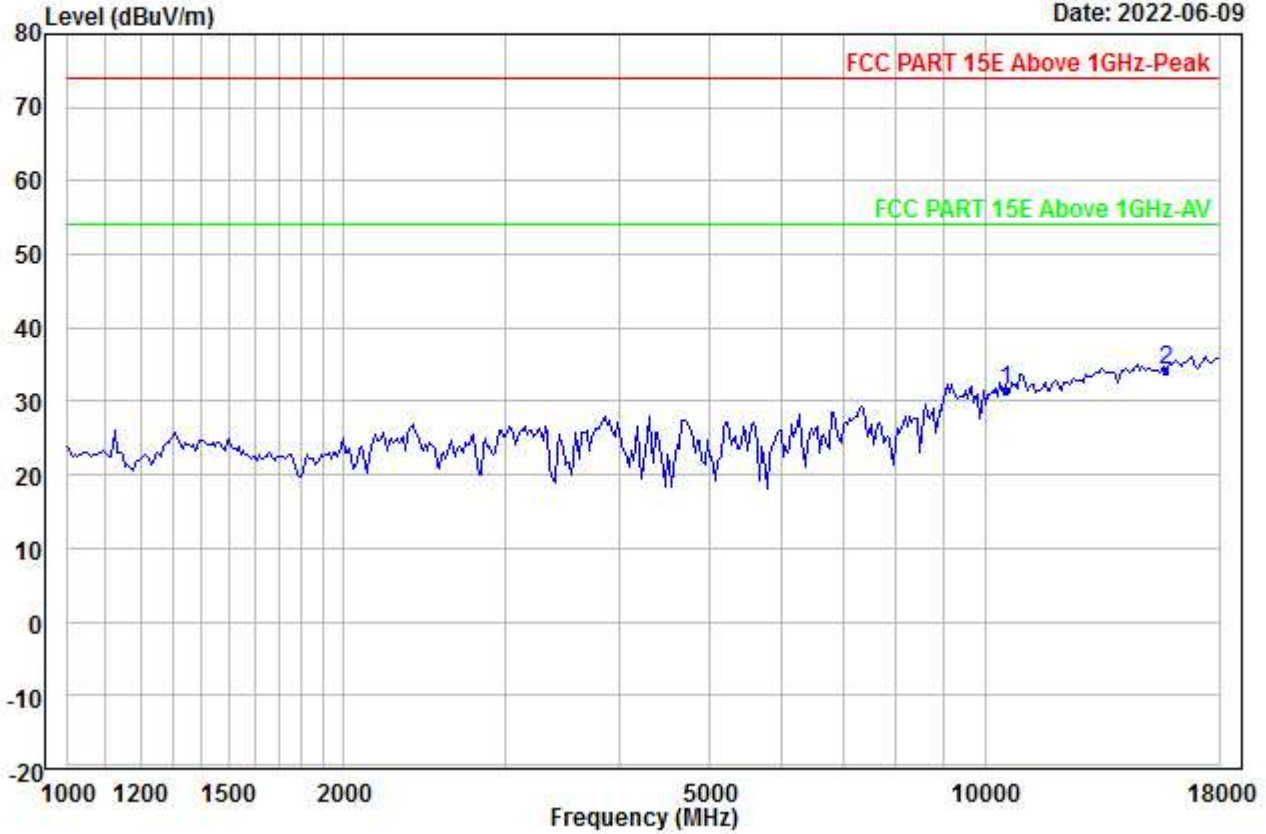


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5260
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 10520.000 | 25.07 | 38.21 | 45.86 | 0.00 | 14.04 | 31.46 | 54.00 | -22.54 | --- | --- | Aver |
| 2 PP15780.000 | 22.68 | 40.59 | 46.12 | 0.00 | 17.09 | 34.24 | 54.00 | -19.76 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00085.EMI

Date: 2022-06-09

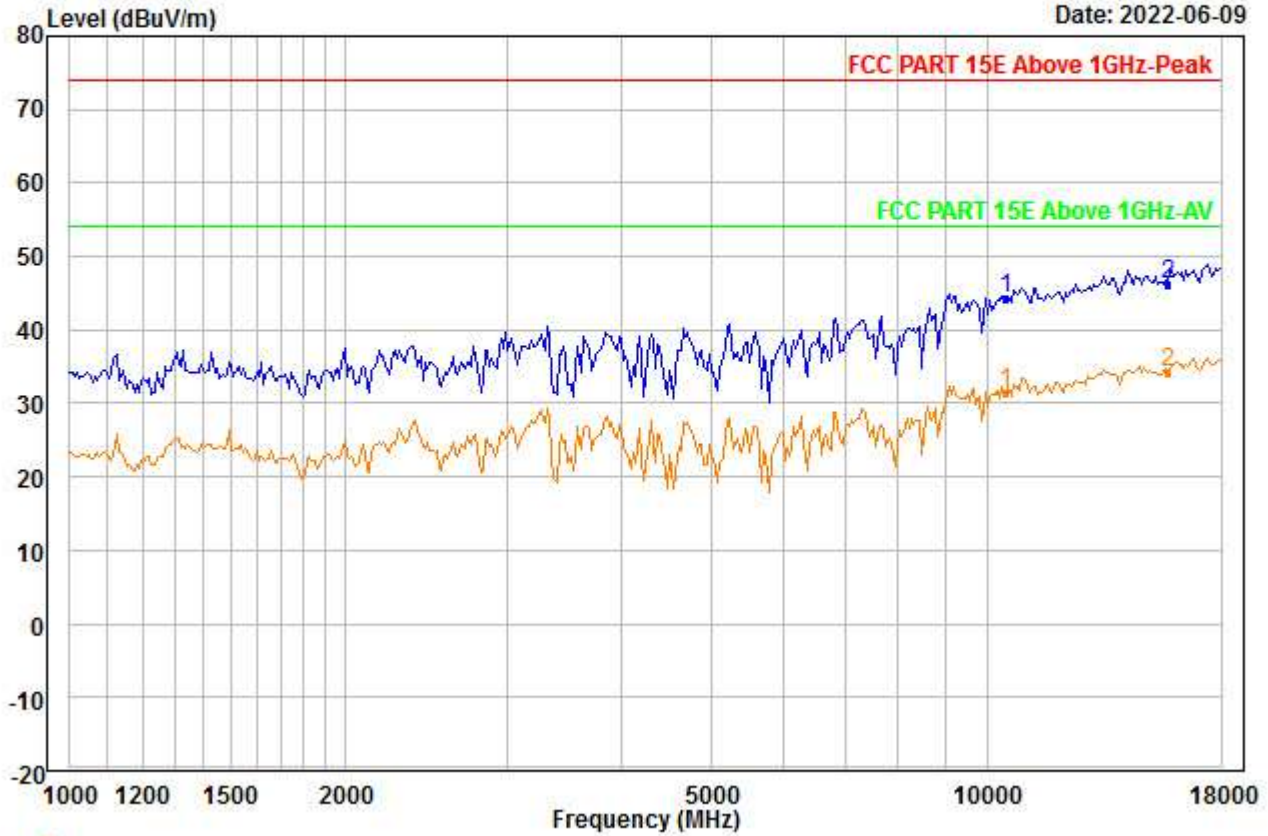


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5240
 Remark :

| | Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Rem: |
|---|-------------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 10480.000 | 37.94 | 38.19 | 45.91 | 0.00 | 14.05 | 44.27 | 74.00 | -29.73 | --- | --- | Peak |
| 2 | PP15720.000 | 34.77 | 40.51 | 46.08 | 0.00 | 17.05 | 46.25 | 74.00 | -27.75 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00086.EMI

Date: 2022-06-09

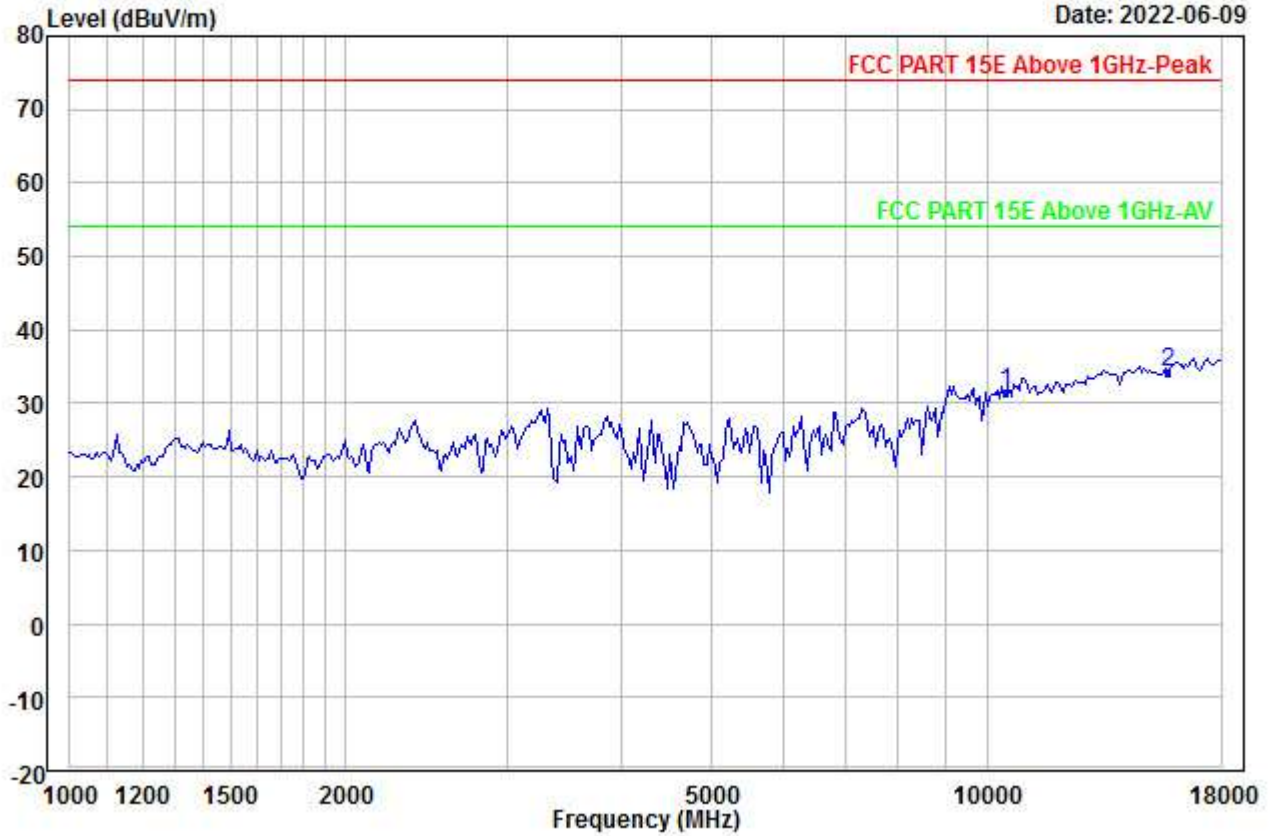


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5240
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 10480.000 | 25.04 | 38.19 | 45.91 | 0.00 | 14.05 | 31.37 | 54.00 | -22.63 | --- | --- | Aver |
| 2 PP15720.000 | 22.86 | 40.51 | 46.08 | 0.00 | 17.05 | 34.34 | 54.00 | -19.66 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00087.EMI

Date: 2022-06-09

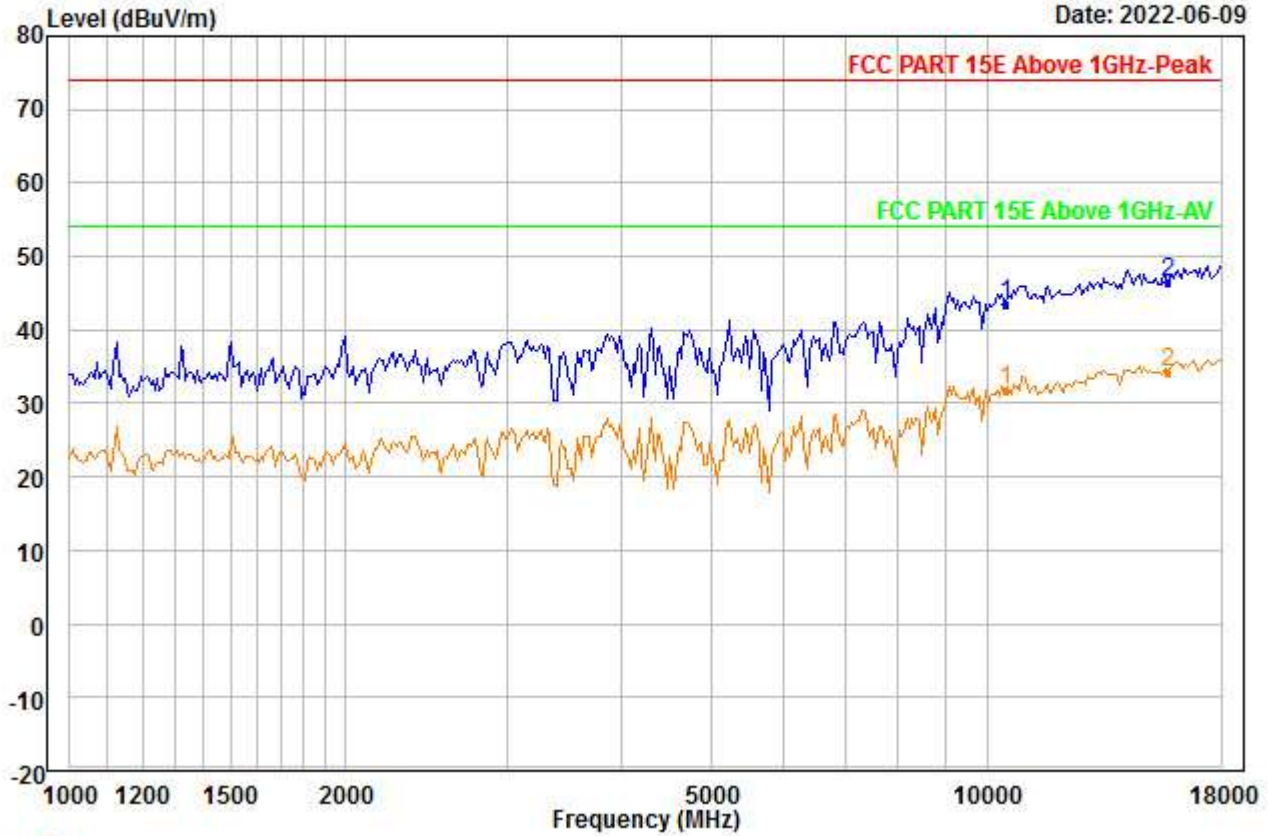


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5240
 Remark :

| | Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Rem: |
|---|-------------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 10480.000 | 37.15 | 38.19 | 45.91 | 0.00 | 14.05 | 43.48 | 74.00 | -30.52 | --- | --- | Peak |
| 2 | PP15720.000 | 34.98 | 40.51 | 46.08 | 0.00 | 17.05 | 46.46 | 74.00 | -27.54 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00088.EMI

Date: 2022-06-09

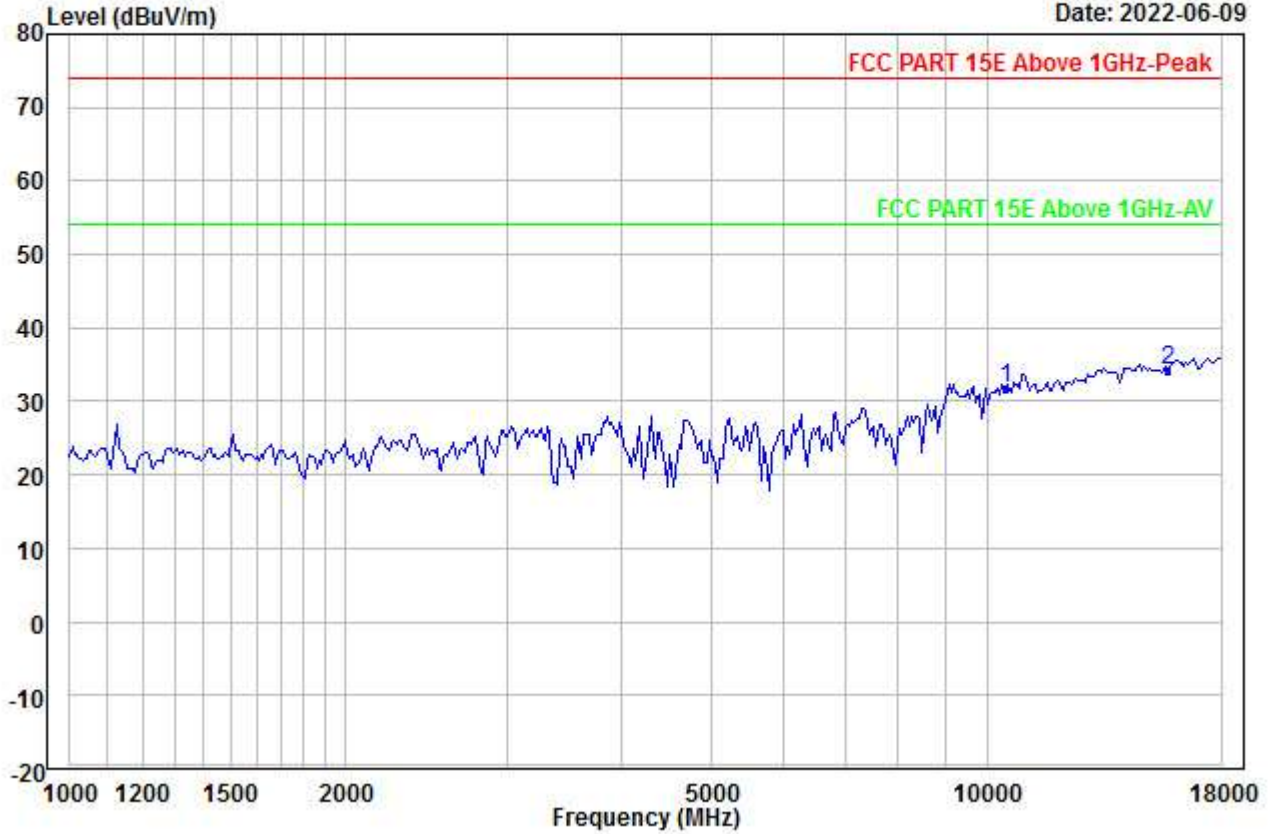


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5240
 Remark :

| | Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Remarks |
|---|-------------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|---------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 10480.000 | 25.36 | 38.19 | 45.91 | 0.00 | 14.05 | 31.69 | 54.00 | -22.31 | --- | --- | Aver |
| 2 | PP15720.000 | 22.86 | 40.51 | 46.08 | 0.00 | 17.05 | 34.34 | 54.00 | -19.66 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00089.EMI

Date: 2022-06-09

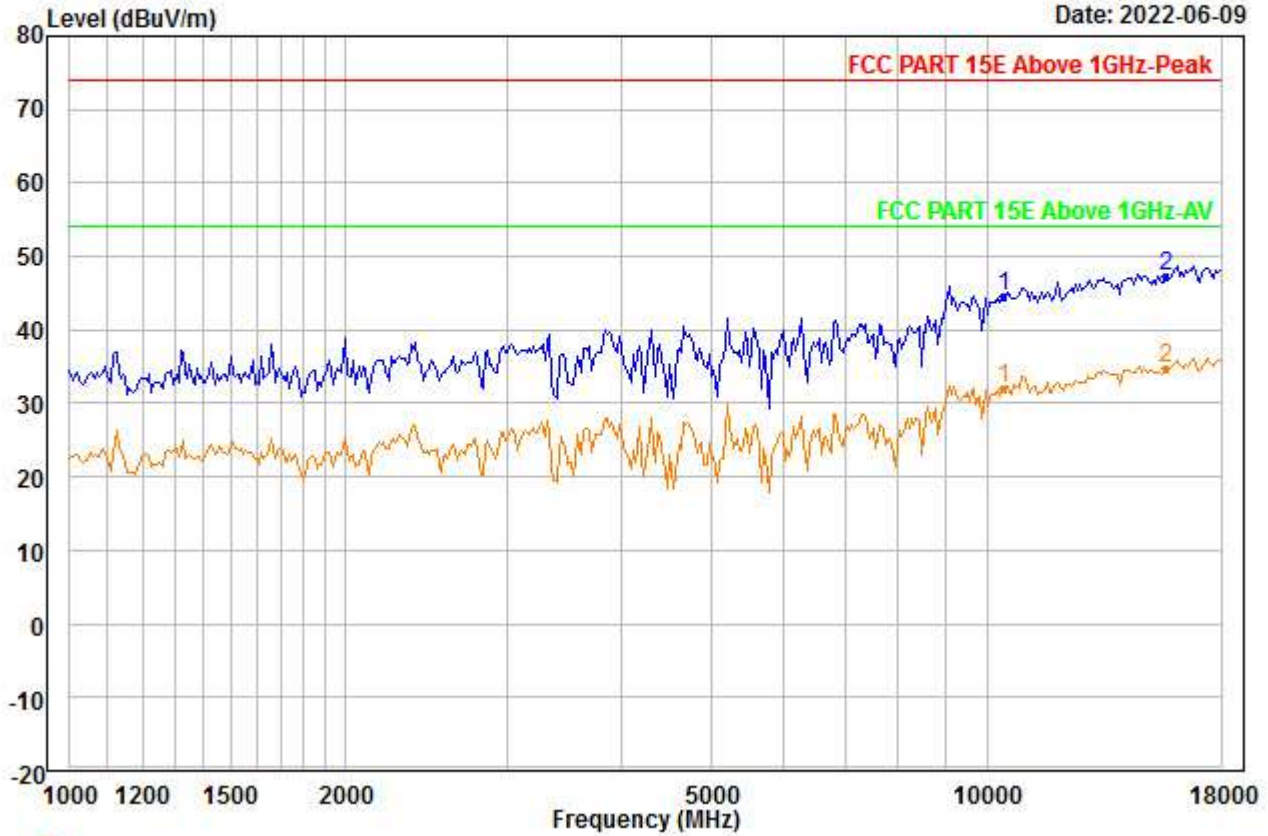


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5220
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 10440.000 | 38.17 | 38.16 | 45.92 | 0.00 | 14.06 | 44.47 | 74.00 | -29.53 | --- | --- | Peak |
| 2 PP15660.000 | 35.91 | 40.42 | 46.03 | 0.00 | 17.01 | 47.31 | 74.00 | -26.69 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00090.EMI

Date: 2022-06-09

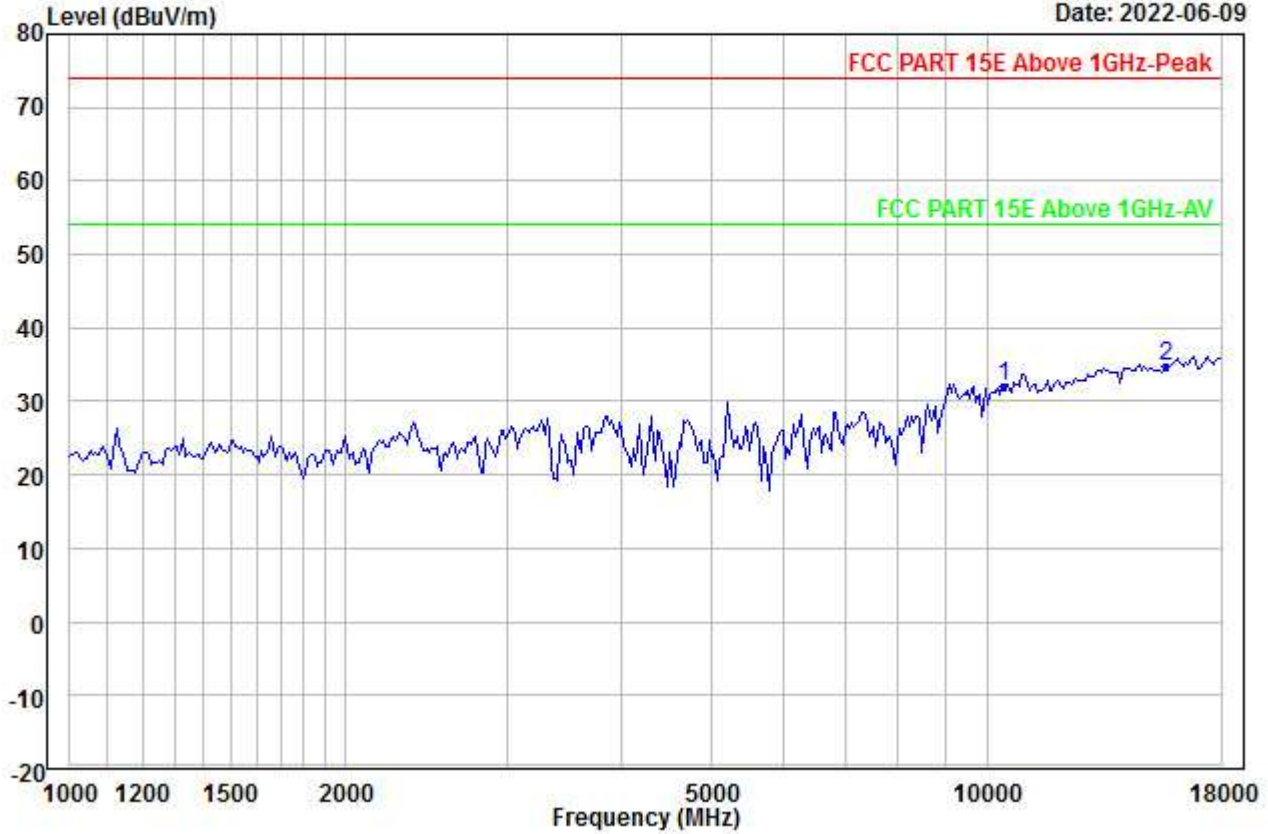


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5220
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 10440.000 | 25.65 | 38.16 | 45.92 | 0.00 | 14.06 | 31.95 | 54.00 | -22.05 | --- | --- | Aver |
| 2 PP15660.000 | 23.34 | 40.42 | 46.03 | 0.00 | 17.01 | 34.74 | 54.00 | -19.26 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00091.EMI

Date: 2022-06-09

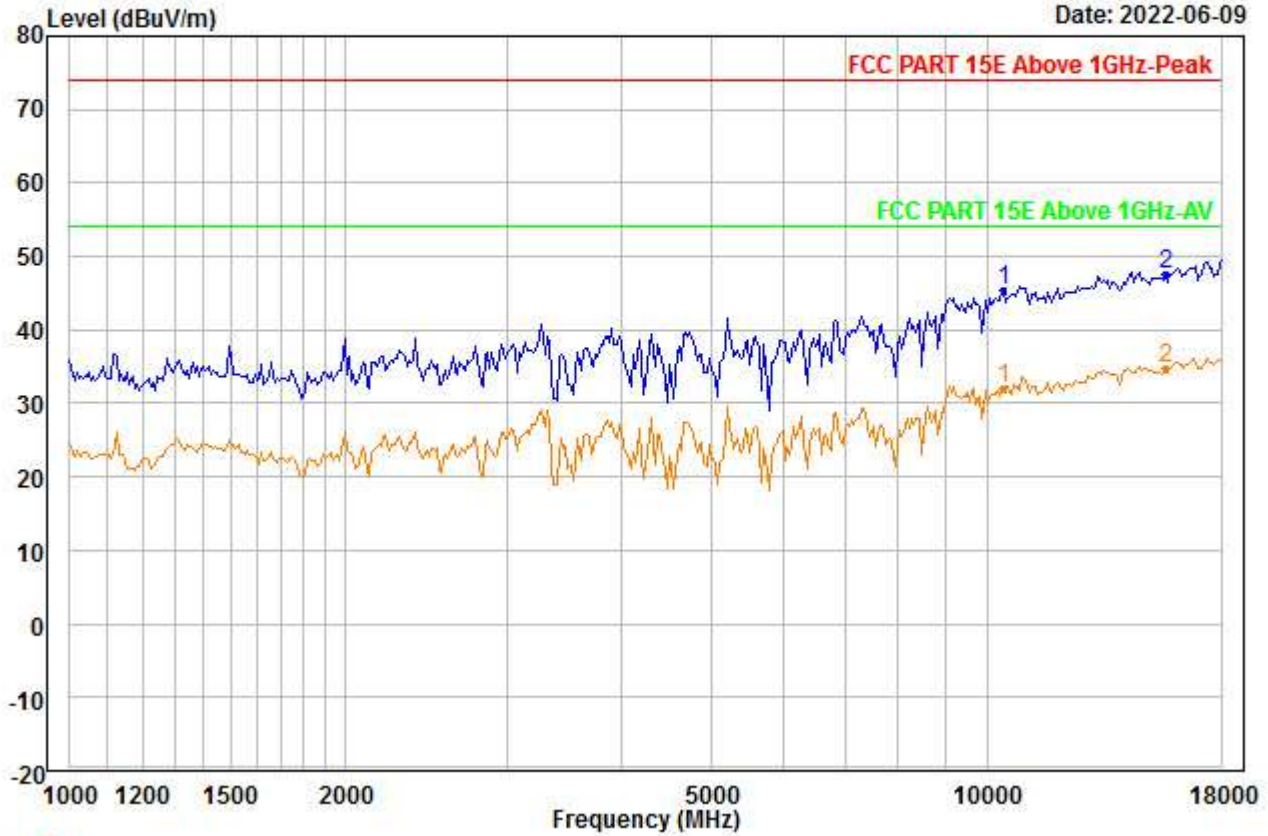


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5220
 Remark :

| | Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Rem: |
|---|-------------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 10440.000 | 39.20 | 38.16 | 45.92 | 0.00 | 14.06 | 45.50 | 74.00 | -28.50 | --- | --- | Peak |
| 2 | PP15660.000 | 36.20 | 40.42 | 46.03 | 0.00 | 17.01 | 47.60 | 74.00 | -26.40 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00092.EMI

Date: 2022-06-09

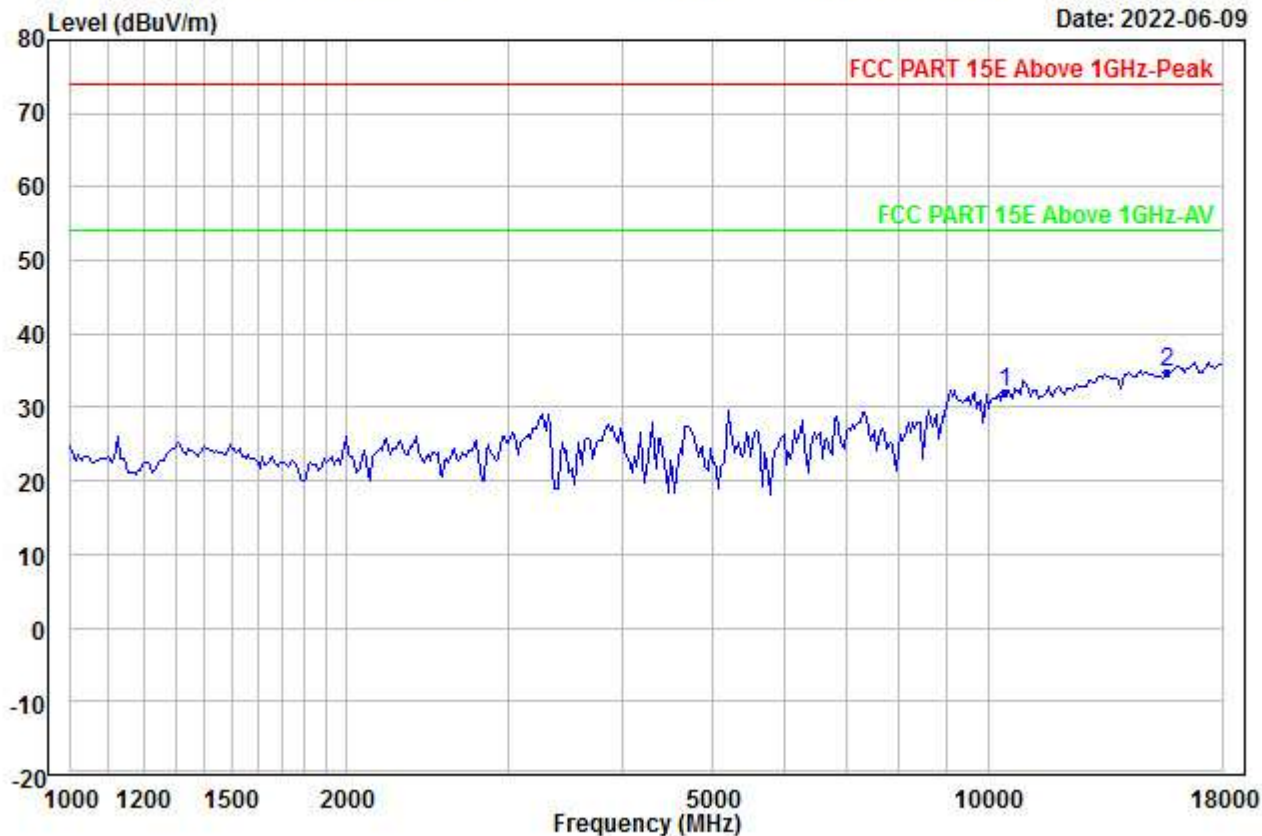


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5220
 Remark :

| | Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Remarks |
|---|-------------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|---------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 10440.000 | 25.65 | 38.16 | 45.92 | 0.00 | 14.06 | 31.95 | 54.00 | -22.05 | --- | --- | Aver |
| 2 | PP15660.000 | 23.34 | 40.42 | 46.03 | 0.00 | 17.01 | 34.74 | 54.00 | -19.26 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00093.EMI

Date: 2022-06-09

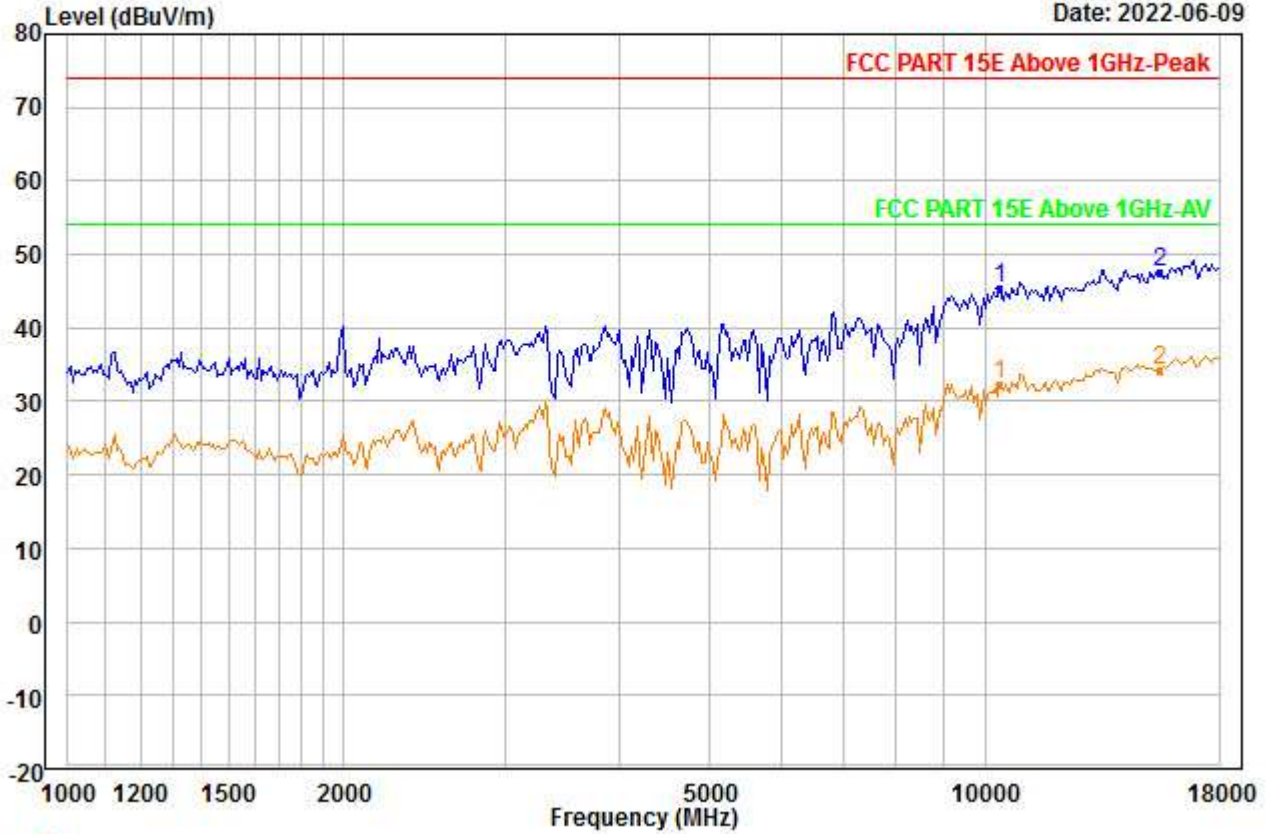


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5180
 Remark :

| | Freq | Read Level | Ant Factor | Preamp Factor | Aux Factor | Cable Loss | Level | Limit Line | Over Limit | APos | TPos | Rem: |
|---|-------------|------------|------------|---------------|------------|------------|--------|------------|------------|------|------|------|
| | MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 | 10360.000 | 39.12 | 38.12 | 45.96 | 0.00 | 14.08 | 45.36 | 74.00 | -28.64 | --- | --- | Peak |
| 2 | PP15540.000 | 36.20 | 40.26 | 45.93 | 0.00 | 16.94 | 47.47 | 74.00 | -26.53 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00094.EMI

Date: 2022-06-09

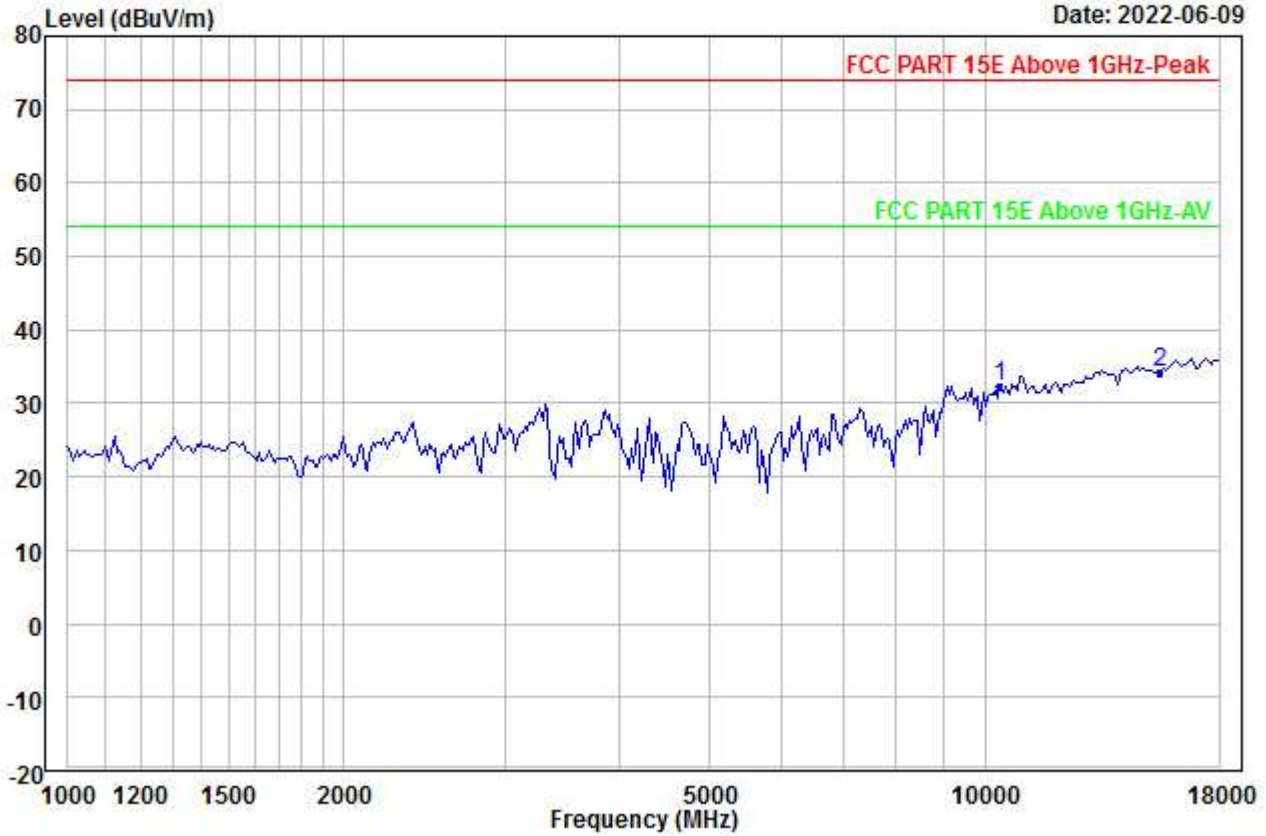


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5180
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 10360.000 | 26.11 | 38.12 | 45.96 | 0.00 | 14.08 | 32.35 | 54.00 | -21.65 | --- | --- | Aver |
| 2 PP15540.000 | 23.05 | 40.26 | 45.93 | 0.00 | 16.94 | 34.32 | 54.00 | -19.68 | --- | --- | Aver |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00095.EMI

Date: 2022-06-09

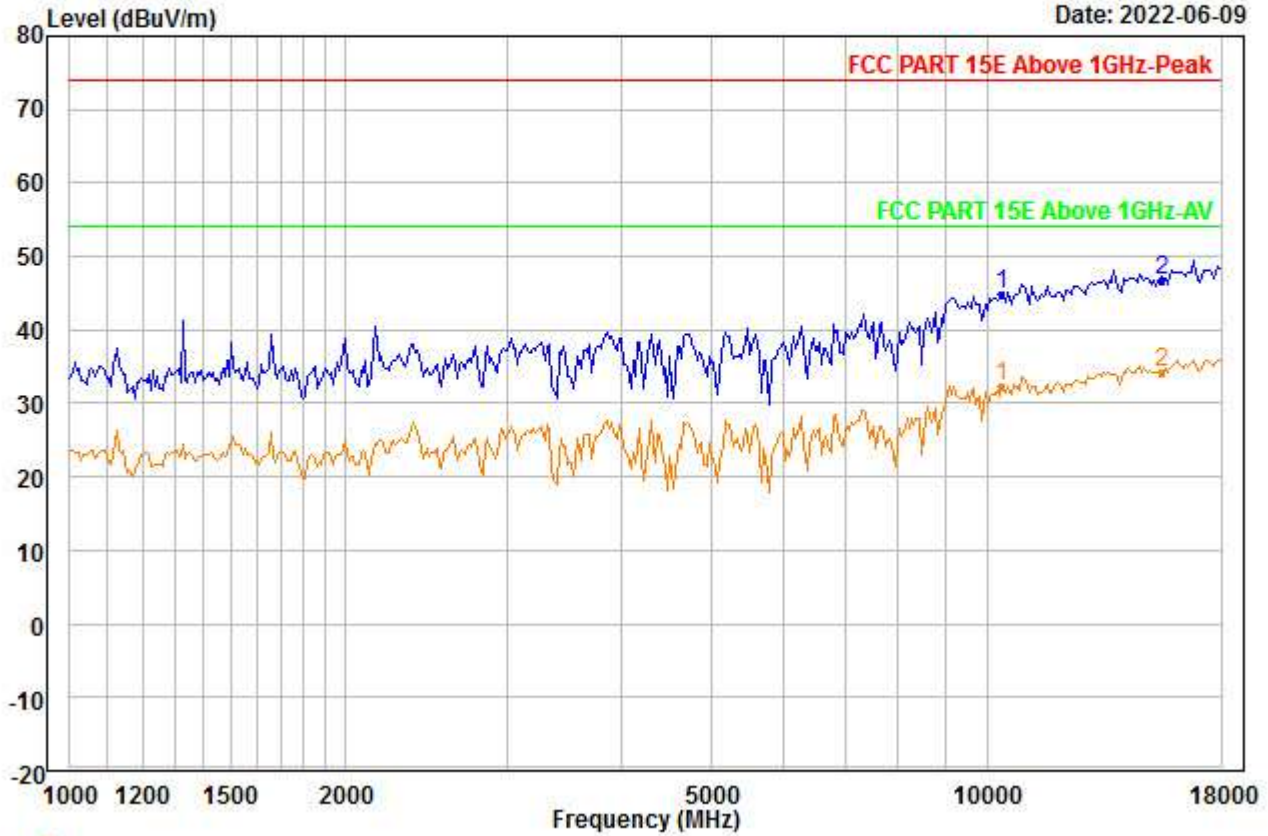


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5180
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 10360.000 | 38.55 | 38.12 | 45.96 | 0.00 | 14.08 | 44.79 | 74.00 | -29.21 | --- | --- | Peak |
| 2 PP15540.000 | 35.47 | 40.26 | 45.93 | 0.00 | 16.94 | 46.74 | 74.00 | -27.26 | --- | --- | Peak |

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00096.EMI

Date: 2022-06-09

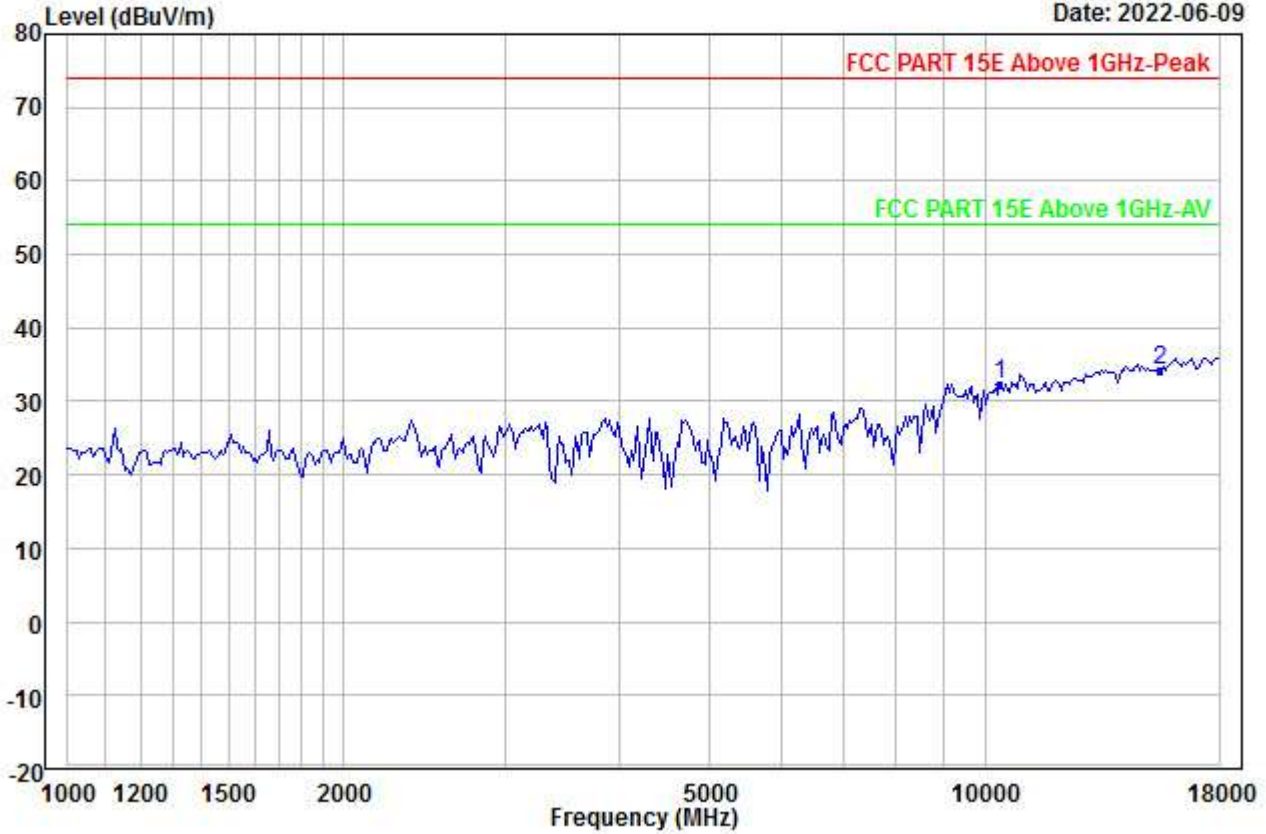

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : A_ANT1_5180
 Remark :

| | Read | Ant | Preamp | Aux | Cable | Limit | Over | APos | TPos | Rem: | |
|---------------|-------|--------|--------|--------|-------|--------|--------|--------|------|------|------|
| Freq | Level | Factor | Factor | Factor | Loss | Line | Limit | | | | |
| MHz | dBuV | dB/m | dB | dB | dB | dBuV/m | dBuV/m | dB | cm | deg | |
| 1 10360.000 | 26.18 | 38.12 | 45.96 | 0.00 | 14.08 | 32.42 | 54.00 | -21.58 | --- | --- | Aver |
| 2 PP15540.000 | 22.85 | 40.26 | 45.93 | 0.00 | 16.94 | 34.12 | 54.00 | -19.88 | --- | --- | Aver |