


File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00193.EMI

Date: 2022-06-09

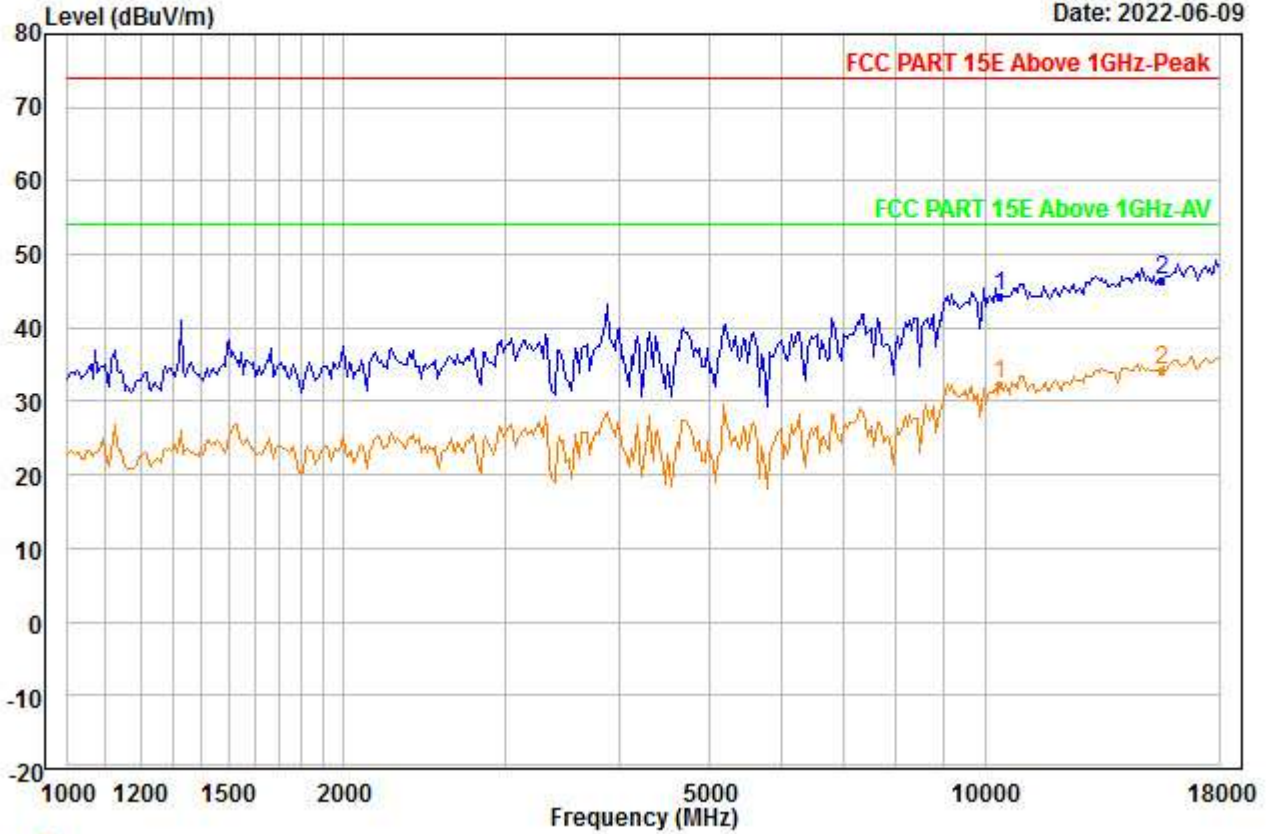


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5190
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10380.000	38.08	38.13	45.95	0.00	14.07	44.33	74.00	-29.67	---	---	Peak
2 PP15570.000	35.25	40.30	45.96	0.00	16.95	46.54	74.00	-27.46	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00194.EMI

Date: 2022-06-09

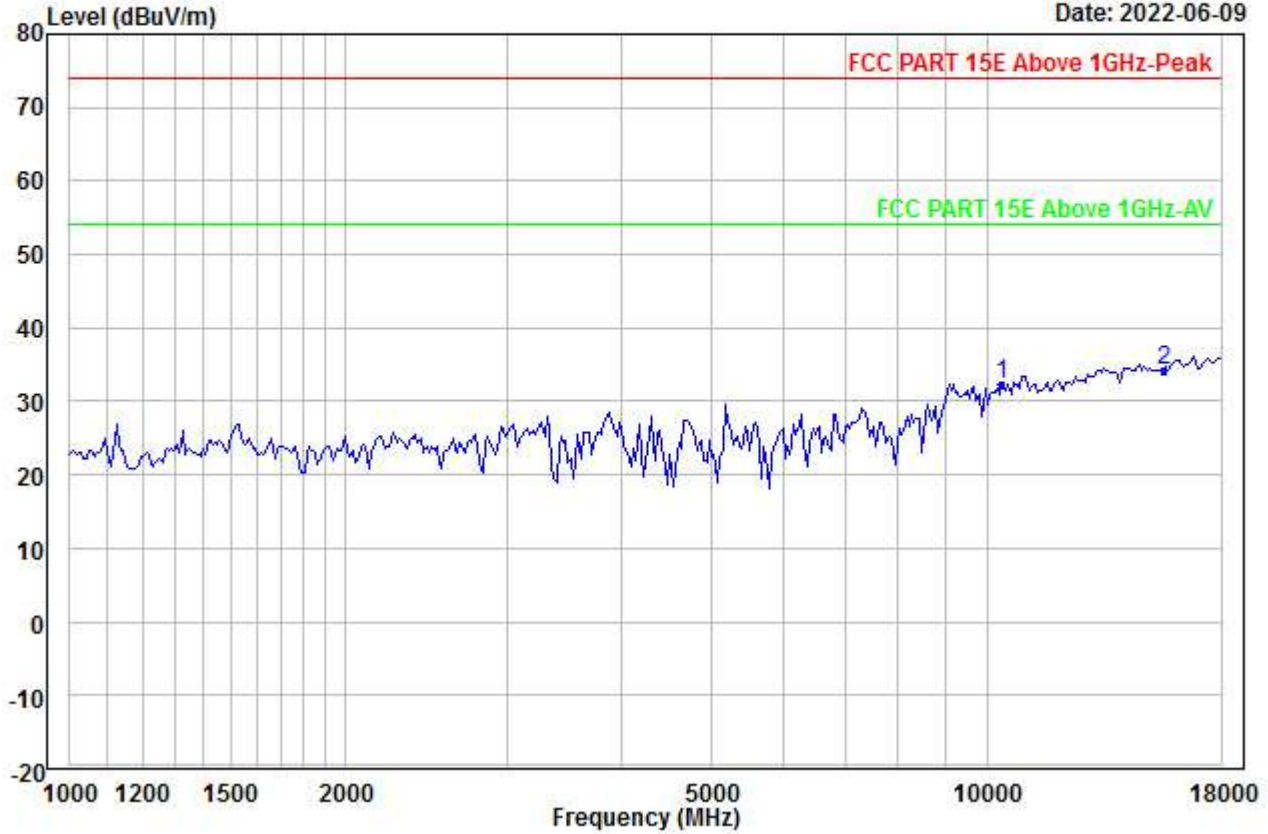


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5190
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10380.000	26.17	38.13	45.95	0.00	14.07	32.42	54.00	-21.58	---	---	Aver
2 PP15570.000	22.93	40.30	45.96	0.00	16.95	34.22	54.00	-19.78	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00195.EMI

Date: 2022-06-09

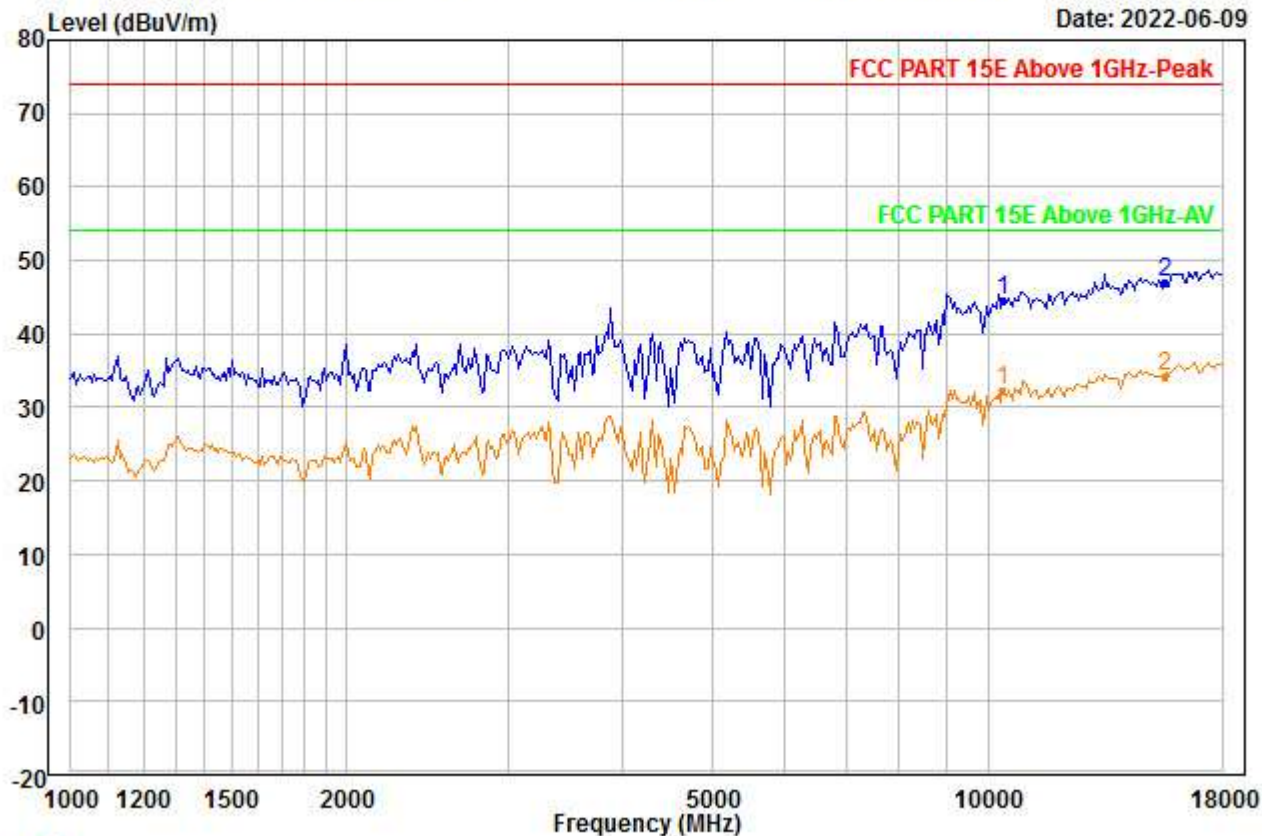


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5190
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10380.000	38.33	38.13	45.95	0.00	14.07	44.58	74.00	-29.42	---	---	Peak
2 PP15570.000	35.74	40.30	45.96	0.00	16.95	47.03	74.00	-26.97	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00196.EMI

Date: 2022-06-09

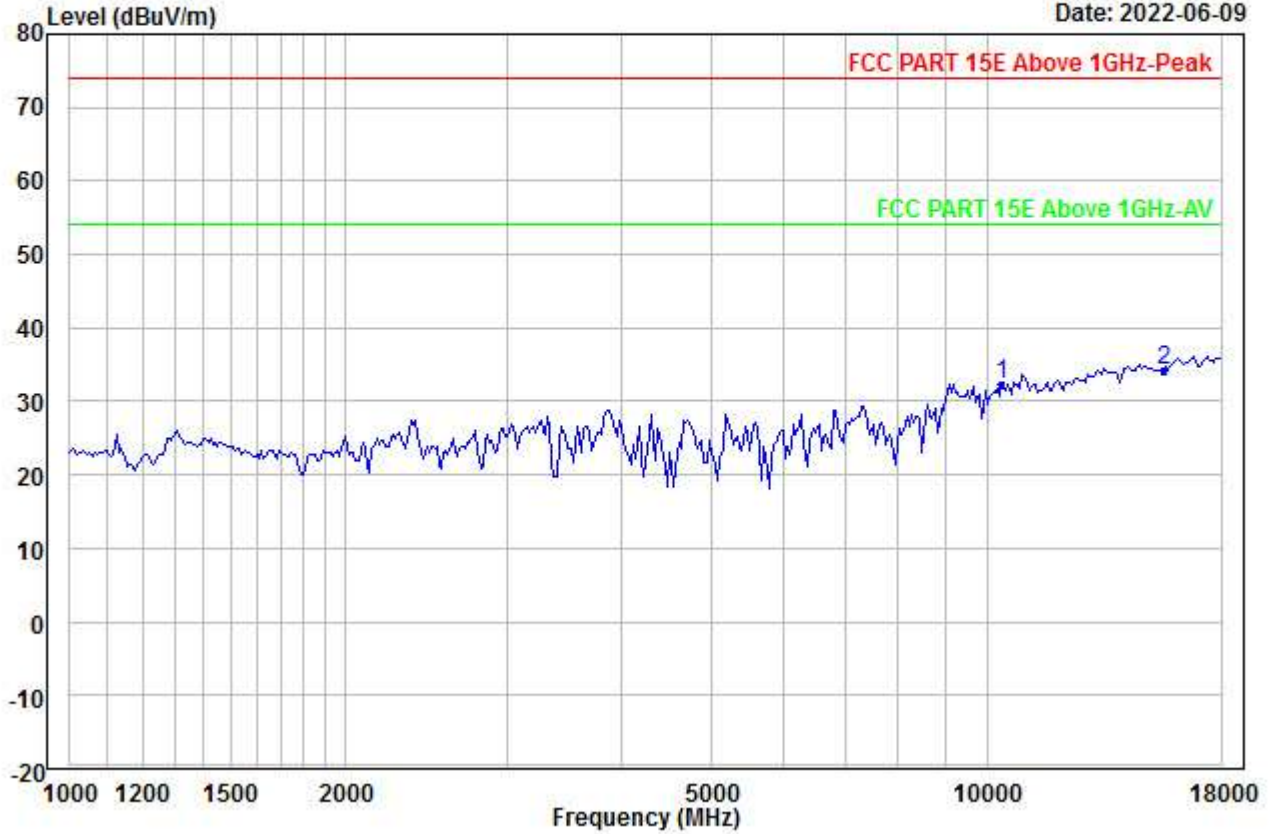


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5190
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10380.000	26.17	38.13	45.95	0.00	14.07	32.42	54.00	-21.58	---	---	Aver
2 PP15570.000	23.03	40.30	45.96	0.00	16.95	34.32	54.00	-19.68	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00197.EMI

Date: 2022-06-09

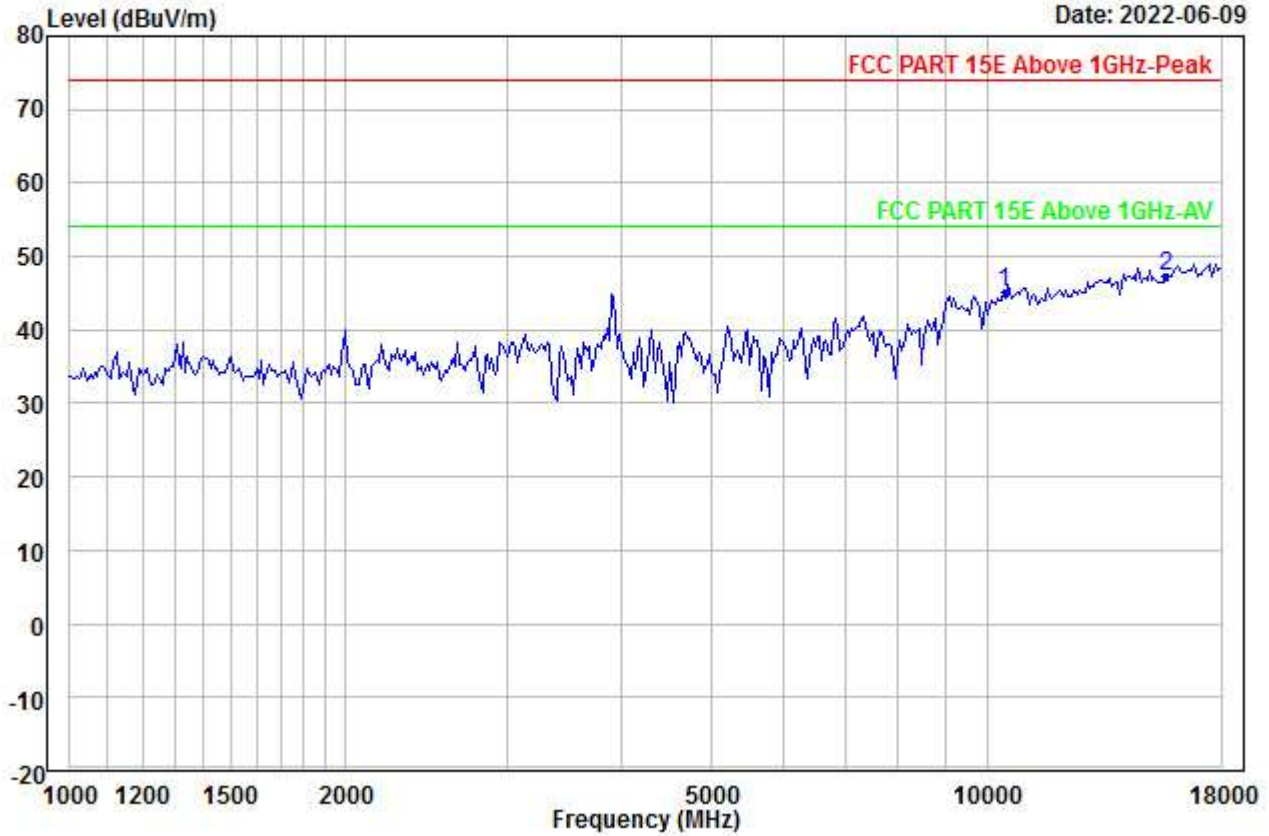


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5230
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10460.000	38.84	38.18	45.92	0.00	14.06	45.16	74.00	-28.84	---	---	Peak
2 PP15690.000	35.74	40.47	46.05	0.00	17.03	47.19	74.00	-26.81	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00198.EMI

Date: 2022-06-09

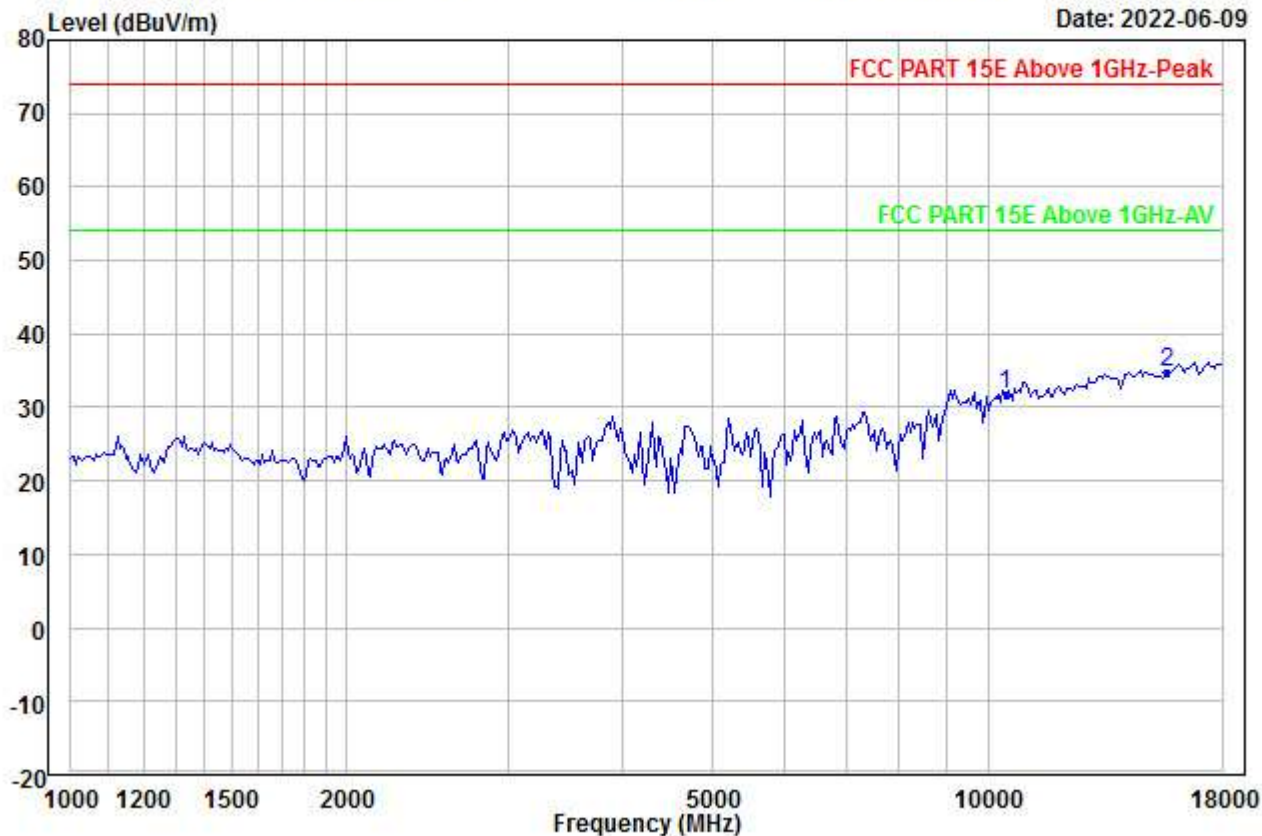


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5230
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10460.000	25.55	38.18	45.92	0.00	14.06	31.87	54.00	-22.13	---	---	Aver
2 PP15690.000	23.29	40.47	46.05	0.00	17.03	34.74	54.00	-19.26	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00199.EMI

Date: 2022-06-09

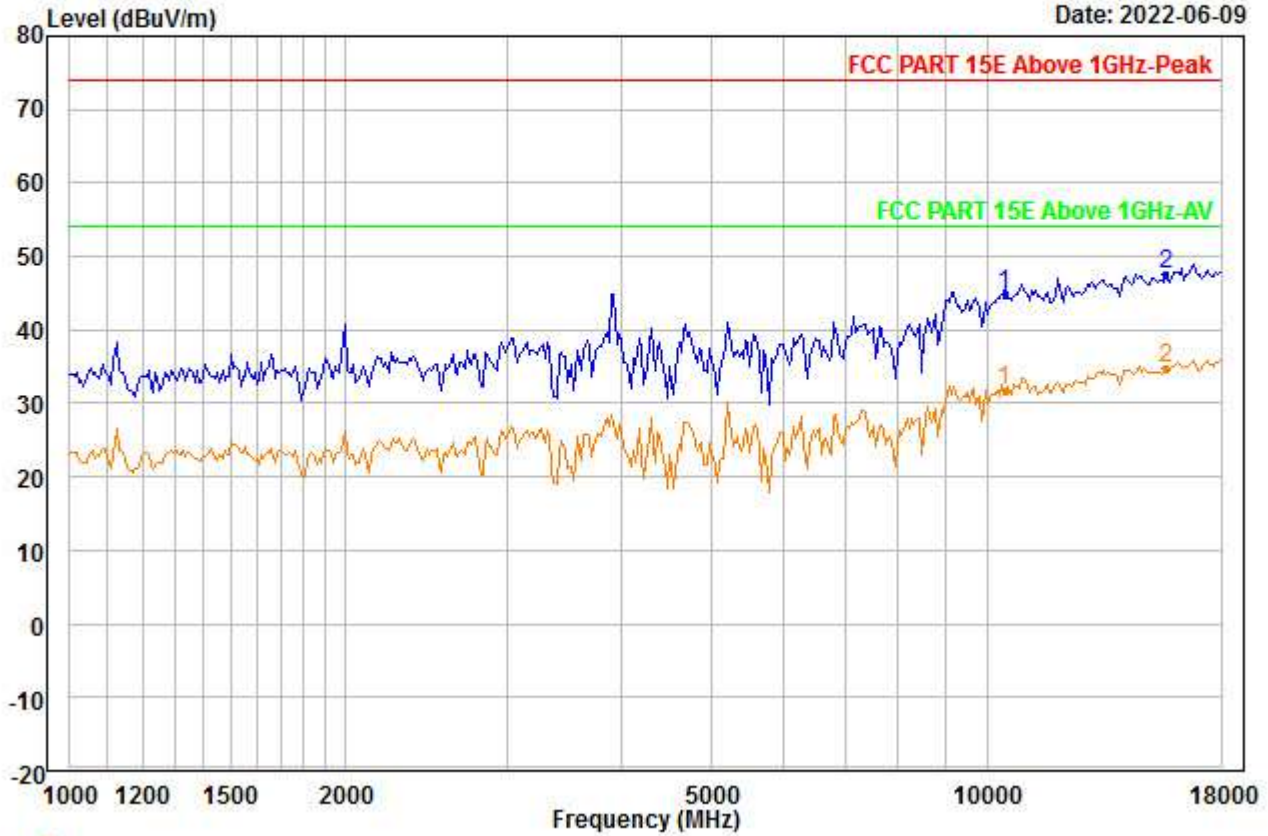


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5230
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10460.000	38.57	38.18	45.92	0.00	14.06	44.89	74.00	-29.11	---	---	Peak
2 PP15690.000	36.11	40.47	46.05	0.00	17.03	47.56	74.00	-26.44	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00200.EMI

Date: 2022-06-09

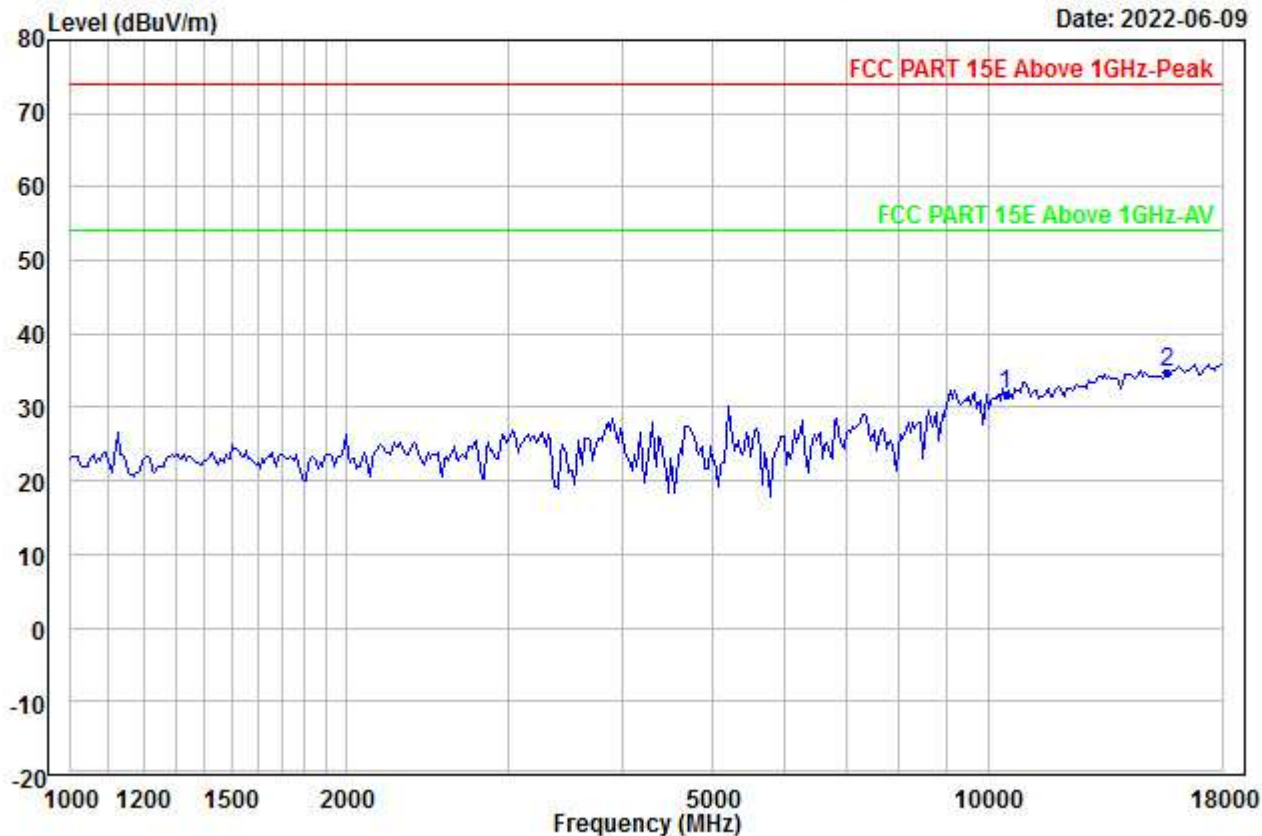


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5230
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10460.000	25.55	38.18	45.92	0.00	14.06	31.87	54.00	-22.13	---	---	Aver
2 PP15690.000	23.19	40.47	46.05	0.00	17.03	34.64	54.00	-19.36	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00201.EMI

Date: 2022-06-09

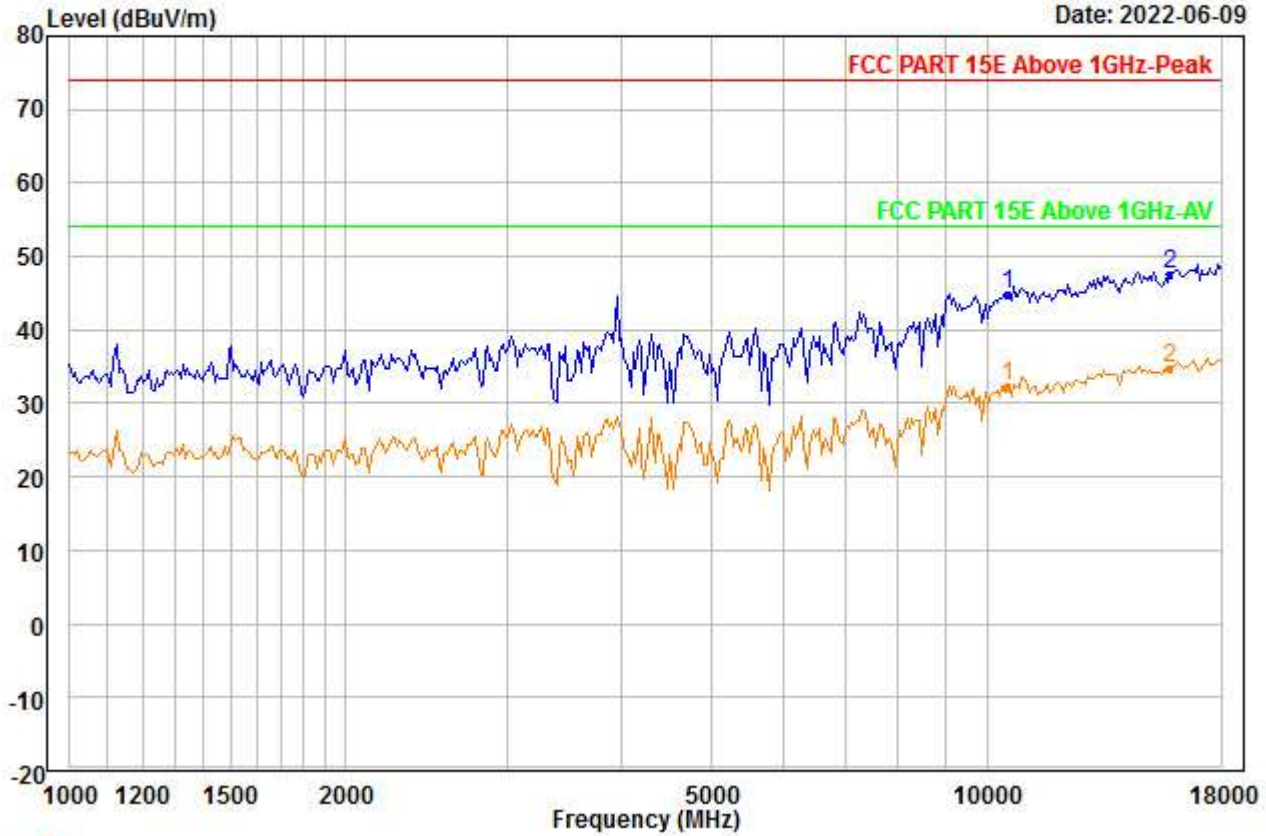


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5270
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10540.000	38.41	38.22	45.83	0.00	14.03	44.83	74.00	-29.17	---	---	Peak
2 PP15810.000	35.87	40.63	46.15	0.00	17.11	47.46	74.00	-26.54	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00202.EMI

Date: 2022-06-09

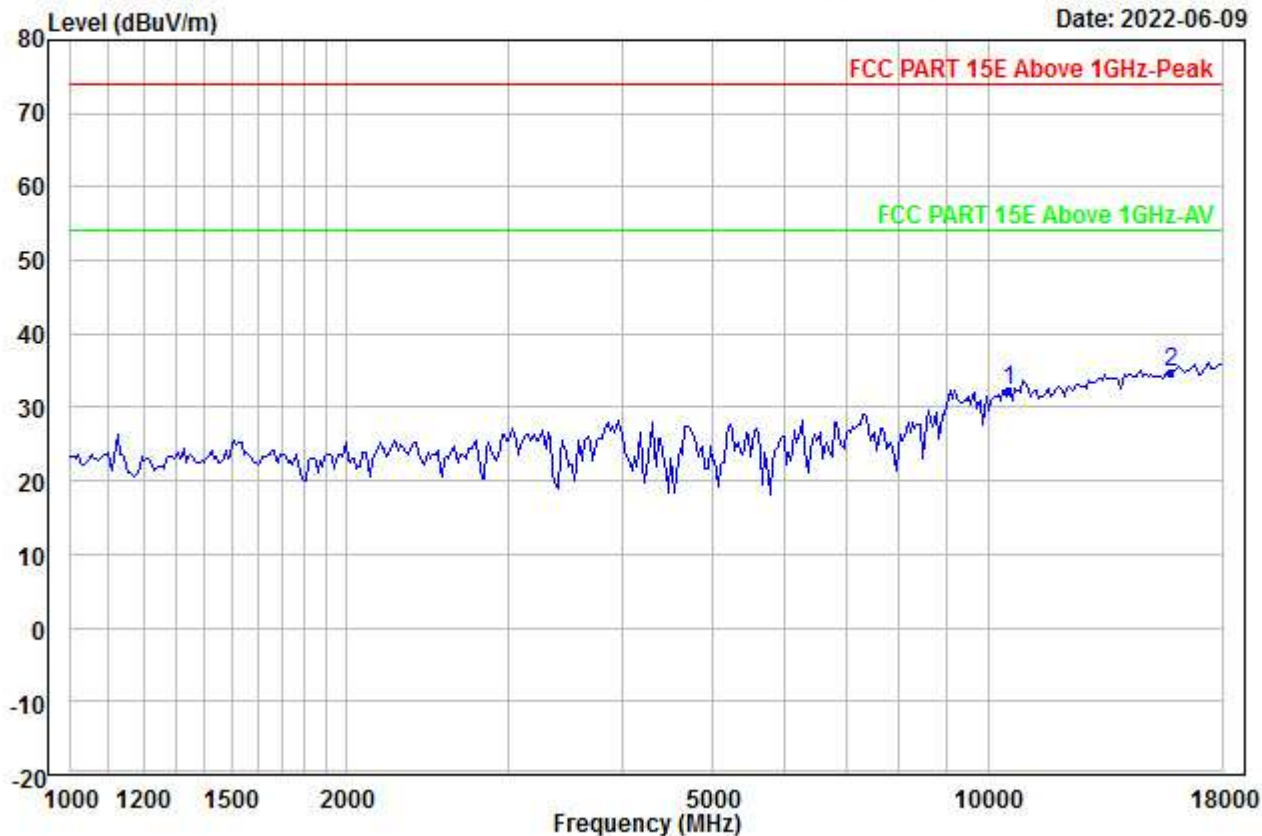


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5270
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10540.000	25.86	38.22	45.83	0.00	14.03	32.28	54.00	-21.72	---	---	Aver
2 PP15810.000	23.07	40.63	46.15	0.00	17.11	34.66	54.00	-19.34	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00203.EMI

Date: 2022-06-09

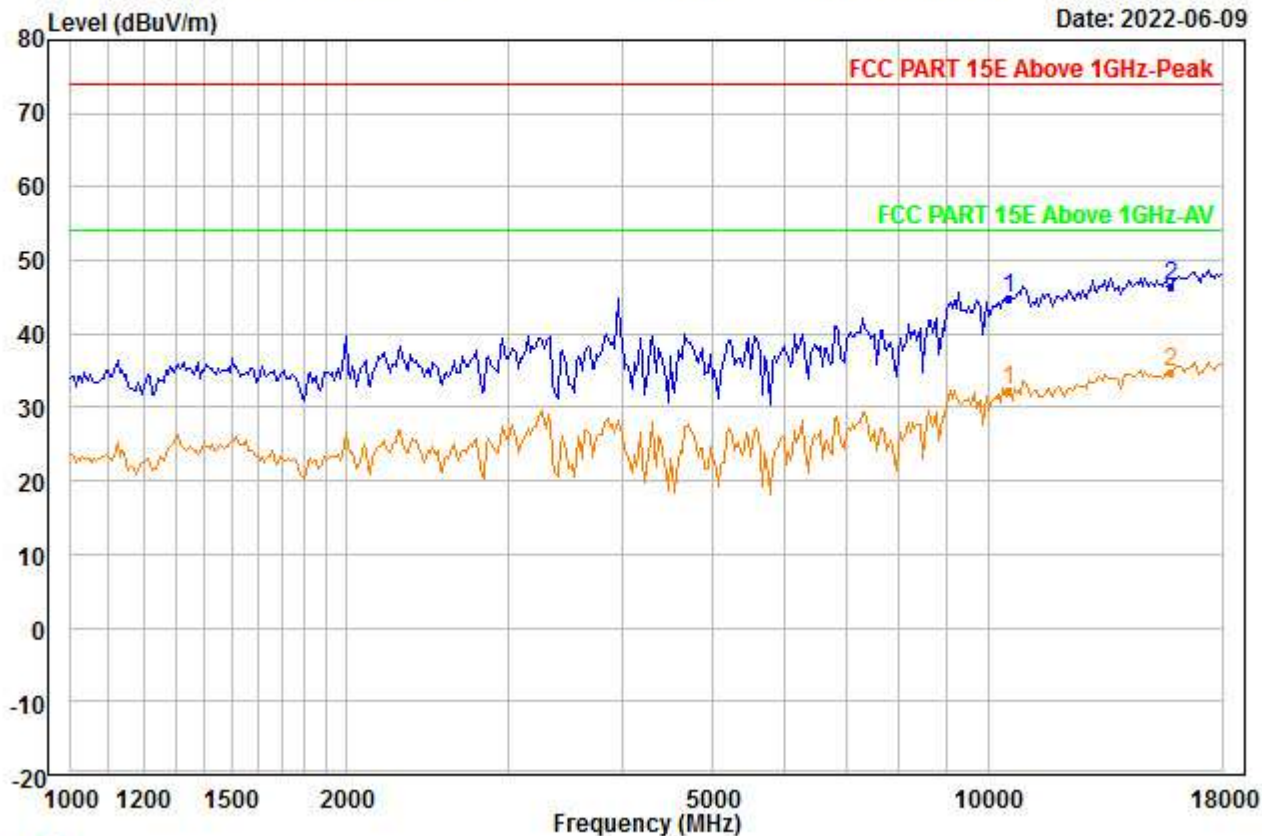


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5270
 Remark :

	Read Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10540.000	38.49	38.22	45.83	0.00	14.03	44.91	74.00	-29.09	---	---	Peak
2	PP15810.000	34.88	40.63	46.15	0.00	17.11	46.47	74.00	-27.53	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00204.EMI

Date: 2022-06-09

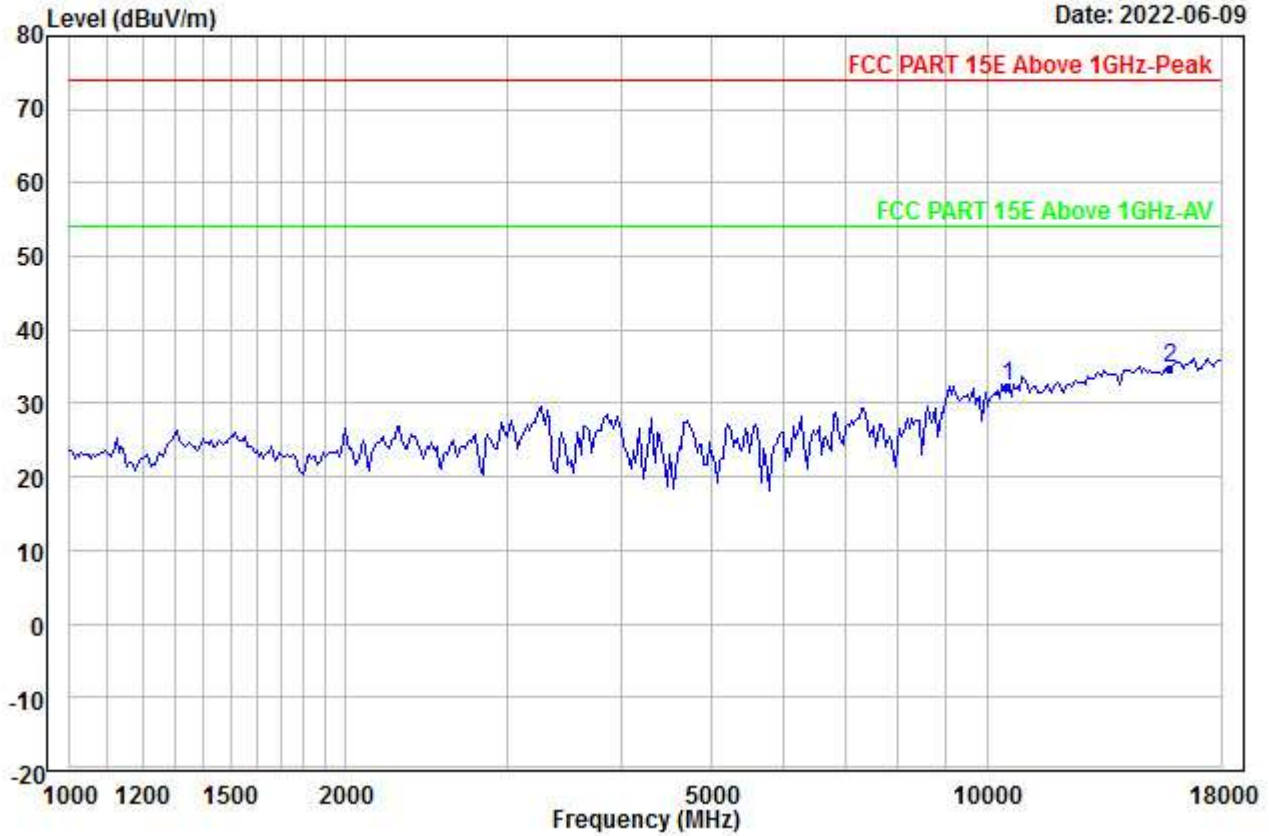


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5270
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10540.000	25.86	38.22	45.83	0.00	14.03	32.28	54.00	-21.72	---	---	Aver
2 PP15810.000	23.07	40.63	46.15	0.00	17.11	34.66	54.00	-19.34	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00205.EMI

Date: 2022-06-09

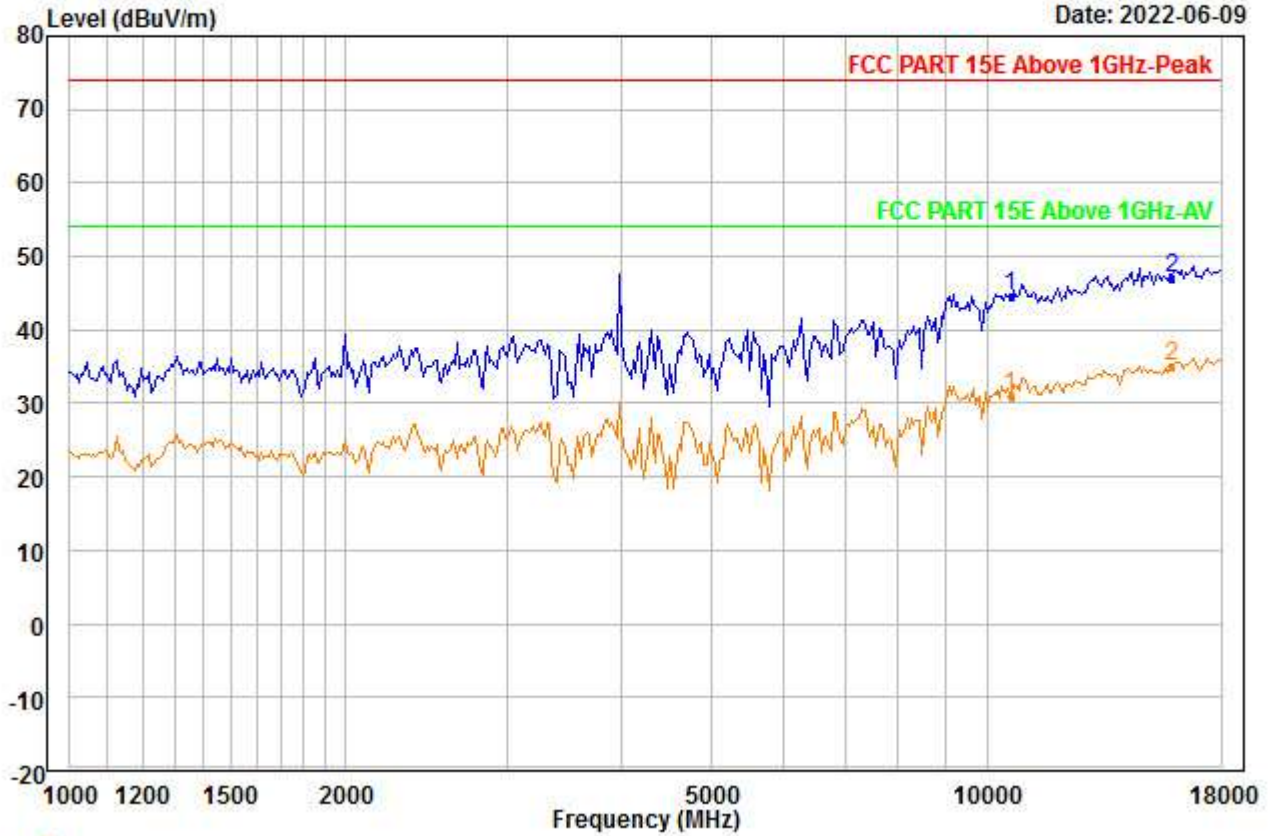


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5310
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10620.000	38.05	38.27	45.68	0.00	14.02	44.66	74.00	-29.34	---	---	Peak
2 PP15930.000	35.34	40.80	46.24	0.00	17.19	47.09	74.00	-26.91	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00206.EMI

Date: 2022-06-09

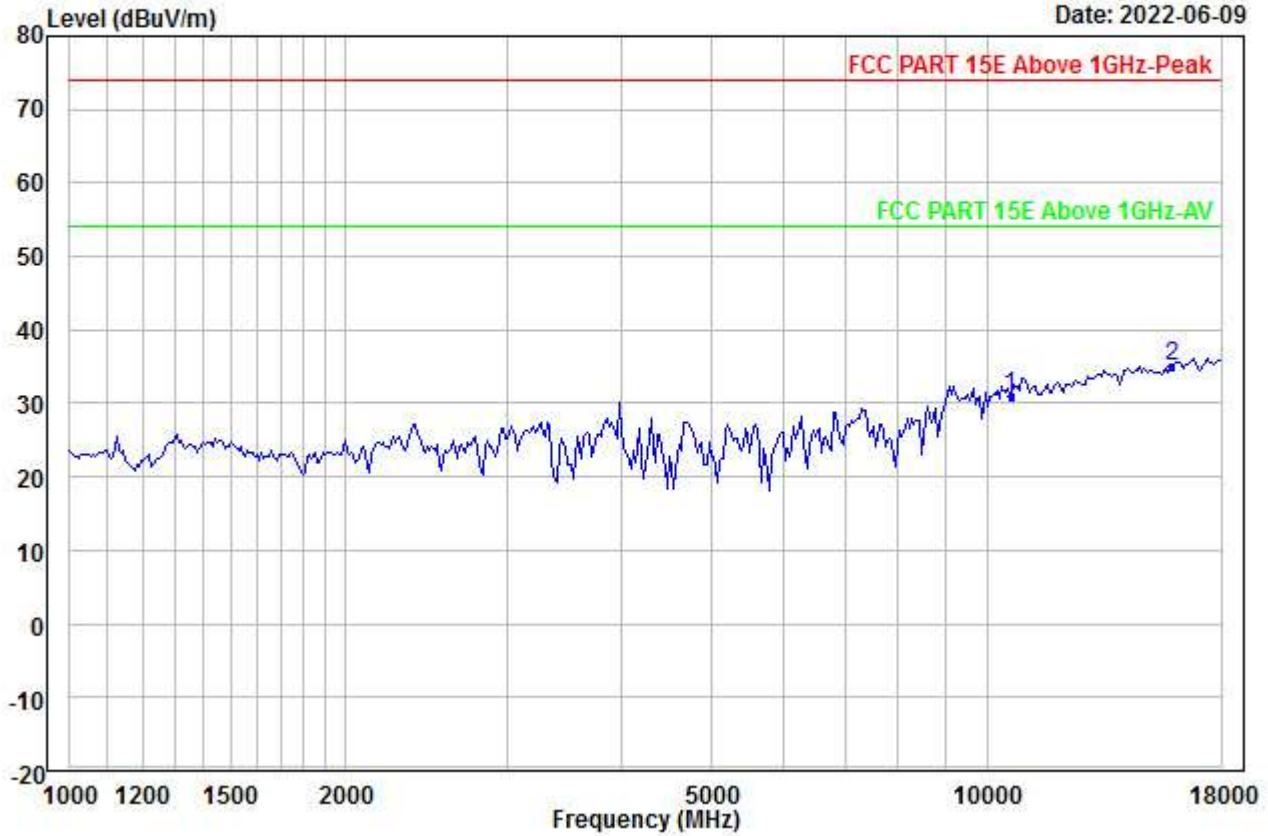


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5310
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10620.000	24.44	38.27	45.68	0.00	14.02	31.05	54.00	-22.95	---	---	Aver
2 PP15930.000	23.43	40.80	46.24	0.00	17.19	35.18	54.00	-18.82	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00207.EMI

Date: 2022-06-09

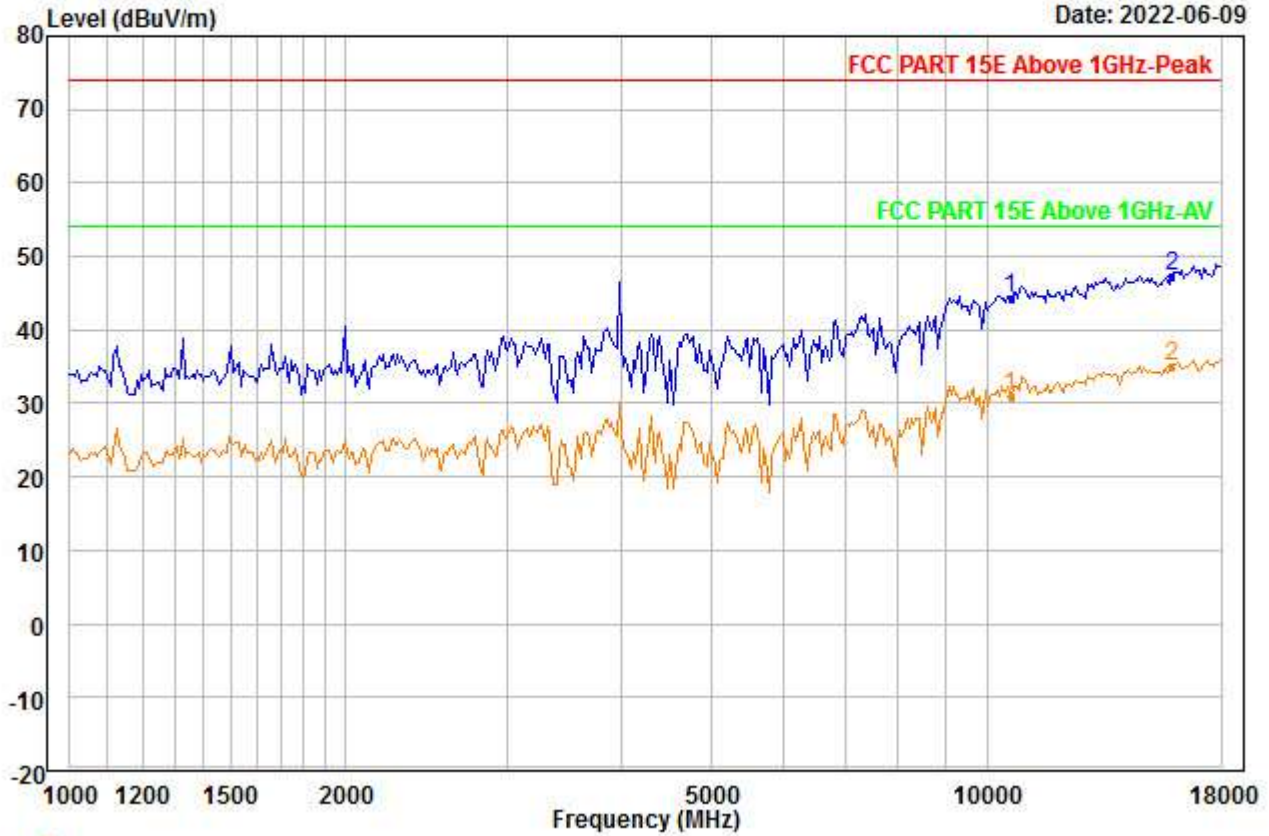


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5310
 Remark :

	Read Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10620.000	37.62	38.27	45.68	0.00	14.02	44.23	74.00	-29.77	---	---	Peak
2	PP15930.000	35.66	40.80	46.24	0.00	17.19	47.41	74.00	-26.59	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00208.EMI

Date: 2022-06-09

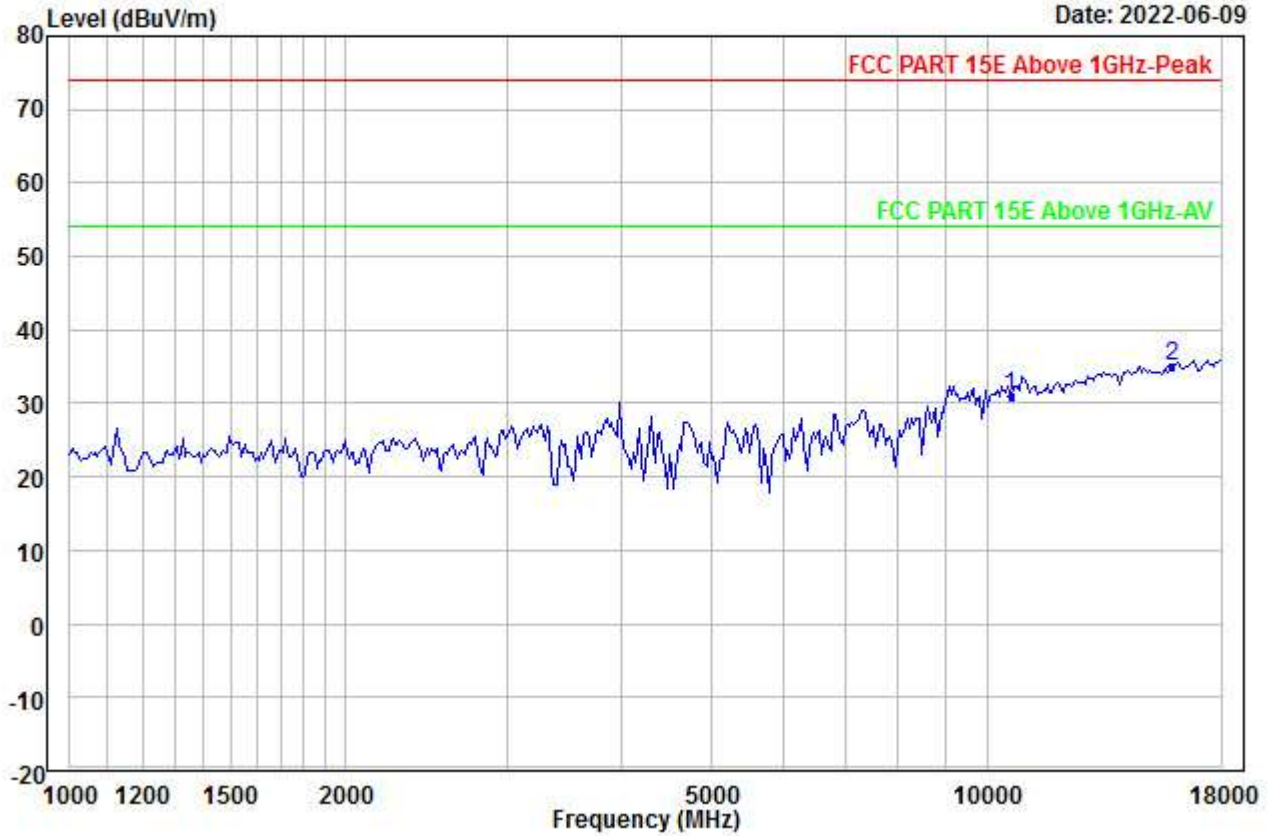


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5310
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10620.000	24.44	38.27	45.68	0.00	14.02	31.05	54.00	-22.95	---	---	Aver
2 PP15930.000	23.23	40.80	46.24	0.00	17.19	34.98	54.00	-19.02	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00209.EMI

Date: 2022-06-09

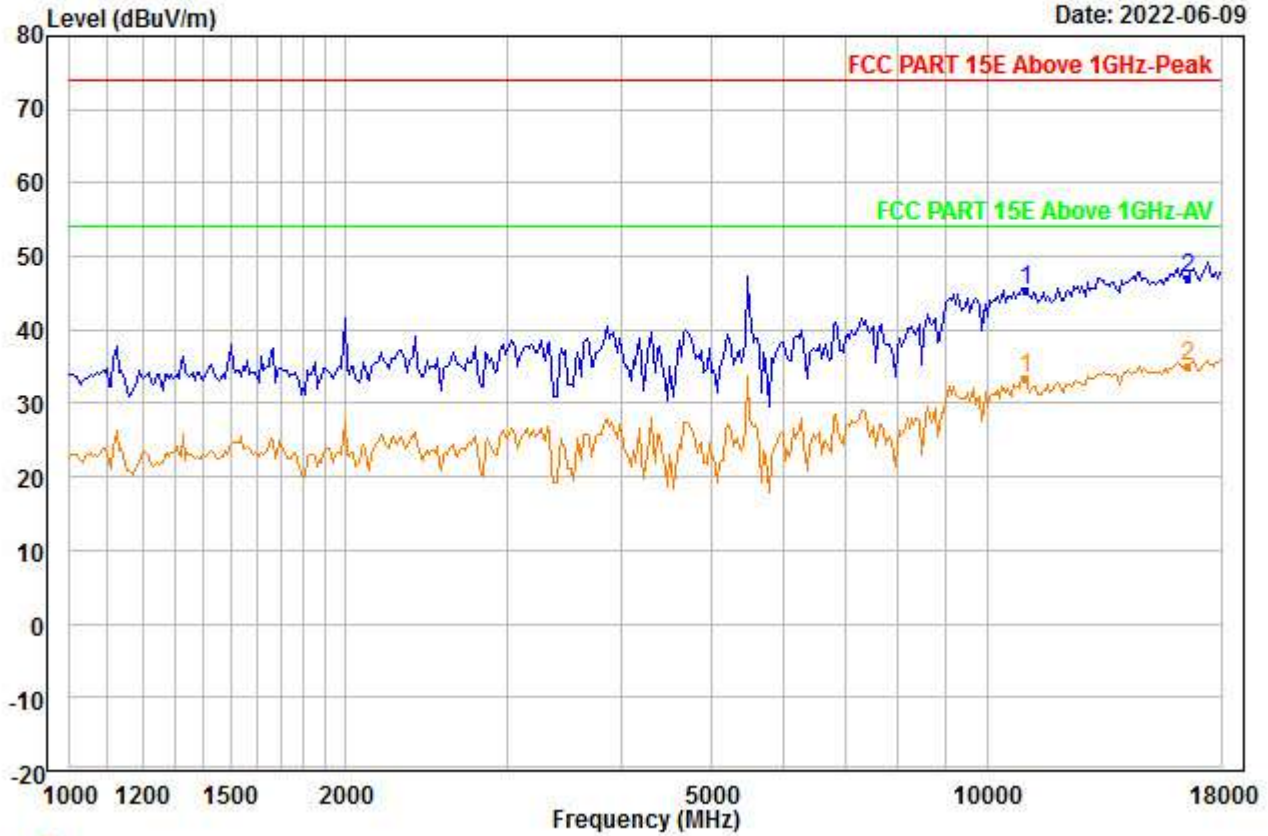


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5510
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 11020.000	37.98	38.52	45.04	0.00	13.93	45.39	74.00	-28.61	---	---	Peak
2 PP16530.000	34.76	41.55	46.64	0.00	17.47	47.14	74.00	-26.86	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00210.EMI

Date: 2022-06-09

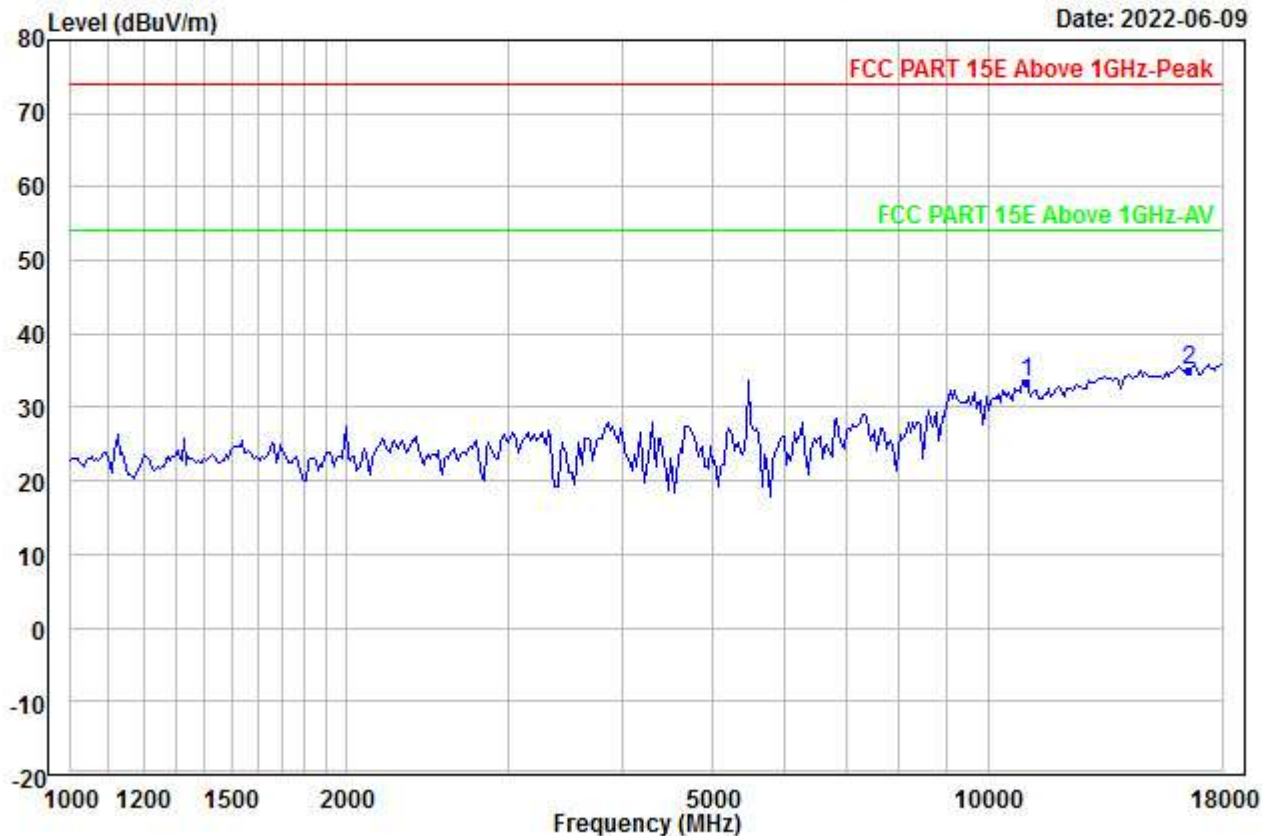


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5510
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 11020.000	25.88	38.52	45.04	0.00	13.93	33.29	54.00	-20.71	---	---	Aver
2 PP16530.000	22.79	41.55	46.64	0.00	17.47	35.17	54.00	-18.83	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00211.EMI

Date: 2022-06-09

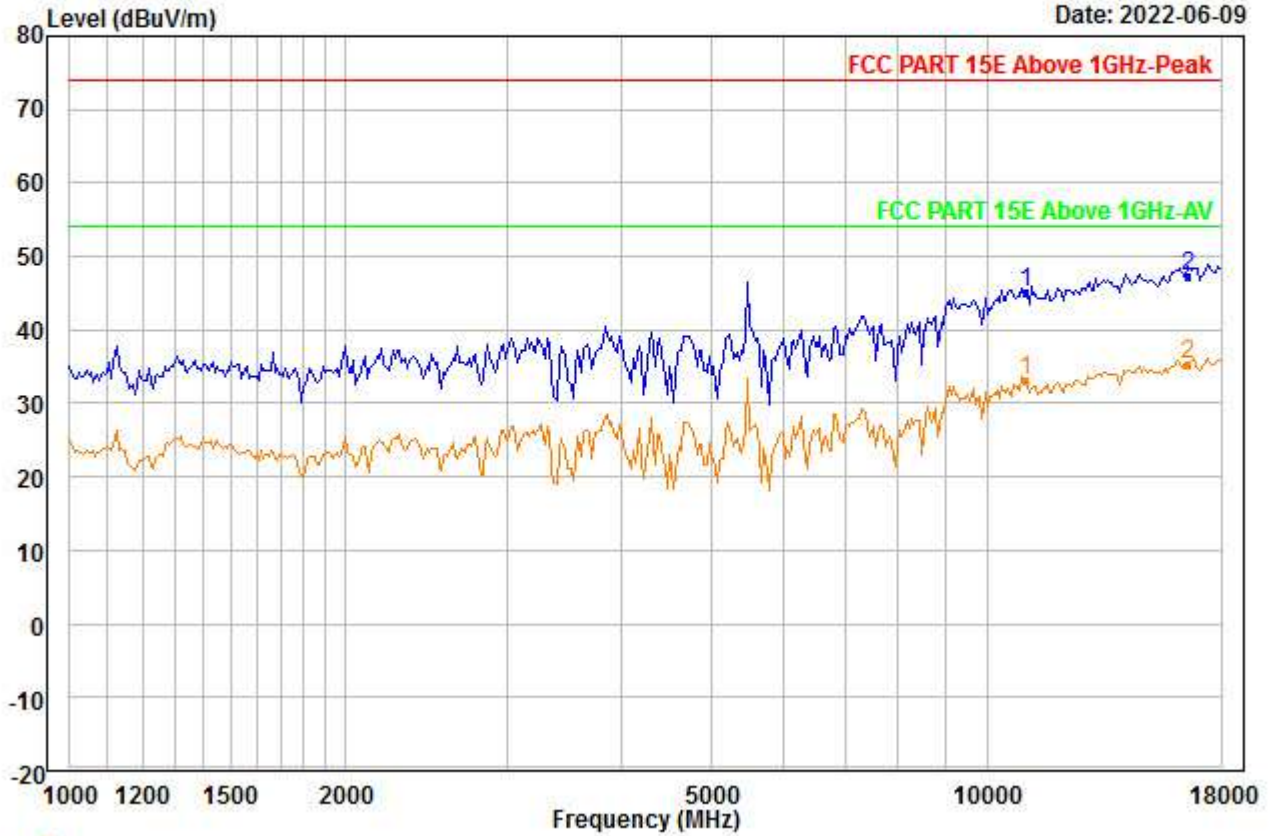


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5510
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11020.000	37.74	38.52	45.04	0.00	13.93	45.15	74.00	-28.85	---	---	Peak
2	PP16530.000	35.04	41.55	46.64	0.00	17.47	47.42	74.00	-26.58	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00212.EMI

Date: 2022-06-09

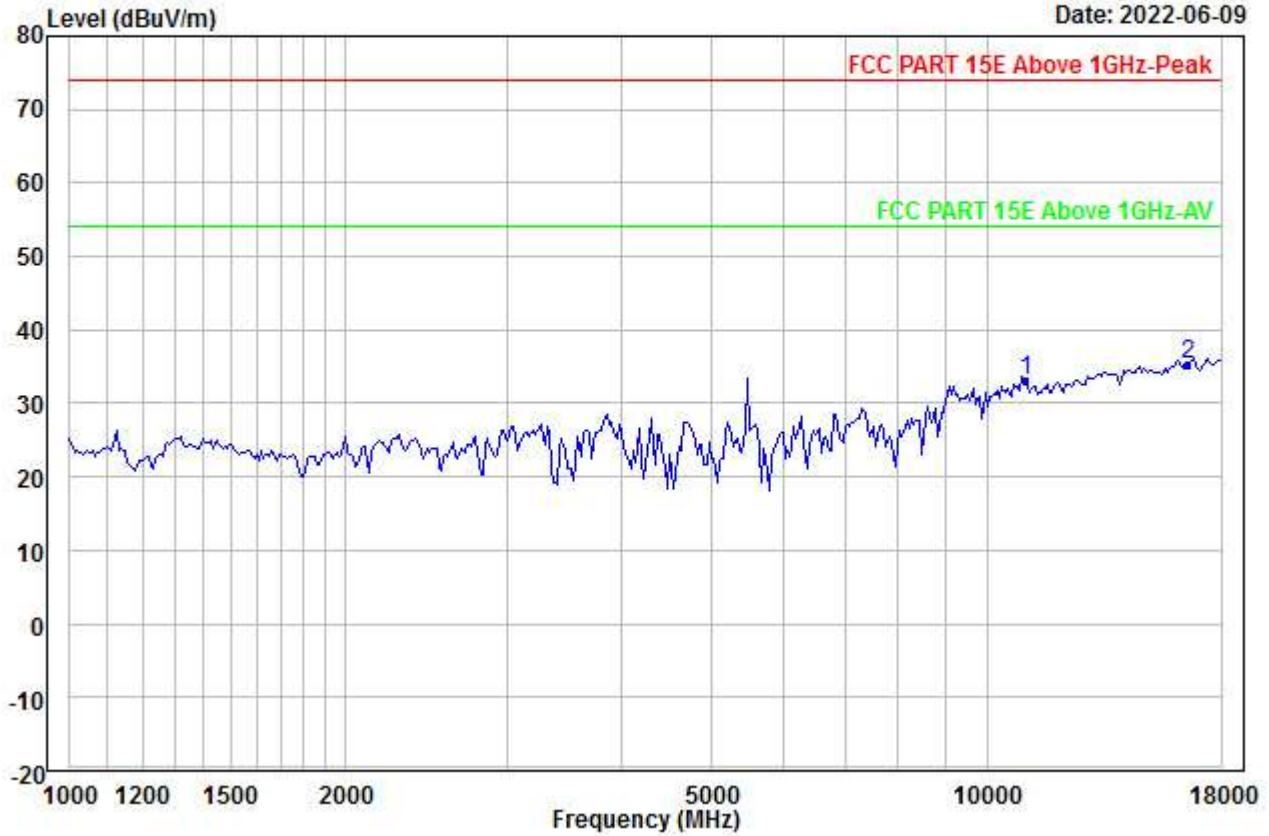


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5510
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 11020.000	25.73	38.52	45.04	0.00	13.93	33.14	54.00	-20.86	---	---	Aver
2 PP16530.000	23.00	41.55	46.64	0.00	17.47	35.38	54.00	-18.62	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00213.EMI

Date: 2022-06-09

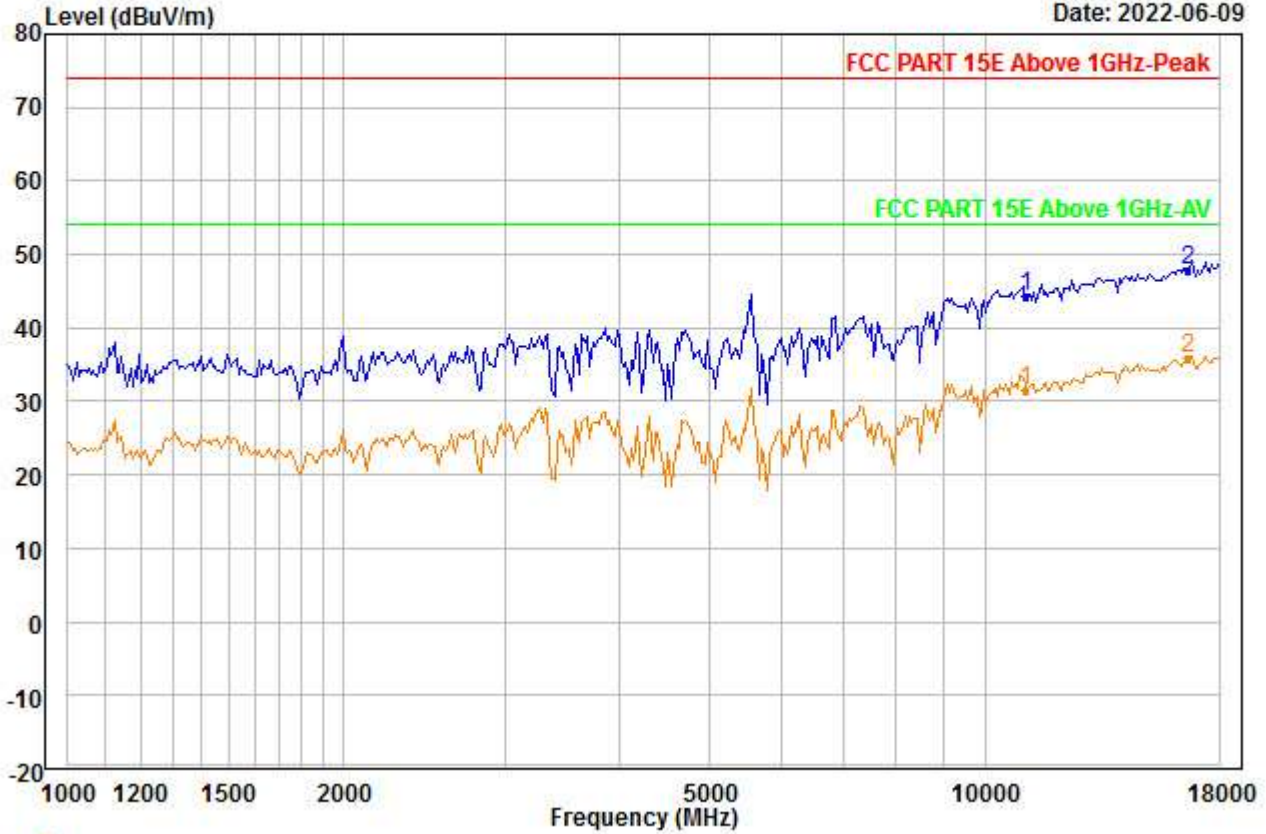


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5550
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11100.000	37.05	38.58	45.22	0.00	13.99	44.40	74.00	-29.60	---	---	Peak
2	PP16650.000	35.33	41.74	46.78	0.00	17.52	47.81	74.00	-26.19	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00214.EMI

Date: 2022-06-09

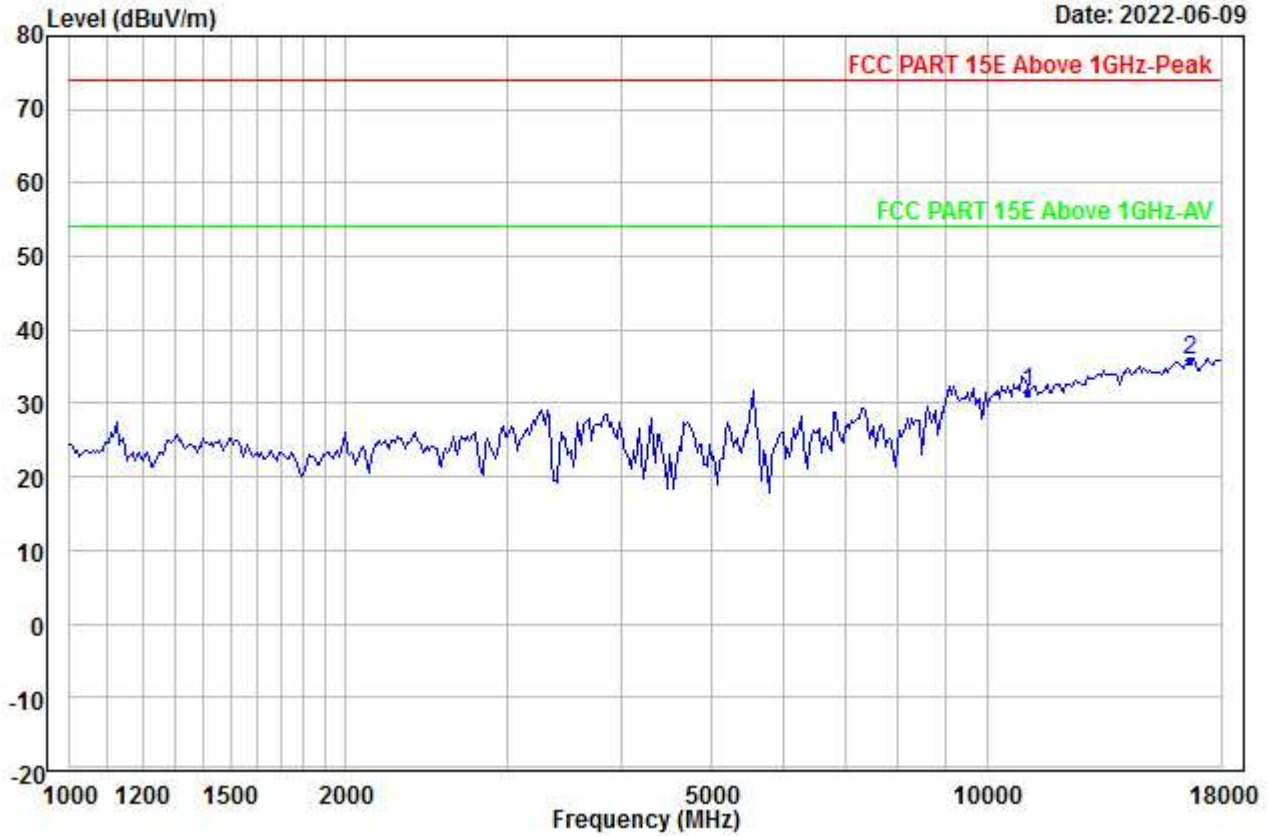


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5550
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11100.000	24.24	38.58	45.22	0.00	13.99	31.59	54.00	-22.41	---	---	Aver
2	PP16650.000	23.27	41.74	46.78	0.00	17.52	35.75	54.00	-18.25	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00215.EMI

Date: 2022-06-09

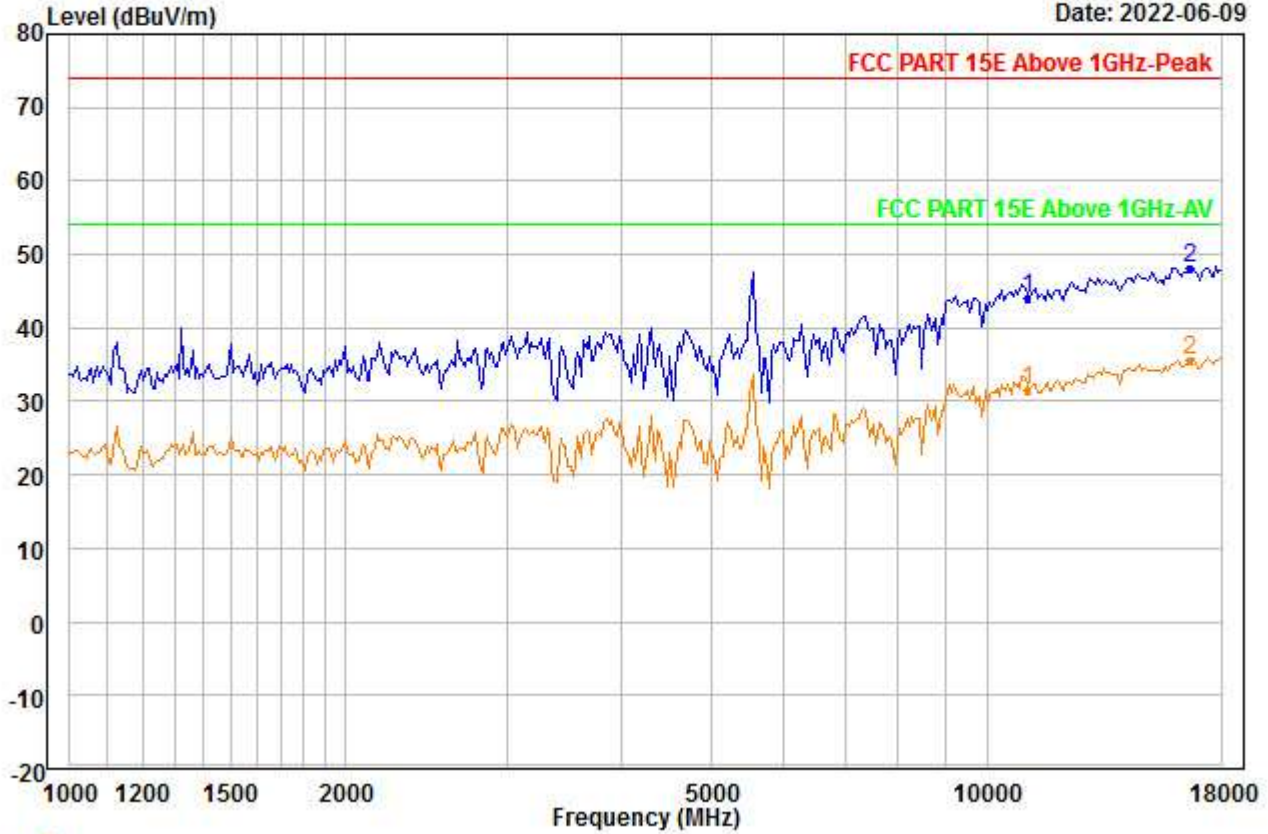


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5550
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11100.000	36.59	38.58	45.22	0.00	13.99	43.94	74.00	-30.06	---	---	Peak
2	PP16650.000	35.50	41.74	46.78	0.00	17.52	47.98	74.00	-26.02	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00216.EMI

Date: 2022-06-09

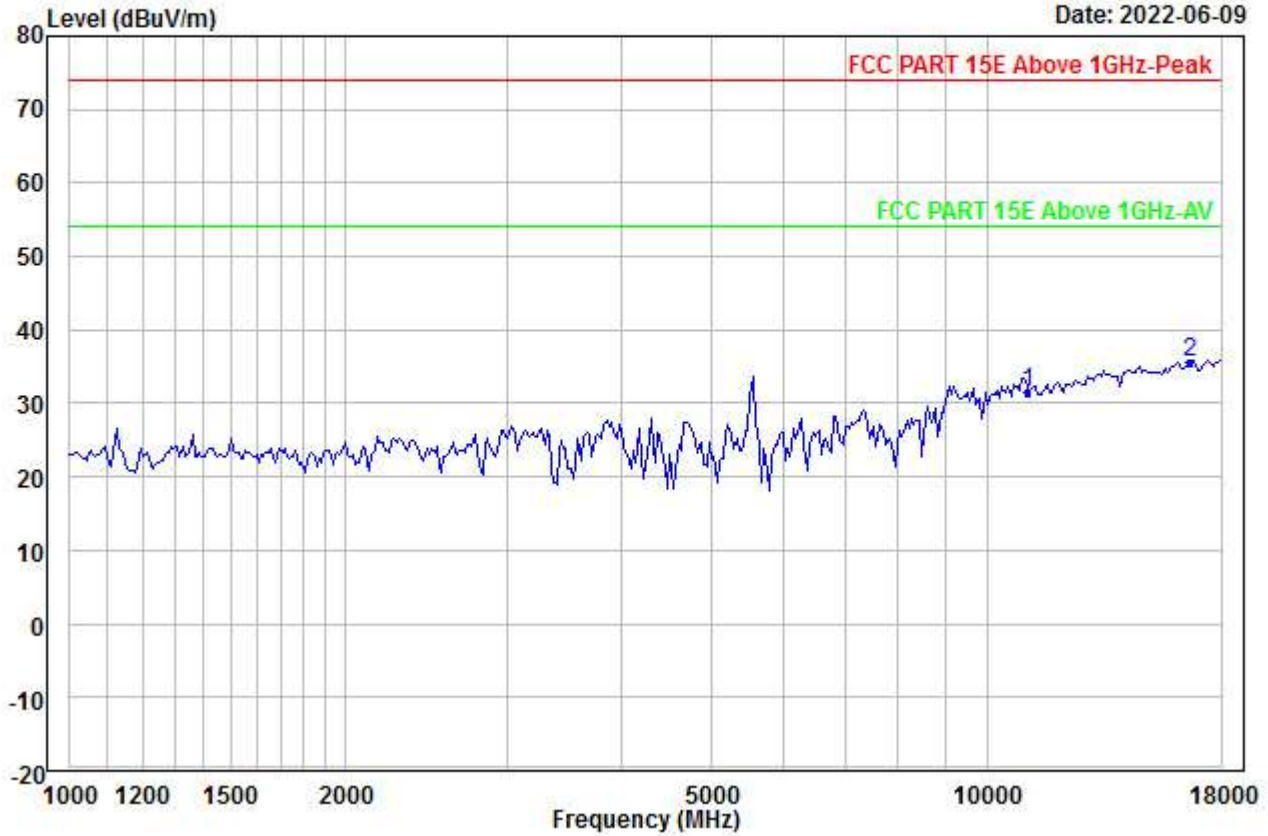


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5550
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 11100.000	24.06	38.58	45.22	0.00	13.99	31.41	54.00	-22.59	---	---	Aver
2 PP16650.000	23.06	41.74	46.78	0.00	17.52	35.54	54.00	-18.46	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00217.EMI

Date: 2022-06-09

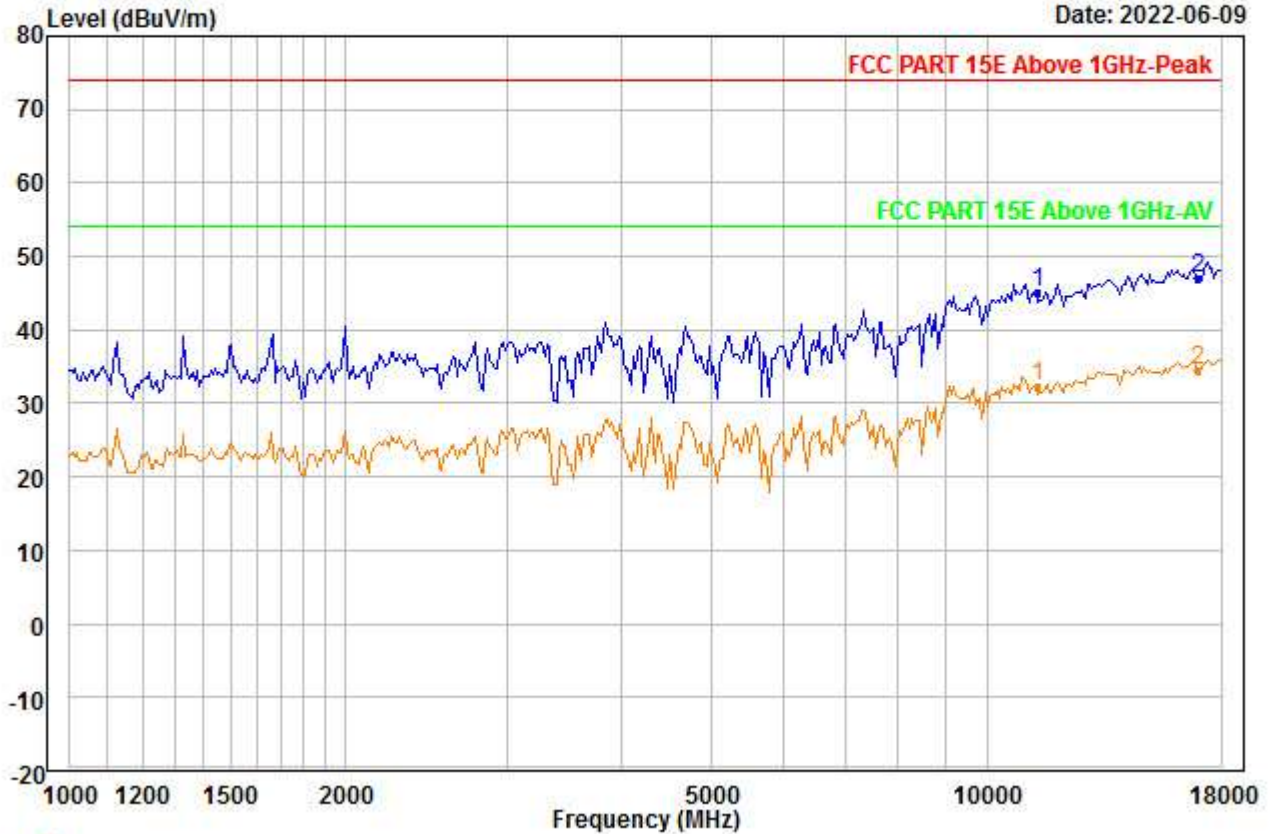


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5670
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 11340.000	38.00	38.77	45.75	0.00	14.17	45.19	74.00	-28.81	---	---	Peak
2 PP17010.000	34.15	42.30	47.19	0.00	17.69	46.95	74.00	-27.05	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00218.EMI

Date: 2022-06-09

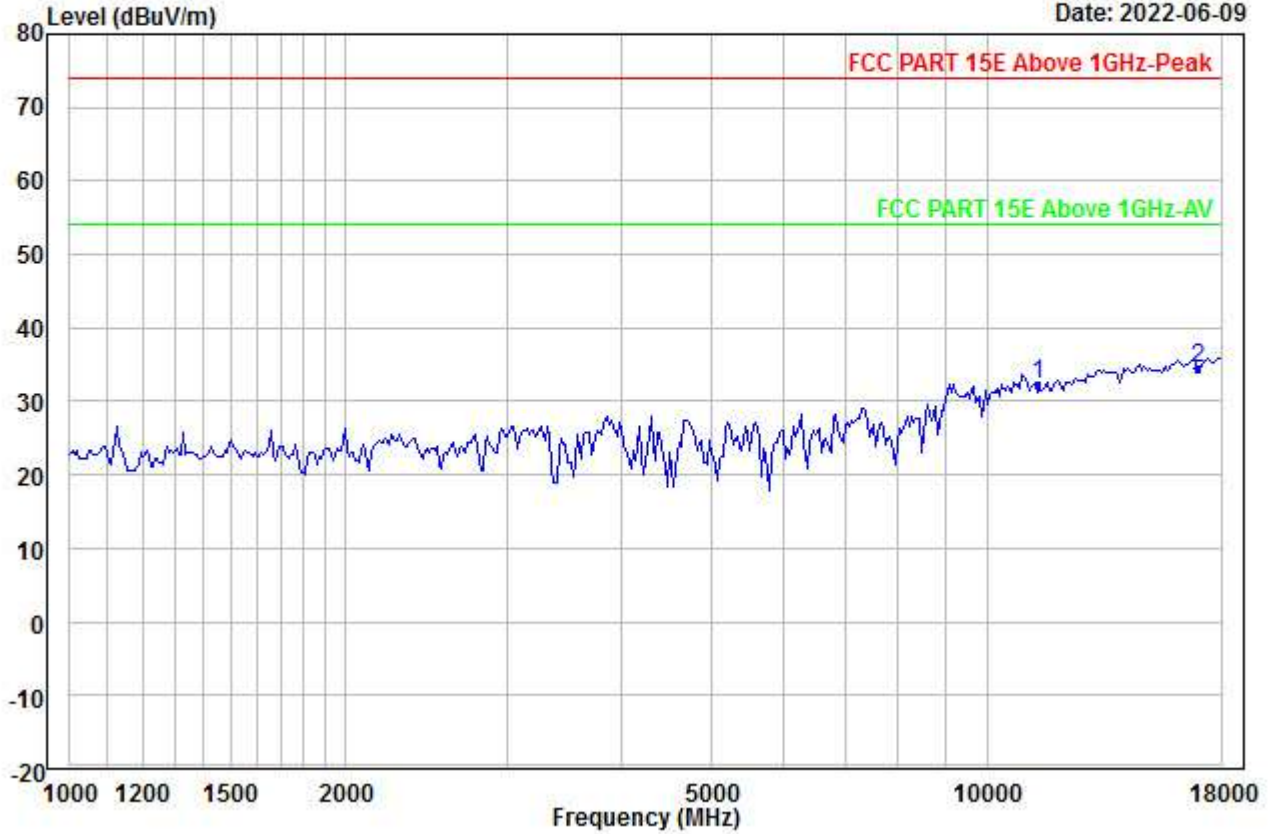


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5670
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 11340.000	25.12	38.77	45.75	0.00	14.17	32.31	54.00	-21.69	---	---	Aver
2 PP17010.000	21.67	42.30	47.19	0.00	17.69	34.47	54.00	-19.53	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00219.EMI

Date: 2022-06-09

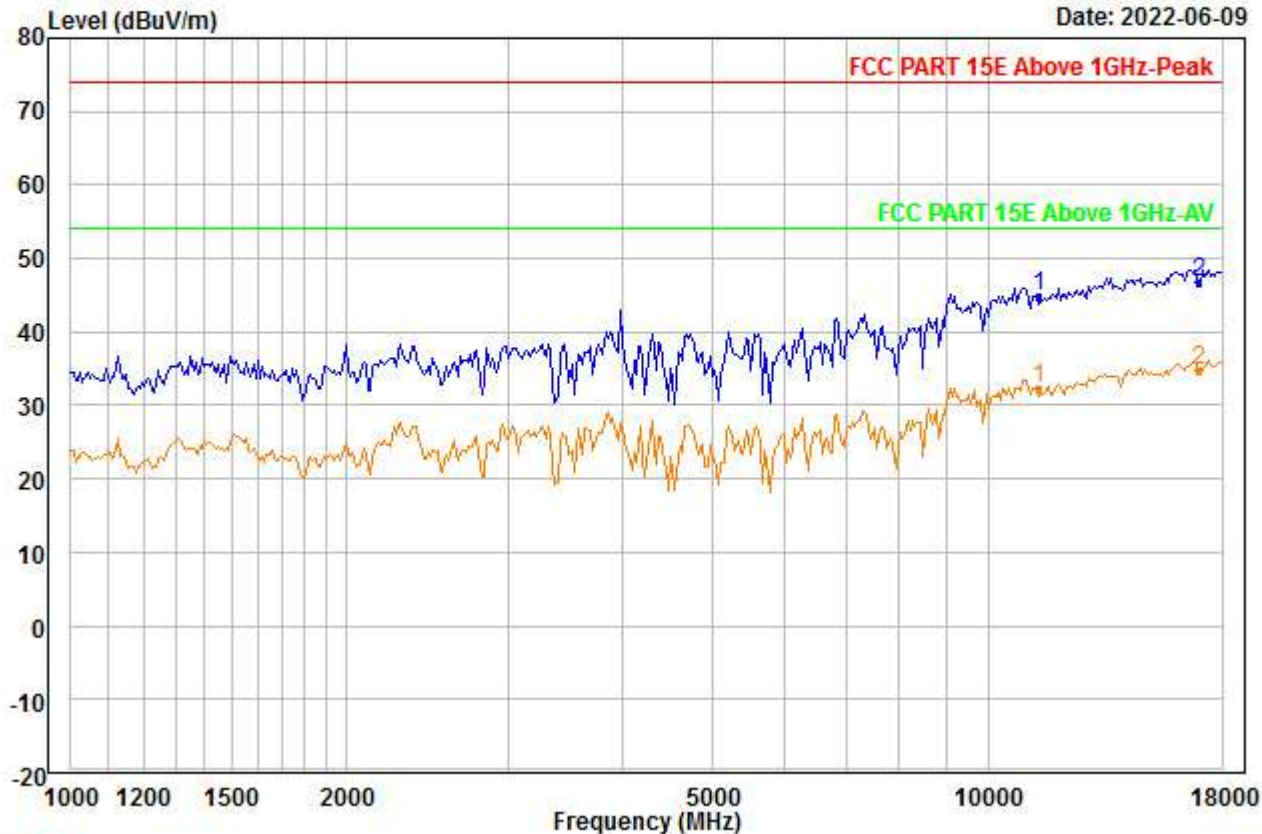


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5670
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 11340.000	37.63	38.77	45.75	0.00	14.17	44.82	74.00	-29.18	---	---	Peak
2 PP17010.000	33.92	42.30	47.19	0.00	17.69	46.72	74.00	-27.28	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00220.EMI

Date: 2022-06-09

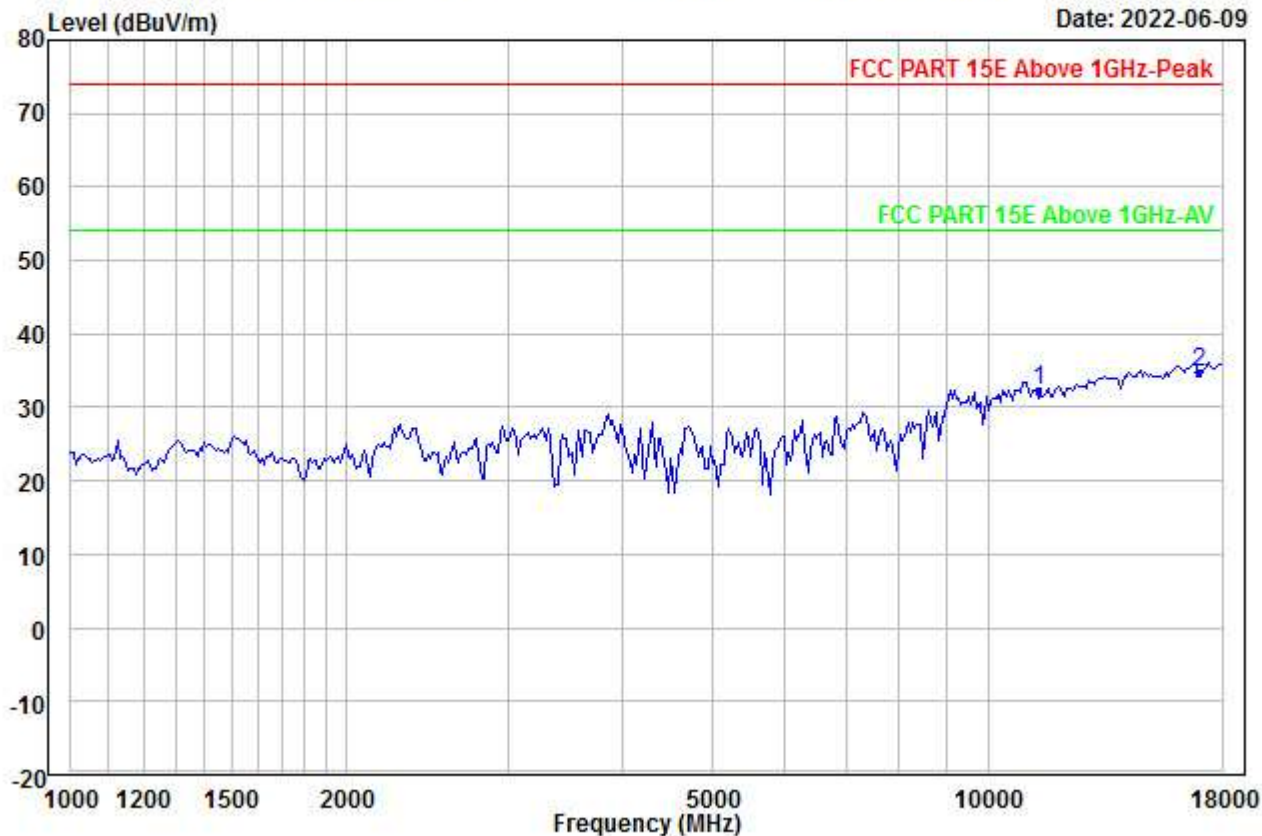


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5670
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 11340.000	25.12	38.77	45.75	0.00	14.17	32.31	54.00	-21.69	---	---	Aver
2 PP17010.000	21.90	42.30	47.19	0.00	17.69	34.70	54.00	-19.30	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00221.EMI

Date: 2022-06-09

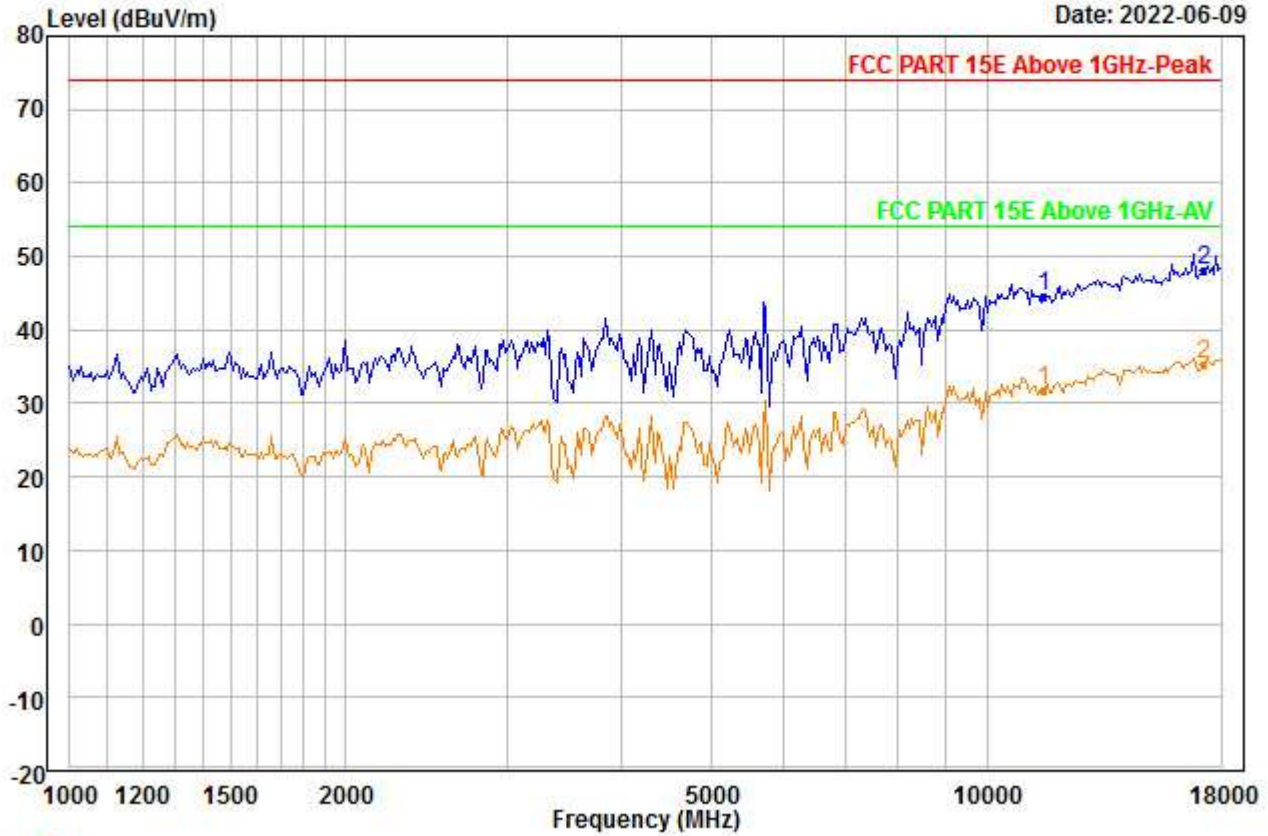


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5755
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11510.000	37.36	38.91	46.10	0.00	14.29	44.46	74.00	-29.54	---	---	Peak
2	PP17265.000	35.07	42.19	46.88	0.00	17.85	48.23	74.00	-25.77	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00222.EMI

Date: 2022-06-09

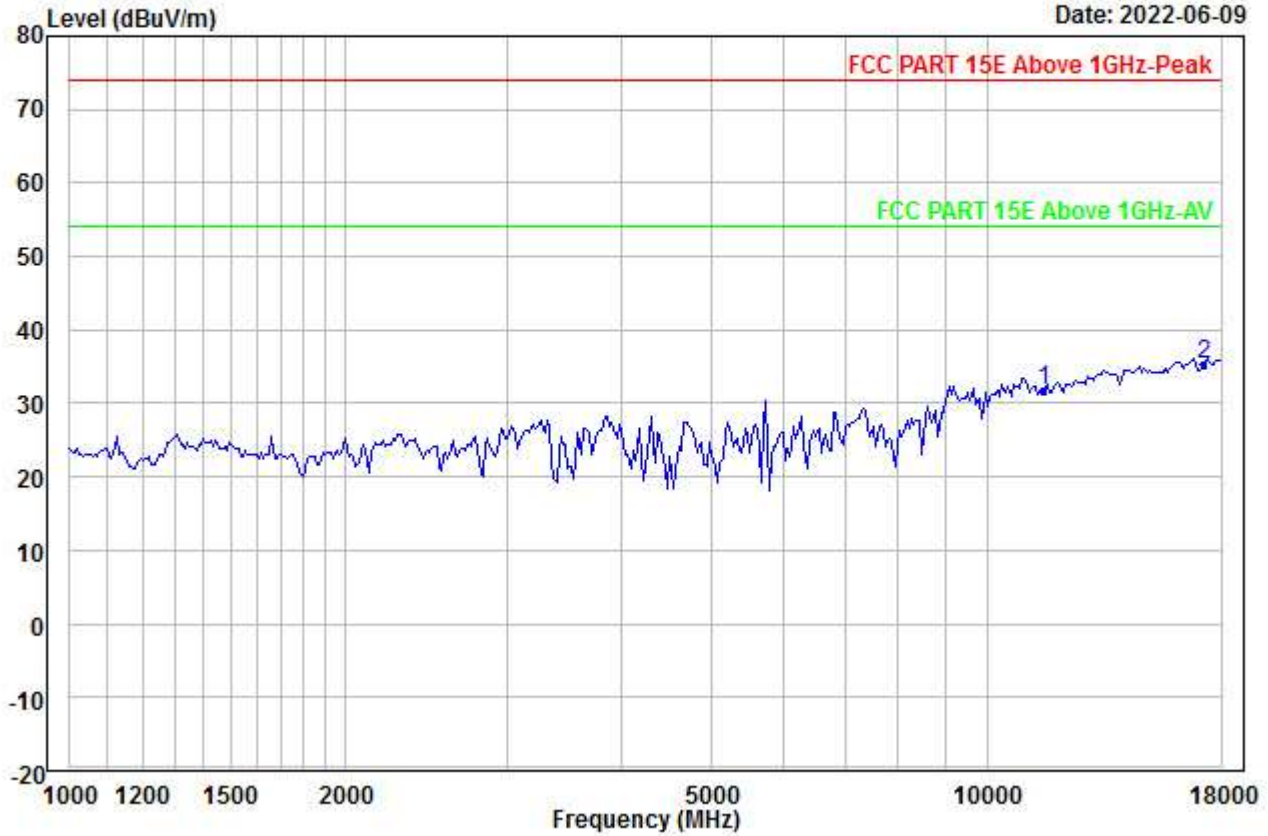


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5755
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 11510.000	24.71	38.91	46.10	0.00	14.29	31.81	54.00	-22.19	---	---	Aver
2 PP17265.000	22.19	42.19	46.88	0.00	17.85	35.35	54.00	-18.65	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00223.EMI

Date: 2022-06-09

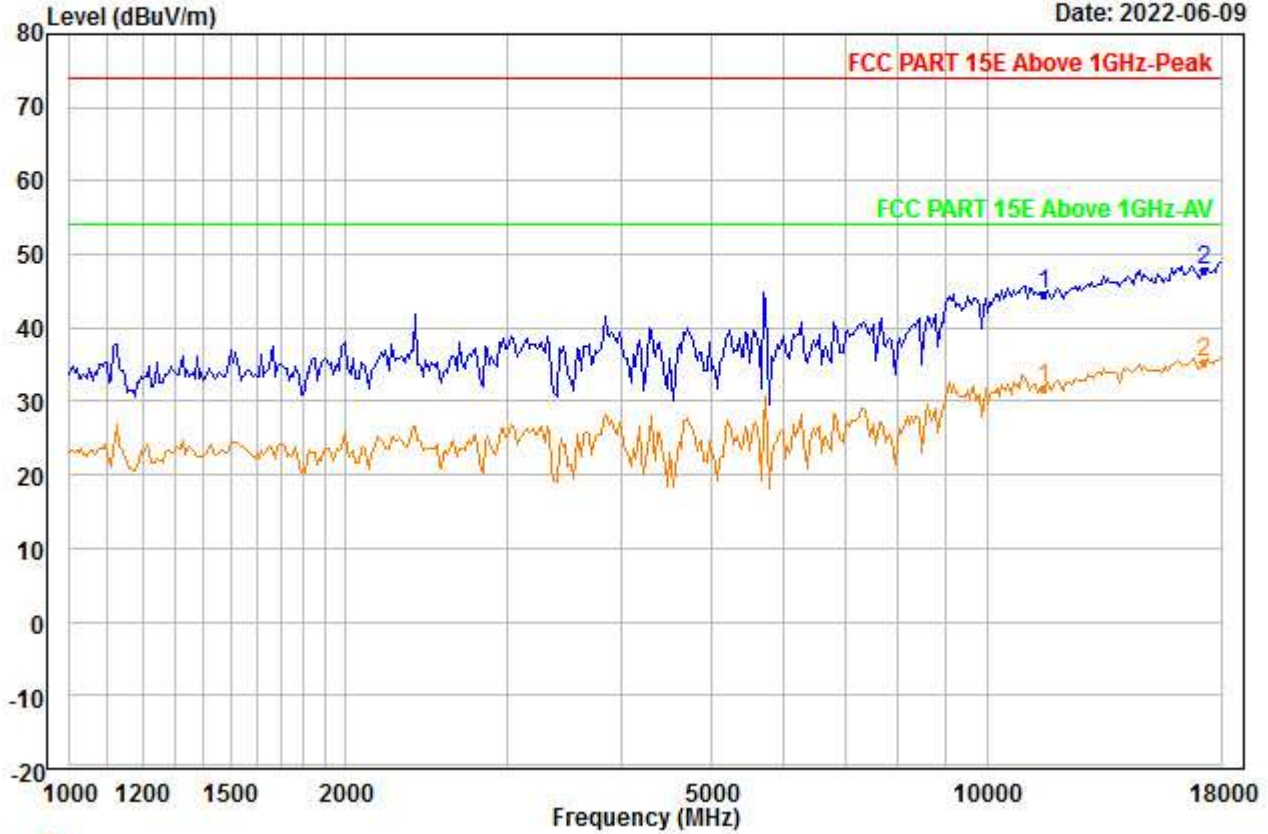


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5755
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11510.000	37.54	38.91	46.10	0.00	14.29	44.64	74.00	-29.36	---	---	Peak
2	PP17265.000	34.75	42.19	46.88	0.00	17.85	47.91	74.00	-26.09	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00224.EMI

Date: 2022-06-09

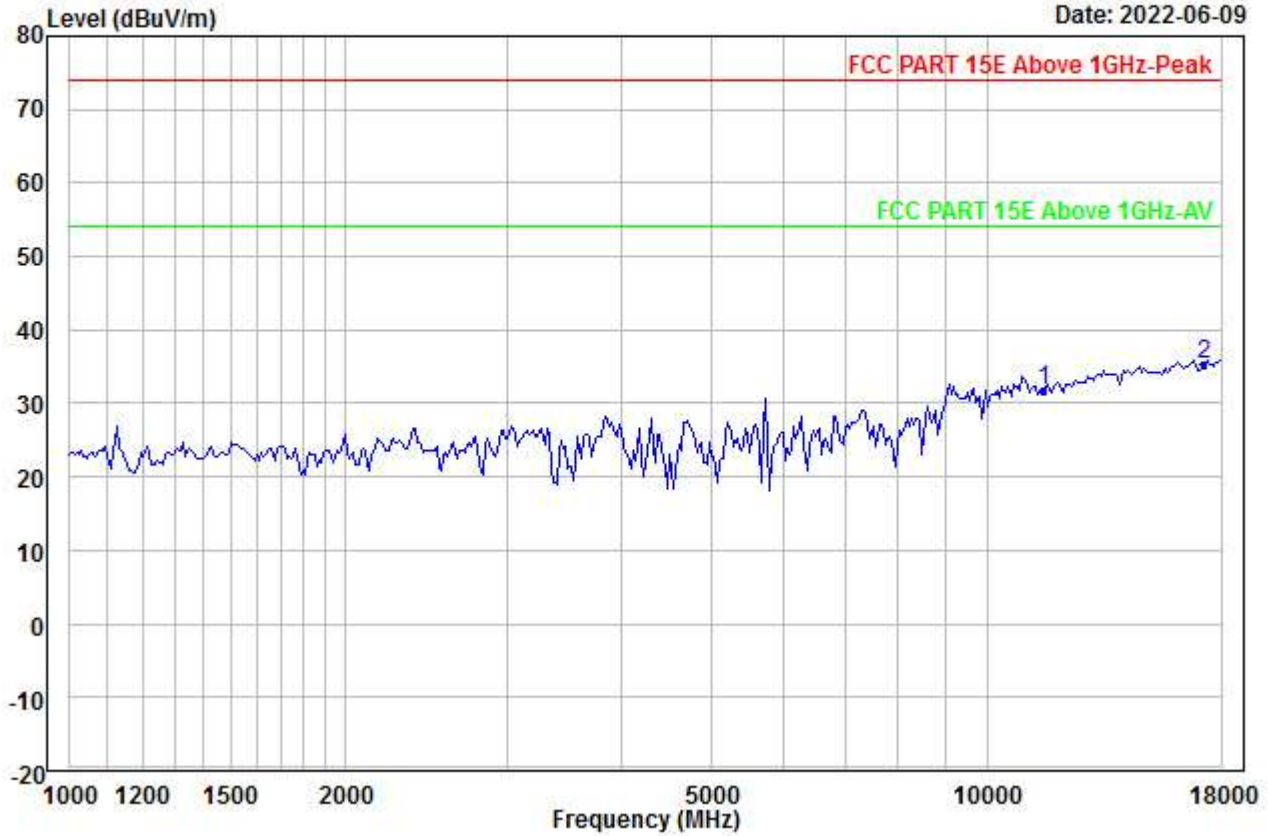


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5755
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 11510.000	24.71	38.91	46.10	0.00	14.29	31.81	54.00	-22.19	---	---	Aver
2 PP17265.000	22.08	42.19	46.88	0.00	17.85	35.24	54.00	-18.76	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00225.EMI

Date: 2022-06-09

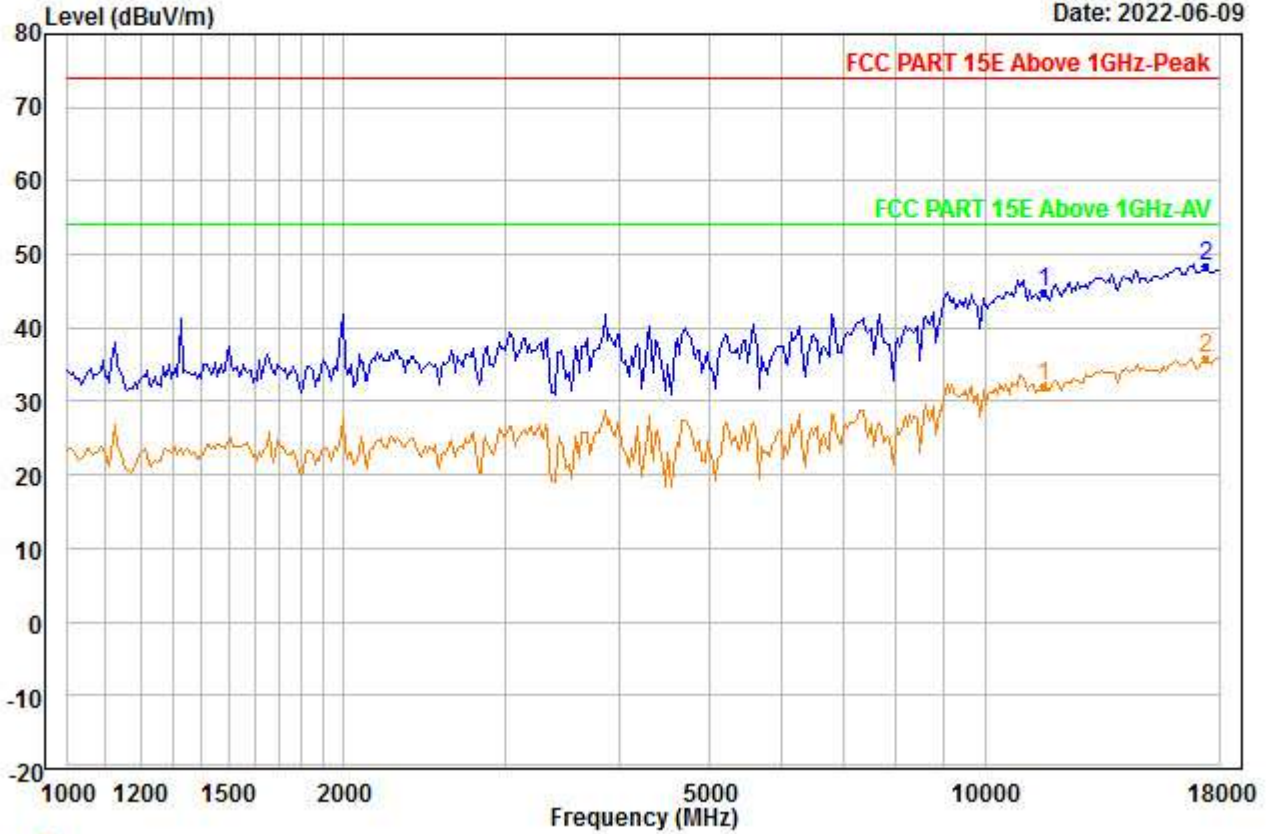


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5795
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 11590.000	37.60	38.95	46.08	0.00	14.35	44.82	74.00	-29.18	---	---	Peak
2 PP17385.000	35.04	42.15	46.74	0.00	17.92	48.37	74.00	-25.63	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00226.EMI

Date: 2022-06-09

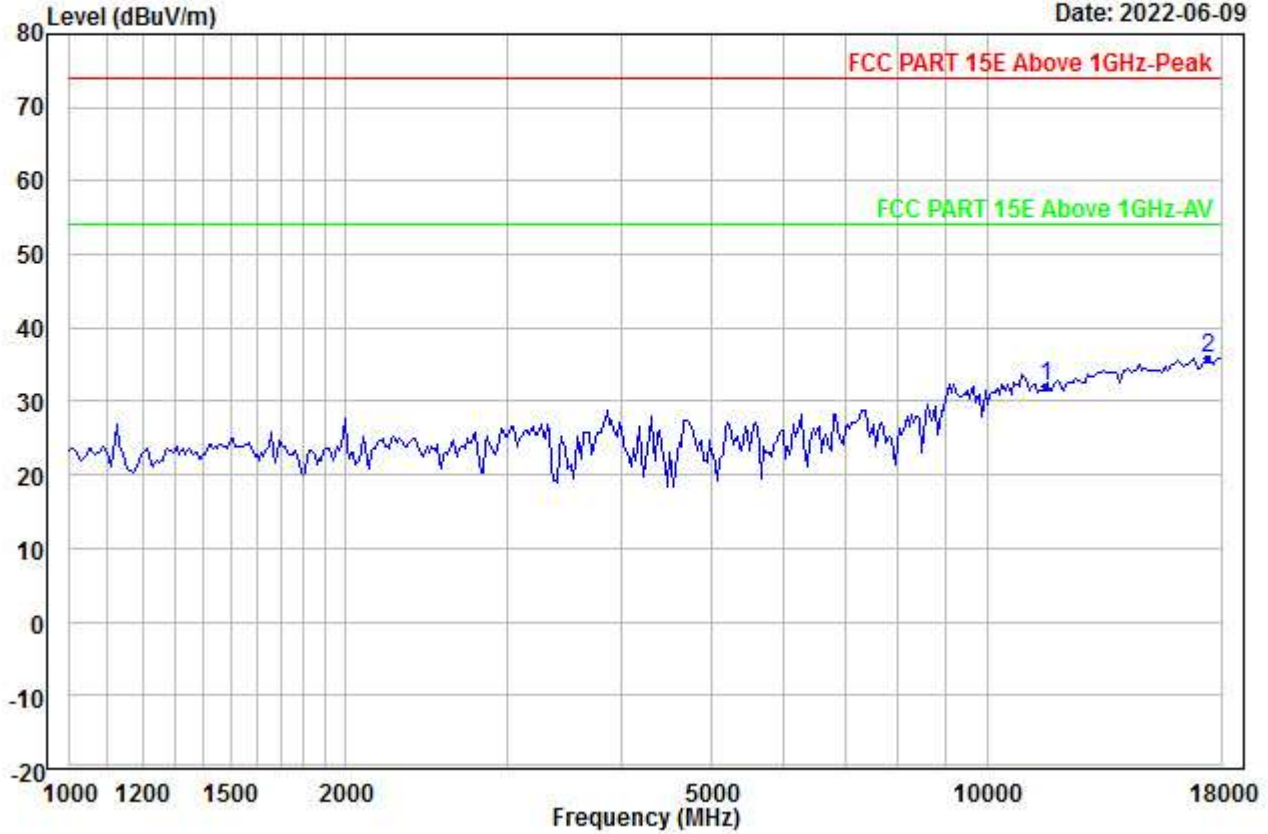


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5795
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11590.000	24.69	38.95	46.08	0.00	14.35	31.91	54.00	-22.09	---	---	Aver
2	PP17385.000	22.50	42.15	46.74	0.00	17.92	35.83	54.00	-18.17	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00227.EMI

Date: 2022-06-09

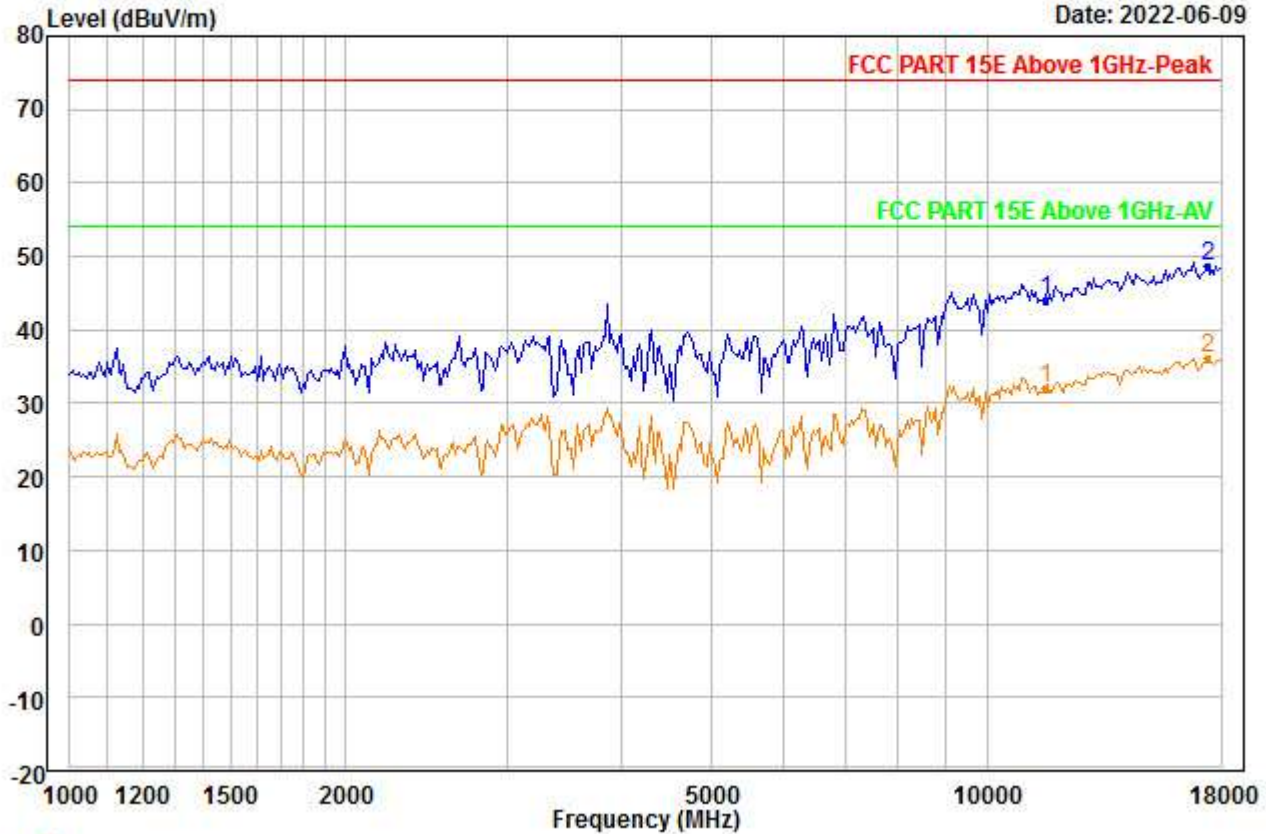


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5795
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11590.000	36.69	38.95	46.08	0.00	14.35	43.91	74.00	-30.09	---	---	Peak
2	PP17385.000	35.24	42.15	46.74	0.00	17.92	48.57	74.00	-25.43	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00228.EMI

Date: 2022-06-09

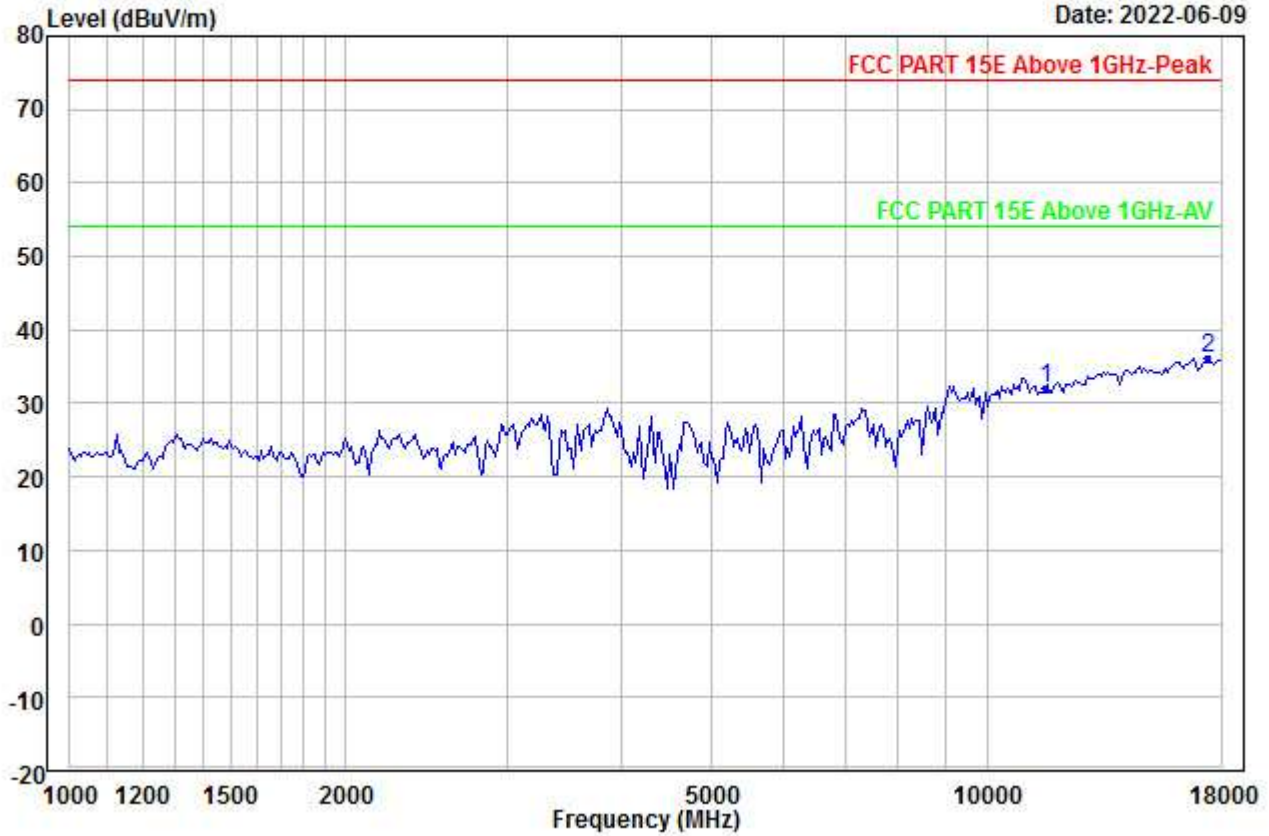


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : N40_ANT0+1_5795
 Remark :

	Read Freq	Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11590.000	24.69	38.95	46.08	0.00	14.35	31.91	54.00	-22.09	---	---	Aver
2	PP17385.000	22.71	42.15	46.74	0.00	17.92	36.04	54.00	-17.96	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00229.EMI

Date: 2022-06-09

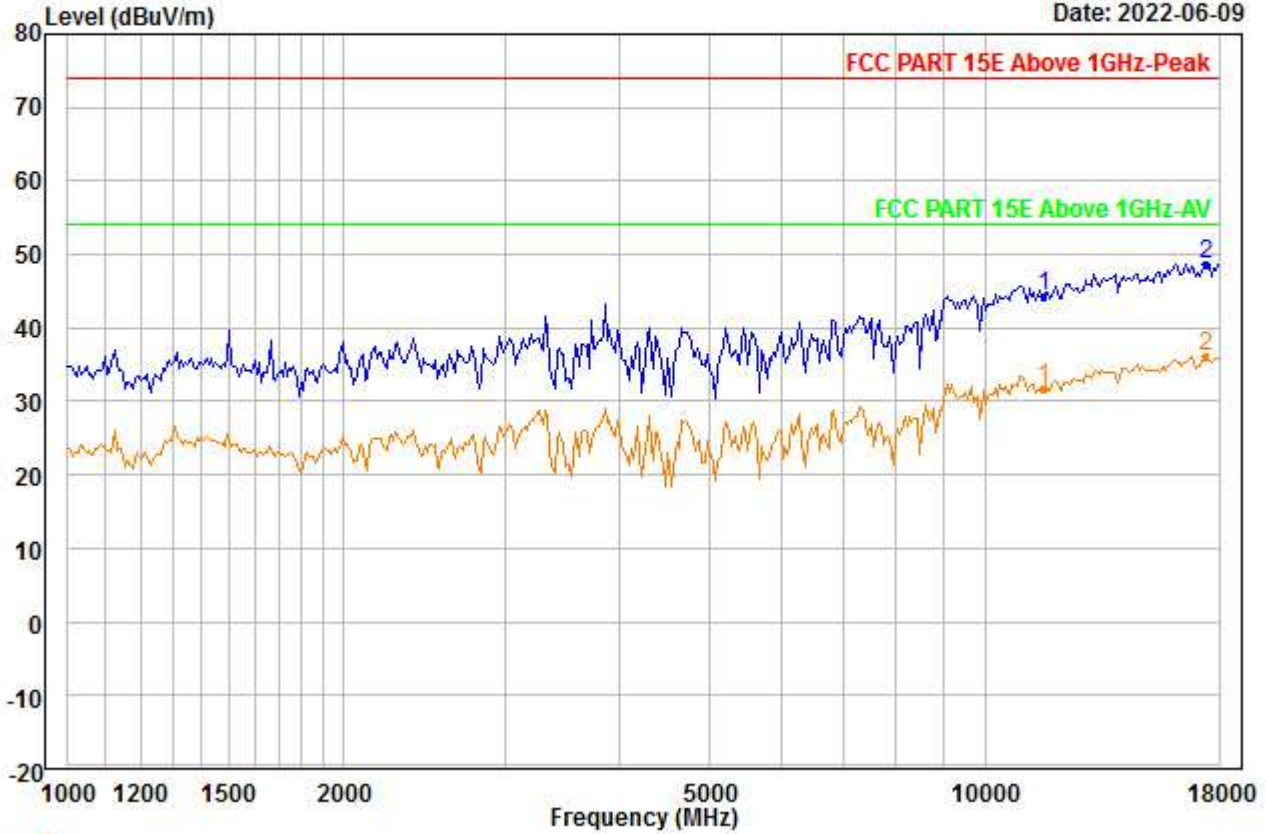


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5795
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11590.000	37.07	38.95	46.08	0.00	14.35	44.29	74.00	-29.71	---	---	Peak
2	PP17385.000	35.44	42.15	46.74	0.00	17.92	48.77	74.00	-25.23	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00230.EMI

Date: 2022-06-09

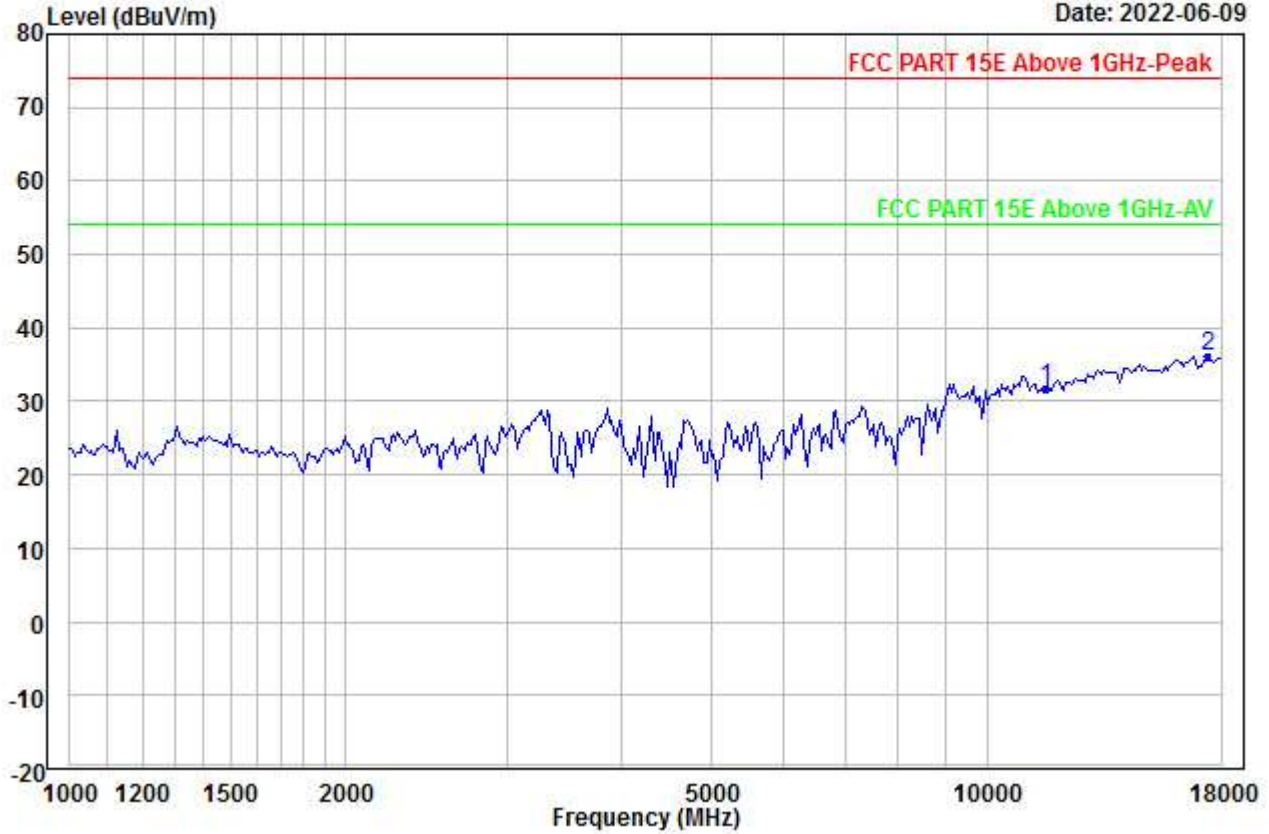


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5795
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11590.000	24.61	38.95	46.08	0.00	14.35	31.83	54.00	-22.17	---	---	Aver
2	PP17385.000	22.71	42.15	46.74	0.00	17.92	36.04	54.00	-17.96	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00231.EMI

Date: 2022-06-09

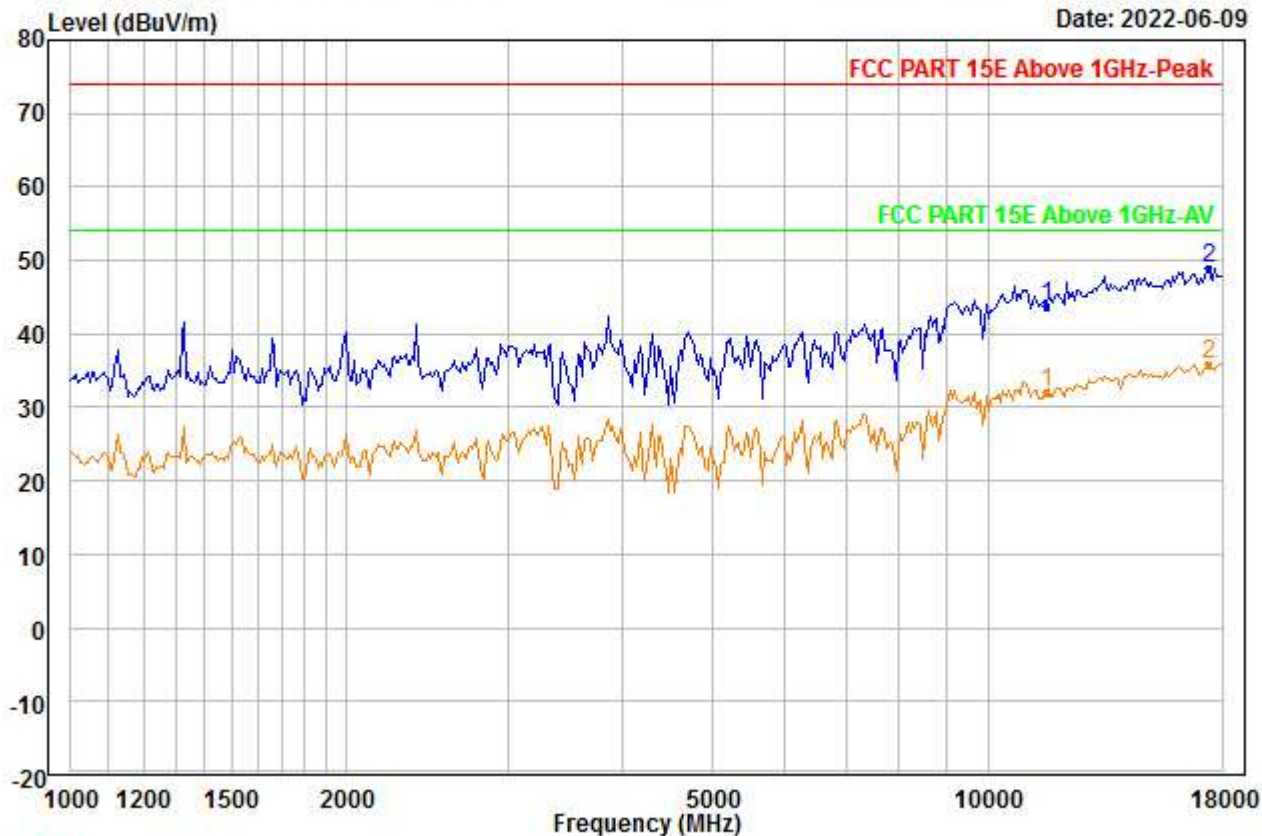


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5795
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11590.000	36.44	38.95	46.08	0.00	14.35	43.66	74.00	-30.34	---	---	Peak
2	PP17385.000	35.56	42.15	46.74	0.00	17.92	48.89	74.00	-25.11	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00232.EMI

Date: 2022-06-09

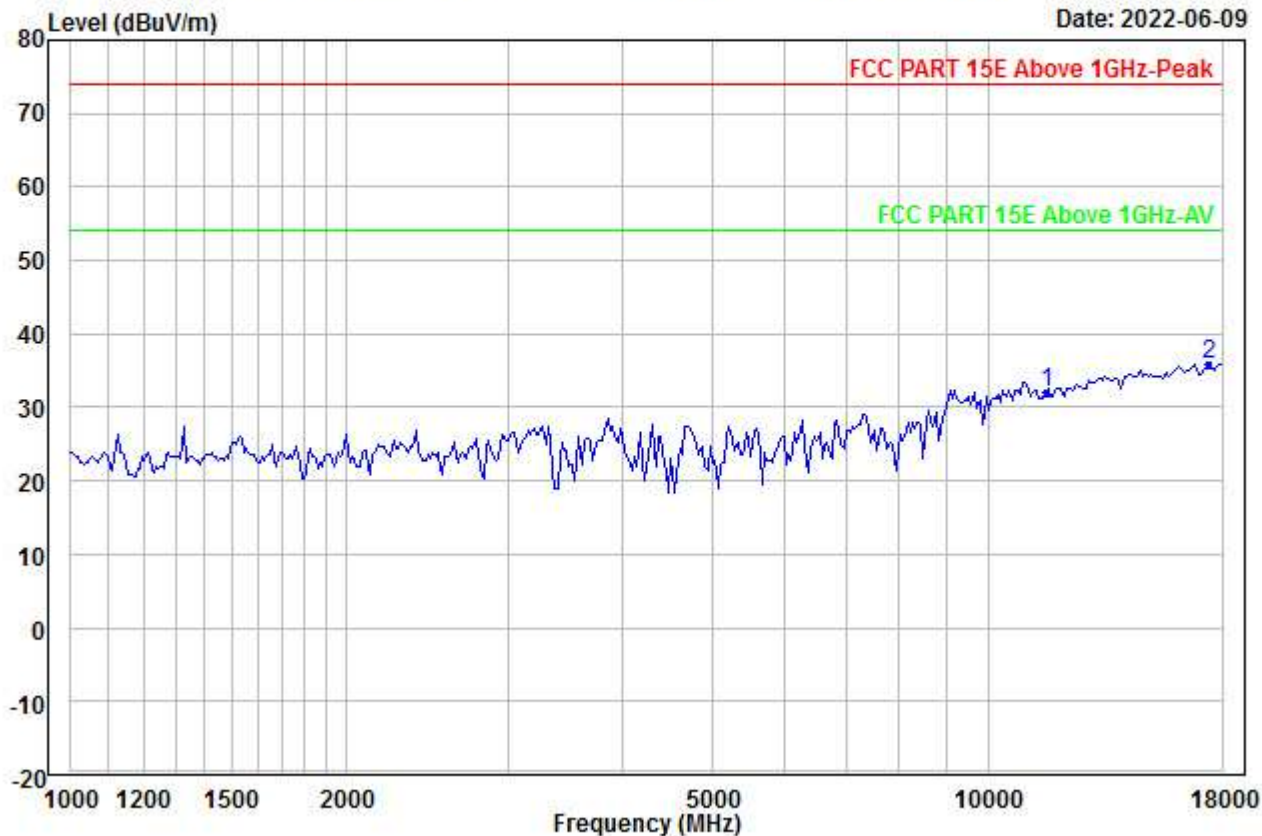


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5795
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11590.000	24.69	38.95	46.08	0.00	14.35	31.91	54.00	-22.09	---	---	Aver
2	PP17385.000	22.50	42.15	46.74	0.00	17.92	35.83	54.00	-18.17	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00233.EMI

Date: 2022-06-09

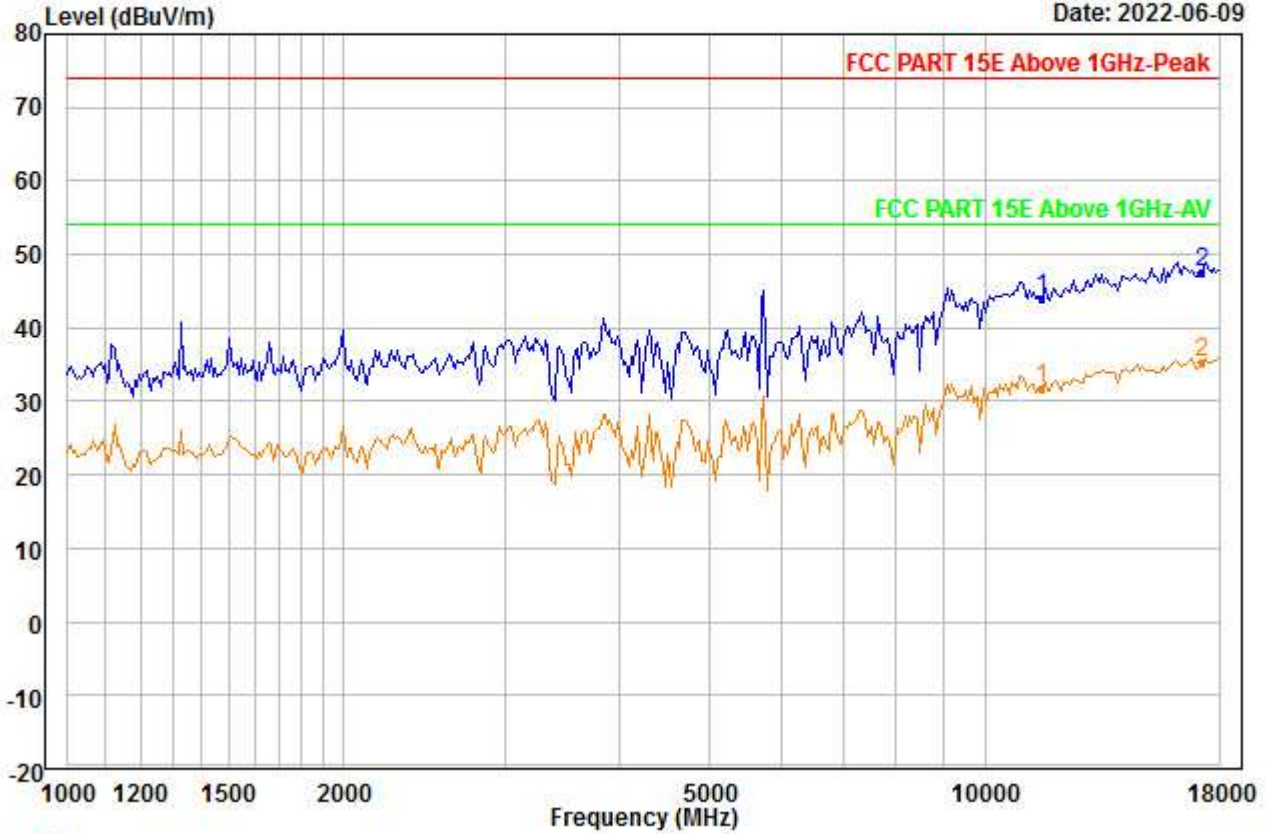


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5755
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 11510.000	37.04	38.91	46.10	0.00	14.29	44.14	74.00	-29.86	---	---	Peak
2 PP17265.000	34.51	42.19	46.88	0.00	17.85	47.67	74.00	-26.33	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00234.EMI

Date: 2022-06-09

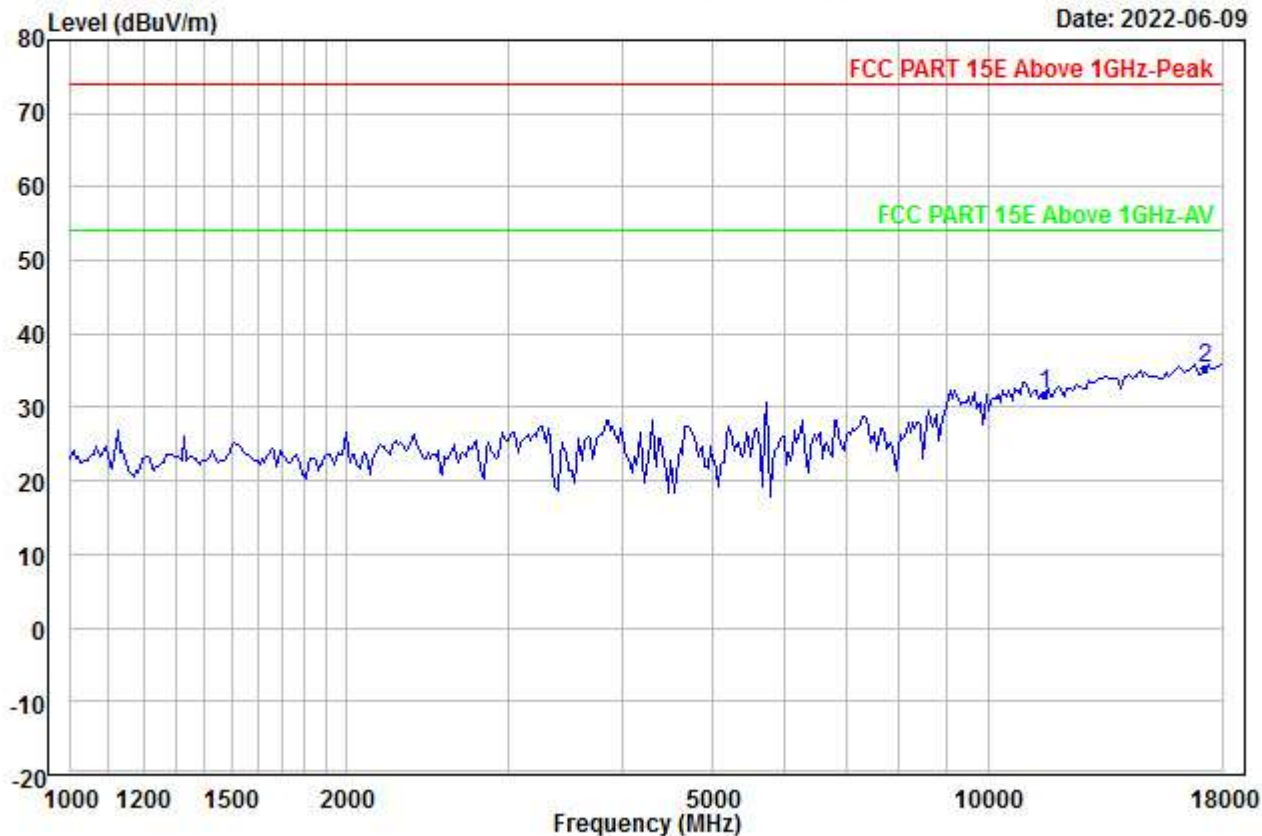


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5755
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 11510.000	24.71	38.91	46.10	0.00	14.29	31.81	54.00	-22.19	---	---	Aver
2 PP17265.000	22.08	42.19	46.88	0.00	17.85	35.24	54.00	-18.76	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00235.EMI

Date: 2022-06-09

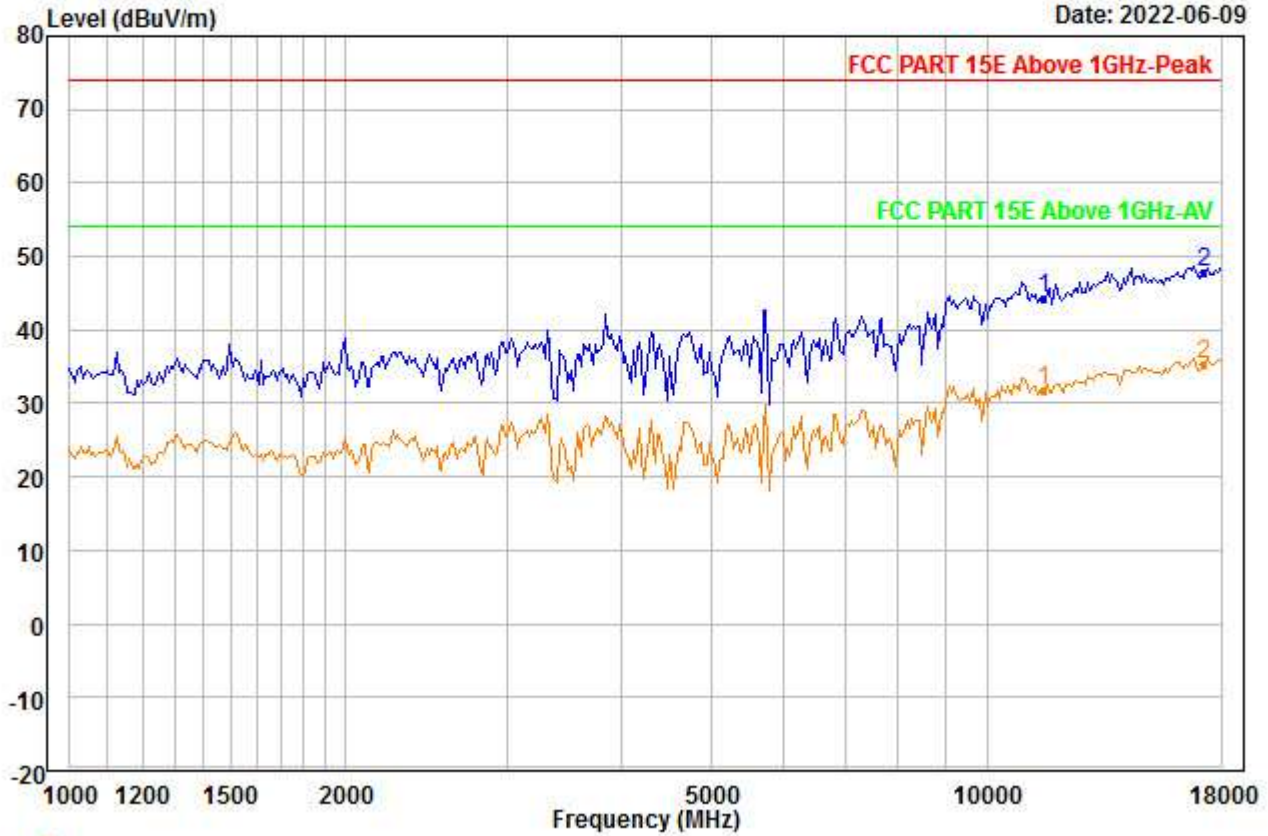


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5755
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11510.000	37.26	38.91	46.10	0.00	14.29	44.36	74.00	-29.64	---	---	Peak
2	PP17265.000	34.62	42.19	46.88	0.00	17.85	47.78	74.00	-26.22	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00236.EMI

Date: 2022-06-09

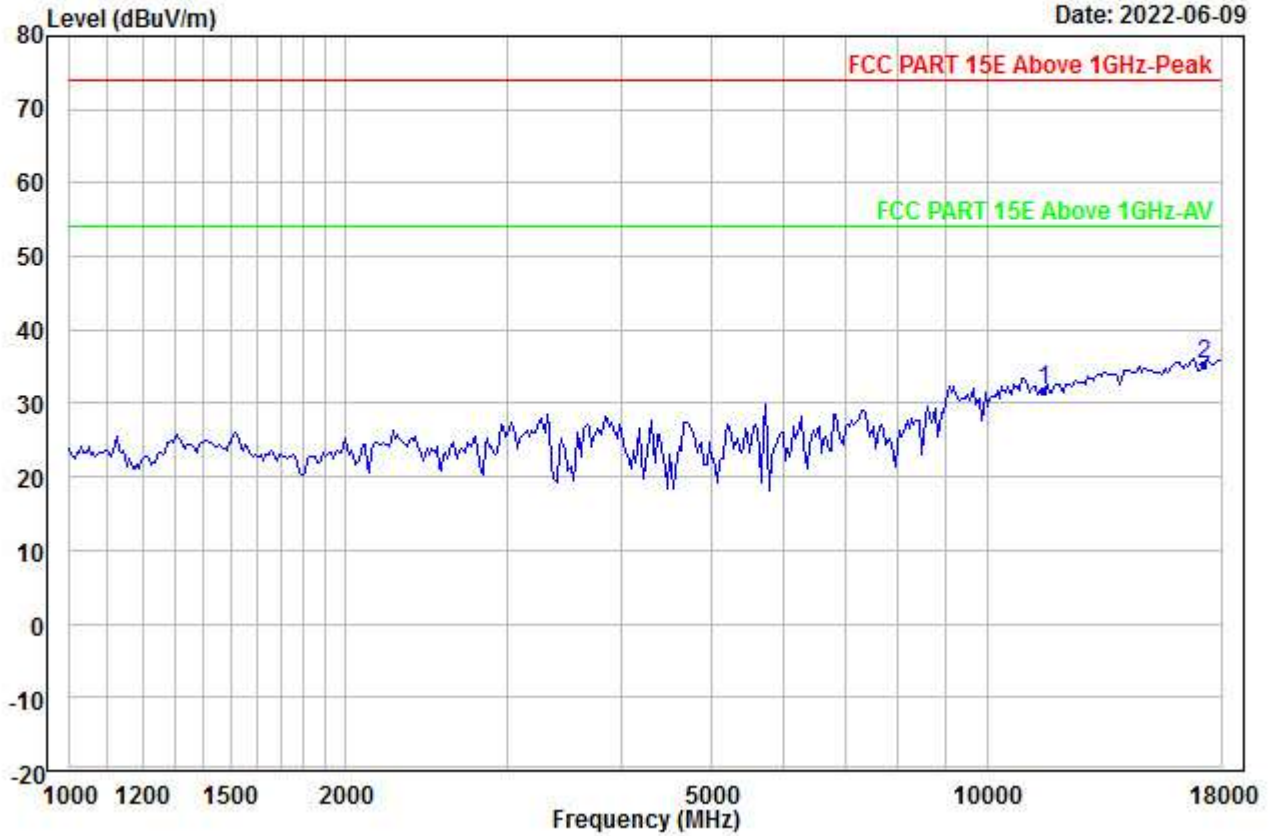


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5755
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 11510.000	24.71	38.91	46.10	0.00	14.29	31.81	54.00	-22.19	---	---	Aver
2 PP17265.000	22.19	42.19	46.88	0.00	17.85	35.35	54.00	-18.65	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00237.EMI

Date: 2022-06-09

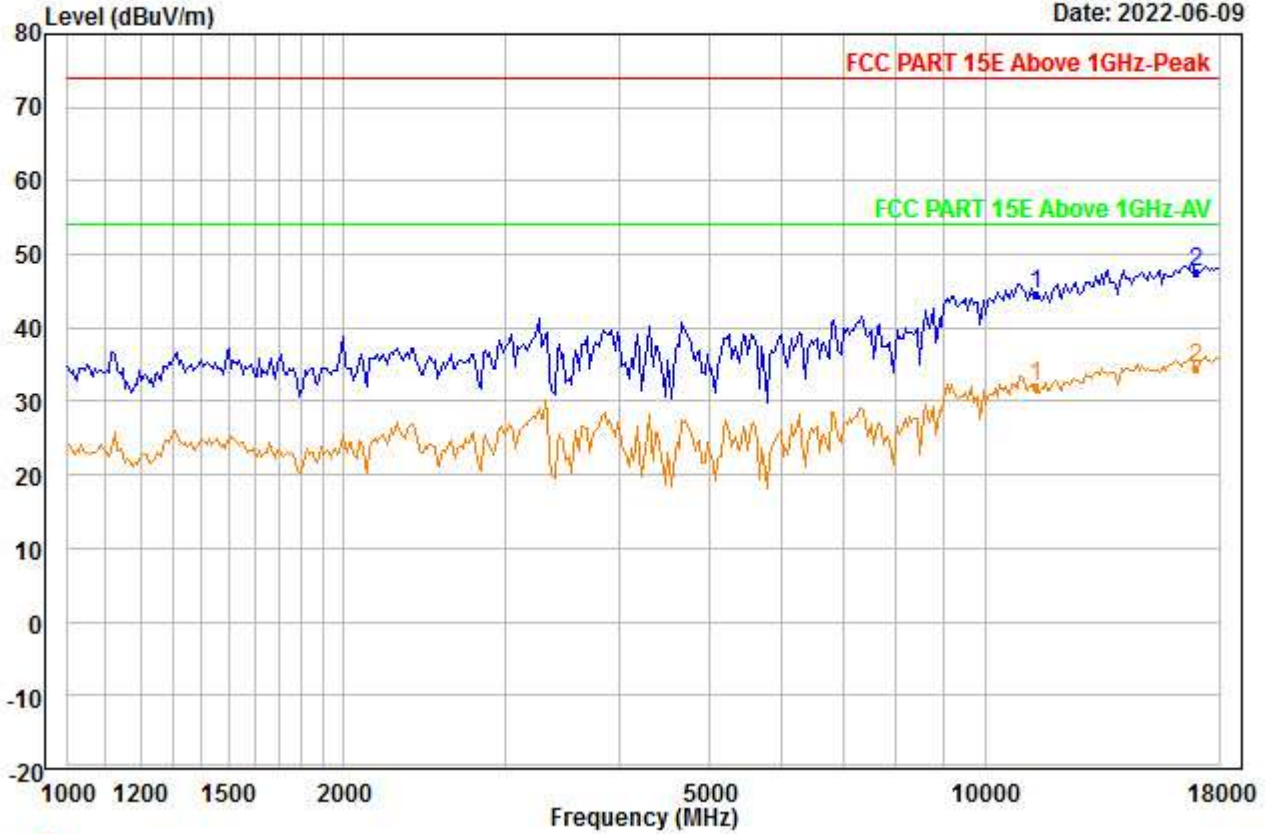


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5670
 Remark :

	Read Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11340.000	37.32	38.77	45.75	0.00	14.17	44.51	74.00	-29.49	---	---	Peak
2	PP17010.000	34.85	42.30	47.19	0.00	17.69	47.65	74.00	-26.35	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00238.EMI

Date: 2022-06-09

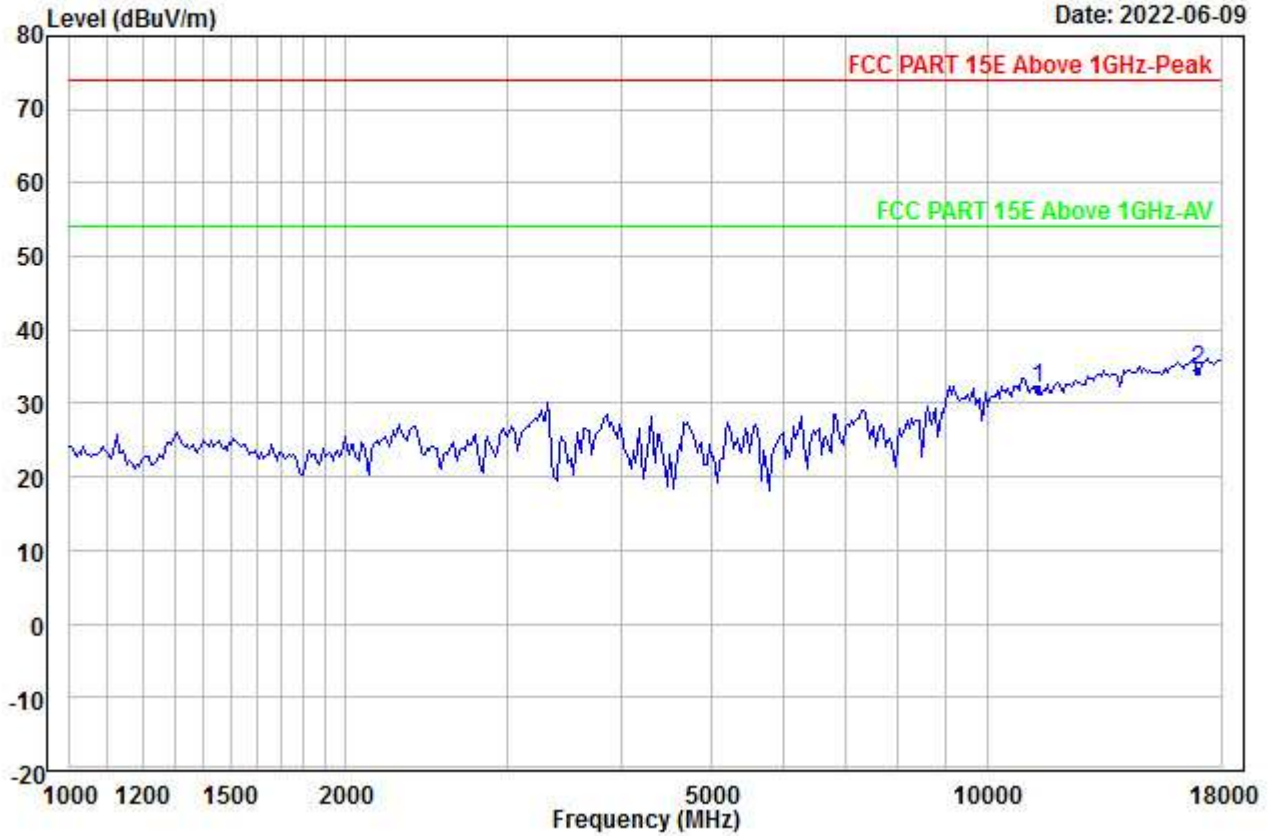


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5670
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rema	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 11340.000	24.95	38.77	45.75	0.00	14.17	32.14	54.00	-21.86	---	---	Aver
2 PP17010.000	21.79	42.30	47.19	0.00	17.69	34.59	54.00	-19.41	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00239.EMI

Date: 2022-06-09

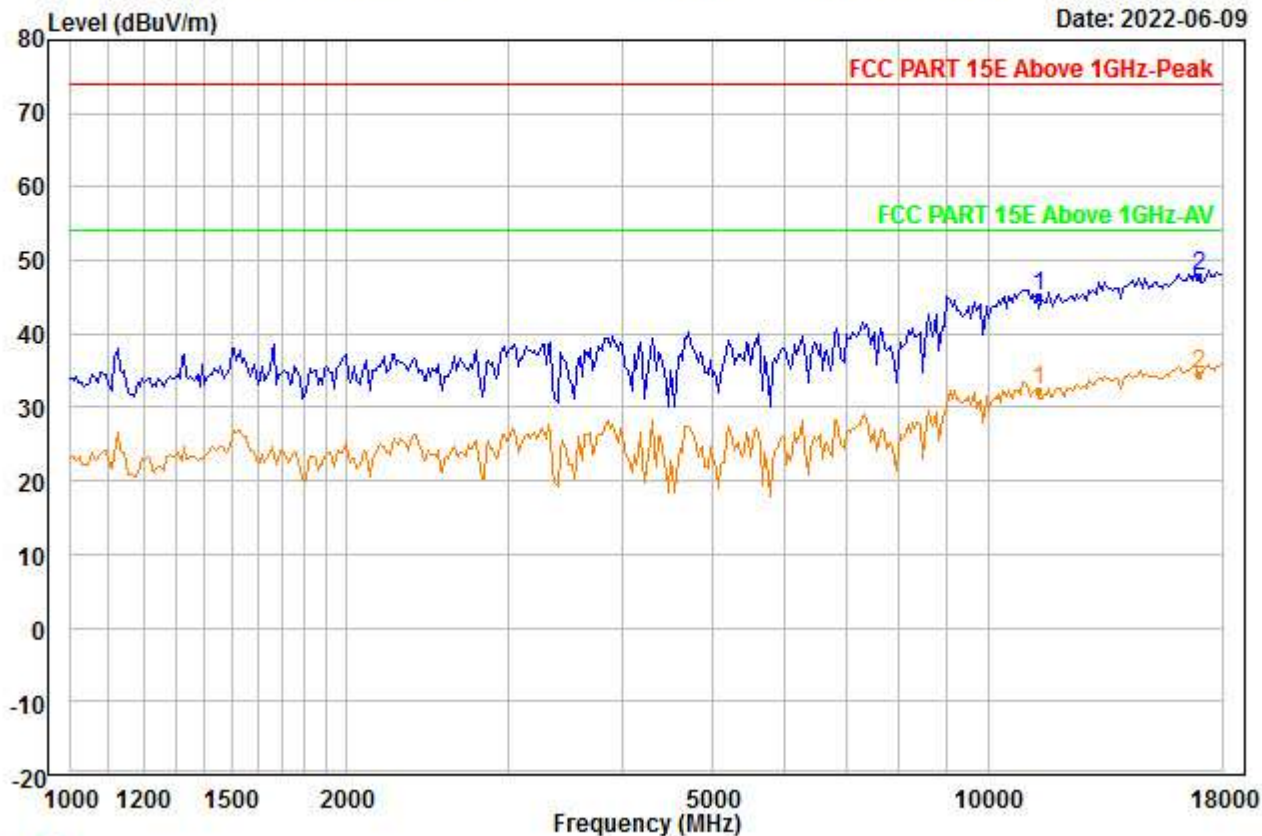


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5670
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 11340.000	37.83	38.77	45.75	0.00	14.17	45.02	74.00	-28.98	---	---	Peak
2 PP17010.000	34.98	42.30	47.19	0.00	17.69	47.78	74.00	-26.22	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00240.EMI

Date: 2022-06-09

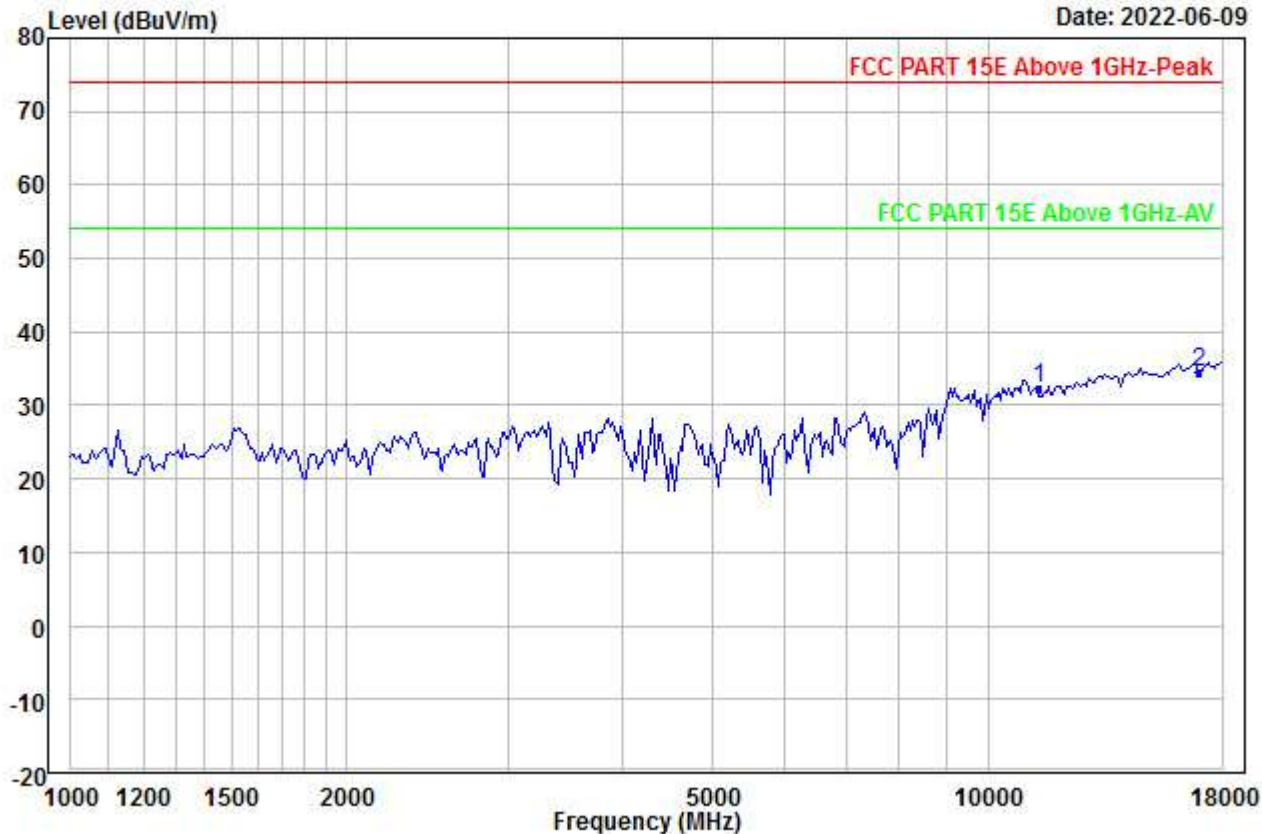


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5670
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 11340.000	25.03	38.77	45.75	0.00	14.17	32.22	54.00	-21.78	---	---	Aver
2 PP17010.000	21.67	42.30	47.19	0.00	17.69	34.47	54.00	-19.53	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00241.EMI

Date: 2022-06-09

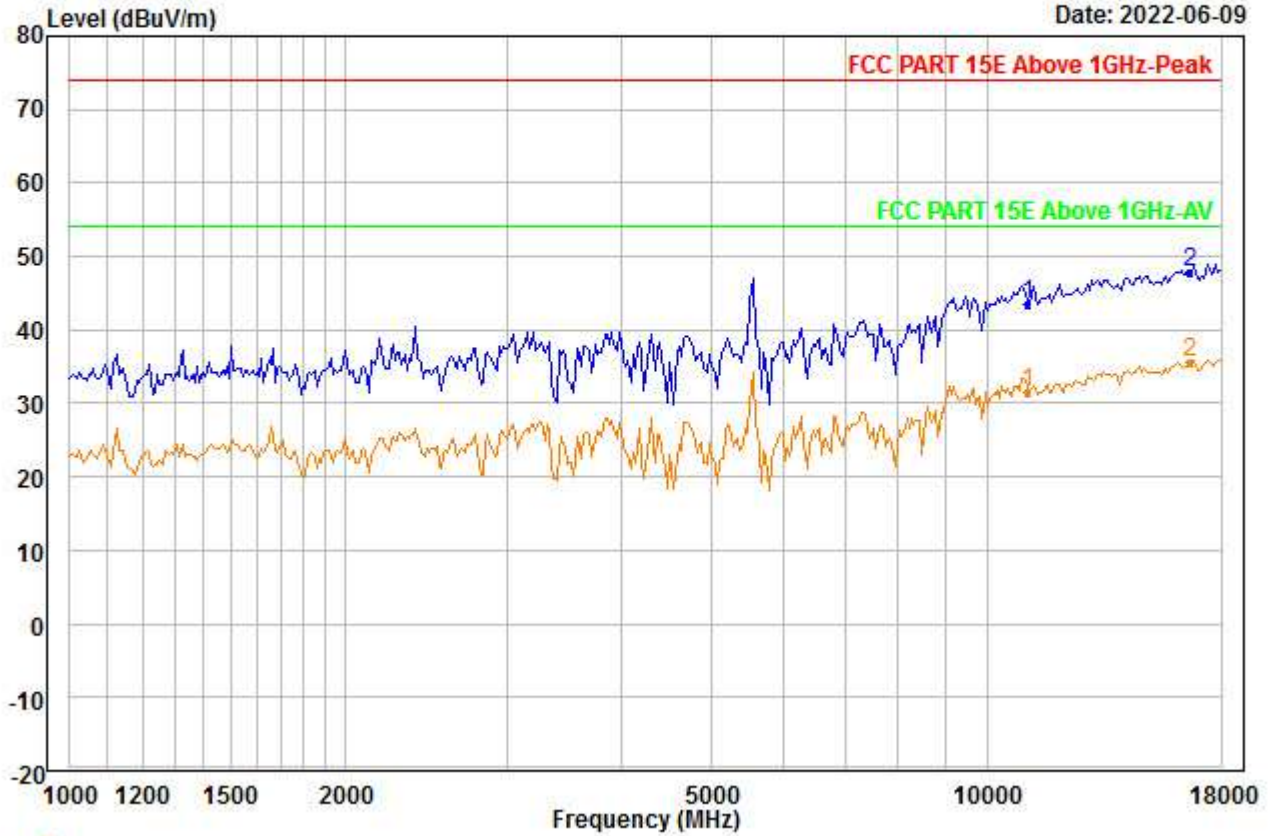


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5550
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 11100.000	36.17	38.58	45.22	0.00	13.99	43.52	74.00	-30.48	---	---	Peak
2 PP16650.000	35.38	41.74	46.78	0.00	17.52	47.86	74.00	-26.14	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00242.EMI

Date: 2022-06-09

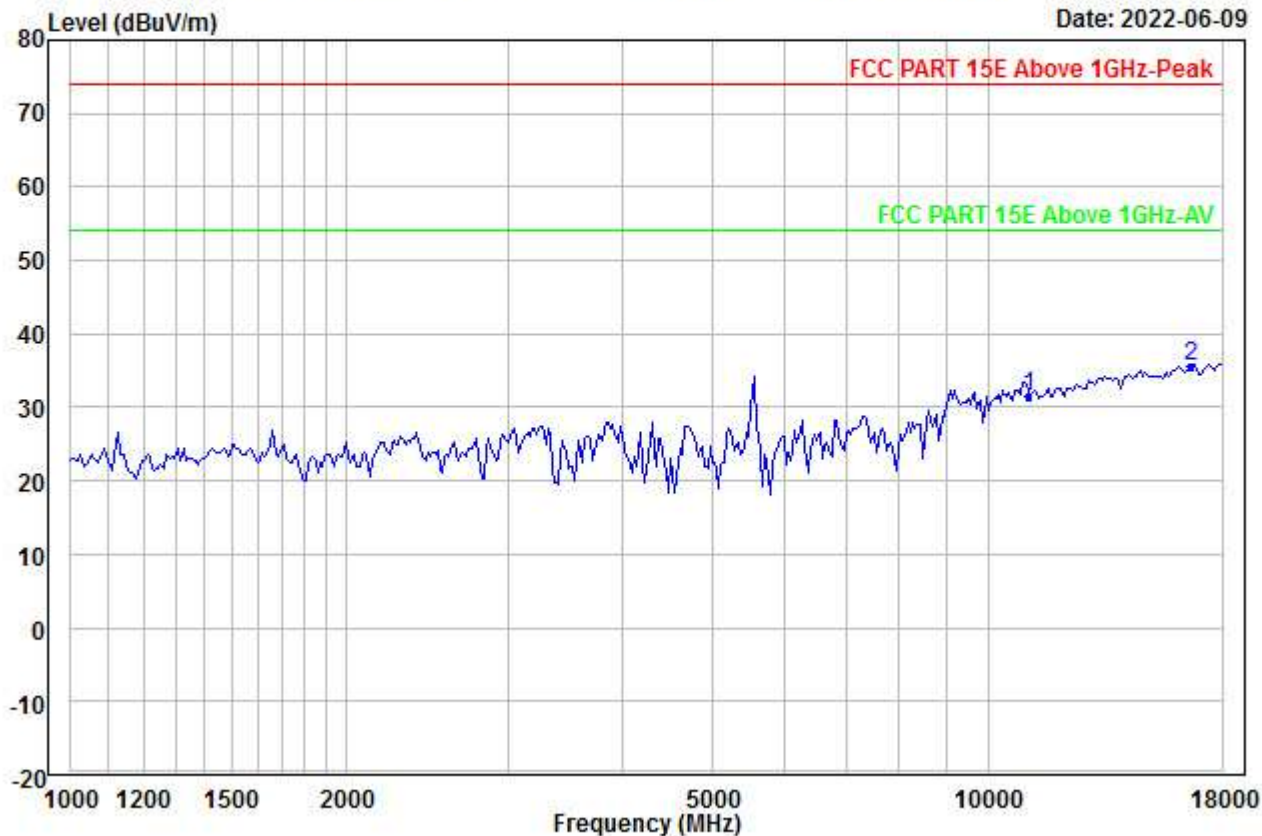


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5550
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 11100.000	24.06	38.58	45.22	0.00	13.99	31.41	54.00	-22.59	---	---	Aver
2 PP16650.000	23.06	41.74	46.78	0.00	17.52	35.54	54.00	-18.46	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00243.EMI

Date: 2022-06-09

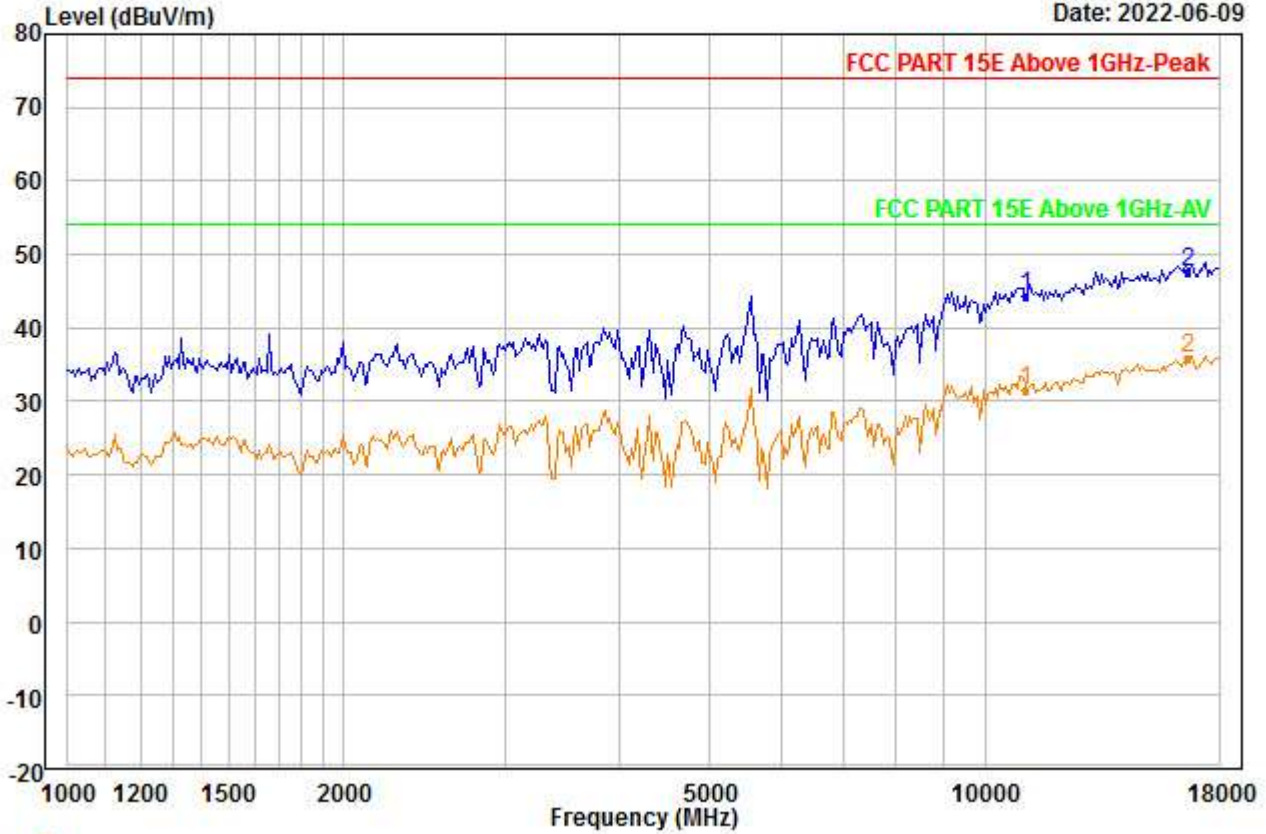


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5550
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11100.000	37.03	38.58	45.22	0.00	13.99	44.38	74.00	-29.62	---	---	Peak
2	PP16650.000	35.18	41.74	46.78	0.00	17.52	47.66	74.00	-26.34	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00244.EMI

Date: 2022-06-09

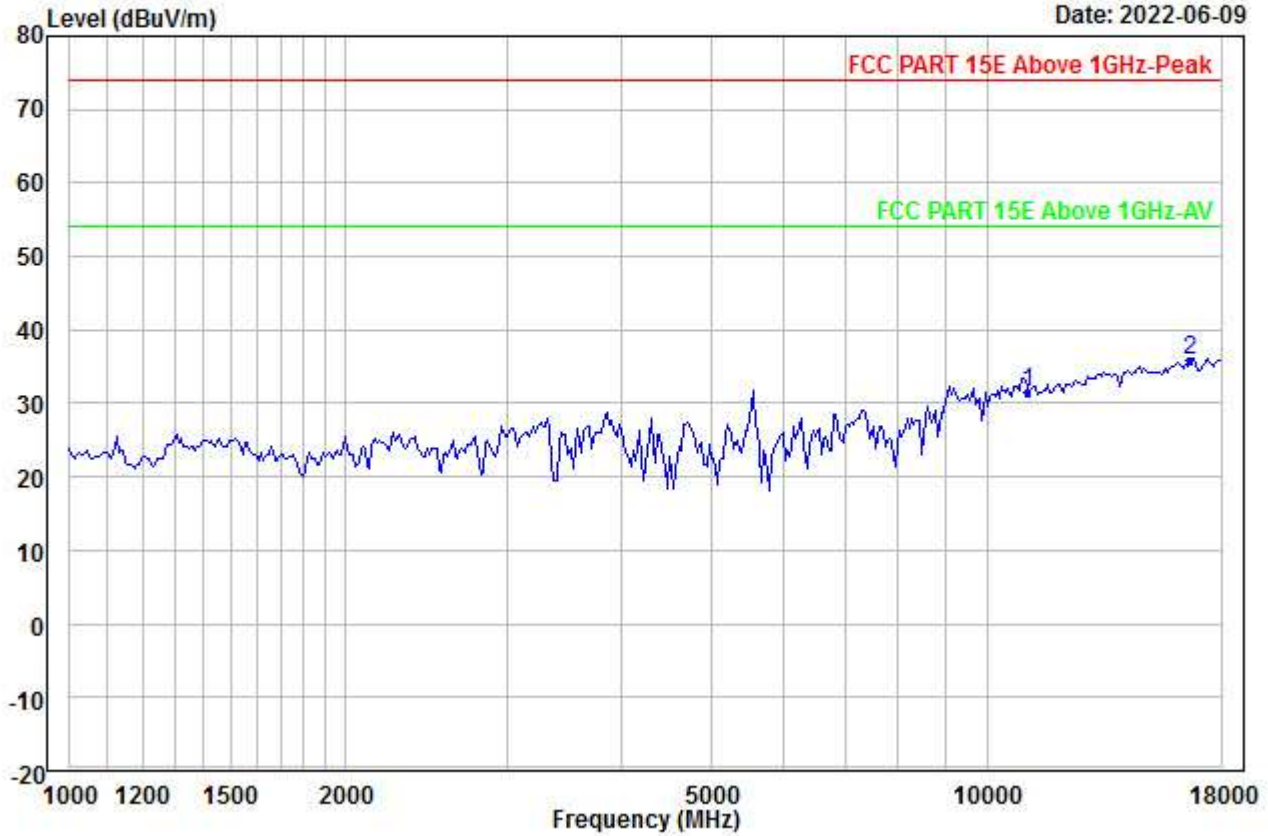


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5550
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11100.000	24.06	38.58	45.22	0.00	13.99	31.41	54.00	-22.59	---	---	Aver
2	PP16650.000	23.27	41.74	46.78	0.00	17.52	35.75	54.00	-18.25	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00245.EMI

Date: 2022-06-09

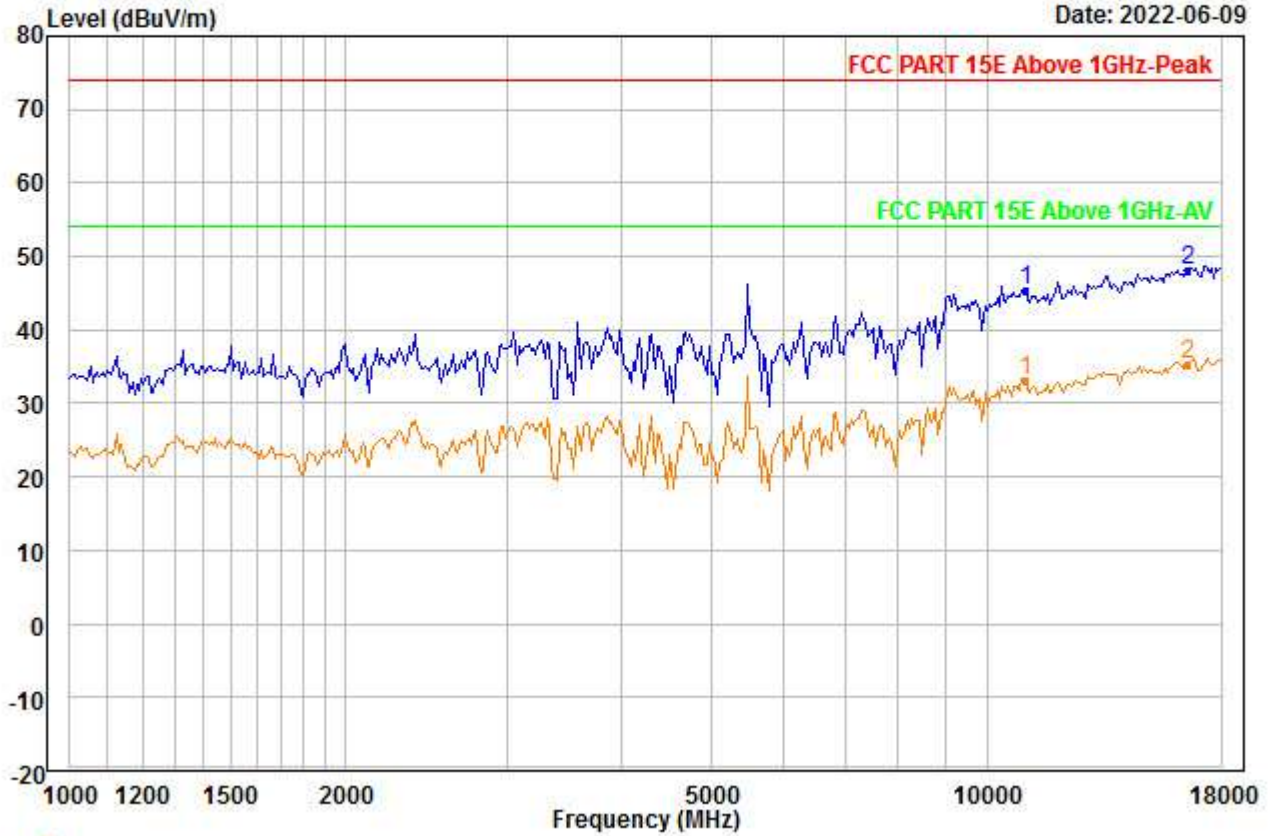


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5510
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 11020.000	38.01	38.52	45.04	0.00	13.93	45.42	74.00	-28.58	---	---	Peak
2 PP16530.000	35.82	41.55	46.64	0.00	17.47	48.20	74.00	-25.80	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00246.EMI

Date: 2022-06-09

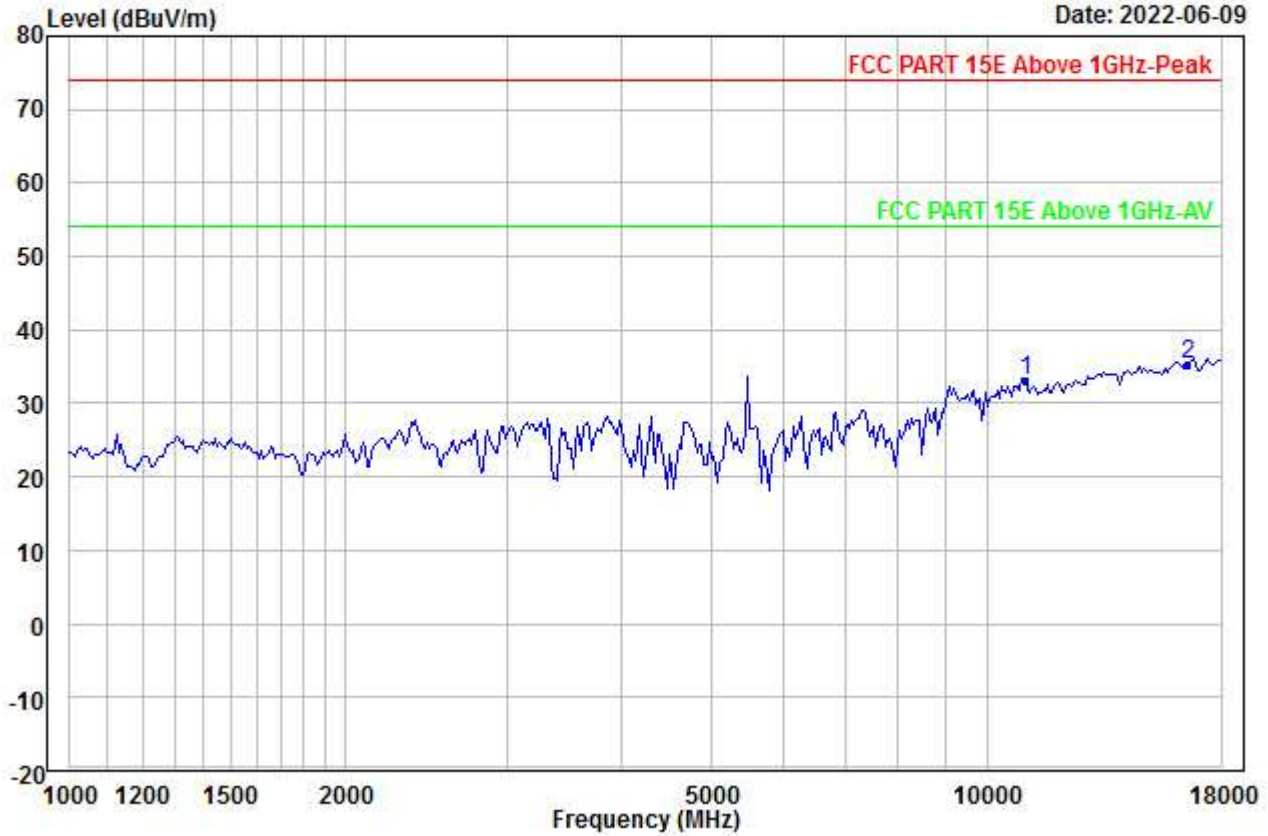


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5510
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11020.000	25.73	38.52	45.04	0.00	13.93	33.14	54.00	-20.86	---	---	Aver
2	PP16530.000	22.90	41.55	46.64	0.00	17.47	35.28	54.00	-18.72	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00247.EMI

Date: 2022-06-09

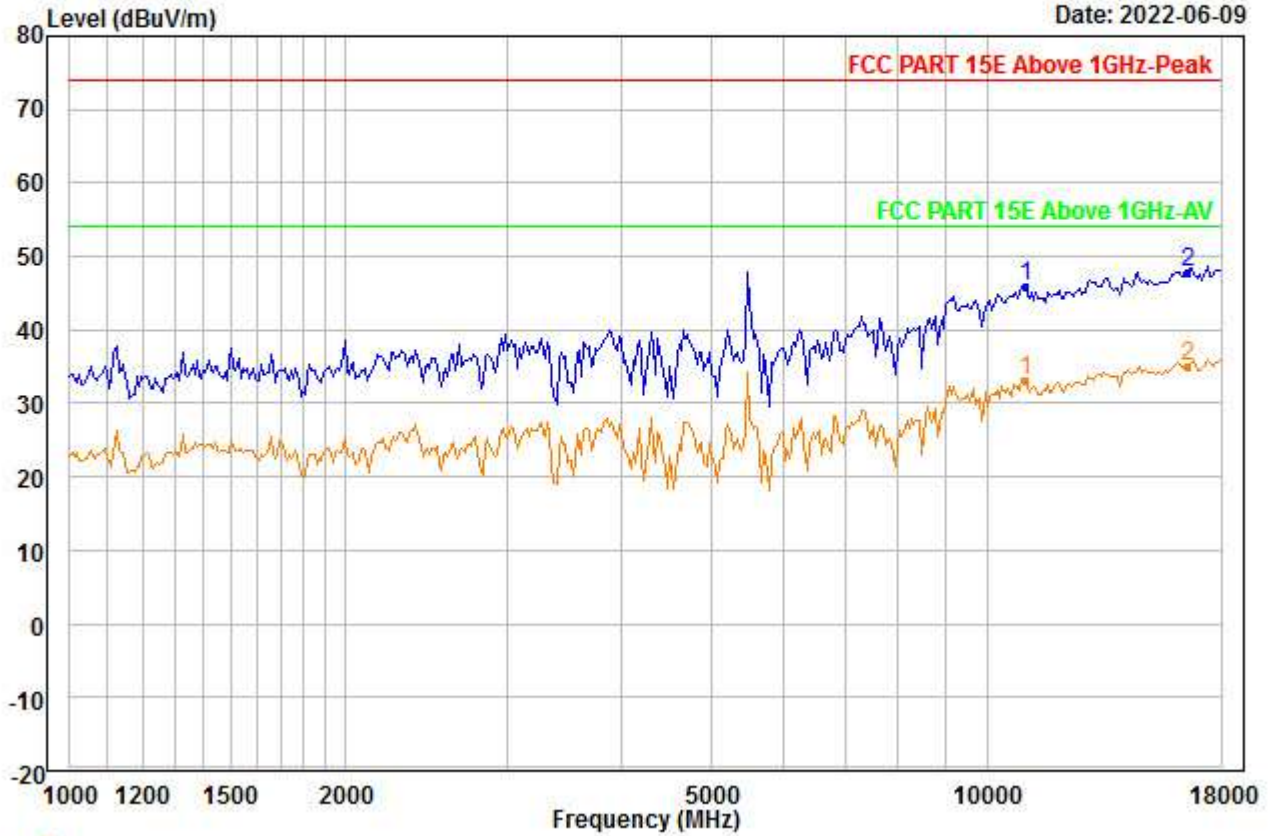


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5510
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 11020.000	38.58	38.52	45.04	0.00	13.93	45.99	74.00	-28.01	---	---	Peak
2 PP16530.000	35.34	41.55	46.64	0.00	17.47	47.72	74.00	-26.28	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00248.EMI

Date: 2022-06-09

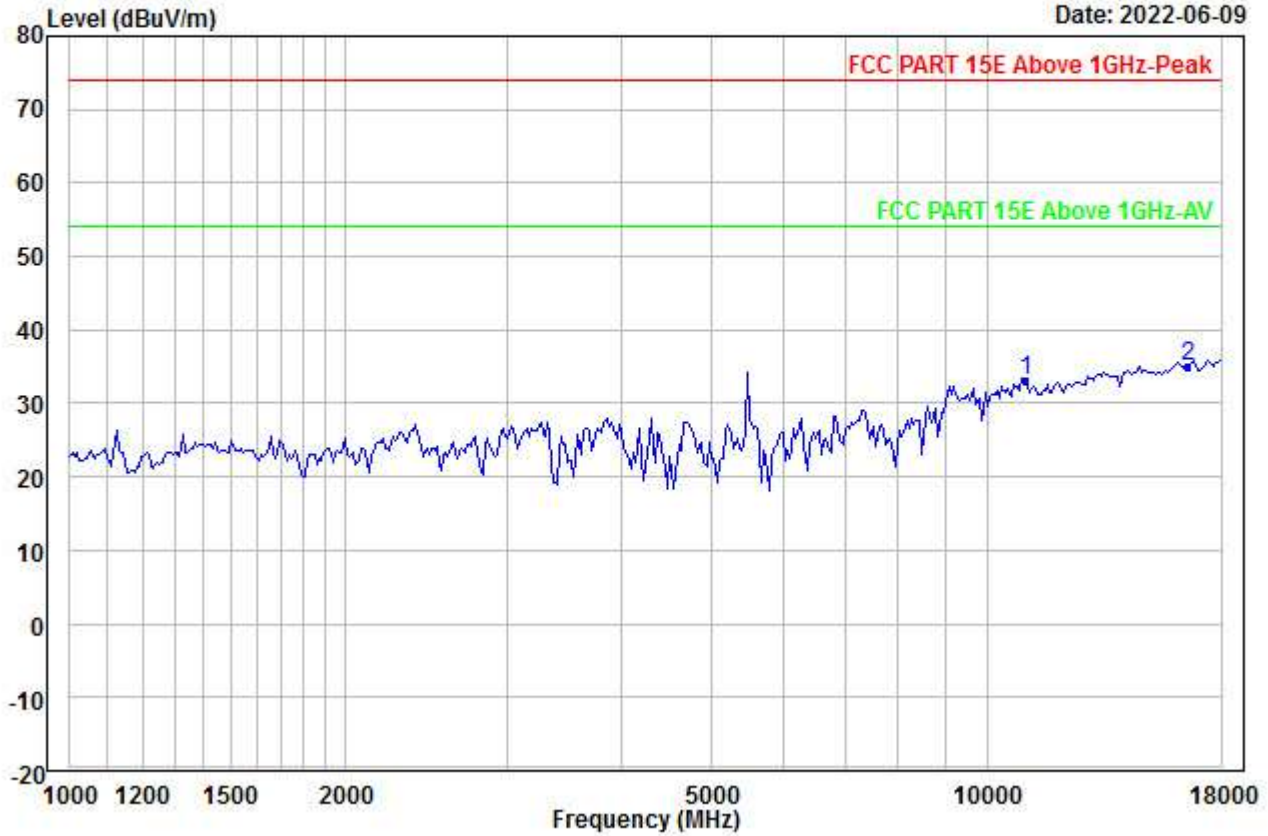


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5510
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 11020.000	25.73	38.52	45.04	0.00	13.93	33.14	54.00	-20.86	---	---	Aver
2 PP16530.000	22.69	41.55	46.64	0.00	17.47	35.07	54.00	-18.93	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00249.EMI

Date: 2022-06-09

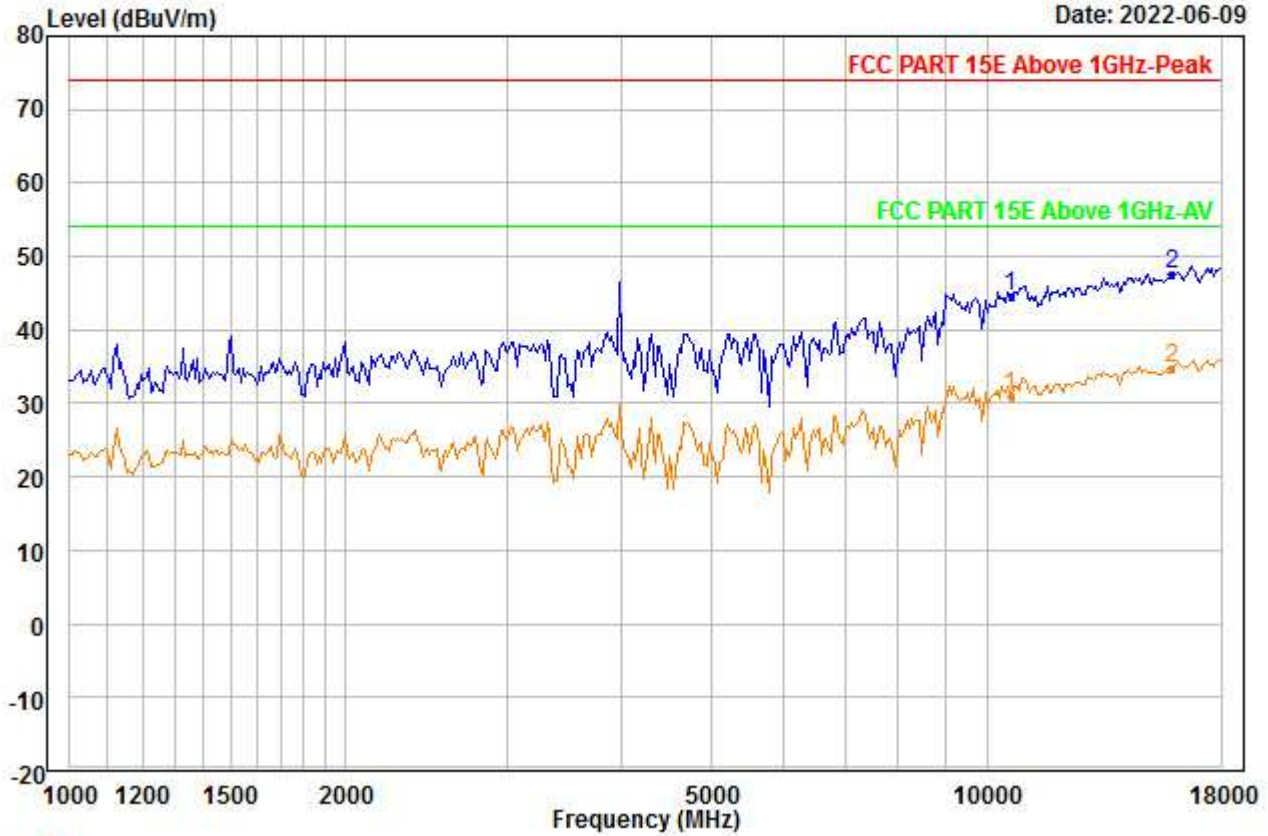


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5310
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10620.000	37.86	38.27	45.68	0.00	14.02	44.47	74.00	-29.53	---	---	Peak
2 PP15930.000	35.73	40.80	46.24	0.00	17.19	47.48	74.00	-26.52	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00250.EMI

Date: 2022-06-09

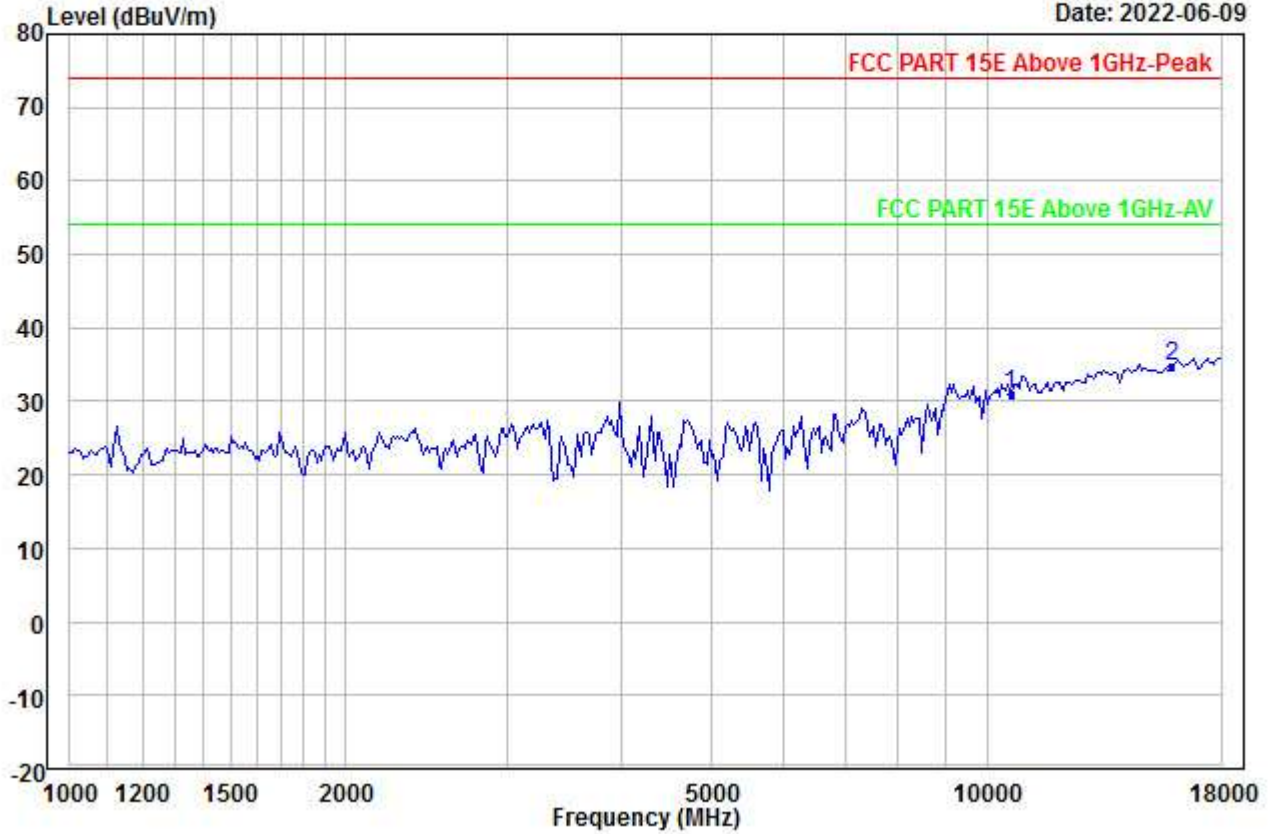


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5310
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10620.000	24.44	38.27	45.68	0.00	14.02	31.05	54.00	-22.95	---	---	Aver
2 PP15930.000	23.13	40.80	46.24	0.00	17.19	34.88	54.00	-19.12	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00251.EMI

Date: 2022-06-09

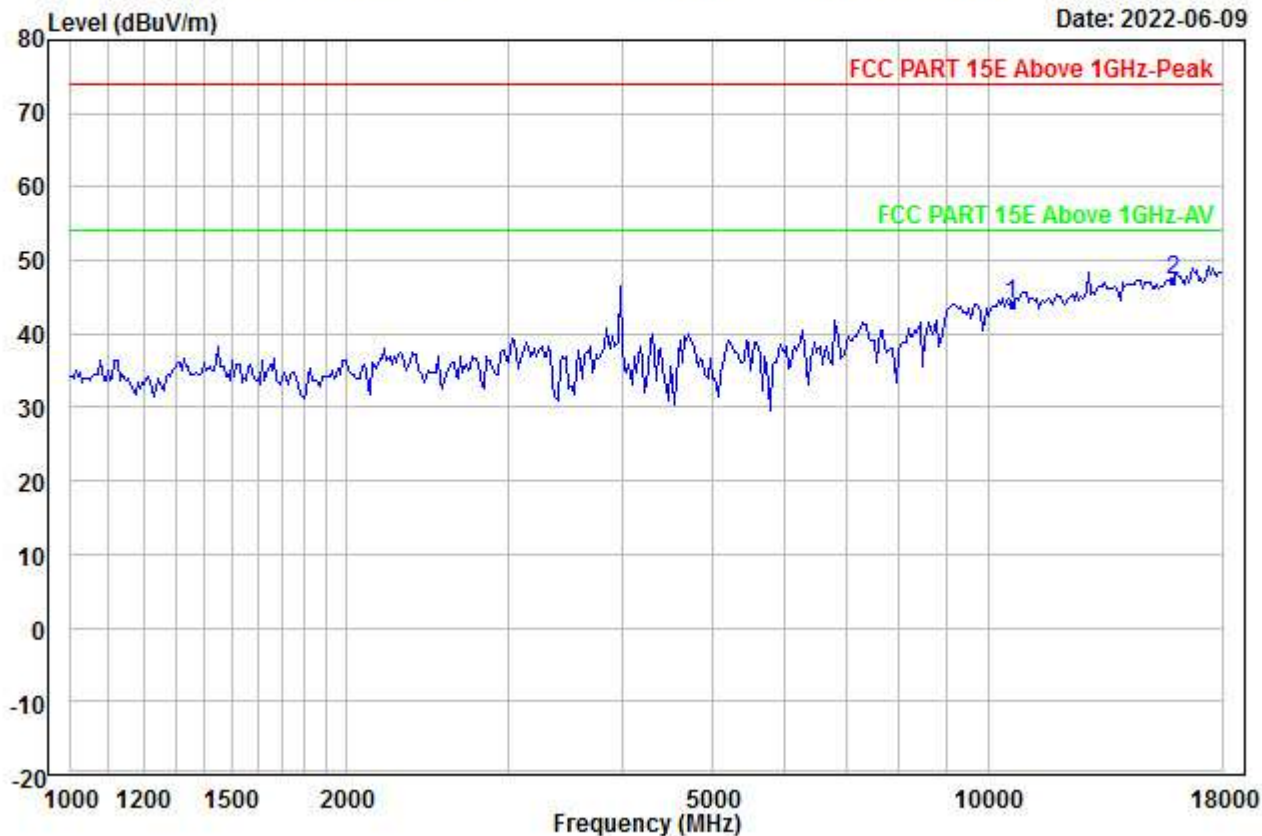


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5310
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10620.000	37.35	38.27	45.68	0.00	14.02	43.96	74.00	-30.04	---	---	Peak
2 PP15930.000	35.56	40.80	46.24	0.00	17.19	47.31	74.00	-26.69	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00252.EMI

Date: 2022-06-09

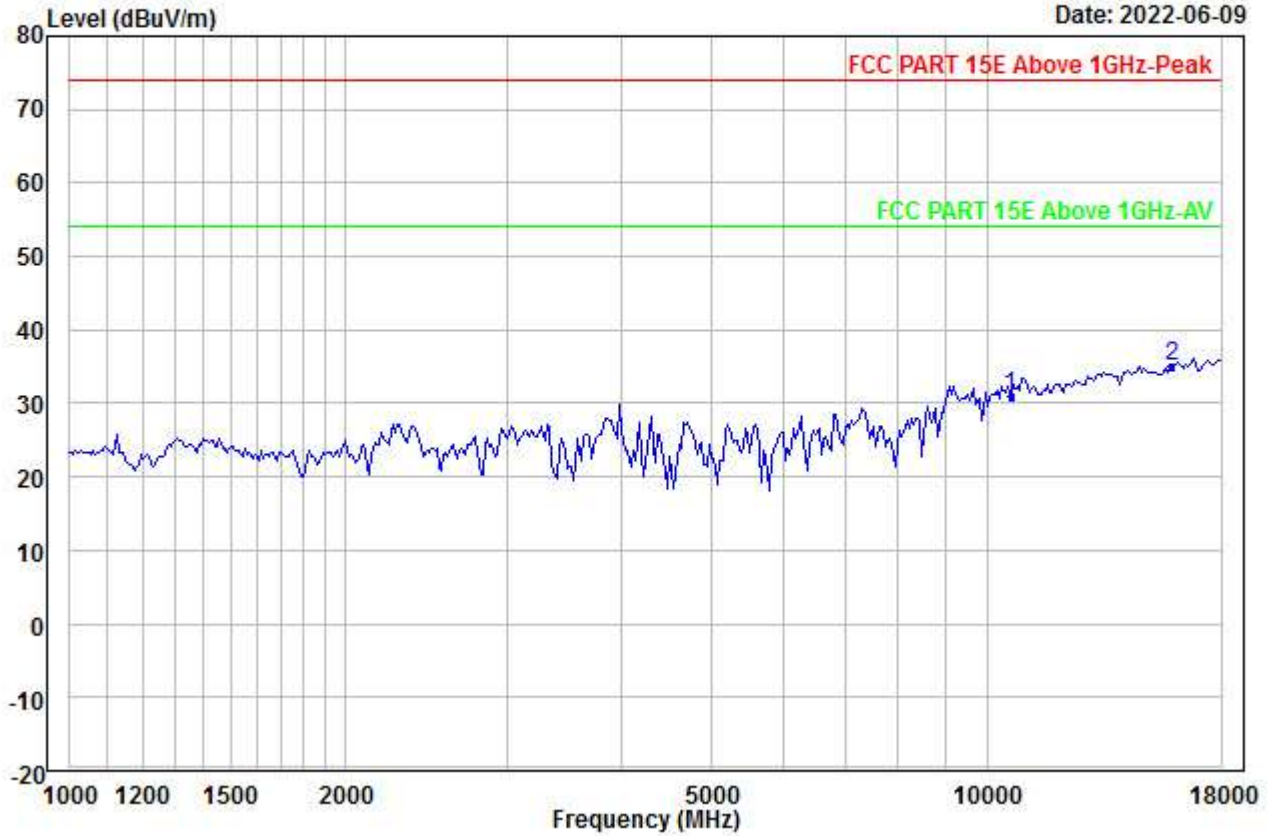


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5310
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10620.000	24.44	38.27	45.68	0.00	14.02	31.05	54.00	-22.95	---	---	Aver
2 PP15930.000	23.23	40.80	46.24	0.00	17.19	34.98	54.00	-19.02	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00253.EMI

Date: 2022-06-09

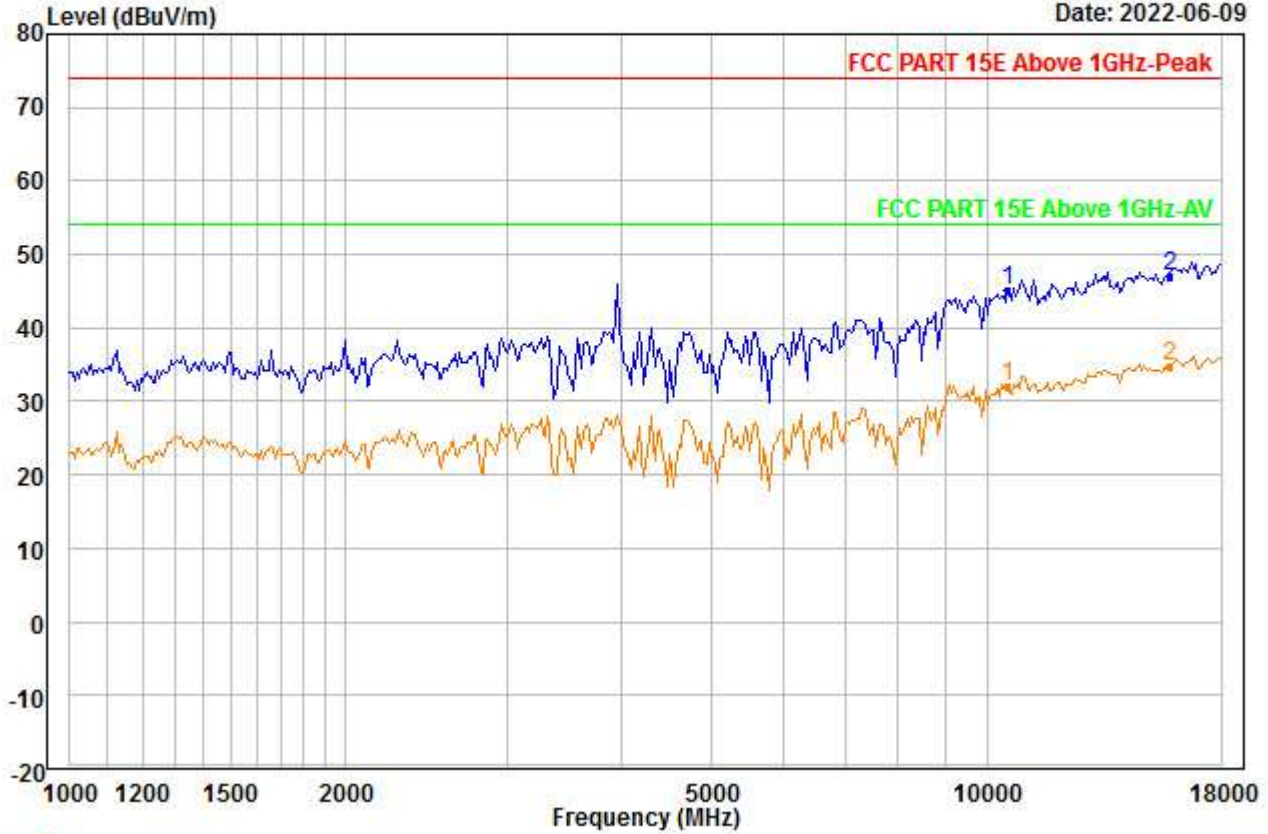


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5270
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10540.000	38.65	38.22	45.83	0.00	14.03	45.07	74.00	-28.93	---	---	Peak
2 PP15810.000	35.56	40.63	46.15	0.00	17.11	47.15	74.00	-26.85	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00254.EMI

Date: 2022-06-09

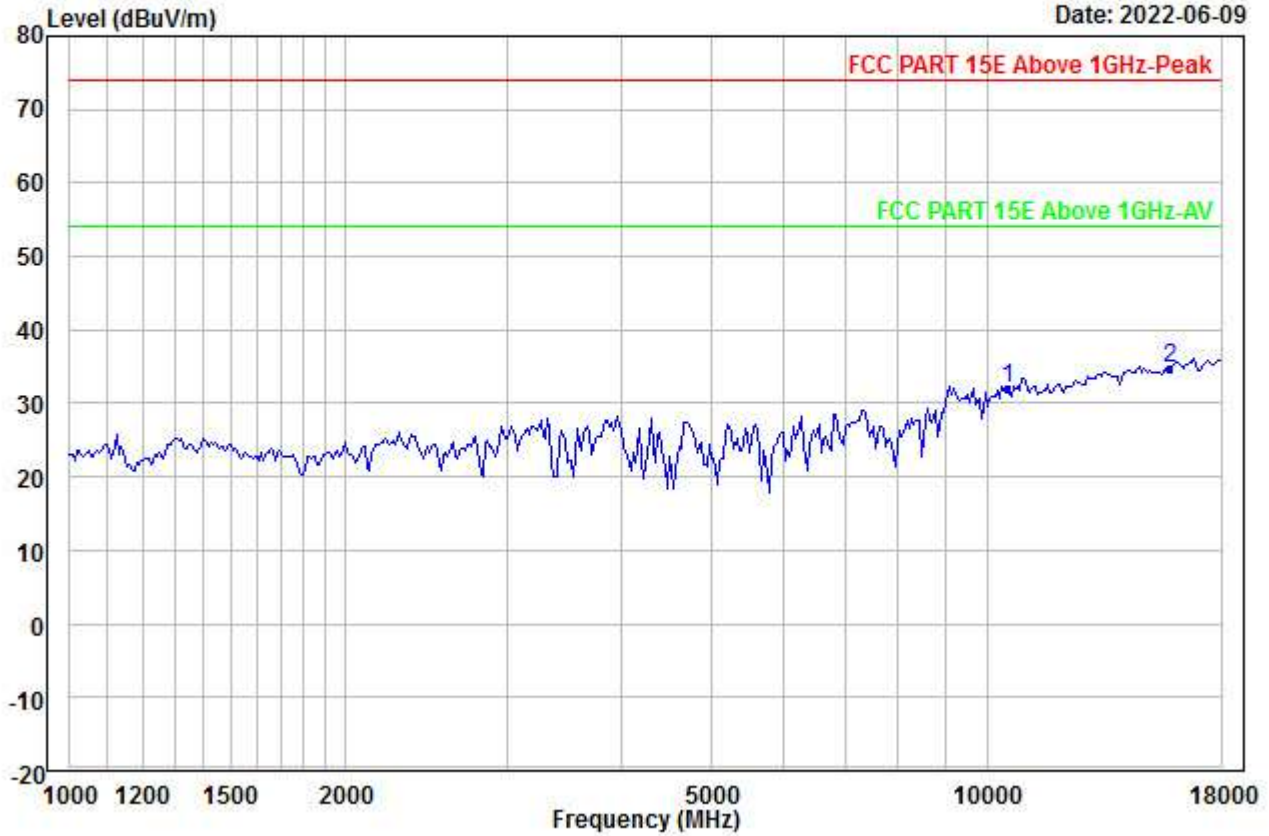


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5270
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10540.000	25.71	38.22	45.83	0.00	14.03	32.13	54.00	-21.87	---	---	Aver
2 PP15810.000	23.07	40.63	46.15	0.00	17.11	34.66	54.00	-19.34	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00255.EMI

Date: 2022-06-09

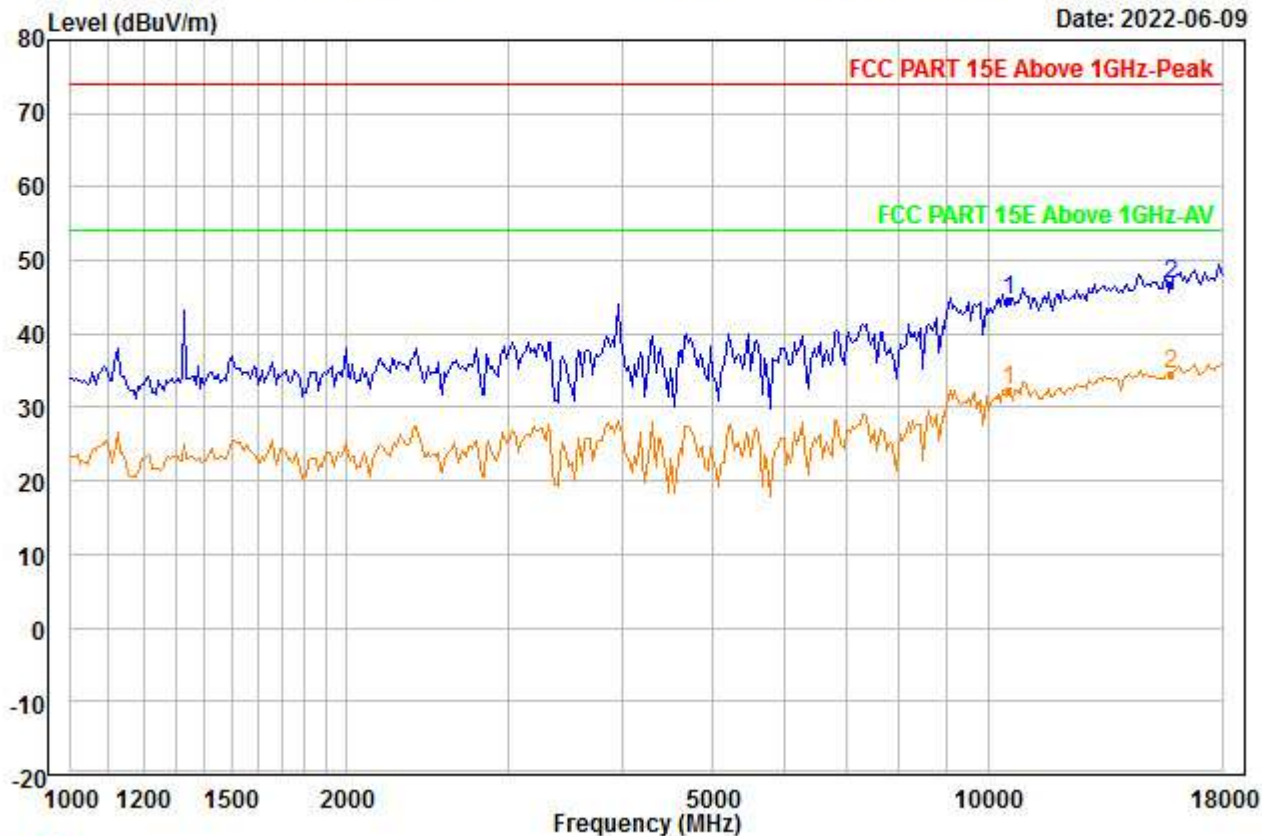


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5270
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10540.000	38.12	38.22	45.83	0.00	14.03	44.54	74.00	-29.46	---	---	Peak
2	PP15810.000	35.24	40.63	46.15	0.00	17.11	46.83	74.00	-27.17	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00256.EMI

Date: 2022-06-09

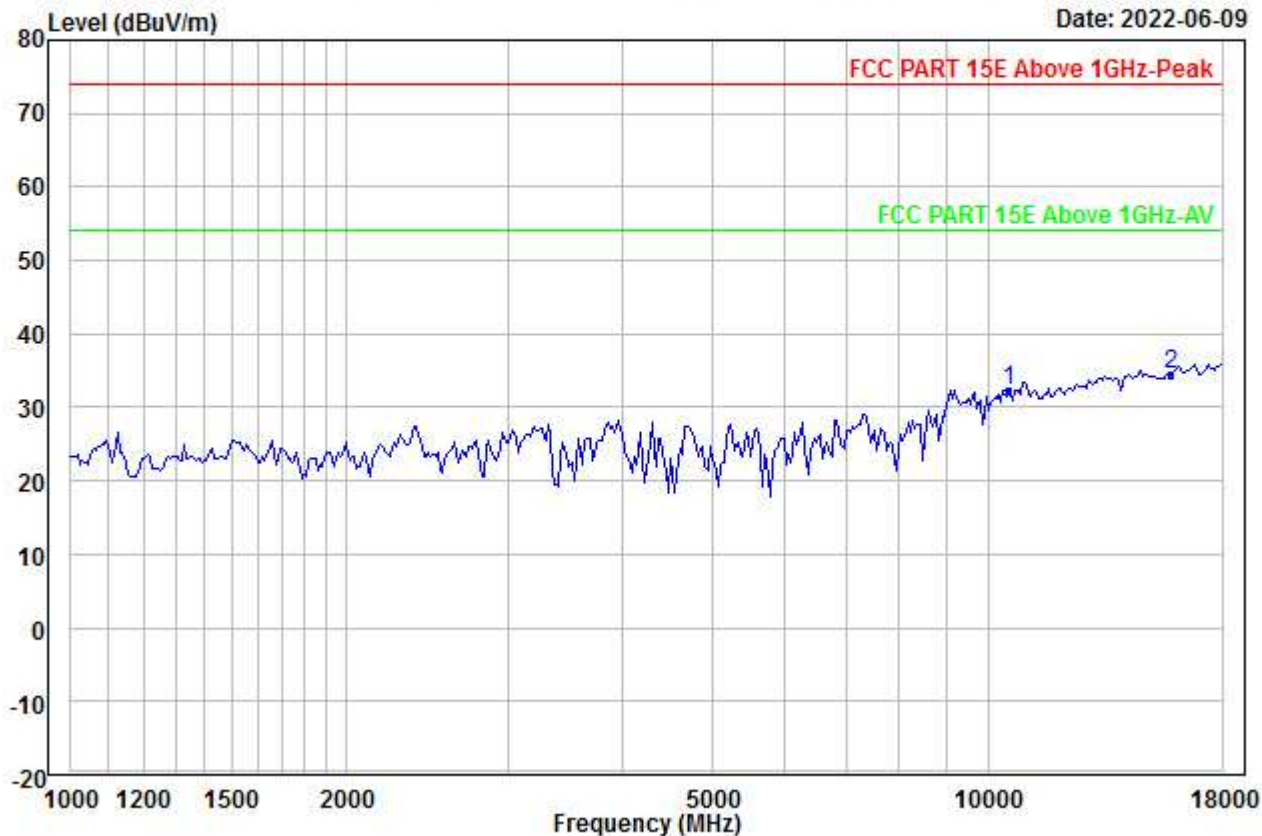


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5270
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10540.000	25.79	38.22	45.83	0.00	14.03	32.21	54.00	-21.79	---	---	Aver
2 PP15810.000	22.97	40.63	46.15	0.00	17.11	34.56	54.00	-19.44	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00257.EMI

Date: 2022-06-09

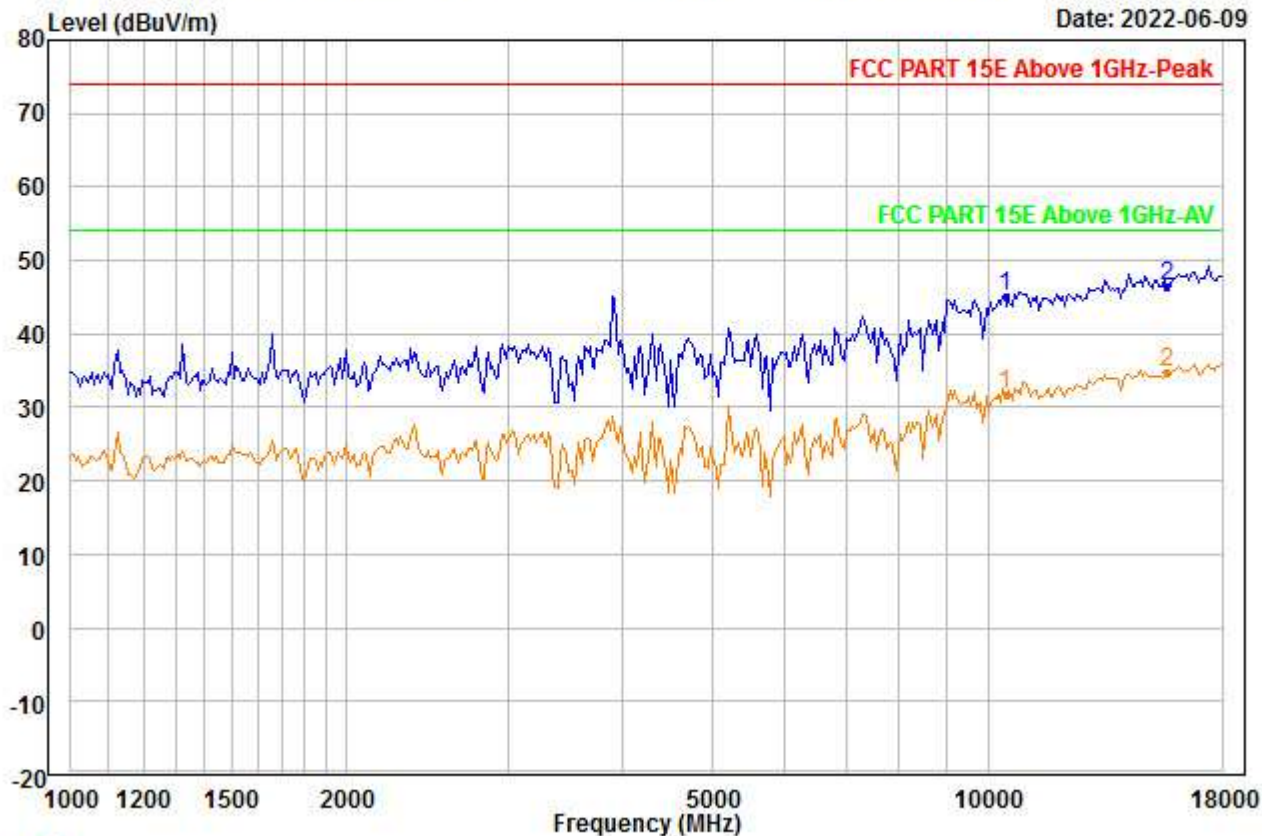


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5230
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10460.000	38.72	38.18	45.92	0.00	14.06	45.04	74.00	-28.96	---	---	Peak
2 PP15690.000	35.10	40.47	46.05	0.00	17.03	46.55	74.00	-27.45	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00258.EMI

Date: 2022-06-09

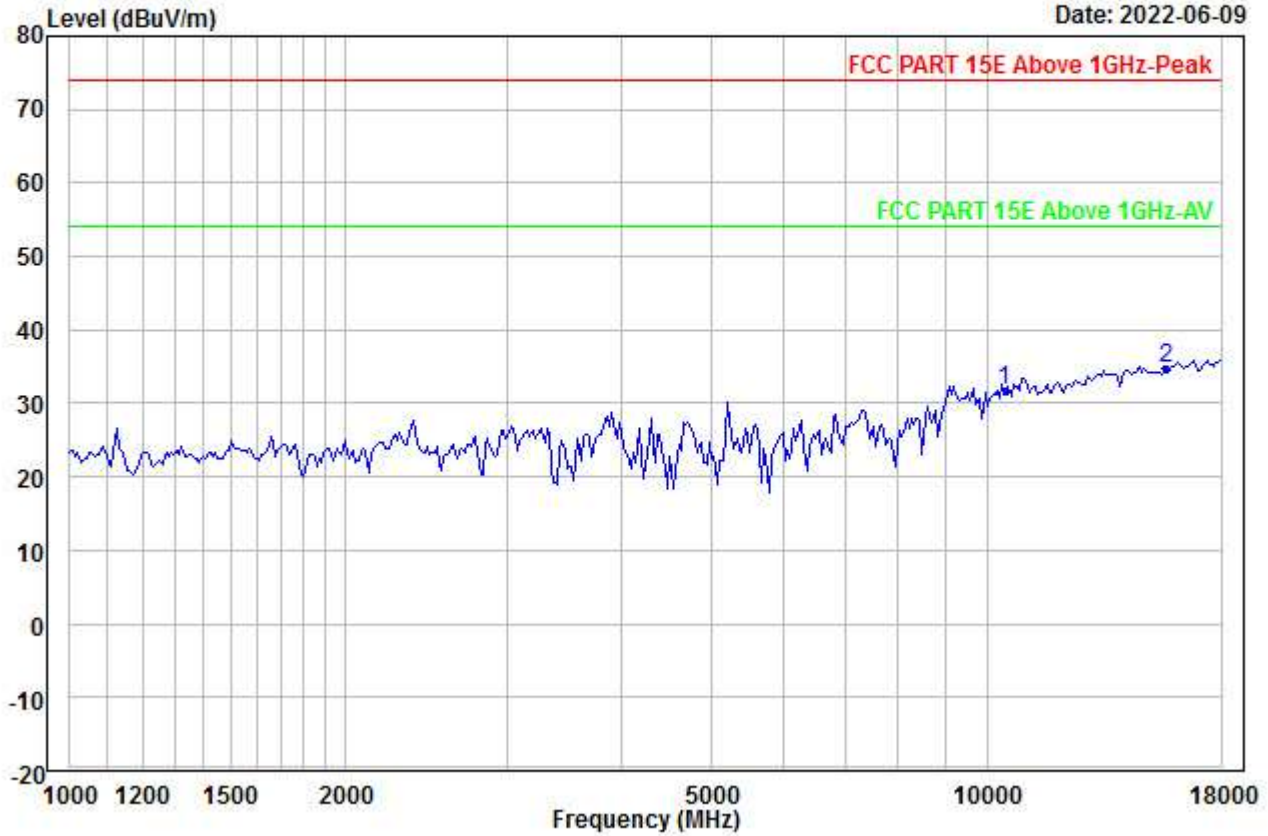


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5230
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10460.000	25.48	38.18	45.92	0.00	14.06	31.80	54.00	-22.20	---	---	Aver
2 PP15690.000	23.19	40.47	46.05	0.00	17.03	34.64	54.00	-19.36	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00259.EMI

Date: 2022-06-09

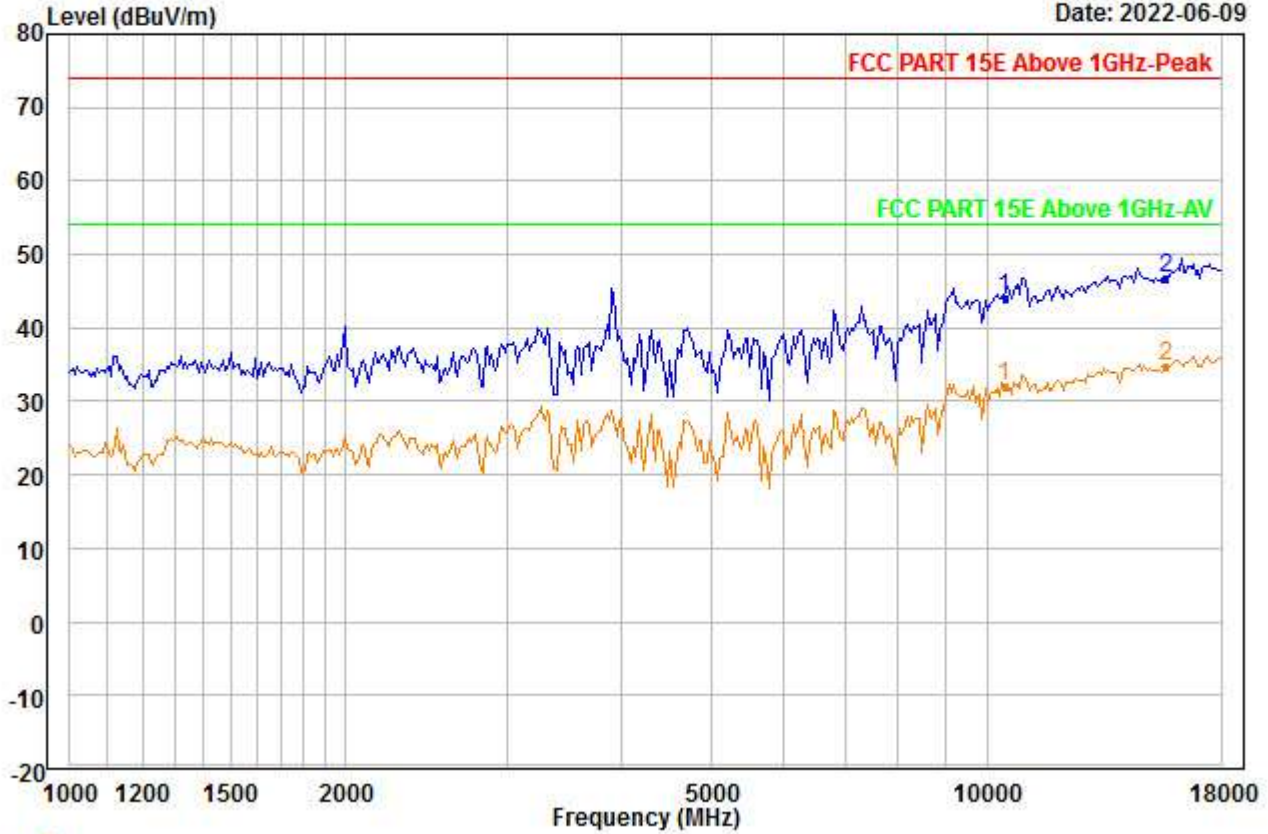


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5230
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10460.000	37.63	38.18	45.92	0.00	14.06	43.95	74.00	-30.05	---	---	Peak
2 PP15690.000	35.38	40.47	46.05	0.00	17.03	46.83	74.00	-27.17	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00260.EMI

Date: 2022-06-09

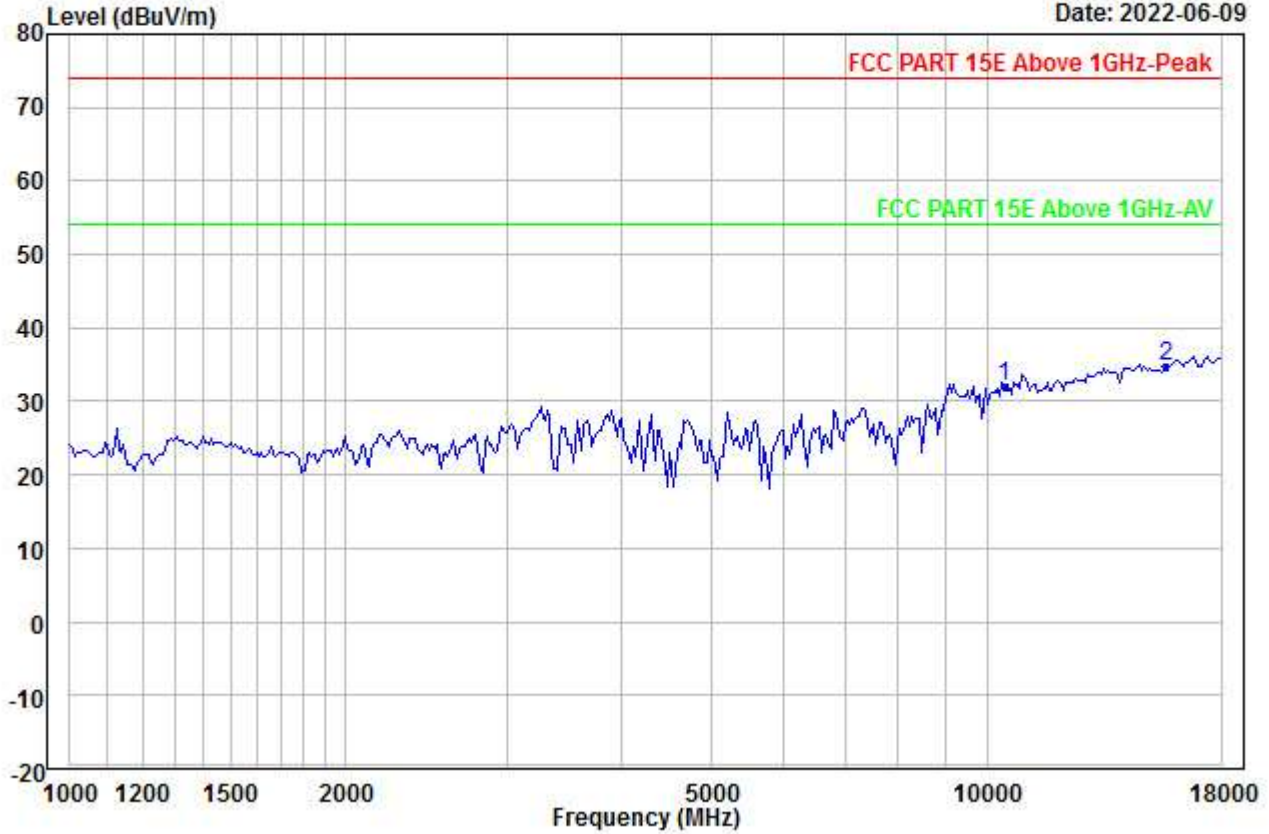


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5230
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10460.000	25.63	38.18	45.92	0.00	14.06	31.95	54.00	-22.05	---	---	Aver
2 PP15690.000	23.29	40.47	46.05	0.00	17.03	34.74	54.00	-19.26	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00261.EMI

Date: 2022-06-09

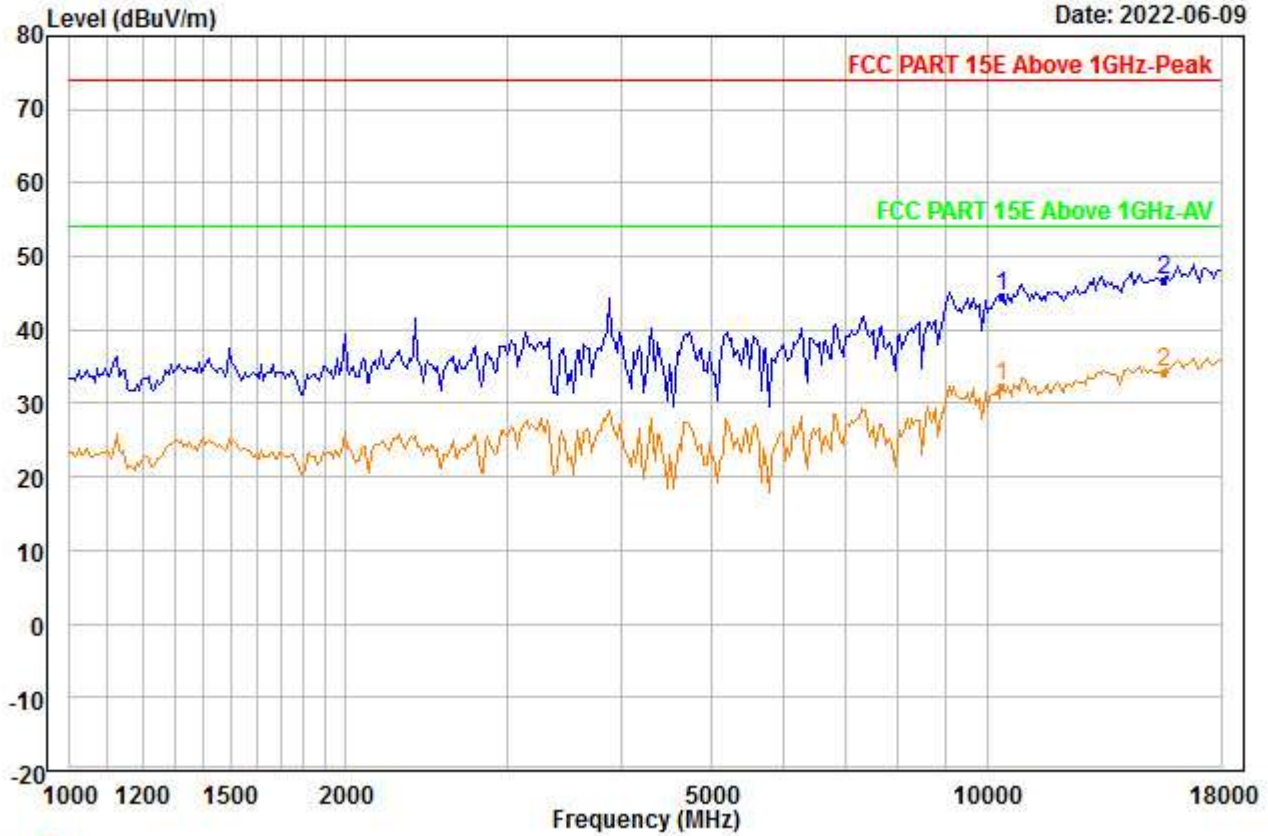


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5190
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10380.000	38.19	38.13	45.95	0.00	14.07	44.44	74.00	-29.56	---	---	Peak
2 PP15570.000	35.60	40.30	45.96	0.00	16.95	46.89	74.00	-27.11	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00262.EMI

Date: 2022-06-09

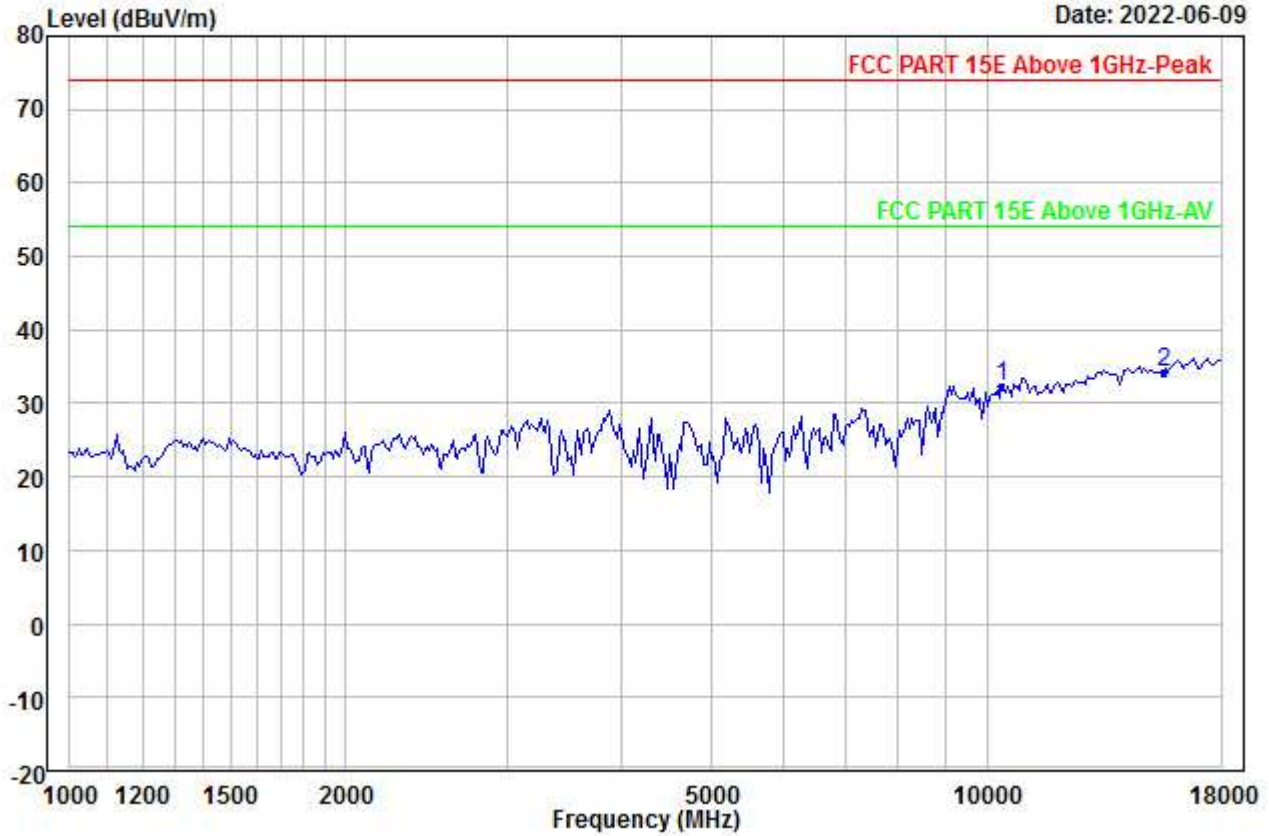


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5190
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10380.000	26.17	38.13	45.95	0.00	14.07	32.42	54.00	-21.58	---	---	Aver
2 PP15570.000	23.03	40.30	45.96	0.00	16.95	34.32	54.00	-19.68	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00263.EMI

Date: 2022-06-09

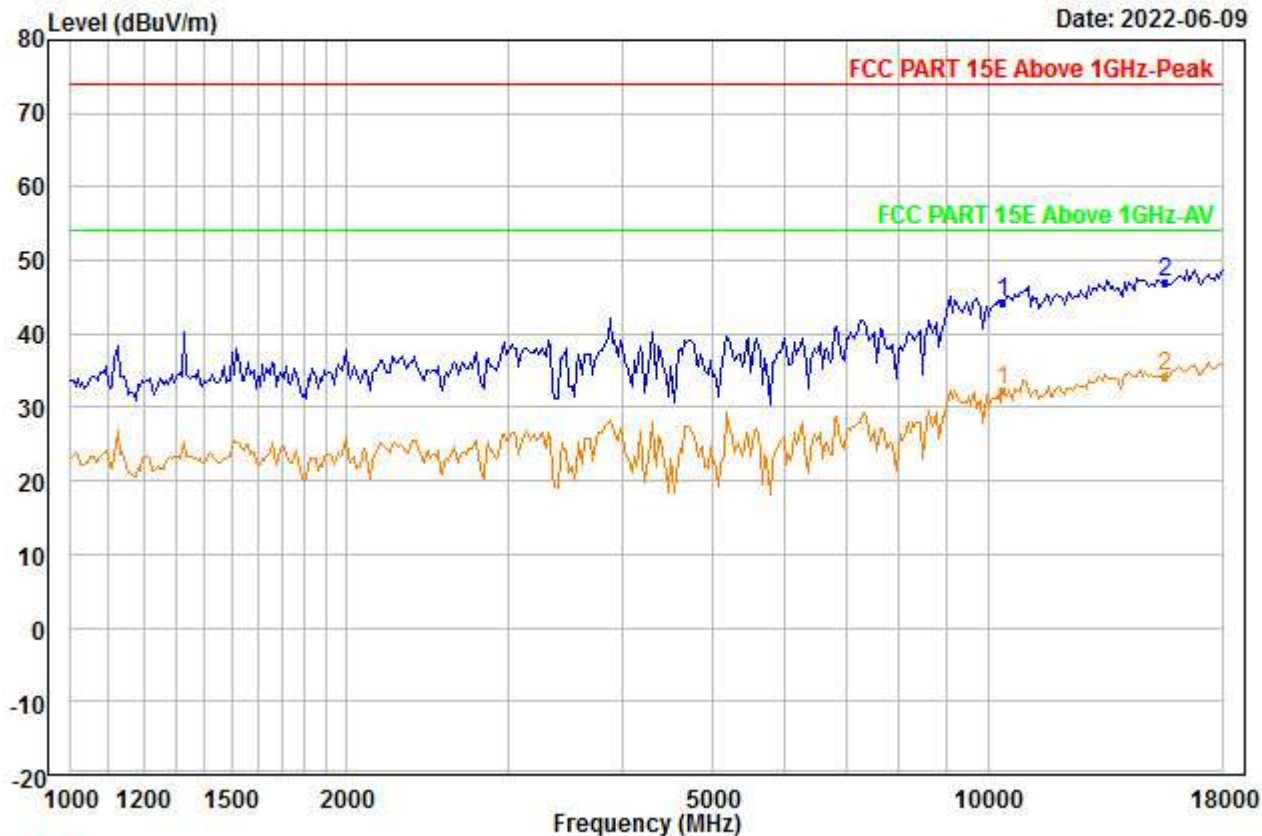


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5190
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10380.000	38.01	38.13	45.95	0.00	14.07	44.26	74.00	-29.74	---	---	Peak
2 PP15570.000	35.72	40.30	45.96	0.00	16.95	47.01	74.00	-26.99	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00264.EMI

Date: 2022-06-09

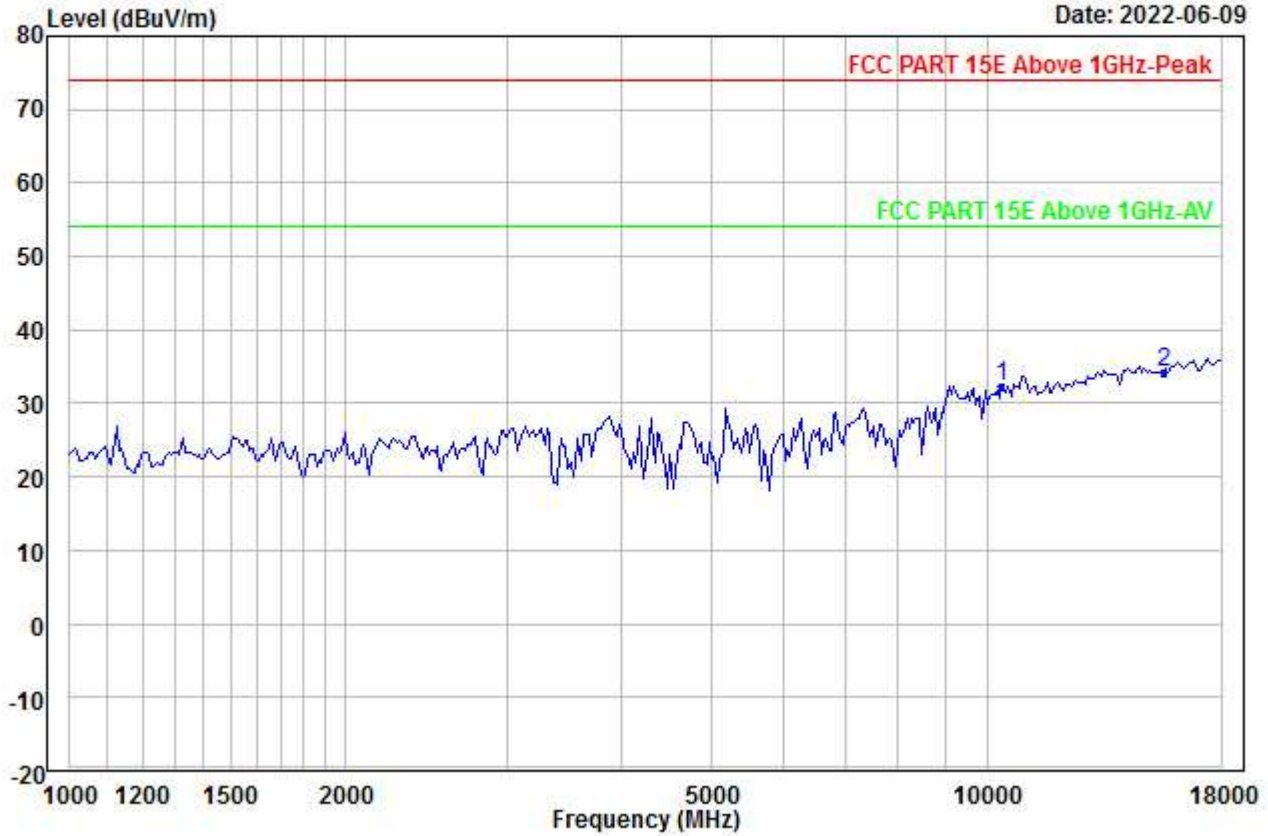


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC40_ANT0+1_5190
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10380.000	26.17	38.13	45.95	0.00	14.07	32.42	54.00	-21.58	---	---	Aver
2 PP15570.000	22.93	40.30	45.96	0.00	16.95	34.22	54.00	-19.78	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00265.EMI

Date: 2022-06-09

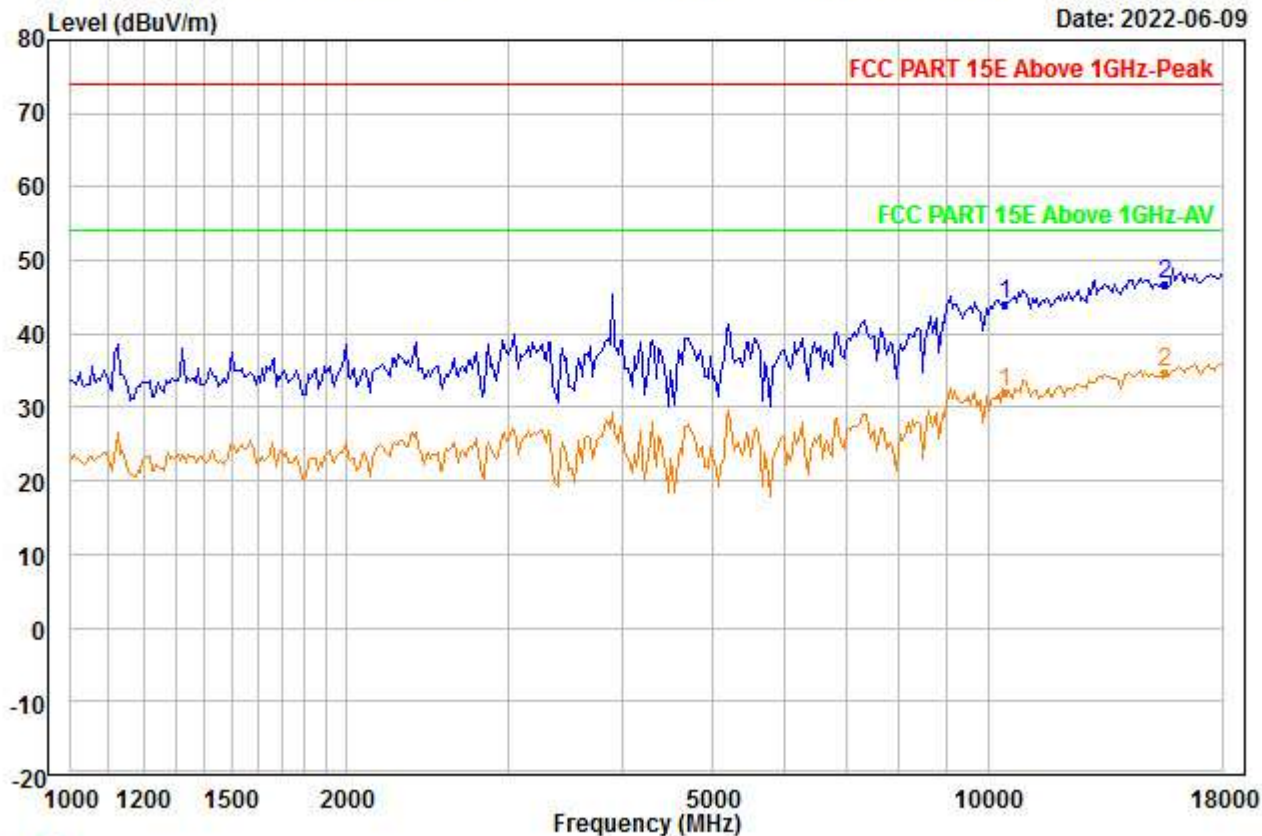


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC80_ANT0+1_5210
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10420.000	37.78	38.15	45.93	0.00	14.07	44.07	74.00	-29.93	---	---	Peak
2 PP15630.000	35.28	40.38	46.00	0.00	16.99	46.65	74.00	-27.35	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00266.EMI

Date: 2022-06-09

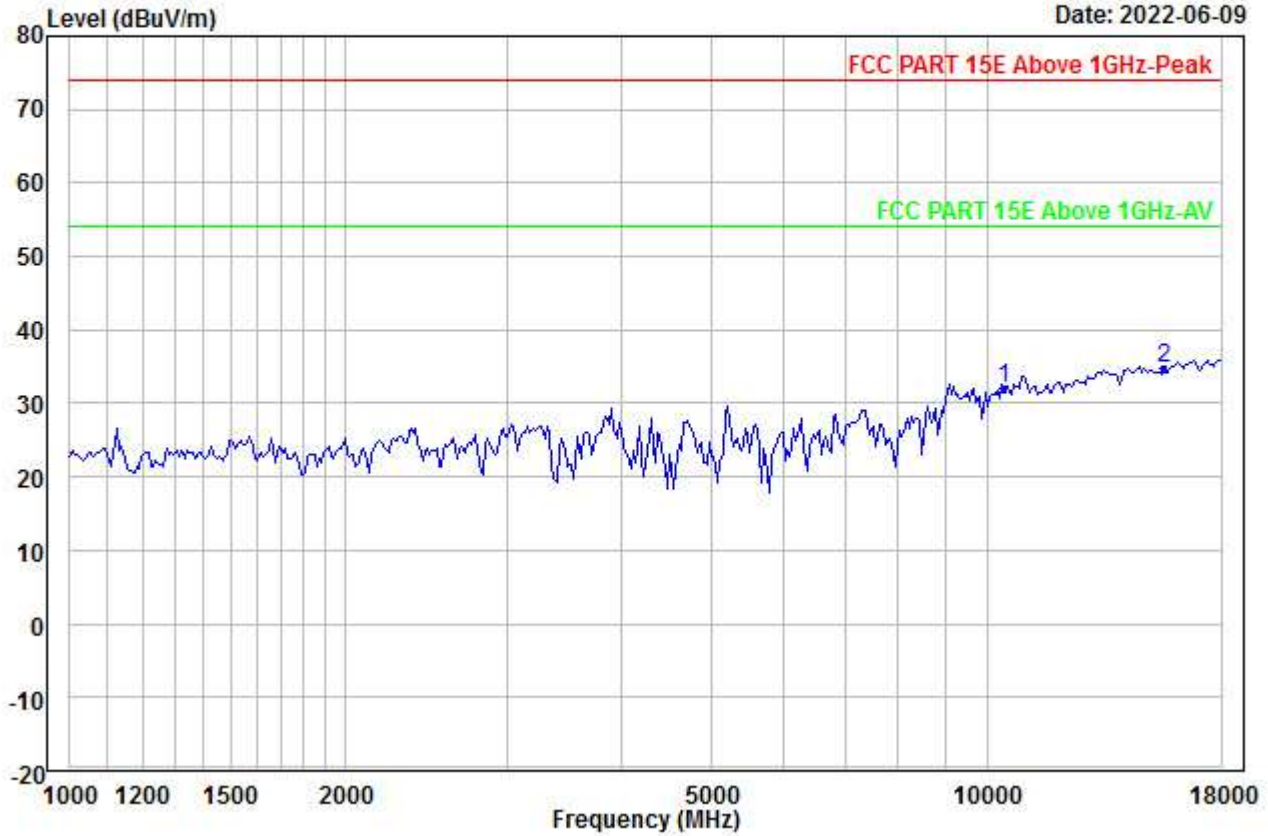


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC80_ANT0+1_5210
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10420.000	25.66	38.15	45.93	0.00	14.07	31.95	54.00	-22.05	---	---	Aver
2 PP15630.000	23.37	40.38	46.00	0.00	16.99	34.74	54.00	-19.26	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00267.EMI

Date: 2022-06-09

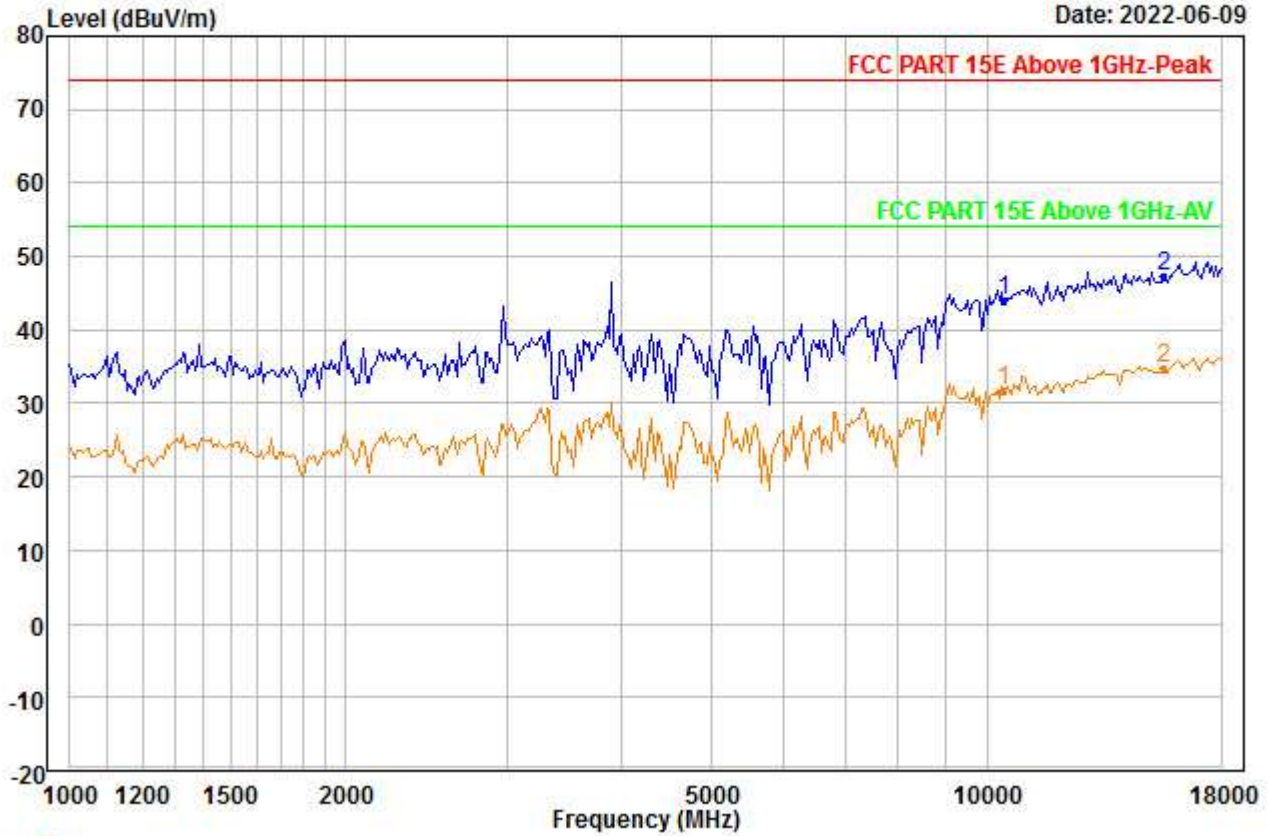


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC80_ANT0+1_5210
 Remark :

	Read Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10420.000	37.83	38.15	45.93	0.00	14.07	44.12	74.00	-29.88	---	---	Peak
2	PP15630.000	35.87	40.38	46.00	0.00	16.99	47.24	74.00	-26.76	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00268.EMI

Date: 2022-06-09

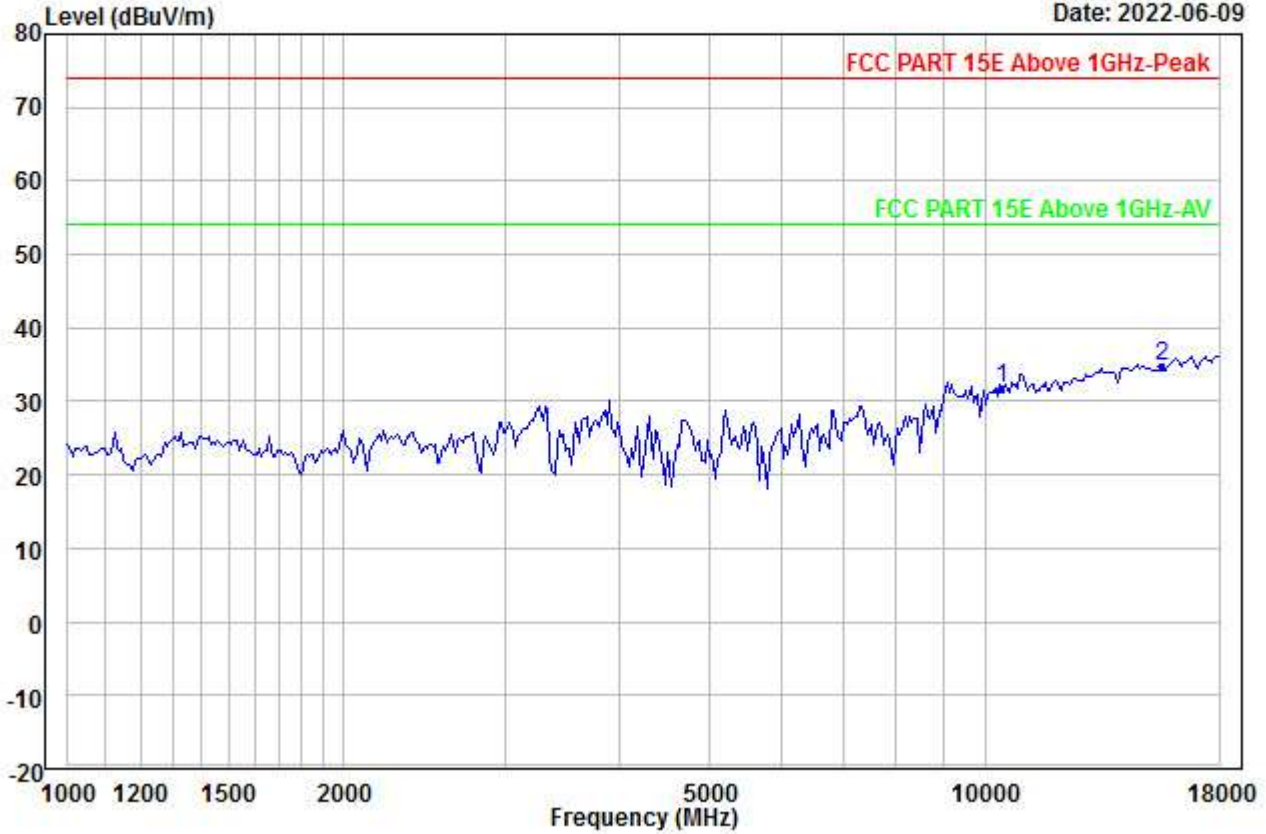


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC80_ANT0+1_5210
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	10420.000	25.58	38.15	45.93	0.00	14.07	31.87	54.00	-22.13	---	---	Aver
2	PP15630.000	23.37	40.38	46.00	0.00	16.99	34.74	54.00	-19.26	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00269.EMI

Date: 2022-06-09

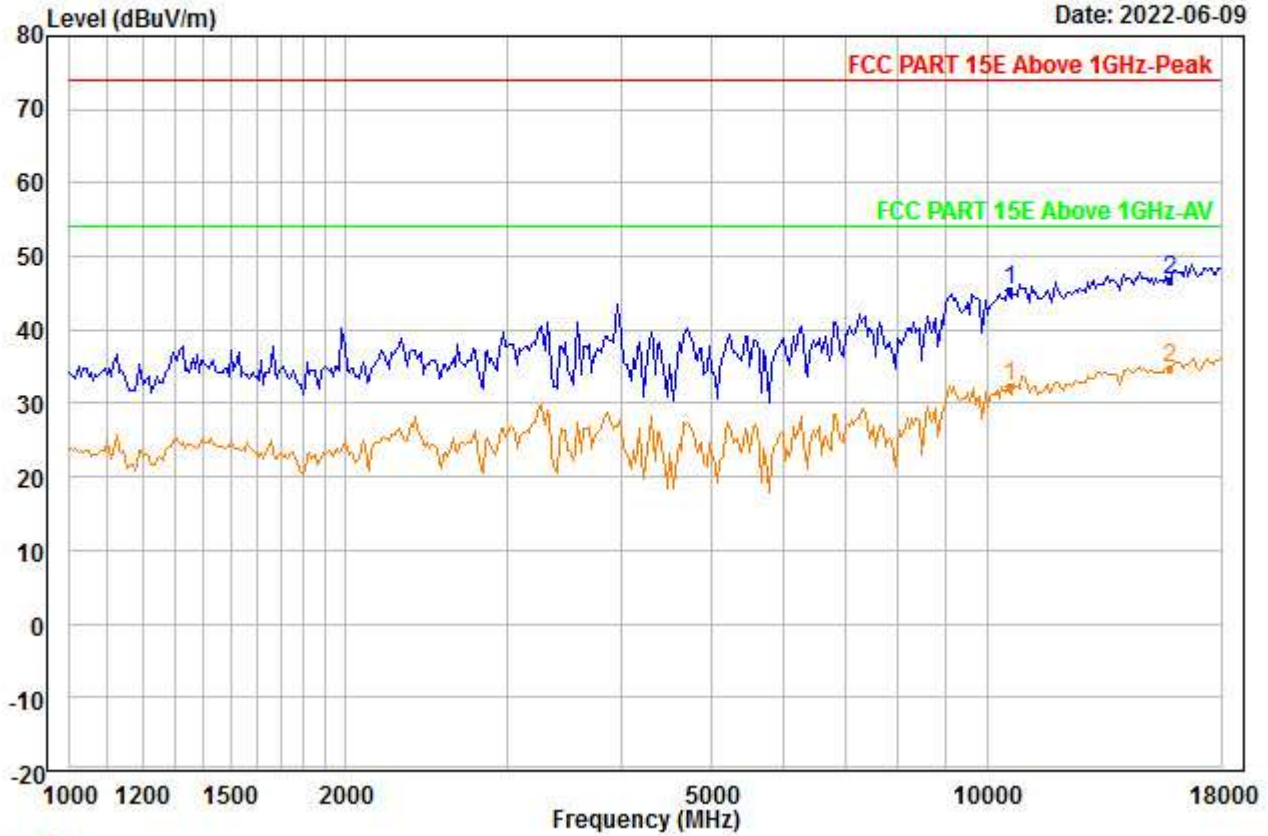


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC80_ANT0+1_5290
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10580.000	38.91	38.25	45.76	0.00	14.02	45.42	74.00	-28.58	---	---	Peak
2 PP15870.000	35.16	40.72	46.20	0.00	17.15	46.83	74.00	-27.17	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00270.EMI

Date: 2022-06-09

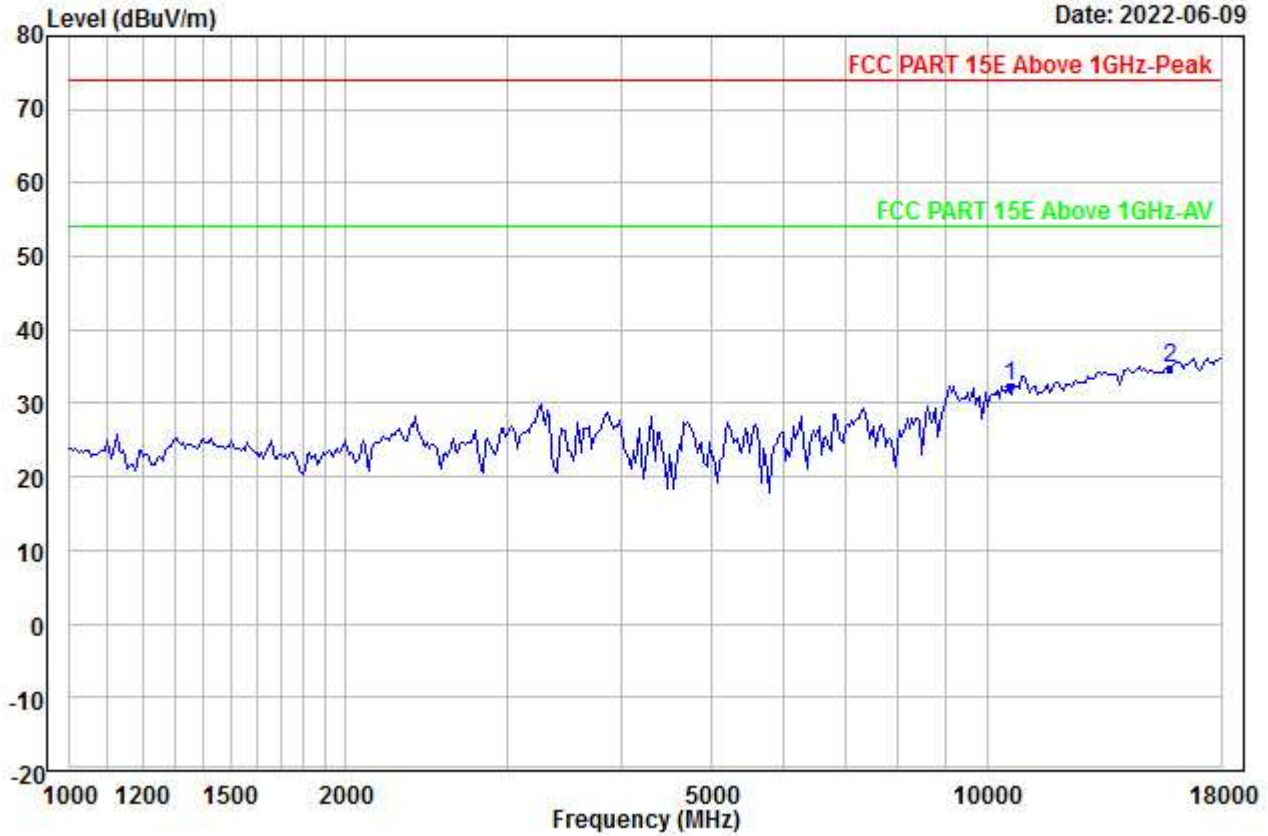


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC80_ANT0+1_5290
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10580.000	25.70	38.25	45.76	0.00	14.02	32.21	54.00	-21.79	---	---	Aver
2 PP15870.000	22.99	40.72	46.20	0.00	17.15	34.66	54.00	-19.34	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00271.EMI

Date: 2022-06-09

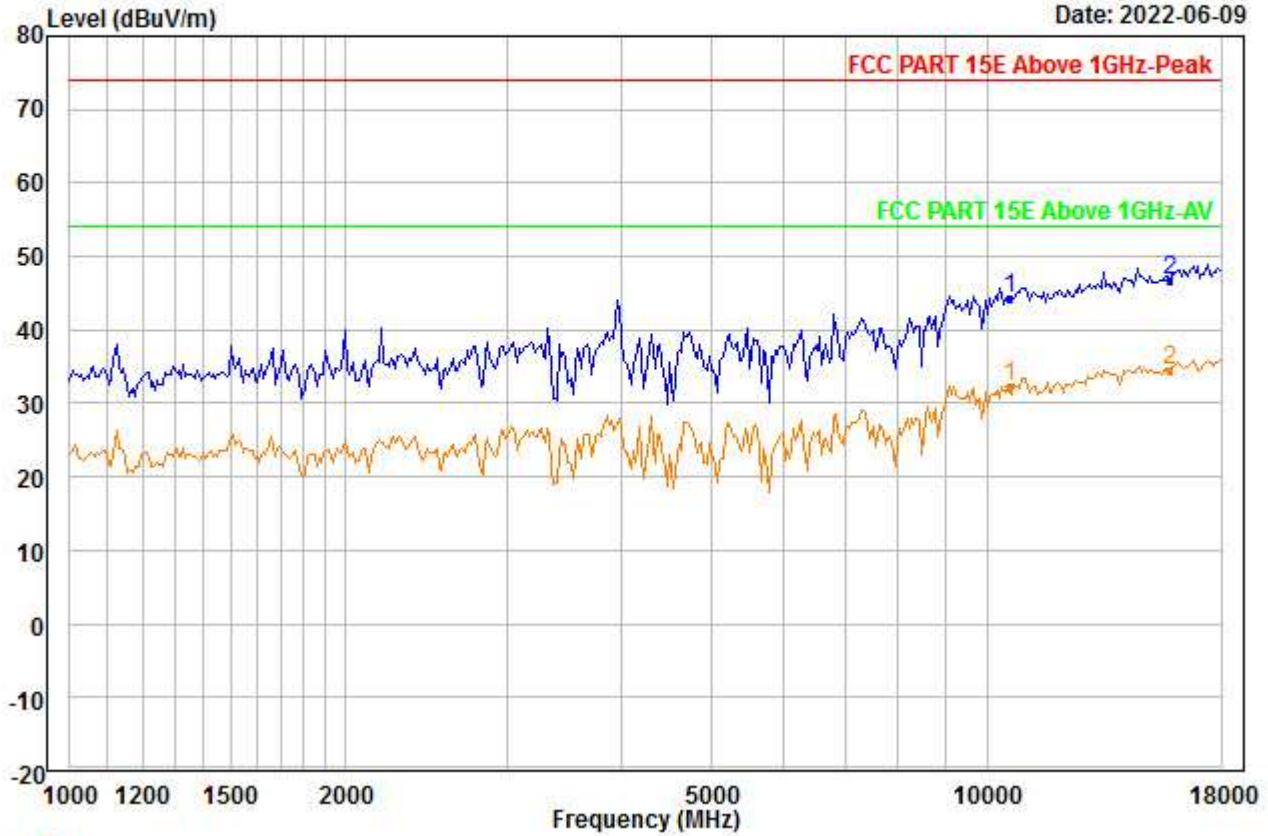


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC80_ANT0+1_5290
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10580.000	37.68	38.25	45.76	0.00	14.02	44.19	74.00	-29.81	---	---	Peak
2 PP15870.000	35.14	40.72	46.20	0.00	17.15	46.81	74.00	-27.19	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00272.EMI

Date: 2022-06-09

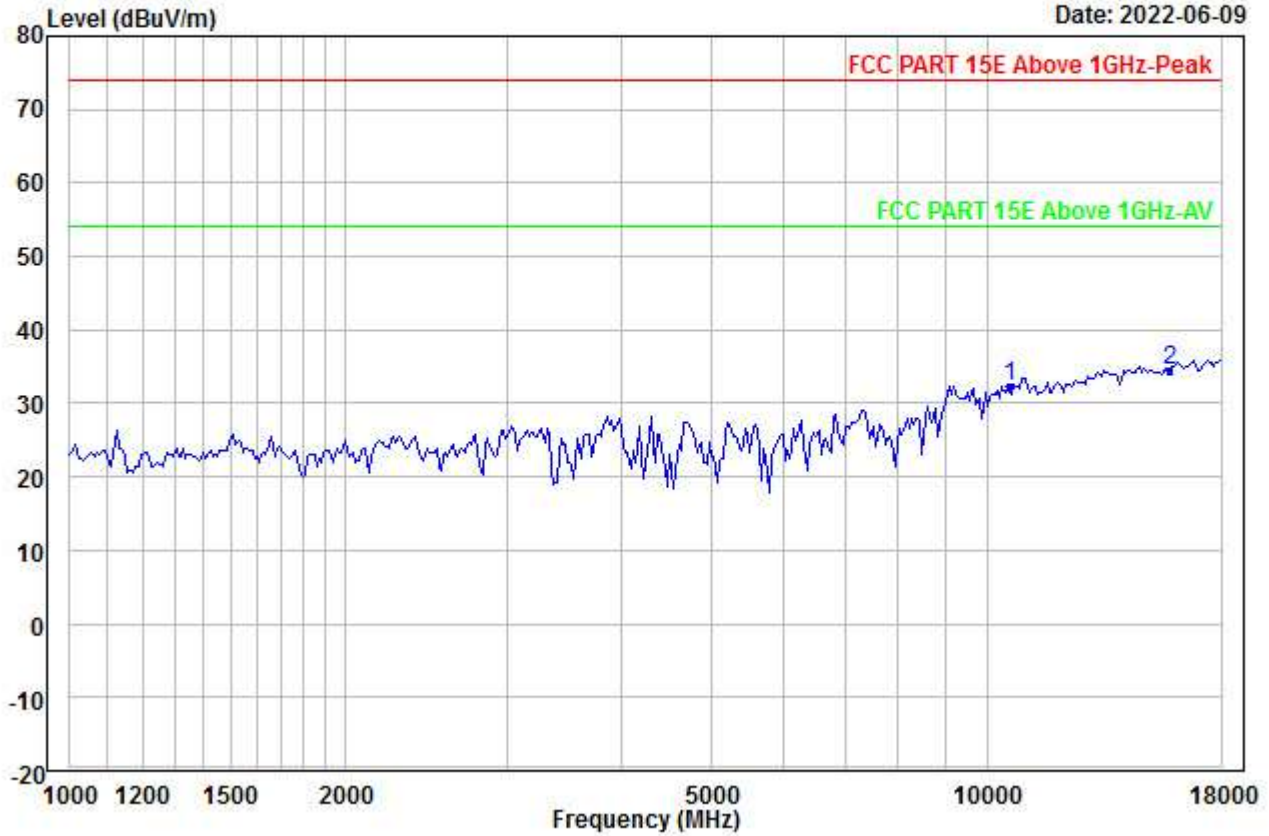


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC80_ANT0+1_5290
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 10580.000	25.70	38.25	45.76	0.00	14.02	32.21	54.00	-21.79	---	---	Aver
2 PP15870.000	22.89	40.72	46.20	0.00	17.15	34.56	54.00	-19.44	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00273.EMI

Date: 2022-06-09

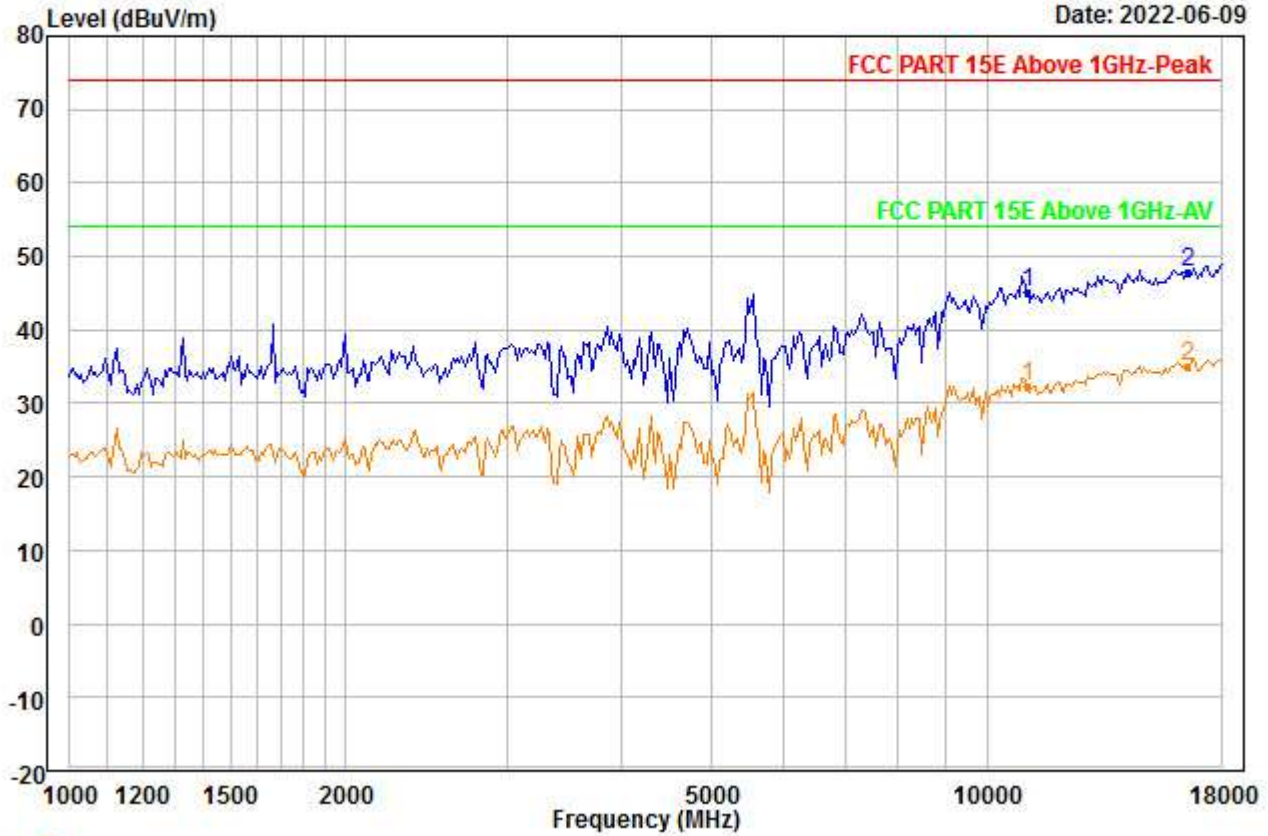


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC80_ANT0+1_5530
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11060.000	37.76	38.55	45.13	0.00	13.96	45.14	74.00	-28.86	---	---	Peak
2	PP16590.000	35.37	41.64	46.71	0.00	17.50	47.80	74.00	-26.20	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00274.EMI

Date: 2022-06-09

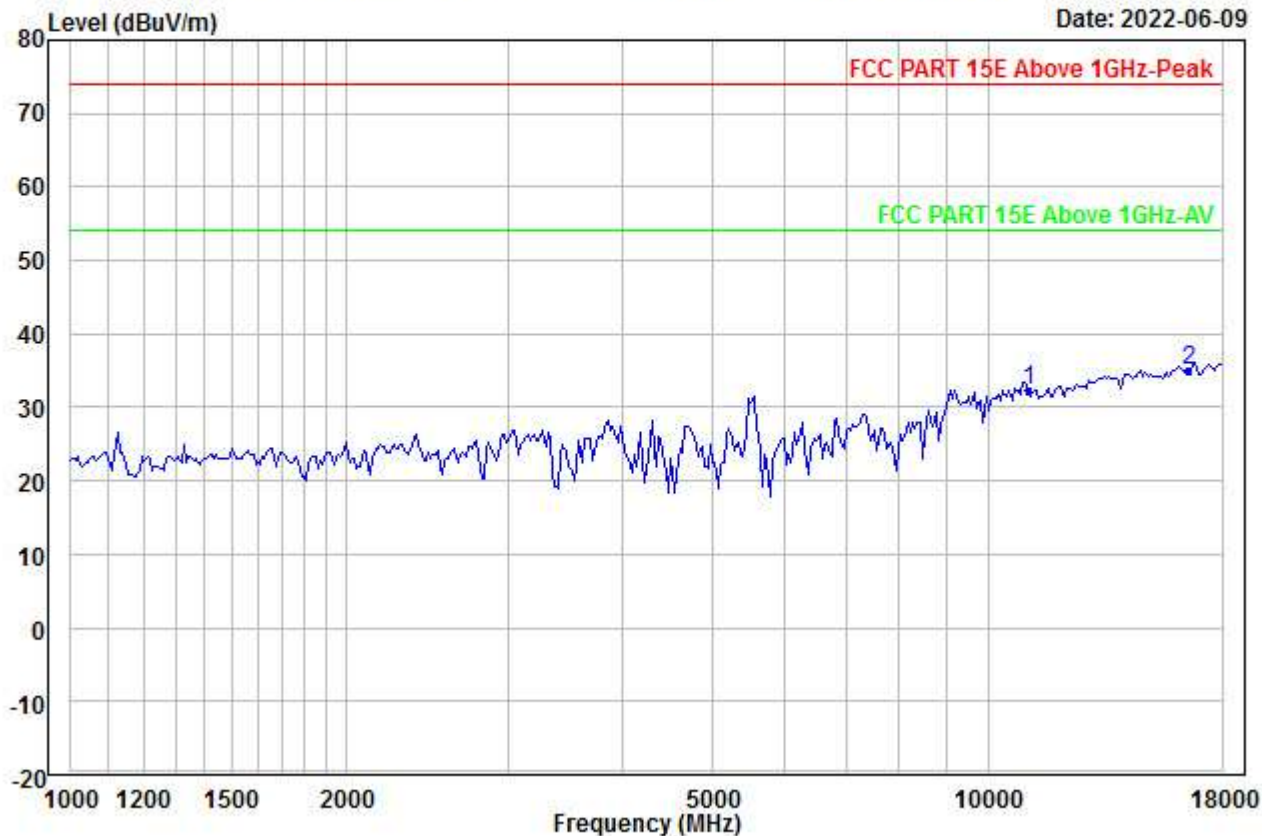


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC80_ANT0+1_5530
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 11060.000	24.85	38.55	45.13	0.00	13.96	32.23	54.00	-21.77	---	---	Aver
2 PP16590.000	22.72	41.64	46.71	0.00	17.50	35.15	54.00	-18.85	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00275.EMI

Date: 2022-06-09

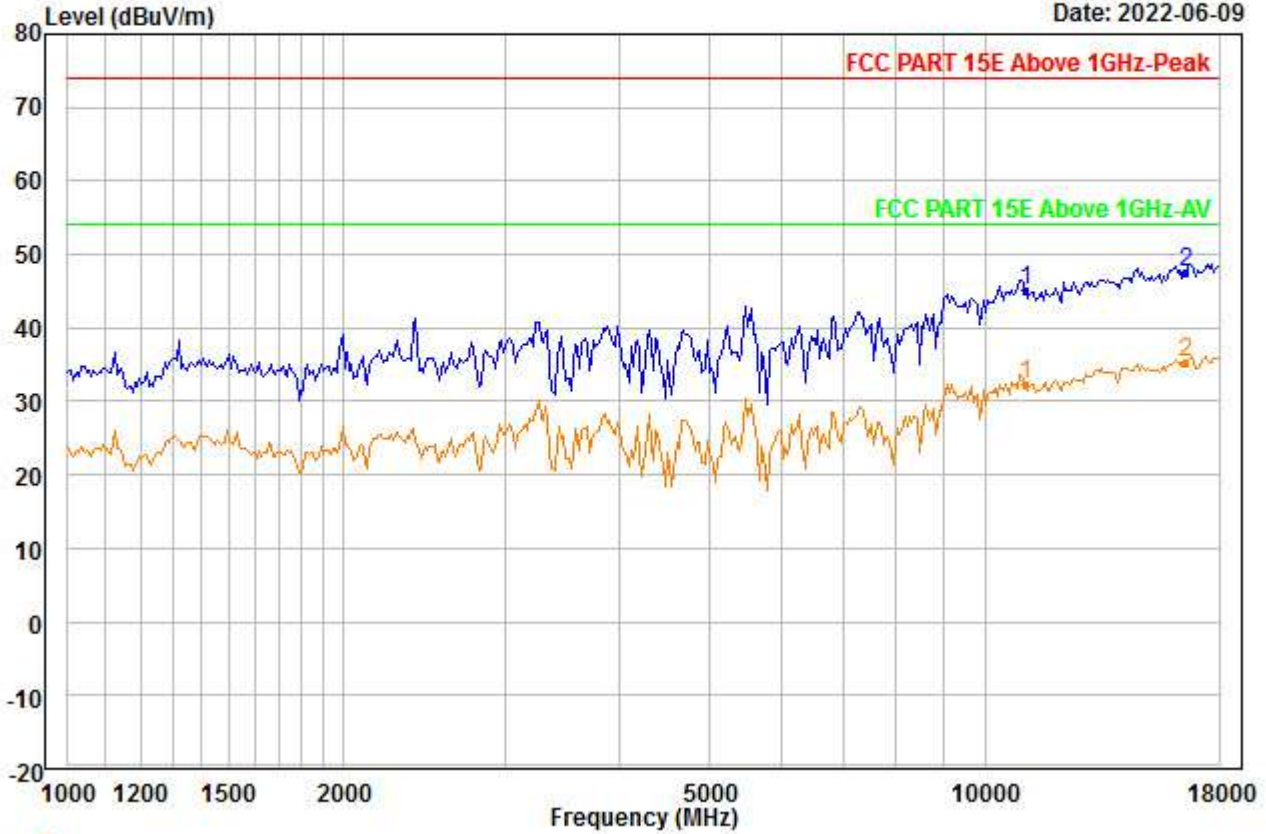


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC80_ANT0+1_5530
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11060.000	37.82	38.55	45.13	0.00	13.96	45.20	74.00	-28.80	---	---	Peak
2	PP16590.000	35.27	41.64	46.71	0.00	17.50	47.70	74.00	-26.30	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00276.EMI

Date: 2022-06-09

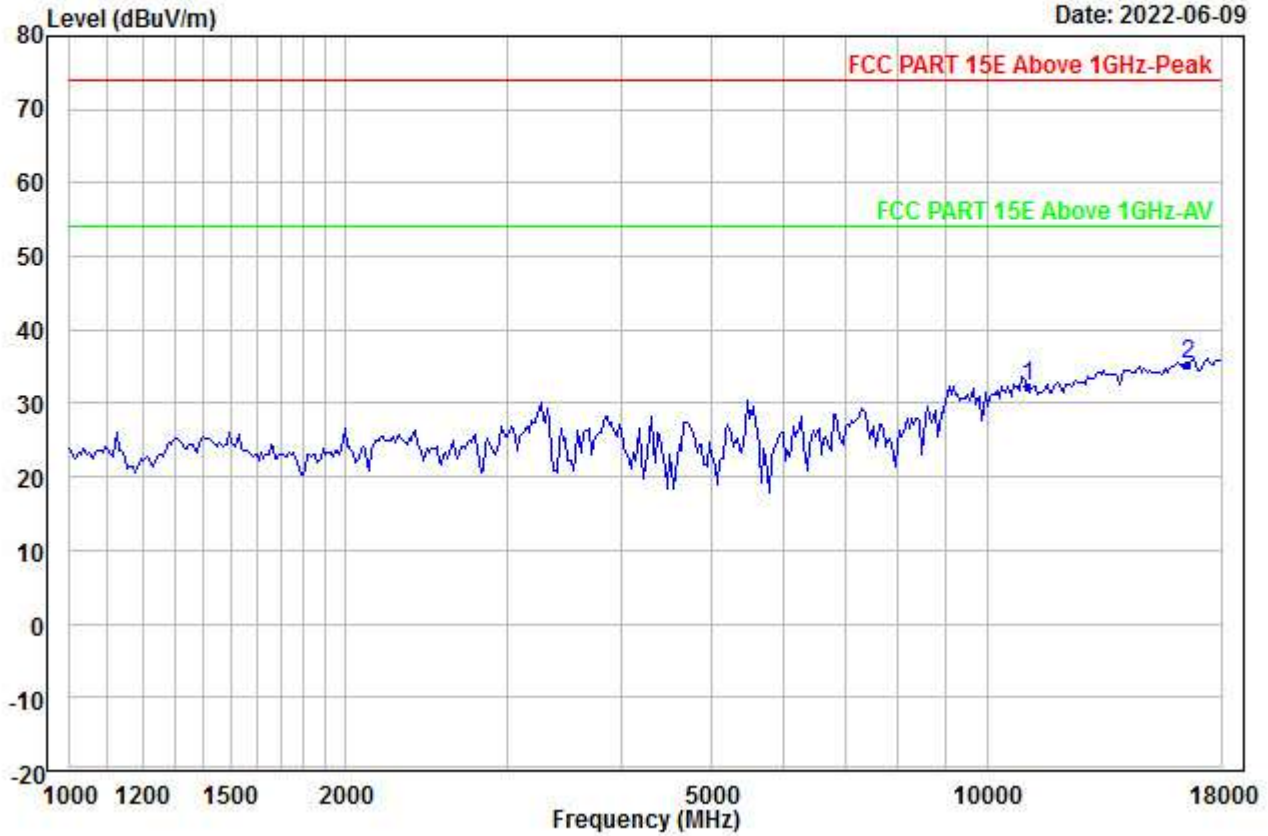


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC80_ANT0+1_5530
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 11060.000	24.94	38.55	45.13	0.00	13.96	32.32	54.00	-21.68	---	---	Aver
2 PP16590.000	22.82	41.64	46.71	0.00	17.50	35.25	54.00	-18.75	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00277.EMI

Date: 2022-06-09

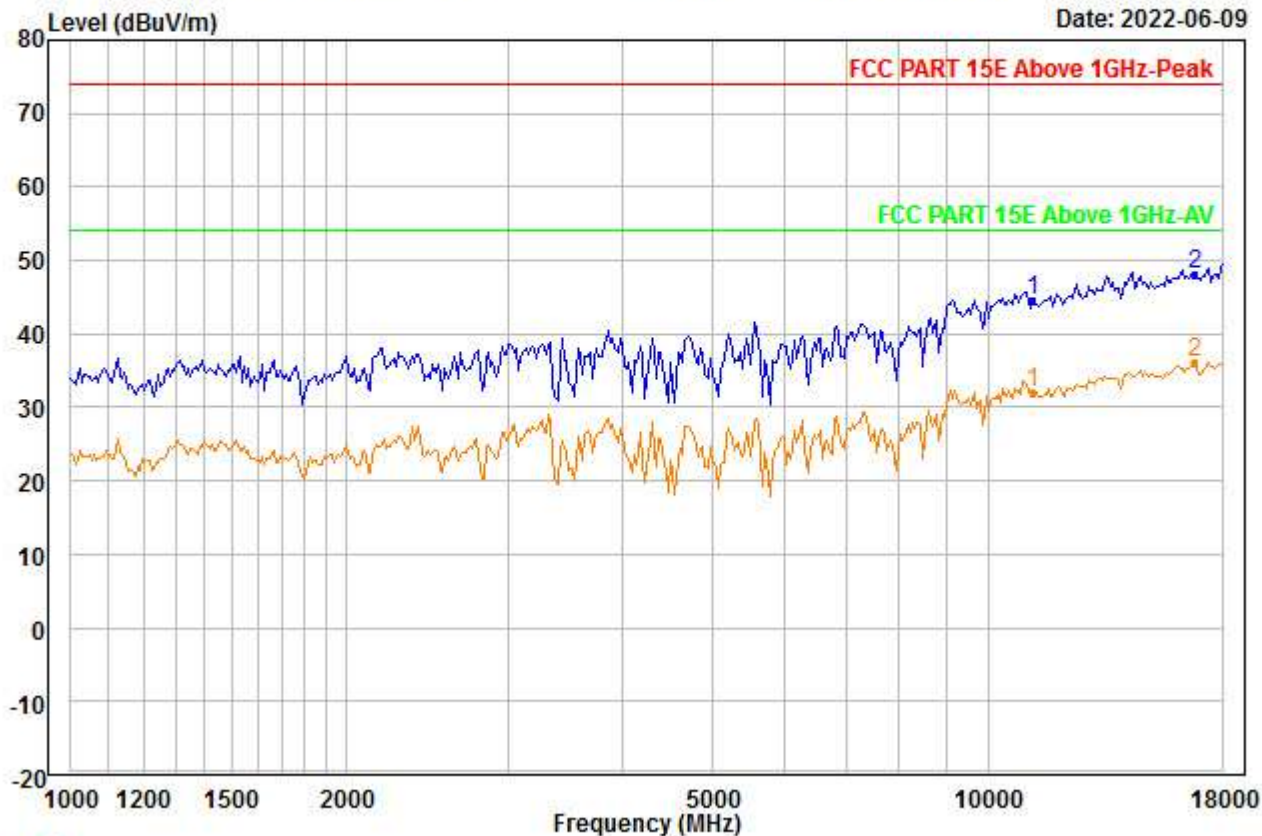


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC80_ANT0+1_5610
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11220.000	37.27	38.68	45.48	0.00	14.08	44.55	74.00	-29.45	---	---	Peak
2	PP16830.000	35.39	42.03	47.00	0.00	17.60	48.02	74.00	-25.98	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00278.EMI

Date: 2022-06-09

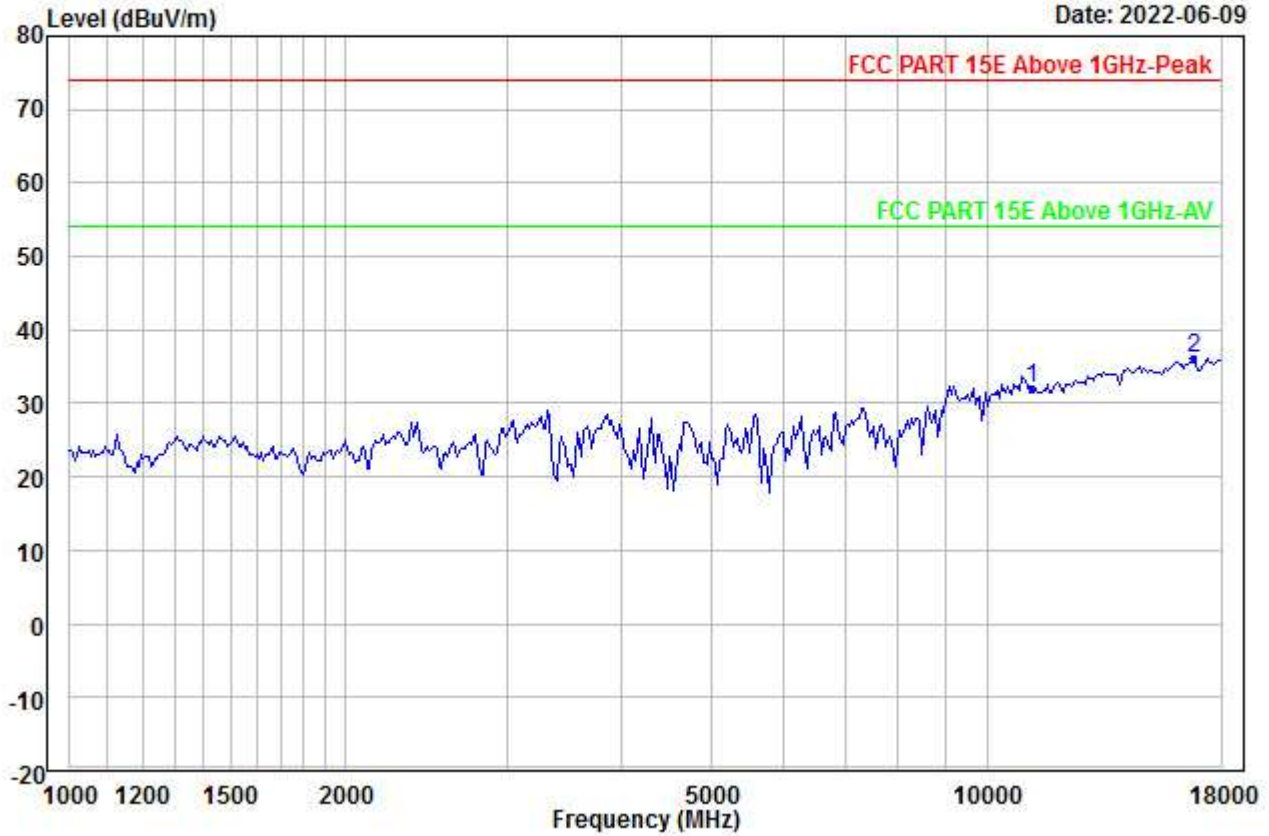


Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC80_ANT0+1_5610
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11220.000	24.87	38.68	45.48	0.00	14.08	32.15	54.00	-21.85	---	---	Aver
2	PP16830.000	23.40	42.03	47.00	0.00	17.60	36.03	54.00	-17.97	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00279.EMI

Date: 2022-06-09

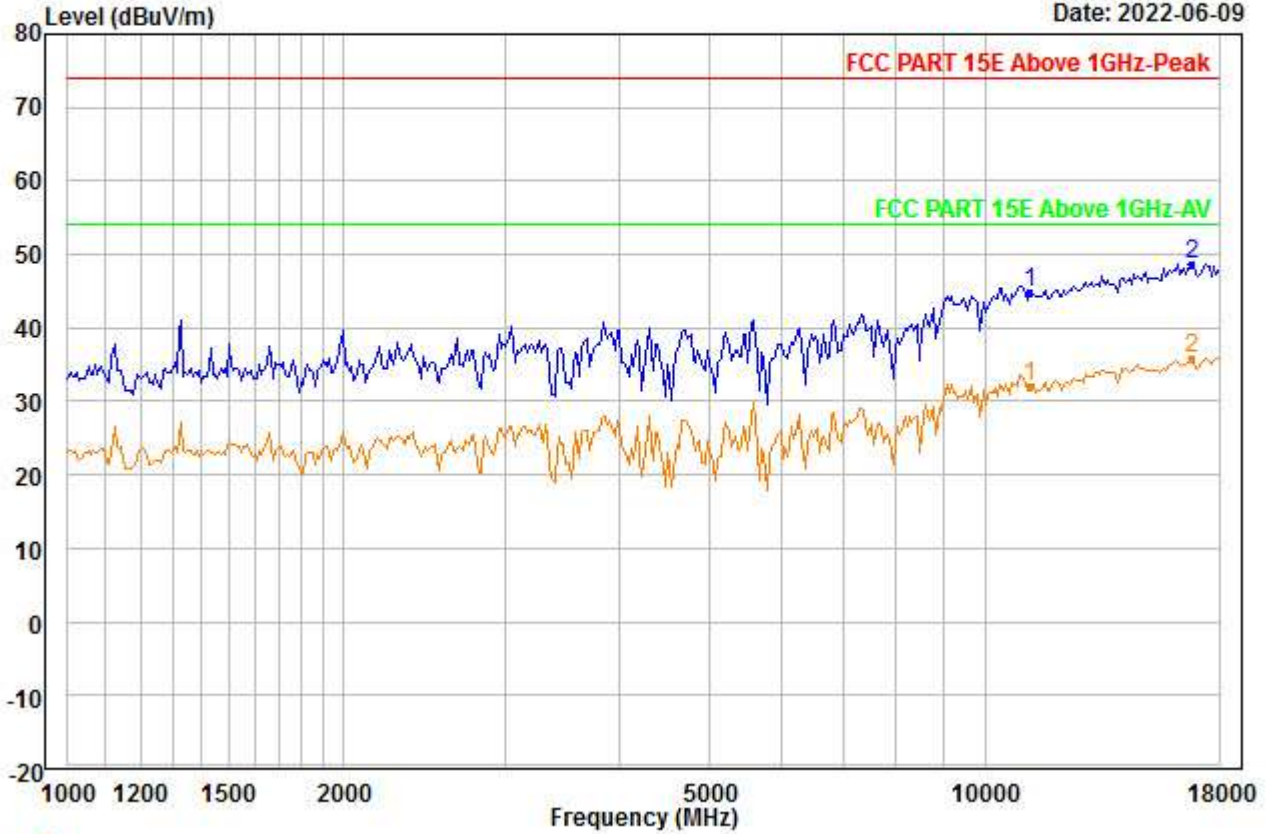


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC80_ANT0+1_5610
 Remark :

	Read Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11220.000	37.45	38.68	45.48	0.00	14.08	44.73	74.00	-29.27	---	---	Peak
2	PP16830.000	36.12	42.03	47.00	0.00	17.60	48.75	74.00	-25.25	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00280.EMI

Date: 2022-06-09

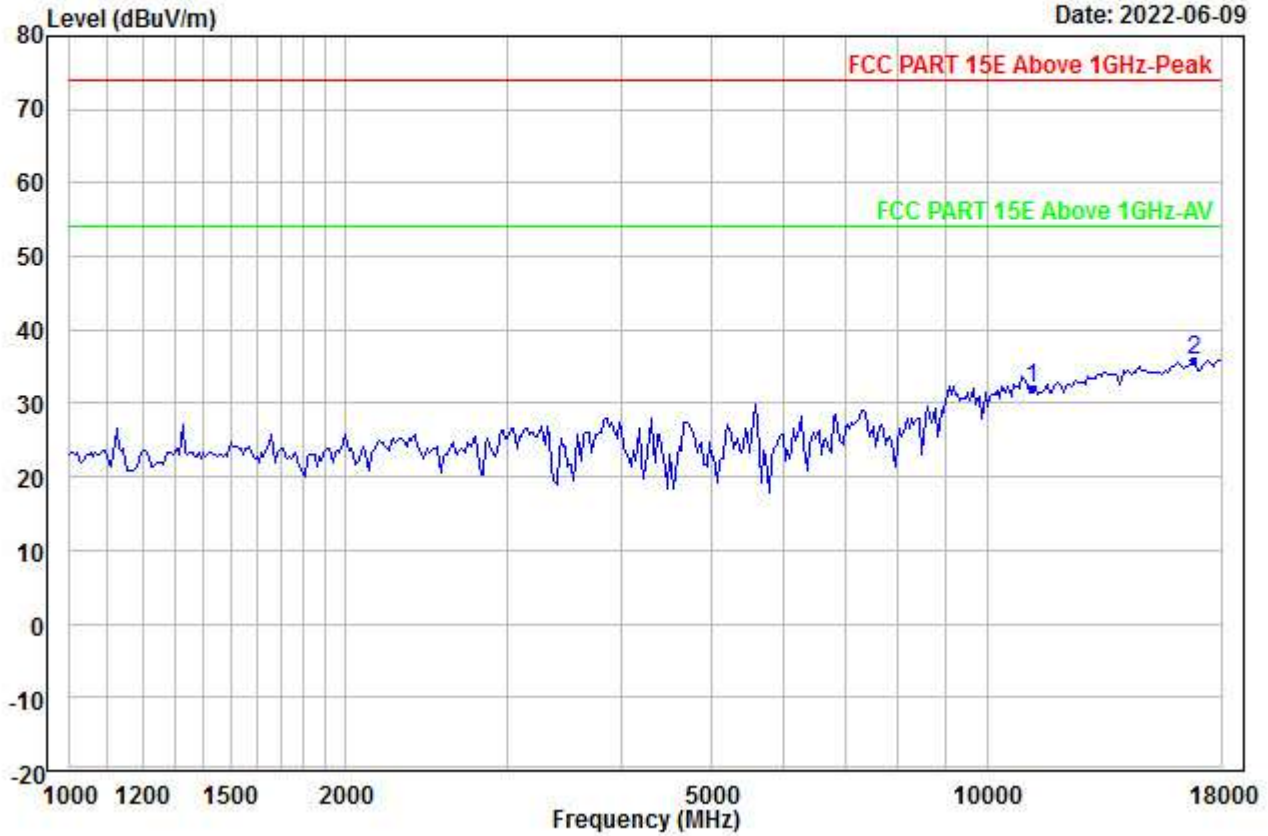


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC80_ANT0+1_5610
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 11220.000	24.79	38.68	45.48	0.00	14.08	32.07	54.00	-21.93	---	---	Aver
2 PP16830.000	23.30	42.03	47.00	0.00	17.60	35.93	54.00	-18.07	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00281.EMI

Date: 2022-06-09

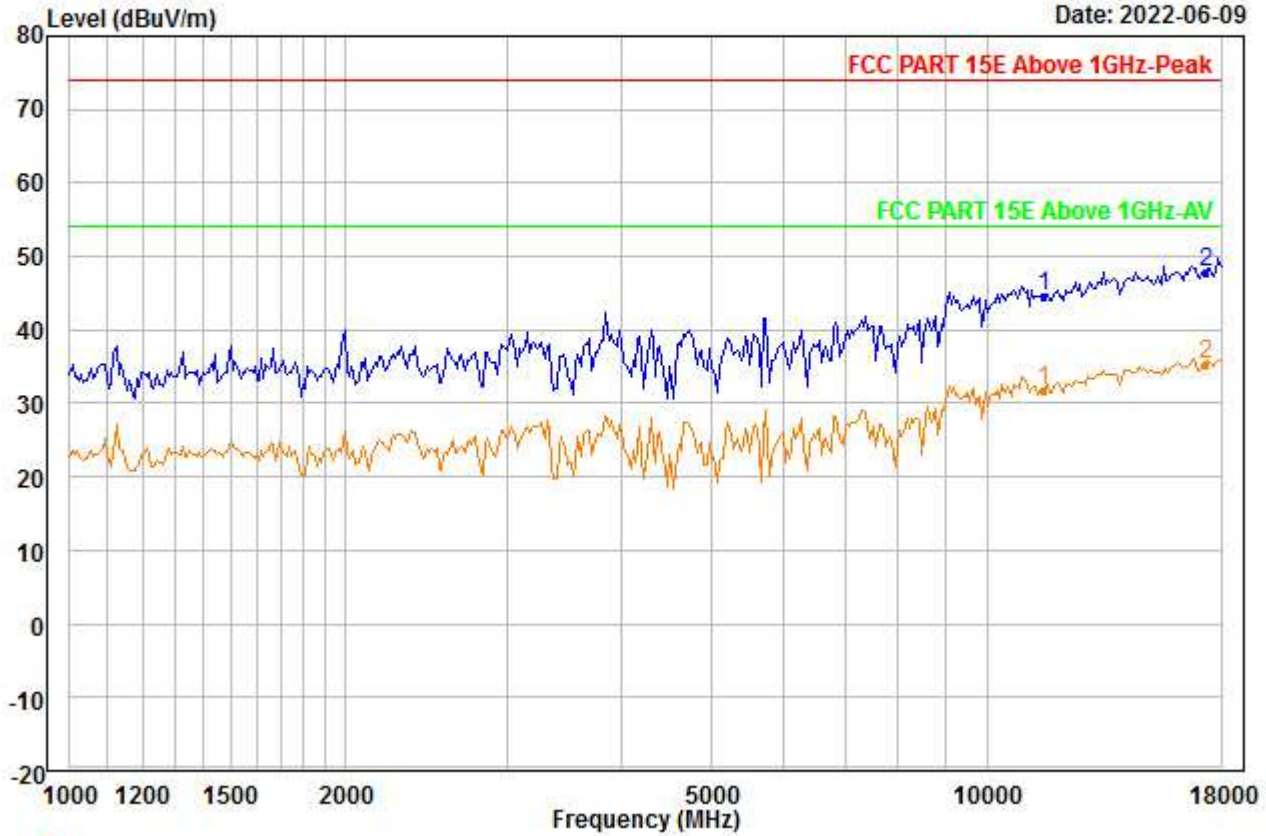


Trace: 1

Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC80_ANT0+1_5775
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 11550.000	37.50	38.93	46.09	0.00	14.32	44.66	74.00	-29.34	---	---	Peak
2 PP17325.000	34.54	42.17	46.81	0.00	17.88	47.78	74.00	-26.22	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00282.EMI

Date: 2022-06-09

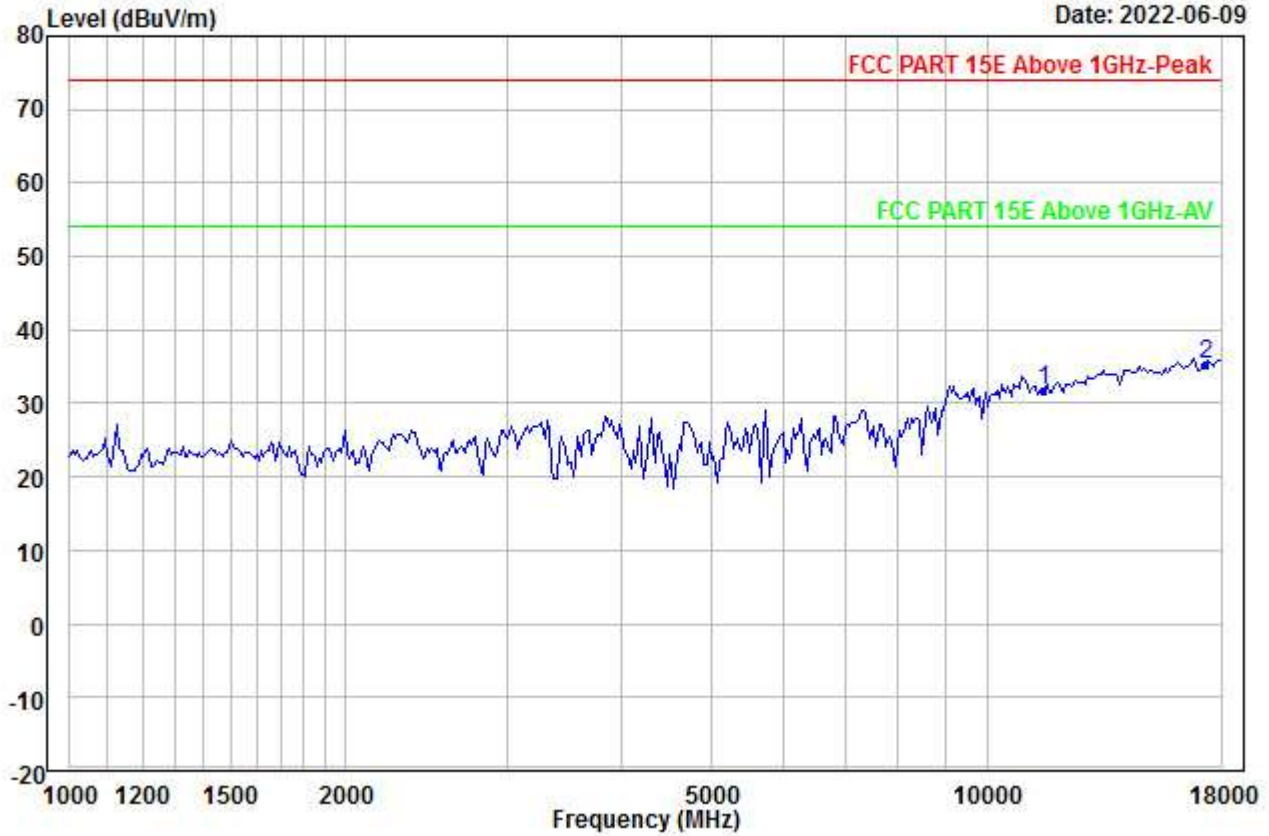


Condition : Horizontal
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC80_ANT0+1_5775
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Remarks
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11550.000	24.74	38.93	46.09	0.00	14.32	31.90	54.00	-22.10	---	---	Aver
2	PP17325.000	22.00	42.17	46.81	0.00	17.88	35.24	54.00	-18.76	---	---	Aver

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00283.EMI

Date: 2022-06-09

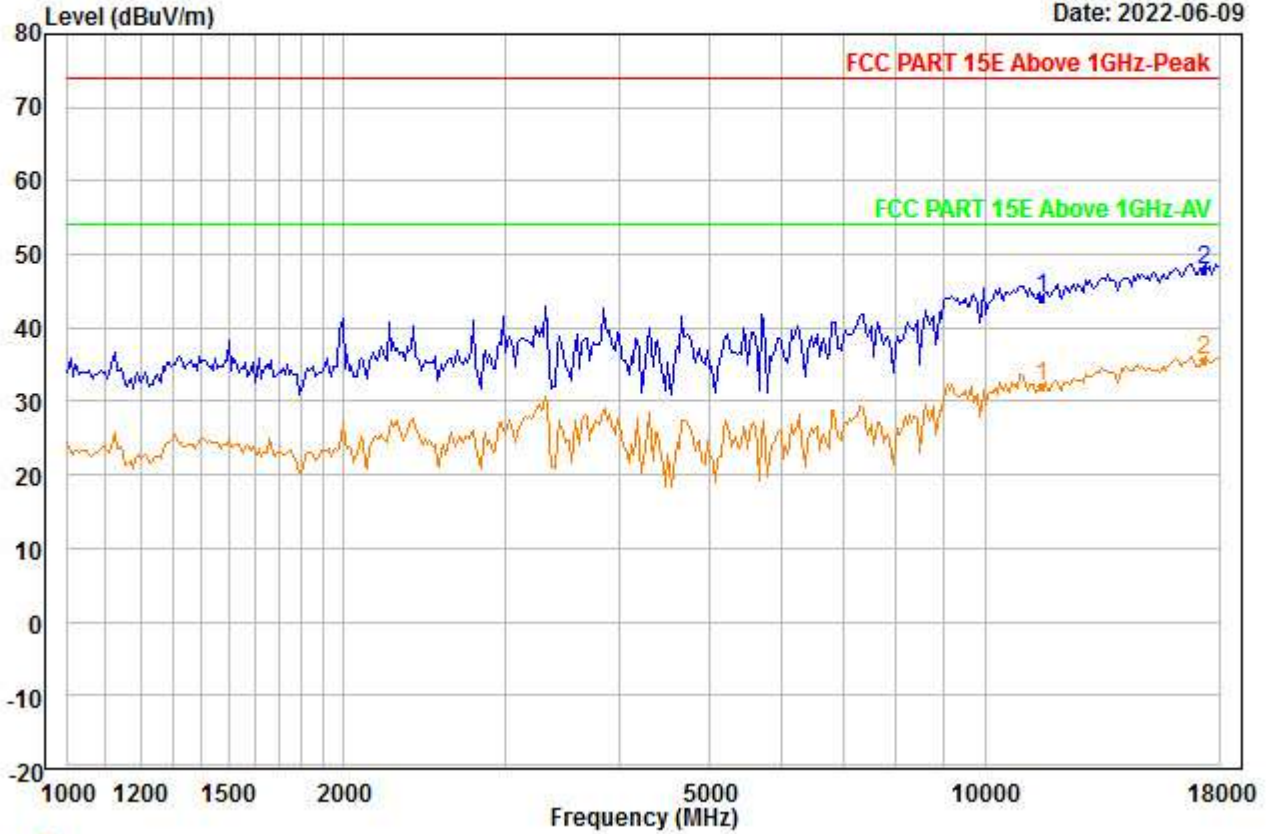


Trace: 1

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC80_ANT0+1_5775
 Remark :

	Freq	Read Level	Ant Factor	Preamp Factor	Aux Factor	Cable Loss	Level	Limit Line	Over Limit	APos	TPos	Rem:
	MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1	11550.000	36.80	38.93	46.09	0.00	14.32	43.96	74.00	-30.04	---	---	Peak
2	PP17325.000	34.65	42.17	46.81	0.00	17.88	47.89	74.00	-26.11	---	---	Peak

File: F:\Test Template\上海ITS\2022\220523032 SA750\B\5G\RSE\4_00284.EMI

Date: 2022-06-09

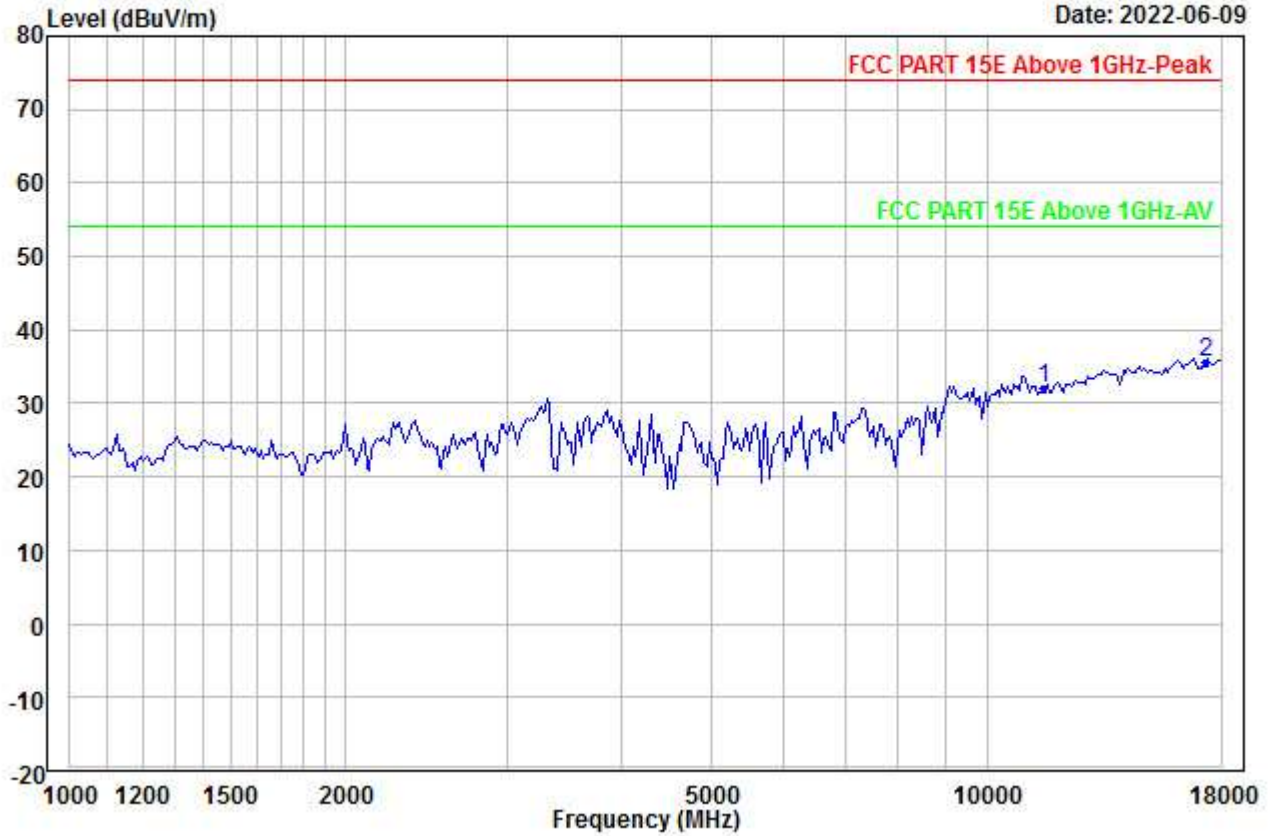

Condition : Vertical
 Temp.(C)/Hum.(%): 22.3(C) / 51%
 Press : 100.4kPa
 Product : SA750
 Model No. : SA750
 Power Rating : AC 120V/60Hz
 Test Engineer : Lucas
 Test Mode : AC80_ANT0+1_5775
 Remark :

	Read	Ant	Preamp	Aux	Cable	Limit	Over	APos	TPos	Rem:	
Freq	Level	Factor	Factor	Factor	Loss	Line	Limit				
MHz	dBuV	dB/m	dB	dB	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 11550.000	24.82	38.93	46.09	0.00	14.32	31.98	54.00	-22.02	---	---	Aver
2 PP17325.000	22.22	42.17	46.81	0.00	17.88	35.46	54.00	-18.54	---	---	Aver