

shown in 15.209, and the emissions appearing within RSS-Gen section 8.10 Restricted frequency bands shall not exceed the limits shown in RSS-Gen section 8.9, all the other emissions shall be at least 20 dB below the fundamental emissions or comply with 15.209 limits and RSS-Gen section 8.9 limits..

### 8.3. Test procedure

(1) EUT height should be 0.8 m for below 1 GHz at a semi-anechoic chamber while EUT height should be 1.5 m for above 1 GHz at full chamber or semi-anechoic chamber ground with absorbers.

(2) The antenna used as below table.

Test frequency range	Test antenna used	Measuring distance
9 kHz-30 MHz	Active Loop antenna	3 m
30 MHz-1 GHz	Trilog Broadband Antenna	3 m
1 GHz-18 GHz	Double Ridged Horn Antenna(1GHz-18GHz)	3 m
18 GHz-40 GHz	Horn Antenna(18GHz-40GHz)	1 m

According ANSI C63.10:2013 clause 6.4.4.2 and 6.5.3, for measurements below 30 MHz, the loop antenna was positioned with its plane vertical from the EUT and rotated about its vertical axis for maximum response at each azimuth position around the EUT. And the loop antenna also be positioned with its plane horizontal at the specified distance from the EUT. The center of the loop is 1 m above the ground. for measurement above 30 MHz, the Trilog Broadband Antenna or Horn Antenna was located 3 m from EUT, Measurements were made with the antenna positioned in both the horizontal and vertical planes of Polarization, and the measurement antenna was varied from 1 m to 4 m. in height above the reference ground plane to obtain the maximum signal strength.

(3) Below pre-scan procedure was first performed in order to find prominent frequency spectrum radiated emissions from 9 kHz to 25 GHz:

(a) Scanning the peak frequency spectrum with the antenna specified in step (3), and the EUT was rotated 360 degree, the antenna height was varied from 1 m to 4 m (Except loop antenna, it's fixed 1m above ground.)

(b) Change work frequency or channel of device if practicable.

(c) Change modulation type of device if practicable.

(d) Change power supply range from 85% to 115% of the rated supply voltage

(e) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions.

Spectrum frequency from 9 kHz to 25 GHz (tenth harmonic of fundamental frequency) was investigated, and no any obvious emission were detected from 18GHz to 25GHz, so below final test was performed with frequency range from 9kHz to 18GHz.

(4) For final emissions measurements at each frequency of interest, the EUT was rotated and the

antenna height was varied between 1 m and 4 m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10 2013 on Radiated Emission test.

- (5) The emissions from 9 kHz to 1 GHz were measured based on CISPR QP detector except for the frequency bands 9-90 kHz, 110-490 kHz, for emissions from 9 kHz-90 kHz, 110 kHz-490 kHz and above 1 GHz were measured based on average detector, for emissions above 1 GHz, peak emissions also be measured and need comply with Peak limit.
- (6) The emissions from 9 kHz to 1 GHz, QP or average values were measured with EMI receiver with below RBW

Frequency band	RBW
9 kHz-150 kHz	200 Hz
150 kHz-30 MHz	9 kHz
30 MHz-1 GHz	120 kHz

- (7) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1 MHz, VBW is set at 3 MHz for Peak measure; RMS detector RBW 1 MHz VBW 10 Hz for Average measure (according ANSI C63.10:2013 clause 4.2.3.2.3 procedure for average measure).

#### 8.4. Test result

##### Pass. (See below detailed test result)

All the emissions except fundamental emission from 9 kHz to 25 GHz were comply with 15.209 limits and RSS-Gen section 8.9 limits.

Note1: According exploratory test, the emission levels are 20 dB below the limit detected from 9 kHz to 30 MHz and 18 GHz to 25 GHz, so the final test was performed with frequency range from 30 MHz to 18 GHz and recorded in below.

Note2: 30 MHz ~ 25 GHz: (Scan with all mode, the worst case is 802.11ax HE20 mode)

Note3: For emissions below 1 GHz, according exploratory explorer test, when change Tx mode and channel, have no distinct influence on emissions level, so for emissions below 1 GHz, the final test was only performed with EUT working in 802.11ax HE20 mode.

Note4: For emissions above 1 GHz. If peak results comply with AV limit, AV Result is deemed to comply with AV limit. And the BT+SRD+2.4GWIFI is the worst simultaneous case and reported.

Radiated Emission test (below 1GHz)

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22051109-2E BAR 1300X\FCC BELOW 1G.EM6

Test Date : 2022-07-27

Tested By : James Gan

EUT : Multi-Channel Soundbar with wireless subwoofer

Model Number : BAR 1300X

Power Supply : AC 120V/60Hz


Test Mode : Tx Mode

Condition : Temp:22.8°C,Humi:52.6%,Press:100.3kPa

Antenna/Distance : 2021 VLUB 9163 #3/3m/HORIZONTAL

Memo : 2.4G WiFi

Data:  
7

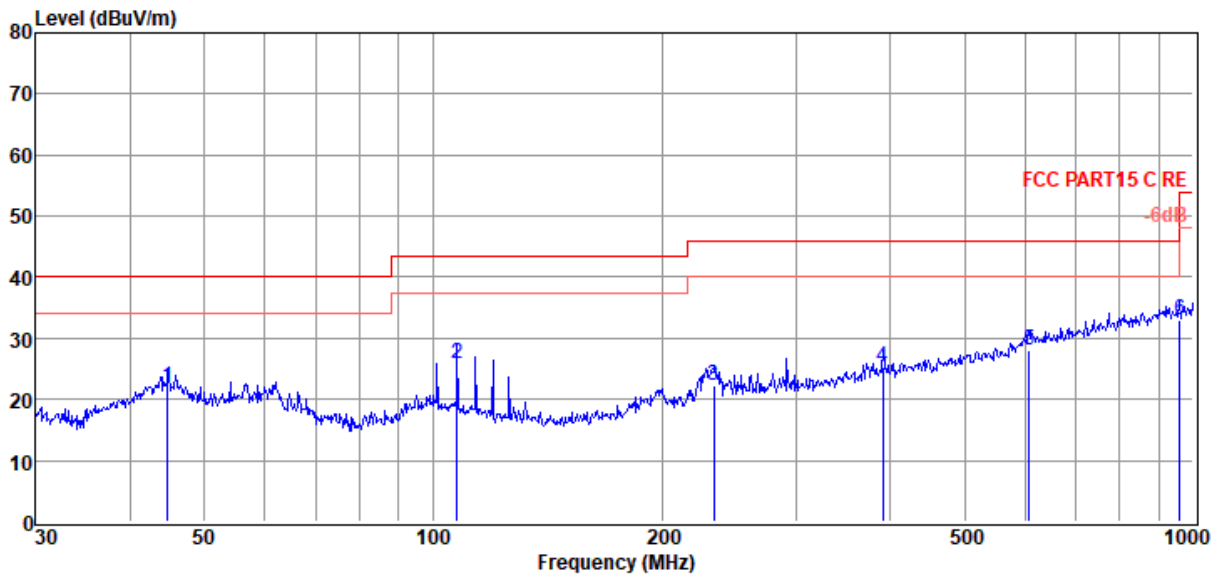

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	44.74	3.21	15.07	3.64	21.92	40.00	-18.08	QP	HORIZONTAL
2	107.51	11.07	10.65	4.03	25.75	43.50	-17.75	QP	HORIZONTAL
3	234.17	5.34	12.25	4.59	22.18	46.00	-23.82	QP	HORIZONTAL
4	390.72	4.93	15.33	5.12	25.38	46.00	-20.62	QP	HORIZONTAL
5	607.79	3.15	19.20	5.76	28.11	46.00	-17.89	QP	HORIZONTAL
6	958.79	4.30	22.12	6.62	33.04	46.00	-12.96	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.


2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 3# D:\E3 6.111\2022 Report Data\Q22051109-2E BAR 1300X\FCC BELOW 1G.EM6  
**Test Date** : 2022-07-27 **Tested By** : James Gan  
**EUT** : Multi-Channel Soundbar with wireless subwoofer **Model Number** : BAR 1300X  
**Power Supply** : AC 120V/60Hz **Test Mode** : Tx Mode  
**Condition** : Temp:22.8°C,Humi:52.6%,Press:100.3kPa **Antenna/Distance** : 2021 VLUB 9163 #3/3m/VERTICAL  
**Memo** : 2.4G WiFi

Data:  
8

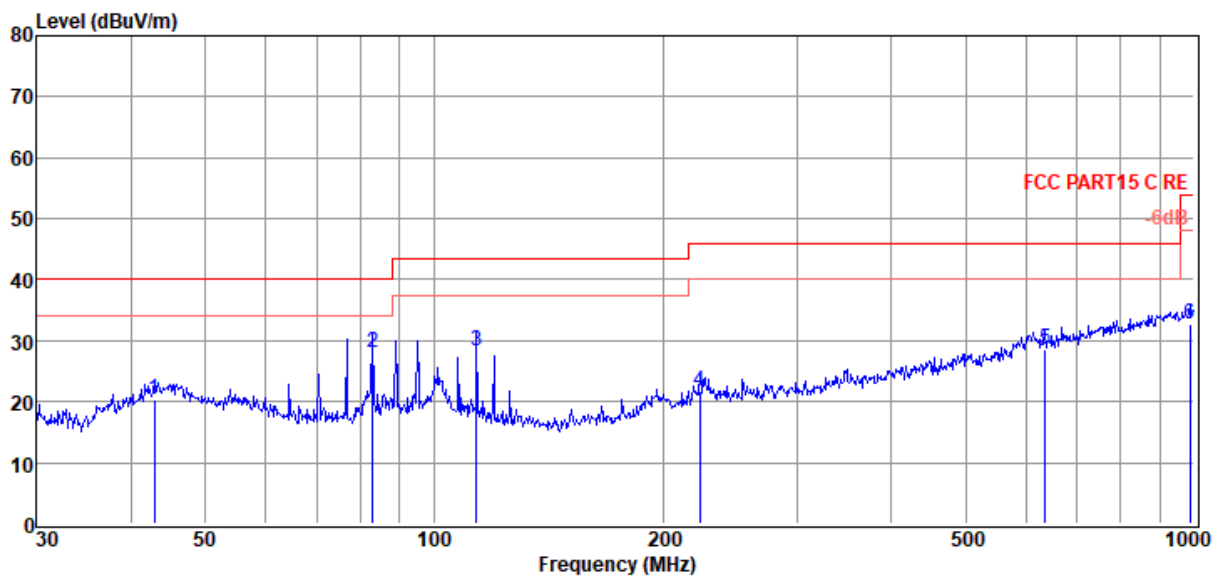


Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	42.90	2.30	14.34	3.63	20.27	40.00	-19.73	QP	VERTICAL
2	82.94	15.12	9.08	3.90	28.10	40.00	-11.90	QP	VERTICAL
3	113.71	14.49	9.86	4.07	28.42	43.50	-15.08	QP	VERTICAL
4	223.73	5.36	11.70	4.55	21.61	46.00	-24.39	QP	VERTICAL
5	636.13	3.78	18.92	5.83	28.53	46.00	-17.47	QP	VERTICAL
6	986.07	3.65	22.40	6.77	32.82	54.00	-21.18	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.  
 2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.  
 3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

## Radiated Emission test (above 1GHz) TR-4-E-009 Radiated Emission Test Result

<b>Test Site</b> : DDT 3m Chamber 3#  <b>Test Date</b> : 2022-07-05  <b>EUT</b> : Multi-Channel Soundbar with wireless subwoofer  <b>Power Supply</b> : AC 120V/60Hz  <b>Condition</b> : Temp:22.2°C,Humi:52.4%,Press:100.3kPa  <b>Memo</b> : 11AX 20 2412 SU	D:\E3 6.111\2022 Report Data\Q22051109-2E BAR 1300X\FCC ABOVE 1G 2.4G.EM6  <b>Tested By</b> : James Gan  <b>Model Number</b> : BAR 1300X  <b>Test Mode</b> : Tx Mode  <b>Antenna/Distance</b> : 2021 BBHA 9120D 3#/3m/HORIZONTAL
---	--

Data: 39

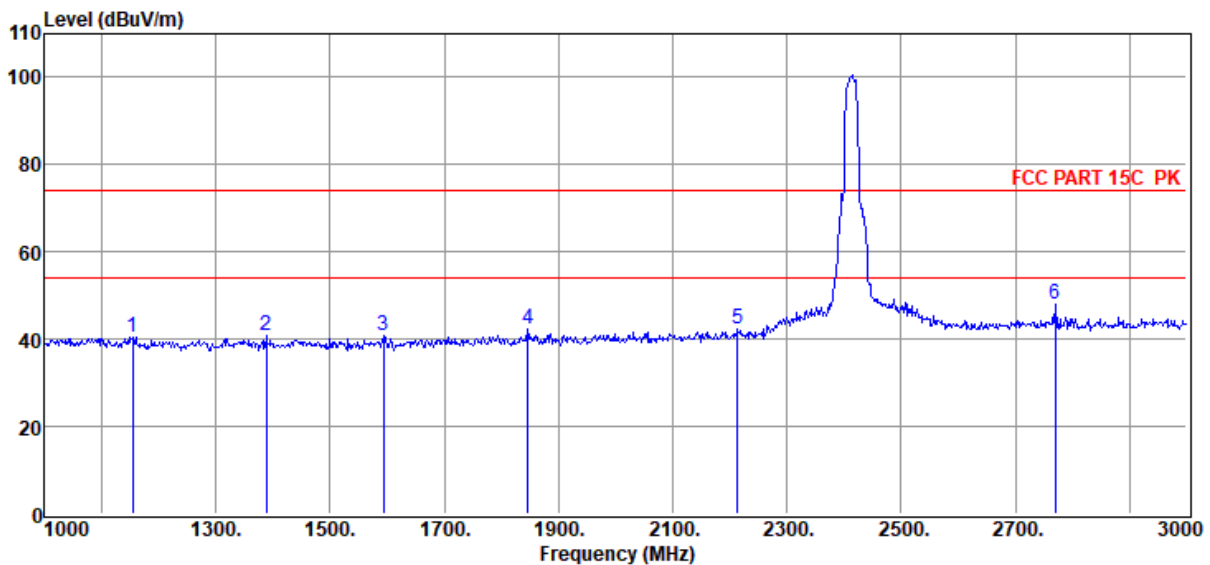


Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Filter Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	1154.00	51.37	25.47	38.13	1.19	0.53	40.43	74.00	-33.57	Peak	HORIZONTAL
2	1388.00	52.06	25.42	38.48	1.32	0.57	40.89	74.00	-33.11	Peak	HORIZONTAL
3	1594.00	51.88	25.64	38.79	1.42	0.61	40.76	74.00	-33.24	Peak	HORIZONTAL
4	1846.00	53.19	26.30	39.17	1.53	0.65	42.50	74.00	-31.50	Peak	HORIZONTAL
5	2214.00	52.33	27.09	39.51	1.66	0.70	42.27	74.00	-31.73	Peak	HORIZONTAL
6	2770.00	56.70	28.63	39.78	1.81	0.76	48.12	74.00	-25.88	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 3# D:\E3 6.111\2022 Report Data\Q22051109-2E BAR 1300X\FCC ABOVE 1G 2.4G.EM6  
**Test Date** : 2022-07-05 **Tested By** : James Gan  
**EUT** : Multi-Channel Soundbar with wireless subwoofer **Model Number** : BAR 1300X  
**Power Supply** : AC 120V/60Hz **Test Mode** : Tx Mode  
**Condition** : Temp:22.2°C,Humi:52.4%,Press:100.3kPa **Antenna/Distance** : 2021 BBHA 9120D 3#/3m/VERTICAL  
**Memo** : 11AX 20 2412 SU

Data: 40

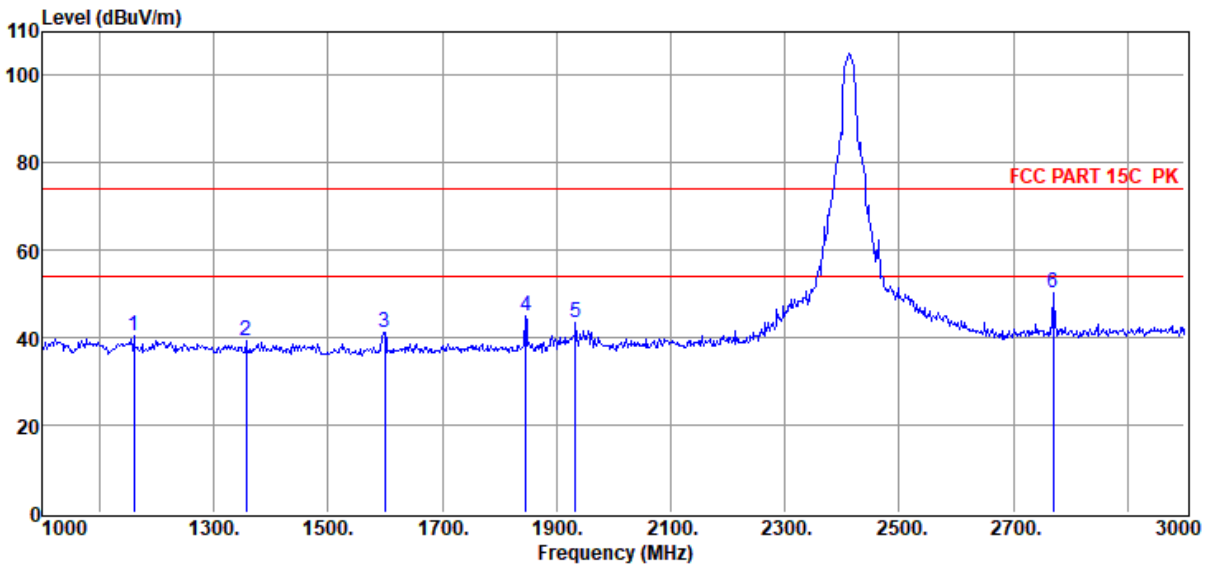

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	1160.00	51.35	25.47	38.14	1.19	0.53	40.40	74.00	-33.60	Peak	VERTICAL
2	1356.00	50.40	25.43	38.43	1.30	0.56	39.26	74.00	-34.74	Peak	VERTICAL
3	1600.00	52.31	25.66	38.80	1.42	0.61	41.20	74.00	-32.80	Peak	VERTICAL
4	1846.00	55.58	26.30	39.17	1.53	0.65	44.89	74.00	-29.11	Peak	VERTICAL
5	1934.00	54.09	26.53	39.30	1.57	0.67	43.56	74.00	-30.44	Peak	VERTICAL
6	2770.00	58.90	28.63	39.78	1.81	0.76	50.32	74.00	-23.68	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 3#  
**Test Date** : 2022-07-05  
**EUT** : Multi-Channel Soundbar with wireless subwoofer  
**Power Supply** : AC 120V/60Hz  
**Condition** : Temp:22.2°C,Humi:52.4%,Press:100.3kPa  
**Memo** : 11AX 20 2437 SU

**Tested By** : James Gan  
**Model Number** : BAR 1300X  
**Test Mode** : Tx Mode  
**Antenna/Distance** : 2021 BBHA 9120D  
 3#/3m/HORIZONTAL

D:\E3 6.111\2022 Report Data\Q22051109-2E BAR 1300X\FCC ABOVE 1G 2.4G.EM6

Data: 41

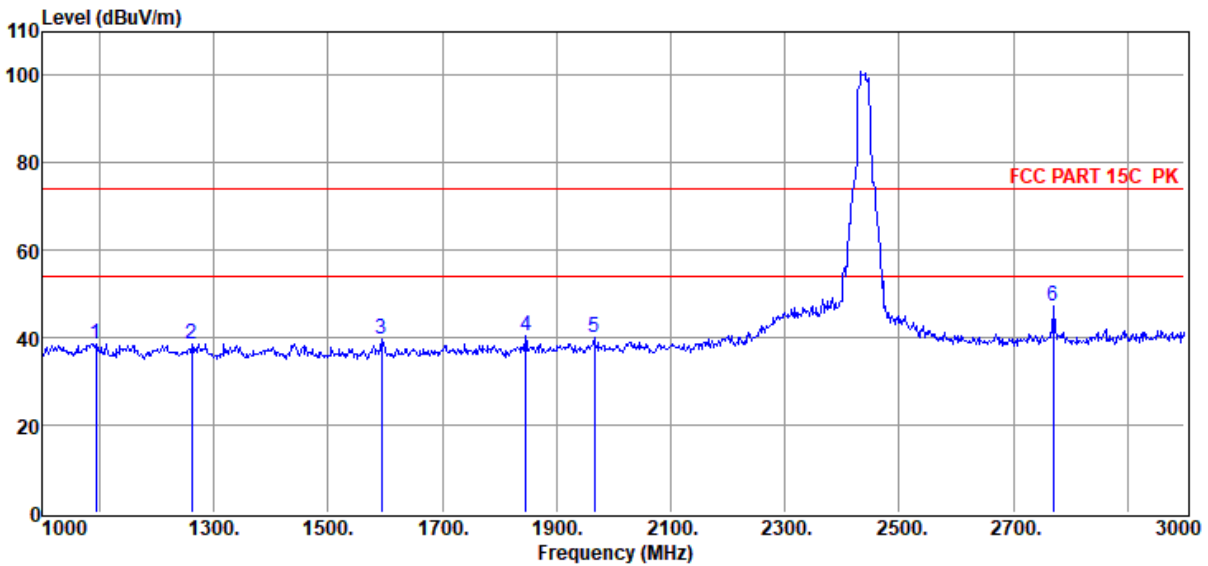


Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	1094.00	49.55	25.48	38.04	1.15	0.52	38.66	74.00	-35.34	Peak	HORIZONTAL
2	1262.00	49.77	25.45	38.29	1.25	0.55	38.73	74.00	-35.27	Peak	HORIZONTAL
3	1594.00	50.64	25.64	38.79	1.42	0.61	39.52	74.00	-34.48	Peak	HORIZONTAL
4	1846.00	51.16	26.30	39.17	1.53	0.65	40.47	74.00	-33.53	Peak	HORIZONTAL
5	1966.00	50.56	26.61	39.35	1.59	0.67	40.08	74.00	-33.92	Peak	HORIZONTAL
6	2770.00	55.90	28.63	39.78	1.81	0.76	47.32	74.00	-26.68	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 3# D:\E3 6.111\2022 Report Data\Q22051109-2E BAR 1300X\FCC ABOVE 1G 2.4G.EM6  
**Test Date** : 2022-07-05 **Tested By** : James Gan  
**EUT** : Multi-Channel Soundbar with wireless subwoofer **Model Number** : BAR 1300X  
**Power Supply** : AC 120V/60Hz **Test Mode** : Tx Mode  
**Condition** : Temp:22.2°C,Humi:52.4%,Press:100.3kPa **Antenna/Distance** : 2021 BBHA 9120D 3#/3m/VERTICAL  
**Memo** : 11AX 20 2437 SU

Data: 42

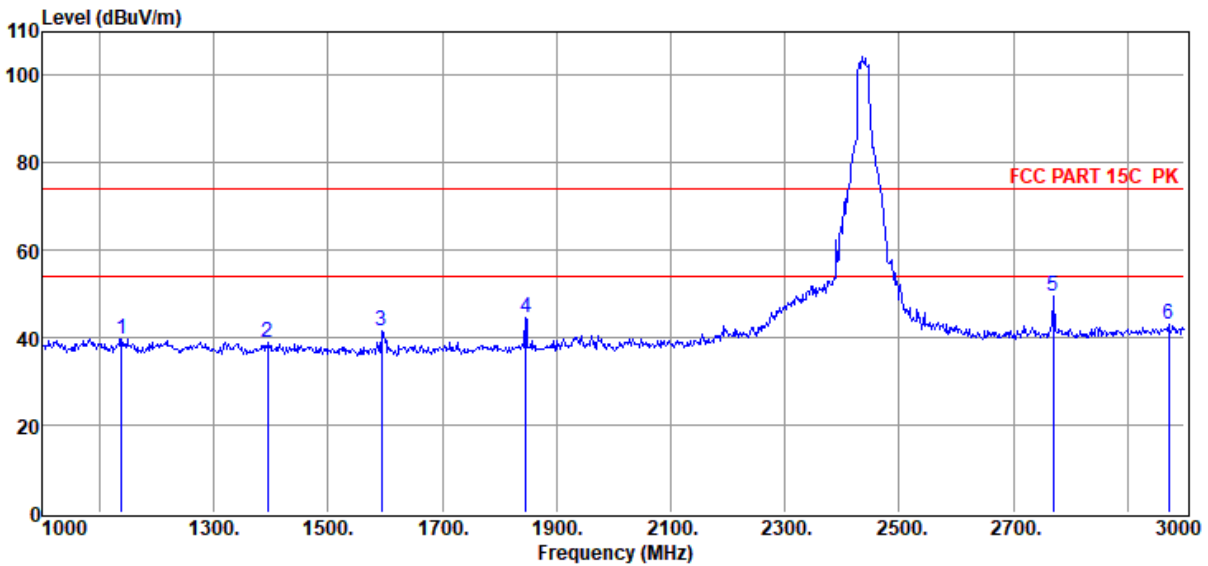

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	1138.00	50.70	25.47	38.11	1.18	0.52	39.76	74.00	-34.24	Peak	VERTICAL
2	1394.00	49.99	25.42	38.49	1.32	0.57	38.81	74.00	-35.19	Peak	VERTICAL
3	1594.00	52.53	25.64	38.79	1.42	0.61	41.41	74.00	-32.59	Peak	VERTICAL
4	1846.00	55.47	26.30	39.17	1.53	0.65	44.78	74.00	-29.22	Peak	VERTICAL
5	2770.00	58.28	28.63	39.78	1.81	0.76	49.70	74.00	-24.30	Peak	VERTICAL
6	2972.00	51.04	29.39	39.89	1.86	0.79	43.19	74.00	-30.81	Peak	VERTICAL


Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.



# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 3# D:\E3 6.111\2022 Report Data\Q22051109-2E BAR 1300X\FCC ABOVE 1G 2.4G.EM6  
**Test Date** : 2022-07-05 **Tested By** : James Gan  
**EUT** : Multi-Channel Soundbar with wireless subwoofer **Model Number** : BAR 1300X  
**Power Supply** : AC 120V/60Hz **Test Mode** : Tx Mode  
**Condition** : Temp:22.2°C,Humi:52.4%,Press:100.3kPa **Antenna/Distance** : 2021 BBHA 9120D 3#/3m/HORIZONTAL  
**Memo** : 11AX 20 2462 SU

Data: 43

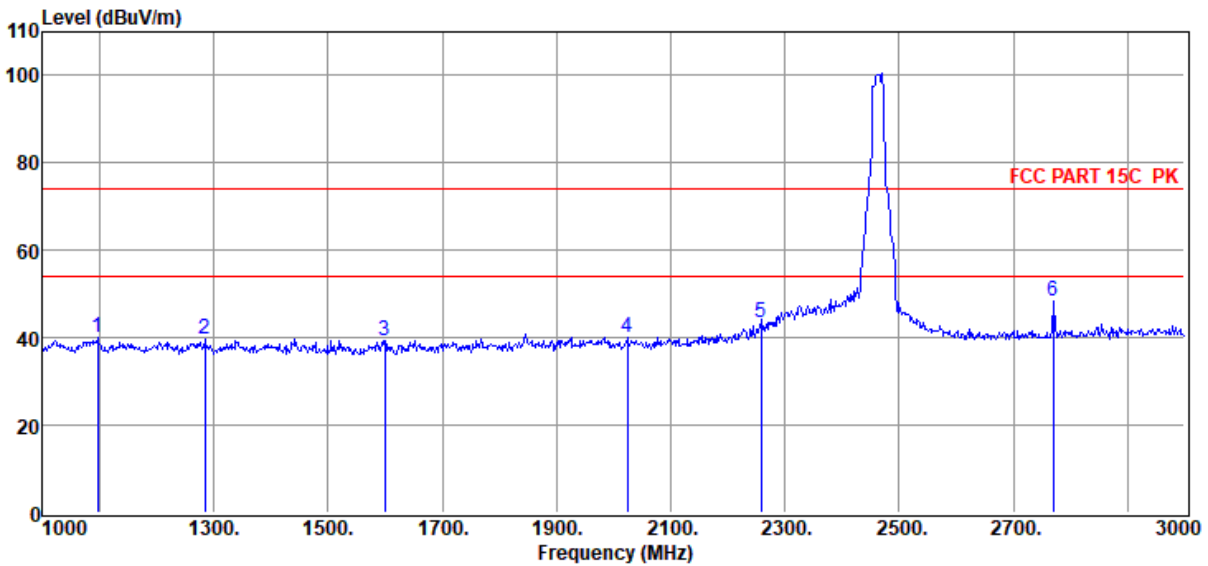


Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	1096.00	50.84	25.48	38.04	1.15	0.52	39.95	74.00	-34.05	Peak	HORIZONTAL
2	1284.00	50.68	25.44	38.33	1.26	0.55	39.60	74.00	-34.40	Peak	HORIZONTAL
3	1600.00	50.59	25.66	38.80	1.42	0.61	39.48	74.00	-34.52	Peak	HORIZONTAL
4	2024.00	50.49	26.74	39.41	1.61	0.68	40.11	74.00	-33.89	Peak	HORIZONTAL
5	2258.00	53.41	27.16	39.53	1.67	0.71	43.42	74.00	-30.58	Peak	HORIZONTAL
6	2770.00	57.07	28.63	39.78	1.81	0.76	48.49	74.00	-25.51	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 3# D:\E3 6.111\2022 Report Data\Q22051109-2E BAR 1300X\FCC ABOVE 1G 2.4G.EM6  
**Test Date** : 2022-07-05 **Tested By** : James Gan  
**EUT** : Multi-Channel Soundbar with wireless subwoofer **Model Number** : BAR 1300X  
**Power Supply** : AC 120V/60Hz **Test Mode** : Tx Mode  
**Condition** : Temp:22.2°C,Humi:52.4%,Press:100.3kPa **Antenna/Distance** : 2021 BBHA 9120D 3#/3m/VERTICAL  
**Memo** : 11AX 20 2462 SU

Data: 44

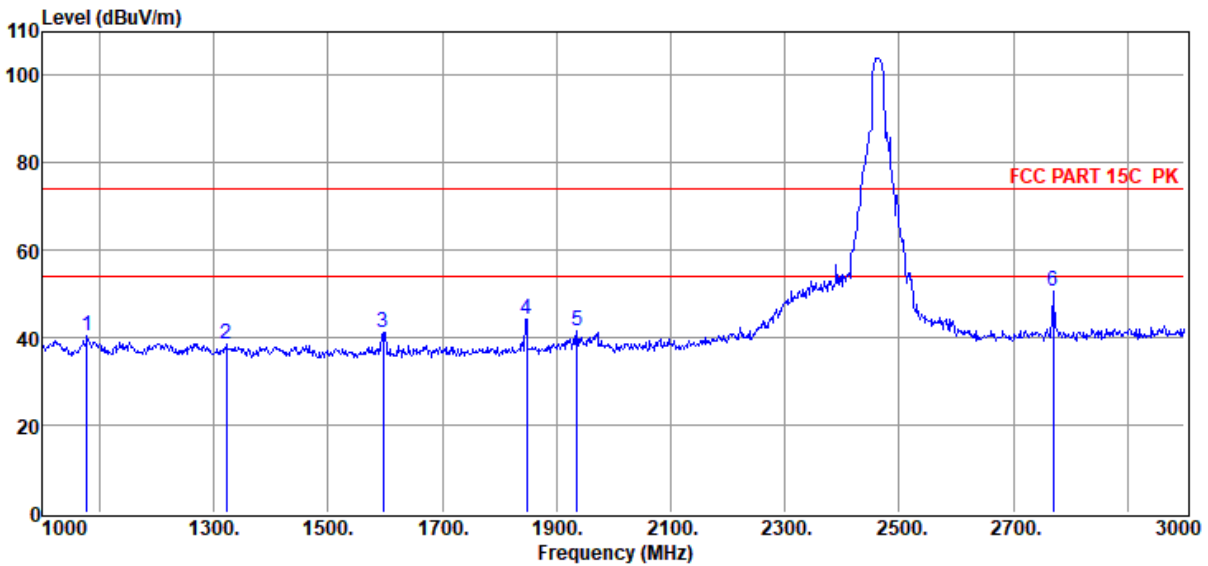


Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	1078.00	51.31	25.48	38.02	1.14	0.51	40.42	74.00	-33.58	Peak	VERTICAL
2	1322.00	49.58	25.44	38.38	1.28	0.56	38.48	74.00	-35.52	Peak	VERTICAL
3	1596.00	52.40	25.65	38.79	1.42	0.61	41.29	74.00	-32.71	Peak	VERTICAL
4	1848.00	54.95	26.30	39.17	1.53	0.65	44.26	74.00	-29.74	Peak	VERTICAL
5	1936.00	52.09	26.53	39.30	1.57	0.67	41.56	74.00	-32.44	Peak	VERTICAL
6	2770.00	59.25	28.63	39.78	1.81	0.76	50.67	74.00	-23.33	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 3# D:\E3 6.111\2022 Report Data\Q22051109-2E BAR 1300X\FCC ABOVE 1G 2.4G.EM6  
**Test Date** : 2022-07-05 **Tested By** : James Gan  
**EUT** : Multi-Channel Soundbar with wireless subwoofer **Model Number** : BAR 1300X  
**Power Supply** : AC 120V/60Hz **Test Mode** : Tx Mode  
**Condition** : Temp:22.2°C,Humi:52.4%,Press:100.3kPa **Antenna/Distance** : 2021 BBHA 9120D 3#/3m/HORIZONTAL  
**Memo** : 11AX 20 2412 SU

Data: 33

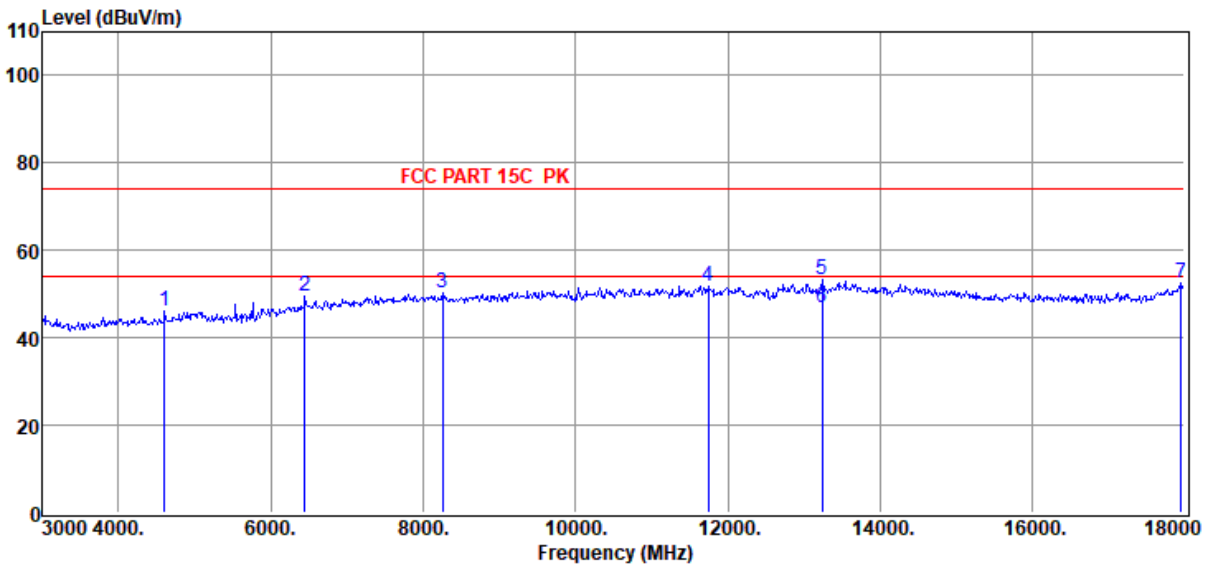


Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	4605.00	49.95	31.84	40.32	2.40	2.13	46.00	74.00	-28.00	Peak	HORIZONTAL
2	6450.00	48.65	35.08	40.14	3.25	2.56	49.40	74.00	-24.60	Peak	HORIZONTAL
3	8250.00	47.43	37.40	39.83	3.20	2.26	50.46	74.00	-23.54	Peak	HORIZONTAL
4	11745.00	46.46	39.10	40.13	4.01	2.39	51.83	74.00	-22.17	Peak	HORIZONTAL
5	13245.00	46.76	39.80	40.23	4.20	2.95	53.48	74.00	-20.52	Peak	HORIZONTAL
6	13245.00	40.10	39.80	40.23	4.20	2.95	46.82	54.00	-7.18	Average	HORIZONTAL
7	17955.00	42.23	42.22	40.67	4.95	3.78	52.51	74.00	-21.49	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 3# D:\E3 6.111\2022 Report Data\Q22051109-2E BAR 1300X\FCC ABOVE 1G 2.4G.EM6  
**Test Date** : 2022-07-05 **Tested By** : James Gan  
**EUT** : Multi-Channel Soundbar with wireless subwoofer **Model Number** : BAR 1300X  
**Power Supply** : AC 120V/60Hz **Test Mode** : Tx Mode  
**Condition** : Temp:22.2°C,Humi:52.4%,Press:100.3kPa **Antenna/Distance** : 2021 BBHA 9120D 3#/3m/VERTICAL  
**Memo** : 11AX 20 2412 SU

Data: 34

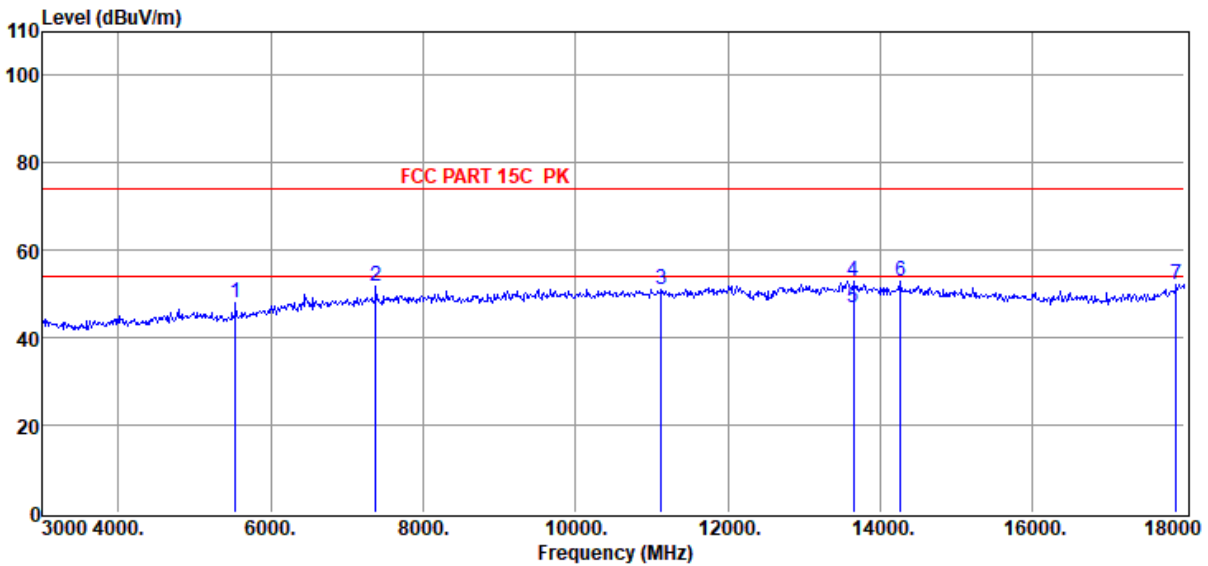


Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	5535.00	50.28	32.88	40.45	2.60	2.52	47.83	74.00	-26.17	Peak	VERTICAL
2	7380.00	49.70	36.30	39.74	3.11	2.27	51.64	74.00	-22.36	Peak	VERTICAL
3	11130.00	45.88	39.22	40.19	3.84	2.38	51.13	74.00	-22.87	Peak	VERTICAL
4	13650.00	45.92	39.97	39.94	4.15	2.92	53.02	74.00	-20.98	Peak	VERTICAL
5	13650.00	39.62	39.97	39.94	4.15	2.92	46.72	54.00	-7.28	Average	VERTICAL
6	14265.00	45.49	39.90	39.67	4.43	2.83	52.98	74.00	-21.02	Peak	VERTICAL
7	17895.00	42.27	41.85	40.64	4.93	3.76	52.17	74.00	-21.83	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 3# D:\E3 6.111\2022 Report Data\Q22051109-2E BAR 1300X\FCC ABOVE 1G 2.4G.EM6  
**Test Date** : 2022-07-05 **Tested By** : James Gan  
**EUT** : Multi-Channel Soundbar with wireless subwoofer **Model Number** : BAR 1300X  
**Power Supply** : AC 120V/60Hz **Test Mode** : Tx Mode  
**Condition** : Temp:22.2°C,Humi:52.4%,Press:100.3kPa **Antenna/Distance** : 2021 BBHA 9120D 3#/3m/HORIZONTAL  
**Memo** : 11AX 20 2437 SU

Data: 35

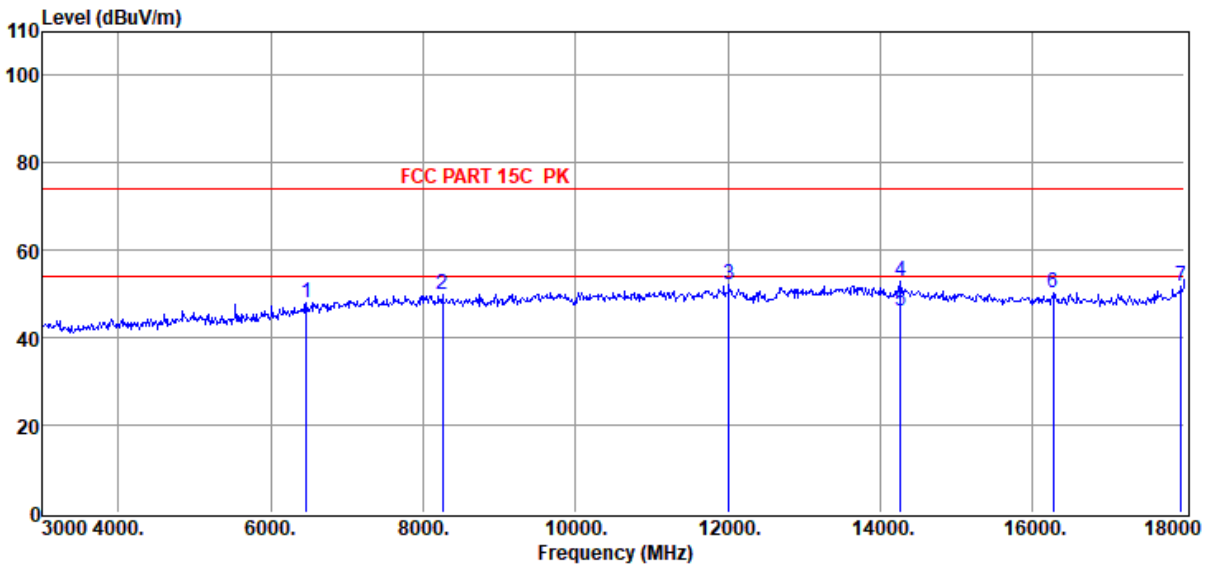


Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	6465.00	47.07	35.12	40.13	3.25	2.55	47.86	74.00	-26.14	Peak	HORIZONTAL
2	8250.00	47.01	37.40	39.83	3.20	2.26	50.04	74.00	-23.96	Peak	HORIZONTAL
3	12015.00	46.48	39.19	40.10	4.04	2.41	52.02	74.00	-21.98	Peak	HORIZONTAL
4	14265.00	45.42	39.90	39.67	4.43	2.83	52.91	74.00	-21.09	Peak	HORIZONTAL
5	14265.00	38.67	39.90	39.67	4.43	2.83	46.16	54.00	-7.84	Average	HORIZONTAL
6	16275.00	44.58	37.90	39.96	4.67	3.23	50.42	74.00	-23.58	Peak	HORIZONTAL
7	17955.00	41.57	42.22	40.67	4.95	3.78	51.85	74.00	-22.15	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 3# D:\E3 6.111\2022 Report Data\Q22051109-2E BAR 1300X\FCC ABOVE 1G 2.4G.EM6  
**Test Date** : 2022-07-05 **Tested By** : James Gan  
**EUT** : Multi-Channel Soundbar with wireless subwoofer **Model Number** : BAR 1300X  
**Power Supply** : AC 120V/60Hz **Test Mode** : Tx Mode  
**Condition** : Temp:22.2°C,Humi:52.4%,Press:100.3kPa **Antenna/Distance** : 2021 BBHA 9120D 3#/3m/VERTICAL  
**Memo** : 11AX 20 2437 SU

Data: 36

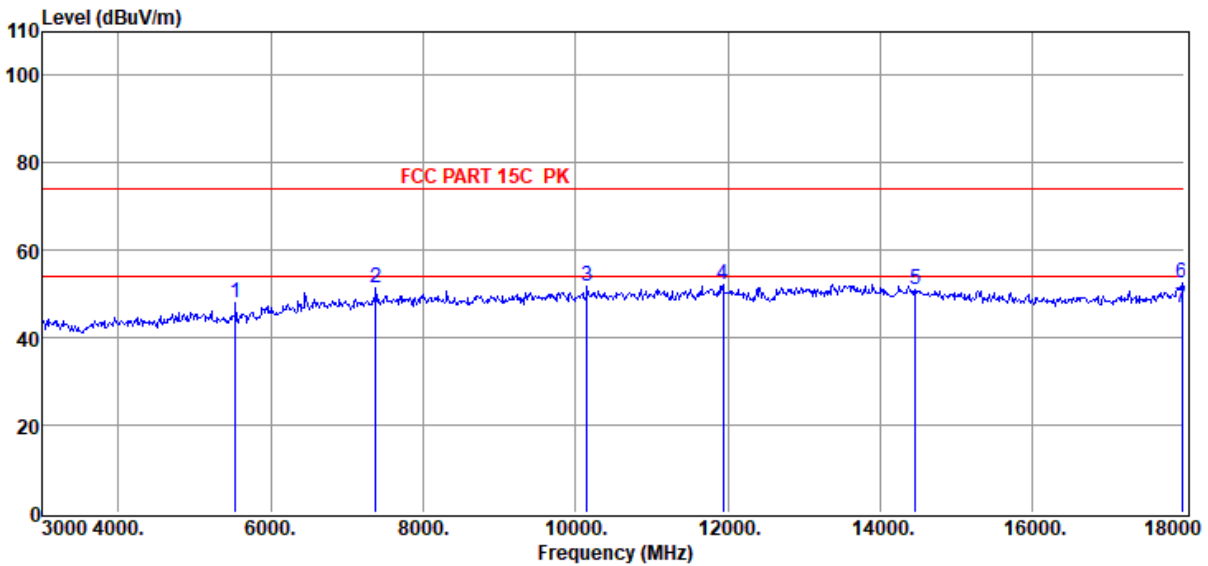


Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	5535.00	50.33	32.88	40.45	2.60	2.52	47.88	74.00	-26.12	Peak	VERTICAL
2	7380.00	49.35	36.30	39.74	3.11	2.27	51.29	74.00	-22.71	Peak	VERTICAL
3	10155.00	47.50	38.59	40.54	3.67	2.46	51.68	74.00	-22.32	Peak	VERTICAL
4	11940.00	46.74	39.18	40.11	4.04	2.40	52.25	74.00	-21.75	Peak	VERTICAL
5	14460.00	43.72	39.90	39.65	4.36	2.77	51.10	74.00	-22.90	Peak	VERTICAL
6	17970.00	42.19	42.31	40.68	4.95	3.78	52.55	74.00	-21.45	Peak	VERTICAL
7	17970.00	36.59	42.31	40.68	4.95	3.78	46.95	54.00	-7.05	Average	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 3# D:\E3 6.111\2022 Report Data\Q22051109-2E BAR 1300X\FCC ABOVE 1G 2.4G.EM6  
**Test Date** : 2022-07-05 **Tested By** : James Gan  
**EUT** : Multi-Channel Soundbar with wireless subwoofer **Model Number** : BAR 1300X  
**Power Supply** : AC 120V/60Hz **Test Mode** : Tx Mode  
**Condition** : Temp:22.2°C,Humi:52.4%,Press:100.3kPa **Antenna/Distance** : 2021 BBHA 9120D 3#/3m/HORIZONTAL  
**Memo** : 11AX 20 2462 SU

Data: 37

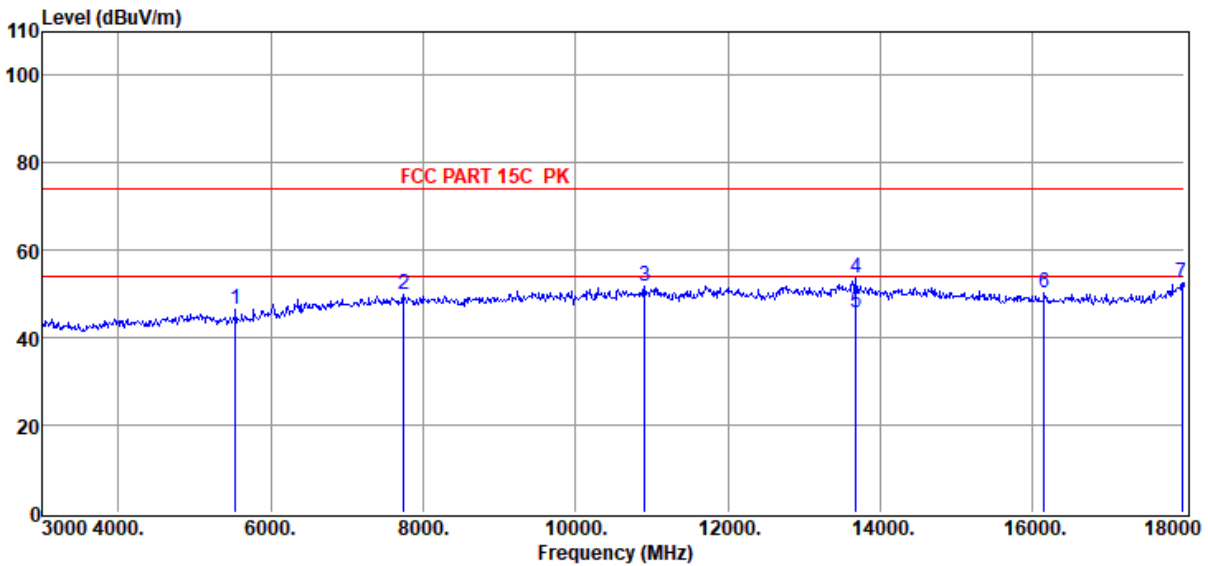


Item (Mark)	Freq. (MHz)	Read Level (dBUV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBUV/m)	Limit Line (dBUV/m)	Over Limit (dB)	Detector	Polarization
1	5535.00	49.00	32.88	40.45	2.60	2.52	46.55	74.00	-27.45	Peak	HORIZONTAL
2	7740.00	47.42	36.69	39.77	3.16	2.27	49.77	74.00	-24.23	Peak	HORIZONTAL
3	10905.00	46.50	39.24	40.24	3.78	2.39	51.67	74.00	-22.33	Peak	HORIZONTAL
4	13680.00	46.38	39.96	39.92	4.18	2.92	53.52	74.00	-20.48	Peak	HORIZONTAL
5	13680.00	38.51	39.96	39.92	4.18	2.92	45.65	54.00	-8.35	Average	HORIZONTAL
6	16155.00	44.50	37.90	39.93	4.64	3.18	50.29	74.00	-23.71	Peak	HORIZONTAL
7	17970.00	42.15	42.31	40.68	4.95	3.78	52.51	74.00	-21.49	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 3# D:\E3 6.111\2022 Report Data\Q22051109-2E BAR 1300X\FCC ABOVE 1G 2.4G.EM6  
**Test Date** : 2022-07-05 **Tested By** : James Gan  
**EUT** : Multi-Channel Soundbar with wireless subwoofer **Model Number** : BAR 1300X  
**Power Supply** : AC 120V/60Hz **Test Mode** : Tx Mode  
**Condition** : Temp:22.2°C,Humi:52.4%,Press:100.3kPa **Antenna/Distance** : 2021 BBHA 9120D 3#/3m/VERTICAL  
**Memo** : 11AX 20 2462 SU

Data: 38

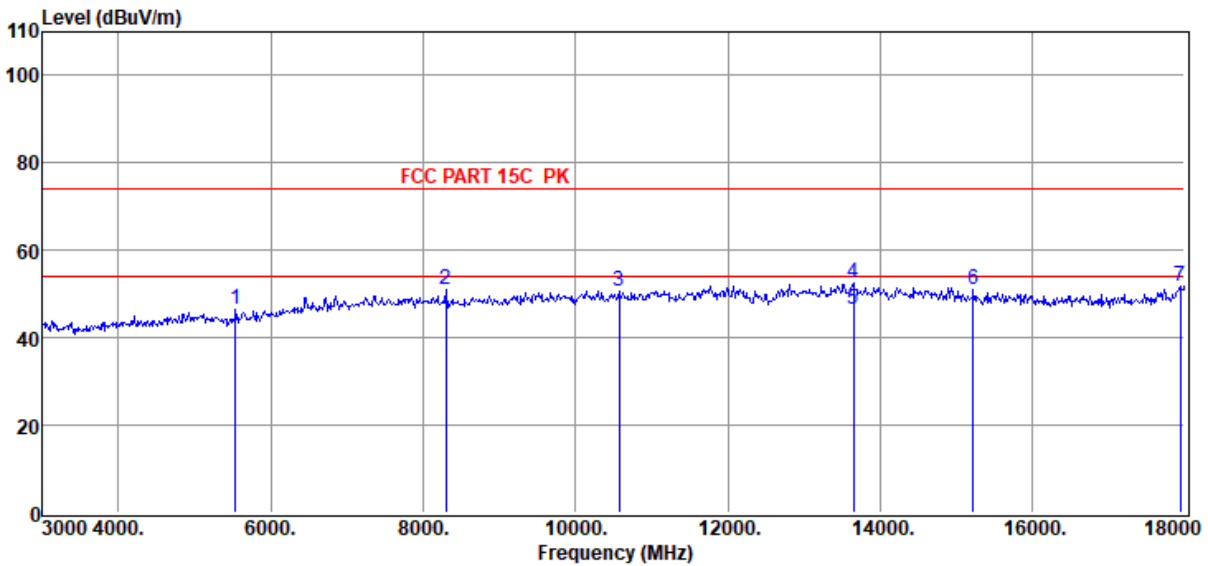

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	5535.00	49.11	32.88	40.45	2.60	2.52	46.66	74.00	-27.34	Peak	VERTICAL
2	8295.00	48.02	37.47	39.83	3.21	2.25	51.12	74.00	-22.88	Peak	VERTICAL
3	10575.00	45.88	39.04	40.37	3.69	2.42	50.66	74.00	-23.34	Peak	VERTICAL
4	13650.00	45.59	39.97	39.94	4.15	2.92	52.69	74.00	-21.31	Peak	VERTICAL
5	13650.00	39.55	39.97	39.94	4.15	2.92	46.65	54.00	-7.35	Average	VERTICAL
6	15225.00	44.08	39.19	39.67	4.51	2.73	50.84	74.00	-23.16	Peak	VERTICAL
7	17940.00	41.43	42.13	40.66	4.94	3.77	51.61	74.00	-22.39	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.



# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22051109-2E BAR 1300X\FCC ABOVE 1G 2.4G WIFI RU.EM6

**Test Date** : 2022-07-07

**Tested By** : James Gan

**EUT** : Multi-Channel Soundbar

**Model Number** : BAR 1300X

**Power Supply** : AC 120V/60Hz


**Test Mode** : Tx Mode

**Condition** : Temp:22.2°C,Humi:52.4%,Press:100.3kPa

**Antenna/Distance** : 2021 BBHA 9120D 3#/3m/HORIZONTAL

**Memo** : 11AX20 2412 RU26 0

Data: 15

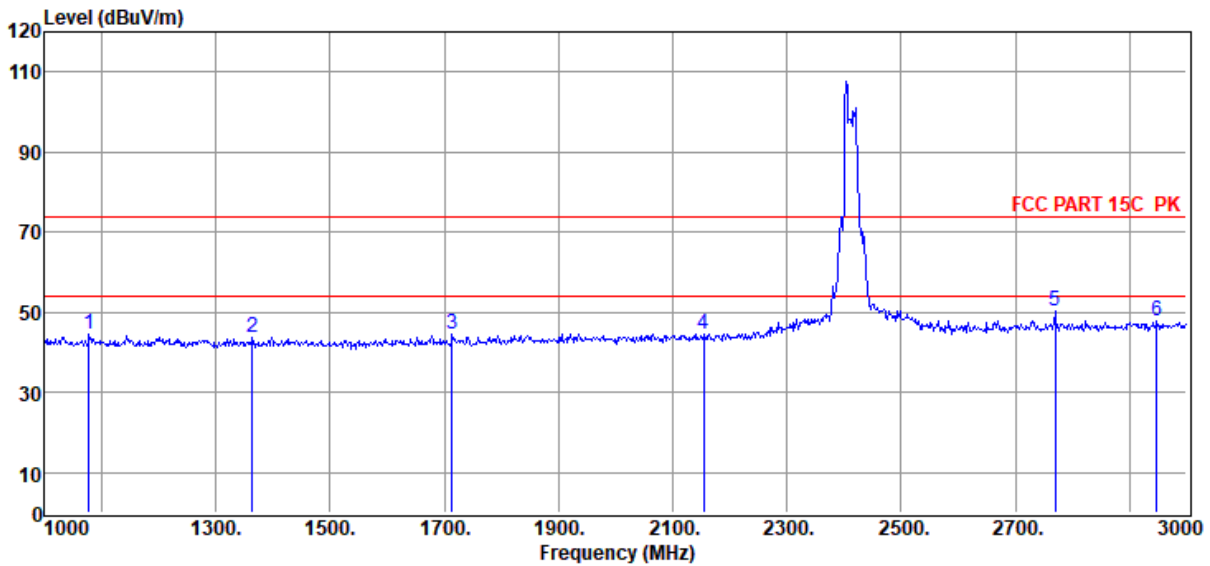


Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	1078.00	55.36	25.48	38.02	1.14	0.51	44.47	74.00	-29.53	Peak	HORIZONTAL
2	1364.00	54.88	25.43	38.45	1.30	0.57	43.73	74.00	-30.27	Peak	HORIZONTAL
3	1714.00	55.28	25.96	38.97	1.47	0.63	44.37	74.00	-29.63	Peak	HORIZONTAL
4	2154.00	54.75	26.98	39.48	1.64	0.70	44.59	74.00	-29.41	Peak	HORIZONTAL
5	2770.00	58.79	28.63	39.78	1.81	0.76	50.21	74.00	-23.79	Peak	HORIZONTAL
6	2948.00	55.89	29.30	39.87	1.86	0.78	47.96	74.00	-26.04	Peak	HORIZONTAL

- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 3# D:\E3 6.111\2022 Report Data\Q22051109-2E BAR 1300X\FCC ABOVE 1G 2.4G WIFI RU.EM6  
**Test Date** : 2022-07-07 **Tested By** : James Gan  
**EUT** : Multi-Channel Soundbar **Model Number** : BAR 1300X  
**Power Supply** : AC 120V/60Hz **Test Mode** : Tx Mode  
**Condition** : Temp:22.2°C,Humi:52.4%,Press:100.3kPa **Antenna/Distance** : 2021 BBHA 9120D 3#/3m/VERTICAL  
**Memo** : 11AX20 2412 RU26 0

Data: 16

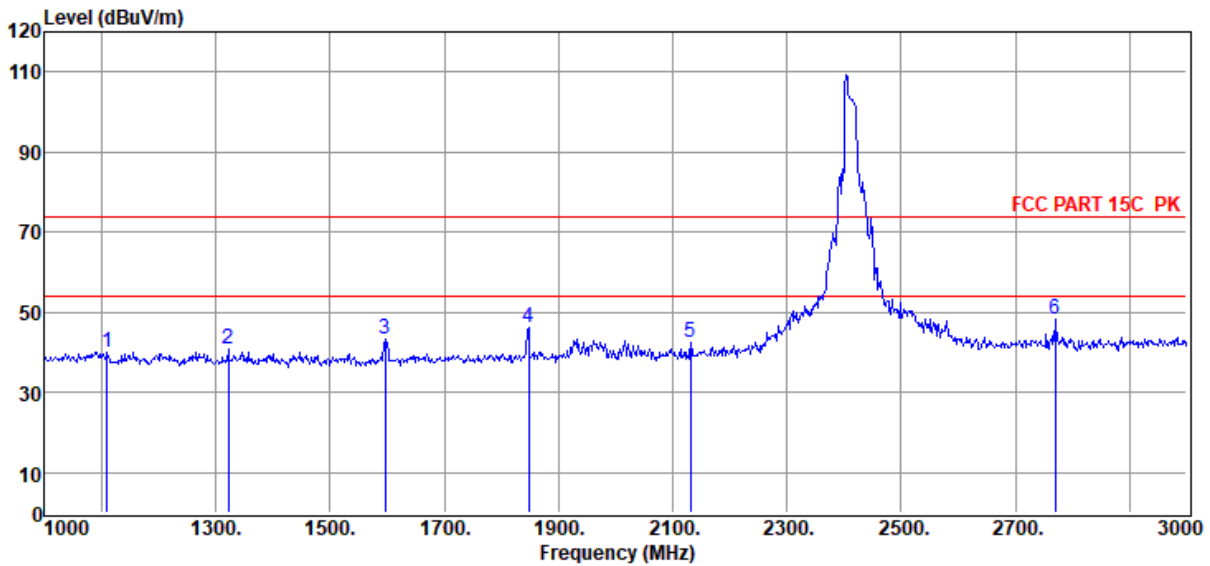

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	1110.00	51.04	25.48	38.07	1.16	0.52	40.13	74.00	-33.87	Peak	VERTICAL
2	1322.00	52.03	25.44	38.38	1.28	0.56	40.93	74.00	-33.07	Peak	VERTICAL
3	1596.00	54.32	25.65	38.79	1.42	0.61	43.21	74.00	-30.79	Peak	VERTICAL
4	1848.00	56.67	26.30	39.17	1.53	0.65	45.98	74.00	-28.02	Peak	VERTICAL
5	2132.00	52.65	26.94	39.47	1.64	0.69	42.45	74.00	-31.55	Peak	VERTICAL
6	2770.00	56.72	28.63	39.78	1.81	0.76	48.14	74.00	-25.86	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22051109-2E BAR 1300X\FCC ABOVE 1G 2.4G WIFI RU.EM6

**Test Date** : 2022-07-07

**Tested By** : James Gan

**EUT** : Multi-Channel Soundbar

**Model Number** : BAR 1300X

**Power Supply** : AC 120V/60Hz


**Test Mode** : Tx Mode

**Condition** : Temp:22.2°C,Humi:52.4%,Press:100.3kPa

**Antenna/Distance** : 2021 BBHA 9120D  
3#/3m/HORIZONTAL

**Memo** : 11AX20 2437 RU26 8

Data: 17

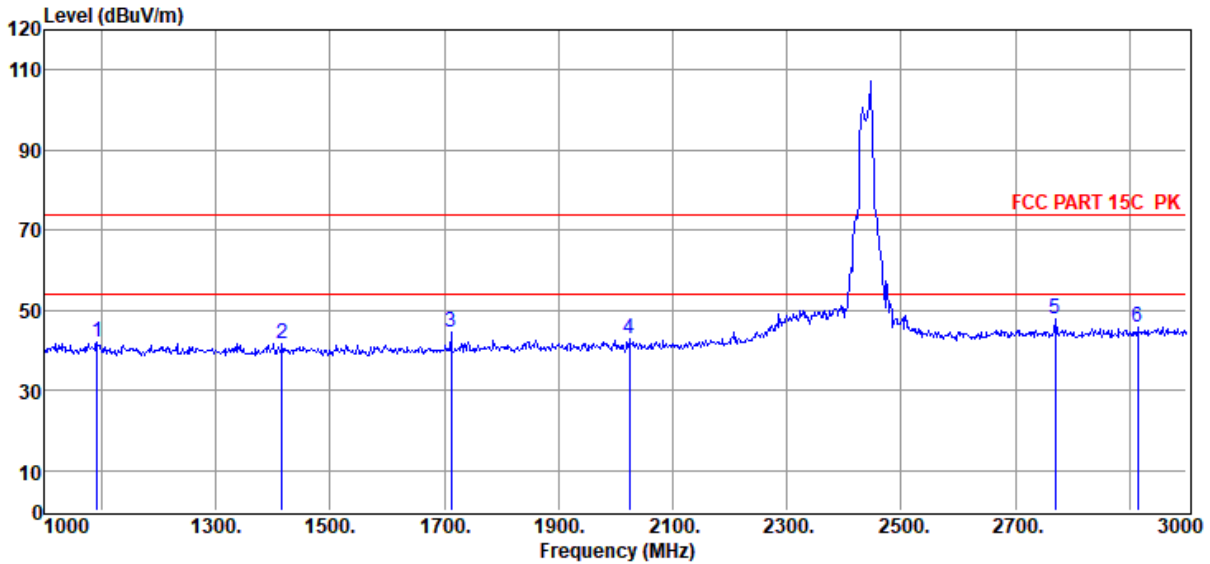


Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	1092.00	52.92	25.48	38.04	1.15	0.52	42.03	74.00	-31.97	Peak	HORIZONTAL
2	1416.00	52.98	25.42	38.52	1.33	0.57	41.78	74.00	-32.22	Peak	HORIZONTAL
3	1712.00	55.45	25.95	38.97	1.47	0.63	44.53	74.00	-29.47	Peak	HORIZONTAL
4	2024.00	53.21	26.74	39.41	1.61	0.68	42.83	74.00	-31.17	Peak	HORIZONTAL
5	2770.00	56.27	28.63	39.78	1.81	0.76	47.69	74.00	-26.31	Peak	HORIZONTAL
6	2914.00	53.79	29.17	39.86	1.85	0.78	45.73	74.00	-28.27	Peak	HORIZONTAL

- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 3# D:\E3 6.111\2022 Report Data\Q22051109-2E BAR 1300X\FCC ABOVE 1G 2.4G WIFI RU.EM6  
**Test Date** : 2022-07-07 **Tested By** : James Gan  
**EUT** : Multi-Channel Soundbar **Model Number** : BAR 1300X  
**Power Supply** : AC 120V/60Hz **Test Mode** : Tx Mode  
**Condition** : Temp:22.2°C,Humi:52.4%,Press:100.3kPa **Antenna/Distance** : 2021 BBHA 9120D 3#/3m/VERTICAL  
**Memo** : 11AX20 2437 RU26 8

Data: 18

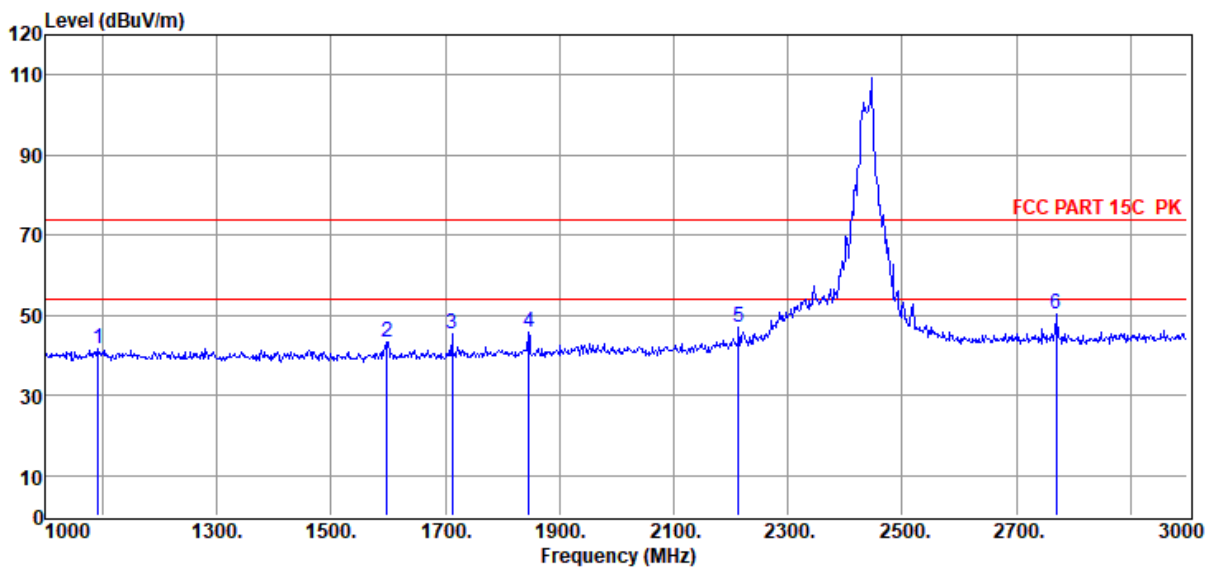

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	1092.00	52.43	25.48	38.04	1.15	0.52	41.54	74.00	-32.46	Peak	VERTICAL
2	1598.00	54.45	25.65	38.80	1.42	0.61	43.33	74.00	-30.67	Peak	VERTICAL
3	1712.00	56.37	25.95	38.97	1.47	0.63	45.45	74.00	-28.55	Peak	VERTICAL
4	1846.00	56.42	26.30	39.17	1.53	0.65	45.73	74.00	-28.27	Peak	VERTICAL
5	2214.00	57.17	27.09	39.51	1.66	0.70	47.11	74.00	-26.89	Peak	VERTICAL
6	2770.00	58.94	28.63	39.78	1.81	0.76	50.36	74.00	-23.64	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22051109-2E BAR 1300X\FCC ABOVE 1G 2.4G WIFI RU.EM6

**Test Date** : 2022-07-07

**Tested By** : James Gan

**EUT** : Multi-Channel Soundbar

**Model Number** : BAR 1300X

**Power Supply** : AC 120V/60Hz


**Test Mode** : Tx Mode

**Condition** : Temp:22.2°C,Humi:52.4%,Press:100.3kPa

**Antenna/Distance** : 2021 BBHA 9120D 3#/3m/HORIZONTAL

**Memo** : 11AX20 2462 RU26 0

Data: 19

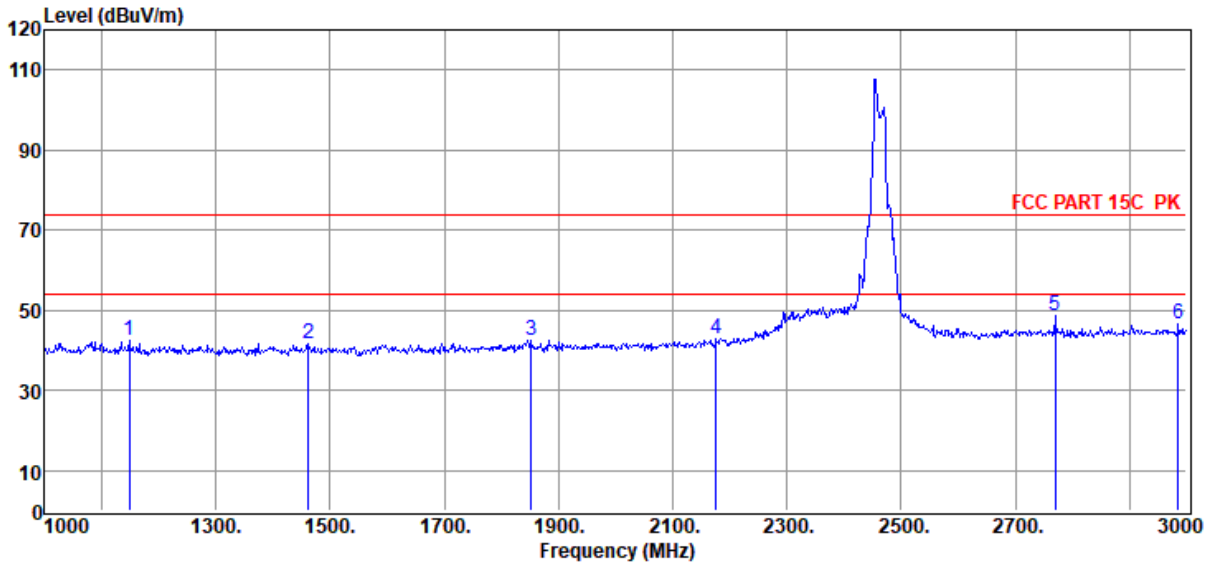


Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	1148.00	53.31	25.47	38.12	1.18	0.53	42.37	74.00	-31.63	Peak	HORIZONTAL
2	1462.00	52.95	25.41	38.59	1.36	0.58	41.71	74.00	-32.29	Peak	HORIZONTAL
3	1852.00	53.33	26.32	39.18	1.53	0.65	42.65	74.00	-31.35	Peak	HORIZONTAL
4	2176.00	52.91	27.02	39.49	1.65	0.70	42.79	74.00	-31.21	Peak	HORIZONTAL
5	2770.00	57.44	28.63	39.78	1.81	0.76	48.86	74.00	-25.14	Peak	HORIZONTAL
6	2986.00	54.39	29.45	39.89	1.87	0.79	46.61	74.00	-27.39	Peak	HORIZONTAL

- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 3# D:\E3 6.111\2022 Report Data\Q22051109-2E BAR 1300X\FCC ABOVE 1G 2.4G WIFI RU.EM6  
**Test Date** : 2022-07-07 **Tested By** : James Gan  
**EUT** : Multi-Channel Soundbar **Model Number** : BAR 1300X  
**Power Supply** : AC 120V/60Hz **Test Mode** : Tx Mode  
**Condition** : Temp:22.2°C,Humi:52.4%,Press:100.3kPa **Antenna/Distance** : 2021 BBHA 9120D 3#/3m/VERTICAL  
**Memo** : 11AX20 2462 RU26 0

Data: 20

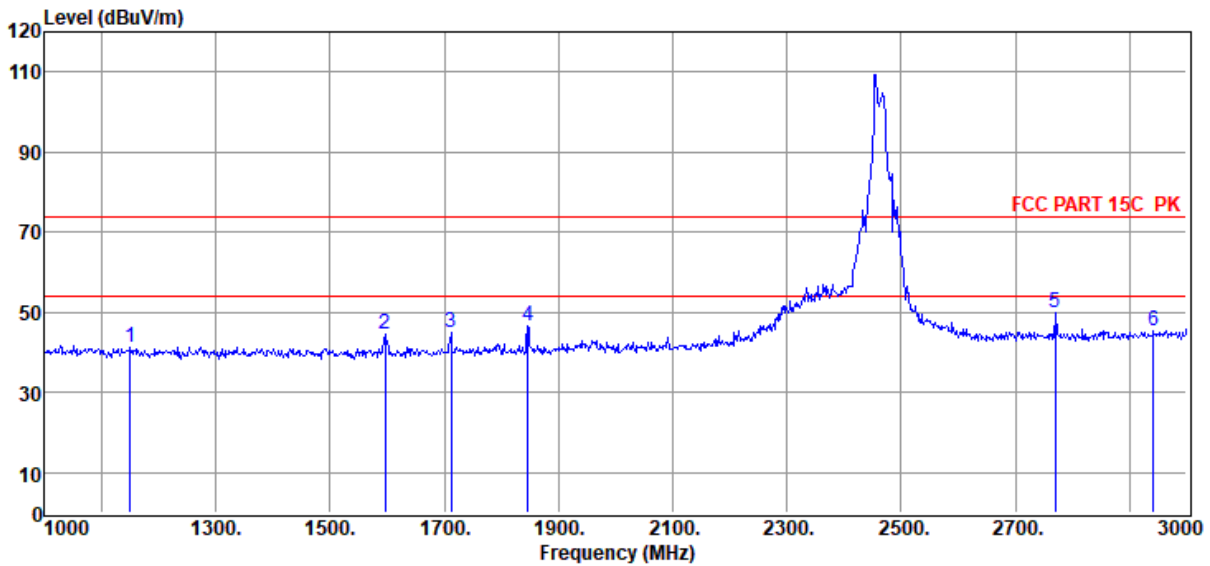


Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	1150.00	52.36	25.47	38.12	1.18	0.53	41.42	74.00	-32.58	Peak	VERTICAL
2	1596.00	55.74	25.65	38.79	1.42	0.61	44.63	74.00	-29.37	Peak	VERTICAL
3	1712.00	55.71	25.95	38.97	1.47	0.63	44.79	74.00	-29.21	Peak	VERTICAL
4	1846.00	57.09	26.30	39.17	1.53	0.65	46.40	74.00	-27.60	Peak	VERTICAL
5	2770.00	58.32	28.63	39.78	1.81	0.76	49.74	74.00	-24.26	Peak	VERTICAL
6	2942.00	53.49	29.28	39.87	1.85	0.78	45.53	74.00	-28.47	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 3# D:\E3 6.111\2022 Report Data\Q22051109-2E BAR 1300X\FCC ABOVE 1G 2.4G WIFI RU.EM6  
**Test Date** : 2022-07-07 **Tested By** : James Gan  
**EUT** : Multi-Channel Soundbar **Model Number** : BAR 1300X  
**Power Supply** : AC 120V/60Hz **Test Mode** : Tx Mode  
**Condition** : Temp:22.2°C,Humi:52.4%,Press:100.3kPa **Antenna/Distance** : 2021 BBHA 9120D  
3#/3m/HORIZONTAL  
**Memo** : 11AX20 2412 RU26 0

Data: 9

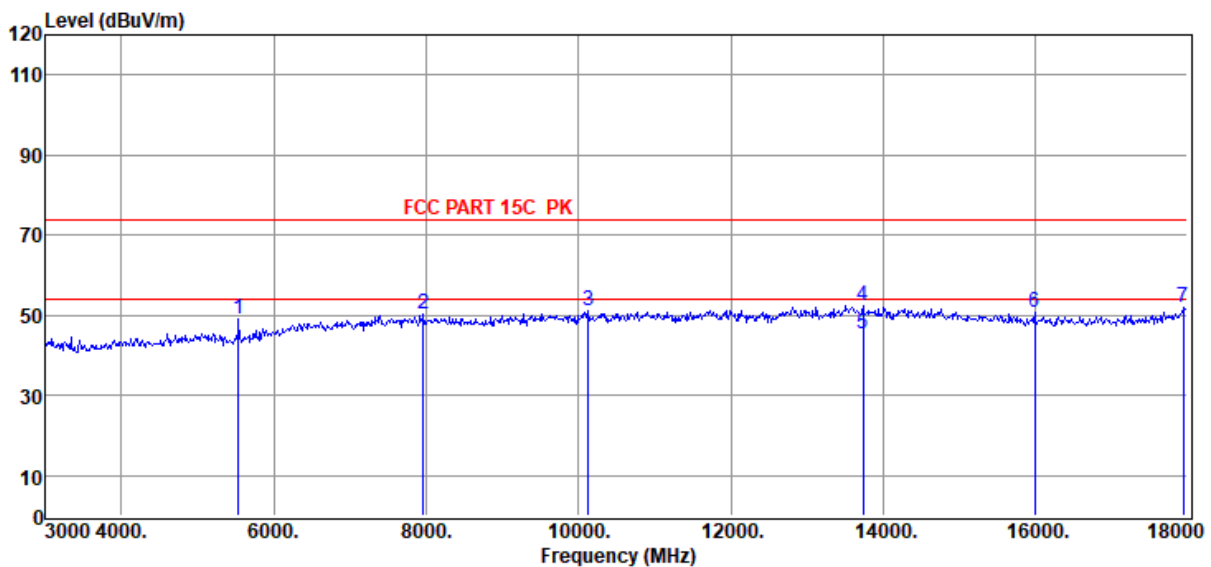


Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	5535.00	51.42	32.88	40.45	2.60	2.52	48.97	74.00	-25.03	Peak	HORIZONTAL
2	7965.00	47.89	36.96	39.80	3.19	2.28	50.52	74.00	-23.48	Peak	HORIZONTAL
3	10125.00	46.88	38.55	40.55	3.67	2.47	51.02	74.00	-22.98	Peak	HORIZONTAL
4	13740.00	45.16	39.95	39.88	4.25	2.92	52.40	74.00	-21.60	Peak	HORIZONTAL
5	13740.00	38.24	39.95	39.88	4.25	2.92	45.48	54.00	-8.52	Average	HORIZONTAL
6	15990.00	45.07	37.92	39.90	4.60	3.11	50.80	74.00	-23.20	Peak	HORIZONTAL
7	17940.00	41.79	42.13	40.66	4.94	3.77	51.97	74.00	-22.03	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 3# D:\E3 6.111\2022 Report Data\Q22051109-2E BAR 1300X\FCC ABOVE 1G 2.4G WIFI RU.EM6  
**Test Date** : 2022-07-07 **Tested By** : James Gan  
**EUT** : Multi-Channel Soundbar **Model Number** : BAR 1300X  
**Power Supply** : AC 120V/60Hz **Test Mode** : Tx Mode  
**Condition** : Temp:22.2°C,Humi:52.4%,Press:100.3kPa **Antenna/Distance** : 2021 BBHA 9120D 3#/3m/VERTICAL  
**Memo** : 11AX20 2412 RU26 0

Data: 10

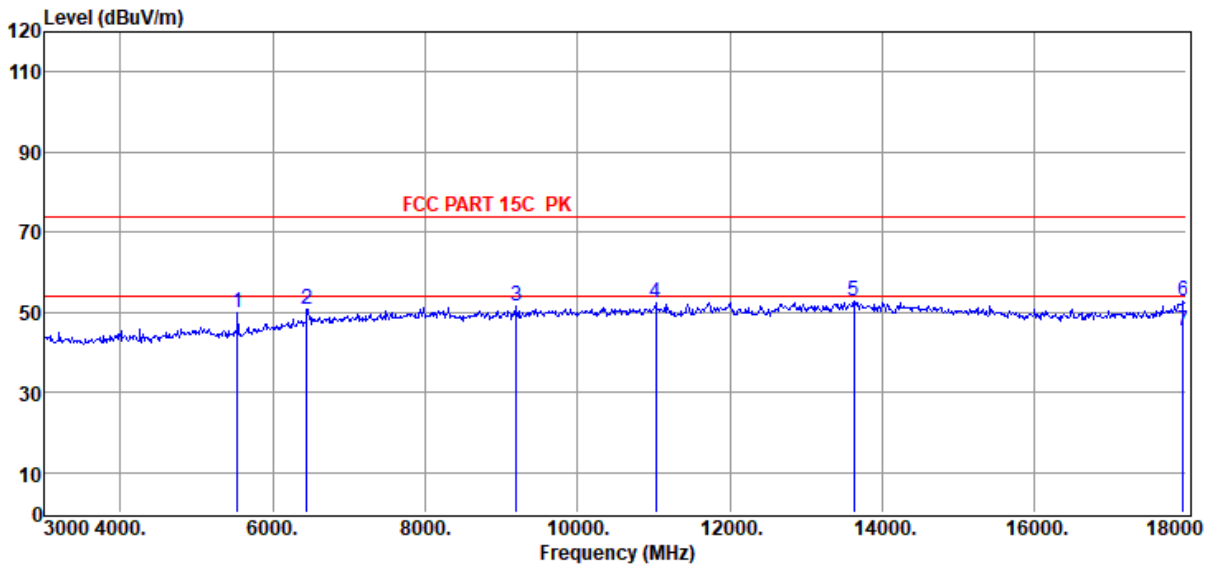

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	5535.00	52.44	32.88	40.45	2.60	2.52	49.99	74.00	-24.01	Peak	VERTICAL
2	6450.00	49.99	35.08	40.14	3.25	2.56	50.74	74.00	-23.26	Peak	VERTICAL
3	9195.00	47.28	38.46	40.04	3.44	2.24	51.38	74.00	-22.62	Peak	VERTICAL
4	11025.00	46.98	39.28	40.20	3.81	2.38	52.25	74.00	-21.75	Peak	VERTICAL
5	13635.00	45.57	39.97	39.96	4.14	2.92	52.64	74.00	-21.36	Peak	VERTICAL
6	17955.00	42.45	42.22	40.67	4.95	3.78	52.73	74.00	-21.27	Peak	VERTICAL
7	17955.00	35.04	42.22	40.67	4.95	3.78	45.32	54.00	-8.68	Average	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.



# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22051109-2E BAR 1300X\FCC ABOVE 1G 2.4G WIFI RU.EM6

**Test Date** : 2022-07-07

**Tested By** : James Gan

**EUT** : Multi-Channel Soundbar

**Model Number** : BAR 1300X

**Power Supply** : AC 120V/60Hz


**Test Mode** : Tx Mode

**Condition** : Temp:22.2°C,Humi:52.4%,Press:100.3kPa

**Antenna/Distance** : 2021 BBHA 9120D 3#/3m/HORIZONTAL

**Memo** : 11AX20 2437 RU26 8

Data: 11

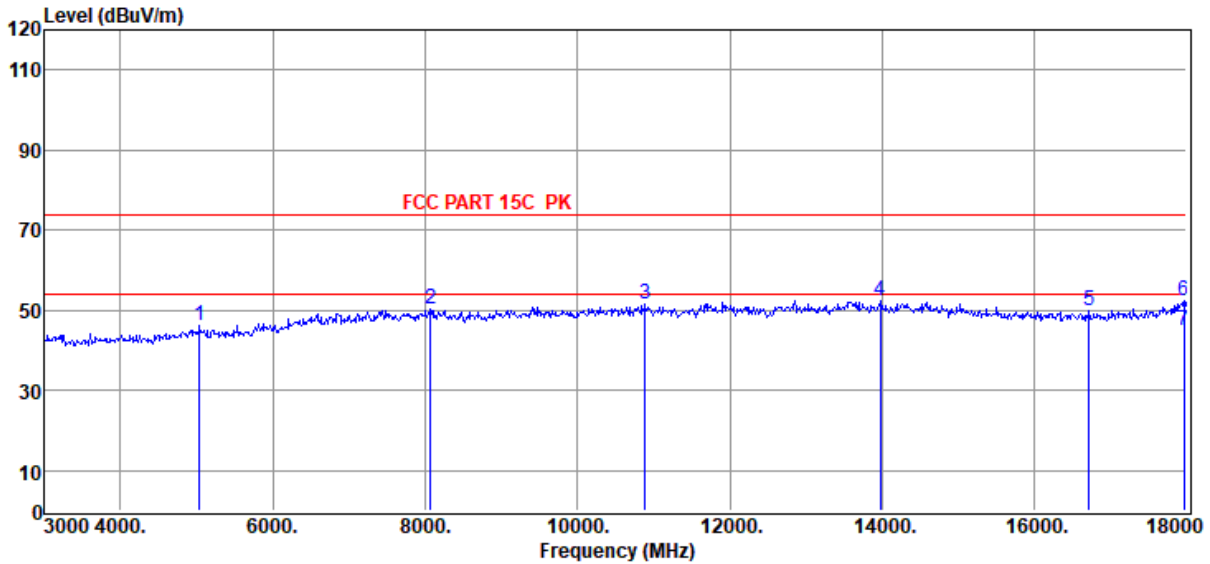

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	5040.00	48.93	33.08	40.40	2.54	2.21	46.36	74.00	-27.64	Peak	HORIZONTAL
2	8070.00	47.67	37.11	39.81	3.19	2.27	50.43	74.00	-23.57	Peak	HORIZONTAL
3	10890.00	46.48	39.23	40.24	3.77	2.39	51.63	74.00	-22.37	Peak	HORIZONTAL
4	13980.00	44.62	39.90	39.71	4.51	2.90	52.22	74.00	-21.78	Peak	HORIZONTAL
5	16725.00	43.74	38.17	40.04	4.72	3.40	49.99	74.00	-24.01	Peak	HORIZONTAL
6	17970.00	41.92	42.31	40.68	4.95	3.78	52.28	74.00	-21.72	Peak	HORIZONTAL
7	17970.00	34.58	42.31	40.68	4.95	3.78	44.94	54.00	-9.06	Average	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 3# D:\E3 6.111\2022 Report Data\Q22051109-2E BAR 1300X\FCC ABOVE 1G 2.4G WIFI RU.EM6  
**Test Date** : 2022-07-07 **Tested By** : James Gan  
**EUT** : Multi-Channel Soundbar **Model Number** : BAR 1300X  
**Power Supply** : AC 120V/60Hz **Test Mode** : Tx Mode  
**Condition** : Temp:22.2°C,Humi:52.4%,Press:100.3kPa **Antenna/Distance** : 2021 BBHA 9120D 3#/3m/VERTICAL  
**Memo** : 11AX20 2437 RU26 8

Data: 12

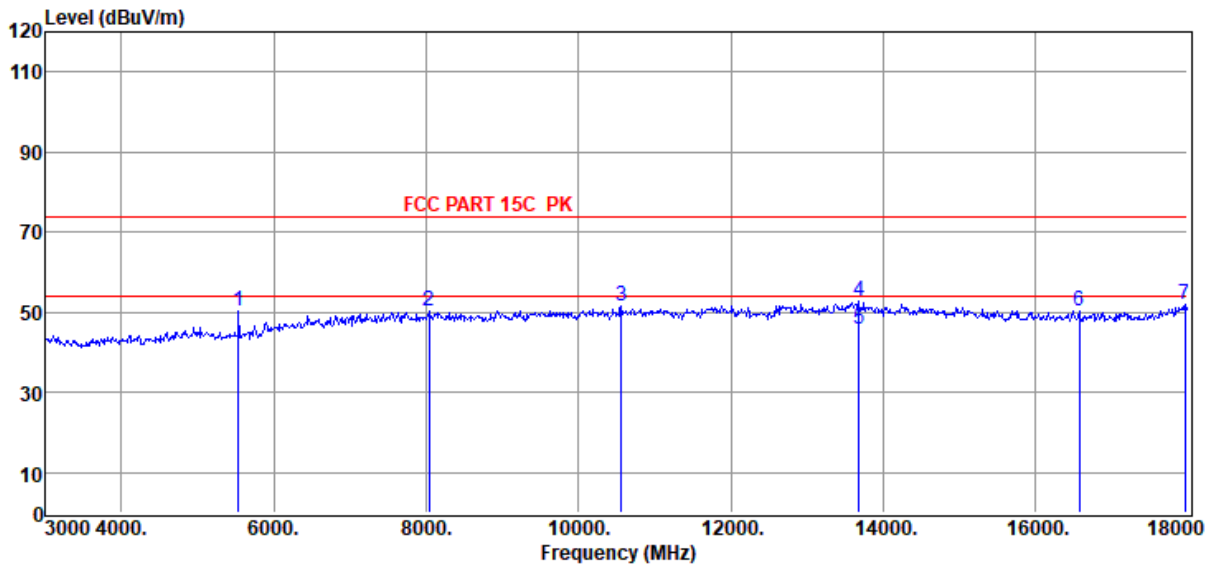


Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	5535.00	52.93	32.88	40.45	2.60	2.52	50.48	74.00	-23.52	Peak	VERTICAL
2	8040.00	47.56	37.06	39.80	3.19	2.28	50.29	74.00	-23.71	Peak	VERTICAL
3	10560.00	46.63	39.04	40.38	3.69	2.42	51.40	74.00	-22.60	Peak	VERTICAL
4	13680.00	45.74	39.96	39.92	4.18	2.92	52.88	74.00	-21.12	Peak	VERTICAL
5	13680.00	38.68	39.96	39.92	4.18	2.92	45.82	54.00	-8.18	Average	VERTICAL
6	16575.00	44.28	37.99	40.01	4.73	3.34	50.33	74.00	-23.67	Peak	VERTICAL
7	17970.00	41.40	42.31	40.68	4.95	3.78	51.76	74.00	-22.24	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 3# D:\E3 6.111\2022 Report Data\Q22051109-2E BAR 1300X\FCC ABOVE 1G 2.4G WIFI RU.EM6  
**Test Date** : 2022-07-07 **Tested By** : James Gan  
**EUT** : Multi-Channel Soundbar **Model Number** : BAR 1300X  
**Power Supply** : AC 120V/60Hz **Test Mode** : Tx Mode  
**Condition** : Temp:22.2°C,Humi:52.4%,Press:100.3kPa **Antenna/Distance** : 2021 BBHA 9120D  
3#/3m/HORIZONTAL  
**Memo** : 11AX20 2462 RU26 0

Data: 13

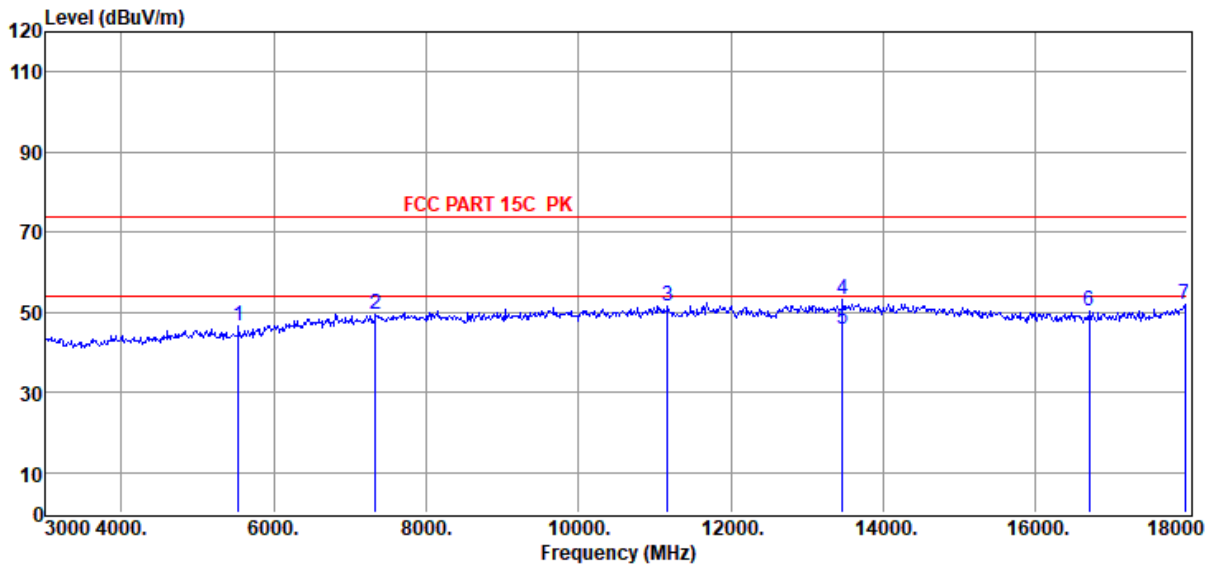


Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	5535.00	49.03	32.88	40.45	2.60	2.52	46.58	74.00	-27.42	Peak	HORIZONTAL
2	7335.00	47.54	36.27	39.73	3.10	2.27	49.45	74.00	-24.55	Peak	HORIZONTAL
3	11175.00	46.32	39.19	40.18	3.86	2.38	51.57	74.00	-22.43	Peak	HORIZONTAL
4	13470.00	46.23	39.98	40.07	4.01	2.93	53.08	74.00	-20.92	Peak	HORIZONTAL
5	13470.00	39.07	39.98	40.07	4.01	2.93	45.92	54.00	-8.08	Average	HORIZONTAL
6	16710.00	44.26	38.15	40.04	4.72	3.40	50.49	74.00	-23.51	Peak	HORIZONTAL
7	17970.00	41.60	42.31	40.68	4.95	3.78	51.96	74.00	-22.04	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 3# D:\E3 6.111\2022 Report Data\Q22051109-2E BAR 1300X\FCC ABOVE 1G 2.4G WIFI RU.EM6  
**Test Date** : 2022-07-07 **Tested By** : James Gan  
**EUT** : Multi-Channel Soundbar **Model Number** : BAR 1300X  
**Power Supply** : AC 120V/60Hz **Test Mode** : Tx Mode  
**Condition** : Temp:22.2°C,Humi:52.4%,Press:100.3kPa **Antenna/Distance** : 2021 BBHA 9120D 3#/3m/VERTICAL  
**Memo** : 11AX20 2462 RU26 0

Data: 14

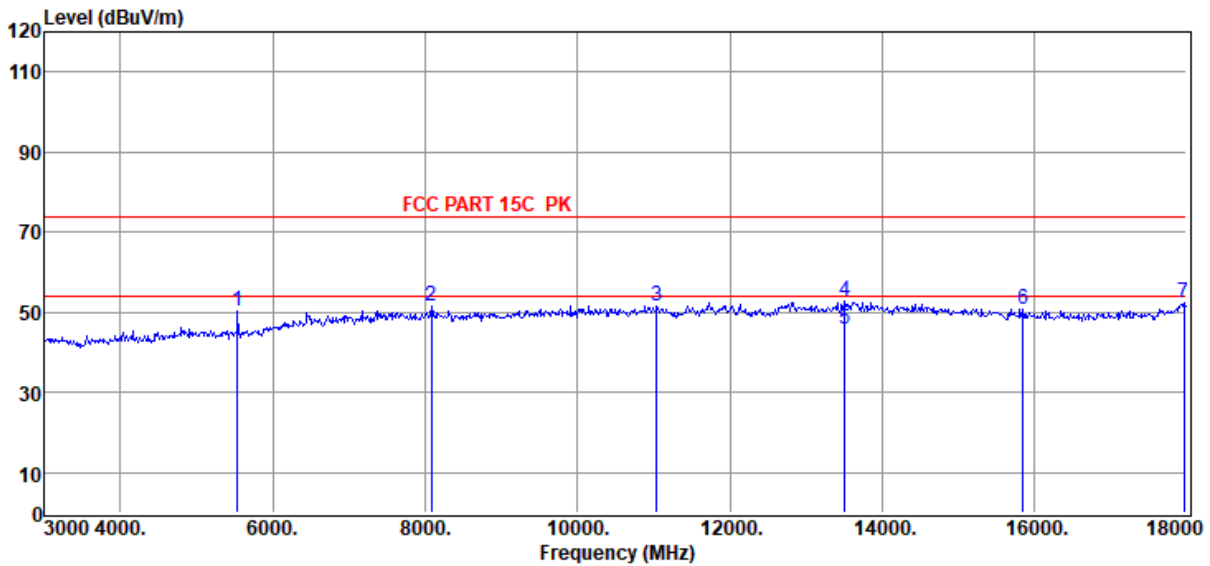

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	5535.00	52.78	32.88	40.45	2.60	2.52	50.33	74.00	-23.67	Peak	VERTICAL
2	8085.00	48.57	37.14	39.81	3.20	2.27	51.37	74.00	-22.63	Peak	VERTICAL
3	11040.00	46.26	39.28	40.20	3.81	2.38	51.53	74.00	-22.47	Peak	VERTICAL
4	13515.00	45.76	40.00	40.04	4.01	2.93	52.66	74.00	-21.34	Peak	VERTICAL
5	13515.00	38.71	40.00	40.04	4.01	2.93	45.61	54.00	-8.39	Average	VERTICAL
6	15855.00	44.87	38.16	39.86	4.59	3.05	50.81	74.00	-23.19	Peak	VERTICAL
7	17970.00	42.22	42.31	40.68	4.95	3.78	52.58	74.00	-21.42	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22051109-2E BAR 1300\FCC ABOVE 1G 2.4G WIFI.EM6

**Test Date** : 2022-08-05

**Tested By** : James Gan

**EUT** : Multi-Channel Soundbar with wireless subwoofer

**Model Number** : BAR 1300X

**Power Supply** : AC 120V/60Hz


**Test Mode** : Tx Mode

**Condition** : Temp:22.2°C,Humi:52.4%,Press:100.3kPa

**Antenna/Distance** : 2021 BBHA 9120D 3#/3m/HORIZONTAL

**Memo** : 3DH5 2480+SRD 2406+11B 2437

Data: 45

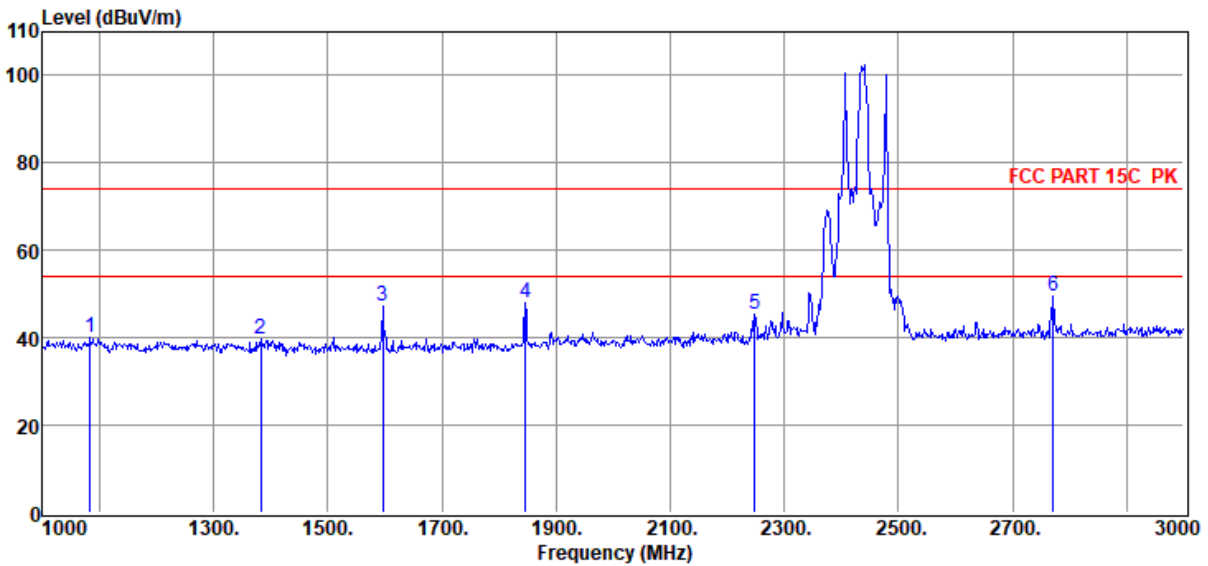


Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	1084.00	50.76	25.48	38.03	1.15	0.52	39.88	74.00	-34.12	Peak	HORIZONTAL
2	1382.00	50.80	25.42	38.47	1.31	0.57	39.63	74.00	-34.37	Peak	HORIZONTAL
3	1596.00	58.36	25.65	38.79	1.42	0.61	47.25	74.00	-26.75	Peak	HORIZONTAL
4	1846.00	58.70	26.30	39.17	1.53	0.65	48.01	74.00	-25.99	Peak	HORIZONTAL
5	2248.00	55.47	27.15	39.52	1.67	0.71	45.48	74.00	-28.52	Peak	HORIZONTAL
6	2772.00	58.10	28.63	39.79	1.81	0.76	49.51	74.00	-24.49	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 3# D:\E3 6.111\2022 Report Data\Q22051109-2E BAR 1300\FCC ABOVE 1G 2.4G WIFI.EM6  
**Test Date** : 2022-08-05 **Tested By** : James Gan  
**EUT** : Multi-Channel Soundbar with wireless subwoofer **Model Number** : BAR 1300X  
**Power Supply** : AC 120V/60Hz **Test Mode** : Tx Mode  
**Condition** : Temp:22.2°C,Humi:52.4%,Press:100.3kPa **Antenna/Distance** : 2021 BBHA 9120D 3#/3m/VERTICAL  
**Memo** : 3DH5 2480+SRD 2406+11B 2437

Data: 46

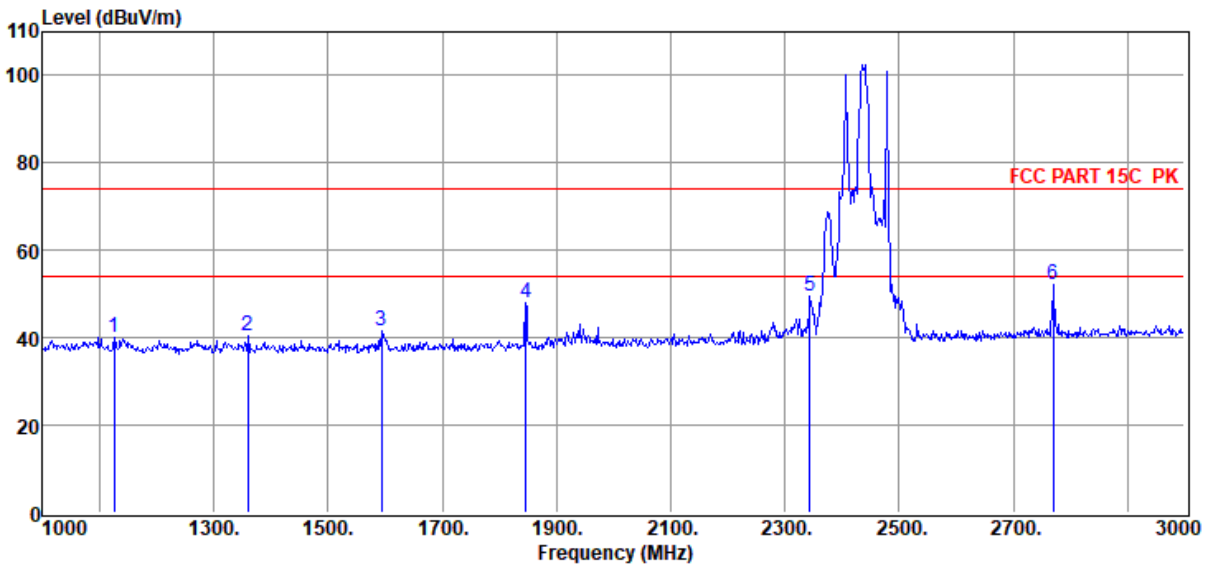

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	1126.00	50.88	25.47	38.09	1.17	0.52	39.95	74.00	-34.05	Peak	VERTICAL
2	1360.00	51.51	25.43	38.44	1.30	0.56	40.36	74.00	-33.64	Peak	VERTICAL
3	1594.00	52.58	25.64	38.79	1.42	0.61	41.46	74.00	-32.54	Peak	VERTICAL
4	1846.00	58.63	26.30	39.17	1.53	0.65	47.94	74.00	-26.06	Peak	VERTICAL
5	2344.00	59.47	27.32	39.57	1.70	0.72	49.64	74.00	-24.36	Peak	VERTICAL
6	2770.00	60.77	28.63	39.78	1.81	0.76	52.19	74.00	-21.81	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.  
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22051109-2E BAR 1300\FCC ABOVE 1G 2.4G WIFI.EM6

**Test Date** : 2022-08-05

**Tested By** : James Gan

**EUT** : Multi-Channel Soundbar with wireless subwoofer

**Model Number** : BAR 1300X

**Power Supply** : AC 120V/60Hz


**Test Mode** : Tx Mode

**Condition** : Temp:22.2°C,Humi:52.4%,Press:100.3kPa

**Antenna/Distance** : 2021 BBHA 9120D 3#/3m/HORIZONTAL

**Memo** : 3DH5 2480+SRD 2406+11B 2437

Data: 47

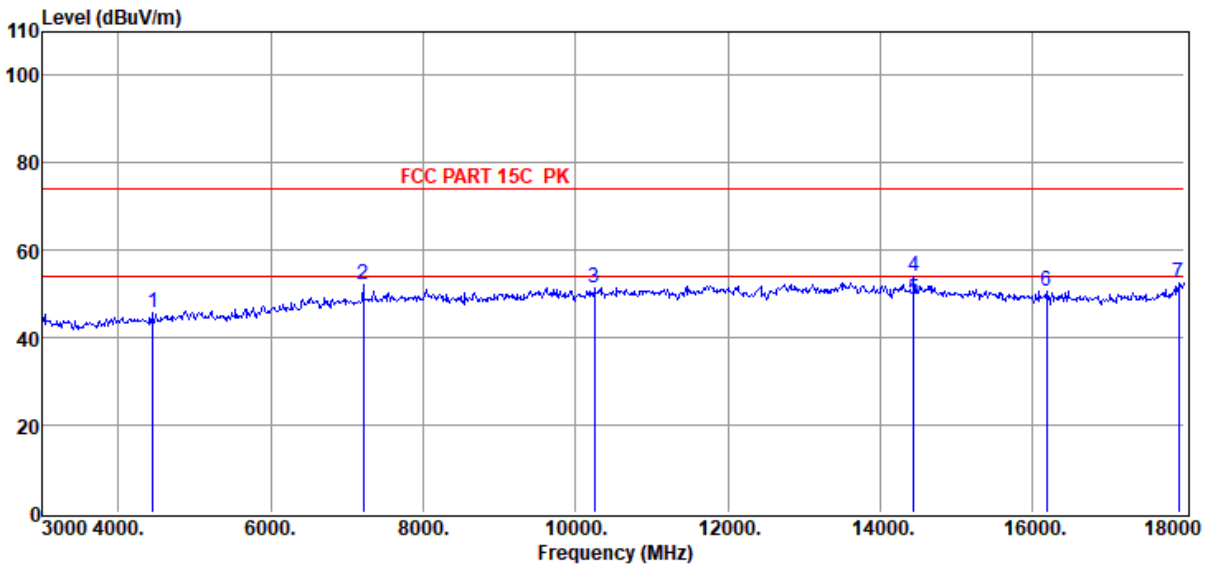

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	4455.00	50.19	31.46	40.29	2.34	2.11	45.81	74.00	-28.19	Peak	HORIZONTAL
2	7215.00	50.41	36.17	39.72	3.07	2.26	52.19	74.00	-21.81	Peak	HORIZONTAL
3	10245.00	47.21	38.69	40.50	3.67	2.46	51.53	74.00	-22.47	Peak	HORIZONTAL
4	14445.00	46.64	39.90	39.66	4.37	2.78	54.03	74.00	-19.97	Peak	HORIZONTAL
5	14445.00	41.39	39.90	39.66	4.37	2.78	48.78	54.00	-5.22	Average	HORIZONTAL
6	16185.00	44.77	37.90	39.94	4.65	3.19	50.57	74.00	-23.43	Peak	HORIZONTAL
7	17925.00	42.45	42.03	40.65	4.94	3.77	52.54	74.00	-21.46	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22051109-2E BAR 1300\FCC ABOVE 1G 2.4G WIFI.EM6

**Test Date** : 2022-08-05

**Tested By** : James Gan

**EUT** : Multi-Channel Soundbar with wireless subwoofer

**Model Number** : BAR 1300X

**Power Supply** : AC 120V/60Hz


**Test Mode** : Tx Mode

**Condition** : Temp:22.2°C,Humi:52.4%,Press:100.3kPa

**Antenna/Distance** : 2021 BBHA 9120D 3#/3m/VERTICAL

**Memo** : 3DH5 2480+SRD 2406+11B 2437

Data: 48

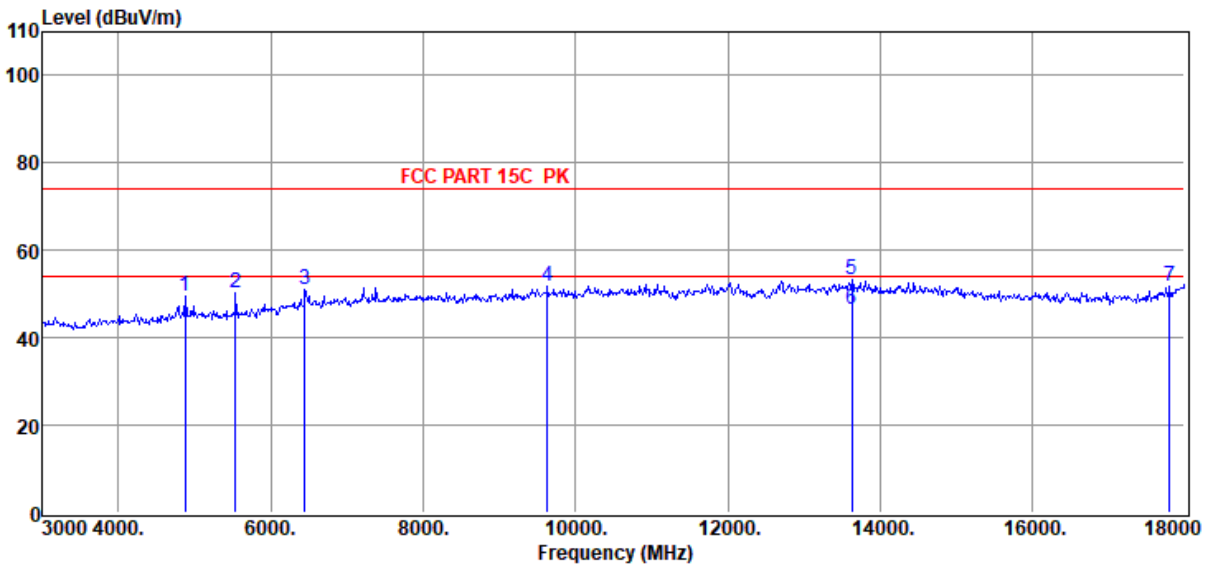

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	4874.00	52.65	32.70	40.37	2.49	2.17	49.64	74.00	-24.36	Peak	VERTICAL
2	5535.00	52.69	32.88	40.45	2.60	2.52	50.24	74.00	-23.76	Peak	VERTICAL
3	6450.00	50.28	35.08	40.14	3.25	2.56	51.03	74.00	-22.97	Peak	VERTICAL
4	9630.00	47.69	38.62	40.34	3.63	2.37	51.97	74.00	-22.03	Peak	VERTICAL
5	13635.00	46.15	39.97	39.96	4.14	2.92	53.22	74.00	-20.78	Peak	VERTICAL
6	13635.00	39.57	39.97	39.96	4.14	2.92	46.64	54.00	-7.36	Average	VERTICAL
7	17805.00	42.30	41.29	40.58	4.91	3.74	51.66	74.00	-22.34	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.



## 9. RF Conducted Spurious Emissions

### 9.1. Block diagram of test setup

Same as section 4.1

### 9.2. Limits

In any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

### 9.3. Test procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Establish a reference level by using the following procedure:

Center frequency	Test frequency
RBW:	100 kHz
VBW:	300 kHz
Span	Wide enough to capture the peak level of the in-band emission
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

(3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.

(4) Set the spectrum analyzer as follows:

RBW:	100 kHz
VBW:	300 kHz
Span	Encompass frequency range to be measured
Number of measurement points	$\geq \text{span}/\text{RBW}$
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold


(5) Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude of all unwanted emissions outside of the authorized frequency band


9.4. Test result

EUT Set Mode	CH or Frequency	Result (dBm)	EUT Set Mode	CH or Frequency	Result (dBm)
11b	CH1	Pass	11g	CH1	Pass
	CH6	Pass		CH6	Pass
	CH11	Pass		CH11	Pass
11n HT 20	CH1	Pass	11n HT 40	CH3	Pass
	CH6	Pass		CH6	Pass
	CH11	Pass		CH9	Pass
11ax HE 20	CH1	Pass	11ax HE 40	CH3	Pass
	CH6	Pass		CH6	Pass
	CH11	Pass		CH9	Pass


Note: for 802.11ax mode, according exploratory explorer test, Specific Resource Unit have no distinct influence, so the final test data only record the Worst Case.

9.5. Original test data

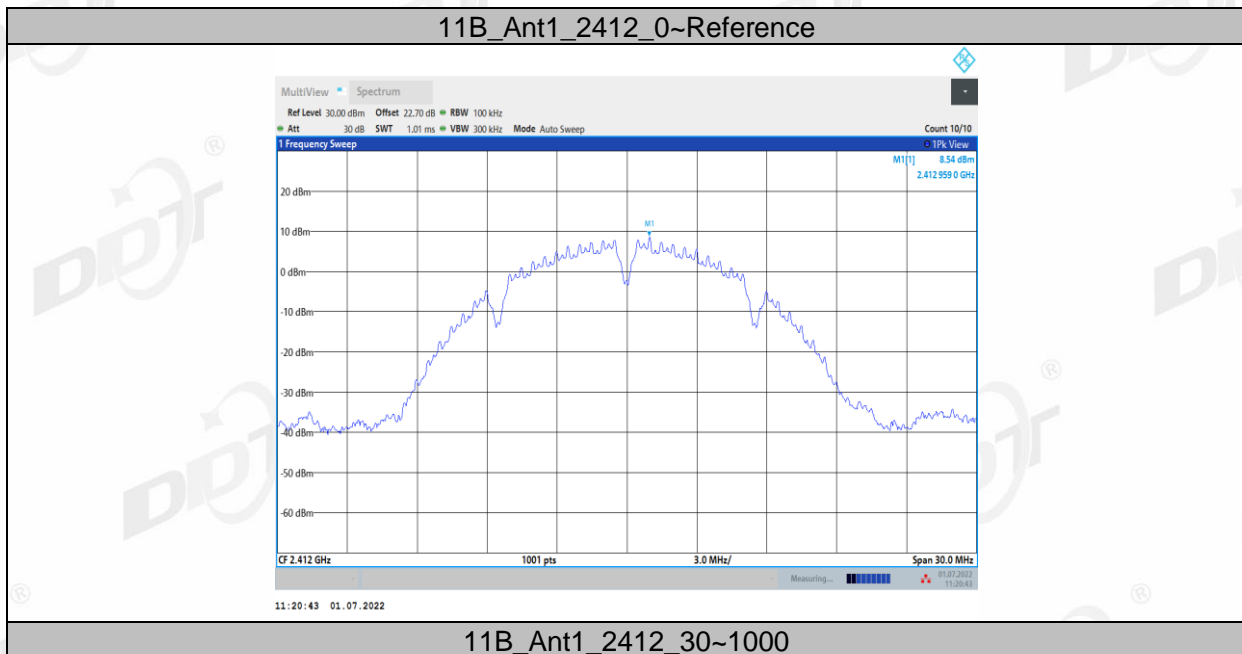


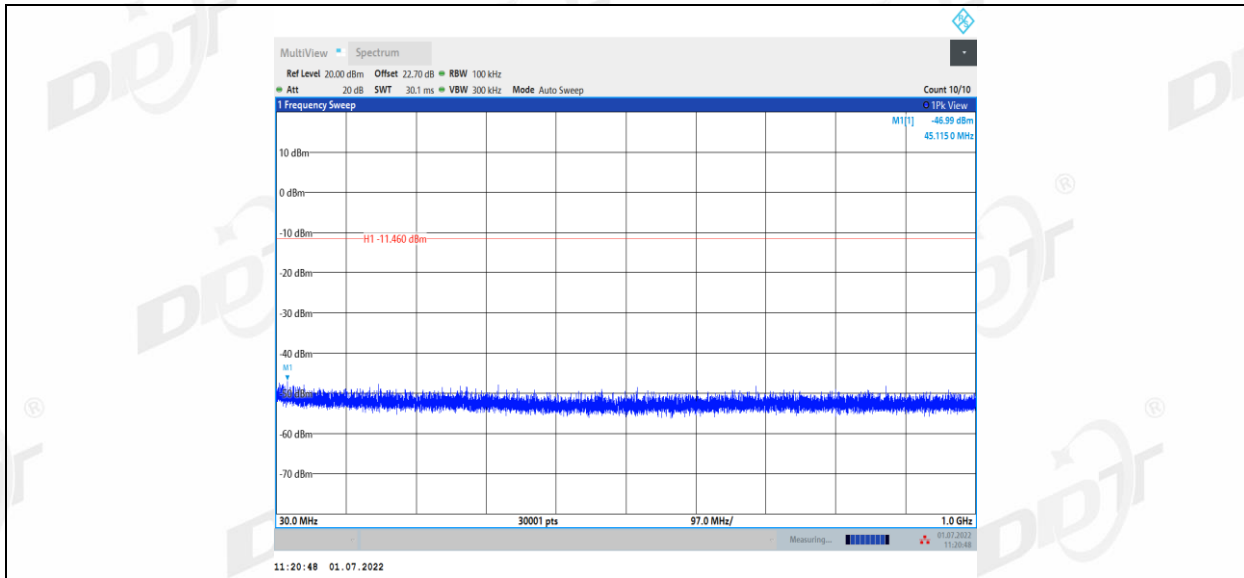


11B\_Ant1\_2412\_1000~26500

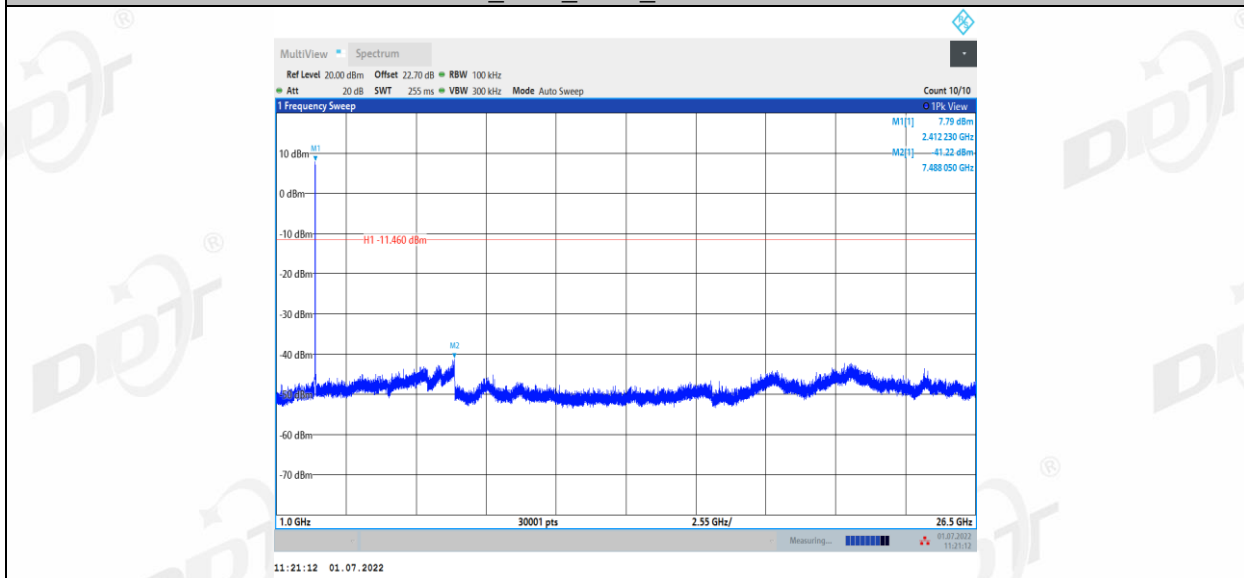


11B\_Ant2\_2412\_0~Reference

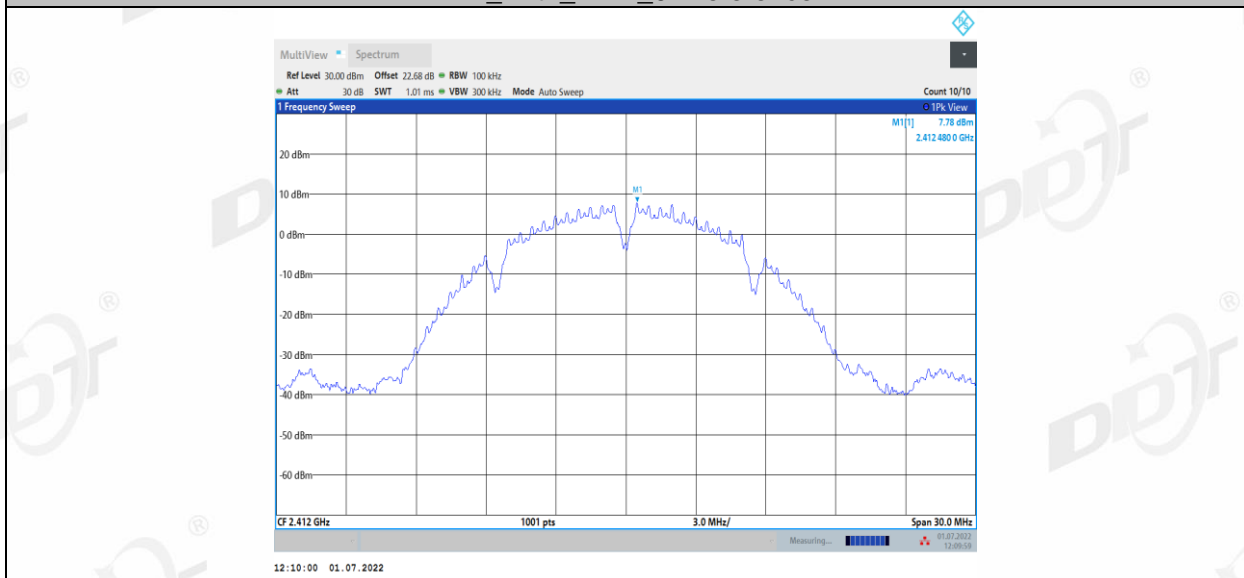


11B\_Ant2\_2412\_30~1000

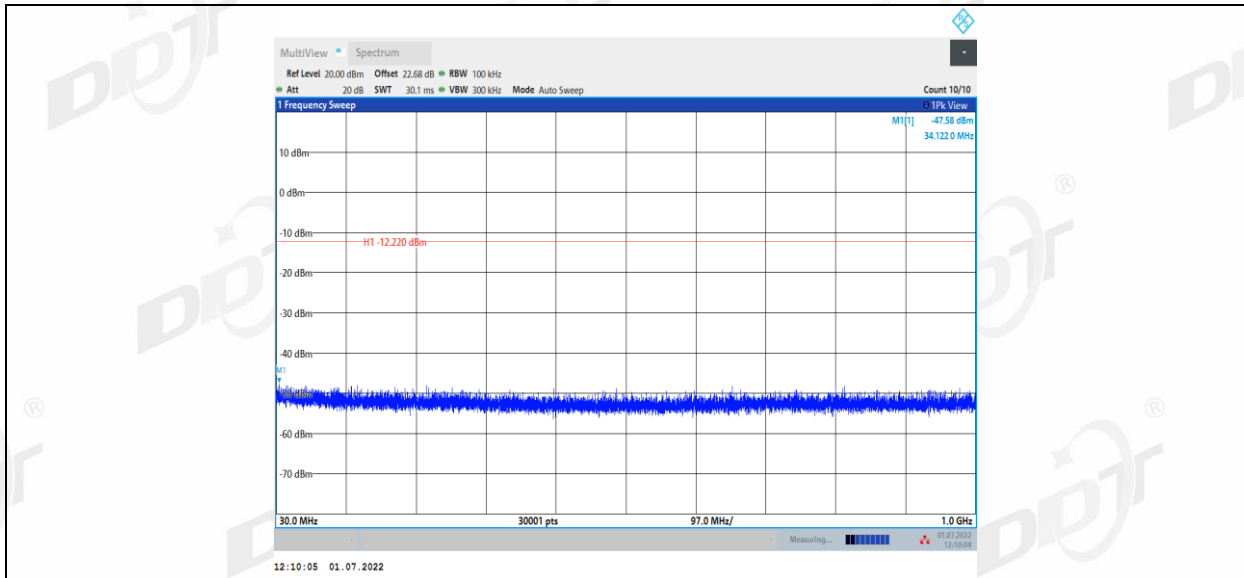


11B\_Ant2\_2412\_1000~26500

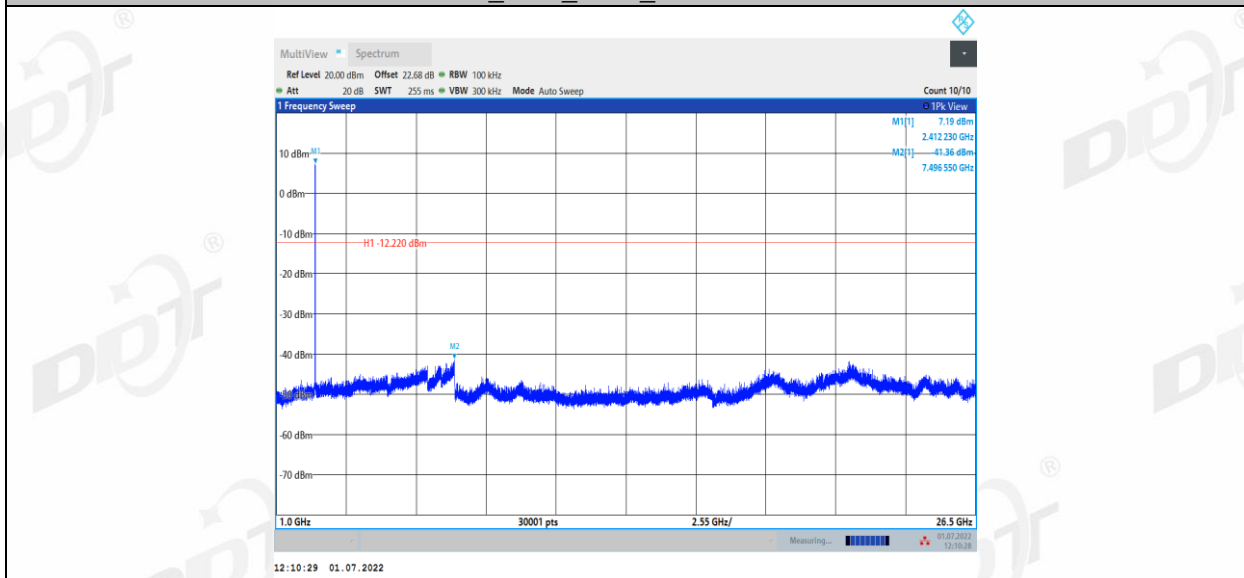


11B\_Ant1\_2437\_0~Reference

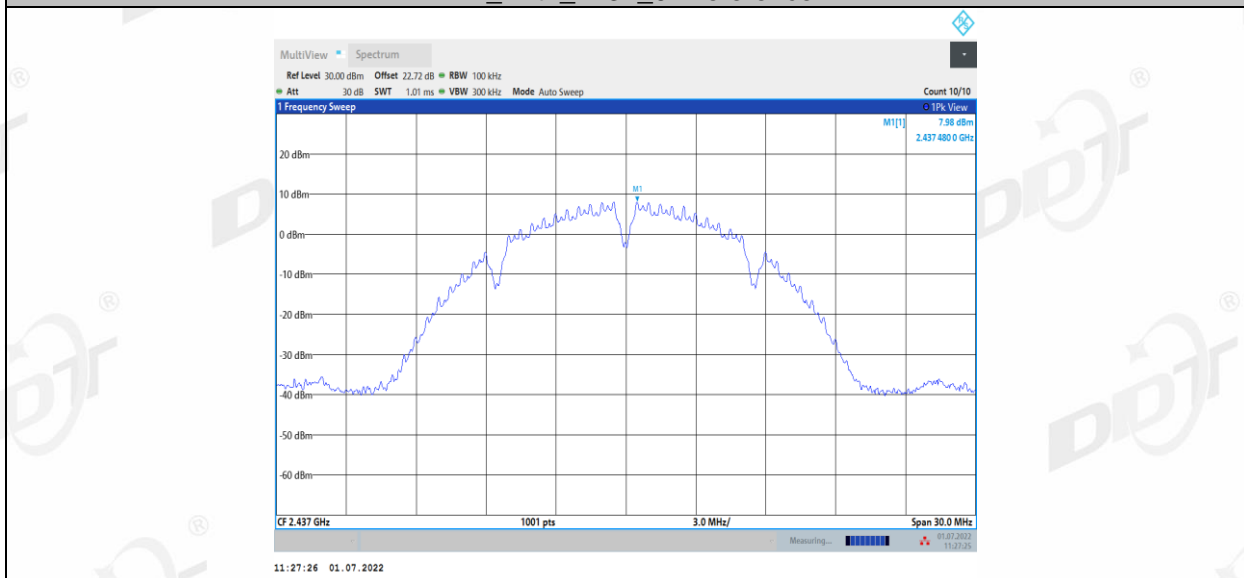


11B\_Ant1\_2437\_30~1000

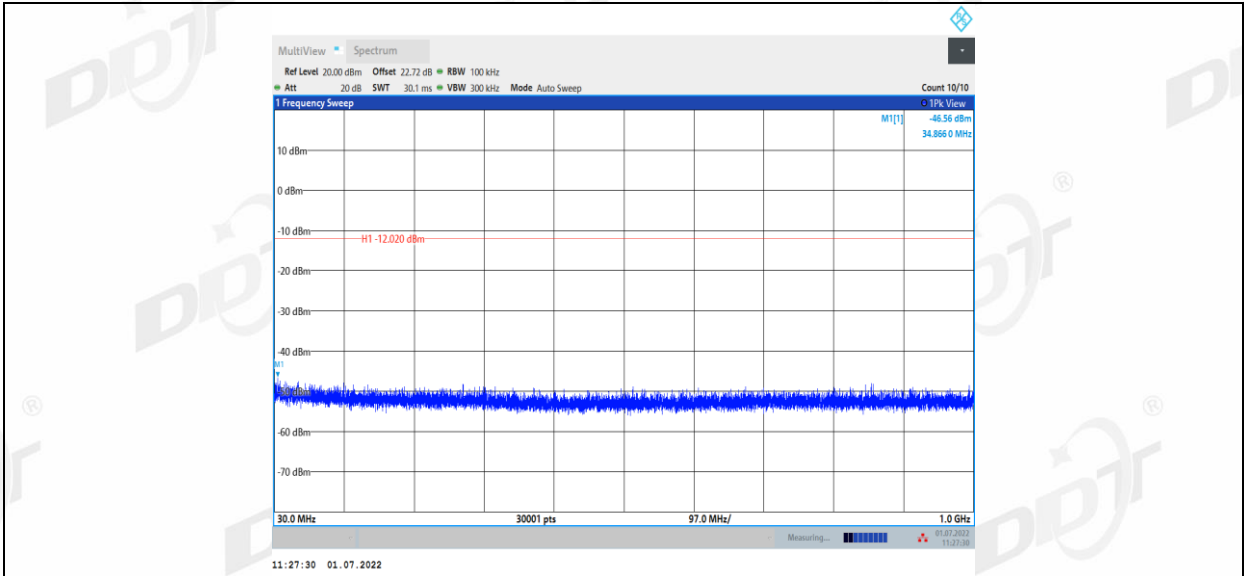


11B\_Ant1\_2437\_1000~26500

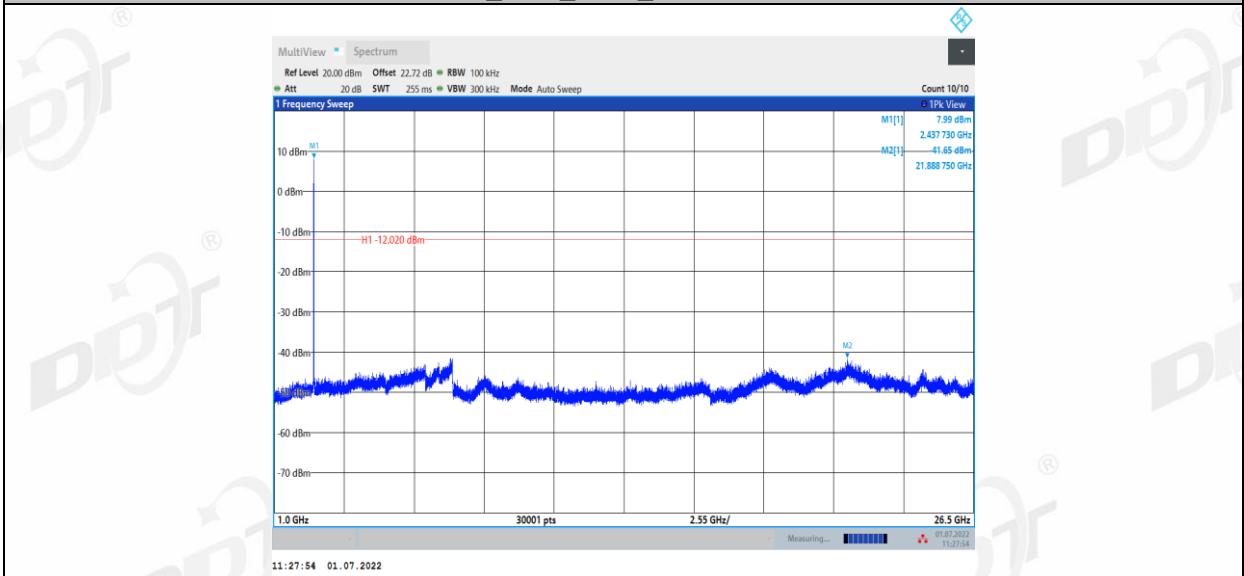


11B\_Ant2\_2437\_0~Reference

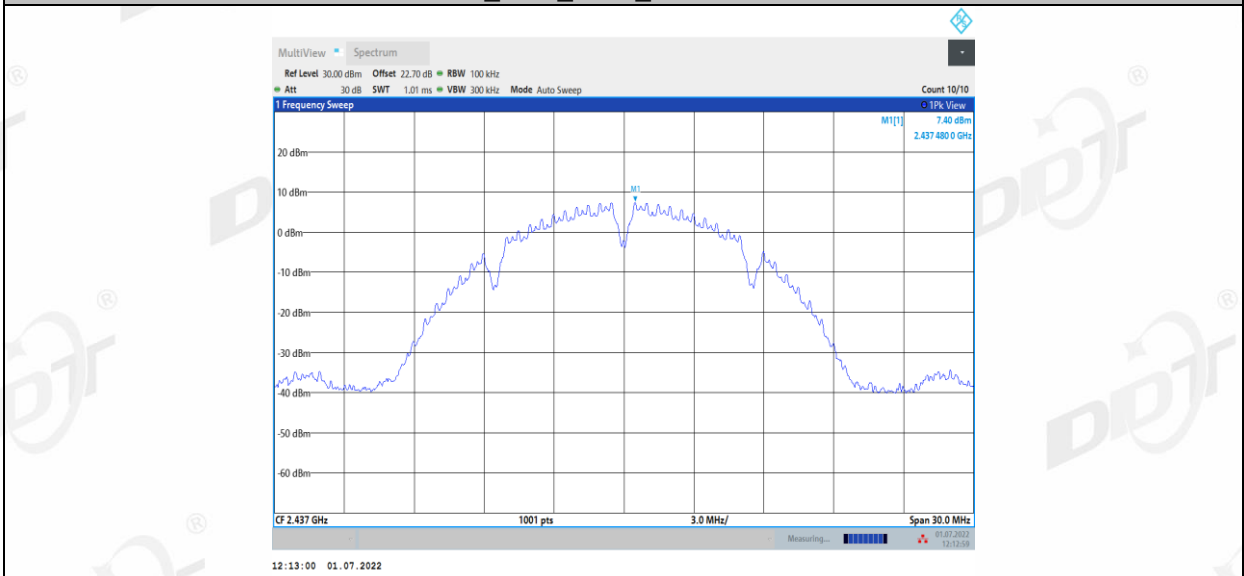


11B\_Ant2\_2437\_30~1000

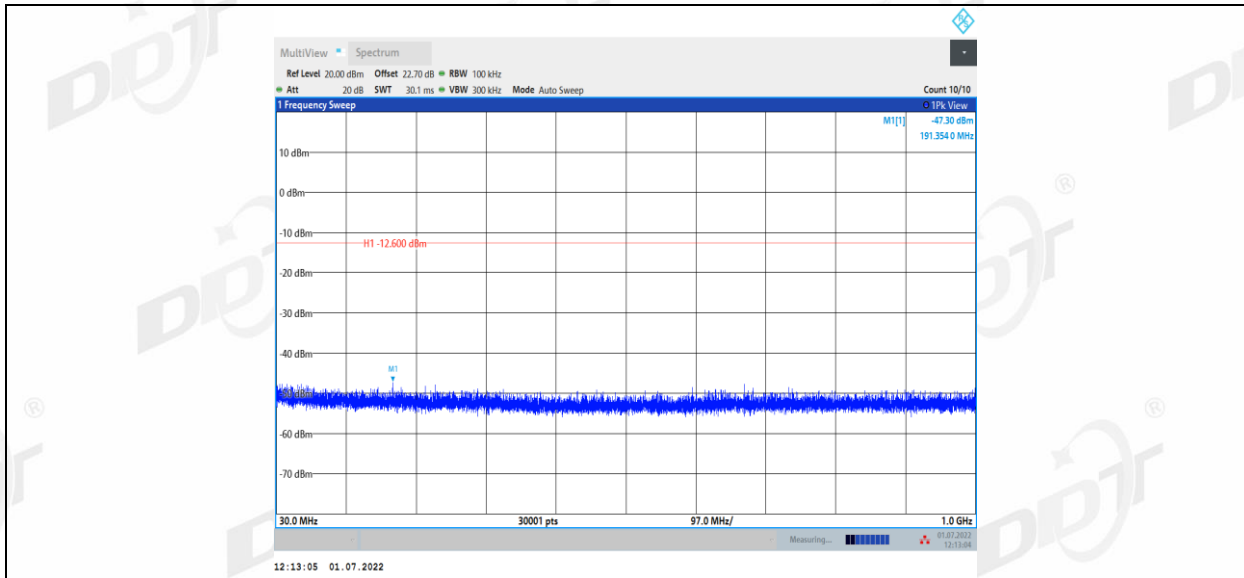


11B\_Ant2\_2437\_1000~26500

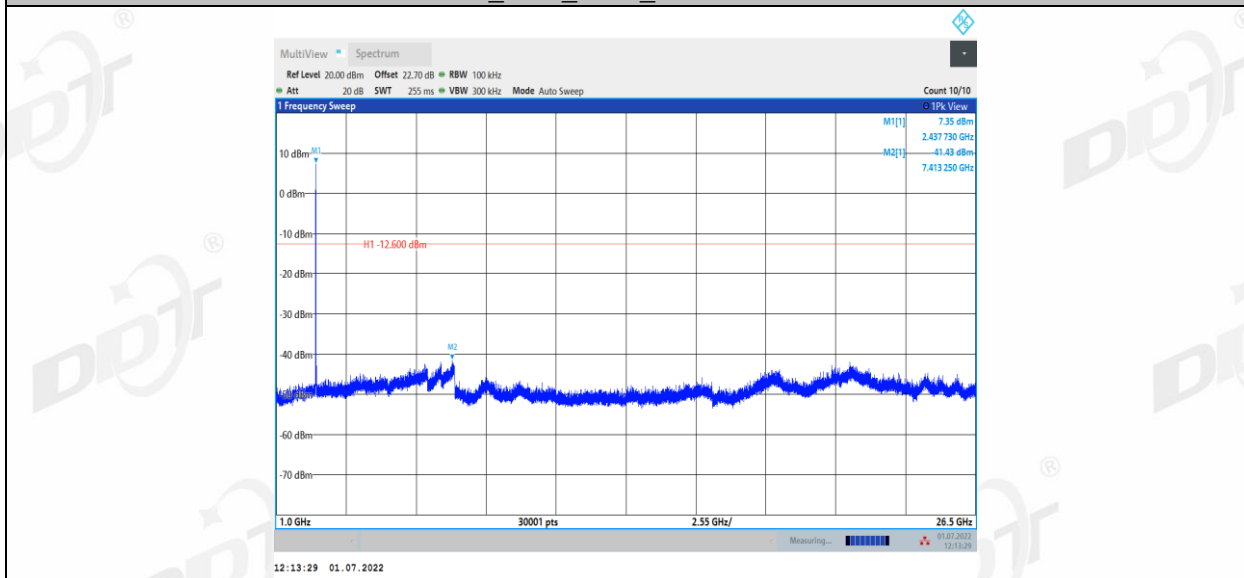


11B\_Ant1\_2462\_0~Reference

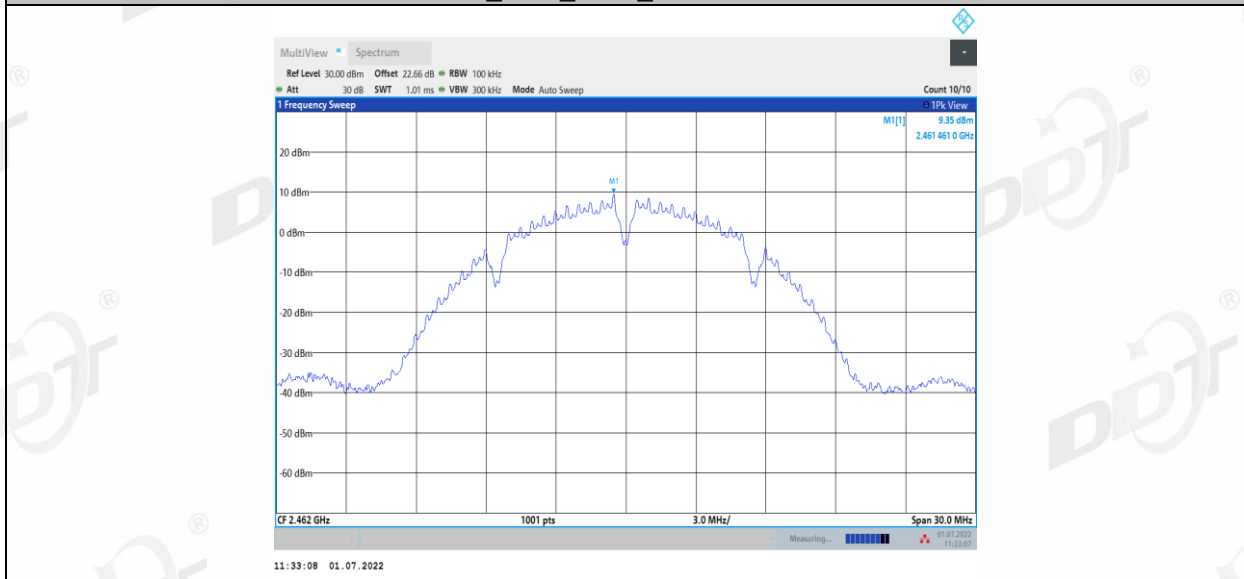


11B\_Ant1\_2462\_30~1000

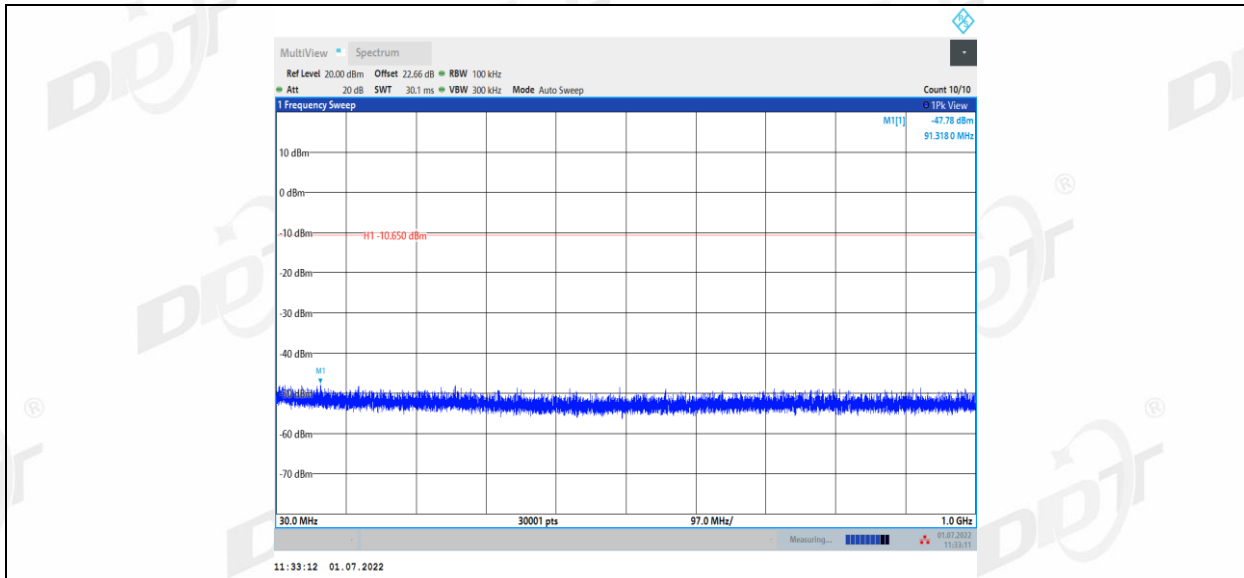


11B\_Ant1\_2462\_1000~26500

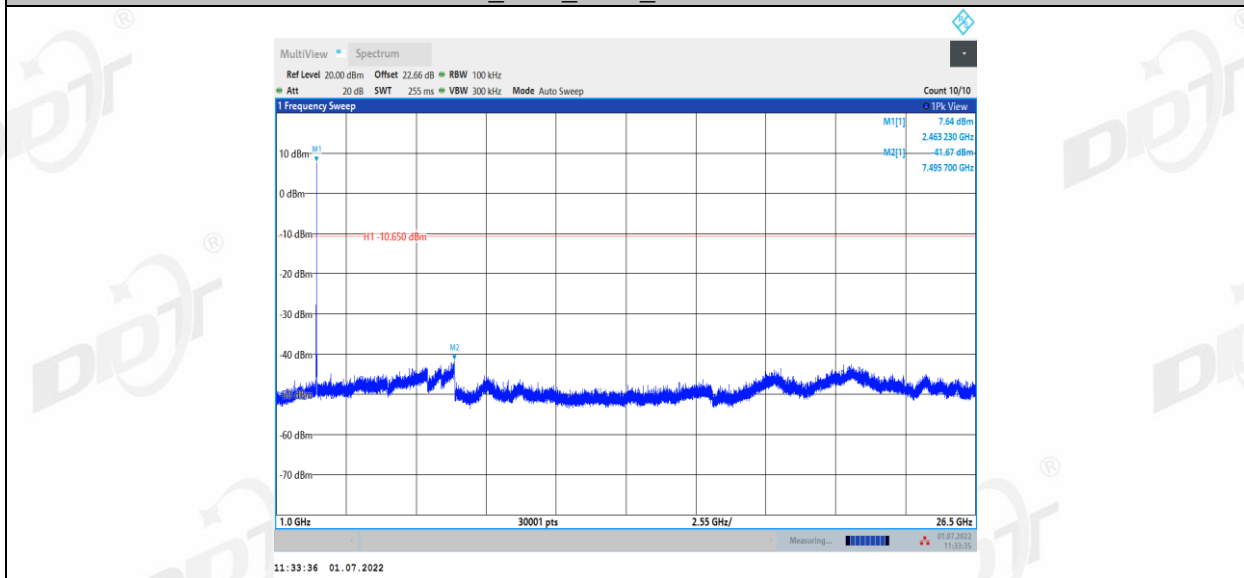


11B\_Ant2\_2462\_0~Reference

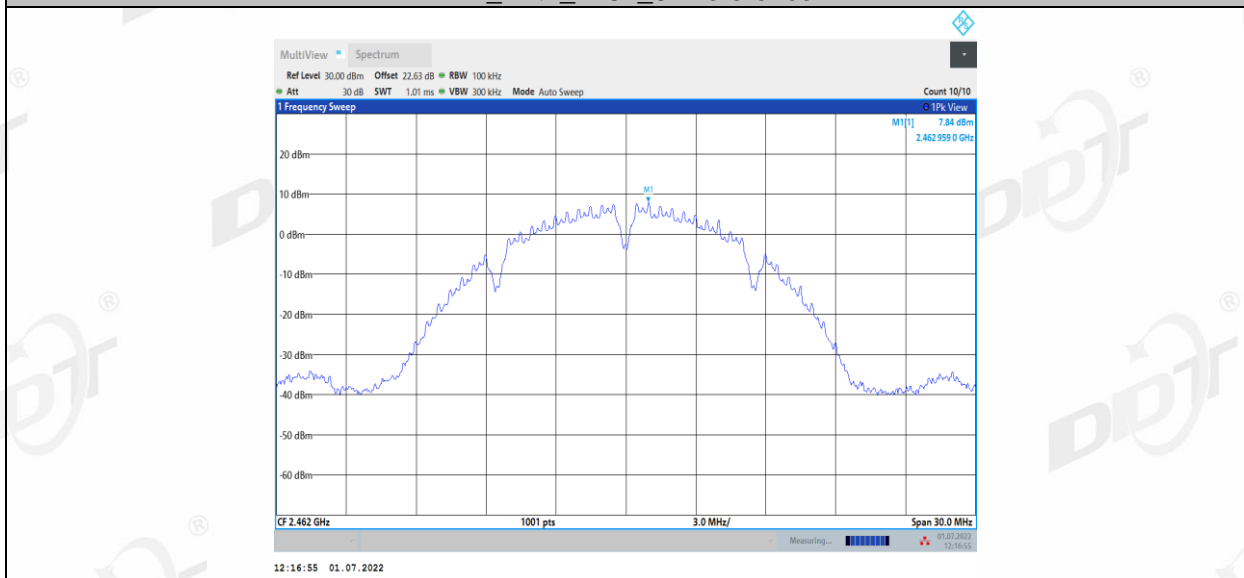


11B\_Ant2\_2462\_30~1000

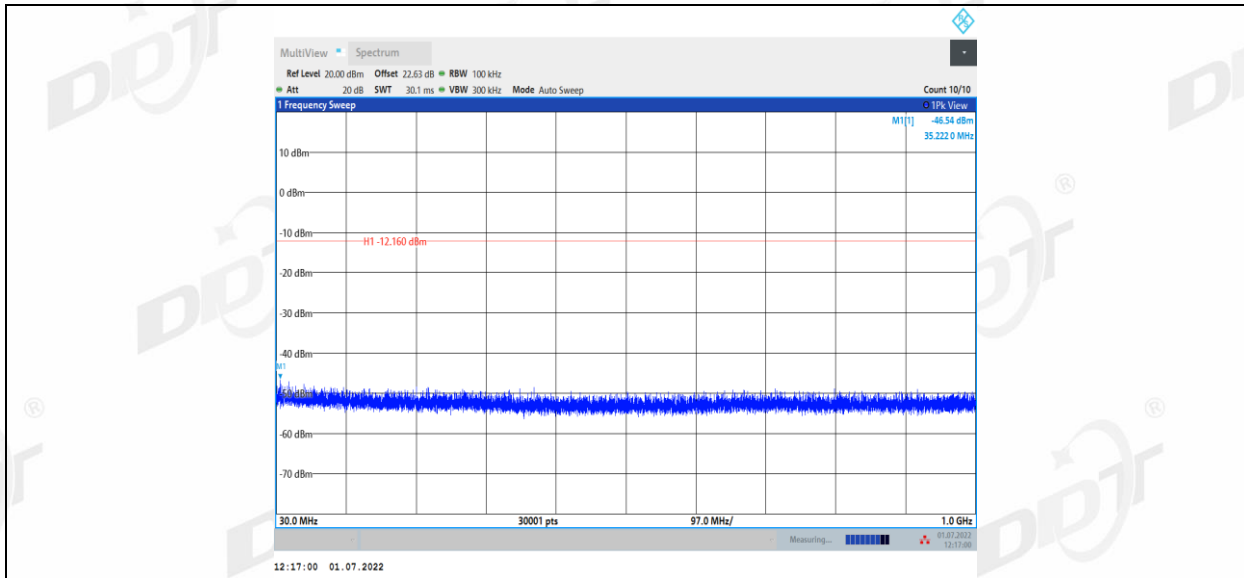

11B\_Ant2\_2462\_1000~26500

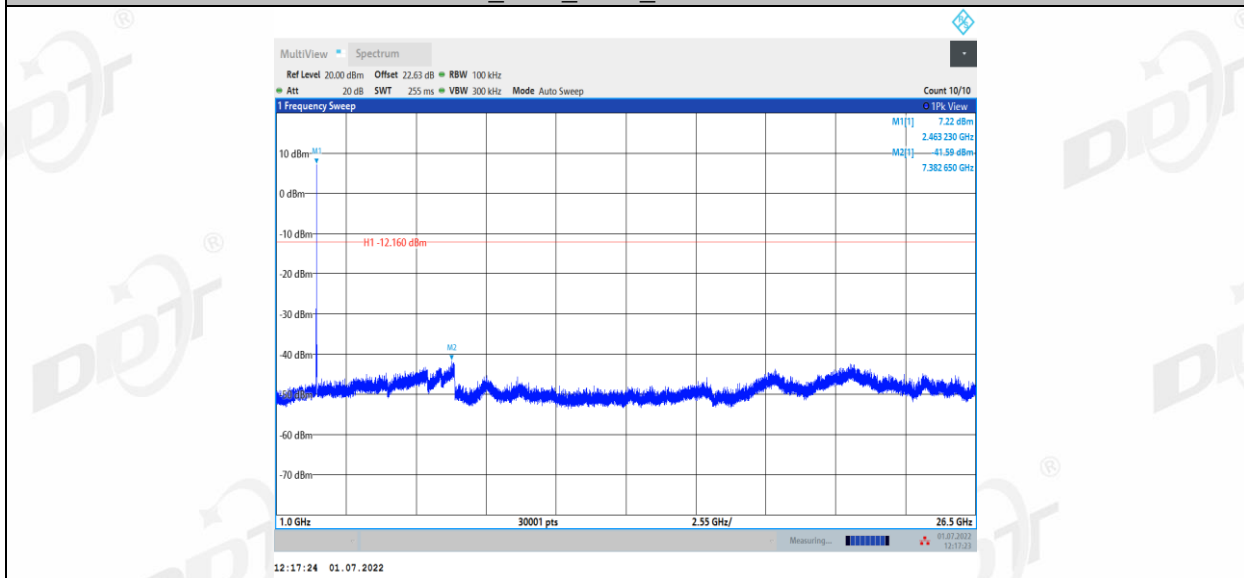


11G\_Ant1\_2412\_0~Reference

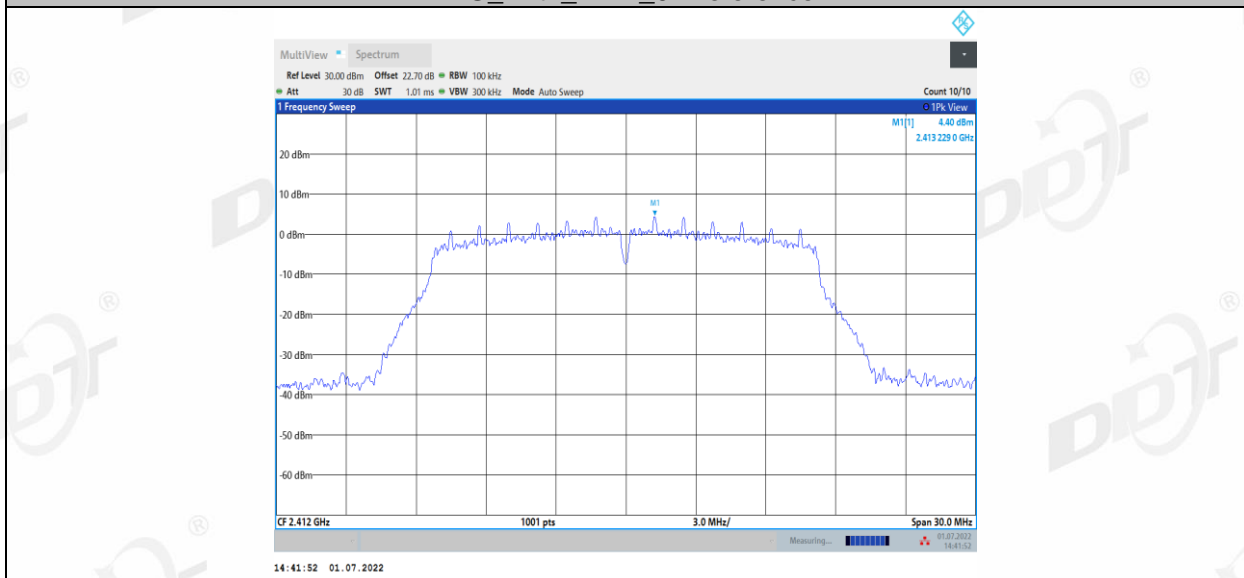


11G\_Ant1\_2412\_30~1000




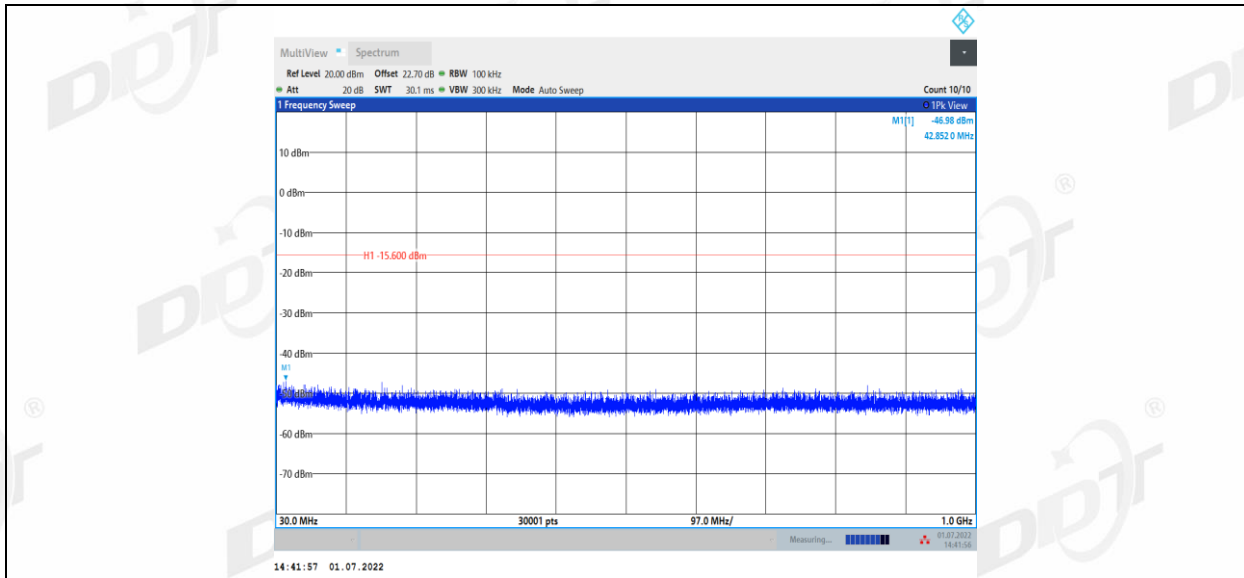


11G\_Ant1\_2412\_1000~26500

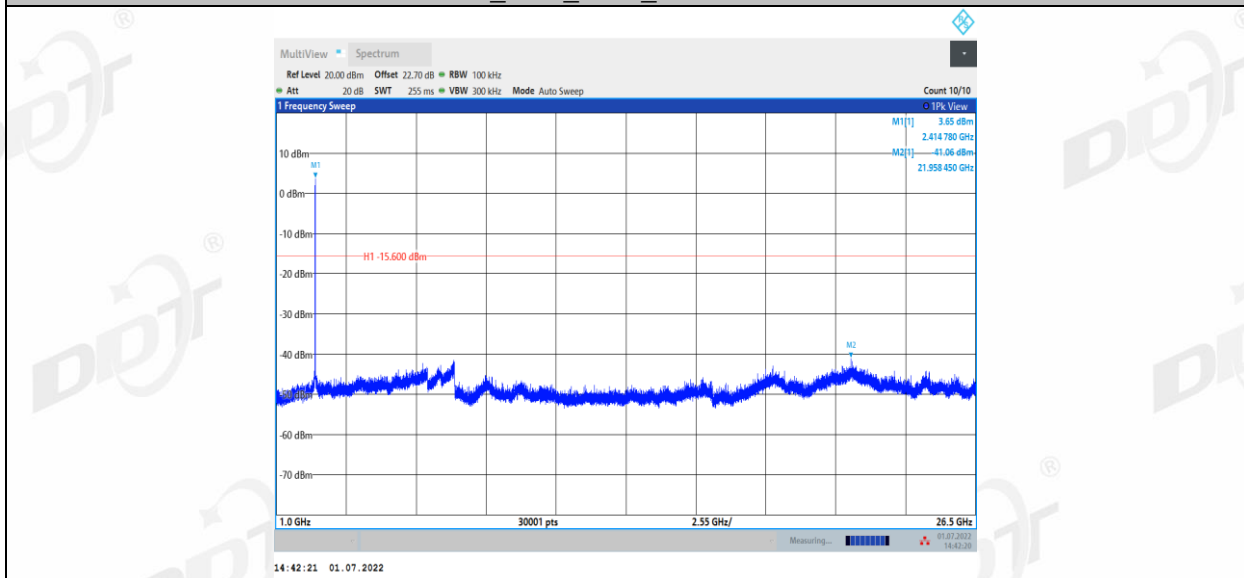


11G\_Ant2\_2412\_0~Reference

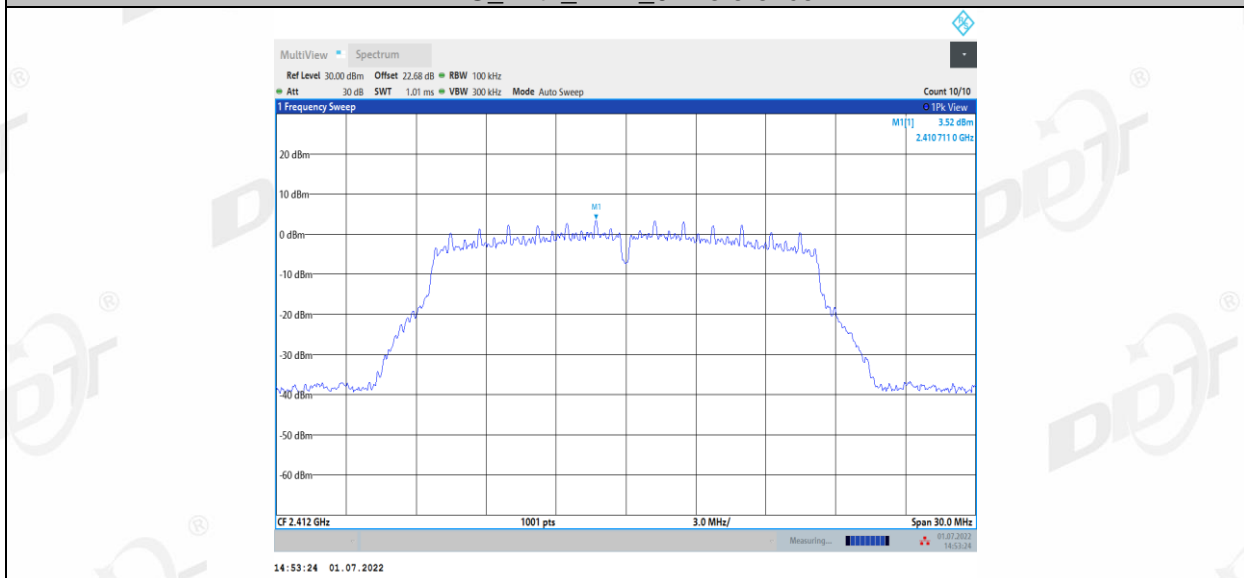


11G\_Ant2\_2412\_30~1000

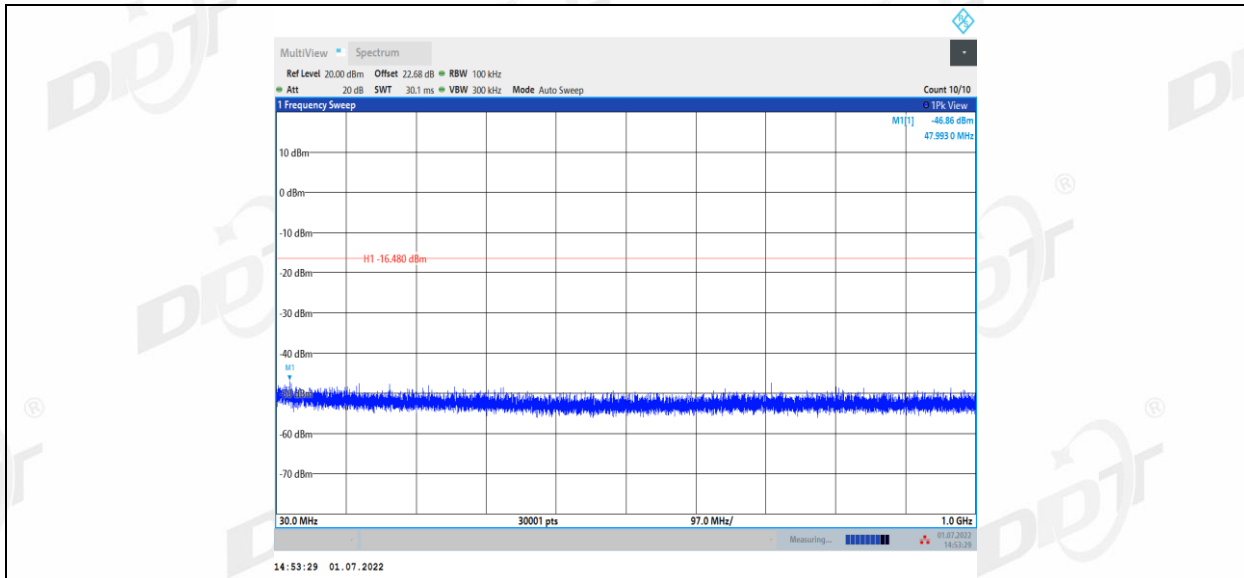


11G\_Ant2\_2412\_1000~26500

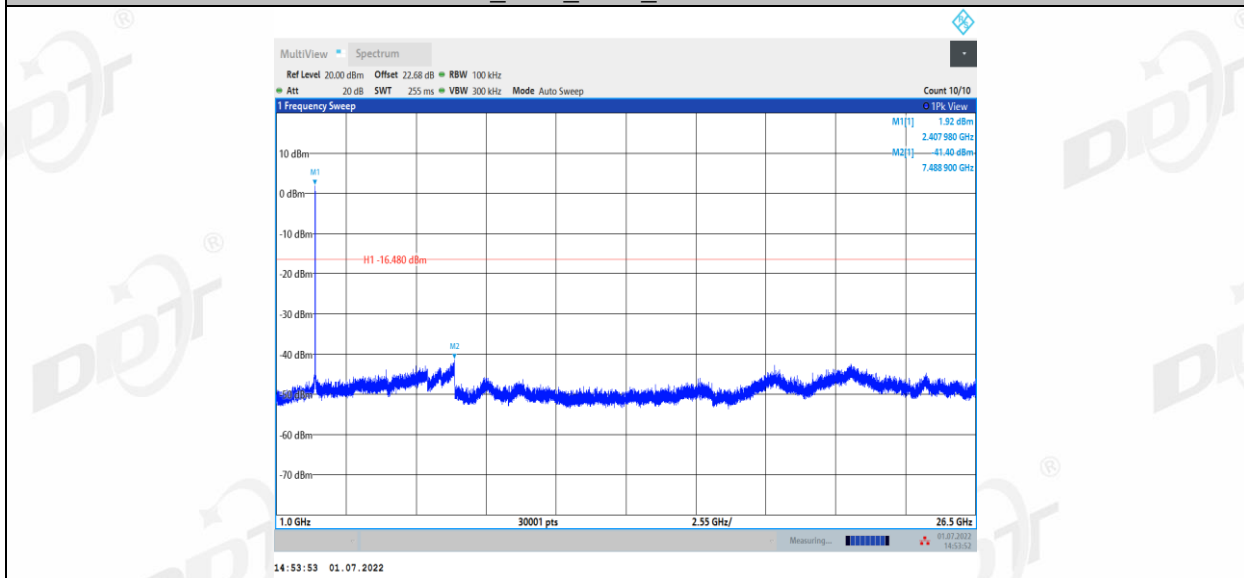


11G\_Ant1\_2437\_0~Reference

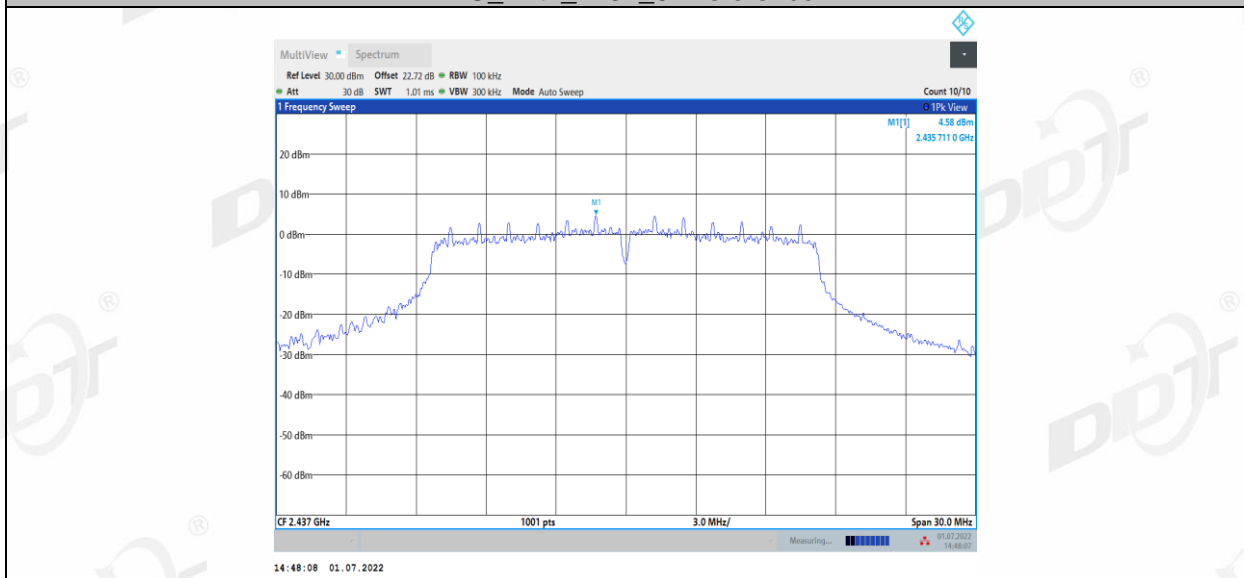


11G\_Ant1\_2437\_30~1000

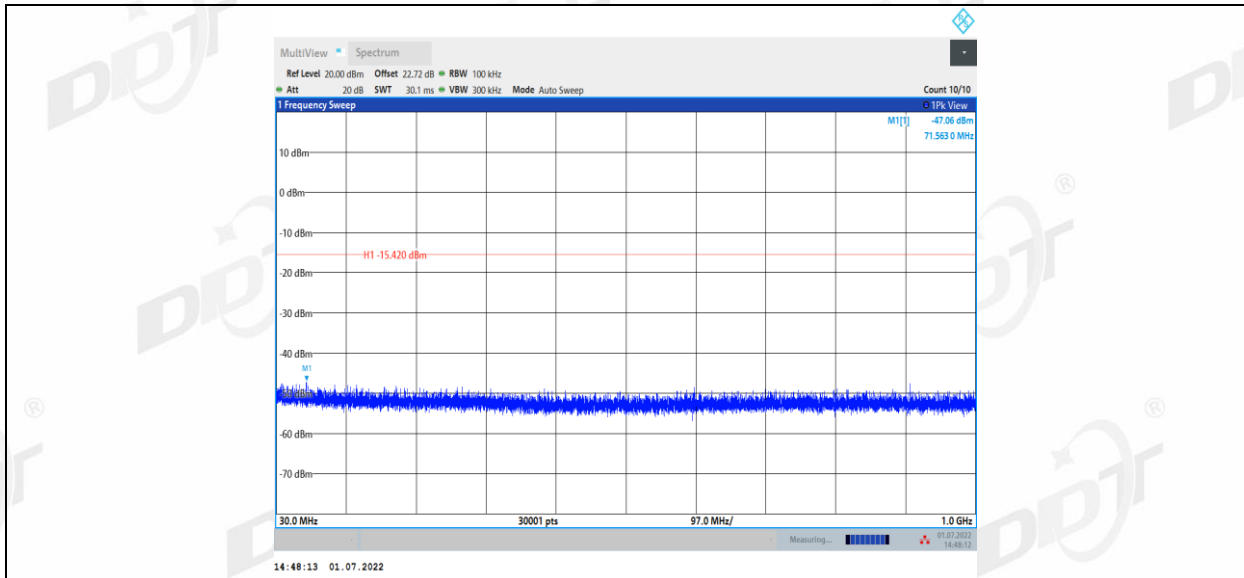


11G\_Ant1\_2437\_1000~26500

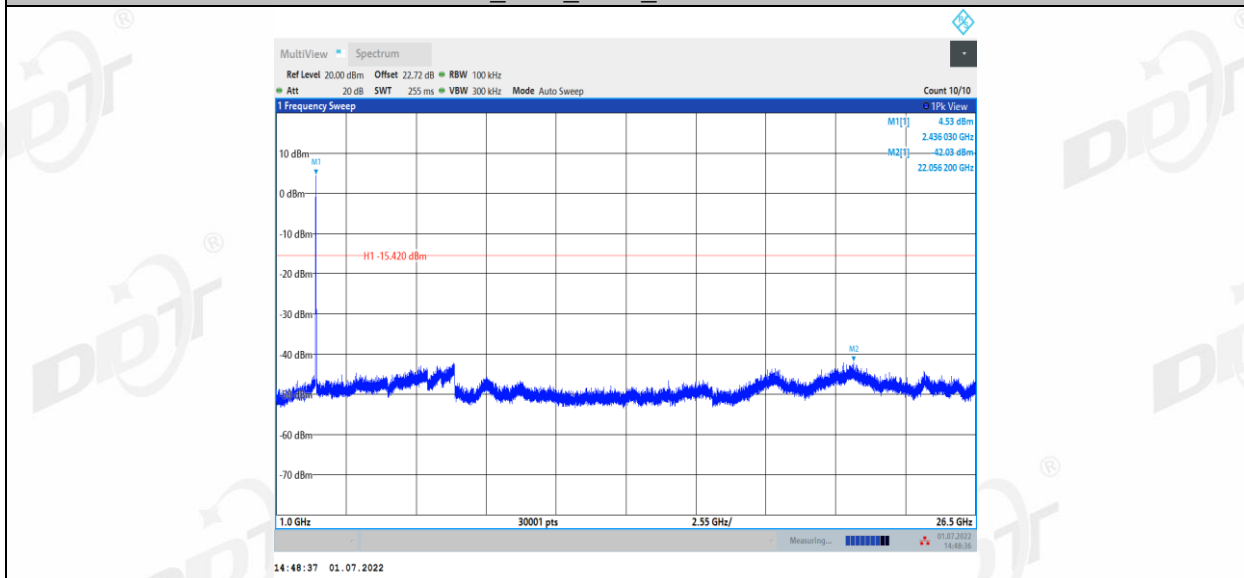


11G\_Ant2\_2437\_0~Reference

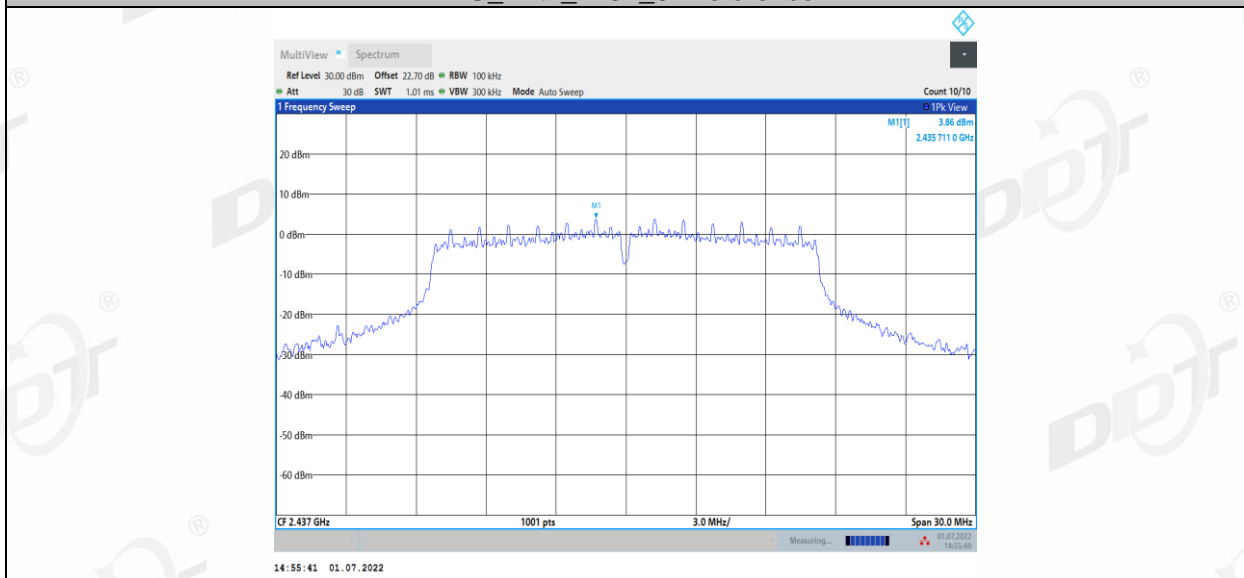


11G\_Ant2\_2437\_30~1000

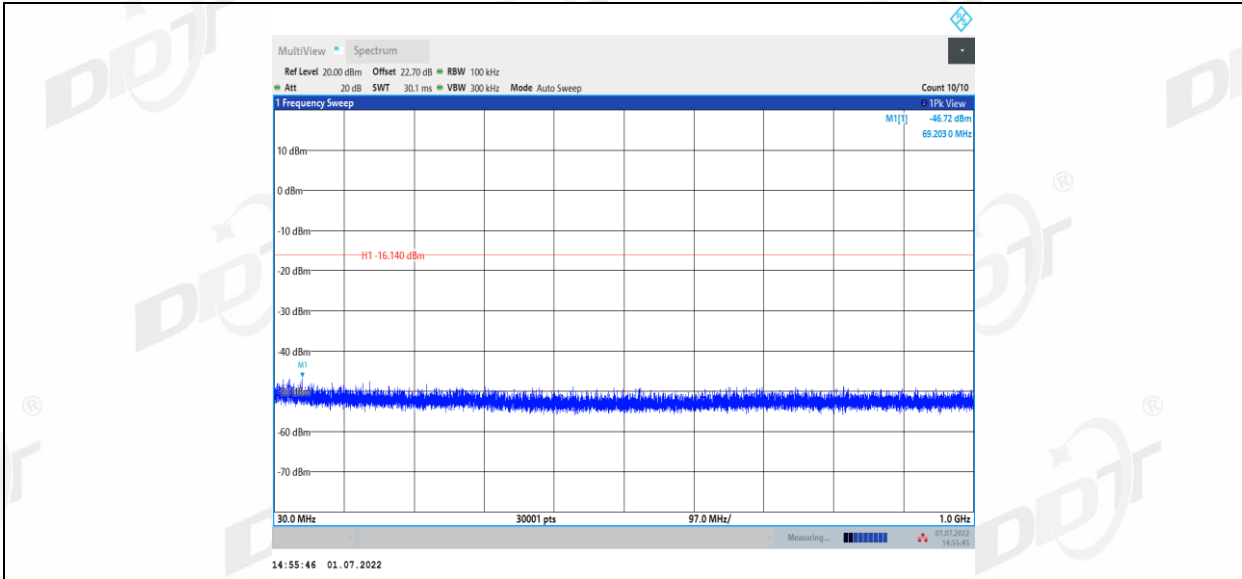


11G\_Ant2\_2437\_1000~26500

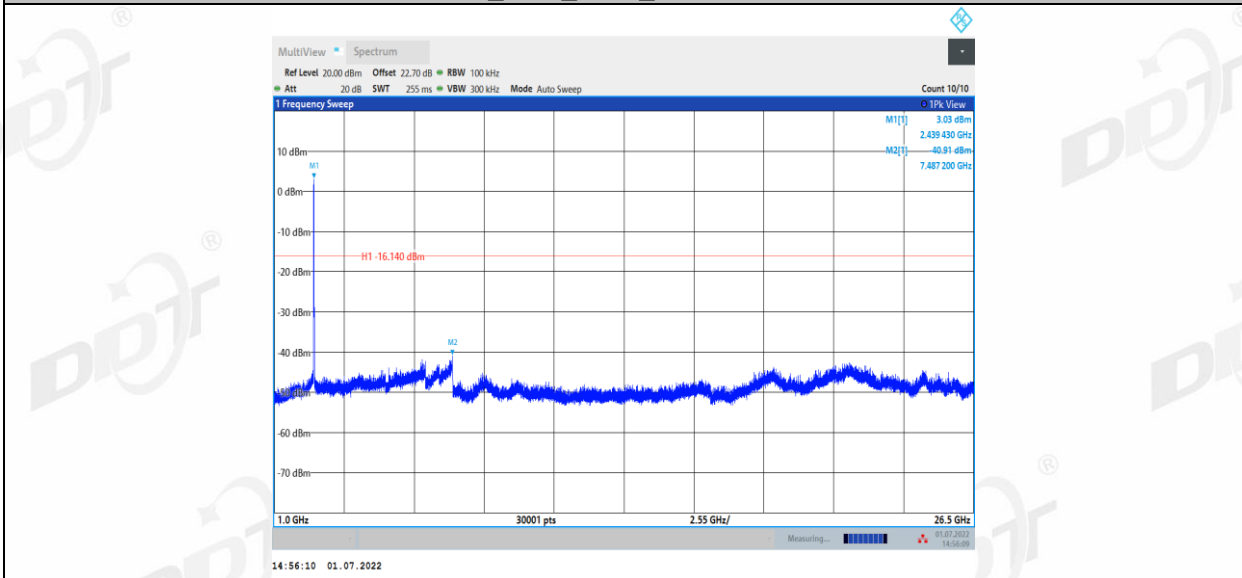


11G\_Ant1\_2462\_0~Reference

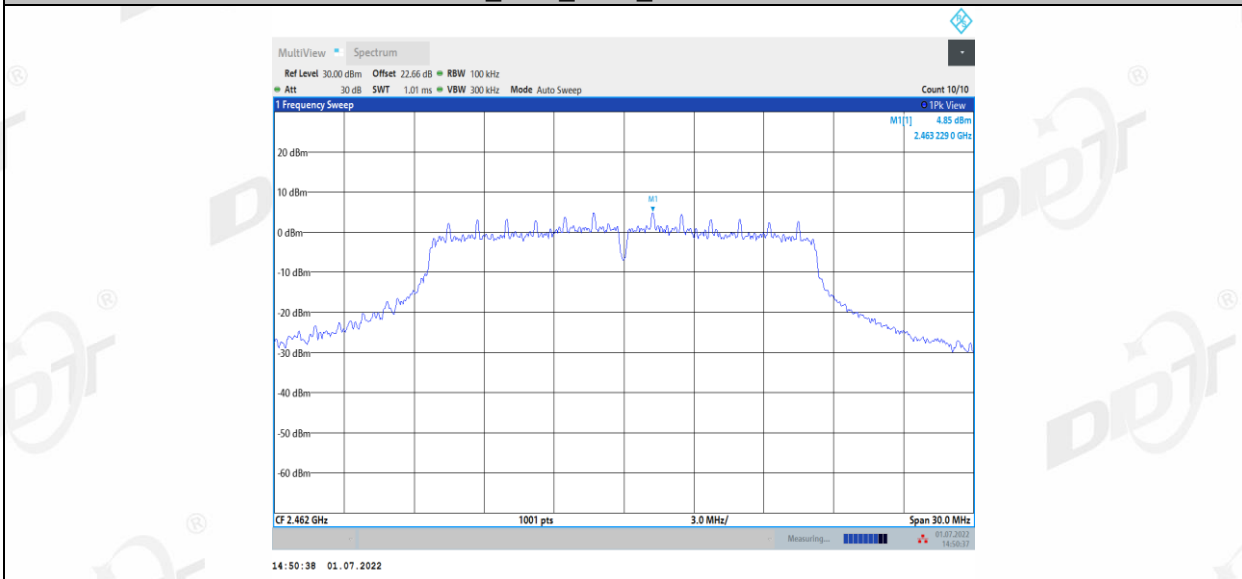


11G\_Ant1\_2462\_30~1000

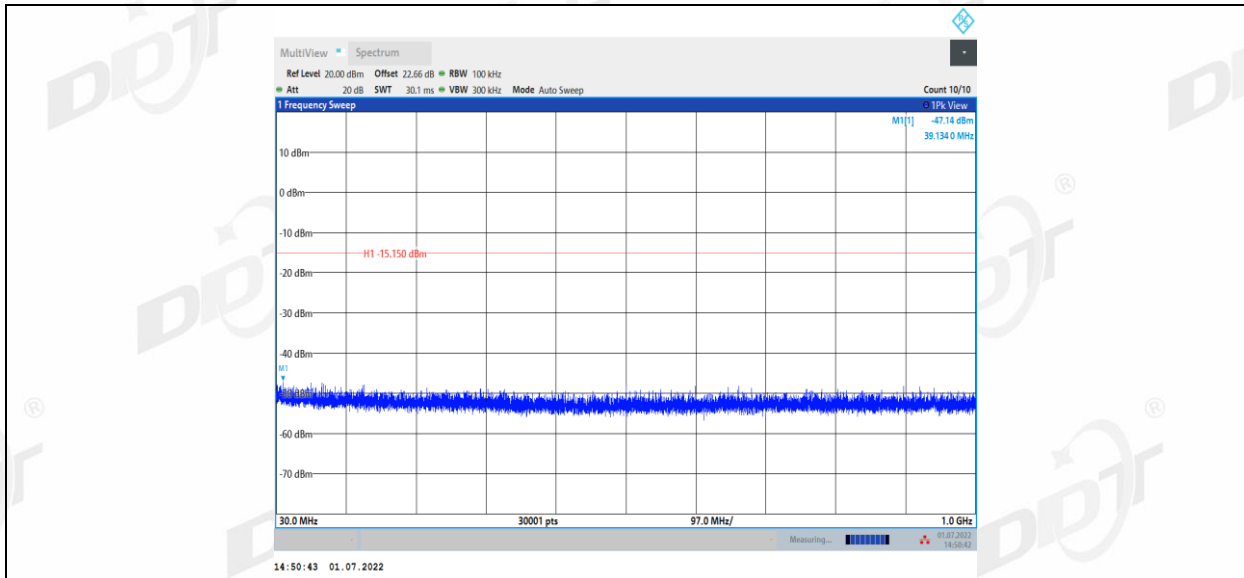


11G\_Ant1\_2462\_1000~26500

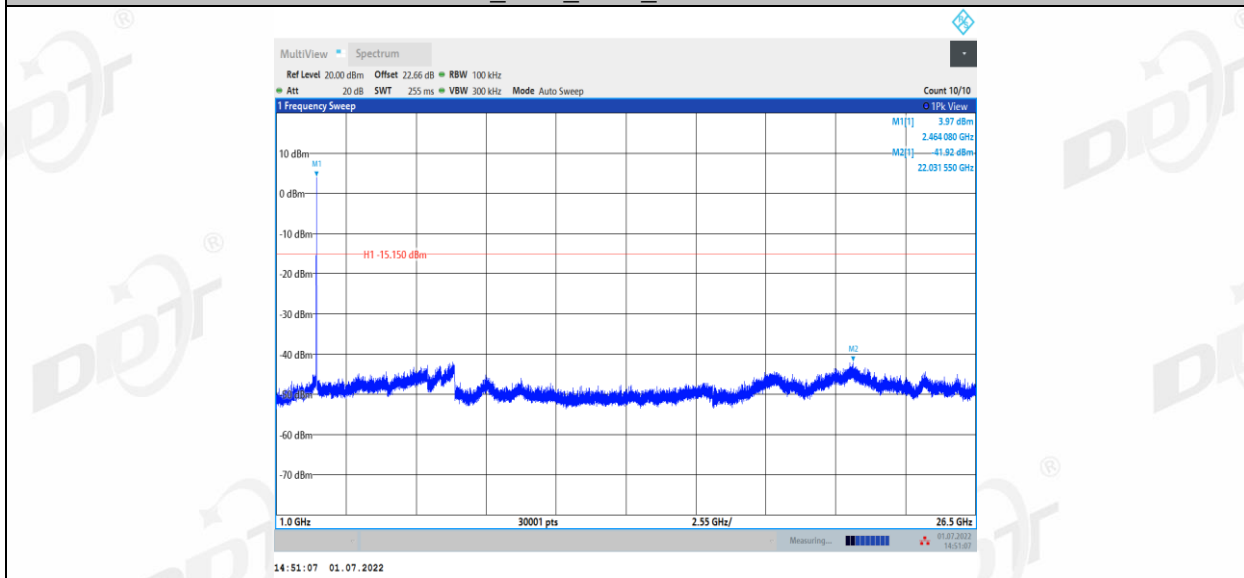


11G\_Ant2\_2462\_0~Reference

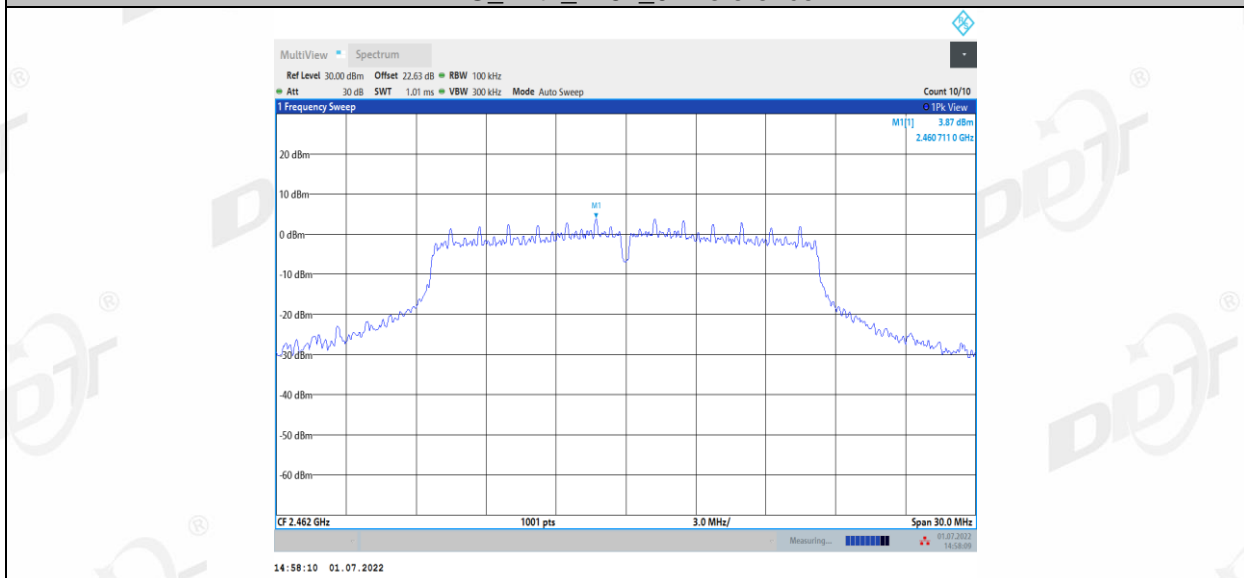


11G\_Ant2\_2462\_30~1000

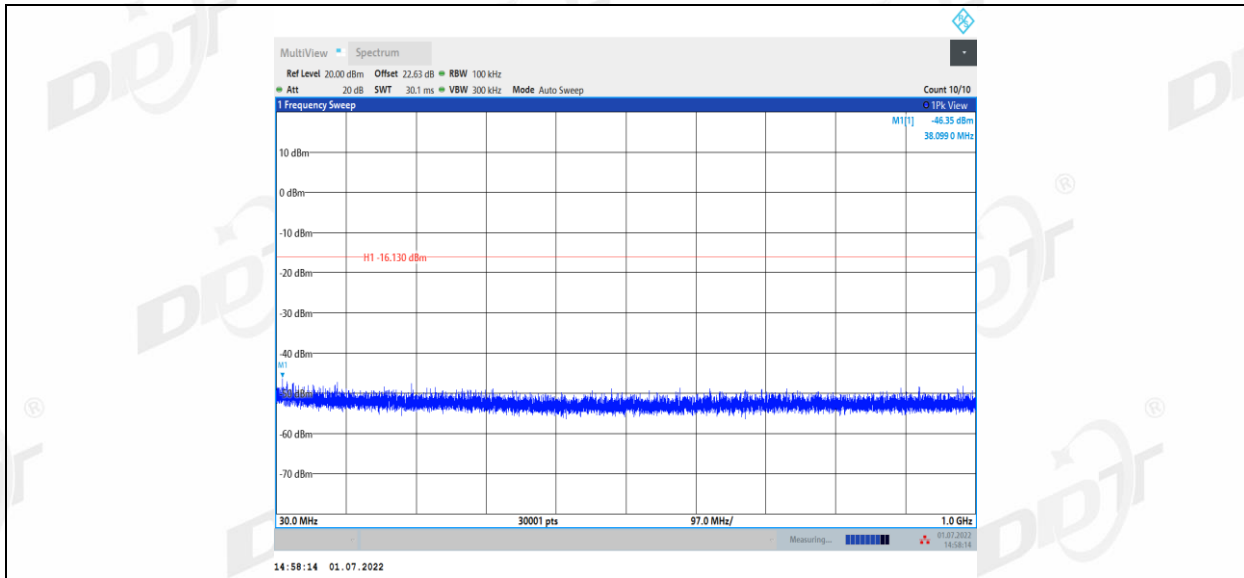


11G\_Ant2\_2462\_1000~26500

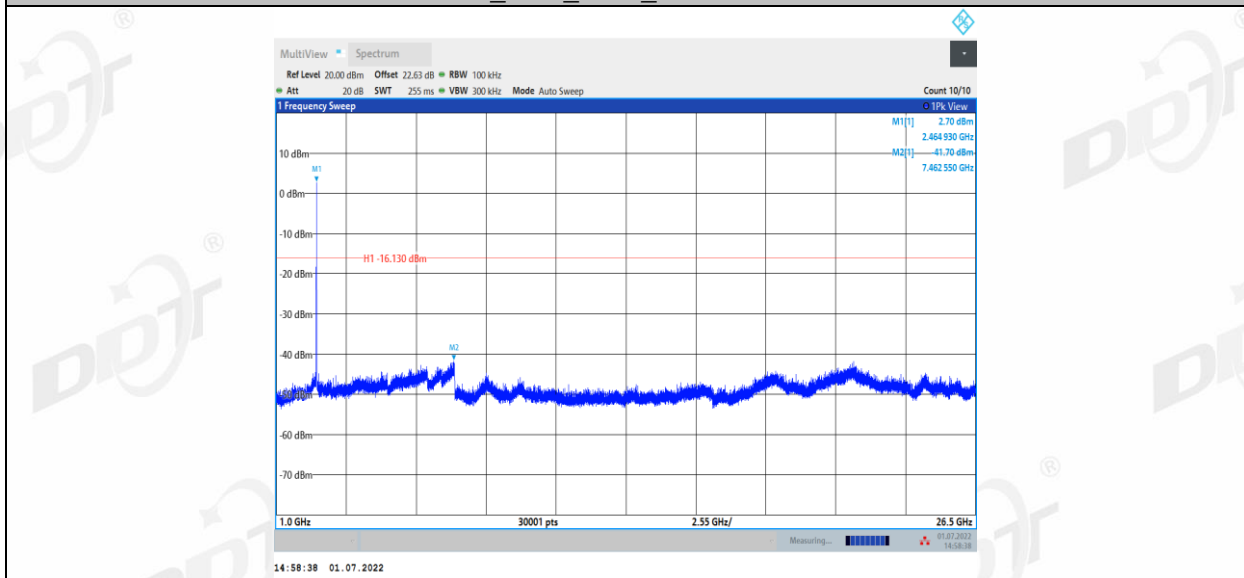


11N20MIMO\_Ant1\_2412\_0~Reference

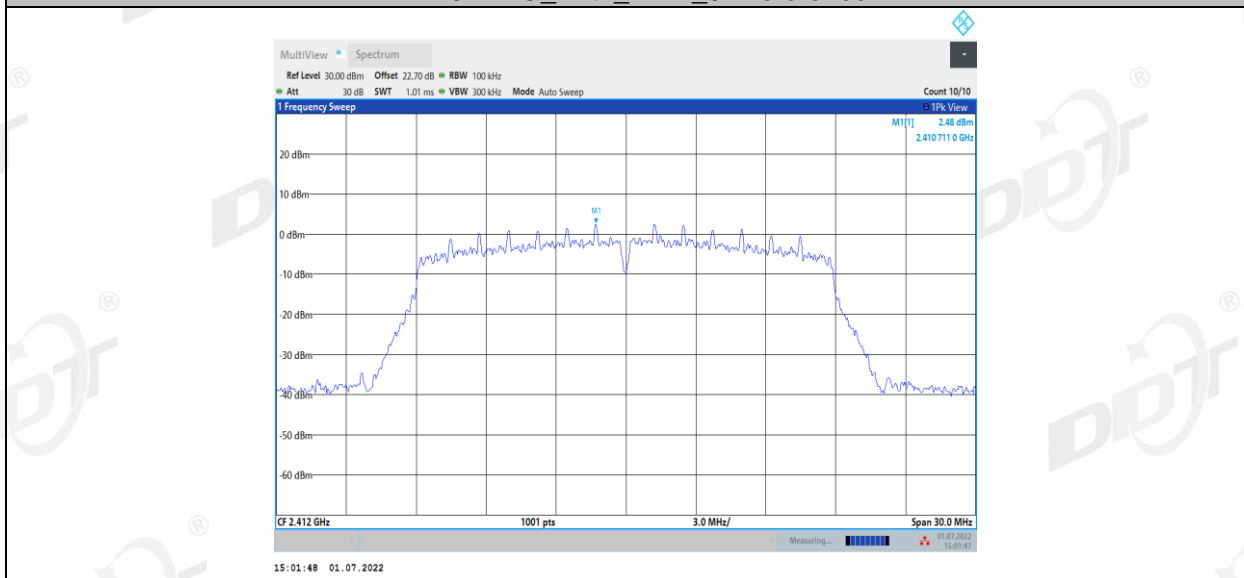


11N20MIMO\_Ant1\_2412\_30~1000

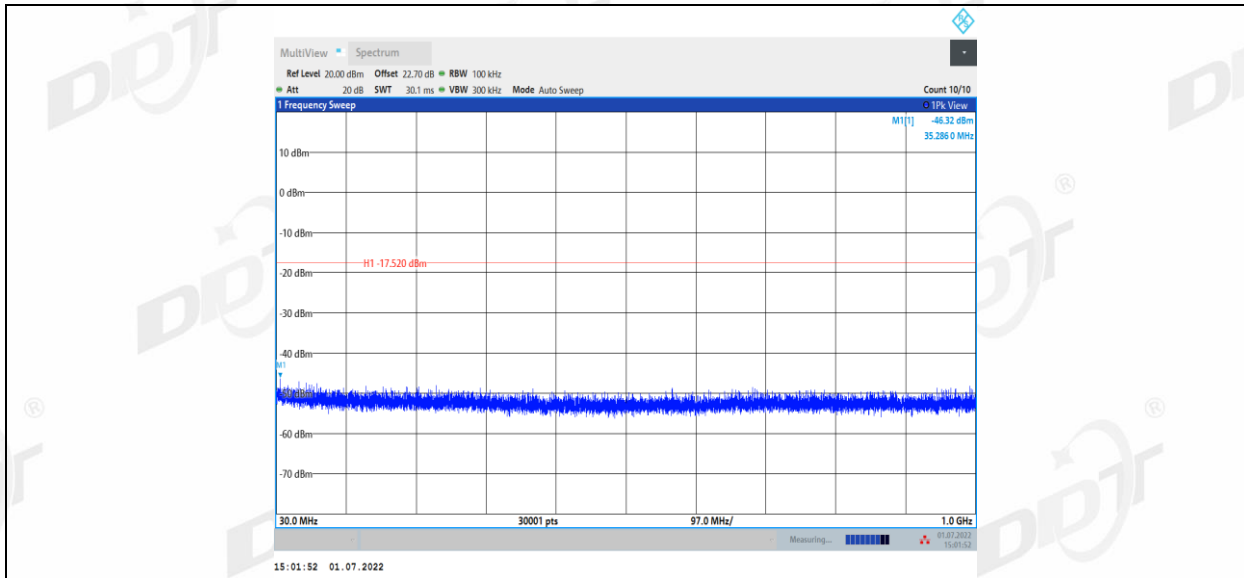


11N20MIMO\_Ant1\_2412\_1000~26500

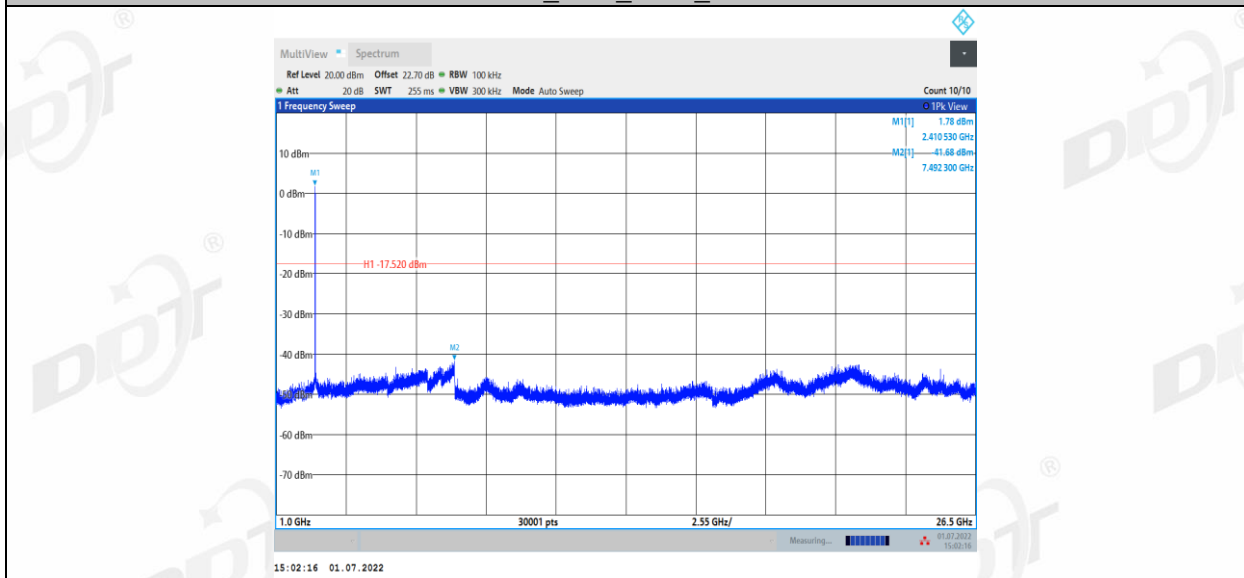


11N20MIMO\_Ant2\_2412\_0~Reference

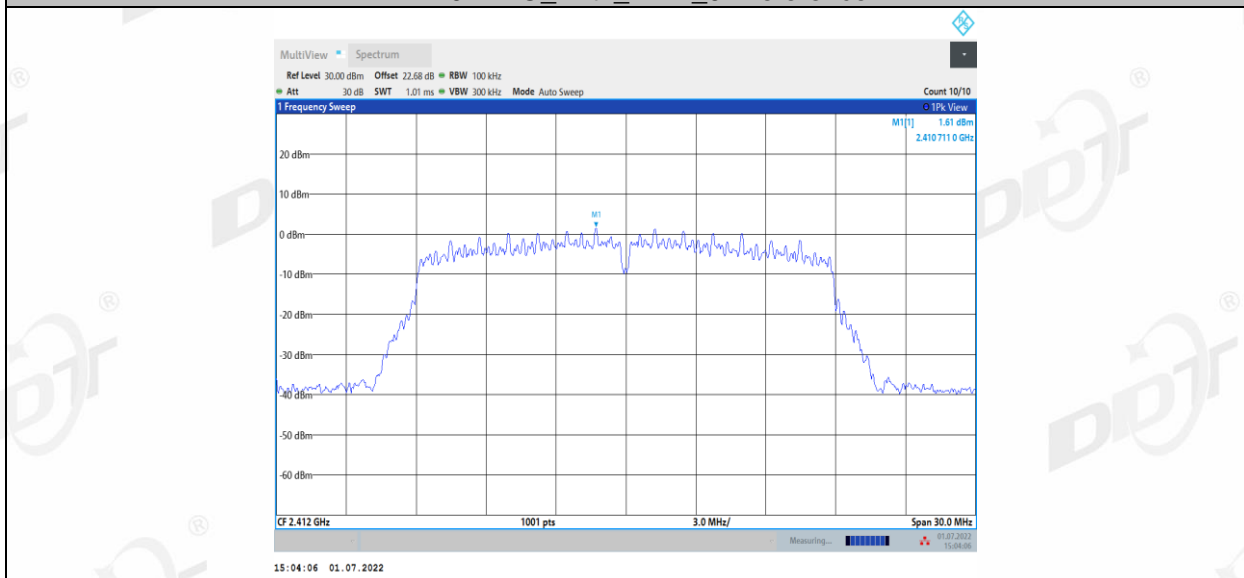


11N20MIMO\_Ant2\_2412\_30~1000

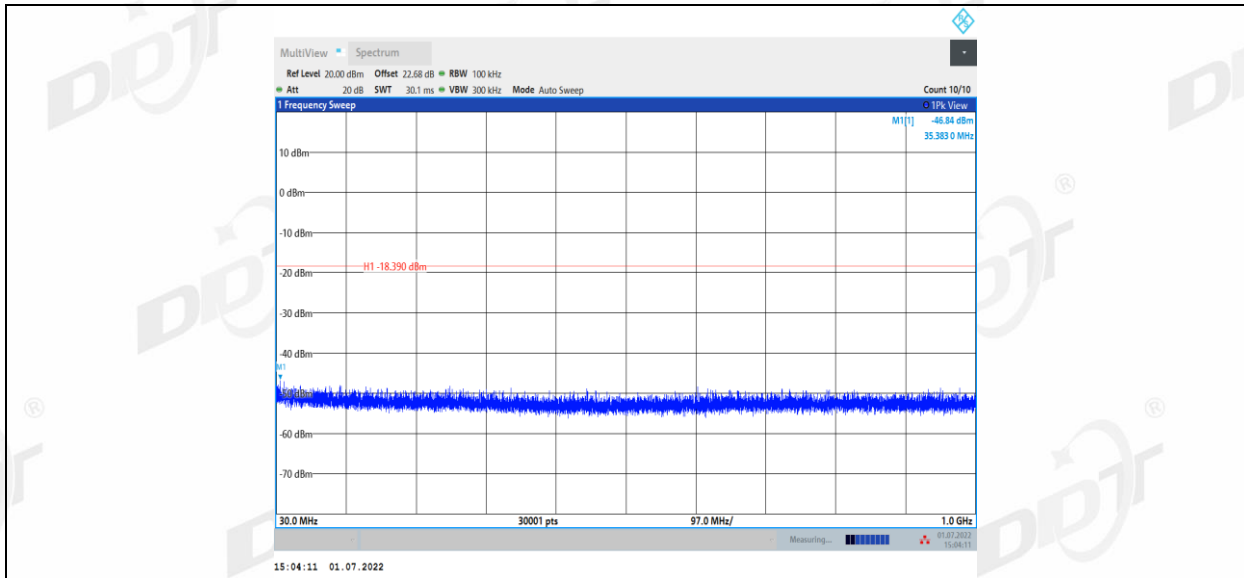

11N20MIMO\_Ant2\_2412\_1000~26500

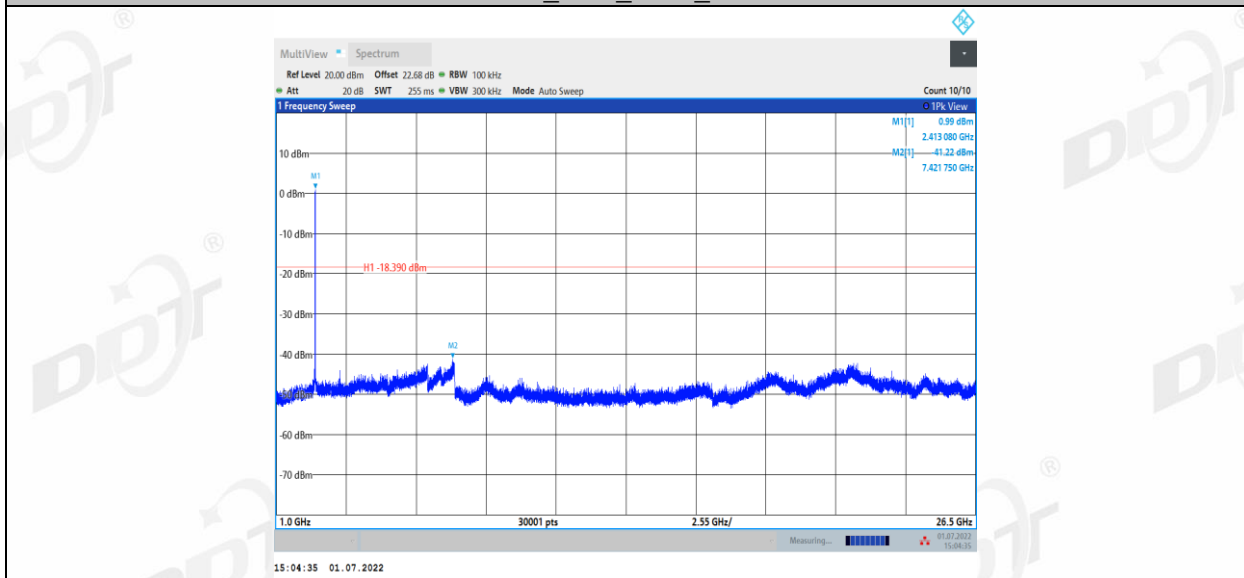

11N20MIMO\_Ant1\_2437\_0~Reference

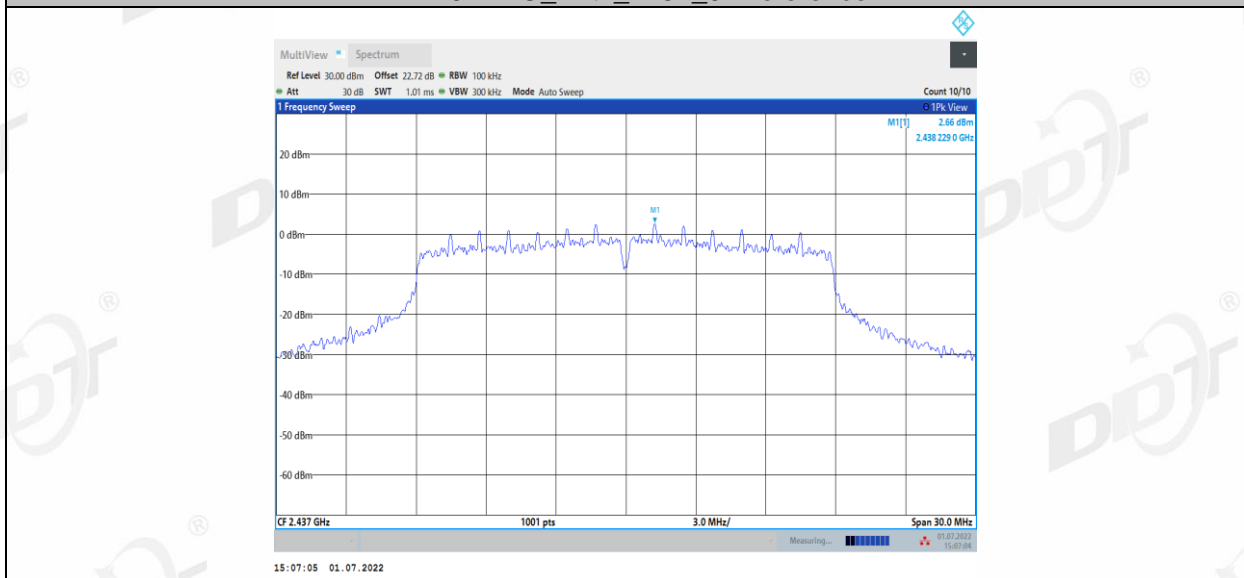

11N20MIMO\_Ant1\_2437\_30~1000