




11N40MIMO ANT2 5670

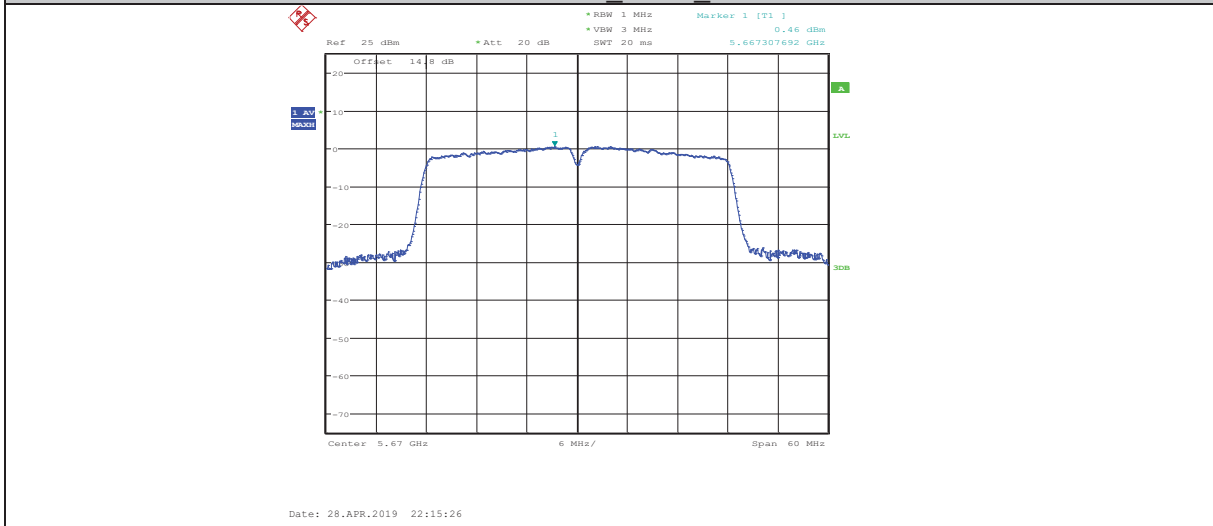


11N40MIMO ANT1 5755

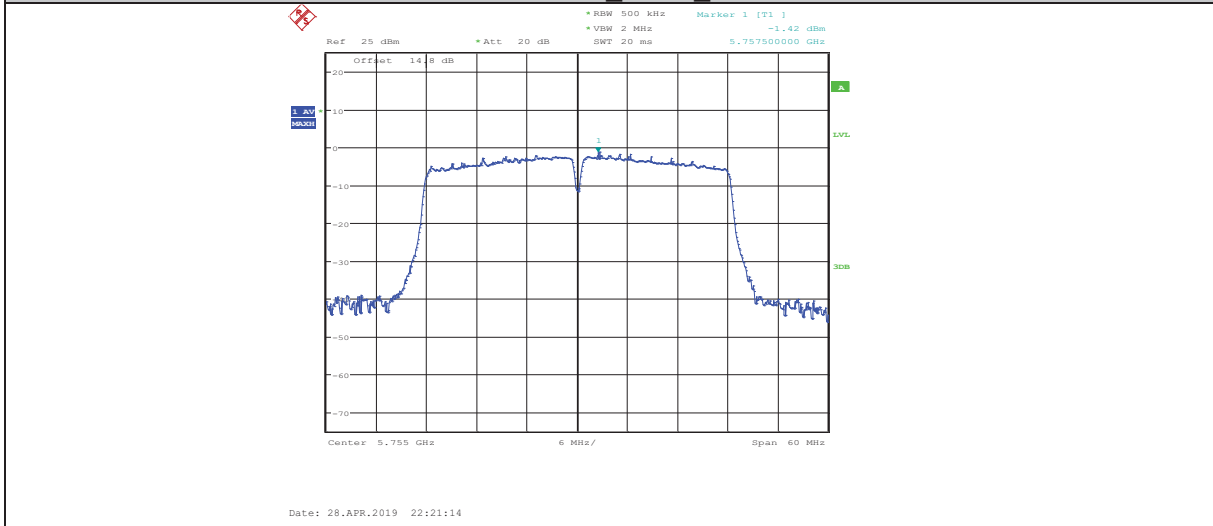


11N40MIMO ANT2 5755

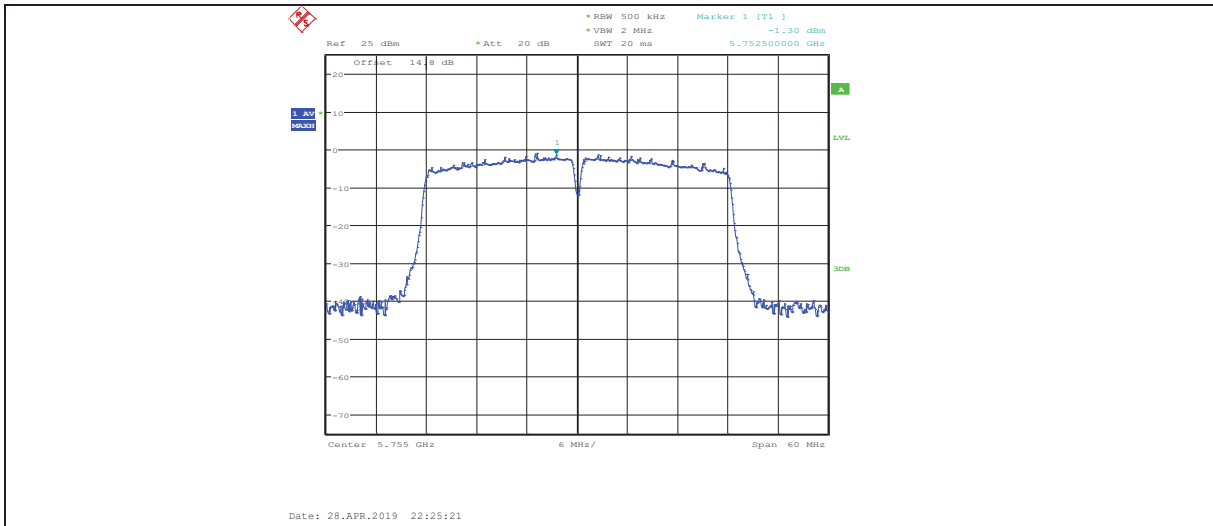

11N40MIMO ANT1_5795

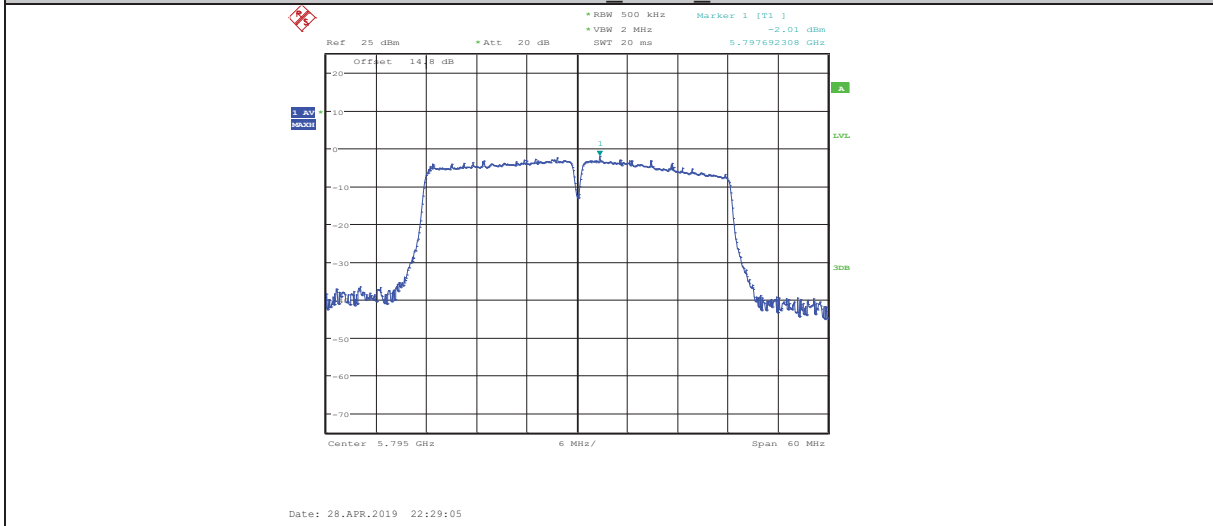


11N40MIMO ANT2_5795

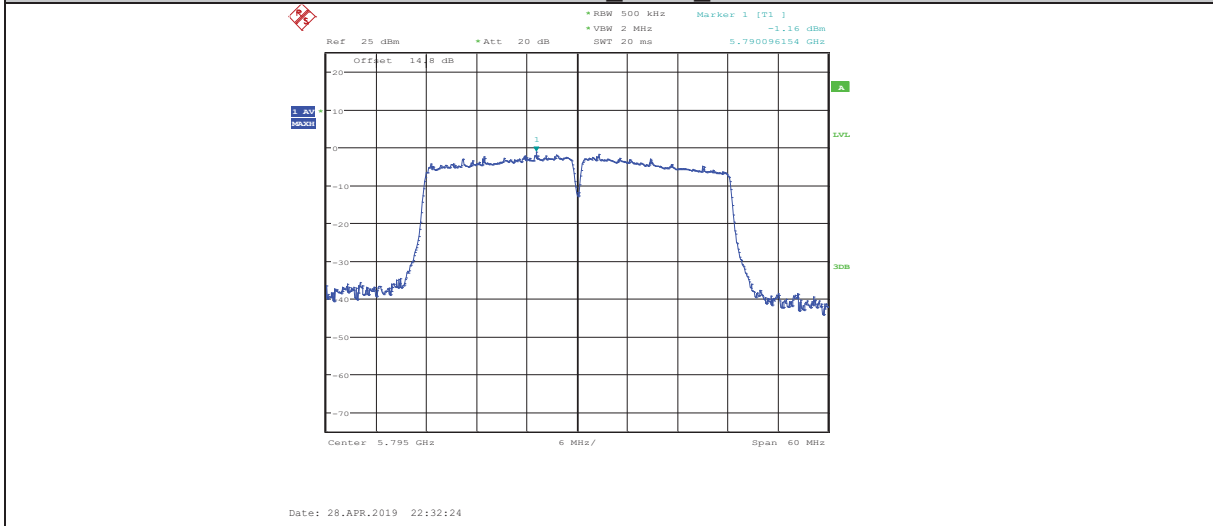

11AC20MIMO ANT1_5180




11AC20MIMO ANT2 5180

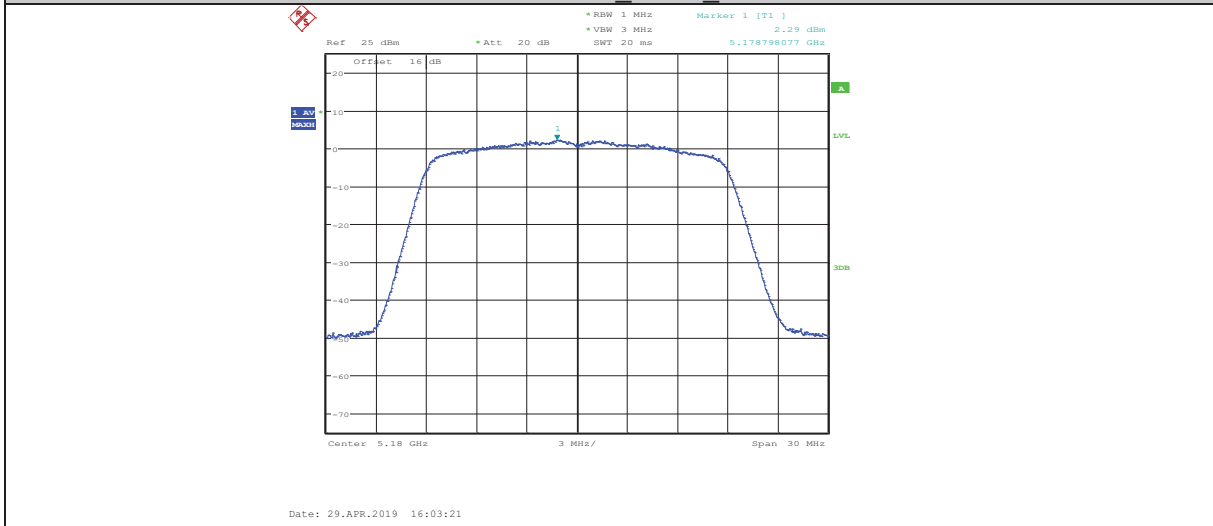


11AC20MIMO ANT1 5200



11AC20MIMO ANT2 5200

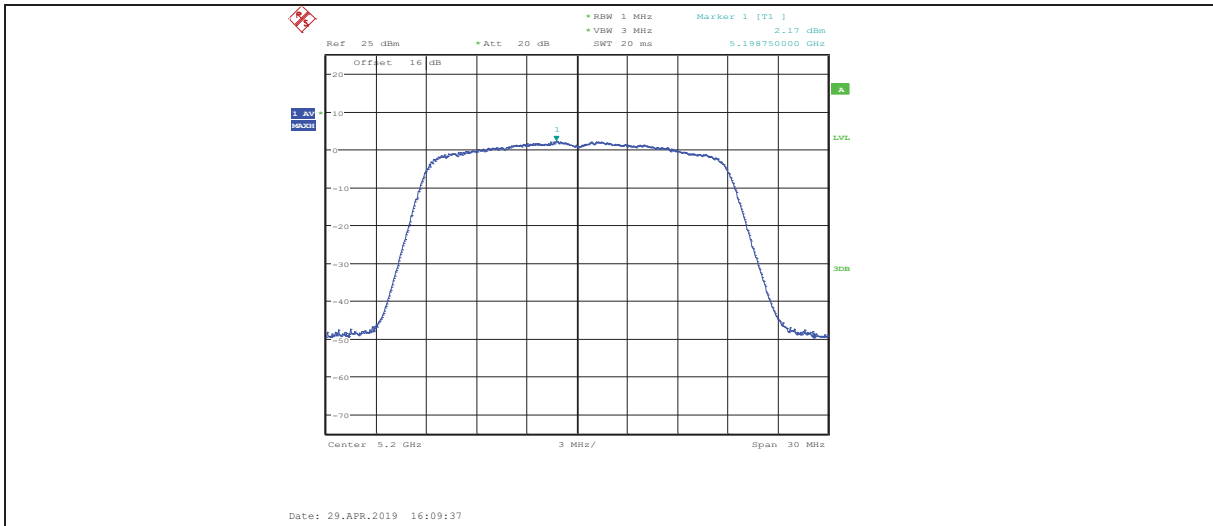


11AC20MIMO ANT1 5240

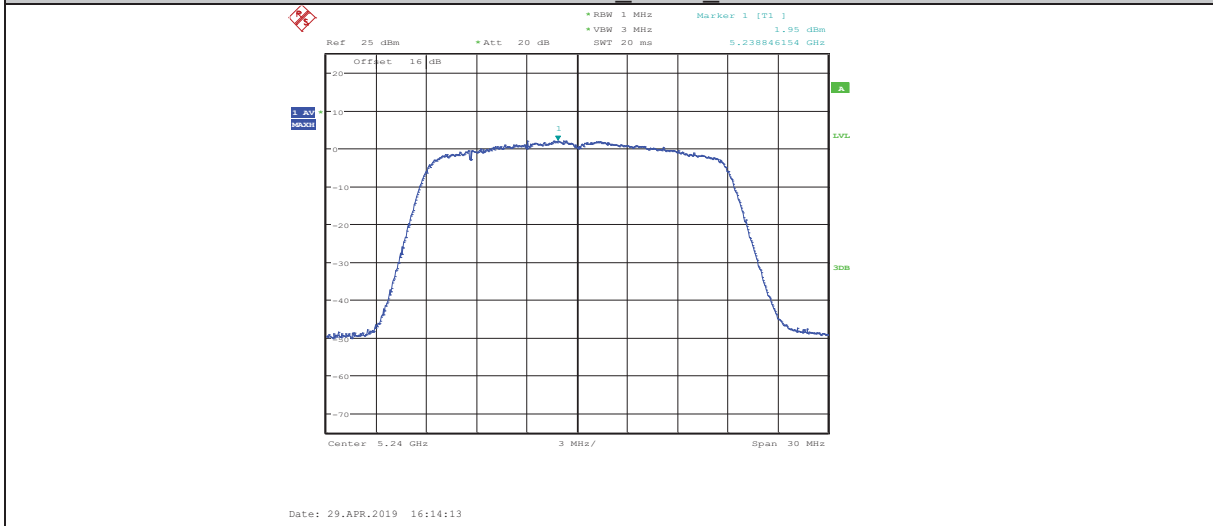


11AC20MIMO ANT2 5240




11AC20MIMO ANT1 5260

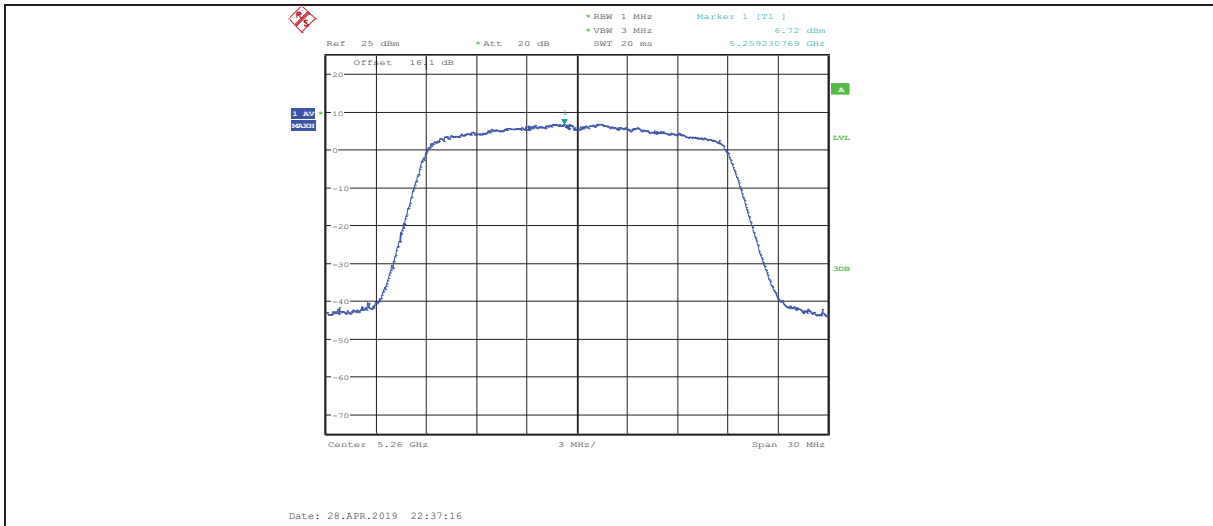


11AC20MIMO ANT2 5260

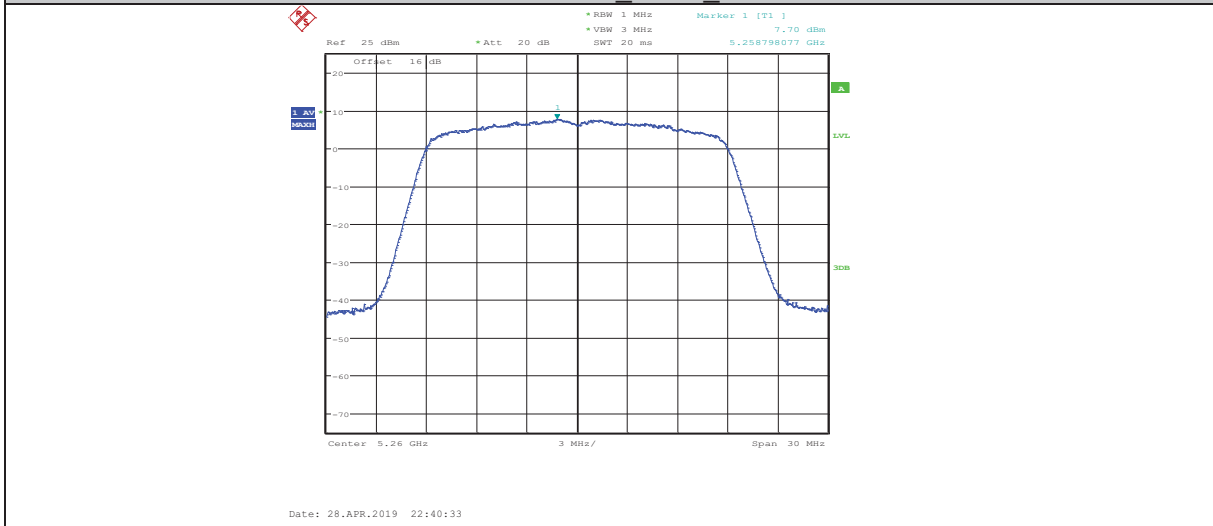


11AC20MIMO ANT1 5280

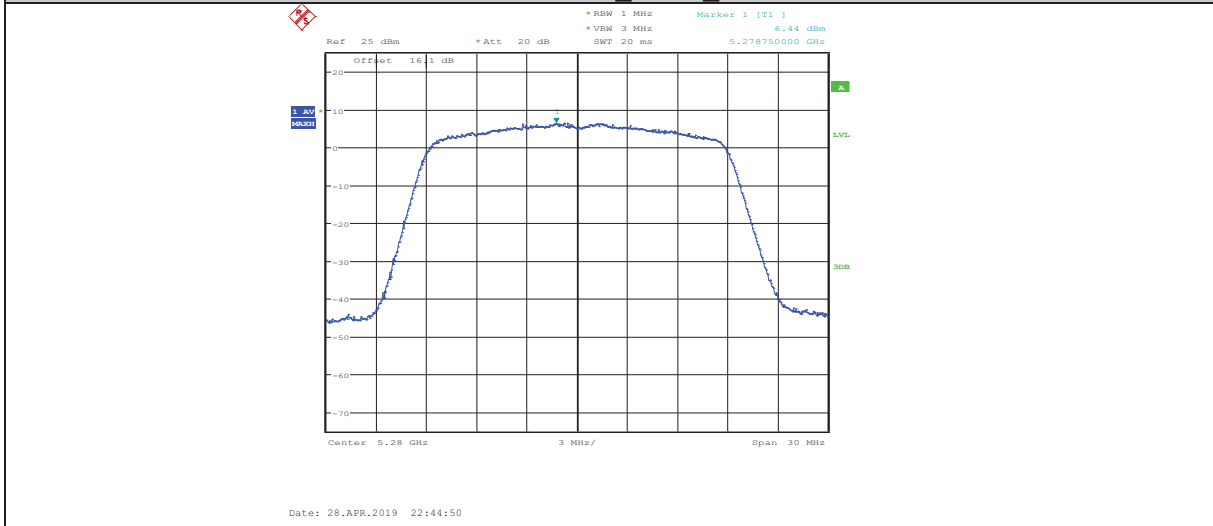


11AC20MIMO ANT2 5280

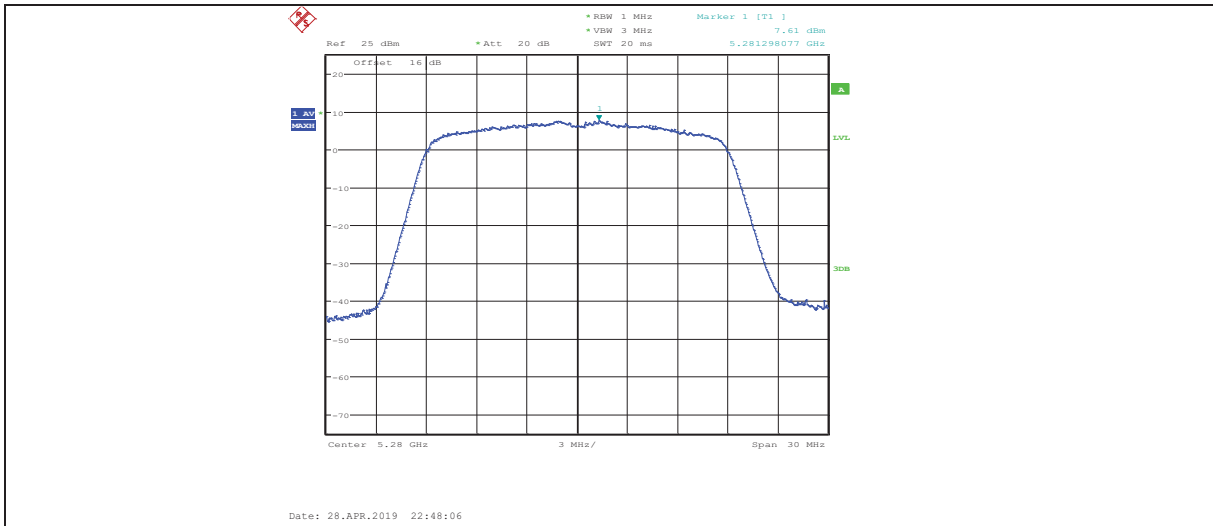


11AC20MIMO ANT1_5320

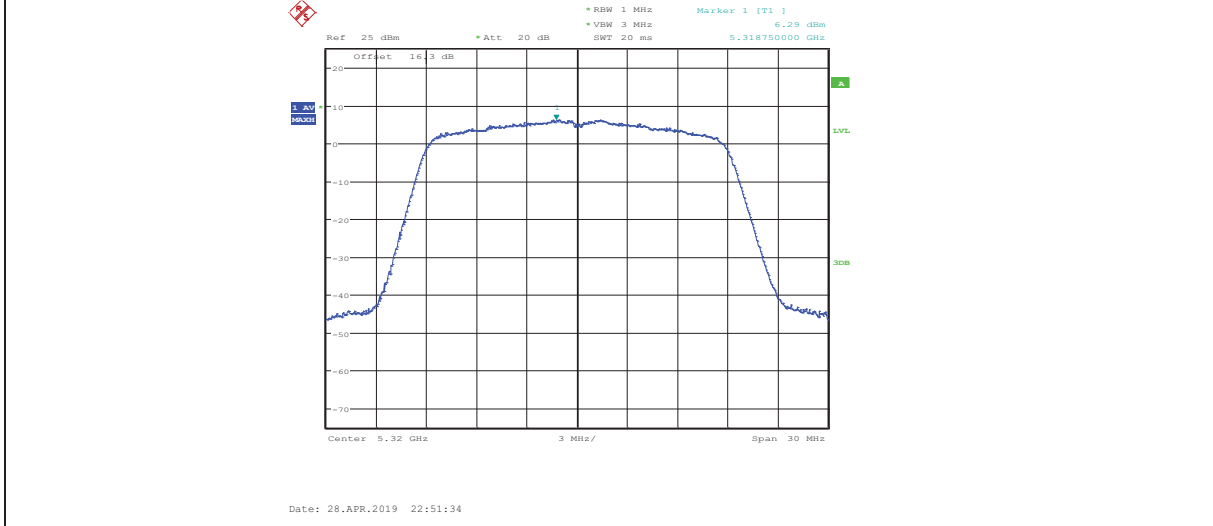


11AC20MIMO ANT2_5320

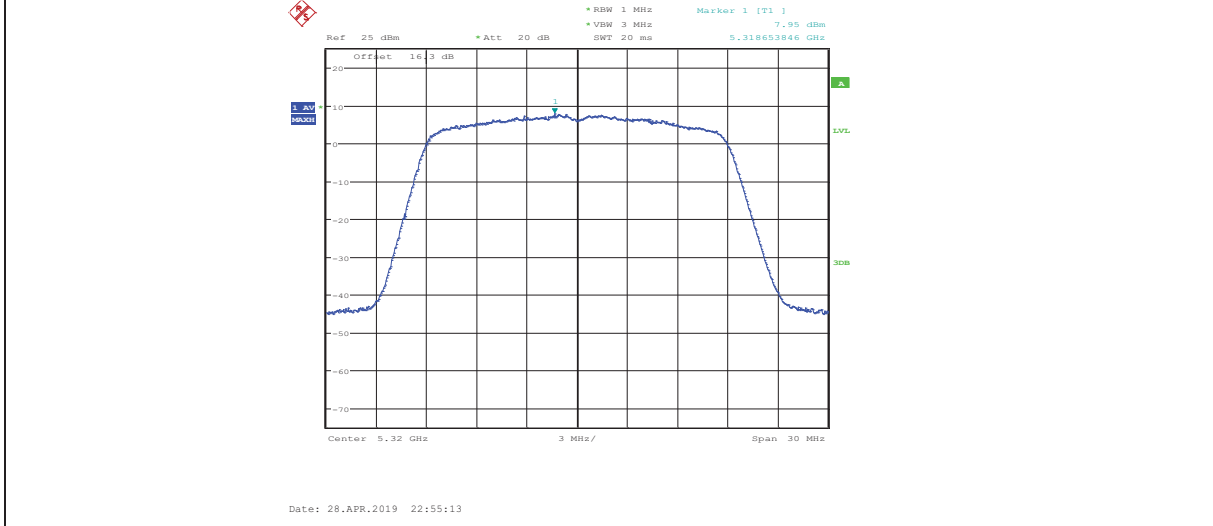

11AC20MIMO ANT1_5500

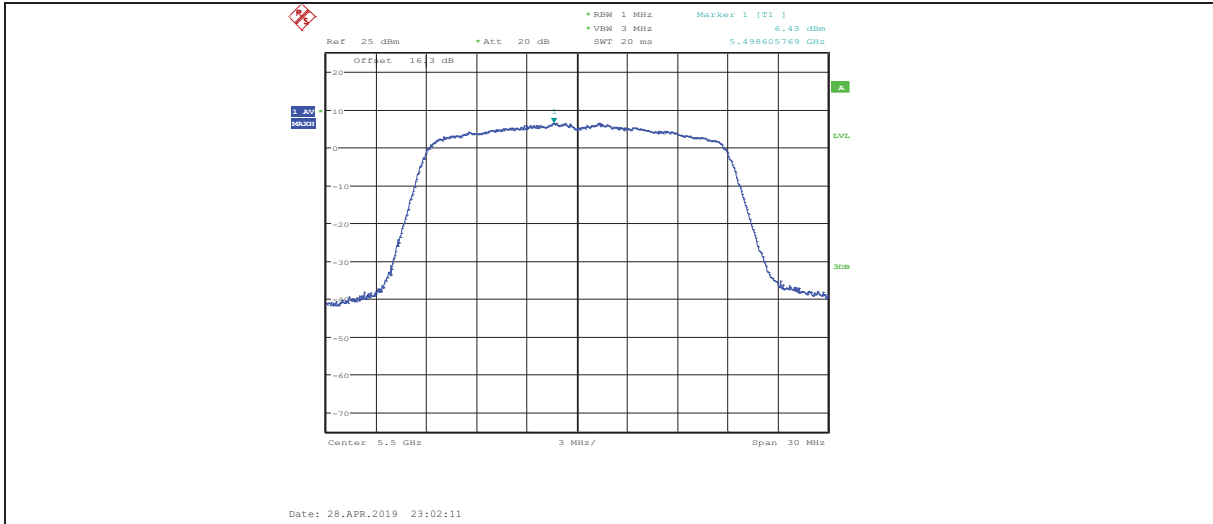


11AC20MIMO ANT2 5500

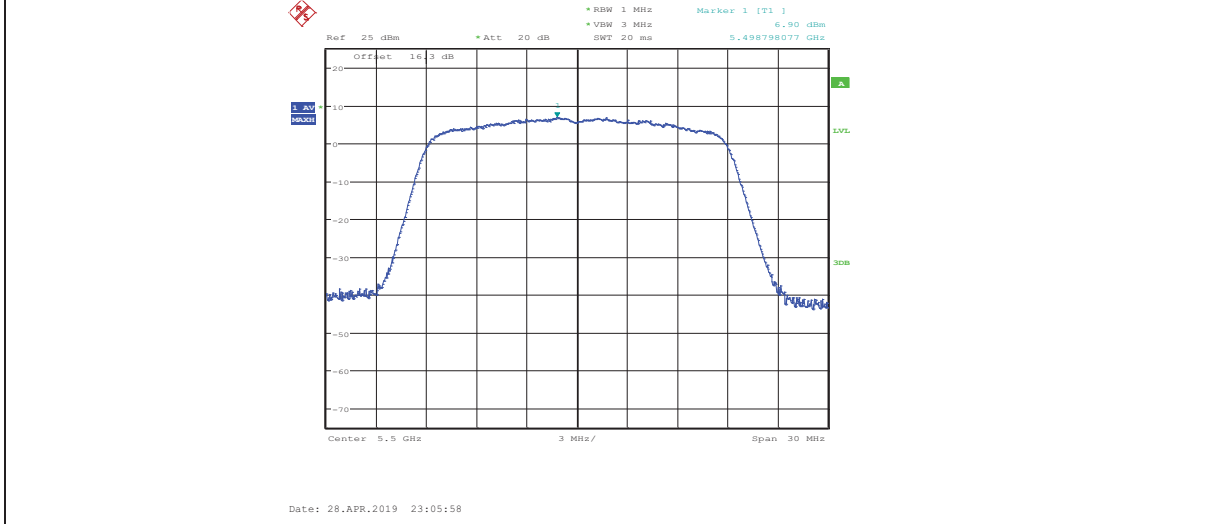


11AC20MIMO ANT1 5580




11AC20MIMO ANT2 5580

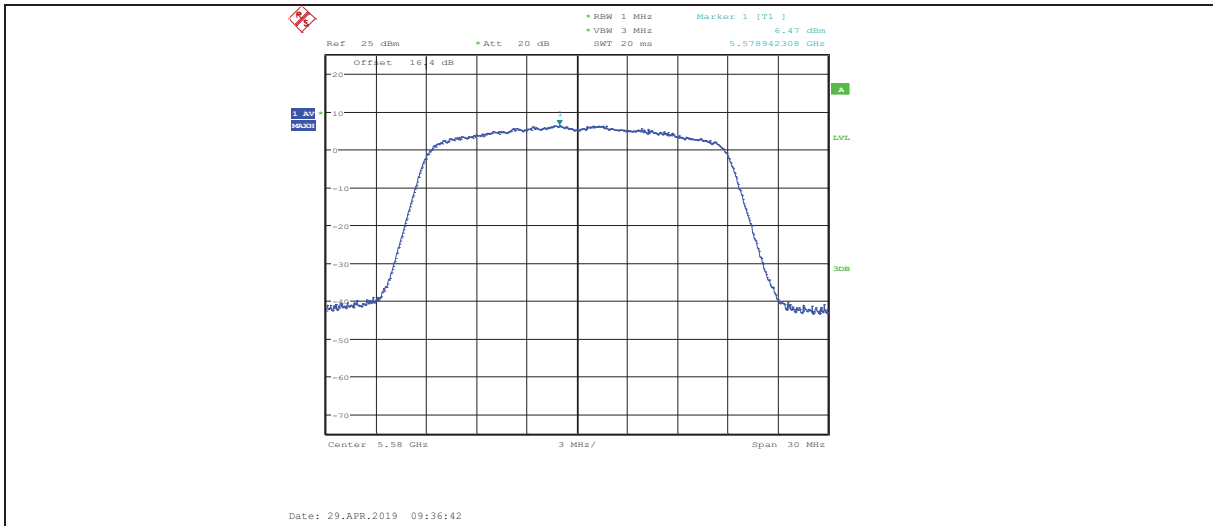


11AC20MIMO ANT1 5700

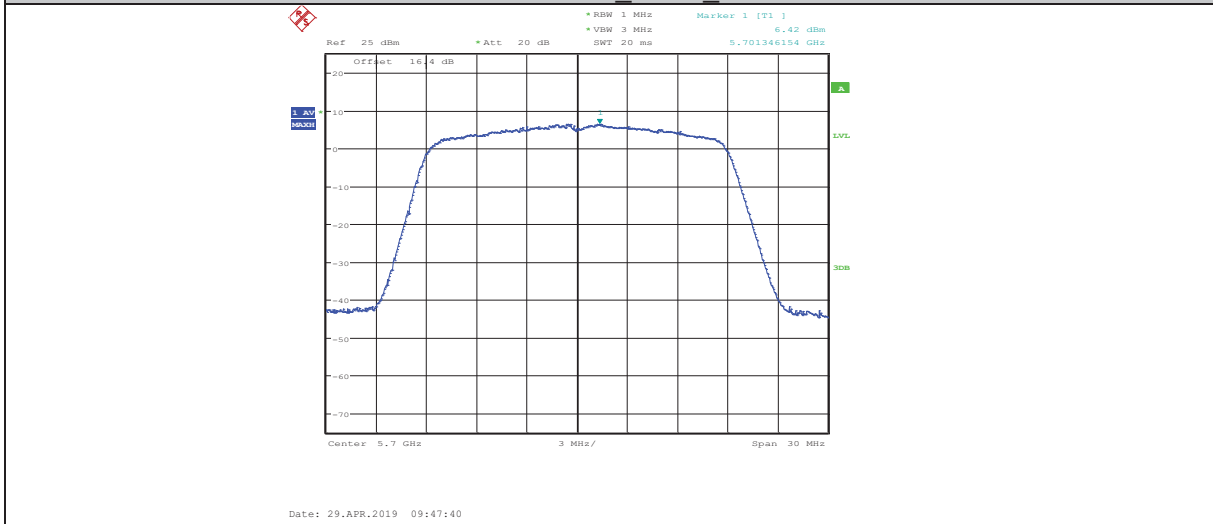


11AC20MIMO ANT2 5700

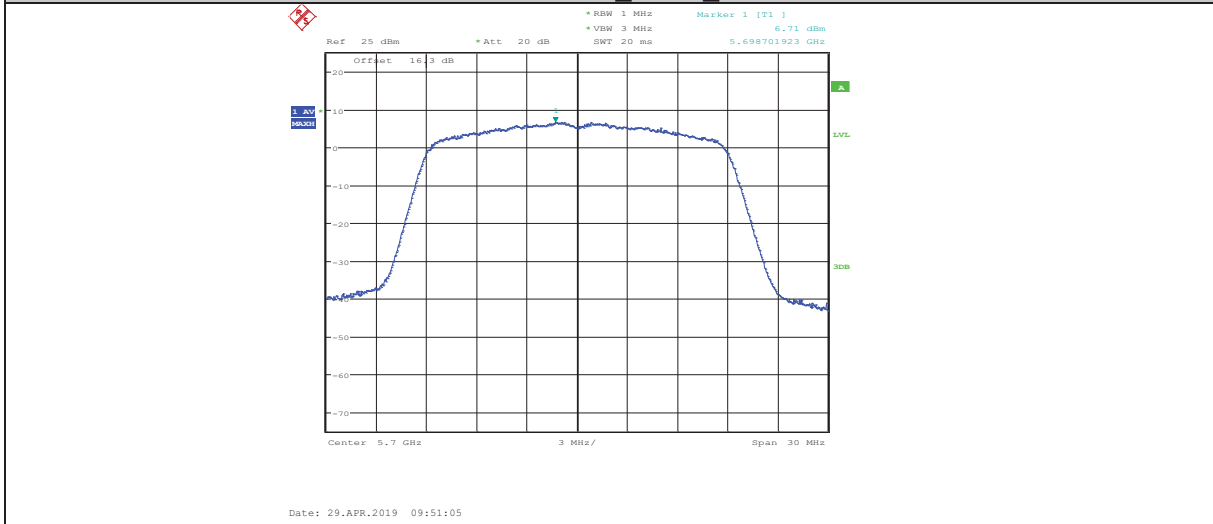


11AC20MIMO ANT1 5745

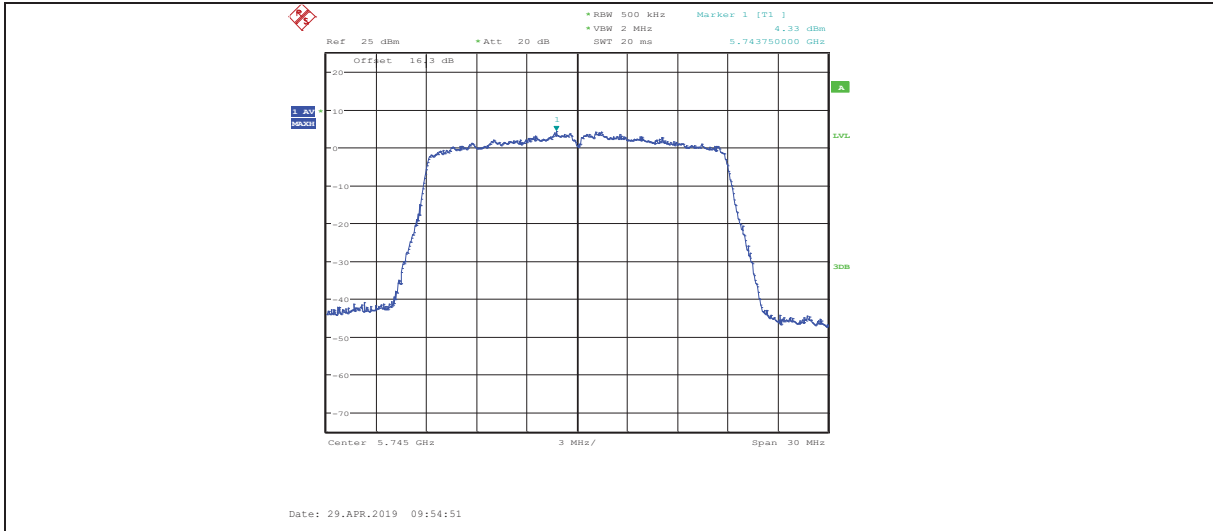


11AC20MIMO ANT2 5745

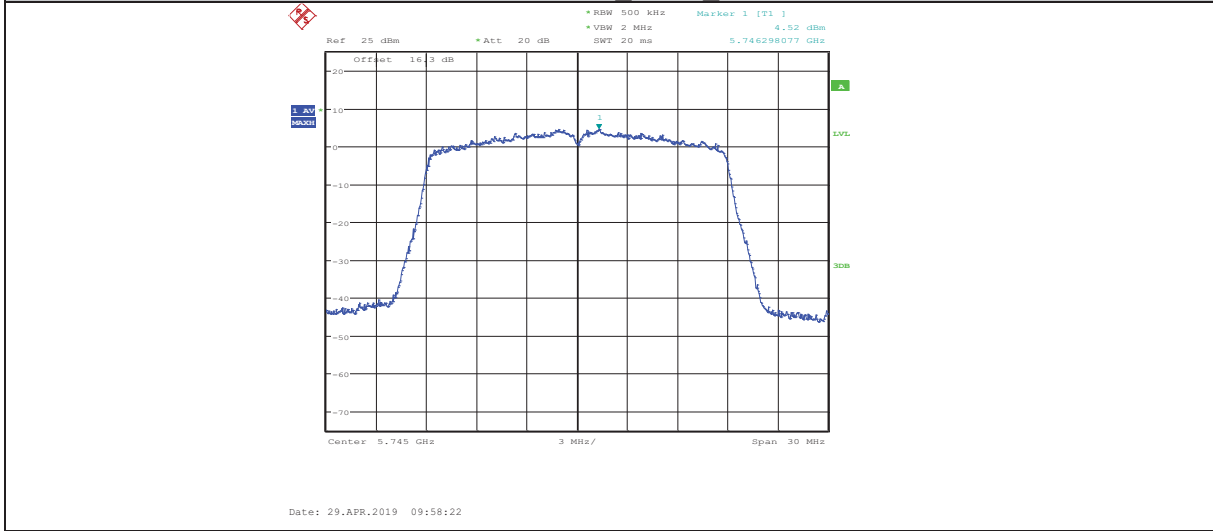


11AC20MIMO ANT1 5785

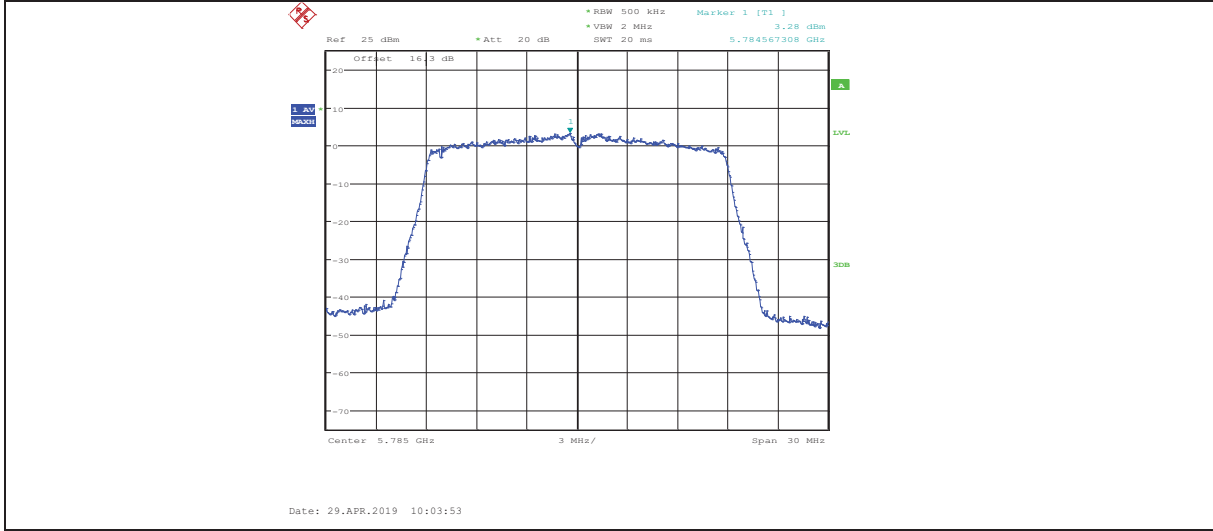


11AC20MIMO ANT2 5785

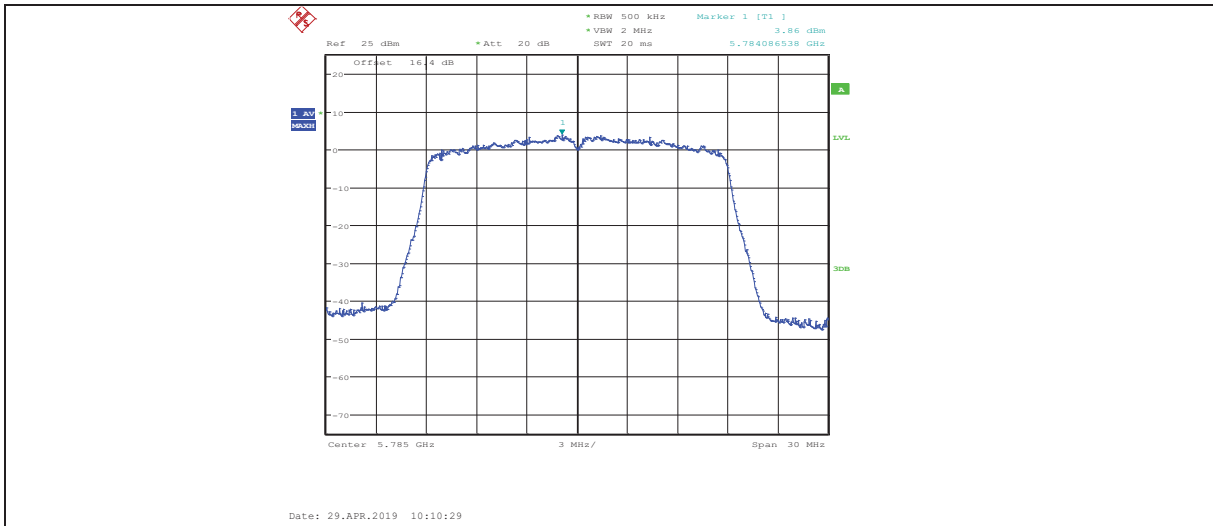


11AC20MIMO ANT1 5825

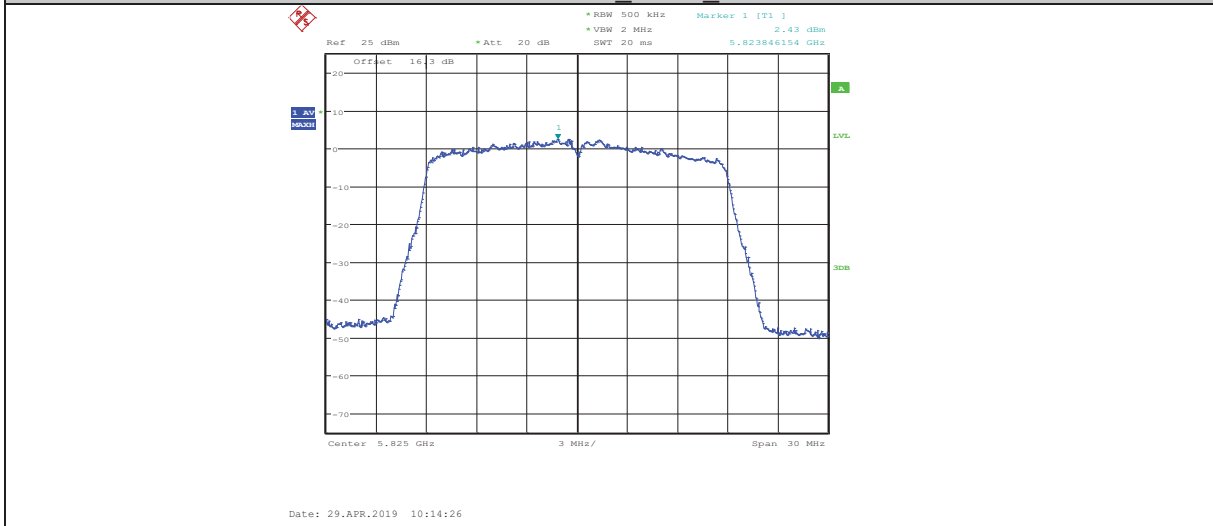


11AC20MIMO ANT2 5825

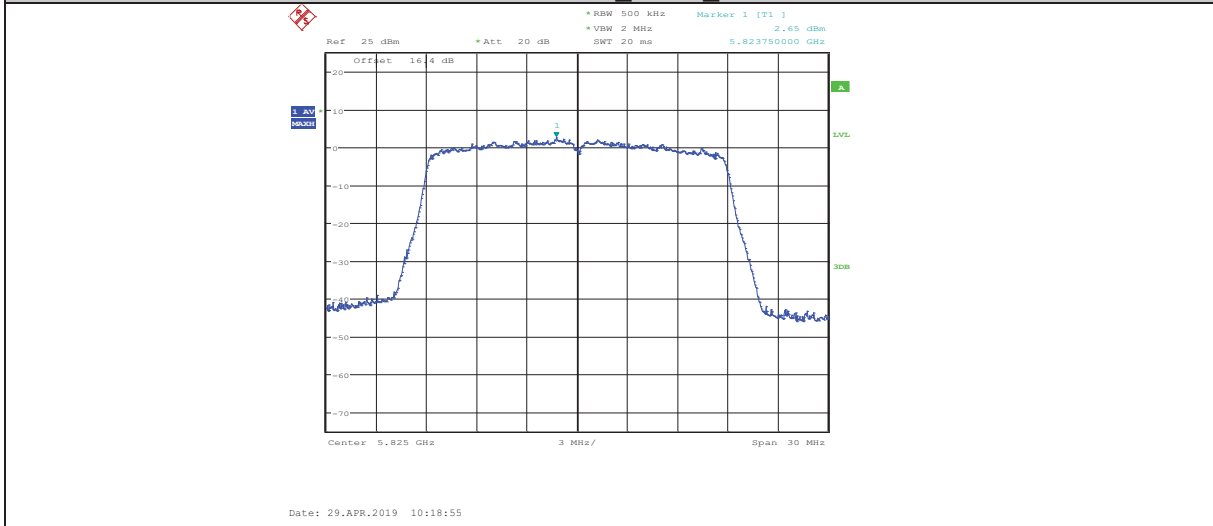


11AC40MIMO ANT1 5190

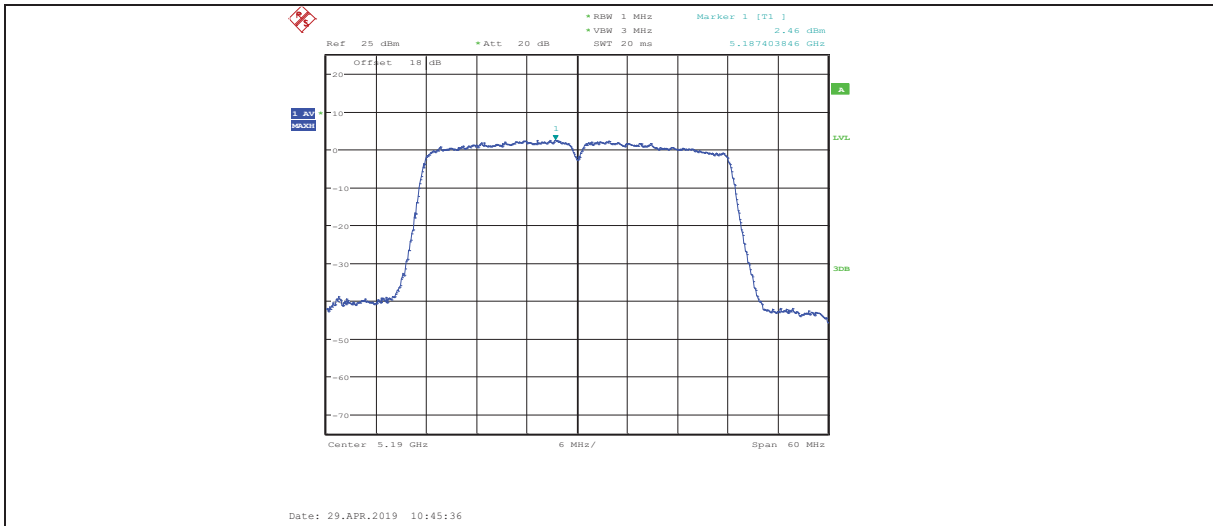


11AC40MIMO ANT2 5190

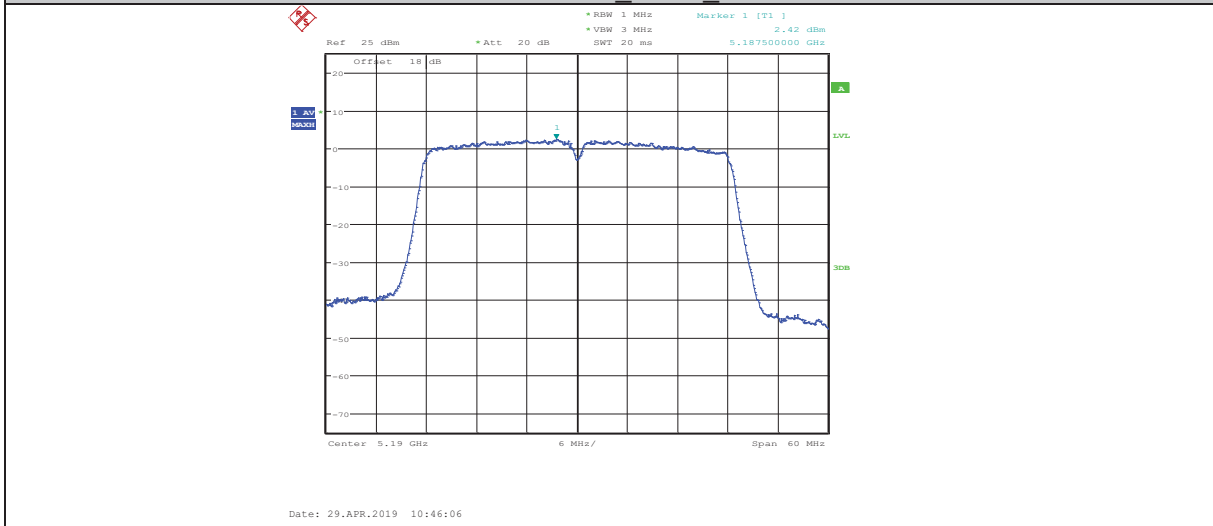


11AC40MIMO ANT1 5230

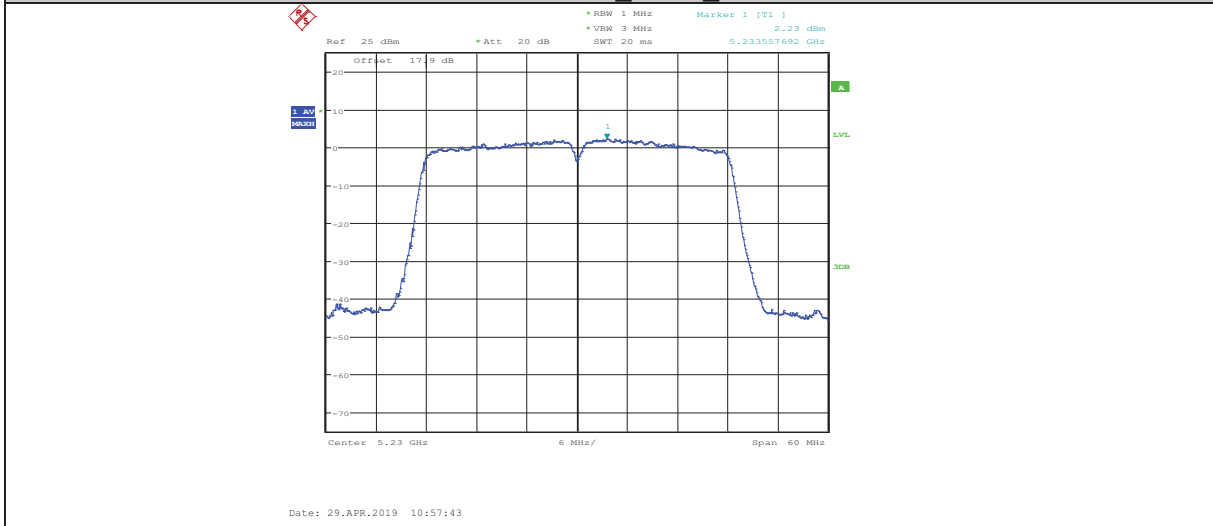


11AC40MIMO ANT2 5230

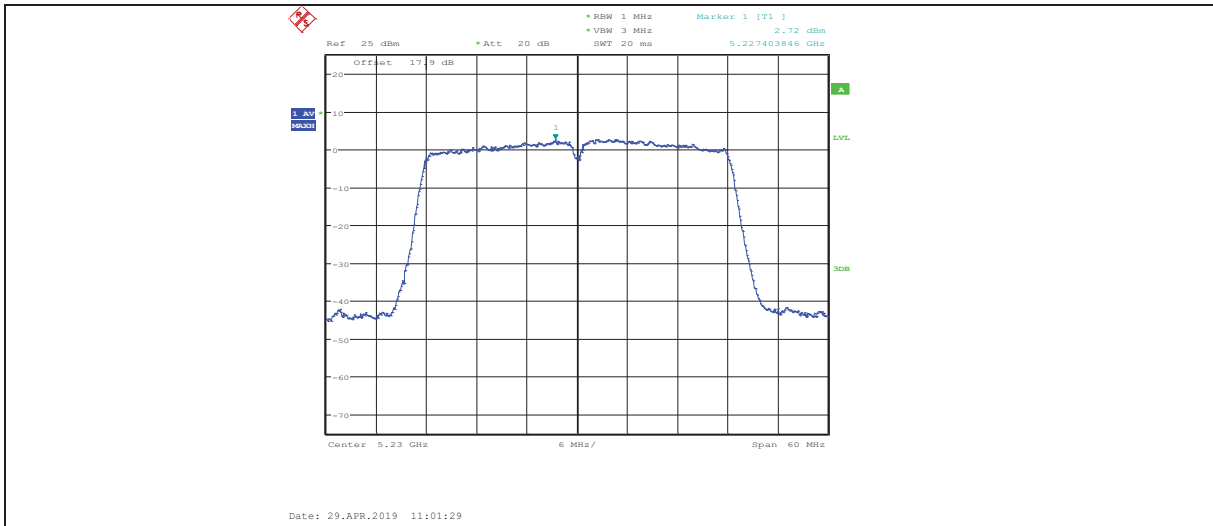


11AC40MIMO ANT1 5270

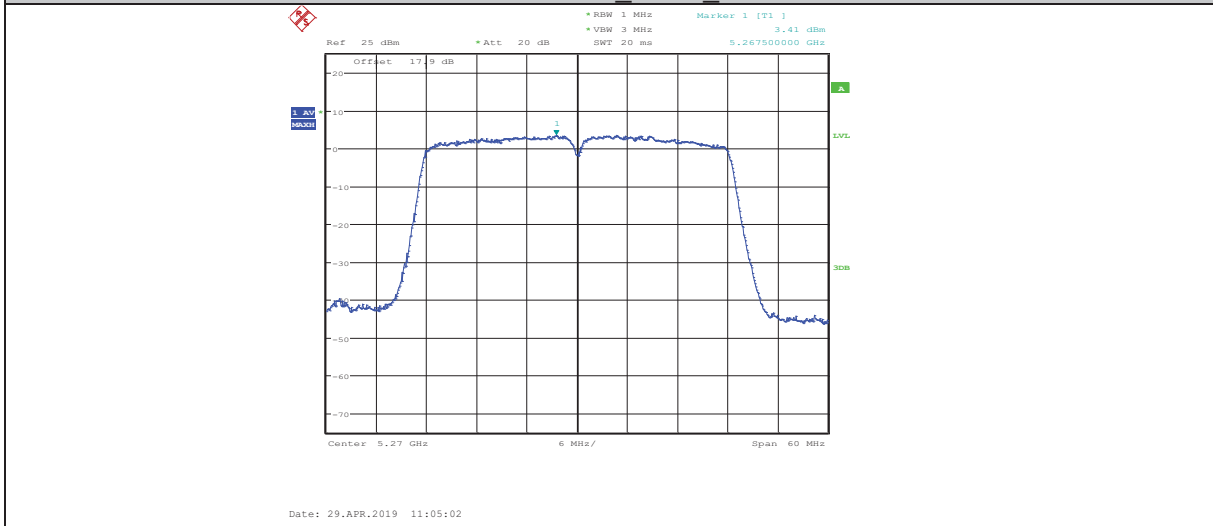


11AC40MIMO ANT2 5270

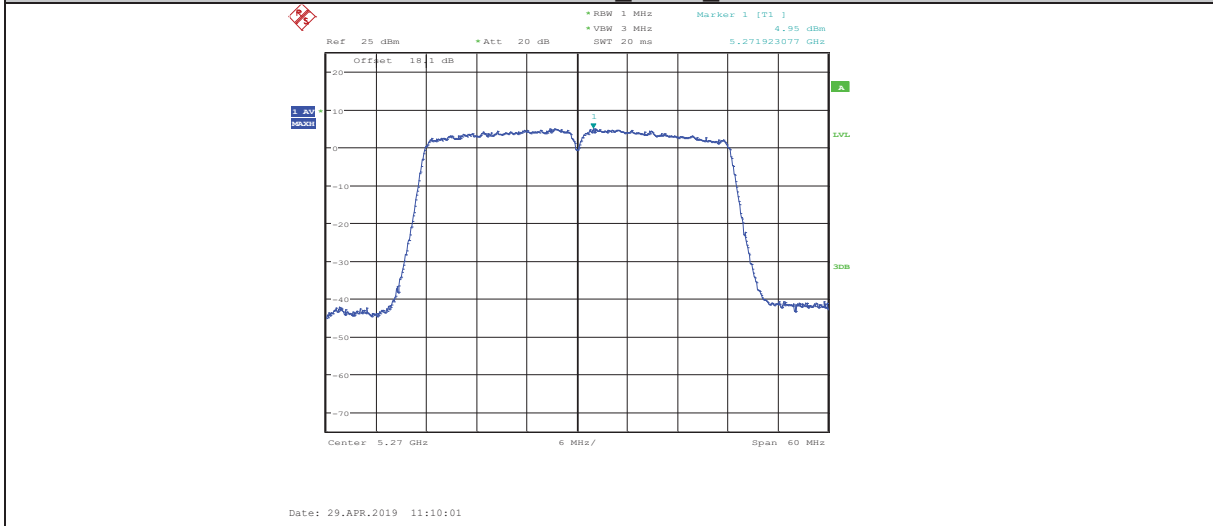


11AC40MIMO ANT1 5310

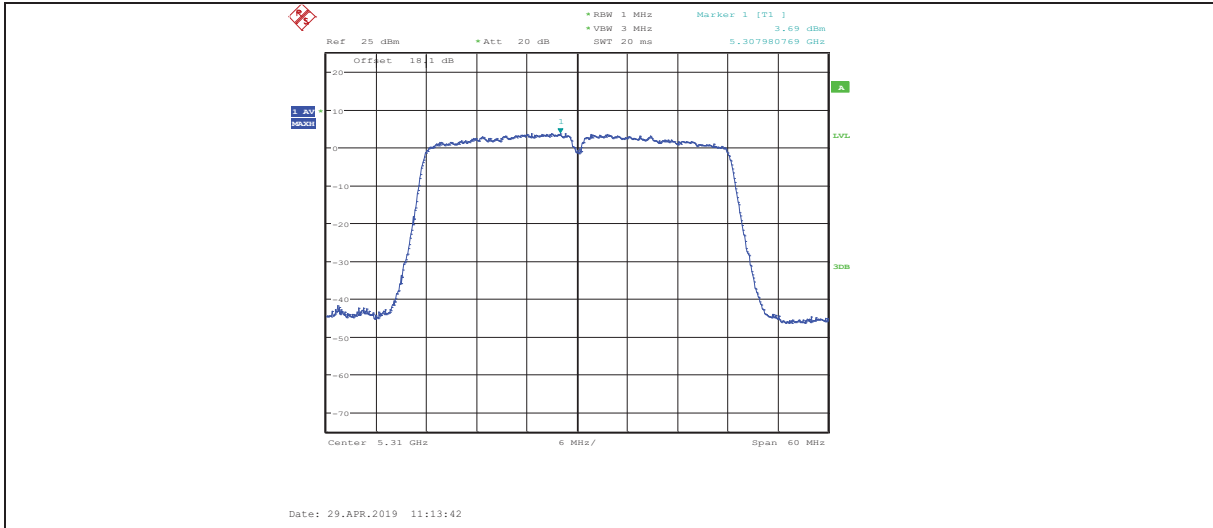


11AC40MIMO ANT2 5310

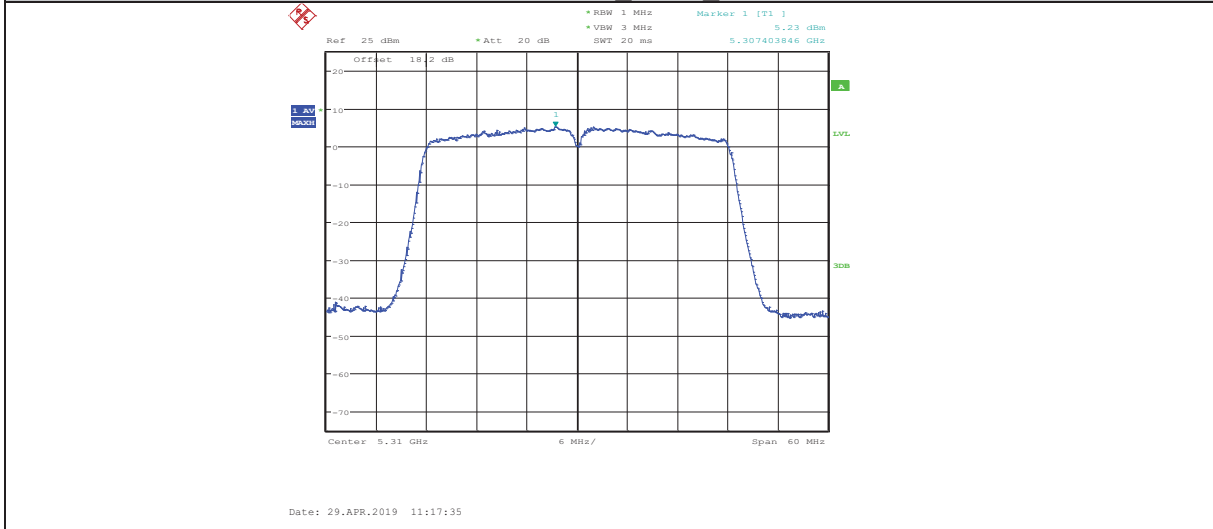


11AC40MIMO ANT1 5510

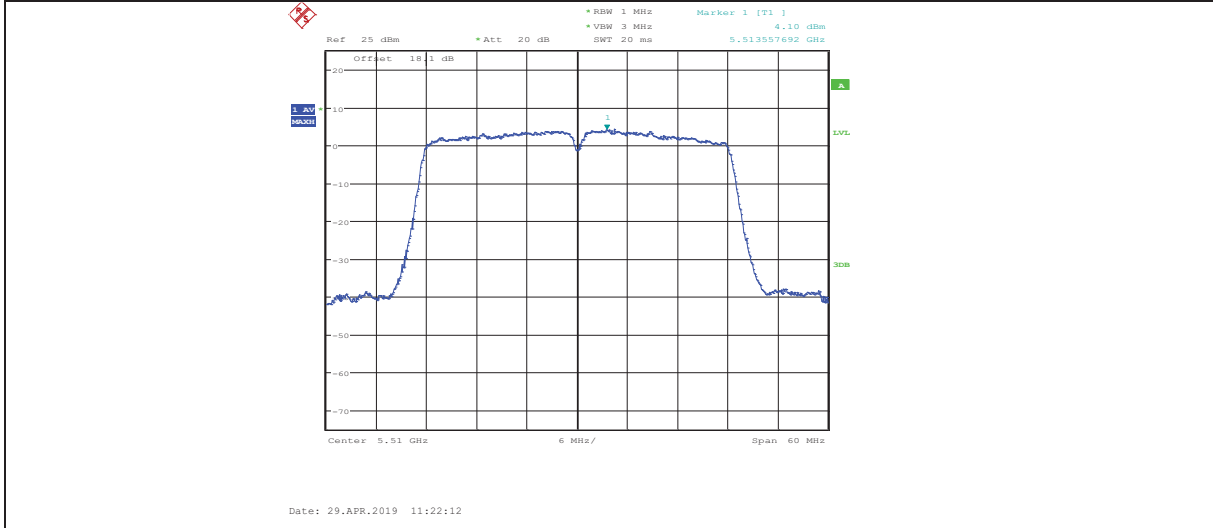


11AC40MIMO ANT2 5510

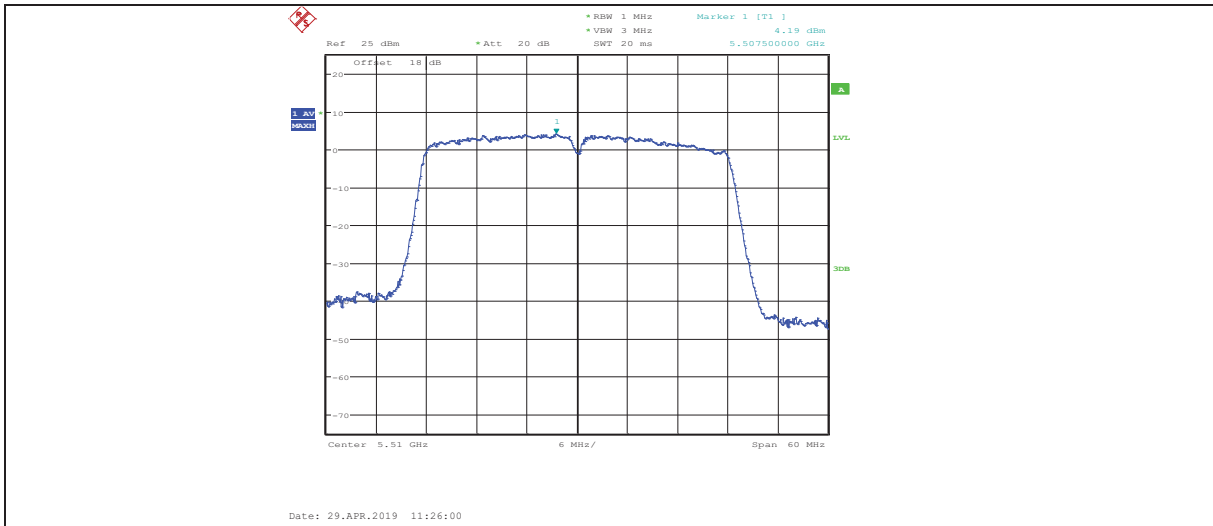


11AC40MIMO ANT1 5550

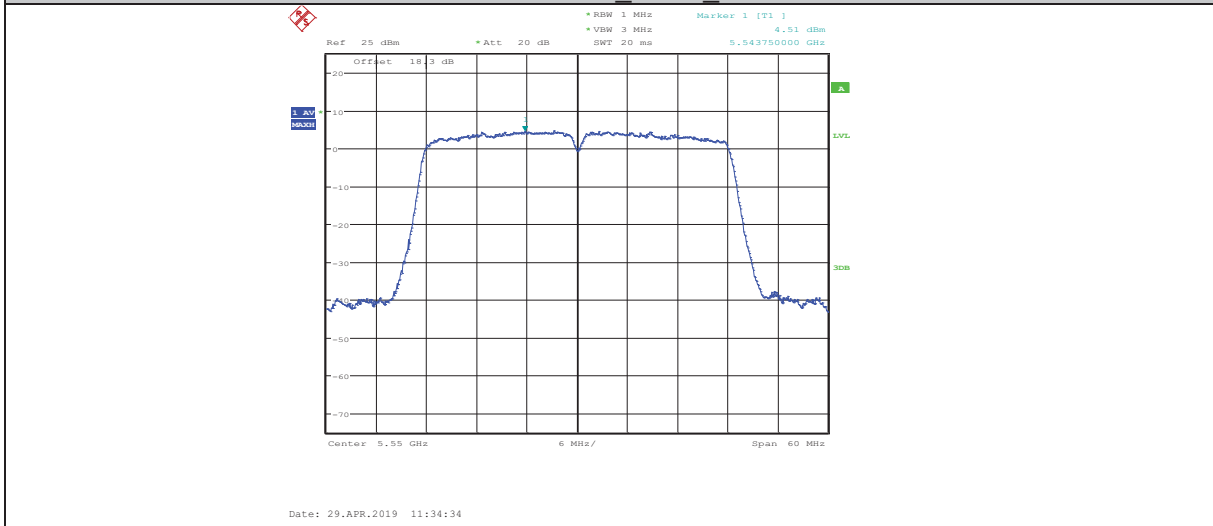


11AC40MIMO ANT2 5550

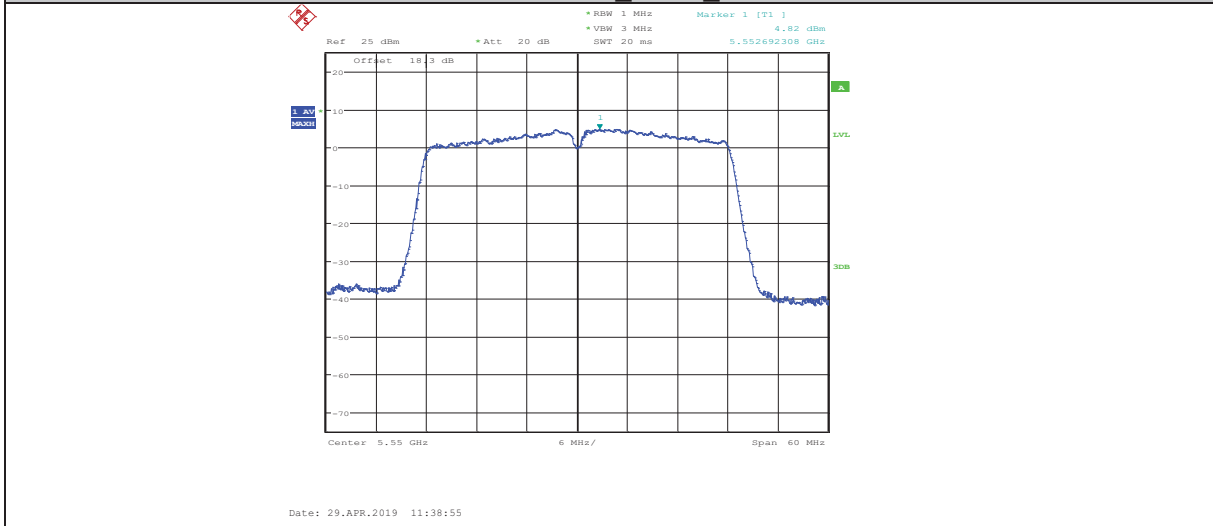


11AC40MIMO ANT1 5670

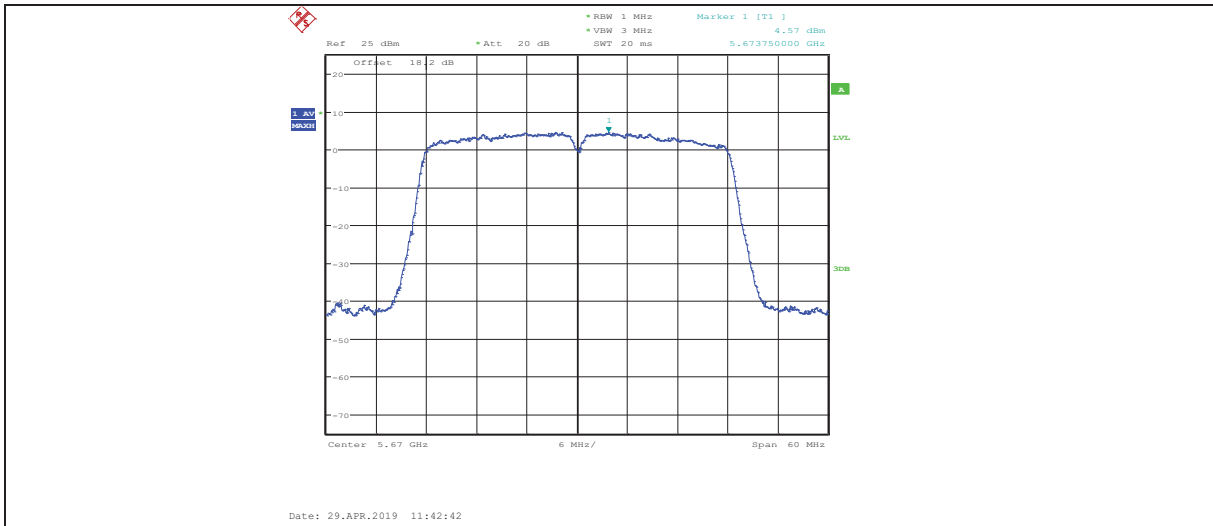


11AC40MIMO ANT2 5670

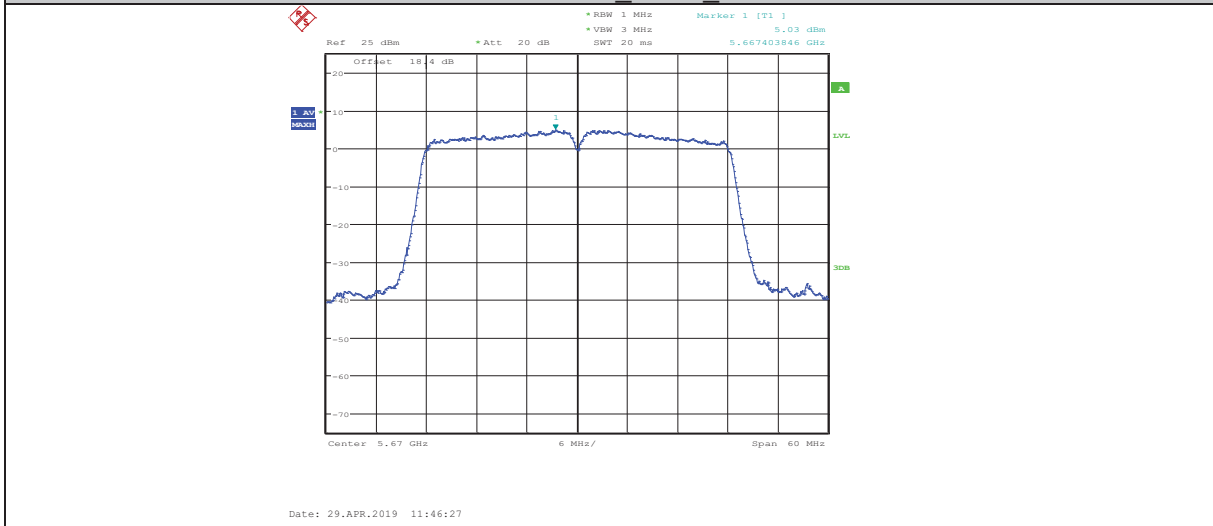


11AC40MIMO ANT1 5755

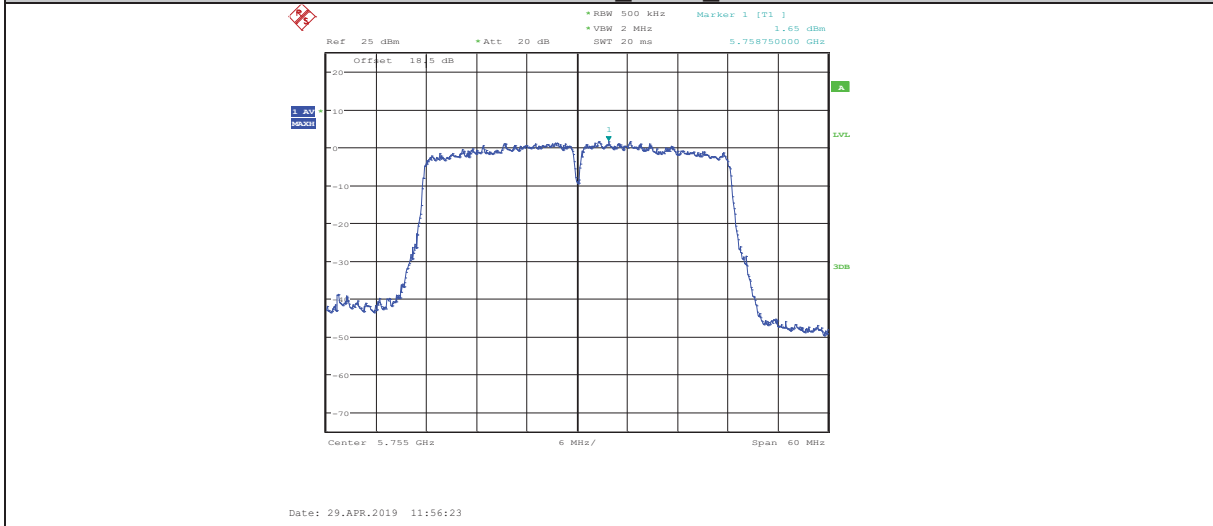

11AC40MIMO ANT2 5755

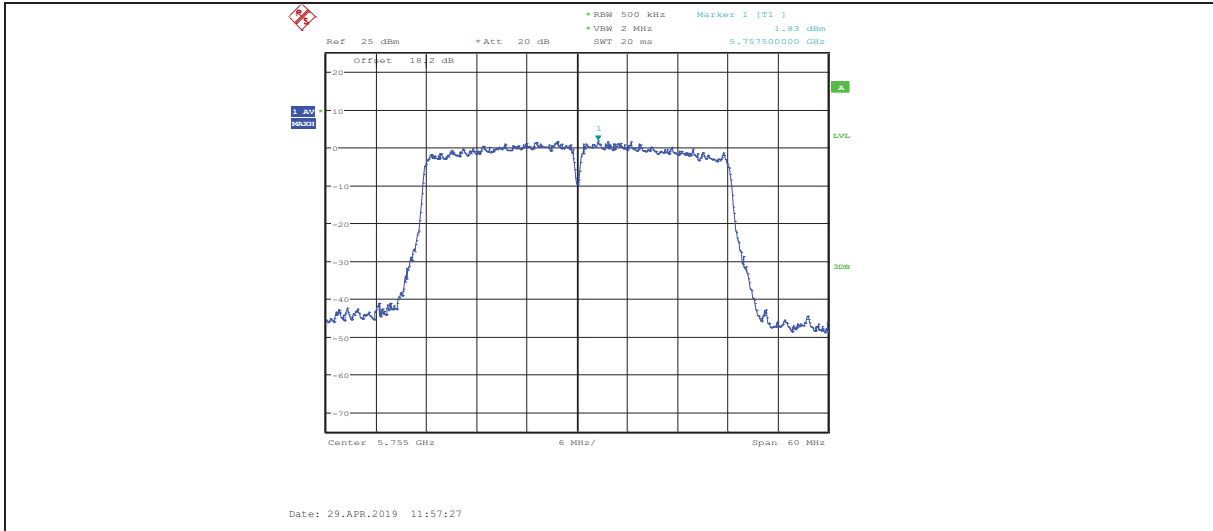


11AC40MIMO ANT1 5795

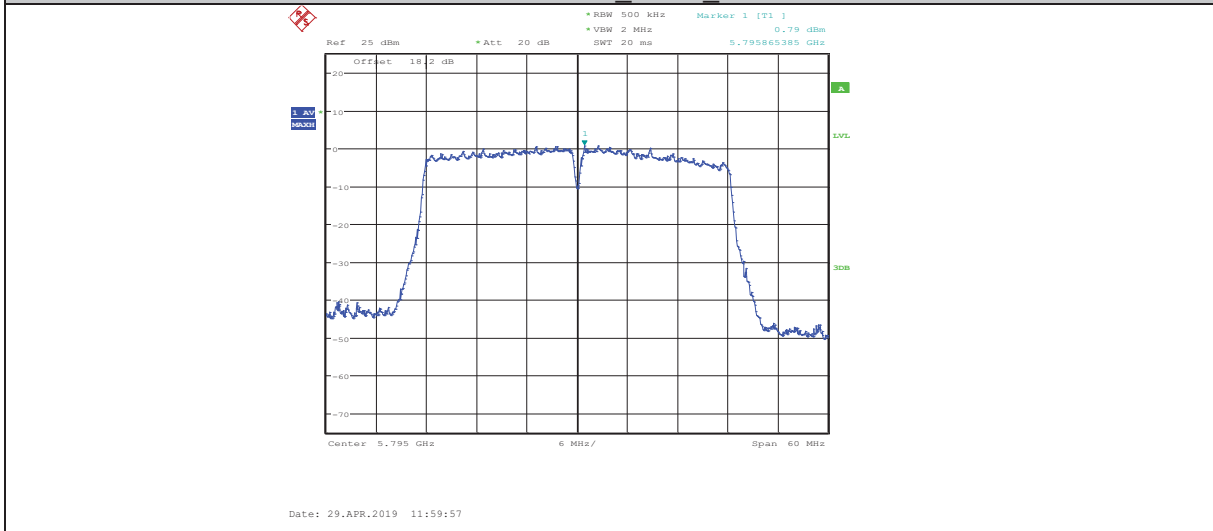


11AC40MIMO ANT2 5795




11AC80MIMO ANT1 5210

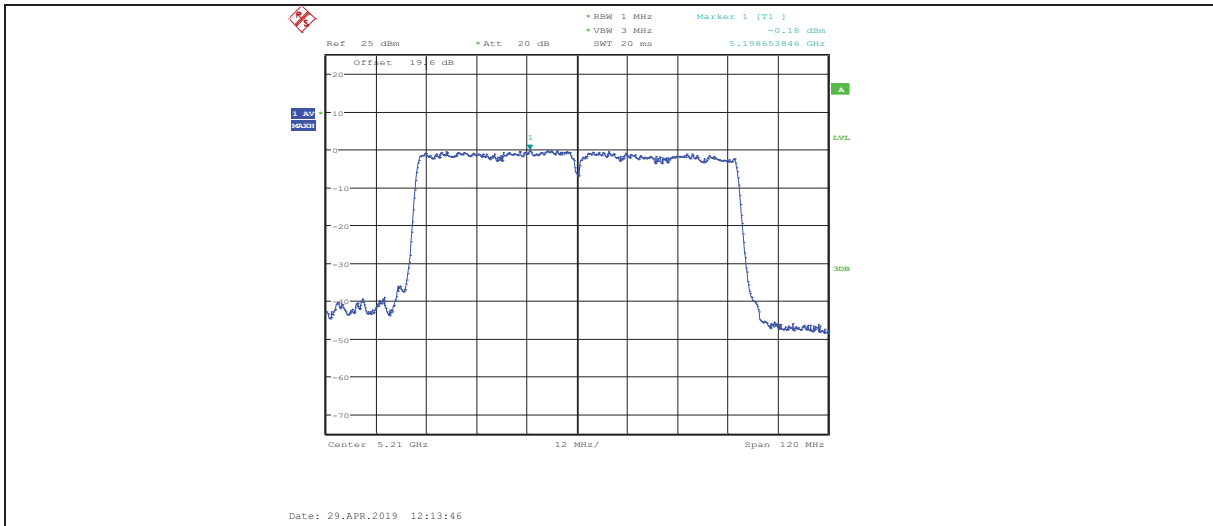


11AC80MIMO ANT2 5210

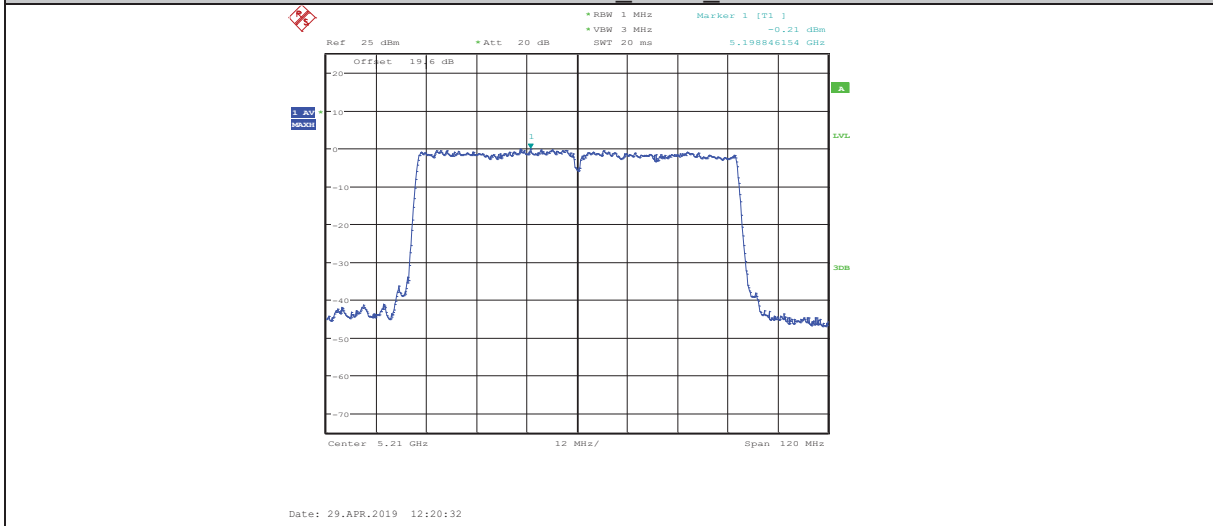


11AC80MIMO ANT1 5290

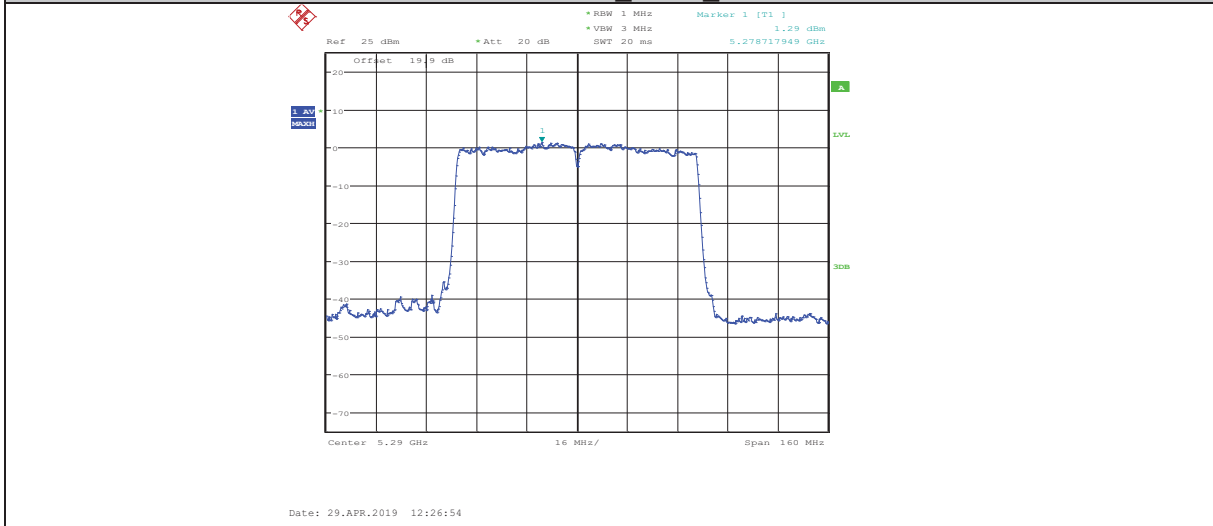


11AC80MIMO ANT2 5290

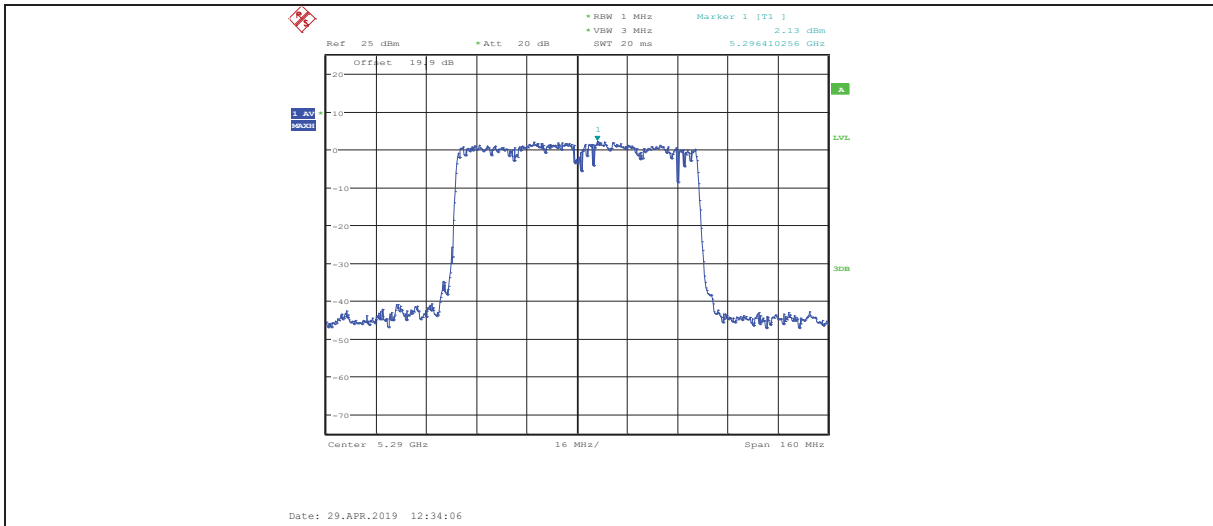


11AC80MIMO ANT1 5530

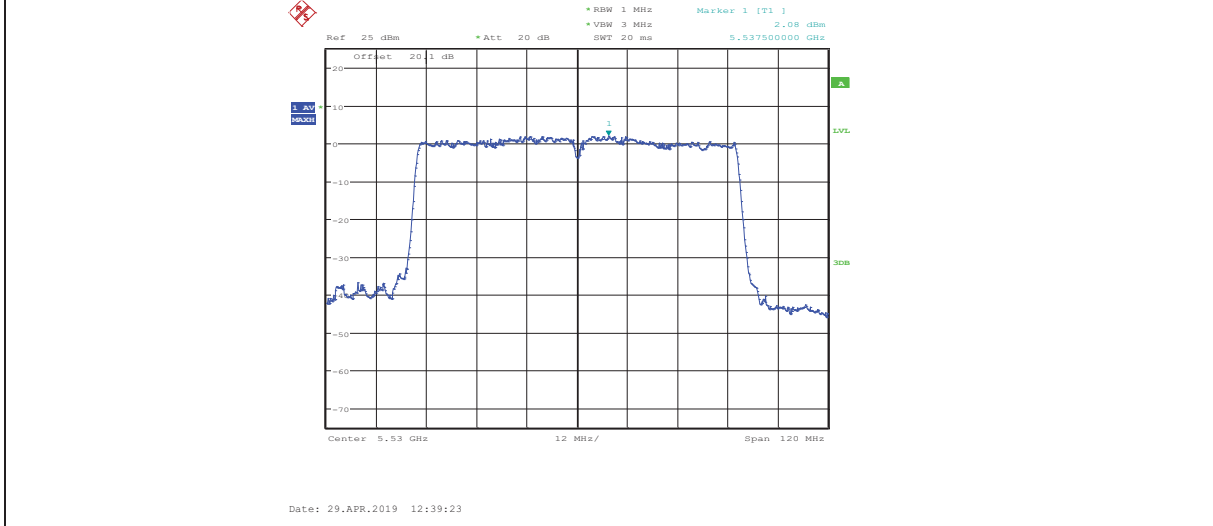


11AC80MIMO ANT2 5530

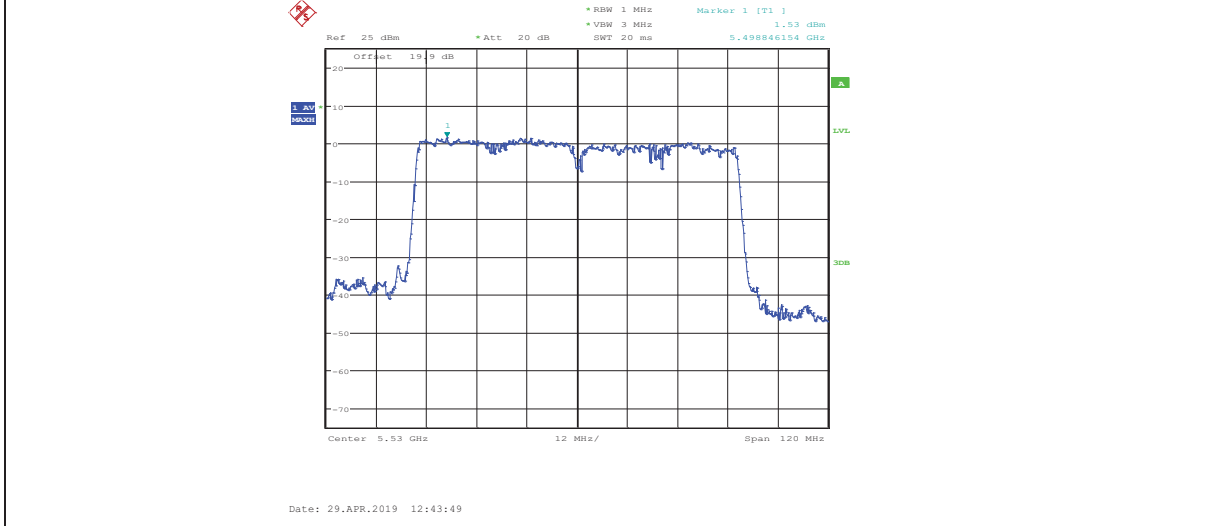

11AC80MIMO ANT1 5775

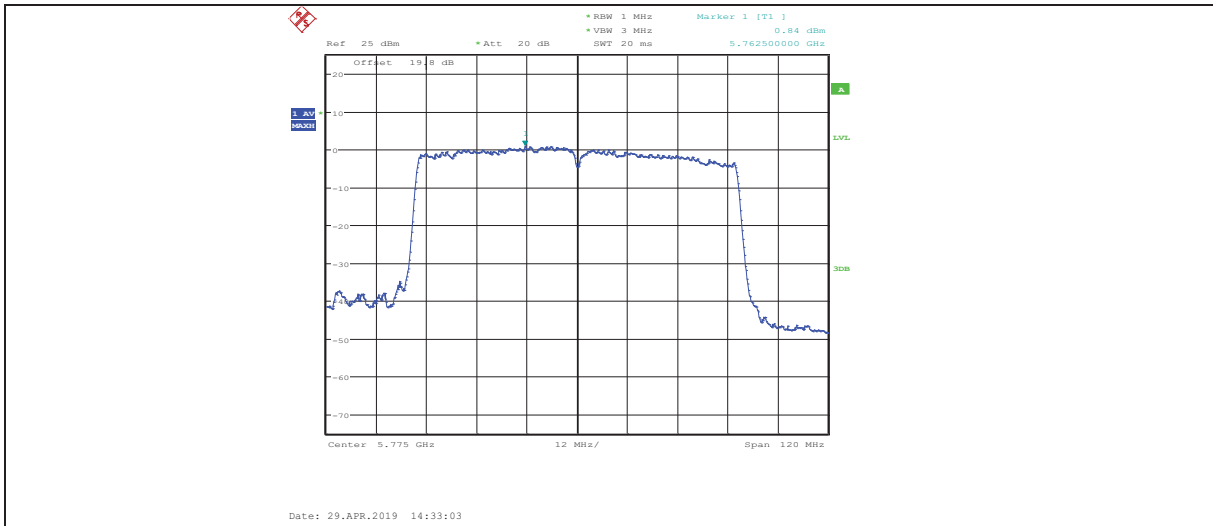

11AC80MIMO ANT2 5775

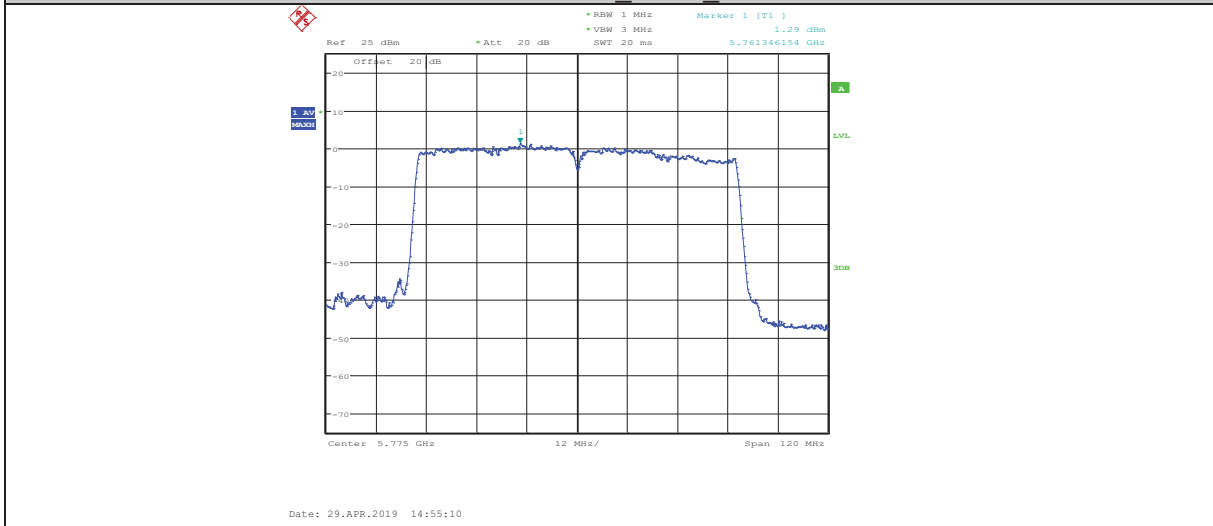

7. Frequency Stability Measurement

7.1. Limit of Frequency Stability

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

7.2. Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


7.3. Test Procedures

(1) To ensure emission at the band edge is maintained within the authorized band, those values shall be measured by radiation emissions at upper and lower frequency points, and finally compensated by frequency deviation as procedures below.

(2) The EUT was operated at the maximum output power, and connected to the spectrum analyzer, which is set to maximum hold function and peak detector. The peak value of the power envelope was measured and noted. The upper and lower frequency points were respectively measured relatively 10 dB lower than the measured peak value.

(3) The frequency deviation was calculated by adding the upper frequency point and the lower frequency point divided by two. Those detailed values of frequency deviation are provided in table below.

7.4. Test Setup

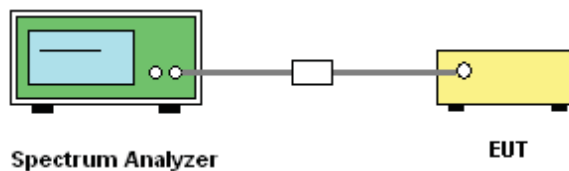

7.5. Test Result

Test Mode	Antenna	Channel	Voltage				Deviation (ppm)	Limit (ppm)	Verdict
			Voltage [Vdc]	Temperature (°C)	Deviation (kHz)	Deviation (ppm)			
11A	ANT1	5180	NV	NT	80	15.444015	20	PASS	
11A	ANT1	5180	LV	NT	0	0	20	PASS	
11A	ANT1	5180	HV	NT	80	15.444015	20	PASS	
11A	ANT2	5180	NV	NT	80	15.444015	20	PASS	
11A	ANT2	5180	LV	NT	0	0	20	PASS	
11A	ANT2	5180	HV	NT	80	15.444015	20	PASS	
11A	ANT1	5200	NV	NT	0	0	20	PASS	
11A	ANT1	5200	LV	NT	0	0	20	PASS	
11A	ANT1	5200	HV	NT	0	0	20	PASS	
11A	ANT2	5200	NV	NT	0	0	20	PASS	
11A	ANT2	5200	LV	NT	0	0	20	PASS	
11A	ANT2	5200	HV	NT	80	15.384615	20	PASS	
11A	ANT1	5240	NV	NT	80	15.267176	20	PASS	
11A	ANT1	5240	LV	NT	80	15.267176	20	PASS	
11A	ANT1	5240	HV	NT	80	15.267176	20	PASS	

11A	ANT2	5240	NV	NT	0	0	20	PASS
11A	ANT2	5240	LV	NT	80	15.267176	20	PASS
11A	ANT2	5240	HV	NT	0	0	20	PASS
11A	ANT1	5260	NV	NT	0	0	20	PASS
11A	ANT1	5260	LV	NT	0	0	20	PASS
11A	ANT1	5260	HV	NT	0	0	20	PASS
11A	ANT2	5260	NV	NT	0	0	20	PASS
11A	ANT2	5260	LV	NT	80	15.209125	20	PASS
11A	ANT2	5260	HV	NT	0	0	20	PASS
11A	ANT1	5280	NV	NT	80	15.151515	20	PASS
11A	ANT1	5280	LV	NT	80	15.151515	20	PASS
11A	ANT1	5280	HV	NT	80	15.151515	20	PASS
11A	ANT2	5280	NV	NT	80	15.151515	20	PASS
11A	ANT2	5280	LV	NT	80	15.151515	20	PASS
11A	ANT2	5280	HV	NT	80	15.151515	20	PASS
11A	ANT1	5320	NV	NT	0	0	20	PASS
11A	ANT1	5320	LV	NT	80	15.037594	20	PASS
11A	ANT1	5320	HV	NT	0	0	20	PASS
11A	ANT2	5320	NV	NT	80	15.037594	20	PASS
11A	ANT2	5320	LV	NT	80	15.037594	20	PASS
11A	ANT2	5320	HV	NT	0	0	20	PASS
11A	ANT1	5500	NV	NT	0	0	20	PASS
11A	ANT1	5500	LV	NT	80	14.545455	20	PASS
11A	ANT1	5500	HV	NT	80	14.545455	20	PASS
11A	ANT2	5500	NV	NT	80	14.545455	20	PASS
11A	ANT2	5500	LV	NT	0	0	20	PASS
11A	ANT2	5500	HV	NT	80	14.545455	20	PASS
11A	ANT1	5580	NV	NT	80	14.336918	20	PASS
11A	ANT1	5580	LV	NT	0	0	20	PASS
11A	ANT1	5580	HV	NT	0	0	20	PASS
11A	ANT2	5580	NV	NT	0	0	20	PASS
11A	ANT2	5580	LV	NT	80	14.336918	20	PASS
11A	ANT2	5580	HV	NT	0	0	20	PASS
11A	ANT1	5700	NV	NT	80	14.035088	20	PASS
11A	ANT1	5700	LV	NT	80	14.035088	20	PASS
11A	ANT1	5700	HV	NT	0	0	20	PASS
11A	ANT2	5700	NV	NT	80	14.035088	20	PASS
11A	ANT2	5700	LV	NT	80	14.035088	20	PASS
11A	ANT2	5700	HV	NT	0	0	20	PASS
11A	ANT1	5745	NV	NT	80	13.925152	20	PASS
11A	ANT1	5745	LV	NT	0	0	20	PASS
11A	ANT1	5745	HV	NT	80	13.925152	20	PASS
11A	ANT2	5745	NV	NT	0	0	20	PASS
11A	ANT2	5745	LV	NT	80	13.925152	20	PASS
11A	ANT2	5745	HV	NT	0	0	20	PASS
11A	ANT1	5785	NV	NT	80	13.828868	20	PASS
11A	ANT1	5785	LV	NT	80	13.828868	20	PASS
11A	ANT1	5785	HV	NT	80	13.828868	20	PASS
11A	ANT2	5785	NV	NT	80	13.828868	20	PASS
11A	ANT2	5785	LV	NT	0	0	20	PASS
11A	ANT2	5785	HV	NT	0	0	20	PASS

11A	ANT1	5825	NV	NT	0	0	20	PASS
11A	ANT1	5825	LV	NT	0	0	20	PASS
11A	ANT1	5825	HV	NT	0	0	20	PASS
11A	ANT2	5825	NV	NT	0	0	20	PASS
11A	ANT2	5825	LV	NT	0	0	20	PASS
11A	ANT2	5825	HV	NT	0	0	20	PASS
11N20 MIMO	ANT1	5180	NV	NT	0	0	20	PASS
11N20 MIMO	ANT1	5180	LV	NT	0	0	20	PASS
11N20 MIMO	ANT1	5180	HV	NT	0	0	20	PASS
11N20 MIMO	ANT2	5180	NV	NT	0	0	20	PASS
11N20 MIMO	ANT2	5180	LV	NT	0	0	20	PASS
11N20 MIMO	ANT2	5180	HV	NT	0	0	20	PASS
11N20MIMO	ANT1	5200	NV	NT	0	0	20	PASS
11N20MIMO	ANT1	5200	LV	NT	0	0	20	PASS
11N20MIMO	ANT1	5200	HV	NT	0	0	20	PASS
11N20MIMO	ANT2	5200	NV	NT	0	0	20	PASS
11N20MIMO	ANT2	5200	LV	NT	0	0	20	PASS
11N20MIMO	ANT2	5200	HV	NT	0	0	20	PASS
11N20MIMO	ANT1	5240	NV	NT	0	0	20	PASS
11N20MIMO	ANT1	5240	LV	NT	0	0	20	PASS
11N20MIMO	ANT1	5240	HV	NT	0	0	20	PASS
11N20MIMO	ANT2	5240	NV	NT	0	0	20	PASS
11N20MIMO	ANT2	5240	LV	NT	0	0	20	PASS
11N20MIMO	ANT2	5240	HV	NT	0	0	20	PASS
11N20MIMO	ANT1	5260	NV	NT	0	0	20	PASS
11N20MIMO	ANT1	5260	LV	NT	0	0	20	PASS
11N20MIMO	ANT1	5260	HV	NT	0	0	20	PASS
11N20MIMO	ANT2	5260	NV	NT	0	0	20	PASS
11N20MIMO	ANT2	5260	LV	NT	0	0	20	PASS
11N20MIMO	ANT2	5260	HV	NT	0	0	20	PASS
11N20MIMO	ANT1	5280	NV	NT	0	0	20	PASS
11N20MIMO	ANT1	5280	LV	NT	0	0	20	PASS
11N20MIMO	ANT1	5280	HV	NT	0	0	20	PASS
11N20MIMO	ANT2	5280	NV	NT	0	0	20	PASS
11N20MIMO	ANT2	5280	LV	NT	0	0	20	PASS
11N20MIMO	ANT2	5280	HV	NT	80	15.151515	20	PASS
11N20MIMO	ANT1	5320	NV	NT	0	0	20	PASS
11N20MIMO	ANT1	5320	LV	NT	0	0	20	PASS
11N20MIMO	ANT1	5320	HV	NT	0	0	20	PASS
11N20MIMO	ANT2	5320	NV	NT	0	0	20	PASS
11N20MIMO	ANT2	5320	LV	NT	0	0	20	PASS
11N20MIMO	ANT2	5320	HV	NT	0	0	20	PASS
11N20MIMO	ANT1	5500	NV	NT	0	0	20	PASS
11N20MIMO	ANT1	5500	LV	NT	0	0	20	PASS
11N20MIMO	ANT1	5500	HV	NT	0	0	20	PASS
11N20MIMO	ANT2	5500	NV	NT	0	0	20	PASS

11N20MIMO	ANT2	5500	LV	NT	0	0	20	PASS
11N20MIMO	ANT2	5500	HV	NT	0	0	20	PASS
11N20MIMO	ANT1	5580	NV	NT	0	0	20	PASS
11N20MIMO	ANT1	5580	LV	NT	0	0	20	PASS
11N20MIMO	ANT1	5580	HV	NT	0	0	20	PASS
11N20MIMO	ANT2	5580	NV	NT	0	0	20	PASS
11N20MIMO	ANT2	5580	LV	NT	0	0	20	PASS
11N20MIMO	ANT2	5580	HV	NT	0	0	20	PASS
11N20MIMO	ANT1	5700	NV	NT	0	0	20	PASS
11N20MIMO	ANT1	5700	LV	NT	0	0	20	PASS
11N20MIMO	ANT1	5700	HV	NT	0	0	20	PASS
11N20MIMO	ANT2	5700	NV	NT	0	0	20	PASS
11N20MIMO	ANT2	5700	LV	NT	0	0	20	PASS
11N20MIMO	ANT2	5700	HV	NT	0	0	20	PASS
11N20MIMO	ANT1	5745	NV	NT	0	0	20	PASS
11N20MIMO	ANT1	5745	LV	NT	0	0	20	PASS
11N20MIMO	ANT1	5745	HV	NT	0	0	20	PASS
11N20MIMO	ANT2	5745	NV	NT	0	0	20	PASS
11N20MIMO	ANT2	5745	LV	NT	0	0	20	PASS
11N20MIMO	ANT2	5745	HV	NT	0	0	20	PASS
11N20MIMO	ANT1	5785	NV	NT	0	0	20	PASS
11N20MIMO	ANT1	5785	LV	NT	0	0	20	PASS
11N20MIMO	ANT1	5785	HV	NT	0	0	20	PASS
11N20MIMO	ANT2	5785	NV	NT	0	0	20	PASS
11N20MIMO	ANT2	5785	LV	NT	80	13.828868	20	PASS
11N20MIMO	ANT2	5785	HV	NT	0	0	20	PASS
11N20MIMO	ANT1	5825	NV	NT	0	0	20	PASS
11N20MIMO	ANT1	5825	LV	NT	0	0	20	PASS
11N20MIMO	ANT1	5825	HV	NT	0	0	20	PASS
11N20MIMO	ANT2	5825	NV	NT	0	0	20	PASS
11N20MIMO	ANT2	5825	LV	NT	0	0	20	PASS
11N20MIMO	ANT2	5825	HV	NT	0	0	20	PASS
11N40MIMO	ANT1	5190	NV	NT	0	0	20	PASS
11N40MIMO	ANT1	5190	LV	NT	0	0	20	PASS
11N40MIMO	ANT1	5190	HV	NT	0	0	20	PASS
11N40MIMO	ANT2	5190	NV	NT	0	0	20	PASS
11N40MIMO	ANT2	5190	LV	NT	0	0	20	PASS
11N40MIMO	ANT2	5190	HV	NT	0	0	20	PASS
11N40MIMO	ANT1	5230	NV	NT	0	0	20	PASS
11N40MIMO	ANT1	5230	LV	NT	80	15.296367	20	PASS
11N40MIMO	ANT1	5230	HV	NT	0	0	20	PASS
11N40MIMO	ANT2	5230	NV	NT	0	0	20	PASS
11N40MIMO	ANT2	5230	LV	NT	0	0	20	PASS
11N40MIMO	ANT2	5230	HV	NT	0	0	20	PASS
11N40MIMO	ANT1	5270	NV	NT	0	0	20	PASS
11N40MIMO	ANT1	5270	LV	NT	0	0	20	PASS
11N40MIMO	ANT1	5270	HV	NT	0	0	20	PASS
11N40MIMO	ANT2	5270	NV	NT	0	0	20	PASS
11N40MIMO	ANT2	5270	LV	NT	0	0	20	PASS
11N40MIMO	ANT2	5270	HV	NT	0	0	20	PASS
11N40MIMO	ANT1	5310	NV	NT	0	0	20	PASS

11N40MIMO	ANT1	5310	LV	NT	0	0	20	PASS
11N40MIMO	ANT1	5310	HV	NT	0	0	20	PASS
11N40MIMO	ANT2	5310	NV	NT	0	0	20	PASS
11N40MIMO	ANT2	5310	LV	NT	0	0	20	PASS
11N40MIMO	ANT2	5310	HV	NT	0	0	20	PASS
11N40MIMO	ANT1	5510	NV	NT	0	0	20	PASS
11N40MIMO	ANT1	5510	LV	NT	0	0	20	PASS
11N40MIMO	ANT1	5510	HV	NT	0	0	20	PASS
11N40MIMO	ANT2	5510	NV	NT	0	0	20	PASS
11N40MIMO	ANT2	5510	LV	NT	0	0	20	PASS
11N40MIMO	ANT2	5510	HV	NT	0	0	20	PASS
11N40MIMO	ANT1	5550	NV	NT	0	0	20	PASS
11N40MIMO	ANT1	5550	LV	NT	0	0	20	PASS
11N40MIMO	ANT1	5550	HV	NT	80	14.414414	20	PASS
11N40MIMO	ANT2	5550	NV	NT	80	14.414414	20	PASS
11N40MIMO	ANT2	5550	LV	NT	80	14.414414	20	PASS
11N40MIMO	ANT2	5550	HV	NT	80	14.414414	20	PASS
11N40MIMO	ANT1	5670	NV	NT	0	0	20	PASS
11N40MIMO	ANT1	5670	LV	NT	0	0	20	PASS
11N40MIMO	ANT1	5670	HV	NT	80	14.109347	20	PASS
11N40MIMO	ANT2	5670	NV	NT	0	0	20	PASS
11N40MIMO	ANT2	5670	LV	NT	80	14.109347	20	PASS
11N40MIMO	ANT2	5670	HV	NT	0	0	20	PASS
11N40MIMO	ANT1	5755	NV	NT	80	13.900956	20	PASS
11N40MIMO	ANT1	5755	LV	NT	80	13.900956	20	PASS
11N40MIMO	ANT1	5755	HV	NT	80	13.900956	20	PASS
11N40MIMO	ANT2	5755	NV	NT	0	0	20	PASS
11N40MIMO	ANT2	5755	LV	NT	80	13.900956	20	PASS
11N40MIMO	ANT2	5755	HV	NT	0	0	20	PASS
11N40MIMO	ANT1	5795	NV	NT	0	0	20	PASS
11N40MIMO	ANT1	5795	LV	NT	0	0	20	PASS
11N40MIMO	ANT1	5795	HV	NT	0	0	20	PASS
11N40MIMO	ANT2	5795	NV	NT	0	0	20	PASS
11N40MIMO	ANT2	5795	LV	NT	80	13.805004	20	PASS
11N40MIMO	ANT2	5795	HV	NT	0	0	20	PASS
11AC20MIMO	ANT1	5180	NV	NT	0	0	20	PASS
11AC20MIMO	ANT1	5180	LV	NT	0	0	20	PASS
11AC20MIMO	ANT1	5180	HV	NT	0	0	20	PASS
11AC20MIMO	ANT2	5180	NV	NT	0	0	20	PASS
11AC20MIMO	ANT2	5180	LV	NT	0	0	20	PASS
11AC20MIMO	ANT2	5180	HV	NT	0	0	20	PASS
11AC20MIMO	ANT1	5200	NV	NT	0	0	20	PASS
11AC20MIMO	ANT1	5200	LV	NT	0	0	20	PASS
11AC20MIMO	ANT1	5200	HV	NT	0	0	20	PASS
11AC20MIMO	ANT2	5200	NV	NT	80	15.384615	20	PASS
11AC20MIMO	ANT2	5200	LV	NT	0	0	20	PASS
11AC20MIMO	ANT2	5200	HV	NT	0	0	20	PASS
11AC20MIMO	ANT1	5240	NV	NT	0	0	20	PASS
11AC20MIMO	ANT1	5240	LV	NT	0	0	20	PASS
11AC20MIMO	ANT1	5240	HV	NT	0	0	20	PASS
11AC20MIMO	ANT2	5240	NV	NT	0	0	20	PASS

11AC20MIMO	ANT2	5240	LV	NT	0	0	20	PASS
11AC20MIMO	ANT2	5240	HV	NT	0	0	20	PASS
11AC20MIMO	ANT1	5260	NV	NT	0	0	20	PASS
11AC20MIMO	ANT1	5260	LV	NT	0	0	20	PASS
11AC20MIMO	ANT1	5260	HV	NT	0	0	20	PASS
11AC20MIMO	ANT2	5260	NV	NT	0	0	20	PASS
11AC20MIMO	ANT2	5260	LV	NT	0	0	20	PASS
11AC20MIMO	ANT2	5260	HV	NT	0	0	20	PASS
11AC20MIMO	ANT1	5280	NV	NT	0	0	20	PASS
11AC20MIMO	ANT1	5280	LV	NT	80	15.151515	20	PASS
11AC20MIMO	ANT1	5280	HV	NT	0	0	20	PASS
11AC20MIMO	ANT2	5280	NV	NT	0	0	20	PASS
11AC20MIMO	ANT2	5280	LV	NT	0	0	20	PASS
11AC20MIMO	ANT2	5280	HV	NT	0	0	20	PASS
11AC20MIMO	ANT1	5320	NV	NT	0	0	20	PASS
11AC20MIMO	ANT1	5320	LV	NT	0	0	20	PASS
11AC20MIMO	ANT1	5320	HV	NT	0	0	20	PASS
11AC20MIMO	ANT2	5320	NV	NT	0	0	20	PASS
11AC20MIMO	ANT2	5320	LV	NT	0	0	20	PASS
11AC20MIMO	ANT2	5320	HV	NT	0	0	20	PASS
11AC20MIMO	ANT1	5500	NV	NT	0	0	20	PASS
11AC20MIMO	ANT1	5500	LV	NT	0	0	20	PASS
11AC20MIMO	ANT1	5500	HV	NT	0	0	20	PASS
11AC20MIMO	ANT2	5500	NV	NT	0	0	20	PASS
11AC20MIMO	ANT2	5500	LV	NT	0	0	20	PASS
11AC20MIMO	ANT2	5500	HV	NT	0	0	20	PASS
11AC20MIMO	ANT1	5580	NV	NT	0	0	20	PASS
11AC20MIMO	ANT1	5580	LV	NT	0	0	20	PASS
11AC20MIMO	ANT1	5580	HV	NT	0	0	20	PASS
11AC20MIMO	ANT2	5580	NV	NT	80	14.336918	20	PASS
11AC20MIMO	ANT2	5580	LV	NT	0	0	20	PASS
11AC20MIMO	ANT2	5580	HV	NT	0	0	20	PASS
11AC20MIMO	ANT1	5700	NV	NT	0	0	20	PASS
11AC20MIMO	ANT1	5700	LV	NT	0	0	20	PASS
11AC20MIMO	ANT1	5700	HV	NT	0	0	20	PASS
11AC20MIMO	ANT2	5700	NV	NT	0	0	20	PASS
11AC20MIMO	ANT2	5700	LV	NT	0	0	20	PASS
11AC20MIMO	ANT2	5700	HV	NT	0	0	20	PASS
11AC20MIMO	ANT1	5745	NV	NT	0	0	20	PASS
11AC20MIMO	ANT1	5745	LV	NT	0	0	20	PASS
11AC20MIMO	ANT1	5745	HV	NT	0	0	20	PASS
11AC20MIMO	ANT2	5745	NV	NT	0	0	20	PASS
11AC20MIMO	ANT2	5745	LV	NT	0	0	20	PASS
11AC20MIMO	ANT2	5745	HV	NT	0	0	20	PASS
11AC20MIMO	ANT1	5785	NV	NT	0	0	20	PASS
11AC20MIMO	ANT1	5785	LV	NT	0	0	20	PASS
11AC20MIMO	ANT1	5785	HV	NT	0	0	20	PASS
11AC20MIMO	ANT2	5785	NV	NT	0	0	20	PASS
11AC20MIMO	ANT2	5785	LV	NT	0	0	20	PASS
11AC20MIMO	ANT2	5785	HV	NT	0	0	20	PASS
11AC20MIMO	ANT1	5825	NV	NT	0	0	20	PASS

11AC20MIMO	ANT1	5825	LV	NT	0	0	20	PASS
11AC20MIMO	ANT1	5825	HV	NT	0	0	20	PASS
11AC20MIMO	ANT2	5825	NV	NT	0	0	20	PASS
11AC20MIMO	ANT2	5825	LV	NT	80	13.733906	20	PASS
11AC20MIMO	ANT2	5825	HV	NT	0	0	20	PASS
11AC40MIMO	ANT1	5190	NV	NT	0	0	20	PASS
11AC40MIMO	ANT1	5190	LV	NT	0	0	20	PASS
11AC40MIMO	ANT1	5190	HV	NT	80	15.414258	20	PASS
11AC40MIMO	ANT2	5190	NV	NT	0	0	20	PASS
11AC40MIMO	ANT2	5190	LV	NT	0	0	20	PASS
11AC40MIMO	ANT2	5190	HV	NT	0	0	20	PASS
11AC40MIMO	ANT1	5230	NV	NT	0	0	20	PASS
11AC40MIMO	ANT1	5230	LV	NT	0	0	20	PASS
11AC40MIMO	ANT1	5230	HV	NT	-80	-15.296367	20	PASS
11AC40MIMO	ANT2	5230	NV	NT	0	0	20	PASS
11AC40MIMO	ANT2	5230	LV	NT	0	0	20	PASS
11AC40MIMO	ANT2	5230	HV	NT	0	0	20	PASS
11AC40MIMO	ANT1	5270	NV	NT	0	0	20	PASS
11AC40MIMO	ANT1	5270	LV	NT	0	0	20	PASS
11AC40MIMO	ANT1	5270	HV	NT	0	0	20	PASS
11AC40MIMO	ANT2	5270	NV	NT	0	0	20	PASS
11AC40MIMO	ANT2	5270	LV	NT	0	0	20	PASS
11AC40MIMO	ANT2	5270	HV	NT	0	0	20	PASS
11AC40MIMO	ANT1	5310	NV	NT	0	0	20	PASS
11AC40MIMO	ANT1	5310	LV	NT	0	0	20	PASS
11AC40MIMO	ANT1	5310	HV	NT	0	0	20	PASS
11AC40MIMO	ANT2	5310	NV	NT	0	0	20	PASS
11AC40MIMO	ANT2	5310	LV	NT	0	0	20	PASS
11AC40MIMO	ANT2	5310	HV	NT	0	0	20	PASS
11AC40MIMO	ANT1	5510	NV	NT	0	0	20	PASS
11AC40MIMO	ANT1	5510	LV	NT	0	0	20	PASS
11AC40MIMO	ANT1	5510	HV	NT	0	0	20	PASS
11AC40MIMO	ANT2	5510	NV	NT	-80	-14.519056	20	PASS
11AC40MIMO	ANT2	5510	LV	NT	0	0	20	PASS
11AC40MIMO	ANT2	5510	HV	NT	0	0	20	PASS
11AC40MIMO	ANT1	5550	NV	NT	0	0	20	PASS
11AC40MIMO	ANT1	5550	LV	NT	0	0	20	PASS
11AC40MIMO	ANT1	5550	HV	NT	0	0	20	PASS
11AC40MIMO	ANT2	5550	NV	NT	0	0	20	PASS
11AC40MIMO	ANT2	5550	LV	NT	0	0	20	PASS
11AC40MIMO	ANT2	5550	HV	NT	0	0	20	PASS
11AC40MIMO	ANT1	5670	NV	NT	0	0	20	PASS
11AC40MIMO	ANT1	5670	LV	NT	0	0	20	PASS
11AC40MIMO	ANT1	5670	HV	NT	0	0	20	PASS
11AC40MIMO	ANT2	5670	NV	NT	0	0	20	PASS
11AC40MIMO	ANT2	5670	LV	NT	0	0	20	PASS
11AC40MIMO	ANT2	5670	HV	NT	0	0	20	PASS
11AC40MIMO	ANT1	5755	NV	NT	0	0	20	PASS
11AC40MIMO	ANT1	5755	LV	NT	80	13.900956	20	PASS
11AC40MIMO	ANT1	5755	HV	NT	80	13.900956	20	PASS
11AC40MIMO	ANT2	5755	NV	NT	0	0	20	PASS

11AC40MIMO	ANT2	5755	LV	NT	0	0	20	PASS
11AC40MIMO	ANT2	5755	HV	NT	-80	-13.900956	20	PASS
11AC40MIMO	ANT1	5795	NV	NT	0	0	20	PASS
11AC40MIMO	ANT1	5795	LV	NT	-80	-13.805004	20	PASS
11AC40MIMO	ANT1	5795	HV	NT	-80	-13.805004	20	PASS
11AC40MIMO	ANT2	5795	NV	NT	0	0	20	PASS
11AC40MIMO	ANT2	5795	LV	NT	0	0	20	PASS
11AC40MIMO	ANT2	5795	HV	NT	80	13.805004	20	PASS
11AC80MIMO	ANT1	5210	NV	NT	0	0	20	PASS
11AC80MIMO	ANT1	5210	LV	NT	0	0	20	PASS
11AC80MIMO	ANT1	5210	HV	NT	0	0	20	PASS
11AC80MIMO	ANT2	5210	NV	NT	0	0	20	PASS
11AC80MIMO	ANT2	5210	LV	NT	0	0	20	PASS
11AC80MIMO	ANT2	5210	HV	NT	0	0	20	PASS
11AC80MIMO	ANT1	5290	NV	NT	0	0	20	PASS
11AC80MIMO	ANT1	5290	LV	NT	0	0	20	PASS
11AC80MIMO	ANT1	5290	HV	NT	0	0	20	PASS
11AC80MIMO	ANT2	5290	NV	NT	0	0	20	PASS
11AC80MIMO	ANT2	5290	LV	NT	0	0	20	PASS
11AC80MIMO	ANT2	5290	HV	NT	0	0	20	PASS
11AC80MIMO	ANT1	5530	NV	NT	0	0	20	PASS
11AC80MIMO	ANT1	5530	LV	NT	0	0	20	PASS
11AC80MIMO	ANT1	5530	HV	NT	0	0	20	PASS
11AC80MIMO	ANT2	5530	NV	NT	0	0	20	PASS
11AC80MIMO	ANT2	5530	LV	NT	80	14.466546	20	PASS
11AC80MIMO	ANT2	5530	HV	NT	0	0	20	PASS
11AC80MIMO	ANT1	5775	NV	NT	0	0	20	PASS
11AC80MIMO	ANT1	5775	LV	NT	0	0	20	PASS
11AC80MIMO	ANT1	5775	HV	NT	0	0	20	PASS
11AC80MIMO	ANT2	5775	NV	NT	0	0	20	PASS
11AC80MIMO	ANT2	5775	LV	NT	0	0	20	PASS
11AC80MIMO	ANT2	5775	HV	NT	0	0	20	PASS

Temperature								
TestMode	Antenna	Channel	Voltage [Vdc]	Temperature (°C)	Deviation (kHz)	Deviation (ppm)	Limit (ppm)	Verdict
11A	ANT1	5180	NV	-30	80	15.444015	20	PASS
11A	ANT1	5180	NV	-20	80	15.444015	20	PASS
11A	ANT1	5180	NV	-10	80	15.444015	20	PASS
11A	ANT1	5180	NV	0	80	15.444015	20	PASS
11A	ANT1	5180	NV	10	80	15.444015	20	PASS
11A	ANT1	5180	NV	20	80	15.444015	20	PASS
11A	ANT1	5180	NV	30	80	15.444015	20	PASS
11A	ANT1	5180	NV	40	0	0	20	PASS
11A	ANT1	5180	NV	50	80	15.444015	20	PASS
11A	ANT2	5180	NV	-30	80	15.444015	20	PASS
11A	ANT2	5180	NV	-20	80	15.444015	20	PASS
11A	ANT2	5180	NV	-10	80	15.444015	20	PASS
11A	ANT2	5180	NV	0	80	15.444015	20	PASS
11A	ANT2	5180	NV	10	80	15.444015	20	PASS
11A	ANT2	5180	NV	20	80	15.444015	20	PASS

11A	ANT2	5180	NV	30	80	15.444015	20	PASS
11A	ANT2	5180	NV	40	80	15.444015	20	PASS
11A	ANT2	5180	NV	50	80	15.444015	20	PASS
11A	ANT1	5200	NV	-30	80	15.384615	20	PASS
11A	ANT1	5200	NV	-20	80	15.384615	20	PASS
11A	ANT1	5200	NV	-10	80	15.384615	20	PASS
11A	ANT1	5200	NV	0	80	15.384615	20	PASS
11A	ANT1	5200	NV	10	0	0	20	PASS
11A	ANT1	5200	NV	20	80	15.384615	20	PASS
11A	ANT1	5200	NV	30	80	15.384615	20	PASS
11A	ANT1	5200	NV	40	80	15.384615	20	PASS
11A	ANT1	5200	NV	50	80	15.384615	20	PASS
11A	ANT2	5200	NV	-30	0	0	20	PASS
11A	ANT2	5200	NV	-20	80	15.384615	20	PASS
11A	ANT2	5200	NV	-10	0	0	20	PASS
11A	ANT2	5200	NV	0	0	0	20	PASS
11A	ANT2	5200	NV	10	80	15.384615	20	PASS
11A	ANT2	5200	NV	20	80	15.384615	20	PASS
11A	ANT2	5200	NV	30	0	0	20	PASS
11A	ANT2	5200	NV	40	80	15.384615	20	PASS
11A	ANT2	5200	NV	50	80	15.384615	20	PASS
11A	ANT1	5240	NV	-30	0	0	20	PASS
11A	ANT1	5240	NV	-20	0	0	20	PASS
11A	ANT1	5240	NV	-10	0	0	20	PASS
11A	ANT1	5240	NV	0	0	0	20	PASS
11A	ANT1	5240	NV	10	80	15.267176	20	PASS
11A	ANT1	5240	NV	20	80	15.267176	20	PASS
11A	ANT1	5240	NV	30	80	15.267176	20	PASS
11A	ANT1	5240	NV	40	0	0	20	PASS
11A	ANT1	5240	NV	50	80	15.267176	20	PASS
11A	ANT2	5240	NV	-30	80	15.267176	20	PASS
11A	ANT2	5240	NV	-20	80	15.267176	20	PASS
11A	ANT2	5240	NV	-10	80	15.267176	20	PASS
11A	ANT2	5240	NV	0	80	15.267176	20	PASS
11A	ANT2	5240	NV	10	80	15.267176	20	PASS
11A	ANT2	5240	NV	20	80	15.267176	20	PASS
11A	ANT2	5240	NV	30	80	15.267176	20	PASS
11A	ANT2	5240	NV	40	80	15.267176	20	PASS
11A	ANT2	5240	NV	50	0	0	20	PASS
11A	ANT1	5260	NV	-30	0	0	20	PASS
11A	ANT1	5260	NV	-20	0	0	20	PASS
11A	ANT1	5260	NV	-10	80	15.209125	20	PASS
11A	ANT1	5260	NV	0	0	0	20	PASS
11A	ANT1	5260	NV	10	80	15.209125	20	PASS
11A	ANT1	5260	NV	20	80	15.209125	20	PASS
11A	ANT1	5260	NV	30	80	15.209125	20	PASS
11A	ANT1	5260	NV	40	0	0	20	PASS
11A	ANT1	5260	NV	50	0	0	20	PASS
11A	ANT2	5260	NV	-30	0	0	20	PASS
11A	ANT2	5260	NV	-20	0	0	20	PASS
11A	ANT2	5260	NV	-10	80	15.209125	20	PASS

11A	ANT2	5260	NV	0	80	15.209125	20	PASS
11A	ANT2	5260	NV	10	80	15.209125	20	PASS
11A	ANT2	5260	NV	20	80	15.209125	20	PASS
11A	ANT2	5260	NV	30	80	15.209125	20	PASS
11A	ANT2	5260	NV	40	80	15.209125	20	PASS
11A	ANT2	5260	NV	50	80	15.209125	20	PASS
11A	ANT1	5280	NV	-30	80	15.151515	20	PASS
11A	ANT1	5280	NV	-20	80	15.151515	20	PASS
11A	ANT1	5280	NV	-10	80	15.151515	20	PASS
11A	ANT1	5280	NV	0	80	15.151515	20	PASS
11A	ANT1	5280	NV	10	80	15.151515	20	PASS
11A	ANT1	5280	NV	20	80	15.151515	20	PASS
11A	ANT1	5280	NV	30	80	15.151515	20	PASS
11A	ANT1	5280	NV	40	80	15.151515	20	PASS
11A	ANT1	5280	NV	50	80	15.151515	20	PASS
11A	ANT2	5280	NV	-30	80	15.151515	20	PASS
11A	ANT2	5280	NV	-20	80	15.151515	20	PASS
11A	ANT2	5280	NV	-10	80	15.151515	20	PASS
11A	ANT2	5280	NV	0	80	15.151515	20	PASS
11A	ANT2	5280	NV	10	0	0	20	PASS
11A	ANT2	5280	NV	20	0	0	20	PASS
11A	ANT2	5280	NV	30	80	15.151515	20	PASS
11A	ANT2	5280	NV	40	80	15.151515	20	PASS
11A	ANT2	5280	NV	50	80	15.151515	20	PASS
11A	ANT1	5320	NV	-30	80	15.037594	20	PASS
11A	ANT1	5320	NV	-20	80	15.037594	20	PASS
11A	ANT1	5320	NV	-10	0	0	20	PASS
11A	ANT1	5320	NV	0	80	15.037594	20	PASS
11A	ANT1	5320	NV	10	0	0	20	PASS
11A	ANT1	5320	NV	20	80	15.037594	20	PASS
11A	ANT1	5320	NV	30	0	0	20	PASS
11A	ANT1	5320	NV	40	0	0	20	PASS
11A	ANT1	5320	NV	50	0	0	20	PASS
11A	ANT2	5320	NV	-30	80	15.037594	20	PASS
11A	ANT2	5320	NV	-20	80	15.037594	20	PASS
11A	ANT2	5320	NV	-10	0	0	20	PASS
11A	ANT2	5320	NV	0	80	15.037594	20	PASS
11A	ANT2	5320	NV	10	80	15.037594	20	PASS
11A	ANT2	5320	NV	20	0	0	20	PASS
11A	ANT2	5320	NV	30	0	0	20	PASS
11A	ANT2	5320	NV	40	0	0	20	PASS
11A	ANT2	5320	NV	50	80	15.037594	20	PASS
11A	ANT1	5500	NV	-30	0	0	20	PASS
11A	ANT1	5500	NV	-20	80	14.545455	20	PASS
11A	ANT1	5500	NV	-10	80	14.545455	20	PASS
11A	ANT1	5500	NV	0	80	14.545455	20	PASS
11A	ANT1	5500	NV	10	80	14.545455	20	PASS
11A	ANT1	5500	NV	20	80	14.545455	20	PASS
11A	ANT1	5500	NV	30	0	0	20	PASS
11A	ANT1	5500	NV	40	80	14.545455	20	PASS
11A	ANT1	5500	NV	50	-80	-14.545455	20	PASS

11A	ANT2	5500	NV	-30	80	14.545455	20	PASS
11A	ANT2	5500	NV	-20	80	14.545455	20	PASS
11A	ANT2	5500	NV	-10	80	14.545455	20	PASS
11A	ANT2	5500	NV	0	80	14.545455	20	PASS
11A	ANT2	5500	NV	10	0	0	20	PASS
11A	ANT2	5500	NV	20	0	0	20	PASS
11A	ANT2	5500	NV	30	0	0	20	PASS
11A	ANT2	5500	NV	40	80	14.545455	20	PASS
11A	ANT2	5500	NV	50	80	14.545455	20	PASS
11A	ANT1	5580	NV	-30	80	14.336918	20	PASS
11A	ANT1	5580	NV	-20	0	0	20	PASS
11A	ANT1	5580	NV	-10	0	0	20	PASS
11A	ANT1	5580	NV	0	0	0	20	PASS
11A	ANT1	5580	NV	10	80	14.336918	20	PASS
11A	ANT1	5580	NV	20	80	14.336918	20	PASS
11A	ANT1	5580	NV	30	80	14.336918	20	PASS
11A	ANT1	5580	NV	40	80	14.336918	20	PASS
11A	ANT1	5580	NV	50	0	0	20	PASS
11A	ANT2	5580	NV	-30	80	14.336918	20	PASS
11A	ANT2	5580	NV	-20	80	14.336918	20	PASS
11A	ANT2	5580	NV	-10	80	14.336918	20	PASS
11A	ANT2	5580	NV	0	80	14.336918	20	PASS
11A	ANT2	5580	NV	10	80	14.336918	20	PASS
11A	ANT2	5580	NV	20	80	14.336918	20	PASS
11A	ANT2	5580	NV	30	0	0	20	PASS
11A	ANT2	5580	NV	40	80	14.336918	20	PASS
11A	ANT2	5580	NV	50	80	14.336918	20	PASS
11A	ANT1	5700	NV	-30	80	14.035088	20	PASS
11A	ANT1	5700	NV	-20	80	14.035088	20	PASS
11A	ANT1	5700	NV	-10	80	14.035088	20	PASS
11A	ANT1	5700	NV	0	0	0	20	PASS
11A	ANT1	5700	NV	10	80	14.035088	20	PASS
11A	ANT1	5700	NV	20	80	14.035088	20	PASS
11A	ANT1	5700	NV	30	0	0	20	PASS
11A	ANT1	5700	NV	40	80	14.035088	20	PASS
11A	ANT1	5700	NV	50	0	0	20	PASS
11A	ANT2	5700	NV	-30	80	14.035088	20	PASS
11A	ANT2	5700	NV	-20	80	14.035088	20	PASS
11A	ANT2	5700	NV	-10	80	14.035088	20	PASS
11A	ANT2	5700	NV	0	0	0	20	PASS
11A	ANT2	5700	NV	10	0	0	20	PASS
11A	ANT2	5700	NV	20	0	0	20	PASS
11A	ANT2	5700	NV	30	80	14.035088	20	PASS
11A	ANT2	5700	NV	40	80	14.035088	20	PASS
11A	ANT2	5700	NV	50	0	0	20	PASS
11A	ANT1	5745	NV	-30	80	13.925152	20	PASS
11A	ANT1	5745	NV	-20	80	13.925152	20	PASS
11A	ANT1	5745	NV	-10	80	13.925152	20	PASS
11A	ANT1	5745	NV	0	80	13.925152	20	PASS
11A	ANT1	5745	NV	10	80	13.925152	20	PASS
11A	ANT1	5745	NV	20	80	13.925152	20	PASS

11A	ANT1	5745	NV	30	80	13.925152	20	PASS
11A	ANT1	5745	NV	40	80	13.925152	20	PASS
11A	ANT1	5745	NV	50	80	13.925152	20	PASS
11A	ANT2	5745	NV	-30	80	13.925152	20	PASS
11A	ANT2	5745	NV	-20	80	13.925152	20	PASS
11A	ANT2	5745	NV	-10	80	13.925152	20	PASS
11A	ANT2	5745	NV	0	80	13.925152	20	PASS
11A	ANT2	5745	NV	10	0	0	20	PASS
11A	ANT2	5745	NV	20	80	13.925152	20	PASS
11A	ANT2	5745	NV	30	80	13.925152	20	PASS
11A	ANT2	5745	NV	40	0	0	20	PASS
11A	ANT2	5745	NV	50	80	13.925152	20	PASS
11A	ANT1	5785	NV	-30	0	0	20	PASS
11A	ANT1	5785	NV	-20	0	0	20	PASS
11A	ANT1	5785	NV	-10	80	13.828868	20	PASS
11A	ANT1	5785	NV	0	80	13.828868	20	PASS
11A	ANT1	5785	NV	10	80	13.828868	20	PASS
11A	ANT1	5785	NV	20	80	13.828868	20	PASS
11A	ANT1	5785	NV	30	80	13.828868	20	PASS
11A	ANT1	5785	NV	40	0	0	20	PASS
11A	ANT1	5785	NV	50	0	0	20	PASS
11A	ANT2	5785	NV	-30	80	13.828868	20	PASS
11A	ANT2	5785	NV	-20	80	13.828868	20	PASS
11A	ANT2	5785	NV	-10	80	13.828868	20	PASS
11A	ANT2	5785	NV	0	80	13.828868	20	PASS
11A	ANT2	5785	NV	10	80	13.828868	20	PASS
11A	ANT2	5785	NV	20	80	13.828868	20	PASS
11A	ANT2	5785	NV	30	80	13.828868	20	PASS
11A	ANT2	5785	NV	40	80	13.828868	20	PASS
11A	ANT2	5785	NV	50	80	13.828868	20	PASS
11A	ANT1	5825	NV	-30	0	0	20	PASS
11A	ANT1	5825	NV	-20	80	13.733906	20	PASS
11A	ANT1	5825	NV	-10	-80	-13.733906	20	PASS
11A	ANT1	5825	NV	0	80	13.733906	20	PASS
11A	ANT1	5825	NV	10	0	0	20	PASS
11A	ANT1	5825	NV	20	0	0	20	PASS
11A	ANT1	5825	NV	30	-80	-13.733906	20	PASS
11A	ANT1	5825	NV	40	0	0	20	PASS
11A	ANT1	5825	NV	50	0	0	20	PASS
11A	ANT2	5825	NV	-30	80	13.733906	20	PASS
11A	ANT2	5825	NV	-20	80	13.733906	20	PASS
11A	ANT2	5825	NV	-10	0	0	20	PASS
11A	ANT2	5825	NV	0	0	0	20	PASS
11A	ANT2	5825	NV	10	80	13.733906	20	PASS
11A	ANT2	5825	NV	20	0	0	20	PASS
11A	ANT2	5825	NV	30	0	0	20	PASS
11A	ANT2	5825	NV	40	80	13.733906	20	PASS
11A	ANT2	5825	NV	50	80	13.733906	20	PASS
11N20MIMO	ANT1	5180	NV	-30	0	0	20	PASS
11N20MIMO	ANT1	5180	NV	-20	0	0	20	PASS
11N20MIMO	ANT1	5180	NV	-10	0	0	20	PASS

11N20MIMO	ANT1	5180	NV	0	0	0	20	PASS
11N20MIMO	ANT1	5180	NV	10	0	0	20	PASS
11N20MIMO	ANT1	5180	NV	20	0	0	20	PASS
11N20MIMO	ANT1	5180	NV	30	0	0	20	PASS
11N20MIMO	ANT1	5180	NV	40	0	0	20	PASS
11N20MIMO	ANT1	5180	NV	50	0	0	20	PASS
11N20MIMO	ANT2	5180	NV	-30	0	0	20	PASS
11N20MIMO	ANT2	5180	NV	-20	0	0	20	PASS
11N20MIMO	ANT2	5180	NV	-10	0	0	20	PASS
11N20MIMO	ANT2	5180	NV	0	0	0	20	PASS
11N20MIMO	ANT2	5180	NV	10	0	0	20	PASS
11N20MIMO	ANT2	5180	NV	20	0	0	20	PASS
11N20MIMO	ANT2	5180	NV	30	0	0	20	PASS
11N20MIMO	ANT2	5180	NV	40	0	0	20	PASS
11N20MIMO	ANT2	5180	NV	50	0	0	20	PASS
11N20MIMO	ANT1	5200	NV	-30	0	0	20	PASS
11N20MIMO	ANT1	5200	NV	-20	0	0	20	PASS
11N20MIMO	ANT1	5200	NV	-10	0	0	20	PASS
11N20MIMO	ANT1	5200	NV	0	0	0	20	PASS
11N20MIMO	ANT1	5200	NV	10	0	0	20	PASS
11N20MIMO	ANT1	5200	NV	20	0	0	20	PASS
11N20MIMO	ANT1	5200	NV	30	0	0	20	PASS
11N20MIMO	ANT1	5200	NV	40	0	0	20	PASS
11N20MIMO	ANT1	5200	NV	50	0	0	20	PASS
11N20MIMO	ANT2	5200	NV	-30	0	0	20	PASS
11N20MIMO	ANT2	5200	NV	-20	0	0	20	PASS
11N20MIMO	ANT2	5200	NV	-10	0	0	20	PASS
11N20MIMO	ANT2	5200	NV	0	0	0	20	PASS
11N20MIMO	ANT2	5200	NV	10	0	0	20	PASS
11N20MIMO	ANT2	5200	NV	20	0	0	20	PASS
11N20MIMO	ANT2	5200	NV	30	0	0	20	PASS
11N20MIMO	ANT2	5200	NV	40	0	0	20	PASS
11N20MIMO	ANT2	5200	NV	50	0	0	20	PASS
11N20MIMO	ANT1	5240	NV	-30	0	0	20	PASS
11N20MIMO	ANT1	5240	NV	-20	0	0	20	PASS
11N20MIMO	ANT1	5240	NV	-10	0	0	20	PASS
11N20MIMO	ANT1	5240	NV	0	0	0	20	PASS
11N20MIMO	ANT1	5240	NV	10	0	0	20	PASS
11N20MIMO	ANT1	5240	NV	20	0	0	20	PASS
11N20MIMO	ANT1	5240	NV	30	0	0	20	PASS
11N20MIMO	ANT1	5240	NV	40	0	0	20	PASS
11N20MIMO	ANT1	5240	NV	50	0	0	20	PASS
11N20MIMO	ANT2	5240	NV	-30	0	0	20	PASS
11N20MIMO	ANT2	5240	NV	-20	0	0	20	PASS
11N20MIMO	ANT2	5240	NV	-10	0	0	20	PASS
11N20MIMO	ANT2	5240	NV	0	0	0	20	PASS
11N20MIMO	ANT2	5240	NV	10	0	0	20	PASS
11N20MIMO	ANT2	5240	NV	20	0	0	20	PASS
11N20MIMO	ANT2	5240	NV	30	0	0	20	PASS
11N20MIMO	ANT2	5240	NV	40	0	0	20	PASS
11N20MIMO	ANT2	5240	NV	50	0	0	20	PASS

11N20MIMO	ANT1	5260	NV	-30	0	0	20	PASS
11N20MIMO	ANT1	5260	NV	-20	0	0	20	PASS
11N20MIMO	ANT1	5260	NV	-10	0	0	20	PASS
11N20MIMO	ANT1	5260	NV	0	0	0	20	PASS
11N20MIMO	ANT1	5260	NV	10	0	0	20	PASS
11N20MIMO	ANT1	5260	NV	20	0	0	20	PASS
11N20MIMO	ANT1	5260	NV	30	0	0	20	PASS
11N20MIMO	ANT1	5260	NV	40	0	0	20	PASS
11N20MIMO	ANT1	5260	NV	50	0	0	20	PASS
11N20MIMO	ANT2	5260	NV	-30	0	0	20	PASS
11N20MIMO	ANT2	5260	NV	-20	80	15.209125	20	PASS
11N20MIMO	ANT2	5260	NV	-10	0	0	20	PASS
11N20MIMO	ANT2	5260	NV	0	0	0	20	PASS
11N20MIMO	ANT2	5260	NV	10	80	15.209125	20	PASS
11N20MIMO	ANT2	5260	NV	20	0	0	20	PASS
11N20MIMO	ANT2	5260	NV	30	0	0	20	PASS
11N20MIMO	ANT2	5260	NV	40	80	15.209125	20	PASS
11N20MIMO	ANT2	5260	NV	50	0	0	20	PASS
11N20MIMO	ANT1	5280	NV	-30	0	0	20	PASS
11N20MIMO	ANT1	5280	NV	-20	0	0	20	PASS
11N20MIMO	ANT1	5280	NV	-10	0	0	20	PASS
11N20MIMO	ANT1	5280	NV	0	0	0	20	PASS
11N20MIMO	ANT1	5280	NV	10	0	0	20	PASS
11N20MIMO	ANT1	5280	NV	20	0	0	20	PASS
11N20MIMO	ANT1	5280	NV	30	0	0	20	PASS
11N20MIMO	ANT1	5280	NV	40	0	0	20	PASS
11N20MIMO	ANT1	5280	NV	50	0	0	20	PASS
11N20MIMO	ANT2	5280	NV	-30	0	0	20	PASS
11N20MIMO	ANT2	5280	NV	-20	0	0	20	PASS
11N20MIMO	ANT2	5280	NV	-10	0	0	20	PASS
11N20MIMO	ANT2	5280	NV	0	0	0	20	PASS
11N20MIMO	ANT2	5280	NV	10	0	0	20	PASS
11N20MIMO	ANT2	5280	NV	20	0	0	20	PASS
11N20MIMO	ANT2	5280	NV	30	0	0	20	PASS
11N20MIMO	ANT2	5280	NV	40	0	0	20	PASS
11N20MIMO	ANT2	5280	NV	50	0	0	20	PASS
11N20MIMO	ANT1	5320	NV	-30	0	0	20	PASS
11N20MIMO	ANT1	5320	NV	-20	0	0	20	PASS
11N20MIMO	ANT1	5320	NV	-10	0	0	20	PASS
11N20MIMO	ANT1	5320	NV	0	0	0	20	PASS
11N20MIMO	ANT1	5320	NV	10	0	0	20	PASS
11N20MIMO	ANT1	5320	NV	20	0	0	20	PASS
11N20MIMO	ANT1	5320	NV	30	0	0	20	PASS
11N20MIMO	ANT1	5320	NV	40	0	0	20	PASS
11N20MIMO	ANT1	5320	NV	50	0	0	20	PASS
11N20MIMO	ANT2	5320	NV	-30	0	0	20	PASS
11N20MIMO	ANT2	5320	NV	-20	0	0	20	PASS
11N20MIMO	ANT2	5320	NV	-10	0	0	20	PASS
11N20MIMO	ANT2	5320	NV	0	0	0	20	PASS
11N20MIMO	ANT2	5320	NV	10	0	0	20	PASS
11N20MIMO	ANT2	5320	NV	20	0	0	20	PASS

11N20MIMO	ANT2	5320	NV	30	0	0	20	PASS
11N20MIMO	ANT2	5320	NV	40	0	0	20	PASS
11N20MIMO	ANT2	5320	NV	50	0	0	20	PASS
11N20MIMO	ANT1	5500	NV	-30	0	0	20	PASS
11N20MIMO	ANT1	5500	NV	-20	0	0	20	PASS
11N20MIMO	ANT1	5500	NV	-10	0	0	20	PASS
11N20MIMO	ANT1	5500	NV	0	0	0	20	PASS
11N20MIMO	ANT1	5500	NV	10	0	0	20	PASS
11N20MIMO	ANT1	5500	NV	20	0	0	20	PASS
11N20MIMO	ANT1	5500	NV	30	0	0	20	PASS
11N20MIMO	ANT1	5500	NV	40	0	0	20	PASS
11N20MIMO	ANT1	5500	NV	50	0	0	20	PASS
11N20MIMO	ANT2	5500	NV	-30	0	0	20	PASS
11N20MIMO	ANT2	5500	NV	-20	0	0	20	PASS
11N20MIMO	ANT2	5500	NV	-10	0	0	20	PASS
11N20MIMO	ANT2	5500	NV	0	0	0	20	PASS
11N20MIMO	ANT2	5500	NV	10	0	0	20	PASS
11N20MIMO	ANT2	5500	NV	20	0	0	20	PASS
11N20MIMO	ANT2	5500	NV	30	0	0	20	PASS
11N20MIMO	ANT2	5500	NV	40	0	0	20	PASS
11N20MIMO	ANT2	5500	NV	50	0	0	20	PASS
11N20MIMO	ANT1	5580	NV	-30	0	0	20	PASS
11N20MIMO	ANT1	5580	NV	-20	0	0	20	PASS
11N20MIMO	ANT1	5580	NV	-10	0	0	20	PASS
11N20MIMO	ANT1	5580	NV	0	0	0	20	PASS
11N20MIMO	ANT1	5580	NV	10	0	0	20	PASS
11N20MIMO	ANT1	5580	NV	20	0	0	20	PASS
11N20MIMO	ANT1	5580	NV	30	0	0	20	PASS
11N20MIMO	ANT1	5580	NV	40	0	0	20	PASS
11N20MIMO	ANT1	5580	NV	50	0	0	20	PASS
11N20MIMO	ANT2	5580	NV	-30	0	0	20	PASS
11N20MIMO	ANT2	5580	NV	-20	0	0	20	PASS
11N20MIMO	ANT2	5580	NV	-10	0	0	20	PASS
11N20MIMO	ANT2	5580	NV	0	0	0	20	PASS
11N20MIMO	ANT2	5580	NV	10	0	0	20	PASS
11N20MIMO	ANT2	5580	NV	20	0	0	20	PASS
11N20MIMO	ANT2	5580	NV	30	0	0	20	PASS
11N20MIMO	ANT2	5580	NV	40	0	0	20	PASS
11N20MIMO	ANT2	5580	NV	50	0	0	20	PASS
11N20MIMO	ANT1	5700	NV	-30	0	0	20	PASS
11N20MIMO	ANT1	5700	NV	-20	0	0	20	PASS
11N20MIMO	ANT1	5700	NV	-10	0	0	20	PASS
11N20MIMO	ANT1	5700	NV	0	0	0	20	PASS
11N20MIMO	ANT1	5700	NV	10	0	0	20	PASS
11N20MIMO	ANT1	5700	NV	20	0	0	20	PASS
11N20MIMO	ANT1	5700	NV	30	0	0	20	PASS
11N20MIMO	ANT1	5700	NV	40	0	0	20	PASS
11N20MIMO	ANT1	5700	NV	50	0	0	20	PASS
11N20MIMO	ANT2	5700	NV	-30	0	0	20	PASS
11N20MIMO	ANT2	5700	NV	-20	0	0	20	PASS
11N20MIMO	ANT2	5700	NV	-10	0	0	20	PASS

11N20MIMO	ANT2	5700	NV	0	0	0	20	PASS
11N20MIMO	ANT2	5700	NV	10	0	0	20	PASS
11N20MIMO	ANT2	5700	NV	20	0	0	20	PASS
11N20MIMO	ANT2	5700	NV	30	0	0	20	PASS
11N20MIMO	ANT2	5700	NV	40	0	0	20	PASS
11N20MIMO	ANT2	5700	NV	50	0	0	20	PASS
11N20MIMO	ANT1	5745	NV	-30	0	0	20	PASS
11N20MIMO	ANT1	5745	NV	-20	0	0	20	PASS
11N20MIMO	ANT1	5745	NV	-10	0	0	20	PASS
11N20MIMO	ANT1	5745	NV	0	0	0	20	PASS
11N20MIMO	ANT1	5745	NV	10	0	0	20	PASS
11N20MIMO	ANT1	5745	NV	20	0	0	20	PASS
11N20MIMO	ANT1	5745	NV	30	0	0	20	PASS
11N20MIMO	ANT1	5745	NV	40	0	0	20	PASS
11N20MIMO	ANT1	5745	NV	50	0	0	20	PASS
11N20MIMO	ANT2	5745	NV	-30	0	0	20	PASS
11N20MIMO	ANT2	5745	NV	-20	0	0	20	PASS
11N20MIMO	ANT2	5745	NV	-10	0	0	20	PASS
11N20MIMO	ANT2	5745	NV	0	0	0	20	PASS
11N20MIMO	ANT2	5745	NV	10	0	0	20	PASS
11N20MIMO	ANT2	5745	NV	20	0	0	20	PASS
11N20MIMO	ANT2	5745	NV	30	0	0	20	PASS
11N20MIMO	ANT2	5745	NV	40	0	0	20	PASS
11N20MIMO	ANT2	5745	NV	50	0	0	20	PASS
11N20MIMO	ANT1	5785	NV	-30	0	0	20	PASS
11N20MIMO	ANT1	5785	NV	-20	0	0	20	PASS
11N20MIMO	ANT1	5785	NV	-10	0	0	20	PASS
11N20MIMO	ANT1	5785	NV	0	0	0	20	PASS
11N20MIMO	ANT1	5785	NV	10	0	0	20	PASS
11N20MIMO	ANT1	5785	NV	20	0	0	20	PASS
11N20MIMO	ANT1	5785	NV	30	0	0	20	PASS
11N20MIMO	ANT1	5785	NV	40	0	0	20	PASS
11N20MIMO	ANT1	5785	NV	50	0	0	20	PASS
11N20MIMO	ANT2	5785	NV	-30	0	0	20	PASS
11N20MIMO	ANT2	5785	NV	-20	0	0	20	PASS
11N20MIMO	ANT2	5785	NV	-10	0	0	20	PASS
11N20MIMO	ANT2	5785	NV	0	0	0	20	PASS
11N20MIMO	ANT2	5785	NV	10	0	0	20	PASS
11N20MIMO	ANT2	5785	NV	20	0	0	20	PASS
11N20MIMO	ANT2	5785	NV	30	0	0	20	PASS
11N20MIMO	ANT2	5785	NV	40	80	13.828868	20	PASS
11N20MIMO	ANT2	5785	NV	50	0	0	20	PASS
11N20MIMO	ANT1	5825	NV	-30	0	0	20	PASS
11N20MIMO	ANT1	5825	NV	-20	0	0	20	PASS
11N20MIMO	ANT1	5825	NV	-10	0	0	20	PASS
11N20MIMO	ANT1	5825	NV	0	0	0	20	PASS
11N20MIMO	ANT1	5825	NV	10	0	0	20	PASS
11N20MIMO	ANT1	5825	NV	20	0	0	20	PASS
11N20MIMO	ANT1	5825	NV	30	0	0	20	PASS
11N20MIMO	ANT1	5825	NV	40	0	0	20	PASS
11N20MIMO	ANT1	5825	NV	50	0	0	20	PASS

11N20MIMO	ANT2	5825	NV	-30	0	0	20	PASS
11N20MIMO	ANT2	5825	NV	-20	0	0	20	PASS
11N20MIMO	ANT2	5825	NV	-10	0	0	20	PASS
11N20MIMO	ANT2	5825	NV	0	0	0	20	PASS
11N20MIMO	ANT2	5825	NV	10	0	0	20	PASS
11N20MIMO	ANT2	5825	NV	20	0	0	20	PASS
11N20MIMO	ANT2	5825	NV	30	0	0	20	PASS
11N20MIMO	ANT2	5825	NV	40	0	0	20	PASS
11N20MIMO	ANT2	5825	NV	50	0	0	20	PASS
11N40MIMO	ANT1	5190	NV	-30	0	0	20	PASS
11N40MIMO	ANT1	5190	NV	-20	0	0	20	PASS
11N40MIMO	ANT1	5190	NV	-10	0	0	20	PASS
11N40MIMO	ANT1	5190	NV	0	0	0	20	PASS
11N40MIMO	ANT1	5190	NV	10	0	0	20	PASS
11N40MIMO	ANT1	5190	NV	20	0	0	20	PASS
11N40MIMO	ANT1	5190	NV	30	0	0	20	PASS
11N40MIMO	ANT1	5190	NV	40	0	0	20	PASS
11N40MIMO	ANT1	5190	NV	50	0	0	20	PASS
11N40MIMO	ANT2	5190	NV	-30	0	0	20	PASS
11N40MIMO	ANT2	5190	NV	-20	0	0	20	PASS
11N40MIMO	ANT2	5190	NV	-10	0	0	20	PASS
11N40MIMO	ANT2	5190	NV	0	0	0	20	PASS
11N40MIMO	ANT2	5190	NV	10	0	0	20	PASS
11N40MIMO	ANT2	5190	NV	20	0	0	20	PASS
11N40MIMO	ANT2	5190	NV	30	0	0	20	PASS
11N40MIMO	ANT2	5190	NV	40	0	0	20	PASS
11N40MIMO	ANT2	5190	NV	50	0	0	20	PASS
11N40MIMO	ANT1	5230	NV	-30	0	0	20	PASS
11N40MIMO	ANT1	5230	NV	-20	0	0	20	PASS
11N40MIMO	ANT1	5230	NV	-10	0	0	20	PASS
11N40MIMO	ANT1	5230	NV	0	0	0	20	PASS
11N40MIMO	ANT1	5230	NV	10	0	0	20	PASS
11N40MIMO	ANT1	5230	NV	20	0	0	20	PASS
11N40MIMO	ANT1	5230	NV	30	0	0	20	PASS
11N40MIMO	ANT1	5230	NV	40	0	0	20	PASS
11N40MIMO	ANT1	5230	NV	50	0	0	20	PASS
11N40MIMO	ANT2	5230	NV	-30	0	0	20	PASS
11N40MIMO	ANT2	5230	NV	-20	0	0	20	PASS
11N40MIMO	ANT2	5230	NV	-10	0	0	20	PASS
11N40MIMO	ANT2	5230	NV	0	0	0	20	PASS
11N40MIMO	ANT2	5230	NV	10	0	0	20	PASS
11N40MIMO	ANT2	5230	NV	20	0	0	20	PASS
11N40MIMO	ANT2	5230	NV	30	0	0	20	PASS
11N40MIMO	ANT2	5230	NV	40	0	0	20	PASS
11N40MIMO	ANT2	5230	NV	50	0	0	20	PASS
11N40MIMO	ANT1	5270	NV	-30	0	0	20	PASS
11N40MIMO	ANT1	5270	NV	-20	0	0	20	PASS
11N40MIMO	ANT1	5270	NV	-10	0	0	20	PASS
11N40MIMO	ANT1	5270	NV	0	0	0	20	PASS
11N40MIMO	ANT1	5270	NV	10	0	0	20	PASS
11N40MIMO	ANT1	5270	NV	20	0	0	20	PASS

11N40MIMO	ANT1	5270	NV	30	0	0	20	PASS
11N40MIMO	ANT1	5270	NV	40	0	0	20	PASS
11N40MIMO	ANT1	5270	NV	50	0	0	20	PASS
11N40MIMO	ANT2	5270	NV	-30	0	0	20	PASS
11N40MIMO	ANT2	5270	NV	-20	0	0	20	PASS
11N40MIMO	ANT2	5270	NV	-10	0	0	20	PASS
11N40MIMO	ANT2	5270	NV	0	0	0	20	PASS
11N40MIMO	ANT2	5270	NV	10	80	15.180266	20	PASS
11N40MIMO	ANT2	5270	NV	20	0	0	20	PASS
11N40MIMO	ANT2	5270	NV	30	0	0	20	PASS
11N40MIMO	ANT2	5270	NV	40	0	0	20	PASS
11N40MIMO	ANT2	5270	NV	50	0	0	20	PASS
11N40MIMO	ANT1	5310	NV	-30	0	0	20	PASS
11N40MIMO	ANT1	5310	NV	-20	0	0	20	PASS
11N40MIMO	ANT1	5310	NV	-10	0	0	20	PASS
11N40MIMO	ANT1	5310	NV	0	0	0	20	PASS
11N40MIMO	ANT1	5310	NV	10	0	0	20	PASS
11N40MIMO	ANT1	5310	NV	20	0	0	20	PASS
11N40MIMO	ANT1	5310	NV	30	0	0	20	PASS
11N40MIMO	ANT1	5310	NV	40	80	15.065913	20	PASS
11N40MIMO	ANT1	5310	NV	50	0	0	20	PASS
11N40MIMO	ANT2	5310	NV	-30	0	0	20	PASS
11N40MIMO	ANT2	5310	NV	-20	0	0	20	PASS
11N40MIMO	ANT2	5310	NV	-10	80	15.065913	20	PASS
11N40MIMO	ANT2	5310	NV	0	0	0	20	PASS
11N40MIMO	ANT2	5310	NV	10	0	0	20	PASS
11N40MIMO	ANT2	5310	NV	20	0	0	20	PASS
11N40MIMO	ANT2	5310	NV	30	0	0	20	PASS
11N40MIMO	ANT2	5310	NV	40	0	0	20	PASS
11N40MIMO	ANT2	5310	NV	50	0	0	20	PASS
11N40MIMO	ANT1	5510	NV	-30	0	0	20	PASS
11N40MIMO	ANT1	5510	NV	-20	0	0	20	PASS
11N40MIMO	ANT1	5510	NV	-10	0	0	20	PASS
11N40MIMO	ANT1	5510	NV	0	0	0	20	PASS
11N40MIMO	ANT1	5510	NV	10	0	0	20	PASS
11N40MIMO	ANT1	5510	NV	20	0	0	20	PASS
11N40MIMO	ANT1	5510	NV	30	0	0	20	PASS
11N40MIMO	ANT1	5510	NV	40	0	0	20	PASS
11N40MIMO	ANT1	5510	NV	50	0	0	20	PASS
11N40MIMO	ANT2	5510	NV	-30	80	14.519056	20	PASS
11N40MIMO	ANT2	5510	NV	-20	0	0	20	PASS
11N40MIMO	ANT2	5510	NV	-10	0	0	20	PASS
11N40MIMO	ANT2	5510	NV	0	80	14.519056	20	PASS
11N40MIMO	ANT2	5510	NV	10	0	0	20	PASS
11N40MIMO	ANT2	5510	NV	20	0	0	20	PASS
11N40MIMO	ANT2	5510	NV	30	0	0	20	PASS
11N40MIMO	ANT2	5510	NV	40	80	14.519056	20	PASS
11N40MIMO	ANT2	5510	NV	50	0	0	20	PASS
11N40MIMO	ANT1	5550	NV	-30	80	14.414414	20	PASS
11N40MIMO	ANT1	5550	NV	-20	0	0	20	PASS
11N40MIMO	ANT1	5550	NV	-10	0	0	20	PASS

11N40MIMO	ANT1	5550	NV	0	0	0	20	PASS
11N40MIMO	ANT1	5550	NV	10	0	0	20	PASS
11N40MIMO	ANT1	5550	NV	20	0	0	20	PASS
11N40MIMO	ANT1	5550	NV	30	0	0	20	PASS
11N40MIMO	ANT1	5550	NV	40	0	0	20	PASS
11N40MIMO	ANT1	5550	NV	50	0	0	20	PASS
11N40MIMO	ANT2	5550	NV	-30	80	14.414414	20	PASS
11N40MIMO	ANT2	5550	NV	-20	80	14.414414	20	PASS
11N40MIMO	ANT2	5550	NV	-10	80	14.414414	20	PASS
11N40MIMO	ANT2	5550	NV	0	80	14.414414	20	PASS
11N40MIMO	ANT2	5550	NV	10	80	14.414414	20	PASS
11N40MIMO	ANT2	5550	NV	20	80	14.414414	20	PASS
11N40MIMO	ANT2	5550	NV	30	80	14.414414	20	PASS
11N40MIMO	ANT2	5550	NV	40	80	14.414414	20	PASS
11N40MIMO	ANT2	5550	NV	50	80	14.414414	20	PASS
11N40MIMO	ANT1	5670	NV	-30	0	0	20	PASS
11N40MIMO	ANT1	5670	NV	-20	80	14.109347	20	PASS
11N40MIMO	ANT1	5670	NV	-10	80	14.109347	20	PASS
11N40MIMO	ANT1	5670	NV	0	80	14.109347	20	PASS
11N40MIMO	ANT1	5670	NV	10	0	0	20	PASS
11N40MIMO	ANT1	5670	NV	20	80	14.109347	20	PASS
11N40MIMO	ANT1	5670	NV	30	80	14.109347	20	PASS
11N40MIMO	ANT1	5670	NV	40	80	14.109347	20	PASS
11N40MIMO	ANT1	5670	NV	50	80	14.109347	20	PASS
11N40MIMO	ANT2	5670	NV	-30	0	0	20	PASS
11N40MIMO	ANT2	5670	NV	-20	0	0	20	PASS
11N40MIMO	ANT2	5670	NV	-10	0	0	20	PASS
11N40MIMO	ANT2	5670	NV	0	0	0	20	PASS
11N40MIMO	ANT2	5670	NV	10	80	14.109347	20	PASS
11N40MIMO	ANT2	5670	NV	20	0	0	20	PASS
11N40MIMO	ANT2	5670	NV	30	0	0	20	PASS
11N40MIMO	ANT2	5670	NV	40	0	0	20	PASS
11N40MIMO	ANT2	5670	NV	50	0	0	20	PASS
11N40MIMO	ANT1	5755	NV	-30	80	13.900956	20	PASS
11N40MIMO	ANT1	5755	NV	-20	80	13.900956	20	PASS
11N40MIMO	ANT1	5755	NV	-10	80	13.900956	20	PASS
11N40MIMO	ANT1	5755	NV	0	80	13.900956	20	PASS
11N40MIMO	ANT1	5755	NV	10	80	13.900956	20	PASS
11N40MIMO	ANT1	5755	NV	20	80	13.900956	20	PASS
11N40MIMO	ANT1	5755	NV	30	80	13.900956	20	PASS
11N40MIMO	ANT1	5755	NV	40	80	13.900956	20	PASS
11N40MIMO	ANT1	5755	NV	50	80	13.900956	20	PASS
11N40MIMO	ANT2	5755	NV	-30	80	13.900956	20	PASS
11N40MIMO	ANT2	5755	NV	-20	80	13.900956	20	PASS
11N40MIMO	ANT2	5755	NV	-10	0	0	20	PASS
11N40MIMO	ANT2	5755	NV	0	80	13.900956	20	PASS
11N40MIMO	ANT2	5755	NV	10	80	13.900956	20	PASS
11N40MIMO	ANT2	5755	NV	20	0	0	20	PASS
11N40MIMO	ANT2	5755	NV	30	0	0	20	PASS
11N40MIMO	ANT2	5755	NV	40	80	13.900956	20	PASS
11N40MIMO	ANT2	5755	NV	50	80	13.900956	20	PASS

11N40MIMO	ANT1	5795	NV	-30	0	0	20	PASS
11N40MIMO	ANT1	5795	NV	-20	0	0	20	PASS
11N40MIMO	ANT1	5795	NV	-10	0	0	20	PASS
11N40MIMO	ANT1	5795	NV	0	0	0	20	PASS
11N40MIMO	ANT1	5795	NV	10	0	0	20	PASS
11N40MIMO	ANT1	5795	NV	20	0	0	20	PASS
11N40MIMO	ANT1	5795	NV	30	0	0	20	PASS
11N40MIMO	ANT1	5795	NV	40	0	0	20	PASS
11N40MIMO	ANT1	5795	NV	50	0	0	20	PASS
11N40MIMO	ANT2	5795	NV	-30	80	13.805004	20	PASS
11N40MIMO	ANT2	5795	NV	-20	80	13.805004	20	PASS
11N40MIMO	ANT2	5795	NV	-10	80	13.805004	20	PASS
11N40MIMO	ANT2	5795	NV	0	0	0	20	PASS
11N40MIMO	ANT2	5795	NV	10	80	13.805004	20	PASS
11N40MIMO	ANT2	5795	NV	20	0	0	20	PASS
11N40MIMO	ANT2	5795	NV	30	0	0	20	PASS
11N40MIMO	ANT2	5795	NV	40	80	13.805004	20	PASS
11N40MIMO	ANT2	5795	NV	50	80	13.805004	20	PASS
11AC20MIMO	ANT1	5180	NV	-30	0	0	20	PASS
11AC20MIMO	ANT1	5180	NV	-20	0	0	20	PASS
11AC20MIMO	ANT1	5180	NV	-10	0	0	20	PASS
11AC20MIMO	ANT1	5180	NV	0	0	0	20	PASS
11AC20MIMO	ANT1	5180	NV	10	0	0	20	PASS
11AC20MIMO	ANT1	5180	NV	20	-80	-15.444015	20	PASS
11AC20MIMO	ANT1	5180	NV	30	0	0	20	PASS
11AC20MIMO	ANT1	5180	NV	40	0	0	20	PASS
11AC20MIMO	ANT1	5180	NV	50	0	0	20	PASS
11AC20MIMO	ANT2	5180	NV	-30	80	15.444015	20	PASS
11AC20MIMO	ANT2	5180	NV	-20	0	0	20	PASS
11AC20MIMO	ANT2	5180	NV	-10	0	0	20	PASS
11AC20MIMO	ANT2	5180	NV	0	80	15.444015	20	PASS
11AC20MIMO	ANT2	5180	NV	10	0	0	20	PASS
11AC20MIMO	ANT2	5180	NV	20	0	0	20	PASS
11AC20MIMO	ANT2	5180	NV	30	0	0	20	PASS
11AC20MIMO	ANT2	5180	NV	40	0	0	20	PASS
11AC20MIMO	ANT2	5180	NV	50	0	0	20	PASS
11AC20MIMO	ANT1	5200	NV	-30	0	0	20	PASS
11AC20MIMO	ANT1	5200	NV	-20	0	0	20	PASS
11AC20MIMO	ANT1	5200	NV	-10	0	0	20	PASS
11AC20MIMO	ANT1	5200	NV	0	0	0	20	PASS
11AC20MIMO	ANT1	5200	NV	10	0	0	20	PASS
11AC20MIMO	ANT1	5200	NV	20	0	0	20	PASS
11AC20MIMO	ANT1	5200	NV	30	0	0	20	PASS
11AC20MIMO	ANT1	5200	NV	40	0	0	20	PASS
11AC20MIMO	ANT1	5200	NV	50	0	0	20	PASS
11AC20MIMO	ANT2	5200	NV	-30	0	0	20	PASS
11AC20MIMO	ANT2	5200	NV	-20	0	0	20	PASS
11AC20MIMO	ANT2	5200	NV	-10	0	0	20	PASS
11AC20MIMO	ANT2	5200	NV	0	0	0	20	PASS
11AC20MIMO	ANT2	5200	NV	10	0	0	20	PASS
11AC20MIMO	ANT2	5200	NV	20	0	0	20	PASS

11AC20MIMO	ANT2	5200	NV	30	0	0	20	PASS
11AC20MIMO	ANT2	5200	NV	40	0	0	20	PASS
11AC20MIMO	ANT2	5200	NV	50	0	0	20	PASS
11AC20MIMO	ANT1	5240	NV	-30	0	0	20	PASS
11AC20MIMO	ANT1	5240	NV	-20	0	0	20	PASS
11AC20MIMO	ANT1	5240	NV	-10	0	0	20	PASS
11AC20MIMO	ANT1	5240	NV	0	0	0	20	PASS
11AC20MIMO	ANT1	5240	NV	10	0	0	20	PASS
11AC20MIMO	ANT1	5240	NV	20	0	0	20	PASS
11AC20MIMO	ANT1	5240	NV	30	0	0	20	PASS
11AC20MIMO	ANT1	5240	NV	40	0	0	20	PASS
11AC20MIMO	ANT1	5240	NV	50	0	0	20	PASS
11AC20MIMO	ANT2	5240	NV	-30	0	0	20	PASS
11AC20MIMO	ANT2	5240	NV	-20	0	0	20	PASS
11AC20MIMO	ANT2	5240	NV	-10	0	0	20	PASS
11AC20MIMO	ANT2	5240	NV	0	0	0	20	PASS
11AC20MIMO	ANT2	5240	NV	10	0	0	20	PASS
11AC20MIMO	ANT2	5240	NV	20	0	0	20	PASS
11AC20MIMO	ANT2	5240	NV	30	0	0	20	PASS
11AC20MIMO	ANT2	5240	NV	40	0	0	20	PASS
11AC20MIMO	ANT2	5240	NV	50	0	0	20	PASS
11AC20MIMO	ANT1	5260	NV	-30	0	0	20	PASS
11AC20MIMO	ANT1	5260	NV	-20	0	0	20	PASS
11AC20MIMO	ANT1	5260	NV	-10	0	0	20	PASS
11AC20MIMO	ANT1	5260	NV	0	0	0	20	PASS
11AC20MIMO	ANT1	5260	NV	10	0	0	20	PASS
11AC20MIMO	ANT1	5260	NV	20	0	0	20	PASS
11AC20MIMO	ANT1	5260	NV	30	0	0	20	PASS
11AC20MIMO	ANT1	5260	NV	40	0	0	20	PASS
11AC20MIMO	ANT1	5260	NV	50	0	0	20	PASS
11AC20MIMO	ANT2	5260	NV	-30	80	15.209125	20	PASS
11AC20MIMO	ANT2	5260	NV	-20	0	0	20	PASS
11AC20MIMO	ANT2	5260	NV	-10	80	15.209125	20	PASS
11AC20MIMO	ANT2	5260	NV	0	0	0	20	PASS
11AC20MIMO	ANT2	5260	NV	10	0	0	20	PASS
11AC20MIMO	ANT2	5260	NV	20	0	0	20	PASS
11AC20MIMO	ANT2	5260	NV	30	0	0	20	PASS
11AC20MIMO	ANT2	5260	NV	40	0	0	20	PASS
11AC20MIMO	ANT2	5260	NV	50	80	15.209125	20	PASS
11AC20MIMO	ANT1	5280	NV	-30	0	0	20	PASS
11AC20MIMO	ANT1	5280	NV	-20	0	0	20	PASS
11AC20MIMO	ANT1	5280	NV	-10	0	0	20	PASS
11AC20MIMO	ANT1	5280	NV	0	0	0	20	PASS
11AC20MIMO	ANT1	5280	NV	10	0	0	20	PASS
11AC20MIMO	ANT1	5280	NV	20	0	0	20	PASS
11AC20MIMO	ANT1	5280	NV	30	0	0	20	PASS
11AC20MIMO	ANT1	5280	NV	40	80	15.151515	20	PASS
11AC20MIMO	ANT1	5280	NV	50	0	0	20	PASS
11AC20MIMO	ANT2	5280	NV	-30	0	0	20	PASS
11AC20MIMO	ANT2	5280	NV	-20	0	0	20	PASS
11AC20MIMO	ANT2	5280	NV	-10	0	0	20	PASS

11AC20MIMO	ANT2	5280	NV	0	0	0	20	PASS
11AC20MIMO	ANT2	5280	NV	10	0	0	20	PASS
11AC20MIMO	ANT2	5280	NV	20	0	0	20	PASS
11AC20MIMO	ANT2	5280	NV	30	0	0	20	PASS
11AC20MIMO	ANT2	5280	NV	40	0	0	20	PASS
11AC20MIMO	ANT2	5280	NV	50	0	0	20	PASS
11AC20MIMO	ANT1	5320	NV	-30	0	0	20	PASS
11AC20MIMO	ANT1	5320	NV	-20	0	0	20	PASS
11AC20MIMO	ANT1	5320	NV	-10	0	0	20	PASS
11AC20MIMO	ANT1	5320	NV	0	0	0	20	PASS
11AC20MIMO	ANT1	5320	NV	10	0	0	20	PASS
11AC20MIMO	ANT1	5320	NV	20	0	0	20	PASS
11AC20MIMO	ANT1	5320	NV	30	0	0	20	PASS
11AC20MIMO	ANT1	5320	NV	40	0	0	20	PASS
11AC20MIMO	ANT1	5320	NV	50	0	0	20	PASS
11AC20MIMO	ANT2	5320	NV	-30	0	0	20	PASS
11AC20MIMO	ANT2	5320	NV	-20	0	0	20	PASS
11AC20MIMO	ANT2	5320	NV	-10	0	0	20	PASS
11AC20MIMO	ANT2	5320	NV	0	0	0	20	PASS
11AC20MIMO	ANT2	5320	NV	10	0	0	20	PASS
11AC20MIMO	ANT2	5320	NV	20	0	0	20	PASS
11AC20MIMO	ANT2	5320	NV	30	0	0	20	PASS
11AC20MIMO	ANT2	5320	NV	40	80	15.037594	20	PASS
11AC20MIMO	ANT2	5320	NV	50	0	0	20	PASS
11AC20MIMO	ANT1	5500	NV	-30	0	0	20	PASS
11AC20MIMO	ANT1	5500	NV	-20	0	0	20	PASS
11AC20MIMO	ANT1	5500	NV	-10	0	0	20	PASS
11AC20MIMO	ANT1	5500	NV	0	0	0	20	PASS
11AC20MIMO	ANT1	5500	NV	10	0	0	20	PASS
11AC20MIMO	ANT1	5500	NV	20	0	0	20	PASS
11AC20MIMO	ANT1	5500	NV	30	0	0	20	PASS
11AC20MIMO	ANT1	5500	NV	40	80	14.545455	20	PASS
11AC20MIMO	ANT1	5500	NV	50	0	0	20	PASS
11AC20MIMO	ANT2	5500	NV	-30	0	0	20	PASS
11AC20MIMO	ANT2	5500	NV	-20	0	0	20	PASS
11AC20MIMO	ANT2	5500	NV	-10	0	0	20	PASS
11AC20MIMO	ANT2	5500	NV	0	0	0	20	PASS
11AC20MIMO	ANT2	5500	NV	10	0	0	20	PASS
11AC20MIMO	ANT2	5500	NV	20	-80	-14.545455	20	PASS
11AC20MIMO	ANT2	5500	NV	30	0	0	20	PASS
11AC20MIMO	ANT2	5500	NV	40	0	0	20	PASS
11AC20MIMO	ANT2	5500	NV	50	80	14.545455	20	PASS
11AC20MIMO	ANT1	5580	NV	-30	0	0	20	PASS
11AC20MIMO	ANT1	5580	NV	-20	0	0	20	PASS
11AC20MIMO	ANT1	5580	NV	-10	0	0	20	PASS
11AC20MIMO	ANT1	5580	NV	0	0	0	20	PASS
11AC20MIMO	ANT1	5580	NV	10	0	0	20	PASS
11AC20MIMO	ANT1	5580	NV	20	0	0	20	PASS
11AC20MIMO	ANT1	5580	NV	30	0	0	20	PASS
11AC20MIMO	ANT1	5580	NV	40	0	0	20	PASS
11AC20MIMO	ANT1	5580	NV	50	0	0	20	PASS

11AC20MIMO	ANT2	5580	NV	-30	80	14.336918	20	PASS
11AC20MIMO	ANT2	5580	NV	-20	0	0	20	PASS
11AC20MIMO	ANT2	5580	NV	-10	0	0	20	PASS
11AC20MIMO	ANT2	5580	NV	0	80	14.336918	20	PASS
11AC20MIMO	ANT2	5580	NV	10	80	14.336918	20	PASS
11AC20MIMO	ANT2	5580	NV	20	80	14.336918	20	PASS
11AC20MIMO	ANT2	5580	NV	30	0	0	20	PASS
11AC20MIMO	ANT2	5580	NV	40	0	0	20	PASS
11AC20MIMO	ANT2	5580	NV	50	0	0	20	PASS
11AC20MIMO	ANT1	5700	NV	-30	0	0	20	PASS
11AC20MIMO	ANT1	5700	NV	-20	0	0	20	PASS
11AC20MIMO	ANT1	5700	NV	-10	0	0	20	PASS
11AC20MIMO	ANT1	5700	NV	0	0	0	20	PASS
11AC20MIMO	ANT1	5700	NV	10	80	14.035088	20	PASS
11AC20MIMO	ANT1	5700	NV	20	0	0	20	PASS
11AC20MIMO	ANT1	5700	NV	30	0	0	20	PASS
11AC20MIMO	ANT1	5700	NV	40	0	0	20	PASS
11AC20MIMO	ANT1	5700	NV	50	0	0	20	PASS
11AC20MIMO	ANT2	5700	NV	-30	0	0	20	PASS
11AC20MIMO	ANT2	5700	NV	-20	0	0	20	PASS
11AC20MIMO	ANT2	5700	NV	-10	0	0	20	PASS
11AC20MIMO	ANT2	5700	NV	0	0	0	20	PASS
11AC20MIMO	ANT2	5700	NV	10	0	0	20	PASS
11AC20MIMO	ANT2	5700	NV	20	0	0	20	PASS
11AC20MIMO	ANT2	5700	NV	30	0	0	20	PASS
11AC20MIMO	ANT2	5700	NV	40	0	0	20	PASS
11AC20MIMO	ANT2	5700	NV	50	0	0	20	PASS
11AC20MIMO	ANT1	5745	NV	-30	0	0	20	PASS
11AC20MIMO	ANT1	5745	NV	-20	0	0	20	PASS
11AC20MIMO	ANT1	5745	NV	-10	0	0	20	PASS
11AC20MIMO	ANT1	5745	NV	0	0	0	20	PASS
11AC20MIMO	ANT1	5745	NV	10	0	0	20	PASS
11AC20MIMO	ANT1	5745	NV	20	0	0	20	PASS
11AC20MIMO	ANT1	5745	NV	30	0	0	20	PASS
11AC20MIMO	ANT1	5745	NV	40	0	0	20	PASS
11AC20MIMO	ANT1	5745	NV	50	0	0	20	PASS
11AC20MIMO	ANT2	5745	NV	-30	0	0	20	PASS
11AC20MIMO	ANT2	5745	NV	-20	0	0	20	PASS
11AC20MIMO	ANT2	5745	NV	-10	0	0	20	PASS
11AC20MIMO	ANT2	5745	NV	0	0	0	20	PASS
11AC20MIMO	ANT2	5745	NV	10	0	0	20	PASS
11AC20MIMO	ANT2	5745	NV	20	0	0	20	PASS
11AC20MIMO	ANT2	5745	NV	30	0	0	20	PASS
11AC20MIMO	ANT2	5745	NV	40	0	0	20	PASS
11AC20MIMO	ANT2	5745	NV	50	0	0	20	PASS
11AC20MIMO	ANT1	5785	NV	-30	0	0	20	PASS
11AC20MIMO	ANT1	5785	NV	-20	0	0	20	PASS
11AC20MIMO	ANT1	5785	NV	-10	0	0	20	PASS
11AC20MIMO	ANT1	5785	NV	0	0	0	20	PASS
11AC20MIMO	ANT1	5785	NV	10	0	0	20	PASS
11AC20MIMO	ANT1	5785	NV	20	0	0	20	PASS

11AC20MIMO	ANT1	5785	NV	30	0	0	20	PASS
11AC20MIMO	ANT1	5785	NV	40	0	0	20	PASS
11AC20MIMO	ANT1	5785	NV	50	0	0	20	PASS
11AC20MIMO	ANT2	5785	NV	-30	0	0	20	PASS
11AC20MIMO	ANT2	5785	NV	-20	0	0	20	PASS
11AC20MIMO	ANT2	5785	NV	-10	0	0	20	PASS
11AC20MIMO	ANT2	5785	NV	0	0	0	20	PASS
11AC20MIMO	ANT2	5785	NV	10	0	0	20	PASS
11AC20MIMO	ANT2	5785	NV	20	80	13.828868	20	PASS
11AC20MIMO	ANT2	5785	NV	30	0	0	20	PASS
11AC20MIMO	ANT2	5785	NV	40	0	0	20	PASS
11AC20MIMO	ANT2	5785	NV	50	80	13.828868	20	PASS
11AC20MIMO	ANT1	5825	NV	-30	0	0	20	PASS
11AC20MIMO	ANT1	5825	NV	-20	0	0	20	PASS
11AC20MIMO	ANT1	5825	NV	-10	0	0	20	PASS
11AC20MIMO	ANT1	5825	NV	0	0	0	20	PASS
11AC20MIMO	ANT1	5825	NV	10	0	0	20	PASS
11AC20MIMO	ANT1	5825	NV	20	0	0	20	PASS
11AC20MIMO	ANT1	5825	NV	30	0	0	20	PASS
11AC20MIMO	ANT1	5825	NV	40	0	0	20	PASS
11AC20MIMO	ANT1	5825	NV	50	0	0	20	PASS
11AC20MIMO	ANT2	5825	NV	-30	80	13.733906	20	PASS
11AC20MIMO	ANT2	5825	NV	-20	0	0	20	PASS
11AC20MIMO	ANT2	5825	NV	-10	0	0	20	PASS
11AC20MIMO	ANT2	5825	NV	0	0	0	20	PASS
11AC20MIMO	ANT2	5825	NV	10	80	13.733906	20	PASS
11AC20MIMO	ANT2	5825	NV	20	0	0	20	PASS
11AC20MIMO	ANT2	5825	NV	30	80	13.733906	20	PASS
11AC20MIMO	ANT2	5825	NV	40	0	0	20	PASS
11AC20MIMO	ANT2	5825	NV	50	80	13.733906	20	PASS
11AC40MIMO	ANT1	5190	NV	-30	0	0	20	PASS
11AC40MIMO	ANT1	5190	NV	-20	0	0	20	PASS
11AC40MIMO	ANT1	5190	NV	-10	0	0	20	PASS
11AC40MIMO	ANT1	5190	NV	0	0	0	20	PASS
11AC40MIMO	ANT1	5190	NV	10	0	0	20	PASS
11AC40MIMO	ANT1	5190	NV	20	0	0	20	PASS
11AC40MIMO	ANT1	5190	NV	30	0	0	20	PASS
11AC40MIMO	ANT1	5190	NV	40	0	0	20	PASS
11AC40MIMO	ANT1	5190	NV	50	0	0	20	PASS
11AC40MIMO	ANT2	5190	NV	-30	0	0	20	PASS
11AC40MIMO	ANT2	5190	NV	-20	0	0	20	PASS
11AC40MIMO	ANT2	5190	NV	-10	0	0	20	PASS
11AC40MIMO	ANT2	5190	NV	0	0	0	20	PASS
11AC40MIMO	ANT2	5190	NV	10	0	0	20	PASS
11AC40MIMO	ANT2	5190	NV	20	0	0	20	PASS
11AC40MIMO	ANT2	5190	NV	30	0	0	20	PASS
11AC40MIMO	ANT2	5190	NV	40	0	0	20	PASS
11AC40MIMO	ANT2	5190	NV	50	0	0	20	PASS
11AC40MIMO	ANT1	5230	NV	-30	0	0	20	PASS
11AC40MIMO	ANT1	5230	NV	-20	80	15.296367	20	PASS
11AC40MIMO	ANT1	5230	NV	-10	0	0	20	PASS

11AC40MIMO	ANT1	5230	NV	0	80	15.296367	20	PASS
11AC40MIMO	ANT1	5230	NV	10	0	0	20	PASS
11AC40MIMO	ANT1	5230	NV	20	0	0	20	PASS
11AC40MIMO	ANT1	5230	NV	30	0	0	20	PASS
11AC40MIMO	ANT1	5230	NV	40	0	0	20	PASS
11AC40MIMO	ANT1	5230	NV	50	0	0	20	PASS
11AC40MIMO	ANT2	5230	NV	-30	0	0	20	PASS
11AC40MIMO	ANT2	5230	NV	-20	0	0	20	PASS
11AC40MIMO	ANT2	5230	NV	-10	0	0	20	PASS
11AC40MIMO	ANT2	5230	NV	0	0	0	20	PASS
11AC40MIMO	ANT2	5230	NV	10	0	0	20	PASS
11AC40MIMO	ANT2	5230	NV	20	0	0	20	PASS
11AC40MIMO	ANT2	5230	NV	30	0	0	20	PASS
11AC40MIMO	ANT2	5230	NV	40	0	0	20	PASS
11AC40MIMO	ANT2	5230	NV	50	0	0	20	PASS
11AC40MIMO	ANT1	5270	NV	-30	0	0	20	PASS
11AC40MIMO	ANT1	5270	NV	-20	0	0	20	PASS
11AC40MIMO	ANT1	5270	NV	-10	0	0	20	PASS
11AC40MIMO	ANT1	5270	NV	0	0	0	20	PASS
11AC40MIMO	ANT1	5270	NV	10	0	0	20	PASS
11AC40MIMO	ANT1	5270	NV	20	0	0	20	PASS
11AC40MIMO	ANT1	5270	NV	30	0	0	20	PASS
11AC40MIMO	ANT1	5270	NV	40	80	15.180266	20	PASS
11AC40MIMO	ANT1	5270	NV	50	0	0	20	PASS
11AC40MIMO	ANT2	5270	NV	-30	0	0	20	PASS
11AC40MIMO	ANT2	5270	NV	-20	0	0	20	PASS
11AC40MIMO	ANT2	5270	NV	-10	0	0	20	PASS
11AC40MIMO	ANT2	5270	NV	0	0	0	20	PASS
11AC40MIMO	ANT2	5270	NV	10	0	0	20	PASS
11AC40MIMO	ANT2	5270	NV	20	0	0	20	PASS
11AC40MIMO	ANT2	5270	NV	30	0	0	20	PASS
11AC40MIMO	ANT2	5270	NV	40	0	0	20	PASS
11AC40MIMO	ANT2	5270	NV	50	0	0	20	PASS
11AC40MIMO	ANT1	5310	NV	-30	0	0	20	PASS
11AC40MIMO	ANT1	5310	NV	-20	0	0	20	PASS
11AC40MIMO	ANT1	5310	NV	-10	0	0	20	PASS
11AC40MIMO	ANT1	5310	NV	0	0	0	20	PASS
11AC40MIMO	ANT1	5310	NV	10	0	0	20	PASS
11AC40MIMO	ANT1	5310	NV	20	0	0	20	PASS
11AC40MIMO	ANT1	5310	NV	30	0	0	20	PASS
11AC40MIMO	ANT1	5310	NV	40	0	0	20	PASS
11AC40MIMO	ANT1	5310	NV	50	0	0	20	PASS
11AC40MIMO	ANT2	5310	NV	-30	0	0	20	PASS
11AC40MIMO	ANT2	5310	NV	-20	0	0	20	PASS
11AC40MIMO	ANT2	5310	NV	-10	0	0	20	PASS
11AC40MIMO	ANT2	5310	NV	0	0	0	20	PASS
11AC40MIMO	ANT2	5310	NV	10	0	0	20	PASS
11AC40MIMO	ANT2	5310	NV	20	0	0	20	PASS
11AC40MIMO	ANT2	5310	NV	30	0	0	20	PASS
11AC40MIMO	ANT2	5310	NV	40	0	0	20	PASS
11AC40MIMO	ANT2	5310	NV	50	0	0	20	PASS

11AC40MIMO	ANT1	5510	NV	-30	0	0	20	PASS
11AC40MIMO	ANT1	5510	NV	-20	0	0	20	PASS
11AC40MIMO	ANT1	5510	NV	-10	0	0	20	PASS
11AC40MIMO	ANT1	5510	NV	0	0	0	20	PASS
11AC40MIMO	ANT1	5510	NV	10	0	0	20	PASS
11AC40MIMO	ANT1	5510	NV	20	0	0	20	PASS
11AC40MIMO	ANT1	5510	NV	30	0	0	20	PASS
11AC40MIMO	ANT1	5510	NV	40	0	0	20	PASS
11AC40MIMO	ANT1	5510	NV	50	0	0	20	PASS
11AC40MIMO	ANT2	5510	NV	-30	0	0	20	PASS
11AC40MIMO	ANT2	5510	NV	-20	-80	-14.519056	20	PASS
11AC40MIMO	ANT2	5510	NV	-10	0	0	20	PASS
11AC40MIMO	ANT2	5510	NV	0	0	0	20	PASS
11AC40MIMO	ANT2	5510	NV	10	0	0	20	PASS
11AC40MIMO	ANT2	5510	NV	20	-80	-14.519056	20	PASS
11AC40MIMO	ANT2	5510	NV	30	0	0	20	PASS
11AC40MIMO	ANT2	5510	NV	40	0	0	20	PASS
11AC40MIMO	ANT2	5510	NV	50	0	0	20	PASS
11AC40MIMO	ANT1	5550	NV	-30	0	0	20	PASS
11AC40MIMO	ANT1	5550	NV	-20	0	0	20	PASS
11AC40MIMO	ANT1	5550	NV	-10	0	0	20	PASS
11AC40MIMO	ANT1	5550	NV	0	0	0	20	PASS
11AC40MIMO	ANT1	5550	NV	10	0	0	20	PASS
11AC40MIMO	ANT1	5550	NV	20	0	0	20	PASS
11AC40MIMO	ANT1	5550	NV	30	0	0	20	PASS
11AC40MIMO	ANT1	5550	NV	40	0	0	20	PASS
11AC40MIMO	ANT1	5550	NV	50	80	14.414414	20	PASS
11AC40MIMO	ANT2	5550	NV	-30	80	14.414414	20	PASS
11AC40MIMO	ANT2	5550	NV	-20	80	14.414414	20	PASS
11AC40MIMO	ANT2	5550	NV	-10	0	0	20	PASS
11AC40MIMO	ANT2	5550	NV	0	0	0	20	PASS
11AC40MIMO	ANT2	5550	NV	10	0	0	20	PASS
11AC40MIMO	ANT2	5550	NV	20	0	0	20	PASS
11AC40MIMO	ANT2	5550	NV	30	80	14.414414	20	PASS
11AC40MIMO	ANT2	5550	NV	40	0	0	20	PASS
11AC40MIMO	ANT2	5550	NV	50	0	0	20	PASS
11AC40MIMO	ANT1	5670	NV	-30	0	0	20	PASS
11AC40MIMO	ANT1	5670	NV	-20	0	0	20	PASS
11AC40MIMO	ANT1	5670	NV	-10	0	0	20	PASS
11AC40MIMO	ANT1	5670	NV	0	0	0	20	PASS
11AC40MIMO	ANT1	5670	NV	10	0	0	20	PASS
11AC40MIMO	ANT1	5670	NV	20	0	0	20	PASS
11AC40MIMO	ANT1	5670	NV	30	0	0	20	PASS
11AC40MIMO	ANT1	5670	NV	40	0	0	20	PASS
11AC40MIMO	ANT1	5670	NV	50	0	0	20	PASS
11AC40MIMO	ANT2	5670	NV	-30	0	0	20	PASS
11AC40MIMO	ANT2	5670	NV	-20	-80	-14.109347	20	PASS
11AC40MIMO	ANT2	5670	NV	-10	0	0	20	PASS
11AC40MIMO	ANT2	5670	NV	0	0	0	20	PASS
11AC40MIMO	ANT2	5670	NV	10	0	0	20	PASS
11AC40MIMO	ANT2	5670	NV	20	0	0	20	PASS

11AC40MIMO	ANT2	5670	NV	30	0	0	20	PASS
11AC40MIMO	ANT2	5670	NV	40	0	0	20	PASS
11AC40MIMO	ANT2	5670	NV	50	0	0	20	PASS
11AC40MIMO	ANT1	5755	NV	-30	-80	-13.900956	20	PASS
11AC40MIMO	ANT1	5755	NV	-20	0	0	20	PASS
11AC40MIMO	ANT1	5755	NV	-10	0	0	20	PASS
11AC40MIMO	ANT1	5755	NV	0	0	0	20	PASS
11AC40MIMO	ANT1	5755	NV	10	0	0	20	PASS
11AC40MIMO	ANT1	5755	NV	20	0	0	20	PASS
11AC40MIMO	ANT1	5755	NV	30	80	13.900956	20	PASS
11AC40MIMO	ANT1	5755	NV	40	0	0	20	PASS
11AC40MIMO	ANT1	5755	NV	50	80	13.900956	20	PASS
11AC40MIMO	ANT2	5755	NV	-30	-80	-13.900956	20	PASS
11AC40MIMO	ANT2	5755	NV	-20	0	0	20	PASS
11AC40MIMO	ANT2	5755	NV	-10	0	0	20	PASS
11AC40MIMO	ANT2	5755	NV	0	-80	-13.900956	20	PASS
11AC40MIMO	ANT2	5755	NV	10	0	0	20	PASS
11AC40MIMO	ANT2	5755	NV	20	0	0	20	PASS
11AC40MIMO	ANT2	5755	NV	30	0	0	20	PASS
11AC40MIMO	ANT2	5755	NV	40	0	0	20	PASS
11AC40MIMO	ANT2	5755	NV	50	0	0	20	PASS
11AC40MIMO	ANT1	5795	NV	-30	0	0	20	PASS
11AC40MIMO	ANT1	5795	NV	-20	0	0	20	PASS
11AC40MIMO	ANT1	5795	NV	-10	0	0	20	PASS
11AC40MIMO	ANT1	5795	NV	0	0	0	20	PASS
11AC40MIMO	ANT1	5795	NV	10	0	0	20	PASS
11AC40MIMO	ANT1	5795	NV	20	80	13.805004	20	PASS
11AC40MIMO	ANT1	5795	NV	30	0	0	20	PASS
11AC40MIMO	ANT1	5795	NV	40	0	0	20	PASS
11AC40MIMO	ANT1	5795	NV	50	-80	-13.805004	20	PASS
11AC40MIMO	ANT2	5795	NV	-30	0	0	20	PASS
11AC40MIMO	ANT2	5795	NV	-20	0	0	20	PASS
11AC40MIMO	ANT2	5795	NV	-10	0	0	20	PASS
11AC40MIMO	ANT2	5795	NV	0	80	13.805004	20	PASS
11AC40MIMO	ANT2	5795	NV	10	0	0	20	PASS
11AC40MIMO	ANT2	5795	NV	20	0	0	20	PASS
11AC40MIMO	ANT2	5795	NV	30	0	0	20	PASS
11AC40MIMO	ANT2	5795	NV	40	80	13.805004	20	PASS
11AC40MIMO	ANT2	5795	NV	50	0	0	20	PASS
11AC80MIMO	ANT1	5210	NV	-30	0	0	20	PASS
11AC80MIMO	ANT1	5210	NV	-20	0	0	20	PASS
11AC80MIMO	ANT1	5210	NV	-10	0	0	20	PASS
11AC80MIMO	ANT1	5210	NV	0	0	0	20	PASS
11AC80MIMO	ANT1	5210	NV	10	0	0	20	PASS
11AC80MIMO	ANT1	5210	NV	20	0	0	20	PASS
11AC80MIMO	ANT1	5210	NV	30	0	0	20	PASS
11AC80MIMO	ANT1	5210	NV	40	0	0	20	PASS
11AC80MIMO	ANT1	5210	NV	50	0	0	20	PASS
11AC80MIMO	ANT2	5210	NV	-30	0	0	20	PASS
11AC80MIMO	ANT2	5210	NV	-20	0	0	20	PASS
11AC80MIMO	ANT2	5210	NV	-10	0	0	20	PASS


11AC80MIMO	ANT2	5210	NV	0	0	0	20	PASS
11AC80MIMO	ANT2	5210	NV	10	0	0	20	PASS
11AC80MIMO	ANT2	5210	NV	20	0	0	20	PASS
11AC80MIMO	ANT2	5210	NV	30	0	0	20	PASS
11AC80MIMO	ANT2	5210	NV	40	0	0	20	PASS
11AC80MIMO	ANT2	5210	NV	50	0	0	20	PASS
11AC80MIMO	ANT1	5290	NV	-30	0	0	20	PASS
11AC80MIMO	ANT1	5290	NV	-20	0	0	20	PASS
11AC80MIMO	ANT1	5290	NV	-10	0	0	20	PASS
11AC80MIMO	ANT1	5290	NV	0	0	0	20	PASS
11AC80MIMO	ANT1	5290	NV	10	0	0	20	PASS
11AC80MIMO	ANT1	5290	NV	20	0	0	20	PASS
11AC80MIMO	ANT1	5290	NV	30	0	0	20	PASS
11AC80MIMO	ANT1	5290	NV	40	0	0	20	PASS
11AC80MIMO	ANT1	5290	NV	50	0	0	20	PASS
11AC80MIMO	ANT2	5290	NV	-30	-80	-15.122873	20	PASS
11AC80MIMO	ANT2	5290	NV	-20	0	0	20	PASS
11AC80MIMO	ANT2	5290	NV	-10	0	0	20	PASS
11AC80MIMO	ANT2	5290	NV	0	0	0	20	PASS
11AC80MIMO	ANT2	5290	NV	10	0	0	20	PASS
11AC80MIMO	ANT2	5290	NV	20	0	0	20	PASS
11AC80MIMO	ANT2	5290	NV	30	0	0	20	PASS
11AC80MIMO	ANT2	5290	NV	40	0	0	20	PASS
11AC80MIMO	ANT2	5290	NV	50	0	0	20	PASS
11AC80MIMO	ANT1	5530	NV	-30	0	0	20	PASS
11AC80MIMO	ANT1	5530	NV	-20	0	0	20	PASS
11AC80MIMO	ANT1	5530	NV	-10	0	0	20	PASS
11AC80MIMO	ANT1	5530	NV	0	0	0	20	PASS
11AC80MIMO	ANT1	5530	NV	10	0	0	20	PASS
11AC80MIMO	ANT1	5530	NV	20	0	0	20	PASS
11AC80MIMO	ANT1	5530	NV	30	0	0	20	PASS
11AC80MIMO	ANT1	5530	NV	40	0	0	20	PASS
11AC80MIMO	ANT1	5530	NV	50	0	0	20	PASS
11AC80MIMO	ANT2	5530	NV	-30	0	0	20	PASS
11AC80MIMO	ANT2	5530	NV	-20	0	0	20	PASS
11AC80MIMO	ANT2	5530	NV	-10	0	0	20	PASS
11AC80MIMO	ANT2	5530	NV	0	0	0	20	PASS
11AC80MIMO	ANT2	5530	NV	10	0	0	20	PASS
11AC80MIMO	ANT2	5530	NV	20	0	0	20	PASS
11AC80MIMO	ANT2	5530	NV	30	0	0	20	PASS
11AC80MIMO	ANT2	5530	NV	40	0	0	20	PASS
11AC80MIMO	ANT2	5530	NV	50	0	0	20	PASS
11AC80MIMO	ANT1	5775	NV	-30	0	0	20	PASS
11AC80MIMO	ANT1	5775	NV	-20	0	0	20	PASS
11AC80MIMO	ANT1	5775	NV	-10	0	0	20	PASS
11AC80MIMO	ANT1	5775	NV	0	-80	-13.852814	20	PASS
11AC80MIMO	ANT1	5775	NV	10	0	0	20	PASS
11AC80MIMO	ANT1	5775	NV	20	0	0	20	PASS
11AC80MIMO	ANT1	5775	NV	30	0	0	20	PASS
11AC80MIMO	ANT1	5775	NV	40	0	0	20	PASS
11AC80MIMO	ANT1	5775	NV	50	0	0	20	PASS

11AC80MIMO	ANT2	5775	NV	-30	0	0	20	PASS
11AC80MIMO	ANT2	5775	NV	-20	0	0	20	PASS
11AC80MIMO	ANT2	5775	NV	-10	0	0	20	PASS
11AC80MIMO	ANT2	5775	NV	0	0	0	20	PASS
11AC80MIMO	ANT2	5775	NV	10	0	0	20	PASS
11AC80MIMO	ANT2	5775	NV	20	0	0	20	PASS
11AC80MIMO	ANT2	5775	NV	30	0	0	20	PASS
11AC80MIMO	ANT2	5775	NV	40	0	0	20	PASS
11AC80MIMO	ANT2	5775	NV	50	0	0	20	PASS


8. Emissions in restricted frequency bands

8.1. Block diagram of test setup


In 3m Anechoic Chamber Test Setup Diagram for 9kHz-30MHz

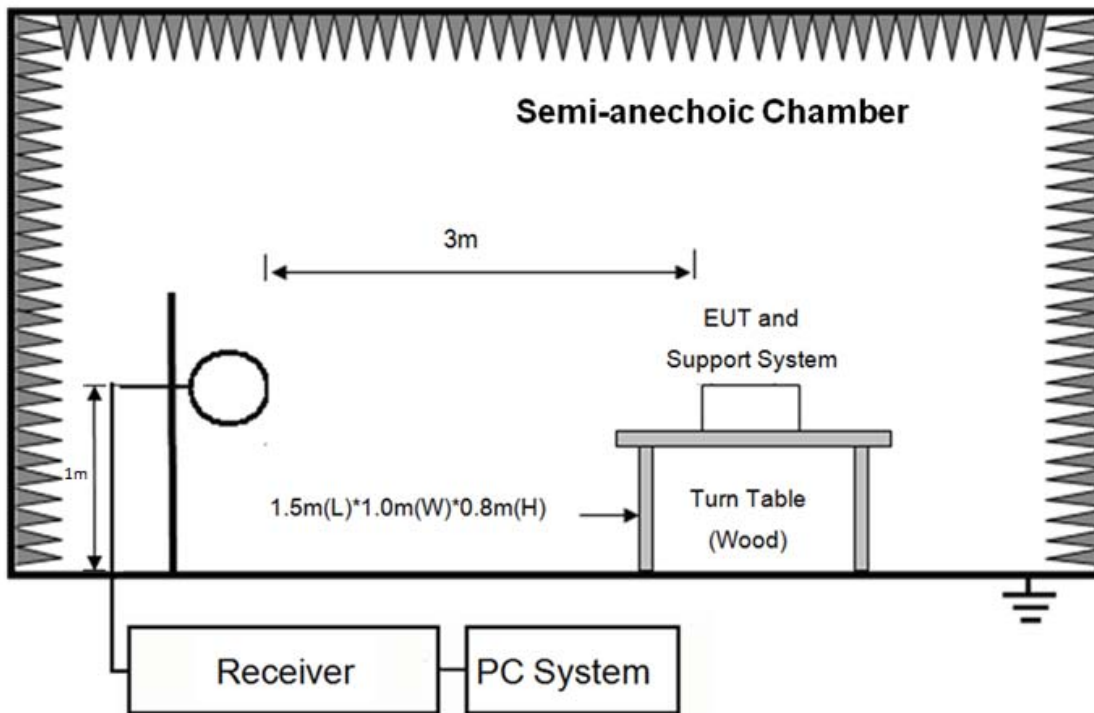

In 3m Anechoic Chamber Test Setup Diagram for 30MHz-1GHz

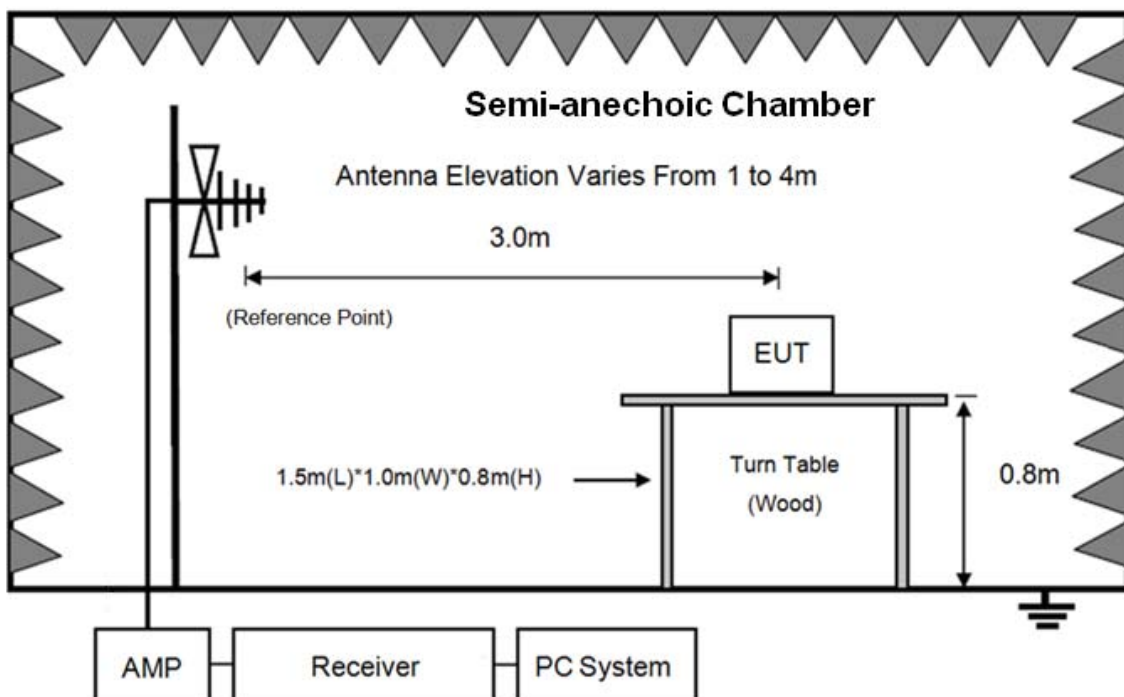

In 3m Anechoic Chamber Test Setup Diagram for frequency above 1GHz

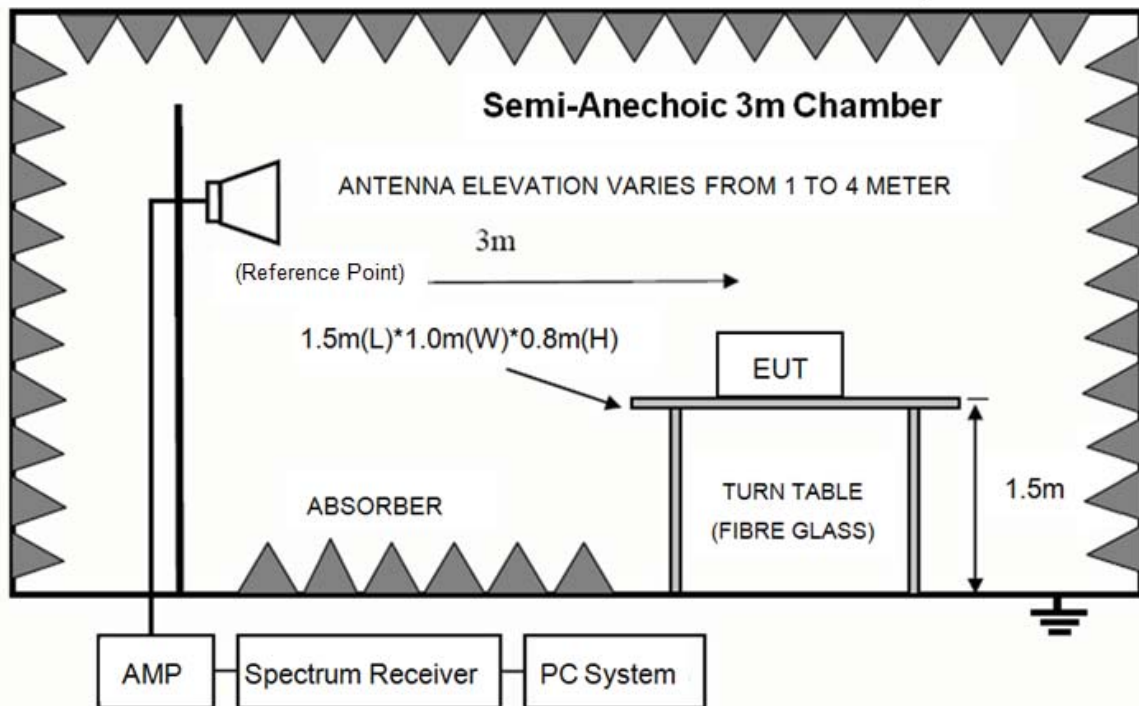

Note: For harmonic emissions test an appropriate high pass filter was inserted in the input port of AMP.

8.2. Limit

8.3.1 FCC 15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.1772&4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.2072&4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

8.3.2 FCC 15.209 Limit.

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V}/\text{m}$	$\text{dB}(\mu\text{V})/\text{m}$
0.009 ~ 0.490	300	2400/F(kHz)	67.6-20log(F)
0.490 ~ 1.705	30	24000/F(kHz)	87.6-20log(F)
1.705 ~ 30.0	30	30	29.54
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	

Note: (1) The emission limits shown in the above table are based on measurements employing a CISPR QP detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000MHz. Radiated emissions limits in these three bands are based on measurements employing an average detector.

(2) At frequencies below 30MHz, measurement may be performed at a distance closer than that specified, and the limit at closer measurement distance can be extrapolated by below formula:

$$\text{Limit}_{3\text{m}}(\text{dB}\mu\text{V}/\text{m}) = \text{Limit}_{30\text{m}}(\text{dB}\mu\text{V}/\text{m}) + 40\text{Log}(30\text{m}/3\text{m})$$

8.3.3 Limit for this EUT

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions or comply with 15.209 limits.

8.3. Test Procedure

- (1) EUT height should be 0.8 m for below 1 GHz at a semi - anechoic chamber while EUT height should be 1.5 m for above 1GHz at full chamber or semi - anechoic chamber ground with absorbers
- (2) Setup EUT and assistant system according clause 2.3 and 8.2
- (3) Test antenna was located 3m from the EUT on an adjustable mast, and the antenna used as below table.

Test frequency range	Test antenna used	Test distance
9 kHz-30 MHz	Active Loop antenna	3 m
30 MHz-1 GHz	Trilog Broadband Antenna	3 m
1 GHz-18 GHz	Double Ridged Horn Antenna(1GHz-18GHz)	3 m
18 GHz-40 GHz	Horn Antenna(18GHz-40GHz)	1 m

According ANSI C63.10:2013 clause 6.4.4.2 and 6.5.3, for measurements below 30 MHz, the loop antenna was positioned with its plane vertical from the EUT and rotated about its vertical axis for maximum response at each azimuth position around the EUT. And the loop antenna also

be positioned with its plane horizontal at the specified distance from the EUT. The center of the loop is 1 m above the ground. for measurement above 30 MHz, the Trilog Broadband Antenna or Horn Antenna was located 3m from EUT, Measurements were made with the antenna positioned in both the horizontal and vertical planes of Polarization, and the measurement antenna was varied from 1 m to 4 m. in height above the reference ground plane to obtain the maximum signal strength.

(4) Below pre-scan procedure was first performed in order to find prominent frequency spectrum radiated emissions from 9 kHz to 40 GHz:

(a) Scanning the peak frequency spectrum with the antenna specified in step (3), and the EUT was rotated 360 degree, the antenna height was varied from 1 m to 4 m (Except loop antenna, it's fixed 1m above ground.)

(b) Change work frequency or channel of device if practicable.

(c) Change modulation type of device if practicable.

(d) Change power supply range from 85% to 115% of the rated supply voltage

(e) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions.

Spectrum frequency from 9 kHz to 40 GHz (tenth harmonic of fundamental frequency) was investigated, and no any obvious emission were detected from 9 kHz to 30 MHz and 18 GHz to 40 GHz, so below final test was performed with frequency range from 30 MHz to 18 GHz.

(5) For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10:2013 on Radiated Emission test.

(6) The emissions from 9 kHz to 1 GHz were measured based on CISPR QP detector except for the frequency bands 9-90 kHz, 110-490 kHz, for emissions from 9 kHz-90kHz,110kHz-490kHz and above 1GHz were measured based on average detector, for emissions above 1 GHz, peak emissions also be measured and need comply with Peak limit.

(7) The emissions from 9 kHz to 1 GHz, QP or average values were measured with EMI receiver with below RBW

Frequency band	RBW
9 kHz-150 kHz	200 Hz
150 kHz-30 MHz	9 kHz
30 MHz-1 GHz	120 kHz

(8) For emissions above 1 GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1 MHz, VBW is set at 3MHz for Peak measure, the RBW is set at 1 MHz, VBW is set at 10 Hz for AV value.

8.4. Test result

PASS. (See below detailed test result)

All the emissions except fundamental emission from 9kHz to 40GHz were comply with 15.209 limit.

Note1: According exploratory test no any obvious emission was detected from 9 kHz to 30 MHz and 18 GHz to 40 GHz, so the final test was performed with frequency range from 30 MHz to 18 GHz and recorded in below.


Note2: For emissions below 1 GHz, according exploratory explorer test, when change Tx mode and channel, have no distinct influence on emissions level, so for emissions below 1 GHz, the final test was only performed with EUT working in 11a mode.

Note3: For below test data, when the limit tabular marked “/” means this frequency point is the fundamental emission and no need comply with this limit.

Radiated Emission test (below 1GHz) TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1# **D:\2018 RE1# Report Data\Q18112315-1EE\RE-1.EM6**
Test Date : 2019-05-20 **Tested By** : Elosky
EUT : JBL Bar 5.1 Surround with wireless subwoofer **Model Number** : BAR 5.1 CNTR
Power Supply : AC 120V/60Hz **Test Mode** : Tx mode
Condition : Temp:24.5°C, Humi:55%, Press:100.1kPa **Antenna/Distance** : 2018 VULB 9163 1#/3m/HORIZONTAL
Memo :

Data: 149

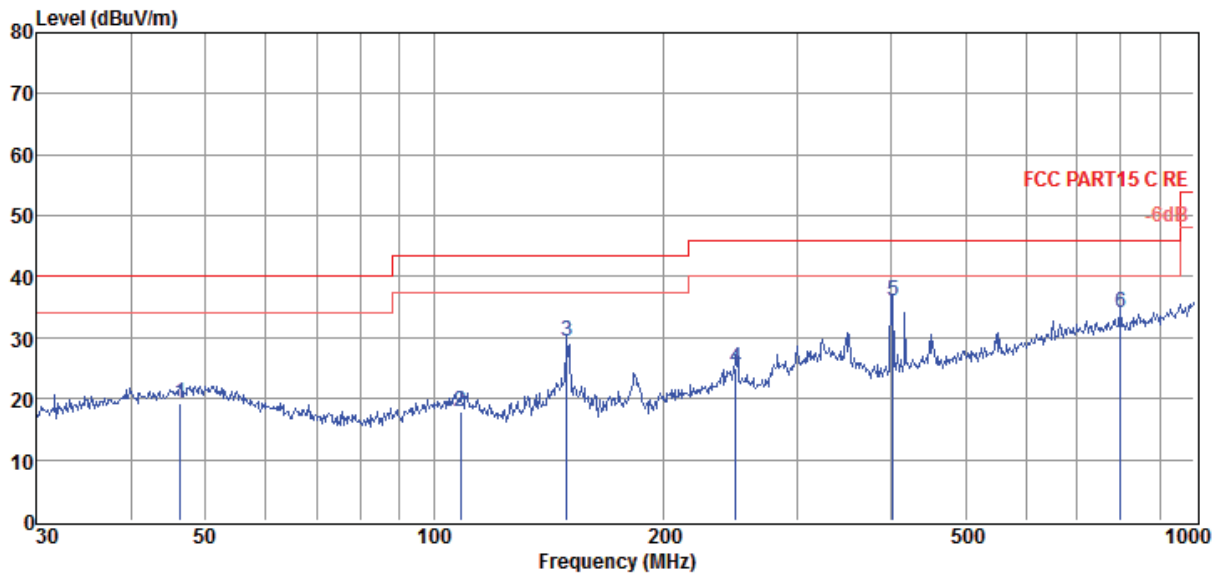


Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	46.34	1.08	14.19	3.84	19.11	40.00	-20.89	QP	HORIZONTAL
2	108.27	1.91	11.78	4.25	17.94	43.50	-25.56	QP	HORIZONTAL
3	149.49	16.51	8.41	4.51	29.43	43.50	-14.07	QP	HORIZONTAL
4	249.43	7.31	12.82	5.00	25.13	46.00	-20.87	QP	HORIZONTAL
5	401.84	14.93	15.63	5.52	36.08	46.00	-9.92	QP	HORIZONTAL
6	798.98	6.70	20.69	6.60	33.99	46.00	-12.01	QP	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.
 2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
 3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1# **D:\2018 RE1# Report Data\Q18112315-1EE\RE-1.EM6**
Test Date : 2019-05-20 **Tested By** : Elosky
EUT : JBL Bar 5.1 Surround with wireless subwoofer **Model Number** : BAR 5.1 CNTR
Power Supply : AC 120V/60Hz **Test Mode** : Tx mode
Condition : Temp:24.5°C, Humi:55%, Press:100.1kPa **Antenna/Distance** : 2018 VULB 9163 1#/3m/VERTICAL
Memo :

Data: 150

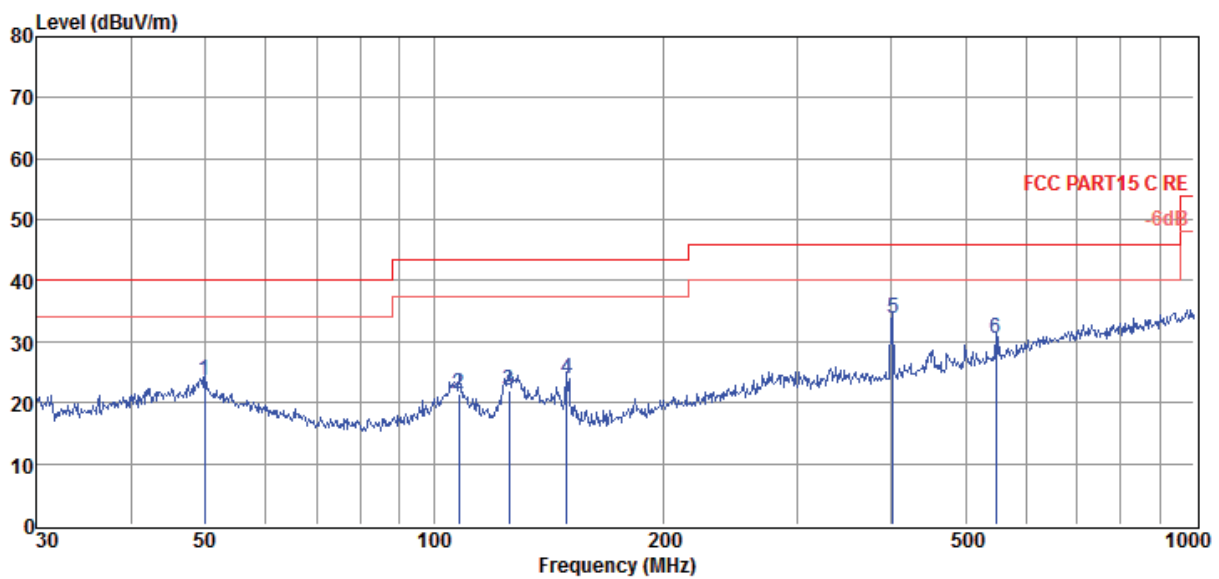

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	49.88	5.31	14.59	3.87	23.77	40.00	-16.23	QP	VERTICAL
2	107.89	5.32	11.78	4.25	21.35	43.50	-22.15	QP	VERTICAL
3	125.45	8.06	9.59	4.33	21.98	43.50	-21.52	QP	VERTICAL
4	149.49	11.12	8.41	4.51	24.04	43.50	-19.46	QP	VERTICAL
5	401.84	12.61	15.63	5.52	33.76	46.00	-12.24	QP	VERTICAL
6	549.02	6.72	17.82	5.96	30.50	46.00	-15.50	QP	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.
 2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
 3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

Radiated Emission test (above 1GHz)

Freq (MHz)	Read level (dBμV)	Antenna Factor (dB/m)	PRM Factor(dB)	Cable Loss (dB)	Result Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector type	Polarization
11a CH36									
5964.00	43.15	34.67	44.01	11.38	45.19	74.00	-28.81	Peak	HORIZONTAL
7936.00	41.61	36.25	43.13	13.90	48.63	74.00	-25.37	Peak	HORIZONTAL
10044.00	43.52	37.43	44.09	15.53	52.39	74.00	-21.61	Peak	HORIZONTAL
12628.00	38.52	38.15	43.41	18.48	51.74	74.00	-22.26	Peak	HORIZONTAL
14821.00	34.41	40.56	42.94	20.08	52.11	74.00	-21.89	Peak	HORIZONTAL
16130.00	30.69	41.41	42.22	22.47	52.35	74.00	-21.65	Peak	HORIZONTAL
5828.00	40.45	34.57	44.03	11.42	42.41	74.00	-31.59	Peak	VERTICAL
7596.00	41.60	35.98	43.26	13.10	47.42	74.00	-26.58	Peak	VERTICAL
9602.00	40.76	37.17	43.92	14.98	48.99	74.00	-25.01	Peak	VERTICAL
11506.00	38.53	38.59	43.68	17.04	50.48	74.00	-23.52	Peak	VERTICAL
13784.00	33.87	39.69	43.15	19.93	50.34	74.00	-23.66	Peak	VERTICAL
15671.00	31.89	40.74	42.49	21.63	51.77	74.00	-22.23	Peak	VERTICAL
11a CH40									
4485.00	44.07	33.58	44.30	9.99	43.34	74.00	-30.66	Peak	HORIZONTAL
5964.00	42.45	34.67	44.01	11.38	44.49	74.00	-29.51	Peak	HORIZONTAL
7290.00	40.06	35.78	43.39	12.70	45.15	74.00	-28.85	Peak	HORIZONTAL
8803.00	41.67	36.80	43.53	14.08	49.02	74.00	-24.98	Peak	HORIZONTAL
10265.00	39.69	37.56	44.02	15.31	48.54	74.00	-25.46	Peak	HORIZONTAL
12407.00	37.24	38.08	43.46	18.25	50.11	74.00	-23.89	Peak	HORIZONTAL
6304.00	42.30	35.07	43.85	11.81	45.33	74.00	-28.67	Peak	VERTICAL
7919.00	41.47	36.24	43.13	13.85	48.43	74.00	-25.57	Peak	VERTICAL
10095.00	42.82	37.46	44.07	15.43	51.64	74.00	-22.36	Peak	VERTICAL
12033.00	38.83	38.01	43.55	17.86	51.15	74.00	-22.85	Peak	VERTICAL
13410.00	35.90	38.88	43.23	19.42	50.97	74.00	-23.03	Peak	VERTICAL
14549.00	33.82	40.34	42.99	20.13	51.30	74.00	-22.70	Peak	VERTICAL
11a CH48									
7001.00	41.20	35.60	43.52	12.64	45.92	74.00	-28.08	Peak	HORIZONTAL
9789.00	40.84	37.28	44.00	14.75	48.87	74.00	-25.13	Peak	HORIZONTAL
11880.00	37.86	38.14	43.59	17.64	50.05	74.00	-23.95	Peak	HORIZONTAL
13767.00	34.05	39.65	43.15	19.90	50.45	74.00	-23.55	Peak	HORIZONTAL
14753.00	33.77	40.50	42.95	20.09	51.41	74.00	-22.59	Peak	HORIZONTAL
15841.00	31.12	40.98	42.39	22.03	51.74	74.00	-22.26	Peak	HORIZONTAL
5165.00	43.39	34.04	44.16	10.38	43.65	74.00	-30.35	Peak	VERTICAL
6729.00	42.64	35.44	43.64	12.15	46.59	74.00	-27.41	Peak	VERTICAL
8905.00	41.01	36.80	43.58	13.98	48.21	74.00	-25.79	Peak	VERTICAL
10843.00	39.36	37.56	43.86	16.04	49.10	74.00	-24.90	Peak	VERTICAL
12407.00	38.11	38.08	43.46	18.25	50.98	74.00	-23.02	Peak	VERTICAL
14022.00	35.40	40.20	43.10	20.22	52.72	74.00	-21.28	Peak	VERTICAL
Conclusion: Pass									
Note: $-27 \text{ dBm/MHz Limit} = 95.2 + \text{EIRP}[\text{dBm}] = 95.2 - 27 = 68.2 \text{ dB}\mu\text{V/m}$ For transmitters operating in the 5150MHz-5250MHz, 5250MHz-5350MHz, 5470MHz-5725MHz, 5725MHz-5850MHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.									

Note:1. 30MHz~40GHz: (11a, 11n20, n40, 11ac20, 11ac40,11ac80 mode all have been tested, only 11a mode is the worst case and reported.)

2. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Freq (MHz)	Read level (dBμV)	Antenna Factor (dB/m)	PRM Factor(dB)	Cable Loss (dB)	Result Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector type	Polarization
11a CH52									
6559.00	40.77	35.34	43.72	11.99	44.38	74.00	-29.62	Peak	HORIZONTAL
7868.00	41.28	36.20	43.15	13.70	48.03	74.00	-25.97	Peak	HORIZONTAL
10027.00	40.14	37.42	44.09	15.56	49.03	74.00	-24.97	Peak	HORIZONTAL
12016.00	38.97	38.00	43.56	17.85	51.26	74.00	-22.74	Peak	HORIZONTAL
14005.00	34.35	40.20	43.10	20.22	51.67	74.00	-22.33	Peak	HORIZONTAL
15739.00	31.55	40.84	42.45	21.79	51.73	74.00	-22.27	Peak	HORIZONTAL
6372.00	41.40	35.15	43.81	11.99	44.73	74.00	-29.27	Peak	VERTICAL
8004.00	39.71	36.30	43.10	14.06	46.97	74.00	-27.03	Peak	VERTICAL
10061.00	43.26	37.44	44.08	15.49	52.11	74.00	-21.89	Peak	VERTICAL
12220.00	38.61	38.04	43.51	18.06	51.20	74.00	-22.80	Peak	VERTICAL
13903.00	33.84	39.97	43.12	20.09	50.78	74.00	-23.22	Peak	VERTICAL
15331.00	32.57	40.57	42.70	20.83	51.27	74.00	-22.73	Peak	VERTICAL
11a CH56									
7137.00	38.56	35.68	43.46	12.70	43.48	74.00	-30.52	Peak	HORIZONTAL
8735.00	40.44	36.80	43.49	14.14	47.89	74.00	-26.11	Peak	HORIZONTAL
10656.00	42.18	37.64	43.91	15.81	51.72	74.00	-22.28	Peak	HORIZONTAL
12322.00	37.96	38.06	43.48	18.16	50.70	74.00	-23.30	Peak	HORIZONTAL
14464.00	33.56	40.29	43.01	20.14	50.98	74.00	-23.02	Peak	HORIZONTAL
15654.00	31.07	40.72	42.50	21.59	50.88	74.00	-23.12	Peak	HORIZONTAL
6457.00	42.43	35.25	43.77	11.98	45.89	74.00	-28.11	Peak	VERTICAL
7919.00	41.51	36.24	43.13	13.85	48.47	74.00	-25.53	Peak	VERTICAL
9636.00	41.30	37.19	43.93	14.87	49.43	74.00	-24.57	Peak	VERTICAL
11897.00	37.43	38.12	43.59	17.67	49.63	74.00	-24.37	Peak	VERTICAL
14362.00	33.96	40.27	43.03	20.16	51.36	74.00	-22.64	Peak	VERTICAL
15858.00	31.72	41.00	42.38	22.07	52.41	74.00	-21.59	Peak	VERTICAL
11a CH64									
6576.00	41.88	35.35	43.71	12.02	45.54	74.00	-28.46	Peak	HORIZONTAL
8055.00	40.55	36.36	43.13	13.74	47.52	74.00	-26.48	Peak	HORIZONTAL
9959.00	39.59	37.38	44.08	15.45	48.34	74.00	-25.66	Peak	HORIZONTAL
11795.00	36.90	38.24	43.61	17.50	49.03	74.00	-24.97	Peak	HORIZONTAL
13835.00	34.44	39.81	43.14	20.00	51.11	74.00	-22.89	Peak	HORIZONTAL
15909.00	31.13	41.07	42.35	22.20	52.05	74.00	-21.95	Peak	HORIZONTAL
6678.00	39.39	35.41	43.67	12.07	43.20	74.00	-30.80	Peak	VERTICAL
8565.00	39.38	36.80	43.41	14.33	47.10	74.00	-26.90	Peak	VERTICAL
10758.00	41.86	37.60	43.88	15.93	51.51	74.00	-22.49	Peak	VERTICAL
13155.00	37.25	38.52	43.29	19.07	51.55	74.00	-22.45	Peak	VERTICAL
14940.00	34.25	40.65	42.91	20.06	52.05	74.00	-21.95	Peak	VERTICAL
15926.00	29.89	41.10	42.34	22.24	50.89	74.00	-23.11	Peak	VERTICAL
Conclusion: Pass									
Note: -27 dBm/MHz Limit=95.2+EIRP[dBm]=95.2-27=68.2 dBμV/m									

For transmitters operating in the 5150MHz-5250MHz, 5250MHz-5350MHz, 5470MHz-5725MHz, 5725MHz-5850MHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.

Note:1. 30MHz~40GHz: (11a, 11n20, n40, 11ac20, 11ac40, 11ac80 mode all have been tested, only 11a mode is the worst case and reported.)

2. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Freq (MHz)	Read level (dBμV)	Antenna Factor (dB/m)	PRM Factor(dB)	Cable Loss (dB)	Result Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector type	Polarization
11a CH110									
5726.00	43.38	34.49	44.05	11.26	45.08	74.00	-28.92	Peak	HORIZONTAL
6372.00	40.08	35.15	43.81	11.99	43.41	74.00	-30.59	Peak	HORIZONTAL
7766.00	40.69	36.12	43.19	13.35	46.97	74.00	-27.03	Peak	HORIZONTAL
9245.00	40.70	36.95	43.75	14.75	48.65	74.00	-25.35	Peak	HORIZONTAL
10877.00	39.92	37.55	43.85	16.08	49.70	74.00	-24.30	Peak	HORIZONTAL
13393.00	35.70	38.85	43.24	19.39	50.70	74.00	-23.30	Peak	HORIZONTAL
6967.00	40.83	35.58	43.53	12.53	45.41	74.00	-28.59	Peak	VERTICAL
8803.00	40.77	36.80	43.53	14.08	48.12	74.00	-25.88	Peak	VERTICAL
10962.00	42.34	37.51	43.83	16.19	52.21	74.00	-21.79	Peak	VERTICAL
12934.00	36.80	38.27	43.34	18.79	50.52	74.00	-23.48	Peak	VERTICAL
15059.00	33.51	40.68	42.86	20.19	51.52	74.00	-22.48	Peak	VERTICAL
15892.00	30.37	41.05	42.36	22.16	51.22	74.00	-22.78	Peak	VERTICAL
11a CH116									
5896.00	41.30	34.62	44.02	11.41	43.31	74.00	-30.69	Peak	HORIZONTAL
6899.00	41.70	35.54	43.56	12.32	46.00	74.00	-28.00	Peak	HORIZONTAL
8463.00	42.00	36.76	43.35	13.88	49.29	74.00	-24.71	Peak	HORIZONTAL
11030.00	40.77	37.57	43.81	16.29	50.82	74.00	-23.18	Peak	HORIZONTAL
13206.00	36.51	38.59	43.28	19.14	50.96	74.00	-23.04	Peak	HORIZONTAL
15620.00	32.42	40.67	42.52	21.51	52.08	74.00	-21.92	Peak	HORIZONTAL
6066.00	41.91	34.78	43.97	11.30	44.02	74.00	-29.98	Peak	VERTICAL
8106.00	40.01	36.41	43.16	13.46	46.72	74.00	-27.28	Peak	VERTICAL
9891.00	43.24	37.34	44.05	15.17	51.70	74.00	-22.30	Peak	VERTICAL
11829.00	41.01	38.20	43.60	17.56	53.17	74.00	-20.83	Peak	VERTICAL
14226.00	34.30	40.25	43.06	20.18	51.67	74.00	-22.33	Peak	VERTICAL
15518.00	31.66	40.53	42.58	21.27	50.88	74.00	-23.12	Peak	VERTICAL
11a CH140									
6610.00	41.07	35.37	43.70	12.05	44.79	74.00	-29.21	Peak	HORIZONTAL
8106.00	40.79	36.41	43.16	13.46	47.50	74.00	-26.50	Peak	HORIZONTAL
10146.00	42.13	37.49	44.06	15.33	50.89	74.00	-23.11	Peak	HORIZONTAL
12339.00	36.66	38.07	43.48	18.18	49.43	74.00	-24.57	Peak	HORIZONTAL
14362.00	34.14	40.27	43.03	20.16	51.54	74.00	-22.46	Peak	HORIZONTAL
15909.00	30.91	41.07	42.35	22.20	51.83	74.00	-22.17	Peak	HORIZONTAL
6559.00	42.24	35.34	43.72	11.99	45.85	74.00	-28.15	Peak	VERTICAL
8140.00	40.67	36.44	43.18	13.43	47.36	74.00	-26.64	Peak	VERTICAL
10146.00	42.64	37.49	44.06	15.33	51.40	74.00	-22.60	Peak	VERTICAL
12254.00	39.69	38.05	43.50	18.09	52.33	74.00	-21.67	Peak	VERTICAL

14090.00	33.97	40.22	43.09	20.20	51.30	74.00	-22.70	Peak	VERTICAL
15501.00	31.51	40.50	42.59	21.23	50.65	74.00	-23.35	Peak	VERTICAL

Conclusion: Pass

Note: $-27 \text{ dBm/MHz Limit} = 95.2 + \text{EIRP}[\text{dBm}] = 95.2 - 27 = 68.2 \text{ dB}\mu\text{V/m}$

For transmitters operating in the 5150MHz-5250MHz, 5250MHz-5350MHz, 5470MHz-5725MHz, 5725MHz-5850MHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz

Note:1. 30MHz~40GHz: (11a, 11n20, n40, 11ac20, 11ac40, 11ac80 mode all have been tested, only 11a mode is the worst case and reported.)

2. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

Freq (MHz)	Read level (dB μ V)	Antenna Factor (dB/m)	PRM Factor(dB)	Cable Loss (dB)	Result Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector type	Polarization
11a CH149									
5029.00	44.61	33.92	44.19	10.06	44.40	74.00	-29.60	Peak	HORIZONTAL
6372.00	40.92	35.15	43.81	11.99	44.25	74.00	-29.75	Peak	HORIZONTAL
8463.00	41.99	36.76	43.35	13.88	49.28	74.00	-24.72	Peak	HORIZONTAL
11217.00	41.86	37.98	43.76	16.59	52.67	74.00	-21.33	Peak	HORIZONTAL
13631.00	35.46	39.32	43.18	19.72	51.32	74.00	-22.68	Peak	HORIZONTAL
15654.00	31.57	40.72	42.50	21.59	51.38	74.00	-22.62	Peak	HORIZONTAL
6814.00	42.38	35.49	43.60	12.35	46.62	74.00	-27.38	Peak	VERTICAL
8293.00	41.47	36.60	43.26	13.35	48.16	74.00	-25.84	Peak	VERTICAL
10622.00	42.68	37.65	43.92	15.76	52.17	74.00	-21.83	Peak	VERTICAL
12781.00	37.66	38.21	43.37	18.63	51.13	74.00	-22.87	Peak	VERTICAL
14549.00	34.46	40.34	42.99	20.13	51.94	74.00	-22.06	Peak	VERTICAL
15501.00	31.83	40.50	42.59	21.23	50.97	74.00	-23.03	Peak	VERTICAL
11a CH157									
6066.00	41.69	34.78	43.97	11.30	43.80	74.00	-30.20	Peak	HORIZONTAL
7902.00	40.58	36.22	43.14	13.80	47.46	74.00	-26.54	Peak	HORIZONTAL
10384.00	42.17	37.63	43.99	15.46	51.27	74.00	-22.73	Peak	HORIZONTAL
12390.00	38.52	38.08	43.47	18.23	51.36	74.00	-22.64	Peak	HORIZONTAL
14396.00	34.09	40.28	43.02	20.15	51.50	74.00	-22.50	Peak	HORIZONTAL
15433.00	31.70	40.53	42.63	21.07	50.67	74.00	-23.33	Peak	HORIZONTAL
5862.00	43.58	34.59	44.03	11.42	45.56	74.00	-28.44	Peak	VERTICAL
7460.00	44.28	35.88	43.32	13.13	49.97	74.00	-24.03	Peak	VERTICAL
9874.00	43.53	37.33	44.04	15.09	51.91	74.00	-22.09	Peak	VERTICAL
12203.00	37.46	38.04	43.51	18.04	50.03	74.00	-23.97	Peak	VERTICAL
14175.00	33.87	40.24	43.07	20.19	51.23	74.00	-22.77	Peak	VERTICAL
15365.00	33.68	40.55	42.67	20.91	52.47	74.00	-21.53	Peak	VERTICAL
11a CH165									
5743.00	43.03	34.50	44.05	11.30	44.78	74.00	-29.22	Peak	HORIZONTAL
6984.00	40.51	35.59	43.52	12.59	45.17	74.00	-28.83	Peak	HORIZONTAL
8939.00	42.99	36.80	43.60	14.12	50.31	74.00	-23.69	Peak	HORIZONTAL
11540.00	38.84	38.55	43.68	17.10	50.81	74.00	-23.19	Peak	HORIZONTAL
14277.00	32.92	40.26	43.05	20.17	50.30	74.00	-23.70	Peak	HORIZONTAL
16062.00	29.33	41.30	42.26	22.44	50.81	74.00	-23.19	Peak	HORIZONTAL

6389.00	42.56	35.17	43.80	12.04	45.97	74.00	-28.03	Peak	VERTICAL
8701.00	39.52	36.80	43.48	14.17	47.01	74.00	-26.99	Peak	VERTICAL
10469.00	40.97	37.68	43.96	15.57	50.26	74.00	-23.74	Peak	VERTICAL
12475.00	37.38	38.10	43.45	18.32	50.35	74.00	-23.65	Peak	VERTICAL
14379.00	32.71	40.28	43.03	20.16	50.12	74.00	-23.88	Peak	VERTICAL
15671.00	32.40	40.74	42.49	21.63	52.28	74.00	-21.72	Peak	VERTICAL

Conclusion: Pass

Note: $-27 \text{ dBm/MHz Limit} = 95.2 + \text{EIRP}[\text{dBm}] = 95.2 - 27 = 68.2 \text{ dB}\mu\text{V/m}$

For transmitters operating in the 5150MHz-5250MHz, 5250MHz-5350MHz, 5470MHz-5725MHz, 5725MHz-5850MHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.


Note: 1. 30MHz~40GHz: (11a, 11n20, n40, 11ac20, 11ac40, 11ac80 mode all have been tested, only 11a mode is the worst case and reported.)

2. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.

3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

9. Band Edge Compliance

9.1. Block diagram of test setup

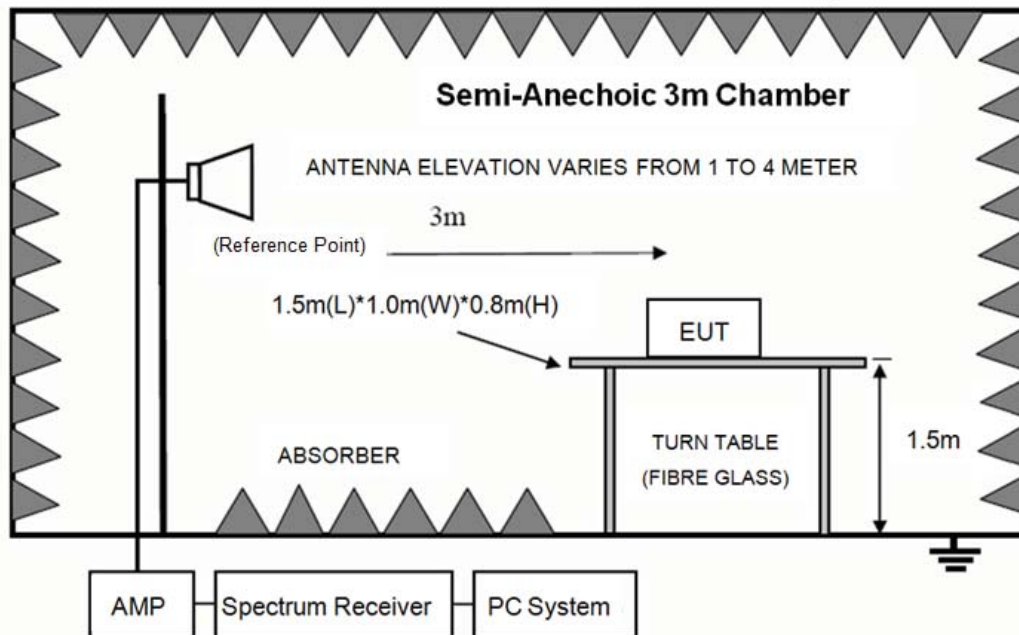

9.2. Limit

For transmitters operating in the 5.15-5.25 GHz and 5.725-5.85 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.

$-27 \text{ dBm/MHz Limit} = 95.2 + \text{EIRP}[\text{dBm}] = 95.2 - 27 = 68.2 \text{ dB}\mu\text{V/m}$

9.3. Test Procedure

Same with clause 8.3 except change investigated frequency range from 5.15-5.25 GHz, 5250-5350 GHz, 5470-5725 GHz, 5.725-5.85 GHz.

Remark: All restriction band have been tested, and only the worst case is shown in report.

9.4. Test result

PASS. (See below detailed test result)


Note1: As specified in 15.407(b), emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz (or -17 dBm/MHz as specified in 15.407(b)(4)). However, an out-of-band emission that complies with both the average and peak limits of 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz peak emission limit

Note2: 11a, 11n20, n40, 11ac20, 11ac40, 11ac80 mode all have been tested, only 11a mode is the worst case and reported.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1# D:\2019 RE1# Test Data\T\TCL\20190418 TCL Bar5.1.EM6
Test Date : 2019-04-18 **Tested By** : Sunny
EUT : JBL Bar 5.1 Surround with wireless subwoofer **Model Number** : BAR 5.1 CNTR
Power Supply : AC 120V/60Hz **Test Mode** : Tx mode
Condition : Temp:24.5'C, Humi:55%, Press:101.4kPa **Antenna/Distance** : 2018 HF 907/3m/HORIZONTAL
Memo : 11a 5180MHz

Data: 47

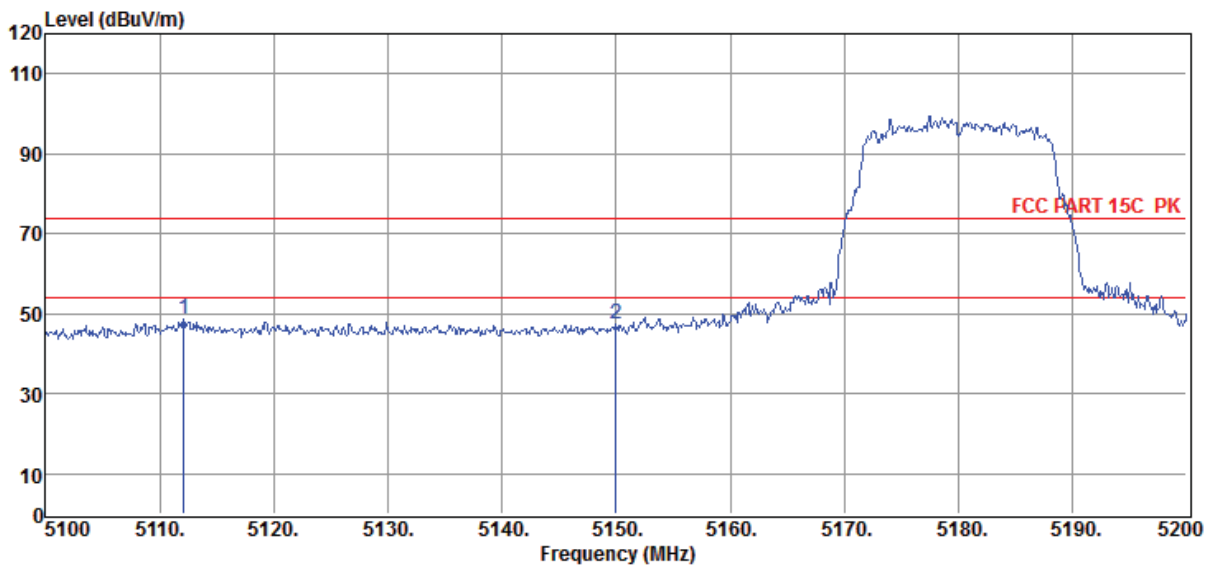


Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	5112.10	48.42	33.99	44.18	10.31	48.54	74.00	-25.46	Peak	HORIZONTAL
2	5150.00	47.03	34.02	44.17	10.36	47.24	74.00	-26.76	Peak	HORIZONTAL

- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1# D:\2019 RE1# Test Data\T\TCL\20190418 TCL Bar5.1.EM6
Test Date : 2019-04-18 **Tested By** : Sunny
EUT : JBL Bar 5.1 Surround with wireless subwoofer **Model Number** : BAR 5.1 CNTR
Power Supply : AC 120V/60Hz **Test Mode** : Tx mode
Condition : Temp:24.5°C, Humi:55%, Press:101.4kPa **Antenna/Distance** : 2018 HF 907/3m/VERTICAL
Memo : 11a 5180MHz

Data: 48

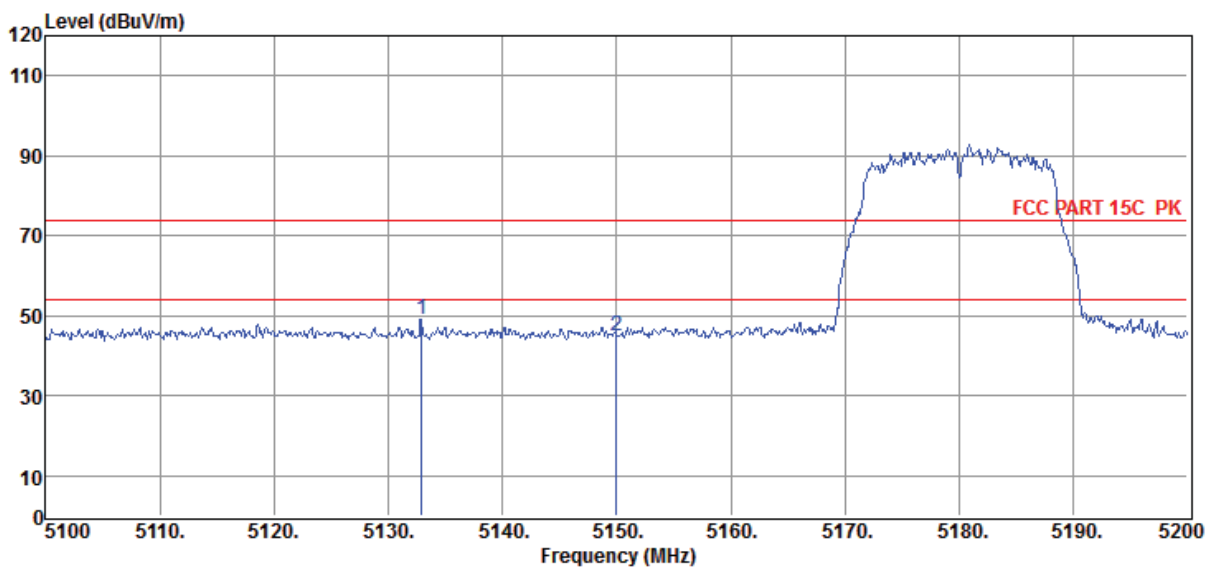


Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	5132.90	48.72	34.01	44.17	10.34	48.90	74.00	-25.10	Peak	VERTICAL
2	5150.00	44.90	34.02	44.17	10.36	45.11	74.00	-28.89	Peak	VERTICAL

- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1# D:\2019 RE1# Test Data\T\TCL\20190418 TCL Bar5.1.EM6
Test Date : 2019-04-18 **Tested By** : Sunny
EUT : JBL Bar 5.1 Surround with wireless subwoofer **Model Number** : BAR 5.1 CNTR
Power Supply : AC 120V/60Hz **Test Mode** : Tx mode
Condition : Temp:24.5°C, Humi:55%, Press:101.4kPa **Antenna/Distance** : 2018 HF 907/3m/HORIZONTAL
Memo : 11a 5320MHz

Data: 49

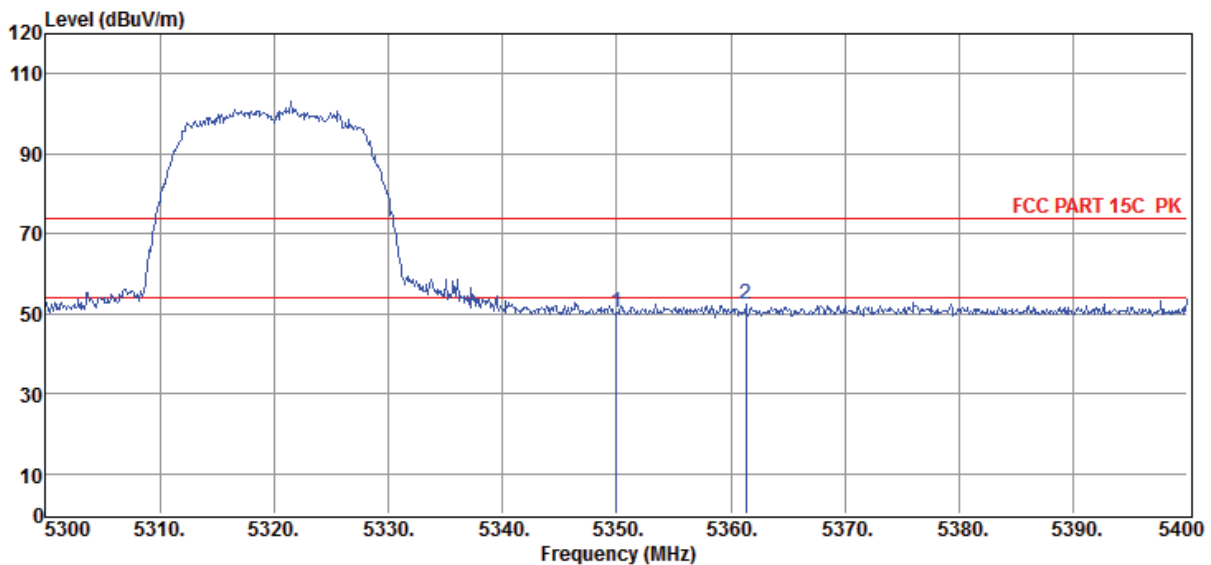


Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	5350.00	49.84	34.18	44.13	10.48	50.37	74.00	-23.63	Peak	HORIZONTAL
2	5361.30	51.66	34.19	44.12	10.48	52.21	74.00	-21.79	Peak	HORIZONTAL

- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1# D:\2019 RE1# Test Data\T\TCL\20190418 TCL Bar5.1.EM6
Test Date : 2019-04-18 **Tested By** : Sunny
EUT : JBL Bar 5.1 Surround with wireless subwoofer **Model Number** : BAR 5.1 CNTR
Power Supply : AC 120V/60Hz **Test Mode** : Tx mode
Condition : Temp:24.5°C, Humi:55%, Press:101.4kPa **Antenna/Distance** : 2018 HF 907/3m/VERTICAL
Memo : 11a 5320MHz

Data: 50

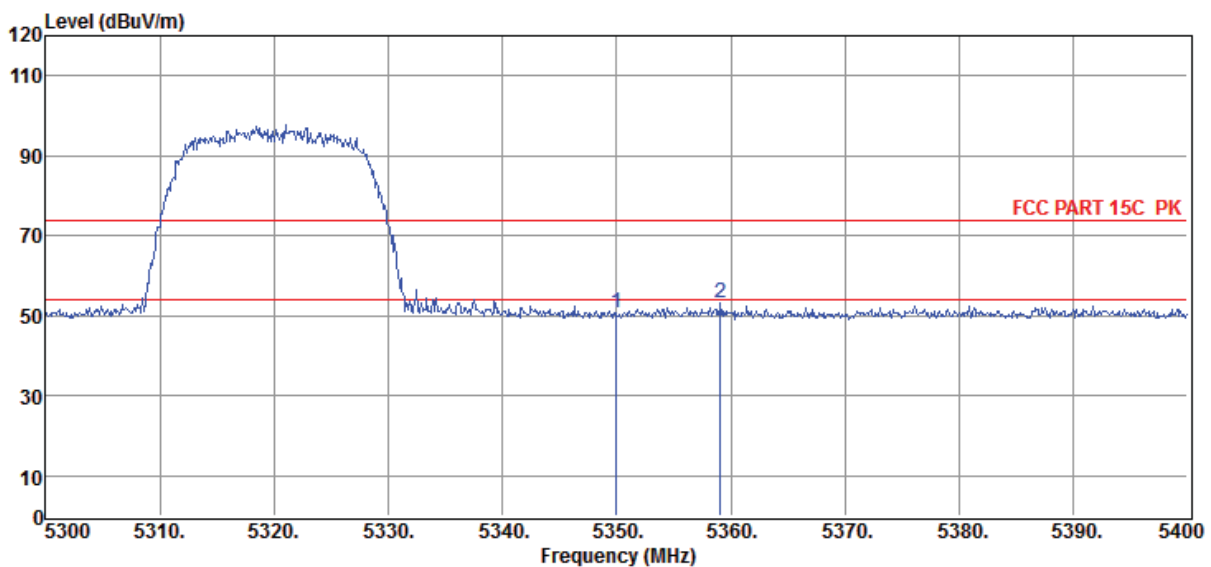


Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	5350.00	50.25	34.18	44.13	10.48	50.78	74.00	-23.22	Peak	VERTICAL
2	5359.10	52.60	34.19	44.12	10.48	53.15	74.00	-20.85	Peak	VERTICAL

- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1# D:\2019 RE1# Test Data\T\TCL\20190418 TCL Bar5.1.EM6
Test Date : 2019-04-18 **Tested By** : Sunny
EUT : JBL Bar 5.1 Surround with wireless subwoofer **Model Number** : BAR 5.1 CNTR
Power Supply : AC 120V/60Hz **Test Mode** : Tx mode
Condition : Temp:24.5'C, Humi:55%, Press:101.4kPa **Antenna/Distance** : 2018 HF 907/3m/HORIZONTAL
Memo : 11a 5500Mhz

Data: 51

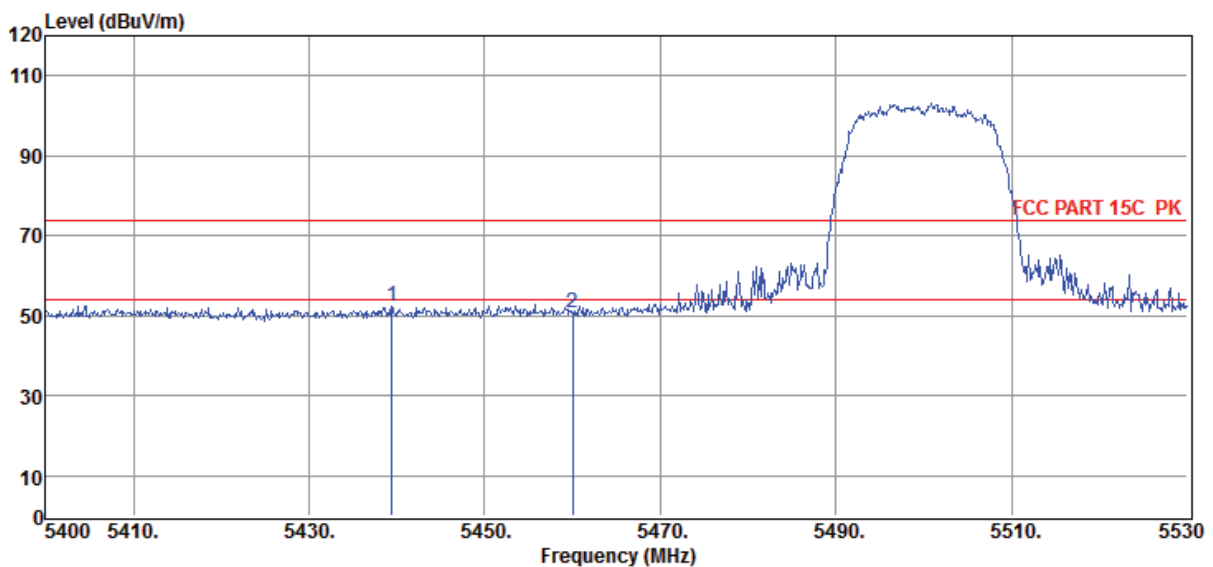


Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	5439.39	51.38	34.25	44.11	10.65	52.17	74.00	-21.83	Peak	HORIZONTAL
2	5460.00	49.61	34.27	44.10	10.74	50.52	74.00	-23.48	Peak	HORIZONTAL

- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1# D:\2019 RE1# Test Data\T\TCL\20190418 TCL Bar5.1.EM6
Test Date : 2019-04-18 **Tested By** : Sunny
EUT : JBL Bar 5.1 Surround with wireless subwoofer **Model Number** : BAR 5.1 CNTR
Power Supply : AC 120V/60Hz **Test Mode** : Tx mode
Condition : Temp:24.5'C, Humi:55%, Press:101.4kPa **Antenna/Distance** : 2018 HF 907/3m/VERTICAL
Memo : 11a 5500Mhz

Data: 52

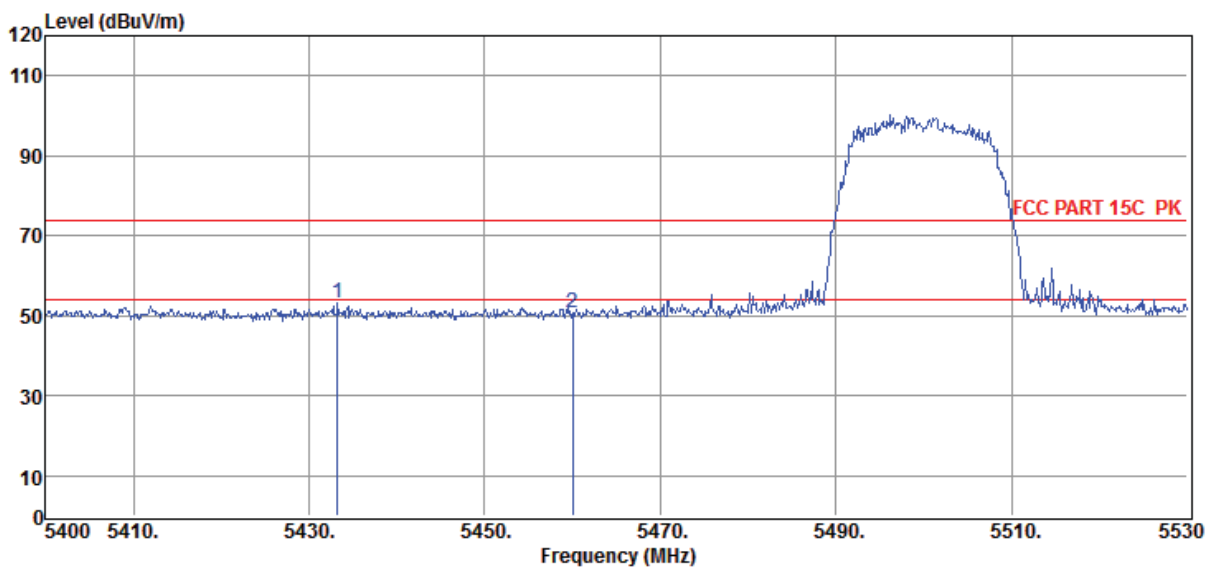


Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	5433.28	52.33	34.25	44.11	10.62	53.09	74.00	-20.91	Peak	VERTICAL
2	5460.00	49.94	34.27	44.10	10.74	50.85	74.00	-23.15	Peak	VERTICAL

- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1# D:\2019 RE1# Test Data\T\TCL\20190418 TCL Bar5.1.EM6
Test Date : 2019-04-18 **Tested By** : Sunny
EUT : JBL Bar 5.1 Surround with wireless subwoofer **Model Number** : BAR 5.1 CNTR
Power Supply : AC 120V/60Hz **Test Mode** : Tx mode
Condition : Temp:24.5°C, Humi:55%, Press:101.4kPa **Antenna/Distance** : 2018 HF 907/3m/HORIZONTAL
Memo : 11n20 5180Mhz

Data: 53

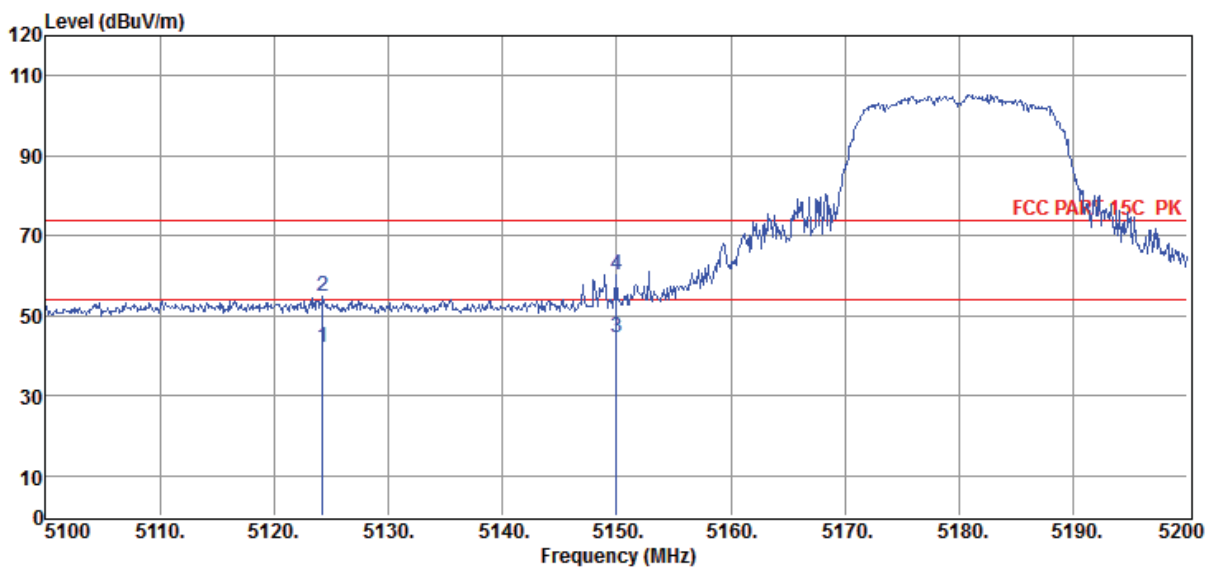


Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	5124.30	41.88	34.00	44.17	10.32	42.03	54.00	-11.97	Average	HORIZONTAL
2	5124.30	54.75	34.00	44.17	10.32	54.90	74.00	-19.10	Peak	HORIZONTAL
3	5150.00	44.44	34.02	44.17	10.36	44.65	54.00	-9.35	Average	HORIZONTAL
4	5150.00	60.07	34.02	44.17	10.36	60.28	74.00	-13.72	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1# D:\2019 RE1# Test Data\T\TCL\20190418 TCL Bar5.1.EM6
Test Date : 2019-04-18 **Tested By** : Sunny
EUT : JBL Bar 5.1 Surround with wireless subwoofer **Model Number** : BAR 5.1 CNTR
Power Supply : AC 120V/60Hz **Test Mode** : Tx mode
Condition : Temp:24.5'C, Humi:55%, Press:101.4kPa **Antenna/Distance** : 2018 HF 907/3m/VERTICAL
Memo : 11n20 5180Mhz

Data: 54

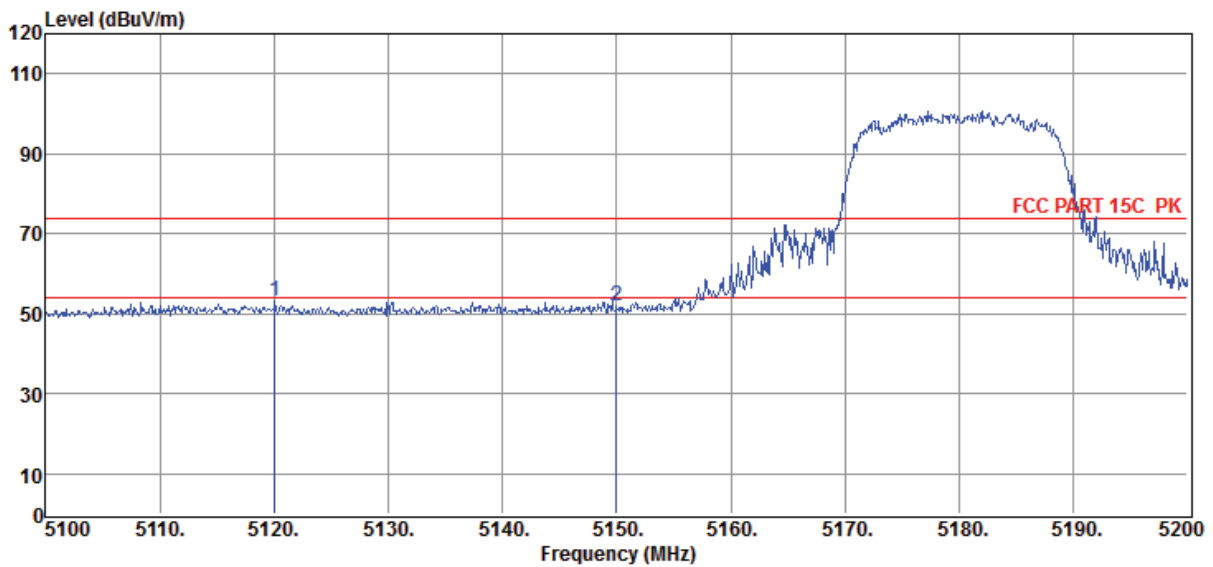


Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	5120.10	53.06	34.00	44.17	10.32	53.21	74.00	-20.79	Peak	VERTICAL
2	5150.00	51.70	34.02	44.17	10.36	51.91	74.00	-22.09	Peak	VERTICAL

- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1# D:\2019 RE1# Test Data\T\TCL\20190418 TCL Bar5.1.EM6
Test Date : 2019-04-18 **Tested By** : Sunny
EUT : JBL Bar 5.1 Surround with wireless subwoofer **Model Number** : BAR 5.1 CNTR
Power Supply : AC 120V/60Hz **Test Mode** : Tx mode
Condition : Temp:24.5°C, Humi:55%, Press:101.4kPa **Antenna/Distance** : 2018 HF 907/3m/HORIZONTAL
Memo : 11n20 5320Mhz

Data: 55

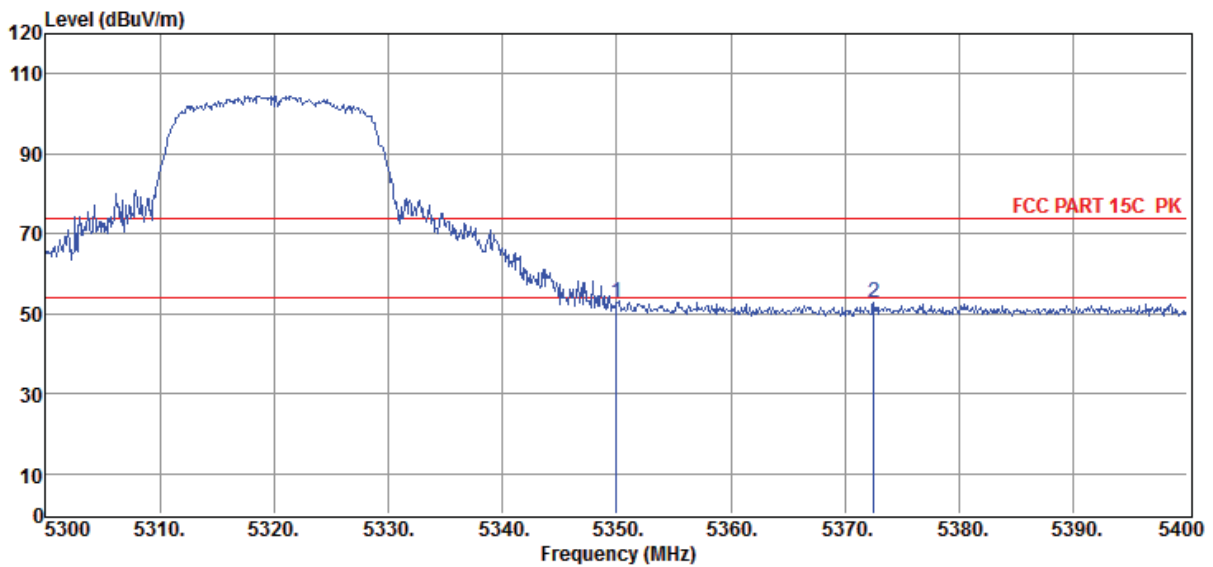


Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	5350.00	52.44	34.18	44.13	10.48	52.97	74.00	-21.03	Peak	HORIZONTAL
2	5372.50	52.15	34.20	44.12	10.48	52.71	74.00	-21.29	Peak	HORIZONTAL

- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1# D:\2019 RE1# Test Data\T\TCL\20190418 TCL Bar5.1.EM6
Test Date : 2019-04-18 **Tested By** : Sunny
EUT : JBL Bar 5.1 Surround with wireless subwoofer **Model Number** : BAR 5.1 CNTR
Power Supply : AC 120V/60Hz **Test Mode** : Tx mode
Condition : Temp:24.5'C, Humi:55%, Press:101.4kPa **Antenna/Distance** : 2018 HF 907/3m/VERTICAL
Memo : 11n20 5320Mhz

Data: 56

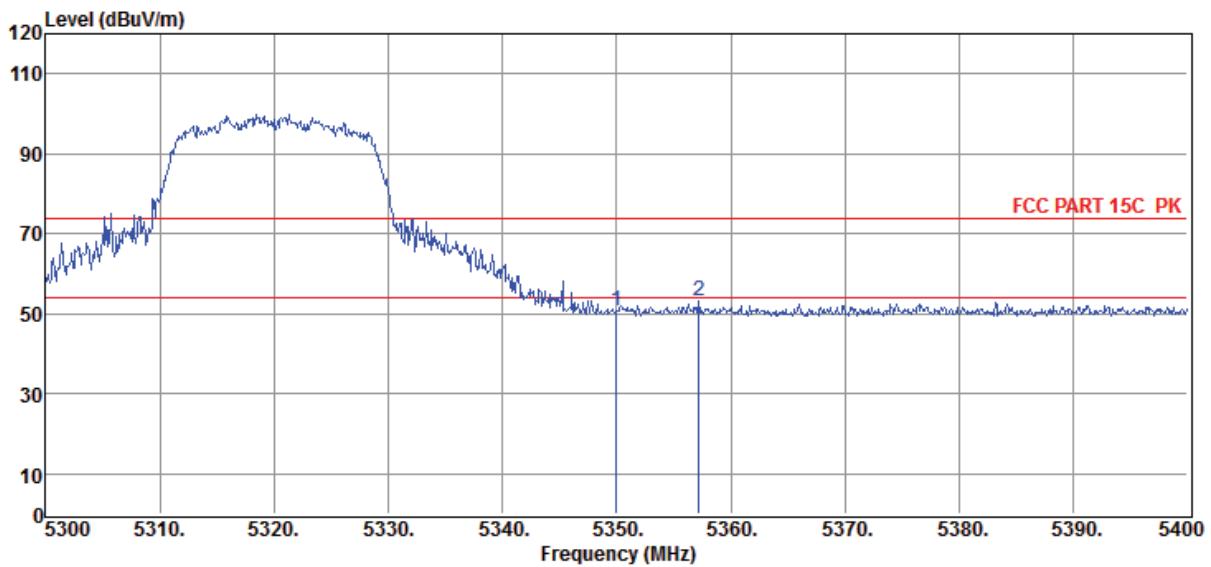


Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	5350.00	50.15	34.18	44.13	10.48	50.68	74.00	-23.32	Peak	VERTICAL
2	5357.20	52.57	34.19	44.12	10.48	53.12	74.00	-20.88	Peak	VERTICAL

- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1# D:\2019 RE1# Test Data\T\TCL\20190418 TCL Bar5.1.EM6
Test Date : 2019-04-18 **Tested By** : Sunny
EUT : JBL Bar 5.1 Surround with wireless subwoofer **Model Number** : BAR 5.1 CNTR
Power Supply : AC 120V/60Hz **Test Mode** : Tx mode
Condition : Temp:24.5'C, Humi:55%, Press:101.4kPa **Antenna/Distance** : 2018 HF 907/3m/HORIZONTAL
Memo : 11n20 5500Mhz

Data: 57

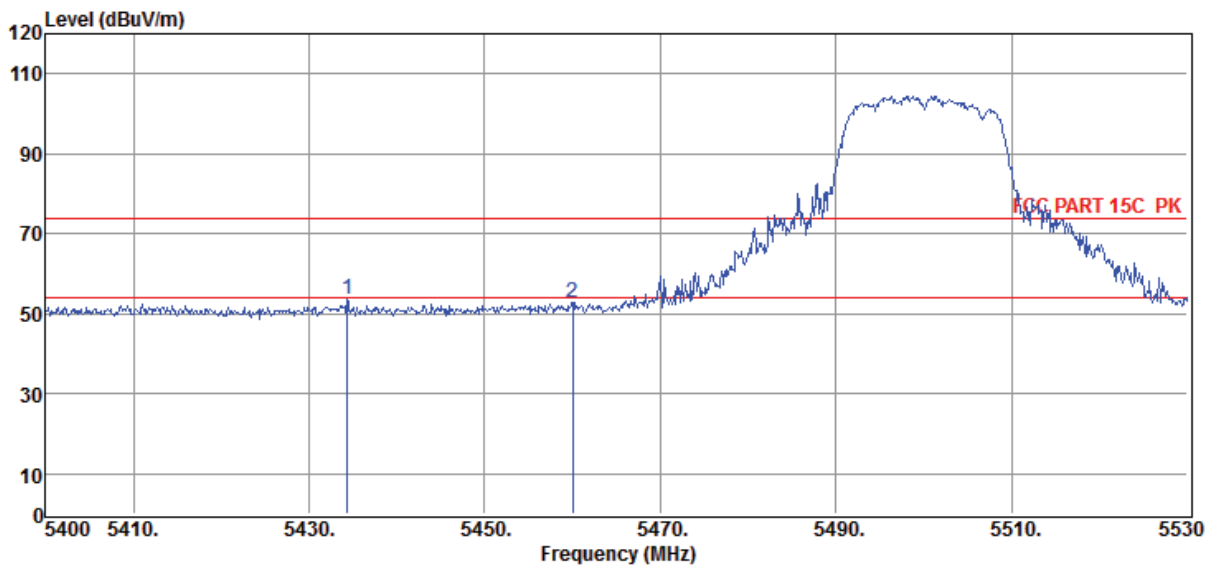


Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	5434.32	52.72	34.25	44.11	10.63	53.49	74.00	-20.51	Peak	HORIZONTAL
2	5460.00	52.07	34.27	44.10	10.74	52.98	74.00	-21.02	Peak	HORIZONTAL

- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1# **D:\2019 RE1# Test Data\T\TCL\20190418 TCL Bar5.1.EM6**
Test Date : 2019-04-18 **Tested By** : Sunny
EUT : JBL Bar 5.1 Surround with wireless subwoofer **Model Number** : BAR 5.1 CNTR
Power Supply : AC 120V/60Hz **Test Mode** : Tx mode
Condition : Temp:24.5°C, Humi:55%, Press:101.4kPa **Antenna/Distance** : 2018 HF 907/3m/VERTICAL
Memo : 11n20 5500Mhz

Data: 58

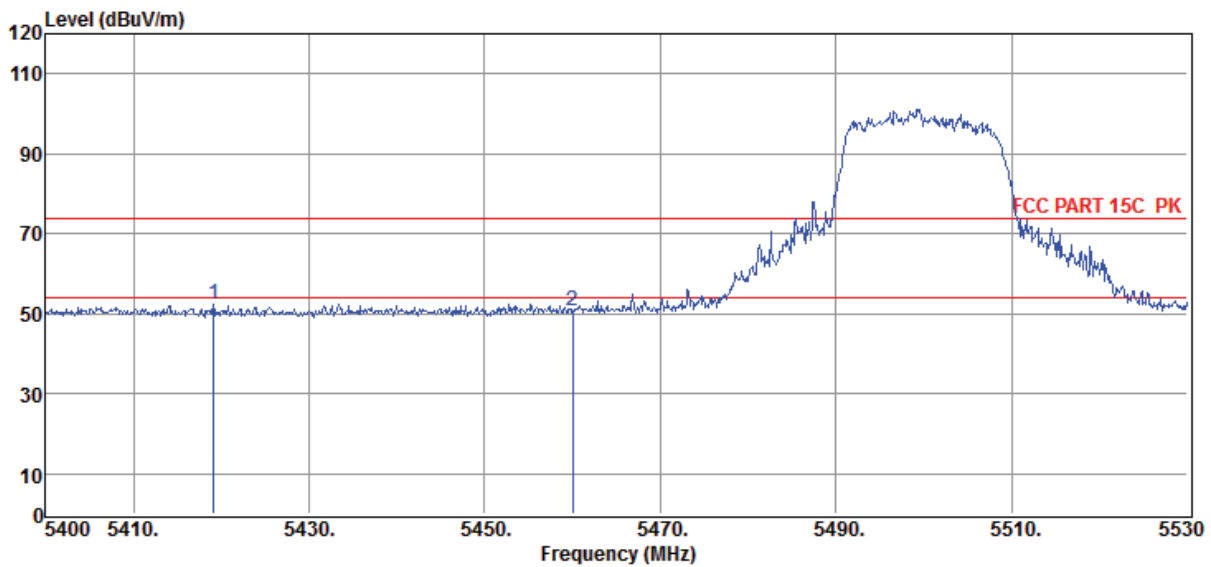


Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	5419.11	51.65	34.24	44.11	10.56	52.34	74.00	-21.66	Peak	VERTICAL
2	5460.00	49.64	34.27	44.10	10.74	50.55	74.00	-23.45	Peak	VERTICAL

- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1# D:\2019 RE1# Test Data\T\TCL\20190418 TCL Bar5.1.EM6
Test Date : 2019-04-18 **Tested By** : Sunny
EUT : JBL Bar 5.1 Surround with wireless subwoofer **Model Number** : BAR 5.1 CNTR
Power Supply : AC 120V/60Hz **Test Mode** : Tx mode
Condition : Temp:24.5°C, Humi:55%, Press:101.4kPa **Antenna/Distance** : 2018 HF 907/3m/HORIZONTAL
Memo : 11n40 5190Mhz

Data: 59

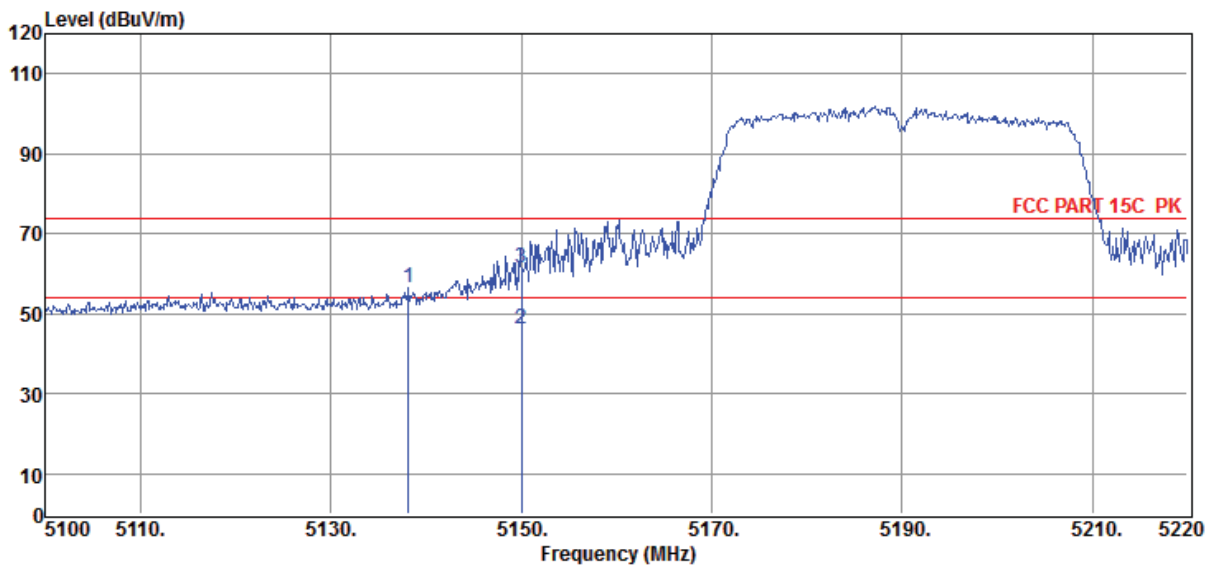


Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	5138.16	56.41	34.01	44.17	10.34	56.59	74.00	-17.41	Peak	HORIZONTAL
2	5150.00	46.04	34.02	44.17	10.36	46.25	54.00	-7.75	Average	HORIZONTAL
3	5150.00	61.16	34.02	44.17	10.36	61.37	74.00	-12.63	Peak	HORIZONTAL

- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1# D:\2019 RE1# Test Data\T\TCL\20190418 TCL Bar5.1.EM6
Test Date : 2019-04-18 **Tested By** : Sunny
EUT : JBL Bar 5.1 Surround with wireless subwoofer **Model Number** : BAR 5.1 CNTR
Power Supply : AC 120V/60Hz **Test Mode** : Tx mode
Condition : Temp:24.5'C, Humi:55%, Press:101.4kPa **Antenna/Distance** : 2018 HF 907/3m/VERTICAL
Memo : 11n40 5190Mhz

Data: 60

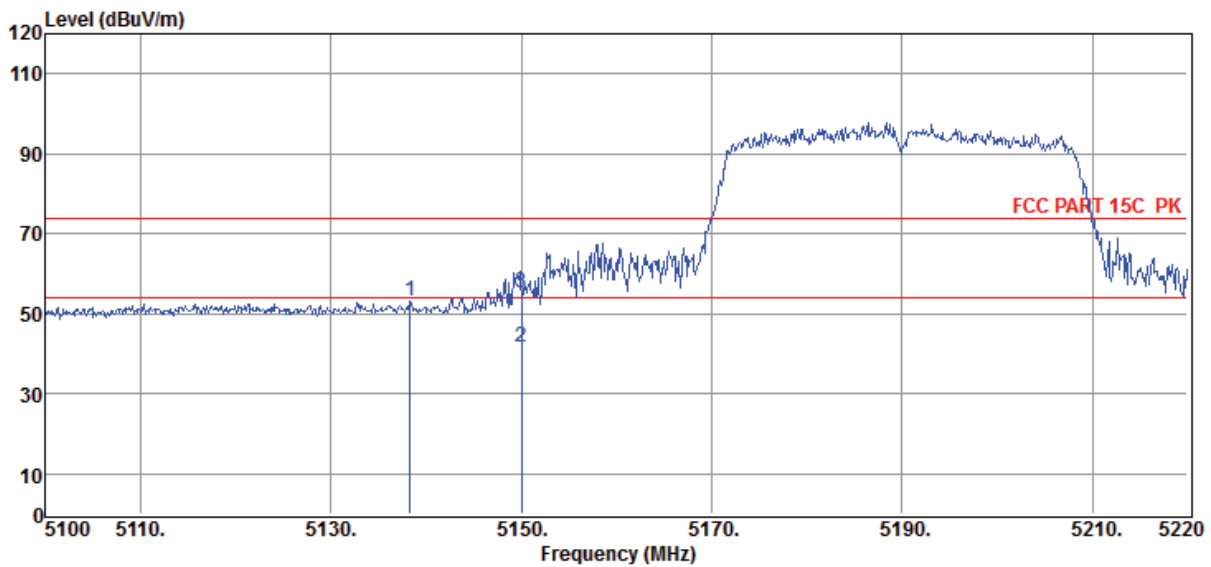


Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	5138.28	52.98	34.01	44.17	10.34	53.16	74.00	-20.84	Peak	VERTICAL
2	5150.00	41.63	34.02	44.17	10.36	41.84	54.00	-12.16	Average	VERTICAL
3	5150.00	55.19	34.02	44.17	10.36	55.40	74.00	-18.60	Peak	VERTICAL

- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1# D:\2019 RE1# Test Data\T\TCL\20190418 TCL Bar5.1.EM6
Test Date : 2019-04-18 **Tested By** : Sunny
EUT : JBL Bar 5.1 Surround with wireless subwoofer **Model Number** : BAR 5.1 CNTR
Power Supply : AC 120V/60Hz **Test Mode** : Tx mode
Condition : Temp:24.5'C, Humi:55%, Press:101.4kPa **Antenna/Distance** : 2018 HF 907/3m/HORIZONTAL
Memo : 11n40 5310Mhz

Data: 61

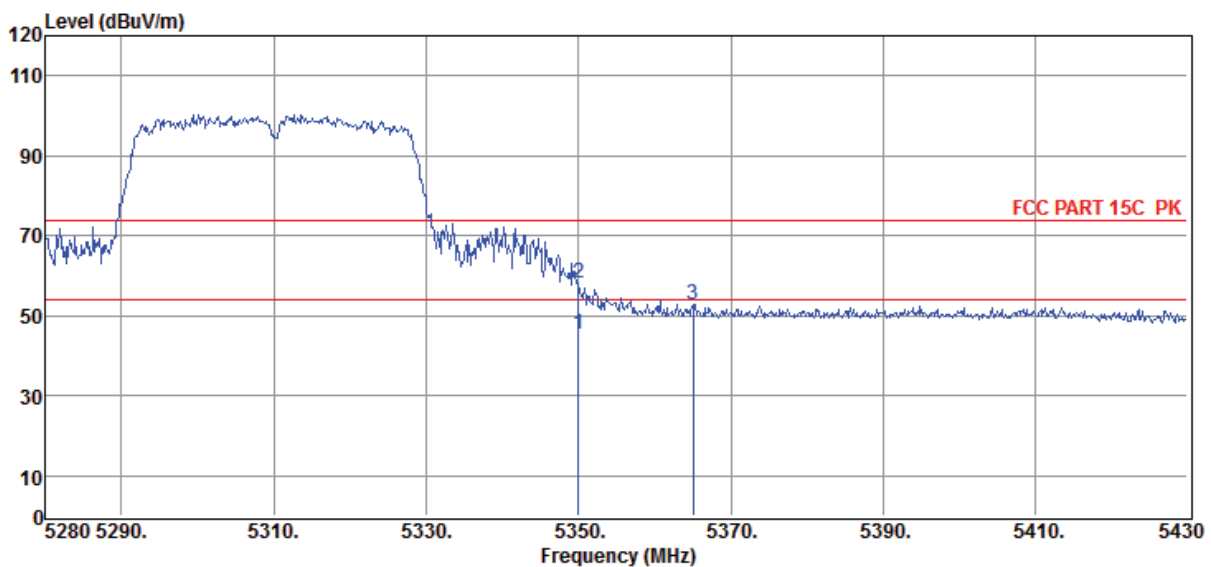


Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	5350.00	44.94	34.18	44.13	10.48	45.47	54.00	-8.53	Average	HORIZONTAL
2	5350.00	57.74	34.18	44.13	10.48	58.27	74.00	-15.73	Peak	HORIZONTAL
3	5365.05	52.27	34.20	44.12	10.48	52.83	74.00	-21.17	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1# D:\2019 RE1# Test Data\T\TCL\20190418 TCL Bar5.1.EM6
Test Date : 2019-04-18 **Tested By** : Sunny
EUT : JBL Bar 5.1 Surround with wireless subwoofer **Model Number** : BAR 5.1 CNTR
Power Supply : AC 120V/60Hz **Test Mode** : Tx mode
Condition : Temp:24.5°C, Humi:55%, Press:101.4kPa **Antenna/Distance** : 2018 HF 907/3m/VERTICAL
Memo : 11n40 5310Mhz

Data: 62

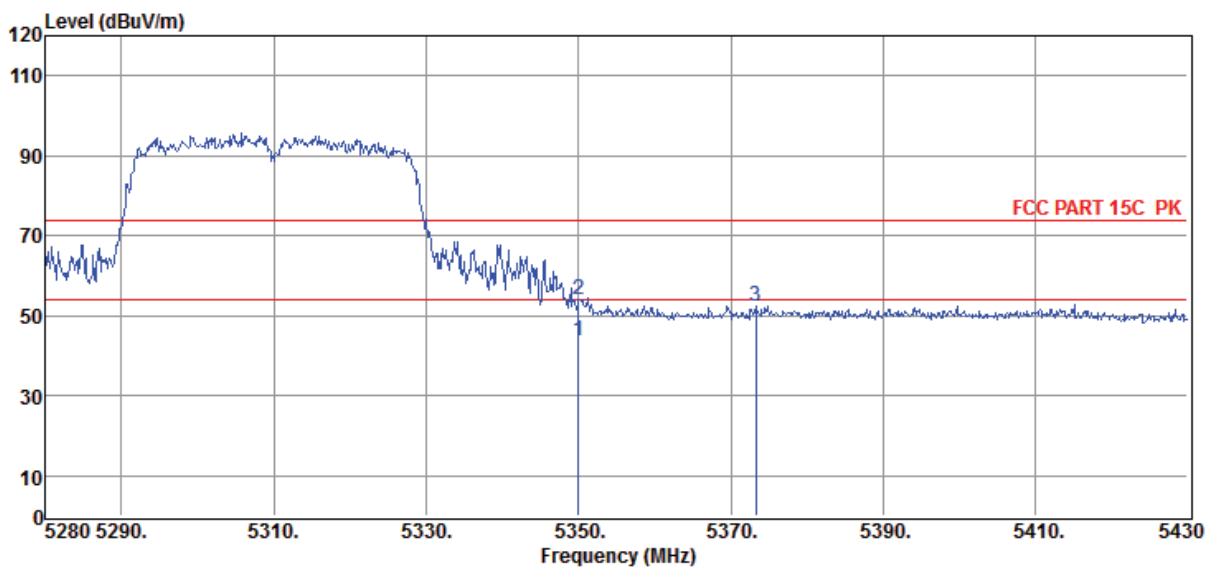


Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	5350.00	43.32	34.18	44.13	10.48	43.85	54.00	-10.15	Average	VERTICAL
2	5350.00	53.37	34.18	44.13	10.48	53.90	74.00	-20.10	Peak	VERTICAL
3	5373.30	51.88	34.20	44.12	10.48	52.44	74.00	-21.56	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1# **D:\2019 RE1# Test Data\T\TCL\20190418 TCL Bar5.1.EM6**
Test Date : 2019-04-18 **Tested By** : Sunny
EUT : JBL Bar 5.1 Surround with wireless subwoofer **Model Number** : BAR 5.1 CNTR
Power Supply : AC 120V/60Hz **Test Mode** : Tx mode
Condition : Temp:24.5°C, Humi:55%, Press:101.4kPa **Antenna/Distance** : 2018 HF 907/3m/HORIZONTAL
Memo : 11n40 5510Mhz

Data: 63

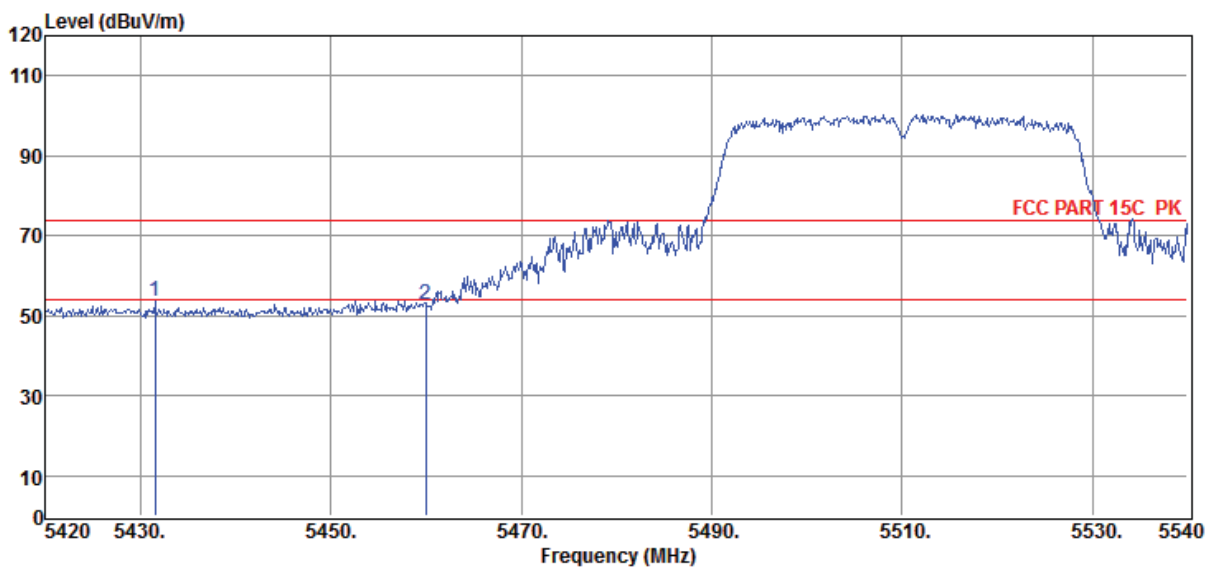


Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	5431.52	52.84	34.25	44.11	10.62	53.60	74.00	-20.40	Peak	HORIZONTAL
2	5460.00	51.81	34.27	44.10	10.74	52.72	74.00	-21.28	Peak	HORIZONTAL

- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1# D:\2019 RE1# Test Data\T\TCL\20190418 TCL Bar5.1.EM6
Test Date : 2019-04-18 **Tested By** : Sunny
EUT : JBL Bar 5.1 Surround with wireless subwoofer **Model Number** : BAR 5.1 CNTR
Power Supply : AC 120V/60Hz **Test Mode** : Tx mode
Condition : Temp:24.5'C, Humi:55%, Press:101.4kPa **Antenna/Distance** : 2018 HF 907/3m/VERTICAL
Memo : 11n40 5510Mhz

Data: 64

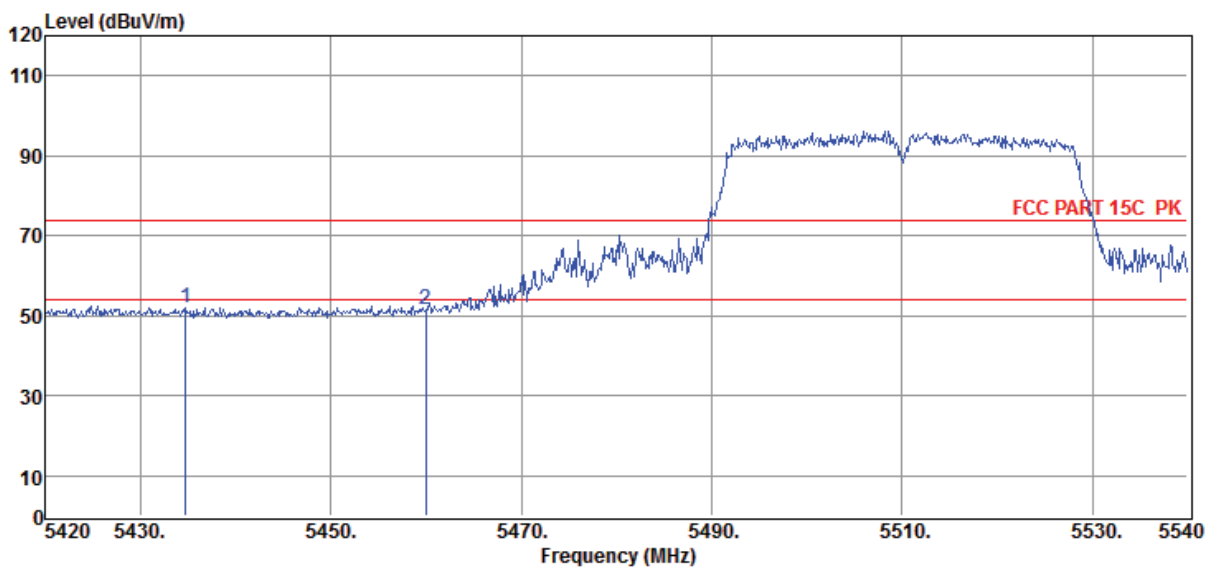


Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	5434.76	51.33	34.25	44.11	10.63	52.10	74.00	-21.90	Peak	VERTICAL
2	5460.00	50.46	34.27	44.10	10.74	51.37	74.00	-22.63	Peak	VERTICAL

- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1# D:\2019 RE1# Test Data\T\TCL\20190418 TCL Bar5.1.EM6
Test Date : 2019-04-18 **Tested By** : Sunny
EUT : JBL Bar 5.1 Surround with wireless subwoofer **Model Number** : BAR 5.1 CNTR
Power Supply : AC 120V/60Hz **Test Mode** : Tx mode
Condition : Temp:24.5°C, Humi:55%, Press:101.4kPa **Antenna/Distance** : 2018 HF 907/3m/HORIZONTAL
Memo : 11ac20 5180Mhz

Data: 65

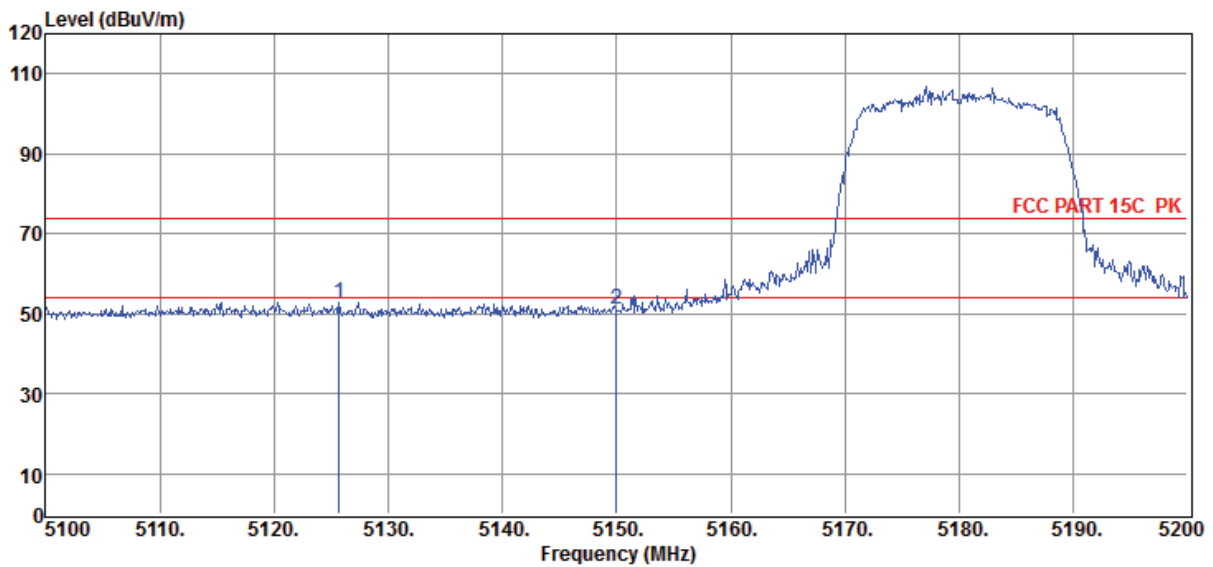


Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	5125.70	52.82	34.00	44.17	10.33	52.98	74.00	-21.02	Peak	HORIZONTAL
2	5150.00	50.87	34.02	44.17	10.36	51.08	74.00	-22.92	Peak	HORIZONTAL

- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1# D:\2019 RE1# Test Data\T\TCL\20190418 TCL Bar5.1.EM6
Test Date : 2019-04-18 **Tested By** : Sunny
EUT : JBL Bar 5.1 Surround with wireless subwoofer **Model Number** : BAR 5.1 CNTR
Power Supply : AC 120V/60Hz **Test Mode** : Tx mode
Condition : Temp:24.5°C, Humi:55%, Press:101.4kPa **Antenna/Distance** : 2018 HF 907/3m/VERTICAL
Memo : 11ac20 5180Mhz

Data: 66

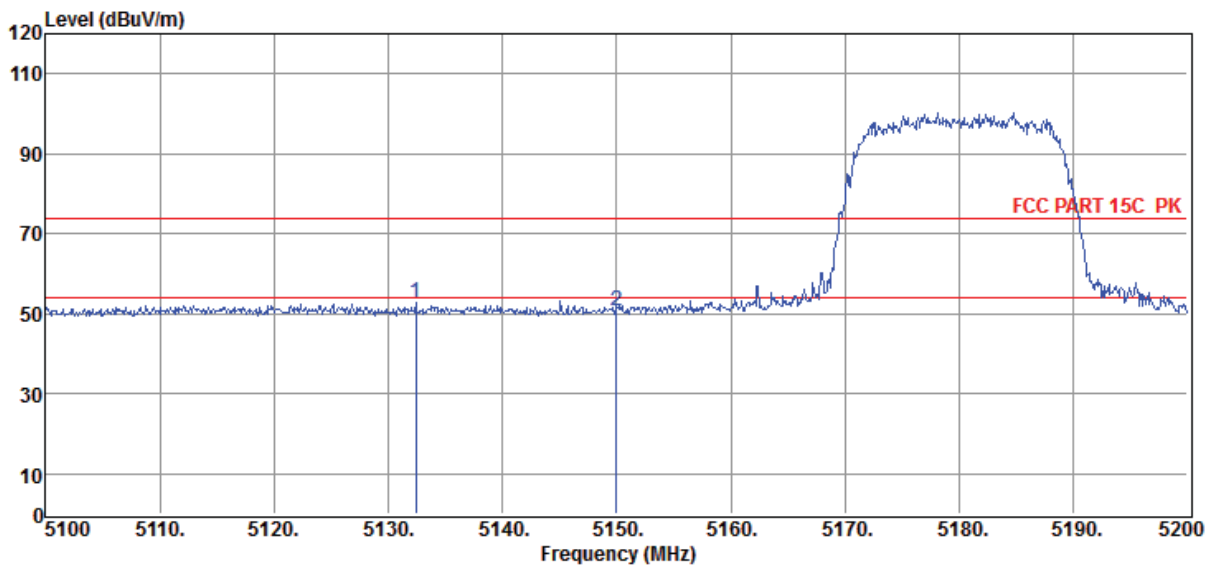


Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	5132.40	52.44	34.01	44.17	10.34	52.62	74.00	-21.38	Peak	VERTICAL
2	5150.00	50.60	34.02	44.17	10.36	50.81	74.00	-23.19	Peak	VERTICAL

- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1# D:\2019 RE1# Test Data\T\TCL\20190418 TCL Bar5.1.EM6
Test Date : 2019-04-18 **Tested By** : Sunny
EUT : JBL Bar 5.1 Surround with wireless subwoofer **Model Number** : BAR 5.1 CNTR
Power Supply : AC 120V/60Hz **Test Mode** : Tx mode
Condition : Temp:24.5°C, Humi:55%, Press:101.4kPa **Antenna/Distance** : 2018 HF 907/3m/HORIZONTAL
Memo : 11ac20 5320Mhz

Data: 67

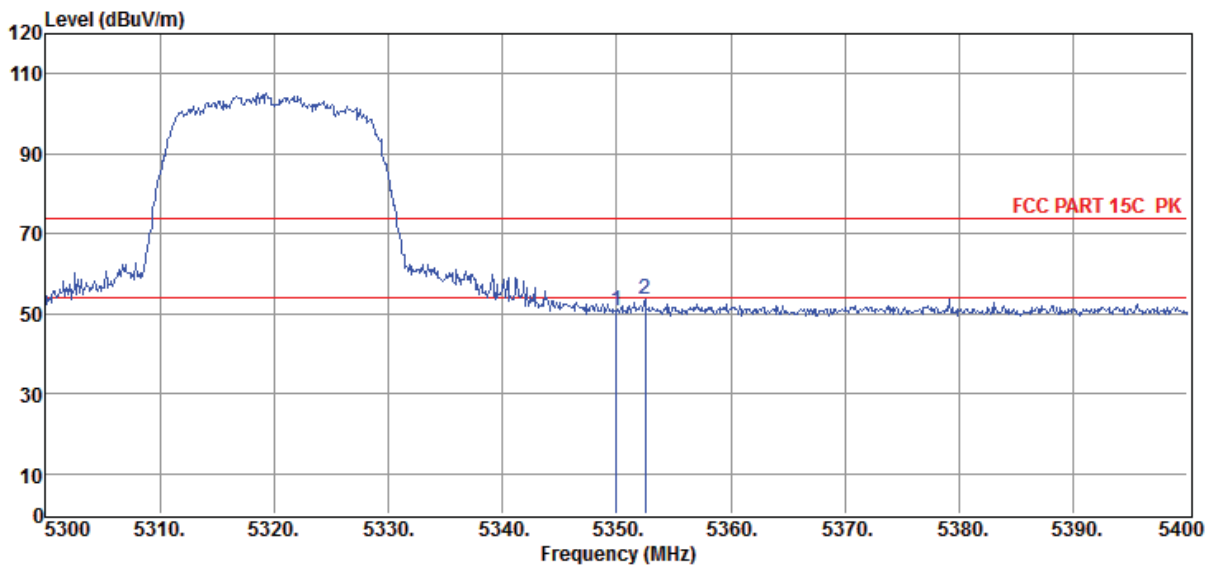


Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	5350.00	50.34	34.18	44.13	10.48	50.87	74.00	-23.13	Peak	HORIZONTAL
2	5352.50	52.92	34.19	44.13	10.48	53.46	74.00	-20.54	Peak	HORIZONTAL

- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1# **D:\2019 RE1# Test Data\T\TCL\20190418 TCL Bar5.1.EM6**
Test Date : 2019-04-18 **Tested By** : Sunny
EUT : JBL Bar 5.1 Surround with wireless subwoofer **Model Number** : BAR 5.1 CNTR
Power Supply : AC 120V/60Hz **Test Mode** : Tx mode
Condition : Temp:24.5°C, Humi:55%, Press:101.4kPa **Antenna/Distance** : 2018 HF 907/3m/VERTICAL
Memo : 11ac20 5320Mhz

Data: 68

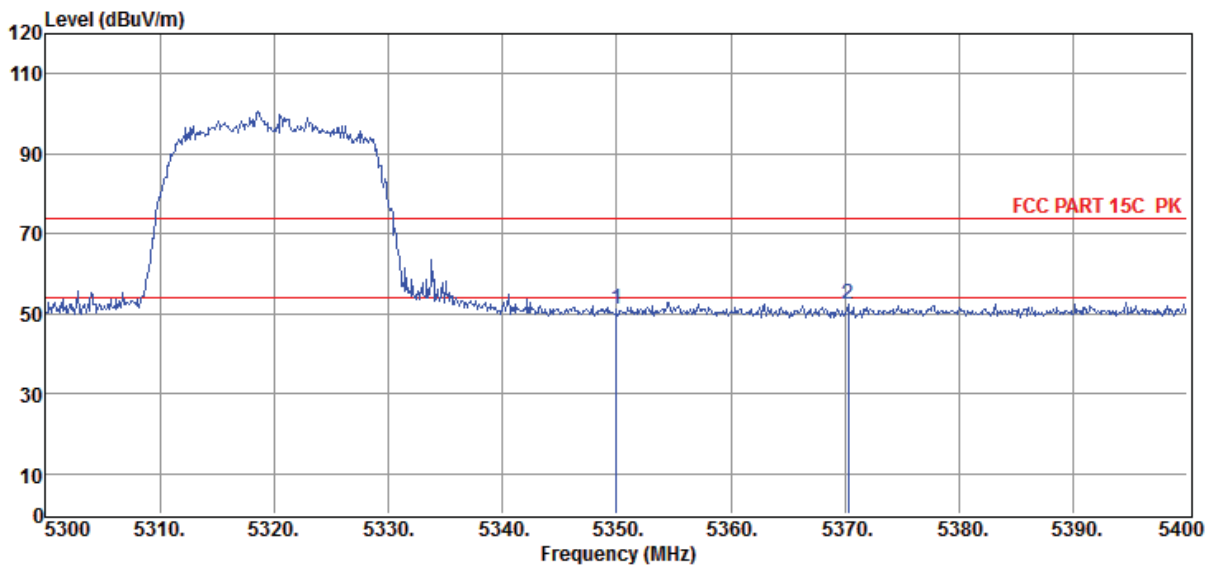


Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	5350.00	50.46	34.18	44.13	10.48	50.99	74.00	-23.01	Peak	VERTICAL
2	5370.30	51.79	34.20	44.12	10.48	52.35	74.00	-21.65	Peak	VERTICAL

- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1# D:\2019 RE1# Test Data\T\TCL\20190418 TCL Bar5.1.EM6
Test Date : 2019-04-18 **Tested By** : Sunny
EUT : JBL Bar 5.1 Surround with wireless subwoofer **Model Number** : BAR 5.1 CNTR
Power Supply : AC 120V/60Hz **Test Mode** : Tx mode
Condition : Temp:24.5'C, Humi:55%, Press:101.4kPa **Antenna/Distance** : 2018 HF 907/3m/HORIZONTAL
Memo : 11ac20 5500Mhz

Data: 69

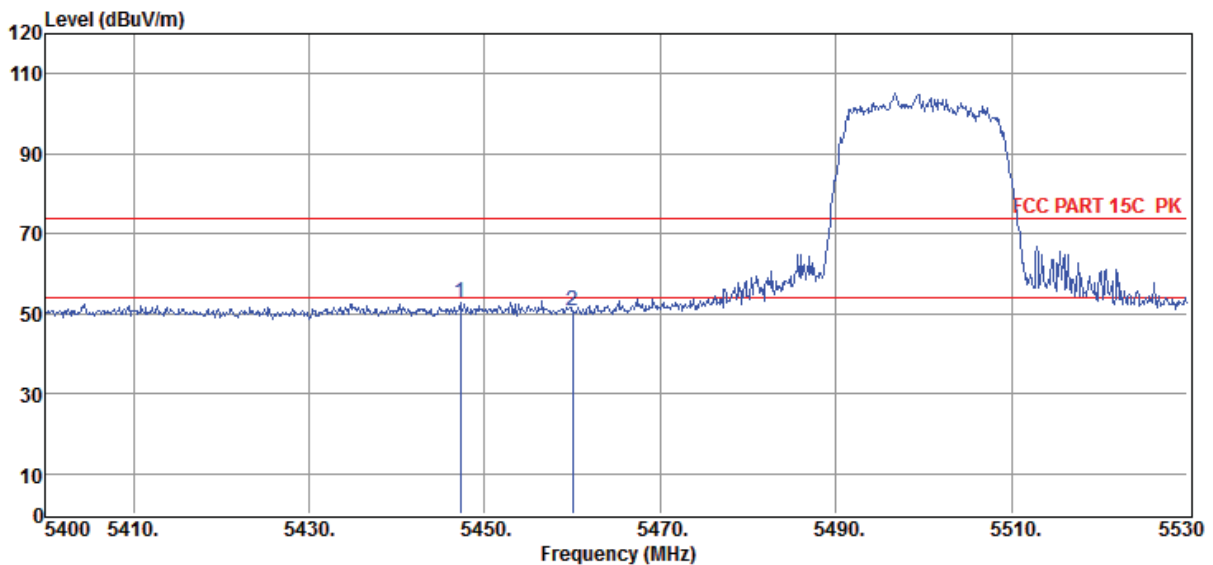


Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	5447.19	52.07	34.26	44.11	10.68	52.90	74.00	-21.10	Peak	HORIZONTAL
2	5460.00	49.68	34.27	44.10	10.74	50.59	74.00	-23.41	Peak	HORIZONTAL

- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1# D:\2019 RE1# Test Data\T\TCL\20190418 TCL Bar5.1.EM6
Test Date : 2019-04-18 **Tested By** : Sunny
EUT : JBL Bar 5.1 Surround with wireless subwoofer **Model Number** : BAR 5.1 CNTR
Power Supply : AC 120V/60Hz **Test Mode** : Tx mode
Condition : Temp:24.5'C, Humi:55%, Press:101.4kPa **Antenna/Distance** : 2018 HF 907/3m/VERTICAL
Memo : 11ac20 5500Mhz

Data: 70

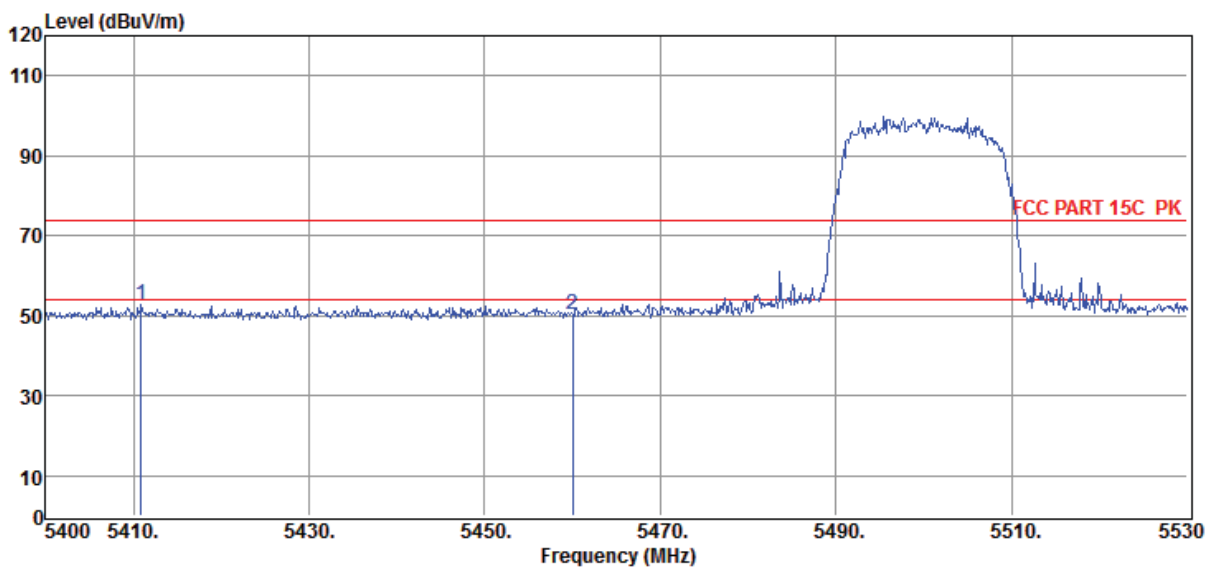


Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	5410.92	52.05	34.23	44.11	10.53	52.70	74.00	-21.30	Peak	VERTICAL
2	5460.00	49.48	34.27	44.10	10.74	50.39	74.00	-23.61	Peak	VERTICAL

- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1# D:\2019 RE1# Test Data\T\TCL\20190418 TCL Bar5.1.EM6
Test Date : 2019-04-18 **Tested By** : Sunny
EUT : JBL Bar 5.1 Surround with wireless subwoofer **Model Number** : BAR 5.1 CNTR
Power Supply : AC 120V/60Hz **Test Mode** : Tx mode
Condition : Temp:24.5'C, Humi:55%, Press:101.4kPa **Antenna/Distance** : 2018 HF 907/3m/HORIZONTAL
Memo : 11ac40 5190Mhz

Data: 71

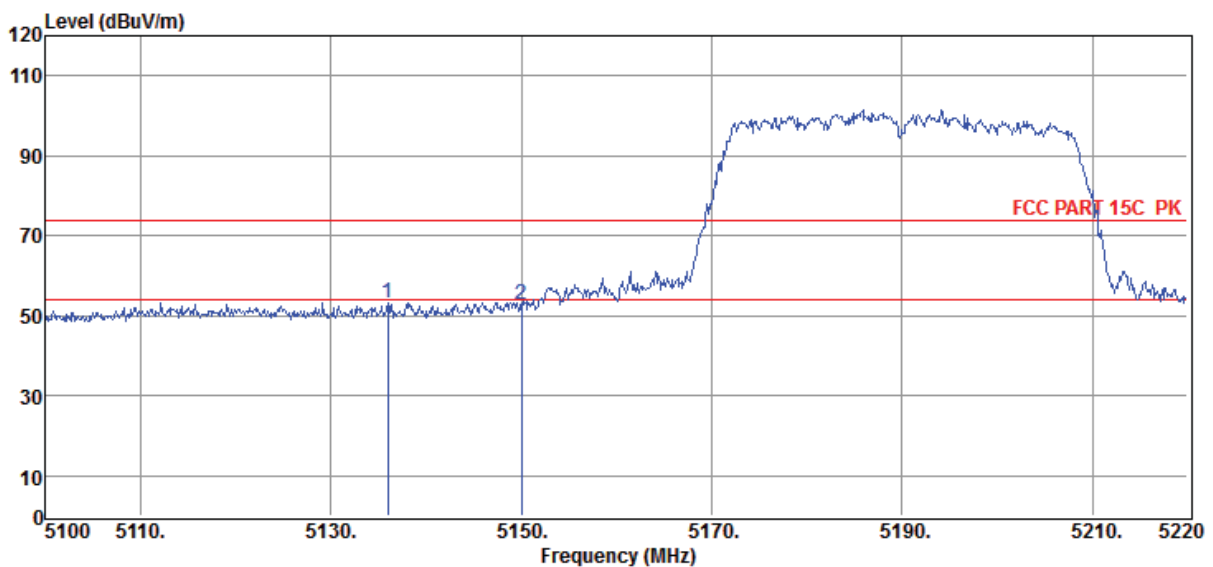


Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	5136.00	53.16	34.01	44.17	10.34	53.34	74.00	-20.66	Peak	HORIZONTAL
2	5150.00	52.78	34.02	44.17	10.36	52.99	74.00	-21.01	Peak	HORIZONTAL

- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1# D:\2019 RE1# Test Data\T\TCL\20190418 TCL Bar5.1.EM6
Test Date : 2019-04-18 **Tested By** : Sunny
EUT : JBL Bar 5.1 Surround with wireless subwoofer **Model Number** : BAR 5.1 CNTR
Power Supply : AC 120V/60Hz **Test Mode** : Tx mode
Condition : Temp:24.5'C, Humi:55%, Press:101.4kPa **Antenna/Distance** : 2018 HF 907/3m/VERTICAL
Memo : 11ac40 5190Mhz

Data: 72

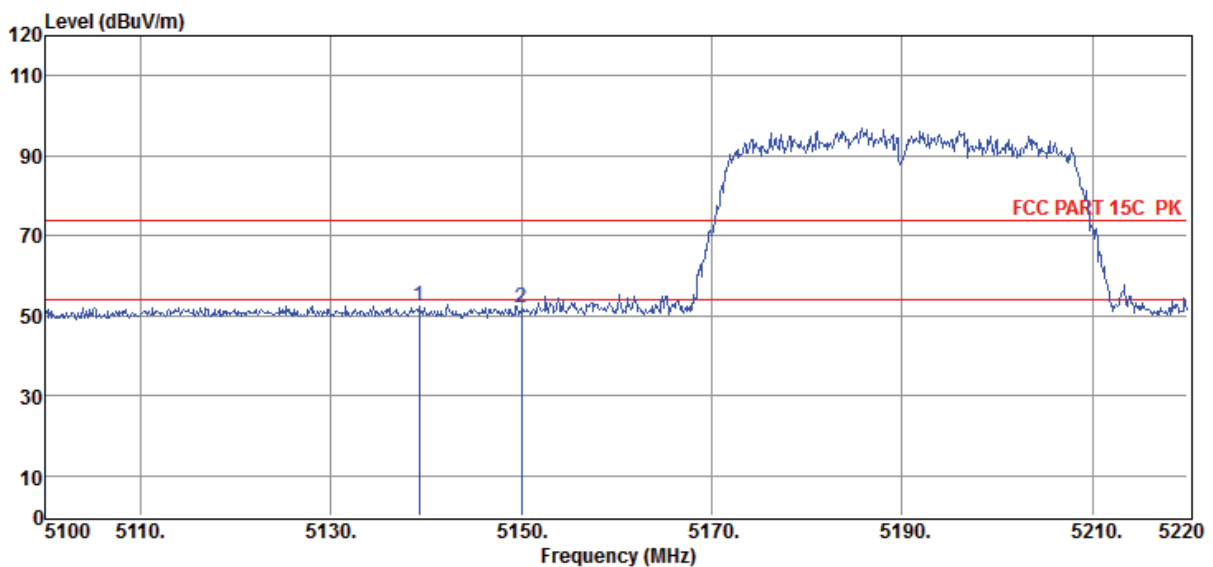


Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	5139.24	52.36	34.02	44.17	10.34	52.55	74.00	-21.45	Peak	VERTICAL
2	5150.00	51.70	34.02	44.17	10.36	51.91	74.00	-22.09	Peak	VERTICAL

- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1# D:\2019 RE1# Test Data\T\TCL\20190418 TCL Bar5.1.EM6
Test Date : 2019-04-18 **Tested By** : Sunny
EUT : JBL Bar 5.1 Surround with wireless subwoofer **Model Number** : BAR 5.1 CNTR
Power Supply : AC 120V/60Hz **Test Mode** : Tx mode
Condition : Temp:24.5'C, Humi:55%, Press:101.4kPa **Antenna/Distance** : 2018 HF 907/3m/HORIZONTAL
Memo : 11ac40 5310Mhz

Data: 73

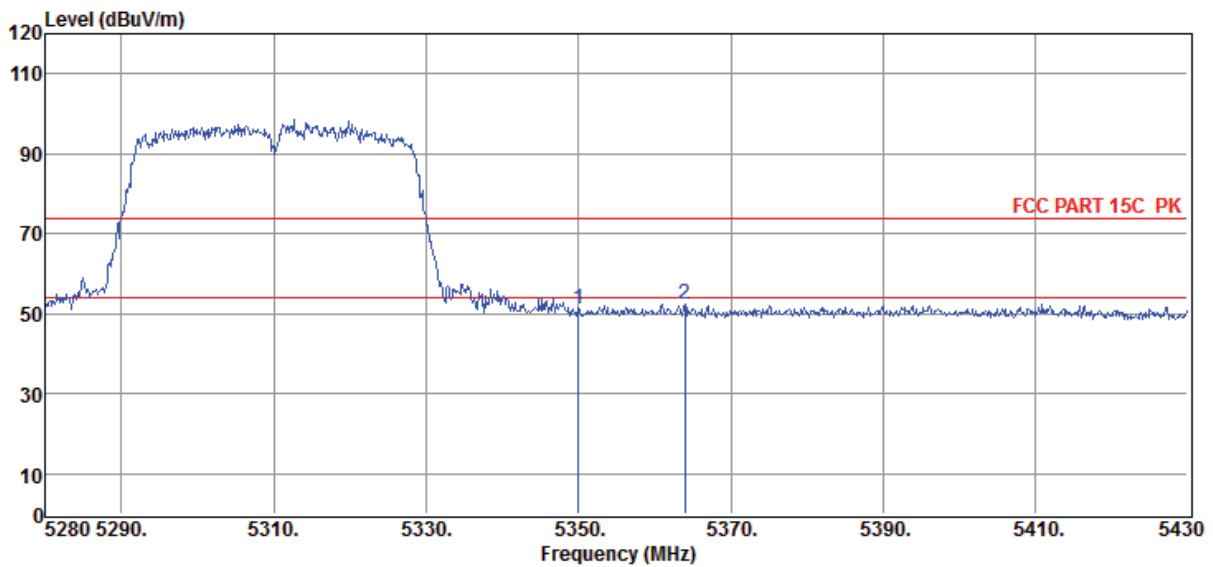


Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	5350.00	50.45	34.18	44.13	10.48	50.98	74.00	-23.02	Peak	HORIZONTAL
2	5364.00	51.75	34.19	44.12	10.48	52.30	74.00	-21.70	Peak	HORIZONTAL

- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1# D:\2019 RE1# Test Data\T\TCL\20190418 TCL Bar5.1.EM6
Test Date : 2019-04-18 **Tested By** : Sunny
EUT : JBL Bar 5.1 Surround with wireless subwoofer **Model Number** : BAR 5.1 CNTR
Power Supply : AC 120V/60Hz **Test Mode** : Tx mode
Condition : Temp:24.5'C, Humi:55%, Press:101.4kPa **Antenna/Distance** : 2018 HF 907/3m/VERTICAL
Memo : 11ac40 5310Mhz

Data: 74

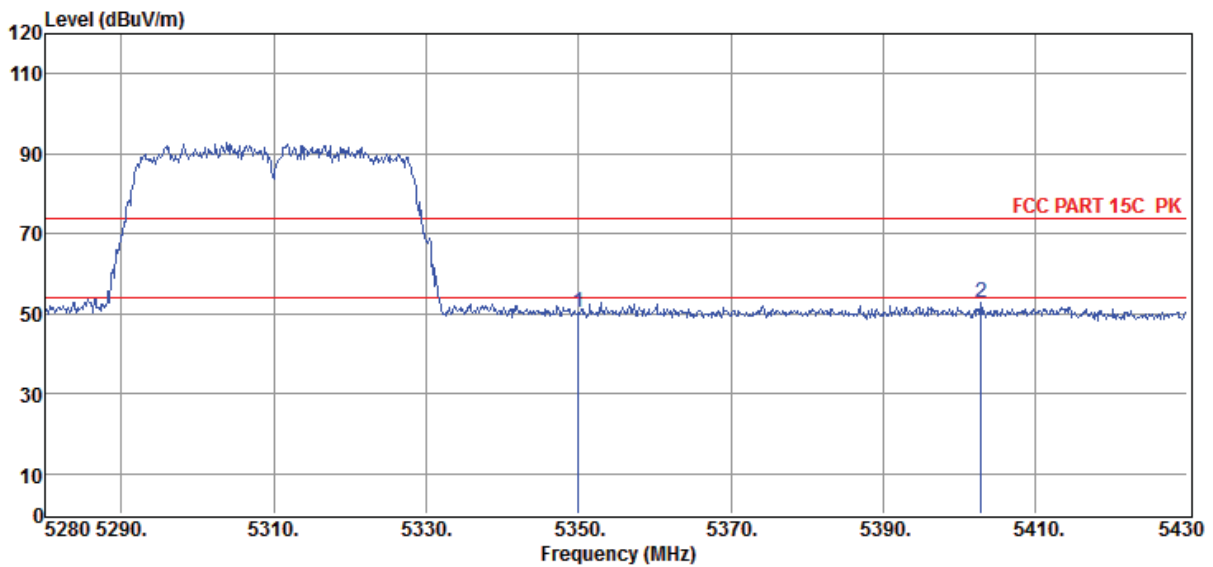


Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	5350.00	49.61	34.18	44.13	10.48	50.14	74.00	-23.86	Peak	VERTICAL
2	5402.85	52.18	34.23	44.11	10.49	52.79	74.00	-21.21	Peak	VERTICAL

- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1# D:\2019 RE1# Test Data\T\TCL\20190418 TCL Bar5.1.EM6
Test Date : 2019-04-18 **Tested By** : Sunny
EUT : JBL Bar 5.1 Surround with wireless subwoofer **Model Number** : BAR 5.1 CNTR
Power Supply : AC 120V/60Hz **Test Mode** : Tx mode
Condition : Temp:24.5°C, Humi:55%, Press:101.4kPa **Antenna/Distance** : 2018 HF 907/3m/HORIZONTAL
Memo : 11ac40 5510Mhz

Data: 75

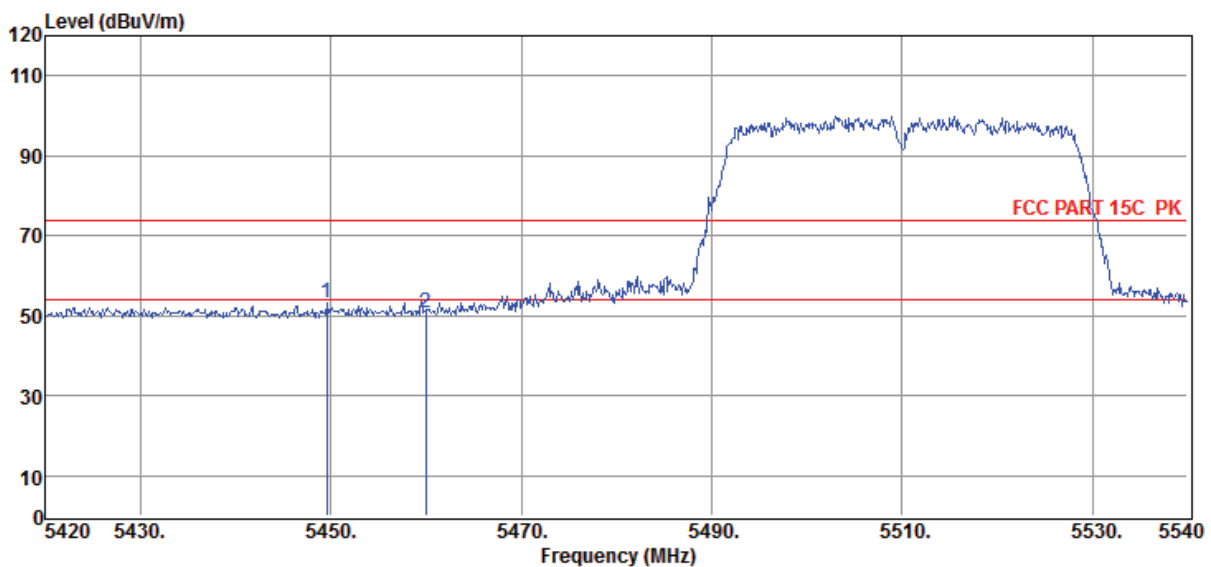


Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	5449.52	52.27	34.26	44.11	10.69	53.11	74.00	-20.89	Peak	HORIZONTAL
2	5460.00	49.62	34.27	44.10	10.74	50.53	74.00	-23.47	Peak	HORIZONTAL

- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1# D:\2019 RE1# Test Data\T\TCL\20190418 TCL Bar5.1.EM6
Test Date : 2019-04-18 **Tested By** : Sunny
EUT : JBL Bar 5.1 Surround with wireless subwoofer **Model Number** : BAR 5.1 CNTR
Power Supply : AC 120V/60Hz **Test Mode** : Tx mode
Condition : Temp:24.5'C, Humi:55%, Press:101.4kPa **Antenna/Distance** : 2018 HF 907/3m/VERTICAL
Memo : 11ac40 5510Mhz

Data: 76

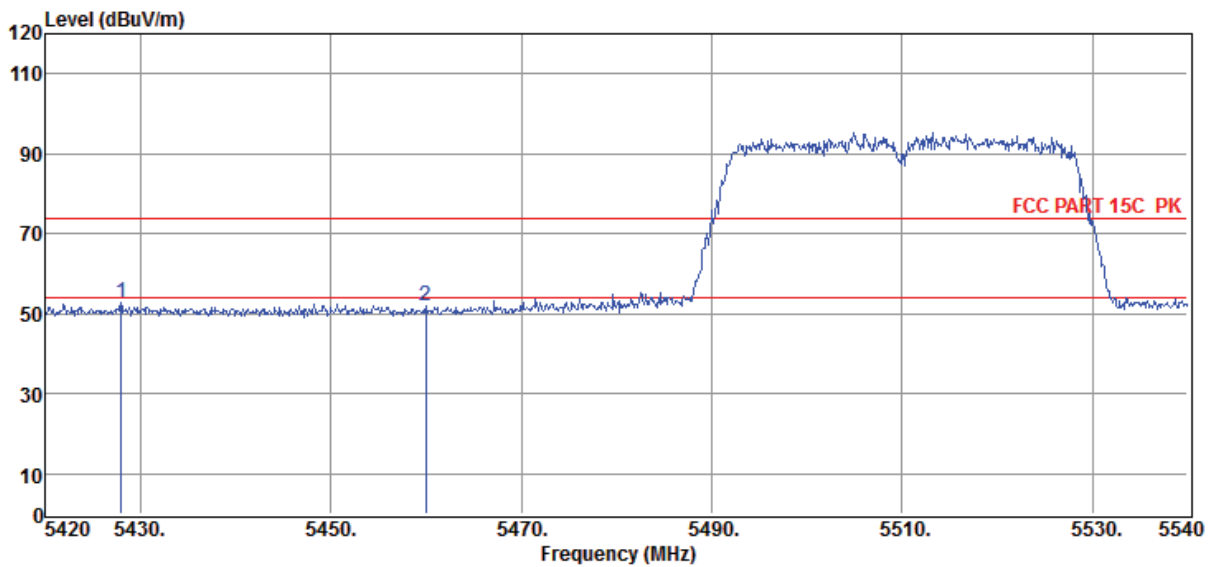


Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	5427.92	52.21	34.24	44.11	10.60	52.94	74.00	-21.06	Peak	VERTICAL
2	5460.00	51.02	34.27	44.10	10.74	51.93	74.00	-22.07	Peak	VERTICAL

- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1# D:\2019 RE1# Test Data\T\TCL\20190418 TCL Bar5.1.EM6
Test Date : 2019-04-18 **Tested By** : Sunny
EUT : JBL Bar 5.1 Surround with wireless subwoofer **Model Number** : BAR 5.1 CNTR
Power Supply : AC 120V/60Hz **Test Mode** : Tx mode
Condition : Temp:24.5°C, Humi:55%, Press:101.4kPa **Antenna/Distance** : 2018 HF 907/3m/HORIZONTAL
Memo : 11ac80 5210Mhz

Data: 77

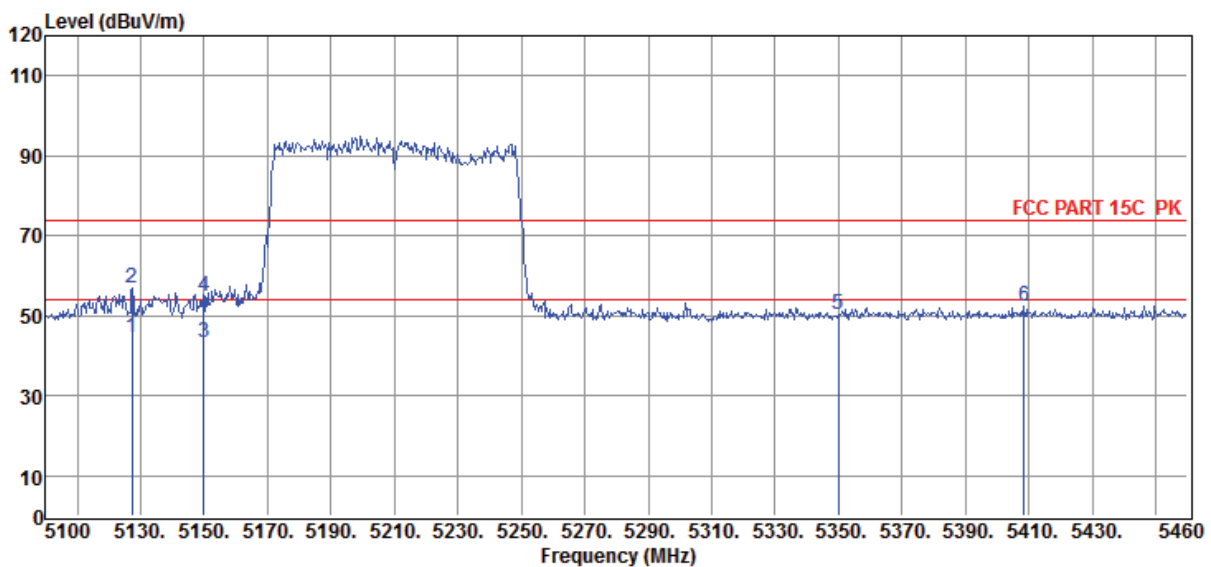


Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	5127.36	44.37	34.01	44.17	10.33	44.54	54.00	-9.46	Average	HORIZONTAL
2	5127.36	56.55	34.01	44.17	10.33	56.72	74.00	-17.28	Peak	HORIZONTAL
3	5150.00	43.22	34.02	44.17	10.36	43.43	54.00	-10.57	Average	HORIZONTAL
4	5150.00	54.66	34.02	44.17	10.36	54.87	74.00	-19.13	Peak	HORIZONTAL
5	5350.00	49.89	34.18	44.13	10.48	50.42	74.00	-23.58	Peak	HORIZONTAL
6	5408.52	51.53	34.23	44.11	10.52	52.17	74.00	-21.83	Peak	HORIZONTAL

- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1# D:\2019 RE1# Test Data\T\TCL\20190418 TCL Bar5.1.EM6
Test Date : 2019-04-18 **Tested By** : Sunny
EUT : JBL Bar 5.1 Surround with wireless subwoofer **Model Number** : BAR 5.1 CNTR
Power Supply : AC 120V/60Hz **Test Mode** : Tx mode
Condition : Temp:24.5°C, Humi:55%, Press:101.4kPa **Antenna/Distance** : 2018 HF 907/3m/VERTICAL
Memo : 11ac80 5210Mhz

Data: 78

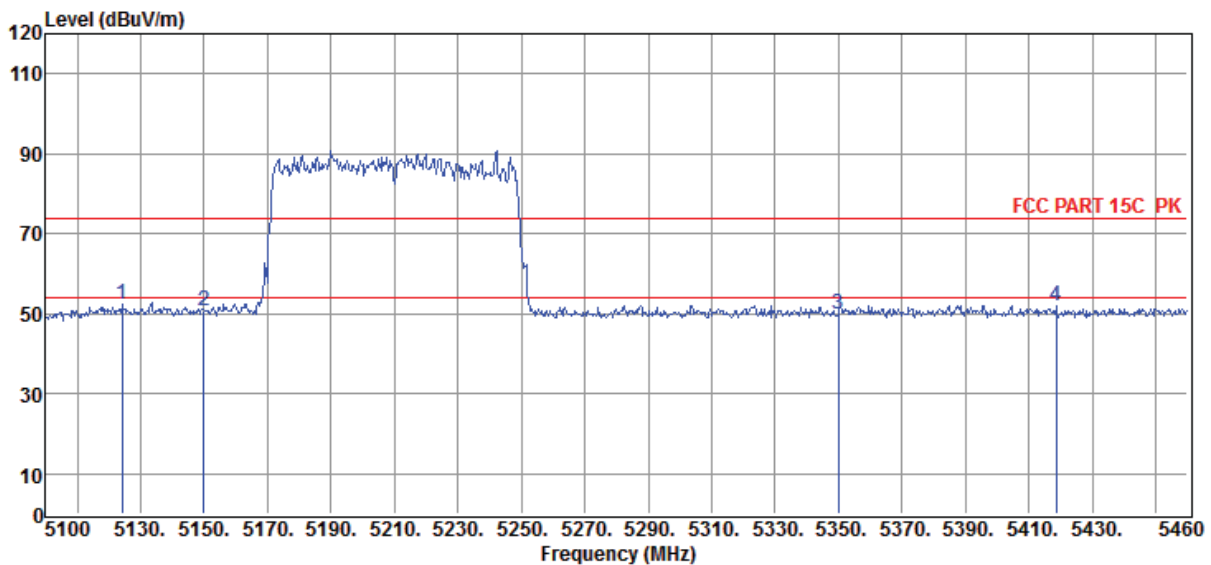


Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	5124.12	52.36	34.00	44.17	10.32	52.51	74.00	-21.49	Peak	VERTICAL
2	5150.00	50.71	34.02	44.17	10.36	50.92	74.00	-23.08	Peak	VERTICAL
3	5350.00	49.28	34.18	44.13	10.48	49.81	74.00	-24.19	Peak	VERTICAL
4	5418.60	51.44	34.24	44.11	10.56	52.13	74.00	-21.87	Peak	VERTICAL

- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1# D:\2019 RE1# Test Data\T\TCL\20190418 TCL Bar5.1.EM6
Test Date : 2019-04-18 **Tested By** : Sunny
EUT : JBL Bar 5.1 Surround with wireless subwoofer **Model Number** : BAR 5.1 CNTR
Power Supply : AC 120V/60Hz **Test Mode** : Tx mode
Condition : Temp:24.5'C, Humi:55%, Press:101.4kPa **Antenna/Distance** : 2018 HF 907/3m/HORIZONTAL
Memo : 11ac80 5290Mhz

Data: 79

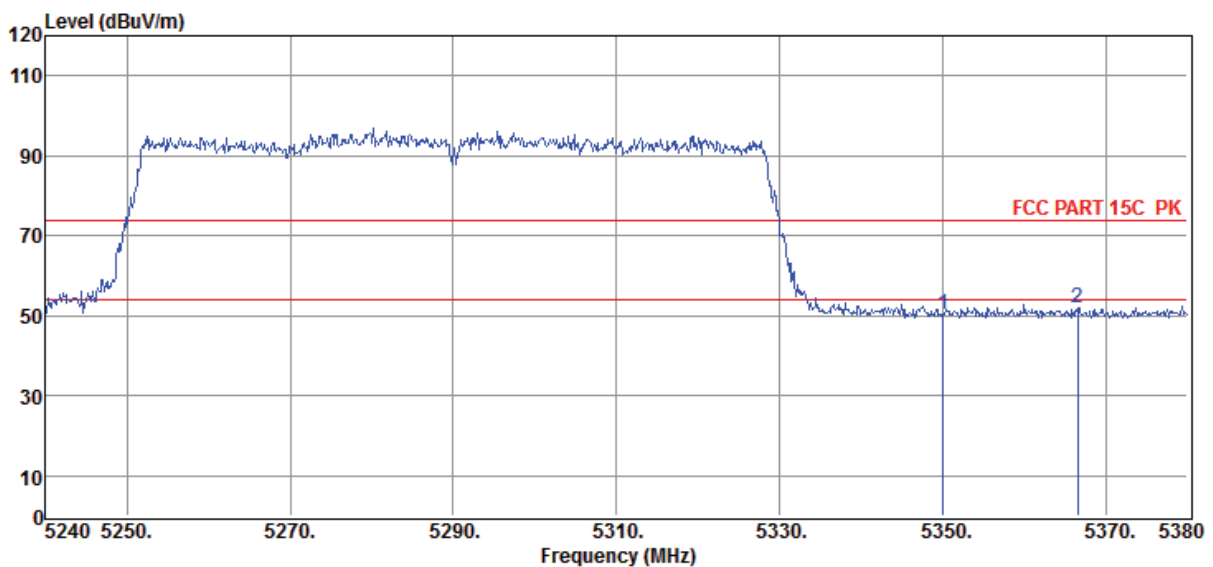


Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	5350.00	49.60	34.18	44.13	10.48	50.13	74.00	-23.87	Peak	HORIZONTAL
2	5366.56	51.34	34.20	44.12	10.48	51.90	74.00	-22.10	Peak	HORIZONTAL

- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1# D:\2019 RE1# Test Data\T\TCL\20190418 TCL Bar5.1.EM6
Test Date : 2019-04-18 **Tested By** : Sunny
EUT : JBL Bar 5.1 Surround with wireless subwoofer **Model Number** : BAR 5.1 CNTR
Power Supply : AC 120V/60Hz **Test Mode** : Tx mode
Condition : Temp:24.5°C, Humi:55%, Press:101.4kPa **Antenna/Distance** : 2018 HF 907/3m/VERTICAL
Memo : 11ac80 5290Mhz

Data: 80

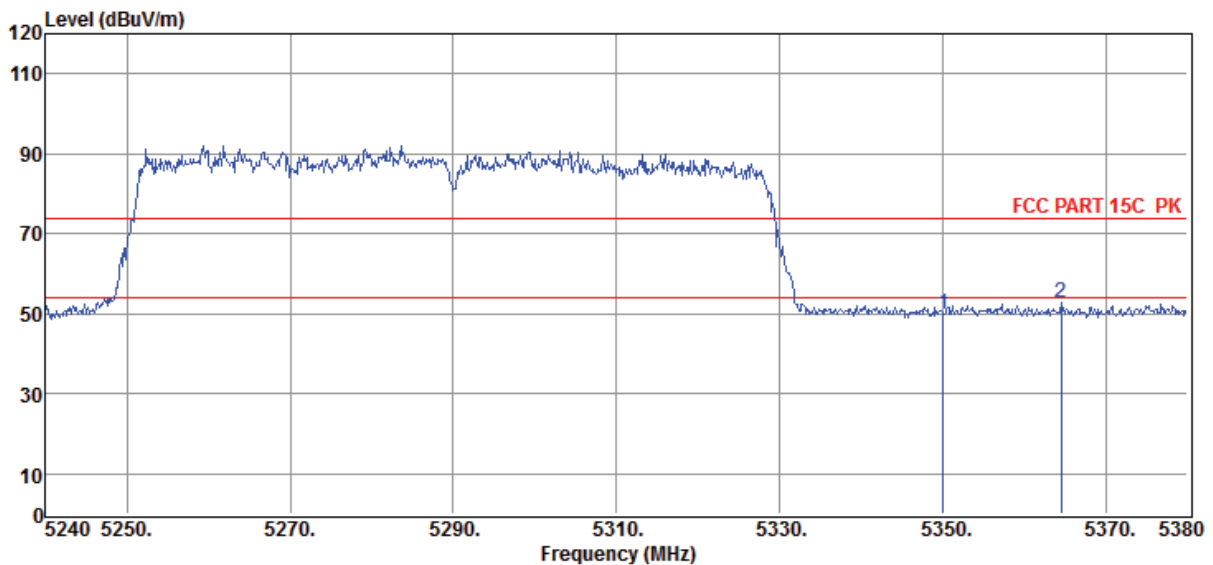


Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	5350.00	49.55	34.18	44.13	10.48	50.08	74.00	-23.92	Peak	VERTICAL
2	5364.46	52.09	34.20	44.12	10.48	52.65	74.00	-21.35	Peak	VERTICAL

- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1# D:\2019 RE1# Test Data\T\TCL\20190418 TCL Bar5.1.EM6
Test Date : 2019-04-18 **Tested By** : Sunny
EUT : JBL Bar 5.1 Surround with wireless subwoofer **Model Number** : BAR 5.1 CNTR
Power Supply : AC 120V/60Hz **Test Mode** : Tx mode
Condition : Temp:24.5'C, Humi:55%, Press:101.4kPa **Antenna/Distance** : 2018 HF 907/3m/HORIZONTAL
Memo : 11ac80 5530Mhz

Data: 81

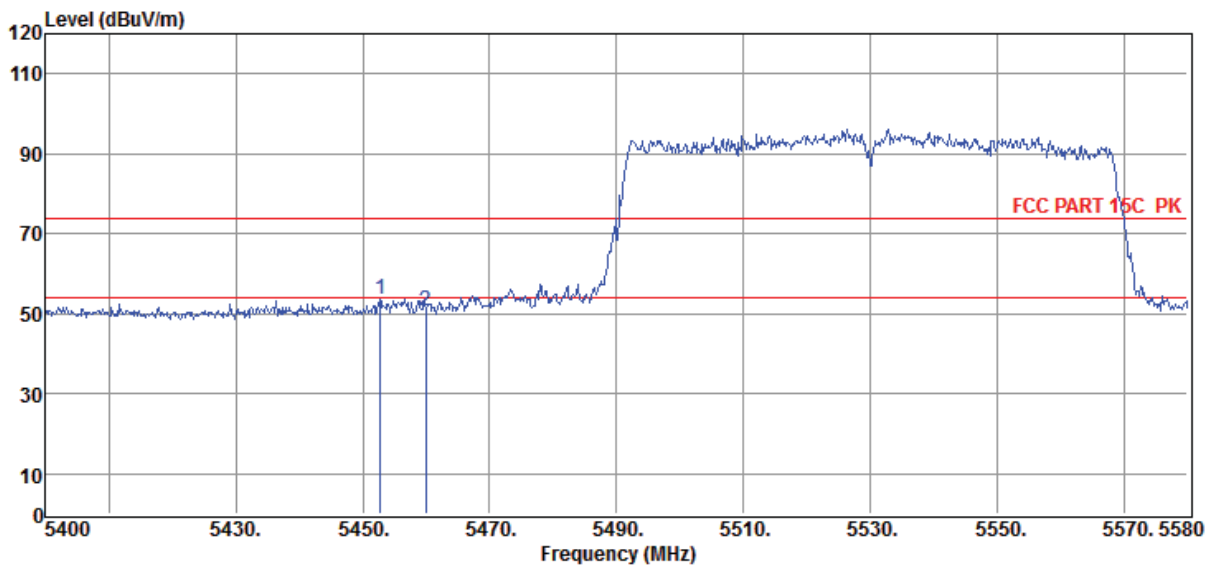


Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	5452.74	52.76	34.26	44.10	10.71	53.63	74.00	-20.37	Peak	HORIZONTAL
2	5460.00	49.76	34.27	44.10	10.74	50.67	74.00	-23.33	Peak	HORIZONTAL

- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 1# D:\2019 RE1# Test Data\T\TCL\20190418 TCL Bar5.1.EM6
Test Date : 2019-04-18 **Tested By** : Sunny
EUT : JBL Bar 5.1 Surround with wireless subwoofer **Model Number** : BAR 5.1 CNTR
Power Supply : AC 120V/60Hz **Test Mode** : Tx mode
Condition : Temp:24.5°C, Humi:55%, Press:101.4kPa **Antenna/Distance** : 2018 HF 907/3m/VERTICAL
Memo : 11ac80 5530Mhz


Data: 82

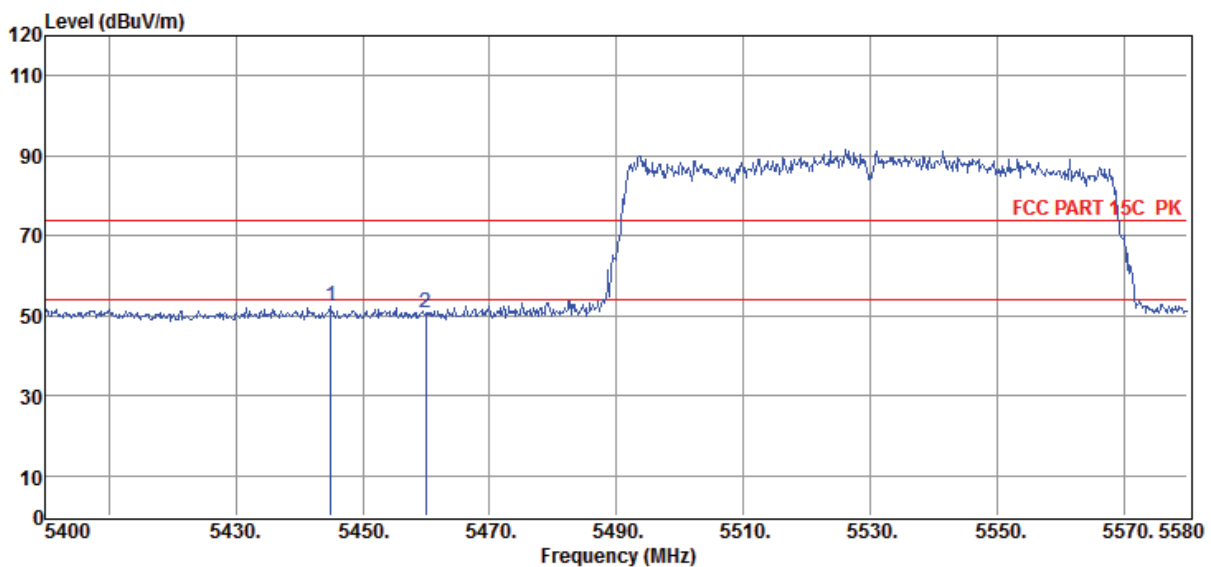

Item (Mark)	Freq. (MHz)	Read Level (dBµV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Result Level (dBµV/m)	Limit Line (dBµV/m)	Over Limit (dB)	Detector	Polarization
1	5445.00	51.62	34.26	44.11	10.67	52.44	74.00	-21.56	Peak	VERTICAL
2	5460.00	49.68	34.27	44.10	10.74	50.59	74.00	-23.41	Peak	VERTICAL


- Note: 1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

11A ANT1 5745

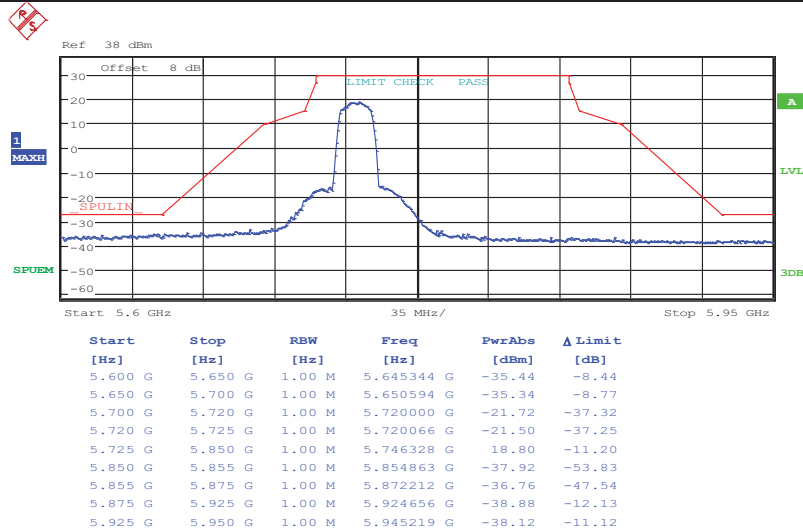


Date: 29.APR.2019 10:38:51

11A ANT2 5745

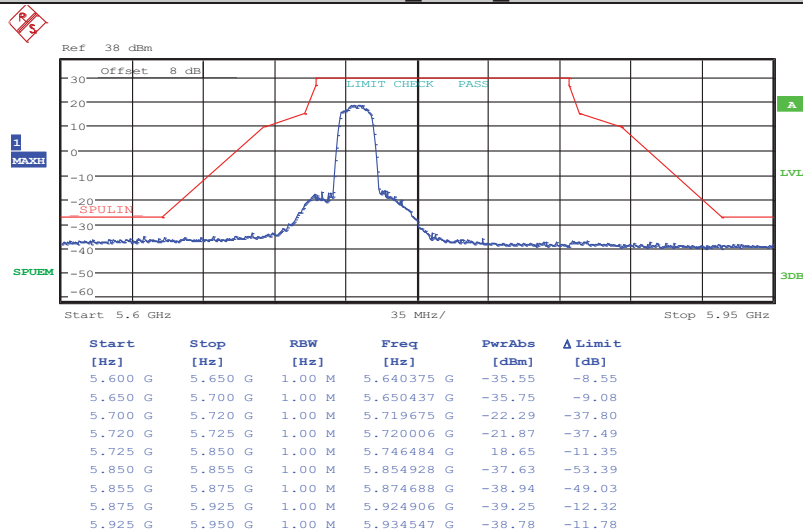


Date: 29.APR.2019 10:44:12


11A ANT1 5785

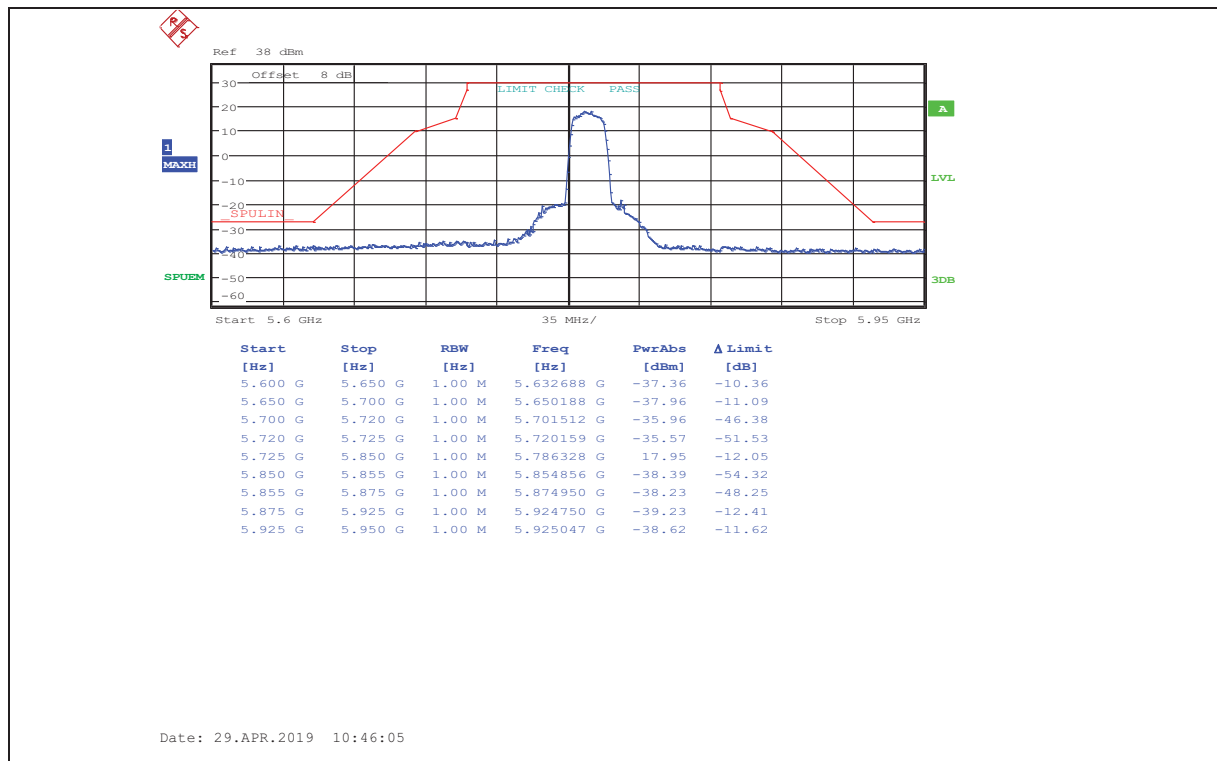


11A_ANT2_5785

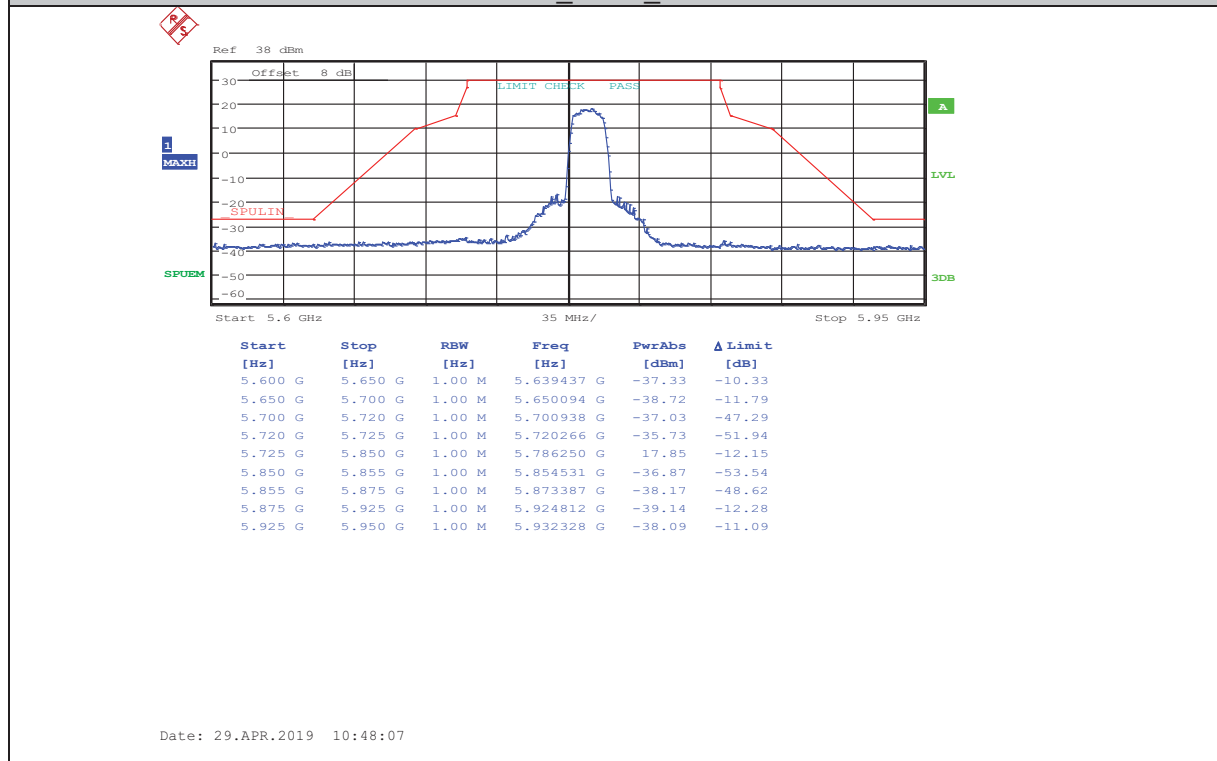


11A_ANT1_5825

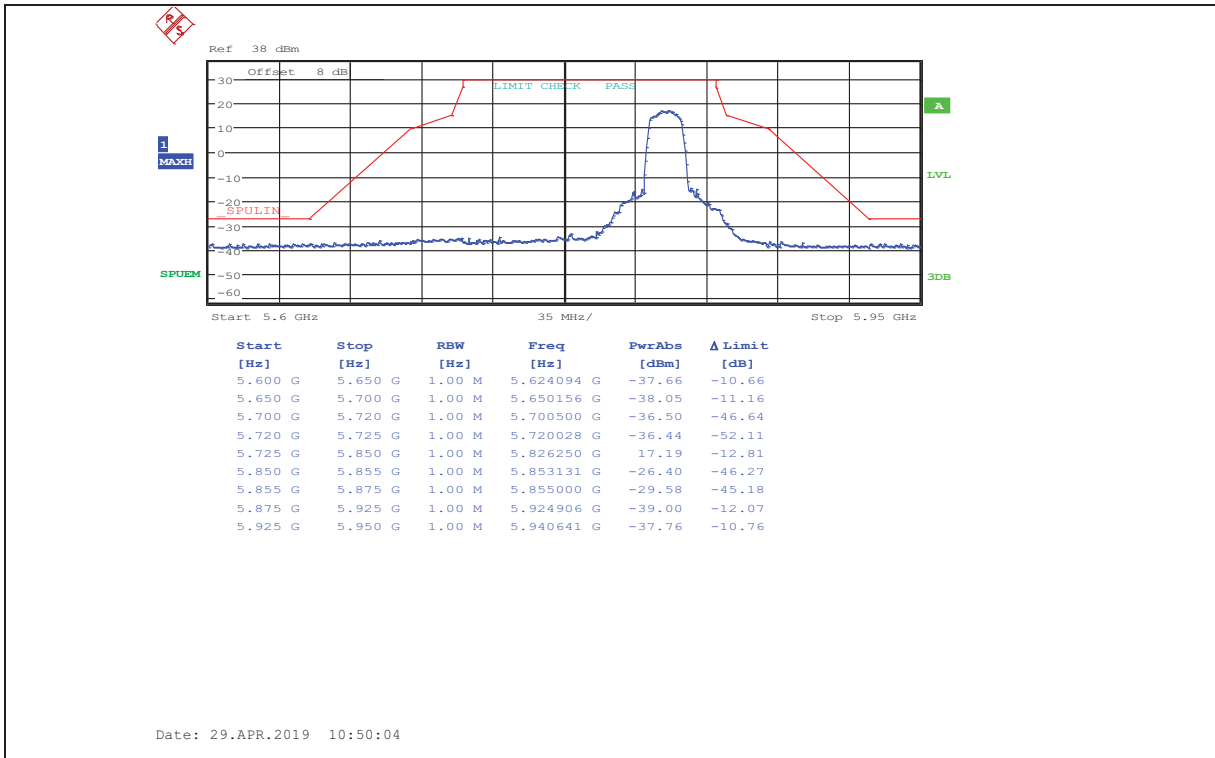


11A_ANT2_5825

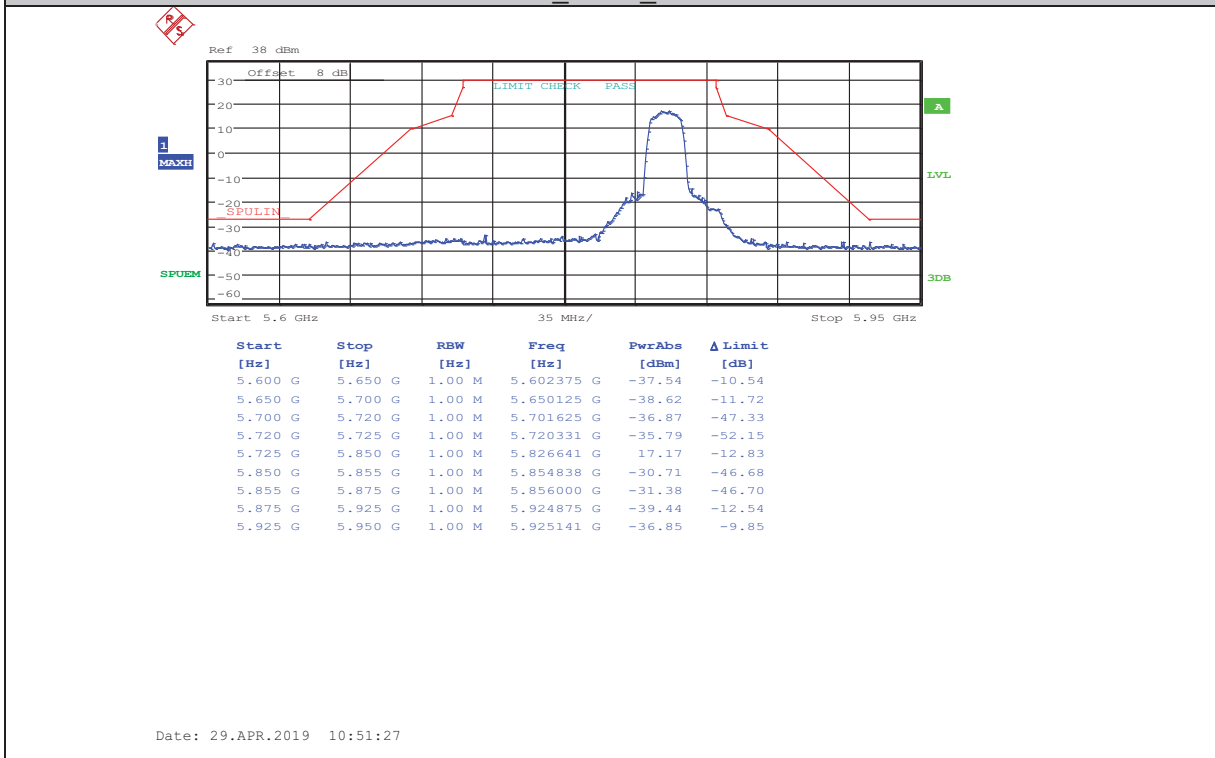


11N20_ANT1_5745

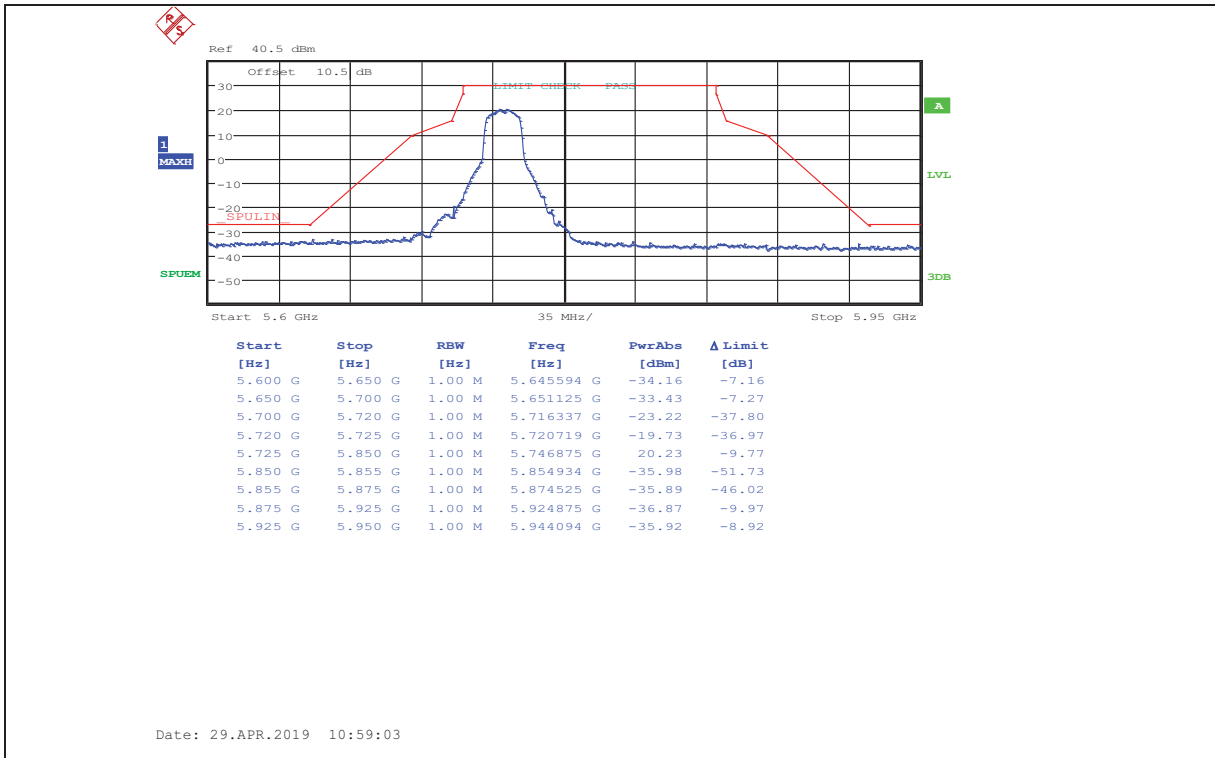


11N20_ANT2_5745

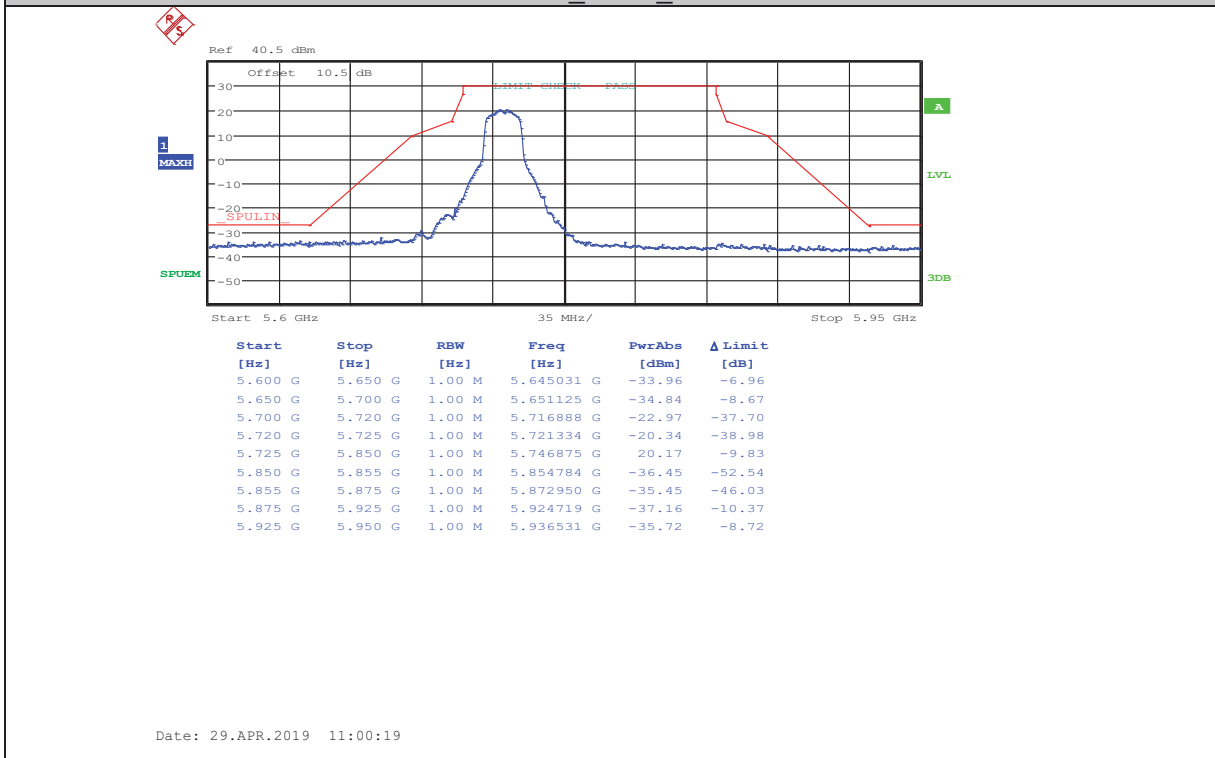


11N20_ANT1_5785

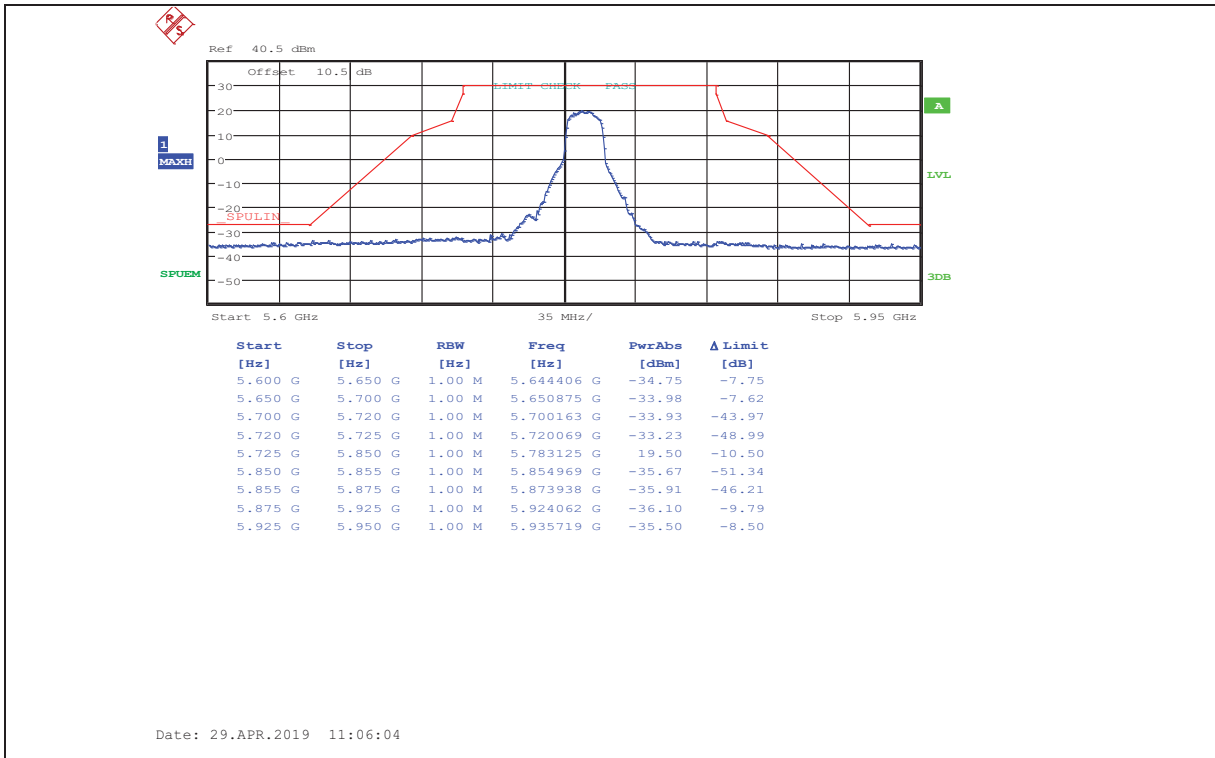


11N20_ANT2_5785

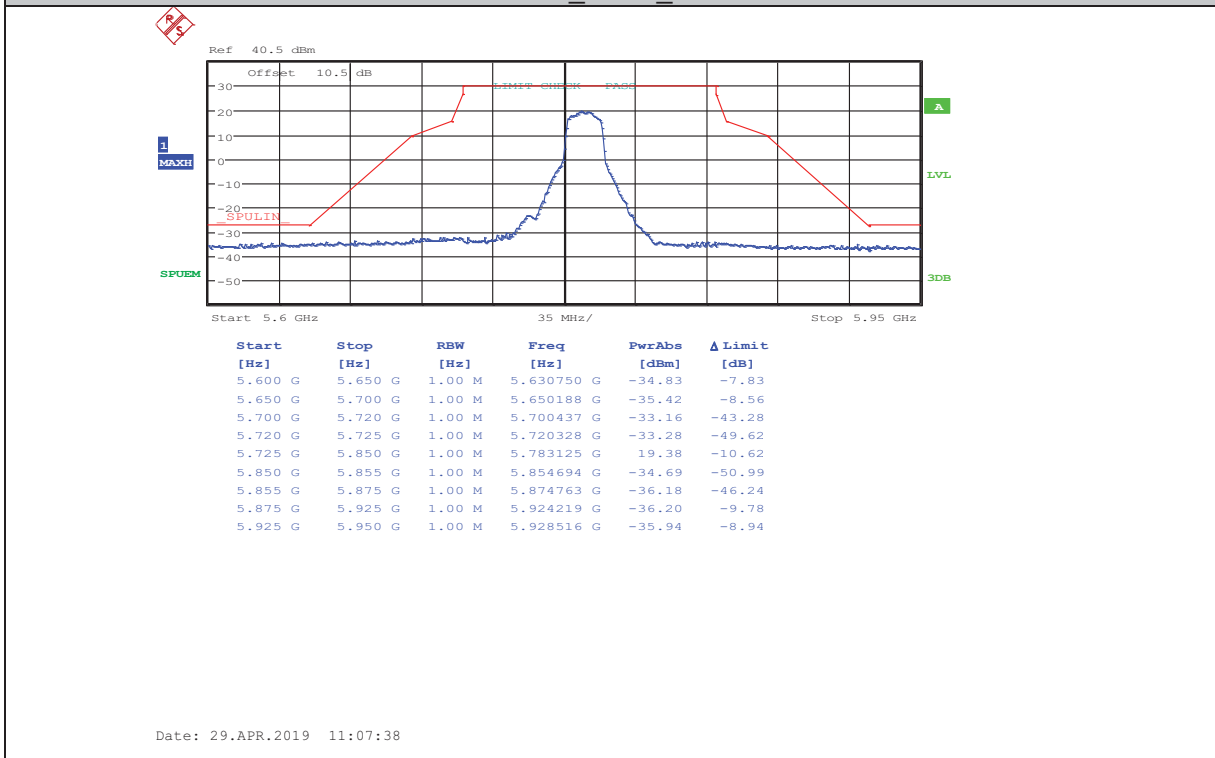


11N20_ANT1_5825

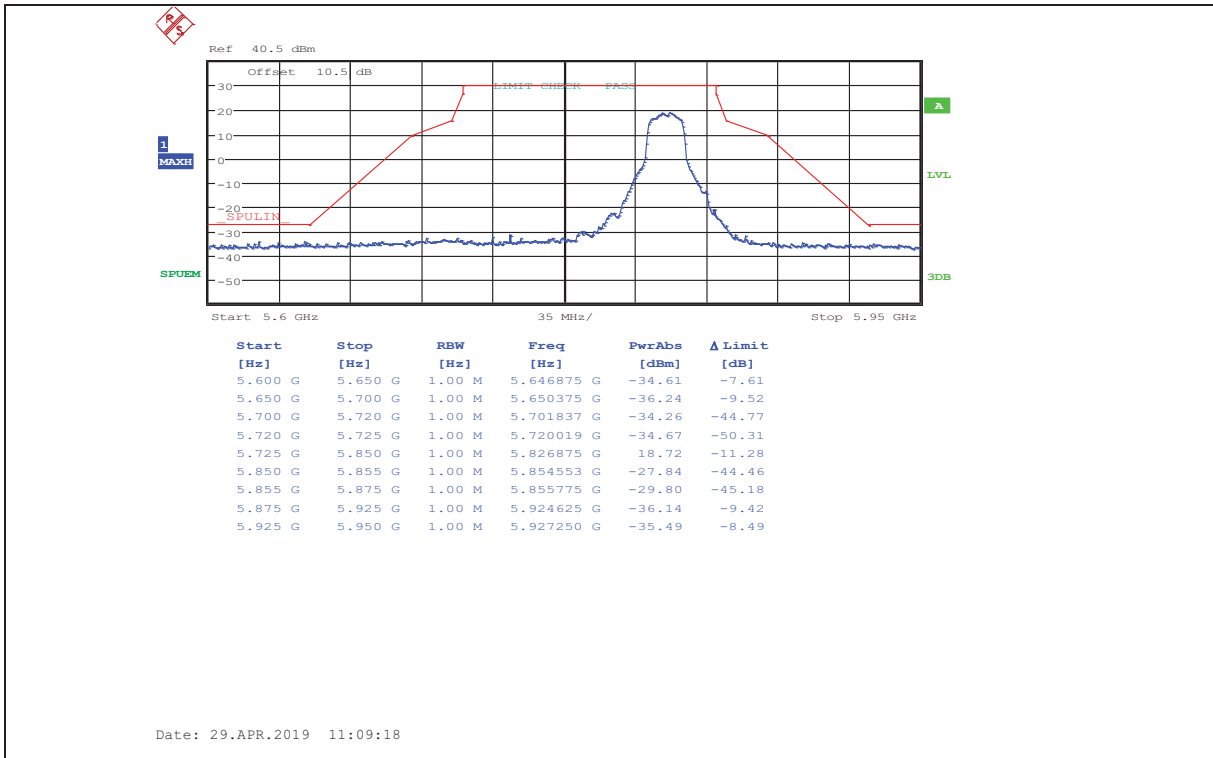


11N20_ANT1_5825

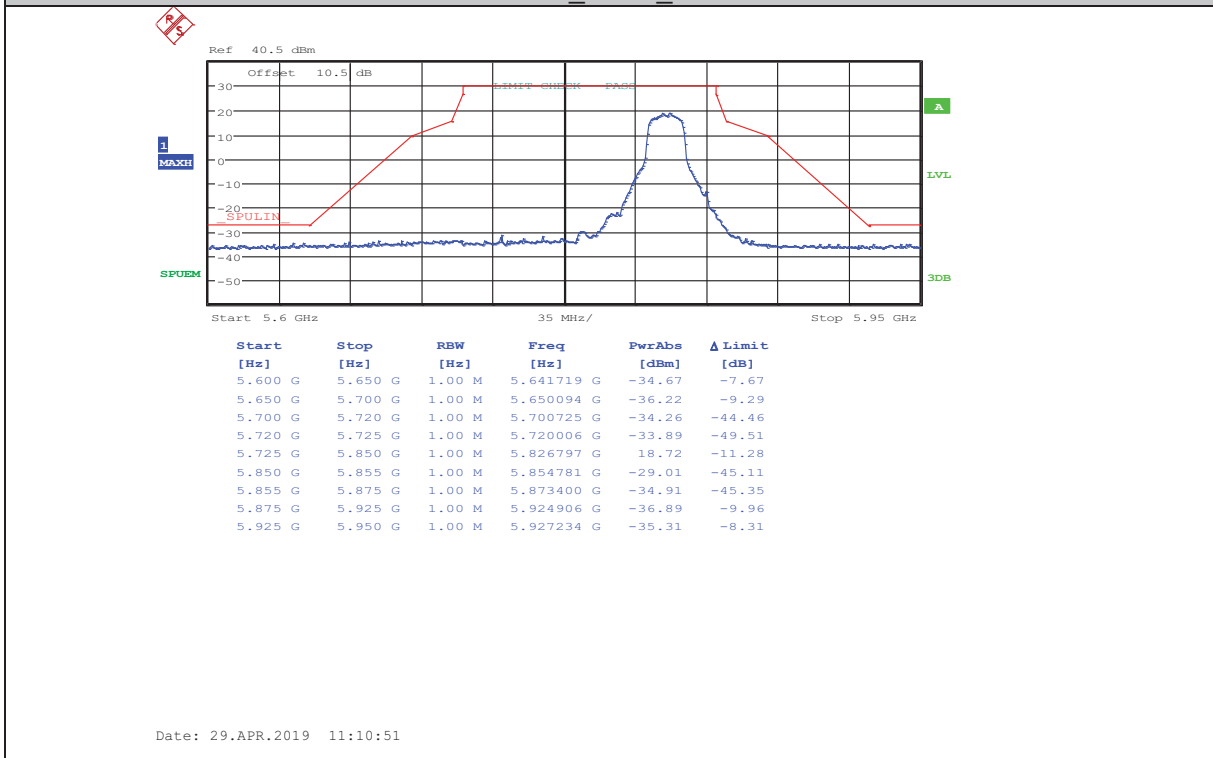


11N40_ANT1_5755

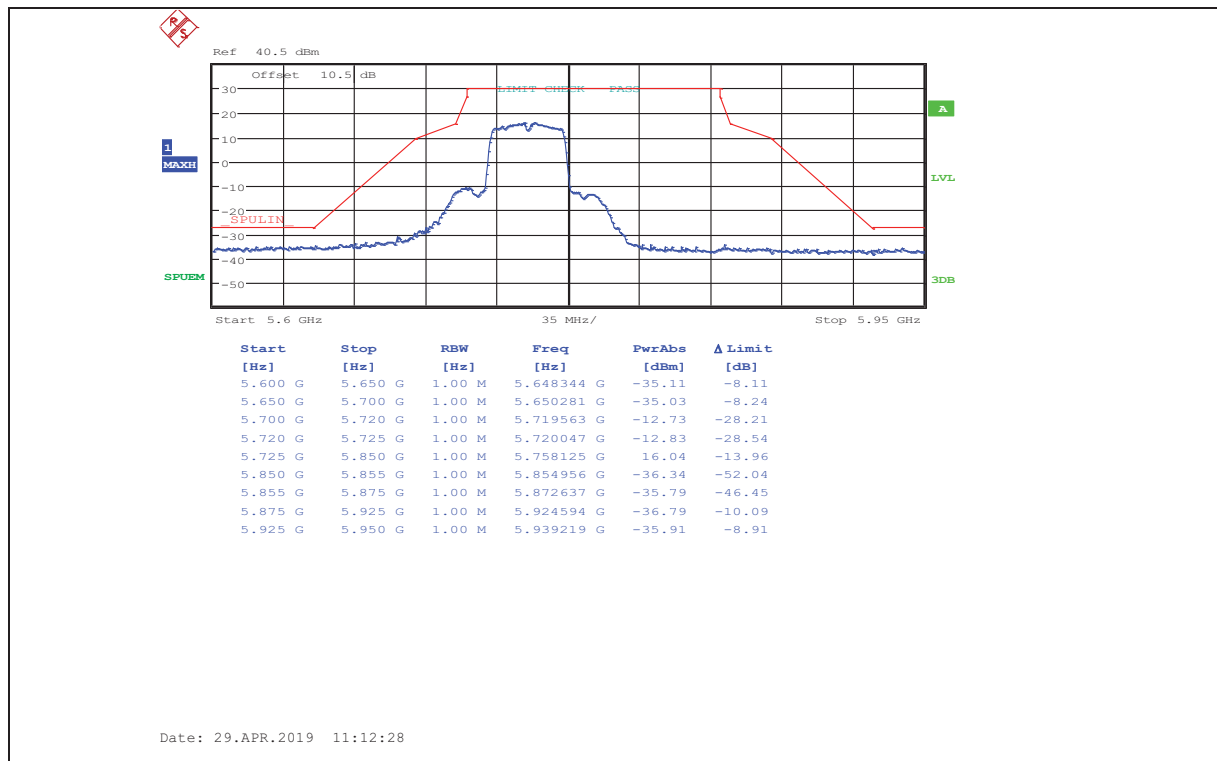


11N40_ANT2_5755

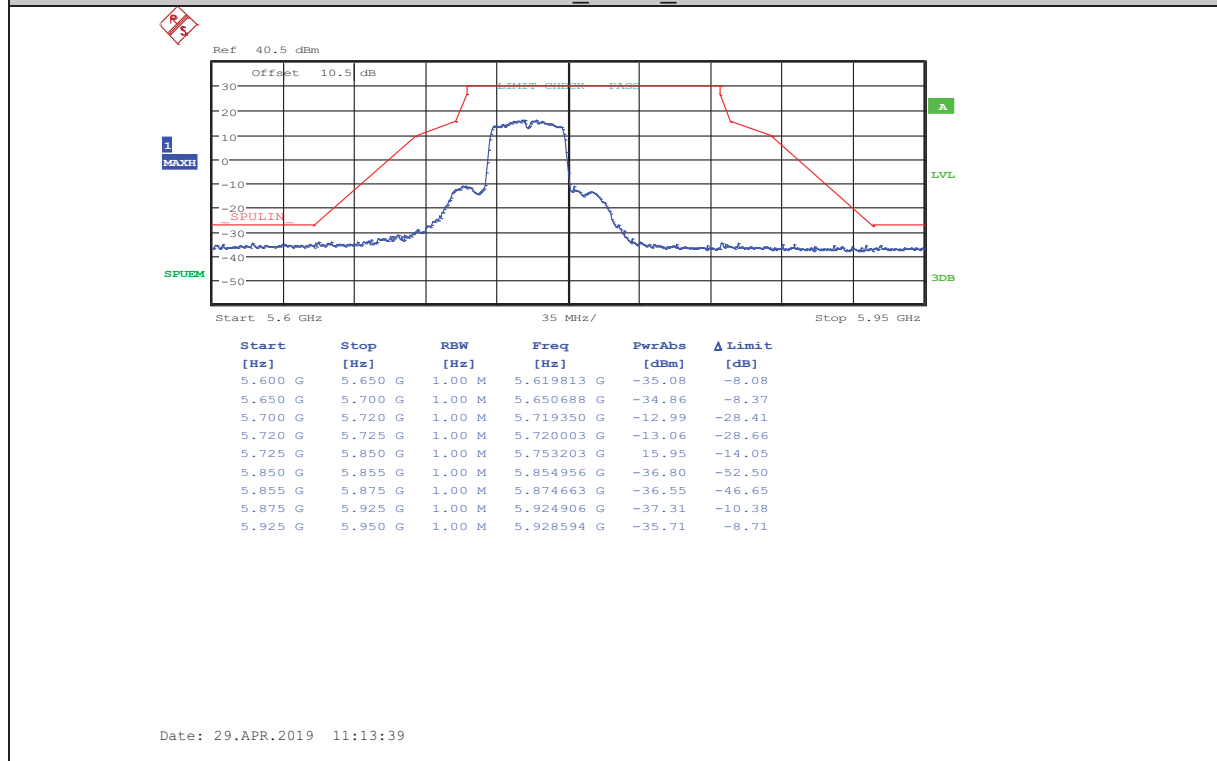


11N40_ANT1_5795

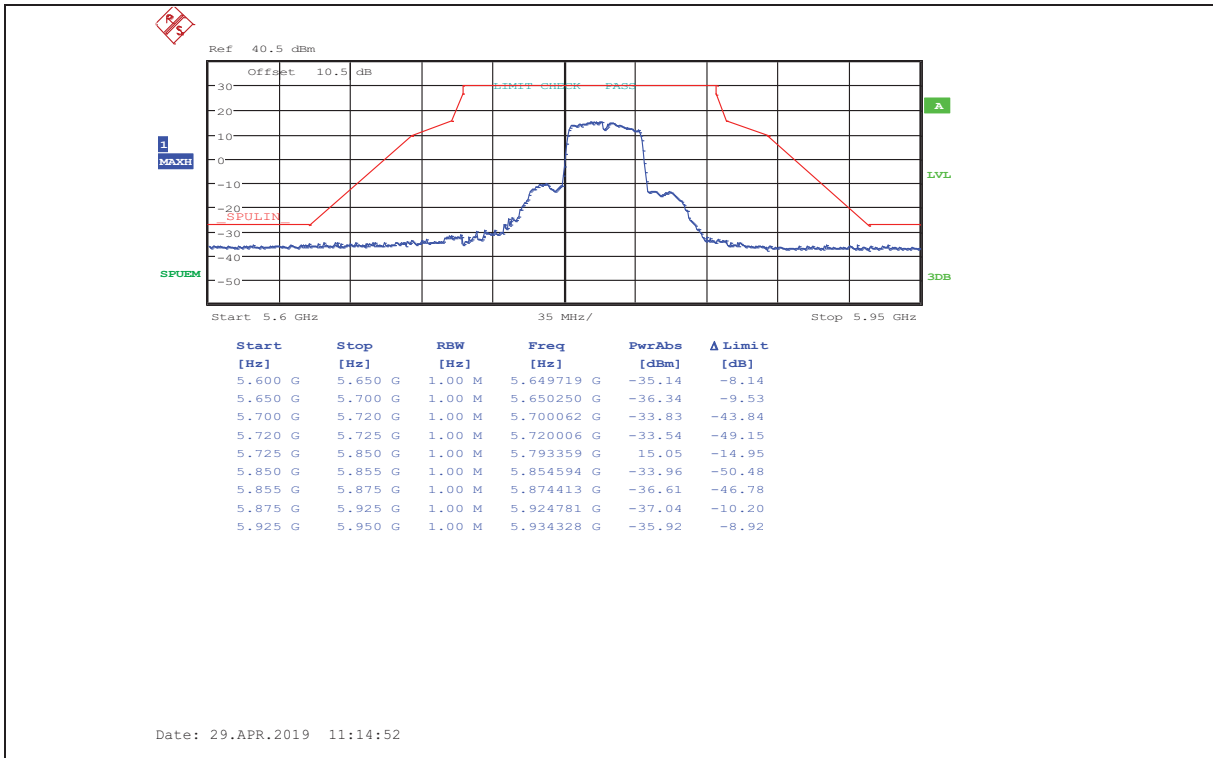


11N40_ANT2_5795

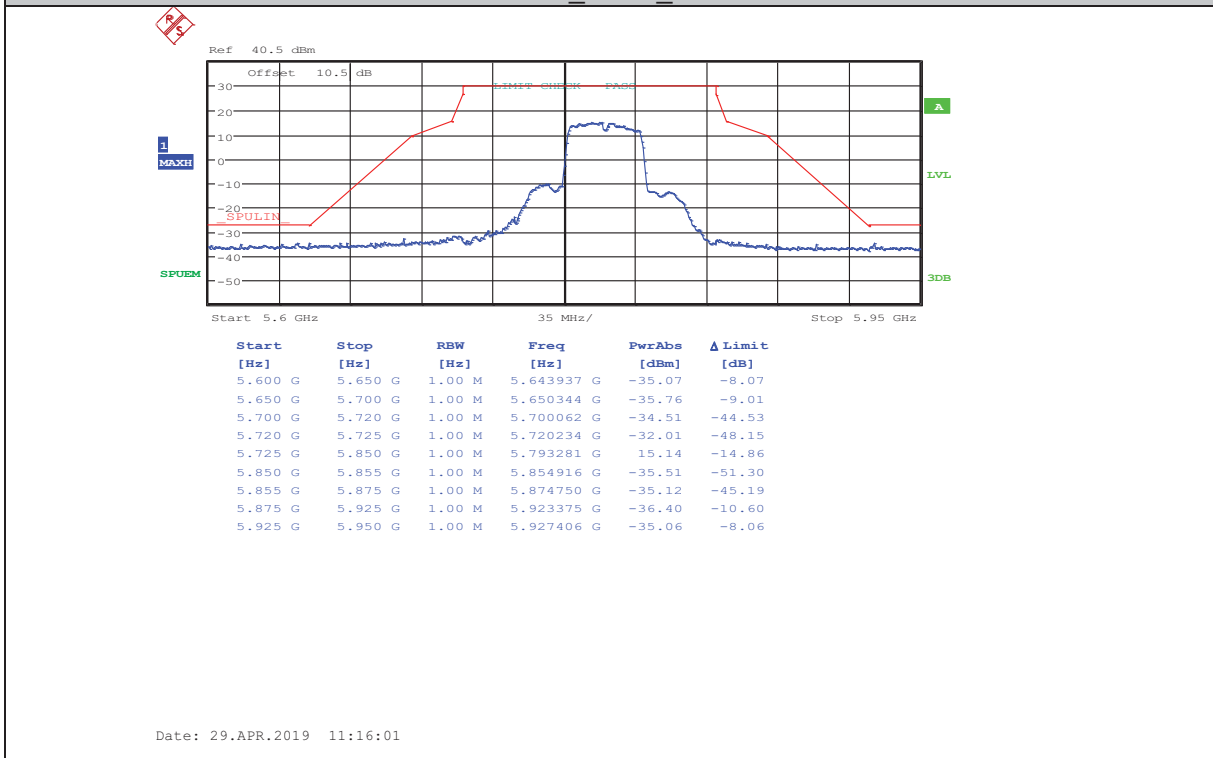


11AC20_ANT1_5745

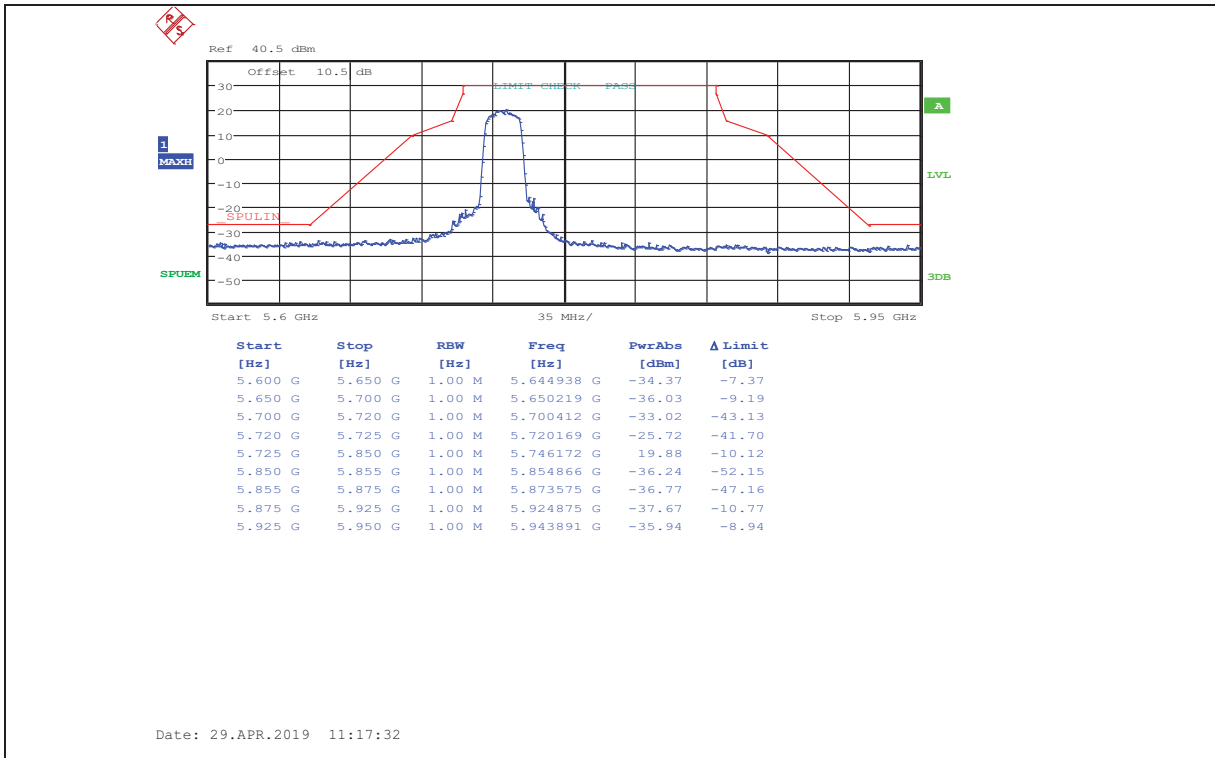


11AC20_ANT2_5745

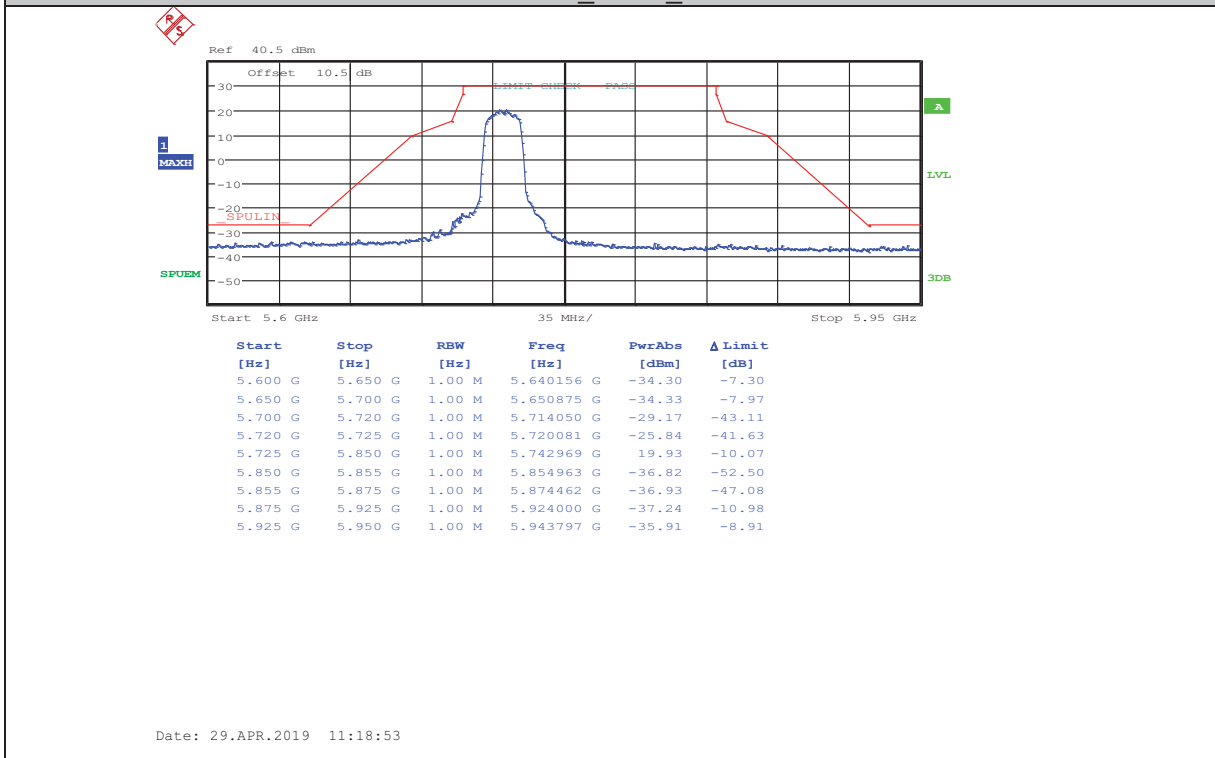


11AC20_ANT1_5785

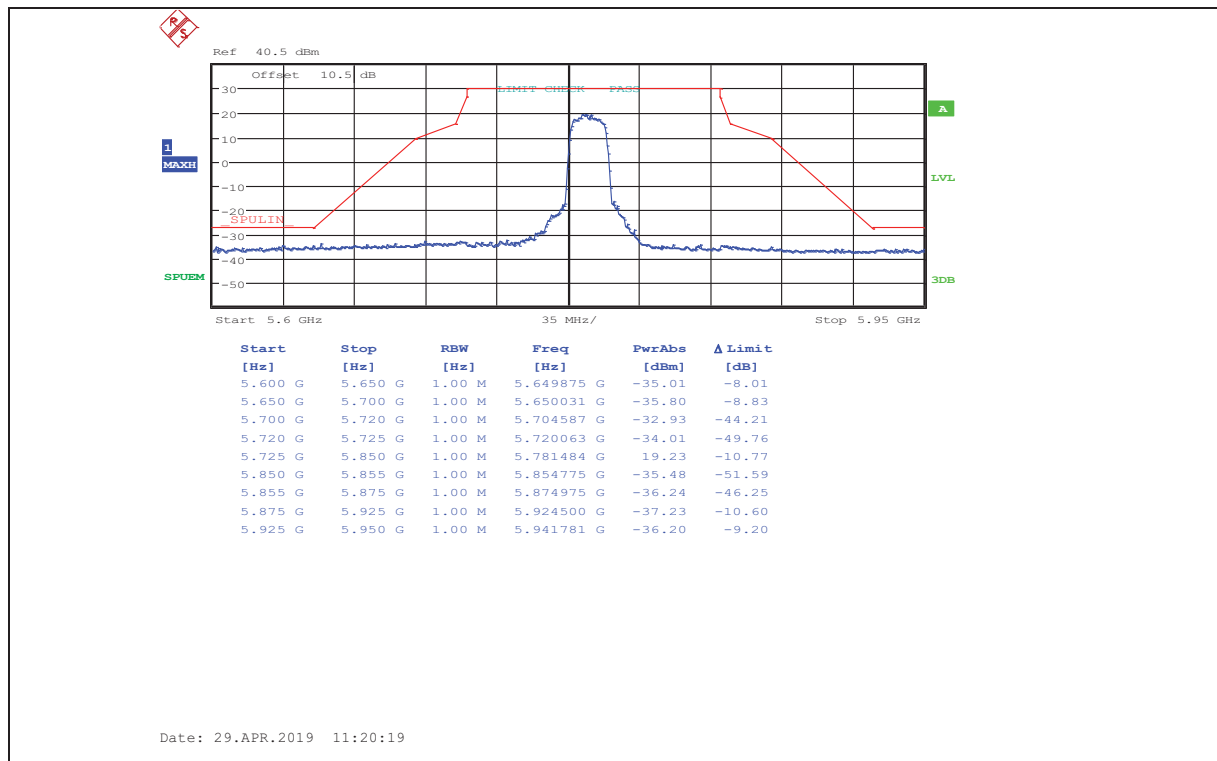


11AC20_ANT2_5785

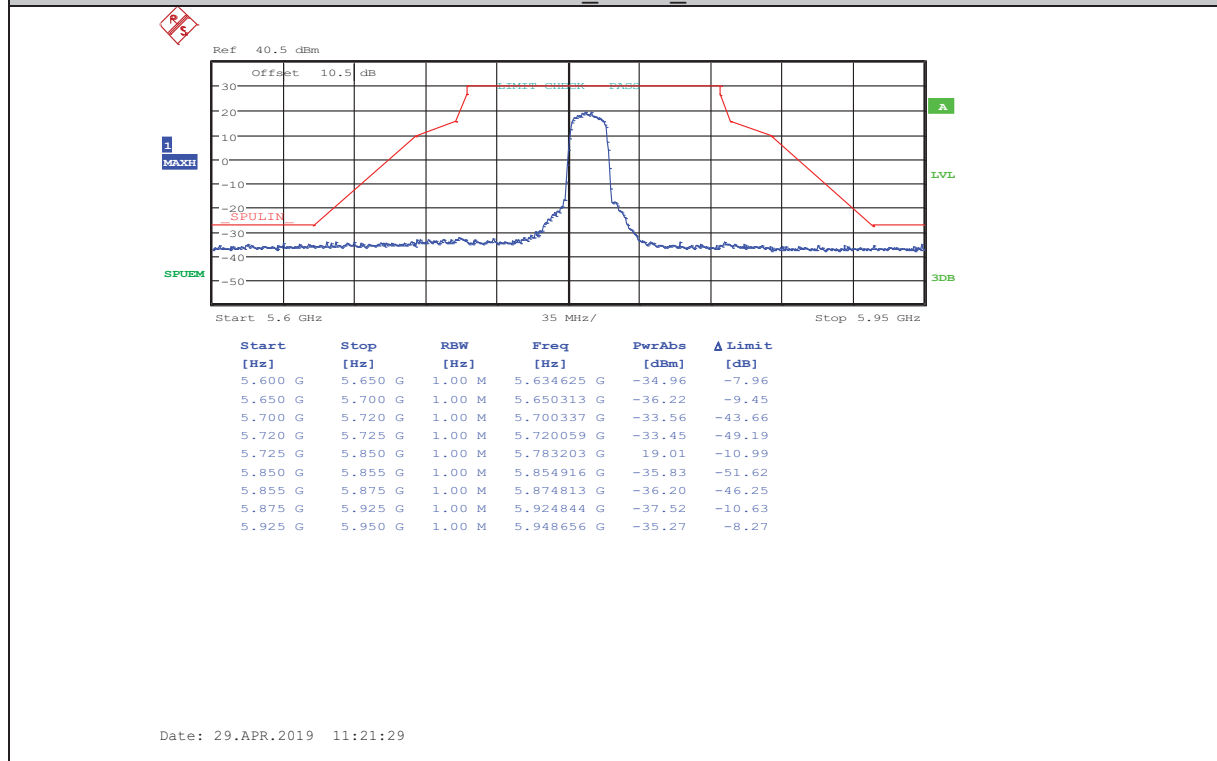


11AC20_ANT1_5825

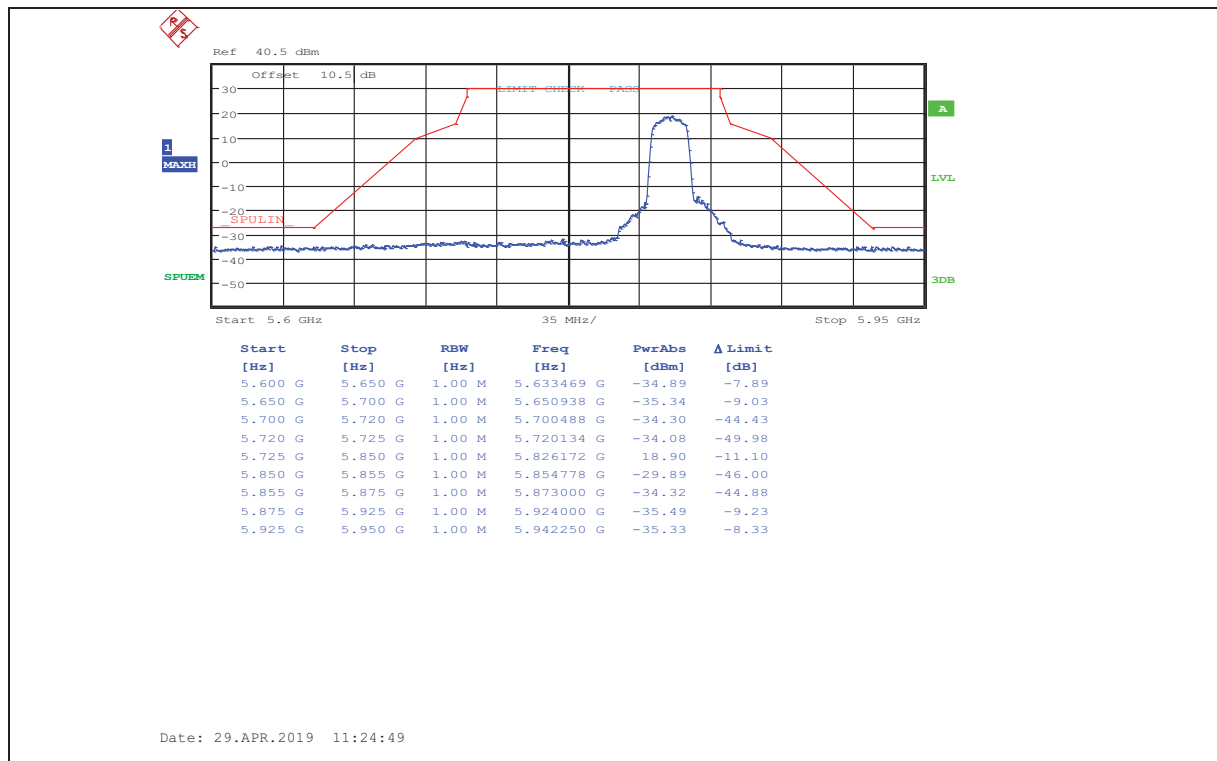


11AC20_ANT2_5825

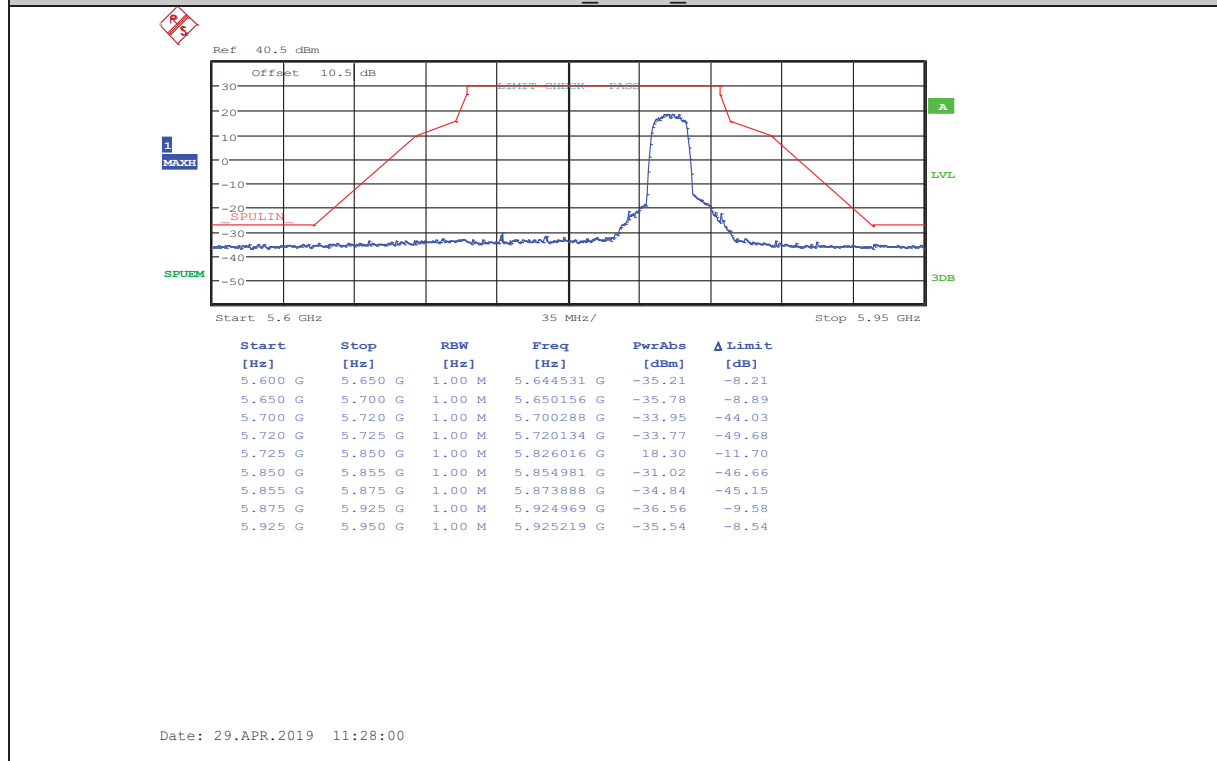


11AC40_ANT1_5755

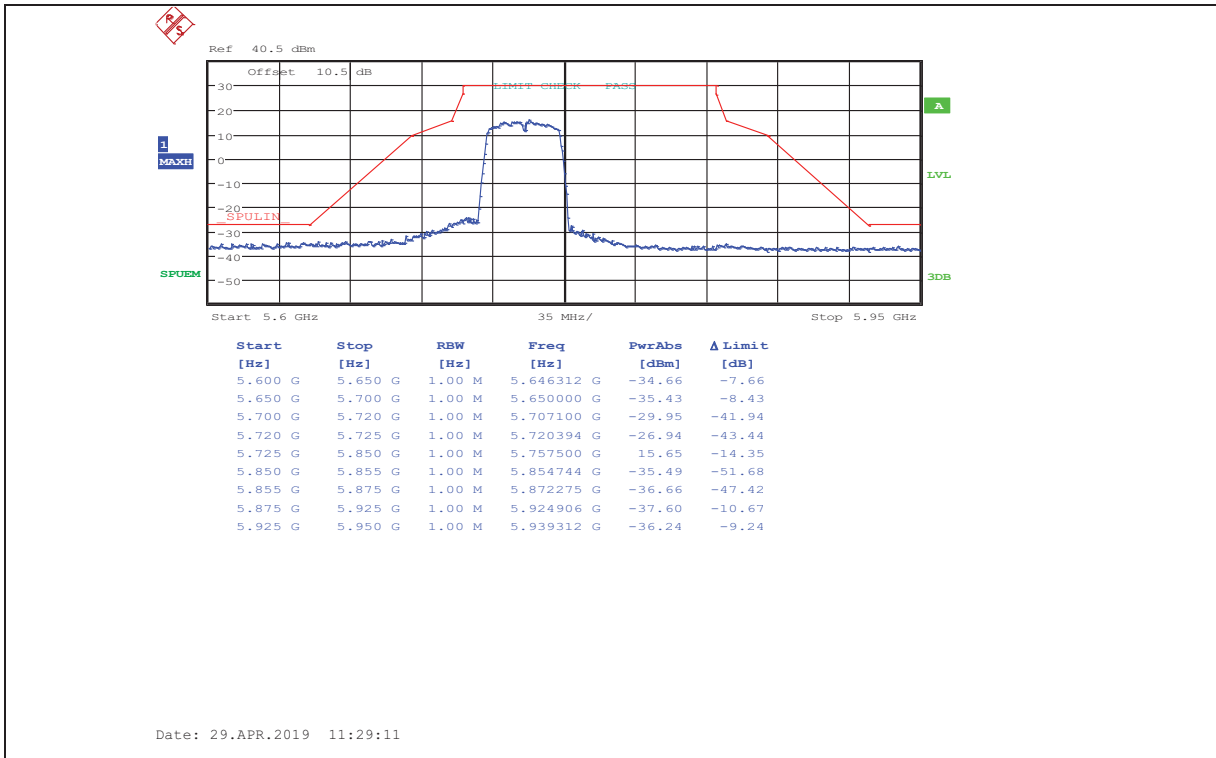


11AC40_ANT2_5755

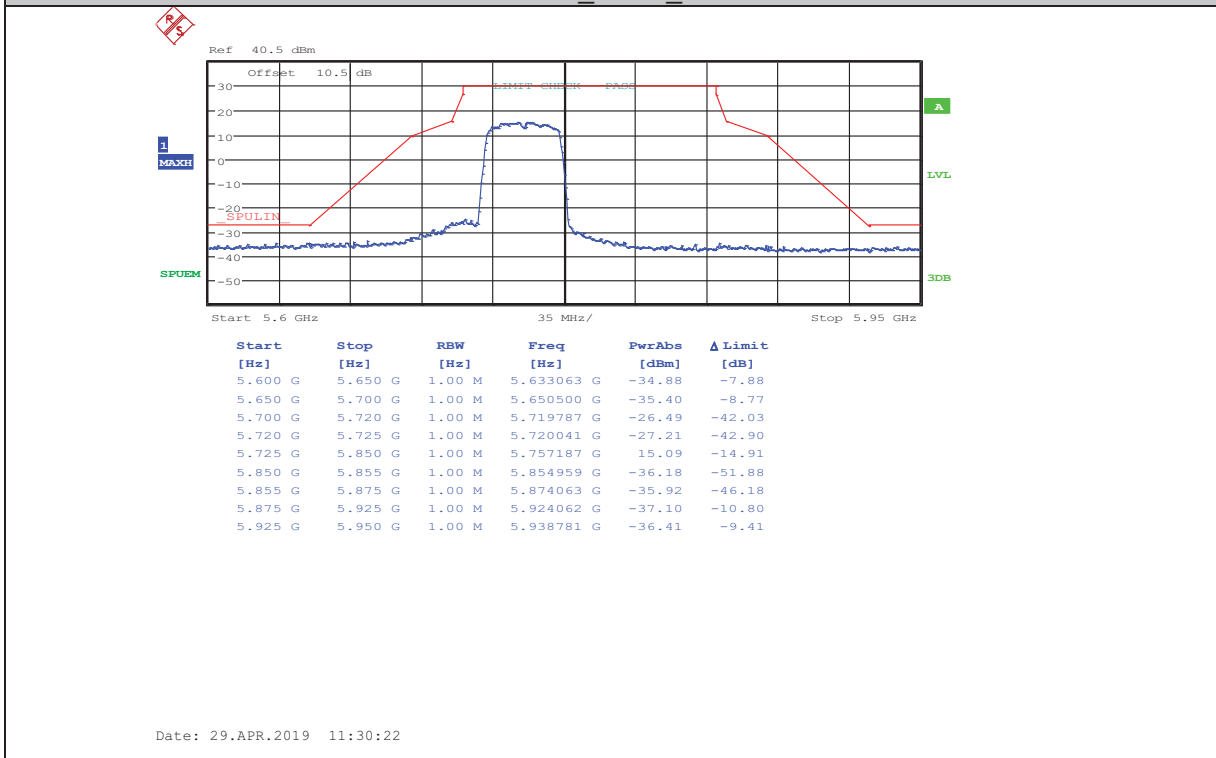


11AC40_ANT1_5795

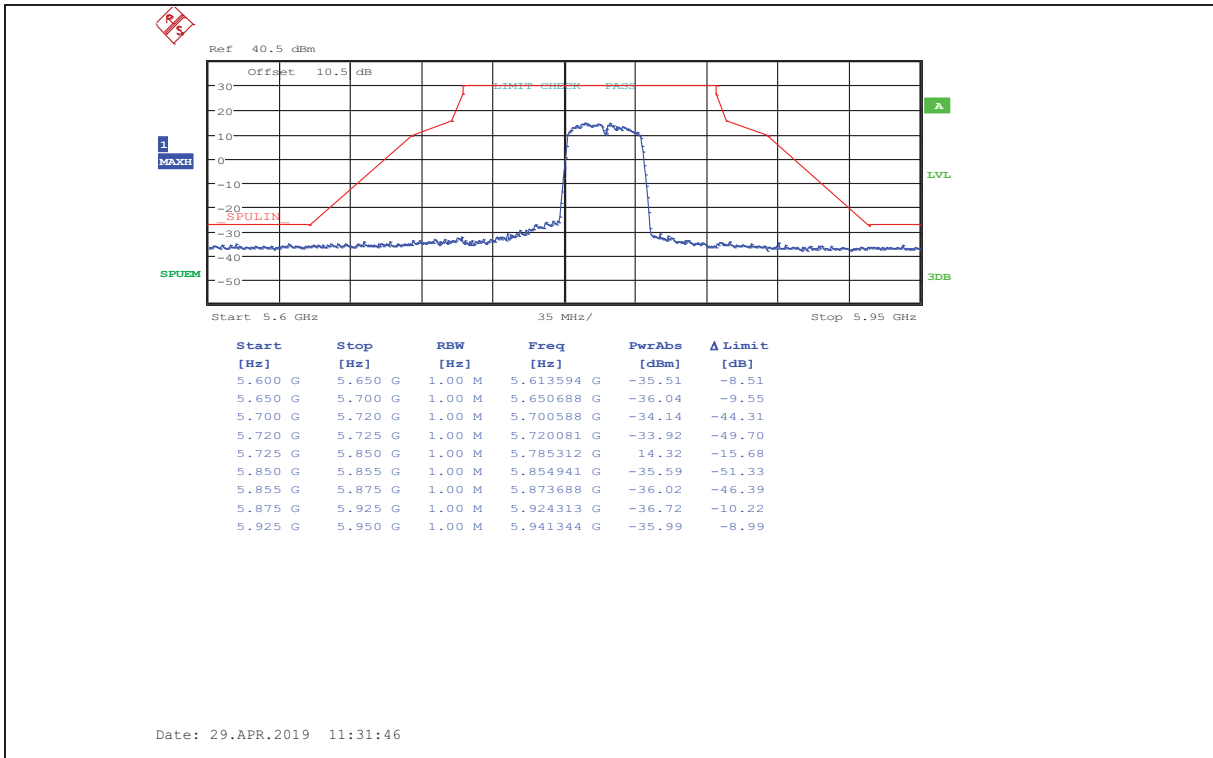


11AC40_ANT2_5795

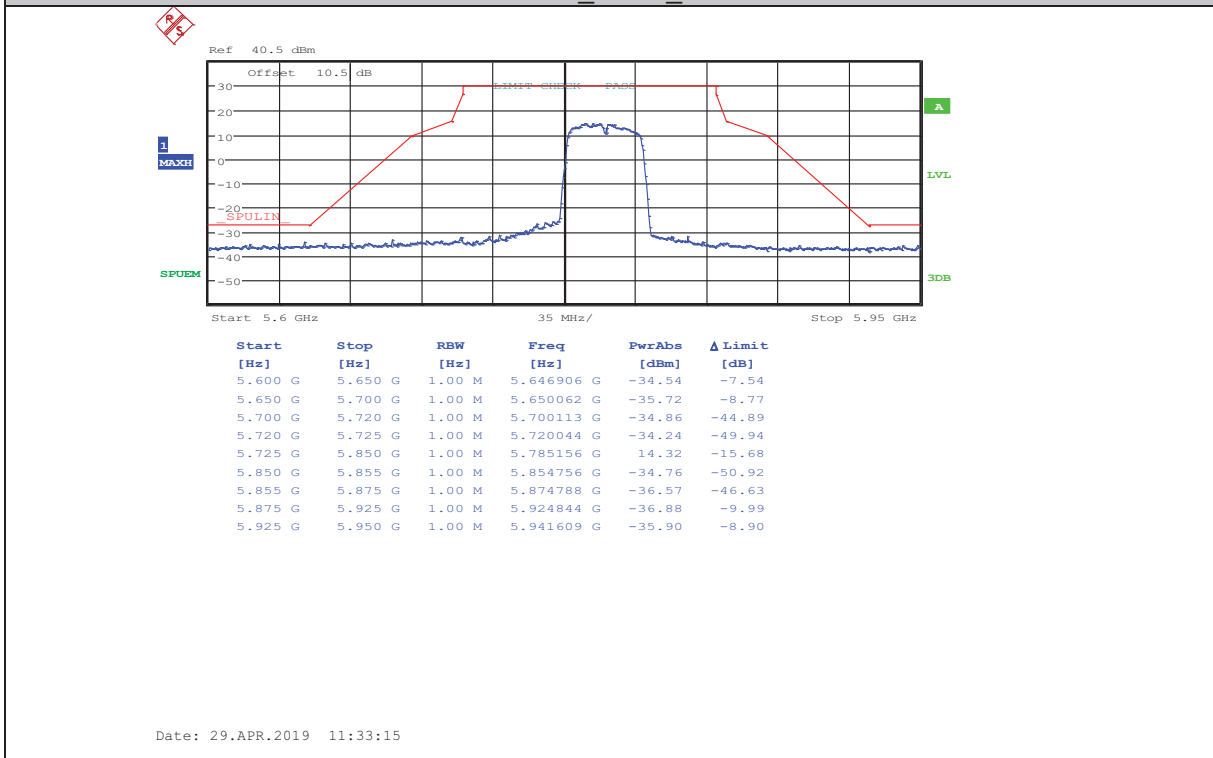

11AC80_ANT1_5775

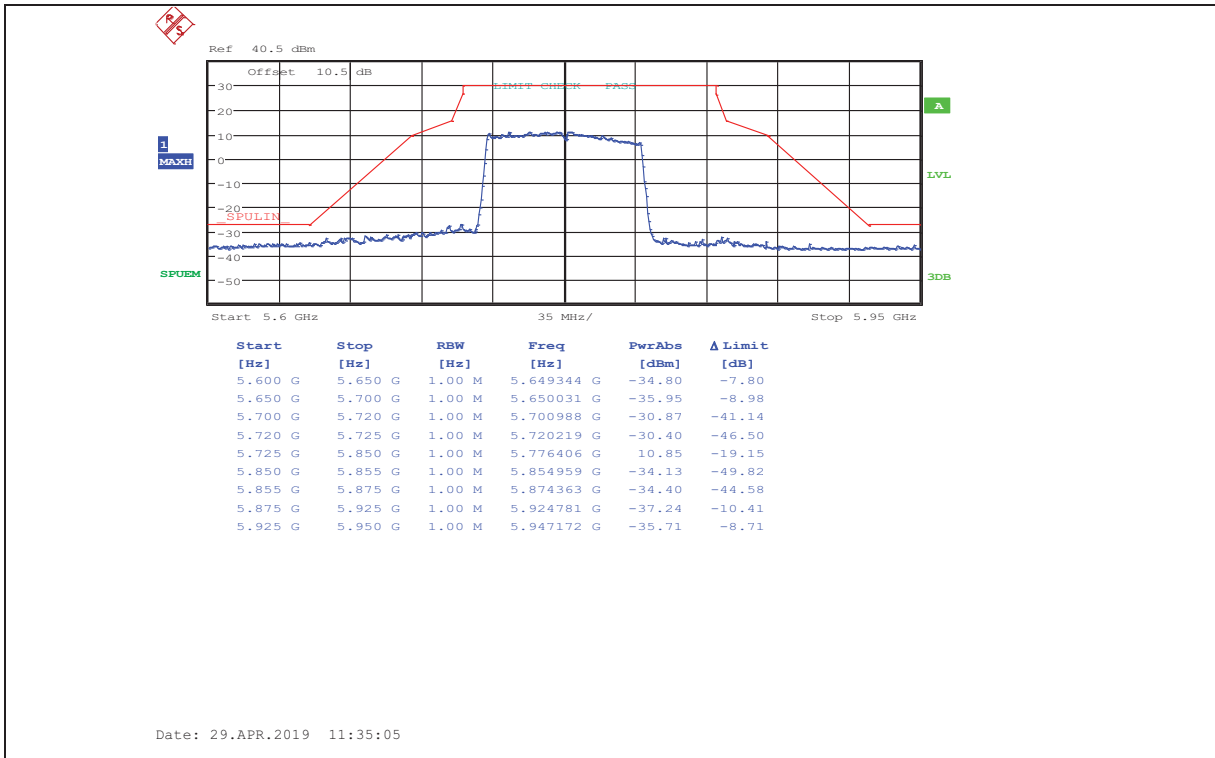


11AC80_ANT2_5775

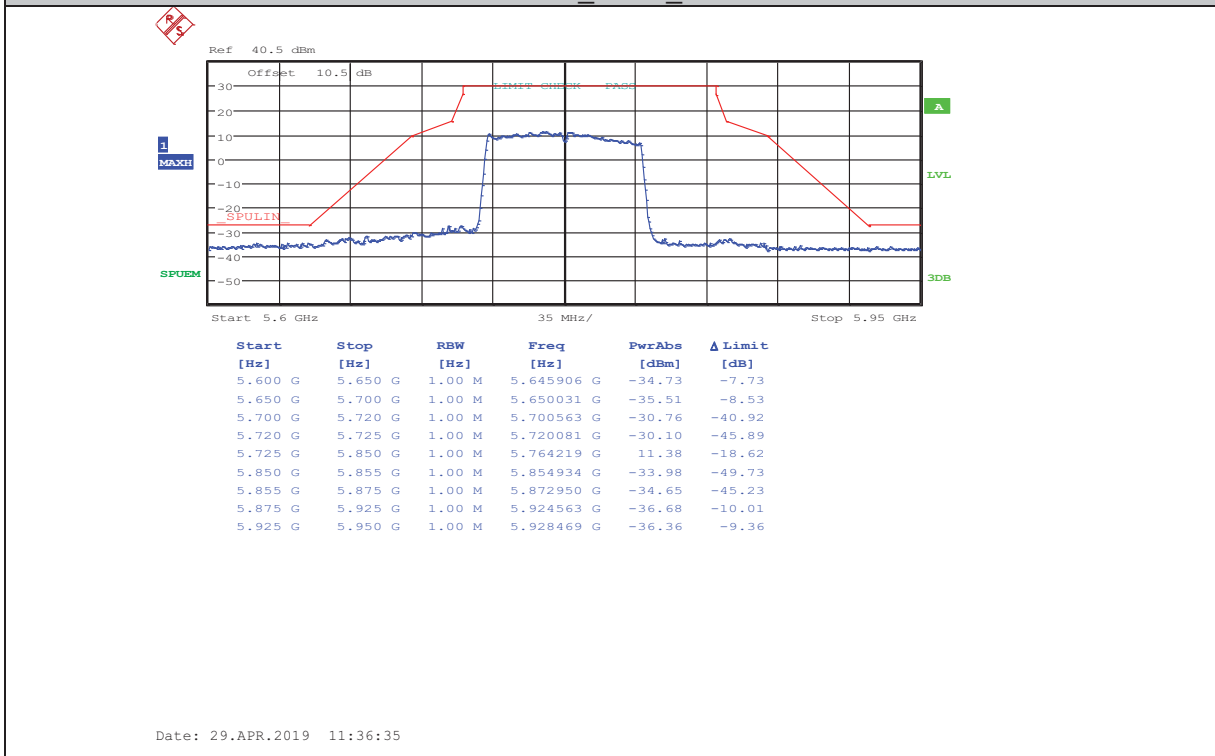

10. Power Line Conducted Emission

10.1. Block diagram of test setup

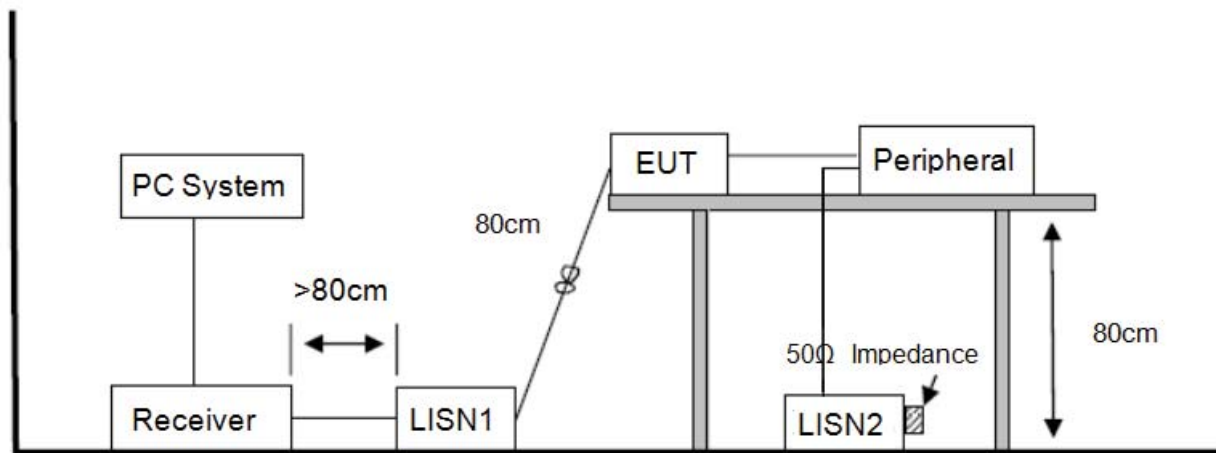

10.2. Power Line Conducted Emission Limits (Class B)

Frequency	Quasi-Peak Level dB(μ V)	Average Level dB(μ V)
150 kHz ~ 500 kHz	66 ~ 56*	56 ~ 46*
500 kHz ~ 5 MHz	56	46
5 MHz ~ 30 MHz	60	50

Note 1: * Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

10.3. Test Procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

Configuration EUT to simulate typical usage as described in clause 2.3 and test equipment as described in clause 10.2 of this report.

All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

The test mode(s) described in clause 2.3 were scanned during the preliminary test.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 kHz.

10.4. Test Result

PASS. (See below detailed test result)

Note1: All emissions not reported below are too low against the prescribed limits.

Note2: "----" means peak detection; "----" means average detection


Note3: Pre-test AC conducted emission at both voltage AC 120V/60Hz and AC 240V/60Hz, recorded worse case (AC 120V/60Hz).

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room D:\2018 CE report data\Q18112315-1E\CE.EM6
Test Date : 2019-05-20 **Tested By** : Aaron
EUT : JBL Bar 5.1 Surround with wireless subwoofer **Model Number** : BAR 5.1 CNTR
Power Supply : AC 120V/60Hz **Test Mode** : Tx mode
Condition : Temp:24.5°C, Humi:55%, Press:100.1KPa **LISN** : 2018 ENV216/LINE

Memo :

Data: 86

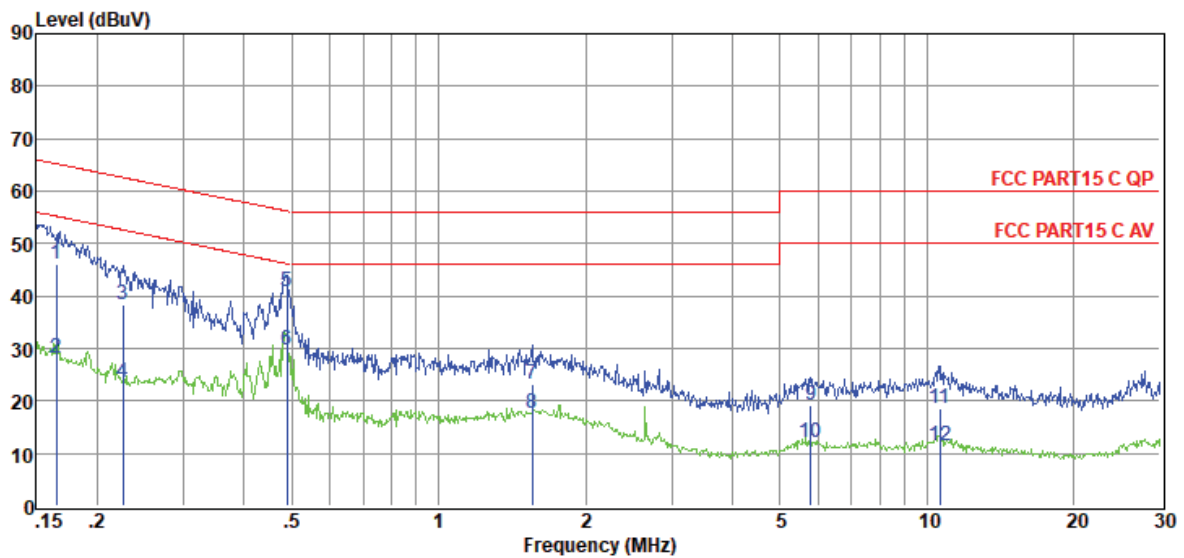

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBμV)	Limit Line (dBμV)	Over Limit (dB)	Detector	Phase
1	0.17	26.70	9.63	0.02	9.86	46.21	65.21	-19.00	QP	LINE
2	0.17	8.68	9.63	0.02	9.86	28.19	55.21	-27.02	Average	LINE
3	0.23	18.94	9.63	0.02	9.86	38.45	62.61	-24.16	QP	LINE
4	0.23	3.87	9.63	0.02	9.86	23.38	52.61	-29.23	Average	LINE
5	0.49	21.30	9.64	0.02	9.86	40.82	56.19	-15.37	QP	LINE
6	0.49	10.20	9.64	0.02	9.86	29.72	46.19	-16.47	Average	LINE
7	1.55	3.55	9.65	0.07	9.87	23.14	56.00	-32.86	QP	LINE
8	1.55	-2.02	9.65	0.07	9.87	17.57	46.00	-28.43	Average	LINE
9	5.77	-0.34	9.70	0.07	9.88	19.31	60.00	-40.69	QP	LINE
10	5.77	-7.52	9.70	0.07	9.88	12.13	50.00	-37.87	Average	LINE
11	10.62	-1.26	9.85	0.12	9.90	18.61	60.00	-41.39	QP	LINE
12	10.62	-8.44	9.85	0.12	9.90	11.43	50.00	-38.57	Average	LINE


- Note: 1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
 2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
 4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room D:\2018 CE report data\Q18112315-1E\CE.EM6
Test Date : 2019-05-20 **Tested By** : Aaron
EUT : JBL Bar 5.1 Surround with wireless subwoofer **Model Number** : BAR 5.1 CNTR
Power Supply : AC 120V/60Hz **Test Mode** : Tx mode
Condition : Temp:24.5°C, Humi:55%, Press:100.1KPa **LISN** : 2018 ENV216/NEUTRAL

Memo :

Data: 88

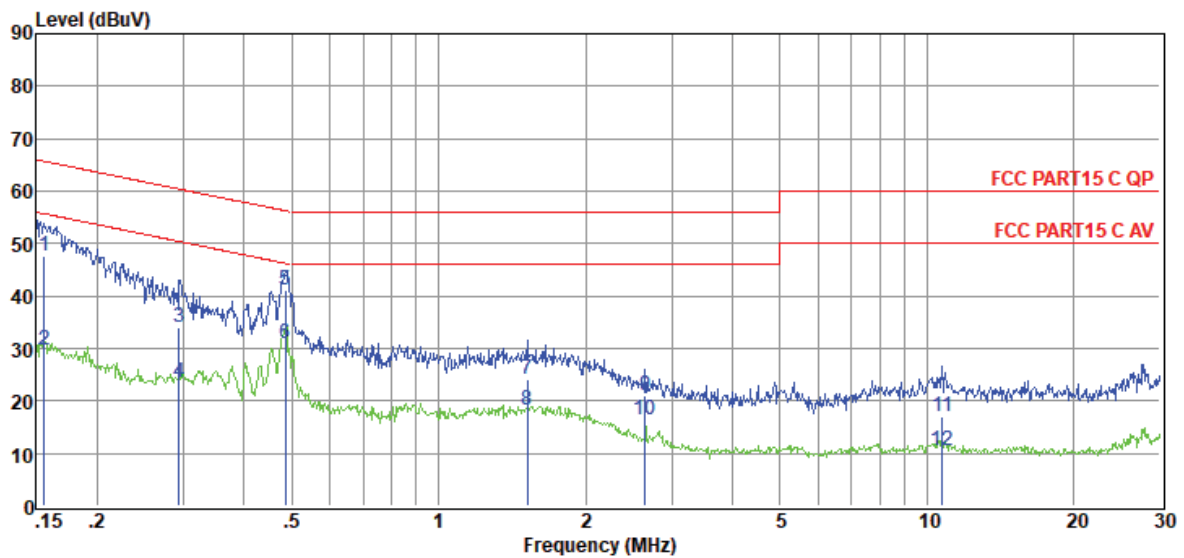

Item (Mark)	Freq. (MHz)	Read Level (dBUV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBUV)	Limit Line (dBUV)	Over Limit (dB)	Detector	Phase
1	0.16	28.17	9.64	0.02	9.86	47.69	65.69	-18.00	QP	NEUTRAL
2	0.16	10.20	9.64	0.02	9.86	29.72	55.69	-25.97	Average	NEUTRAL
3	0.29	14.61	9.64	0.02	9.86	34.13	60.41	-26.28	QP	NEUTRAL
4	0.29	4.06	9.64	0.02	9.86	23.58	50.41	-26.83	Average	NEUTRAL
5	0.49	21.66	9.64	0.02	9.86	41.18	56.23	-15.05	QP	NEUTRAL
6	0.49	11.48	9.64	0.02	9.86	31.00	46.23	-15.23	Average	NEUTRAL
7	1.52	4.49	9.66	0.07	9.87	24.09	56.00	-31.91	QP	NEUTRAL
8	1.52	-1.25	9.66	0.07	9.87	18.35	46.00	-27.65	Average	NEUTRAL
9	2.65	1.33	9.68	0.04	9.87	20.92	56.00	-35.08	QP	NEUTRAL
10	2.65	-3.20	9.68	0.04	9.87	16.39	46.00	-29.61	Average	NEUTRAL
11	10.73	-2.79	9.90	0.12	9.91	17.14	60.00	-42.86	QP	NEUTRAL
12	10.73	-9.44	9.90	0.12	9.91	10.49	50.00	-39.51	Average	NEUTRAL

- Note: 1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
 2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
 4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

11. Antenna Requirements

11.1. Limit

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

11.2. Result

The antennas used for this product are integrated antenna and other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is 3.68 dBi.

12. Dynamic Frequency Selection

12.1. Applicability of DFS requirements

Table 1: Applicability of DFS Requirements Prior to Use of a Channel

Requirement	Operational Mode		
	<input type="checkbox"/> Master	<input checked="" type="checkbox"/> Client Without Radar Detection	<input type="checkbox"/> Client with Radar Detection
Non-Occupancy Period	Yes	Not required	Yes
DFS Detection Threshold	Yes	Not required	Yes
Channel Availability Check Time	Yes	Not required	Not required
U-NII Detection Bandwidth	Yes	Not required	Yes

Table 2: Applicability of DFS requirements during normal operation

Requirement	Operational Mode	
	<input type="checkbox"/> Master Device or Client with Radar Detection	<input checked="" type="checkbox"/> Client Without Radar Detection
DFS Detection Threshold	Yes	Not required
Channel Closing Transmission Time	Yes	Yes
Channel Move Time	Yes	Yes
U-NII Detection Bandwidth	Yes	Not required

Additional requirements for devices with multiple bandwidth modes	<input type="checkbox"/> Master Device or Client with Radar Detection	<input checked="" type="checkbox"/> Client Without Radar Detection
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other tests	Any single BW mode	Not required

Note: Frequencies selected for statistical performance check should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.

12.2. Limit

(1) DFS Detection Thresholds

Table 3: DFS Detection Thresholds for Master Devices and Client Devices with Radar Detection

Maximum Transmit Power	Value (See Notes 1, 2, and 3)
EIRP \geq 200 milliwatt	-64 dBm
EIRP < 200 milliwatt and power spectral density < 10 dBm/MHz	-62 dBm
EIRP < 200 milliwatt that do not meet the power spectral density requirement	-64 dBm

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.
 Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.
 Note3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.

(2) DFS Response Requirements

Table 4: DFS Response Requirement Values

Parameter	Value
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds See Note 1.
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
U-NII Detection Bandwidth	Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3.

Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.
 Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required facilitating a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.
 Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

12.3. Parameters of radar test waveforms

This section provides the parameters for required test waveforms, minimum percentage of successful detections, and the minimum number of trials that must be used for determining DFS conformance. Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.

Table 5 Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A	Roundup $\left\{ \left(\frac{1}{360} \right) \cdot \left(\frac{19 \cdot 10^6}{\text{PRI}_{\mu\text{sec}}} \right) \right\}$	60%	30
		Test B			
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120
Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests. Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A					


A minimum of 30 unique waveforms are required for each of the Short Pulse Radar Types 2 through 4. If more than 30 waveforms are used for Short Pulse Radar Types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms. If more than 30 waveforms are used for Short Pulse Radar Type 1, then each additional waveform is generated with Test B and must also be unique and not repeated from the previous waveforms in Tests A or B. Test aggregate is average of the percentage of successful detections of short pulse radar types 1-4

12.4. Calibration of radar waveform

Radar Waveform Calibration Procedure:

- (1) A 50 ohm load is connected in place of the spectrum analyzer, and the spectrum analyzer is connected to place of the master
- (2) The interference Radar Detection Threshold Level is $-62\text{dBm} + 0\text{dBi} + 1\text{dB} = -61\text{dBm}$ that had been taken into account the output power range and antenna gain.
- (3) The following equipment setup was used to calibrate the conducted radar waveform. A vector signal generator was utilized to establish the test signal level for radar type 0. During this process there were no transmissions by either the master or client device. The spectrum analyzer was switched to the zero spans (time domain) at the frequency of the radar waveform generator. Peak detection was used. The spectrum analyzer resolution bandwidth (RBW) and video bandwidth (VBW) were set to 3 MHz. The spectrum analyzer had offset -1.0dB to compensate RF cable loss 1.0dB .
- (4) The vector signal generator amplitude was set so that the power level measured at the spectrum analyzer was $-62\text{dBm} + 0\text{dBi} + 1\text{dB} = -61\text{dBm}$. Capture the spectrum analyzer plots on short pulse radar waveform.

Conducted Calibration Setup:

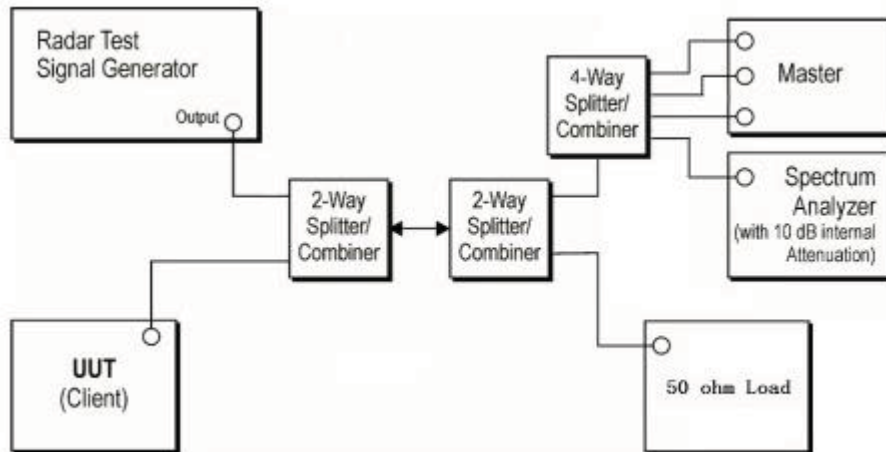


Note: 1. Use the software "Web" to set the frequency channel.

2. EUT is not support TPC and not with Radar detection.

Radar Waveform Calibration Result:

Radar Type 0

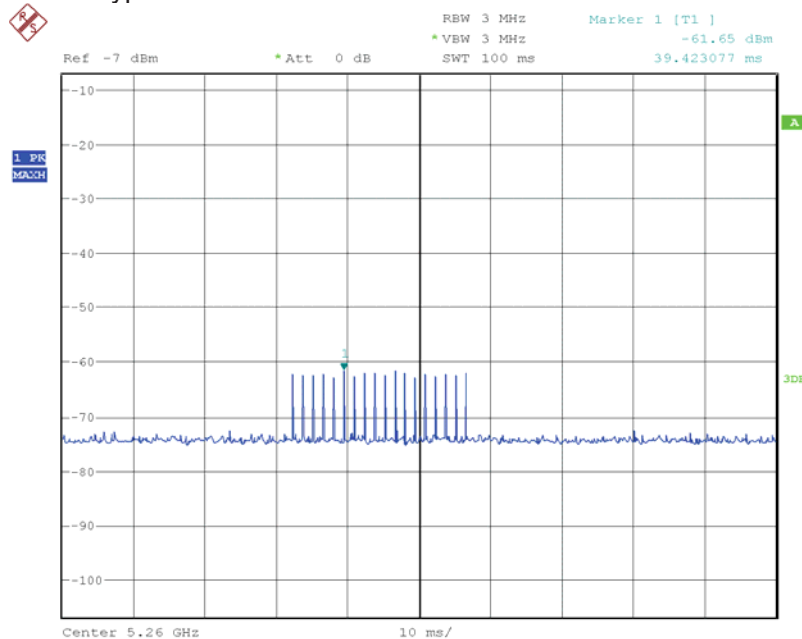

Trial List Table - FCC-13-22

Save Load Trigger Download All

Sample Rate 10 MHz

Trial List

	Trial Id	Radar Type	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length (us)
Download	0	Type 0	1.0	1428.0	18	25704.0
Download	1	Type 0	1.0	1428.0	18	25704.0
Download	2	Type 0	1.0	1428.0	18	25704.0
Download	3	Type 0	1.0	1428.0	18	25704.0
Download	4	Type 0	1.0	1428.0	18	25704.0
Download	5	Type 0	1.0	1428.0	18	25704.0
Download	6	Type 0	1.0	1428.0	18	25704.0
Download	7	Type 0	1.0	1428.0	18	25704.0
Download	8	Type 0	1.0	1428.0	18	25704.0
Download	9	Type 0	1.0	1428.0	18	25704.0
Download	10	Type 0	1.0	1428.0	18	25704.0
Download	11	Type 0	1.0	1428.0	18	25704.0
Download	12	Type 0	1.0	1428.0	18	25704.0
Download	13	Type 0	1.0	1428.0	18	25704.0
Download	14	Type 0	1.0	1428.0	18	25704.0
Download	15	Type 0	1.0	1428.0	18	25704.0
Download	16	Type 0	1.0	1428.0	18	25704.0
Download	17	Type 0	1.0	1428.0	18	25704.0
Download	18	Type 0	1.0	1428.0	18	25704.0
Download	19	Type 0	1.0	1428.0	18	25704.0
Download	20	Type 0	1.0	1428.0	18	25704.0
Download	21	Type 0	1.0	1428.0	18	25704.0
Download	22	Type 0	1.0	1428.0	18	25704.0
Download	23	Type 0	1.0	1428.0	18	25704.0
Download	24	Type 0	1.0	1428.0	18	25704.0
Download	25	Type 0	1.0	1428.0	18	25704.0
Download	26	Type 0	1.0	1428.0	18	25704.0
Download	27	Type 0	1.0	1428.0	18	25704.0

12.5. Channel closing transmission time, channel move time and non-occupancy period


Block diagram of test setup Test Procedure:

- (1) The radar pulse generator is setup to provide a pulse at frequency that the master and client are operating. A type 0 radar pulse with a 1us pulse width and a 1428us PRI is used for the testing.
- (2) The vector signal generator is adjusted to provide the radar burst (18 pulses) at the level of approximately -61dBm at the antenna port of the master device.
- (3) A trigger is provided from the pulse generator to the DFS monitoring system in order to capture the traffic and the occurrence of the radar pulse.
- (4) EUT will associate with the master at channel. The file "iperf.exe" specified by the FCC is streamed from the PC 2 through the master and the client device to the PC 1 and played in full motion video using Test Software in order to properly load the network for the entire period of the test.
- (5) When radar burst with a level equal to the DFS Detection Threshold +1dB is generated on the operating channel of the U-NII device. At time T0 the radar waveform generator sends a burst of pulse of the radar waveform at Detection Threshold +1dB.
- (6) Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel. Measure and record the transmissions from the UUT during the observation time (Channel Move Time). One 15 seconds plot is reported for the Short Pulse Radar Type 0. The plot for the Short Pulse Radar Types start at the end of the radar burst. The Channel Move Time will be calculated based on the zoom in 600ms plot of the Short Pulse Radar Type.
- (7) Measurement of the aggregate duration of the Channel Closed Transmission Time method. With the
- (8) spectrum analyzer set to zero span tuned to the center frequency of the EUT operating channel at the radar simulated frequency, peak detection, and max hold, the dwell time per bin is given by: $Dwell (0.3ms) = S (12000ms) / B (4000)$; where Dwell is the dwell time per spectrum analyzer sampling bin, S is sweep time and B is the number of spectrum analyzer sampling bins. An upper bound of the aggregate duration of the intermittent control signals of Channel Closing Transmission Time is calculated by: $C (ms) = N \times Dwell (0.3ms)$; where C is the Closing Time, N is the number of spectrum analyzer sampling bins (intermittent control signals) showing a U-NII transmission and Dwell is the dwell time per bin.

Measurement the EUT for more than 30 minutes following the channel move time to verify that no transmission or beacons occur on this channel.

12.6. Test setup


Setup for Client with injection at the Master

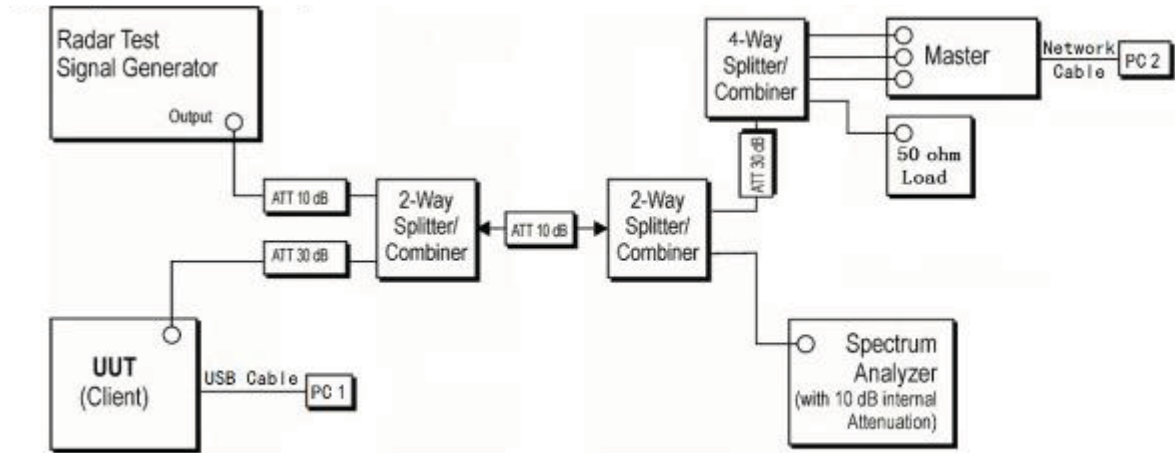


12.7. Test result


BW/Channel	Test Item	Test Result	Limit	Results
80M/5260MHz	Channel Move Time	5.206s	< 10s	pass
	Channel Closing Transmission Time	0.040s	< 0.26s	pass
80M/5670MHz	Channel Move Time	5.534s	< 10s	pass
	Channel Closing Transmission Time	0.058s	< 0.26s	pass


Test plots as follows:

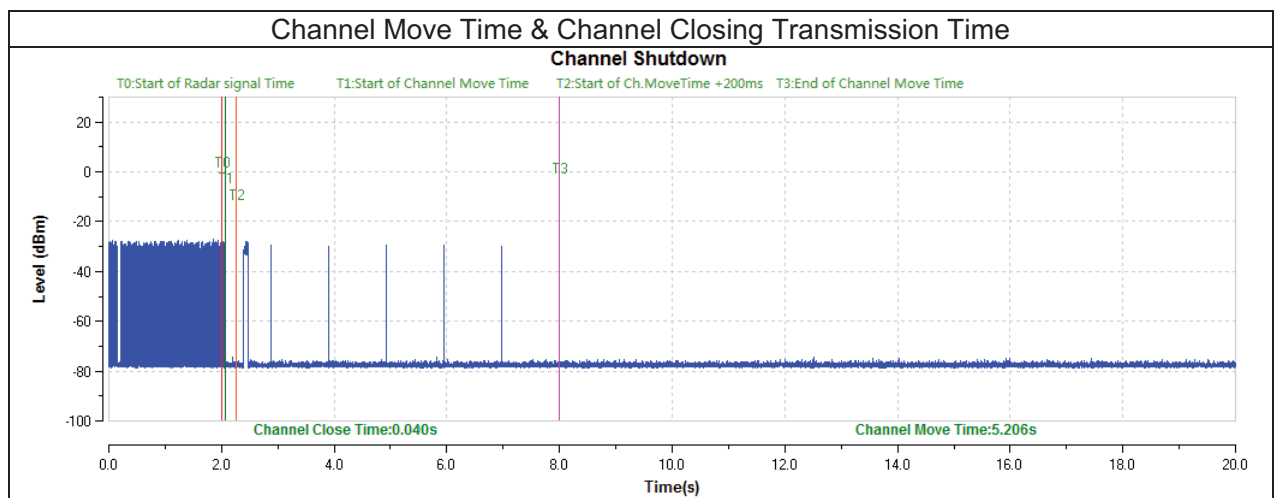

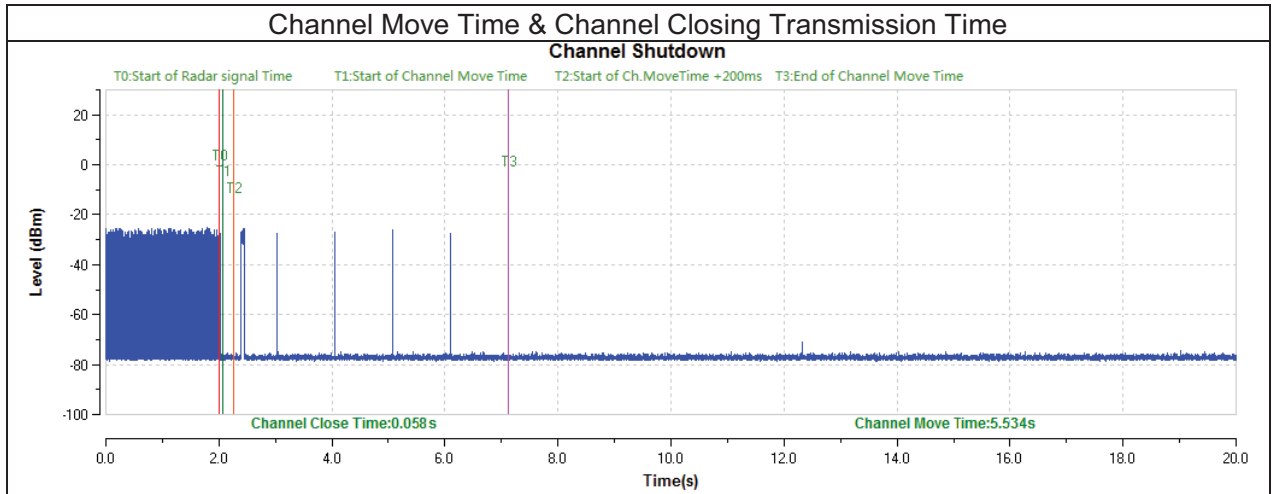

BW/Channel	Test Item	Test Result	Limit	Results
80M/5260MHz	Non-Occupancy Period	>30min	30min	pass
80M/5670MHz	Non-Occupancy Period	>30min	30min	pass

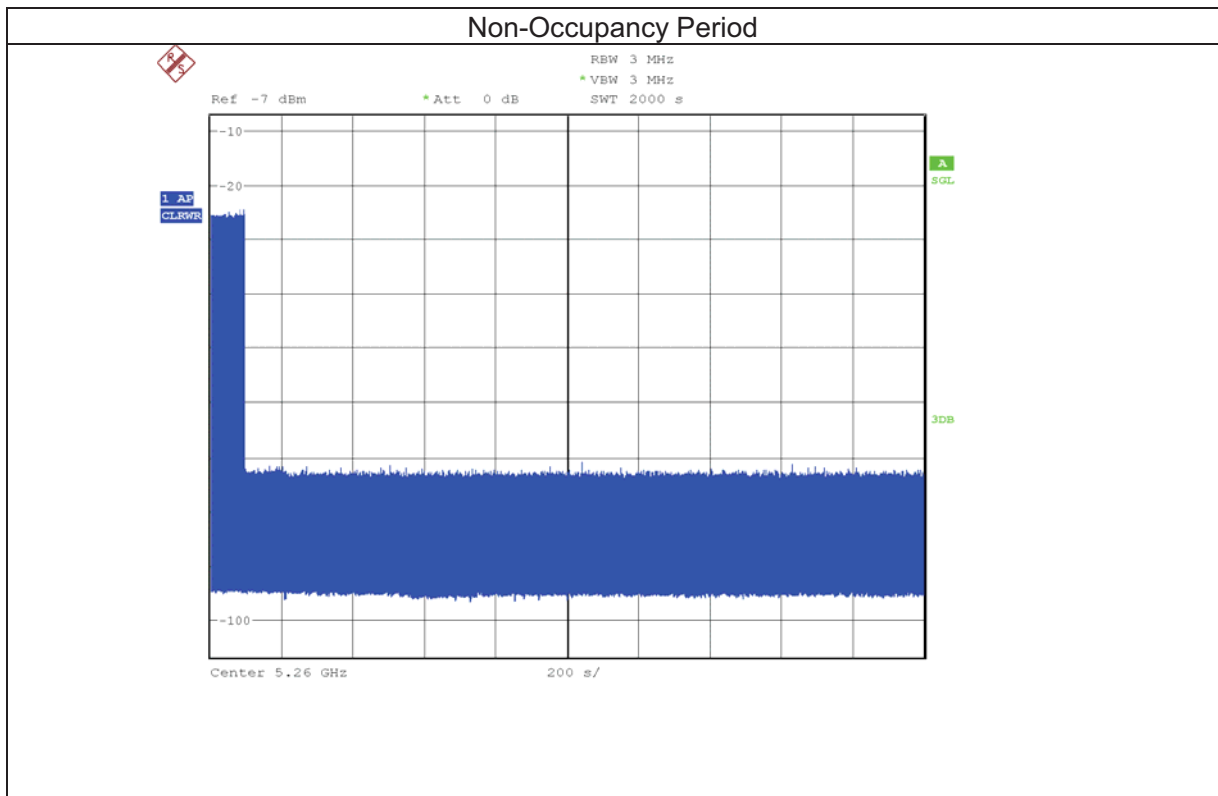

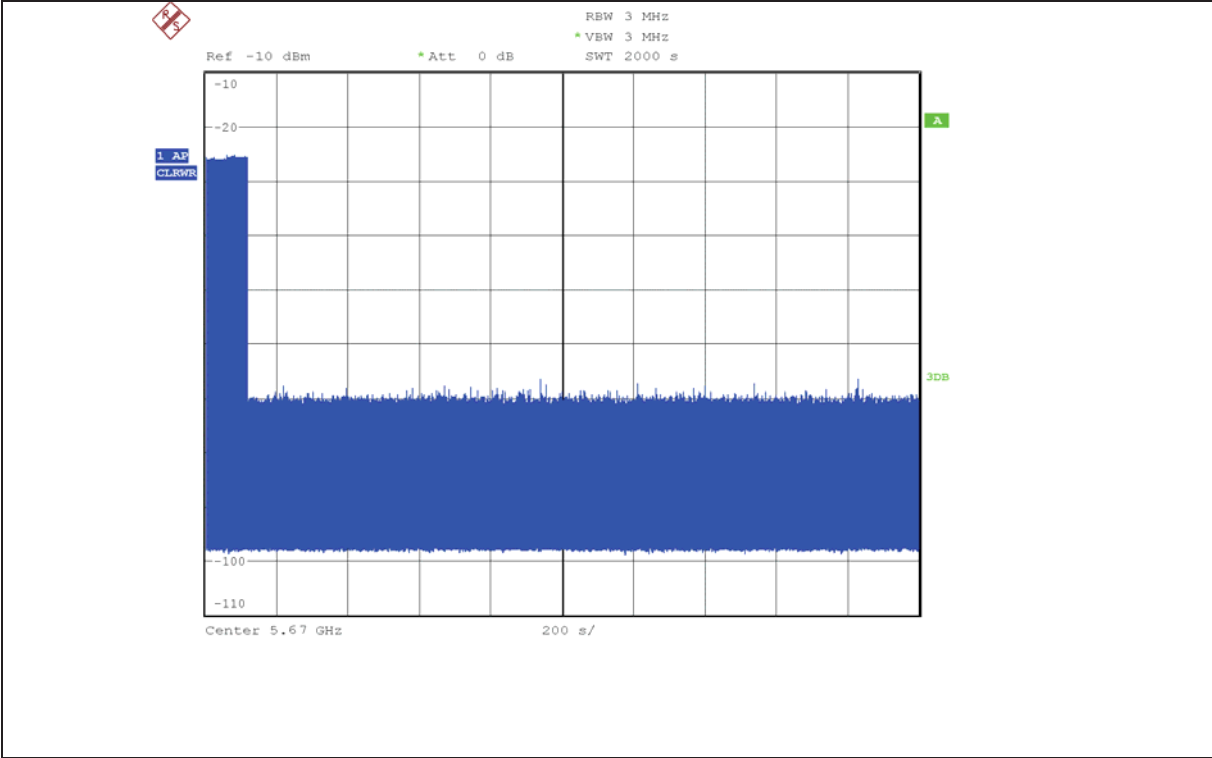

END OF REPORT