




11N20MIMO_Ant1_High_2462

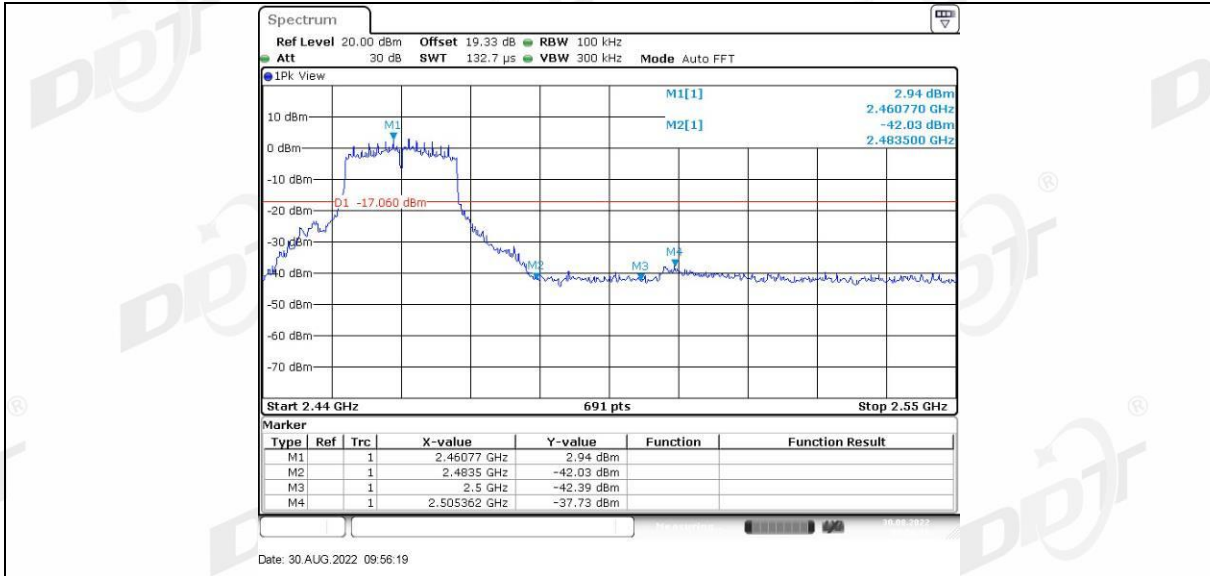




11N20MIMO_Ant2_High_2462

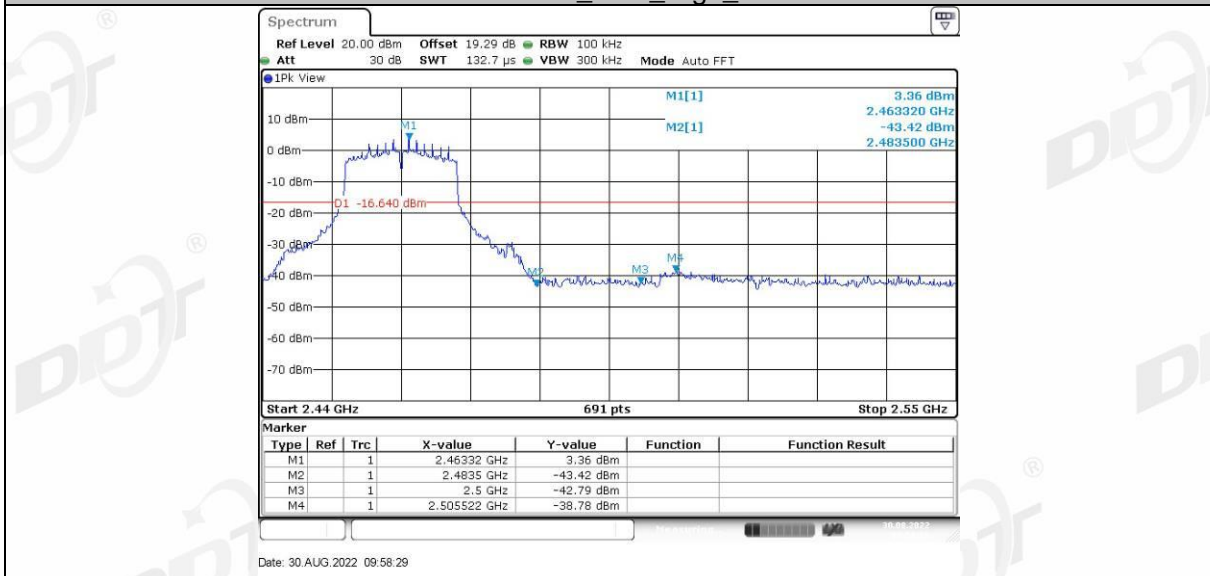


11N40MIMO_Ant1_Low_2422

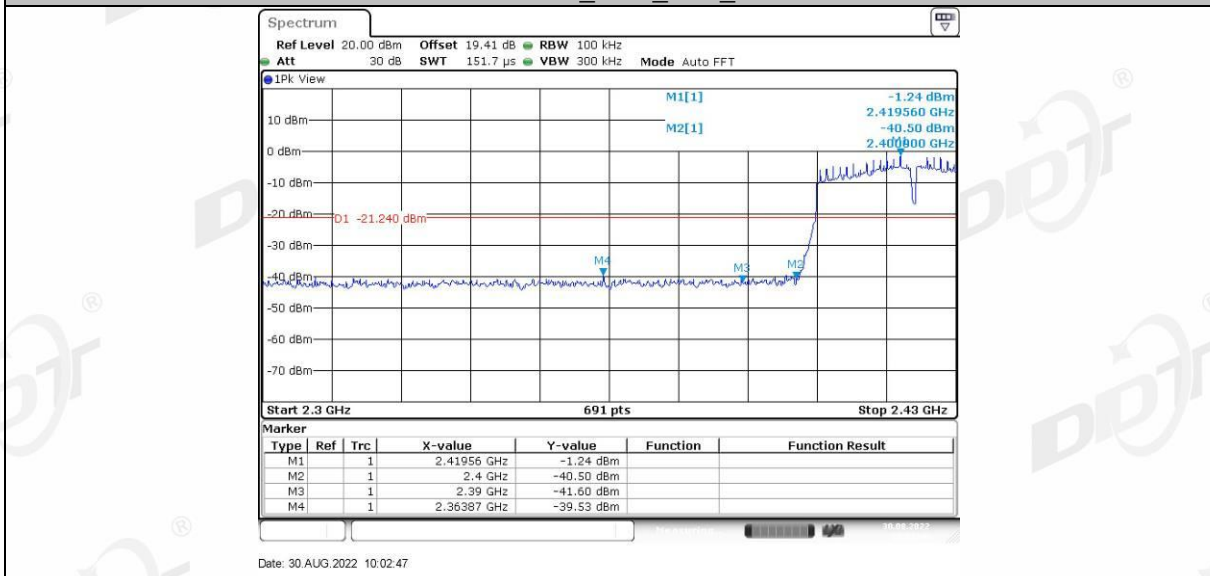


11N40MIMO_Ant2_Low_2422

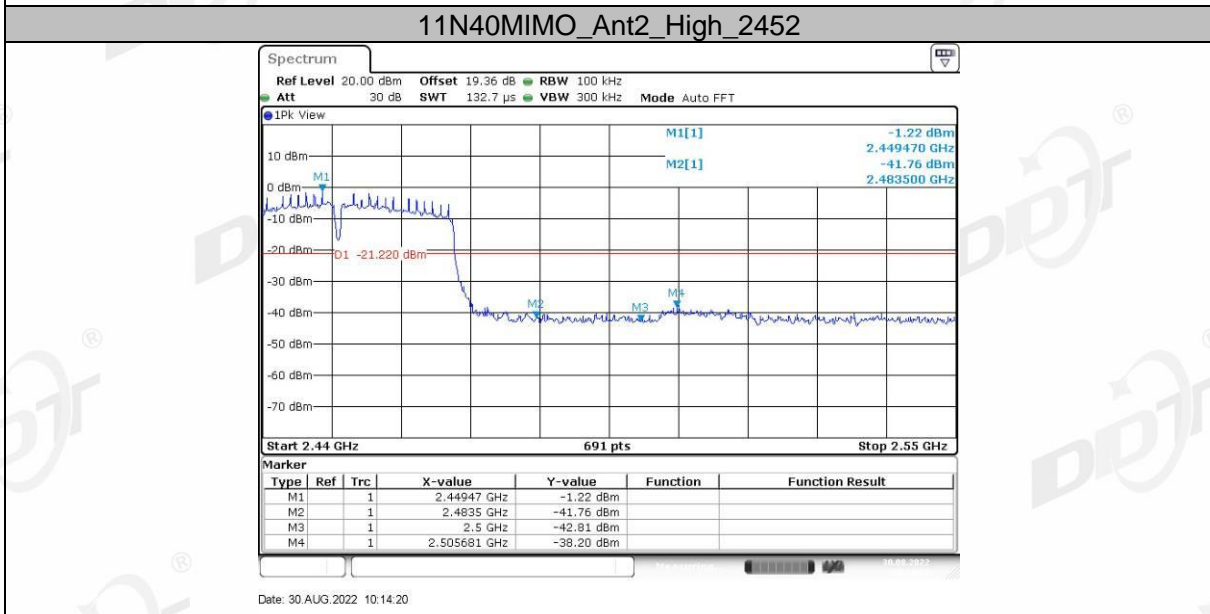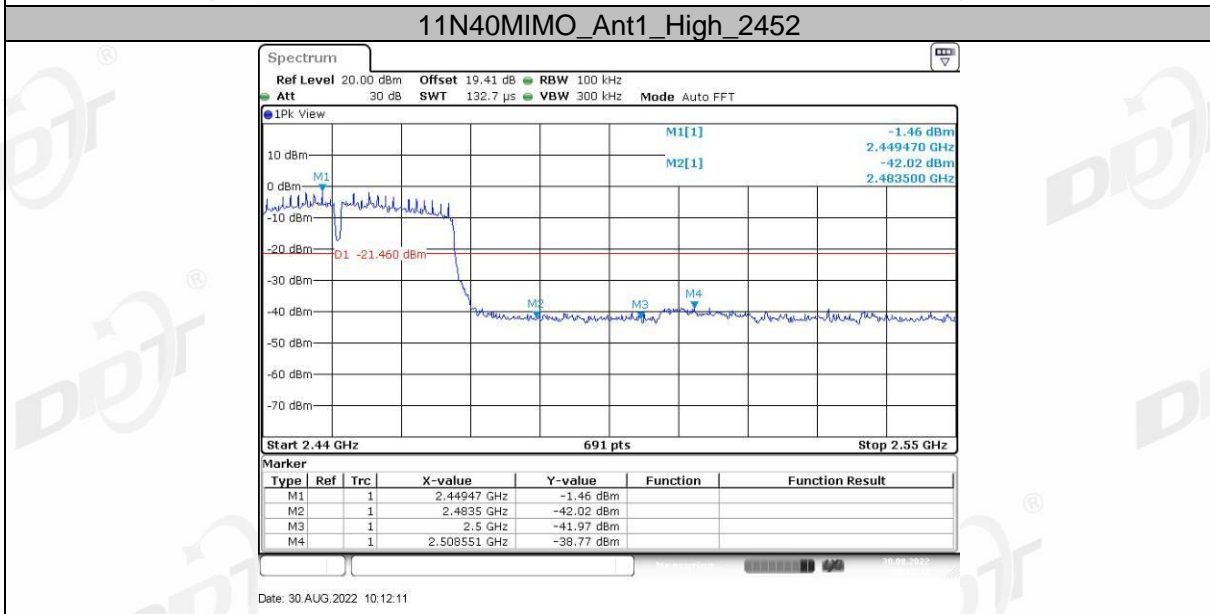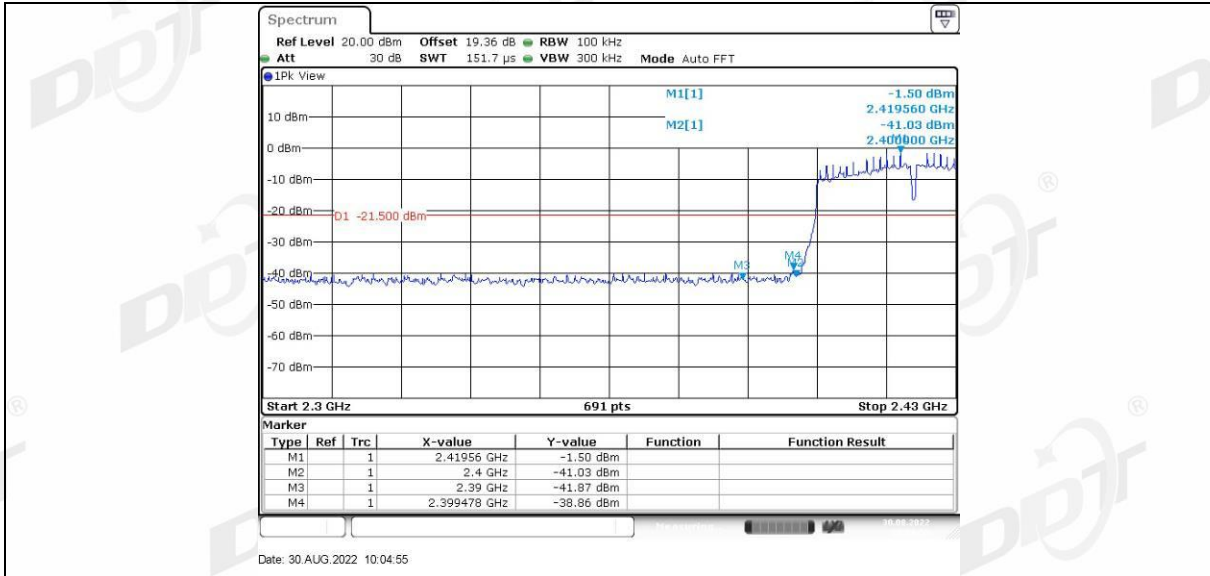


11AX20MIMO_Ant1_Low_2412

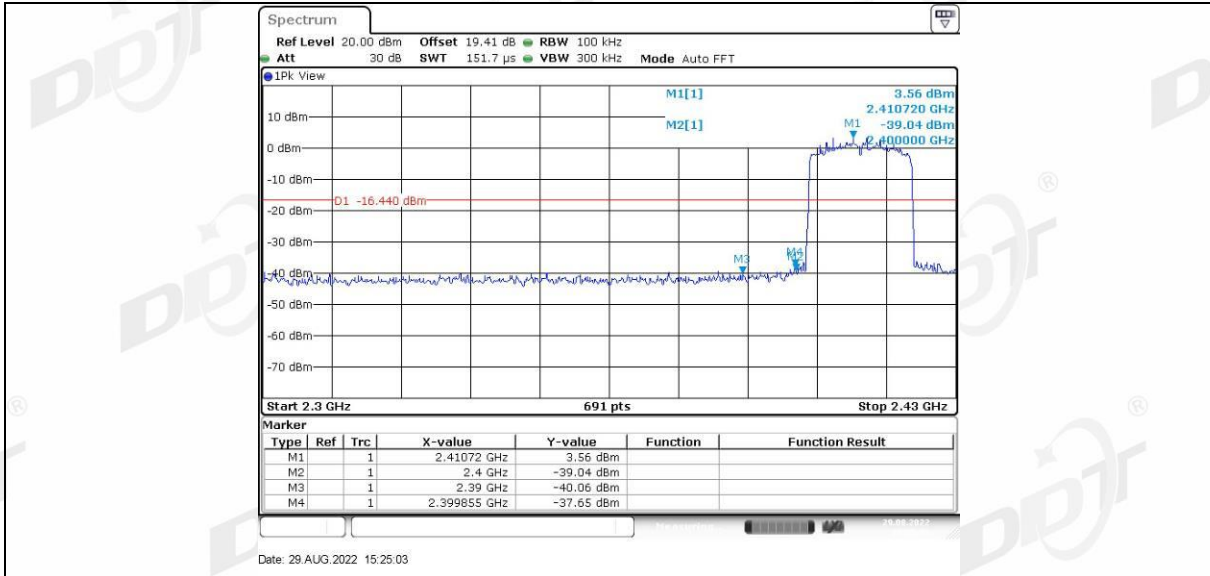



11AX20MIMO_Ant2_Low_2412


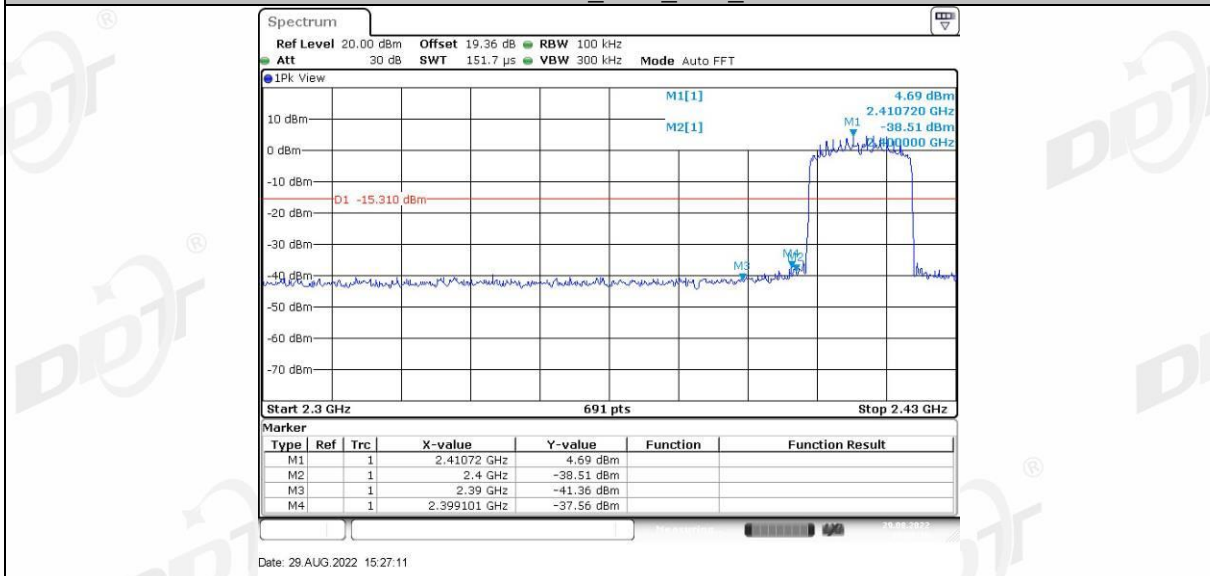


11AX20MIMO_Ant1_High_2462

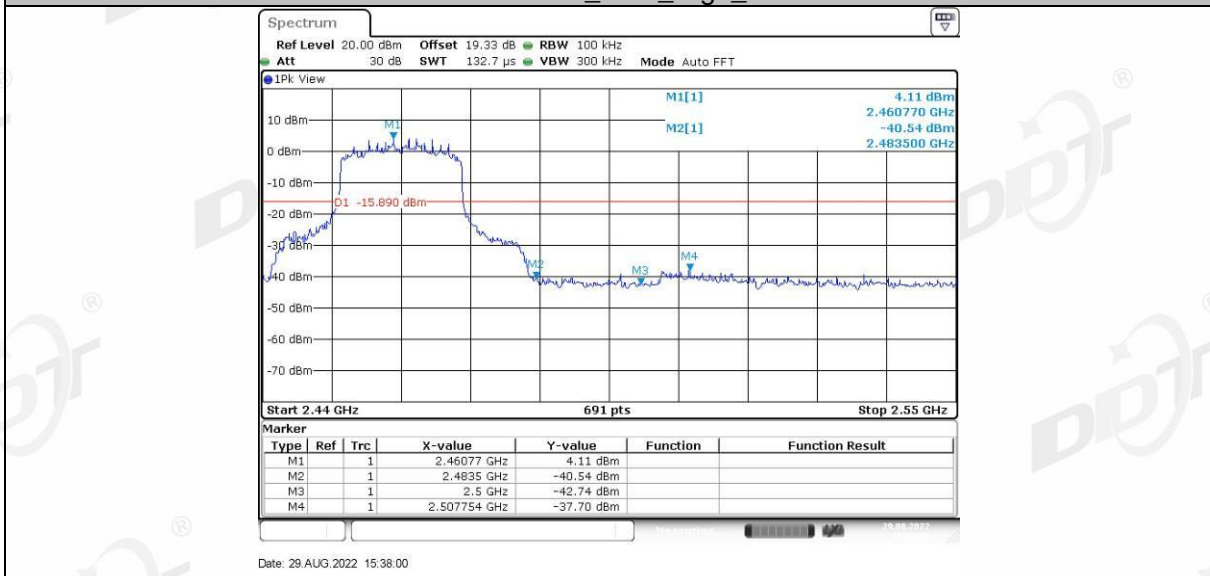

11AX20MIMO_Ant2_High_2462

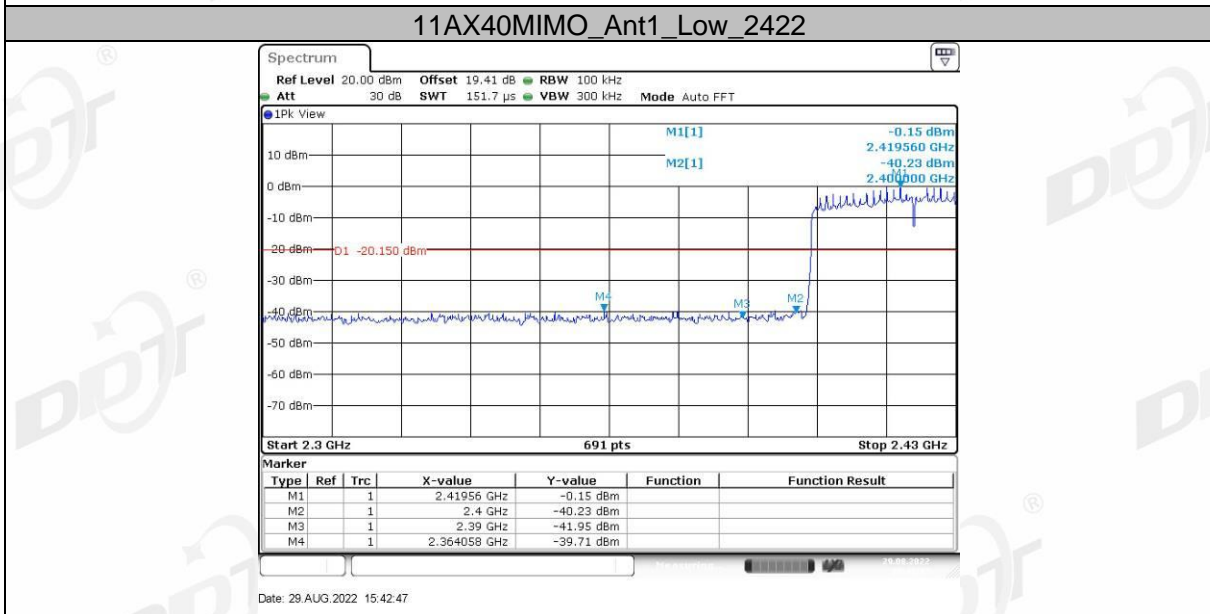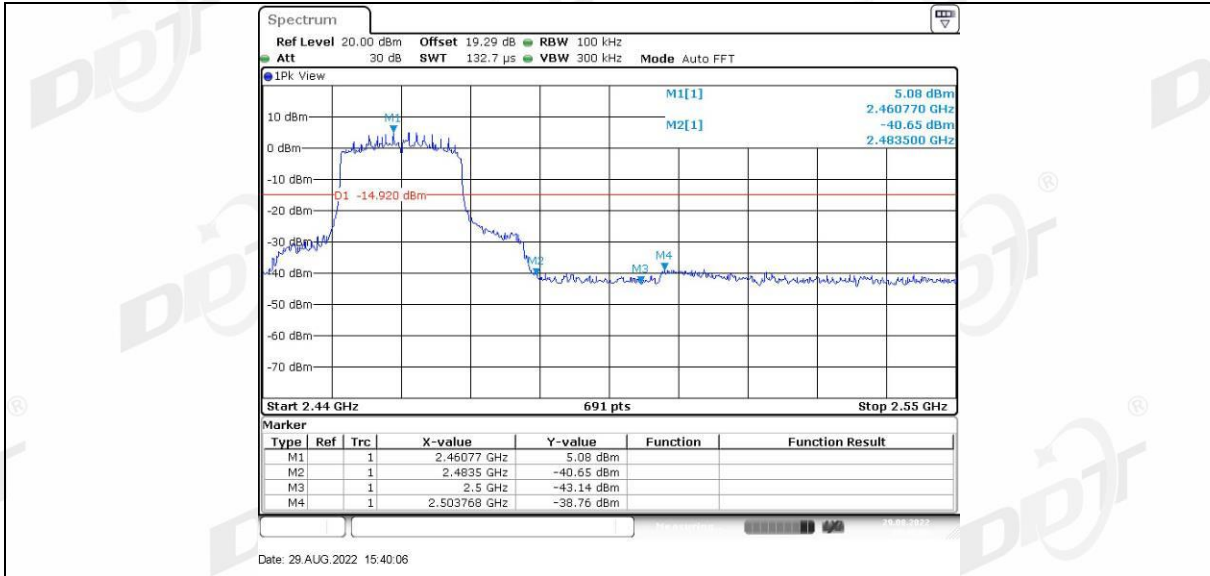


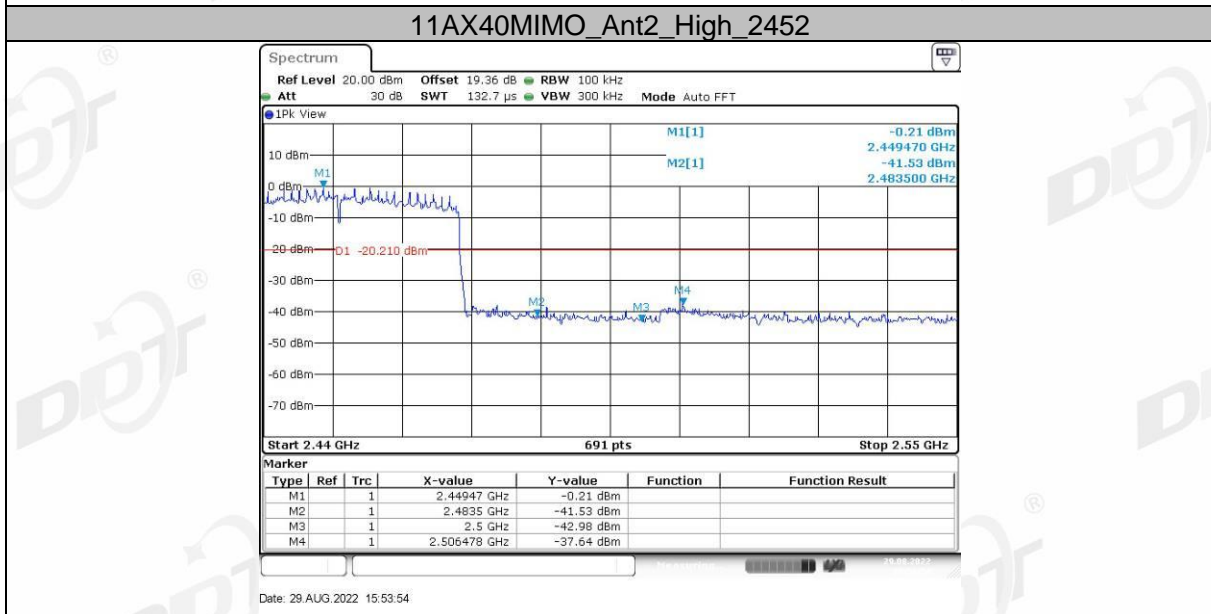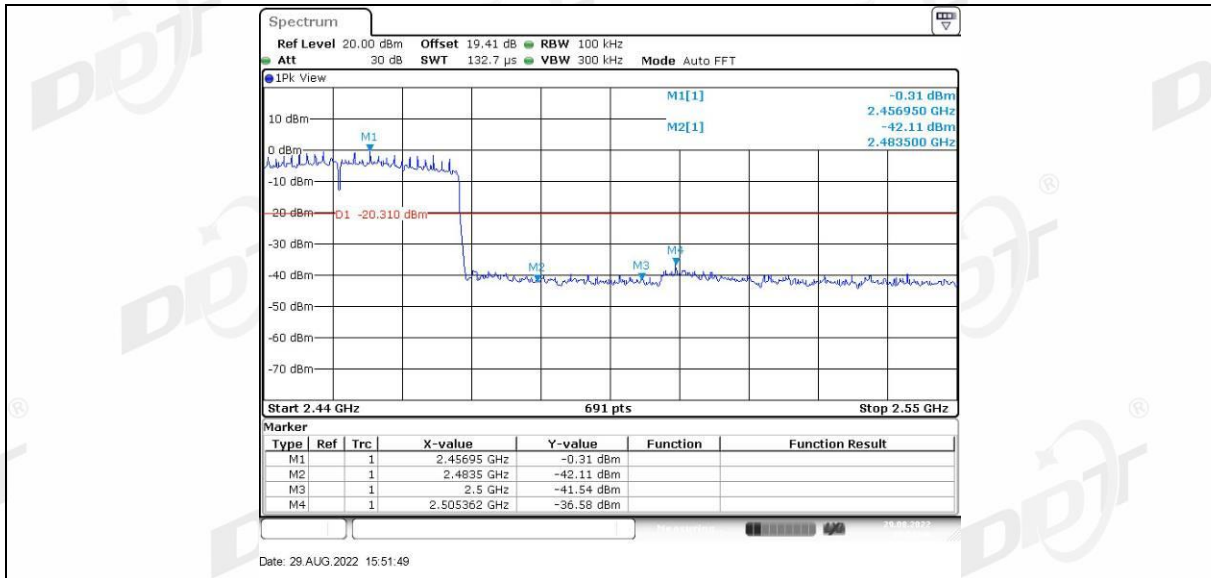


8. Radiated Spurious Emissions

8.1. Block diagram of test setup


In 3 m Anechoic Chamber, test setup diagram for 9 kHz - 30 MHz:

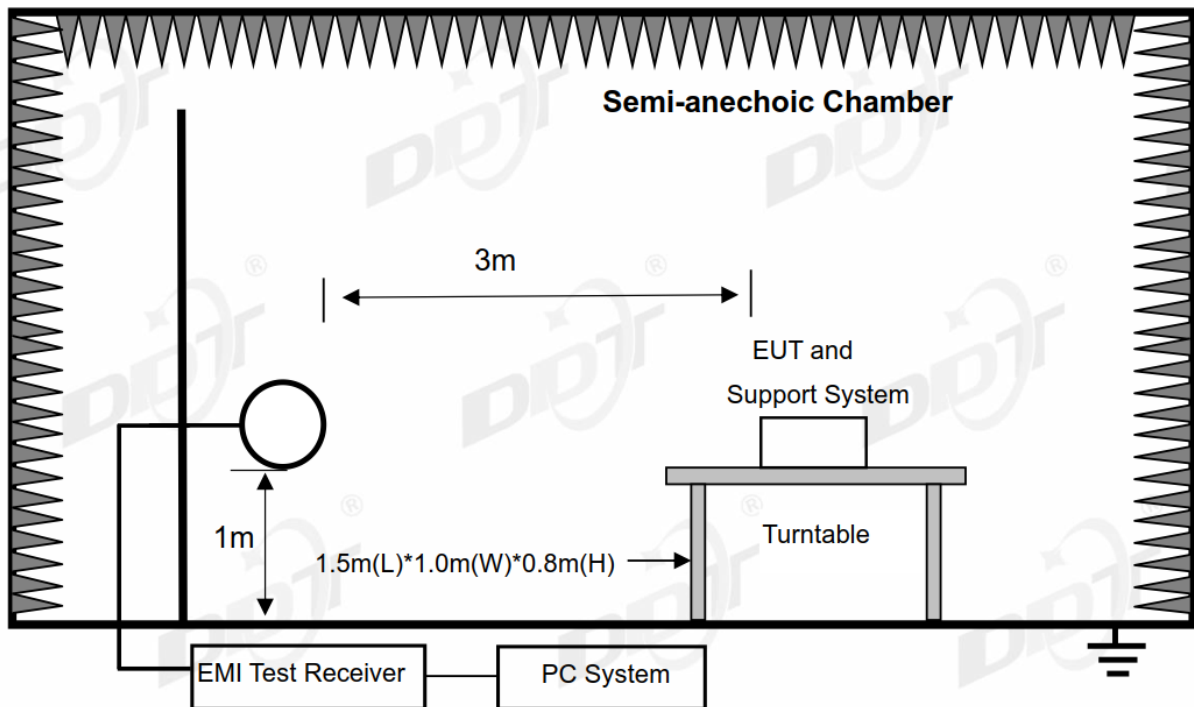

In 3 m Anechoic Chamber, test setup diagram for 30 MHz - 1 GHz:

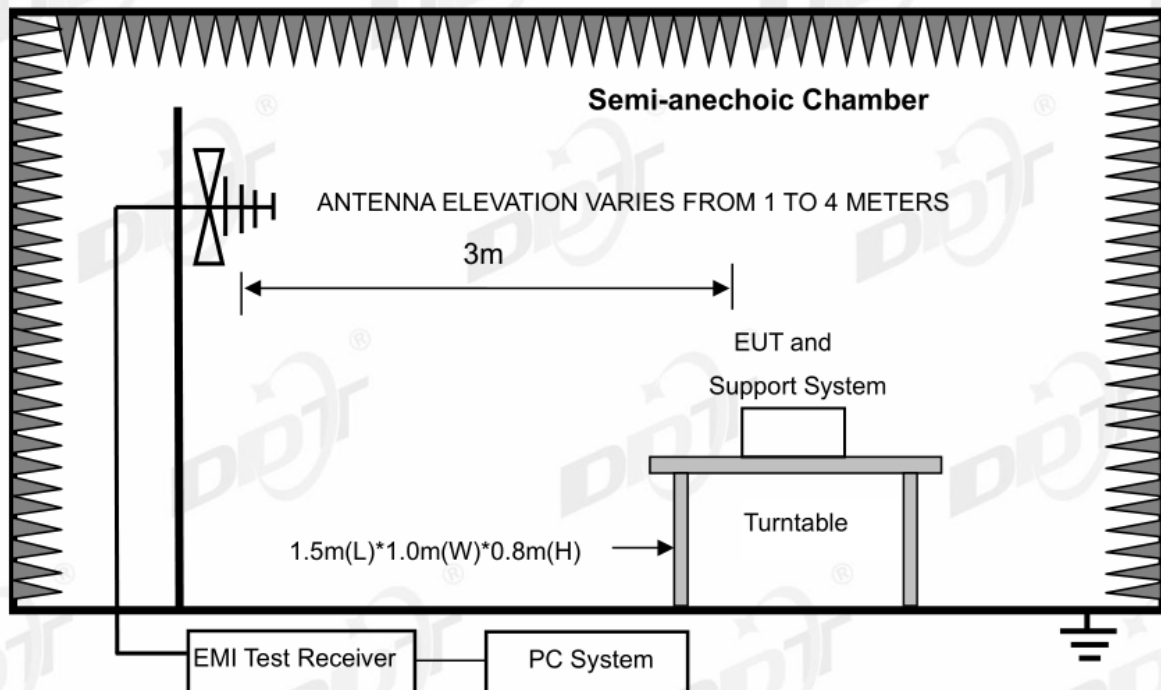

In 3 m Anechoic Chamber, test setup diagram for frequency above 1 GHz:

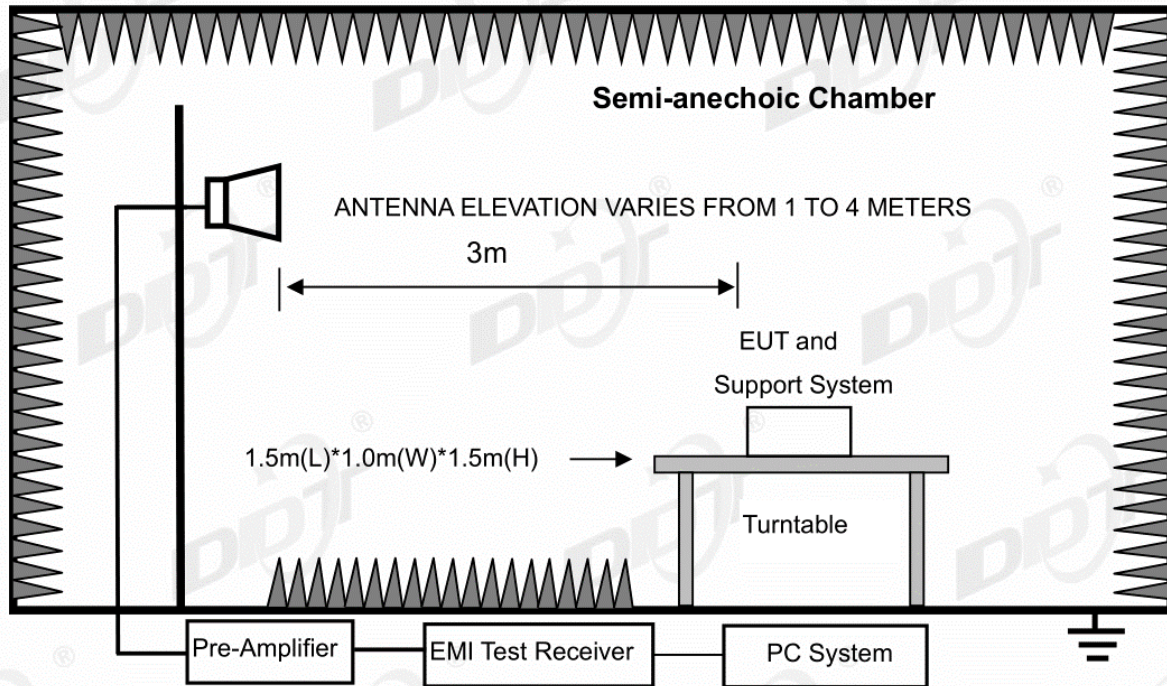

Note: For harmonic emissions test an appropriate high pass filter was inserted in the input port of AMP.

8.2. Limit

(1) FCC 15.205 Restricted frequency band:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.1772&4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.2072&4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6

RSS-Gen section 8.10 Restricted frequency bands*

MHz	MHz	MHz	GHz
0.090-0.110	12.51975-12.52025	240-285	3.5-4.4
0.495-0.505	12.57675-12.57725	322-335.4	4.5-5.15
2.1735-2.1905	13.36-13.41	399.9-410	5.35-5.46
3.020-3.026	16.42-16.423	608-614	7.25-7.75
4.125-4.128	16.69475-16.69525	960-1427	8.025-8.5
4.1772&4.17775	16.80425-16.80475	1435-1626.5	9.0-9.2
4.2072&4.20775	25.5-25.67	1645.5-1646.5	9.3-9.5
5.677-5.683	37.5-38.25	1660-1710	10.6-12.7
6.215-6.218	73-74.6	1718.8-1722.2	13.25-13.4
6.26775-6.26825	74.8-75.2	2200-2300	14.47-14.5
6.31175-6.31225	108-138	2310-2390	15.35-16.2
8.291-8.294	149.9-150.05	2483.5-2500	17.7-21.4
8.362-8.366	156.52475-156.52525	2655-2900	22.01-23.12
8.37625-8.38675	156.7-156.9	3260-3267	23.6-24.0
8.41425-8.41475	162.0125-167.17	3332-3339	31.2-31.8
12.29-12.293	167.72-173.2	3345.8-3358	36.43-36.5
			Above 38.6

* Certain frequency bands listed in table and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

(2) FCC 15.209 Limit.

Frequency (MHz)	Measurement distance (meters)	Field strength limit	
		$\mu\text{V}/\text{m}$	$\text{dB}(\mu\text{V})/\text{m}$
0.009 ~ 0.490	300	2400/F(kHz)	67.6-20log(F)
0.490 ~ 1.705	30	24000/F(kHz)	87.6-20log(F)
1.705 ~ 30.0	30	30	29.54
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB(μV)/m (Peak), 54.0 dB(μV)/m (Average)	

Note:

(1) The emission limits shown in the above table are based on measurements employing a CISPR QP detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000MHz, radiated emissions limits in these three bands are based on measurements employing an average detector.

(2) At frequencies below 30MHz, measurement may be performed at a distance closer than that specified, and the limit at closer measurement distance can be extrapolated by below formula:

$$\text{Limit}_{3\text{m}}(\text{dB}\mu\text{V}/\text{m}) = \text{Limit}_{30\text{m}}(\text{dB}\mu\text{V}/\text{m}) + 40\text{Log}(30\text{m}/3\text{m})$$

(3) Limit for this EUT

The emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, and the emissions appearing within RSS-Gen section 8.10 Restricted frequency bands shall not exceed the limits shown in RSS-Gen section 8.9, all the other emissions shall be at least 20 dB below the fundamental emissions or comply with 15.209 limits and RSS-Gen section 8.9 limits.

8.3. Test procedure

(1) EUT height should be 0.8 m for below 1 GHz at a semi - anechoic chamber while EUT height should be 1.5 m for above 1 GHz at full chamber or semi - anechoic chamber ground with absorbers.

(2) The antenna used as below table.

Test frequency range	Test antenna used	Test antenna distance
9kHz-30MHz	Active Loop antenna	3m
30MHz-1GHz	Trilog Broadband Antenna	3m
1GHz-18GHz	Double Ridged Horn Antenna (1GHz-18GHz)	3m
18GHz-40GHz	Horn Antenna (18GHz-40GHz)	1m

According ANSI C63.10:2013 clause 6.4.6 and 6.5.3, for measurements below 30 MHz, Antenna was located 3 m from EUT, the loop antenna was positioned in three antenna orientations (parallel, perpendicular, and round-parallel), for each measurement antenna alignment, the EUT shall be rotated through 0° to 360° on a turntable, and the lowest height of the magnetic antenna shall be 1 m above the ground. For measurement above 30MHz, the trilog Broadband Antenna or Horn Antenna was located 3m from EUT, Measurements were made with the antenna positioned in both the horizontal and vertical planes of Polarization, and the measurement antenna was varied from 1 m to 4 m. in height above the reference ground plane to obtain the maximum signal strength.

(3) Below pre-scan procedure was first performed in order to find prominent frequency spectrum radiated emissions from 9 kHz to 25 GHz:

(a) Scanning the peak frequency spectrum with the antenna specified in step (3), and the EUT was rotated 360 degree, the antenna height was varied from 1 m to 4 m (Except loop antenna, it's fixed 1m above ground.)

(b) Change work frequency or channel of device if practicable.

(c) Change modulation type of device if practicable.

(d) Change power supply range from 85% to 115% of the rated supply voltage

(e) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions.

Spectrum frequency from 9 kHz to 25 GHz (tenth harmonic of fundamental frequency) was investigated, and no any obvious emission were detected from 18GHz to 25GHz, so below

final test was performed with frequency range from 9kHz to 18GHz.

- (4) For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1 m and 4 m in order to maximize the emission.

Measurements in both horizontal and vertical polarities were made and the data was recorded.

In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.10 2013 on Radiated Emission test.

- (5) The emissions from 9 kHz to 1 GHz were measured based on CISPR QP detector except for the frequency bands 9-90 kHz, 110-490 kHz, for emissions from 9 kHz-90 kHz, 110 kHz-490 kHz and above 1 GHz were measured based on average detector, for emissions above 1 GHz, peak emissions also be measured and need comply with Peak limit.
- (6) The emissions from 9 kHz to 1 GHz, QP or average values were measured with EMI receiver with below RBW

Frequency band	RBW
9 kHz-150 kHz	200 Hz
150 kHz-30 MHz	9 kHz
30 MHz-1 GHz	120 kHz

- (7) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1 MHz, VBW is set at 3 MHz for Peak measure; RMS detector RBW 1 MHz VBW 10 Hz for Average measure (according ANSI C63.10:2013 clause 4.2.3.2.3 procedure for average measure).
- (8) X axis, Y axis, Z axis are tested, and worse setup X axis is reported.

8.4. Test result

Pass. (See below detailed test result)

All the emissions except fundamental emission from 9 kHz to 25 GHz were comply with 15.209 limits and RSS-Gen section 8.9 limits.

Note1: According exploratory test, the emission levels are 20 dB below the limit detected from 9 kHz to 30 MHz and 18 GHz to 25 GHz, so the final test was performed with frequency range from 30 MHz to 18 GHz and recorded in below.

Note2: 30 MHz ~ 25 GHz: (Scan with all mode, the worst case is 802.11ax HT20 mode)

Note3: For emissions below 1 GHz, according exploratory explorer test, when change Tx mode and channel, have no distinct influence on emissions level, so for emissions below 1 GHz, the final test was only performed with EUT working in 802.11ax HE20, Tx 2412 MHz 26 Tone mode.

Note4: For emissions above 1 GHz. If peak results comply with AV limit, AV Result is deemed to comply with AV limit, only recorded the worst case in this report. And the BT+2.4GWIFI is the worst simultaneous case and was recorded.

Radiated Emission test (below 1GHz) TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22070406-2E Charge 5
Wifi\FCC BELOW 1G.EM6

Test Date : 2022-07-22

Tested By : James Gan

EUT : Wireless Speaker

Model Number : CHARGE 5 Wi-Fi


Power Supply : Battery

Test Mode : Tx Mode

Condition : Temp:22.6°C,Humi:54.3%,Press:100.1kPa **Antenna/Distance** : 2022 VULB9161 #3 H/3m/HORIZONTAL

Memo : 2.4G WIFI

Data:
7

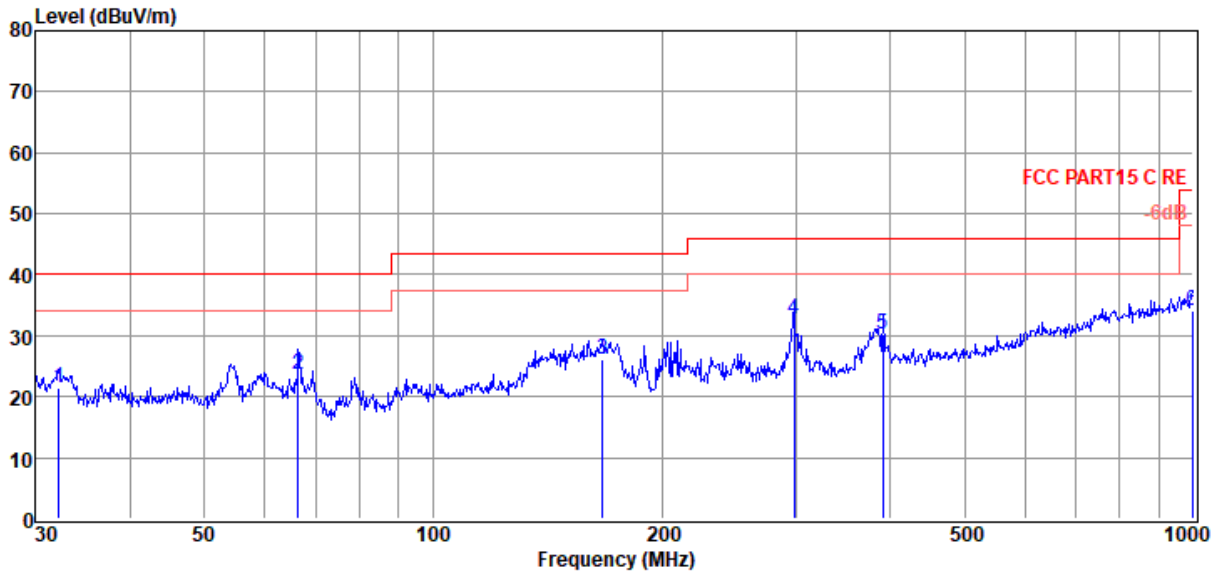

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	32.18	6.82	11.14	3.56	21.52	40.00	-18.48	QP	HORIZONTAL
2	66.50	10.39	9.45	3.80	23.64	40.00	-16.36	QP	HORIZONTAL
3	167.24	2.25	19.50	4.33	26.08	43.50	-17.42	QP	HORIZONTAL
4	298.27	15.06	12.97	4.81	32.84	46.00	-13.16	QP	HORIZONTAL
5	390.72	9.45	15.70	5.12	30.27	46.00	-15.73	QP	HORIZONTAL
6	996.50	3.53	23.86	6.82	34.21	54.00	-19.79	QP	HORIZONTAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss.
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.11\2022 Report Data\Q22070406-2E Charge 5
Wifi\FCC BELOW 1G.EM6

Test Date : 2022-07-22

Tested By : James Gan

EUT : Wireless Speaker

Model Number : CHARGE 5 Wi-Fi


Power Supply : Battery

Test Mode : Tx Mode

Condition : Temp:22.6°C,Humi:54.3%,Press:100.1kPa **Antenna/Distance** : 2022 VULB9161 #3 V/3m/VERTICAL

Memo : 2.4G WIFI

Data:
8

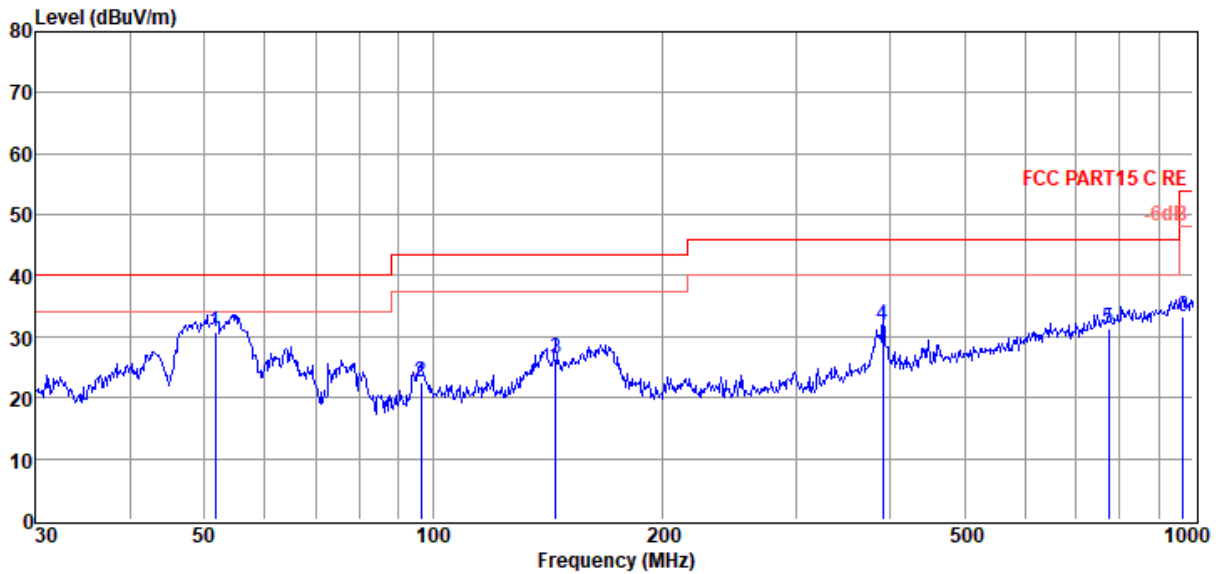

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	51.66	15.50	11.57	3.68	30.75	40.00	-9.25	QP	VERTICAL
2	96.44	6.55	12.04	3.96	22.55	43.50	-20.95	QP	VERTICAL
3	144.84	5.41	16.70	4.23	26.34	43.50	-17.16	QP	VERTICAL
4	390.72	10.95	15.70	5.12	31.77	46.00	-14.23	QP	VERTICAL
5	774.16	3.68	21.58	6.16	31.42	46.00	-14.58	QP	VERTICAL
6	968.93	2.89	23.76	6.67	33.32	54.00	-20.68	QP	VERTICAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss.
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

Radiated Emission test (above 1GHz) TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22070406-2E Charge 5
Wifi\FCC ABOVE 1G 2.4G.EM6

Test Date : 2022-07-20

Tested By : James Gan

EUT : Wireless Speaker

Model Number : CHARGE 5 Wi-Fi

Power Supply : AC 120V/60Hz


Test Mode : Tx Mode

Condition : Temp:22.2°C,Humi:52.9%,Press:100.3kPa

Antenna/Distance : 2021 BBHA 9120D
3#/3m/HORIZONTAL

Memo : 11AX20 2412 Power:15

Data: 47

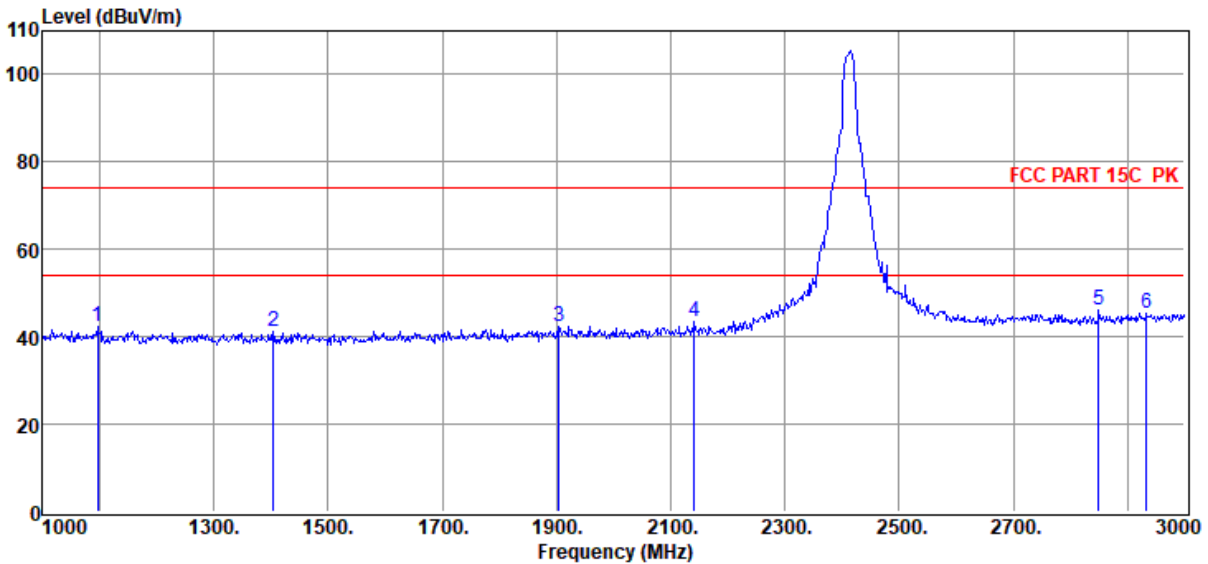

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	1096.00	53.16	25.48	38.04	1.15	0.52	42.27	74.00	-31.73	Peak	HORIZONTAL
2	1404.00	52.36	25.42	38.51	1.33	0.57	41.17	74.00	-32.83	Peak	HORIZONTAL
3	1904.00	53.07	26.45	39.26	1.56	0.66	42.48	74.00	-31.52	Peak	HORIZONTAL
4	2142.00	53.74	26.96	39.47	1.64	0.70	43.57	74.00	-30.43	Peak	HORIZONTAL
5	2850.00	54.54	28.93	39.83	1.83	0.77	46.24	74.00	-27.76	Peak	HORIZONTAL
6	2934.00	53.52	29.25	39.87	1.85	0.78	45.53	74.00	-28.47	Peak	HORIZONTAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22070406-2E Charge 5
Wif\FCC ABOVE 1G 2.4G.EM6

Test Date : 2022-07-20

Tested By : James Gan

EUT : Wireless Speaker

Model Number : CHARGE 5 Wi-Fi

Power Supply : AC 120V/60Hz


Test Mode : Tx Mode

Condition : Temp:22.2°C,Humi:52.9%,Press:100.3kPa

Antenna/Distance : 2021 BBHA 9120D 3#/3m/VERTICAL

Memo : 11AX20 2412 Power:15

Data: 48

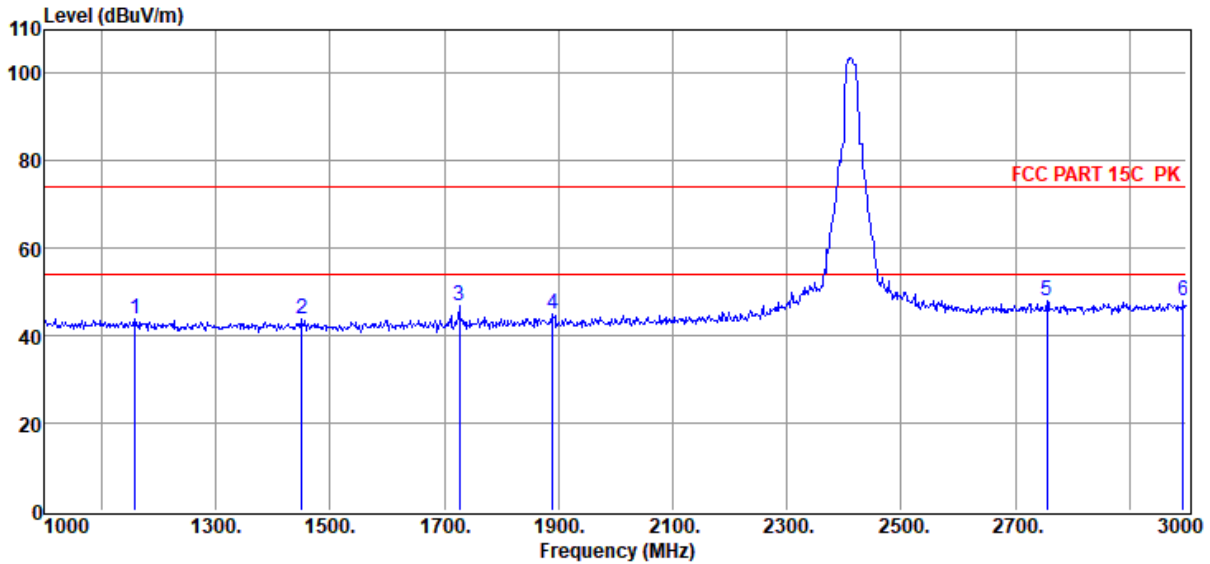

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Filter Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	1158.00	54.96	25.47	38.14	1.19	0.53	44.01	74.00	-29.99	Peak	VERTICAL
2	1450.00	54.92	25.41	38.58	1.35	0.58	43.68	74.00	-30.32	Peak	VERTICAL
3	1726.00	57.94	25.99	38.99	1.48	0.63	47.05	74.00	-26.95	Peak	VERTICAL
4	1890.00	55.54	26.41	39.24	1.55	0.66	44.92	74.00	-29.08	Peak	VERTICAL
5	2756.00	56.54	28.57	39.78	1.81	0.76	47.90	74.00	-26.10	Peak	VERTICAL
6	2994.00	55.60	29.48	39.90	1.87	0.79	47.84	74.00	-26.16	Peak	VERTICAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22070406-2E Charge 5
Wifi\FCC ABOVE 1G 2.4G.EM6

Test Date : 2022-07-20

Tested By : James Gan

EUT : Wireless Speaker

Model Number : CHARGE 5 Wi-Fi

Power Supply : AC 120V/60Hz


Test Mode : Tx Mode

Condition : Temp:22.2°C,Humi:52.9%,Press:100.3kPa

Antenna/Distance : 2021 BBHA 9120D
3#/3m/HORIZONTAL

Memo : 11AX20 2437 Power:15

Data: 49

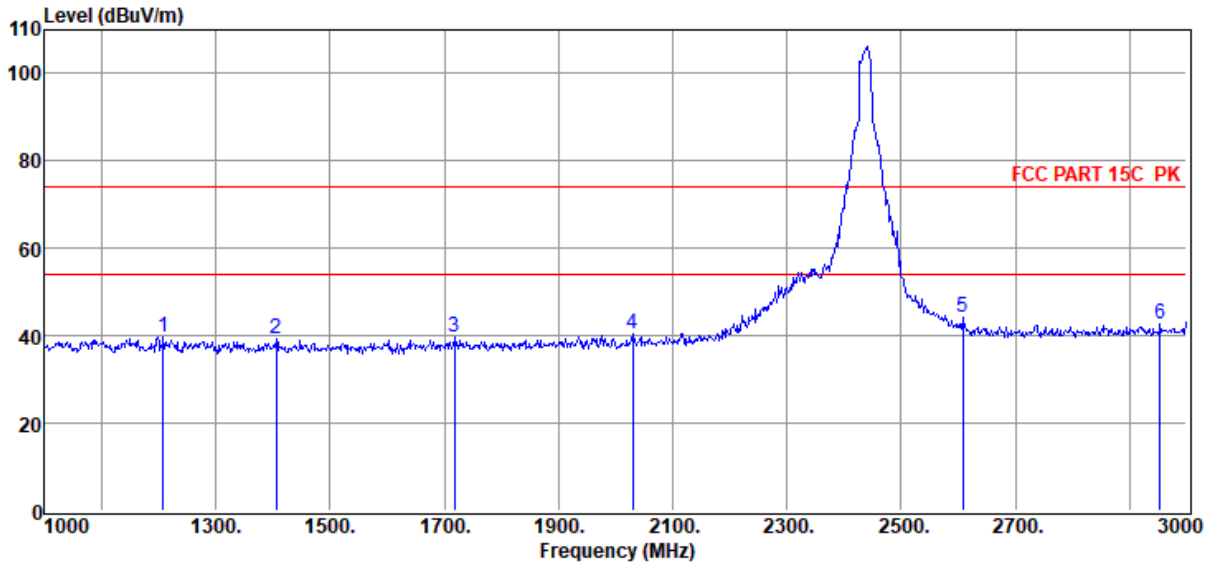

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Filter Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	1208.00	50.84	25.46	38.21	1.22	0.54	39.85	74.00	-34.15	Peak	HORIZONTAL
2	1406.00	50.60	25.42	38.51	1.33	0.57	39.41	74.00	-34.59	Peak	HORIZONTAL
3	1718.00	50.55	25.97	38.98	1.48	0.63	39.65	74.00	-34.35	Peak	HORIZONTAL
4	2030.00	50.92	26.75	39.42	1.61	0.68	40.54	74.00	-33.46	Peak	HORIZONTAL
5	2608.00	53.25	28.01	39.70	1.77	0.75	44.08	74.00	-29.92	Peak	HORIZONTAL
6	2954.00	50.66	29.33	39.88	1.86	0.78	42.75	74.00	-31.25	Peak	HORIZONTAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22070406-2E Charge 5
Wif\FCC ABOVE 1G 2.4G.EM6

Test Date : 2022-07-20

Tested By : James Gan

EUT : Wireless Speaker

Model Number : CHARGE 5 Wi-Fi

Power Supply : AC 120V/60Hz


Test Mode : Tx Mode

Condition : Temp:22.2°C,Humi:52.9%,Press:100.3kPa

Antenna/Distance : 2021 BBHA 9120D 3#/3m/VERTICAL

Memo : 11AX20 2437 Power:15

Data: 50

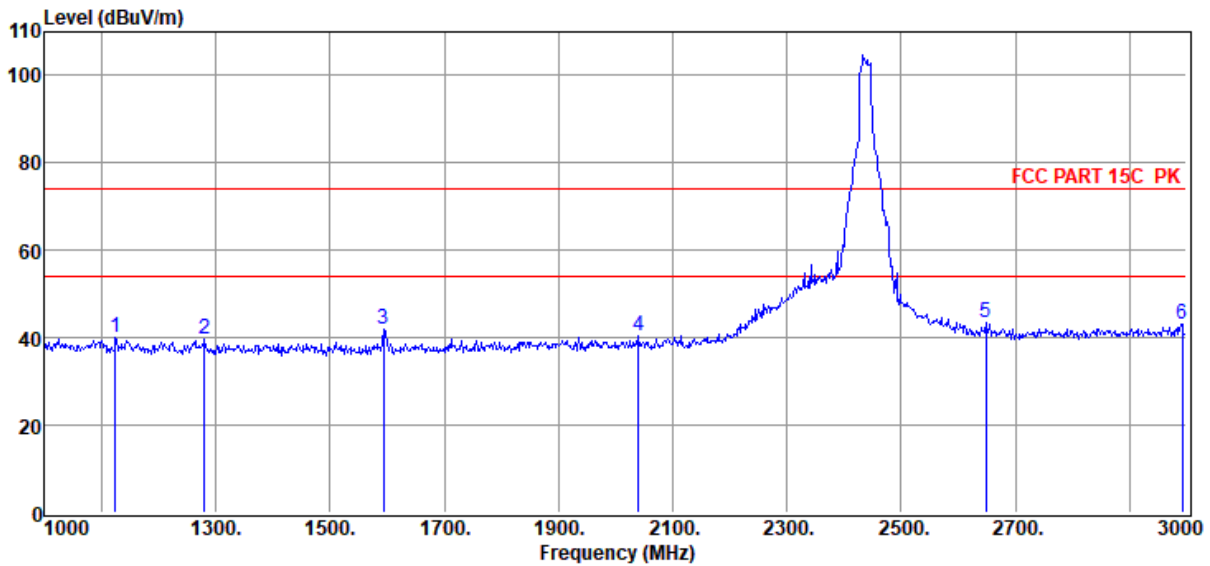

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Filter Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	1124.00	51.15	25.48	38.09	1.17	0.52	40.23	74.00	-33.77	Peak	VERTICAL
2	1280.00	50.73	25.44	38.32	1.26	0.55	39.66	74.00	-34.34	Peak	VERTICAL
3	1594.00	53.03	25.64	38.79	1.42	0.61	41.91	74.00	-32.09	Peak	VERTICAL
4	2040.00	50.64	26.77	39.42	1.61	0.68	40.28	74.00	-33.72	Peak	VERTICAL
5	2648.00	52.42	28.16	39.72	1.78	0.75	43.39	74.00	-30.61	Peak	VERTICAL
6	2992.00	50.98	29.47	39.90	1.87	0.79	43.21	74.00	-30.79	Peak	VERTICAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22070406-2E Charge 5
Wifi\FCC ABOVE 1G 2.4G.EM6

Test Date : 2022-07-20

Tested By : James Gan

EUT : Wireless Speaker

Model Number : CHARGE 5 Wi-Fi

Power Supply : AC 120V/60Hz


Test Mode : Tx Mode

Condition : Temp:22.2°C,Humi:52.9%,Press:100.3kPa

Antenna/Distance : 2021 BBHA 9120D
3#/3m/HORIZONTAL

Memo : 11AX20 2462 Power:15

Data: 51

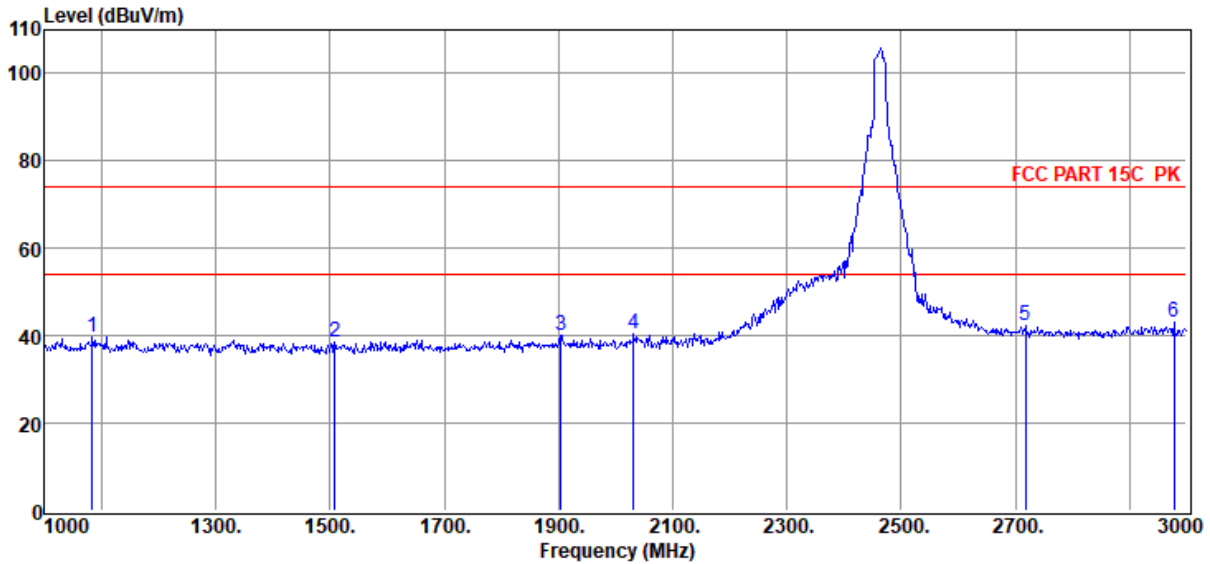

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Filter Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	1084.00	50.51	25.48	38.03	1.15	0.52	39.63	74.00	-34.37	Peak	HORIZONTAL
2	1508.00	49.96	25.42	38.66	1.38	0.59	38.69	74.00	-35.31	Peak	HORIZONTAL
3	1904.00	50.75	26.45	39.26	1.56	0.66	40.16	74.00	-33.84	Peak	HORIZONTAL
4	2032.00	50.69	26.76	39.42	1.61	0.68	40.32	74.00	-33.68	Peak	HORIZONTAL
5	2718.00	51.29	28.43	39.76	1.80	0.76	42.52	74.00	-31.48	Peak	HORIZONTAL
6	2978.00	50.83	29.42	39.89	1.86	0.79	43.01	74.00	-30.99	Peak	HORIZONTAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22070406-2E Charge 5
Wif\FCC ABOVE 1G 2.4G.EM6

Test Date : 2022-07-20

Tested By : James Gan

EUT : Wireless Speaker

Model Number : CHARGE 5 Wi-Fi

Power Supply : AC 120V/60Hz


Test Mode : Tx Mode

Condition : Temp:22.2°C,Humi:52.9%,Press:100.3kPa

Antenna/Distance : 2021 BBHA 9120D 3#/3m/VERTICAL

Memo : 11AX20 2462 Power:15

Data: 52

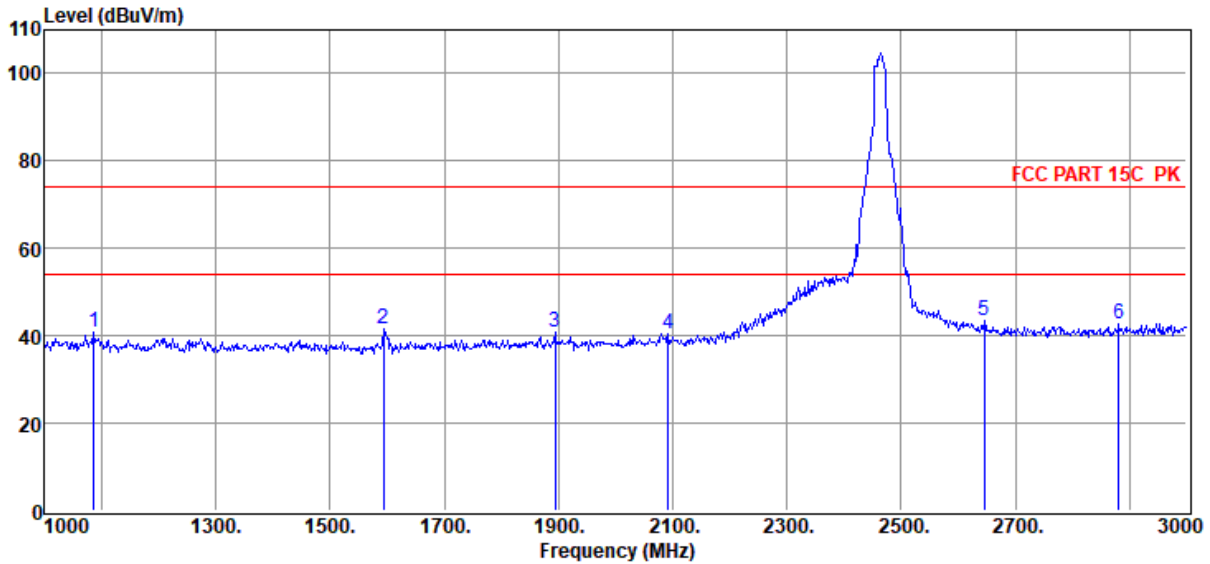

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Filter Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	1086.00	51.57	25.48	38.03	1.15	0.52	40.69	74.00	-33.31	Peak	VERTICAL
2	1594.00	52.54	25.64	38.79	1.42	0.61	41.42	74.00	-32.58	Peak	VERTICAL
3	1894.00	51.26	26.42	39.24	1.55	0.66	40.65	74.00	-33.35	Peak	VERTICAL
4	2092.00	50.57	26.87	39.45	1.63	0.69	40.31	74.00	-33.69	Peak	VERTICAL
5	2646.00	52.51	28.15	39.72	1.78	0.75	43.47	74.00	-30.53	Peak	VERTICAL
6	2882.00	51.02	29.05	39.84	1.84	0.78	42.85	74.00	-31.15	Peak	VERTICAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22070406-2E Charge 5
Wifi\FCC ABOVE 1G 2.4G.EM6

Test Date : 2022-07-20

Tested By : James Gan

EUT : Wireless Speaker

Model Number : CHARGE 5 Wi-Fi

Power Supply : AC 120V/60Hz


Test Mode : Tx Mode

Condition : Temp:22.2°C,Humi:52.9%,Press:100.3kPa

Antenna/Distance : 2021 BBHA 9120D
3#/3m/HORIZONTAL

Memo : 11AX20 RU26 0 2412 Power:15

Data: 59

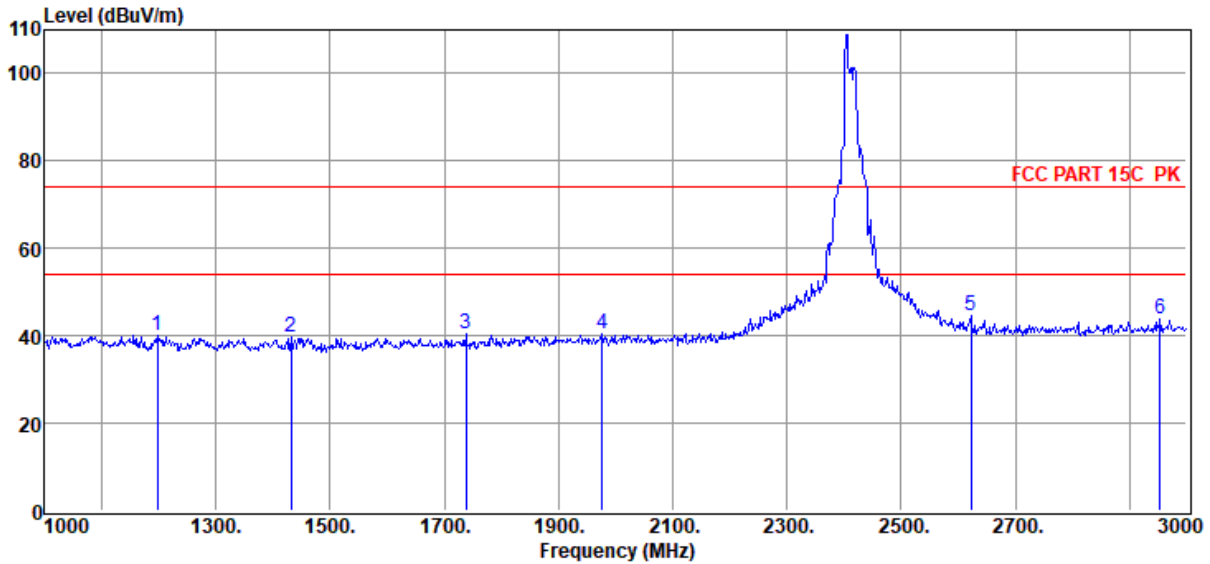

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Filter Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	1198.00	51.07	25.46	38.20	1.21	0.54	40.08	74.00	-33.92	Peak	HORIZONTAL
2	1432.00	50.80	25.41	38.55	1.34	0.58	39.58	74.00	-34.42	Peak	HORIZONTAL
3	1738.00	51.27	26.02	39.01	1.48	0.63	40.39	74.00	-33.61	Peak	HORIZONTAL
4	1976.00	50.95	26.64	39.36	1.59	0.68	40.50	74.00	-33.50	Peak	HORIZONTAL
5	2622.00	53.60	28.06	39.71	1.77	0.75	44.47	74.00	-29.53	Peak	HORIZONTAL
6	2954.00	51.60	29.33	39.88	1.86	0.78	43.69	74.00	-30.31	Peak	HORIZONTAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22070406-2E Charge 5
Wif\FCC ABOVE 1G 2.4G.EM6

Test Date : 2022-07-20

Tested By : James Gan

EUT : Wireless Speaker

Model Number : CHARGE 5 Wi-Fi

Power Supply : AC 120V/60Hz


Test Mode : Tx Mode

Condition : Temp:22.2°C,Humi:52.9%,Press:100.3kPa

Antenna/Distance : 2021 BBHA 9120D 3#/3m/VERTICAL

Memo : 11AX20 RU26 0 2412 Power:15

Data: 60

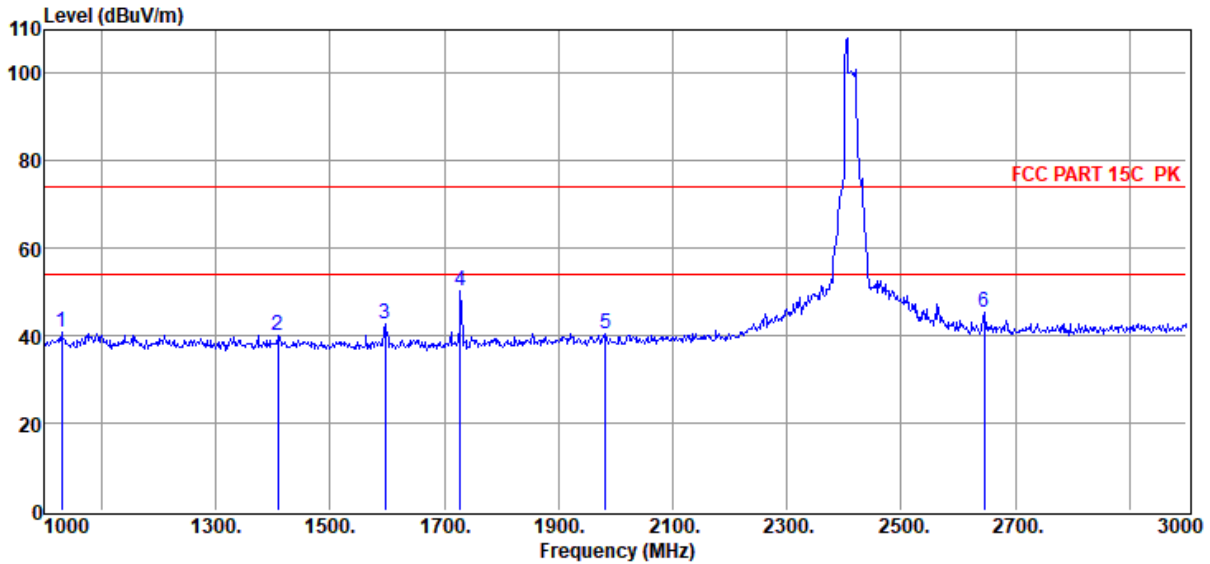

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	1030.00	51.52	25.49	37.94	1.12	0.51	40.70	74.00	-33.30	Peak	VERTICAL
2	1408.00	51.31	25.42	38.51	1.33	0.57	40.12	74.00	-33.88	Peak	VERTICAL
3	1596.00	53.98	25.65	38.79	1.42	0.61	42.87	74.00	-31.13	Peak	VERTICAL
4	1728.00	61.35	25.99	38.99	1.48	0.63	50.46	74.00	-23.54	Peak	VERTICAL
5	1982.00	51.06	26.65	39.37	1.59	0.68	40.61	74.00	-33.39	Peak	VERTICAL
6	2646.00	54.36	28.15	39.72	1.78	0.75	45.32	74.00	-28.68	Peak	VERTICAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22070406-2E Charge 5
Wif\FCC ABOVE 1G 2.4G.EM6

Test Date : 2022-07-20

Tested By : James Gan

EUT : Wireless Speaker

Model Number : CHARGE 5 Wi-Fi

Power Supply : AC 120V/60Hz


Test Mode : Tx Mode

Condition : Temp:22.2°C,Humi:52.9%,Press:100.3kPa

Antenna/Distance : 2021 BBHA 9120D
3#/3m/HORIZONTAL

Memo : 11AX20 RU26 8 2437 Power:15

Data: 61

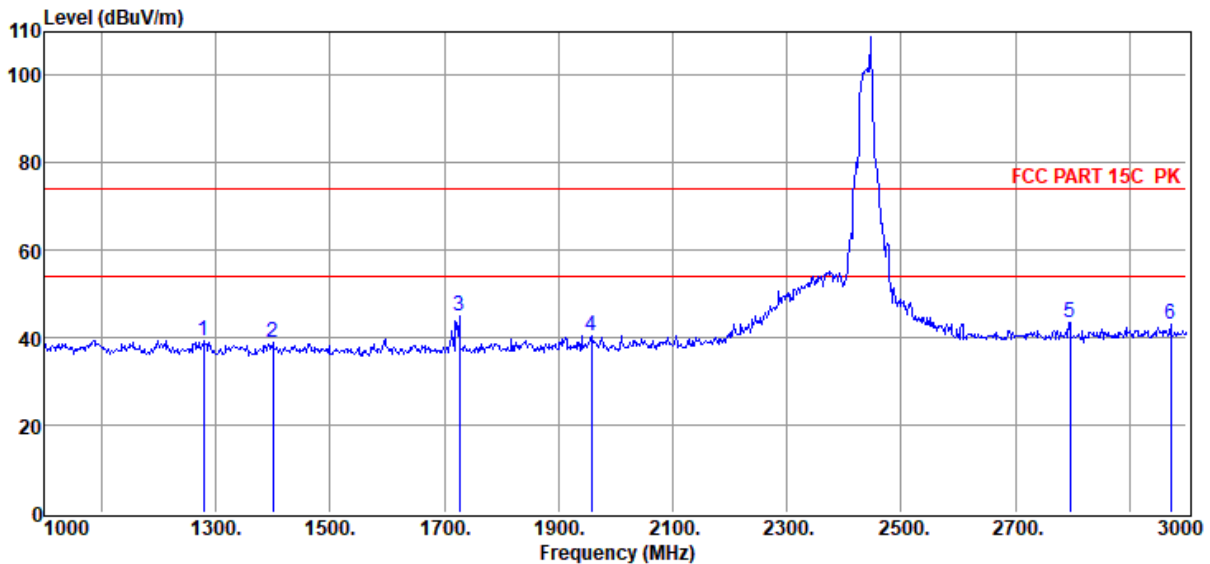

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	1278.00	50.30	25.44	38.32	1.26	0.55	39.23	74.00	-34.77	Peak	HORIZONTAL
2	1400.00	49.96	25.42	38.50	1.32	0.57	38.77	74.00	-35.23	Peak	HORIZONTAL
3	1726.00	55.99	25.99	38.99	1.48	0.63	45.10	74.00	-28.90	Peak	HORIZONTAL
4	1958.00	51.07	26.59	39.34	1.58	0.67	40.57	74.00	-33.43	Peak	HORIZONTAL
5	2796.00	52.01	28.72	39.80	1.82	0.77	43.52	74.00	-30.48	Peak	HORIZONTAL
6	2972.00	50.81	29.39	39.89	1.86	0.79	42.96	74.00	-31.04	Peak	HORIZONTAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22070406-2E Charge 5
Wif\FCC ABOVE 1G 2.4G.EM6

Test Date : 2022-07-20

Tested By : James Gan

EUT : Wireless Speaker

Model Number : CHARGE 5 Wi-Fi

Power Supply : AC 120V/60Hz


Test Mode : Tx Mode

Condition : Temp:22.2°C,Humi:52.9%,Press:100.3kPa

Antenna/Distance : 2021 BBHA 9120D 3#/3m/VERTICAL

Memo : 11AX20 RU26 8 2437 Power:15

Data: 62

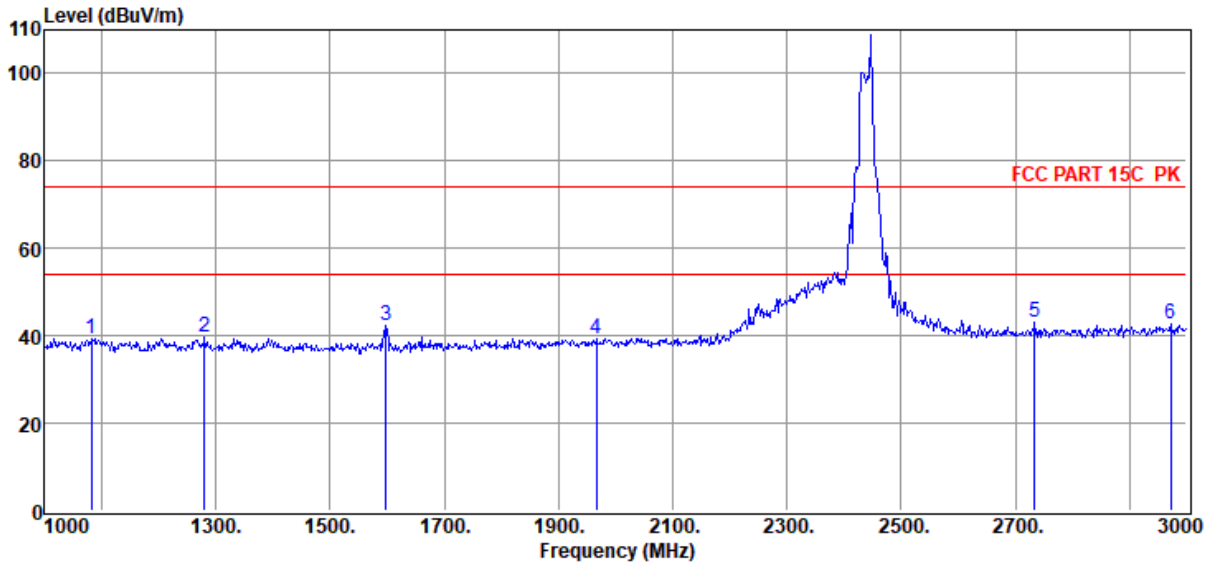

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Filter Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	1082.00	50.37	25.48	38.02	1.15	0.51	39.49	74.00	-34.51	Peak	VERTICAL
2	1280.00	50.86	25.44	38.32	1.26	0.55	39.79	74.00	-34.21	Peak	VERTICAL
3	1598.00	53.41	25.65	38.80	1.42	0.61	42.29	74.00	-31.71	Peak	VERTICAL
4	1966.00	49.94	26.61	39.35	1.59	0.67	39.46	74.00	-34.54	Peak	VERTICAL
5	2734.00	51.66	28.49	39.77	1.80	0.76	42.94	74.00	-31.06	Peak	VERTICAL
6	2972.00	50.56	29.39	39.89	1.86	0.79	42.71	74.00	-31.29	Peak	VERTICAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22070406-2E Charge 5
Wifi\FCC ABOVE 1G 2.4G.EM6

Test Date : 2022-07-20

Tested By : James Gan

EUT : Wireless Speaker

Model Number : CHARGE 5 Wi-Fi

Power Supply : AC 120V/60Hz


Test Mode : Tx Mode

Condition : Temp:22.2°C,Humi:52.9%,Press:100.3kPa

Antenna/Distance : 2021 BBHA 9120D
3#/3m/HORIZONTAL

Memo : 11AX20 RU26 0 2462 Power:15

Data: 63

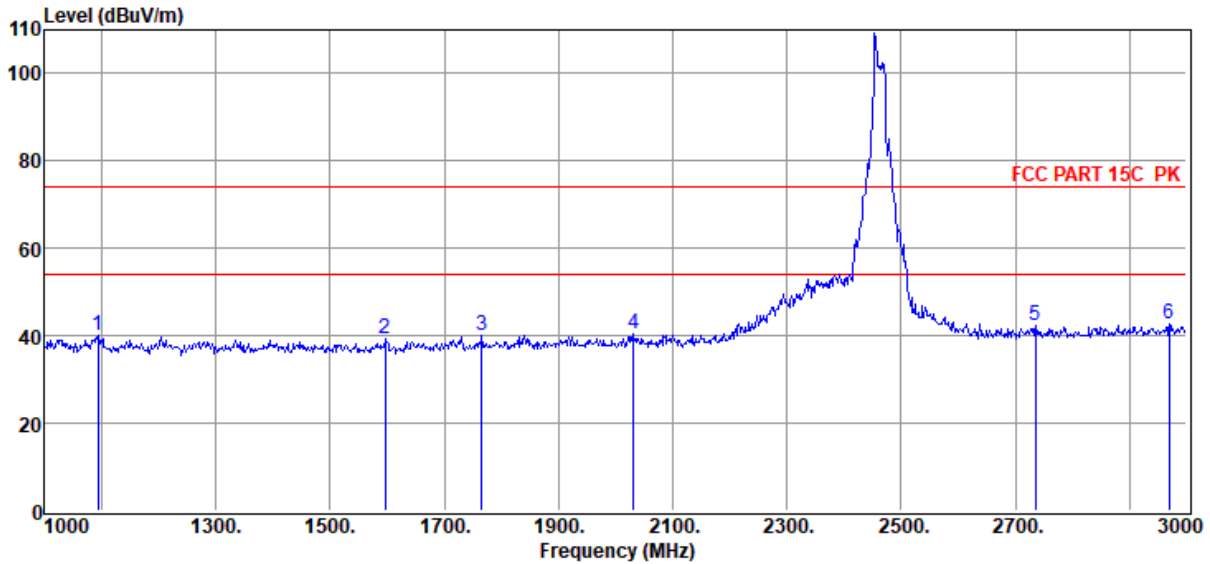

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Filter Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	1094.00	50.78	25.48	38.04	1.15	0.52	39.89	74.00	-34.11	Peak	HORIZONTAL
2	1596.00	50.58	25.65	38.79	1.42	0.61	39.47	74.00	-34.53	Peak	HORIZONTAL
3	1766.00	50.93	26.09	39.05	1.50	0.64	40.11	74.00	-33.89	Peak	HORIZONTAL
4	2032.00	50.97	26.76	39.42	1.61	0.68	40.60	74.00	-33.40	Peak	HORIZONTAL
5	2736.00	51.15	28.50	39.77	1.80	0.76	42.44	74.00	-31.56	Peak	HORIZONTAL
6	2970.00	50.58	29.39	39.89	1.86	0.79	42.73	74.00	-31.27	Peak	HORIZONTAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22070406-2E Charge 5
Wif\FCC ABOVE 1G 2.4G.EM6

Test Date : 2022-07-20

Tested By : James Gan

EUT : Wireless Speaker

Model Number : CHARGE 5 Wi-Fi

Power Supply : AC 120V/60Hz


Test Mode : Tx Mode

Condition : Temp:22.2°C,Humi:52.9%,Press:100.3kPa

Antenna/Distance : 2021 BBHA 9120D 3#/3m/VERTICAL

Memo : 11AX20 RU26 0 2462 Power:15

Data: 64

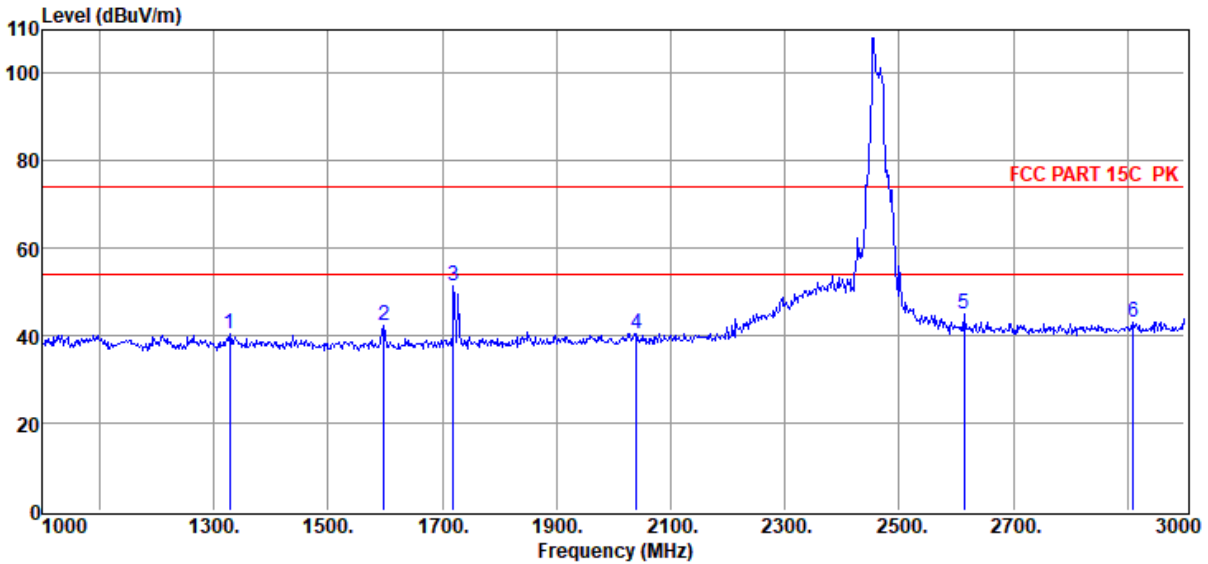

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Filter Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	1328.00	51.57	25.43	38.39	1.28	0.56	40.45	74.00	-33.55	Peak	VERTICAL
2	1598.00	53.29	25.65	38.80	1.42	0.61	42.17	74.00	-31.83	Peak	VERTICAL
3	1720.00	62.32	25.97	38.98	1.48	0.63	51.42	74.00	-22.58	Peak	VERTICAL
4	2040.00	50.89	26.77	39.42	1.61	0.68	40.53	74.00	-33.47	Peak	VERTICAL
5	2614.00	54.08	28.03	39.71	1.77	0.75	44.92	74.00	-29.08	Peak	VERTICAL
6	2910.00	51.24	29.16	39.86	1.85	0.78	43.17	74.00	-30.83	Peak	VERTICAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22070406-2E Charge 5
Wifi\FCC ABOVE 1G 2.4G.EM6

Test Date : 2022-07-20

Tested By : James Gan

EUT : Wireless Speaker

Model Number : CHARGE 5 Wi-Fi

Power Supply : AC 120V/60Hz


Test Mode : Tx Mode

Condition : Temp:22.2°C,Humi:52.9%,Press:100.3kPa

Antenna/Distance : 2021 BBHA 9120D
3#/3m/HORIZONTAL

Memo : 11AX20 2412 Power:15

Data: 41

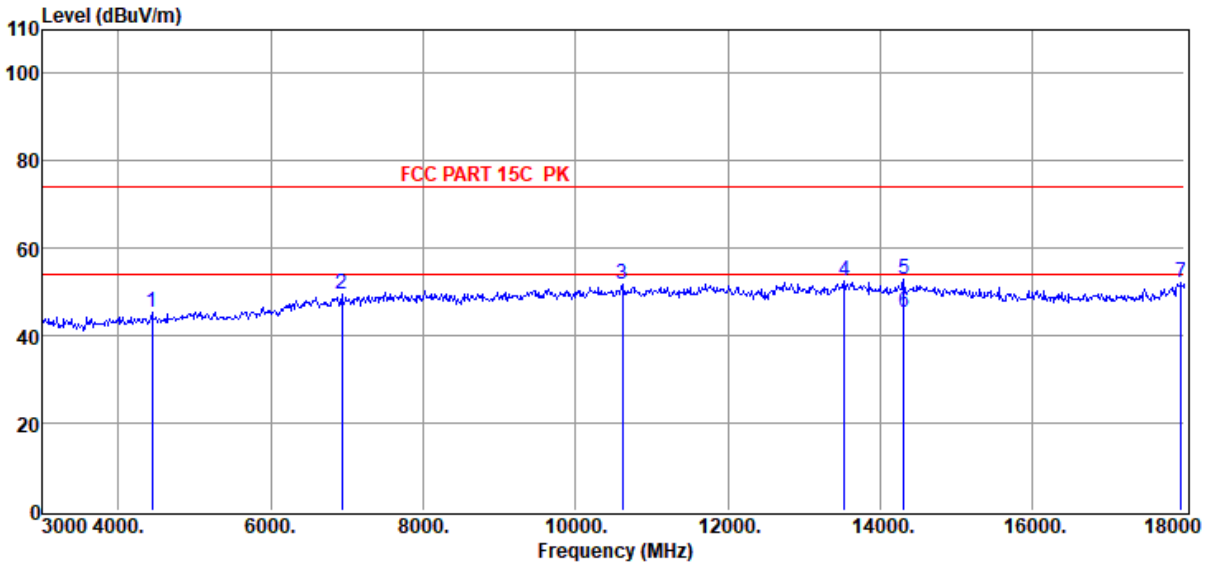

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Filter Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	4440.00	49.87	31.45	40.29	2.33	2.11	45.47	74.00	-28.53	Peak	HORIZONTAL
2	6930.00	47.89	35.89	39.76	3.06	2.30	49.38	74.00	-24.62	Peak	HORIZONTAL
3	10620.00	47.08	39.07	40.35	3.70	2.42	51.92	74.00	-22.08	Peak	HORIZONTAL
4	13530.00	45.46	39.99	40.03	4.02	2.93	52.37	74.00	-21.63	Peak	HORIZONTAL
5	14310.00	45.50	39.90	39.67	4.42	2.81	52.96	74.00	-21.04	Peak	HORIZONTAL
6	14310.00	37.84	39.90	39.67	4.42	2.81	45.30	54.00	-8.70	Average	HORIZONTAL
7	17955.00	42.07	42.22	40.67	4.95	3.78	52.35	74.00	-21.65	Peak	HORIZONTAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22070406-2E Charge 5
Wifi\FCC ABOVE 1G 2.4G.EM6

Test Date : 2022-07-20

Tested By : James Gan

EUT : Wireless Speaker

Model Number : CHARGE 5 Wi-Fi

Power Supply : AC 120V/60Hz


Test Mode : Tx Mode

Condition : Temp:22.2°C,Humi:52.9%,Press:100.3kPa

Antenna/Distance : 2021 BBHA 9120D 3#/3m/VERTICAL

Memo : 11AX20 2412 Power:15

Data: 42

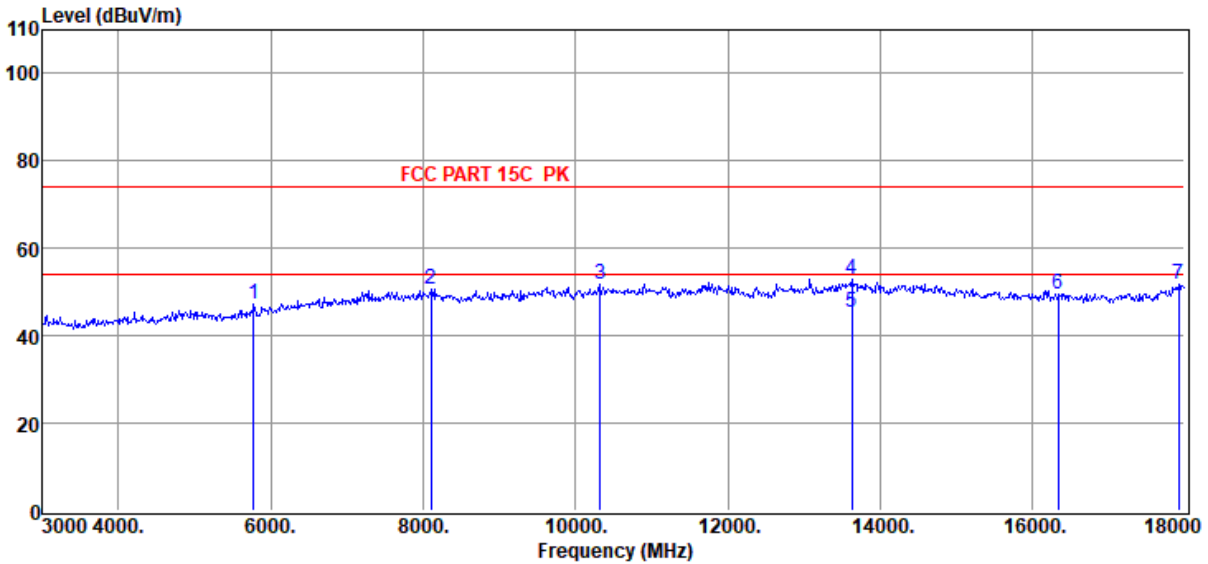

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	5775.00	48.65	33.46	40.48	2.82	2.66	47.11	74.00	-26.89	Peak	VERTICAL
2	8100.00	47.87	37.16	39.81	3.20	2.27	50.69	74.00	-23.31	Peak	VERTICAL
3	10320.00	47.45	38.78	40.47	3.67	2.45	51.88	74.00	-22.12	Peak	VERTICAL
4	13635.00	45.84	39.97	39.96	4.14	2.92	52.91	74.00	-21.09	Peak	VERTICAL
5	13635.00	38.28	39.97	39.96	4.14	2.92	45.35	54.00	-8.65	Average	VERTICAL
6	16335.00	43.72	37.90	39.97	4.69	3.25	49.59	74.00	-24.41	Peak	VERTICAL
7	17925.00	41.72	42.03	40.65	4.94	3.77	51.81	74.00	-22.19	Peak	VERTICAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22070406-2E Charge 5
Wifi\FCC ABOVE 1G 2.4G.EM6

Test Date : 2022-07-20

Tested By : James Gan

EUT : Wireless Speaker

Model Number : CHARGE 5 Wi-Fi

Power Supply : AC 120V/60Hz


Test Mode : Tx Mode

Condition : Temp:22.2°C,Humi:52.9%,Press:100.3kPa

Antenna/Distance : 2021 BBHA 9120D
3#/3m/HORIZONTAL

Memo : 11AX20 2437 Power:15

Data: 43

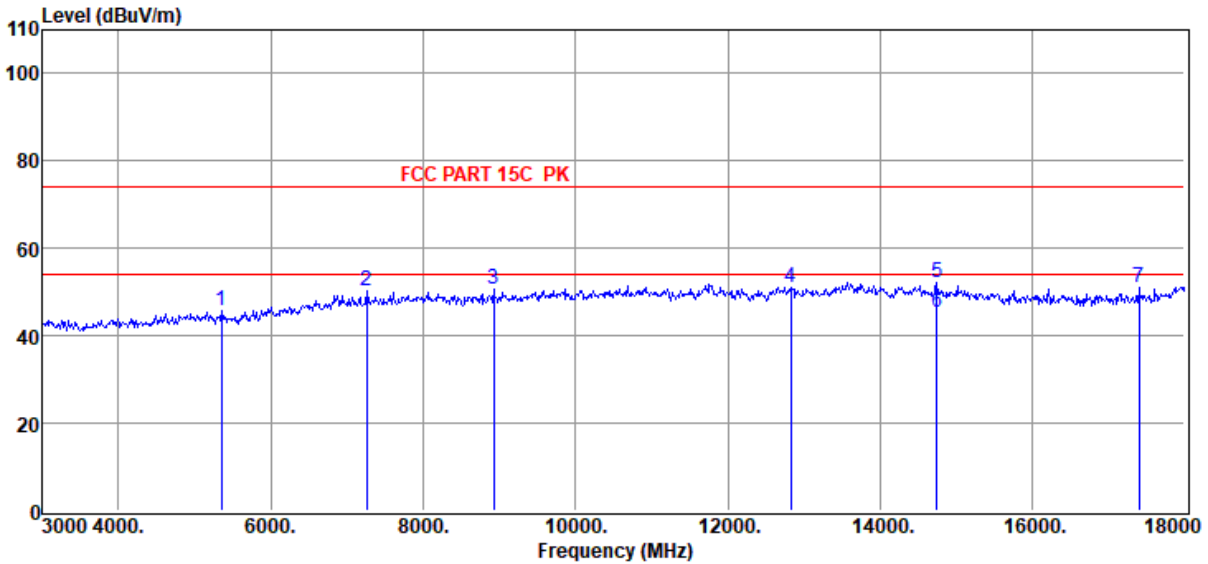

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	5355.00	48.42	32.89	40.44	2.56	2.41	45.84	74.00	-28.16	Peak	HORIZONTAL
2	7260.00	48.33	36.21	39.73	3.08	2.27	50.16	74.00	-23.84	Peak	HORIZONTAL
3	8925.00	46.64	38.22	39.89	3.31	2.19	50.47	74.00	-23.53	Peak	HORIZONTAL
4	12825.00	45.11	39.39	40.35	4.16	2.86	51.17	74.00	-22.83	Peak	HORIZONTAL
5	14745.00	44.86	39.70	39.63	4.41	2.69	52.03	74.00	-21.97	Peak	HORIZONTAL
6	14745.00	38.28	39.70	39.63	4.41	2.69	45.45	54.00	-8.55	Average	HORIZONTAL
7	17400.00	43.72	39.22	40.34	4.80	3.62	51.02	74.00	-22.98	Peak	HORIZONTAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22070406-2E Charge 5
Wifi\FCC ABOVE 1G 2.4G.EM6

Test Date : 2022-07-20

Tested By : James Gan

EUT : Wireless Speaker

Model Number : CHARGE 5 Wi-Fi

Power Supply : AC 120V/60Hz


Test Mode : Tx Mode

Condition : Temp:22.2°C,Humi:52.9%,Press:100.3kPa

Antenna/Distance : 2021 BBHA 9120D 3#/3m/VERTICAL

Memo : 11AX20 2437 Power:15

Data: 44

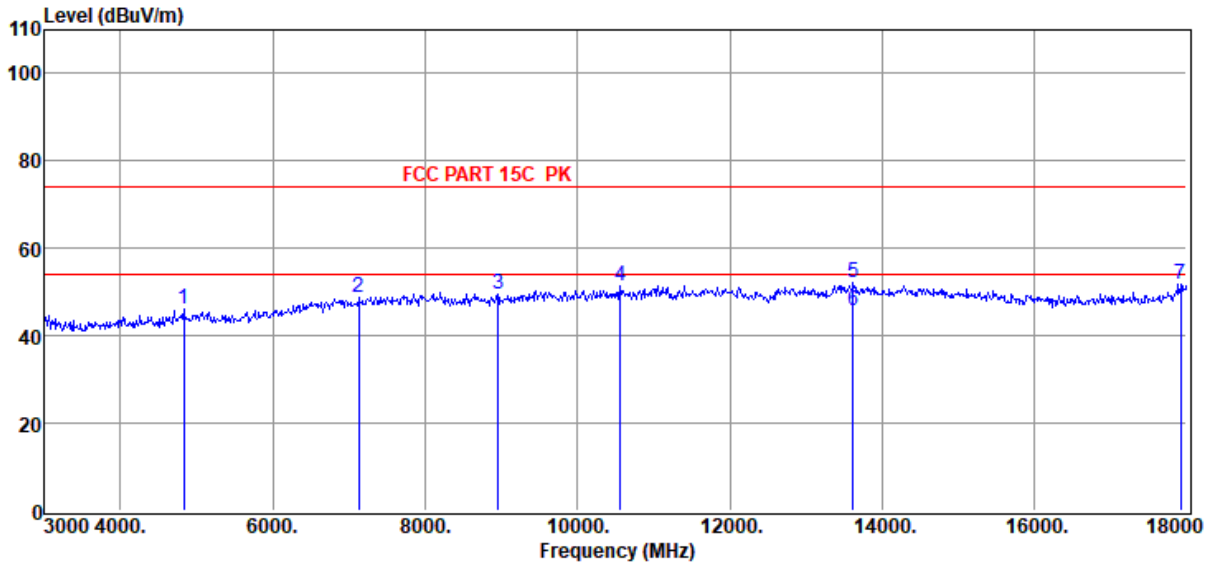

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Filter Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	4830.00	49.43	32.56	40.37	2.48	2.16	46.26	74.00	-27.74	Peak	VERTICAL
2	7125.00	47.15	36.10	39.71	3.05	2.26	48.85	74.00	-25.15	Peak	VERTICAL
3	8955.00	45.79	38.26	39.90	3.32	2.18	49.65	74.00	-24.35	Peak	VERTICAL
4	10560.00	46.72	39.04	40.38	3.69	2.42	51.49	74.00	-22.51	Peak	VERTICAL
5	13620.00	45.29	39.98	39.97	4.12	2.92	52.34	74.00	-21.66	Peak	VERTICAL
6	13620.00	38.66	39.98	39.97	4.12	2.92	45.71	54.00	-8.29	Average	VERTICAL
7	17925.00	41.85	42.03	40.65	4.94	3.77	51.94	74.00	-22.06	Peak	VERTICAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22070406-2E Charge 5
Wifi\FCC ABOVE 1G 2.4G.EM6

Test Date : 2022-07-20

Tested By : James Gan

EUT : Wireless Speaker

Model Number : CHARGE 5 Wi-Fi

Power Supply : AC 120V/60Hz


Test Mode : Tx Mode

Condition : Temp:22.2°C,Humi:52.9%,Press:100.3kPa

Antenna/Distance : 2021 BBHA 9120D
3#/3m/HORIZONTAL

Memo : 11AX20 2462 Power:15

Data: 45

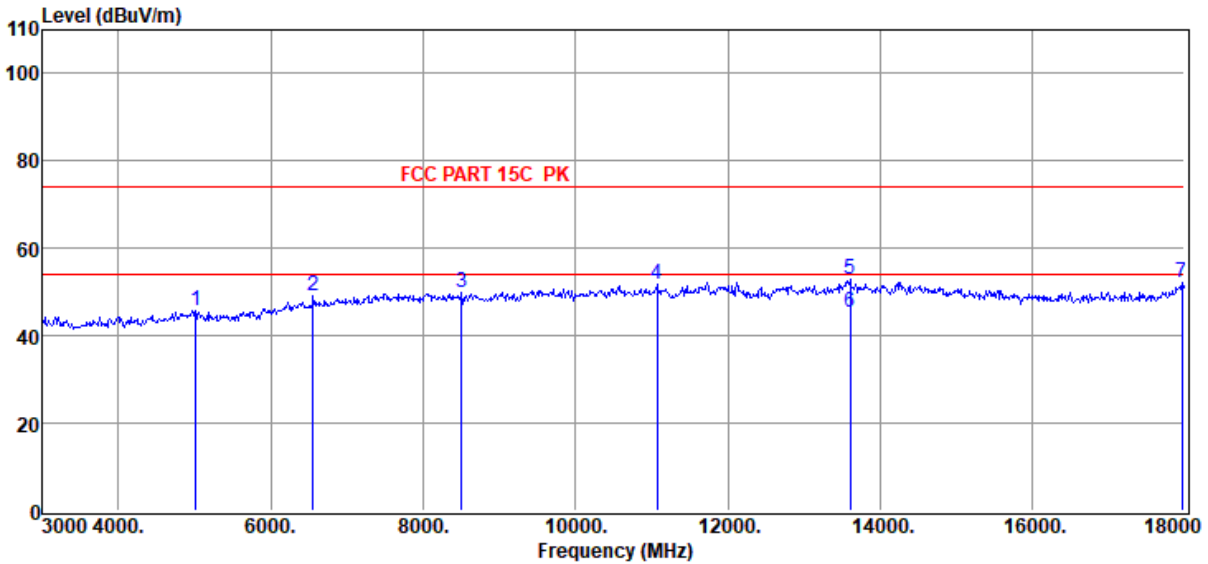

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	5010.00	48.46	33.09	40.40	2.54	2.20	45.89	74.00	-28.11	Peak	HORIZONTAL
2	6555.00	48.34	35.29	40.06	3.24	2.50	49.31	74.00	-24.69	Peak	HORIZONTAL
3	8505.00	46.46	37.81	39.85	3.22	2.23	49.87	74.00	-24.13	Peak	HORIZONTAL
4	11070.00	46.54	39.26	40.19	3.82	2.38	51.81	74.00	-22.19	Peak	HORIZONTAL
5	13605.00	46.02	39.98	39.98	4.10	2.92	53.04	74.00	-20.96	Peak	HORIZONTAL
6	13605.00	38.36	39.98	39.98	4.10	2.92	45.38	54.00	-8.62	Average	HORIZONTAL
7	17970.00	41.96	42.31	40.68	4.95	3.78	52.32	74.00	-21.68	Peak	HORIZONTAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22070406-2E Charge 5
Wif\FCC ABOVE 1G 2.4G.EM6

Test Date : 2022-07-20

Tested By : James Gan

EUT : Wireless Speaker

Model Number : CHARGE 5 Wi-Fi

Power Supply : AC 120V/60Hz


Test Mode : Tx Mode

Condition : Temp:22.2°C,Humi:52.9%,Press:100.3kPa

Antenna/Distance : 2021 BBHA 9120D 3#/3m/VERTICAL

Memo : 11AX20 2462 Power:15

Data: 46

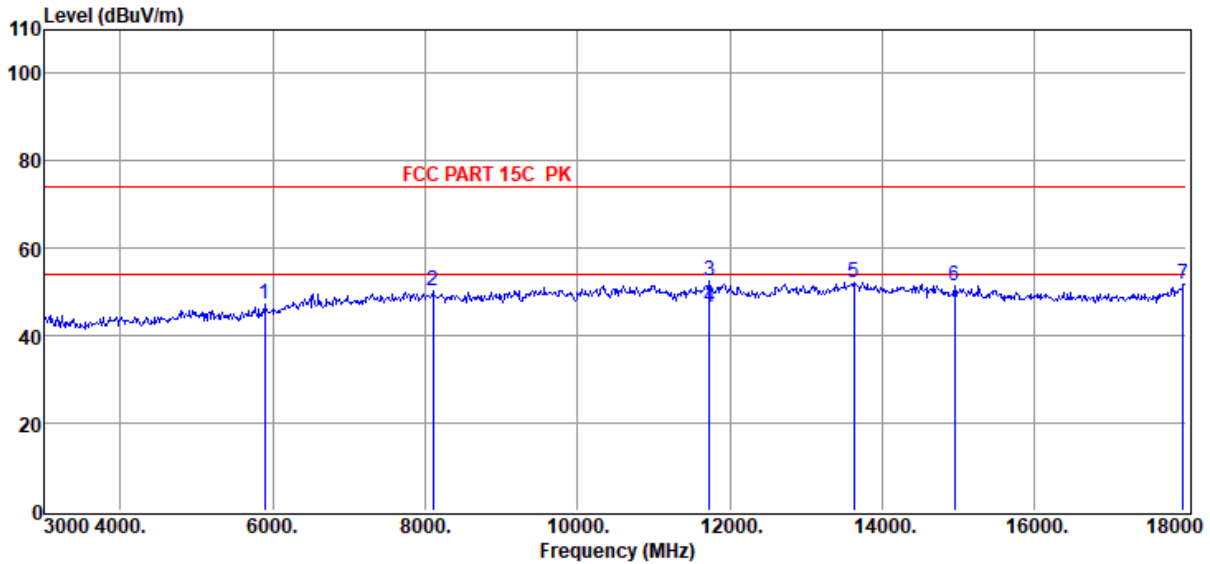

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	5895.00	48.43	33.75	40.49	2.93	2.74	47.36	74.00	-26.64	Peak	VERTICAL
2	8100.00	47.34	37.16	39.81	3.20	2.27	50.16	74.00	-23.84	Peak	VERTICAL
3	11730.00	47.23	39.09	40.13	4.01	2.39	52.59	74.00	-21.41	Peak	VERTICAL
4	11730.00	41.18	39.09	40.13	4.01	2.39	46.54	54.00	-7.46	Average	VERTICAL
5	13635.00	45.22	39.97	39.96	4.14	2.92	52.29	74.00	-21.71	Peak	VERTICAL
6	14955.00	44.49	39.54	39.60	4.46	2.63	51.52	74.00	-22.48	Peak	VERTICAL
7	17955.00	41.69	42.22	40.67	4.95	3.78	51.97	74.00	-22.03	Peak	VERTICAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22070406-2E Charge 5
Wif\FCC ABOVE 1G 2.4G.EM6

Test Date : 2022-07-20

Tested By : James Gan

EUT : Wireless Speaker

Model Number : CHARGE 5 Wi-Fi

Power Supply : AC 120V/60Hz


Test Mode : Tx Mode

Condition : Temp:22.2°C,Humi:52.9%,Press:100.3kPa

Antenna/Distance : 2021 BBHA 9120D
3#/3m/HORIZONTAL

Memo : 11AX20 RU26 0 2412 Power:15

Data: 53

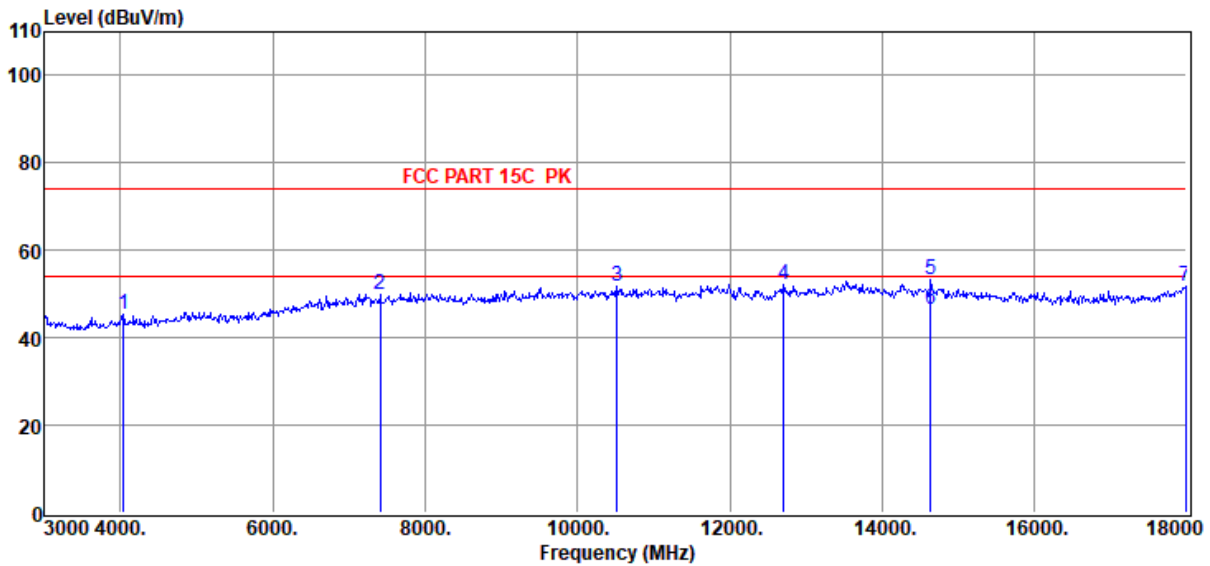

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Filter Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	4035.00	50.11	31.13	40.21	2.13	2.05	45.21	74.00	-28.79	Peak	HORIZONTAL
2	7410.00	48.03	36.33	39.74	3.12	2.27	50.01	74.00	-23.99	Peak	HORIZONTAL
3	10515.00	47.23	39.01	40.39	3.67	2.43	51.95	74.00	-22.05	Peak	HORIZONTAL
4	12705.00	46.42	39.25	40.31	3.99	2.79	52.14	74.00	-21.86	Peak	HORIZONTAL
5	14640.00	45.92	39.79	39.64	4.38	2.72	53.17	74.00	-20.83	Peak	HORIZONTAL
6	14640.00	39.29	39.79	39.64	4.38	2.72	46.54	54.00	-7.46	Average	HORIZONTAL
7	17985.00	41.17	42.41	40.69	4.96	3.79	51.64	74.00	-22.36	Peak	HORIZONTAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22070406-2E Charge 5
Wif\FCC ABOVE 1G 2.4G.EM6

Test Date : 2022-07-20

Tested By : James Gan

EUT : Wireless Speaker

Model Number : CHARGE 5 Wi-Fi

Power Supply : AC 120V/60Hz


Test Mode : Tx Mode

Condition : Temp:22.2°C,Humi:52.9%,Press:100.3kPa

Antenna/Distance : 2021 BBHA 9120D 3#/3m/VERTICAL

Memo : 11AX20 RU26 0 2412 Power:15

Data: 54

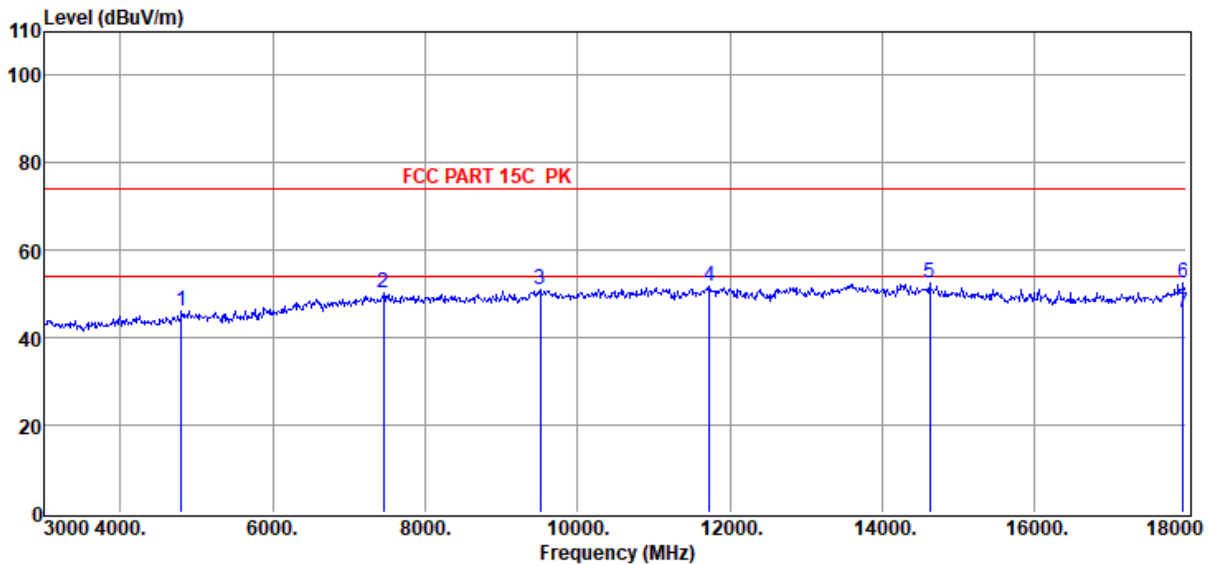

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	4800.00	49.30	32.46	40.36	2.47	2.16	46.03	74.00	-27.97	Peak	VERTICAL
2	7455.00	48.20	36.36	39.75	3.13	2.27	50.21	74.00	-23.79	Peak	VERTICAL
3	9510.00	46.57	38.69	40.26	3.62	2.33	50.95	74.00	-23.05	Peak	VERTICAL
4	11730.00	46.28	39.09	40.13	4.01	2.39	51.64	74.00	-22.36	Peak	VERTICAL
5	14625.00	45.19	39.80	39.64	4.38	2.72	52.45	74.00	-21.55	Peak	VERTICAL
6	17955.00	42.21	42.22	40.67	4.95	3.78	52.49	74.00	-21.51	Peak	VERTICAL
7	17955.00	35.42	42.22	40.67	4.95	3.78	45.70	54.00	-8.30	Average	VERTICAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22070406-2E Charge 5
Wifi\FCC ABOVE 1G 2.4G.EM6

Test Date : 2022-07-20

Tested By : James Gan

EUT : Wireless Speaker

Model Number : CHARGE 5 Wi-Fi

Power Supply : AC 120V/60Hz


Test Mode : Tx Mode

Condition : Temp:22.2°C,Humi:52.9%,Press:100.3kPa

Antenna/Distance : 2021 BBHA 9120D
3#/3m/HORIZONTAL

Memo : 11AX20 RU26 8 2437 Power:15

Data: 55

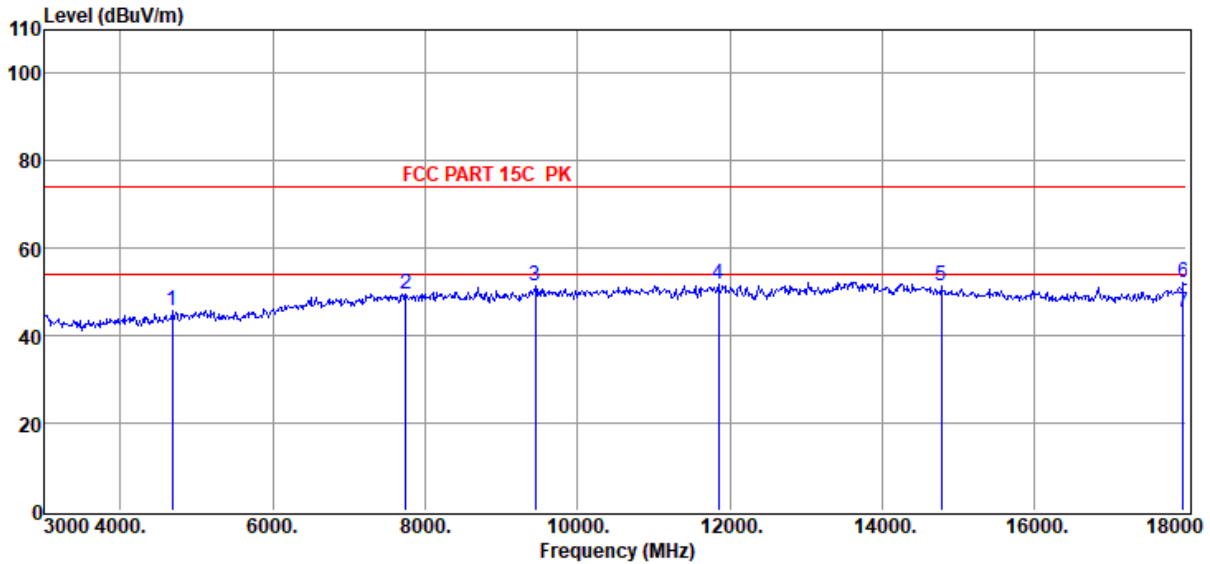

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Filter Factor (dB)	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	4680.00	49.52	32.08	40.34	2.42	2.14	45.82	74.00	-28.18	Peak	HORIZONTAL
2	7740.00	47.29	36.69	39.77	3.16	2.27	49.64	74.00	-24.36	Peak	HORIZONTAL
3	9450.00	47.03	38.66	40.22	3.59	2.32	51.38	74.00	-22.62	Peak	HORIZONTAL
4	11850.00	46.33	39.14	40.11	4.03	2.40	51.79	74.00	-22.21	Peak	HORIZONTAL
5	14775.00	44.14	39.68	39.62	4.42	2.68	51.30	74.00	-22.70	Peak	HORIZONTAL
6	17955.00	41.80	42.22	40.67	4.95	3.78	52.08	74.00	-21.92	Peak	HORIZONTAL
7	17955.00	35.10	42.22	40.67	4.95	3.78	45.38	54.00	-8.62	Average	HORIZONTAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22070406-2E Charge 5
Wifi\FCC ABOVE 1G 2.4G.EM6

Test Date : 2022-07-20

Tested By : James Gan

EUT : Wireless Speaker

Model Number : CHARGE 5 Wi-Fi

Power Supply : AC 120V/60Hz


Test Mode : Tx Mode

Condition : Temp:22.2°C,Humi:52.9%,Press:100.3kPa

Antenna/Distance : 2021 BBHA 9120D 3#/3m/VERTICAL

Memo : 11AX20 RU26 8 2437 Power:15

Data: 56

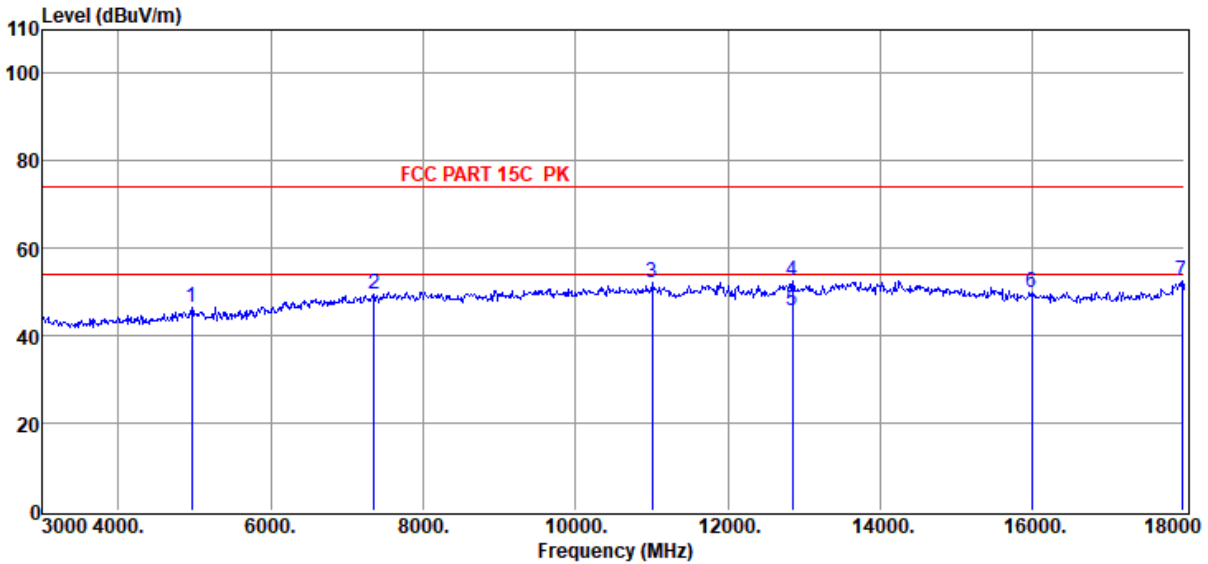

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Filter Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	4965.00	49.12	32.99	40.39	2.53	2.18	46.43	74.00	-27.57	Peak	VERTICAL
2	7350.00	47.44	36.28	39.74	3.10	2.27	49.35	74.00	-24.65	Peak	VERTICAL
3	11010.00	46.79	39.29	40.20	3.80	2.38	52.06	74.00	-21.94	Peak	VERTICAL
4	12855.00	46.53	39.43	40.36	4.20	2.88	52.68	74.00	-21.32	Peak	VERTICAL
5	12855.00	39.51	39.43	40.36	4.20	2.88	45.66	54.00	-8.34	Average	VERTICAL
6	15990.00	44.29	37.92	39.90	4.60	3.11	50.02	74.00	-23.98	Peak	VERTICAL
7	17970.00	42.18	42.31	40.68	4.95	3.78	52.54	74.00	-21.46	Peak	VERTICAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22070406-2E Charge 5
Wif\FCC ABOVE 1G 2.4G.EM6

Test Date : 2022-07-20

Tested By : James Gan

EUT : Wireless Speaker

Model Number : CHARGE 5 Wi-Fi

Power Supply : AC 120V/60Hz


Test Mode : Tx Mode

Condition : Temp:22.2°C,Humi:52.9%,Press:100.3kPa

Antenna/Distance : 2021 BBHA 9120D
3#/3m/HORIZONTAL

Memo : 11AX20 RU26 0 2462 Power:15

Data: 57

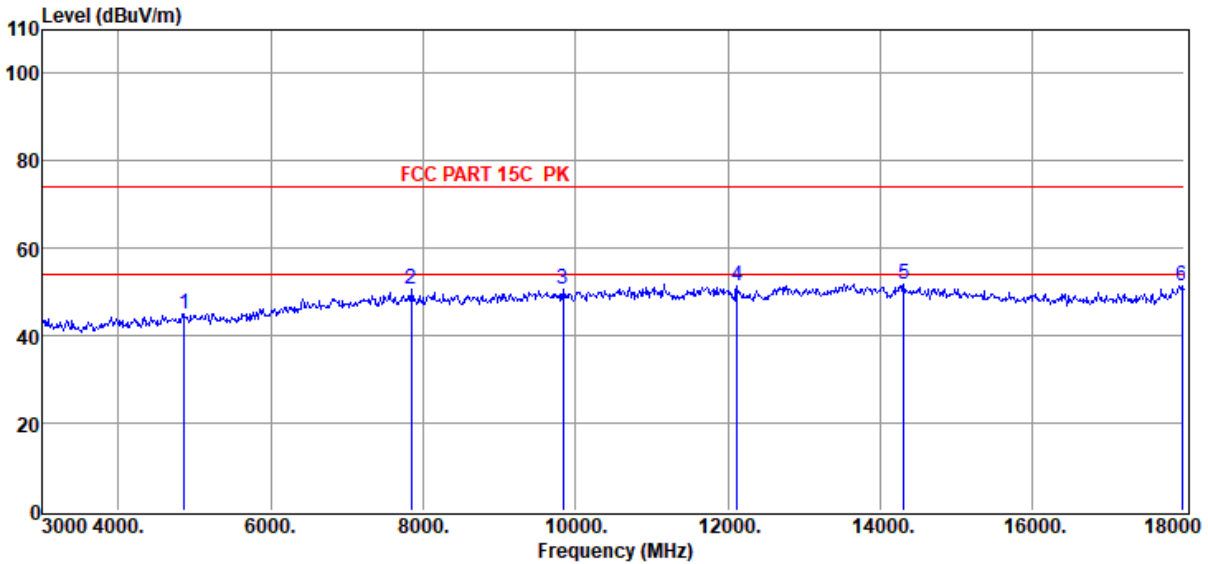

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	4860.00	48.19	32.65	40.37	2.49	2.17	45.13	74.00	-28.87	Peak	HORIZONTAL
2	7845.00	48.26	36.81	39.78	3.17	2.28	50.74	74.00	-23.26	Peak	HORIZONTAL
3	9840.00	46.55	38.50	40.49	3.65	2.43	50.64	74.00	-23.36	Peak	HORIZONTAL
4	12120.00	45.86	39.15	40.14	3.97	2.47	51.31	74.00	-22.69	Peak	HORIZONTAL
5	14310.00	44.16	39.90	39.67	4.42	2.81	51.62	74.00	-22.38	Peak	HORIZONTAL
6	17970.00	41.05	42.31	40.68	4.95	3.78	51.41	74.00	-22.59	Peak	HORIZONTAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#

D:\E3 6.111\2022 Report Data\Q22070406-2E Charge 5
Wifi\FCC ABOVE 1G 2.4G.EM6

Test Date : 2022-07-20

Tested By : James Gan

EUT : Wireless Speaker

Model Number : CHARGE 5 Wi-Fi

Power Supply : AC 120V/60Hz


Test Mode : Tx Mode

Condition : Temp:22.2°C,Humi:52.9%,Press:100.3kPa

Antenna/Distance : 2021 BBHA 9120D 3#/3m/VERTICAL

Memo : 11AX20 RU26 0 2462 Power:15

Data: 58

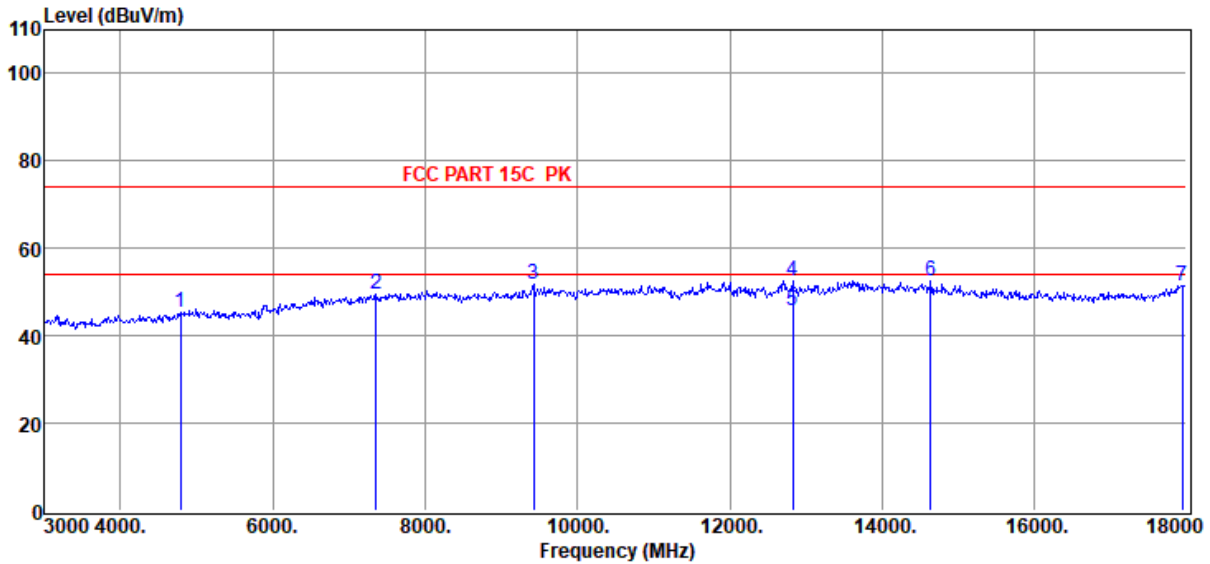

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	PRM Factor (dB)	Cable Loss (dB)	Filter Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	4785.00	48.71	32.41	40.36	2.46	2.16	45.38	74.00	-28.62	Peak	VERTICAL
2	7350.00	47.67	36.28	39.74	3.10	2.27	49.58	74.00	-24.42	Peak	VERTICAL
3	9420.00	47.40	38.64	40.19	3.57	2.31	51.73	74.00	-22.27	Peak	VERTICAL
4	12825.00	46.58	39.39	40.35	4.16	2.86	52.64	74.00	-21.36	Peak	VERTICAL
5	12825.00	39.69	39.39	40.35	4.16	2.86	45.75	54.00	-8.25	Average	VERTICAL
6	14640.00	45.18	39.79	39.64	4.38	2.72	52.43	74.00	-21.57	Peak	VERTICAL
7	17940.00	41.39	42.13	40.66	4.94	3.77	51.57	74.00	-22.43	Peak	VERTICAL


Note:

1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3# D:\E3 6.111\2022 Report Data\Q22070406-2E Charge 5 Wifi\FCC ABOVE 1G 2.4G.EM6
Test Date : 2022-08-31 **Tested By** : James Gan
EUT : Wireless Speaker **Model Number** : CHARGE 5 Wi-Fi
Power Supply : AC 120V/60Hz **Test Mode** : Tx Mode
Condition : Temp:22.2°C,Humi:52.9%,Press:100.3kPa **Antenna/Distance** : 2021 BBHA 9120D
3#/3m/HORIZONTAL
Memo : 11B 2462+3DH5 2480

Data: 65

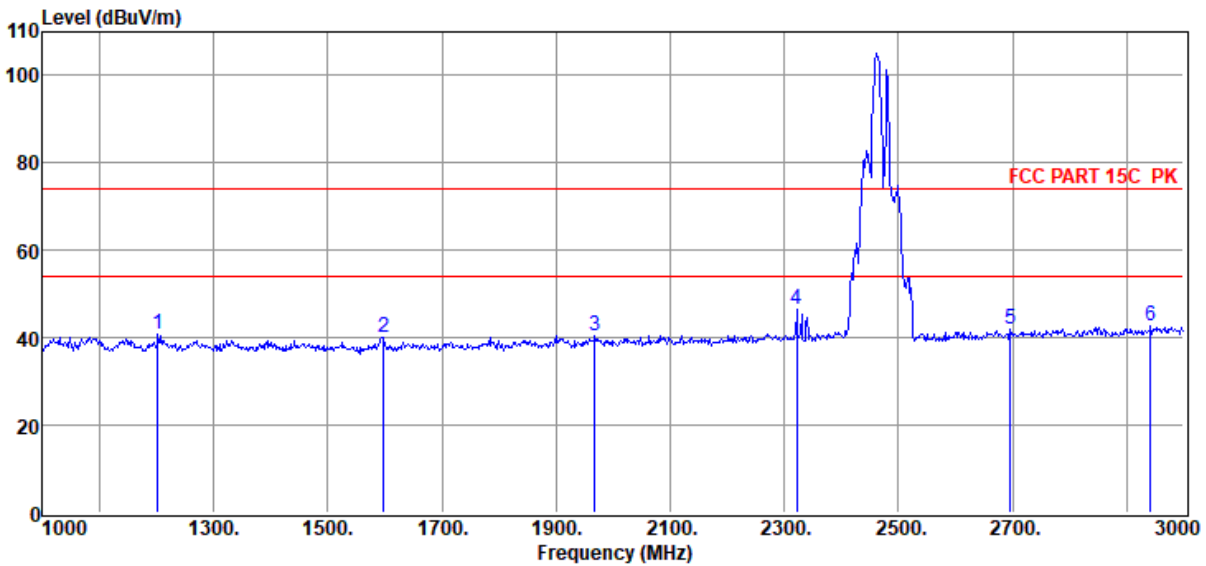


Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	1202.00	51.77	25.46	38.20	1.21	0.54	40.78	74.00	-33.22	Peak	HORIZONTAL
2	1598.00	51.15	25.65	38.80	1.42	0.61	40.03	74.00	-33.97	Peak	HORIZONTAL
3	1968.00	50.76	26.62	39.35	1.59	0.67	40.29	74.00	-33.71	Peak	HORIZONTAL
4	2322.00	56.38	27.28	39.56	1.69	0.72	46.51	74.00	-27.49	Peak	HORIZONTAL
5	2696.00	50.64	28.34	39.75	1.79	0.76	41.78	74.00	-32.22	Peak	HORIZONTAL
6	2942.00	50.58	29.28	39.87	1.85	0.78	42.62	74.00	-31.38	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3# D:\E3 6.111\2022 Report Data\Q22070406-2E Charge 5 Wifi\FCC ABOVE 1G 2.4G.EM6
Test Date : 2022-08-31 **Tested By** : James Gan
EUT : Wireless Speaker **Model Number** : CHARGE 5 Wi-Fi
Power Supply : AC 120V/60Hz **Test Mode** : Tx Mode
Condition : Temp:22.2°C,Humi:52.9%,Press:100.3kPa **Antenna/Distance** : 2021 BBHA 9120D 3#/3m/VERTICAL
Memo : 11B 2462+3DH5 2480

Data: 66

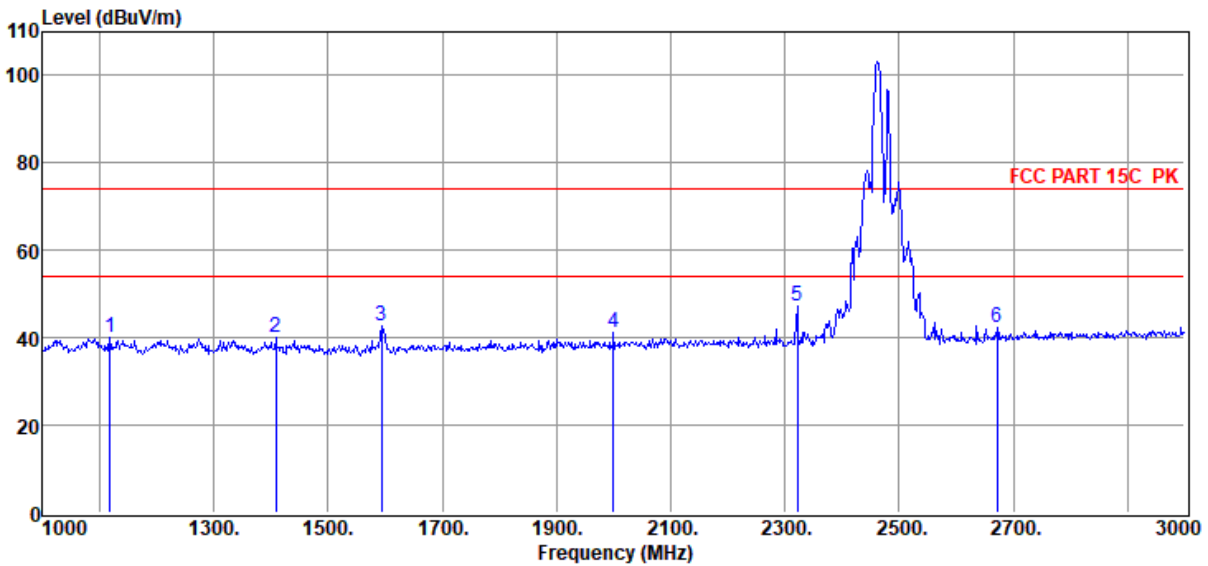

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	1118.00	50.97	25.48	38.08	1.17	0.52	40.06	74.00	-33.94	Peak	VERTICAL
2	1408.00	51.16	25.42	38.51	1.33	0.57	39.97	74.00	-34.03	Peak	VERTICAL
3	1594.00	53.74	25.64	38.79	1.42	0.61	42.62	74.00	-31.38	Peak	VERTICAL
4	2000.00	51.53	26.70	39.40	1.60	0.68	41.11	74.00	-32.89	Peak	VERTICAL
5	2322.00	57.11	27.28	39.56	1.69	0.72	47.24	74.00	-26.76	Peak	VERTICAL
6	2672.00	51.23	28.25	39.74	1.78	0.75	42.27	74.00	-31.73	Peak	VERTICAL


Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3#
Test Date : 2022-08-31
EUT : Wireless Speaker
Power Supply : AC 120V/60Hz
Condition : Temp:22.2°C,Humi:52.9%,Press:100.3kPa
Memo : 11B 2462+3DH5 2480

D:\E3 6.111\2022 Report Data\Q22070406-2E Charge 5 Wifi\FCC ABOVE 1G 2.4G.EM6
Tested By : James Gan
Model Number : CHARGE 5 Wi-Fi
Test Mode : Tx Mode
Antenna/Distance : 2021 BBHA 9120D
 3#/3m/HORIZONTAL

Data: 67

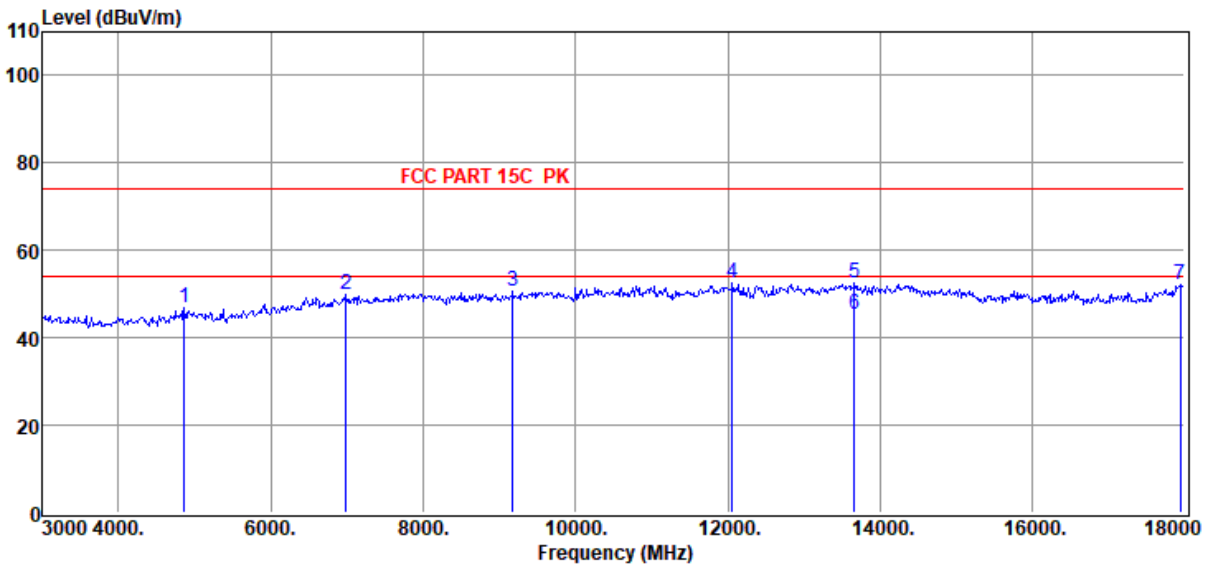


Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	4860.00	49.84	32.65	40.37	2.49	2.17	46.78	74.00	-27.22	Peak	HORIZONTAL
2	6990.00	48.17	35.98	39.71	3.03	2.27	49.74	74.00	-24.26	Peak	HORIZONTAL
3	9180.00	46.55	38.44	40.03	3.43	2.23	50.62	74.00	-23.38	Peak	HORIZONTAL
4	12060.00	47.05	39.18	40.12	4.01	2.43	52.55	74.00	-21.45	Peak	HORIZONTAL
5	13665.00	45.58	39.97	39.93	4.17	2.92	52.71	74.00	-21.29	Peak	HORIZONTAL
6	13665.00	38.16	39.97	39.93	4.17	2.92	45.29	54.00	-8.71	Average	HORIZONTAL
7	17940.00	41.98	42.13	40.66	4.94	3.77	52.16	74.00	-21.84	Peak	HORIZONTAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Site : DDT 3m Chamber 3# D:\E3 6.111\2022 Report Data\Q22070406-2E Charge 5
Wifi\FCC ABOVE 1G 2.4G.EM6
Test Date : 2022-08-31 **Tested By** : James Gan
EUT : Wireless Speaker **Model Number** : CHARGE 5 Wi-Fi
Power Supply : AC 120V/60Hz **Test Mode** : Tx Mode
Condition : Temp:22.2°C,Humi:52.9%,Press:100.3kPa **Antenna/Distance** : 2021 BBHA 9120D 3#/3m/VERTICAL
Memo : 11B 2462+3DH5 2480

Data: 68

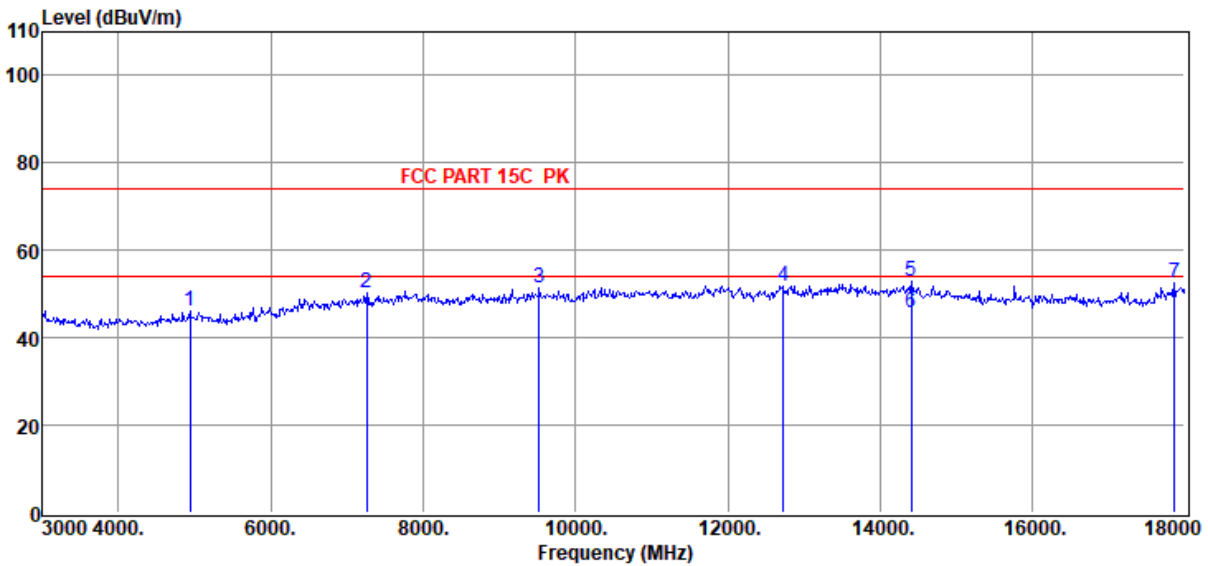

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	PRM Factor dB	Cable Loss dB	Filter Factor dB	Result Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Detector	Polarization
1	4935.00	48.74	32.89	40.39	2.52	2.18	45.94	74.00	-28.06	Peak	VERTICAL
2	7260.00	48.44	36.21	39.73	3.08	2.27	50.27	74.00	-23.73	Peak	VERTICAL
3	9525.00	46.99	38.69	40.27	3.62	2.34	51.37	74.00	-22.63	Peak	VERTICAL
4	12735.00	46.06	39.28	40.32	4.03	2.81	51.86	74.00	-22.14	Peak	VERTICAL
5	14415.00	45.44	39.90	39.66	4.38	2.78	52.84	74.00	-21.16	Peak	VERTICAL
6	14415.00	38.30	39.90	39.66	4.38	2.78	45.70	54.00	-8.30	Average	VERTICAL
7	17865.00	42.70	41.66	40.62	4.92	3.75	52.41	74.00	-21.59	Peak	VERTICAL

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss + Filter Factor - PRM Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

9. RF Conducted Spurious Emissions

9.1. Block diagram of test setup

Same as section 4.1

9.2. Limits

In any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

9.3. Test procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Establish a reference level by using the following procedure:

Center frequency	Test frequency
RBW:	100 kHz
VBW:	300 kHz
Span	Wide enough to capture the peak level of the in-band emission
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

(3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.

(4) Set the spectrum analyzer as follows:

RBW:	100 kHz
VBW:	300 kHz
Span	Encompass frequency range to be measured
Number of measurement points	$\geq \text{span}/\text{RBW}$
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold


(5) Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude of all unwanted emissions outside of the authorized frequency band

9.4. Test result


EUT Set Mode	CH or Frequency	Result (dBm)	EUT Set Mode	CH or Frequency	Result (dBm)
11b	CH1	Pass	11g	CH1	Pass
	CH6	Pass		CH6	Pass
	CH11	Pass		CH11	Pass
11n HT 20	CH1	Pass	11n HT 40	CH3	Pass
	CH6	Pass		CH6	Pass
	CH11	Pass		CH9	Pass
11ax HE 20	CH1	Pass	11ax HE 40	CH3	Pass
	CH6	Pass		CH6	Pass
	CH11	Pass		CH9	Pass

Note: for 802.11ax mode, according exploratory explorer test, Specific Resource Unit have no distinct influence, so the final test data only record the Worst Case.


9.5. Original test data

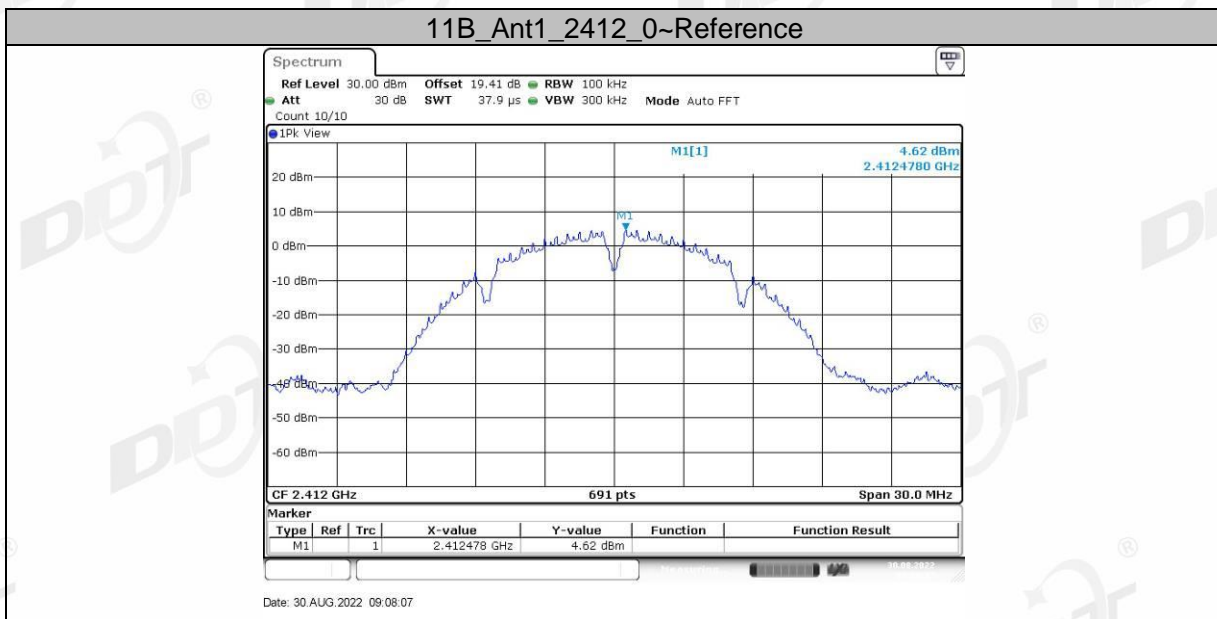


11B_Ant1_2412_30~1000

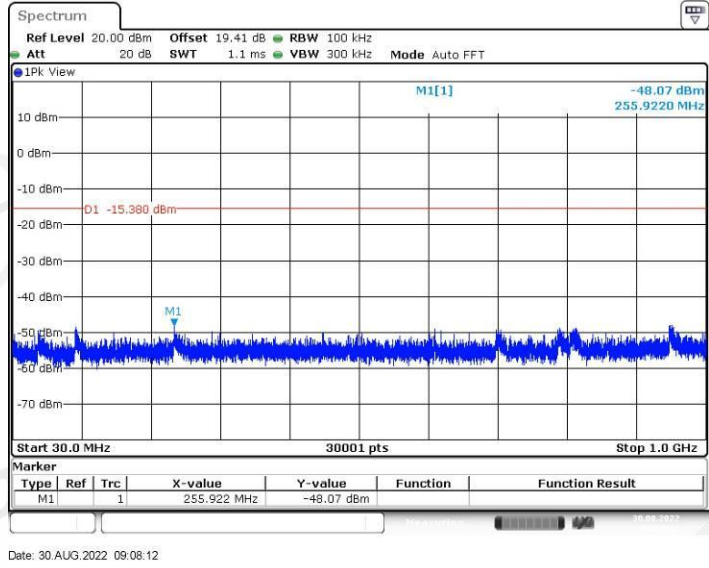


11B_Ant1_2412_1000~26500

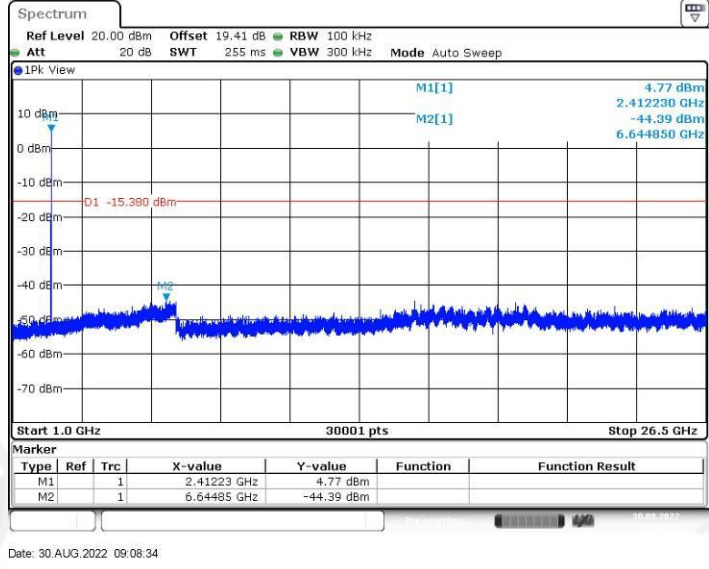


11B_Ant2_2412_0~Reference

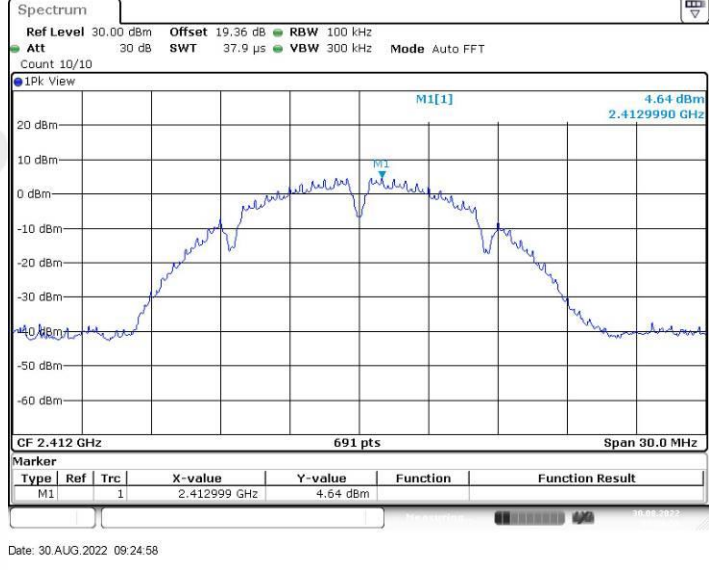


11B_Ant2_2412_30~1000

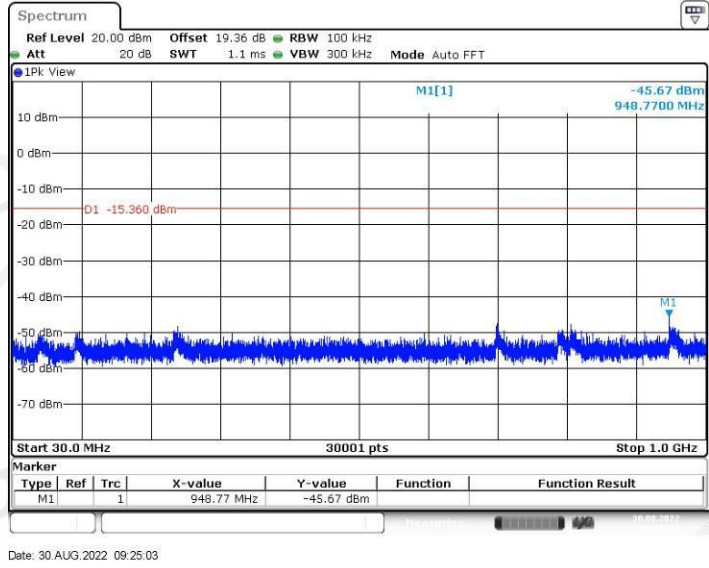


11B_Ant2_2412_1000~26500

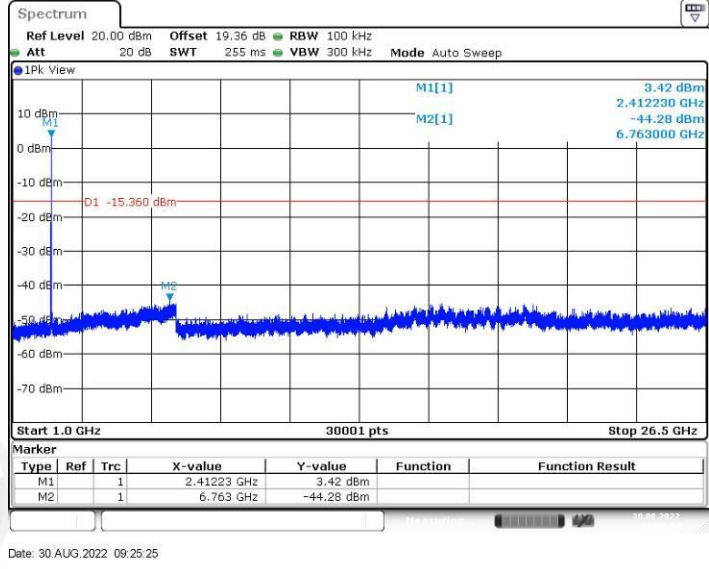


11B_Ant1_2437_0~Reference

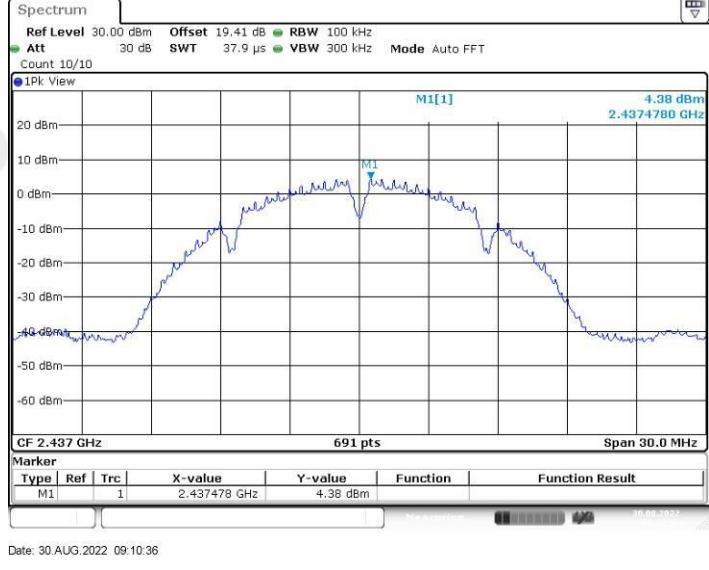


11B_Ant1_2437_30~1000

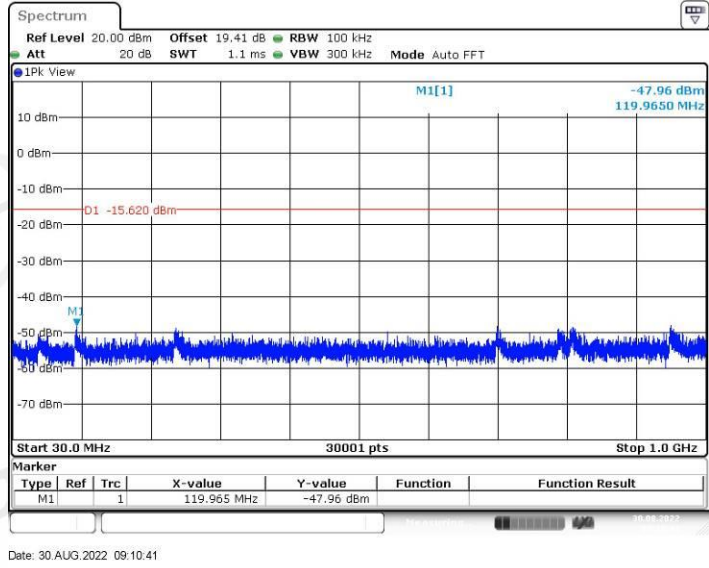


11B_Ant1_2437_1000~26500

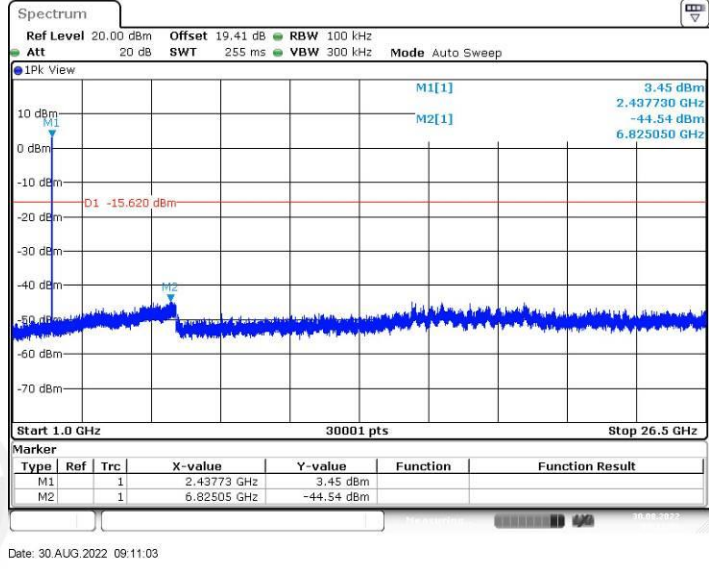


11B_Ant2_2437_0~Reference

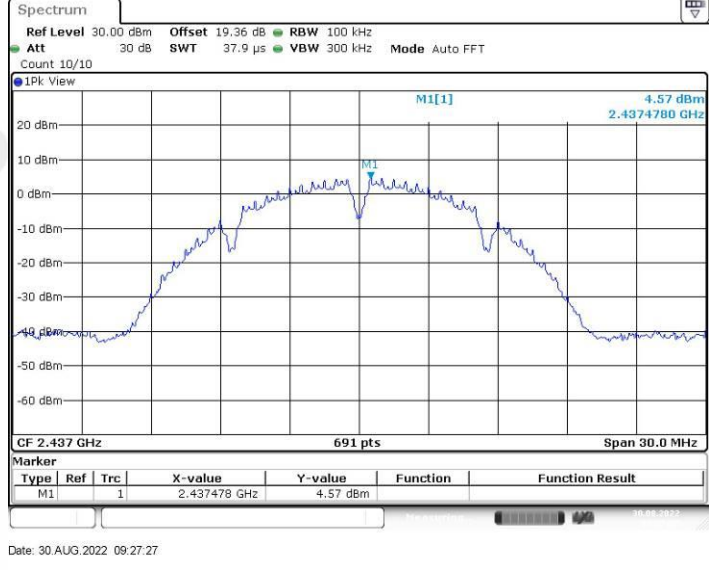


11B_Ant2_2437_30~1000

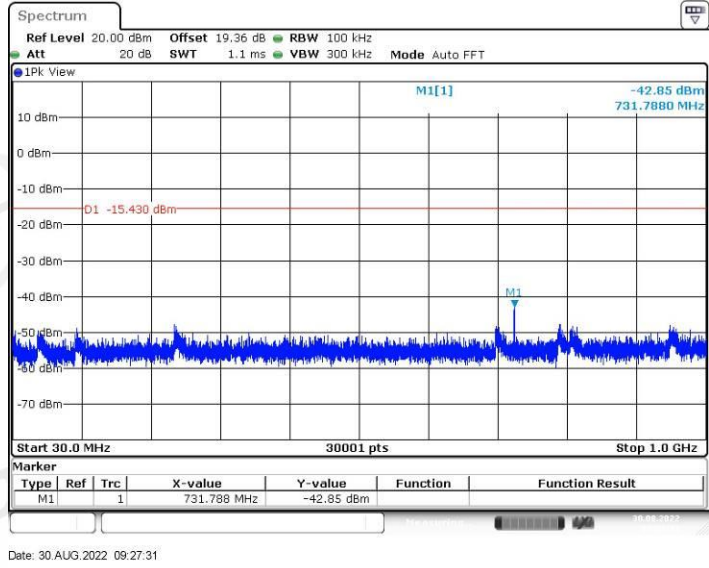


11B_Ant2_2437_1000~26500

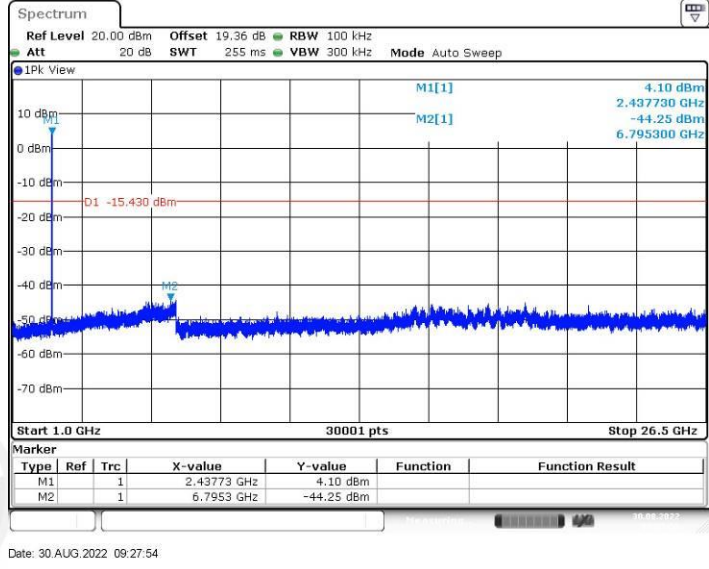


11B_Ant1_2462_0~Reference

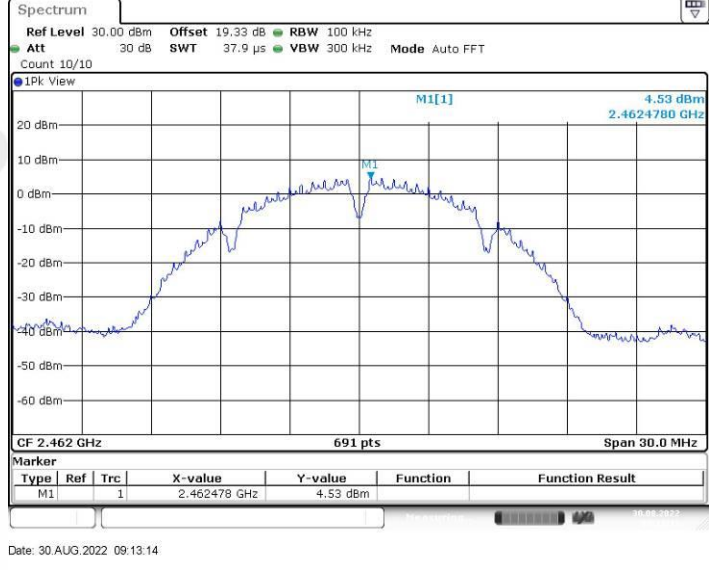

11B_Ant1_2462_30~1000

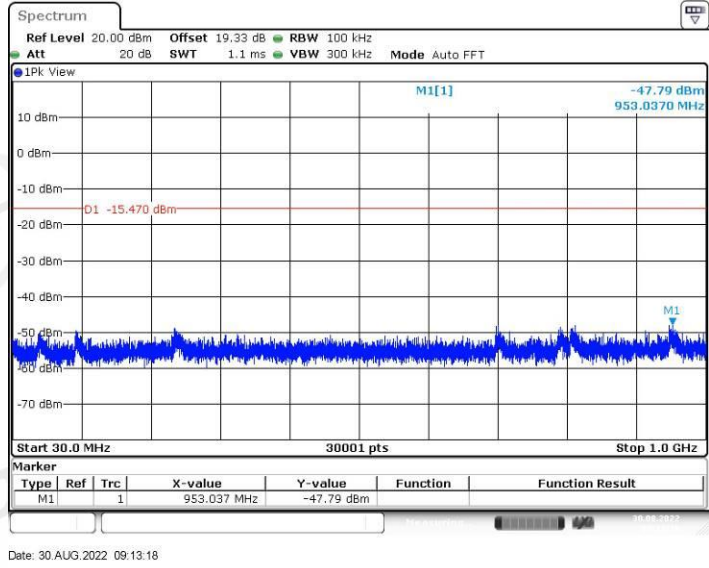

11B_Ant1_2462_1000~26500

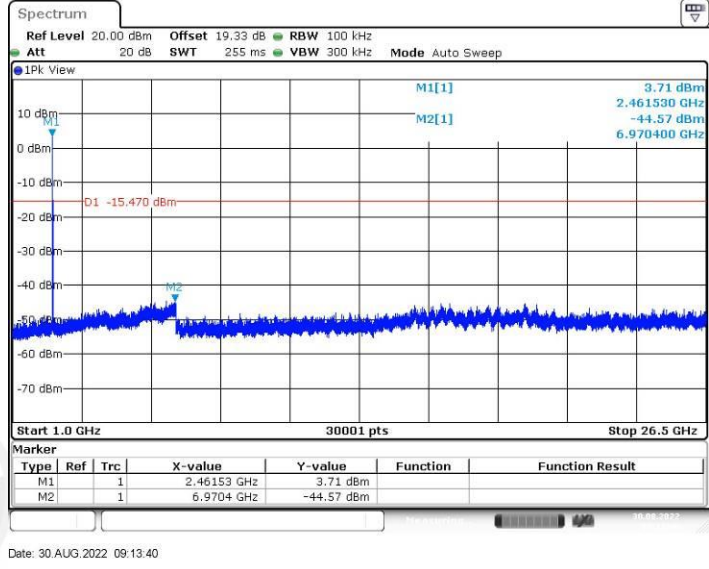

11B_Ant2_2462_0~Reference

