




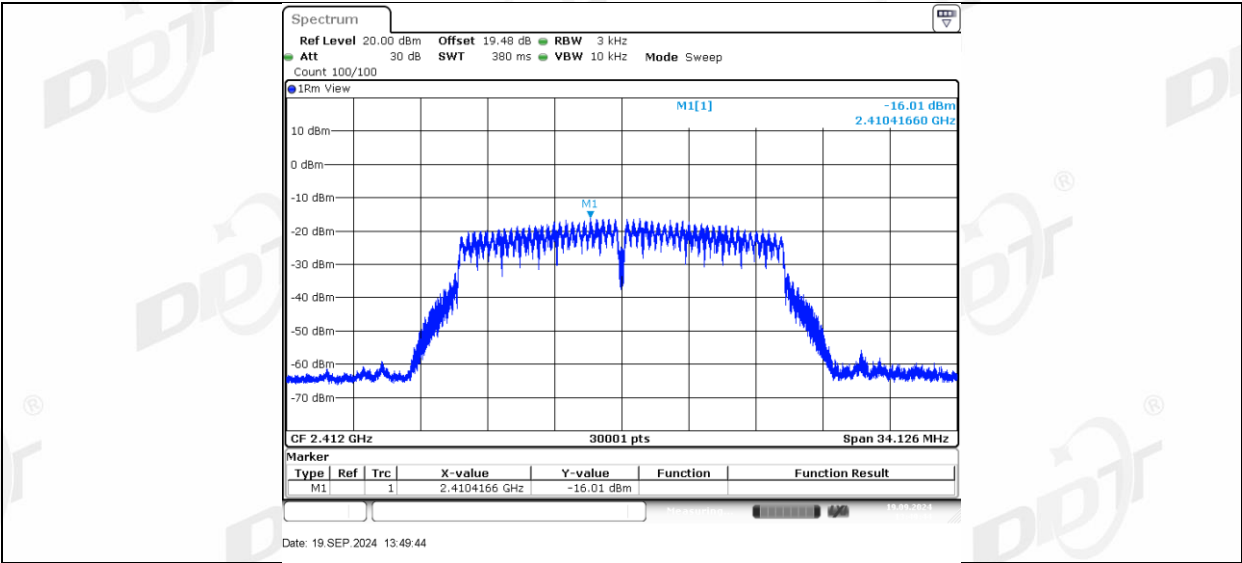


11G_Ant2_2412

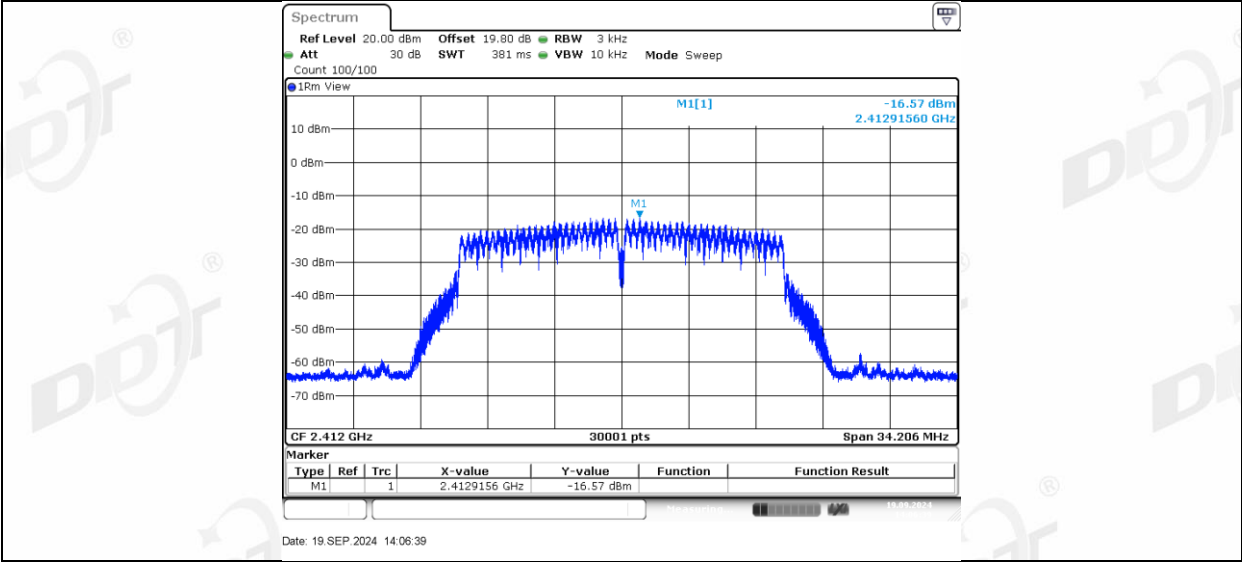


11G_Ant1_2437

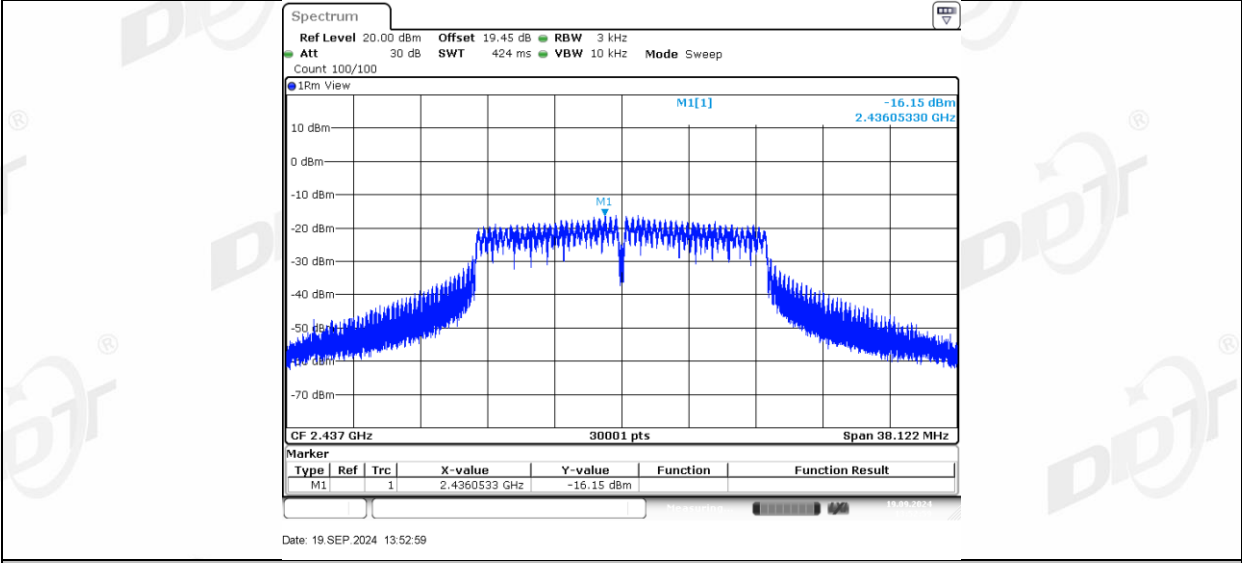


11G_Ant2_2437

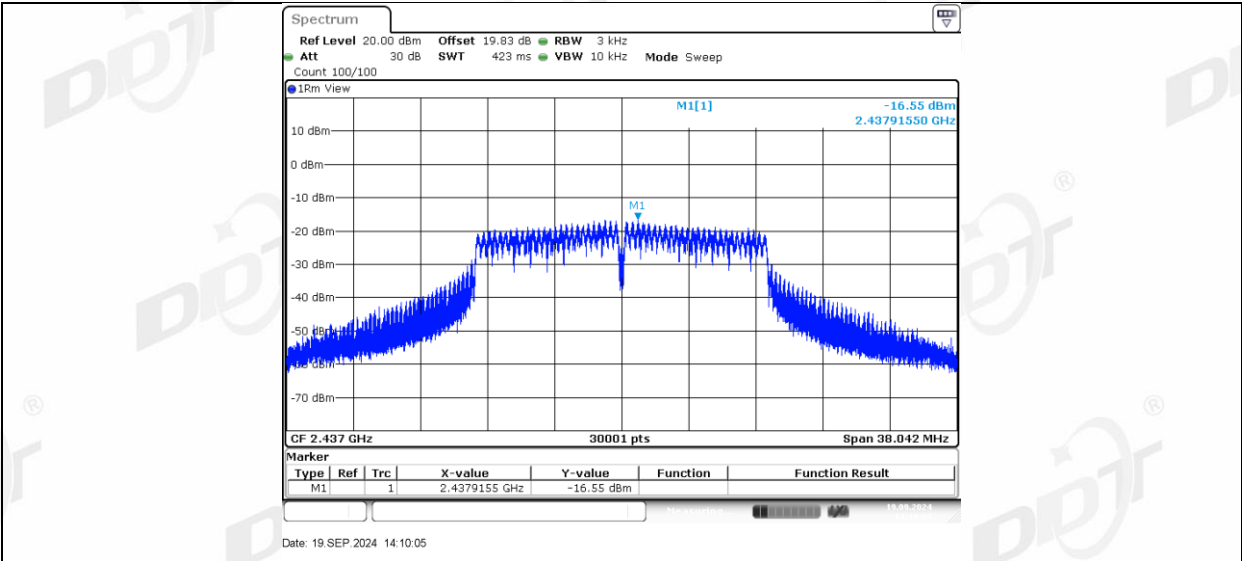


11G Ant1_2462

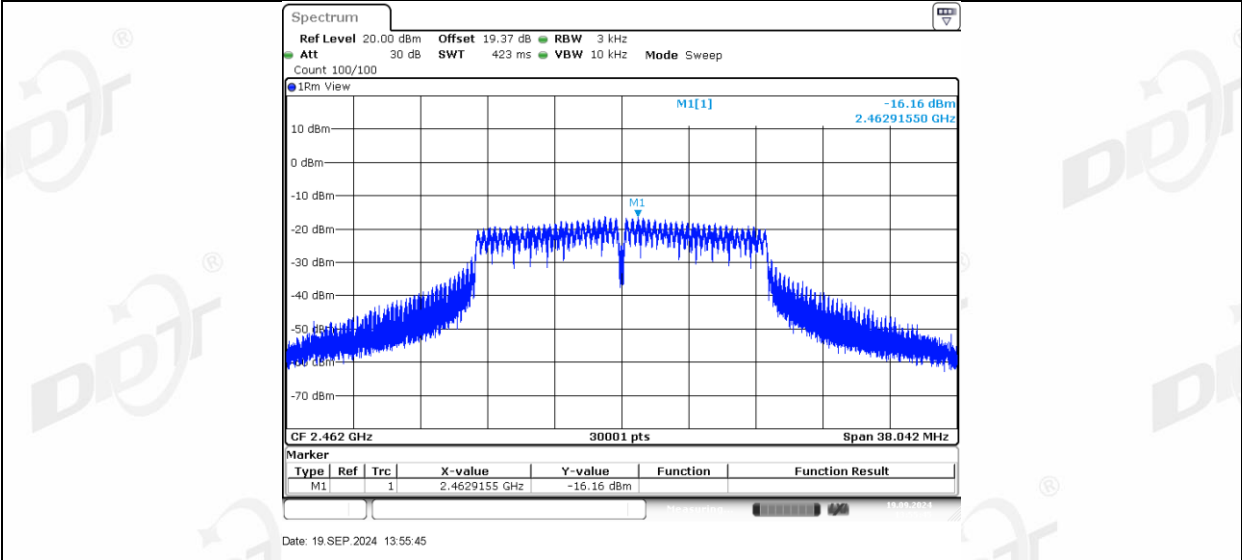


11G Ant2_2462

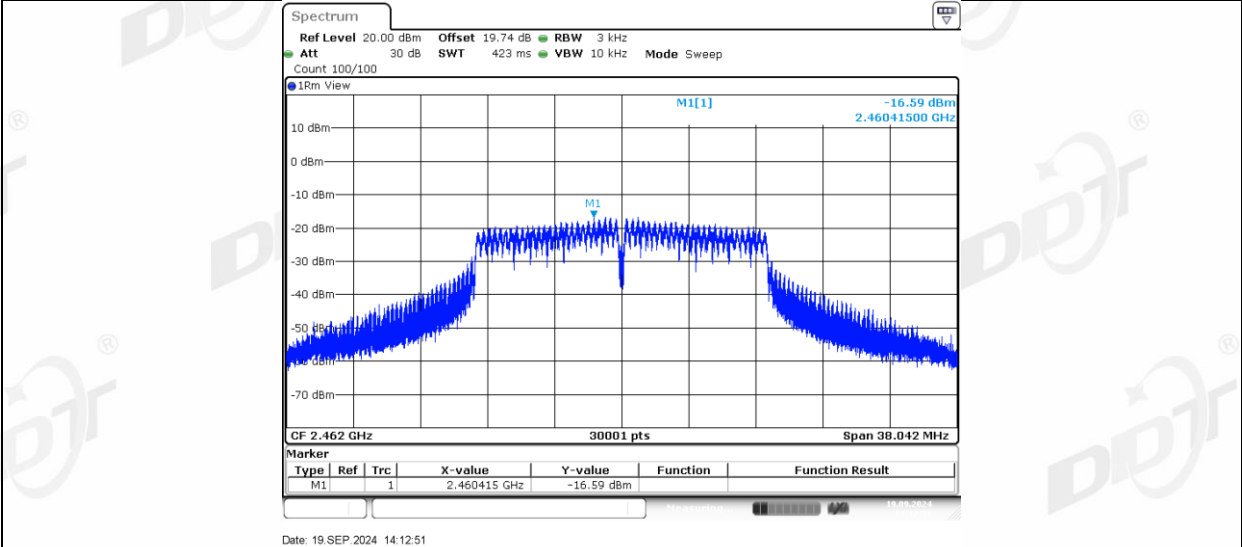


11N20MIMO_Ant1_2412

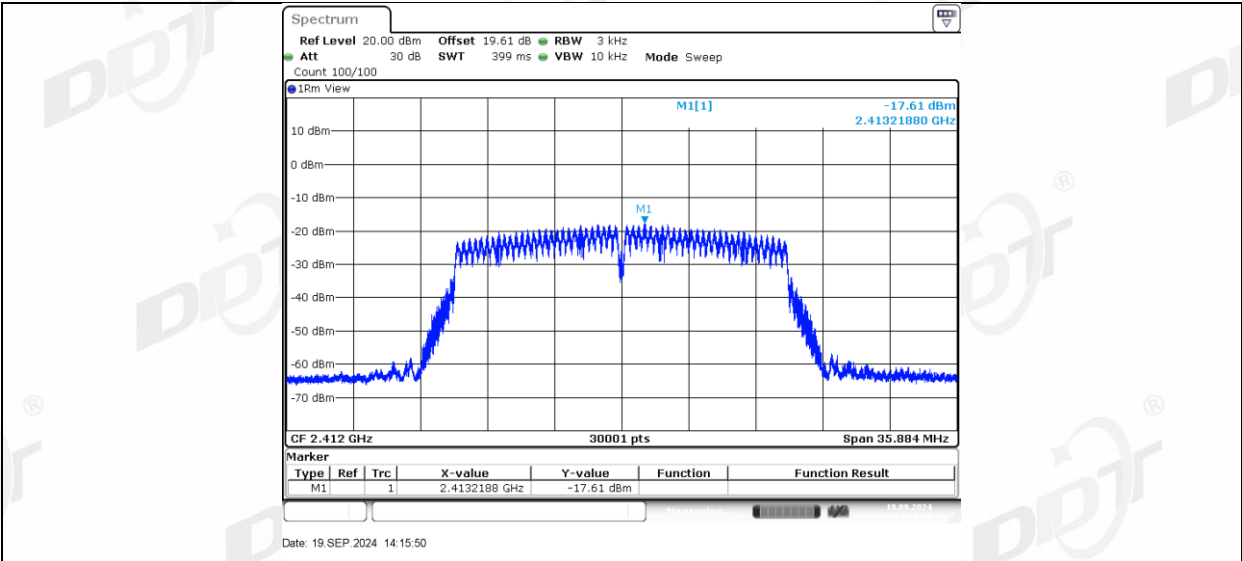


11N20MIMO_Ant2_2412

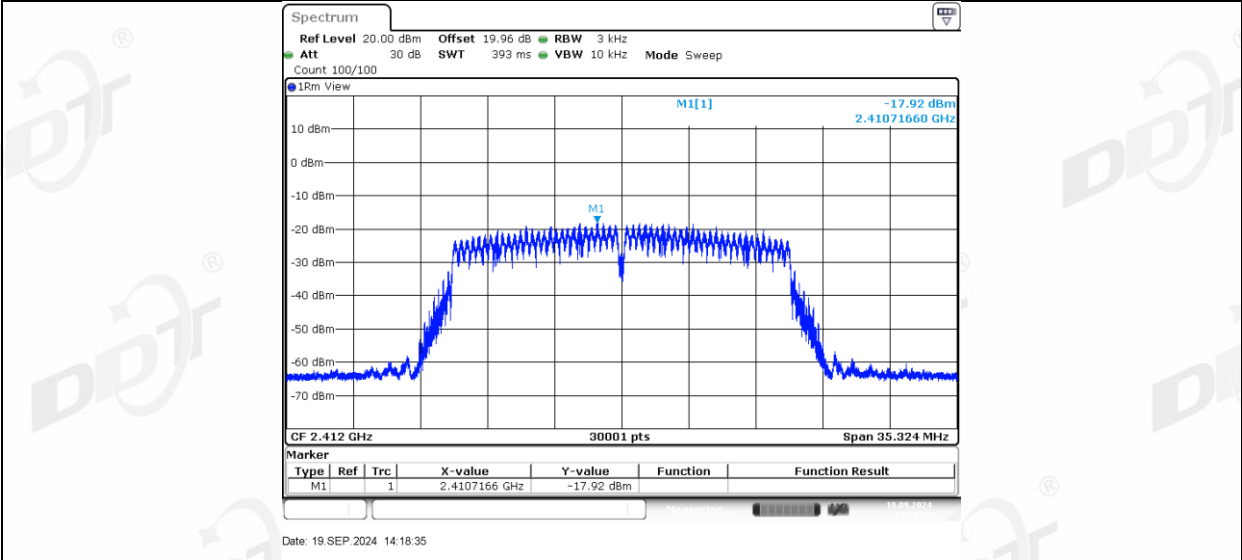


11N20MIMO_Ant1_2437

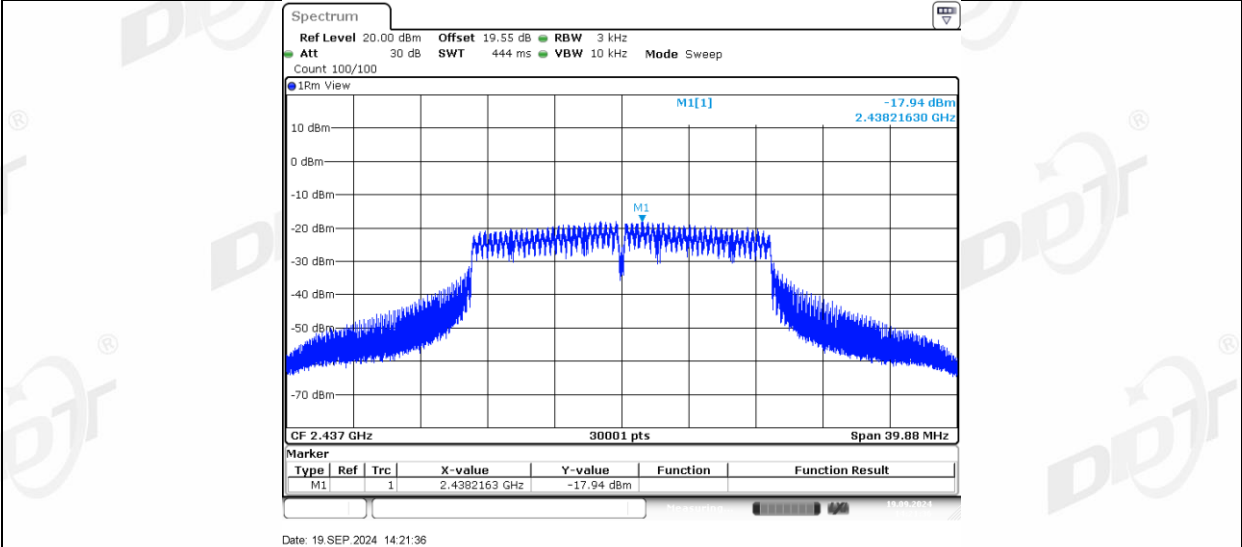


11N20MIMO_Ant2_2437

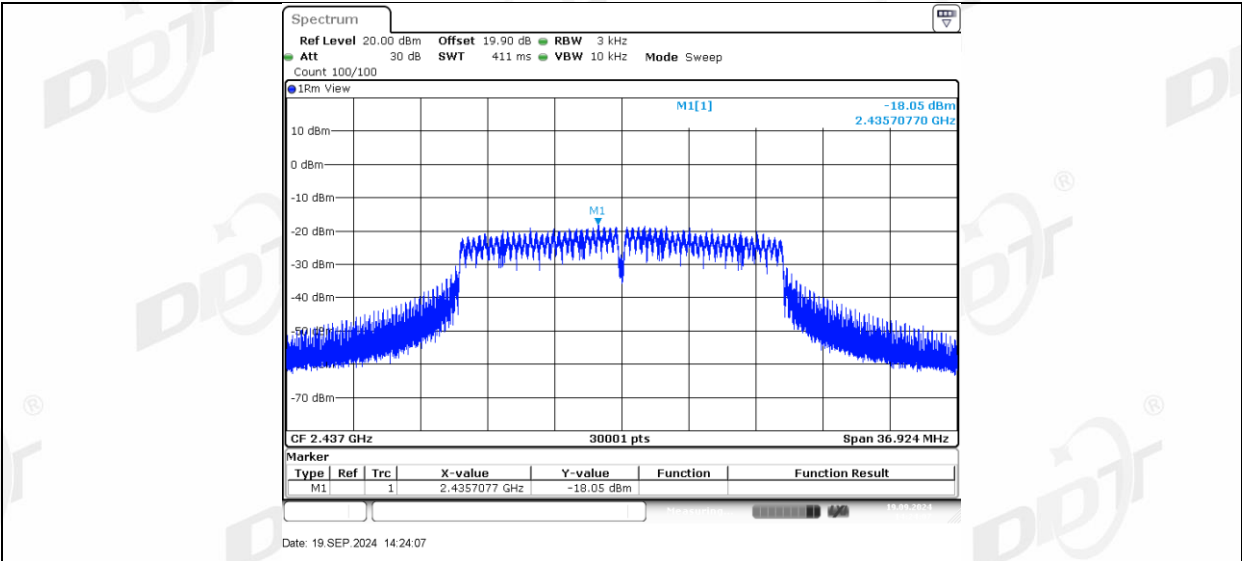


11N20MIMO_Ant1_2462

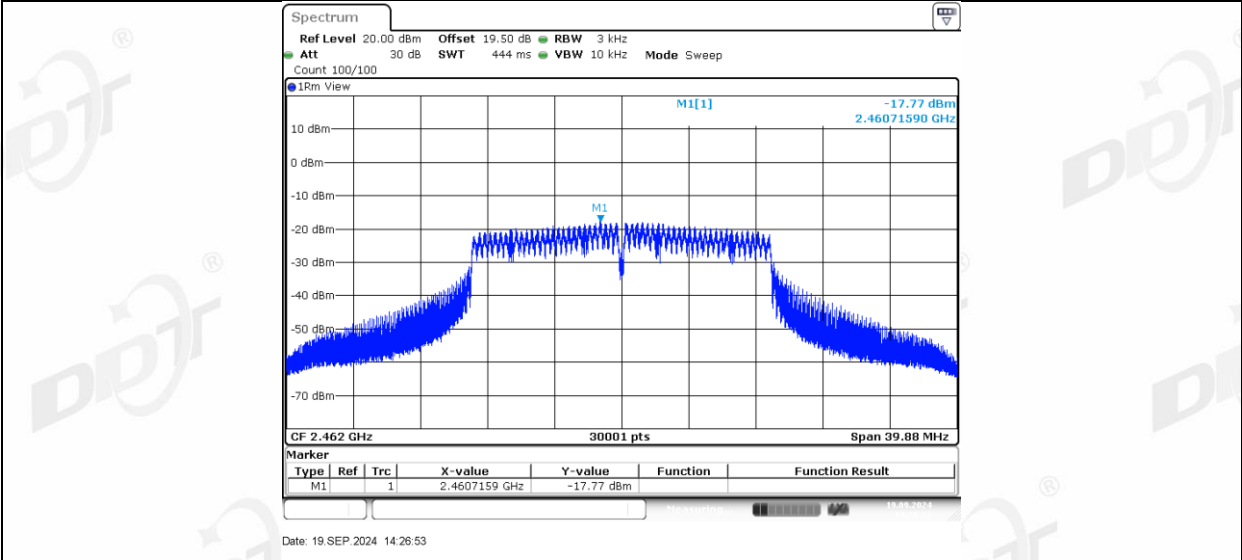


11N20MIMO_Ant2_2462

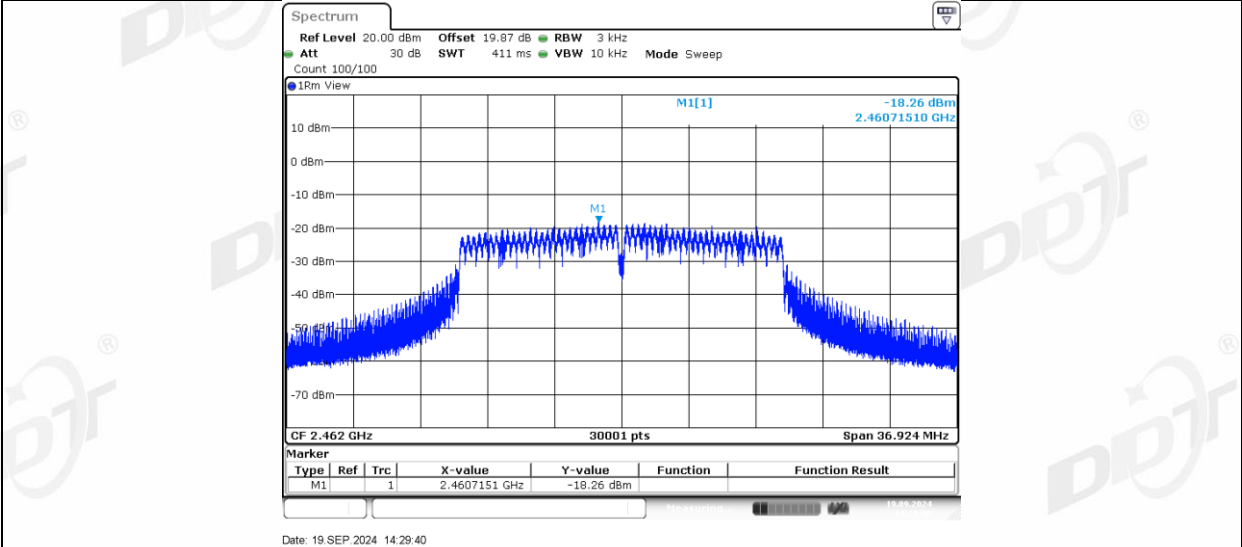


11N40MIMO_Ant1_2422

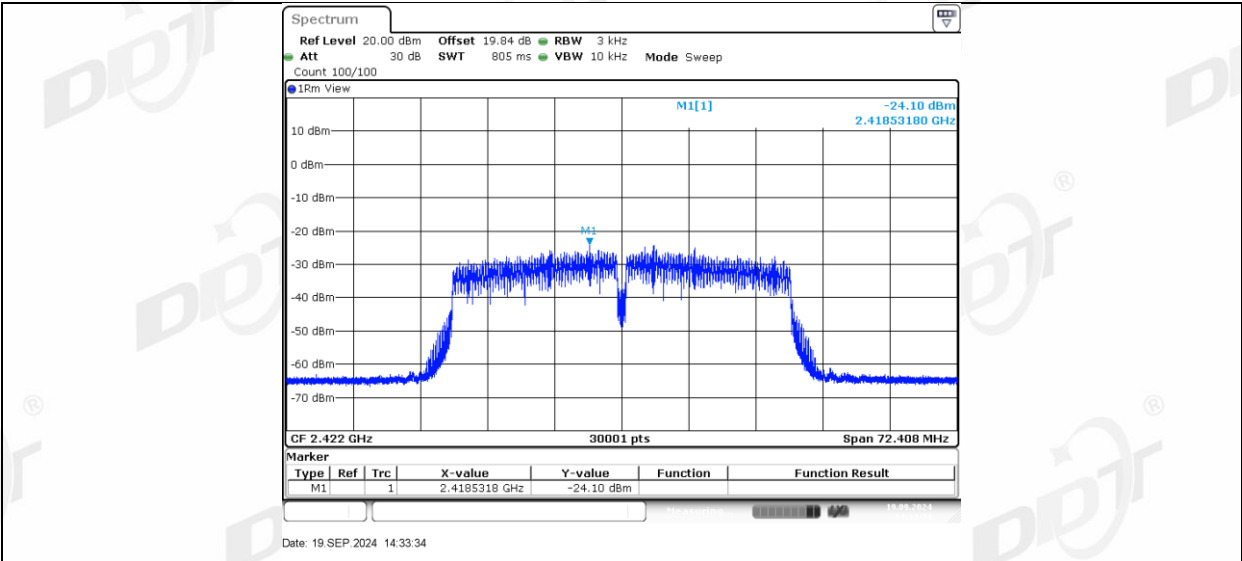


11N40MIMO_Ant2_2422

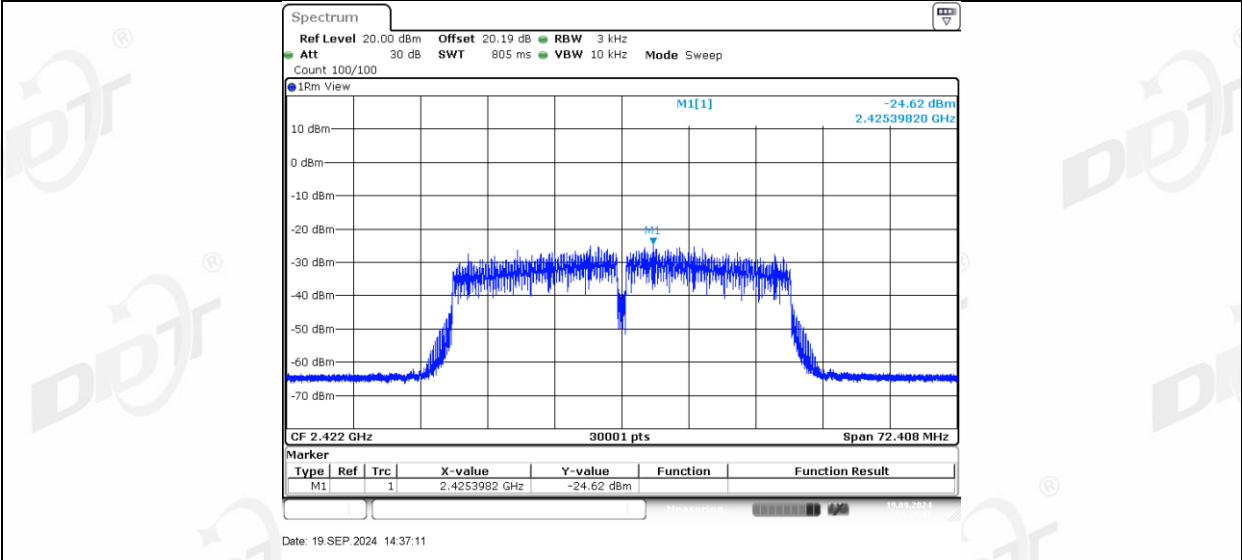


11N40MIMO_Ant1_2437

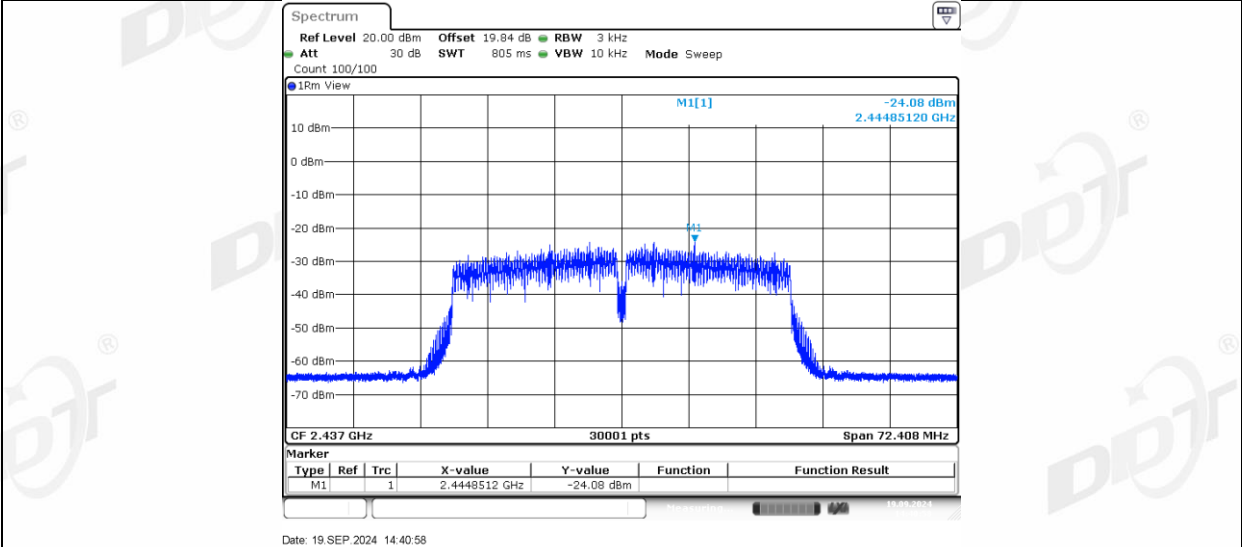


11N40MIMO_Ant2_2437

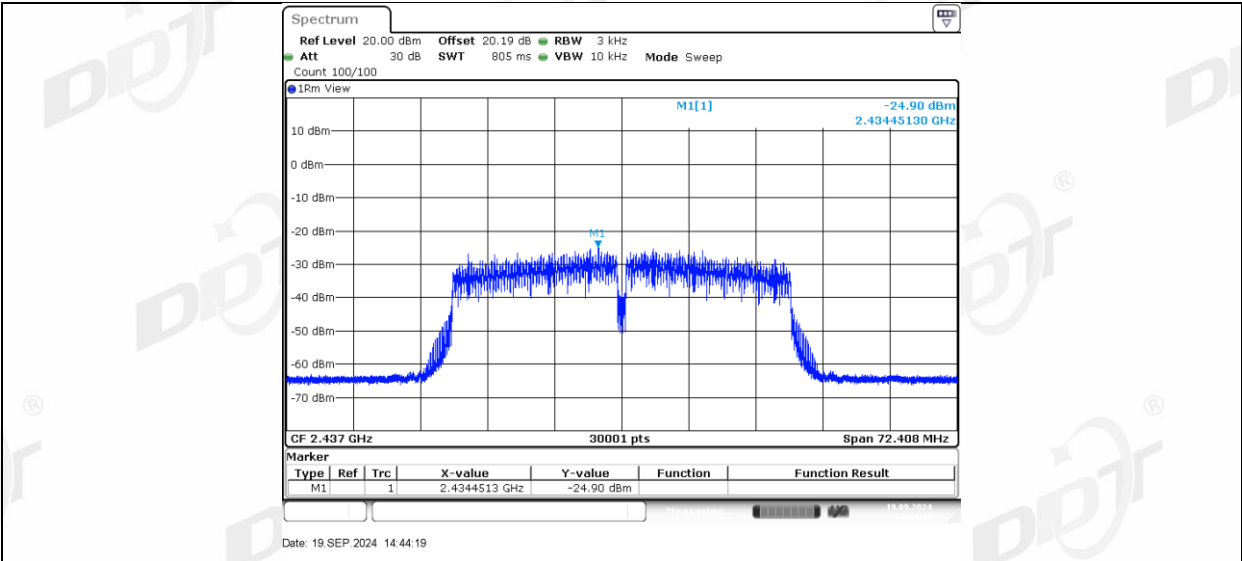


11N40MIMO_Ant1_2452

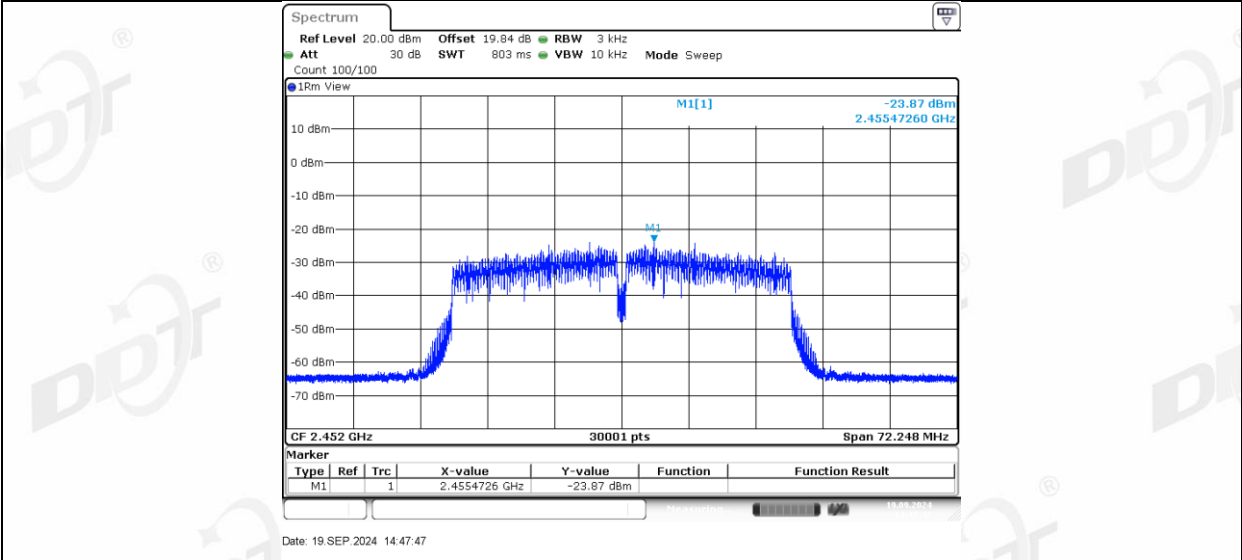


11N40MIMO_Ant2_2452

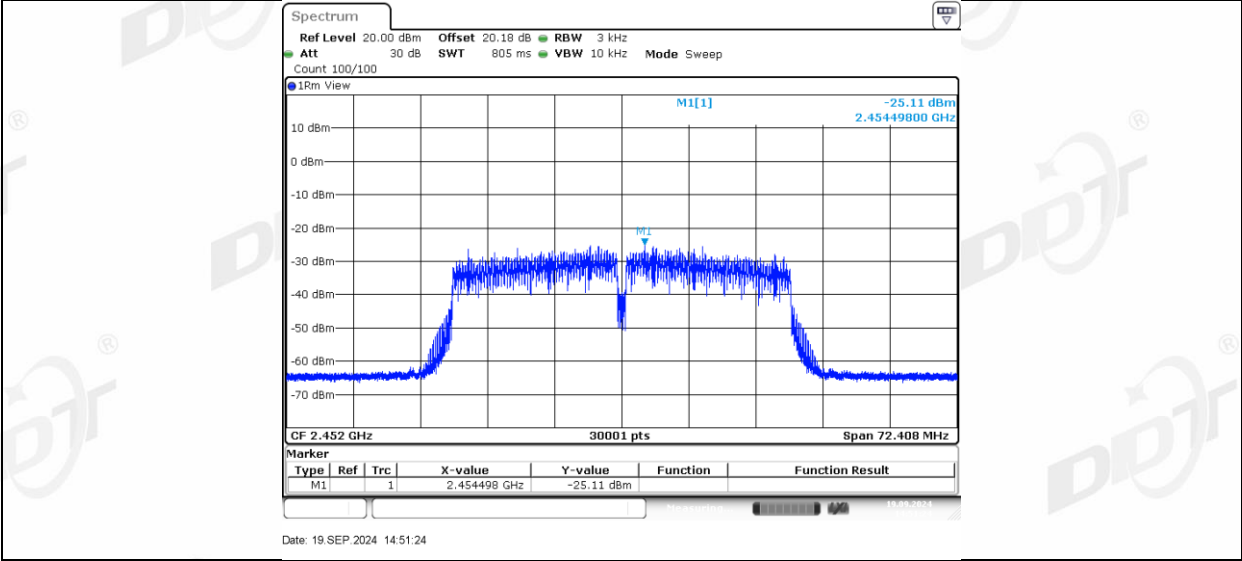


11AX20MIMO_Ant1_2412

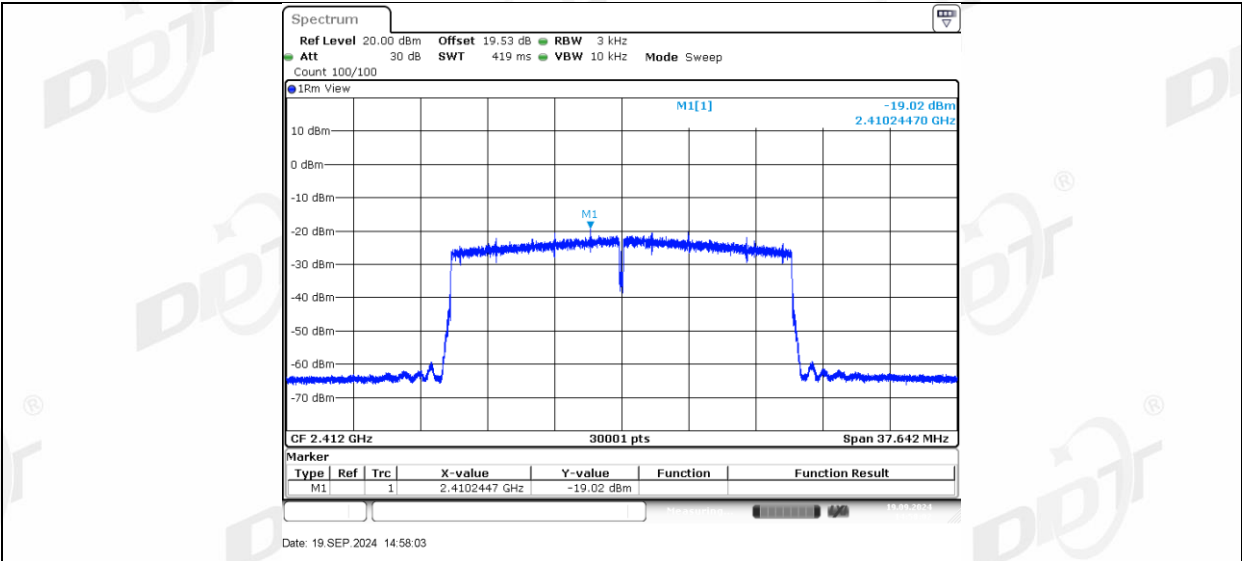


11AX20MIMO_Ant2_2412

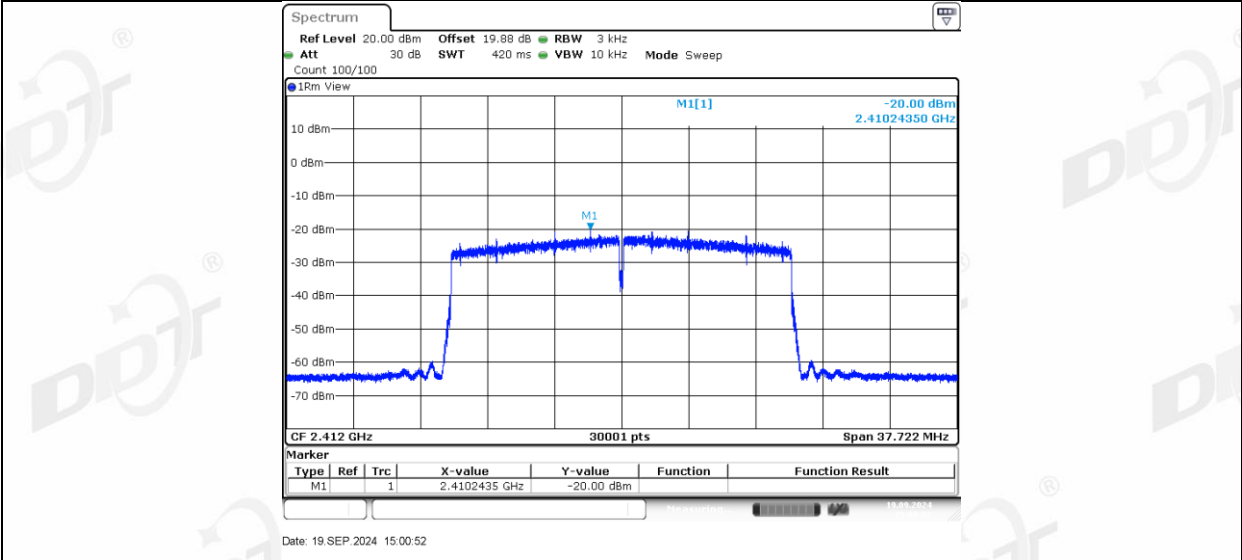


11AX20MIMO_Ant1_2437

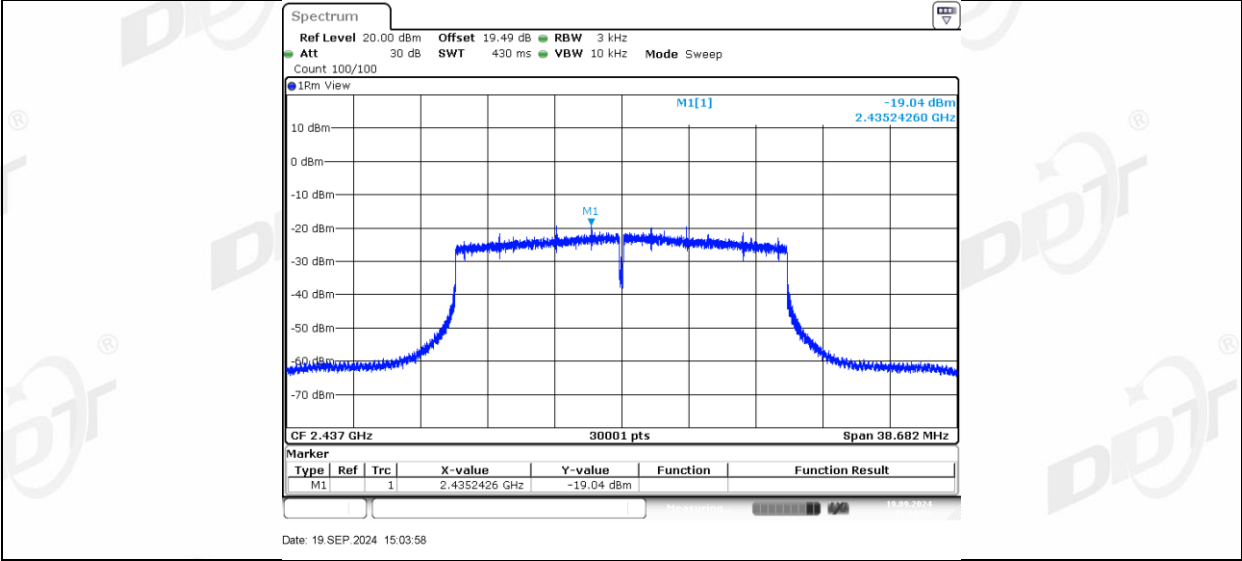


11AX20MIMO_Ant2_2437

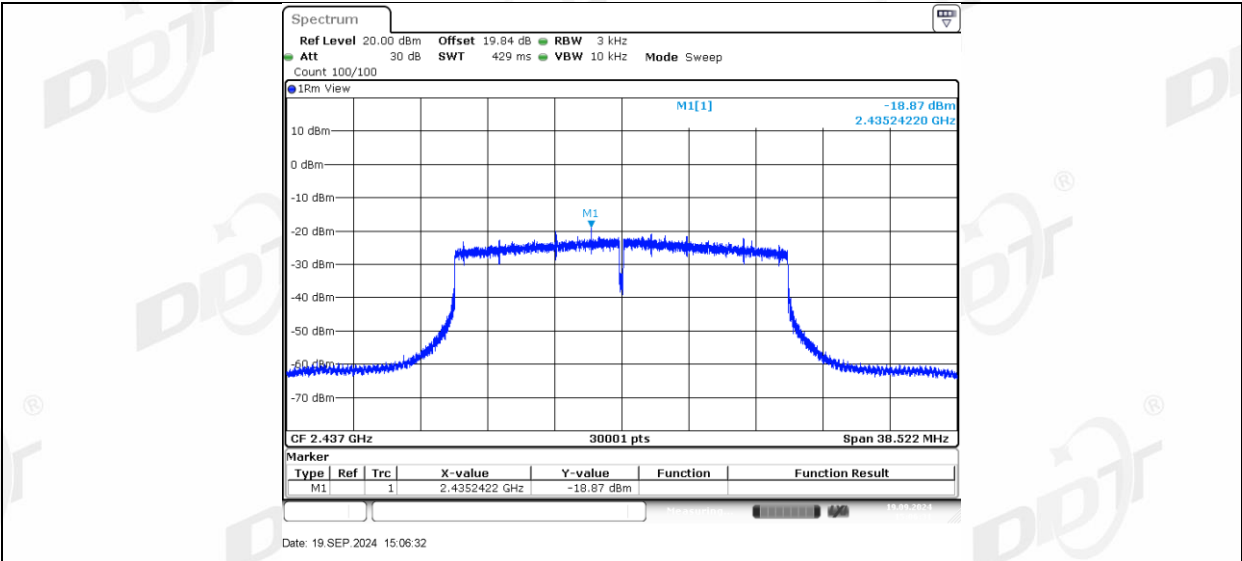


11AX20MIMO_Ant1_2462

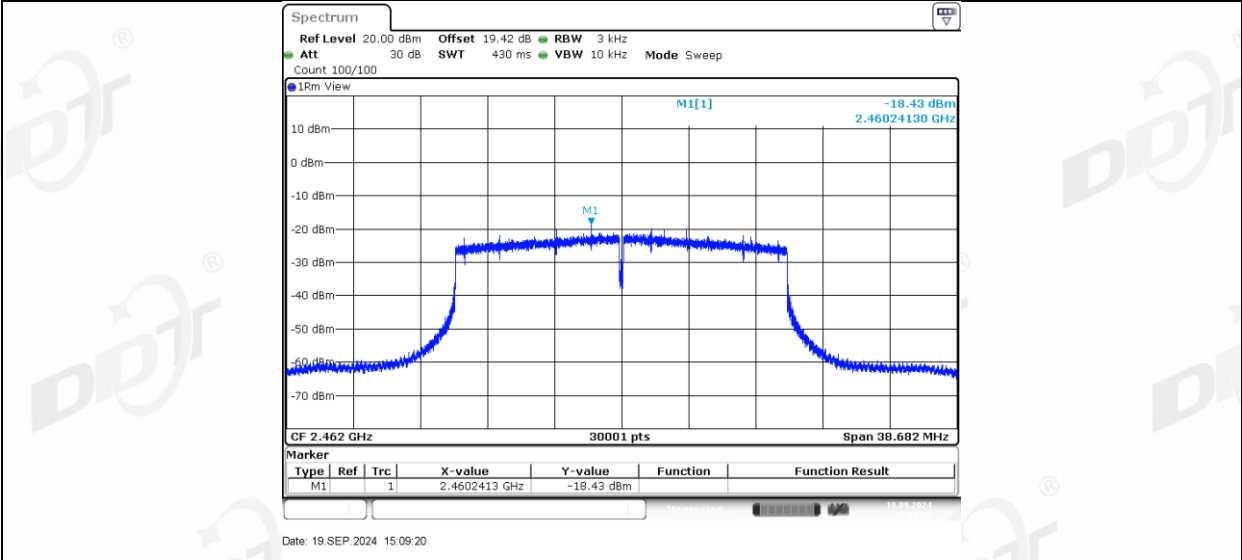


11AX20MIMO_Ant2_2462

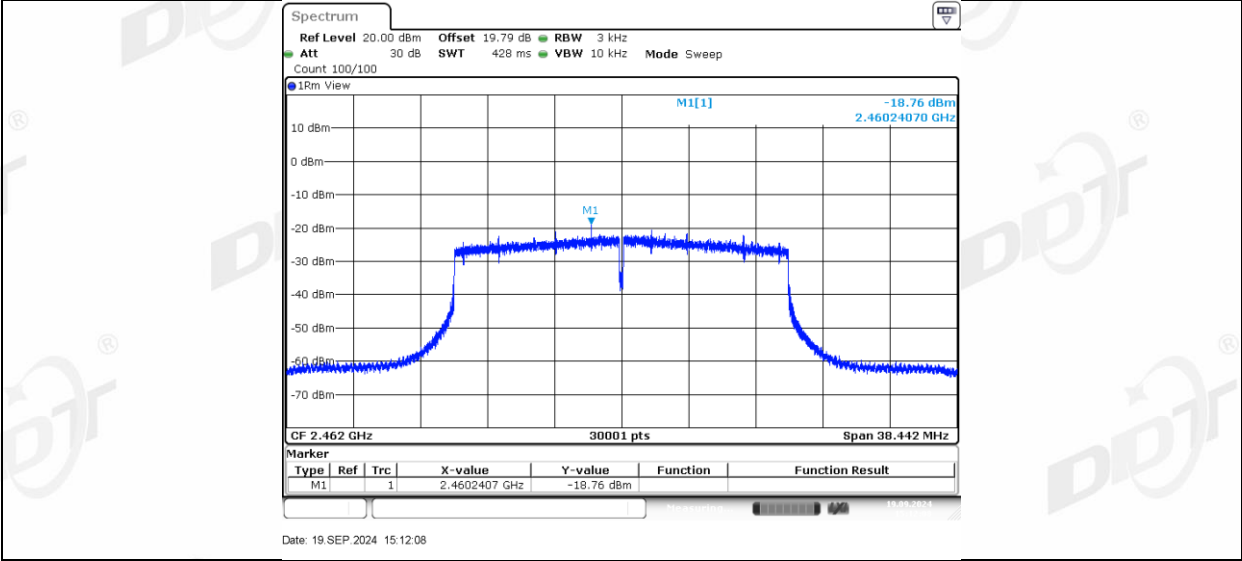


11AX40MIMO_Ant1_2422

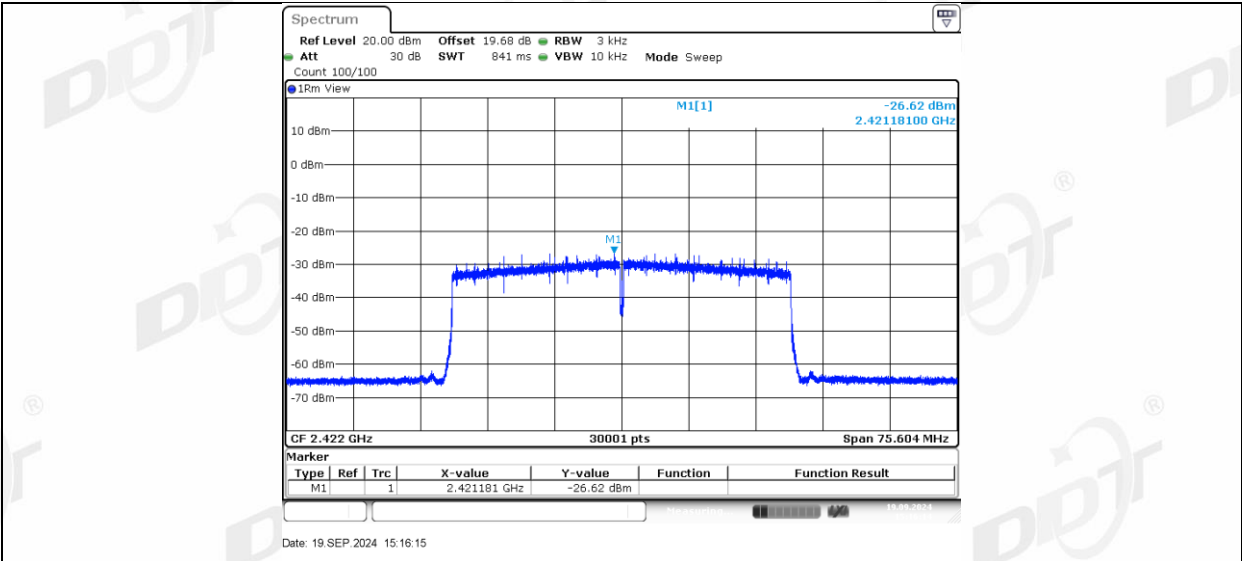


11AX40MIMO_Ant2_2422

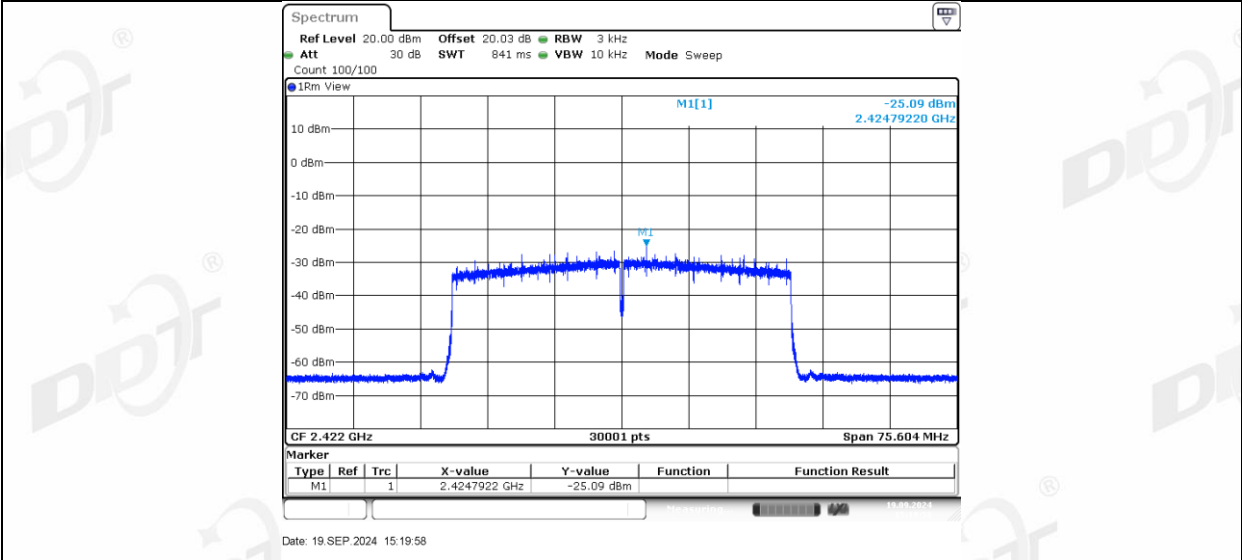


11AX40MIMO_Ant1_2437

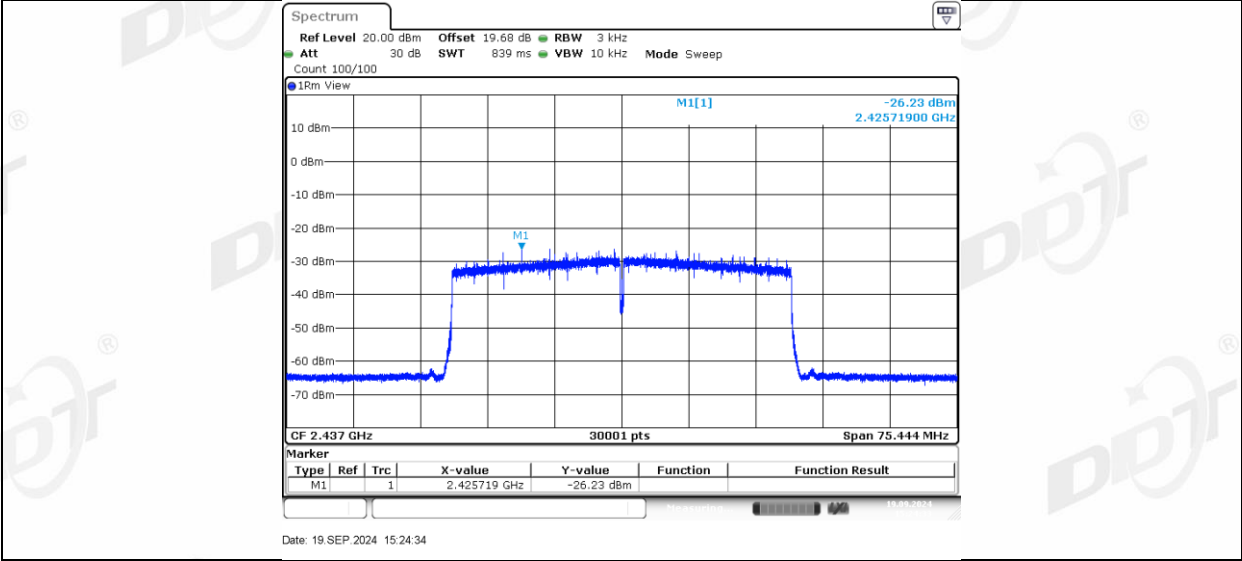


11AX40MIMO_Ant2_2437

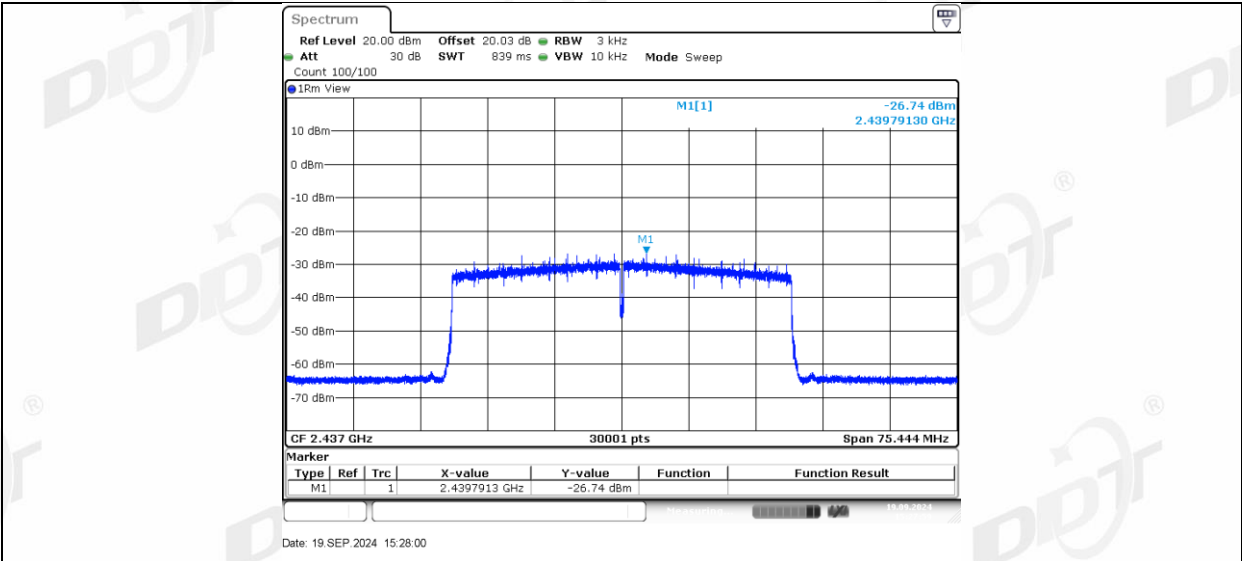



11AX40MIMO_Ant1_2452

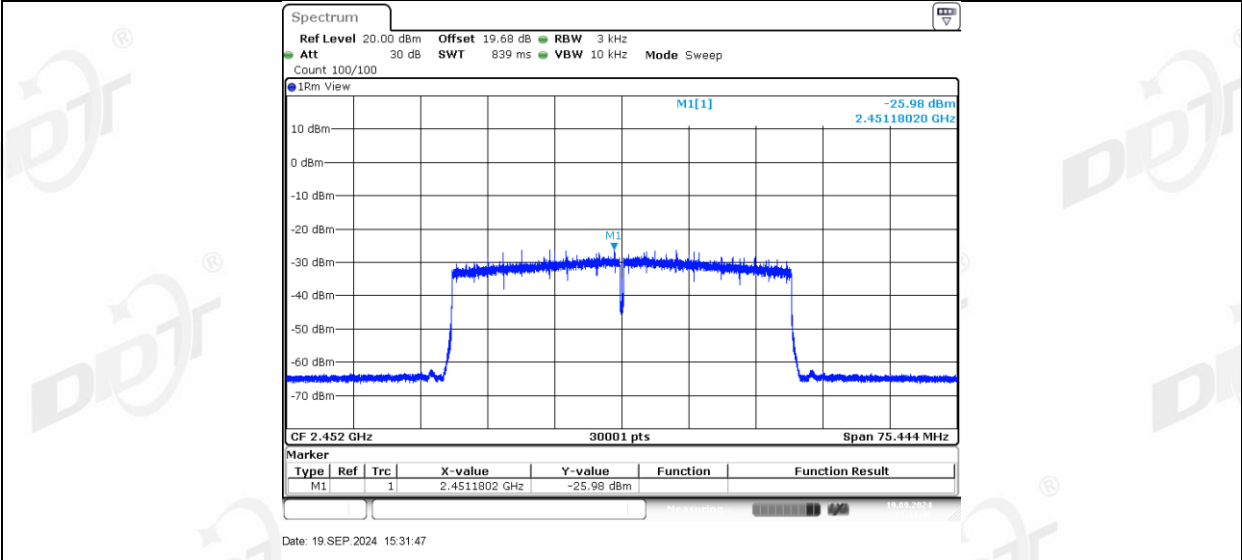



11AX40MIMO_Ant2_2452

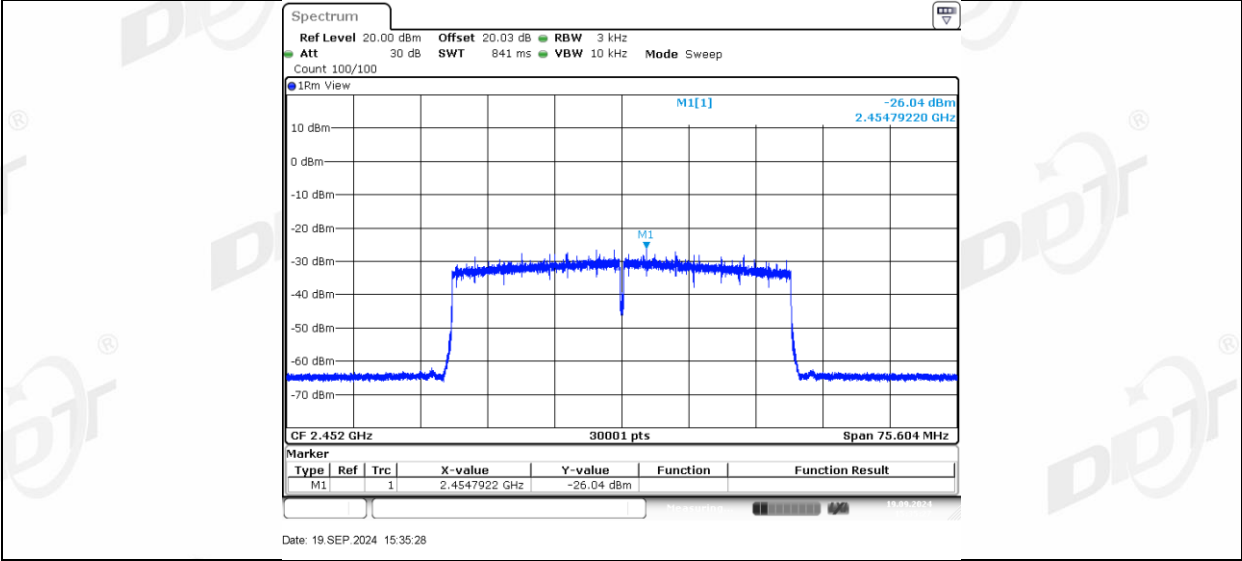


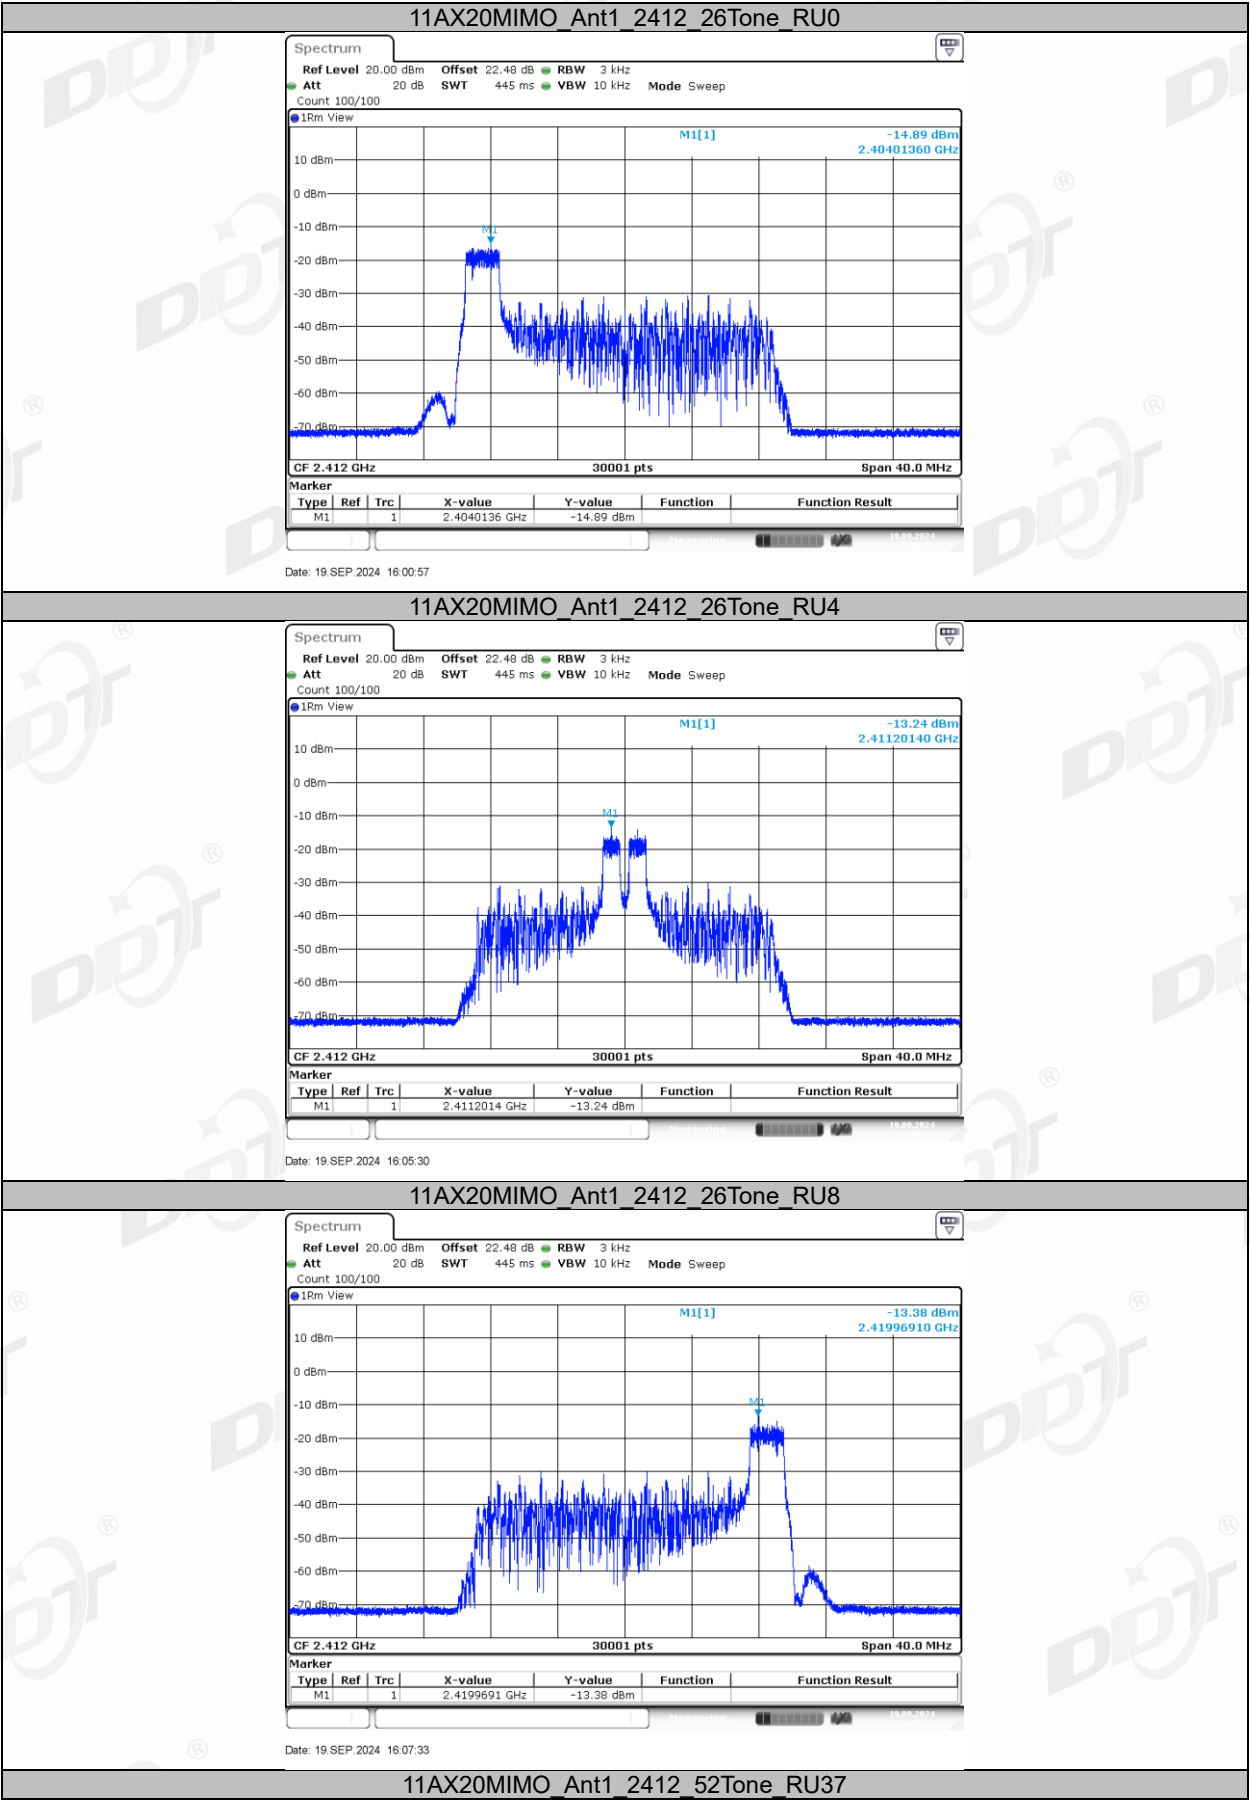

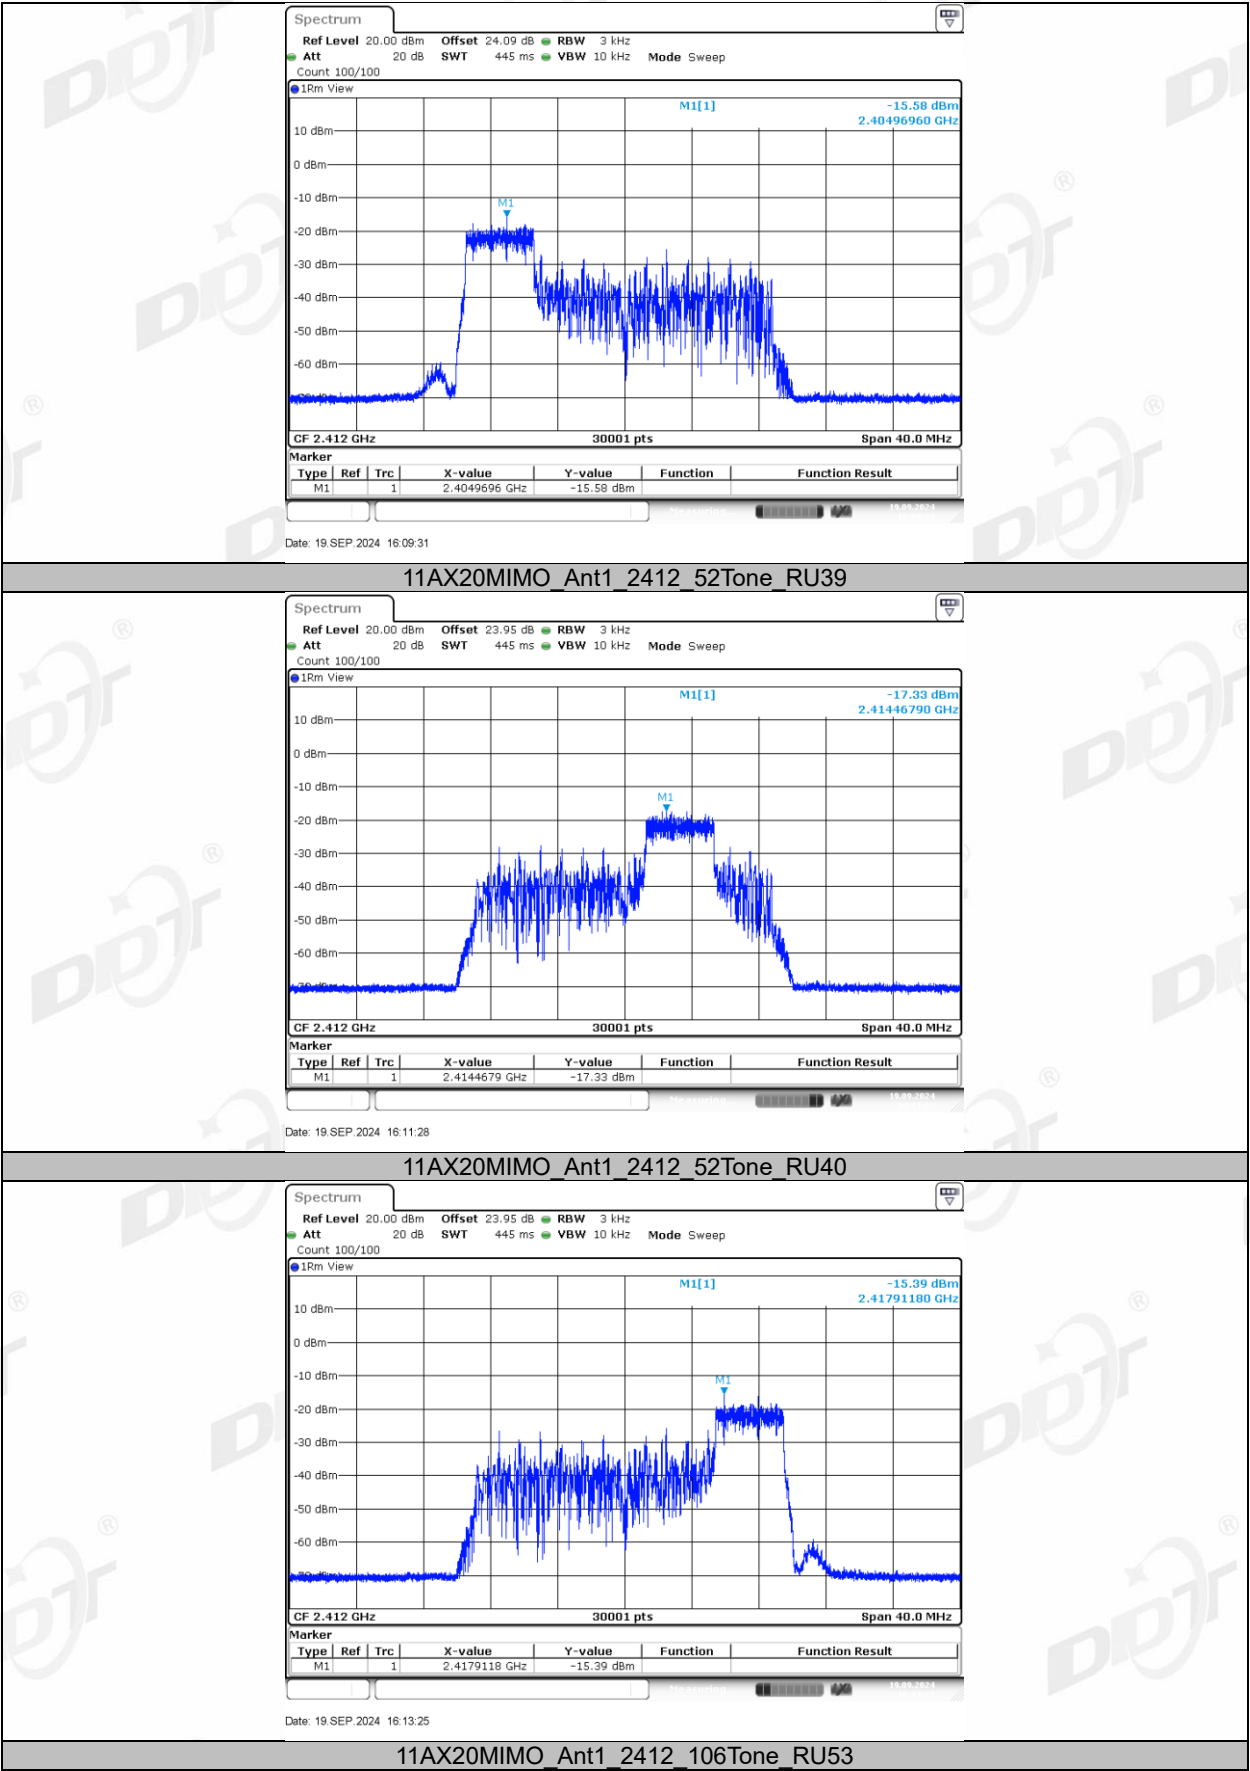


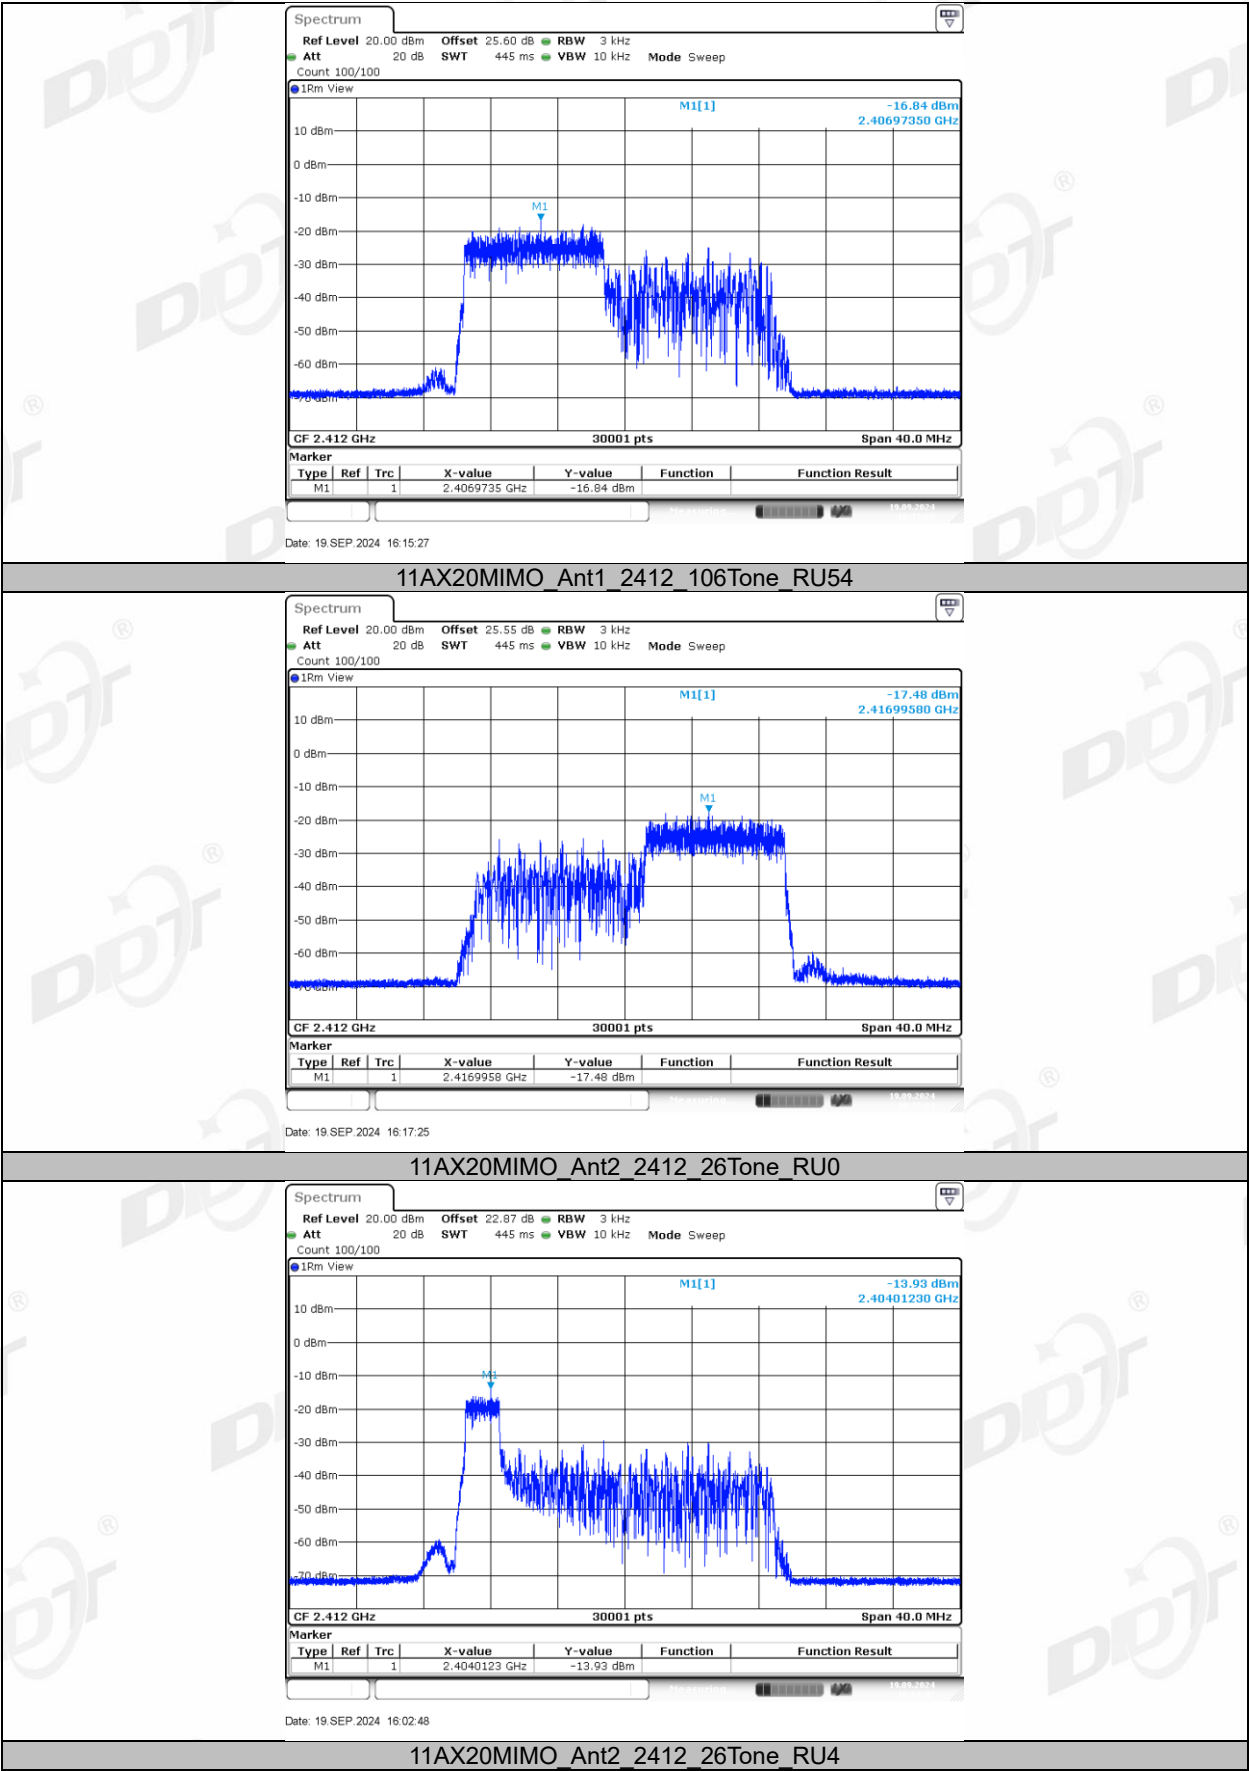

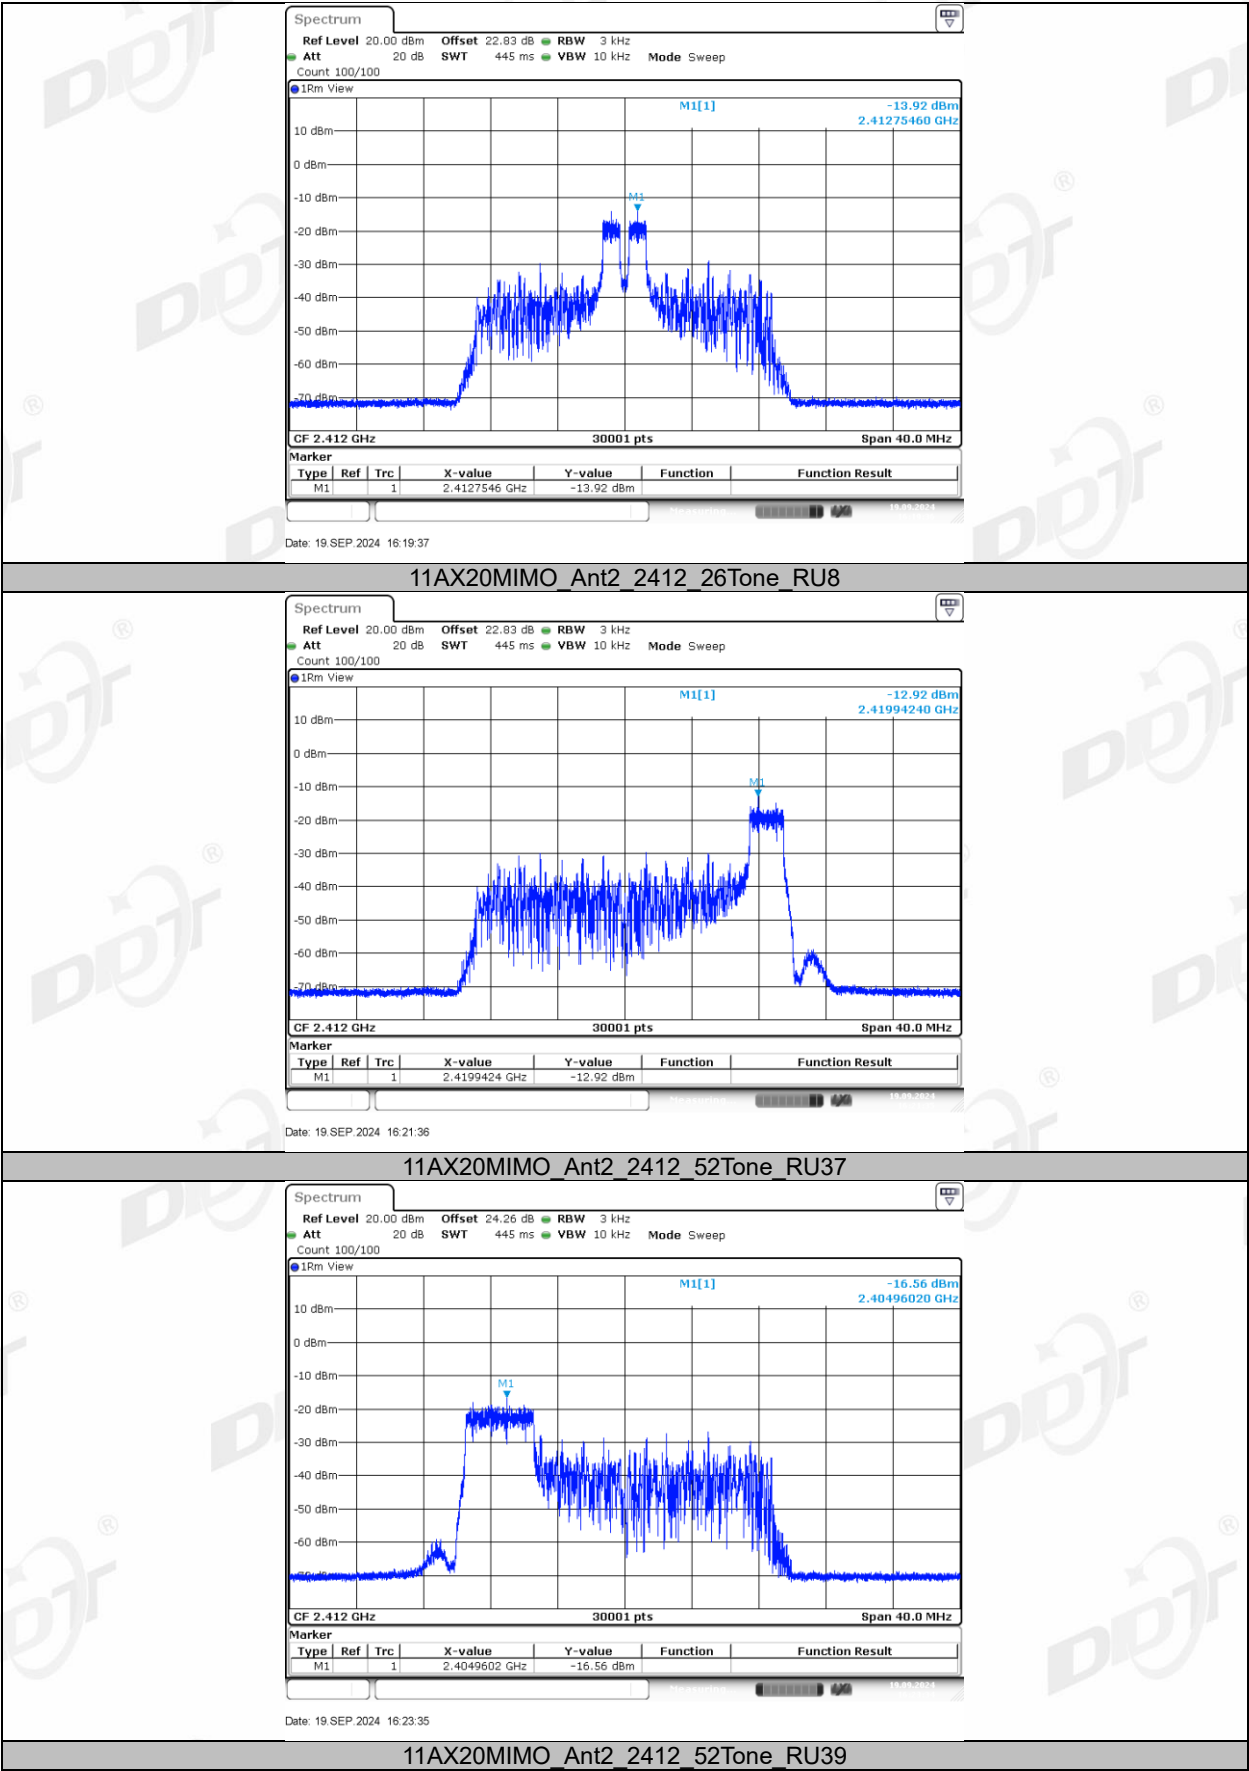


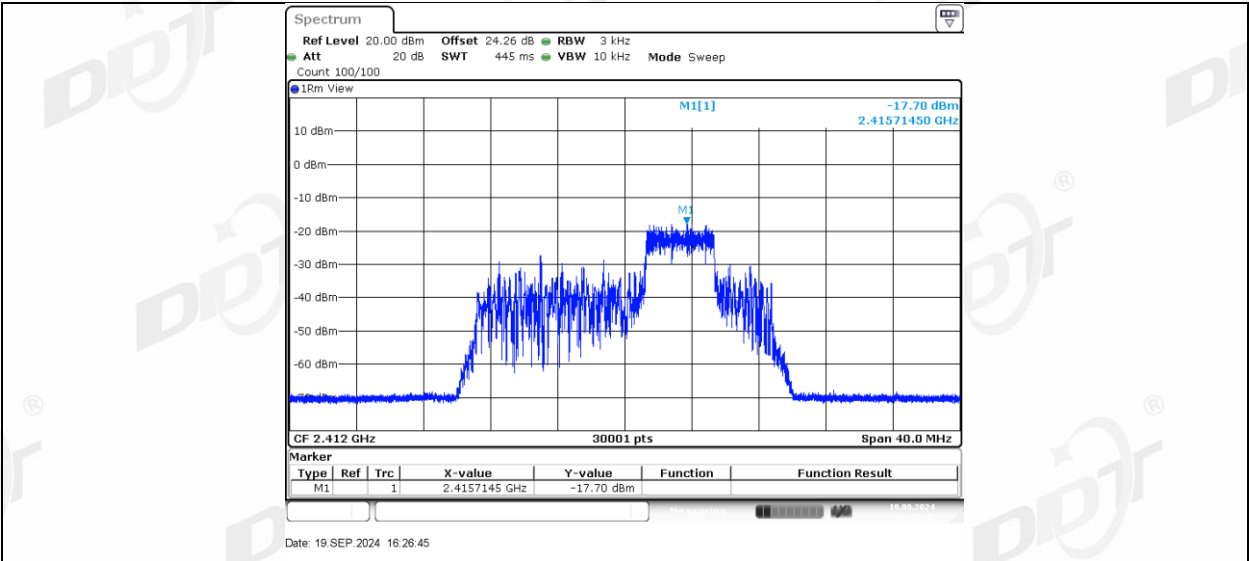


11AX20MIMO_Ant2_2412_52Tone_RU40

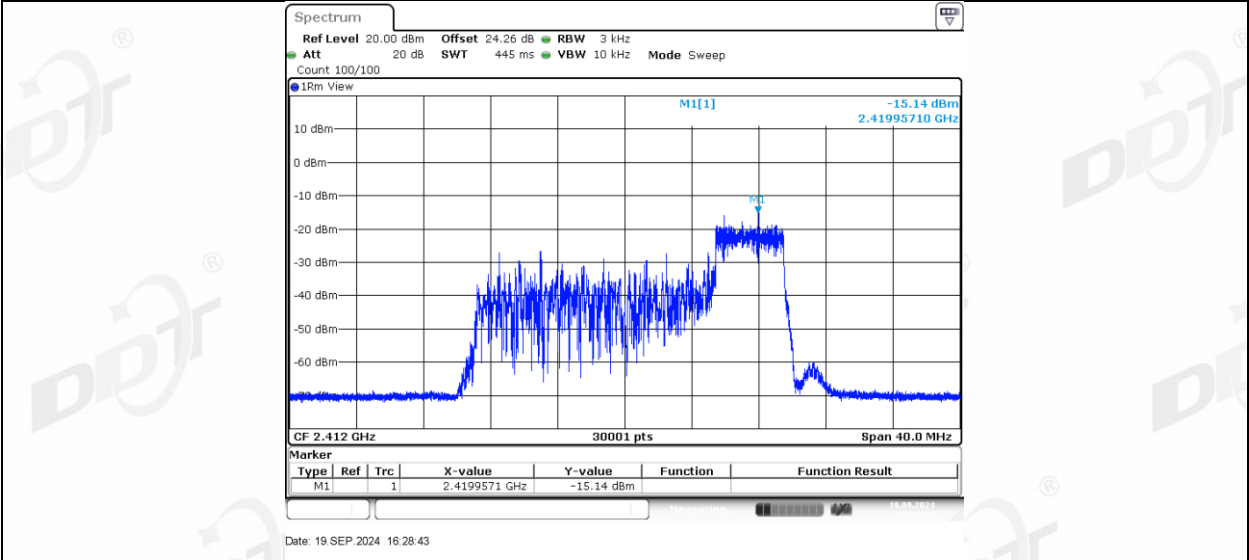



11AX20MIMO_Ant2_2412_106Tone_RU53

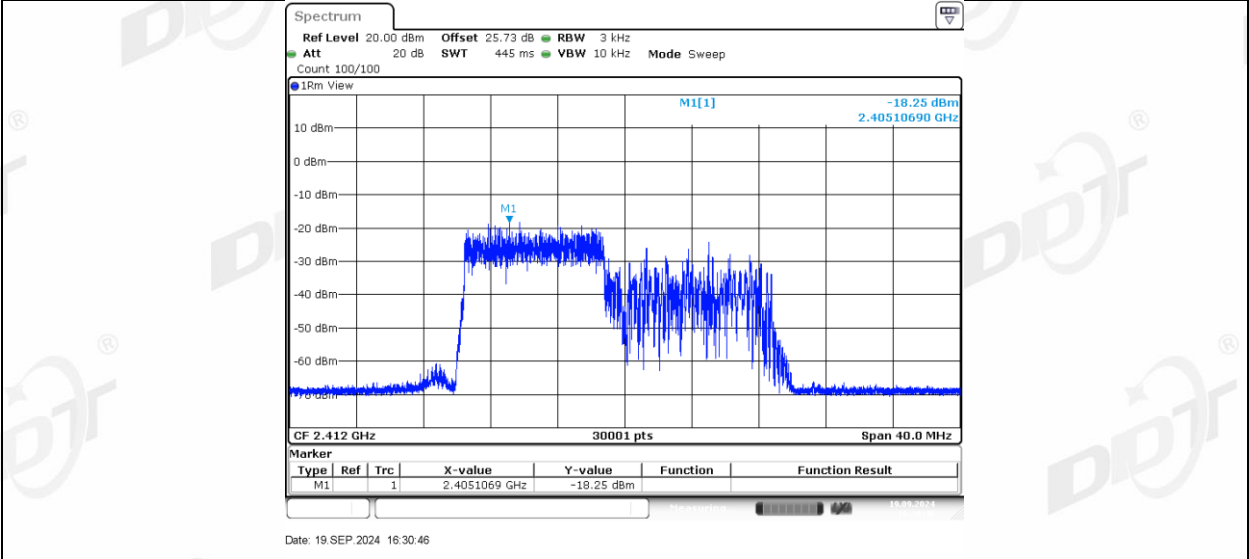



11AX20MIMO_Ant2_2412_106Tone_RU54

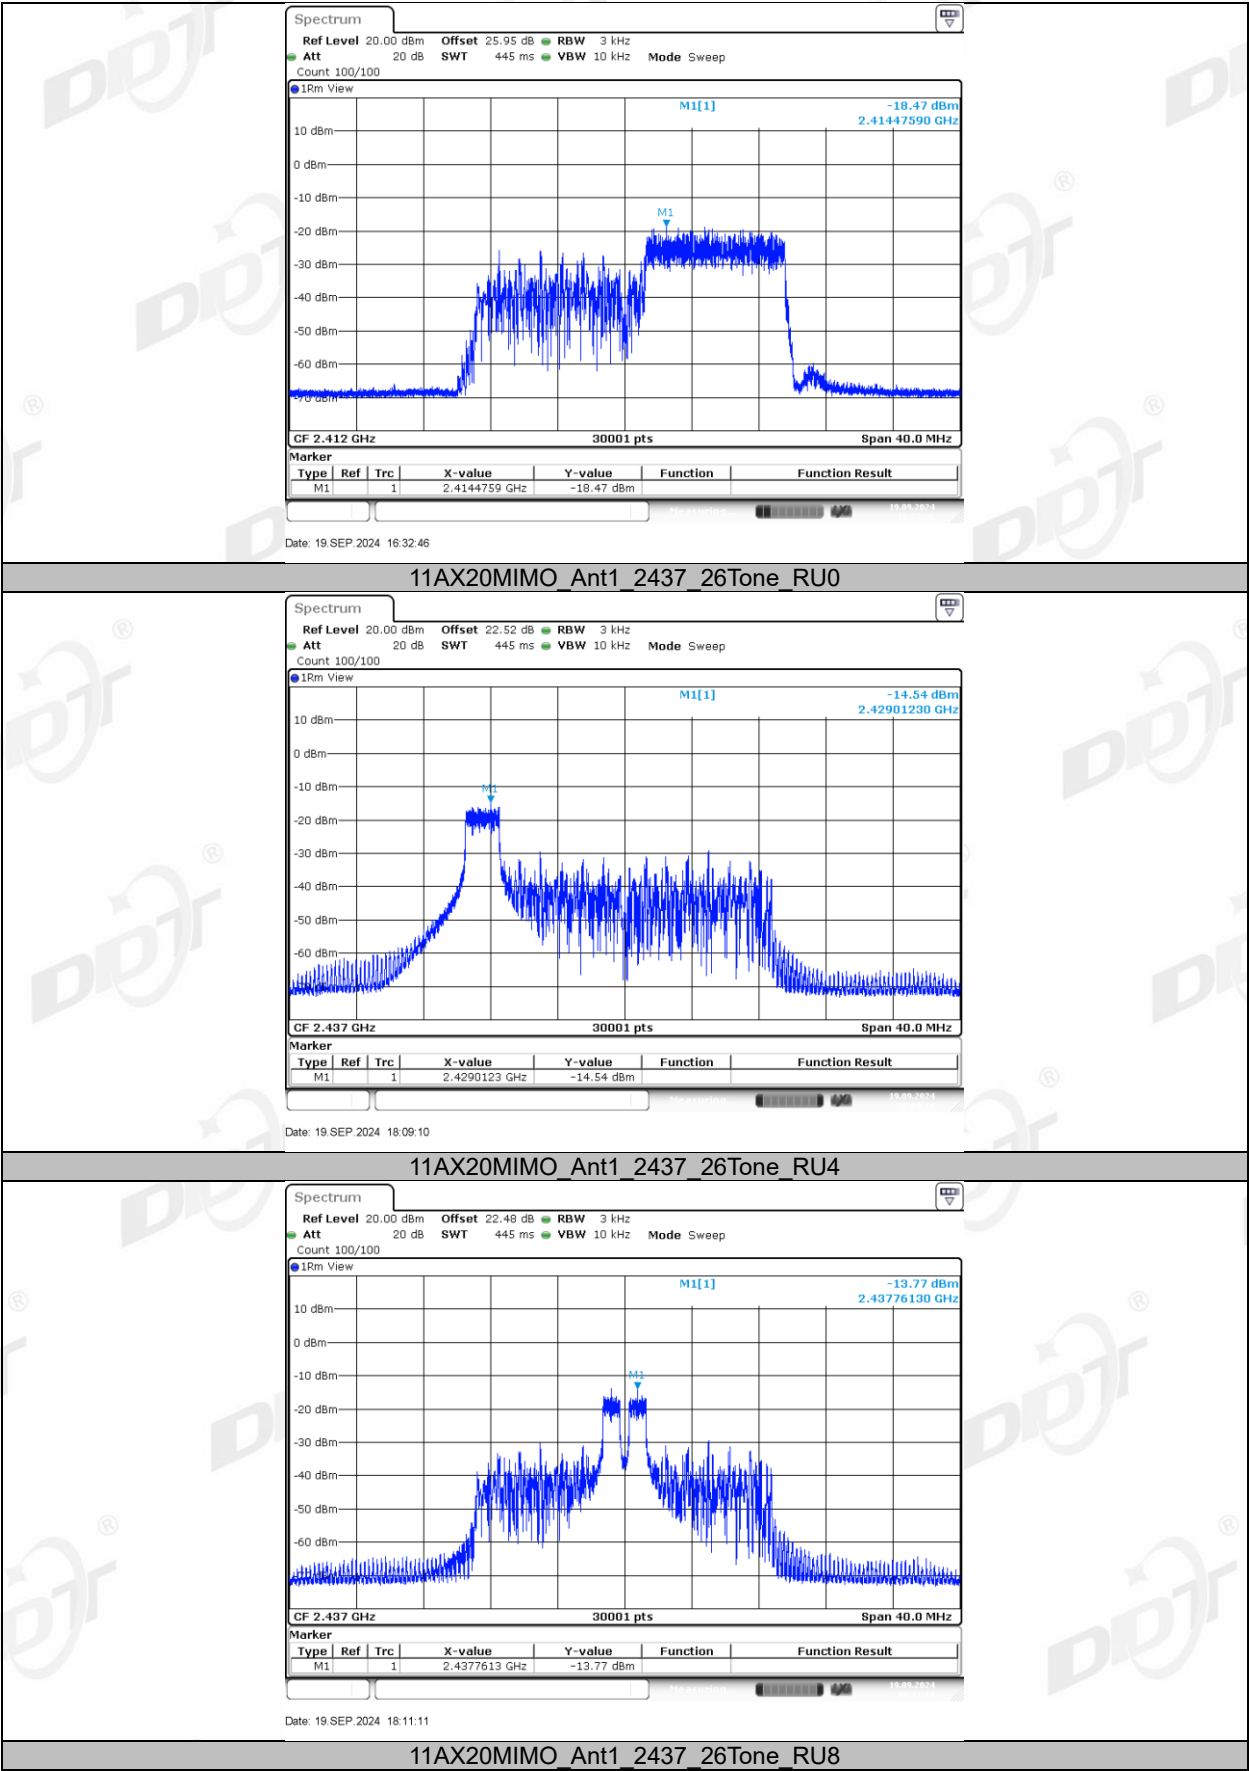


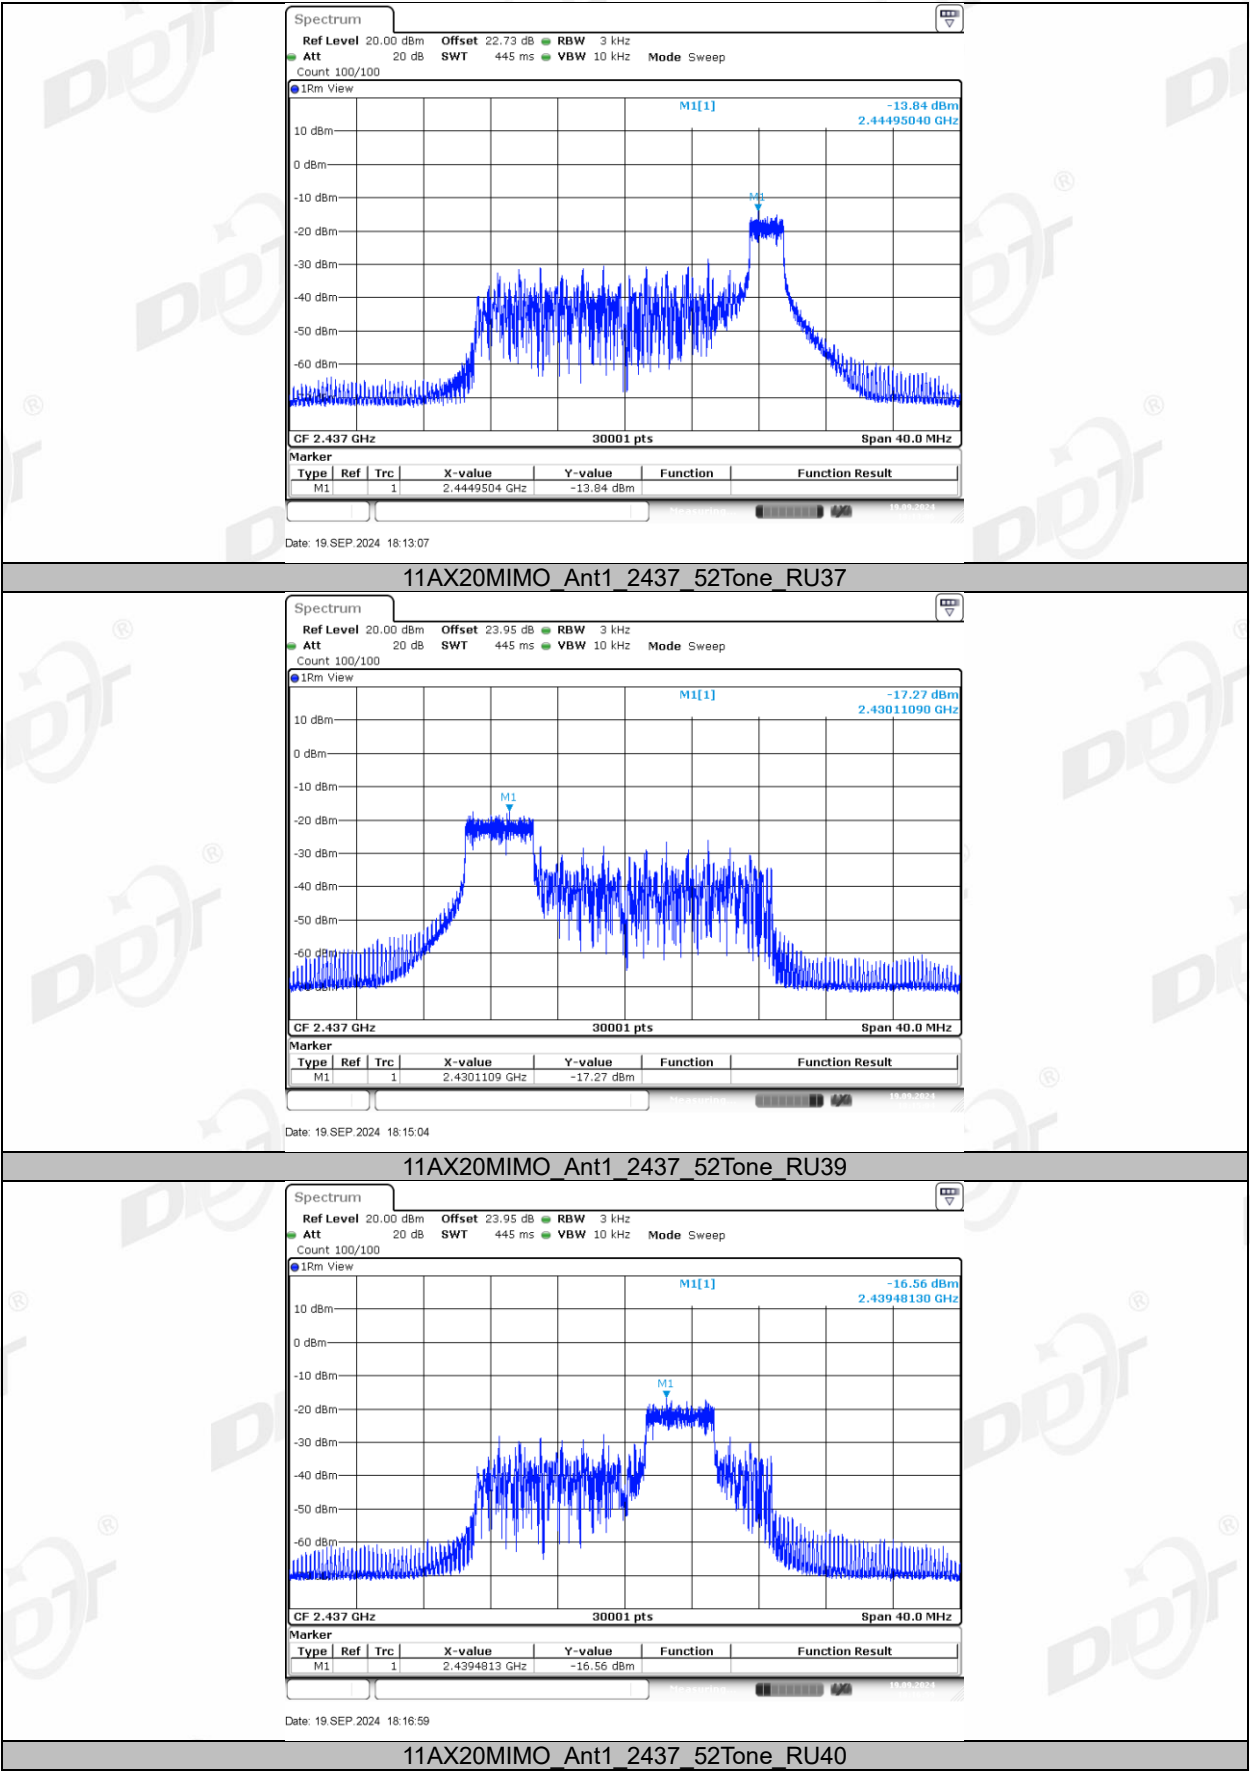


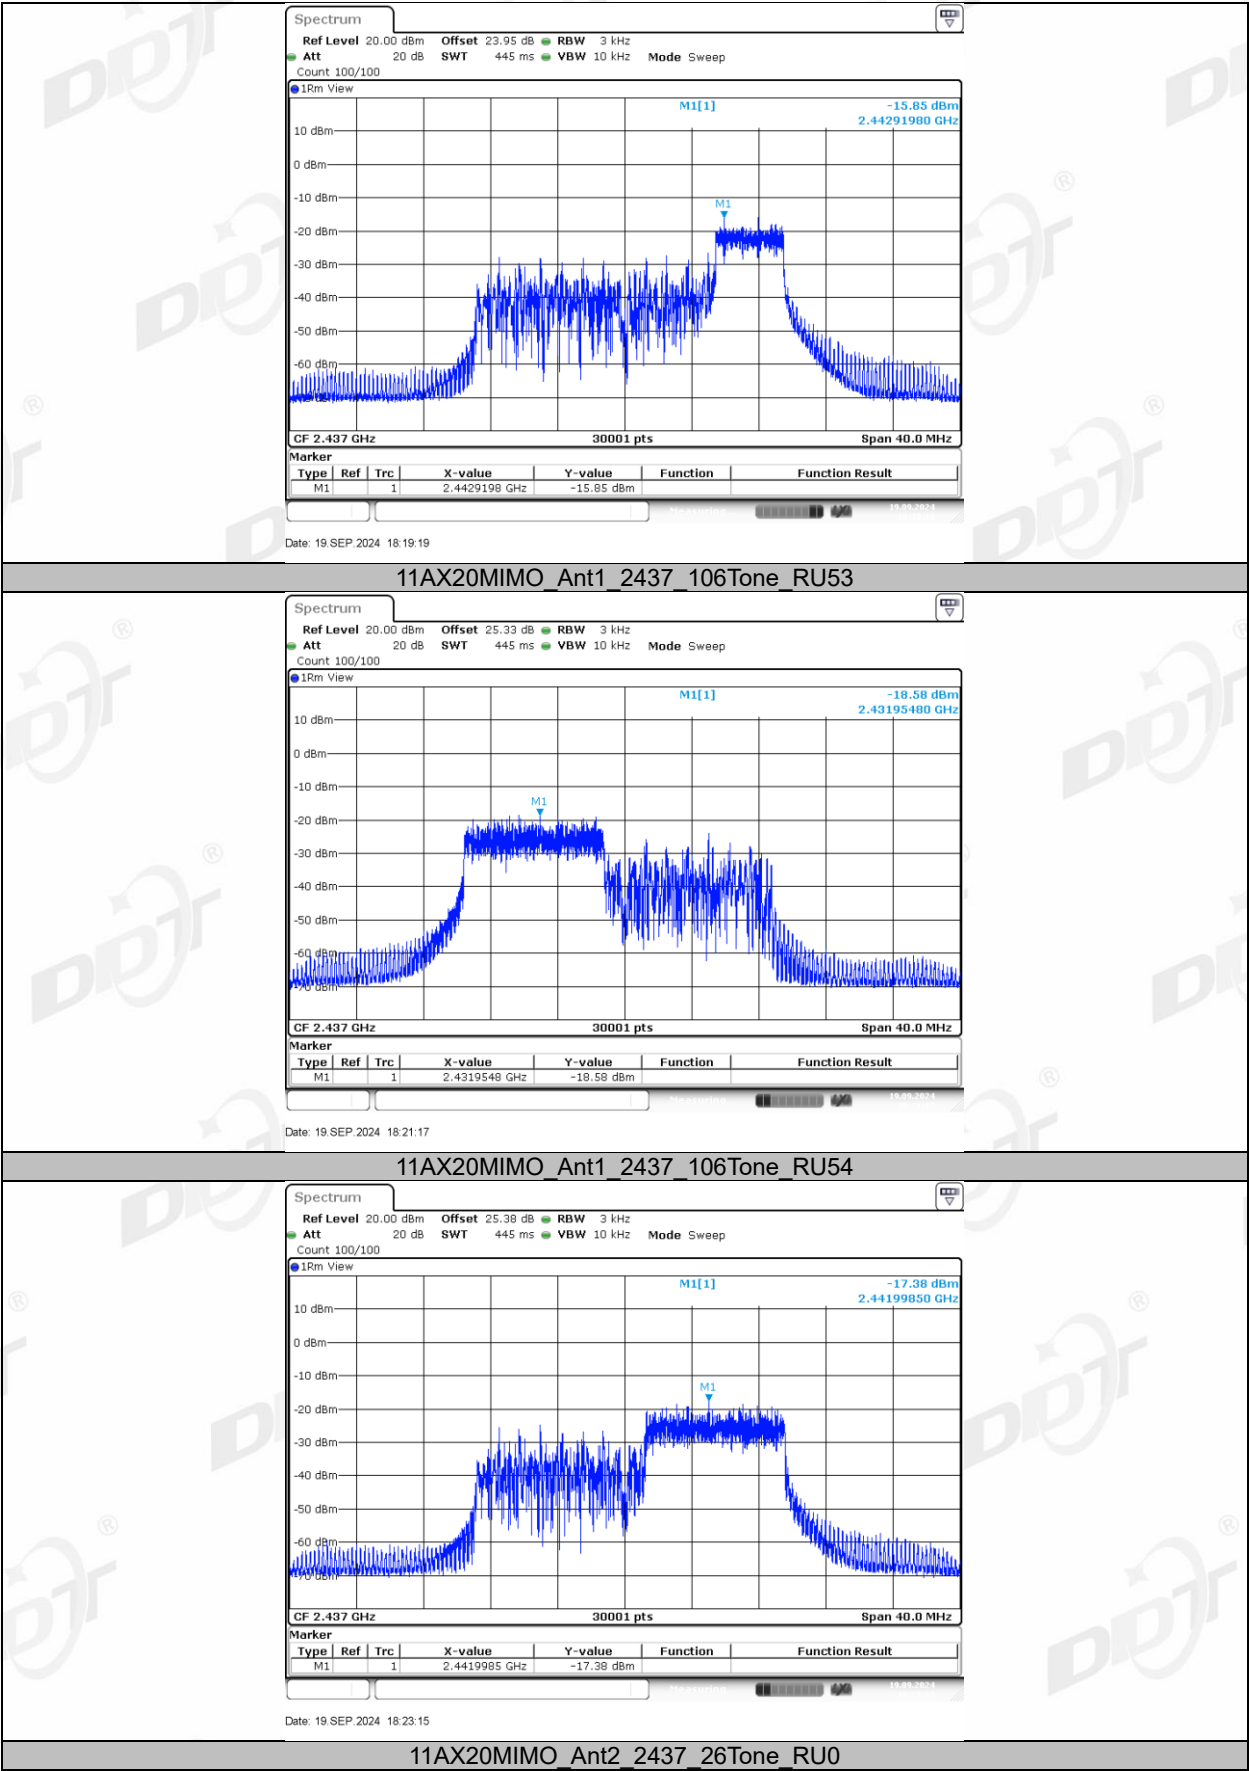


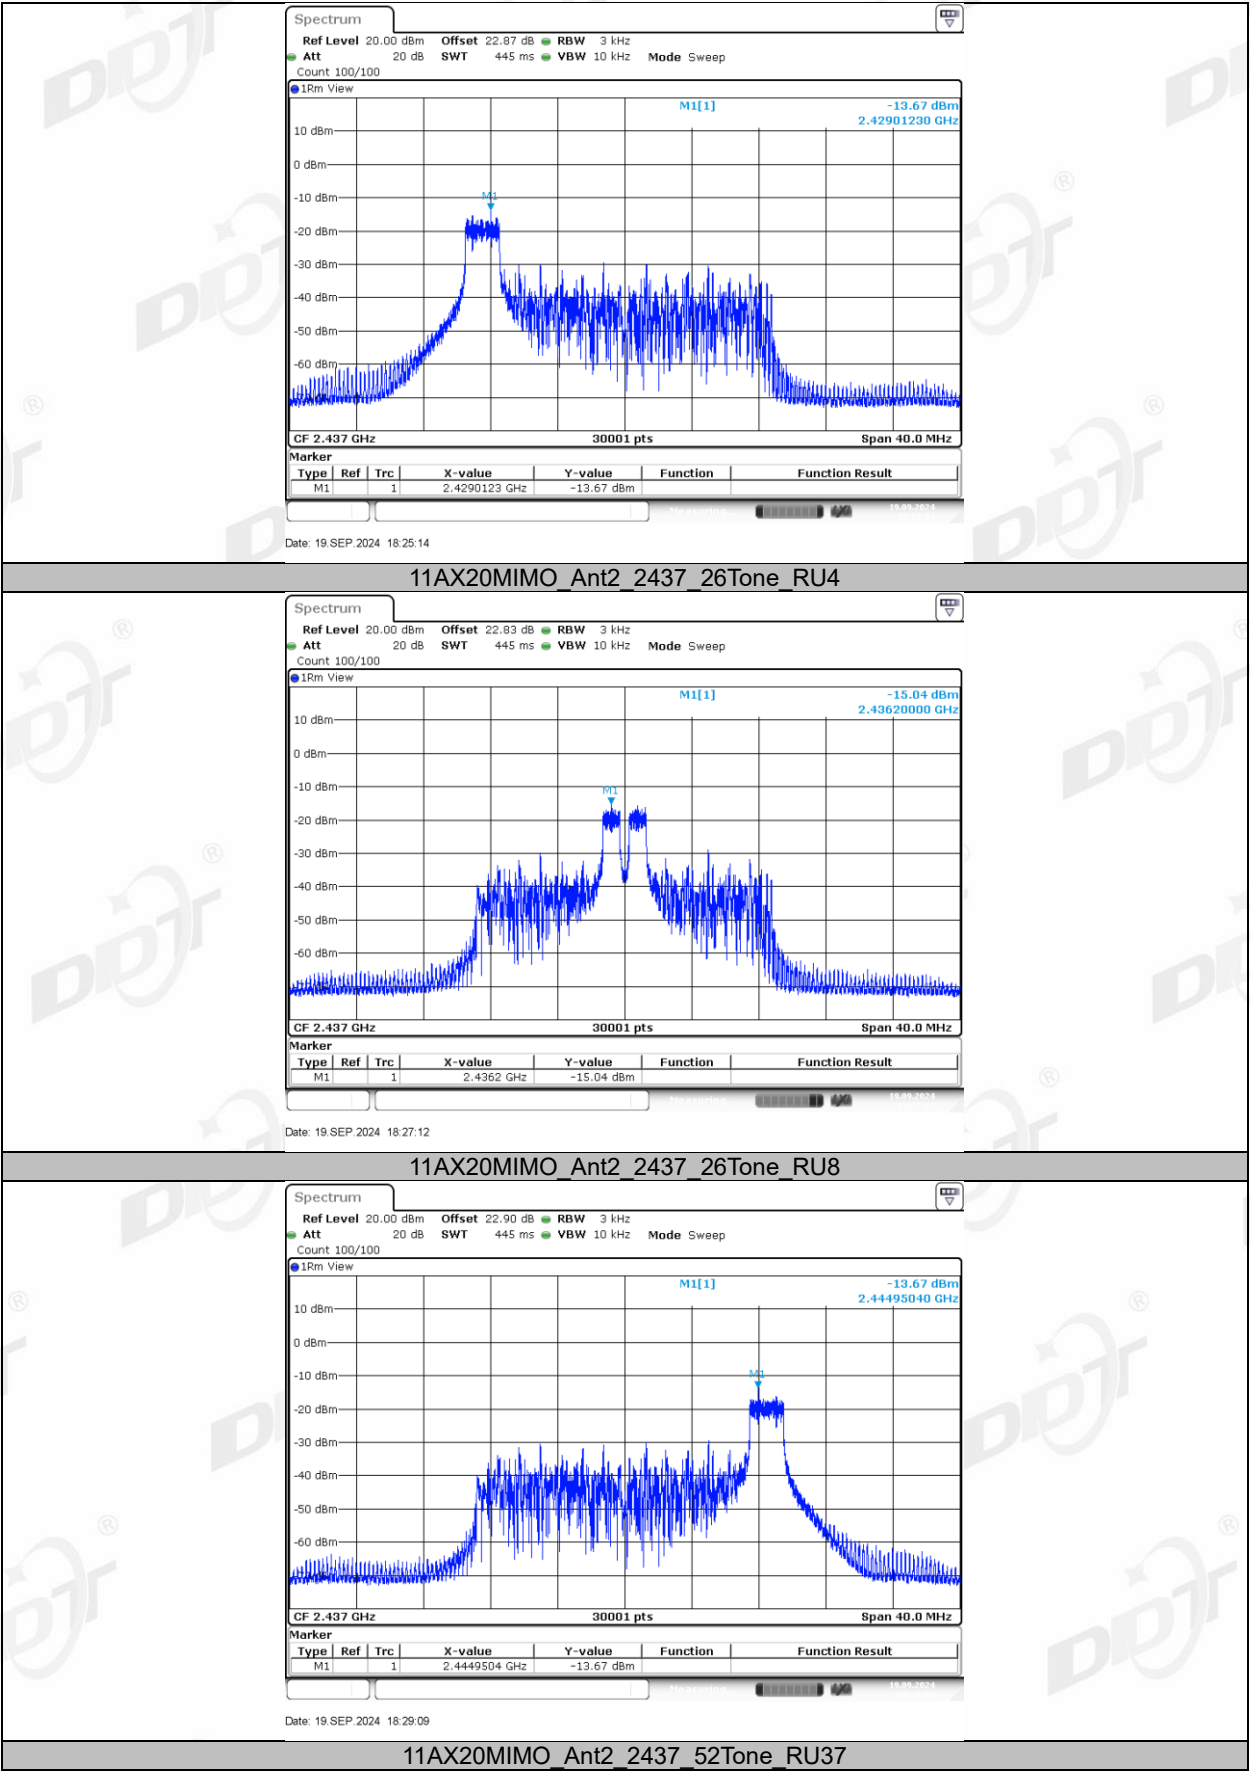


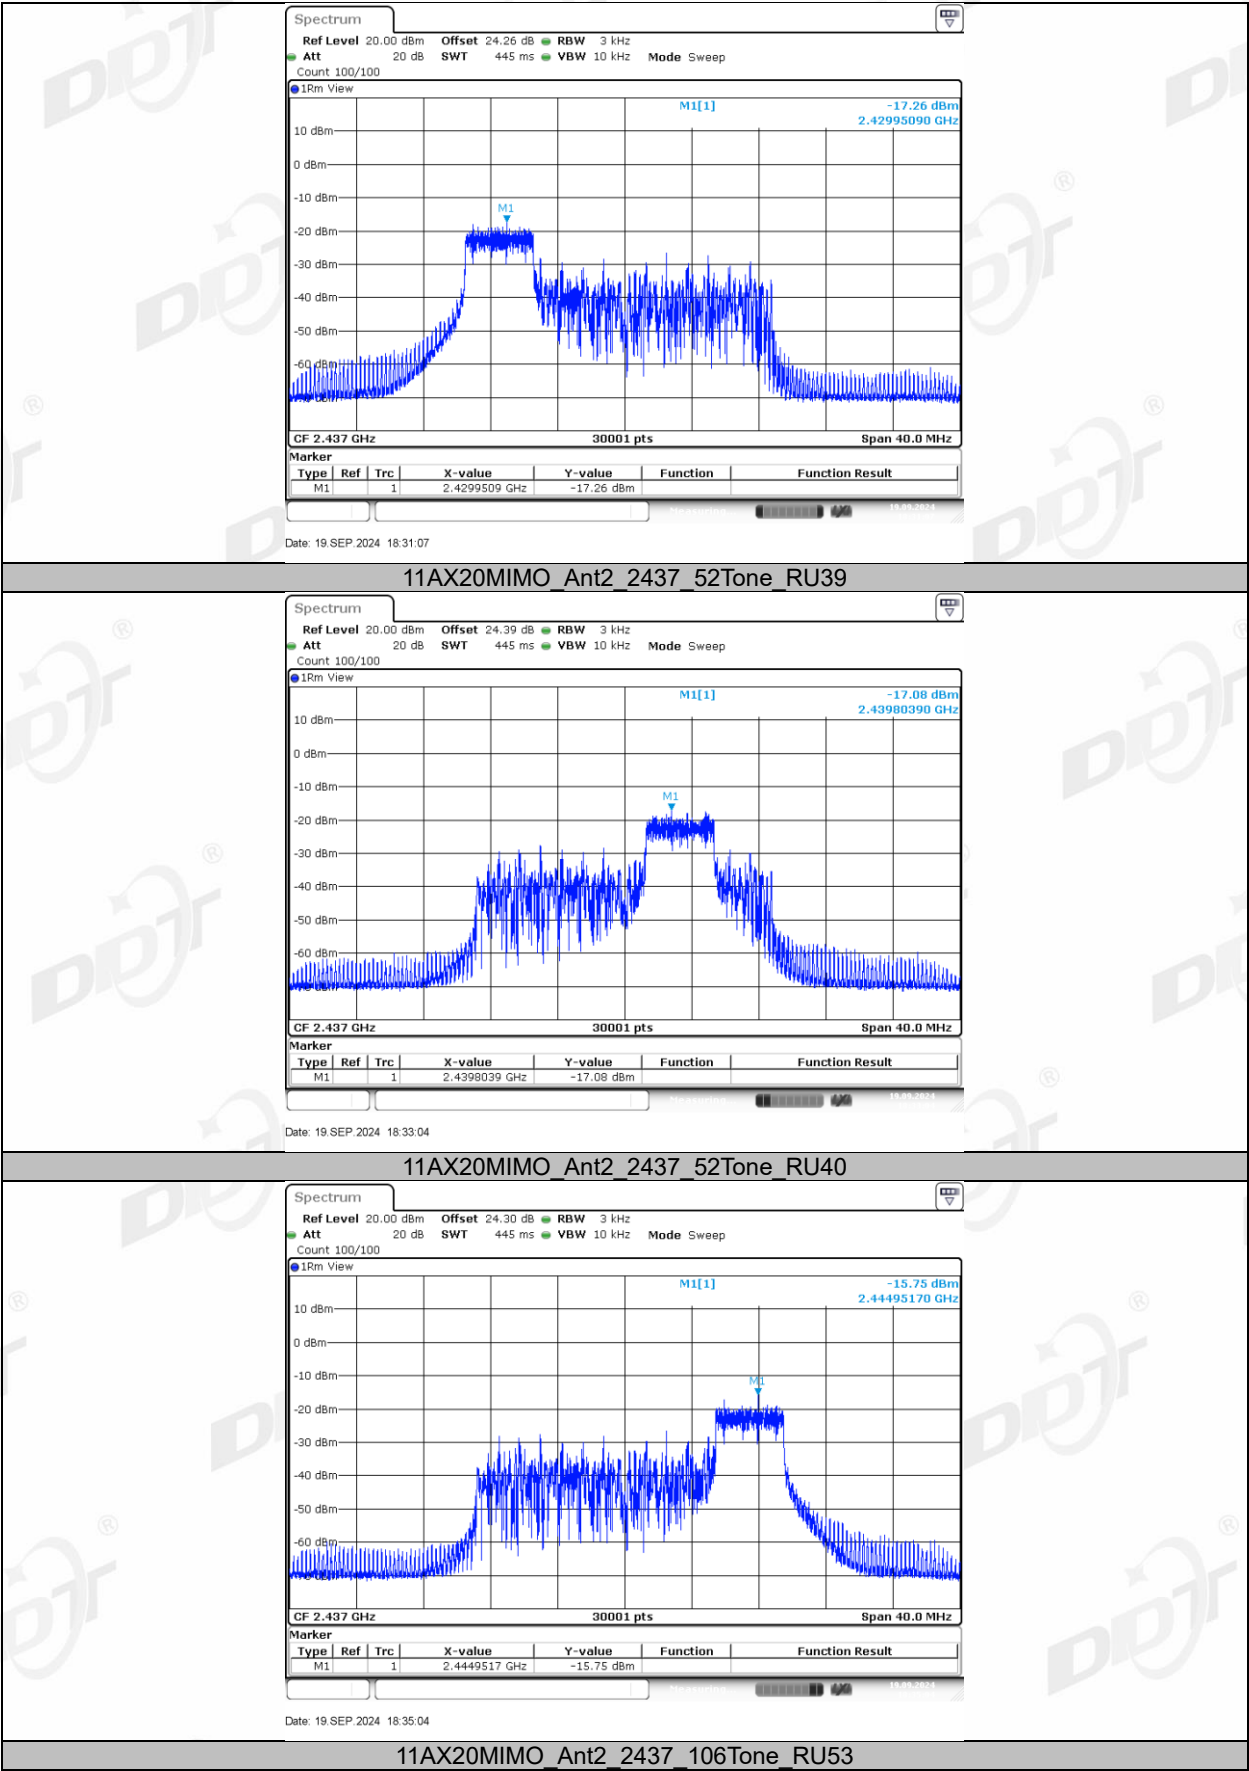


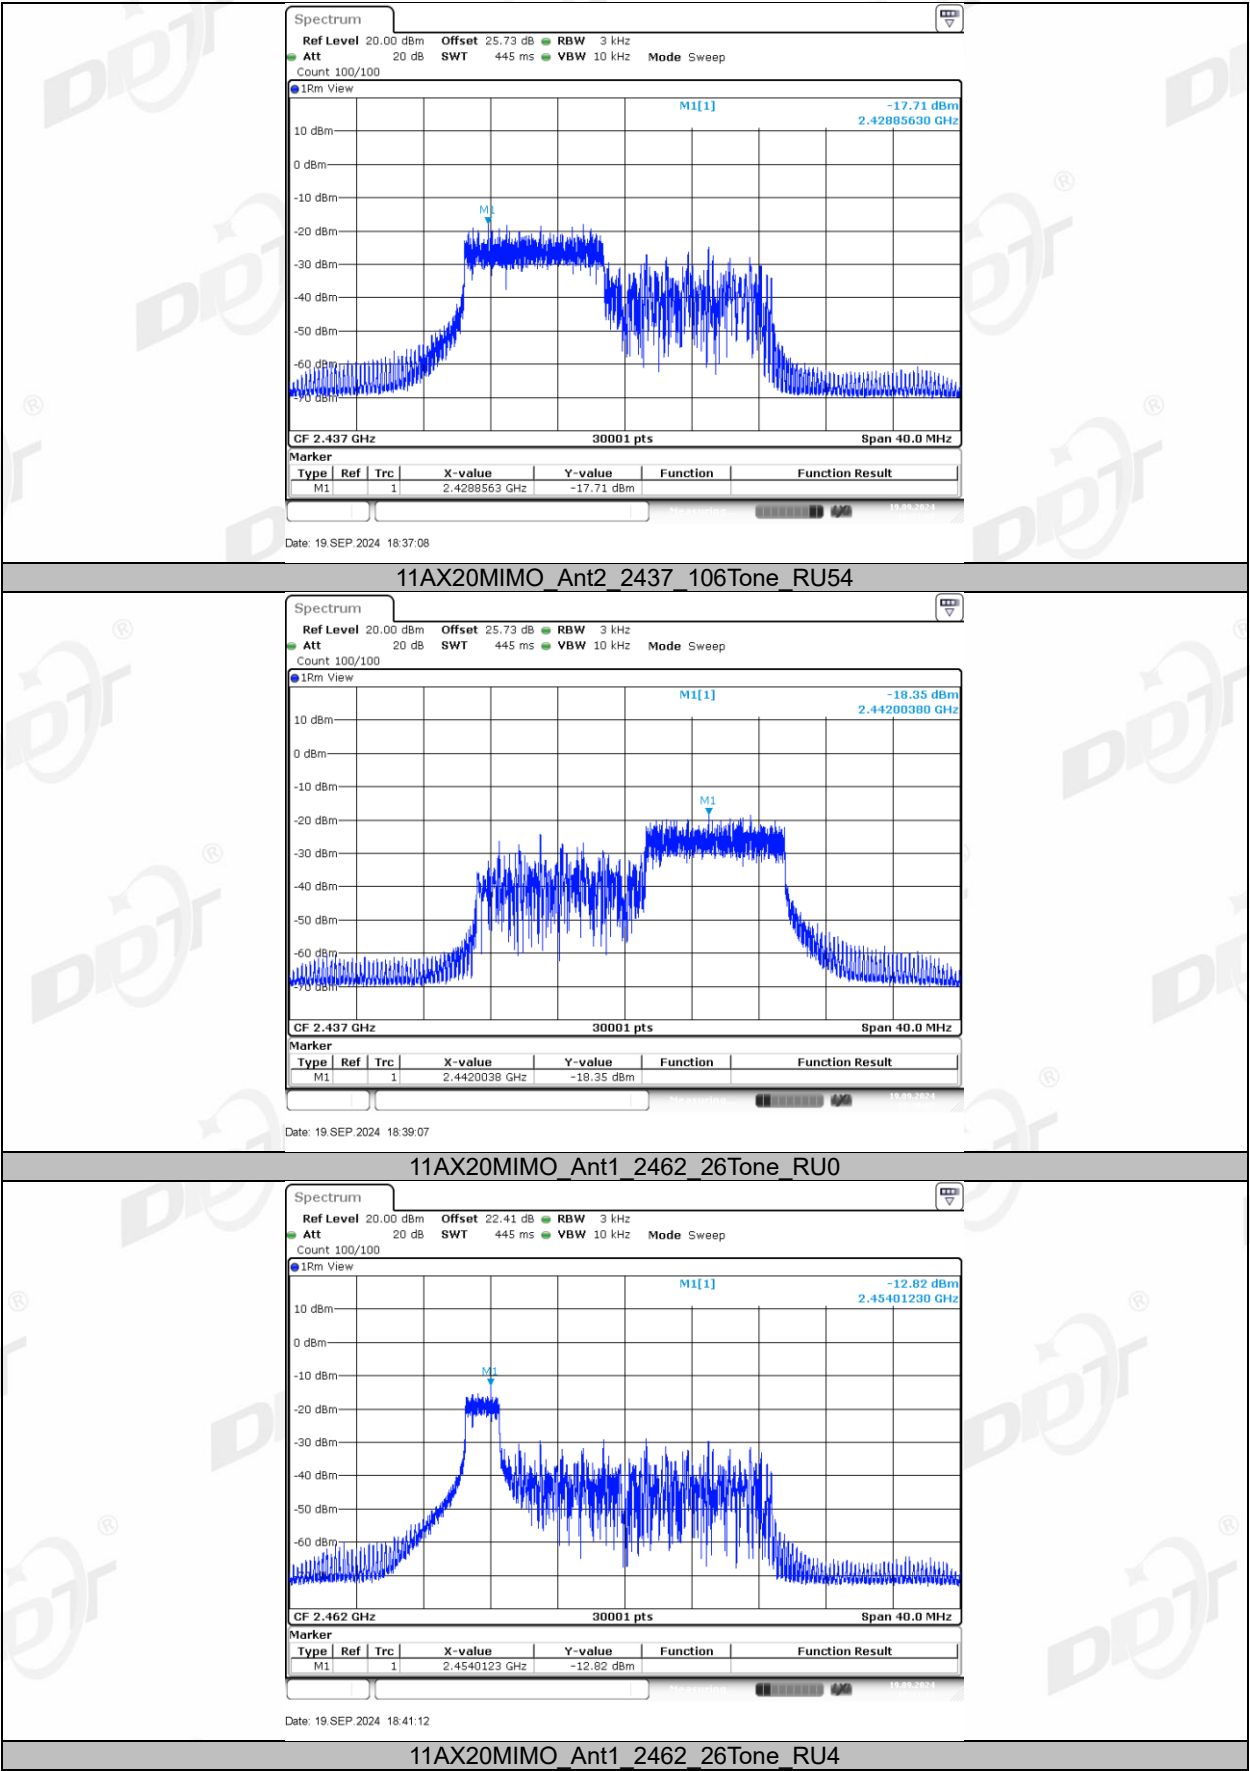


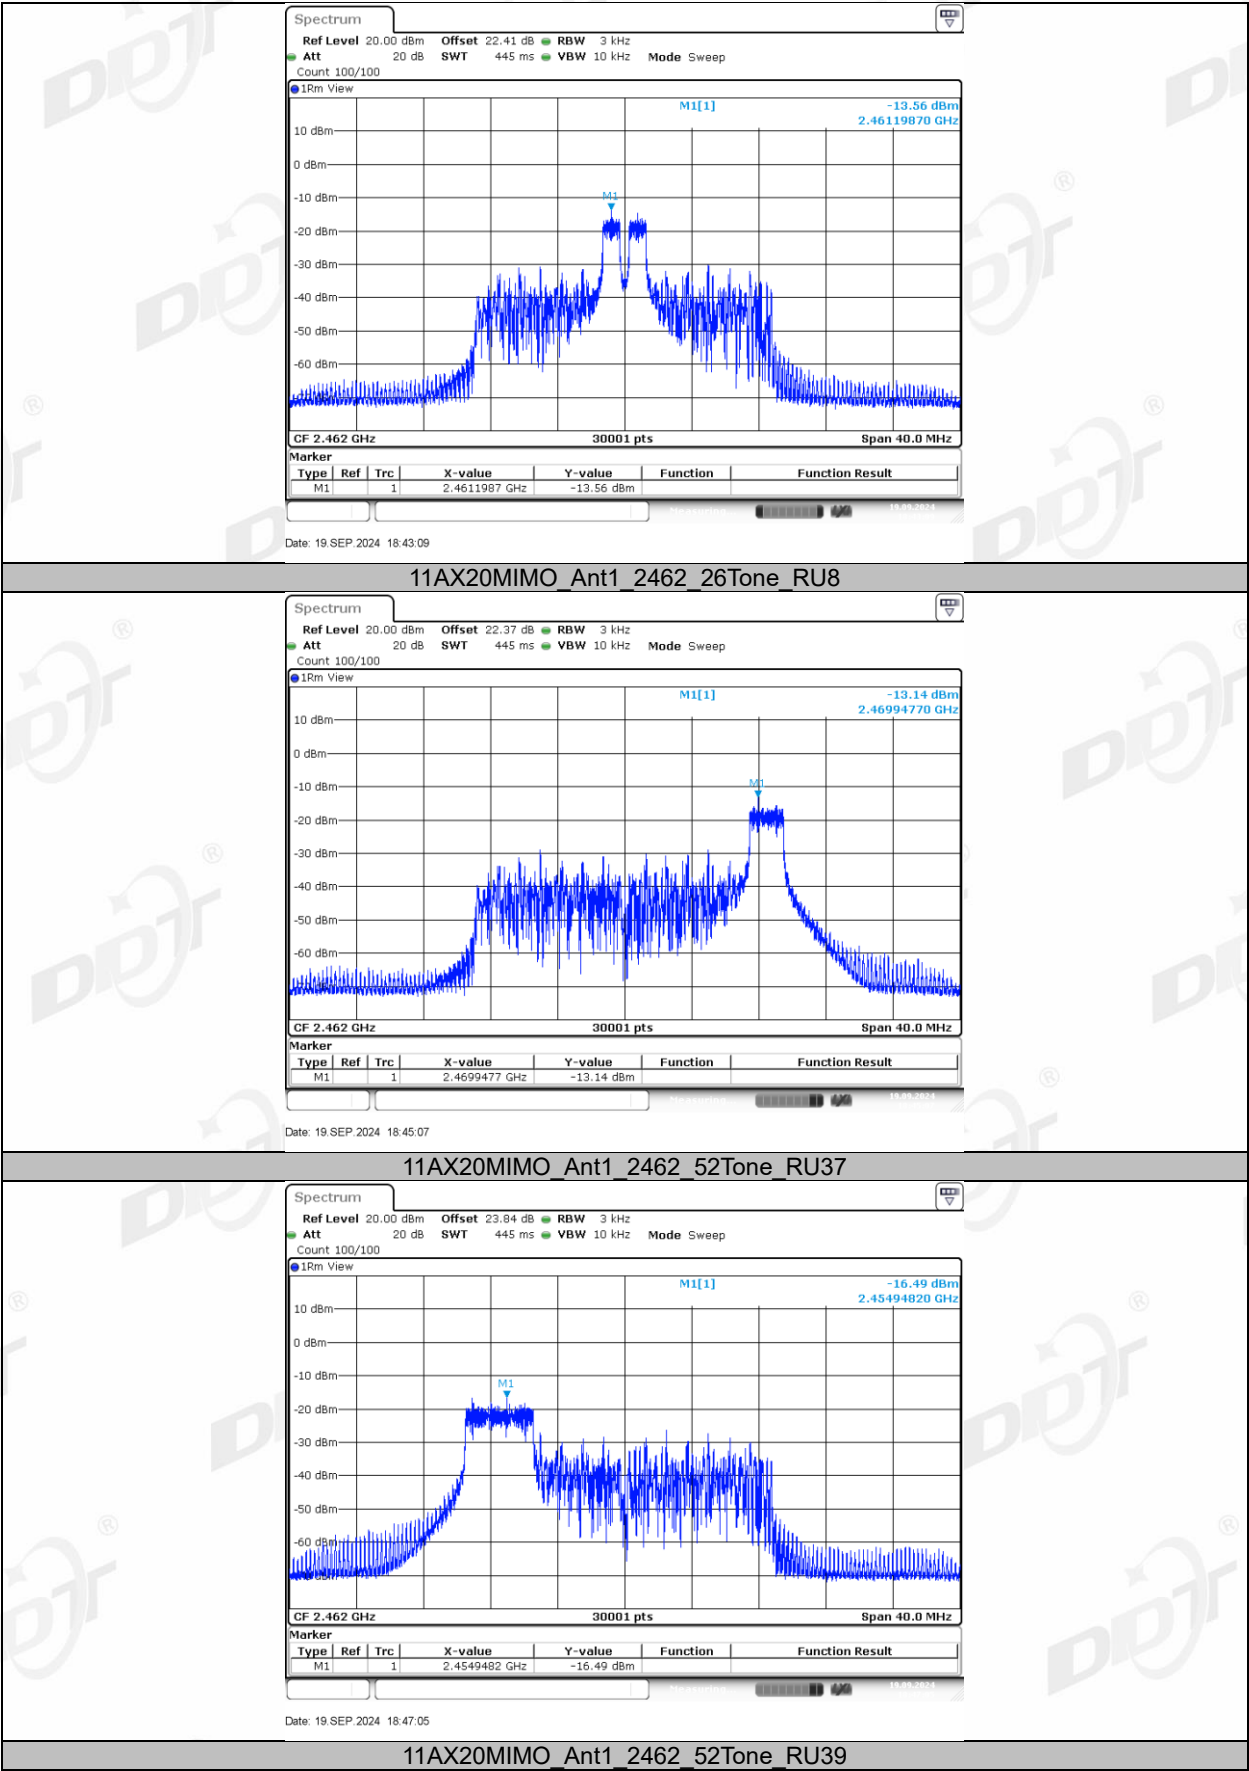


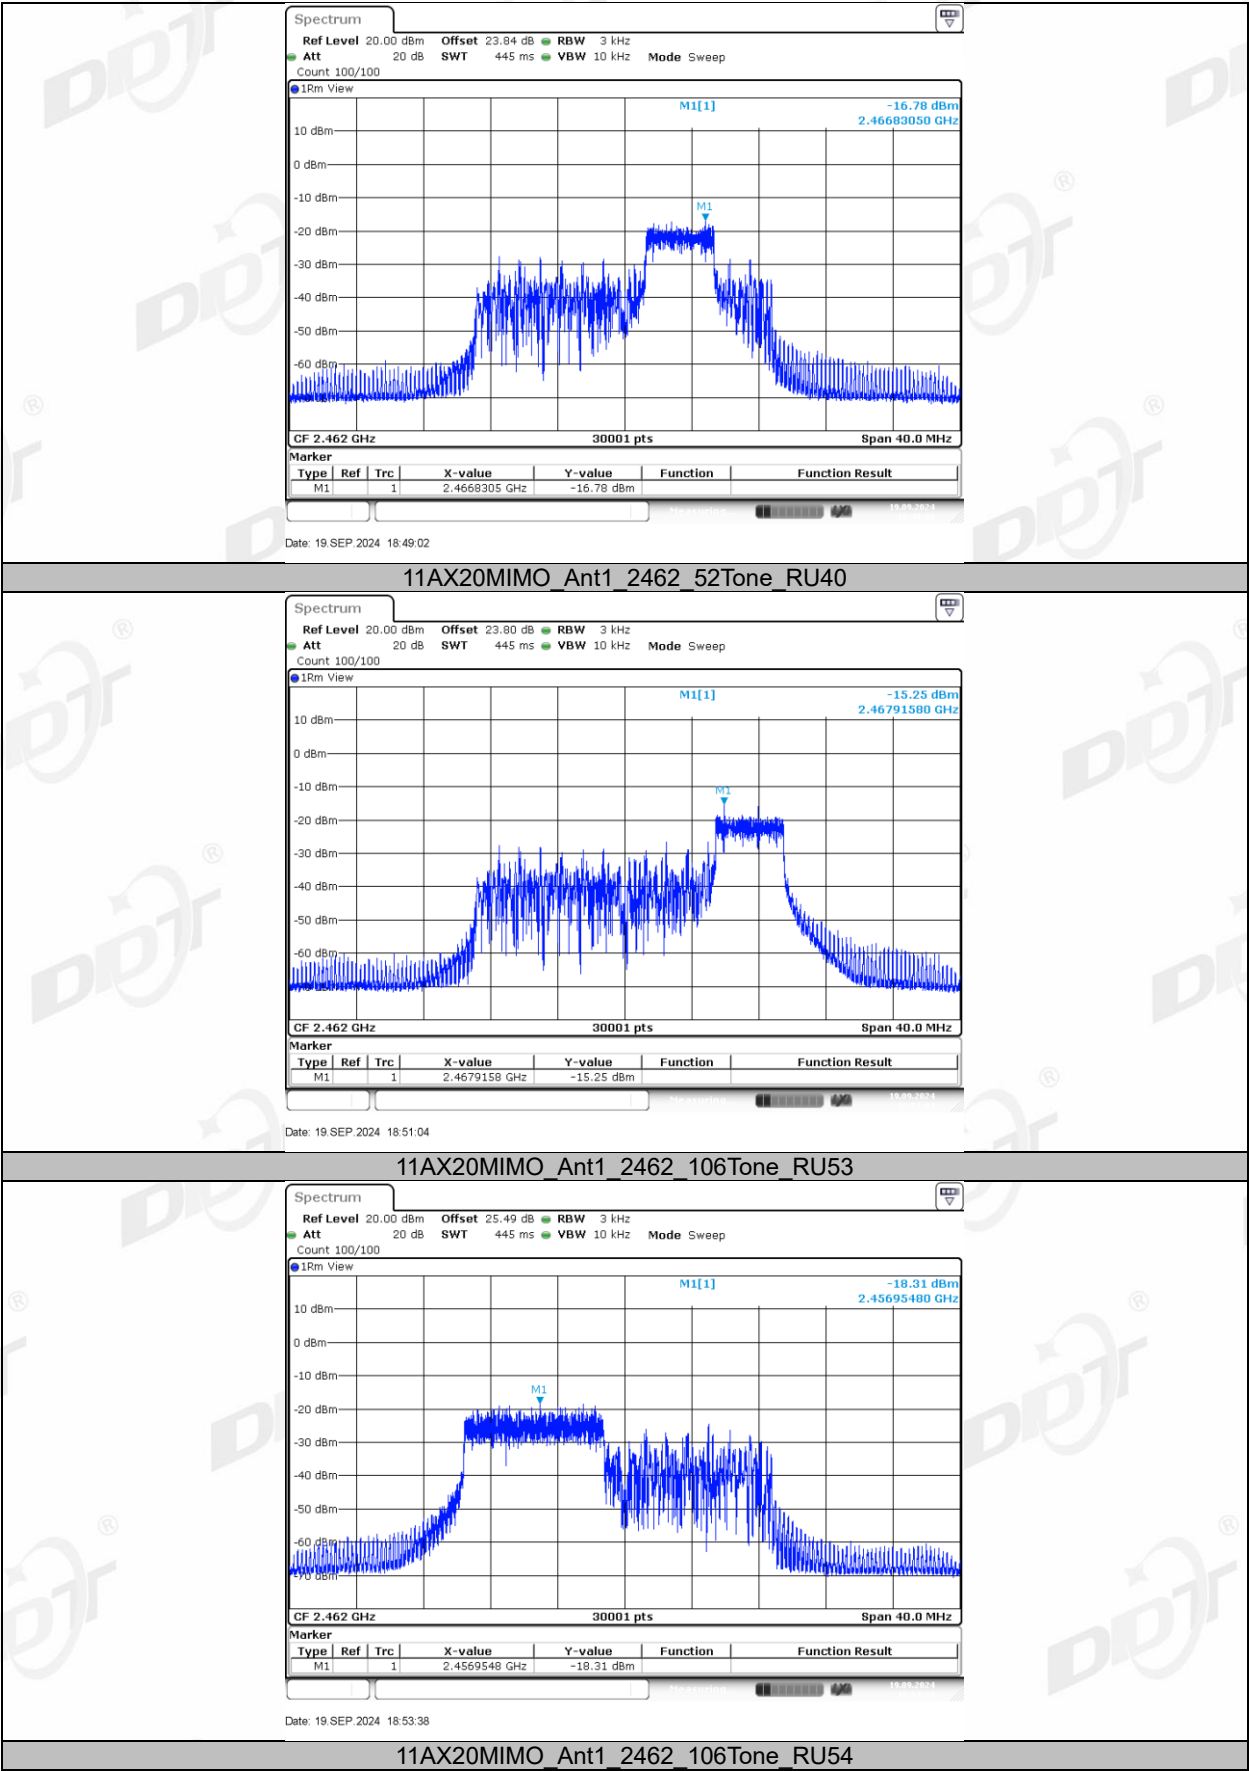


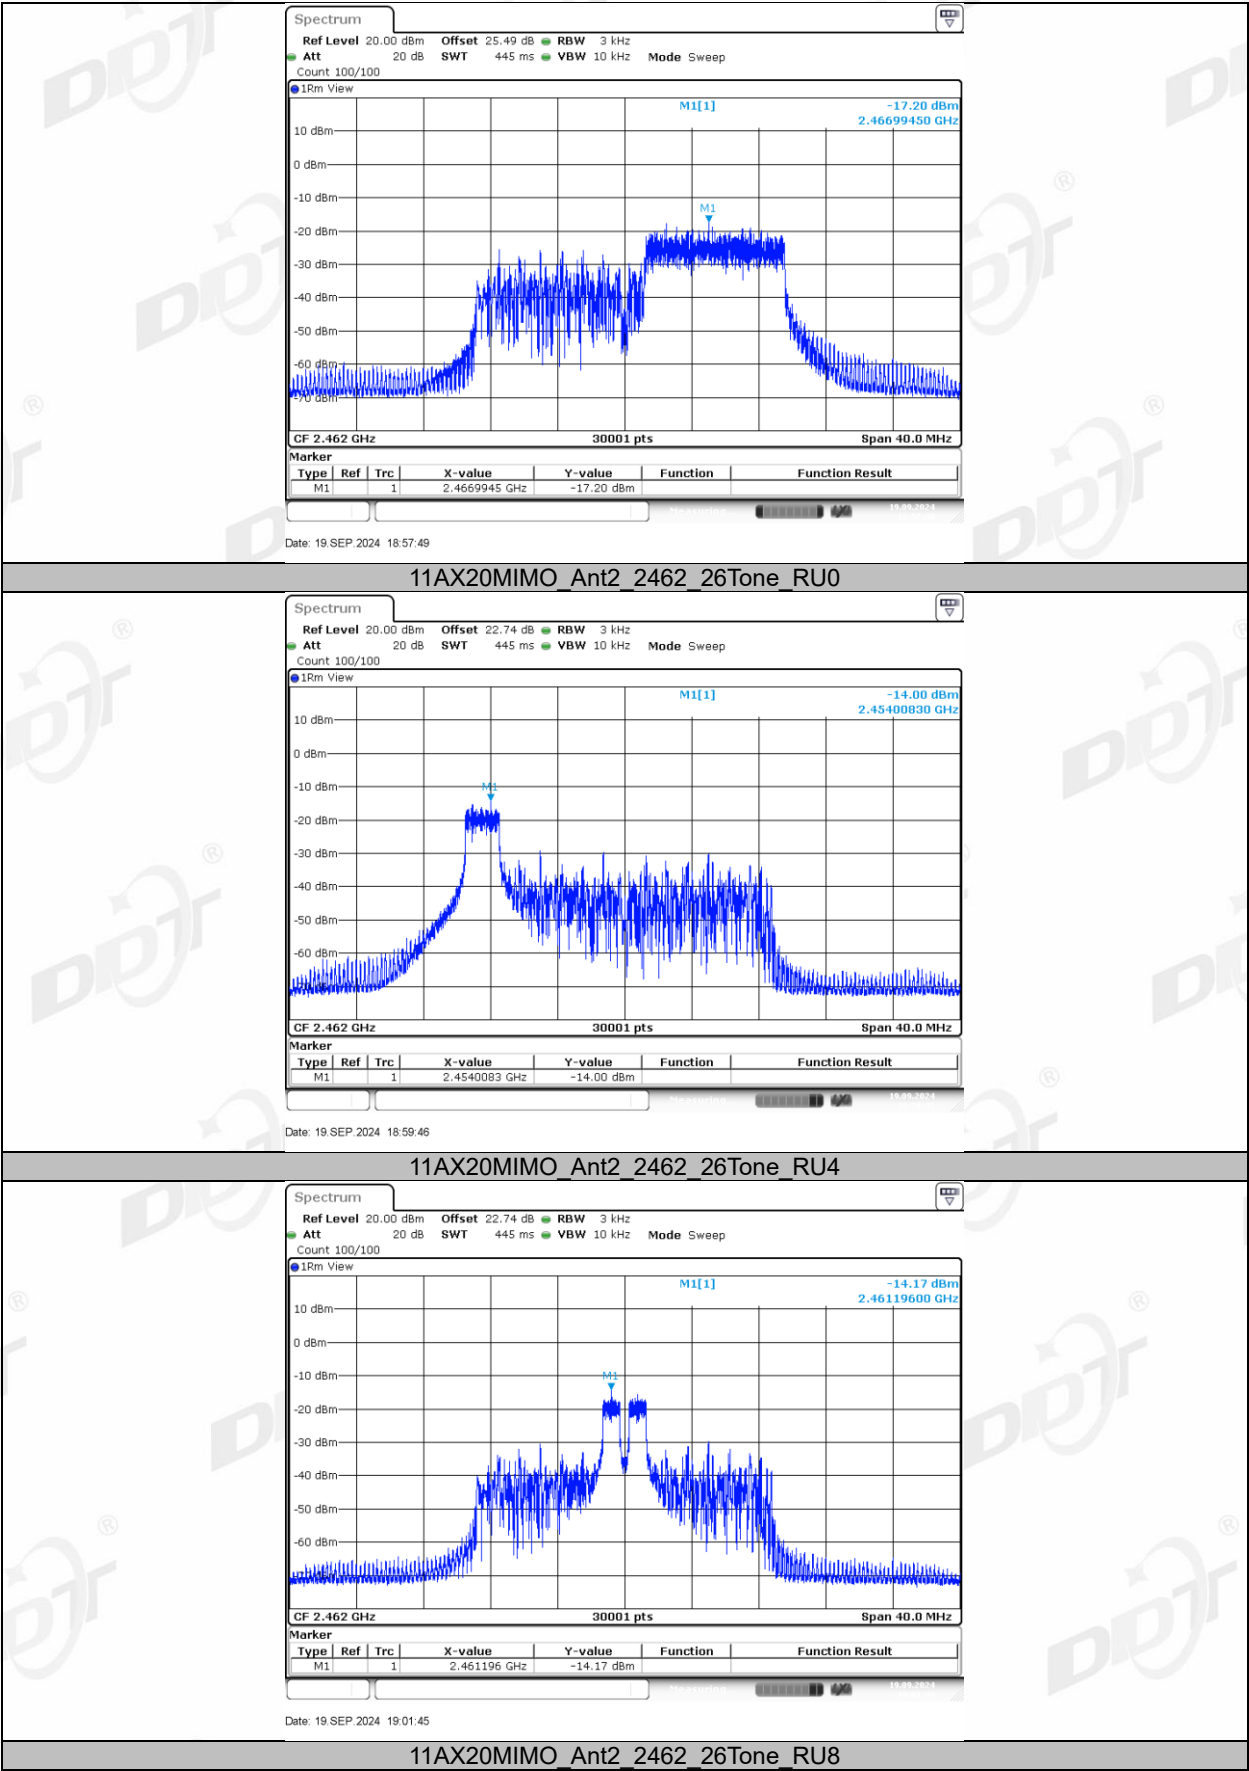


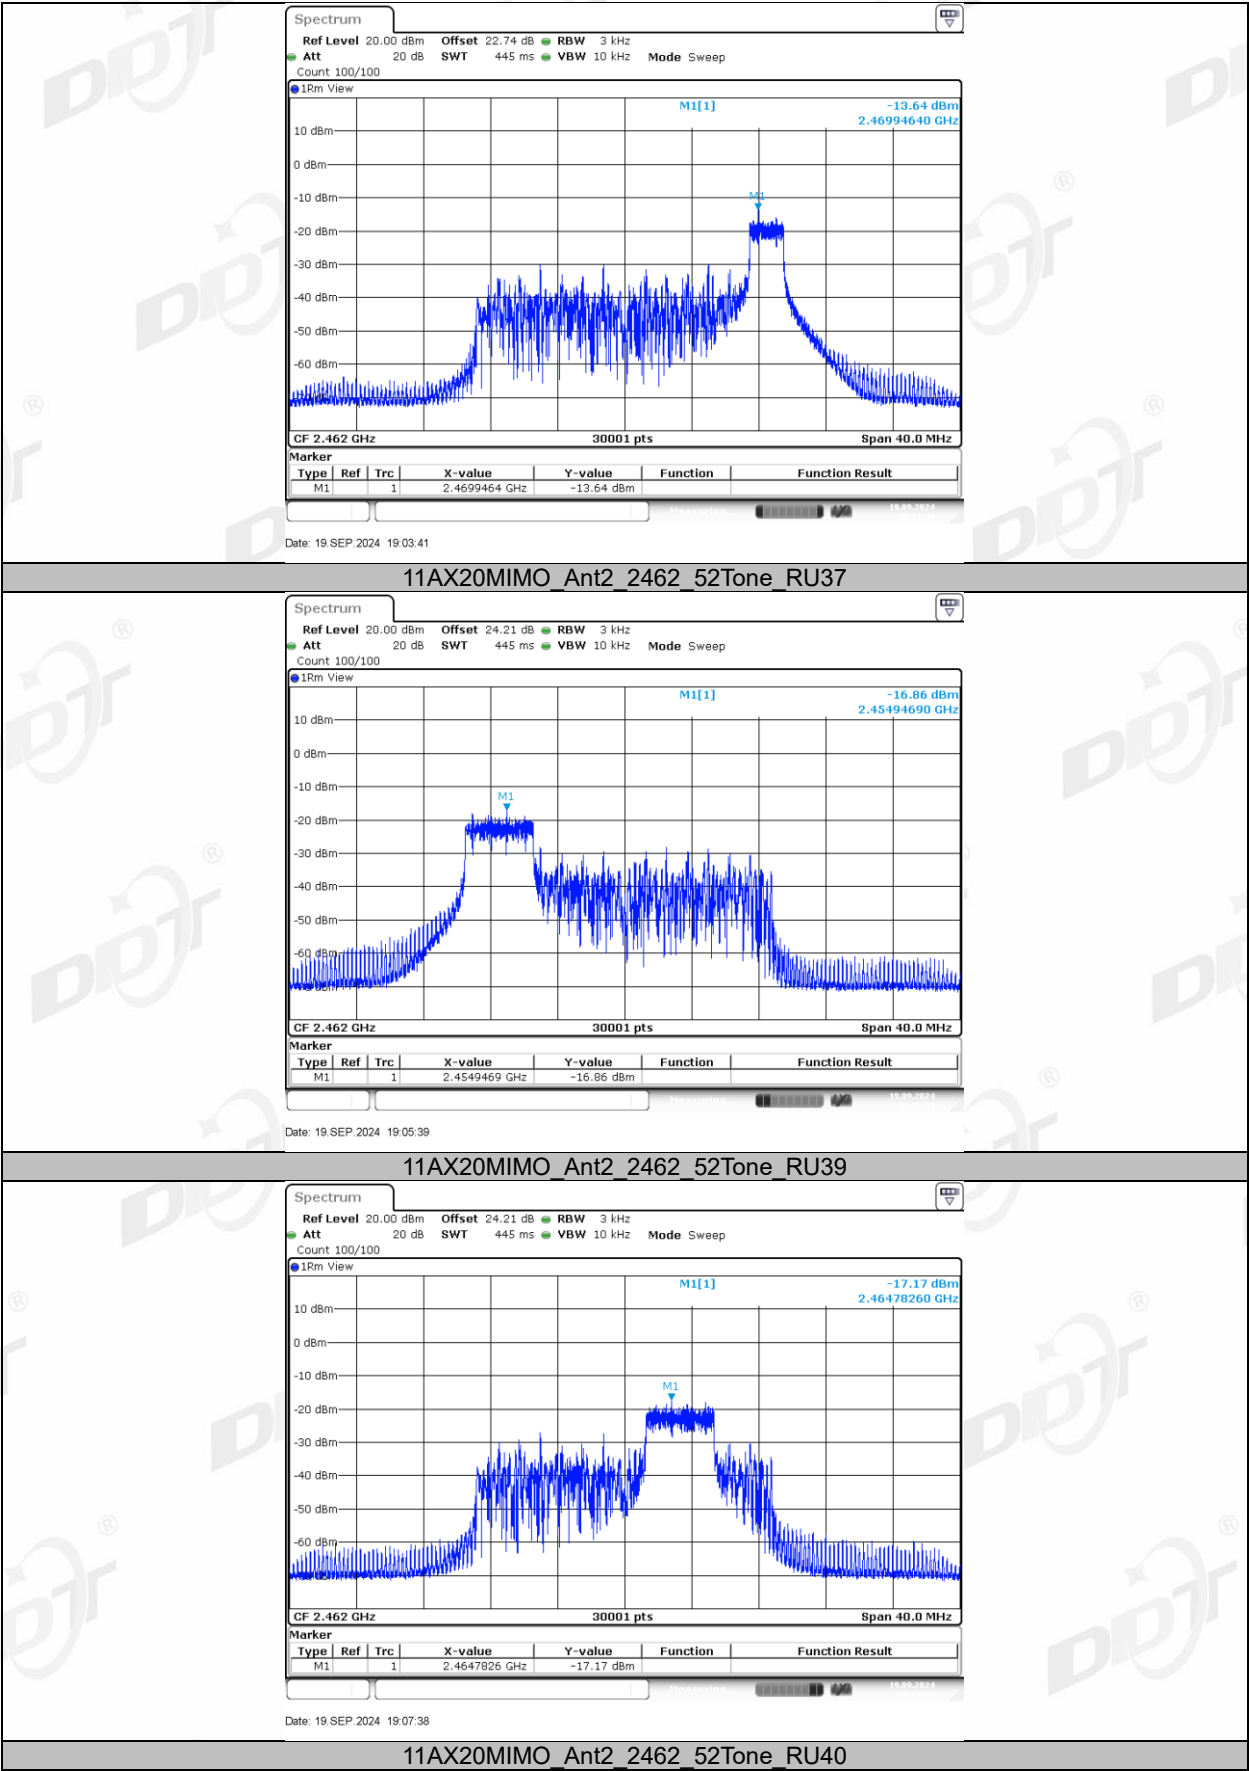


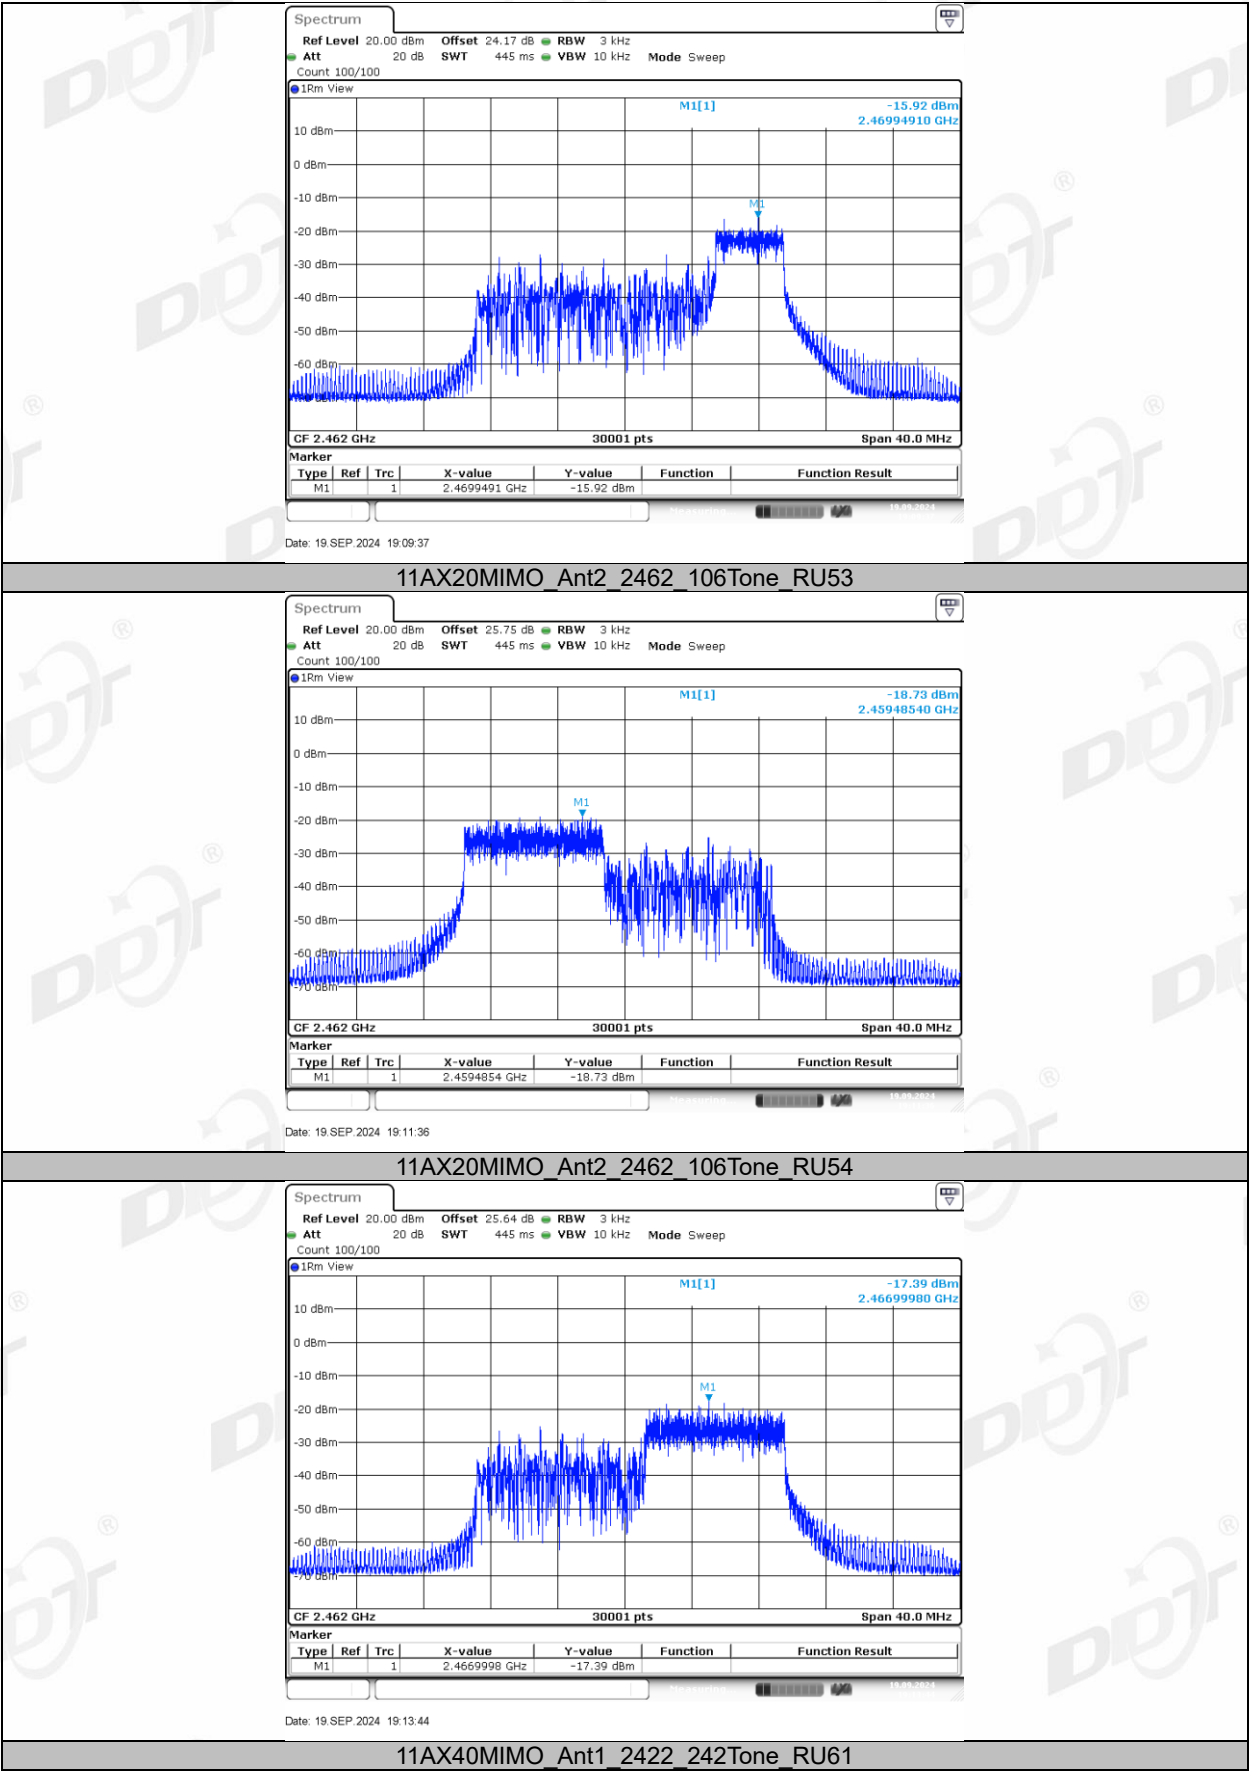

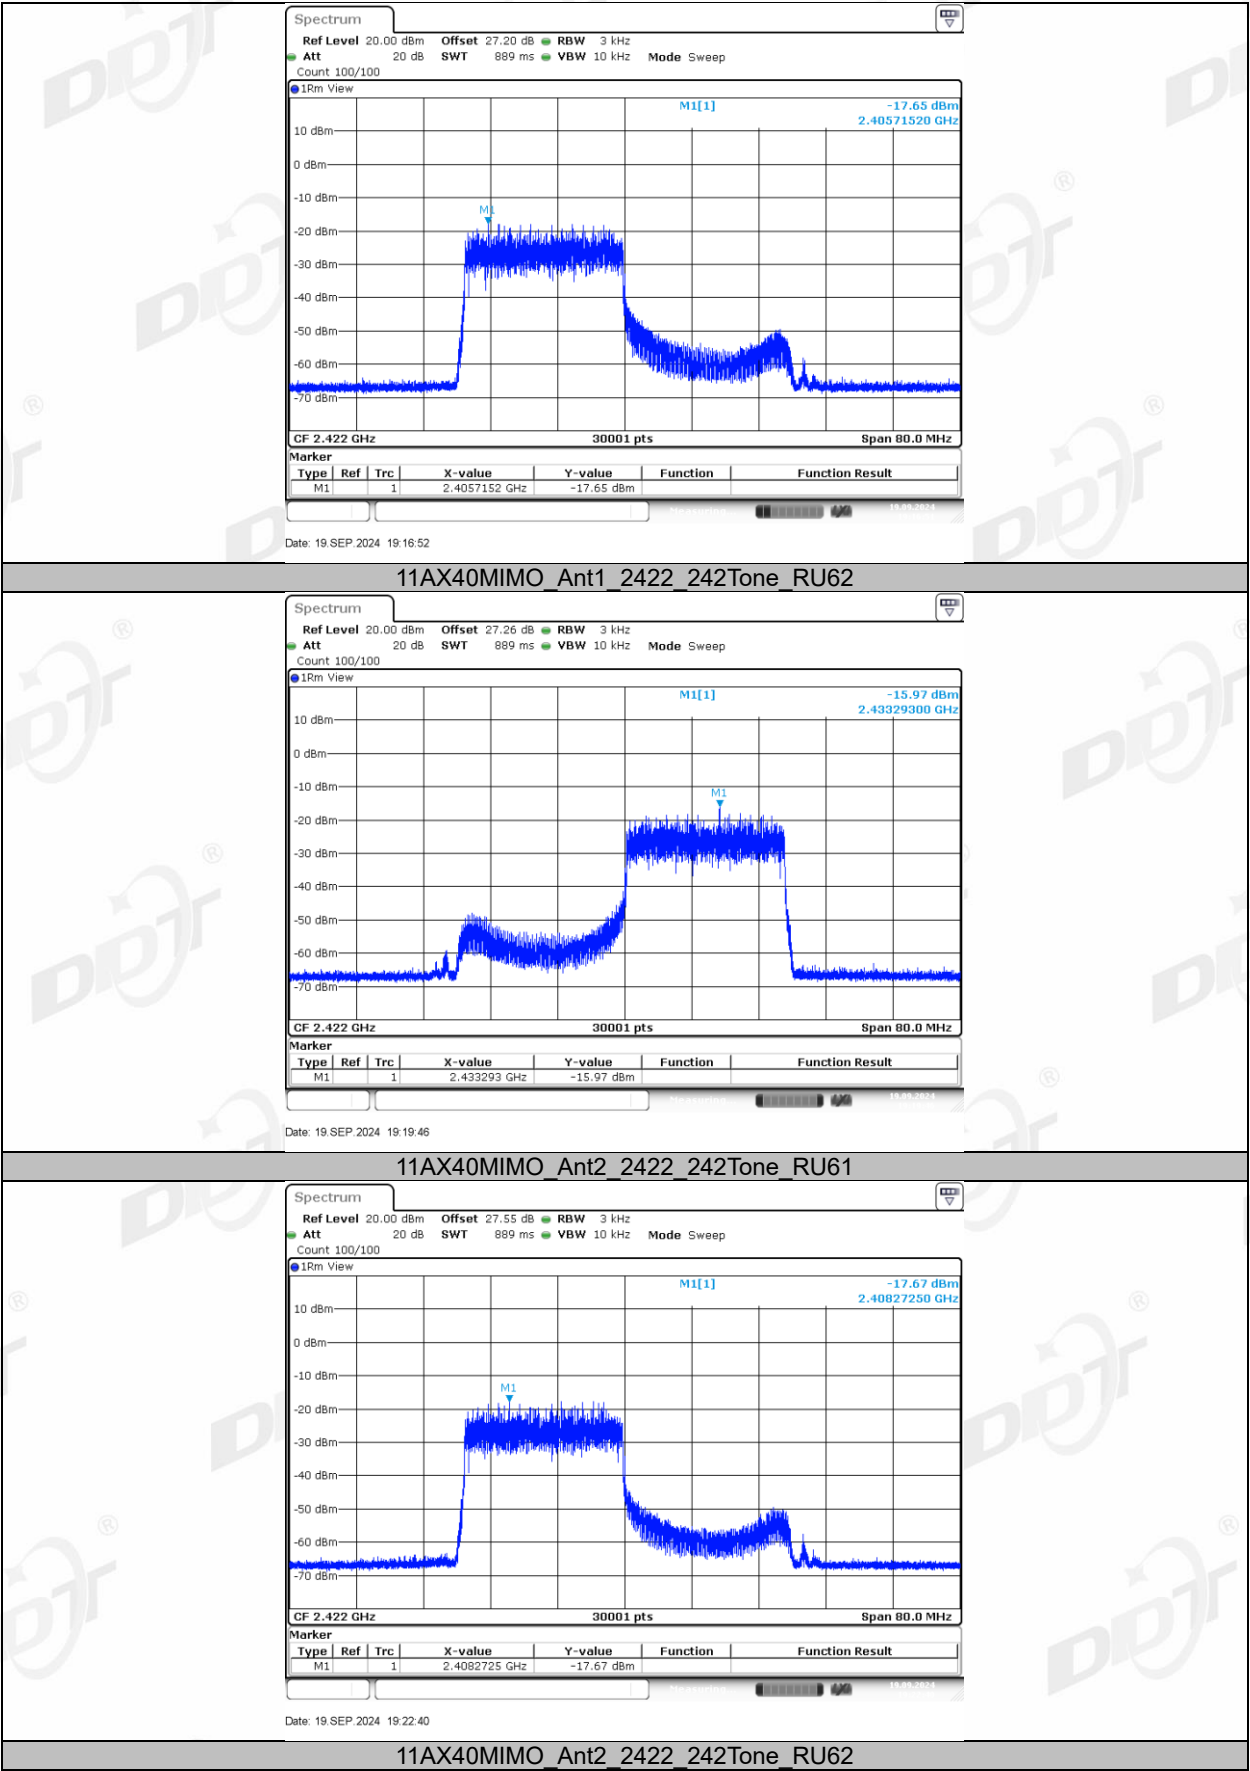

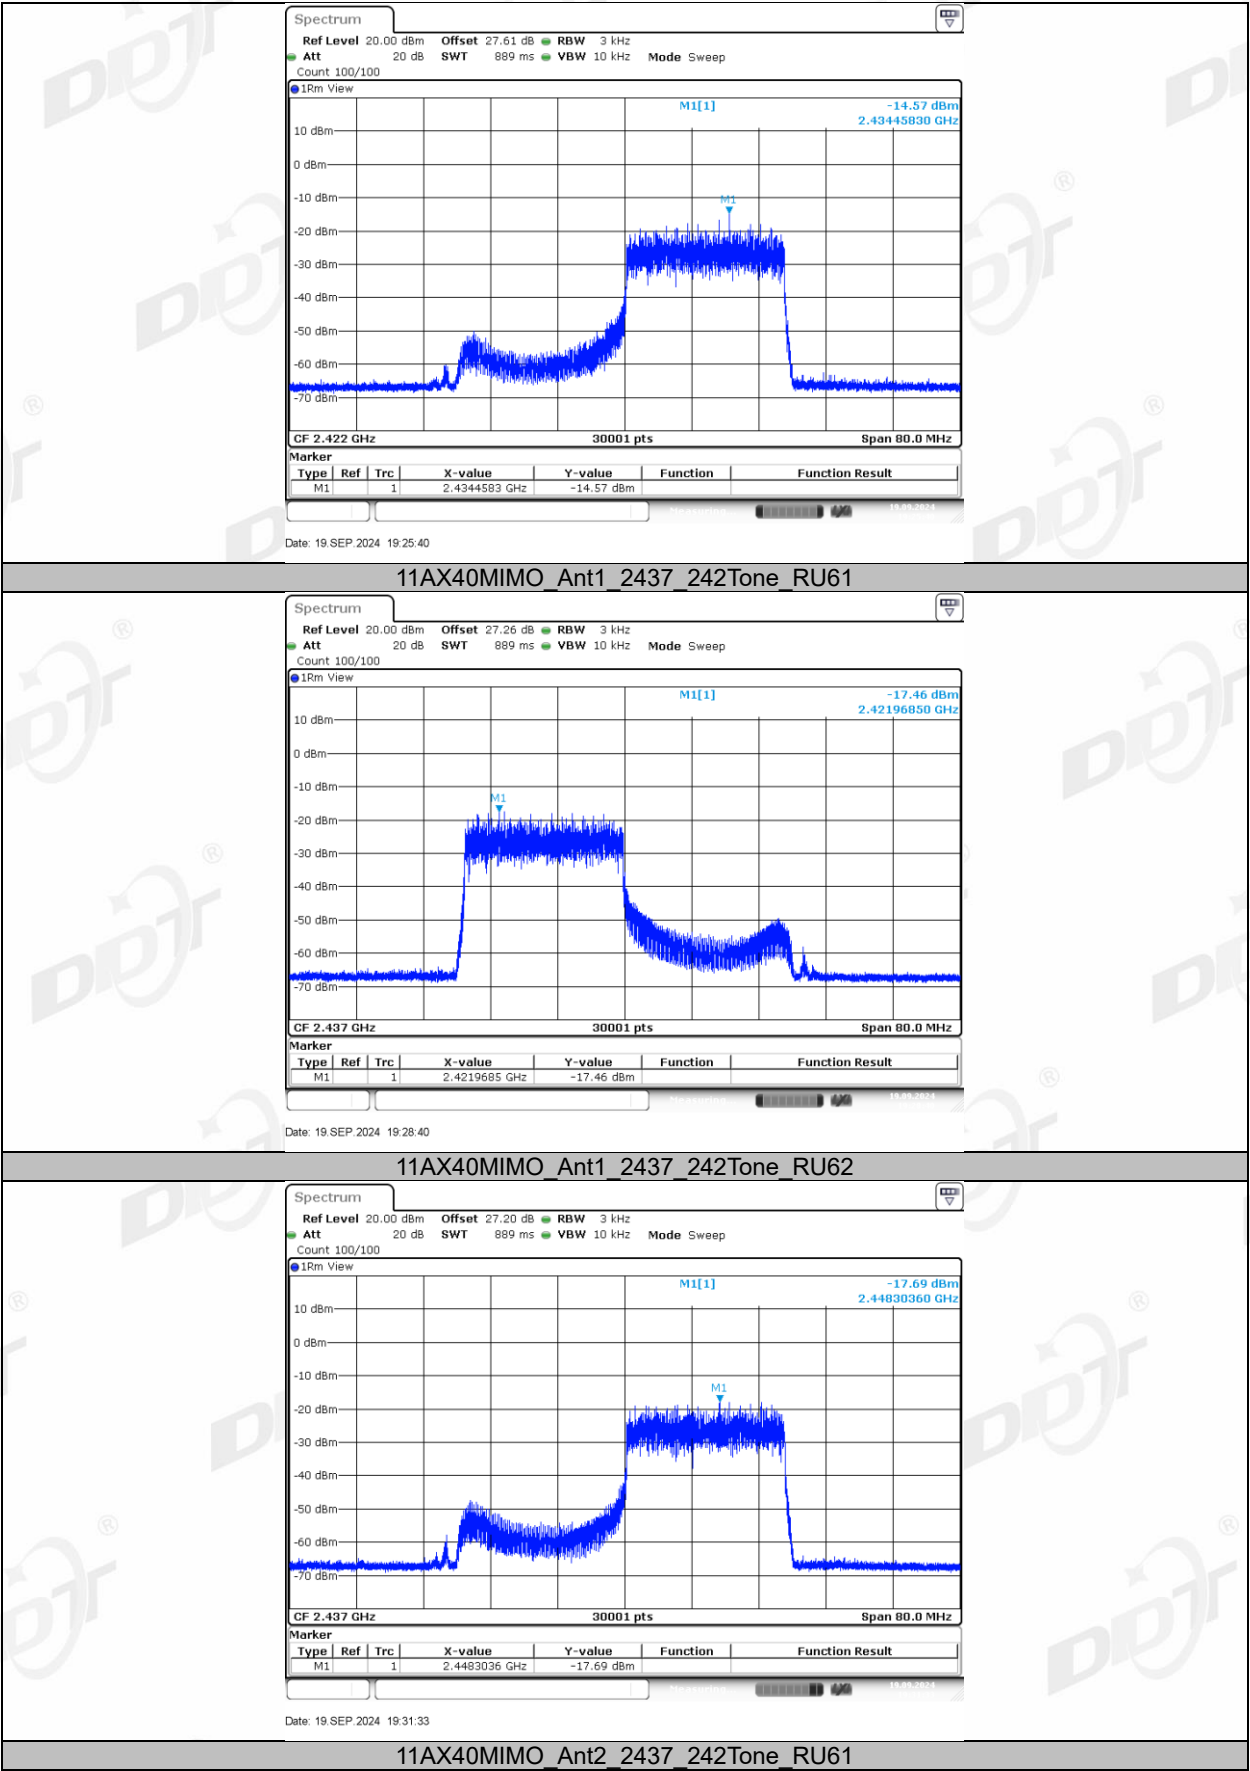


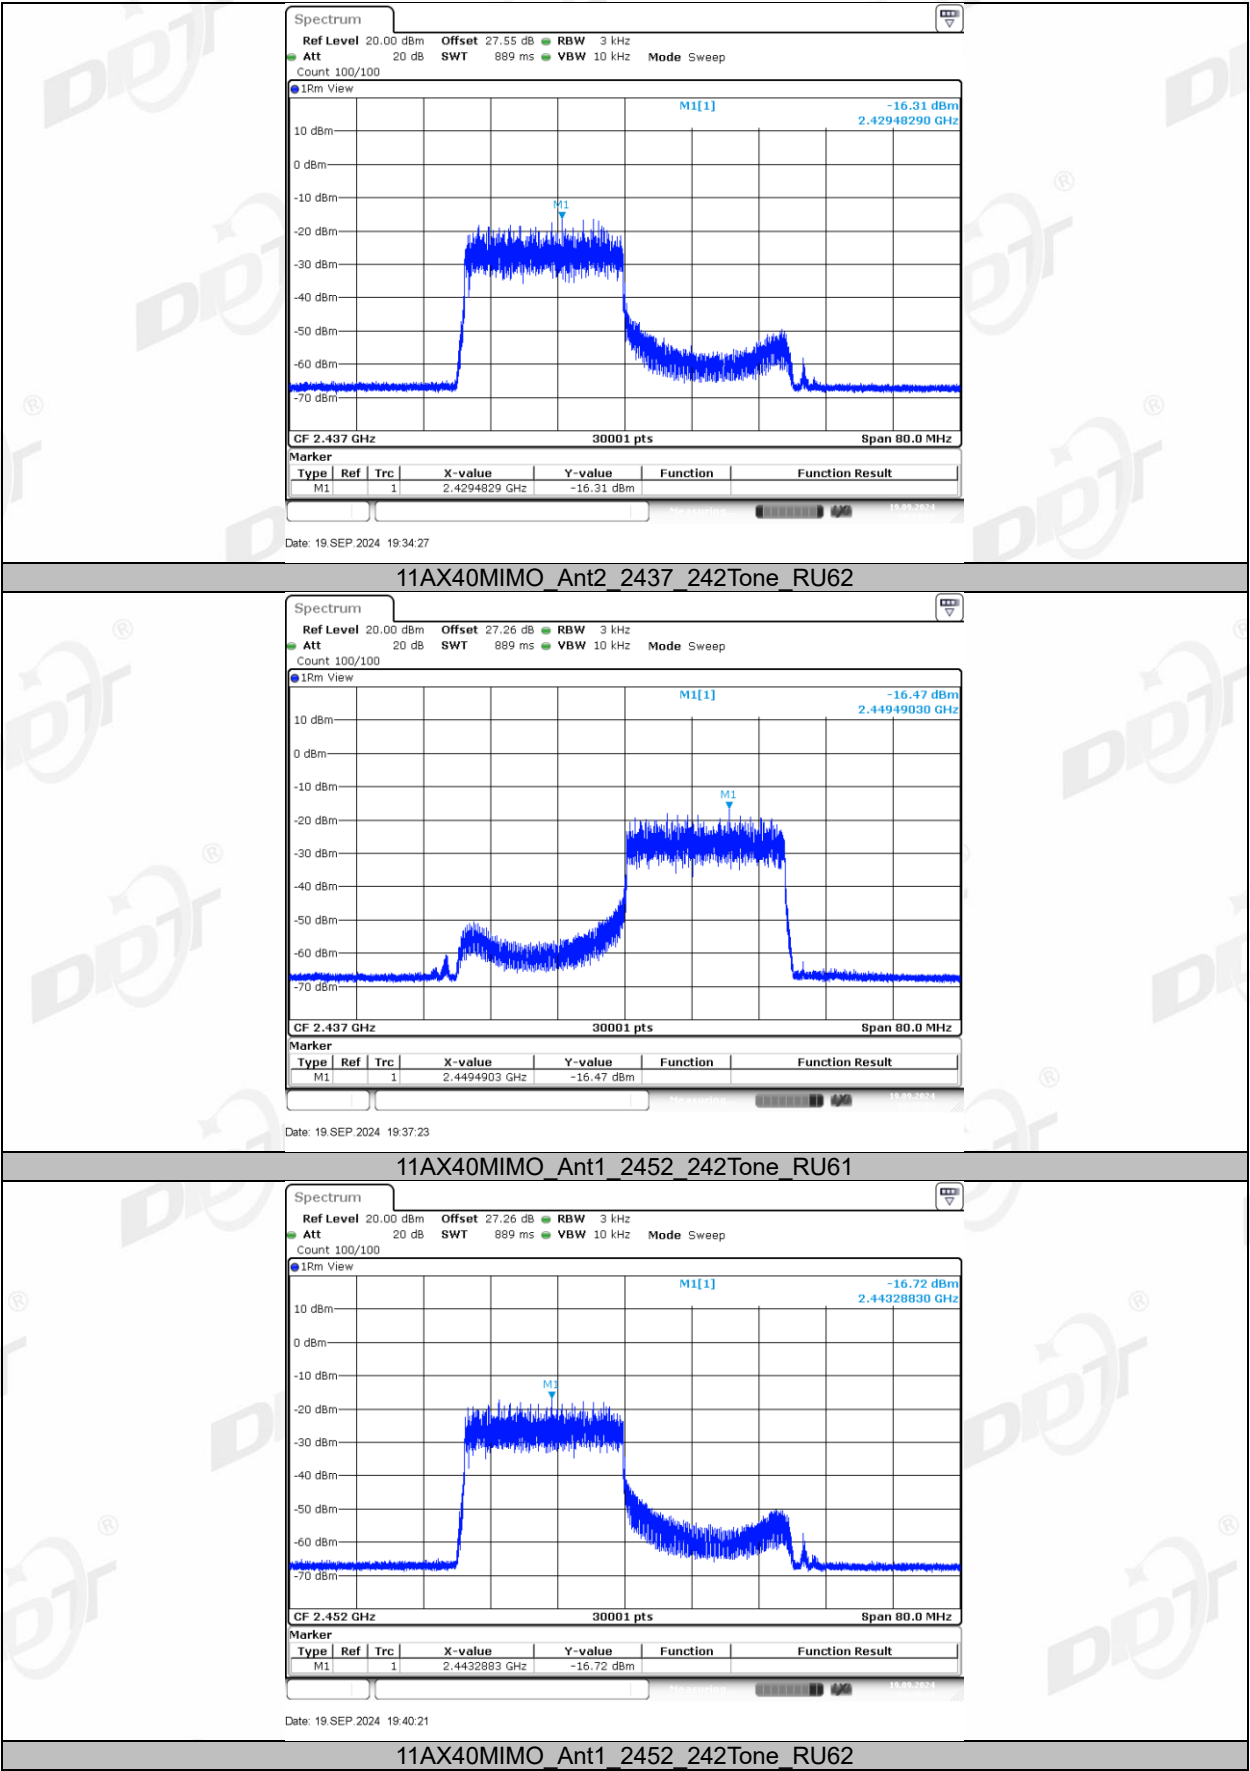

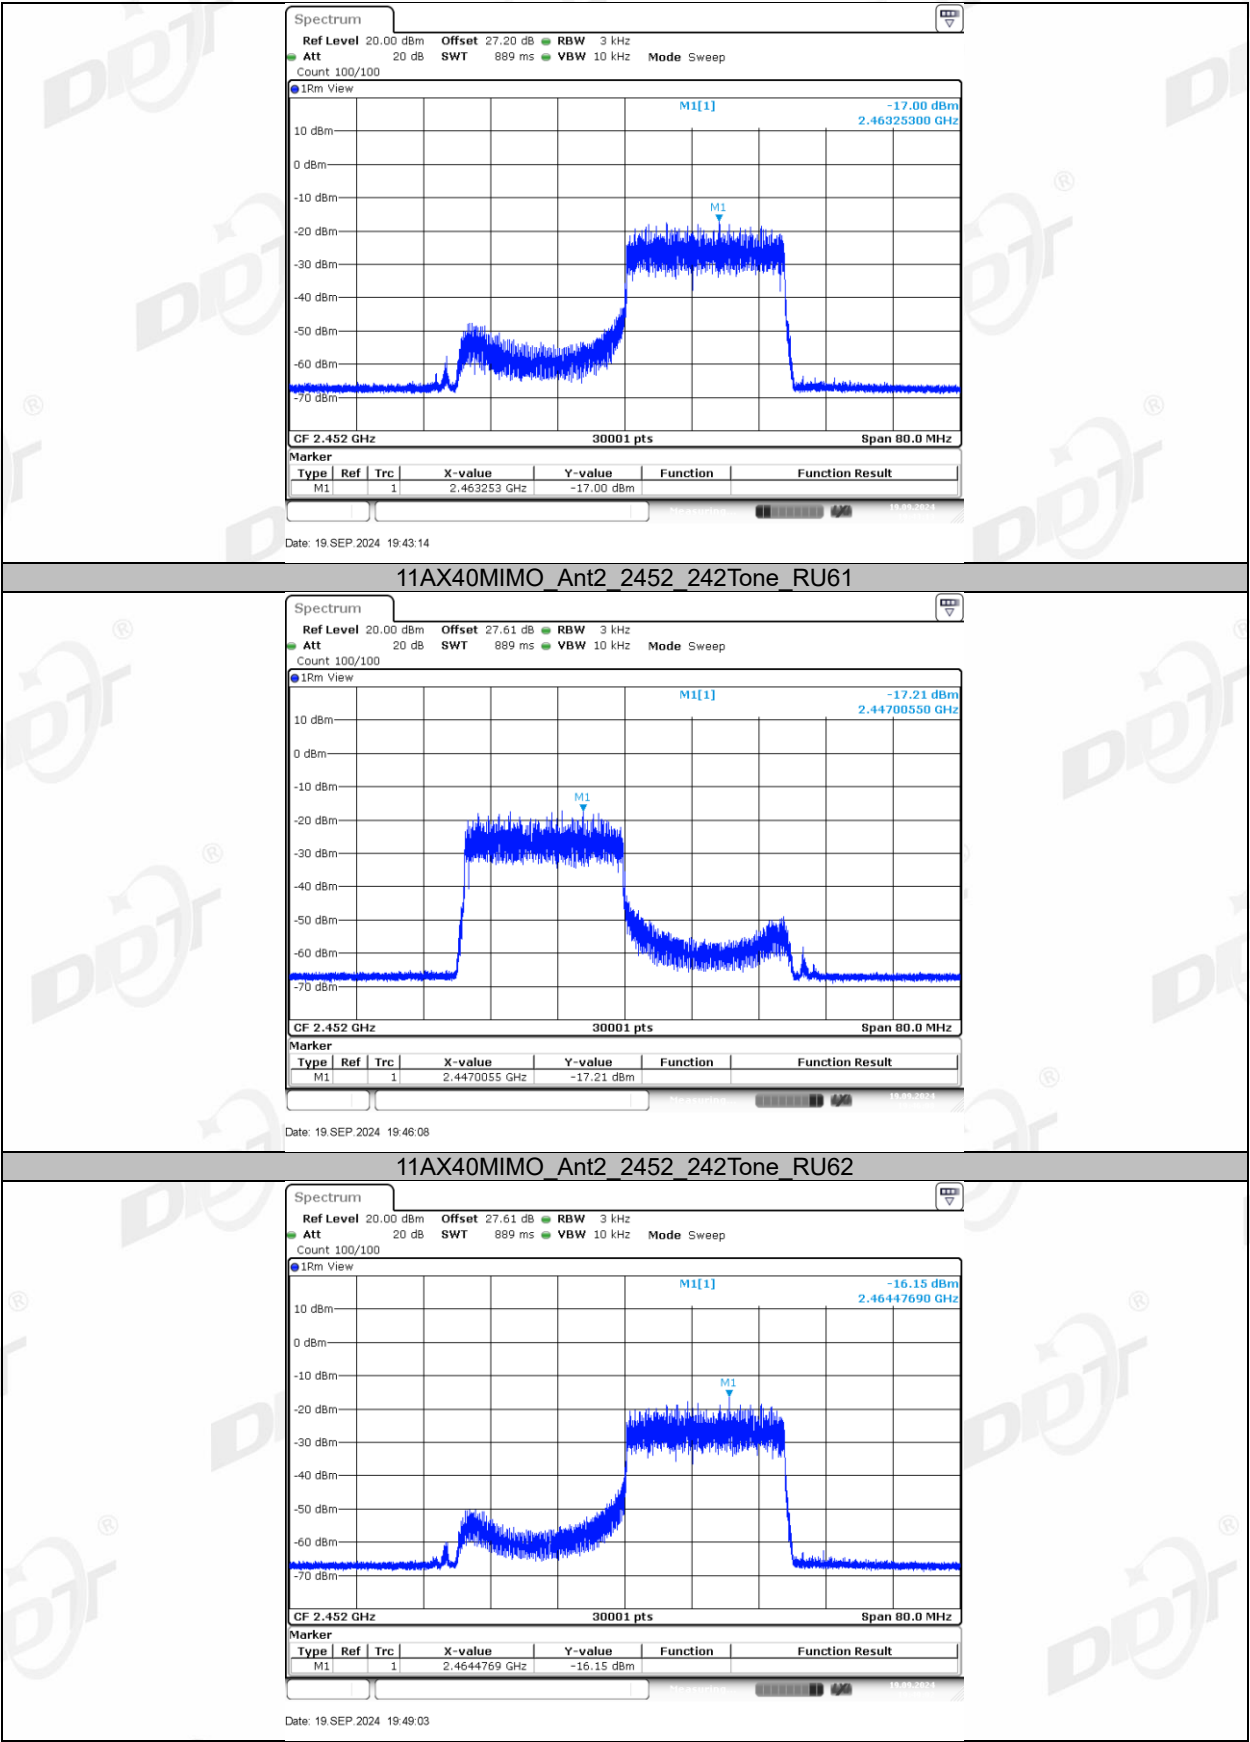

8. Band Edge Compliance (Conducted Method)

8.1. Block diagram of test setup

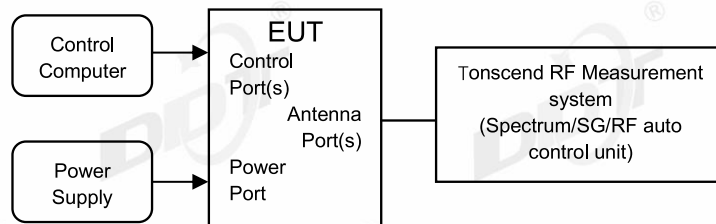

8.2. Limits

In any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

8.3. Test procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.

(2) Establish a reference level by using the following procedure:

RBW:	100 kHz
VBW:	300 kHz
Span	Encompass frequency range to be measured
Detector Mode:	Peak
Sweep time:	auto
Trace mode	Max hold

(3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.


Then mark the maximum amplitude of all unwanted emissions outside of the authorized frequency band.


8.4. Test result

Test Engineer:	Haofeng	Test Site:	RF Measurement System 3#
Ambient Condition:	26.9℃,45.7%RH	Test Date:	2024.09.19
Test Power Supply:	AC 120V/60Hz	Sample Number:	S24081428-001


EUT Set Mode	CH or Frequency	Result(dBm)	EUT Set Mode	CH or Frequency	Result (dBm)
11b	CH1	Pass	11g	CH1	Pass
	CH11	Pass		CH11	Pass
11n HT 20	CH1	Pass	11n HT 40	CH3	Pass
	CH11	Pass		CH9	Pass
11ax HE 20	CH1	Pass	11ax HE 40	CH3	Pass
	CH11	Pass		CH9	Pass

8.5. Test graphs

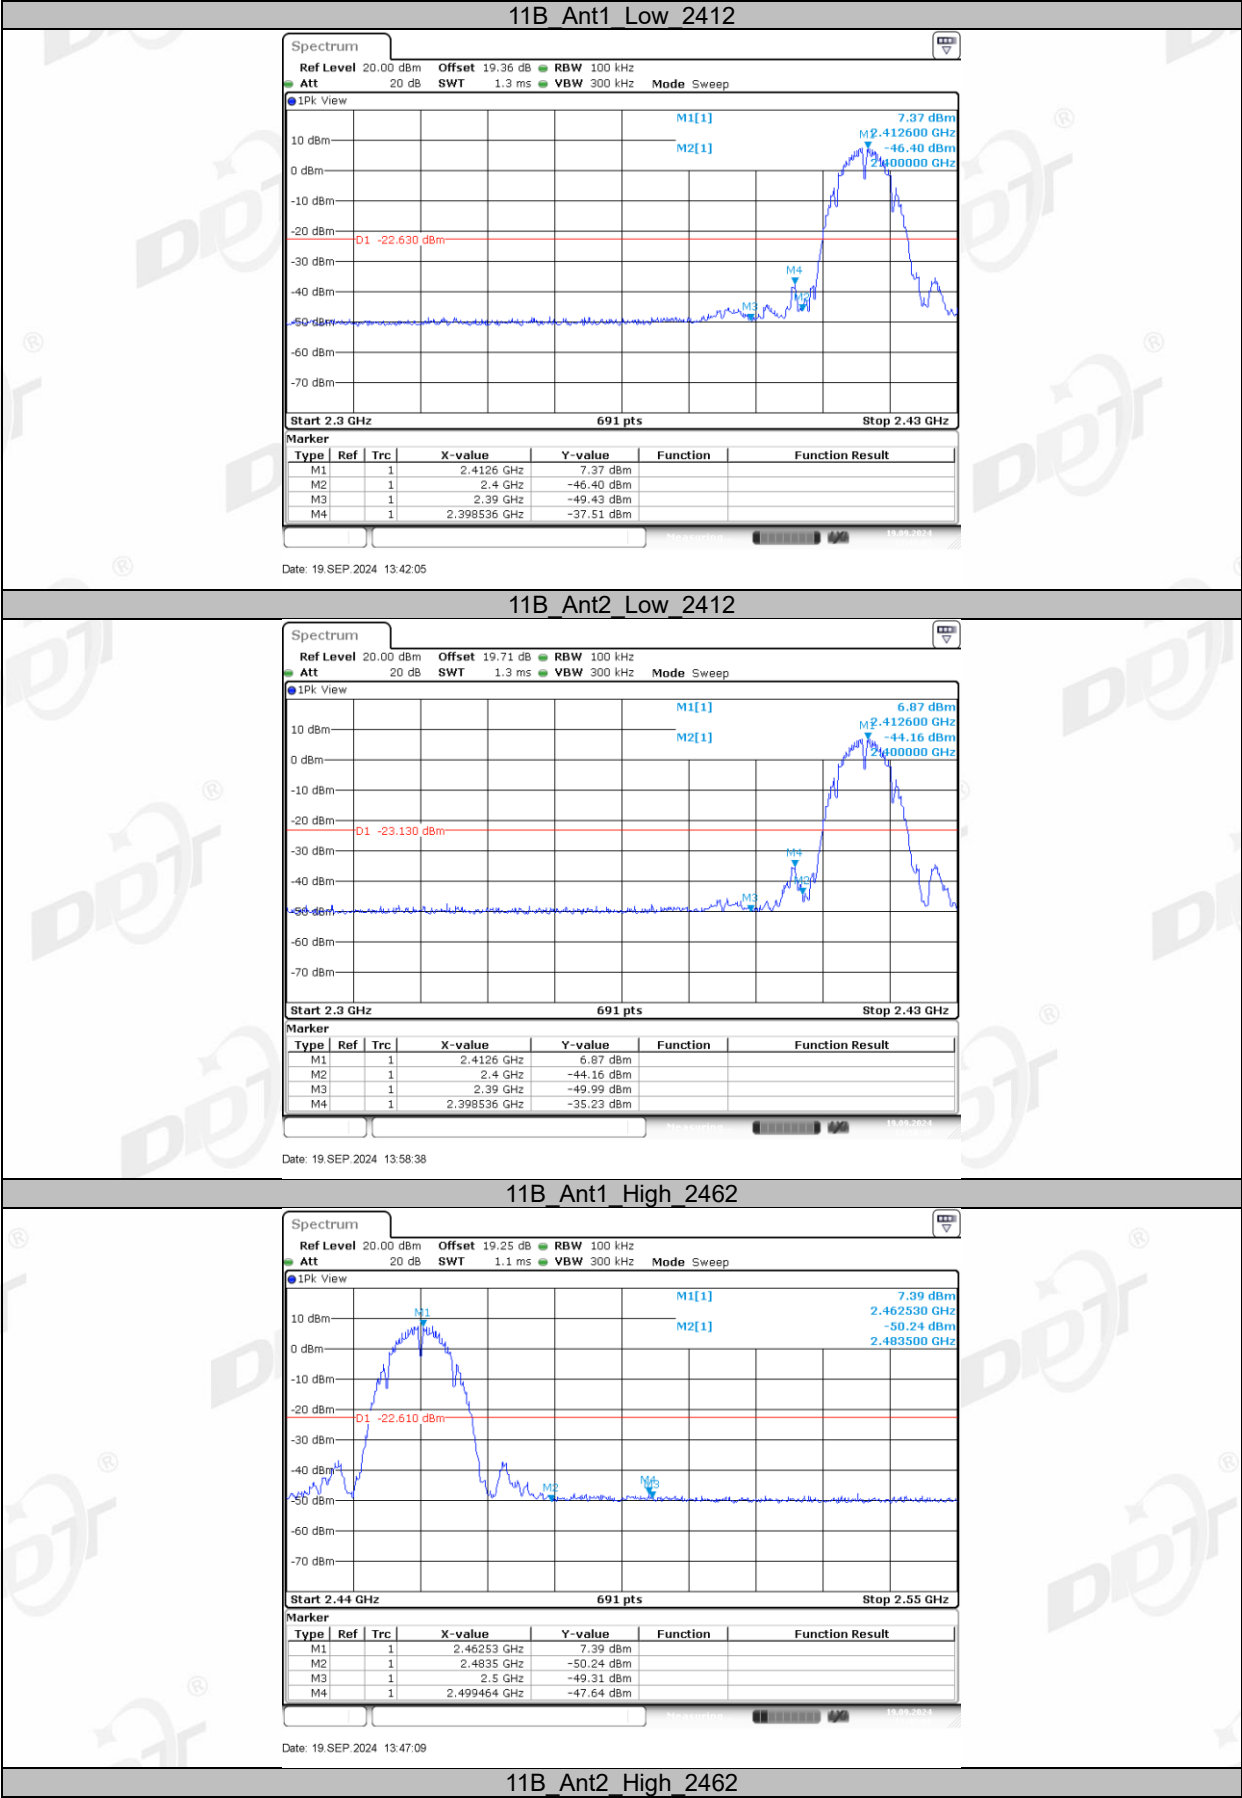


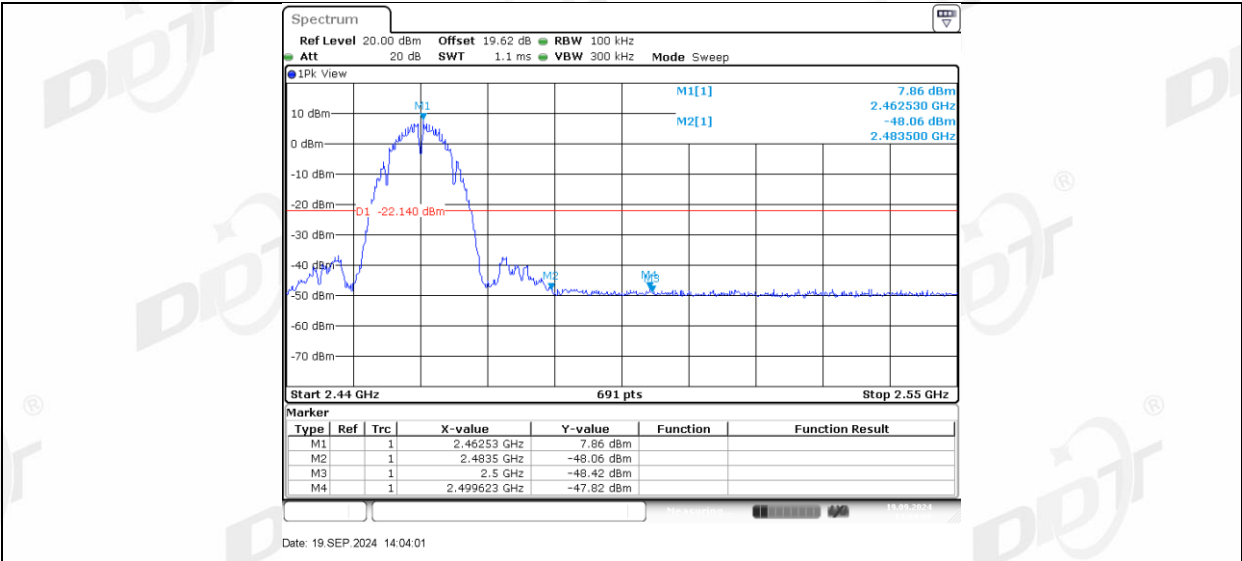


11G Ant1 Low 2412

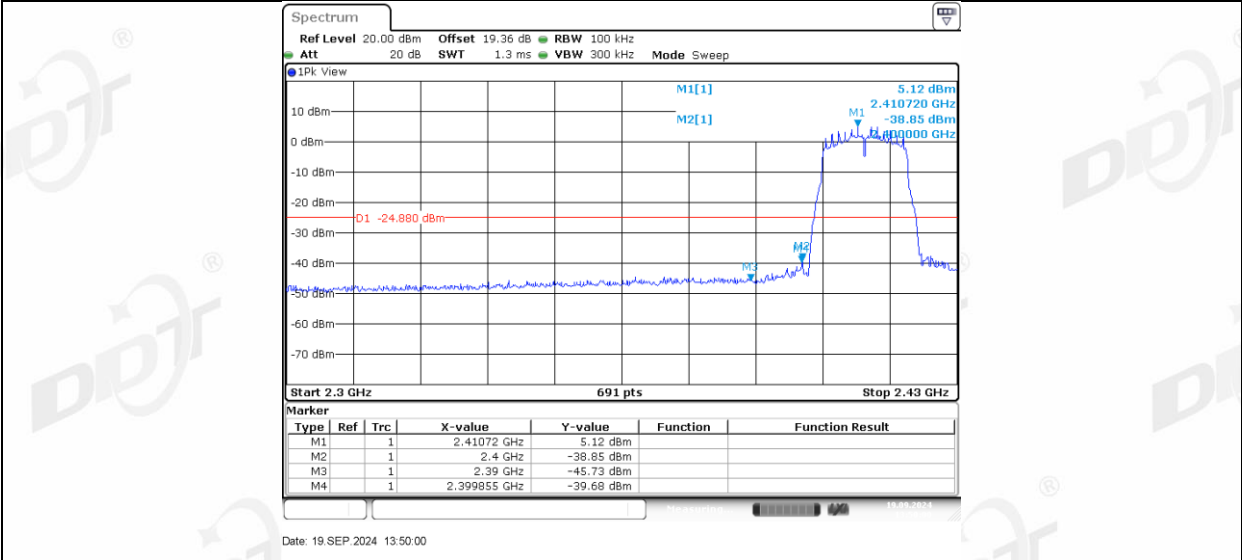


11G Ant2 Low 2412

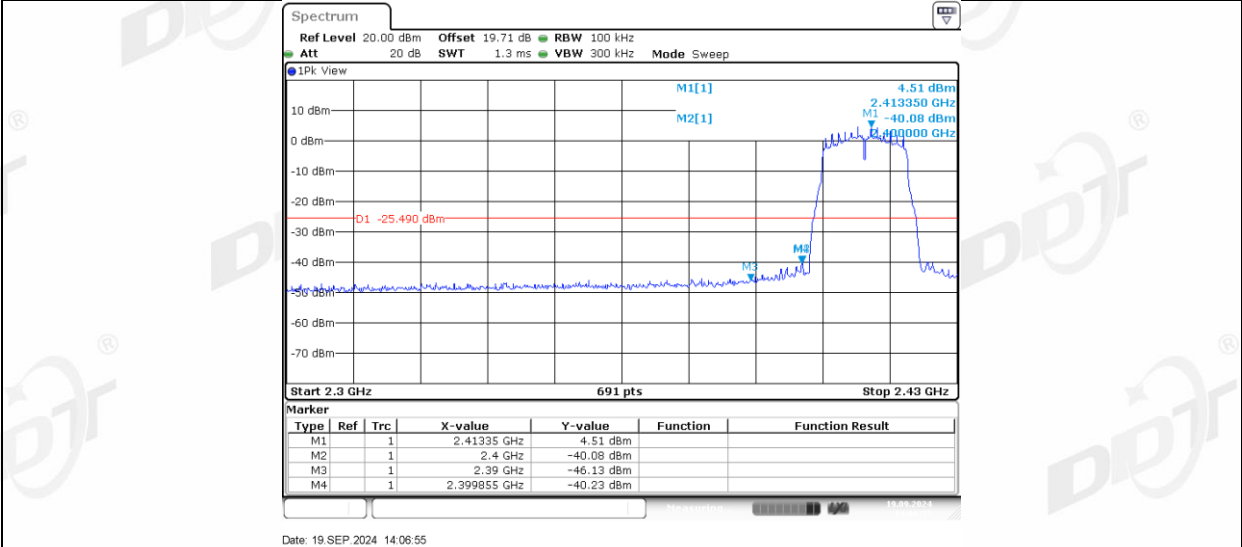


11G Ant1 High 2462

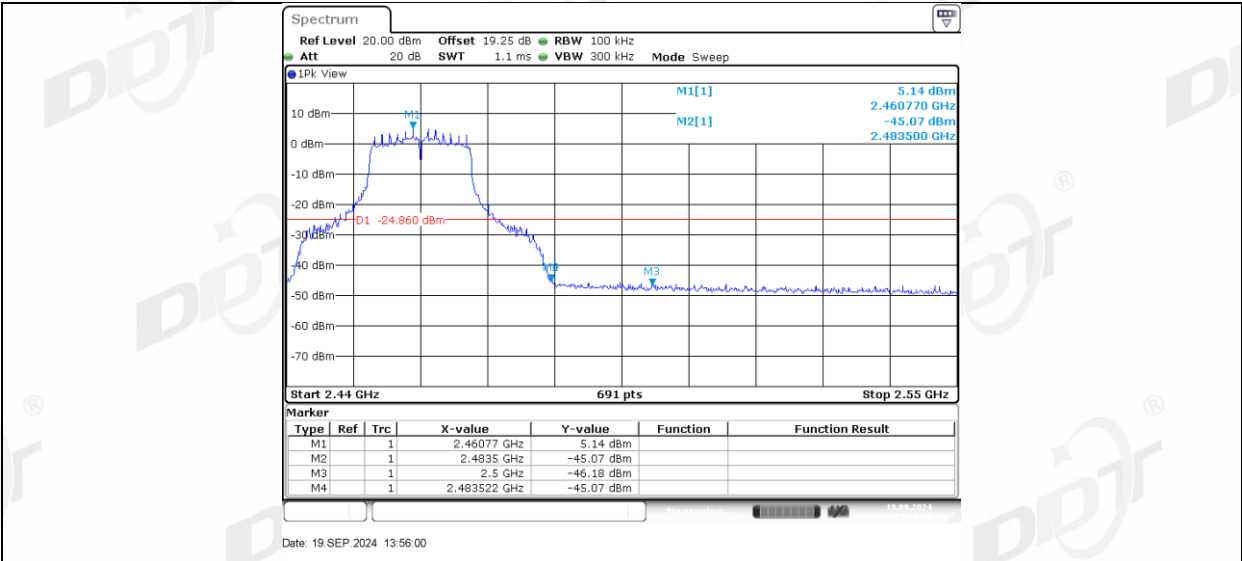

11G Ant2_High_2462

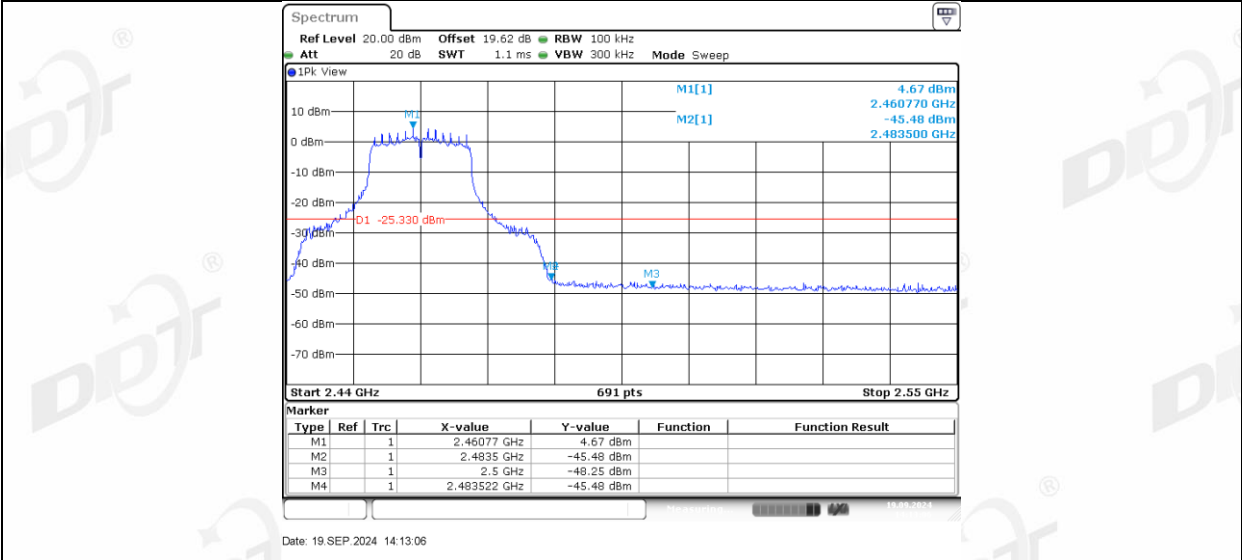

11N20MIMO Ant1_Low_2412

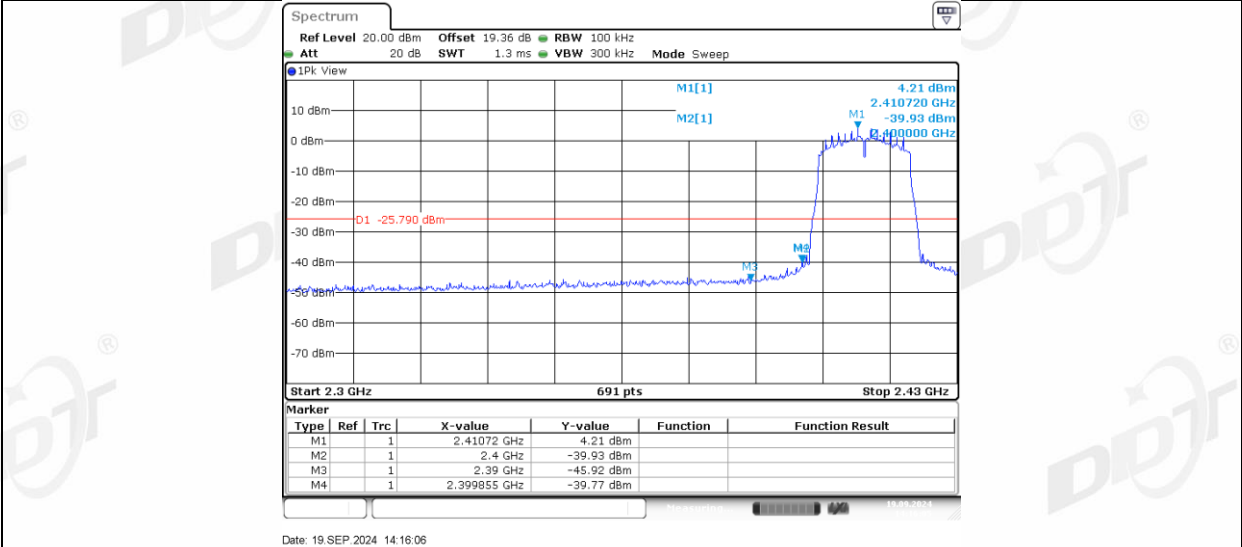

11N20MIMO Ant2_Low_2412