

SPECIFICATION



深圳市大显科技有限公司

Shenzhen Daxian Technology Co., Ltd.

中山悦辰 LoveSac Sofa WIFI-1 天线组件

Richsound LoveSac Sofa WIFI-1 Antenna assembly

产 品 规 格 书

Product Specification

客 户 connection	中山悦辰 Richsound	频 段 frequency range	2400 ~ 2500MHz、5150 ~ 5850MHz、 5925 ~ 7125MHz
项目名称 entry name	LoveSac Sofa	版 本 edition	V1.0
物料编号 Material No	3S-8290X-004	颜 色 Color	黑色 Black
客户料号 Customer Item Number	101000661		
R F 设计 R F Design	沈 川 Chuan.Shen	结构设计 Structural Design	周锐斌 RuiBin.Zhou
品质经理 Quality Manager	杨 进 Jin.Yang	技术总监 Technical Director	张 磊 Lei.Zhang
日 期 Date	2024-8-6		

客户确认:

Customer confirmation:

装配是否符合贵司要求: ☐OK ☐NGWhether the assembly meets your company's requirements: ☐OK ☐NG

深圳市大显科技有限公司

Shenzhen DaXian Technology Co., Ltd.

深圳市龙岗区布吉镇吉华路 513 号上水径村 (国防培训基地
对面) 达成工业园综合楼 7 楼

TEL:0755-28576002

FAX:0755-84276383

上海分部: 上海市张江高科技园区集成电路产业区龙东大道
3000 号 8 号楼 201 室

TEL:021-61630552

FAX :755-84276383

Buji Town, Longgang District, Shenzhen, China Jihua Road 513,
Shangshuijing Village (opposite the national defense
training base) Dacheng Industrial Park, Building 7.

TEL:0755-28576002

FAX:0755-84276383

Room201, Building8, LongDongRoad3000#, Semiconductor Industry
Park, ZhangJiang Hitech Zone, ShangHai

TEL:021-61630552

FAX:755-84276383

变更履历

[illegible]

www.Topant.com.cn
Confidentiality requirements

Shenzhen Daxian Technology Co., Ltd. already possesses the information provided by the proprietary technology, which should be strictly confidential and not allowed to be disclosed to any person or company without the prior written consent of Shenzhen Daxian Technology Co., Ltd

索引 Indexes

一、项目说明 Project Description.....	4
二、 WiFi-1 天线 antenna.....	4
1、 规格 specifications.....	4
1.1 电气规格标准 Electrical specifications and standards.....	5
1.1.1 电性能指标 Electrical performance index.....	5
1.2 结构规格标准 Structural specifications and standards.....	5
1.2.1 天线组成 Antenna composition..	5
2、测试环境 testing environment.....	6
3、测试 test.	7
3.1 驻波(VSWR)的测试 Test of standing wave (VSWR).....	7
3.1.1 测试连接 Test connection.....	7
3.2 效率、功率 (TRP)、灵敏度 (TIS) 的测试 Testing of efficiency, power (TRP), sensitivity (TIS).....	7
3.2.1 测试的场地 Test site.....	7
3.2.2 测试的仪表 Tested Instruments.....	7
3.2.3 测试数据 test data.....	7-8
4、VSWR 参数图 Parameter diagram.....	8
5、天线隔离度 Antenna isolation.....	9
6-6.2、无源场型图 Passive field pattern diagram.....	10-11
7、外场测试 Field Test.....	12
9、哈曼 RF 衰减测试数据 Harman RF attenuation test data.....	13
10、结论 conclusion.....	13
三、工程图 schedule drawing.....	14
四、样品测试报告 Sample Test Report.....	15
五、CPK 尺寸报告 CPK Dimensional Report.....	16
六、盐雾试验报告 Salt Spray Test Report.....	17
七、包装图 Package Drawing.....	18

www.Topant.com.cn

Confidentiality requirements

Shenzhen Daxian Technology Co., Ltd. already possesses the information provided by the proprietary technology, which should be strictly confidential and not allowed to be disclosed to any person or company without the prior written consent of Shenzhen Daxian Technology Co., Ltd

一 项目说明 Project Description

客户名: Customer Name:	中山悦辰 Richsound
整机类型: Type of complete machine:	音箱 loudspeaker box
天线频段: Antenna band:	2400 ~ 2500MHz, 5150 ~ 5850MHz, 5925 ~ 7125MHz
天线形式: Antenna form:	FPC+同轴线+线材海绵 FPC+coaxial line+wire sponge
馈电形式: Feed form:	焊接 weld
馈脚数量: Number of feed legs:	两个 Two
硬件版本: Hardware version:	/


二 WIFI-1 天线组件 Antenna assembly

1 规格 specifications

本报告主要提供 LoveSac Sofa项目天线的各项电气和结构性能参数的测试状况。下图为大显设计的天线图片。

This report mainly provides the testing status of various electrical and structural performance parameters of the antenna for the LoveSac Sofa project.

The following image shows an antenna with a large display design.

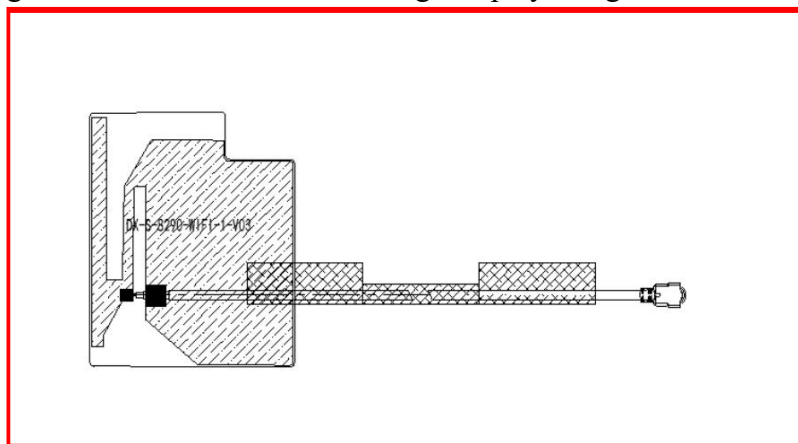

天线外观图

antenna appearing diagram

www.Topant.com.cn
Confidentiality requirements

Shenzhen Daxian Technology Co., Ltd. already possesses the information provided by the proprietary technology, which should be strictly confidential and not allowed to be disclosed to any person or company without the prior written consent of Shenzhen Daxian Technology Co., Ltd

1.1 电气规格标准 Electrical specifications and standards

1.1.1 电性能指标 Electrical performance index

天线工作频段在 2400 ~ 2500 MHz, 5150 ~ 5850 MHz, 5925 ~ 7125MHz。下表是大显设计和量产天线的电性能的指标。

The operating frequency band of the antenna is between 2400 and 2500 MHz, 5150 and 5850MHz, 5925 and 7125MHz. The following table shows the electrical performance indicators of large display design and mass production antennas.

Frequency Range	Frequency (MHz)	VSWR
WIFI-1	2400 ~ 2500	≤ 2
WIFI-1	5150 ~ 5850	≤ 2
WIFI-1	5925 ~ 7125	≤ 2

2 结构规格标准 Structural specifications and standards

1.2.1 天线组成 Antenna composition

天线主要是由 FPC+同轴线+线材海绵 组成。

The antenna is mainly composed of FPC+coaxial line+wire sponge.

www.Topant.com.cn
Confidentiality requirements

Shenzhen Daxian Technology Co., Ltd. already possesses the information provided by the proprietary technology, which should be strictly confidential and not allowed to be disclosed to any person or company without the prior written consent of Shenzhen Daxian Technology Co., Ltd

2、测试设备 The Equipment of Active Test

Satimo 3D Chamber $6 \times 4 \times 4$ (m)

Agilent 8960 E5515c

Network analyzer-R&S ZVL



图 2

Figure 2

www.Topant.com.cn
Confidentiality requirements

Shenzhen Daxian Technology Co., Ltd. already possesses the information provided by the proprietary technology, which should be strictly confidential and not allowed to be disclosed to any person or company without the prior written consent of Shenzhen Daxian Technology Co., Ltd

3 测试 test

3.1 驻波(VSWR)的测试 Test of standing wave (VSWR)

3.1.1 测试连接: VSWR 测试装置依次的连接为: R&S ZVL 网络分析仪 → 测试线 → 测试治

Test connection: The VSWR test device is sequentially connected as follows: R&S ZVL network analyzer → test line → test fixture

实测(附图)Actual measurement (attached drawing)

3.2 增益及效率、功率 (TRP)、灵敏度 (TIS) 的测试

Gain and efficiency, power (TRP), sensitivity (TIS) testing

3.2.1 测试的场地 Test site:

大显微波暗室。测试频率范围为 400MHz—6GHz, 静区范围为 50cm 圆周, 反射率小于 -50 dB。

Large display microwave anechoic chamber. The test frequency range is 400MHz - 6GHz, the static zone range is 50cm circumferential, and the reflectivity is less than -50dB.

3.2.2 测试的仪表 Tested Instruments:

R&S ZVL 网络分析仪、Agilent8960 E5515C、标准喇叭天线、法国 SATIMO-SG24SYSTEM 系统、打印机等。

R&S ZVL network analyzer, Agilent 8960 E5515C, standard horn antenna, French SATIMO-SG24SYSTEM system, printer, etc.

3.2.3 测试数据: 在微波暗室中, 测试的功率和灵敏度相关的数值如下表

Test data: In a microwave anechoic chamber, the values related to the power and sensitivity tested are shown in the table below

OTA 有源测试 OTA Active Test:

Band	CH	TPR	TIS
802.11b 11M	1	15.75	-83.83
	6	15.64	-83.65
	11	15.49	-83.75
802.11g 54M	1	14.82	-73.79
	6	14.52	-73.68
	11	14.66	-73.23
802.11n MCS7	1	14.33	-71.69
	6	14.23	-71.40
	11	14.14	-71.19
802.11a 54M	36	10.89	-73.47
	149	10.51	-73.35
	161	10.31	-73.21

www.Topant.com.cn

Confidentiality requirements


Shenzhen Daxian Technology Co., Ltd. already possesses the information provided by the proprietary technology, which should be strictly confidential and not allowed to be disclosed to any person or company without the prior written consent of Shenzhen Daxian Technology Co., Ltd

无源效率&增益 Passive efficiency&gain-2.4&5.8G&6G:

Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)
2400	48.56	-3.14	1.56
2450	48.79	-3.12	1.67
2500	48.67	-3.13	1.45
5150	48.66	-3.13	2.62
5350	48.85	-3.11	2.77
5500	49.05	-3.09	2.88
5650	49.26	-3.08	2.68
5750	48.87	-3.11	2.59
5850	48.51	-3.14	2.66

Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)
5925	47.27	-3.25	2.44
6125	47.94	-3.19	2.57
6325	47.91	-3.20	2.49
6525	48.38	-3.15	2.74
6725	47.92	-3.19	2.84
6925	47.66	-3.22	2.63
7125	47.31	-3.25	2.38

4、VSWR 参数图 VSWR parameter diagram


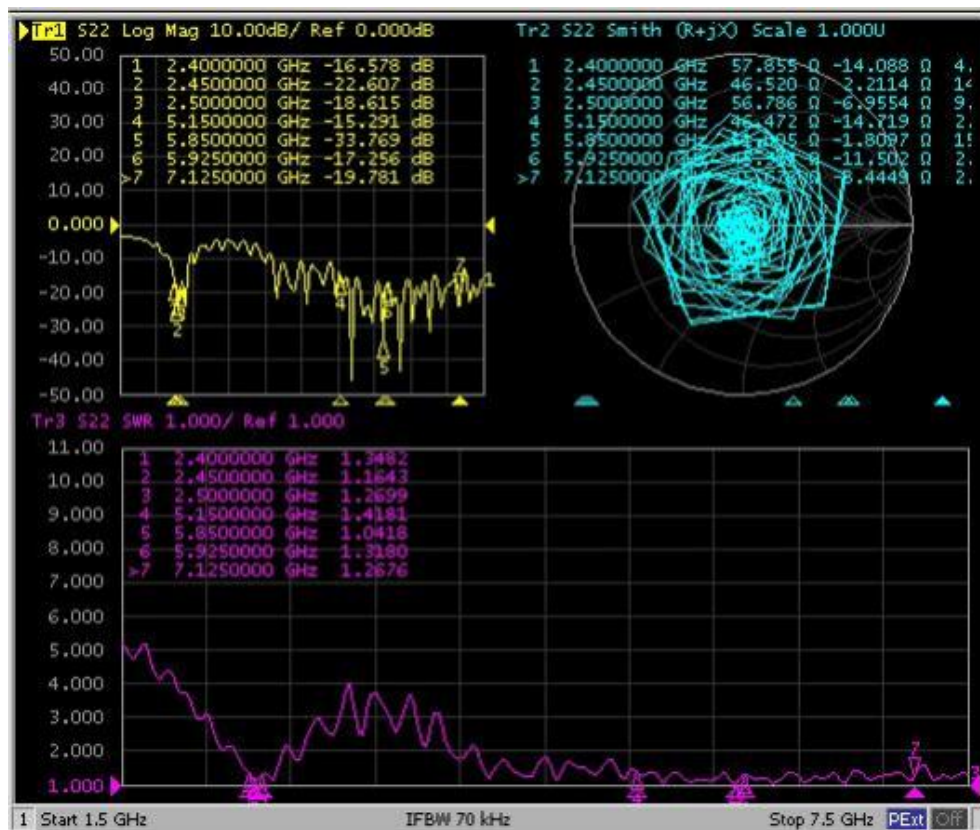


www.Topant.com.cn

Confidentiality requirements

Shenzhen Daxian Technology Co., Ltd. already possesses the information provided by the proprietary technology, which should be strictly confidential and not allowed to be disclosed to any person or company without the prior written consent of Shenzhen Daxian Technology Co., Ltd

5、天线隔离度 Antenna isolation

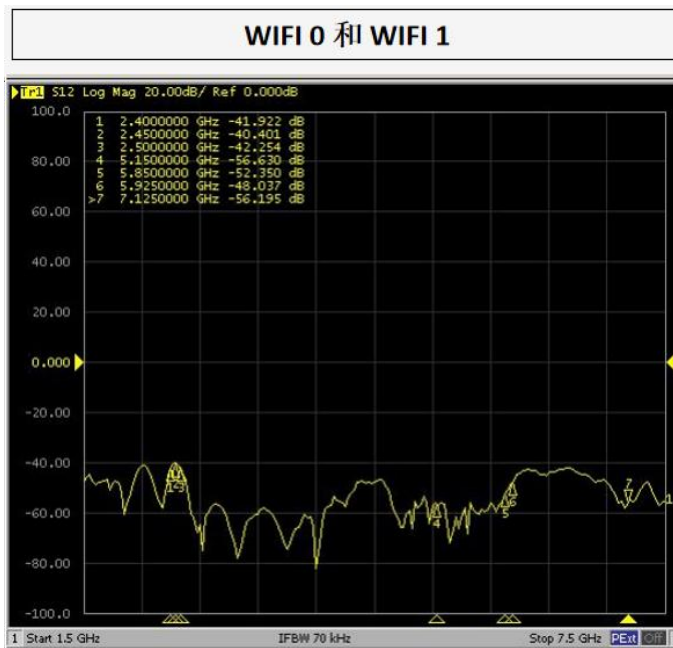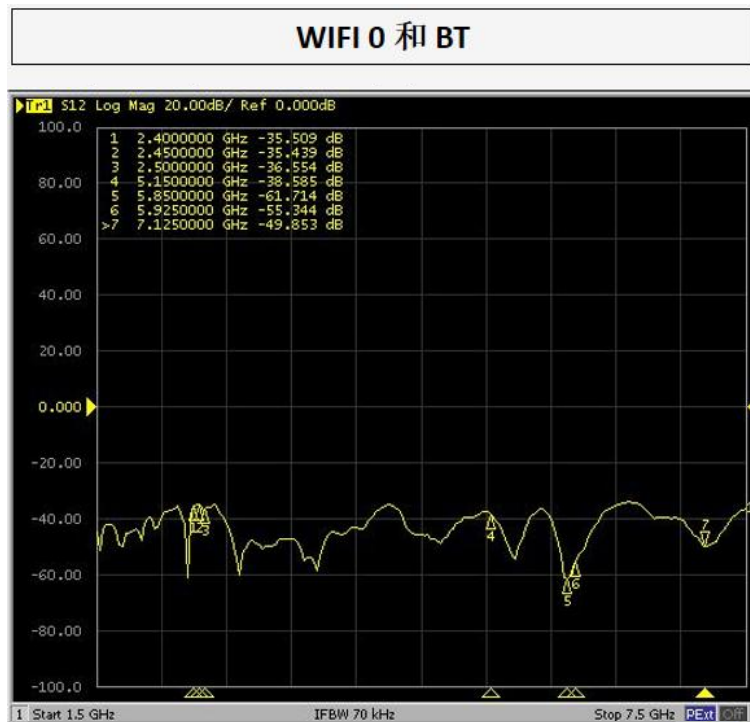


www.Topant.com.cn

Confidentiality requirements

Shenzhen Daxian Technology Co., Ltd. already possesses the information provided by the proprietary technology, which should be strictly confidential and not allowed to be disclosed to any person or company without the prior written consent of Shenzhen Daxian Technology Co., Ltd


6、无源场型图-2450MHz

Passive Field Pattern Diagram - 2450MHz

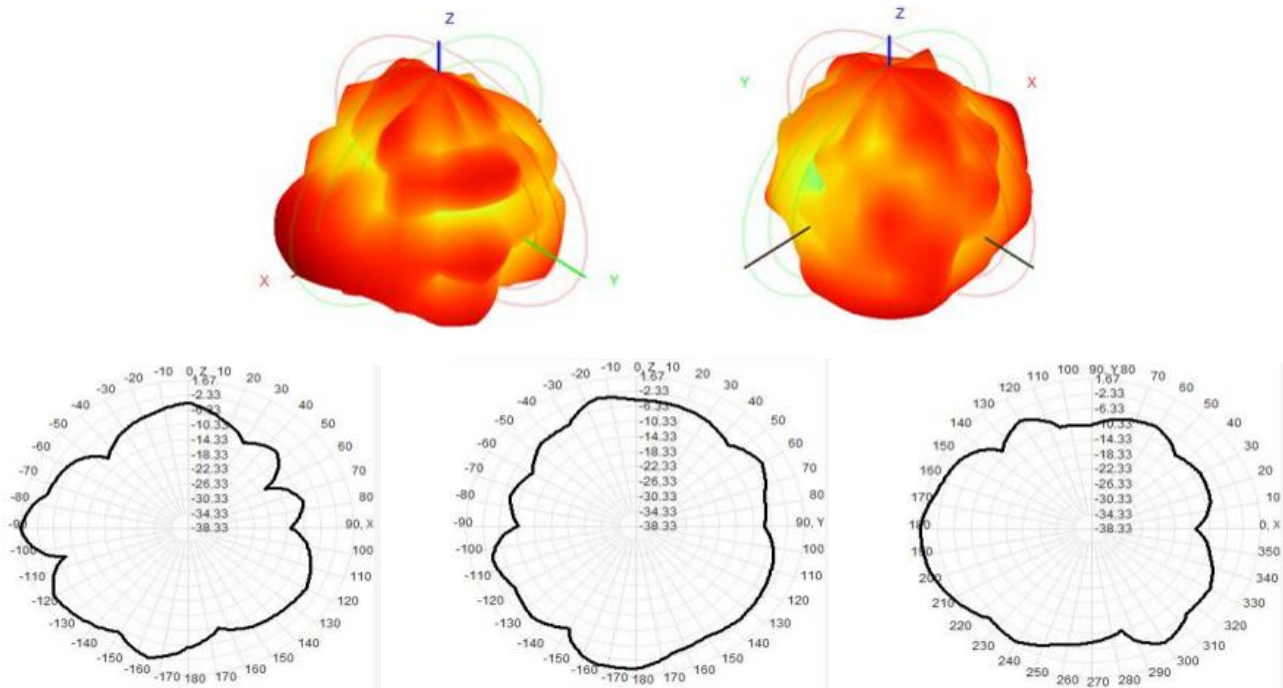

6.1、无源场型图-5500MHz

Passive Field Pattern Diagram - 5500MHz

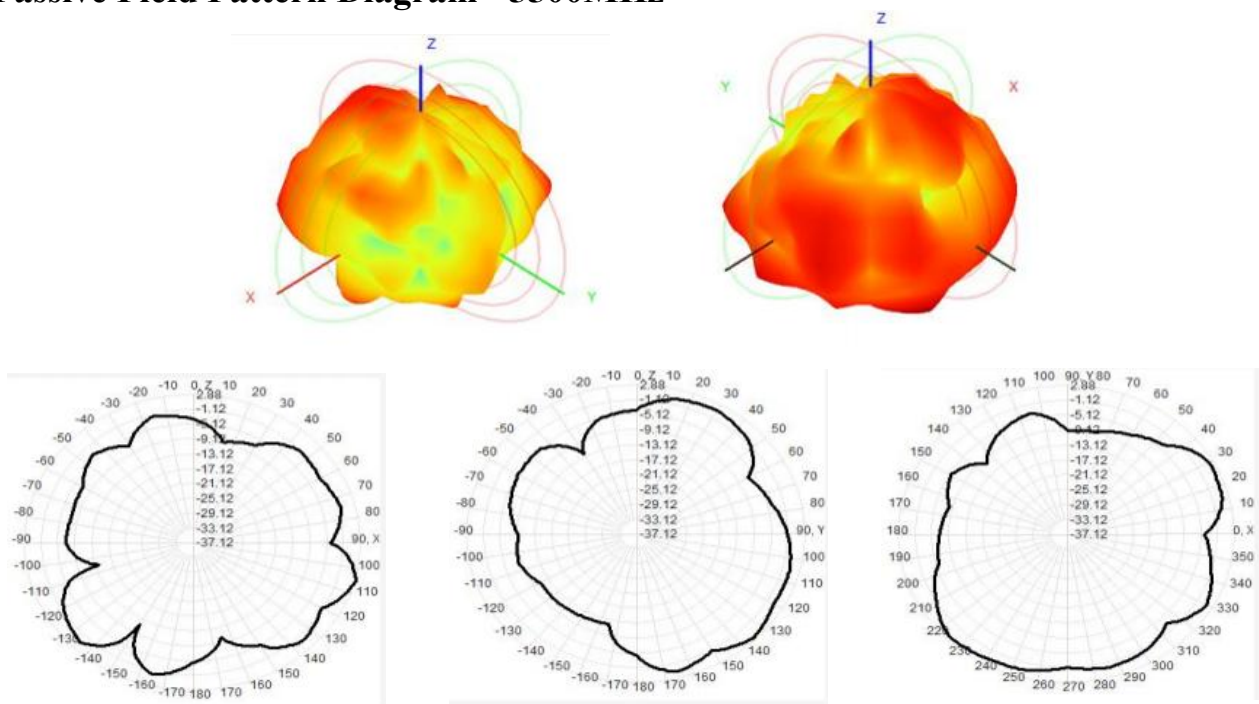





www.Topant.com.cn

Confidentiality requirements

Shenzhen Daxian Technology Co., Ltd. already possesses the information provided by the proprietary technology, which should be strictly confidential and not allowed to be disclosed to any person or company without the prior written consent of Shenzhen Daxian Technology Co., Ltd

6.2、无源场型图-6525MHz

Passive Field Pattern Diagram - 6525MHz

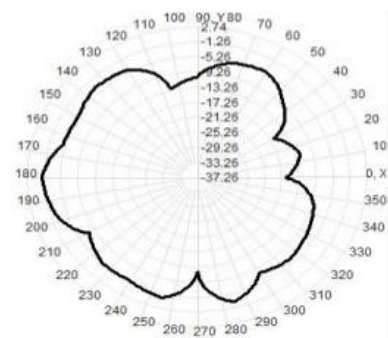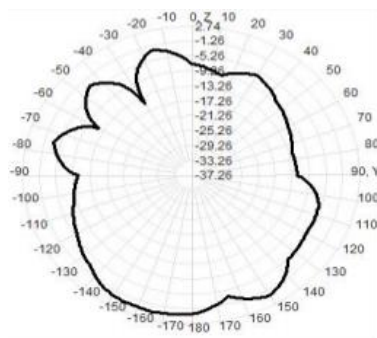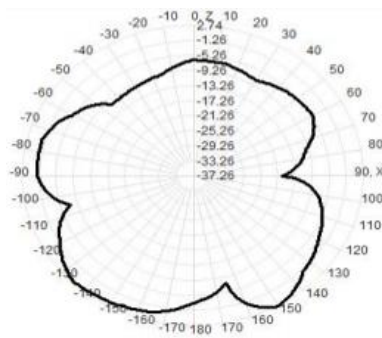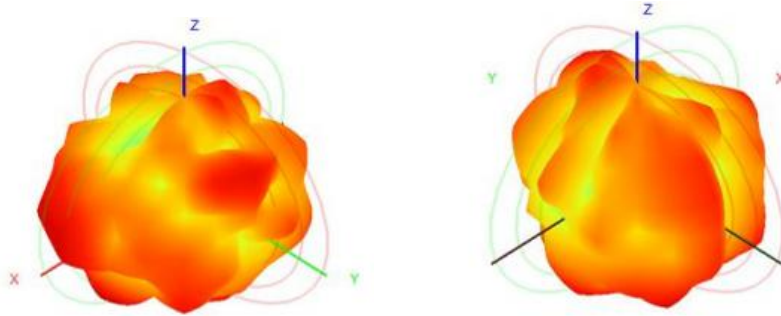

www.Topant.com.cn
Confidentiality requirements

Shenzhen Daxian Technology Co., Ltd. already possesses the information provided by the proprietary technology, which should be strictly confidential and not allowed to be disclosed to any person or company without the prior written consent of Shenzhen Daxian Technology Co., Ltd

7、外场测试 field test

测试时间Test Time: 2023/05/19

测试场地: 深圳烟草公司附近

Testing site: near Shenzhen Tobacco Company

测试手机test mobile: Iphone 14 Pro

配网手机Distribution phone: XiaoMi MIX2

配网Distribution Network APP: HK ONE

测试路由器Test Router: ASUS-RT-AC86U

www.Topant.com.cn

Confidentiality requirements

Shenzhen Daxian Technology Co., Ltd. already possesses the information provided by the proprietary technology, which should be strictly confidential and not allowed to be disclosed to any person or company without the prior written consent of Shenzhen Daxian Technology Co., Ltd

8、户外拉距测试 Outdoor pull distance test

测试方向 Test direction	前 Front	后 Behind	左 Left	右 Right
	测试距离 Test distance			
BT	100m	100m	100m	100m
WIFI 2.4G	200m	200m	200m	200m
WIFI 5.8G	255m	255m	255m	255m

9、哈曼 RF 衰减测试数据 Harman RF attenuation test data

机器方向面 Machine direction plane	BT	WIFI 2.4G	WIFI 5.8G
前Front	27 db	27 db	25 db
左Left	28 db	29 db	26 db
后Behind	28 db	29 db	25 db
右Right	27 db	27 db	25 db

10、结论 conclusion

此天线是在客户提供样机基础上设计，电参数和结构性能已达到技术要求，请确认！

This antenna is designed based on the prototype provided by the customer. The electrical parameters and structural performance have met the technical requirements, please confirm!

www.Topant.com.cn
Confidentiality requirements

Shenzhen Daxian Technology Co., Ltd. already possesses the information provided by the proprietary technology, which should be strictly confidential and not allowed to be disclosed to any person or company without the prior written consent of Shenzhen Daxian Technology Co., Ltd

深圳市大显科技有限公司

样品测试报告

送样单位:工程

2024年8月1日

品 名		WiFi-1天线		批 量		4pcs		类别		☐ 模具零件 ☐ 材料评估				
料 号		3S-8290X-004		模穴数						☒ 送样评估 ☐ 其他				
序号	图面规格	量具	测试结果								超差值	判定		
			1	2	3	4	5	6	7	8		OK	NG	
1	24.75±0.15	P	24.77	24.75	24.72	24.70					0	✓		
2	30.57±0.15	P	30.59	30.52	30.56	30.54					0	✓		
3	16.40±0.15	P	16.42	16.40	16.45	16.38					0	✓		
4	0.13±0.03	P	0.13	0.14	0.13	0.12					0	✓		
5	25.02±0.10	P	25.05	25.02	25.00	25.04					0	✓		
6	15±2	P	15.00	15.00	16.00	15.00					0	✓		
7	150±3	P	150.00	152.00	150.00	151.00					0	✓		
8	140±3	P	140.00	142.00	140.00	141.00					0	✓		
9	100±3	P	100.00	102.00	100.00	101.00					0	✓		
10	440±5.0	P	440.00	442.00	440.00	443.00					0	✓		
11	2.7±0.30	P	2.75	2.70	2.68	2.66					0	✓		
12	1.0±0.30	P	1.05	1.02	1.00	0.94					0	✓		
13	1.5±0.30	P	1.55	1.50	1.46	1.49					0	✓		
量具		目视 E 卡尺 C 千分尺 M 投影仪 P 螺纹规 Pg											最终判定	
代号		网络分析仪 Ne 扭力计 G 万用表 Me 直 尺 F											OK	NG
备注:		外观OK.												

表单编号: QR/RD-P01-08

核准:杨进

作成:李朝花

Shenzhen Topant Technology Co., Ltd.

1. Basic information:

Product Name: WiFi-1天线

Sample size : 30 pcs

Product no.: 3S-8290X-004

Control paramete SIZP

2、Data measurement:

Test date: 1/Aug/24

NO. ITEM	NO.1	NO.2	NO.3	NO.4			
spec	30.57±0.15mm	24.75±0.15mm	440±5.0mm	0.13±0.03mm			
USL	30.72	24.9	445	0.16			
LSL	30.42	24.60	435.00	0.10			
μ	30.57	24.75	440.00	0.13			
MAX	30.600	24.790	443.000	0.140			
MIN	30.520	24.700	439.000	0.120			
1	30.59	24.77	440.00	0.13			
2	30.55	24.75	441.00	0.12			
3	30.52	24.72	442.00	0.13			
4	30.56	24.79	441.00	0.14			
5	30.59	24.73	439.00	0.13			
6	30.54	24.70	440.00	0.13			
7	30.52	24.79	442.00	0.12			
8	30.56	24.75	440.00	0.13			
9	30.50	24.70	440.05	0.14			
10	30.54	24.79	440.18	0.13			
11	30.59	24.77	440.09	0.13			
12	30.55	24.75	440.02	0.12			
13	30.52	24.72	440.00	0.13			
14	30.60	24.79	441.00	0.14			
15	30.59	24.73	442.00	0.13			
16	30.54	24.75	441.00	0.13			
17	30.52	24.79	439.00	0.12			
18	30.56	24.75	440.00	0.13			
19	30.60	24.72	442.00	0.14			
20	30.54	24.79	440.00	0.13			
21	30.59	24.77	440.05	0.13			
22	30.55	24.75	440.18	0.12			
23	30.52	24.72	440.09	0.13			
24	30.59	24.79	440.02	0.14			
25	30.59	24.73	441.00	0.13			
26	30.54	24.70	442.00	0.13			
27	30.52	24.79	443.00	0.12			
28	30.56	24.75	440.00	0.13			
29	30.57	24.70	440.05	0.14			
30	30.54	24.79	440.02	0.13			

3、Data calculation:

No.	No.1	No.2	No.3	No.4			
Average	30.555	24.751	440.558	0.130			
σ	0.03	0.03	0.96	0.01			
Ca	0.10	0.01	0.11	0.00			
Cp	1.71	1.55	1.74	1.55			
CPK	1.54	1.53	1.54	1.55			

4. Conclusion:

THE CAPABILITY OF PROCESS IS PERFECT STATE, MAINTAIN ACTUALITY.

Approved: 杨进

Designed: 李朝花

深圳市大显科技有限公司

Shenzhen Daxian Technology Co., Ltd

包装运输存储说明

一、包装规范

1 . FPC+同轴线+线材海绵:



2、装袋, 每袋装 50pcs;每 500pcs 装 1pcs 纸箱 (根据订单数量可调整) .



每 10 小袋装入 1pcs 纸箱



所附图片仅供参考, 以实物为准。

3、 装箱,纸箱规格: 390*305*335, 打包后装箱密封, 贴标签。



二、运输要求:

产品包装件运输时, 应防潮、防破损、防污染。

三、存储要求:

产品包装件应在仓库内堆放, 库房应干燥、通风、清洁。