






11B\_Ant2\_2462\_0~Reference

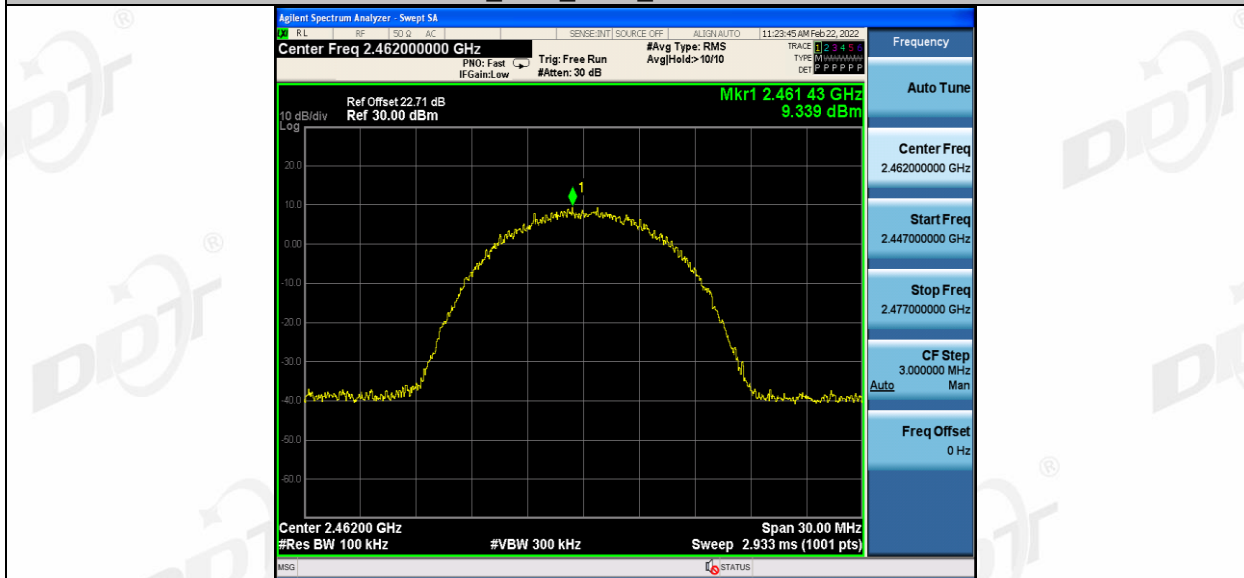

11B\_Ant2\_2462\_30~1000

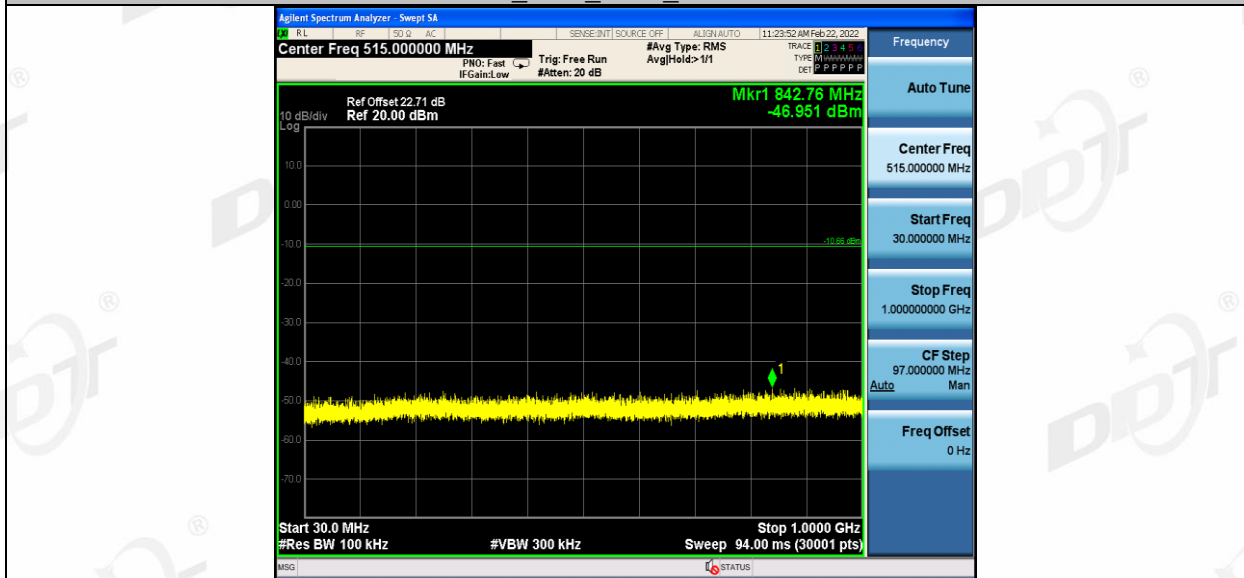


11B\_Ant2\_2462\_1000~26500

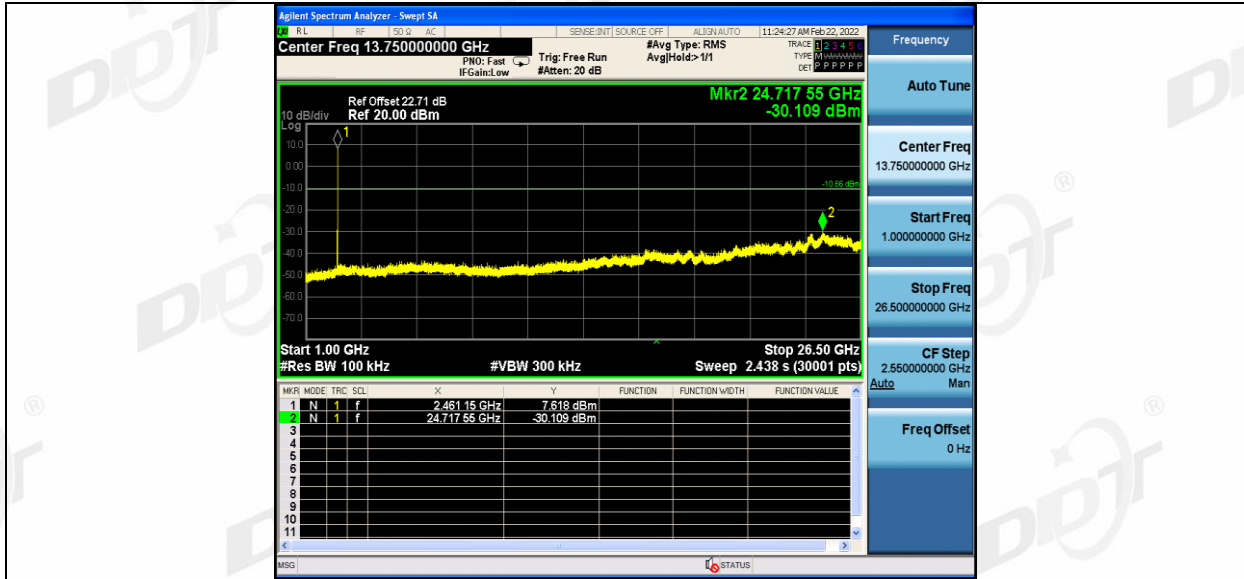


11G\_Ant1\_2412\_0~Reference



11G\_Ant1\_2412\_30~1000

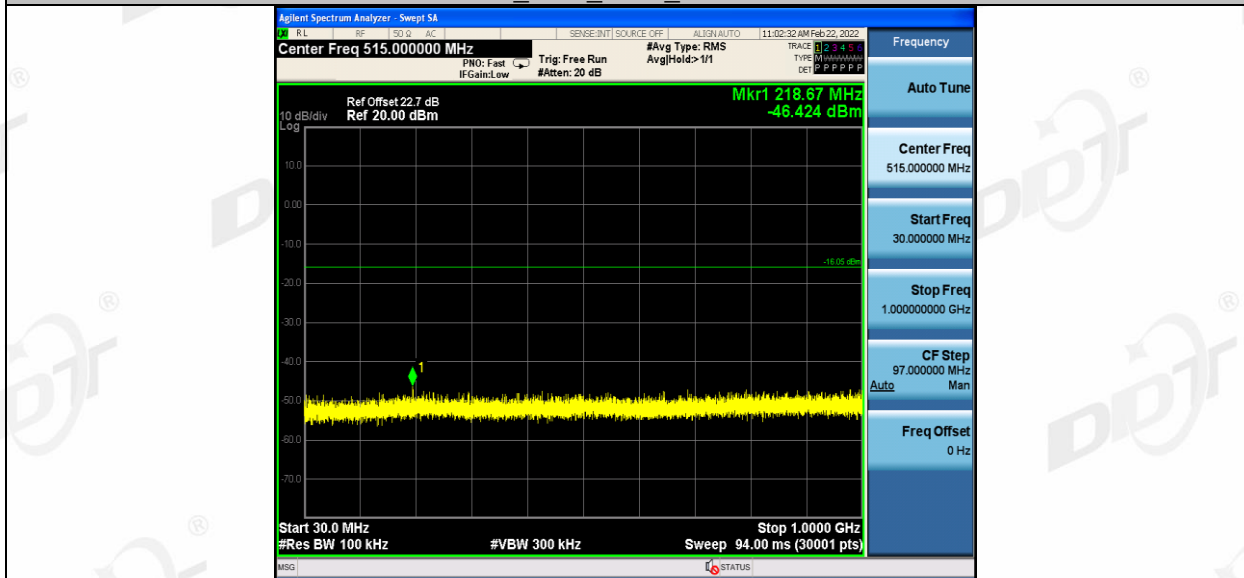


11G\_Ant1\_2412\_1000~26500

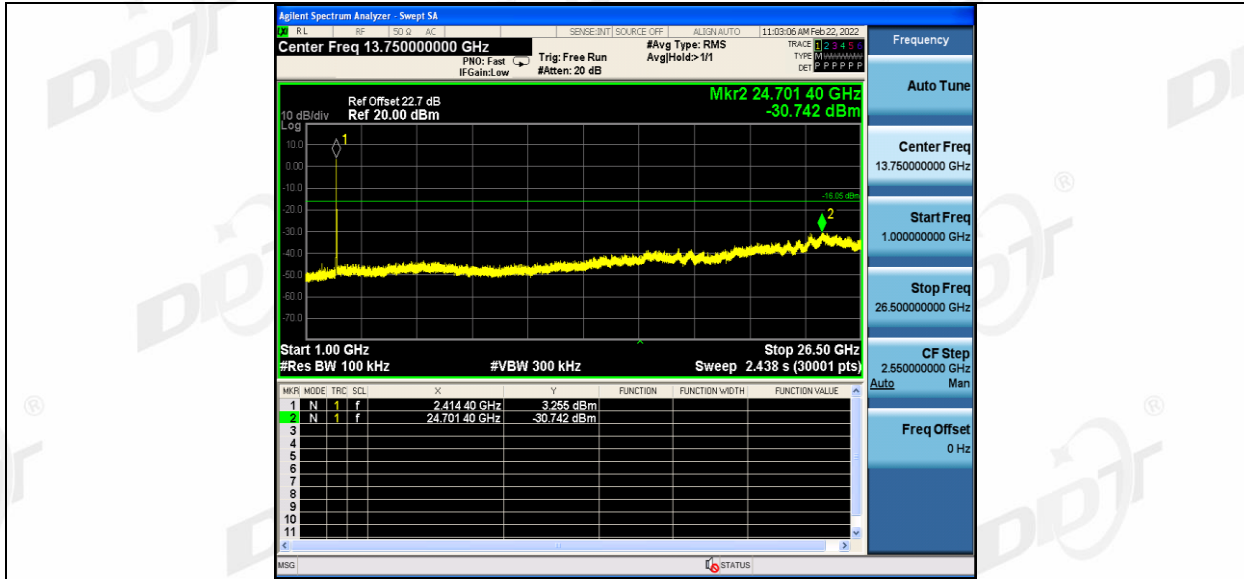

11G\_Ant2\_2412\_0~Reference



11G\_Ant2\_2412\_30~1000

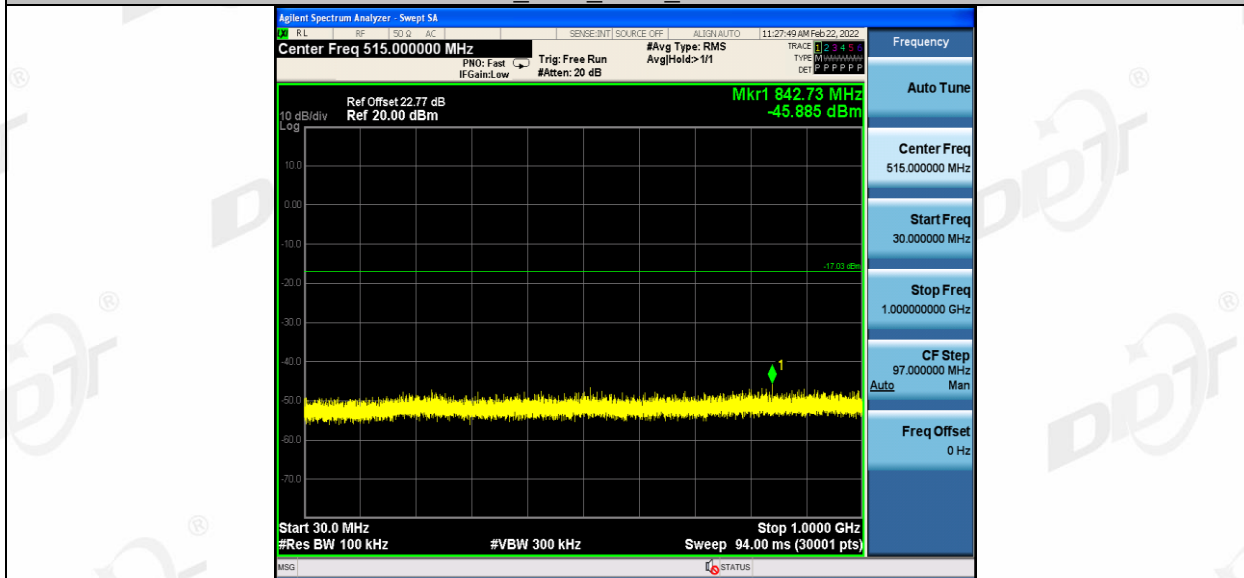


11G\_Ant2\_2412\_1000~26500




11G\_Ant1\_2437\_0~Reference



11G\_Ant1\_2437\_30~1000

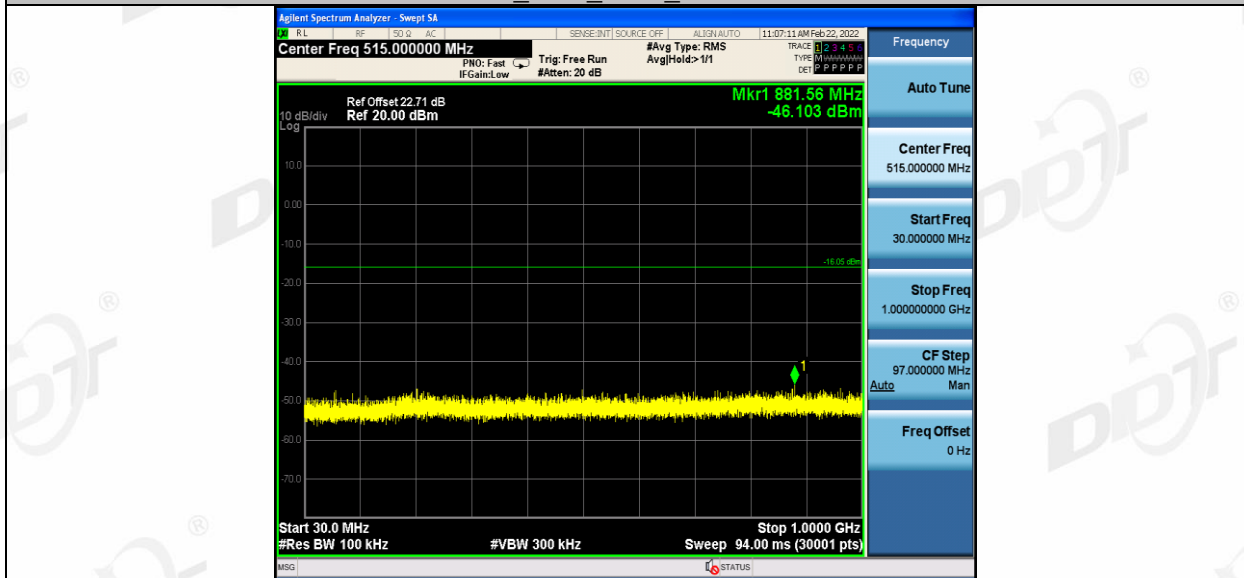


11G\_Ant1\_2437\_1000~26500

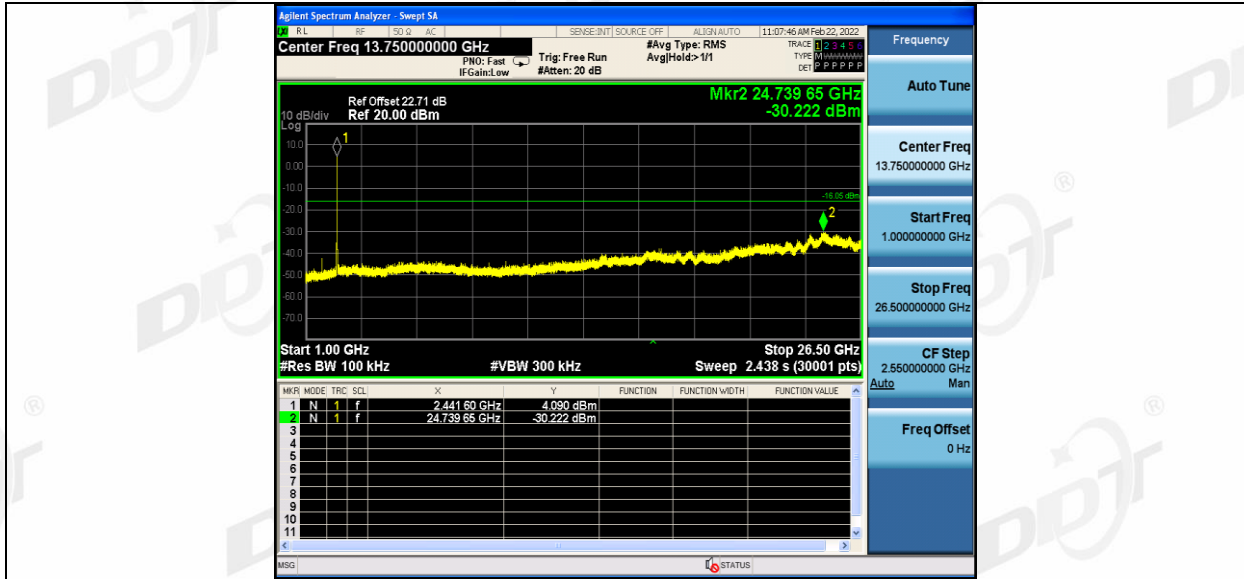

11G\_Ant2\_2437\_0~Reference




11G\_Ant2\_2437\_30~1000

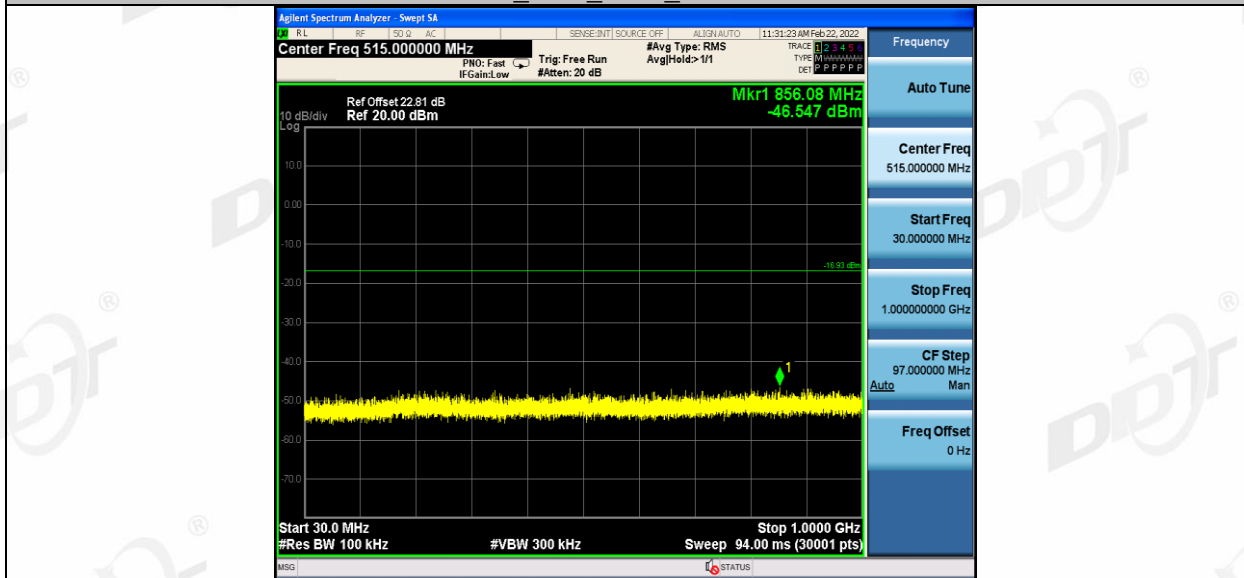

11G\_Ant2\_2437\_1000~26500




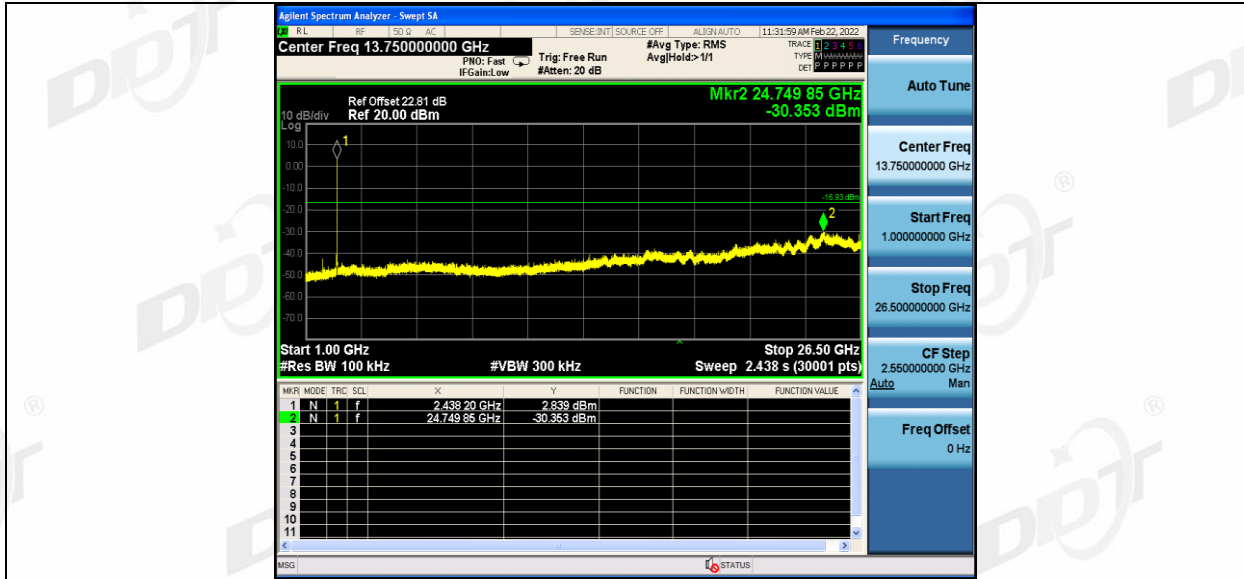


11G\_Ant1\_2462\_0~Reference



11G\_Ant1\_2462\_30~1000

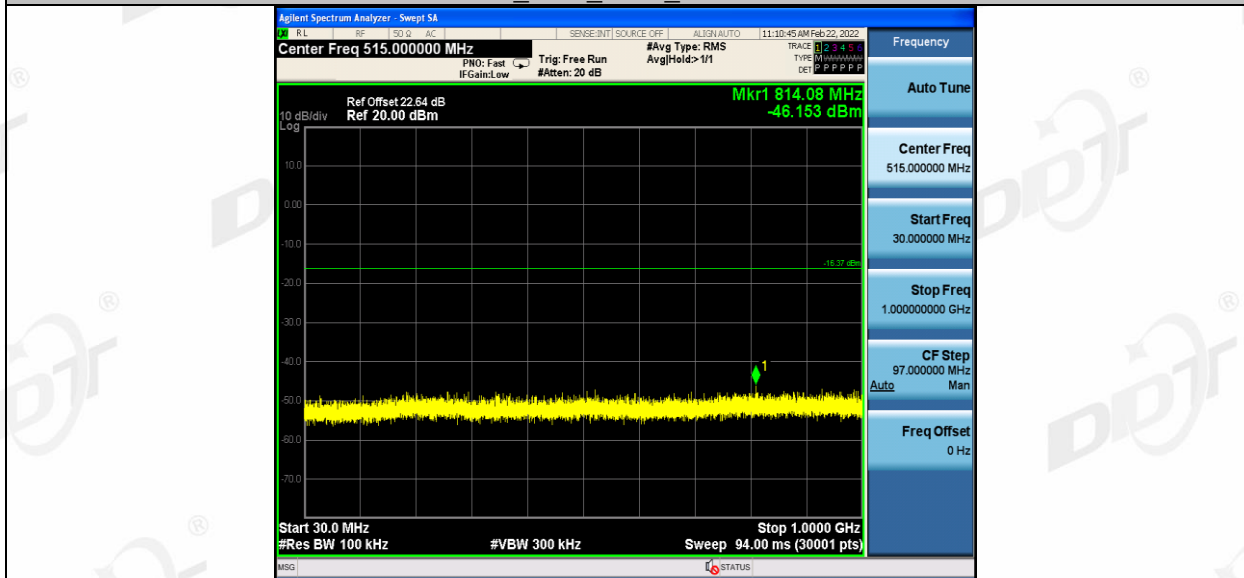


11G\_Ant1\_2462\_1000~26500

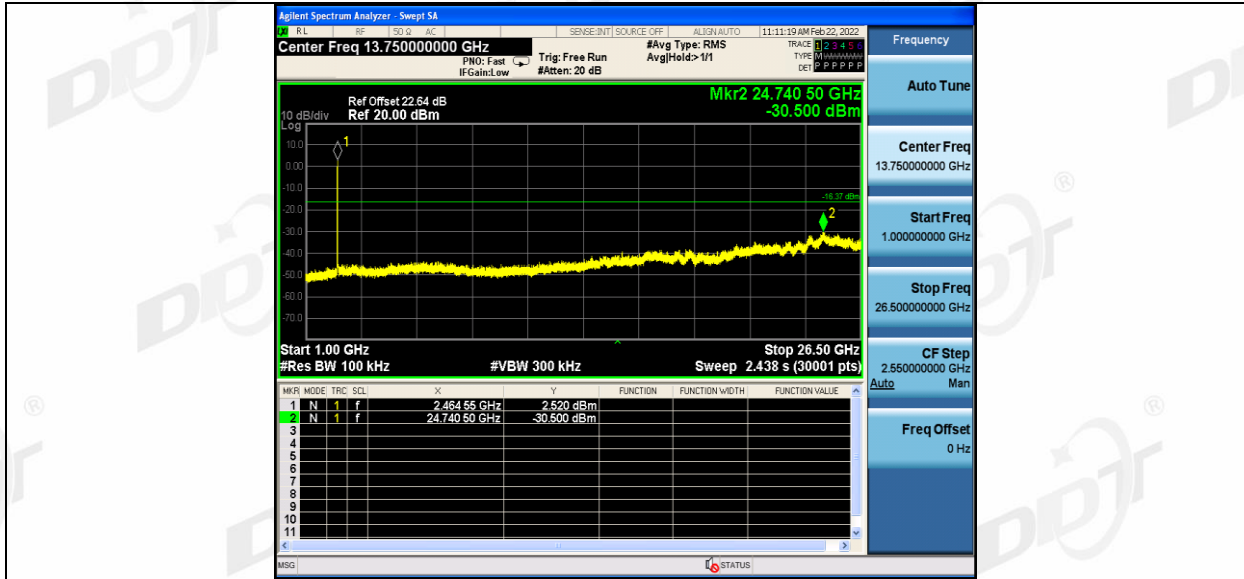


11G\_Ant2\_2462\_0~Reference




11G\_Ant2\_2462\_30~1000

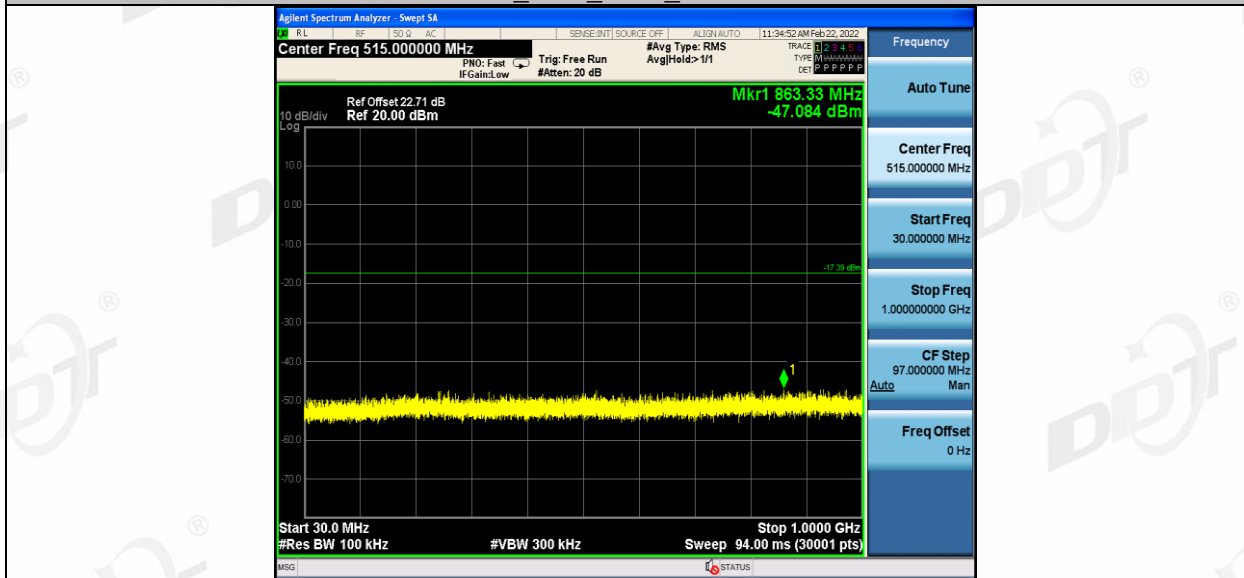


11G\_Ant2\_2462\_1000~26500

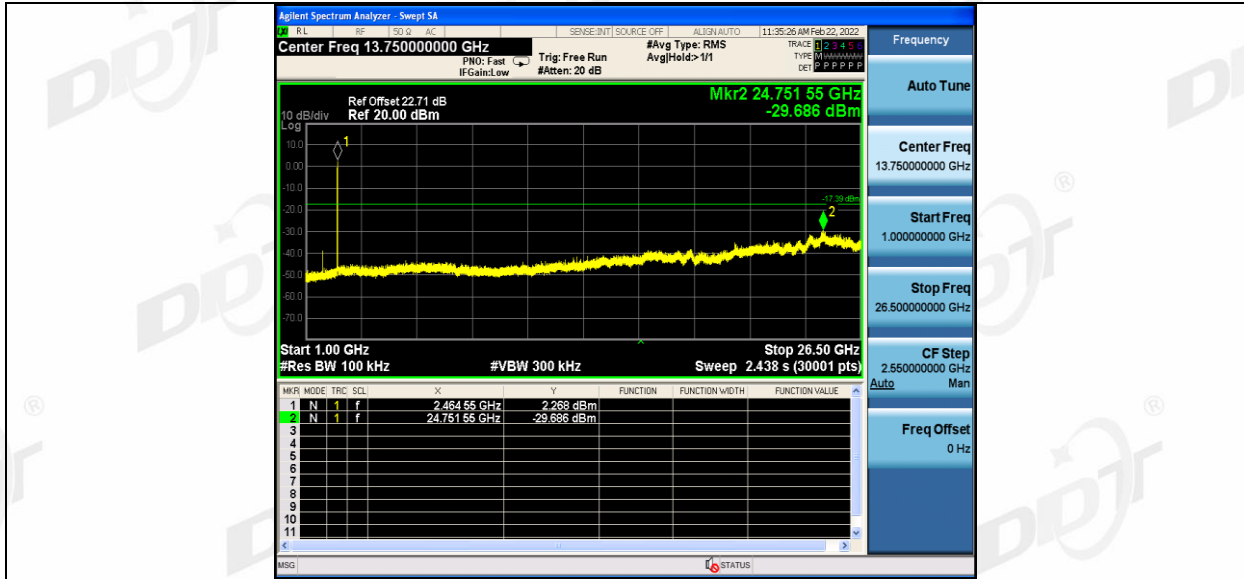

11N20MIMO\_Ant1\_2412\_0~Reference

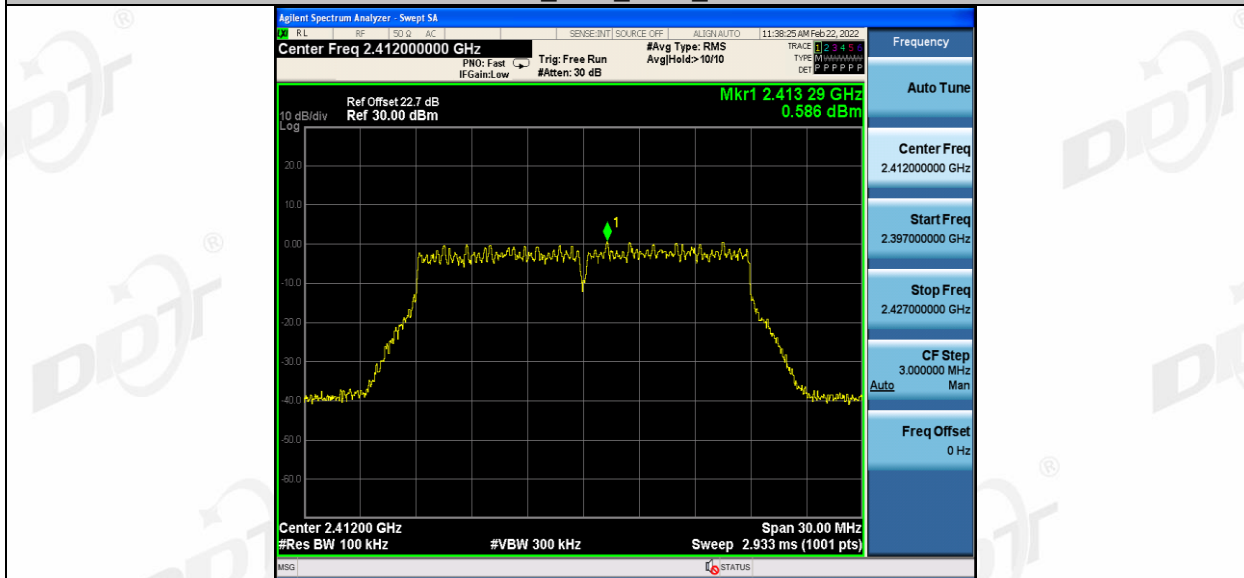


11N20MIMO\_Ant1\_2412\_30~1000

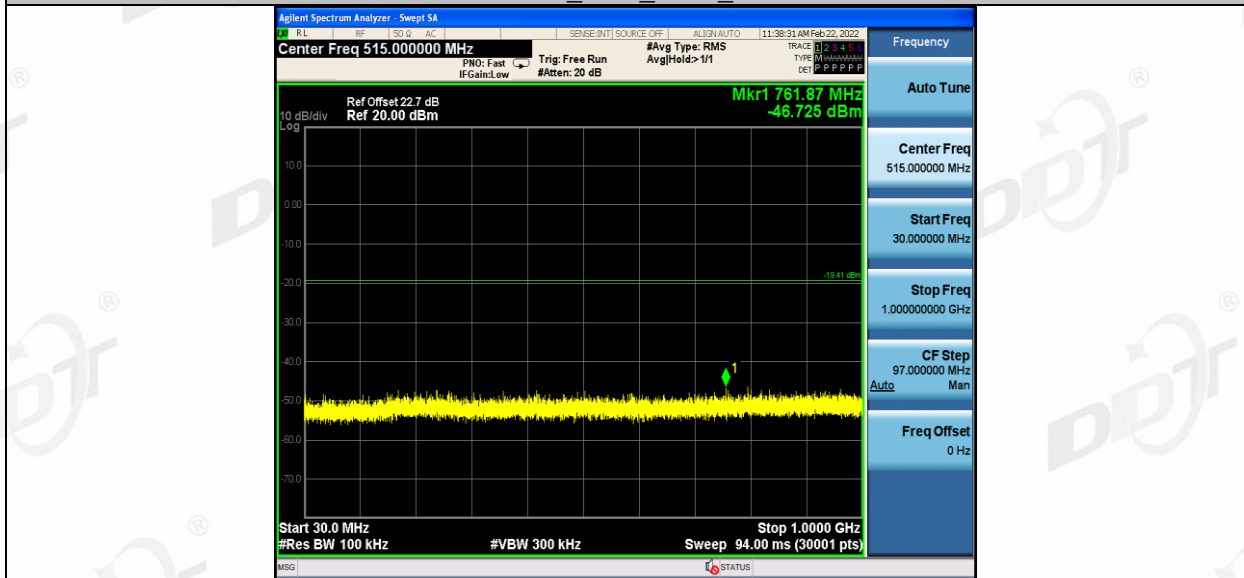

11N20MIMO\_Ant1\_2412\_1000~26500




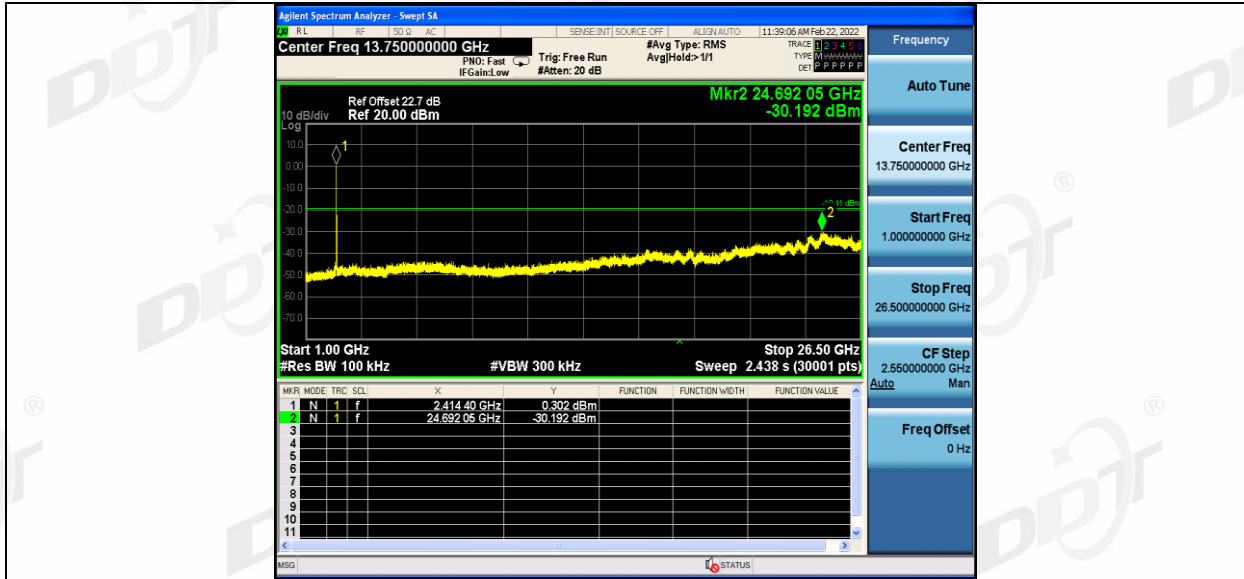


11N20MIMO\_Ant2\_2412\_0~Reference




11N20MIMO\_Ant2\_2412\_30~1000

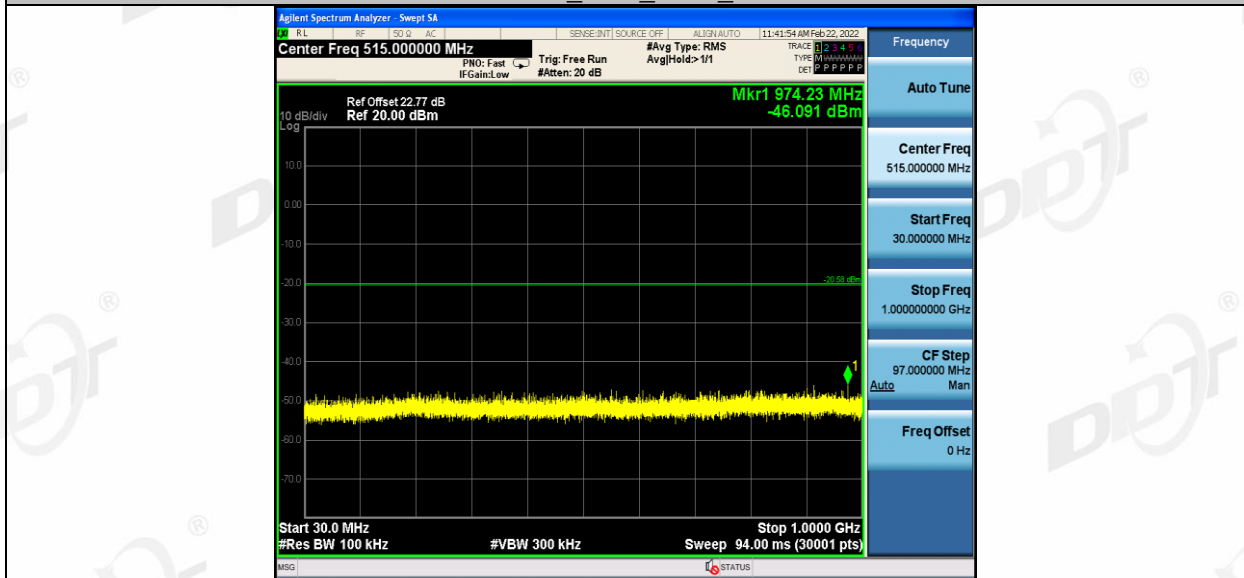


11N20MIMO\_Ant2\_2412\_1000~26500

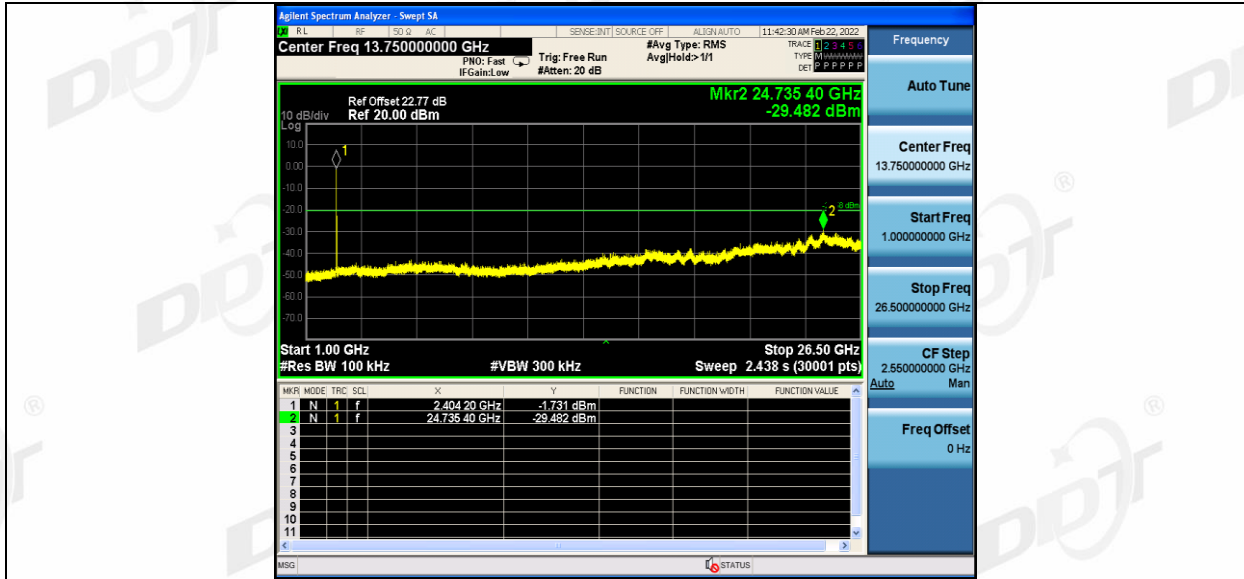


11N20MIMO\_Ant1\_2437\_0~Reference

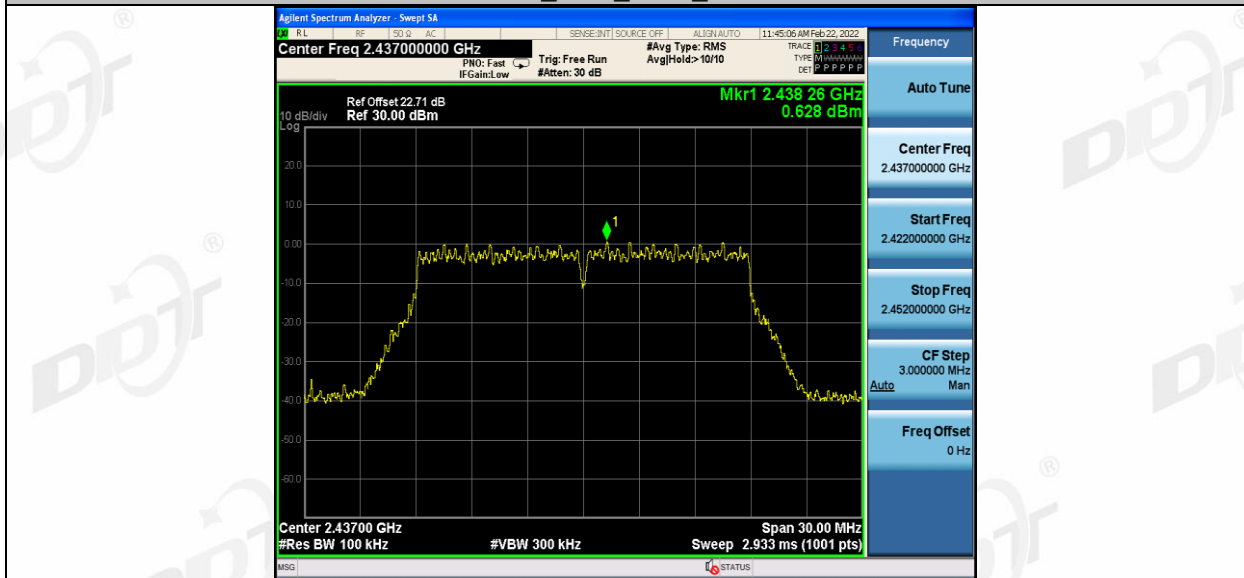


11N20MIMO\_Ant1\_2437\_30~1000

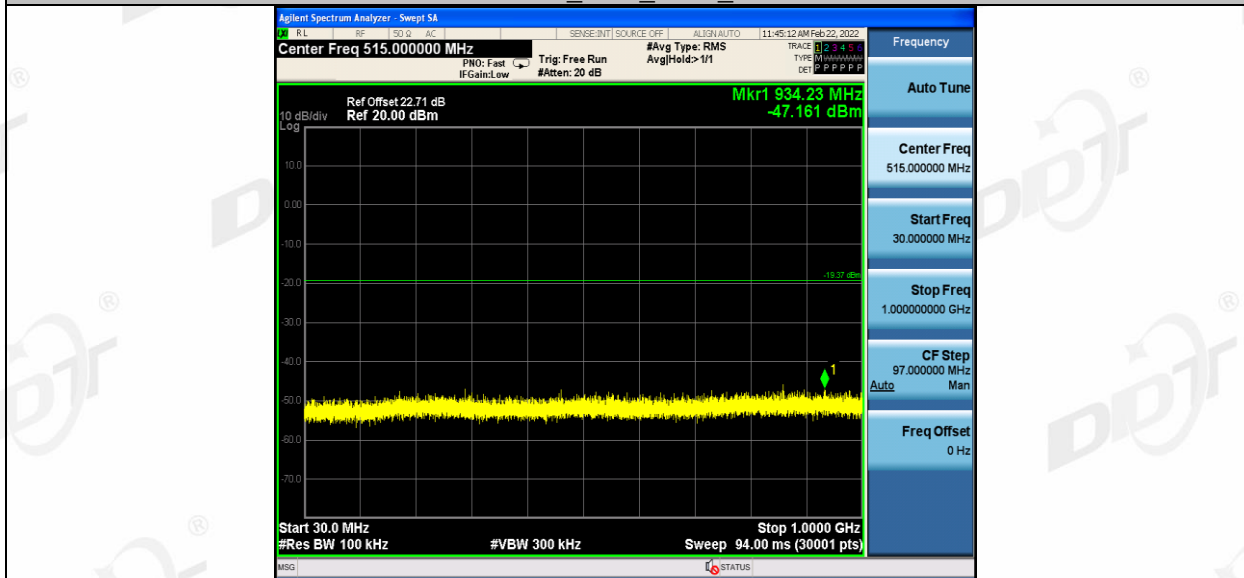


11N20MIMO\_Ant1\_2437\_1000~26500

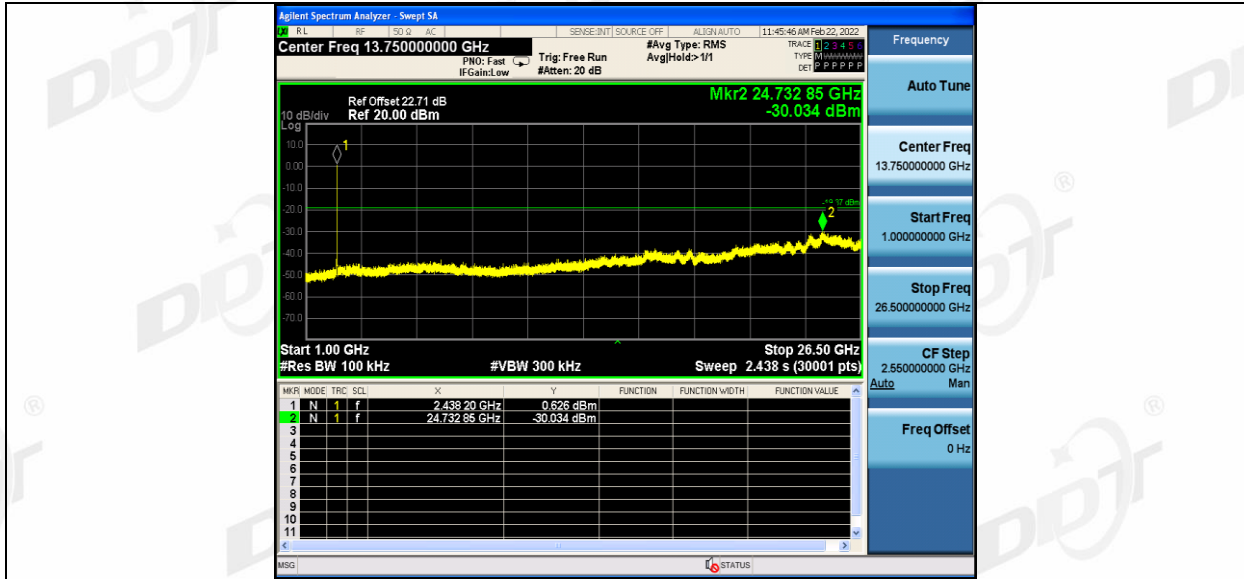

11N20MIMO\_Ant2\_2437\_0~Reference

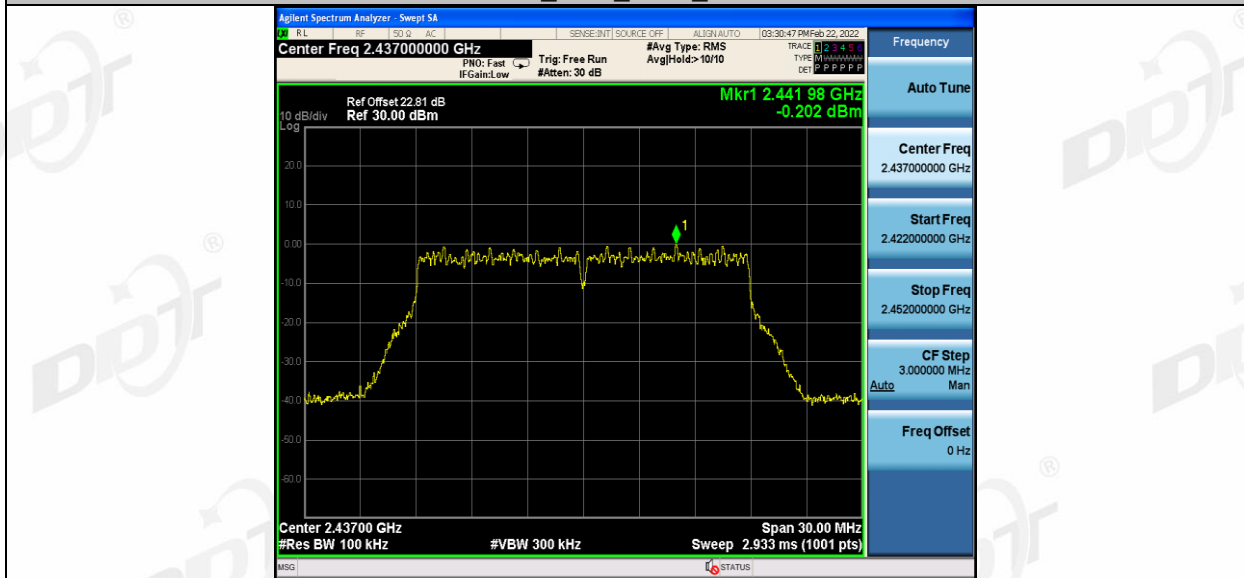


11N20MIMO\_Ant2\_2437\_30~1000

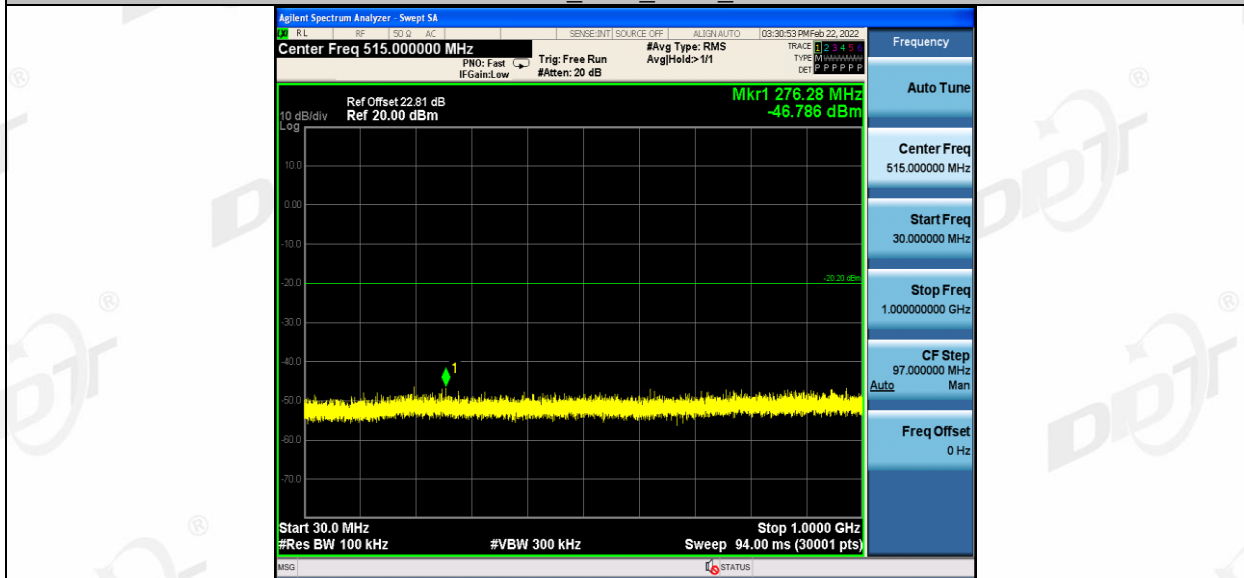


11N20MIMO\_Ant2\_2437\_1000~26500




11N20MIMO\_Ant1\_2462\_0~Reference

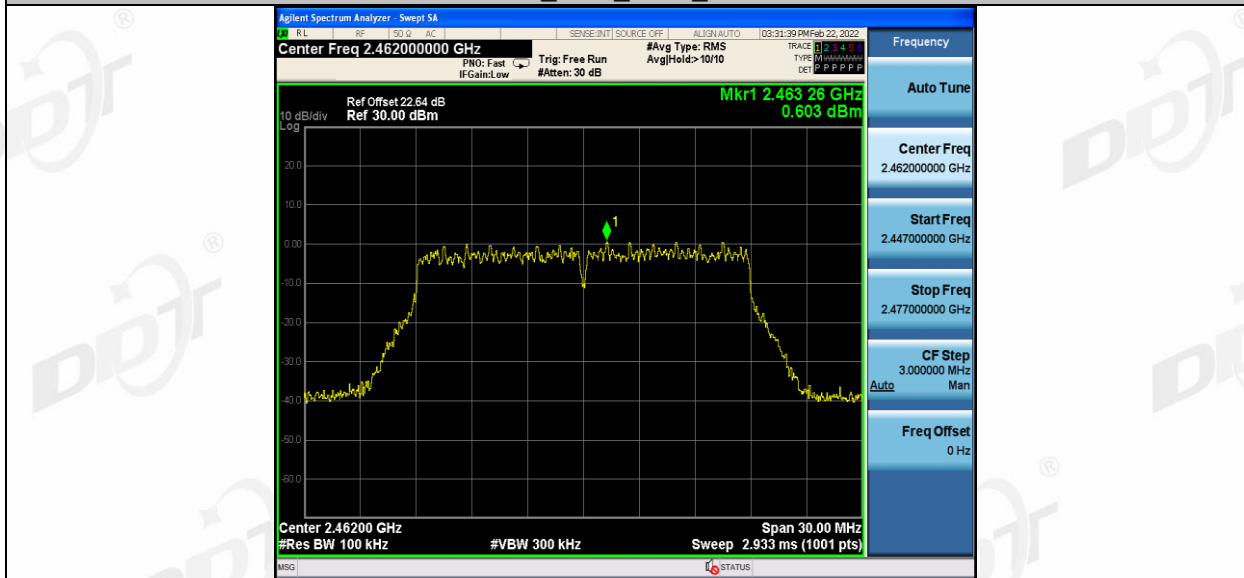


11N20MIMO\_Ant1\_2462\_30~1000

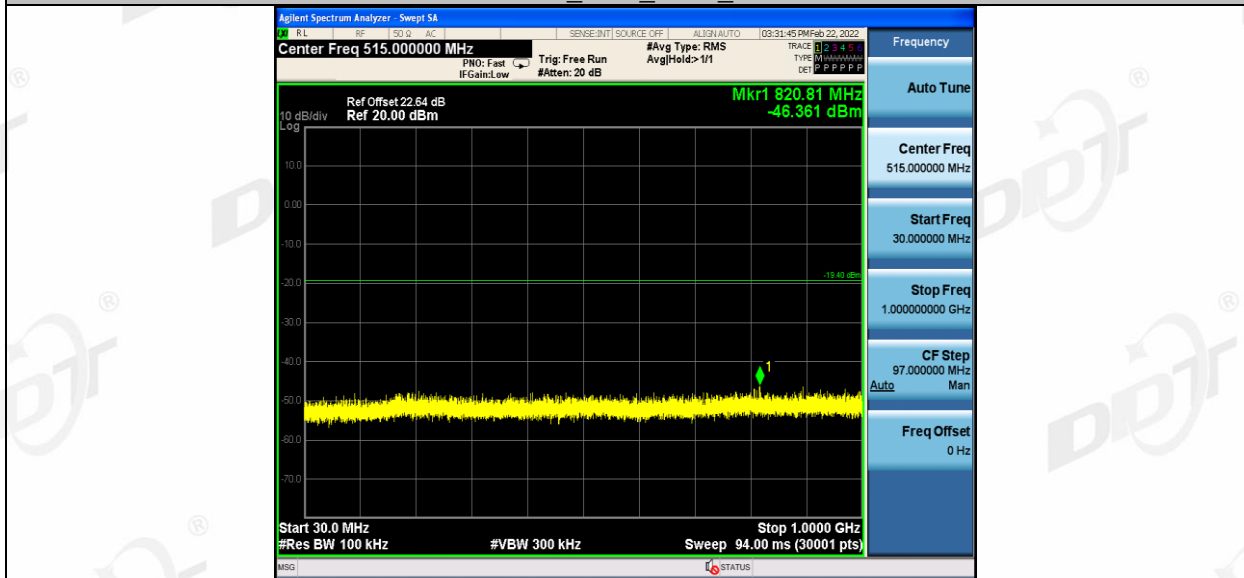


11N20MIMO\_Ant1\_2462\_1000~26500

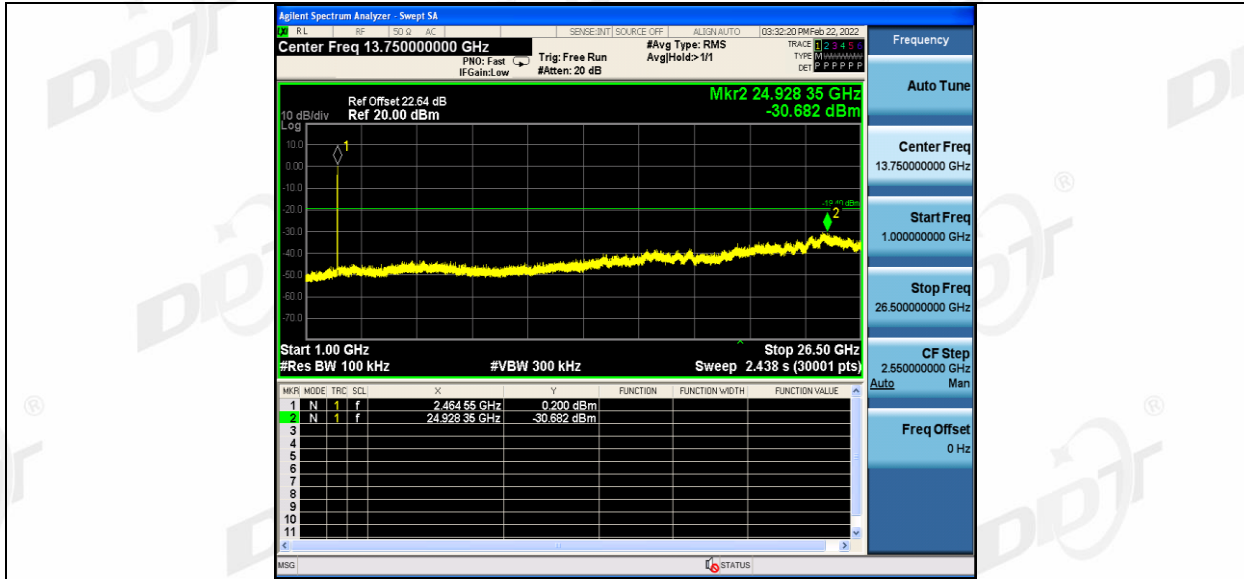

11N20MIMO\_Ant2\_2462\_0~Reference

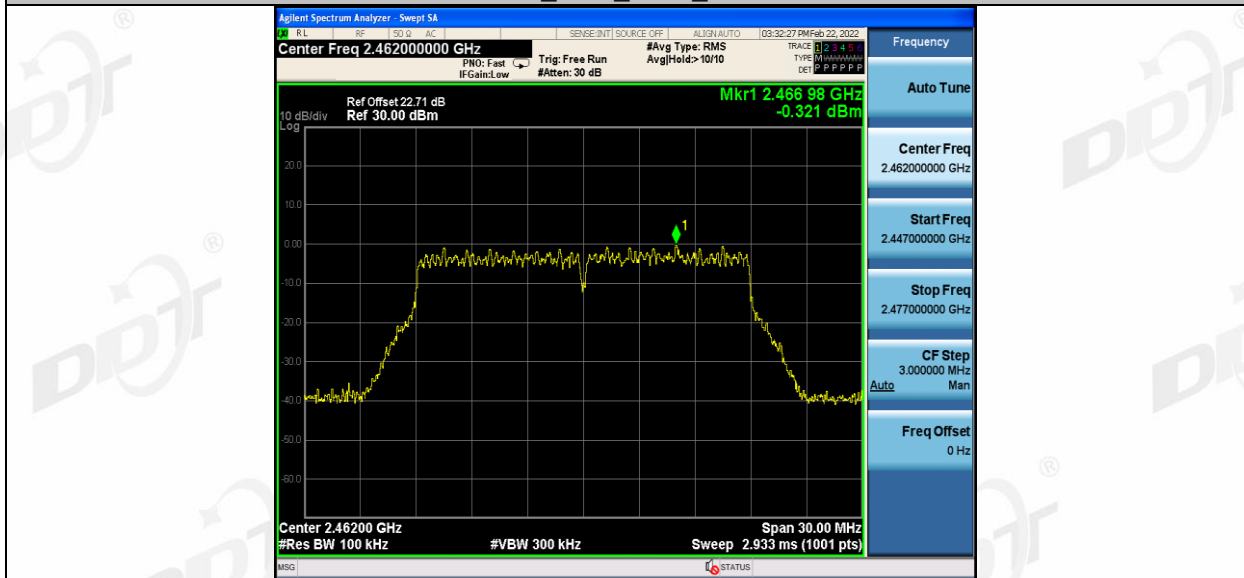

11N20MIMO\_Ant2\_2462\_30~1000

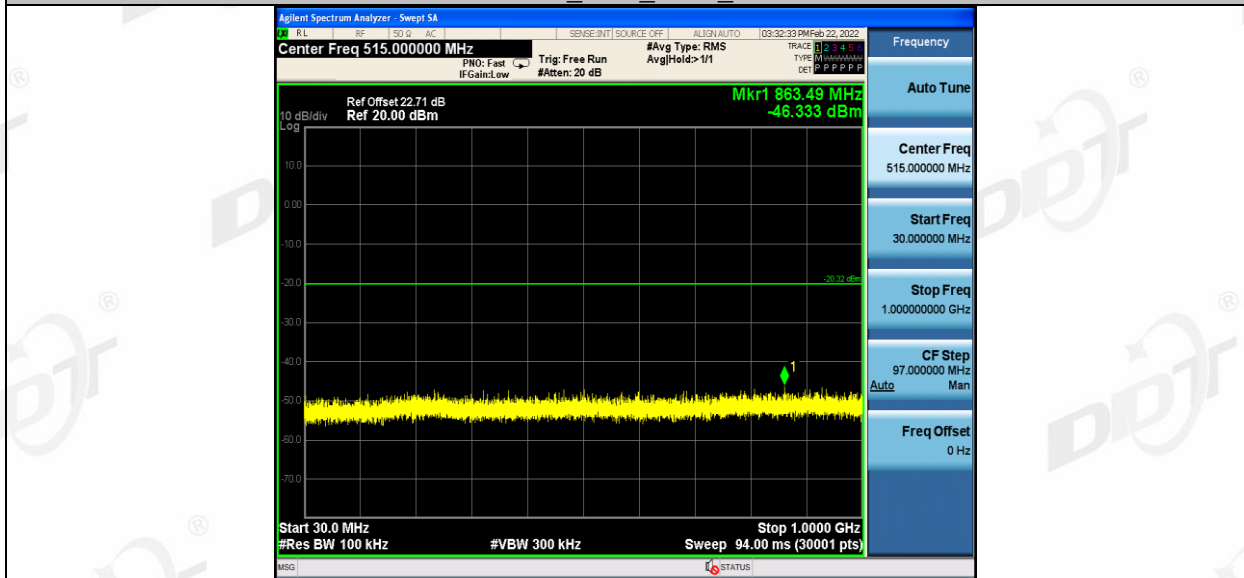


11N20MIMO\_Ant2\_2462\_1000~26500





## 10. Radiated Band Edge Compliance

### 10.1. Block diagram of test setup

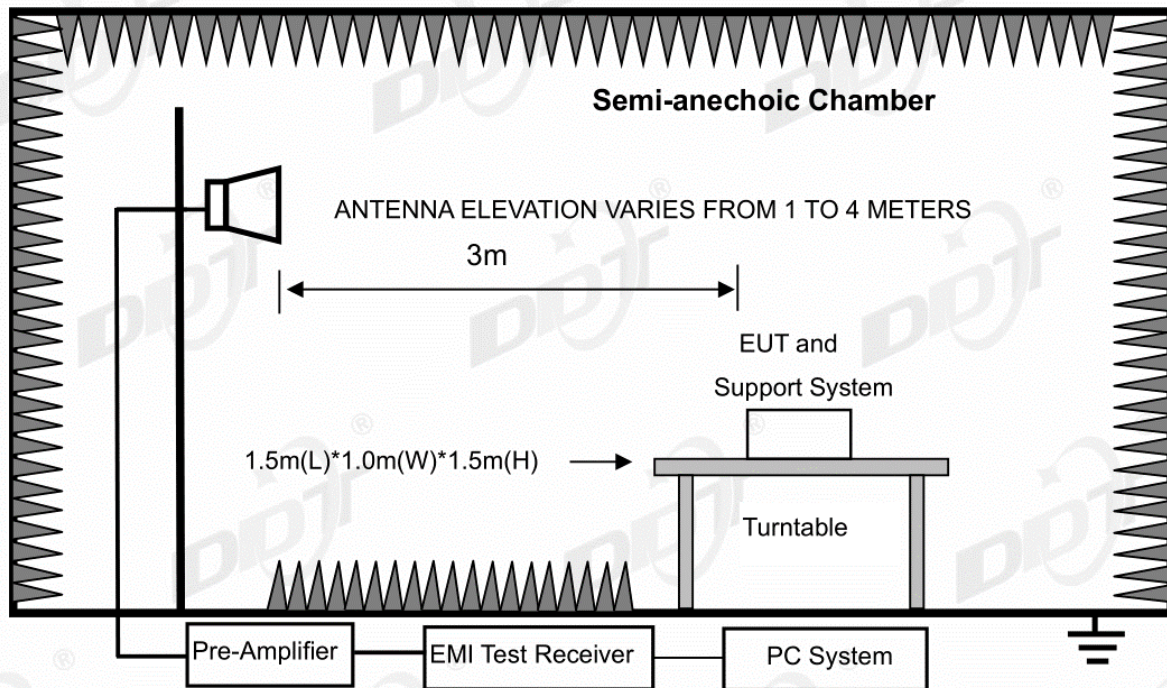

### 10.2. Limit

All restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation frequency band 2400 MHz to 2483.5 MHz shall be at least 20dB below the fundamental emissions or comply with RSS-Gen Issue 3 clause 7.2.5 (Same as FCC 15.209) limits.

### 10.3. Test Procedure

Same with clause 8.3 except change investigated frequency range from 2310 MHz to 2430 MHz and 2445 MHz to 2500 MHz.

Remark: All restriction band have been tested, and only the worst case is shown in report.

### 10.4. Test result

**Pass. (See below detailed test result)**

Note: All mode was tested and only the worst case of the ANT1 was recorded this report.

# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 3#

D:\2021 report data\Q21121003 9z9bJBL  
4305P\0113\FCC ABOVE 1G\FCC ABOVE  
1G\_00109.EMI

**Test Date** : 2022-02-21

**Tested By** : James Gan

**EUT** : STUDIO MONITOR

**Model Number** : 4305P


**Power Supply** : AC 120V/60Hz

**Test Mode** : Tx Mode

**Condition** : Temp:22.4°,Humi:50.4%,Press:100.6kPa

**Antenna/Distance** : 2021 BBHA 9120D 3#  
NEW/3m/HORIZONTAL

**Memo** : 11B 2412 ANT1

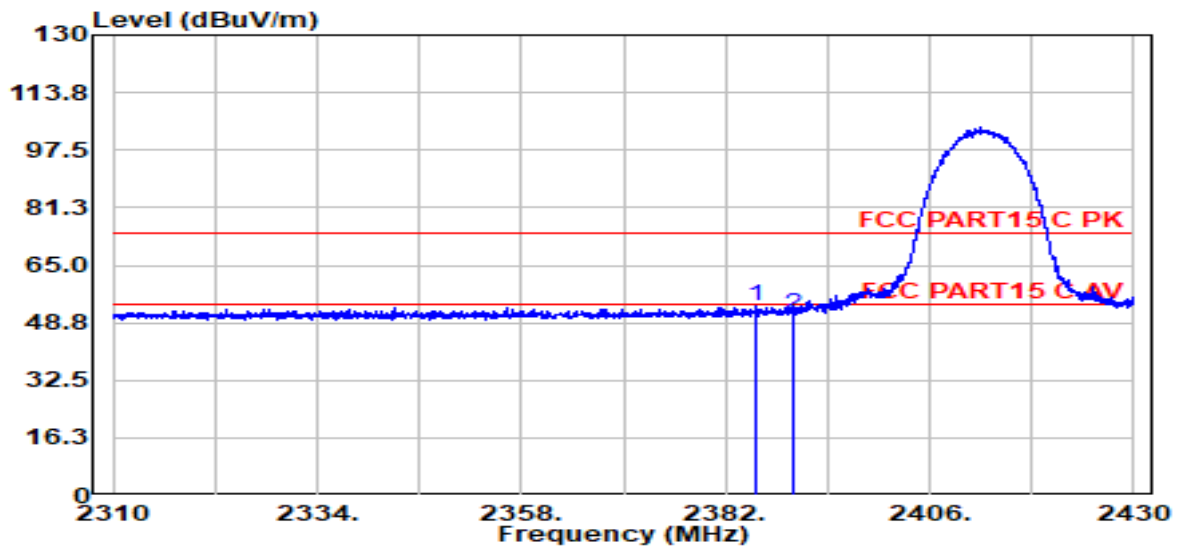

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	PRM Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2385.54	23.50	27.39	1.71	0.00	53.32	74.00	-20.68	Peak	HORIZONTAL
2	2390.00	21.05	27.40	1.71	0.00	50.88	74.00	-23.12	Peak	HORIZONTAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 3#

D:\2021 report data\Q21121003 9z9bJBL  
4305P\0113\FCC ABOVE 1G\FCC ABOVE  
1G\_00110.EMI

**Test Date** : 2022-02-21

**Tested By** : James Gan

**EUT** : STUDIO MONITOR


**Model Number** : 4305P

**Power Supply** : AC 120V/60Hz

**Test Mode** : Tx Mode

**Condition** : Temp:22.4°,Humi:50.4%,Press:100.6kPa **Antenna/Distance** : 2021 BBHA 9120D 3#  
NEW/3m/VERTICAL

**Memo** : 11B 2412 ANT1

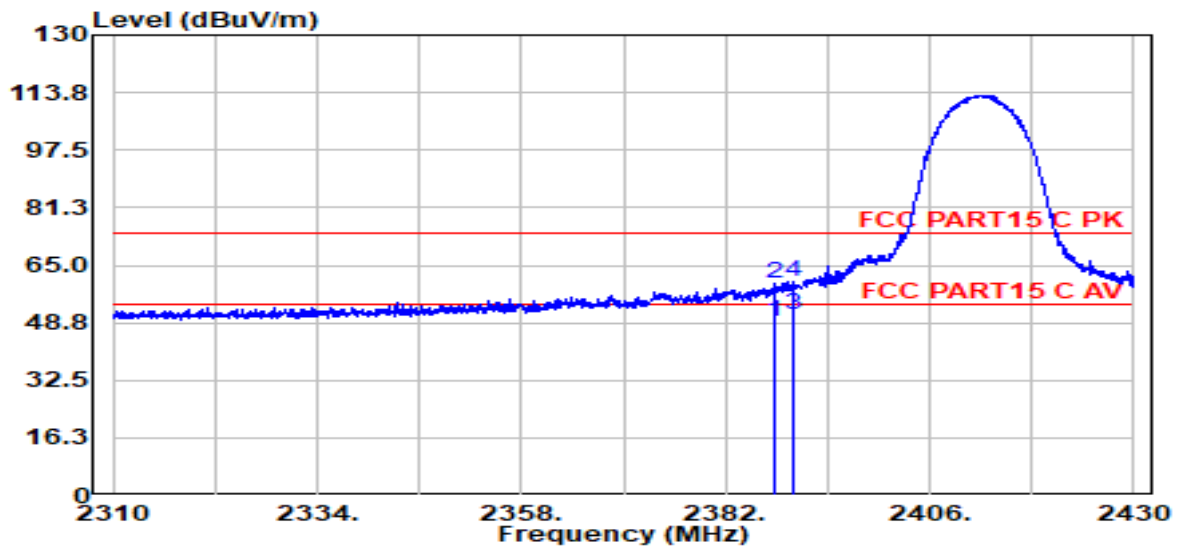

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	PRM Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2387.82	19.37	27.40	1.71	0.00	49.20	54.00	-4.80	Average	VERTICAL
2	2387.82	29.99	27.40	1.71	0.00	59.82	74.00	-14.18	Peak	VERTICAL
3	2390.00	21.06	27.40	1.71	0.00	50.89	54.00	-3.11	Average	VERTICAL
4	2390.00	30.34	27.40	1.71	0.00	60.17	74.00	-13.83	Peak	VERTICAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 3#

D:\2021 report data\Q21121003 9z9bJBL  
4305P\0113\FCC ABOVE 1G\FCC ABOVE  
1G\_00111.EMI

**Test Date** : 2022-02-21

**Tested By** : James Gan

**EUT** : STUDIO MONITOR


**Model Number** : 4305P

**Power Supply** : AC 120V/60Hz

**Test Mode** : Tx Mode

**Condition** : Temp:22.4°,Humi:50.4%,Press:100.6kPa **Antenna/Distance** : 2021 BBHA 9120D 3#  
NEW/3m/HORIZONTAL

**Memo** : 11B 2462 ANT1

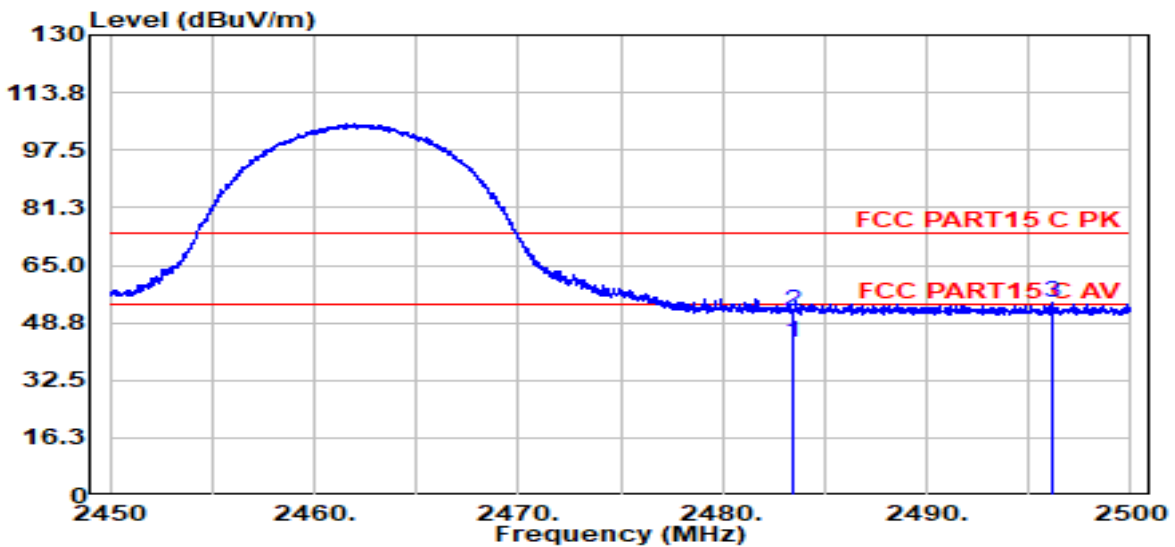

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	PRM Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	13.25	27.57	1.74	0.00	43.29	54.00	-10.71	Average	HORIZONTAL
2	2483.50	22.10	27.57	1.74	0.00	52.14	74.00	-21.86	Peak	HORIZONTAL
3	2496.10	24.23	27.59	1.74	0.00	54.29	74.00	-19.71	Peak	HORIZONTAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.



# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 3#

D:\2021 report data\Q21121003 9z9bJBL  
4305P\0113\FCC ABOVE 1G\FCC ABOVE  
1G\_00112.EMI

**Test Date** : 2022-02-21

**Tested By** : James Gan

**EUT** : STUDIO MONITOR


**Model Number** : 4305P

**Power Supply** : AC 120V/60Hz

**Test Mode** : Tx Mode

**Condition** : Temp:22.4°,Humi:50.4%,Press:100.6kPa **Antenna/Distance** : 2021 BBHA 9120D 3#  
NEW/3m/VERTICAL

**Memo** : 11B 2462 ANT1

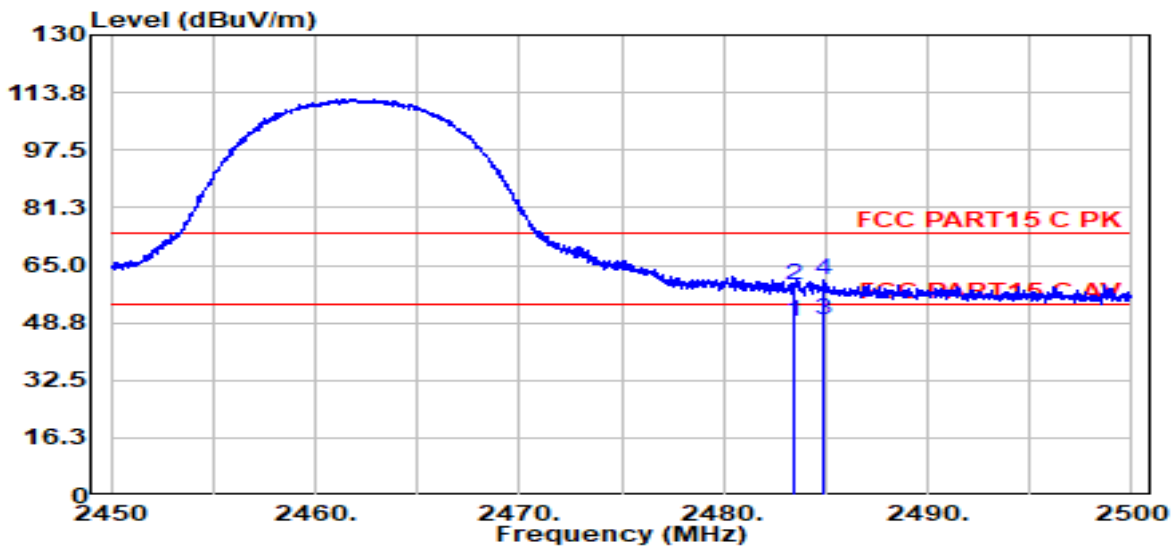

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	PRM Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	19.26	27.57	1.74	0.00	49.30	54.00	-4.70	Average	VERTICAL
2	2483.50	29.49	27.57	1.74	0.00	59.52	74.00	-14.48	Peak	VERTICAL
3	2484.90	19.69	27.57	1.74	0.00	49.73	54.00	-4.27	Average	VERTICAL
4	2484.90	30.74	27.57	1.74	0.00	60.79	74.00	-13.21	Peak	VERTICAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 3#

D:\2021 report data\Q21121003 9z9bJBL  
4305P\0113\FCC ABOVE 1G\FCC ABOVE  
1G\_00005.EMI

**Test Date** : 2022-02-16

**Tested By** : James Gan

**EUT** : STUDIO MONITOR

**Model Number** : 4305P


**Power Supply** : AC 120V/60Hz

**Test Mode** : Tx Mode

**Condition** : Temp:22.4°,Humi:50.4%,Press:100.6kPa

**Antenna/Distance** : 2021 BBHA 9120D 3#  
NEW/3m/HORIZONTAL

**Memo** : 11G 2412 ANT1

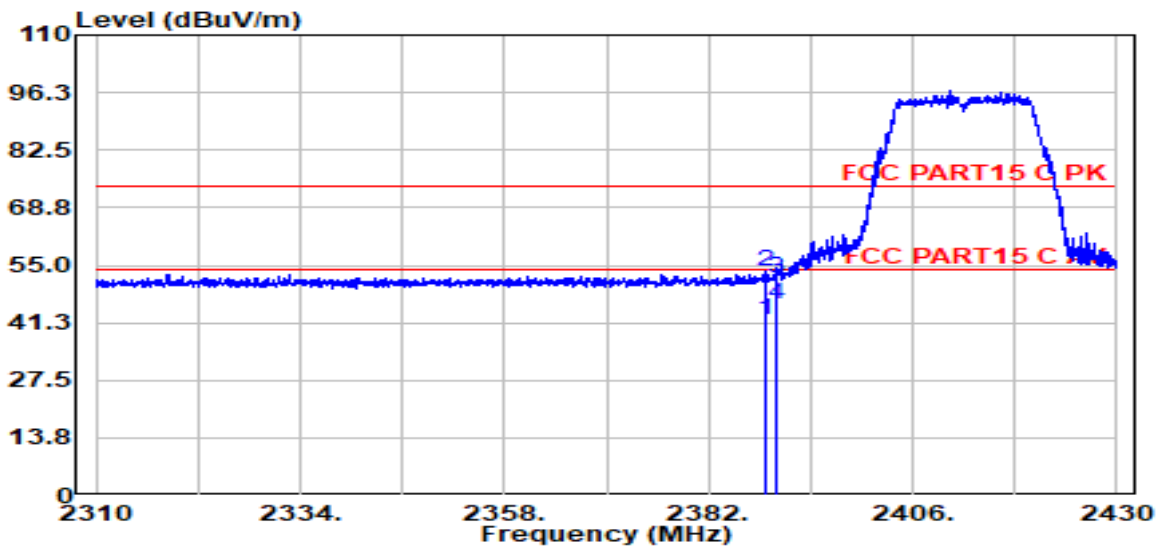

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	PRM Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2388.78	12.11	27.40	1.71	0.00	41.94	54.00	-12.06	Average	HORIZONTAL
2	2388.78	23.53	27.40	1.71	0.00	53.36	74.00	-20.64	Peak	HORIZONTAL
3	2390.00	22.11	27.40	1.71	0.00	51.94	74.00	-22.06	Peak	HORIZONTAL
4	2390.00	15.76	27.40	1.71	0.00	45.59	54.00	-8.41	Average	HORIZONTAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 3#

D:\2021 report data\Q21121003 9z9bJBL  
4305P\0113\FCC ABOVE 1G\FCC ABOVE  
1G\_00006.EMI

**Test Date** : 2022-02-16

**Tested By** : James Gan

**EUT** : STUDIO MONITOR


**Model Number** : 4305P

**Power Supply** : AC 120V/60Hz

**Test Mode** : Tx Mode

**Condition** : Temp:22.4°,Humi:50.4%,Press:100.6kPa **Antenna/Distance** : 2021 BBHA 9120D 3#  
NEW/3m/VERTICAL

**Memo** : 11G 2412 ANT1

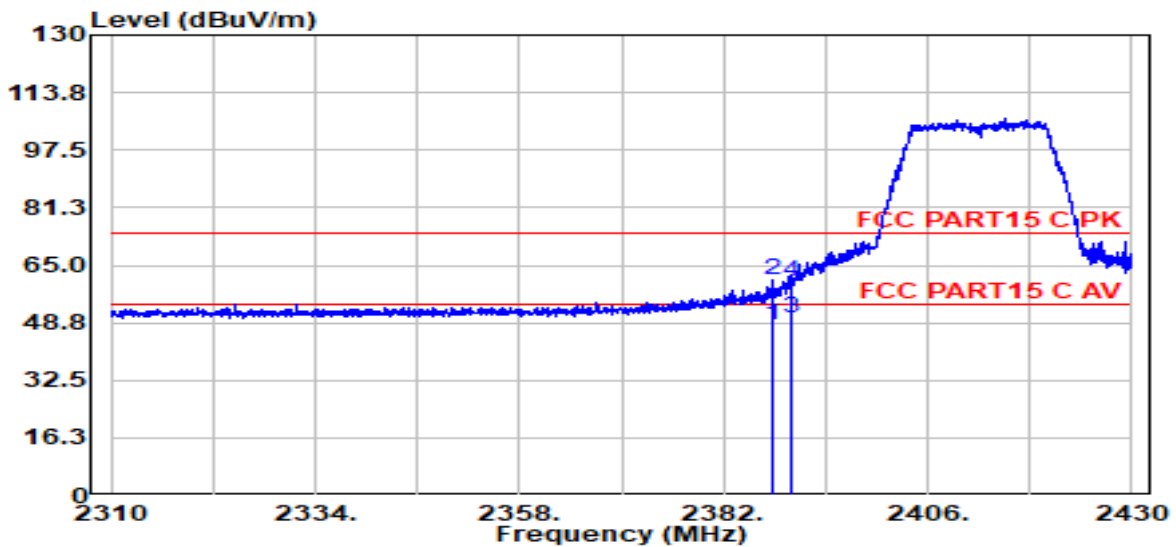

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	PRM Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2387.88	18.28	27.40	1.71	0.00	48.11	54.00	-5.89	Average	VERTICAL
2	2387.88	31.06	27.40	1.71	0.00	60.89	74.00	-13.11	Peak	VERTICAL
3	2390.00	20.27	27.40	1.71	0.00	50.10	54.00	-3.90	Average	VERTICAL
4	2390.00	30.56	27.40	1.71	0.00	60.39	74.00	-13.61	Peak	VERTICAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 3#

D:\2021 report data\Q21121003 9z9bJBL  
4305P\0113\FCC ABOVE 1G\FCC ABOVE  
1G\_00007.EMI

**Test Date** : 2022-02-16

**Tested By** : James Gan

**EUT** : STUDIO MONITOR


**Model Number** : 4305P

**Power Supply** : AC 120V/60Hz

**Test Mode** : Tx Mode

**Condition** : Temp:22.4°,Humi:50.4%,Press:100.6kPa **Antenna/Distance** : 2021 BBHA 9120D 3#  
NEW/3m/HORIZONTAL

**Memo** : 11G 2462 Ant1

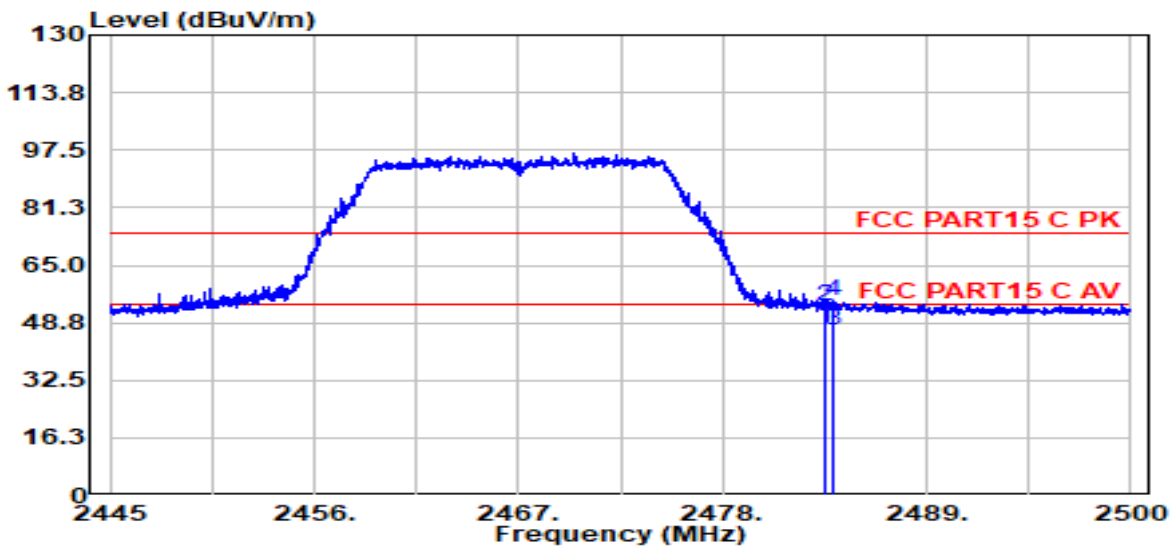

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	PRM Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	17.73	27.57	1.74	0.00	47.77	54.00	-6.23	Average	HORIZONTAL
2	2483.50	23.63	27.57	1.74	0.00	53.67	74.00	-20.33	Peak	HORIZONTAL
3	2483.94	16.66	27.57	1.74	0.00	46.70	54.00	-7.30	Average	HORIZONTAL
4	2483.94	25.13	27.57	1.74	0.00	55.17	74.00	-18.83	Peak	HORIZONTAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 3#

D:\2021 report data\Q21121003 9z9bJBL  
4305P\0113\FCC ABOVE 1G\FCC ABOVE  
1G\_00008.EMI

**Test Date** : 2022-02-16

**Tested By** : James Gan

**EUT** : STUDIO MONITOR


**Model Number** : 4305P

**Power Supply** : AC 120V/60Hz

**Test Mode** : Tx Mode

**Condition** : Temp:22.4°,Humi:50.4%,Press:100.6kPa **Antenna/Distance** : 2021 BBHA 9120D 3#  
NEW/3m/VERTICAL

**Memo** : 11G 2462 Ant1

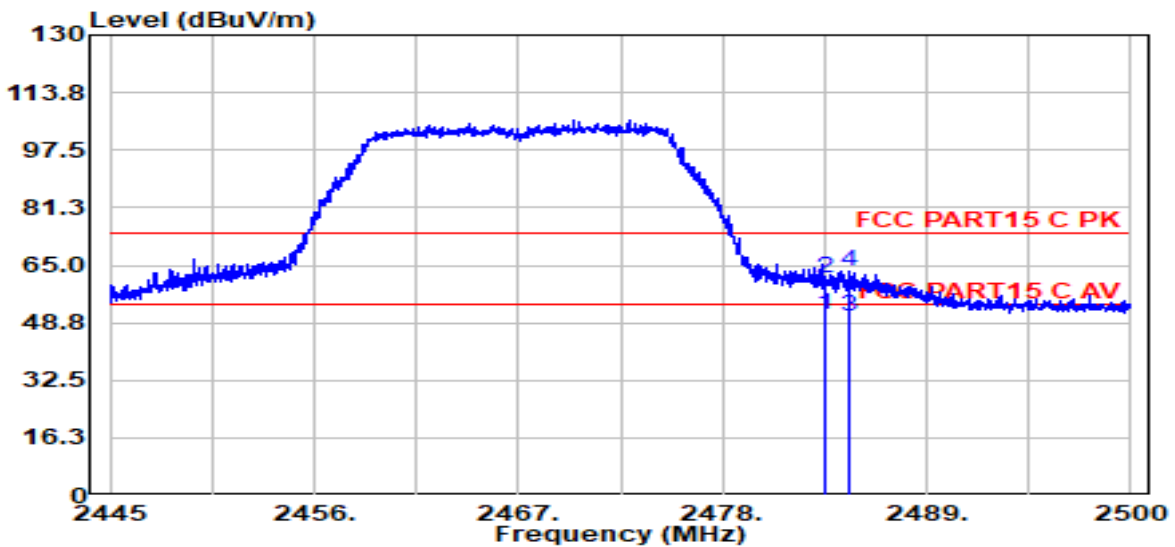

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	PRM Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	20.90	27.57	1.74	0.00	50.94	54.00	-3.06	Average	VERTICAL
2	2483.50	31.09	27.57	1.74	0.00	61.13	74.00	-12.87	Peak	VERTICAL
3	2484.82	20.65	27.57	1.74	0.00	50.69	54.00	-3.31	Average	VERTICAL
4	2484.82	33.36	27.57	1.74	0.00	63.40	74.00	-10.60	Peak	VERTICAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.



# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 3#

D:\2021 report data\Q21121003 9z9bJBL  
4305P\0113\FCC ABOVE 1G\FCC ABOVE  
1G\_00001.EMI

**Test Date** : 2022-02-16

**Tested By** : James Gan

**EUT** : STUDIO MONITOR


**Model Number** : 4305P

**Power Supply** : AC 120V/60Hz

**Test Mode** : Tx Mode

**Condition** : Temp:22.4°,Humi:50.4%,Press:100.6kPa **Antenna/Distance** : 2021 BBHA 9120D 3#  
NEW/3m/HORIZONTAL

**Memo** : 11N20 2412 Ant1

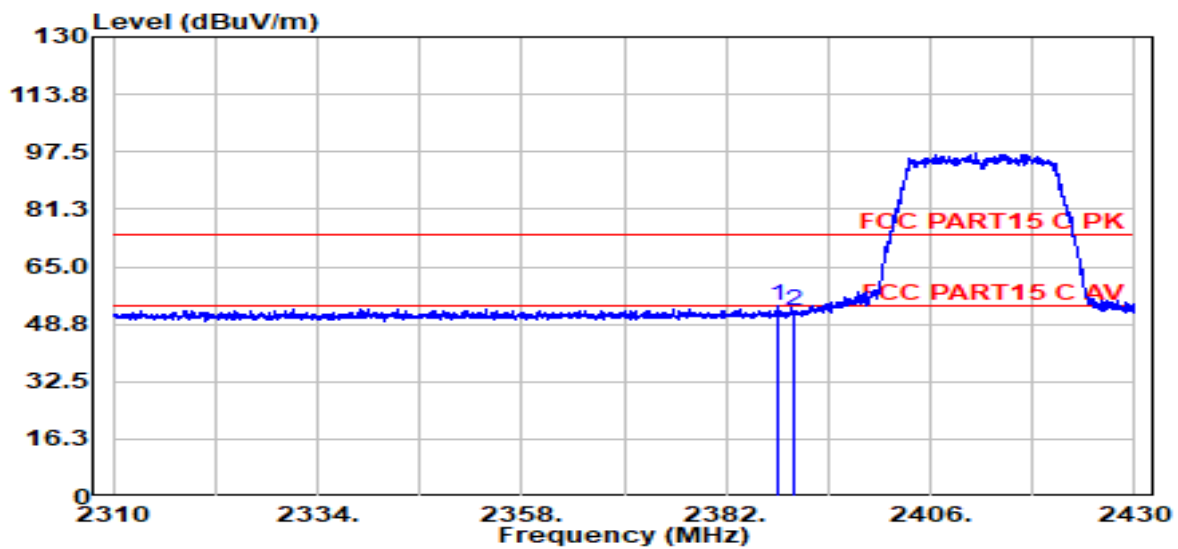

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	PRM Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2388.18	24.02	27.40	1.71	0.00	53.85	74.00	-20.15	Peak	HORIZONTAL
2	2390.00	22.57	27.40	1.71	0.00	52.40	74.00	-21.60	Peak	HORIZONTAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 3#

D:\2021 report data\Q21121003 9z9bJBL  
4305P\0113\FCC ABOVE 1G\FCC ABOVE  
1G\_00002.EMI

**Test Date** : 2022-02-16

**Tested By** : James Gan

**EUT** : STUDIO MONITOR


**Model Number** : 4305P

**Power Supply** : AC 120V/60Hz

**Test Mode** : Tx Mode

**Condition** : Temp:22.4°,Humi:50.4%,Press:100.6kPa **Antenna/Distance** : 2021 BBHA 9120D 3#  
NEW/3m/VERTICAL

**Memo** : 11N20 2412 Ant1

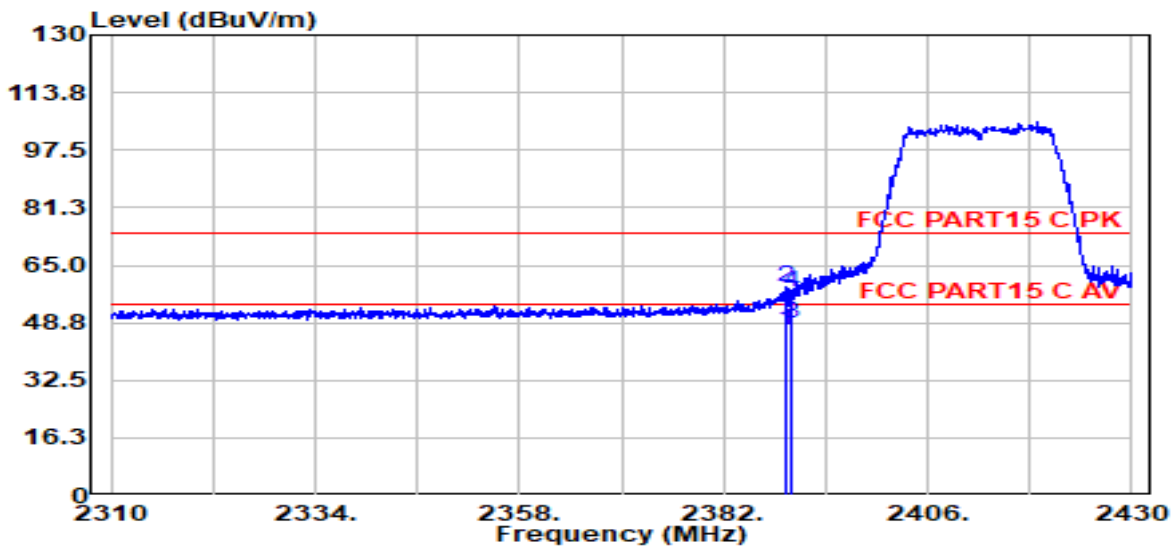

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	PRM Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2389.26	16.81	27.40	1.71	0.00	46.64	54.00	-7.36	Average	VERTICAL
2	2389.26	29.24	27.40	1.71	0.00	59.08	74.00	-14.92	Peak	VERTICAL
3	2390.00	18.56	27.40	1.71	0.00	48.39	54.00	-5.61	Average	VERTICAL
4	2390.00	27.62	27.40	1.71	0.00	57.46	74.00	-16.54	Peak	VERTICAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 3#

D:\2021 report data\Q21121003 9z9bJBL  
4305P\0113\FCC ABOVE 1G\FCC ABOVE  
1G\_00003.EMI

**Test Date** : 2022-02-16

**Tested By** : James Gan

**EUT** : STUDIO MONITOR


**Model Number** : 4305P

**Power Supply** : AC 120V/60Hz

**Test Mode** : Tx Mode

**Condition** : Temp:22.4°,Humi:50.4%,Press:100.6kPa **Antenna/Distance** : 2021 BBHA 9120D 3#  
NEW/3m/HORIZONTAL

**Memo** : 11N20 2462 Ant1

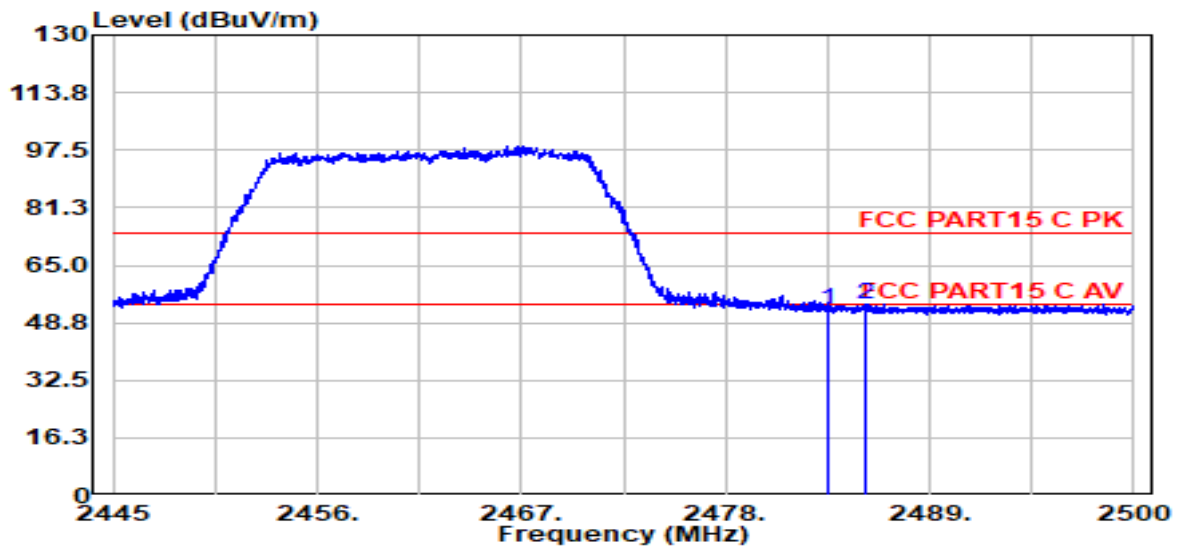

Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	PRM Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	22.57	27.57	1.74	0.00	52.61	74.00	-21.39	Peak	HORIZONTAL
2	2485.56	23.99	27.57	1.74	0.00	54.03	74.00	-19.97	Peak	HORIZONTAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

# TR-4-E-009 Radiated Emission Test Result

**Test Site** : DDT 3m Chamber 3#

D:\2021 report data\Q21121003 9z9bJBL  
4305P\0113\FCC ABOVE 1G\FCC ABOVE  
1G\_00004.EMI

**Test Date** : 2022-02-16

**Tested By** : James Gan

**EUT** : STUDIO MONITOR


**Model Number** : 4305P

**Power Supply** : AC 120V/60Hz

**Test Mode** : Tx Mode

**Condition** : Temp:22.4°,Humi:50.4%,Press:100.6kPa **Antenna/Distance** : 2021 BBHA 9120D 3#  
NEW/3m/VERTICAL

**Memo** : 11N20 2462 Ant1

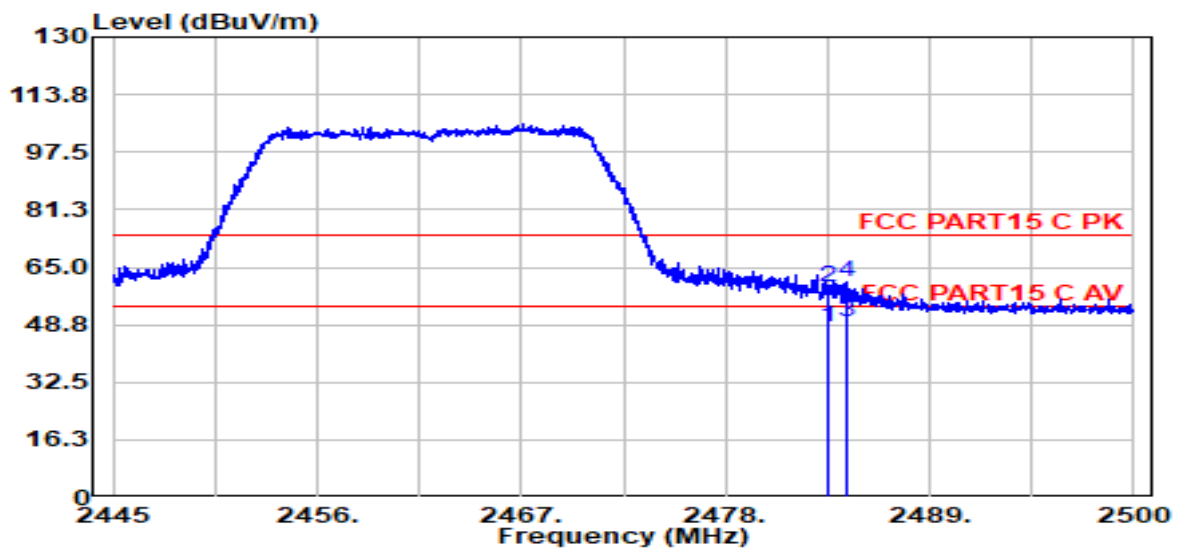


Item (Mark)	Freq. (MHz)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	PRM Factor (dB)	Result Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Detector	Polarization
1	2483.50	18.14	27.57	1.74	0.00	48.18	54.00	-5.82	Average	VERTICAL
2	2483.50	29.12	27.57	1.74	0.00	59.16	74.00	-14.84	Peak	VERTICAL
3	2484.60	19.27	27.57	1.74	0.00	49.31	54.00	-4.69	Average	VERTICAL
4	2484.60	30.84	27.57	1.74	0.00	60.88	74.00	-13.12	Peak	VERTICAL

Note:

1. Result Level = Read Level + Antenna Factor + Cable loss - PRM Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

## 11. Power Line Conducted Emission

### 11.1. Block diagram of test setup

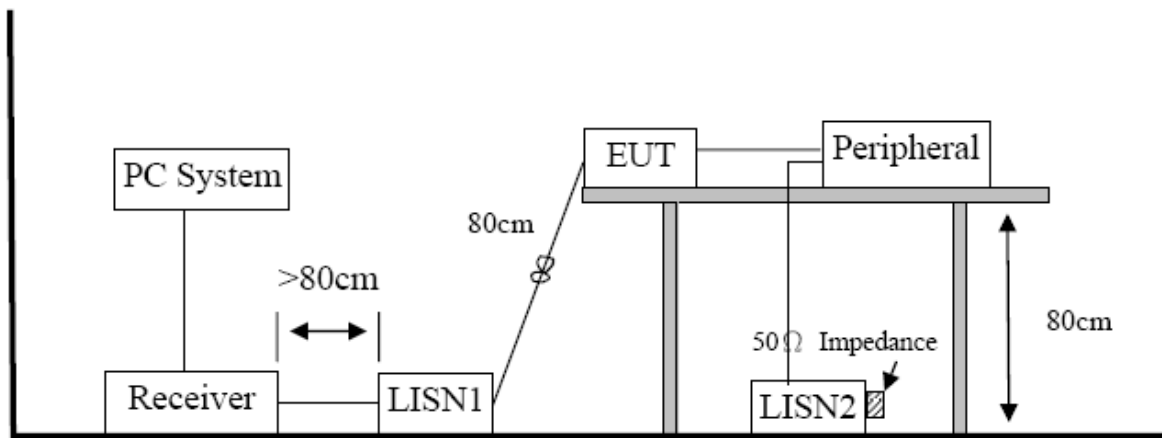

### 11.2. Power Line Conducted Emission Limits (Class B)

Frequency	Quasi-Peak Level dB( $\mu$ V)	Average Level dB( $\mu$ V)
150 kHz ~ 500 kHz	66 ~ 56*	56 ~ 46*
500 kHz ~ 5 MHz	56	46
5 MHz ~ 30 MHz	60	50

Note 1: \* Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

### 11.3. Test Procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.



A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 kHz.

#### 11.4. Test Result

**Pass. (See below detailed test result)**


Note1: All emissions not reported below are too low against the prescribed limits.

Note2: "----" means peak detection; "----" means average detection

Note3: Pre-test AC conducted emission at both voltage AC 120V/60Hz and AC 240V/60Hz, recorded worse case.

# TR-4-E-010 Conducted Emission Test Result

**Test Site** : DDT 1# Shield Room D:\2022 CE report date\Q21121003-2E 4305P\FCC .EM6  
**Test Date** : 2022-03-03 **Tested By** : James Gan  
**EUT** : STUDIO MONITOR **Model Number** : 4305P  
**Power Supply** : AC 120V/60Hz **Test Mode** : TX mode  
**Condition** : TEMP:24.3°C, RH:53.0%, BP:101.0kPa **LISN** : 2021 1# ENV216/LINE  
**Memo** :

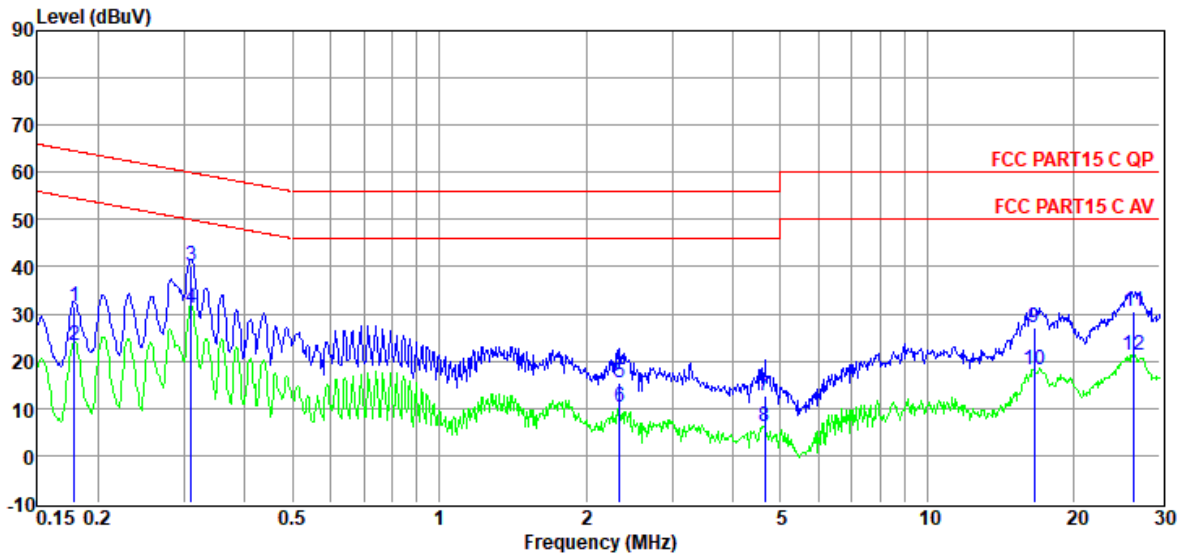


Item (Mark)	Freq. (MHz)	Read Level (dBuV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBuV)	Limit Line (dBuV)	Over Limit (dB)	Detector	Phase
1	0.18	11.84	9.72	0.01	9.92	31.49	64.55	-33.06	QP	LINE
2	0.18	3.80	9.72	0.01	9.92	23.45	54.55	-31.10	Average	LINE
3	0.31	20.52	9.70	0.02	9.92	40.16	59.97	-19.81	QP	LINE
4	0.31	11.57	9.70	0.02	9.92	31.21	49.97	-18.76	Average	LINE
5	2.35	-3.97	9.52	0.05	9.90	15.50	56.00	-40.50	QP	LINE
6	2.35	-9.12	9.52	0.05	9.90	10.35	46.00	-35.65	Average	LINE
7	4.65	-6.86	9.57	0.06	9.93	12.70	56.00	-43.30	QP	LINE
8	4.65	-13.56	9.57	0.06	9.93	6.00	46.00	-40.00	Average	LINE
9	16.57	7.20	9.73	0.15	9.94	27.02	60.00	-32.98	QP	LINE
10	16.57	-1.71	9.73	0.15	9.94	18.11	50.00	-31.89	Average	LINE
11	26.56	10.61	9.67	0.19	9.99	30.46	60.00	-29.54	QP	LINE
12	26.56	1.36	9.67	0.19	9.99	21.21	50.00	-28.79	Average	LINE

**Note:**

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

# TR-4-E-010 Conducted Emission Test Result

**Test Site** : DDT 1# Shield Room D:\2022 CE report date\Q21121003-2E 4305P\FCC .EM6  
**Test Date** : 2022-03-03 **Tested By** : James Gan  
**EUT** : STUDIO MONITOR **Model Number** : 4305P  
**Power Supply** : AC 120V/60Hz **Test Mode** : TX mode  
**Condition** : TEMP:24.3°C, RH:53.0%, BP:101.0kPa **LISN** : 2021 1# ENV216/NEUTRAL  
**Memo** :

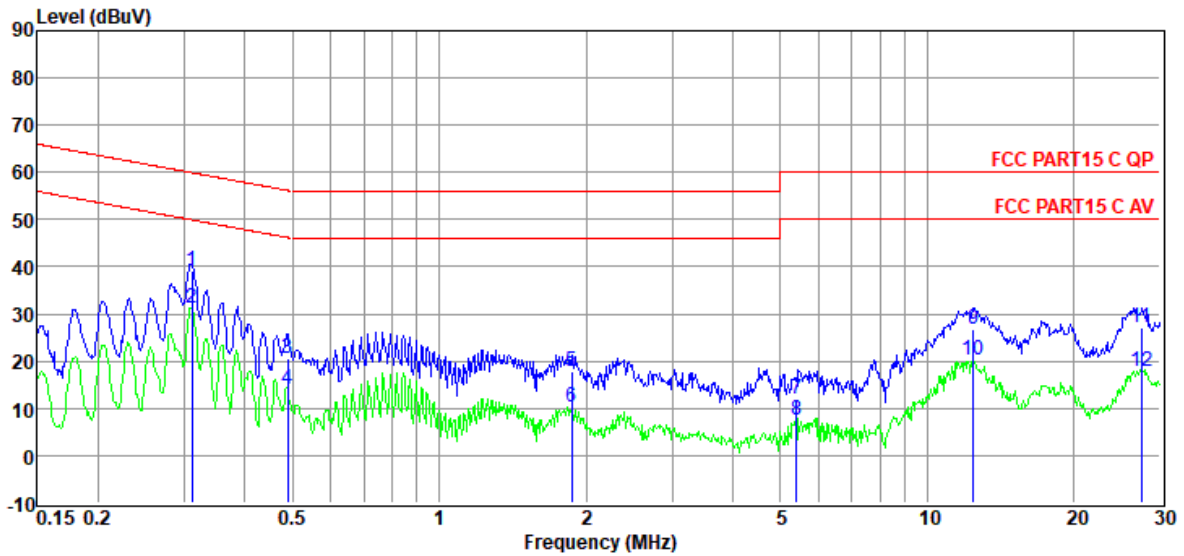

Item (Mark)	Freq. (MHz)	Read Level (dBuV)	LISN Factor (dB)	Cable Loss (dB)	Pulse Limiter Factor (dB)	Result Level (dBuV)	Limit Line (dBuV)	Over Limit (dB)	Detector	Phase
1	0.31	19.61	9.65	0.02	9.92	39.20	59.93	-20.73	QP	NEUTRAL
2	0.31	11.67	9.65	0.02	9.92	31.26	49.93	-18.67	Average	NEUTRAL
3	0.49	1.21	9.51	0.02	9.91	20.65	56.19	-35.54	QP	NEUTRAL
4	0.49	-5.31	9.51	0.02	9.91	14.13	46.19	-32.06	Average	NEUTRAL
5	1.87	-1.77	9.61	0.04	9.89	17.77	56.00	-38.23	QP	NEUTRAL
6	1.87	-9.22	9.61	0.04	9.89	10.32	46.00	-35.68	Average	NEUTRAL
7	5.39	-7.70	9.69	0.07	9.93	11.99	60.00	-48.01	QP	NEUTRAL
8	5.39	-12.12	9.69	0.07	9.93	7.57	50.00	-42.43	Average	NEUTRAL
9	12.45	6.90	9.69	0.13	9.93	26.65	60.00	-33.35	QP	NEUTRAL
10	12.45	0.55	9.69	0.13	9.93	20.30	50.00	-29.70	Average	NEUTRAL
11	27.42	6.98	9.88	0.20	9.99	27.05	60.00	-32.95	QP	NEUTRAL
12	27.42	-2.40	9.88	0.20	9.99	17.67	50.00	-32.33	Average	NEUTRAL

**Note:**

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

## 12. Antenna Requirements

### 12.1. Limit

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For intentional device, according to RSS-Gen issue 5 section 6.8.

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

### 12.2. Result

The device support 2T2R MIMO, the antennas both used for this product are FPC antennas and no antenna other than that furnished by the responsible party shall be used with the device, maximum antenna gain is 2.73 dBi for antenna 1, 2.8 dBi for antenna 2.