



## FCC AND ISED CERTIFICATION TEST REPORT

<b>Applicant</b>	:	Harman International Industries, Incorporated.
<b>Address of Applicant</b>	:	8500 Balboa Boulevard Nothridge CA 91329,USA
<b>Manufacturer</b>	:	Harman International Industries, Incorporated.
<b>Address of Manufacturer</b>	:	8500 Balboa Boulevard Nothridge CA 91329,USA
<b>Equipment under Test</b>	:	Wireless Speaker
<b>Model No.</b>	:	CHARGE 5 Wi-Fi
<b>HVIN</b>	:	JBLC5WiFi
<b>FCC ID</b>	:	APIJBLC5-WIFI
<b>IC</b>	:	6132A-C5WIFI
<b>Test Standard(s)</b>	:	FCC Rules and Regulations Part 15 Subpart C, RSS-247 Issue 3 August 2023, ANSI C63.10:2013, RSS-Gen Issue 5, Apr. 2018, Amendment 2 (February 2021)
<b>Report No.</b>	:	DDT-RE23111313-2E03
<b>Issue Date</b>	:	2024/06/22
<b>Issue By</b>	:	Guangdong Dongdian Testing Service Co., Ltd. Unit 2, Building 1, No. 17, Zongbu 2nd Road, Songshan Lake Park, Dongguan, Guangdong, China, 523808

## Table of Contents

1.	Summary of Test Results .....	7
2.	General Test Information.....	8
2.1.	Description of EUT .....	8
2.2.	Accessories of EUT .....	9
2.3.	Block diagram of EUT configuration for test .....	9
2.4.	Decision of final test mode .....	9
2.5.	Deviations of test standard .....	9
2.6.	Test environment conditions .....	10
2.7.	Test laboratory .....	10
2.8.	Measurement uncertainty .....	11
3.	Equipment Used During Conductive Test .....	12
4.	6dB Bandwidth .....	13
4.1.	Block diagram of test setup .....	13
4.2.	Limits.....	13
4.3.	Test procedure .....	13
4.4.	Test result .....	14
4.5.	Test graphs .....	15
5.	99% Bandwidth .....	27
5.1.	Block diagram of test setup .....	27
5.2.	Limits.....	27
5.3.	Test procedure .....	27
5.4.	Test result .....	28
5.5.	Test graphs .....	29
6.	Conducted Output Power .....	41
6.1.	Block diagram of test setup .....	41
6.2.	Limits.....	41
6.3.	Test procedure .....	41
6.4.	Test result average.....	42
7.	Power Spectral Density .....	45
7.1.	Block diagram of test setup .....	45
7.2.	Limits.....	45
7.3.	Test procedure .....	45
7.4.	Test result .....	46
7.5.	Test graphs .....	49
8.	Band Edge Compliance (Conducted Method) .....	87
8.1.	Block diagram of test setup .....	87

8.2.	Limits.....	87
8.3.	Test procedure.....	87
8.4.	Test result.....	88
8.5.	Test graphs.....	89
9.	RF Conducted Spurious Emissions.....	97
9.1.	Block diagram of test setup.....	97
9.2.	Limits.....	97
9.3.	Test procedure.....	97
9.4.	Test result.....	98
9.5.	Test graphs.....	99
10.	Duty Cycle.....	135
10.1.	Block diagram of test setup.....	135
10.2.	Limit.....	135
10.3.	Test procedure.....	135
10.4.	Test result.....	136
10.5.	Test graphs.....	137
11	Antenna Requirements.....	149
11.1.	Limit.....	149
11.2.	Result.....	149
12.	Radiated Emission.....	150
12.1.	Test equipment.....	150
12.2.	Block diagram of test setup.....	151
12.3.	Limits.....	152
12.4.	Assistant equipment used for test.....	154
12.5.	Test procedure.....	154
12.6.	Test result.....	155
12.7.	Test data.....	156
13.	Band Edge Compliance.....	164
13.1.	Test equipment.....	164
13.2.	Block diagram of test setup.....	165
13.3.	Limits.....	165
13.4.	Assistant equipment used for test.....	165
13.5.	Test procedure.....	165
13.6.	Test result.....	165
13.7.	Test data.....	166
14.	Power Line Conducted Emissions.....	198
14.1.	Test equipment.....	198
14.2.	Block diagram of test setup.....	198

14.3.	Limits.....	198
14.4.	Assistant equipment used for test .....	198
14.5.	Test procedure .....	198
14.6.	Test result .....	199
14.7.	Test data .....	200
15.	Test Setup Photograph .....	203
16.	Photos of the EUT .....	205

## Test Report Declare

<b>Applicant</b>	:	Harman International Industries, Incorporated.
<b>Address of Applicant</b>	:	8500 Balboa Boulevard Nothridge CA 91329,USA
<b>Equipment under Test</b>	:	Wireless Speaker
<b>Model No.</b>	:	CHARGE 5 Wi-Fi
<b>Manufacturer</b>	:	Harman International Industries, Incorporated.
<b>Address of Manufacturer</b>	:	8500 Balboa Boulevard Nothridge CA 91329,USA

### Test Standard Used:

FCC Rules and Regulations Part 15 Subpart C,  
 RSS-247 Issue 3 August 2023,  
 ANSI C63.10:2013,  
 RSS-Gen Issue 5, Apr. 2018, Amendment 2 (February 2021)

### We Declare:

The equipment described above is tested by Guangdong Dongdian Testing Service Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Guangdong Dongdian Testing Service Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

<b>Report No.:</b>	DDT-RE23111313-2E03		
<b>Date of Receipt:</b>	2023/11/13	<b>Date of Test:</b>	2023/11/13~2024/06/20

**Prepared By:**

*Ella Gong*

**Ella Gong/Engineer**

**Approved By:**

*Damon Hu*

**Damon Hu/EMC Manager**

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Guangdong Dongdian Testing Service Co., Ltd.

## Revision History

Rev.	Revisions	Issue Date	Revised By
---	Initial issue	2024/06/22	

## 1. Summary of Test Results

No.	Test Parameter	Clause No.	Condition	Result
1	6 dB Bandwidth and 99% Bandwidth	FCC Part 15: 15.247(a)(2), RSS-247 Issue 3 clause 5.2(a), RSS-Gen Issue 5 clause 6.7	/	Pass
2	Peak Output Power	FCC Part 15: 15.247(b)(3), RSS-247 Issue 3 clause 5.4(d)	/	Pass
3	Power Spectral Density	FCC Part 15:15.247(e), RSS-247 Issue 3 clause 5.2(b)	/	Pass
4	RF Conducted Spurious Emissions	FCC Part 15: 15.247(d), RSS-247 Issue 3 clause 5.5	/	Pass
5	Radiated Emission	FCC Part 15: 15.205, FCC Part 15: 15.209, FCC Part 15: 15.247(d), RSS-247 Issue 3 clause 5.5, RSS-Gen Issue 5 clause 8.9, RSS-Gen Issue 5 clause 8.10	/	Pass
6	Band Edge Compliance	FCC Part 15: 15.205, FCC Part 15: 15.209, FCC Part 15: 15.247(d), RSS-247 Issue 3 clause 5.5, RSS-Gen Issue 5 clause 8.9, RSS-Gen Issue 5 clause 8.10	/	Pass
7	Antenna Requirement	FCC Part 15: 15.203, RSS-Gen Issue 5 clause 6.8	/	Pass
8	Power Line Conducted Emissions	FCC Part 15: 15.207(a), RSS-Gen Issue 5 clause 8.8	/	Pass

Note: N/A is an abbreviation for Not Applicable, and means this item is not applicable for this device or no need to test according to standard.

## 2. General Test Information

### 2.1. Description of EUT

EUT Name	: Wireless Speaker
Model Number	: CHARGE 5 Wi-Fi
EUT Function Description	: Please reference user manual of this device
Power Supply	: DC 5V from external adapter or DC 3.69V built-in battery, 14100mAh, 52Wh
Hardware Version	: MP
Software Version	: 23.16.35.60.00

Note: This EUT support Bluetooth BR/EDR/LE, 2.4 GHz WLAN, 5 GHz WLAN, this report only for 2.4 GHz WLAN.

Radio Technology	: IEEE 802.11b/g/n/ax
Operation frequency	: IEEE 802.11b: 2412MHz-2462MHz IEEE 802.11g: 2412MHz-2462MHz IEEE 802.11n HT20: 2412MHz-2462MHz IEEE 802.11n HT40: 2422MHz-2452MHz IEEE 802.11ax HE20: 2412MHz-2462MHz IEEE 802.11ax HE40: 2422MHz-2452MHz
Modulation	: IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11ax: OFDM, OFDMA (1024QAM, 64QAM, 16QAM, QPSK, BPSK)

Antenna information			
	Ant1 gain	Ant2 gain	Directional gain
IEEE 802.11b	2.91	2.36	/
IEEE 802.11g	2.91	2.36	/
IEEE 802.11n HT20	2.91	2.36	2.64
IEEE 802.11n HT40	2.91	2.36	2.64
IEEE 802.11ax HE20	2.91	2.36	2.64
IEEE 802.11ax HE40	2.91	2.36	2.64

Channel information					
CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
1	2412	5	2432	9	2452
2	2417	6	2437	10	2457
3	2422	7	2442	11	2462
4	2427	8	2447	/	/

Note: The above EUT information is declared by manufacturer and for more detailed features description please refer to the manufacturer's specifications or User's Manual. The above Antenna information is declared by manufacturer and for more detailed features description please refer to the manufacturer's specifications, the laboratory shall not be held responsible.


“☑” means to be chosen or applicable; “☐” means don't to be chosen or not applicable; This note applies to entire report.



## 2.2. Accessories of EUT

Accessories	Manufacturer	Model number	Description
USB cable	Harman	N/A	Length: 1.17m

## 2.3. Block diagram of EUT configuration for test

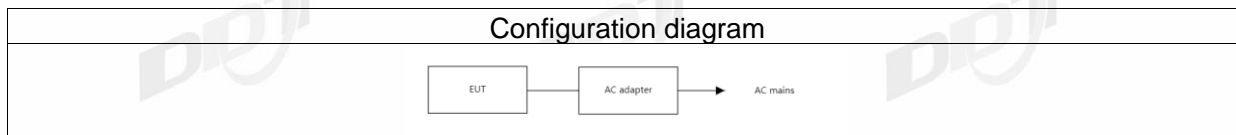

## 2.4. Decision of final test mode

According pre-test, the worst test modes were reported as below:

Test software: adb.exe

The test software was used to control EUT work in Continuous Tx mode and select test channel, wireless mode as below table.

The pathloss of external cable: 0.5dB (According to the manufacturer's claims)

Tested mode, channel, and data rate information				
Mode	Setting Tx Power	data rate (Mbps) (see Note)	Channel	Frequency (MHz)
IEEE 802.11b	14	11	LCH: CH1	2412
	14	11	MCH: CH6	2437
	14	11	HCH: CH11	2462
IEEE 802.11g	13	54	LCH: CH1	2412
	13	54	MCH: CH6	2437
	13	54	HCH: CH11	2462
IEEE 802.11n HT20	13	MCS 15	LCH: CH1	2412
	13	MCS 15	MCH: CH6	2437
	13	MCS 15	HCH: CH11	2462
IEEE 802.11n HT40	13	MCS 15	LCH: CH3	2422
	13	MCS 15	MCH: CH6	2437
	13	MCS 15	HCH: CH9	2452
IEEE 802.11ax HE20	SU:12 RU:15	MCS 11	LCH: CH1	2412
	SU:12 RU:15	MCS 11	MCH: CH6	2437
	SU:12 RU:15	MCS 11	HCH: CH11	2462
IEEE 802.11ax HE40	SU:15 RU:15	MCS 11	LCH: CH3	2422
	SU:15 RU:15	MCS 11	MCH: CH6	2437
	SU:15 RU:15	MCS 11	HCH: CH9	2452

Note: According exploratory test, EUT will have maximum output power in those data rate, so those data rate were used for all test.

## 2.5. Deviations of test standard

No deviation.

## 2.6. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	21-25°C
Humidity range:	40-75%
Pressure range:	86-106kPa

Note: The specific temperature and humidity information of each test item refers to the temperature and humidity record in the corresponding test data.

## 2.7. Test laboratory

Guangdong Dongdian Testing Service Co., Ltd.

Add.: Unit 2, Building 1, No. 17, Zongbu 2nd Road, Songshan Lake Park, Dongguan, Guangdong, China, 523808.

Tel.: +86-0769-38826678, <http://www.dgddt.com>, Email: [ddt@dgddt.com](mailto:ddt@dgddt.com).

CNAS Accreditation No. L6451; A2LA Accreditation Number: 3870.01

FCC Designation Number: CN1182, Test Firm Registration Number: 540522

Innovation, Science and Economic Development Canada Site Registration Number: 10288A

Conformity Assessment Body identifier: CN0048

VCCI facility registration number: C-20087, T-20088, R-20123, R-20155, G-20118

## 2.8. Measurement uncertainty

Test Item	Uncertainty
Bandwidth	1.1%
Peak Output Power (Conducted) (Spectrum analyzer)	0.86 dB (10 MHz ≤ f < 3.6 GHz);
	1.38 dB (3.6 GHz ≤ f < 8 GHz)
Peak Output Power (Conducted) (Power Sensor)	0.74 dB
Power Spectral Density	0.74 dB (10 MHz ≤ f < 3.6 GHz);
	1.38 dB (3.6 GHz ≤ f < 8 GHz)
Frequencies Stability	6.7 x 10 <sup>-8</sup> (Antenna couple method)
	5.5 x 10 <sup>-8</sup> (Conducted method)
Conducted spurious emissions	0.86 dB (10 MHz ≤ f < 3.6 GHz);
	1.40 dB (3.6 GHz ≤ f < 8 GHz)
	1.66 dB (8 GHz ≤ f < 26.5 GHz)
Uncertainty for radio frequency (RBW < 20 kHz)	3x10 <sup>-8</sup>
Temperature	0.4 °C
Humidity	2 %
Uncertainty for Radiation Emission test (9 kHz – 30 MHz)	3.44 dB
Uncertainty for Radiation Emission test (30 MHz - 1 GHz)	4.70 dB (Antenna Polarize: V)
	4.84 dB (Antenna Polarize: H)
Uncertainty for Radiation Emission test (1 GHz - 40 GHz)	4.10 dB (1 - 6 GHz)
	4.40 dB (6 GHz - 18 GHz)
	3.54 dB (18 GHz - 26 GHz)
	4.30 dB (26 GHz - 40 GHz)
Uncertainty for Power line conduction emission test	3.34dB (150KHz-30MHz)
	3.72dB (9KHz-150KHz)


Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

### 3. Equipment Used During Conductive Test

Equipment	Manufacturer	Model No.	Serial Number	Due Date
☑RF Connected Test (RF Measurement System 4#)				
Signal &Spectrum Analyzer	R&S	FSV3044	101173	2024/04/22
Wideband Radio Communication Tester	R&S	CMW500	168801	2024/04/26
MXG Vector Signal Generator	Agilent	N5182A	MY4818073 7	2024/04/26
PSG Vector Signal Generator	Agilent	E8267D	US4906019 2	2024/09/05
RF Control Unit	Tonsend	JS0806-2	2118060485	2024/04/26
TEMP&HUMI Programmable Chamber	ZHIXIANG	ZXGDJS-150L	ZX170110-A	2024/05/14
Test Software	Tonscend	JS1120-3	Ver.3.2.22	N/A

## 4. 6dB Bandwidth

### 4.1. Block diagram of test setup

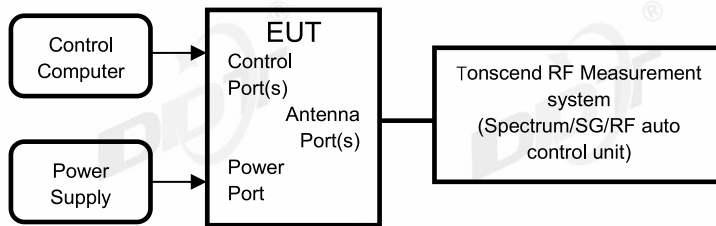

### 4.2. Limits

For direct sequence systems, the minimum 6 dB bandwidth shall be at least 500 kHz

### 4.3. Test procedure

- (1) The test according to ANSI C63.10-2013 clause 11.8.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously
- (4) Use the following spectrum analyzer settings for 6 dB Bandwidth:
 

RBW:	100 kHz
VBW:	$\geq [3 \times \text{RBW}]$
Detector Mode:	peak
Sweep time:	auto
Trace mode	max hold


Allow the trace to stabilize, measure the 6 dB bandwidth of signal, and record the results in the report


## 4.4. Test result

Test Engineer:	Haofeng	Test Site:	RF Measurement System 4#
Ambient Condition:	24.4℃,45.3%RH	Test Date:	2024.02.02-2024.02.06
Test Power Supply:	Battery	EUT:	Wireless Speaker
Sample Number:	S23111313-04	Model No.:	CHARGE5 Wi-Fi


Test Mode	Antenna	Frequency [MHz]	DTS BW [MHz]	FL [MHz]	FH [MHz]	Limit [MHz]	Verdict
11B	Ant1	2412	7.56	2407.96	2415.52	0.5	PASS
	Ant2	2412	8.56	2407.44	2416.00	0.5	PASS
	Ant1	2437	8.08	2432.92	2441.00	0.5	PASS
	Ant2	2437	8.08	2432.92	2441.00	0.5	PASS
	Ant1	2462	8.08	2457.92	2466.00	0.5	PASS
	Ant2	2462	7.60	2458.40	2466.00	0.5	PASS
11G	Ant1	2412	15.12	2404.40	2419.52	0.5	PASS
	Ant2	2412	15.12	2404.40	2419.52	0.5	PASS
	Ant1	2437	15.80	2429.08	2444.88	0.5	PASS
	Ant2	2437	15.76	2429.08	2444.84	0.5	PASS
	Ant1	2462	15.68	2454.04	2469.72	0.5	PASS
	Ant2	2462	15.44	2454.08	2469.52	0.5	PASS
11N20MI MO	Ant1	2412	15.12	2404.40	2419.52	0.5	PASS
	Ant2	2412	15.12	2404.40	2419.52	0.5	PASS
	Ant1	2437	16.52	2428.84	2445.36	0.5	PASS
	Ant2	2437	16.92	2428.80	2445.72	0.5	PASS
	Ant1	2462	16.80	2453.56	2470.36	0.5	PASS
	Ant2	2462	16.92	2453.20	2470.12	0.5	PASS
11N40MI MO	Ant1	2422	35.12	2404.48	2439.60	0.5	PASS
	Ant2	2422	35.20	2404.40	2439.60	0.5	PASS
	Ant1	2437	35.12	2419.48	2454.60	0.5	PASS
	Ant2	2437	35.12	2419.48	2454.60	0.5	PASS
	Ant1	2452	35.12	2434.48	2469.60	0.5	PASS
	Ant2	2452	35.12	2434.48	2469.60	0.5	PASS
11AX20M IMO	Ant1	2412	18.28	2402.80	2421.08	0.5	PASS
	Ant2	2412	18.12	2403.12	2421.24	0.5	PASS
	Ant1	2437	18.44	2427.68	2446.12	0.5	PASS
	Ant2	2437	18.80	2427.52	2446.32	0.5	PASS
	Ant1	2462	18.64	2452.60	2471.24	0.5	PASS
	Ant2	2462	18.68	2452.56	2471.24	0.5	PASS
11AX40M IMO	Ant1	2422	37.44	2403.28	2440.72	0.5	PASS
	Ant2	2422	37.20	2403.68	2440.88	0.5	PASS
	Ant1	2437	37.60	2418.36	2455.96	0.5	PASS
	Ant2	2437	36.96	2418.84	2455.80	0.5	PASS
	Ant1	2452	37.12	2433.52	2470.64	0.5	PASS
	Ant2	2452	35.92	2434.40	2470.32	0.5	PASS

4.5. Test graphs

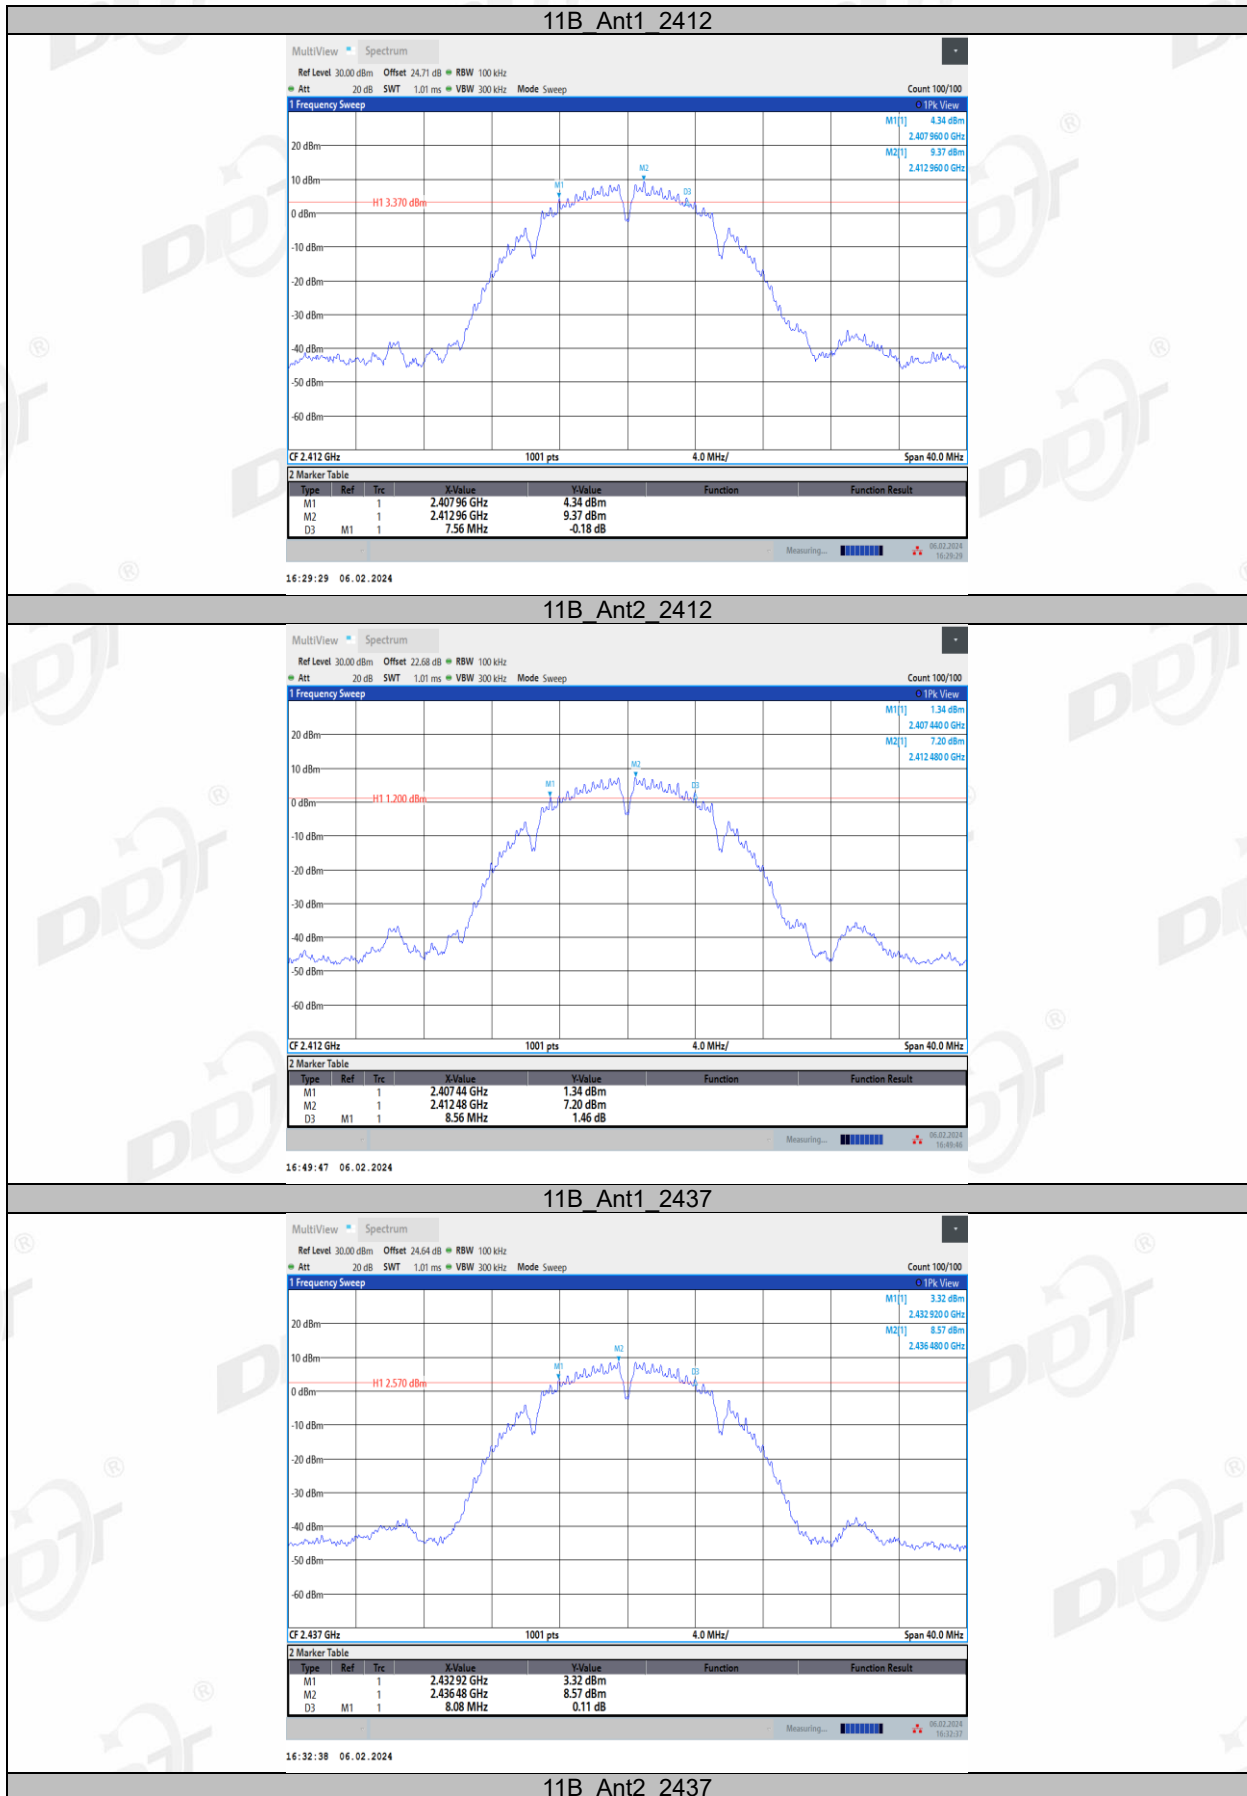


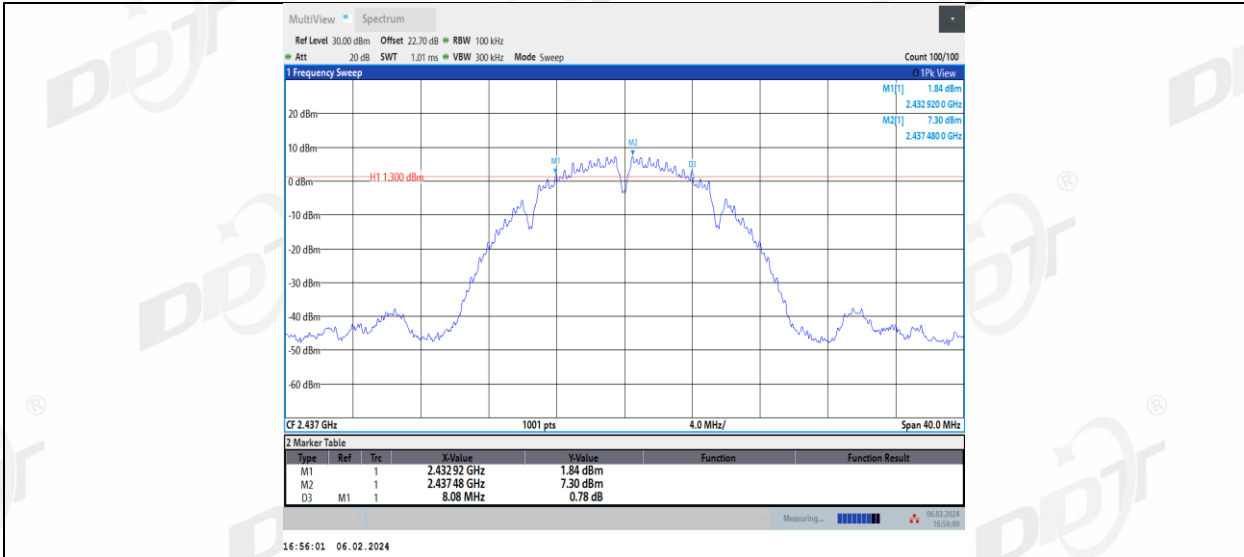

11B\_Ant1\_2462

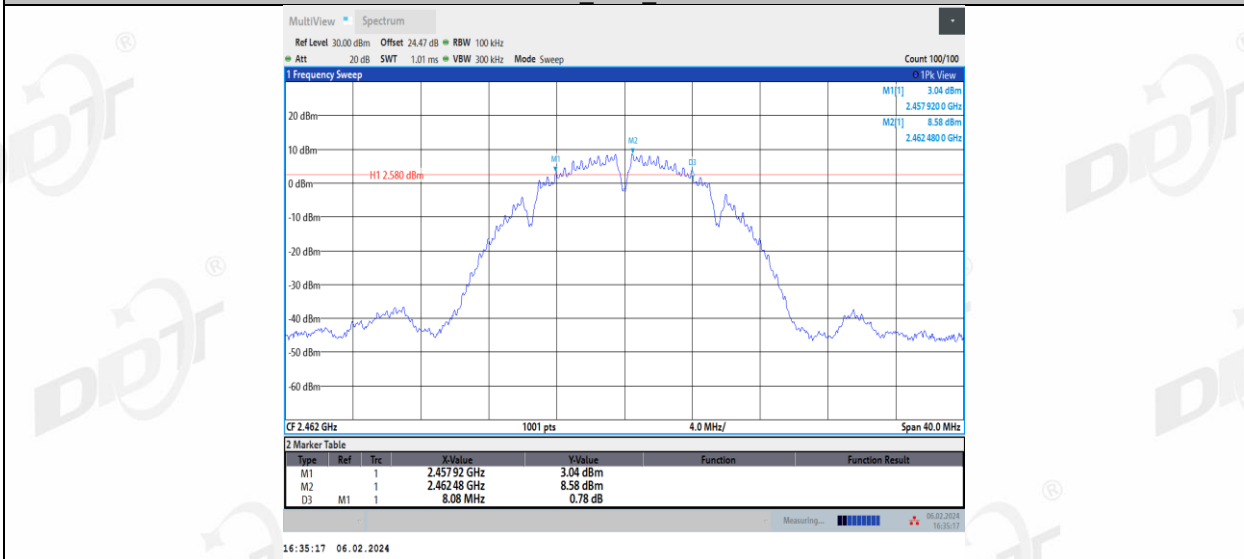


11B\_Ant2\_2462

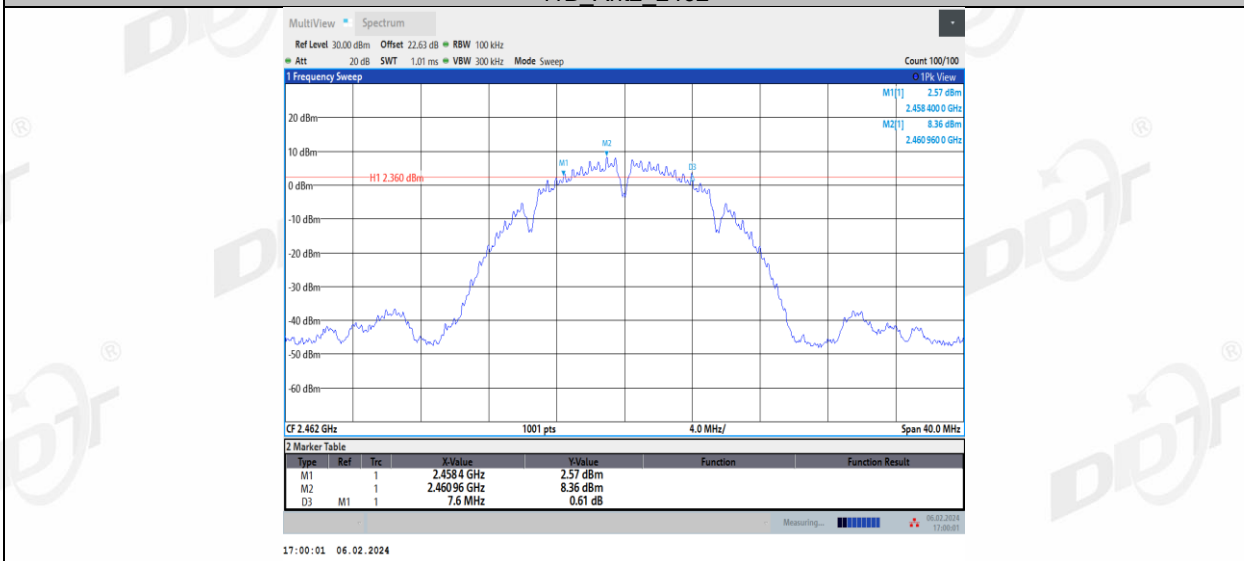


11G\_Ant1\_2412




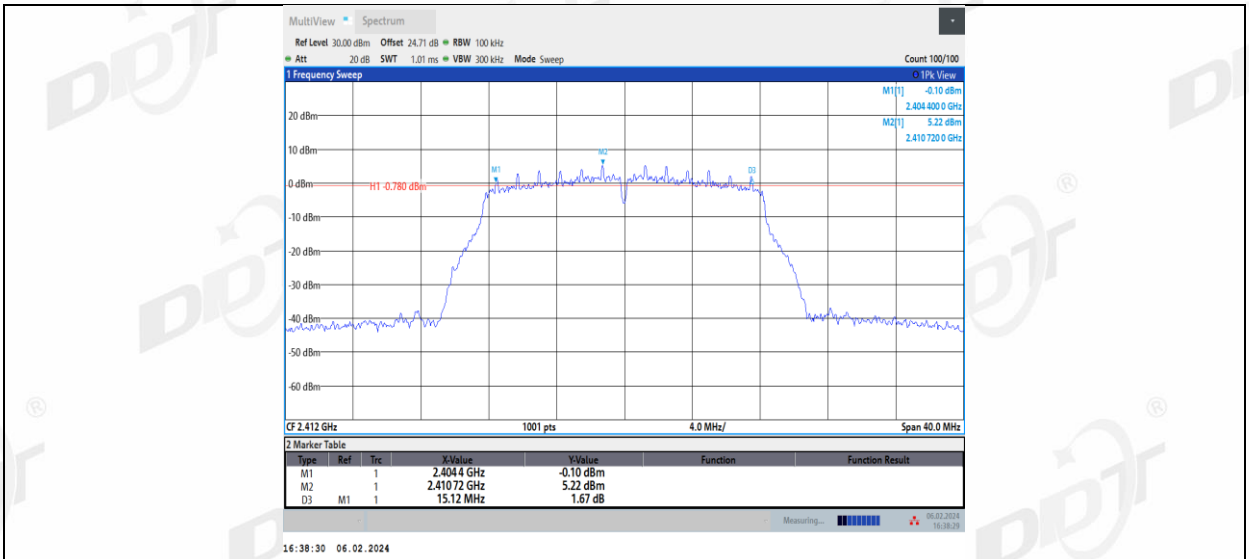


11G\_Ant2\_2412

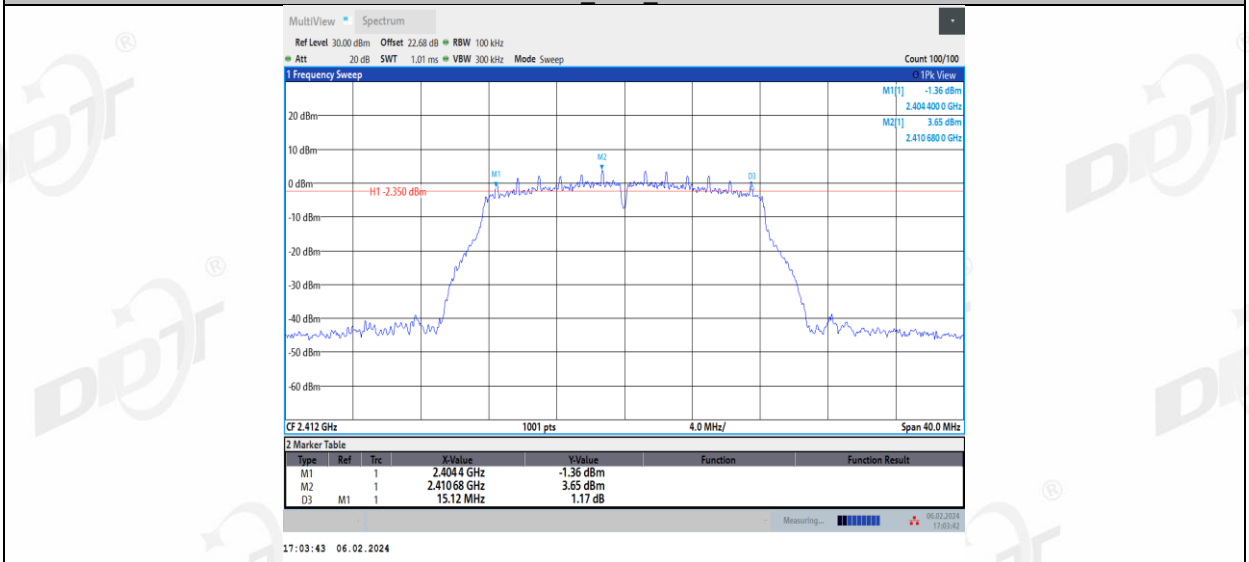


11G\_Ant1\_2437

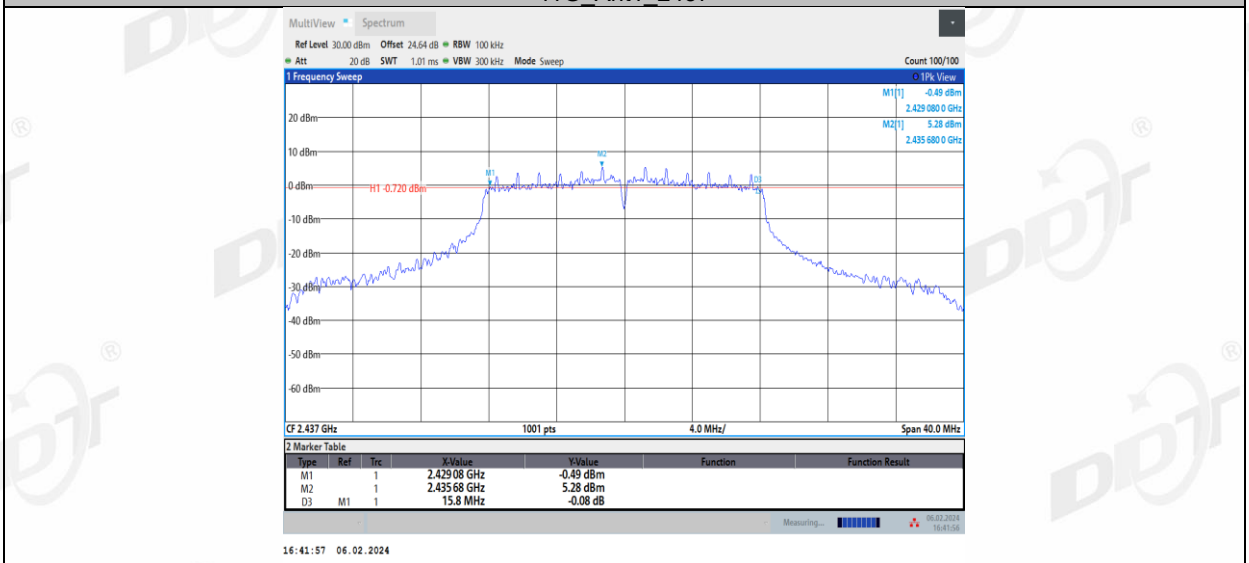


11G\_Ant2\_2437

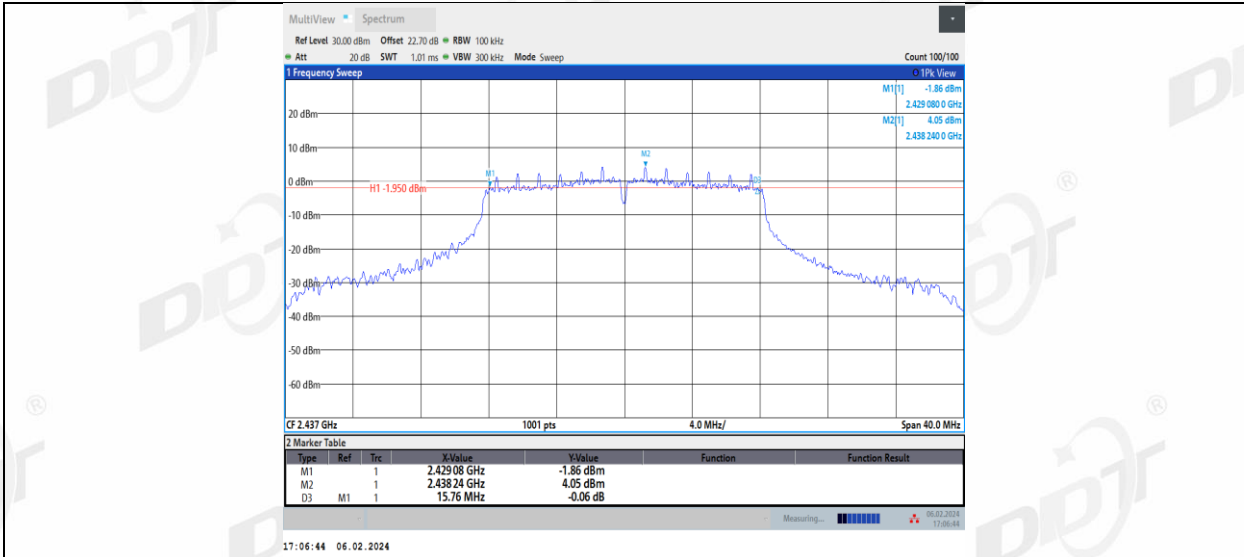


11G\_Ant1\_2462

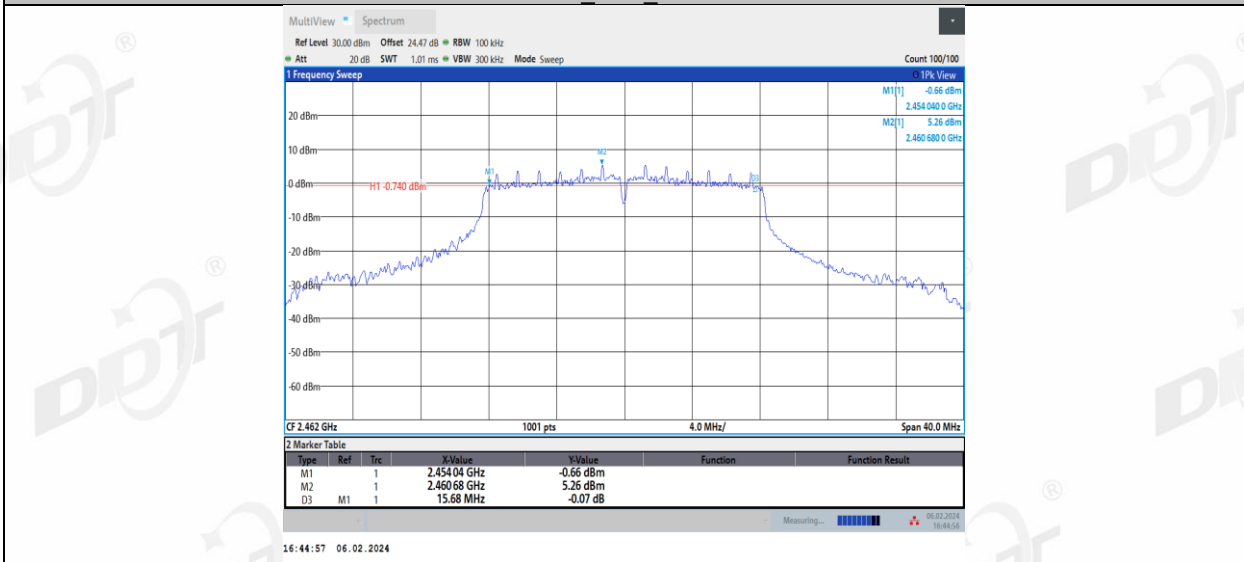


11G\_Ant2\_2462

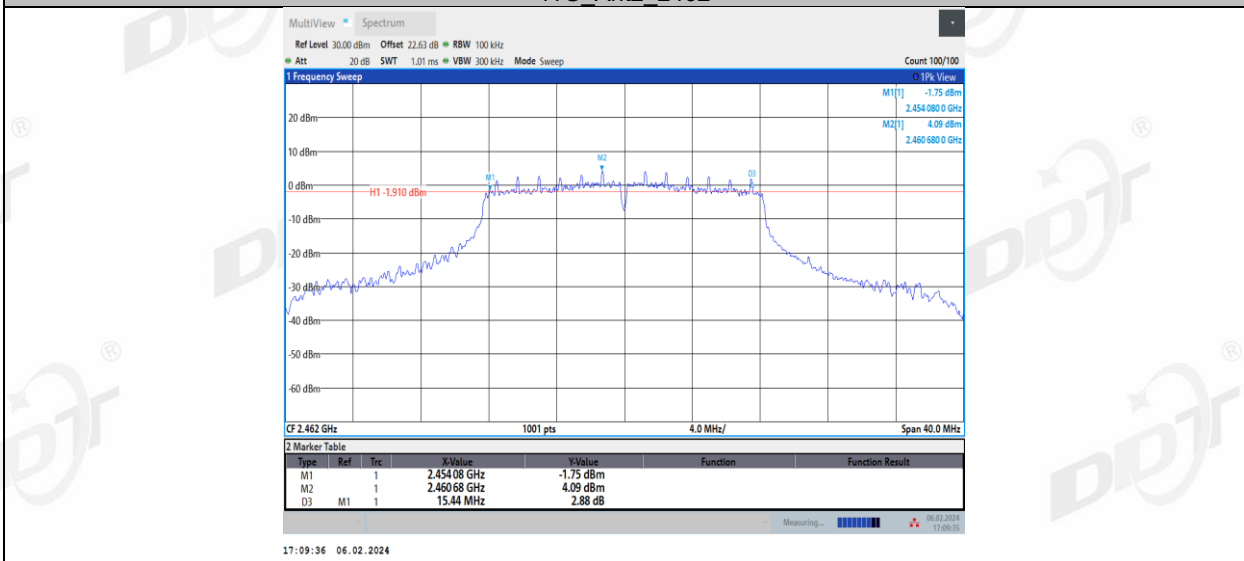


11N20MIMO\_Ant1\_2412

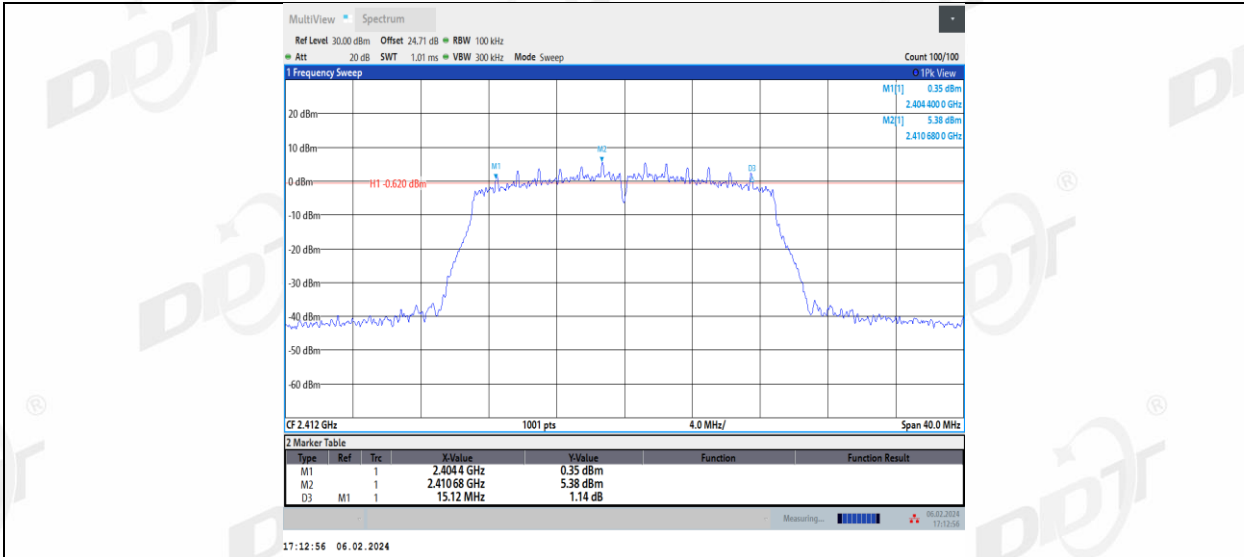


11N20MIMO\_Ant2\_2412

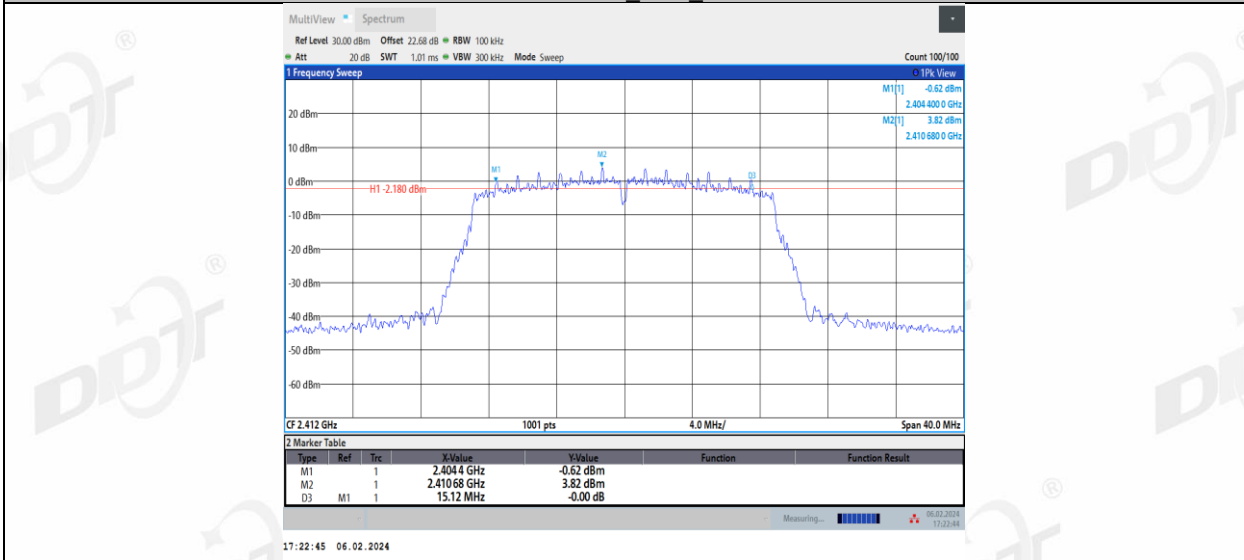


11N20MIMO\_Ant1\_2437

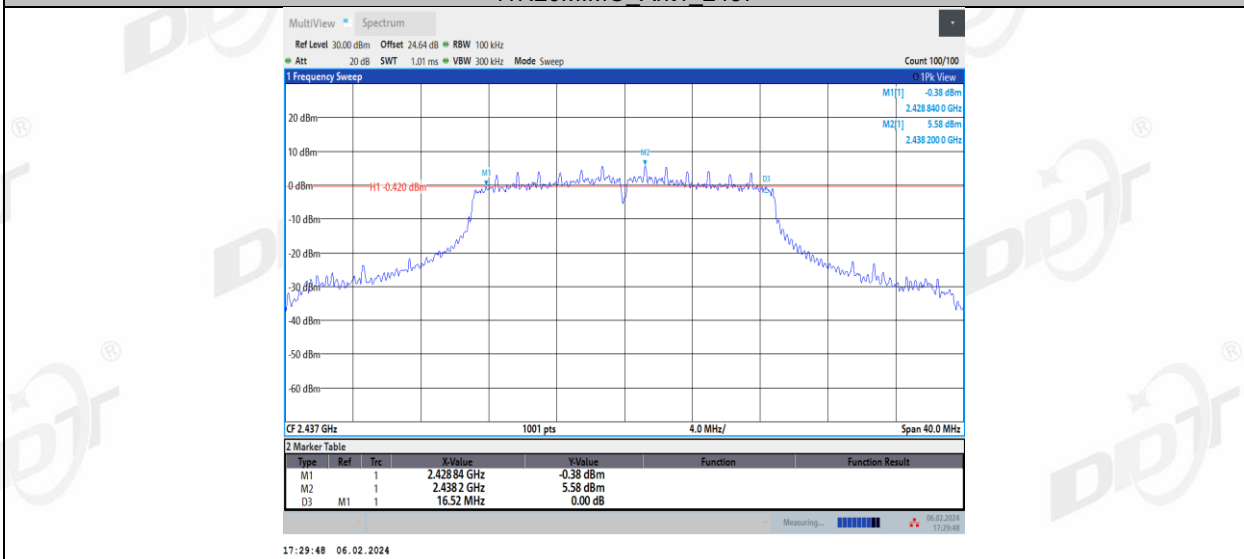


11N20MIMO\_Ant2\_2437

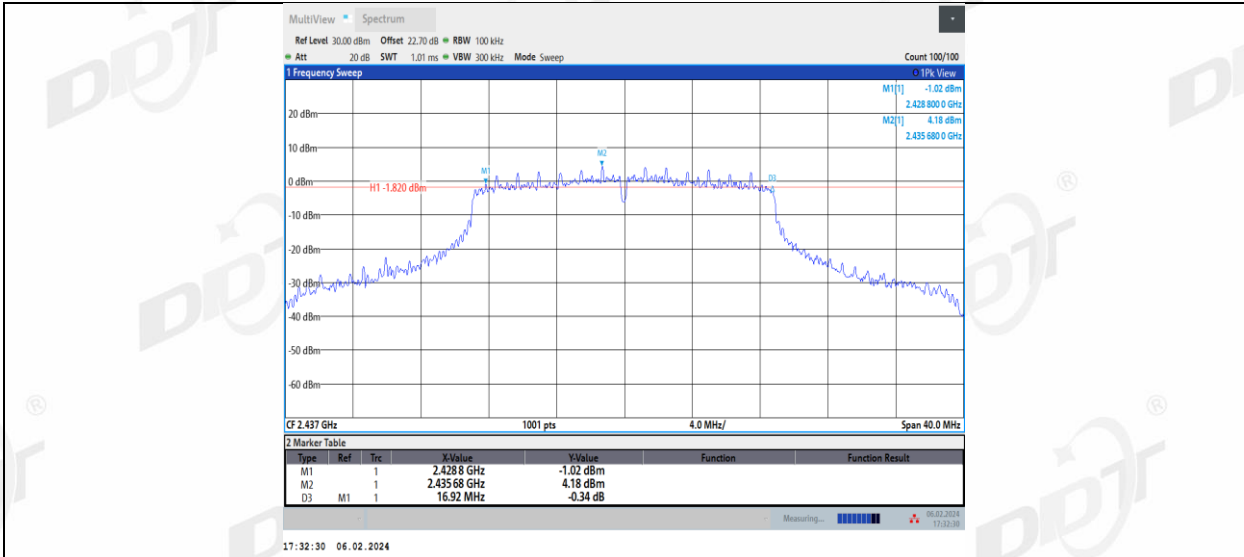


11N20MIMO\_Ant1\_2462

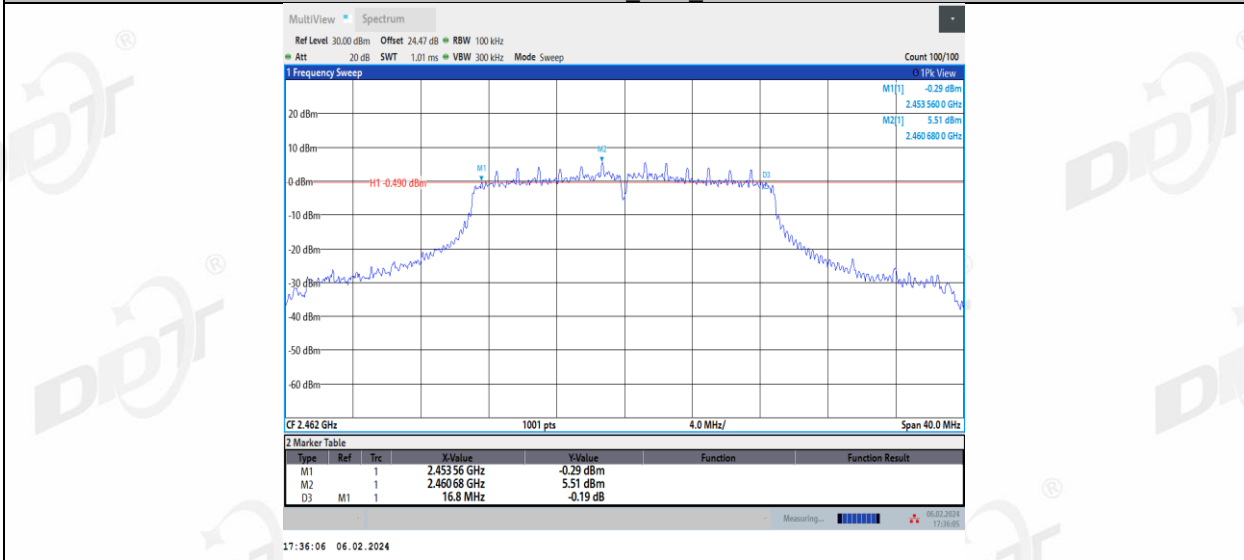


11N20MIMO\_Ant2\_2462

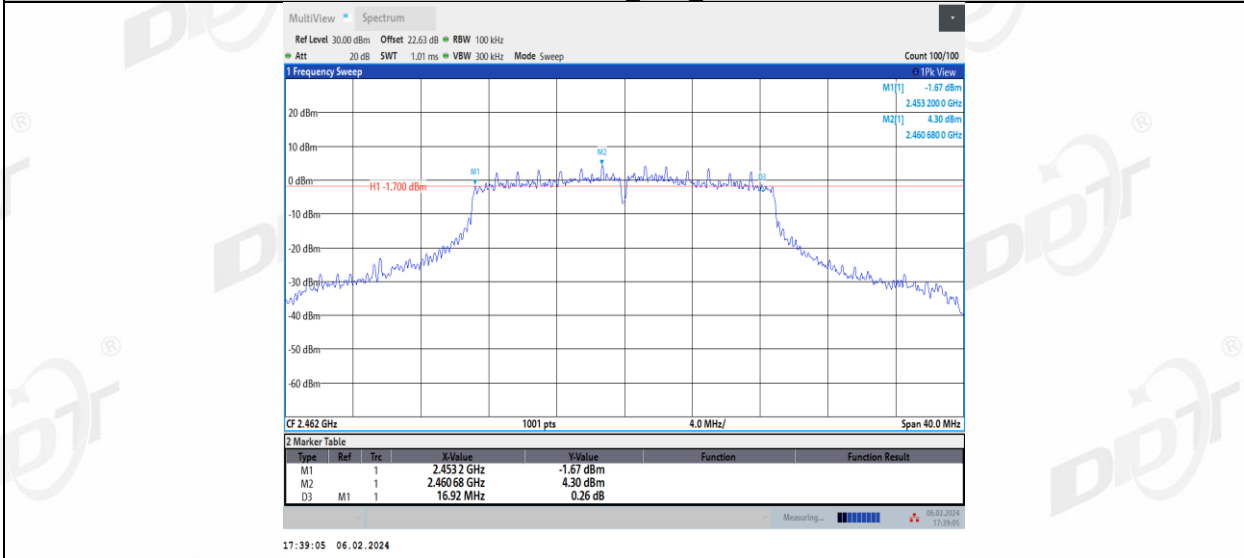


11N40MIMO\_Ant1\_2422

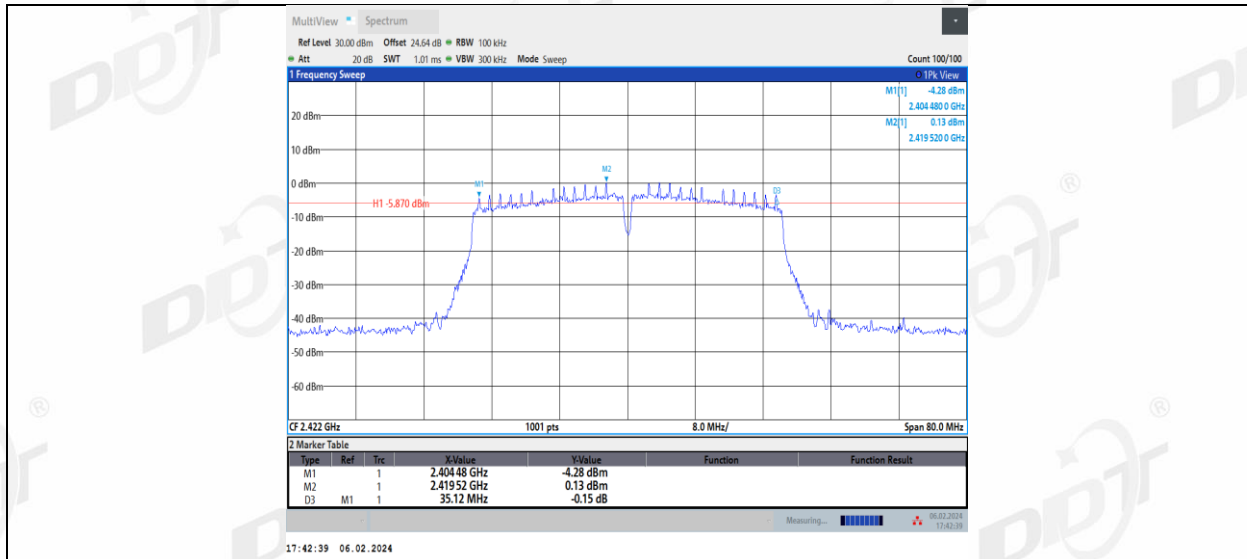


11N40MIMO\_Ant2\_2422

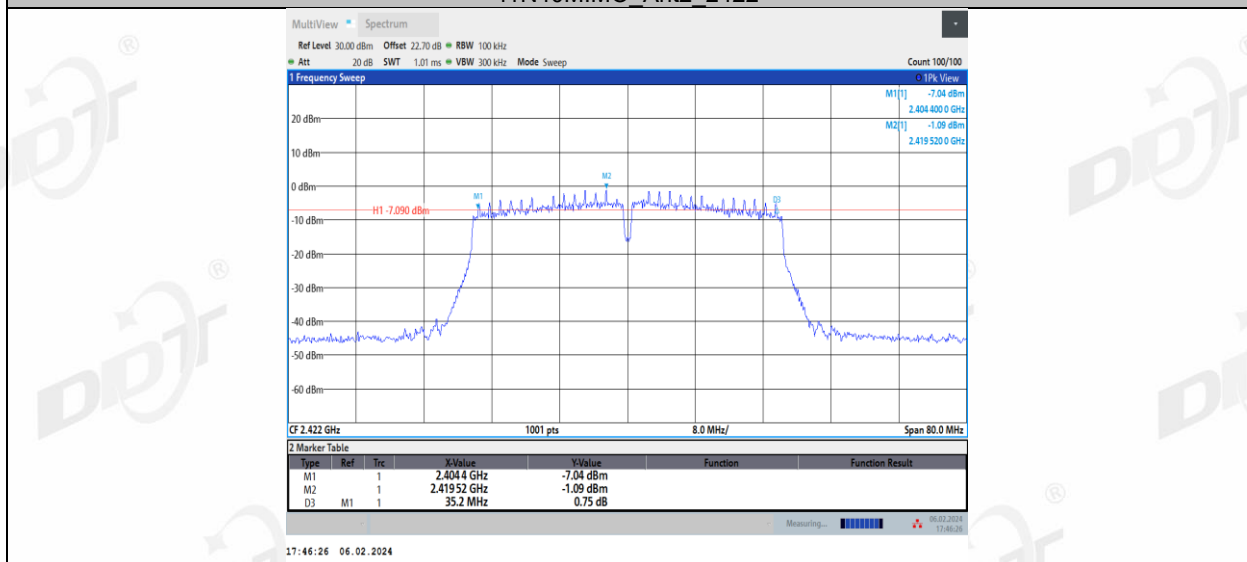


11N40MIMO\_Ant1\_2437

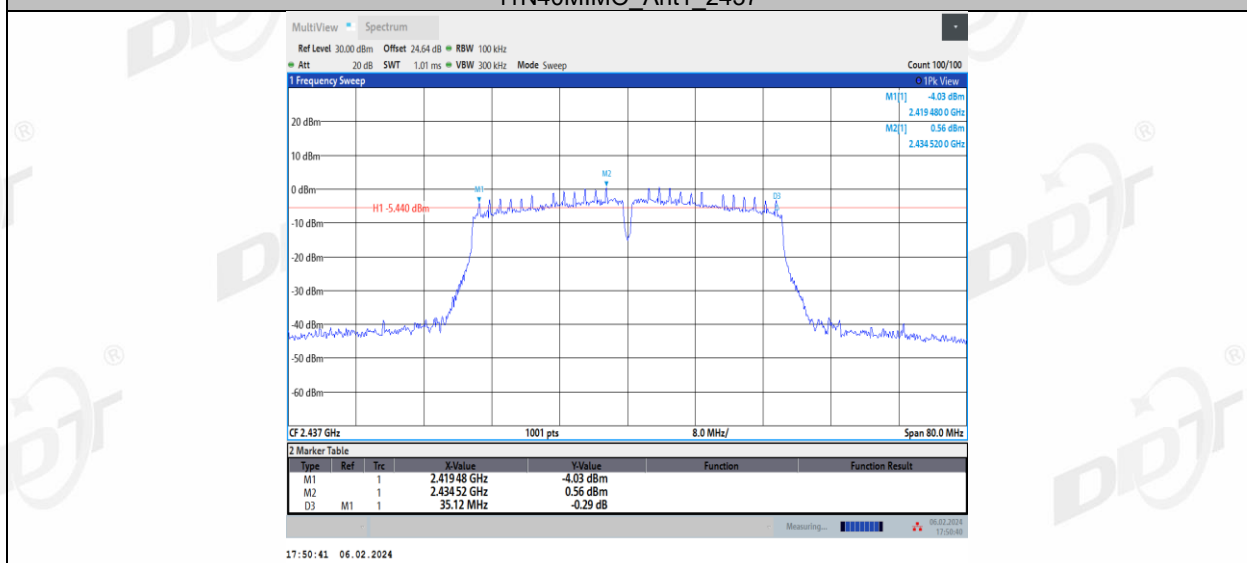


11N40MIMO\_Ant2\_2437

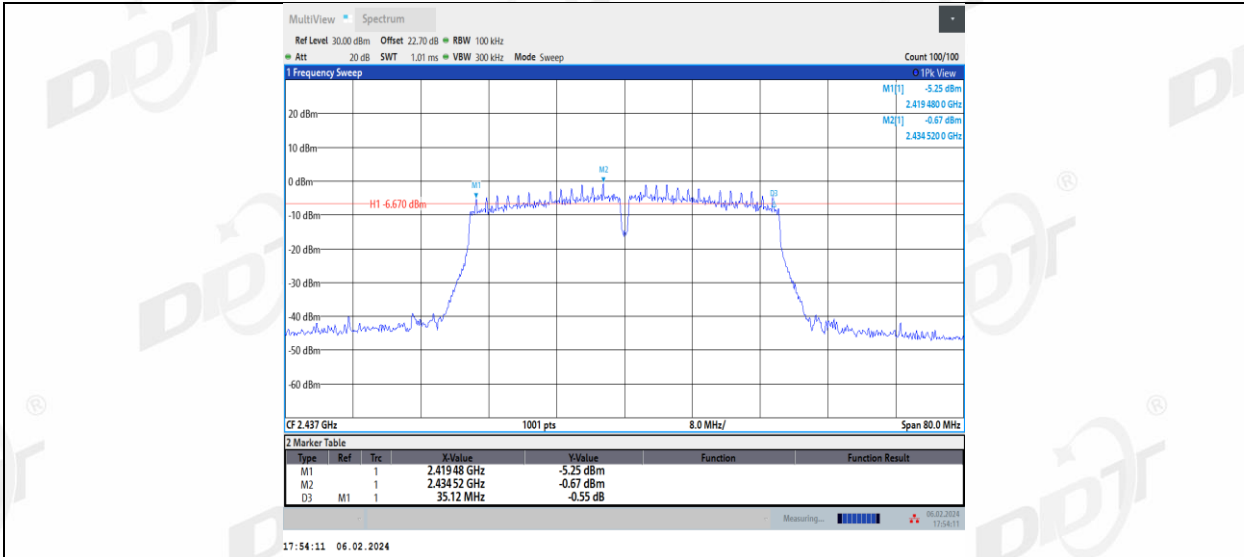


11N40MIMO\_Ant1\_2452

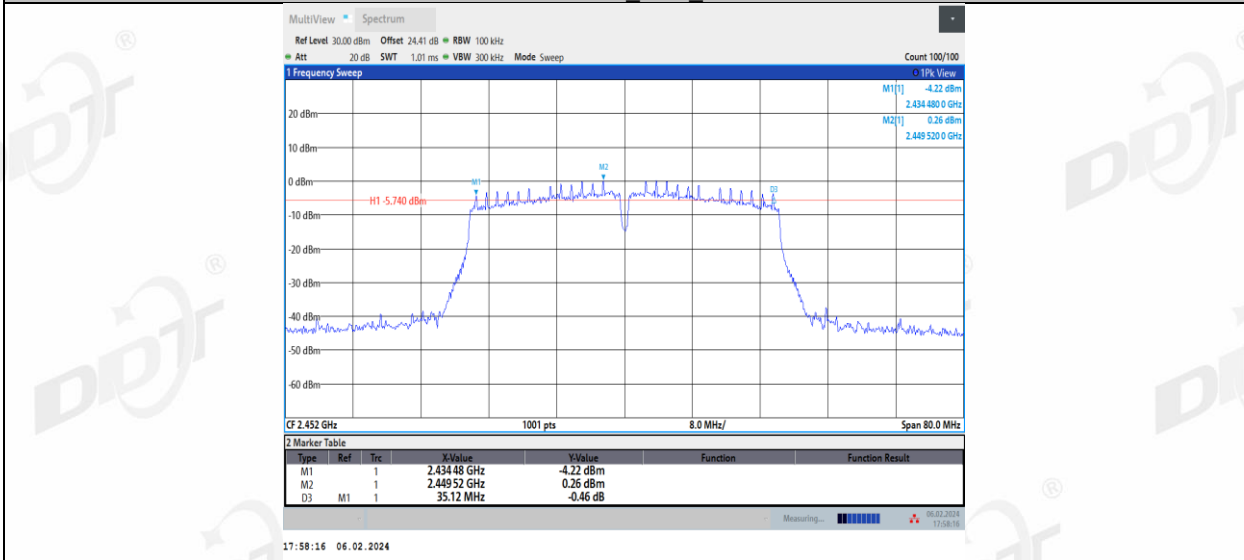


11N40MIMO\_Ant2\_2452

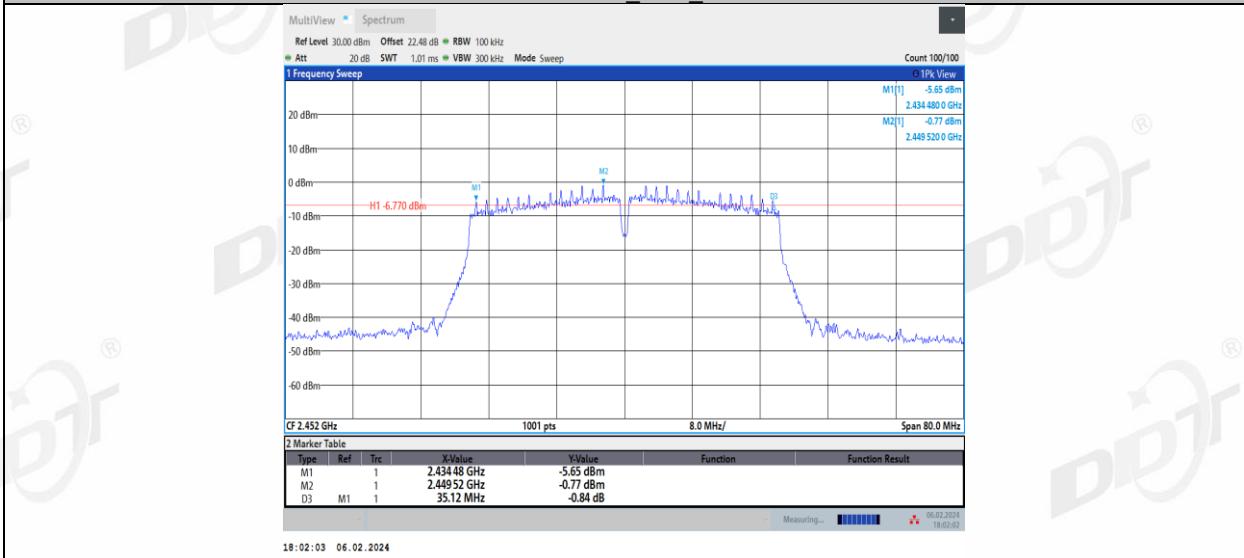


11AX20MIMO\_Ant1\_2412

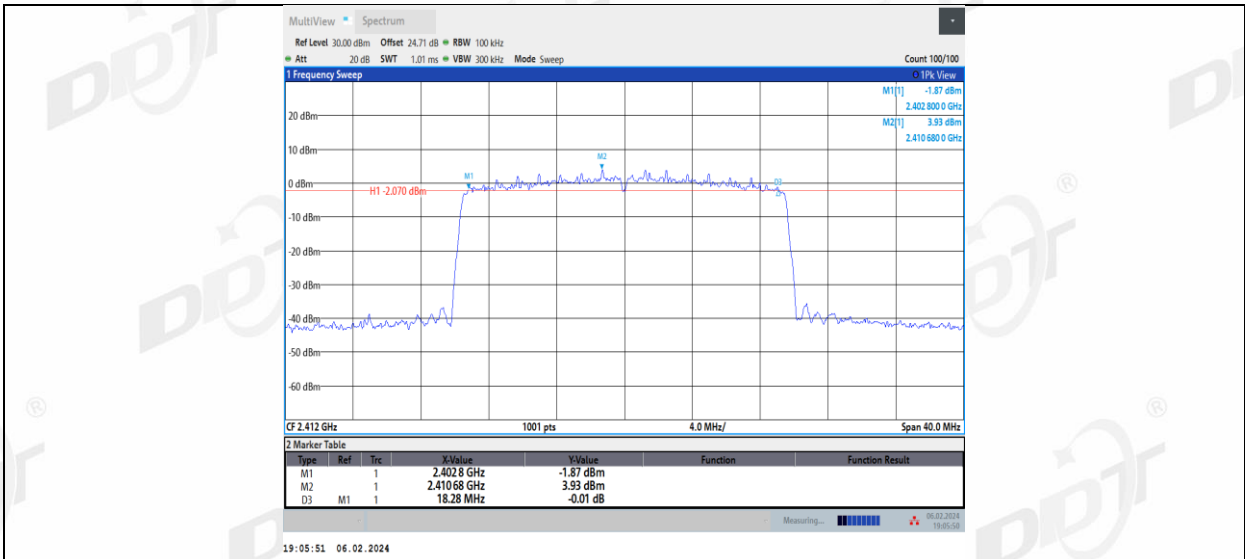


11AX20MIMO\_Ant2\_2412

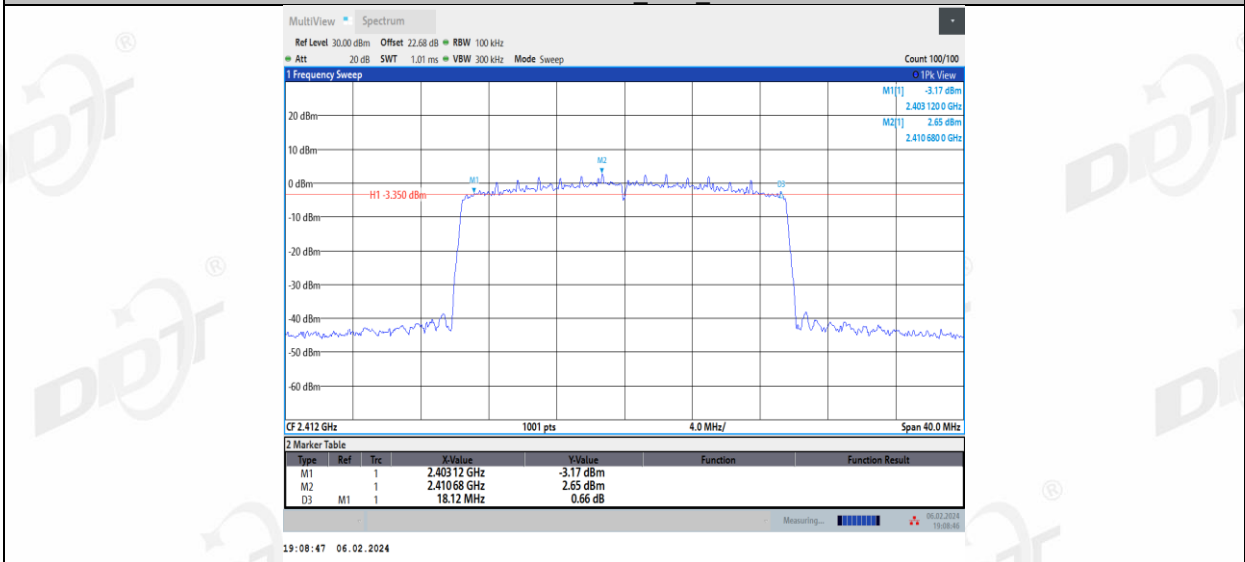


11AX20MIMO\_Ant1\_2437

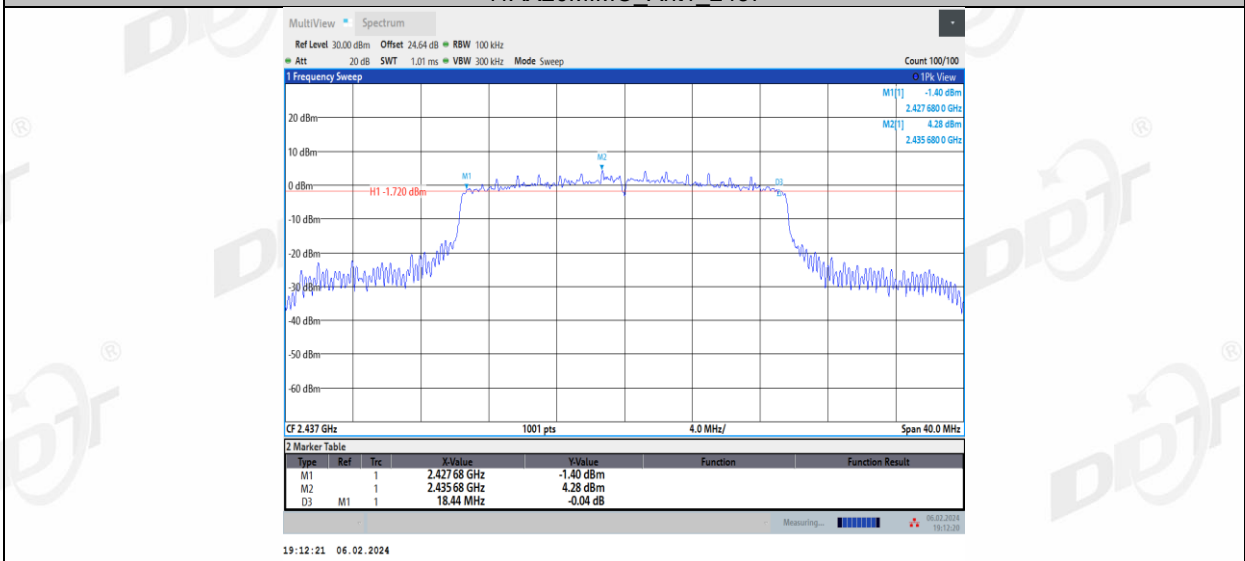


11AX20MIMO\_Ant2\_2437

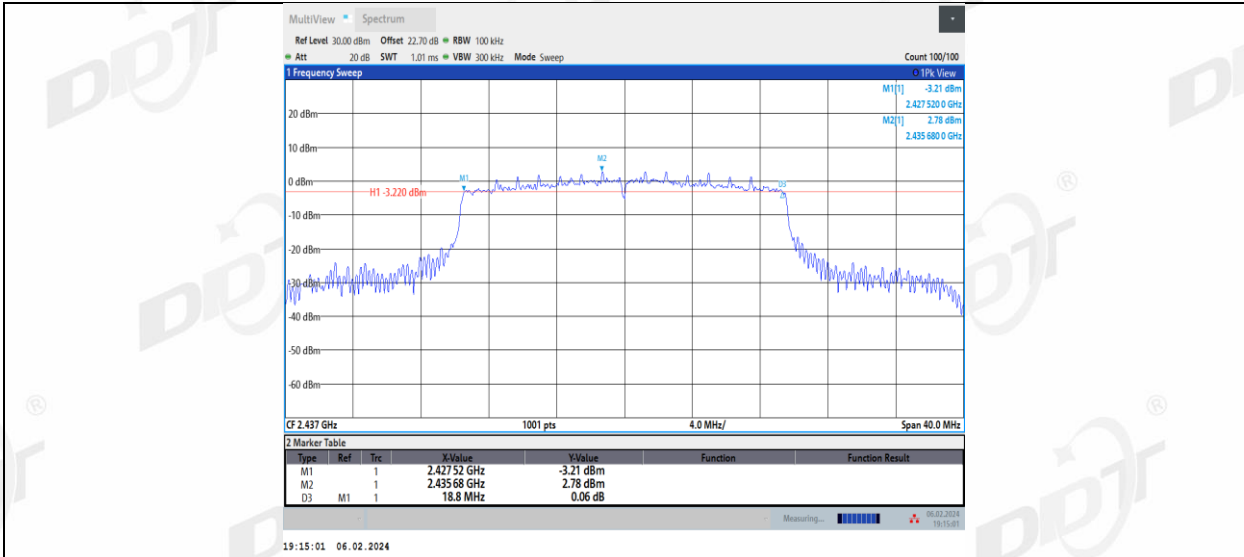

11AX20MIMO\_Ant1\_2462

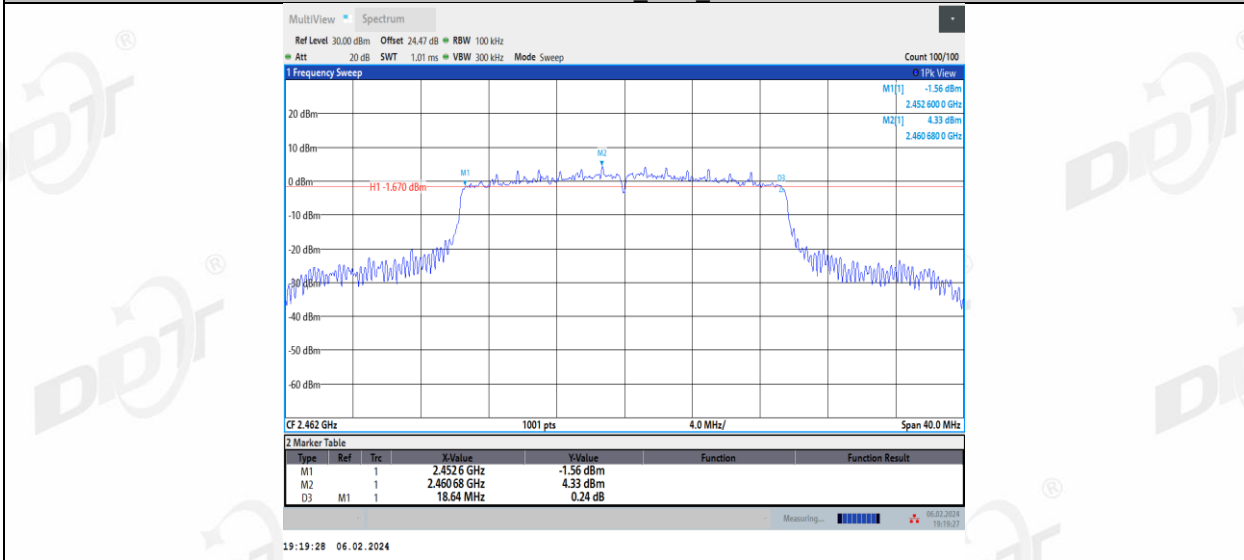


11AX20MIMO\_Ant2\_2462

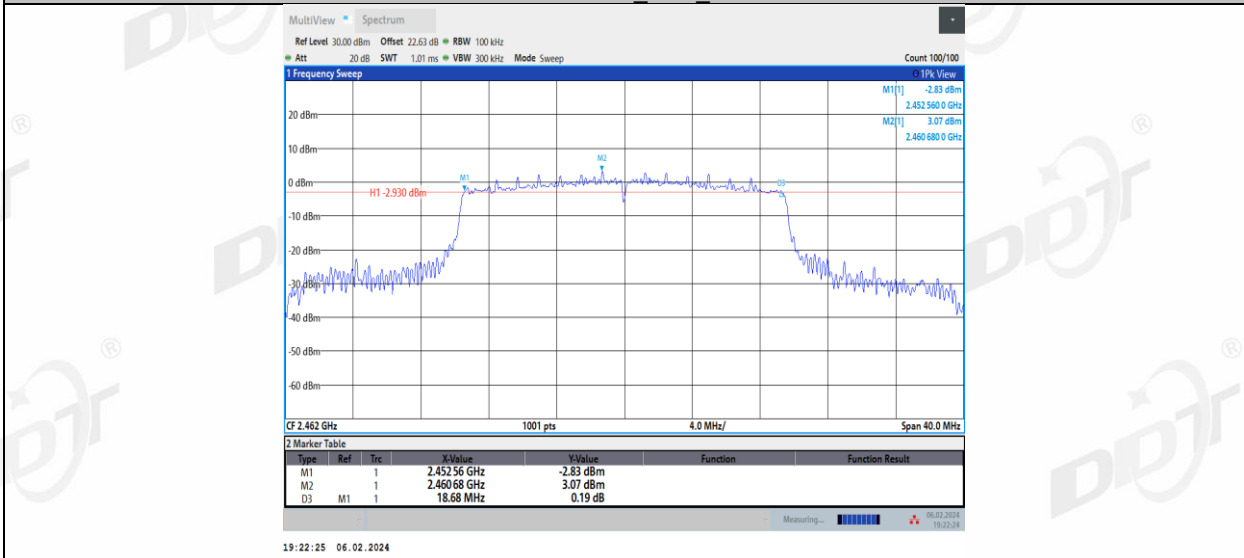


11AX40MIMO\_Ant1\_2422




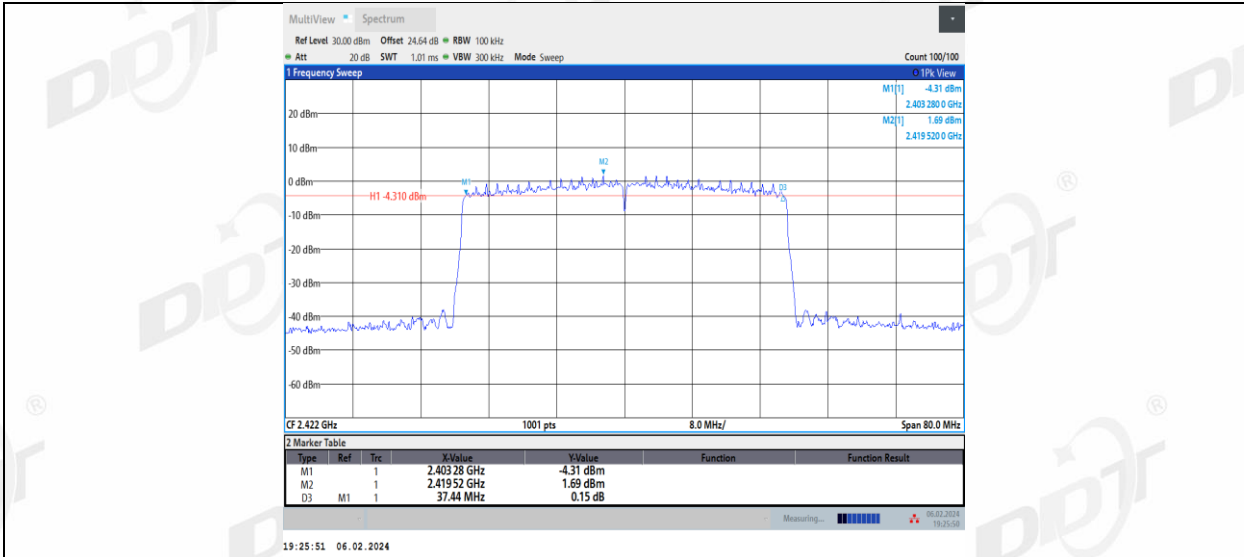


11AX40MIMO\_Ant2\_2422

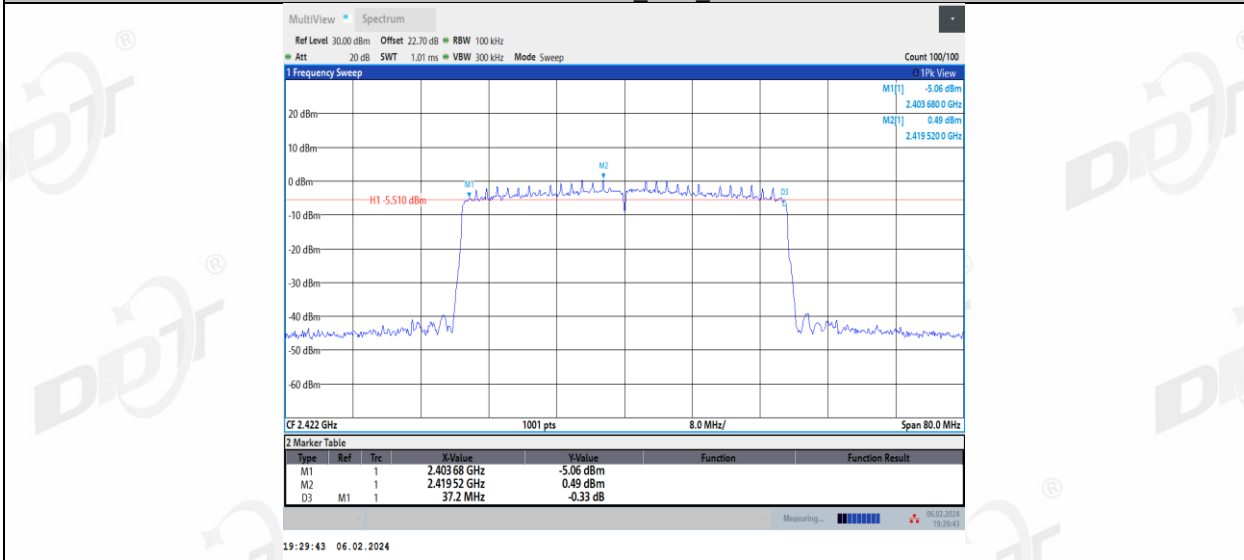


11AX40MIMO\_Ant1\_2437

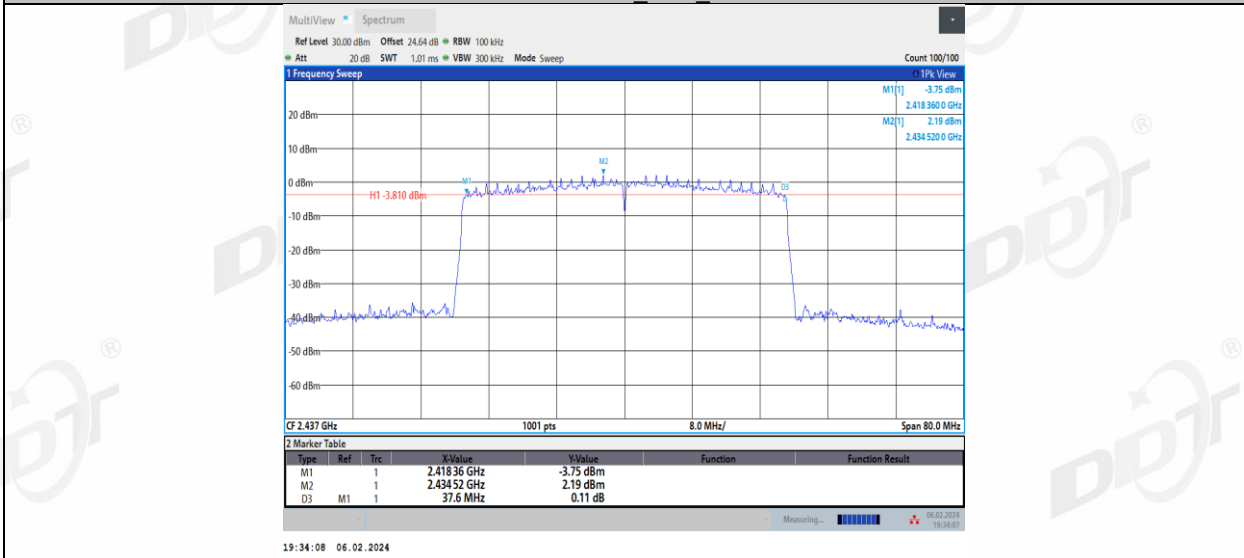


11AX40MIMO\_Ant2\_2437

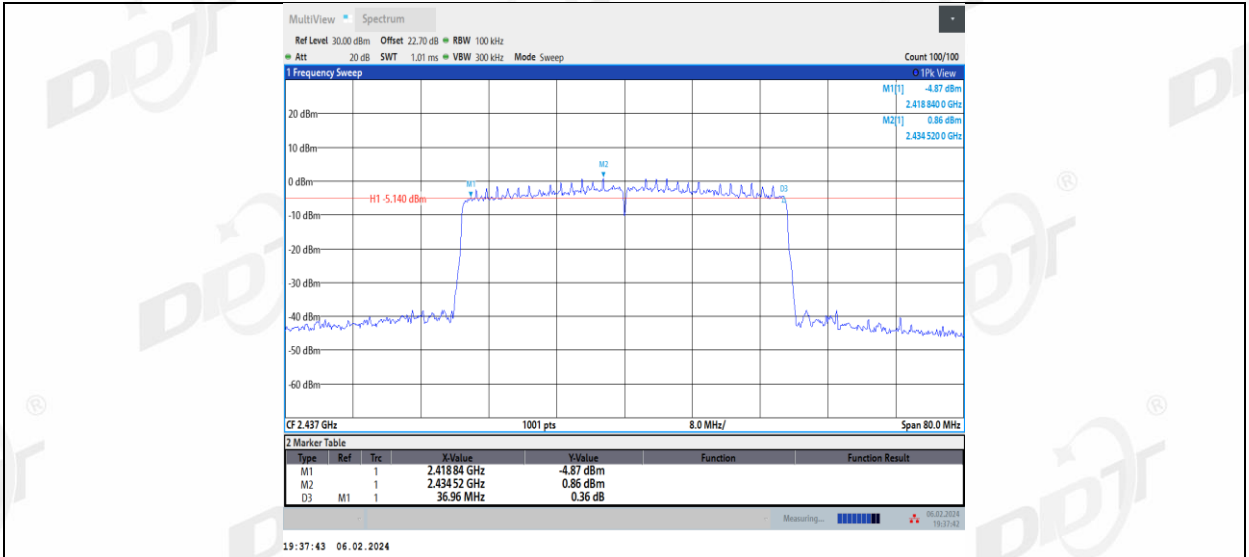

11AX40MIMO\_Ant1\_2452

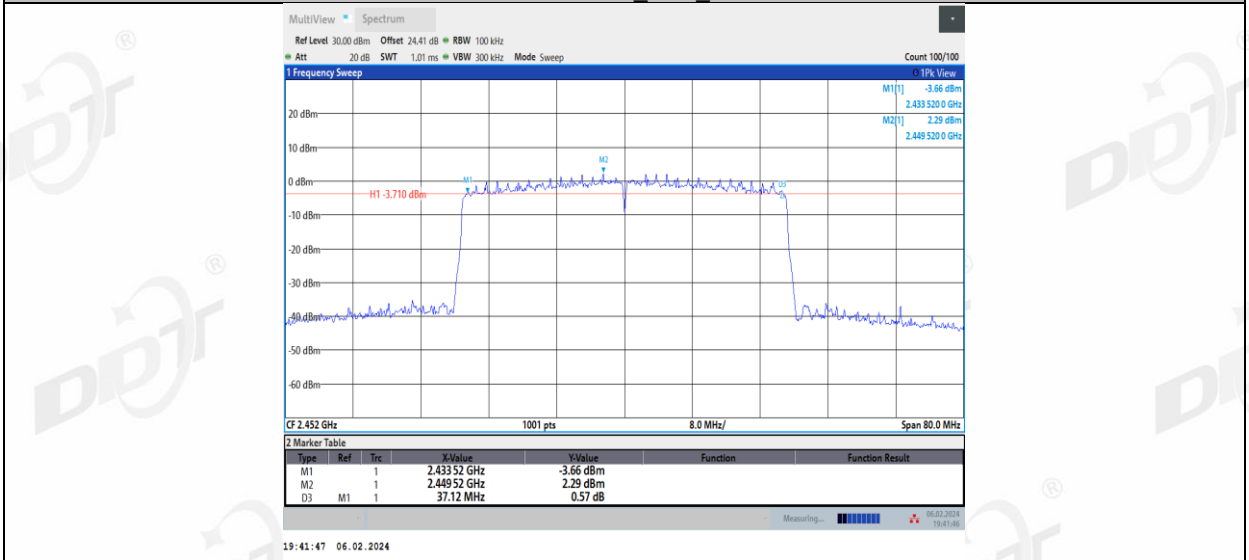


11AX40MIMO\_Ant2\_2452

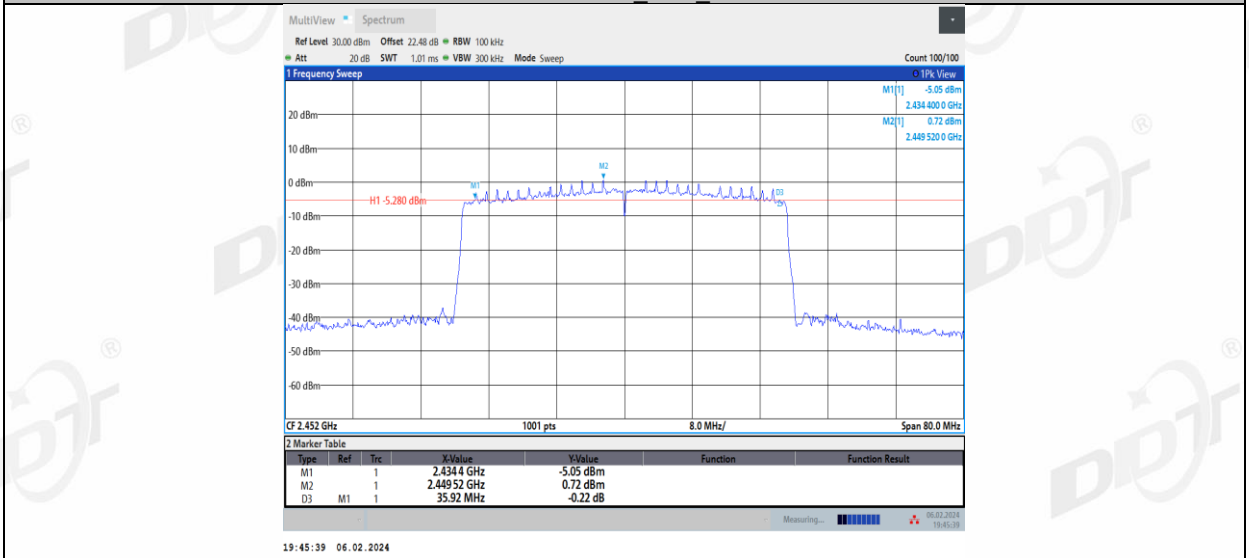

## 5. 99% Bandwidth

### 5.1. Block diagram of test setup

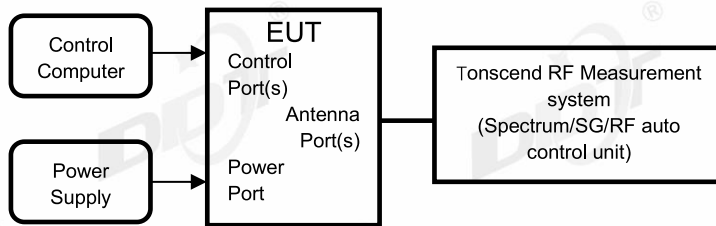

### 5.2. Limits

Just for Report.

### 5.3. Test procedure

- (1) The test according to ANSI C63.10-2013 clause 6.9.3.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously
- (4) Use the following spectrum analyzer settings for the 99% Bandwidth:
 

RBW:	1% to 5% of the OBW
VBW:	approximately three times RBW
Span:	between 1.5 times and 5.0 times the OBW
Detector Mode:	peak
Sweep time:	auto
Trace mode	max hold


Allow the trace to stabilize, measure the 99% bandwidth of signal, and record the results in the report.


## 5.4. Test result

Test Engineer:	Haofeng	Test Site:	RF Measurement System 4#
Ambient Condition:	24.4℃,45.3%RH	Test Date:	2024.02.02-2024.02.06
Test Power Supply:	Battery	EUT:	Wireless Speaker
Sample Number:	S23111313-04	Model No.:	CHARGE5 Wi-Fi


TestMode	Antenna	Channel Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	12.42	2405.7970	2418.2169	---	---
	Ant2	2412	12.329	2405.8209	2418.1496	---	---
	Ant1	2437	12.563	2430.7090	2443.2717	---	---
	Ant2	2437	12.456	2430.7850	2443.2407	---	---
	Ant1	2462	12.519	2455.7253	2468.2443	---	---
	Ant2	2462	12.434	2455.7546	2468.1886	---	---
11G	Ant1	2412	17.089	2403.4043	2420.4936	---	---
	Ant2	2412	17.09	2403.3814	2420.4712	---	---
	Ant1	2437	19.002	2427.4164	2446.4186	---	---
	Ant2	2437	18.98	2427.4826	2446.4628	---	---
	Ant1	2462	19.008	2452.3666	2471.3746	---	---
11N20MI MO	Ant2	2462	18.973	2452.3597	2471.3325	---	---
	Ant1	2412	17.848	2403.0534	2420.9014	---	---
	Ant2	2412	17.676	2403.1210	2420.7968	---	---
	Ant1	2437	19.88	2427.0481	2446.9284	---	---
	Ant2	2437	18.44	2427.6793	2446.1195	---	---
11N40MI MO	Ant1	2462	19.862	2452.0080	2471.8704	---	---
	Ant2	2462	18.446	2452.6164	2471.0621	---	---
	Ant1	2422	36.174	2403.9214	2440.0953	---	---
	Ant2	2422	36.251	2403.8434	2440.0949	---	---
	Ant1	2437	36.168	2418.8987	2455.0670	---	---
	Ant2	2437	36.298	2418.8406	2455.1391	---	---
11AX20M IMO	Ant1	2452	36.16	2433.8948	2470.0549	---	---
	Ant2	2452	36.196	2433.8883	2470.0848	---	---
	Ant1	2412	18.85	2402.5569	2421.4067	---	---
	Ant2	2412	18.876	2402.5390	2421.4154	---	---
	Ant1	2437	19.285	2427.3431	2446.6277	---	---
	Ant2	2437	19.271	2427.3544	2446.6249	---	---
11AX40M IMO	Ant1	2462	19.317	2452.3004	2471.6170	---	---
	Ant2	2462	19.207	2452.3474	2471.5540	---	---
	Ant1	2422	37.791	2403.0571	2440.8485	---	---
	Ant2	2422	37.821	2403.0366	2440.8571	---	---
	Ant1	2437	37.743	2418.1163	2455.8590	---	---
	Ant2	2437	37.828	2418.0721	2455.8996	---	---
	Ant1	2452	37.751	2433.0721	2470.8228	---	---
	Ant2	2452	37.708	2433.1479	2470.8555	---	---

### 5.5. Test graphs

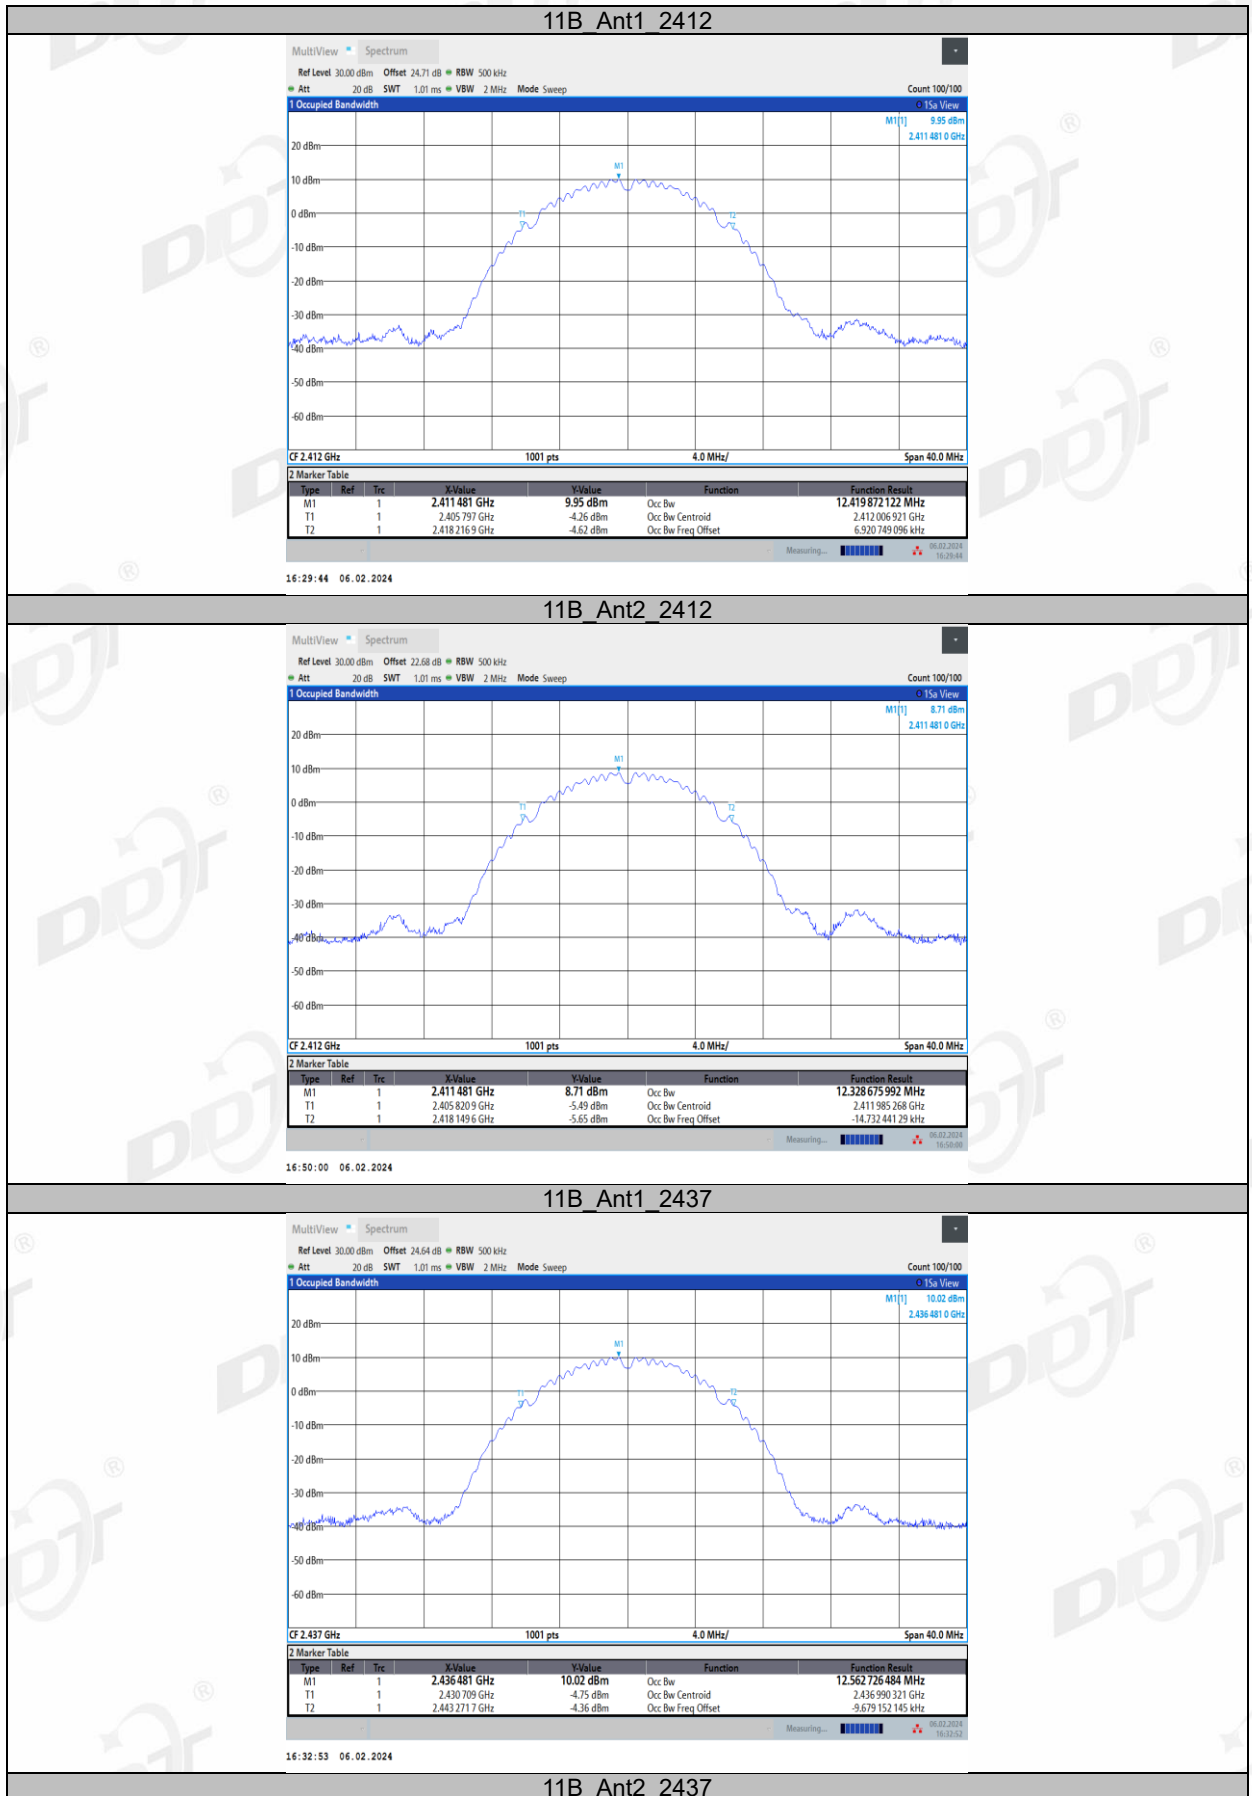


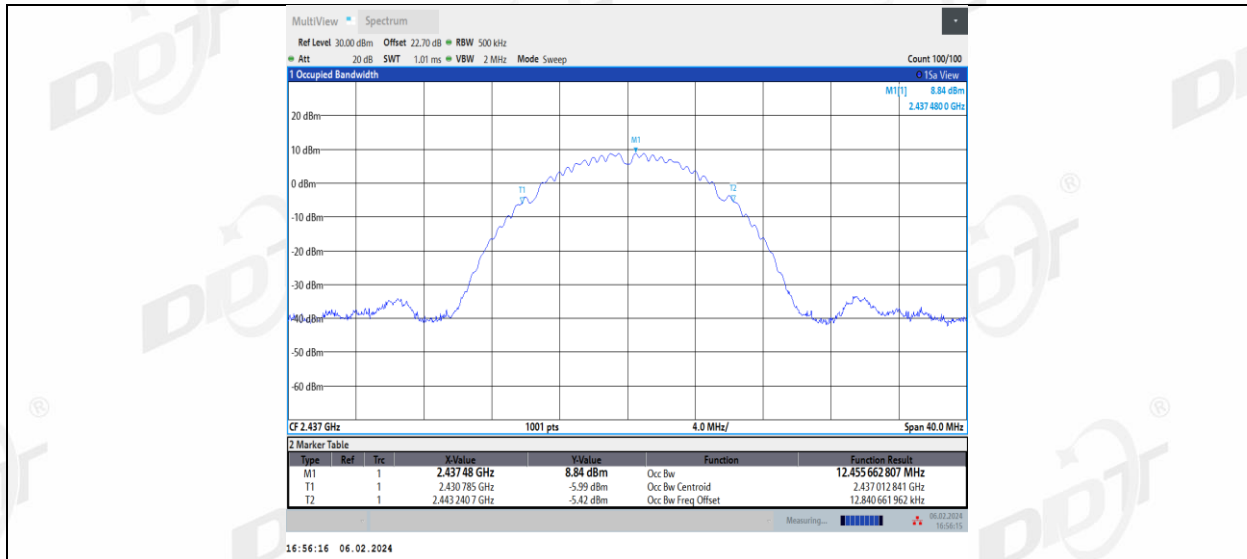


11B\_Ant1\_2462

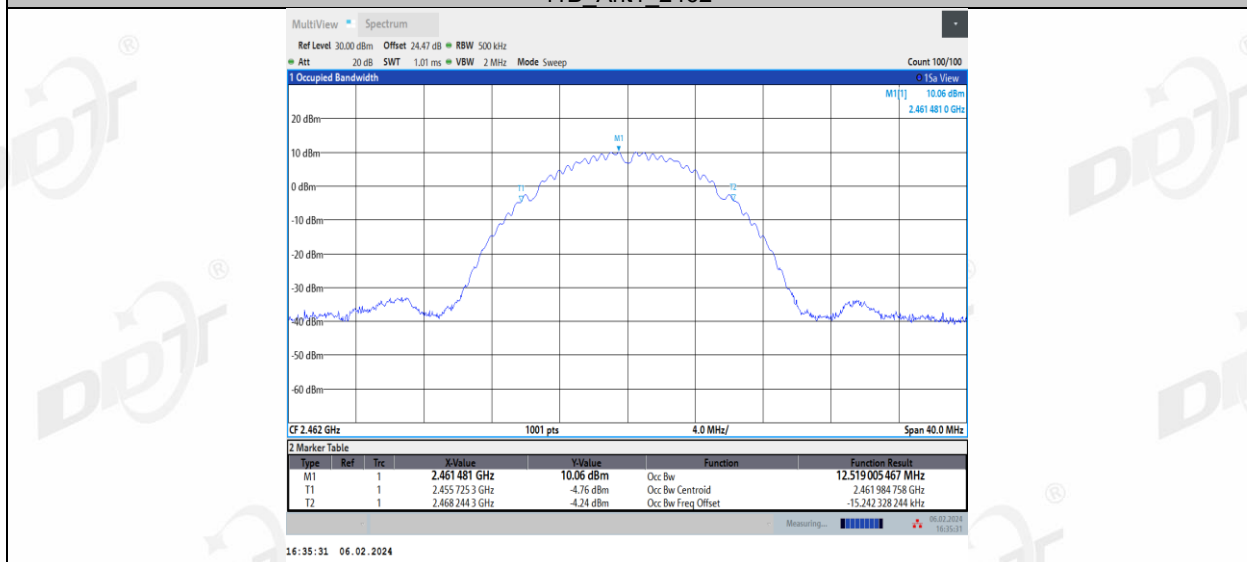


11B\_Ant2\_2462

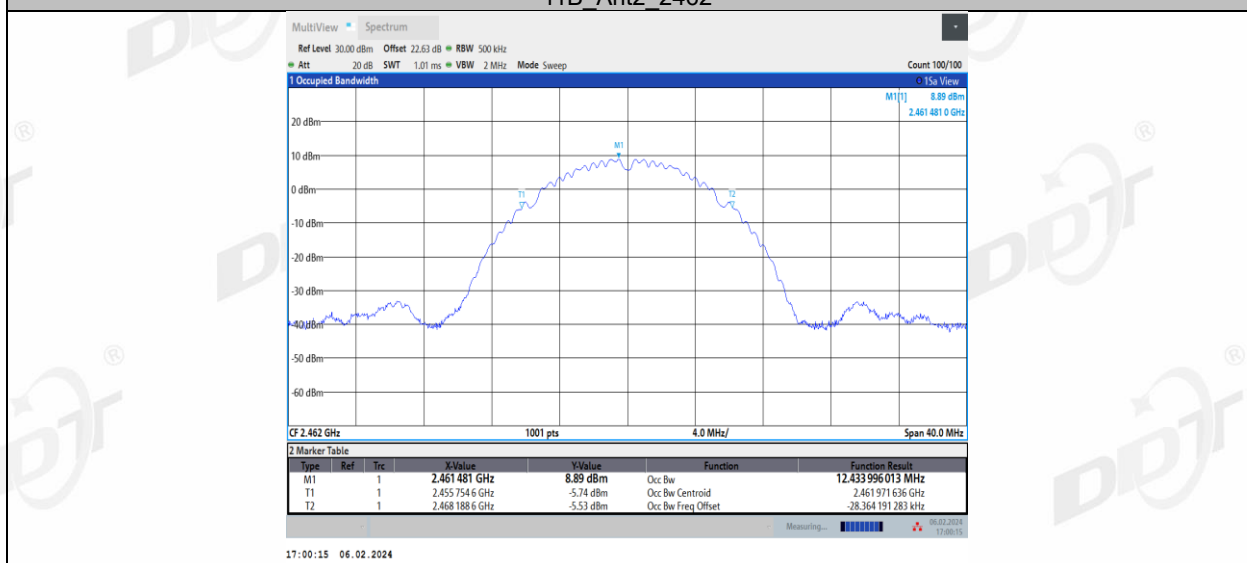


11G\_Ant1\_2412

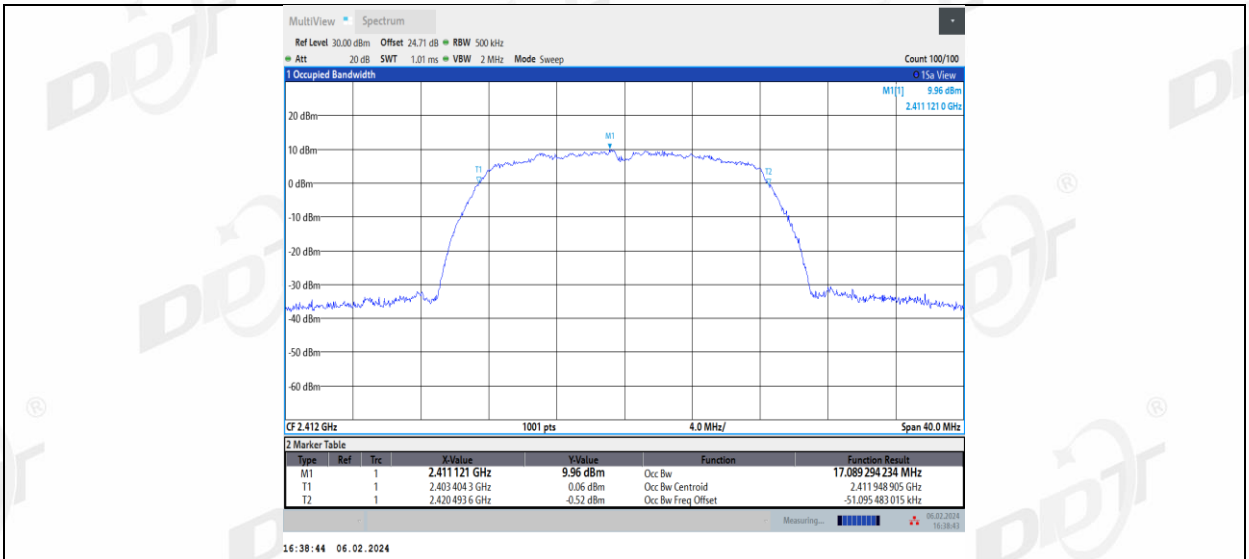


11G\_Ant2\_2412

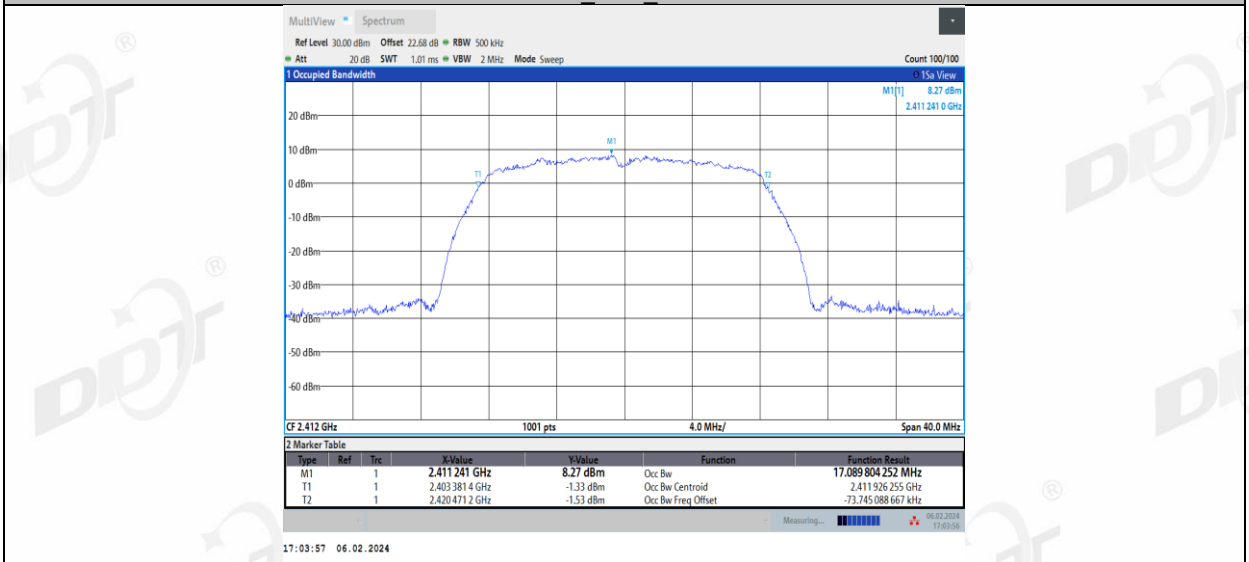


11G\_Ant1\_2437

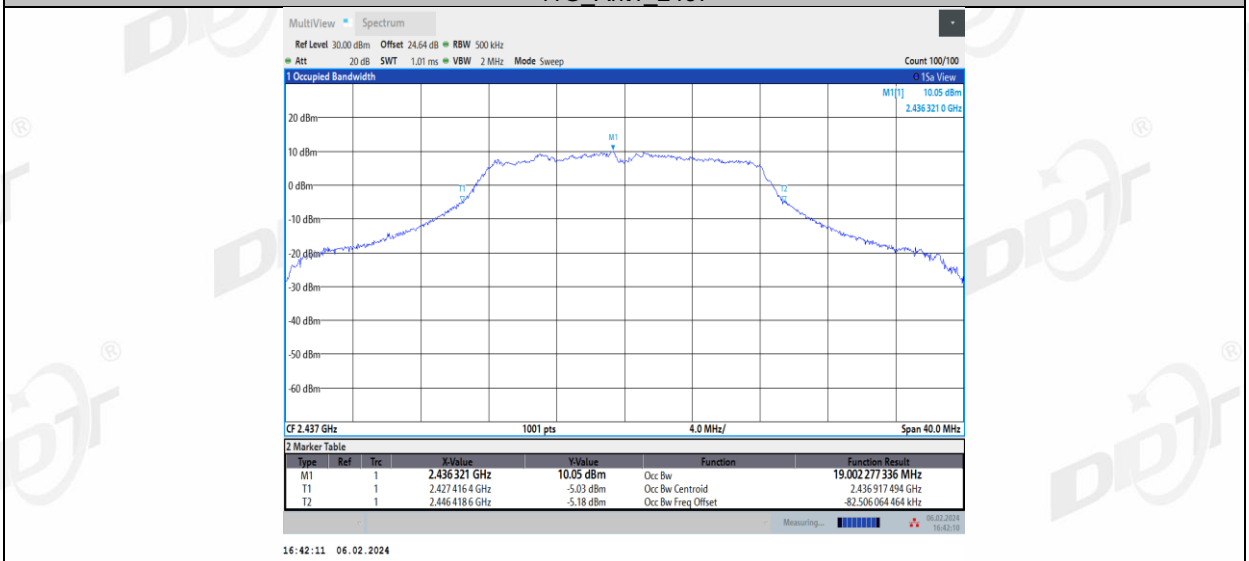


11G\_Ant2\_2437

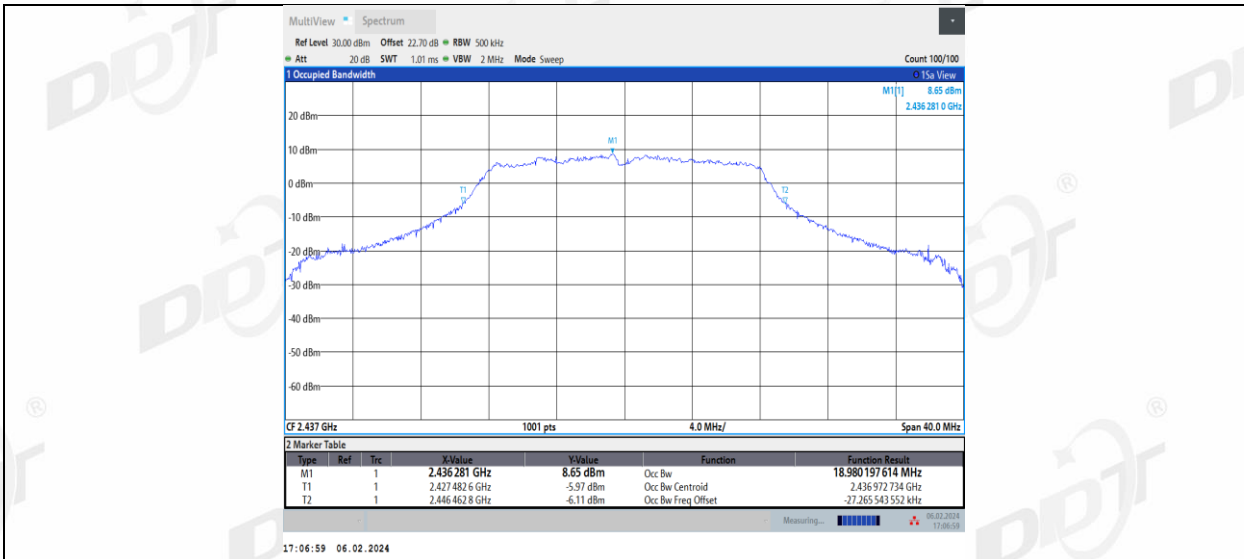

11G\_Ant1\_2462

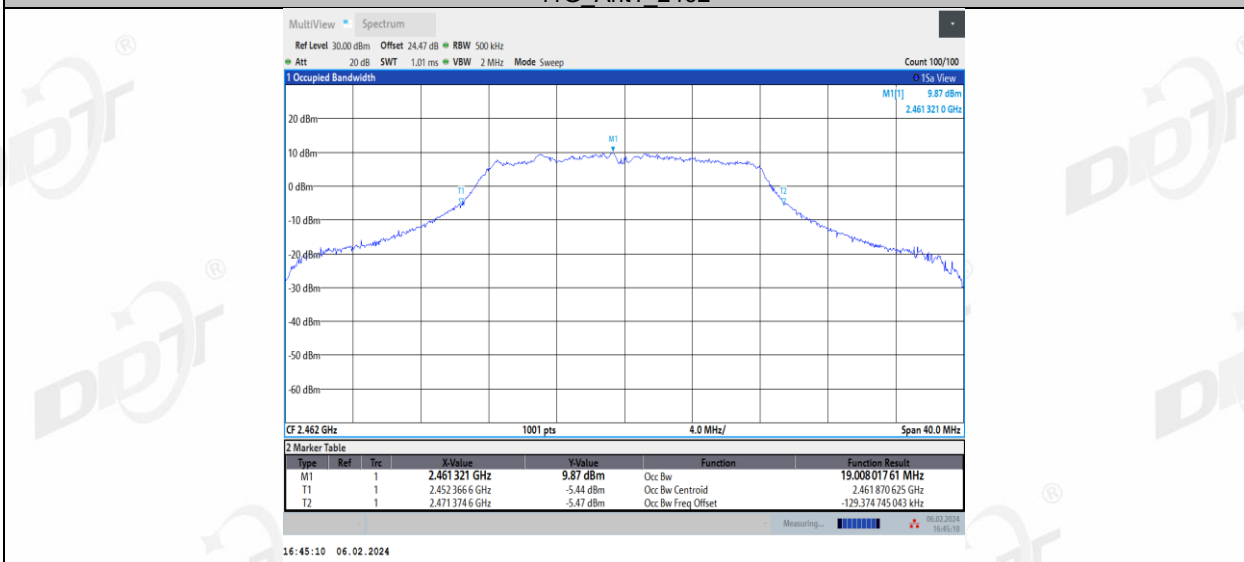


11G\_Ant2\_2462

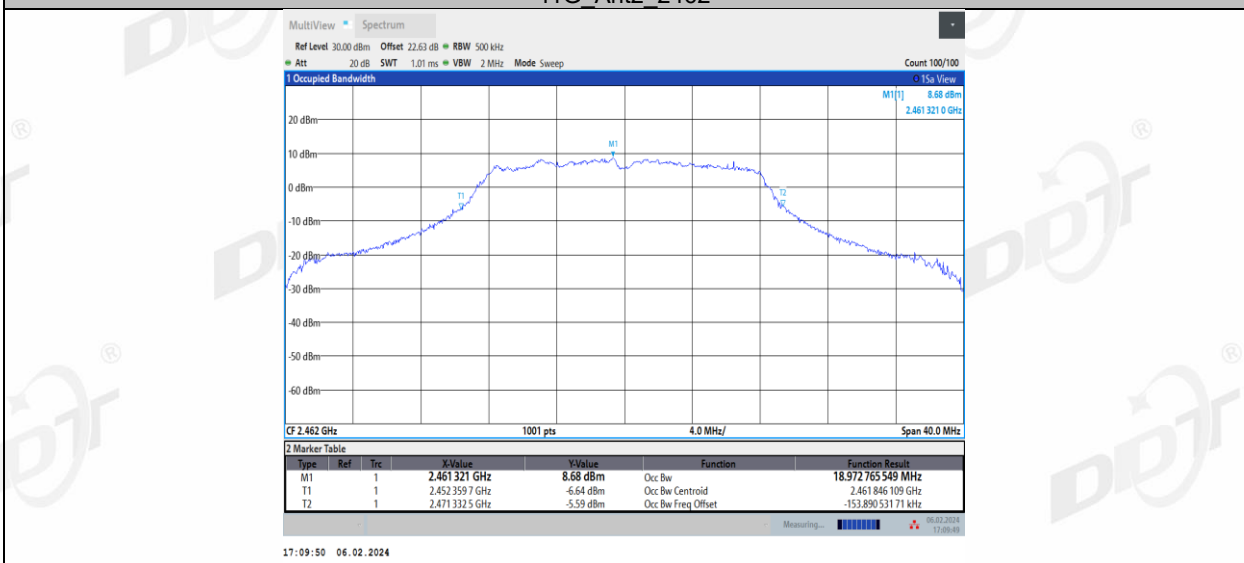


11N20MIMO\_Ant1\_2412




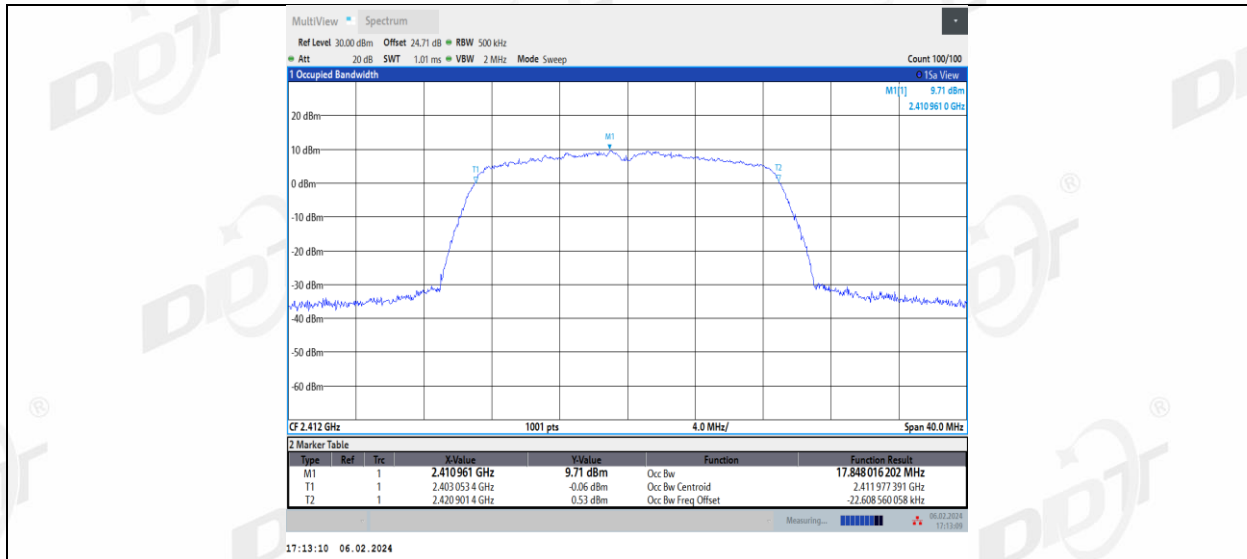

11N20MIMO\_Ant2\_2412

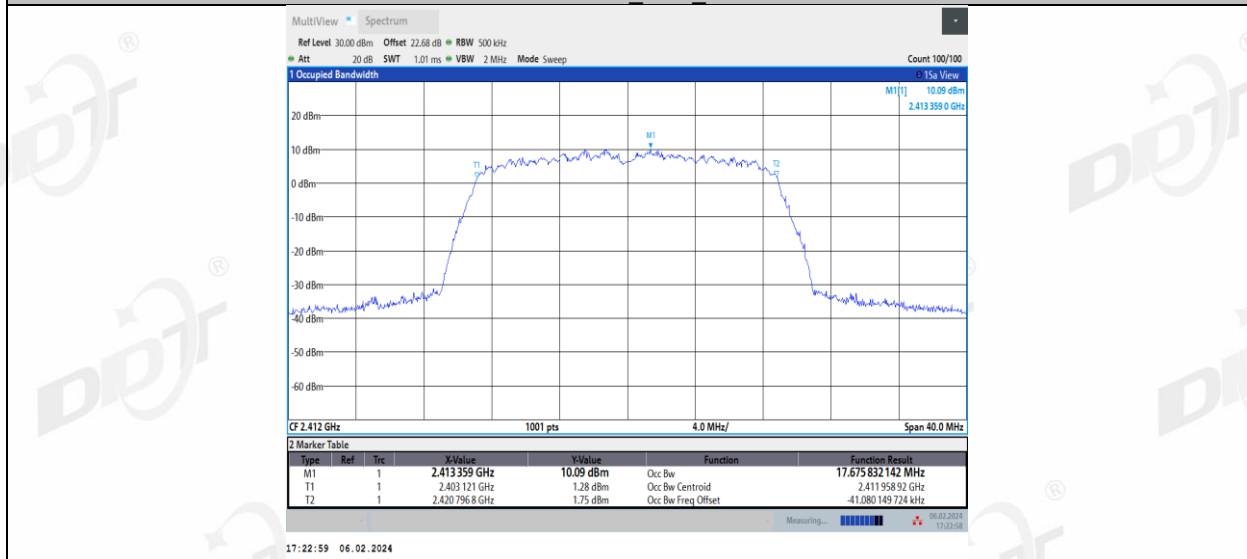

11N20MIMO\_Ant1\_2437

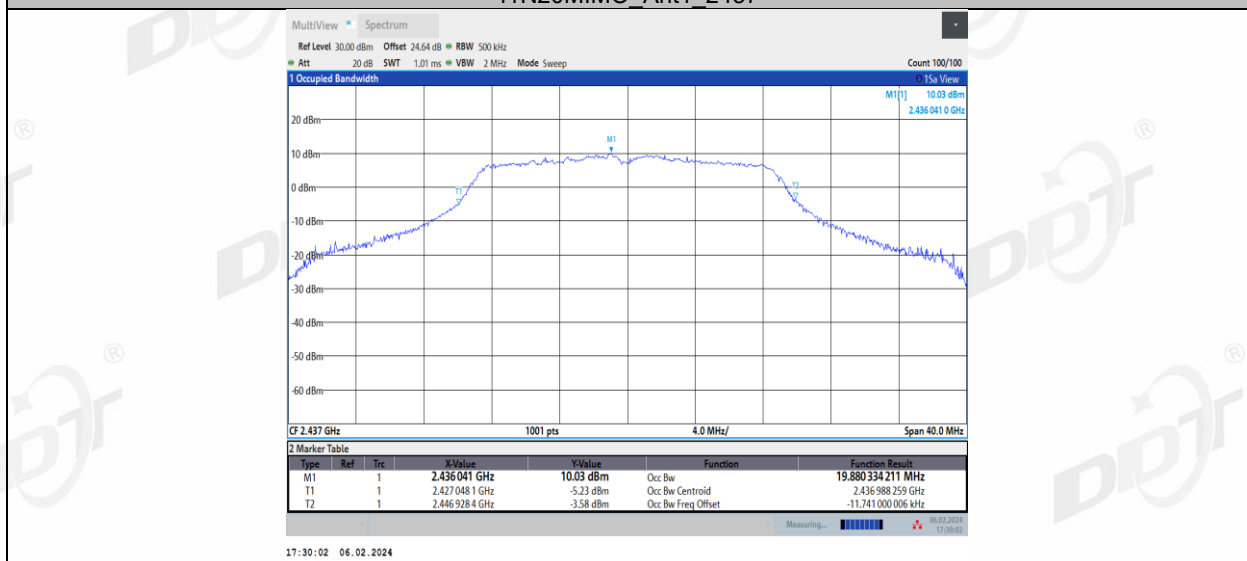

11N20MIMO\_Ant2\_2437