

Report No.: SEWM2204000037RG01

Rev.: 01 Page: 1 of 33

# FCC SAR TEST REPORT

Application No.: SEWM2204000037RG

**Applicant:** Harman International Industries, Inc. **Manufacturer:** Harman International Industries, Inc.

Product Name: BLUETOOTH HEADSET Model No.(EUT): ENDURANCE PEAK 3

Trade Mark: JBL

FCC ID: APIJBLENPEAK

Standards: FCC 47CFR §2.1093

**Date of Receipt:** 2022-04-26

**Date of Test:** 2022-04-27 to 2022-04-27

Date of Issue: 2022-05-07
Test conclusion: PASS \*

\* In the configuration tested, the EUT detailed in this report complied with the standards specified above.

Authorized Signature:

Panta Sun

Wireless Laboratory Manager



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printe overleaf, available on request or accessible at http://www.sgs.com/en/Terms.and-Conditions.apx and, for electronic format documents subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx.Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduce except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content of appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tere tealined for 30 days only.

| Suth of No. Float, No. T, Rursheng Road, Surbou Industrial Park, Surbou Area, Ohira (Alangsu) Pilot Free Trade Zone 215000 t (86—512) 62992980 www.sgs.group.com.c 中国 - 苏州 - 中国 (江苏) 自由贸易试验区苏州 Fi 区苏州工业园区润胜商 I 号的场 Fi 原南部 邮编: 215000 t (86—512) 62992980 sgs.china@sgs.com



Report No.: SEWM2204000037RG01

Rev.: 01 Page: 2 of 33

#### **REVISION HISTORY**

Report Number	Revision	Description	Issue Date
SEWM2204000037RG01	01	Original	2022-05-07



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sas.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sas.com/en/Terms-and-Conditions appx and, for electronic format documents, at http://www.sas.com/en/Terms-and-Conditions for Electronic Document as a http://www.sas.com/en/Terms-and-Conditions for Terms-a-Document ex. Attention is drawn to the limitation of liability, Indemnification and jurisdiction issues define therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or fallsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-75) 8307 1443,

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suzhou Area, China (Kangsu) Plot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜鹿1号的6号厂房南部 邮编: 215000

t (86–512) 62992980 v

www.sgsgroup.com.cn sgs.china@sgs.com



Report No.: SEWM2204000037RG01

Rev.: 01 Page: 3 of 33

#### **TEST SUMMARY**

Frequency Band	Maximum Reported SAR(W/kg)
ВТ	0.99
SAR Limited(W/kg)	1.6

Reviewed by

well wei

Well Wei

**Prepared by** 

Nick Hu



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not excerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone (86-755) \$3071443.



Report No.: SEWM2204000037RG01

Rev.: 01 Page: 4 of 33

### **CONTENTS**

1	GENERAL INFORMATION	6
	1.1 DETAILS OF CLIENT	6
	1.2 TEST LOCATION	6
	1.3 TEST FACILITY	
	1.4 GENERAL DESCRIPTION OF EUT	8
	1.5 TEST SPECIFICATION	9
	1.6 RF EXPOSURE LIMITS	10
2	SAR MEASUREMENTS SYSTEM CONFIGURATION	11
	2.1 THE SAR MEASUREMENT SYSTEM	11
	2.2 ISOTROPIC E-FIELD PROBE EX3DV4	12
	2.3 DATA ACQUISITION ELECTRONICS (DAE)	13
	2.4 SAM TWIN PHANTOM	13
	2.5 ELI PHANTOM	14
	2.6 DEVICE HOLDER FOR TRANSMITTERS	15
	2.7 MEASUREMENT PROCEDURE	16
	2.7.1 Scanning procedure	16
	2.7.2 Data Storage	
	2.7.3 Data Evaluation by SEMCAD	
3	DESCRIPTION OF TEST POSITION	20
4	SAR SYSTEM VERIFICATION PROCEDURE	21
	4.1 TISSUE SIMULATE LIQUID	21
	4.1.1 Recipes for Tissue Simulate Liquid	21
	4.1.2 Measurement for Tissue Simulate Liquid	
	4.2 SAR SYSTEM CHECK	23
	4.2.1 Justification for Extended SAR Dipole Calibrations	24
	4.2.2 Summary System Check Result(s)	25
	4.2.3 Detailed System Check Results	25
5	TEST RESULTS AND MEASUREMENT DATA	26
	5.1.1 Bluetooth Test Configuration	26
	5.1.2 Duty cycle	26
	5.1.3 DUT Antenna Locations	Error! Bookmark not defined.
	5.2 MEASUREMENT OF RF CONDUCTED POWER	29
	5.2.1 Conducted Power of BT	29
	5.3 STAND-ALONE SAR TEST EVALUATION	30
	5.4 MEASUREMENT OF SAR DATA	
	5.4.1 SAR Result of BT	
6	E FOLIIDMENT LIST	22



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues define therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration (rigery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) test earlied for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, \*\*Certificate, Please contact us at telephone: (86-755) 8307 1443, \*\*Certificate, Please contact us at telephone: (86-755) 8307 1443, \*\*Certificate, Please contact us at telephone: (86-755) 8307 1443, \*\*Certificate, Please contact us at telephone: (86-755) 8307 1443, \*\*Certificate, Please contact us at telephone: (86-755) 8307 1443, \*\*Certificate, Please contact us at telephone: (86-755) 8307 1443, \*\*Certificate, Please contact us at telephone: (86-755) 8307 1443, \*\*Certificate, Pl

South of No. 6 Pfart, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号约6号厂房南部 邮编: 215000



Report No.: SEWM2204000037RG01

Rev.: 01 Page: 5 of 33

7	CALIBRATION CERTIFICATE	33
8	PHOTOGRAPHS	33
APF	PENDIX A: DETAILED SYSTEM CHECK RESULTS	33
APF	PENDIX B: DETAILED TEST RESULTS	33
APF	PENDIX C: CALIBRATION CERTIFICATE	33
ΔΡΙ	PENDIX D: PHOTOGRAPHS	33



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sas.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sas.com/en/Terms-and-Conditions appx and, for electronic format documents, at http://www.sas.com/en/Terms-and-Conditions for Electronic Document as a http://www.sas.com/en/Terms-and-Conditions for Terms-a-Document ex. Attention is drawn to the limitation of liability, Indemnification and jurisdiction issues define therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or fallsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-75) 8307 1443,

South of No. 6 Pfart, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号约6号厂房南部 邮编: 215000

t (86–512) 62992980 v

www.sgsgroup.com.cn sgs.china@sgs.com



Report No.: SEWM2204000037RG01

Rev.: 01 Page: 6 of 33

### 1 General Information

### 1.1 Details of Client

Applicant:	Harman International Industries, Inc.	
Address:	8500 Balboa Boulevard, Northridge, California, 91329, United States	
Manufacturer:	Harman International Industries, Inc.	
Address:	8500 Balboa Boulevard, Northridge, California, 91329, United States	

#### 1.2 Test Location

Company:	SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Address:	South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone
Post code:	215000
Test Engineer:	Leon Xu



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CND.occheck@sgs.com



Report No.: SEWM2204000037RG01

Rev.: 01 Page: 7 of 33

#### 1.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• A2LA (Certificate No. 6336.01)

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 6336.01.

• Innovation, Science and Economic Development Canada

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0120.

IC#: 27594.

• FCC -Designation Number: CN1312

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized as an

accredited testing laboratory.

Designation Number: CN1312.

Test Firm Registration Number: 717327





Report No.: SEWM2204000037RG01

Rev.: 01 Page: 8 of 33

### 1.4 General Description of EUT

Device Type :	portable device			
Exposure Category:	uncontrolled environment / general population			
Product Name:	BLUETOOTH HEADSE	Т		
Model No.(EUT):	ENDURANCE PEAK 3			
FCC ID:	APIJBLENPEAK			
Trade Mark:	JBL			
Product Phase:	production unit			
SN:	CM0151-CM0000594	CM0151-CM0000594		
Hardware Version:	1.3	1.3		
Software Version:	3.3.0			
Antenna Type:	Integral Antenna			
Device Operating Configurations :				
Modulation Mode:	BT: GFSK, π/4DQPSK,8DPSK			
Croquency Dondo	Band	Tx (MHz)	Rx (MHz)	
Frequency Bands:	Bluetooth	2400~2483.5	2400~2483.5	
Pottory Information:	Normal Voltage:	3.85V		
Battery Information:	Rated capacity:	70mAh		



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sas.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sas.com/en/Terms-and-Conditions appx and, for electronic format documents, at http://www.sas.com/en/Terms-and-Conditions for Electronic Document as a http://www.sas.com/en/Terms-and-Conditions for Terms-a-Document ex. Attention is drawn to the limitation of liability, Indemnification and jurisdiction issues define therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or fallsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-75) 8307 1443,

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suzhou Area, China (Jiangsu) Plot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜裔1号约6号厂房南部 邮编: 215000



Report No.: SEWM2204000037RG01

Rev.: 01 Page: 9 of 33

### 1.5 Test Specification

Identity	Document Title
FCC 47CFR §2.1093	Radiofrequency Radiation Exposure Evaluation: Portable Devices
ANSI/IEEE C95.1-1992	IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz – 300 GHz.
IEEE 1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
KDB 447498 D01	General RF Exposure Guidance v06
KDB 865664 D01	SAR Measurement 100 MHz to 6 GHz v01r04
KDB 865664 D02	RF Exposure Reporting v01r02



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sas.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sas.com/en/Terms-and-Conditions appx and, for electronic format documents, at http://www.sas.com/en/Terms-and-Conditions for Electronic Document as a http://www.sas.com/en/Terms-and-Conditions for Terms-a-Document ex. Attention is drawn to the limitation of liability, Indemnification and jurisdiction issues define therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or fallsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-75) 8307 1443,

South of No. 6 Pfart, No. 1, Runsheng Read, Suchou Industrial Park, Suchou Area, China (Jangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWM2204000037RG01

Rev.: 01 Page: 10 of 33

### 1.6 RF exposure limits

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Spatial Peak SAR* (Brain*Trunk)	1.60 mW/g	8.00 mW/g
Spatial Average SAR** (Whole Body)	0.08 mW/g	0.40 mW/g
Spatial Peak SAR*** (Hands/Feet/Ankle/Wrist)	4.00 mW/g	20.00 mW/g

#### Notes:

**Uncontrolled Environments** are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

**Controlled Environments** are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation.)



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.ags.com/en/Terms-and-Conditions.agx; and, for electronic Documents at http://www.ags.com/en/Terms-and-Conditions/Terms-e-Document as public to Terms and Conditions for Telectronic Document as http://www.ags.com/en/Terms-and-Conditions/Terms-e-Document as public to the state of the stat

<sup>\*</sup> The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time

<sup>\*\*</sup> The Spatial Average value of the SAR averaged over the whole body.

<sup>\*\*\*</sup> The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.



Report No.: SEWM2204000037RG01

Rev.: 01 Page: 11 of 33

# 2 SAR Measurements System Configuration2.1 The SAR Measurement System

This SAR Measurement System uses a Computer-controlled 3-D stepper motor system (SPEAG DASY5 professional system). A E-field probe is used to determine the internal electric fields. The SAR can be obtained from the equation SAR=  $\sigma$  (|Ei|2)/  $\rho$  where  $\sigma$  and  $\rho$  are the conductivity and mass density of the tissue-Simulate.


The DASY5 system for performing compliance tests consists of the following items:

A standard high precision 6-axis robot (Stabile RX family) with controller, teach pendant and software .An arm extension for accommodation the data acquisition electronics (DAE).

A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.

A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.

The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.

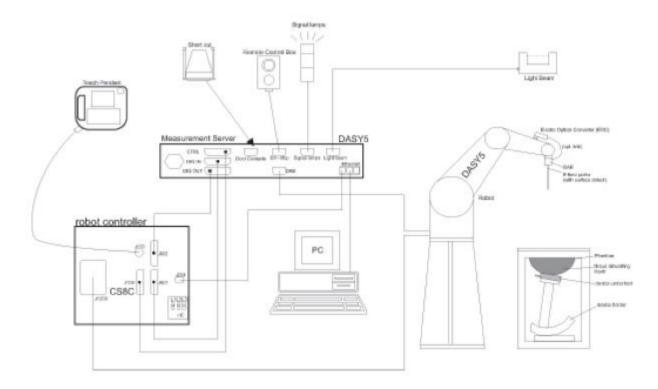

F-1. SAR Measurement System Configuration



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.apx.and">http://www.sgs.com/en/Terms-and-Conditions.apx.and</a>, for electronic format documents as subject to Terms and Conditions [Jerms-e-Document as the Iting-//www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.sgs. Attention is drawn to the limitation of liability, indemnification and jurisdicton issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent or the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suzhou Area, China (Liangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86–512) 62992980

www.sgsgroup.com.cn sgs.china@sgs.com



Report No.: SEWM2204000037RG01

Rev.: 01 Page: 12 of 33

The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.

- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows 7.
- DASY5 software.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom enabling testing left-hand, right-hand and Body Worn usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- Validation dipole kits allowing to validating the proper functioning of the system.

### 2.2 Isotropic E-field Probe EX3DV4

	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	ISO/IEC 17025 calibration service available.
Frequency	10 MHz to > 6 GHz Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)
Dynamic Range	10 μW/g to > 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 μW/g)
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields); the only probe that enables compliance testing for frequencies up to 6 GHz with precision of better 30%.
Compatibility	DASY3, DASY4, DASY52 SAR and higher, EASY4/MRI



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/en/Terms-and-Conditions.aspx.and">https://www.sgs.com/en/Terms-and-Conditions.aspx.and</a>, for electronic format documents as subject to Terms and Conditions for Electronic Document sat http://www.sgs.com/en/Terms-en/Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

\*\*Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) \$307,1443.

South of No. 6 Pfart, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86–512) 62992980

sgs.china@sgs.com



Report No.: SEWM2204000037RG01

Rev.: 01 Page: 13 of 33

### 2.3 Data Acquisition Electronics (DAE)

Model	DAE
Construction	Signal amplifier, multiplexer, A/D converter and control logic. Serial optical link for communication with DASY4/5 embedded system (fully remote controlled). Two step probe touch detector for mechanical surface detection and emergency robot stop.
Measurement Range	-100 to +300 mV (16 bit resolution and two range settings: 4mV,400mV)
Input Offset Voltage	< 5μV (with auto zero)
Input Bias Current	< 50 f A
Dimensions	60 x 60 x 68 mm



#### 2.4 SAM Twin Phantom

Material	Vinylester, glass fiber reinforced (VE-GF)
Liquid Compatibility	Compatible with all SPEAG tissue simulating liquids (incl. DGBE type)
Shell Thickness	2 ± 0.2 mm (6 ± 0.2 mm at ear point)
Dimensions (incl. Wooden Support)	Length: 1000 mm Width: 500 mm Height: adjustable feet
Filling Volume	approx. 25 liters
Wooden Support	SPEAG standard phantom table



The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 and IEC 62209-1. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot.

Twin SAM V5.0 has the same shell geometry and is manufactured from the same material as Twin SAM V4.0, but has reinforced top structure.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx.and.">http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx.and.</a> condictions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx.">http://www.sgs.com/en/Terms-en-Document.aspx.</a>
Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

\*\*Attention: To check the authenticity of testing /inspection report & certificite.\*\* please contact us at telephone: (86-755) \$307.1443.

South of No. 6 Pfart, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

5000 t (86–512) 629929

www.sgsgroup.com.cn sgs.china@sgs.com



Report No.: SEWM2204000037RG01

Rev.: 01 Page: 14 of 33

#### 2.5 ELI Phantom

Material	Vinylester, glass fiber reinforced (VE-GF)
Liquid	Compatible with all SPEAG tissue
Compatibility	simulating liquids (incl. DGBE type)
Shell Thickness	2.0 ± 0.2 mm (bottom plate)
Dimensions	Major axis: 600 mm
	Minor axis: 400 mm
Filling Volume	approx. 30 liters
Wooden Support	SPEAG standard phantom table



Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.

ELI V5.0 has the same shell geometry and is manufactured from the same material as ELI4, but has reinforced top structure.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.ags.com/en/Terms-and-Conditions.agx; and, for electronic Documents at http://www.ags.com/en/Terms-and-Conditions/Terms-e-Document as public to Terms and Conditions for Telectronic Document as http://www.ags.com/en/Terms-and-Conditions/Terms-e-Document as public to the state of the stat



Report No.: SEWM2204000037RG01

Rev.: 01 Page: 15 of 33

#### 2.6 Device Holder for Transmitters



F-2. Device Holder for Transmitters

- The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation centres for both scales are the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.
- The DASY device holder has been made out of low-loss POM material having the following dielectric parameters: relative permittivity  $\varepsilon$ =3 and loss tangent  $\delta$ =0.02. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx.and">http://www.sgs.com/en/Terms-and-Conditions.aspx.and</a>, for electronic format documents subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx.">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx.</a><a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx.">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx.</a><a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx.">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx.</a><a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx.">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx.</a><a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx.">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx.</a><a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx.">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx.</a><a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx.">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx.</a><a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx.">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx.</a><a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-and-Conditions/Terms-e-Document.aspx.">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx.</a><a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx.">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx.</a><a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx.">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx.</a><a href="http://www.sgs.com/en/Terms-and-Co



Report No.: SEWM2204000037RG01

Rev.: 01 Page: 16 of 33

#### 2.7 Measurement procedure

#### 2.7.1 Scanning procedure

#### **Step 1: Power reference measurement**

The "reference" and "drift" measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure.

#### Step 2: Area scan

The SAR distribution at the exposed side of the head was measured at a distance of 4mm from the inner surface of the shell. The area covered the entire dimension of the head and the horizontal grid spacing was 15mm\*15mm or 12mm\*12mm or 10mm\*10mm.Based on the area scan data, the area of the maximum absorption was determined by spline interpolation.

#### Step 3: Zoom scan

Around this point, a volume of 32mm\*32mm\*30mm (f≤2GHz), 30mm\*30mm\*30mm (f for 2-3GHz) and 24mm\*24mm\*22mm (f for 5-6GHz) was assessed by measuring 5x5x7 points (f≤2GHz), 7x7x7 points (f for 2-3GHz) and 7x7x12 points (f for 5-6GHz). On this basis of this data set, the spatial peak SAR value was evaluated with the following procedure:

The data at the surface was extrapolated, since the centre of the dipoles is 2.0mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.2mm. (This can be variable. Refer to the probe specification). The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip. The maximum interpolated value was searched with a straight-forward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1g or 10g) were computed using the 3D-Spline interpolation algorithm. The volume was integrated with the trapezoidal algorithm. One thousand points were interpolated to calculate the average. All neighbouring volumes were evaluated until no neighboring volume with a higher average value was found.

The area and zoom scan resolutions specified in the table below must be applied to the SAR measurements Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1-g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std. 1528-2013.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.apx">http://www.sgs.com/en/Terms-and-Conditions.apx</a> and, for electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document.apx">http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document.apx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Report No.: SEWM2204000037RG01

Rev.: 01 Page: 17 of 33

			≤ 3 GHz	> 3 GHz		
Maximum distance from			5 ± 1 mm	½·δ·ln(2) ± 0.5 mm		
Maximum probe angle surface normal at the n			30° ± 1°	20° ± 1°		
			≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm		
Maximum area scan sp	atial resolu	ation: ∆x <sub>Area</sub> , ∆y <sub>Area</sub>	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.			
Maximum zoom scan s	patial reso	lution: Δx <sub>Zoom</sub> , Δy <sub>Zoom</sub>	≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*		
	uniform	grid: ∆z <sub>Z∞m</sub> (n)	≤ 5 mm	$3-4 \text{ GHz}: \le 4 \text{ mm}$ $4-5 \text{ GHz}: \le 3 \text{ mm}$ $5-6 \text{ GHz}: \le 2 \text{ mm}$		
Maximum zoom scan spatial resolution, normal to phantom surface	graded	Δz <sub>Zoom</sub> (1): between 1 <sup>st</sup> two points closest to phantom surface	≤ 4 mm	$3-4$ GHz: $\leq 3$ mm $4-5$ GHz: $\leq 2.5$ mm $5-6$ GHz: $\leq 2$ mm		
	grid	Δz <sub>Zoom</sub> (n>1): between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$			
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm		

#### **Step 4: Power reference measurement (drift)**

The Power Drift Measurement job measures the field at the same location as the most recent power reference measurement job within the same procedure, and with the same settings. The indicated drift is mainly the variation of the DUT's output power and should vary max.  $\pm$  5 %



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not excerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone (86-755) \$3071443.

South of No. 6 Pfart, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号约6号厂房南部 邮编: 215000



Report No.: SEWM2204000037RG01

Rev.: 01 Page: 18 of 33

#### 2.7.2 Data Storage

The DASY software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension ".DAE4". The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be reevaluated. The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [m W/g], [m W/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

#### 2.7.3 Data Evaluation by SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters: - Sensitivity Normi, ai0, ai1, ai2

Conversion factorDiode compression pointDcpi

Device parameters: - Frequency f

- Crest factor cf Media parameters: - Conductivity ε

- Density p

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot c f / d c p_i$$

With Vi = compensated signal of channel i (i = x, y, z)

Ui = input signal of channel i (i = x, y, z)

cf = crest factor of exciting field (DASY parameter)

dcp i = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes:

$$E_{i} = (V_{i} / Norm_{i} \cdot ConvF)^{1/2}$$



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.appx">http://www.sgs.com/en/Terms-and-Conditions.appx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document.appx">http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document.appx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

\*\*Attention:\*\*To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) \$3071443.

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jlangsu) Pilot Free Trade Zone 215000

中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWM2204000037RG01

Rev.: Page: 19 of 33

H-field probes:

 $H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1}f + a_{i2}f^2)/f$ With Vi = compensated signal of channel i (i = x, y, z) Normi = sensor sensitivity of channel I (i = x, y, z)

[mV/(V/m)2] for E-field Probes

ConvF = sensitivity enhancement in solution

aij = sensor sensitivity factors for H-field probes

f = carrier frequency [GHz]

Ei = electric field strength of channel i in V/m

Hi = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$SAR = (Etot^2 \cdot \sigma) / (\varepsilon \cdot 1000)$$

with SAR = local specific absorption rate in mW/g

Etot = total field strength in V/m

 $\sigma$ = conductivity in [mho/m] or [Siemens/m]

ε= equivalent tissue density in g/cm3

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = E_{tot}^2 / 3770_{Or} P_{pwe} = H_{tot}^2 \cdot 37.7$$

Ppwe = equivalent power density of a plane wave in mW/cm2

Etot = total electric field strength in V/m

Htot = total magnetic field strength in A/m



South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国•苏州•中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWM2204000037RG01

Rev.: 01 Page: 20 of 33

### 3 Description of Test Position

SAR test the sides near the antenna, the surface of the device should be tested for SAR compliance with the device touching the phantom. The SAR Exclusion Threshold in KDB 447498 D01 can be applied to determine SAR test exclusion for adjacent edge configurations. The closest distance from the antenna to an adjacent device surface is used to determine if SAR testing is required for the adjacent surfaces, with the adjacent surface positioned against the phantom and the surface containing the antenna positioned perpendicular to the phantom.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.ags.com/en/Terms-and-Conditions.agx; and, for electronic Documents at http://www.ags.com/en/Terms-and-Conditions/Terms-e-Document as public to Terms and Conditions for Telectronic Document as http://www.ags.com/en/Terms-and-Conditions/Terms-e-Document as public to the state of the stat

South of No. 6 Pfart, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWM2204000037RG01

Rev.: 01 Page: 21 of 33

### 4 SAR System Verification Procedure

### 4.1 Tissue Simulate Liquid

#### 4.1.1 Recipes for Tissue Simulate Liquid

The bellowing tables give the recipes for tissue simulating liquids to be used in different frequency bands:

Ingredients (% by weight)	Frequency (MHz) 2450
Tissue Type	Head
Water	55.00
Salt (NaCl)	0.2
Sucrose	0
HEC	0
Bactericide	0
Tween	44.80

Salt: 99 $^+$ % Pure Sodium Chloride Sucrose: 98 $^+$ % Pure Sucrose Water: De-ionized, 16 M $\Omega^+$  resistivity HEC: Hydroxyethyl Cellulose

Tween: Polyoxyethylene (20) sorbitan monolaurate

Table 1: Recipe of Tissue Simulate Liquid





Report No.: SEWM2204000037RG01

Rev.: 01 Page: 22 of 33

#### 4.1.2 Measurement for Tissue Simulate Liquid

The Conductivity ( $\sigma$ ) and Permittivity ( $\rho$ ) are listed in bellow table. For the SAR measurement given in this report. The temperature variation of the Tissue Simulate Liquids was 22±2°C.

Tissue Type	Measured	Target Tiss	Measure	d Tissue	Liquid		
	Frequency (MHz)	ε <sub>r</sub>	σ(S/m)	ε <sub>r</sub>	σ(S/m)	Temp.(°C)	Measured Date
2450 Head	2450	39.20 (37.24~41.16)	1.80 (1.71~1.89)	39.623	1.780	22.1	2022/4/27

Table 2: Measurement result of Tissue electric parameters



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.ags.com/en/Terms-and-Conditions.agx; and, for electronic Documents at http://www.ags.com/en/Terms-and-Conditions/Terms-e-Document as public to Terms and Conditions for Telectronic Document as http://www.ags.com/en/Terms-and-Conditions/Terms-e-Document as public to the state of the stat

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Plot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号约6号厂房南部 邮编: 215000




Report No.: SEWM2204000037RG01

Rev.: 01 Page: 23 of 33

#### 4.2 SAR System Check

The microwave circuit arrangement for system Check is sketched in F-12. The daily system accuracy verification occurs within the flat section of the SAM phantom. A SAR measurement was performed to see if the measured SAR was within +/- 10% from the target SAR values. The tests were conducted on the same days as the measurement of the EUT. The obtained results from the system accuracy verification are displayed in the following table (A power level of 250mW (below 3GHz) or 100mW (3-6GHz) was input to the dipole antenna). During the tests, the ambient temperature of the laboratory was in the range 22±2°C, the relative humidity was in the range 60% and the liquid depth above the ear reference points was above 15±0.5 cm in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.

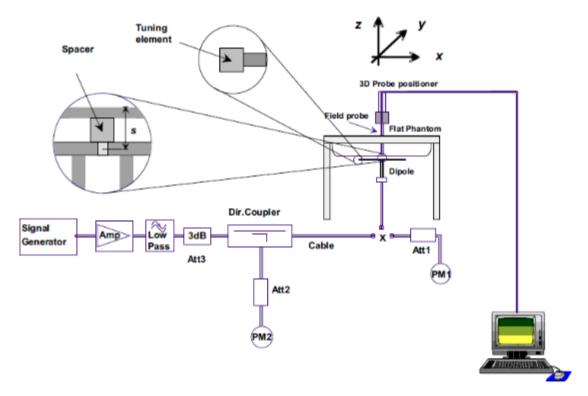

F-3. the microwave circuit arrangement used for SAR system check



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Documents">http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Documents</a>. Subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.sgx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

South of No. 6 Pfart, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWM2204000037RG01

Rev.: 01 Page: 24 of 33

#### 4.2.1 Justification for Extended SAR Dipole Calibrations

- 1) Referring to KDB865664 D01 requirements for dipole calibration, instead of the typical annual calibration recommended by measurement standards, longer calibration intervals of up to three years may be considered when it is demonstrated that the SAR target, impedance and return loss of a dipole have remain stable according to the following requirements. Each measured dipole is expected to evaluate with the following criteria at least on annual interval in Appendix C.
- a) There is no physical damage on the dipole;
- b) System check with specific dipole is within 10% of calibrated value;
- c) Return-loss is within 10% of calibrated measurement;
- d) Impedance is within  $5\Omega$  from the previous measurement.
- 2) Network analyzer probe calibration against air, distilled water and a shorting block performed before measuring liquid parameters.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.ags.com/en/Terms-and-Conditions.agx; and, for electronic Documents at http://www.ags.com/en/Terms-and-Conditions/Terms-e-Document as public to Terms and Conditions for Telectronic Document as http://www.ags.com/en/Terms-and-Conditions/Terms-e-Document as public to the state of the stat



Report No.: SEWM2204000037RG01

Rev.: 01 Page: 25 of 33

### 4.2.2 Summary System Check Result(s)

Validation Kit		Measured SAR 250mW	Measured SAR 250mW	Measured SAR (normalized to 1W)	Measured SAR (normalized to 1W)	Target SAR (normalized to 1W) (±10%)	Target SAR (normalized to 1W) (±10%)	Liquid Temp. (°C)	Measured Date
		1g (W/kg)	10g (W/kg)	1g (W/kg)	10g (W/kg)	1-g(W/kg)	10-g(W/kg)		
D2450V2	Head	12.80	6.14	51.20	24.56	52.2 (46.98~57.42)	24.5 (22.05~26.95)	22.1	2022/4/27

Table 3: SAR System Check Result

#### 4.2.3 Detailed System Check Results

Please see the Appendix A



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CAI. Doccheck@sgs.com

South of No. 6 Pfart, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号约6号厂房南部 邮编: 215000



Report No.: SEWM2204000037RG01

Rev.: 01 Page: 26 of 33


#### 5 Test results and Measurement Data

#### **5.1.1 Bluetooth Test Configuration**

For the Bluetooth SAR tests, a communication link is set up with the test mode software for BT mode test. Bluetooth USES frequency hopping technology to divide the transmitted data into packets and transmit the packets respectively through 79 designated Bluetooth channels,1MHz Bandwidth, frequency hops at 1600 hops/second per the Bluetooth standard. The Radio Frequency Channel Number (RFCN) is allocated to 0, 39 and 78 respectively in the case of 2402~2480 MHz during the test at each test frequency channel, the EUT is operated at the RF continuous emission mode.

#### 5.1.2 Duty cycle

1) Left Earbuds Duty cycle =58.29%

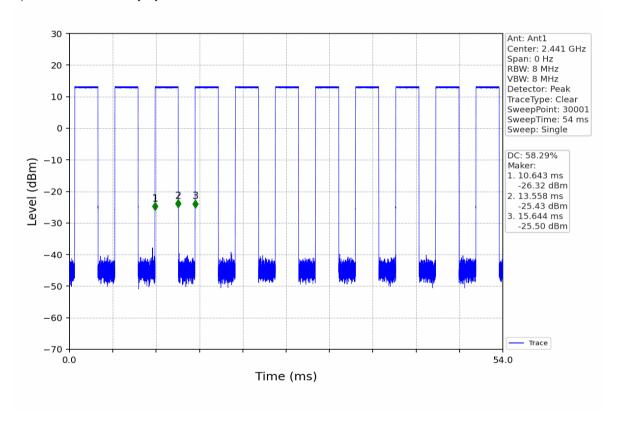



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not excerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone (86-755) \$3071443.

South of No. 6 Pfart, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000 t (86–512) 62992980 www t (86–512) 62992980 sgs.c


www.sgsgroup.com.cn sgs.china@sgs.com



Report No.: SEWM2204000037RG01

Rev.: 01 Page: 27 of 33

#### 2) Right Earbuds Duty cycle =58.29%

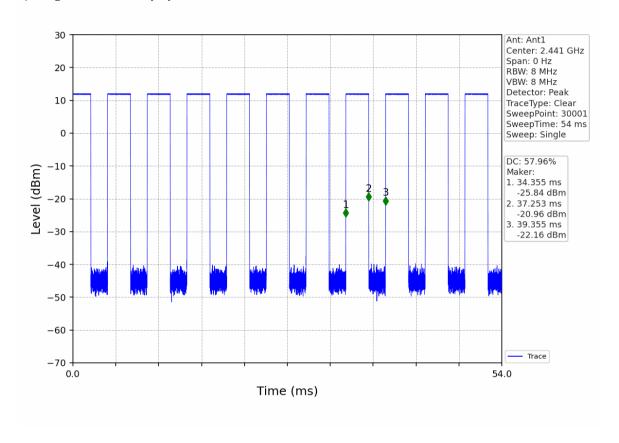



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not excerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone (86-755) \$3071443.

South of No. 6 Pfart, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号约6号厂房南部 邮编: 215000



Report No.: SEWM2204000037RG01

Rev.: 01 Page: 28 of 33

#### 5.1.3 DUT Antenna Locations

Please see the Appendix D



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sas.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sas.com/en/Terms-and-Conditions appx and, for electronic format documents, at http://www.sas.com/en/Terms-and-Conditions for Electronic Document as a http://www.sas.com/en/Terms-and-Conditions for Terms-a-Document ex. Attention is drawn to the limitation of liability, Indemnification and jurisdiction issues define therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or fallsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-75) 8307 1443,

South of No. 6 Pfart, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号约6号厂房南部 邮编: 215000



Report No.: SEWM2204000037RG01

Rev.: 01 Page: 29 of 33

#### 5.2 Measurement of RF Conducted Power

#### 5.2.1 Conducted Power of BT

В	вт	Left Earbuds Average Conducted Power(dBm)					
Band	Band Channel		39	78	Tune up		
	GFSK	11.68	12.20	12.19	13.00		
ВТ	π/4DQPSK	11.61	12.18	12.13	13.00		
	8DPSK	11.40	12.05	12.16	13.00		
Band	Channel	0	19	39	Tune up		
BLE 1M	GFSK	6.93	7.49	7.51	8.00		

В	вт	Right Earbuds Average Conducted Power(dBm)					
Band	Channel	Channel 0 39		78	Tune up		
	GFSK	10.91	11.17	10.91	12.00		
ВТ	π/4DQPSK	10.81	11.08	10.89	12.00		
	8DPSK	10.88	11.15	10.88	12.00		
Band	Channel	0	19	39	Tune up		
BLE 1M	GFSK	6.11	6.42	5.95	7.00		

Table 4: Conducted Power of BT



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not excerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone (86-755) \$3071443.



Report No.: SEWM2204000037RG01

Rev.: 01 Page: 30 of 33

#### 5.3 Stand-alone SAR test evaluation

Unless specifically required by the published RF exposure KDB procedures, standalone 1-g head or body and Product specific 10g SAR evaluation for general population exposure conditions, by measurement or numerical simulation, is not required when the corresponding SAR Test Exclusion Threshold condition is satisfied. These test exclusion conditions are based on source-based time-averaged maximum conducted output power of the RF channel requiring evaluation, adjusted for tune-up tolerance, and the minimum test separation distance required for the exposure conditions.

Freq.	Frequency	Position	Average Test Power Separation		Test Separation	paration   Calculate		Exclusion (Y/N)	
Band	(GHz)		dBm	mW	(mm)	Value	Threshold	(1/N)	
Bluetooth	2.48	Head	13.00	19.95	5	6.48	3	N	

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

[(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)]  $\cdot [\sqrt{f(GHz)}] \le 3.0$  for 1-g SAR and  $\le 7.5$  for 10-g extremity SAR, where

- f(GHz) is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.appx">http://www.sgs.com/en/Terms-and-Conditions.appx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document.appx">http://www.sgs.com/en/Terms-and-Conditions/Terms-a-Document.appx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

\*\*Attention:\*\*To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) \$3071443.



Report No.: SEWM2204000037RG01

Rev.: 01 Page: 31 of 33

#### 5.4 Measurement of SAR Data

#### 5.4.1SAR Result of BT

Test position	Test mode	Test ch./Freq.	Duty Cycle	Duty Cycle Scaled factor	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(℃)	
	Left earbud Head Test Data (0mm)											
Front side	DH5	39/2441	58.29%	1.716	0.112	0.01	12.20	13.00	1.202	0.231	22.1	
Rear side	DH5	39/2441	58.29%	1.716	0.372	0.03	12.20	13.00	1.202	0.767	22.1	
Side 1	DH5	39/2441	58.29%	1.716	0.263	0.06	12.20	13.00	1.202	0.542	22.1	
Side 2	DH5	39/2441	58.29%	1.716	0.020	-0.01	12.20	13.00	1.202	0.041	22.1	
Side 3	DH5	39/2441	58.29%	1.716	0.007	0.01	12.20	13.00	1.202	0.014	22.1	
Side 4	DH5	39/2441	58.29%	1.716	0.027	-0.04	12.20	13.00	1.202	0.056	22.1	
Rear side	DH5	0/2402	58.29%	1.716	0.347	0.05	11.68	13.00	1.355	0.807	22.1	
Rear side	DH5	78/2480	58.29%	1.716	0.245	0.06	12.19	13.00	1.205	0.506	22.1	
				Ri	ight earbu	d Head Te	est Data (0mm)					
Front side	DH5	39/2441	57.96%	1.725	0.031	0.06	11.17	12.00	1.211	0.065	22.1	
Rear side	DH5	39/2441	57.96%	1.725	0.357	-0.05	11.17	12.00	1.211	0.746	22.1	
Side 1	DH5	39/2441	57.96%	1.725	0.005	0.07	11.17	12.00	1.211	0.010	22.1	
Side 3	DH5	39/2441	57.96%	1.725	0.031	0.01	11.17	12.00	1.211	0.065	22.1	
Side 4	DH5	39/2441	57.96%	1.725	0.014	0.03	11.17	12.00	1.211	0.029	22.1	
Side 2	DH5	39/2441	57.96%	1.725	0.213	0.05	11.17	12.00	1.211	0.445	22.1	
Rear side	DH5	0/2402	57.96%	1.725	0.278	0.12	10.91	12.00	1.285	0.616	22.1	
Rear side	DH5	78/2480	57.96%	1.725	0.448	0.03	10.91	12.00	1.285	0.993	22.1	

Table 5: SAR result of BT

#### Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.
- 2) Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
- ≤ 0.8W/kg for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is ≤ 100MHz.
- ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
- ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.ags.com/en/Terms-and-Conditions.agx; and, for electronic Documents at http://www.ags.com/en/Terms-and-Conditions/Terms-e-Document as public to Terms and Conditions for Telectronic Document as http://www.ags.com/en/Terms-and-Conditions/Terms-e-Document as public to the state of the stat

South of No. 6 Pfart, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

t (86–512) 62992980

www.sgsgroup.com.cn sgs.china@sgs.com



Report No.: SEWM2204000037RG01

Rev.: 01 Page: 32 of 33

### 6 Equipment list

•													
	Test Platform	SPEAG DASY5	Professional										
	Description SAR Test System (Frequency range 300MHz-6GHz)												
	Software Reference DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)												
	Hardware Reference												
	Equipment Manufacturer Model Serial Number Calibration Due da calibra												
$\boxtimes$	Twin Phantom	SPEAG	SAM2	1563	NCR	NCR							
$\boxtimes$	DAE	SPEAG	DAE4	1327	2021-11-05	2022-11-04							
$\boxtimes$	E-Field Probe	SPEAG	EX3DV4	7620	2021-08-24	2022-08-23							
$\boxtimes$	Validation Kits	SPEAG	D2450V2	1038	2020-04-08	2023-04-07							
$\boxtimes$	Dielectric parameter probes	SPEAG	DAKS-3.5	0005	2021-07-15	2022-07-14							
$\boxtimes$	Vector Network Analyzer and Vector Reflectometer	SPEAG	DAKS_VNA R140	0140913	2021-07-22	2022-07-21							
$\boxtimes$	RF Bi-Directional Coupler	Agilent	86205-60001	MY31400031	NCR	NCR							
	Signal Generator	R&S	SMB100A	100379	2021-12-04	2022-12-03							
$\boxtimes$	Preamplifier	Qiji	YX28980933	202104001	NCR	NCR							
$\boxtimes$	Power Meter	Aglient	E4419B	6843318103	2021-06-08	2022-06-07							
$\boxtimes$	Power Sensor	Aglient	E9301A	MY41496508	2021-09-09	2022-09-08							
$\boxtimes$	Power Sensor	Aglient	E9301H	MY41495605	2021-06-08	2022-06-07							
$\boxtimes$	Attenuator	SHX	TS2-3dB	30704	NCR	NCR							
$\boxtimes$	Coaxial low pass filter	Mini-Circuits	VLF-2500(+)	NA	NCR	NCR							
$\boxtimes$	Coaxial low pass filter	Microlab Fxr	LA-F13	NA	NCR	NCR							
	DC POWER SUPPLY	SAKO	SK1730SL5A	NA	NCR	NCR							
$\boxtimes$	Speed reading thermometer	LKM	DTM3000	SUW201-30-01	2021-10-09	2022-10-08							
$\boxtimes$	Humidity and Temperature Indicator	MingGao	MingGao	NA	2021-06-16	2022-06-15							

Note: All the equipments are within the valid period when the tests are performed.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not excerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone (86-755) \$3071443.

South of No. 6 Pfart, No. 1, Runsheng Read, Suchou Industrial Park, Suchou Area, China (Jangsu) Pilot Free Trade Zone 215000 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000



Report No.: SEWM2204000037RG01

Rev.: 01 Page: 33 of 33

7 Calibration certificate

Please see the Appendix C

8 Photographs

Please see the Appendix D

**Appendix A: Detailed System Check Results** 

**Appendix B: Detailed Test Results** 

**Appendix C: Calibration certificate** 

**Appendix D: Photographs** 



