

**BT DH5 2402MHz\_Left edge 0mm**

Communication System: UID 0, BT(0) (0); Communication System Band: BT; Frequency: 2402 MHz;

Medium parameters used (interpolated):  $f = 2402$  MHz;  $\sigma = 1.79$  S/m;  $\epsilon_r = 39.48$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7383; ConvF(7.65, 7.65, 7.65); Calibrated: 2022/1/12;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection),  $z = -29.0, 31.0$
- Electronics: DAE3 Sn427; Calibrated: 2022/4/12
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Configuration/Body/Area Scan (6x10x1):** Measurement grid:  $dx=12$ mm,  $dy=12$ mm

Maximum value of SAR (measured) = 0.0399 W/kg


**Configuration/Body/Zoom Scan (7x7x4)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 3.733 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.0500 W/kg

**SAR(1 g) = 0.024 W/kg; SAR(10 g) = 0.011 W/kg**

Maximum value of SAR (measured) = 0.0398 W/kg

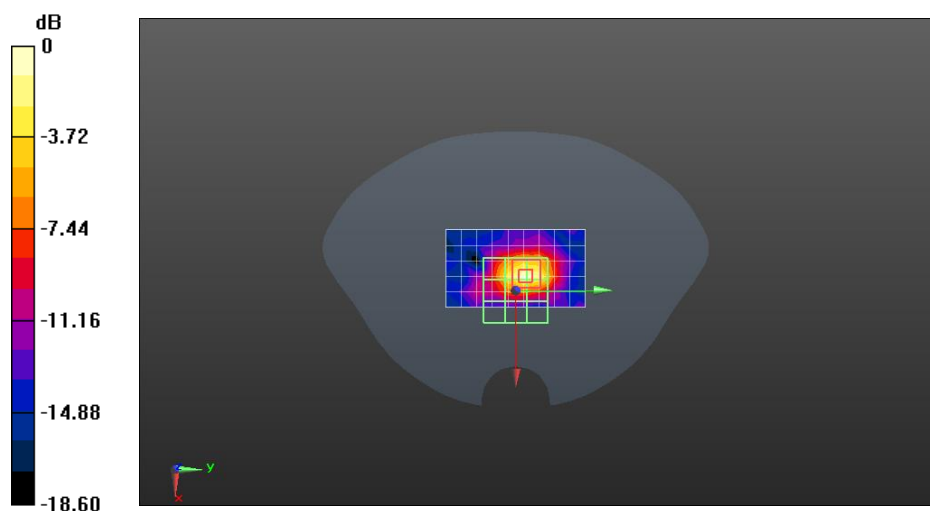

0 dB = 0.0399 W/kg = -13.99 dBW/kg