

# SPECIFICATION

Daxian Communication Technology Limited



**Shenzhen Daxian Technology Co., Ltd.**

**SKYLARK EM112 Microphone TX antenna**

## Product specification

Guest households	SKYLARK	frequency band	2400MHz~2500MHz
Project name	EM112	version	V01
Material No.	2E-M112X-031	color	stainless steel
R F design	Chuan.Shen	structure design	YeZhi.Bi
Quality Manager	Jin.Yang	R & D director	Lei.Zhang
Date	2023-09-07		

client confirmation:

Whether the assembly meets your requirements: OK NG

Shenzhen Topant Technology Co., Ltd.

Shangshuijing Village, No. 513, ihua Road, BujiTown, Longgang District, Shenzhen (opposite to theNational Defense Training Base)reached the 7thfloor of the Industrial Park Complex

TEL:0755-28576002

FAX:0755-84276383

Shanghai Branch: Room 201, Building 8 No, 3000Longdong Avenue, Integrated Circuit IndustrialZone, Zhangjiang Hi-tech Park, Shanghai

TEL:021-61630552

FAX:755-84276383



# Index

一、 Project description.....	4
二、 TX antenna.....	4
1、 specifications.....	4
1.1 Electrical specification standard.....	4
1.2 Antenna position picture.....	5
1.2.1Antenna matching.....	5
1.3 Antenna composition.....	5
2、 The Equipment of Active Test.....	6
3、 test.....	7
3.1 The Test of standing Wave (VSWR).....	7
3.1.1 test connection.....	7
3.2 Measurement of Efficiency, Power (TRP) and Sensitivity (TIS).....	7
3.2.1 Test site.....	7
3.2.2 Test instrument.....	7
3.2.3 test data .....	7-8
4、 Attachment chart.....	8
4.1、 VSWR parameter diagram.....	8
5-5.1、 Antenna active field pattern diagram-TRP&TIS.....	9-10
6、 Antenna passive field Pattern diagram.....	11
7、 Conclusion.....	11
三、 schedule drawing.....	12

[www.Topant.com.cn](http://www.Topant.com.cn)

**Confidential requirement**


Shenzhen Daxian limited company of science and technology has proprietary technology to provide information, which should be kept strictly confidential and proprietary information, without the prior written consent of Shenzhen Daxian Co. Ltd. are not allowed to disclose to any person or company.

## – Project description

<b>Customer name:</b>	SKYLARK
<b>Whole machine type:</b>	Microphone
<b>Antenna band:</b>	2400 ~ 2500MHz
<b>Antenna form:</b>	shrapnel
<b>Feed form:</b>	weld

## 一、TX antenna

This report provides a variety of measurements of the electrical performance of the EM112 antenna. Figure 1 shows the antenna designed by the display.

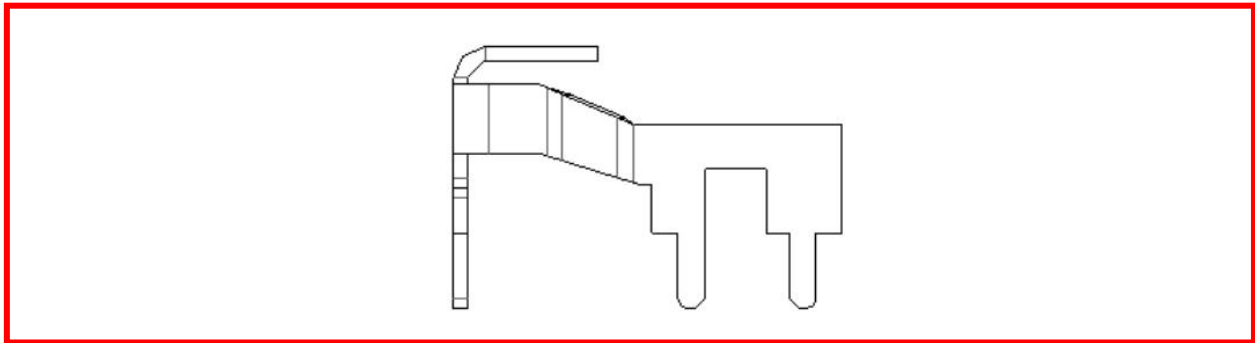

antenna appearing diagram

Figure 1

### 1.1 Electrical specification standard

The frequency range of the antenna is 2400 ~ 2500 MHz. The following table indicates the electrical performance specifications of the antenna. The antenna is designed and manufactured by a large display.


Frequency Range	Frequency (MHz)	VSWR
TX	2400 ~ 2500	≤ 3

[www.Topant.com.cn](http://www.Topant.com.cn)


**Confidential requirement**

Shenzhen Daxian limited company of science and technology has proprietary technology to provide information, which should be kept strictly confidential and proprietary information, without the prior written consent of Shenzhen Daxian Co. Ltd. are not allowed to disclose to any person or company.

## 1.2 Antenna position picture

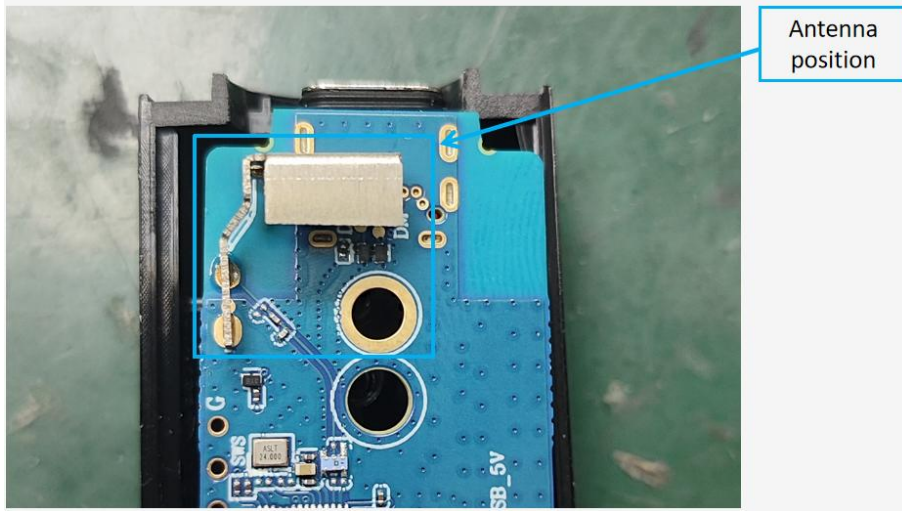

### 1.2.1 antenna matching

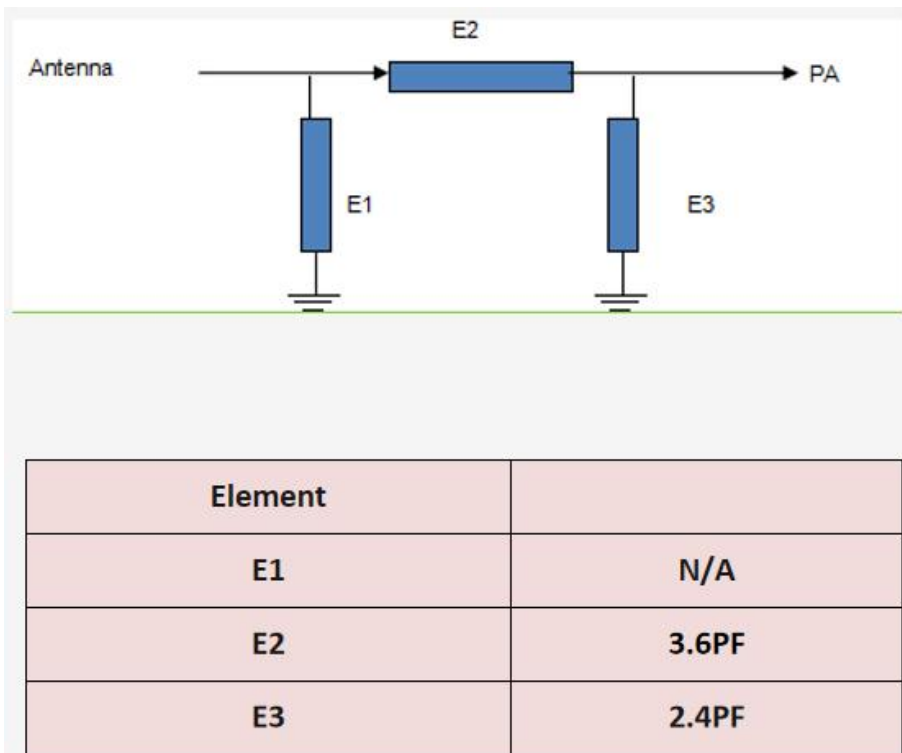

## 1.3 Antenna composition

The antenna is mainly composed of shrapnel.

[www.Topant.com.cn](http://www.Topant.com.cn)

**Confidential requirement**

Shenzhen Daxian limited company of science and technology has proprietary technology to provide information, which should be kept strictly confidential and proprietary information, without the prior written consent of Shenzhen Daxian Co. Ltd. are not allowed to disclose to any person or company.

## 2、 The Equipment of Active Test

Satimo 3D Chamber 6×4×4( m )

Agilent 8960 E5515c

Network analyzer-R&S ZVL



Figure 2

[www.Topant.com.cn](http://www.Topant.com.cn)

**Confidential requirement**

Shenzhen Daxian limited company of science and technology has proprietary technology to provide information, which should be kept strictly confidential and proprietary information, without the prior written consent of Shenzhen Daxian Co. Ltd. are not allowed to disclose to any person or company.

### 3 test

#### 3.1 The Test of standing Wave (VSWR)

**3.1.1 The Test of standing Wave (VSWR):** In turn, the connection of the VSWR testing device is as follows: RES ZVL Network Analyzer / testing Line / testing tool

**Actual measurement (with diagram)**

#### 3.2 Measurement of Efficiency, Power (TRP) and Sensitivity (TIS)

##### 3.2.1 Test site:

Large-scale microwave darkroom. The test frequency range is 400MHz / 6GHz, the static range is 50cm circumferential and the reflectivity is less than-50 dB..

##### 3.2.2 Test instrument:

Rs ZVL Network Analyzer, Agilent8960 E5515C, Standard Horn Antenna, French SATIMO-SG24SYSTEM system, Printer, etc.

**3.2.3 test data : In microwave anechoic chambers, the power and sensitivity values measured are shown in the following table:**

OTA Active Test:

BAND	CH	TRP (dBm)	TIS (dBm)
BT	0	9.37	-87.13
	39	9.76	-88.80
	78	9.81	-88.41

[www.Topant.com.cn](http://www.Topant.com.cn)

**Confidential requirement**


Shenzhen Daxian limited company of science and technology has proprietary technology to provide information, which should be kept strictly confidential and proprietary information, without the prior written consent of Shenzhen Daxian Co. Ltd. are not allowed to disclose to any person or company.

**OTA Passive Efficiency&Gain Test:**

Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)
2400	41.48	-3.82	1.11
2410	41.84	-3.78	1.28
2420	42.07	-3.76	1.31
2430	42.27	-3.74	1.29
2440	42.43	-3.72	1.17
2450	43.11	-3.65	1.33
2460	43.26	-3.64	1.22
2470	42.81	-3.68	1.18
2480	42.62	-3.70	1.25
2490	41.93	-3.77	1.16
2500	41.21	-3.85	1.24

**4、 Attachment chart**

**4.1 VSWR parameter diagram**

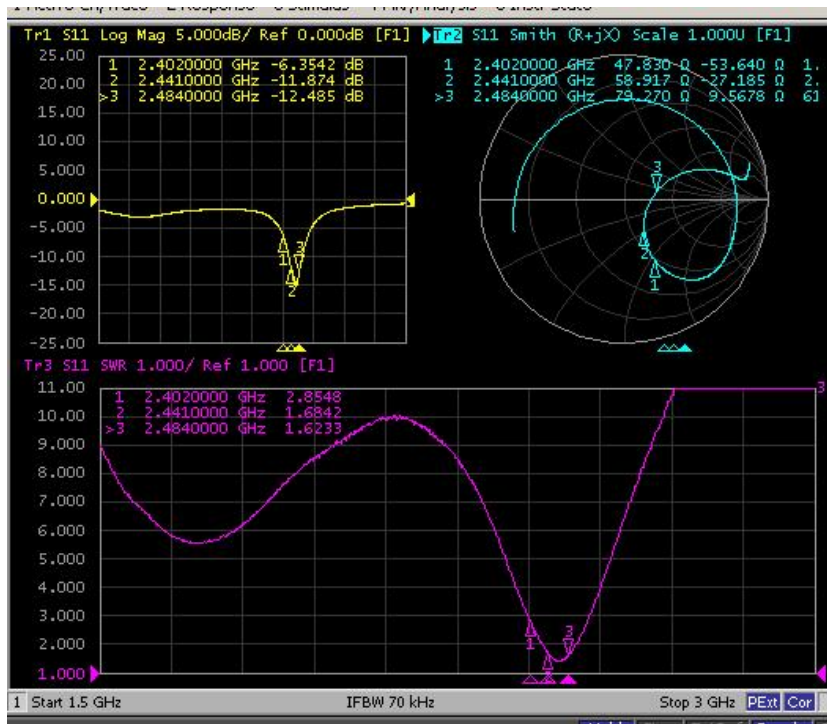


[www.Topant.com.cn](http://www.Topant.com.cn)

**Confidential requirement**

Shenzhen Daxian limited company of science and technology has proprietary technology to provide information, which should be kept strictly confidential and proprietary information, without the prior written consent of Shenzhen Daxian Co. Ltd. are not allowed to disclose to any person or company.



## 5、 Antenna active field pattern diagram--TRP



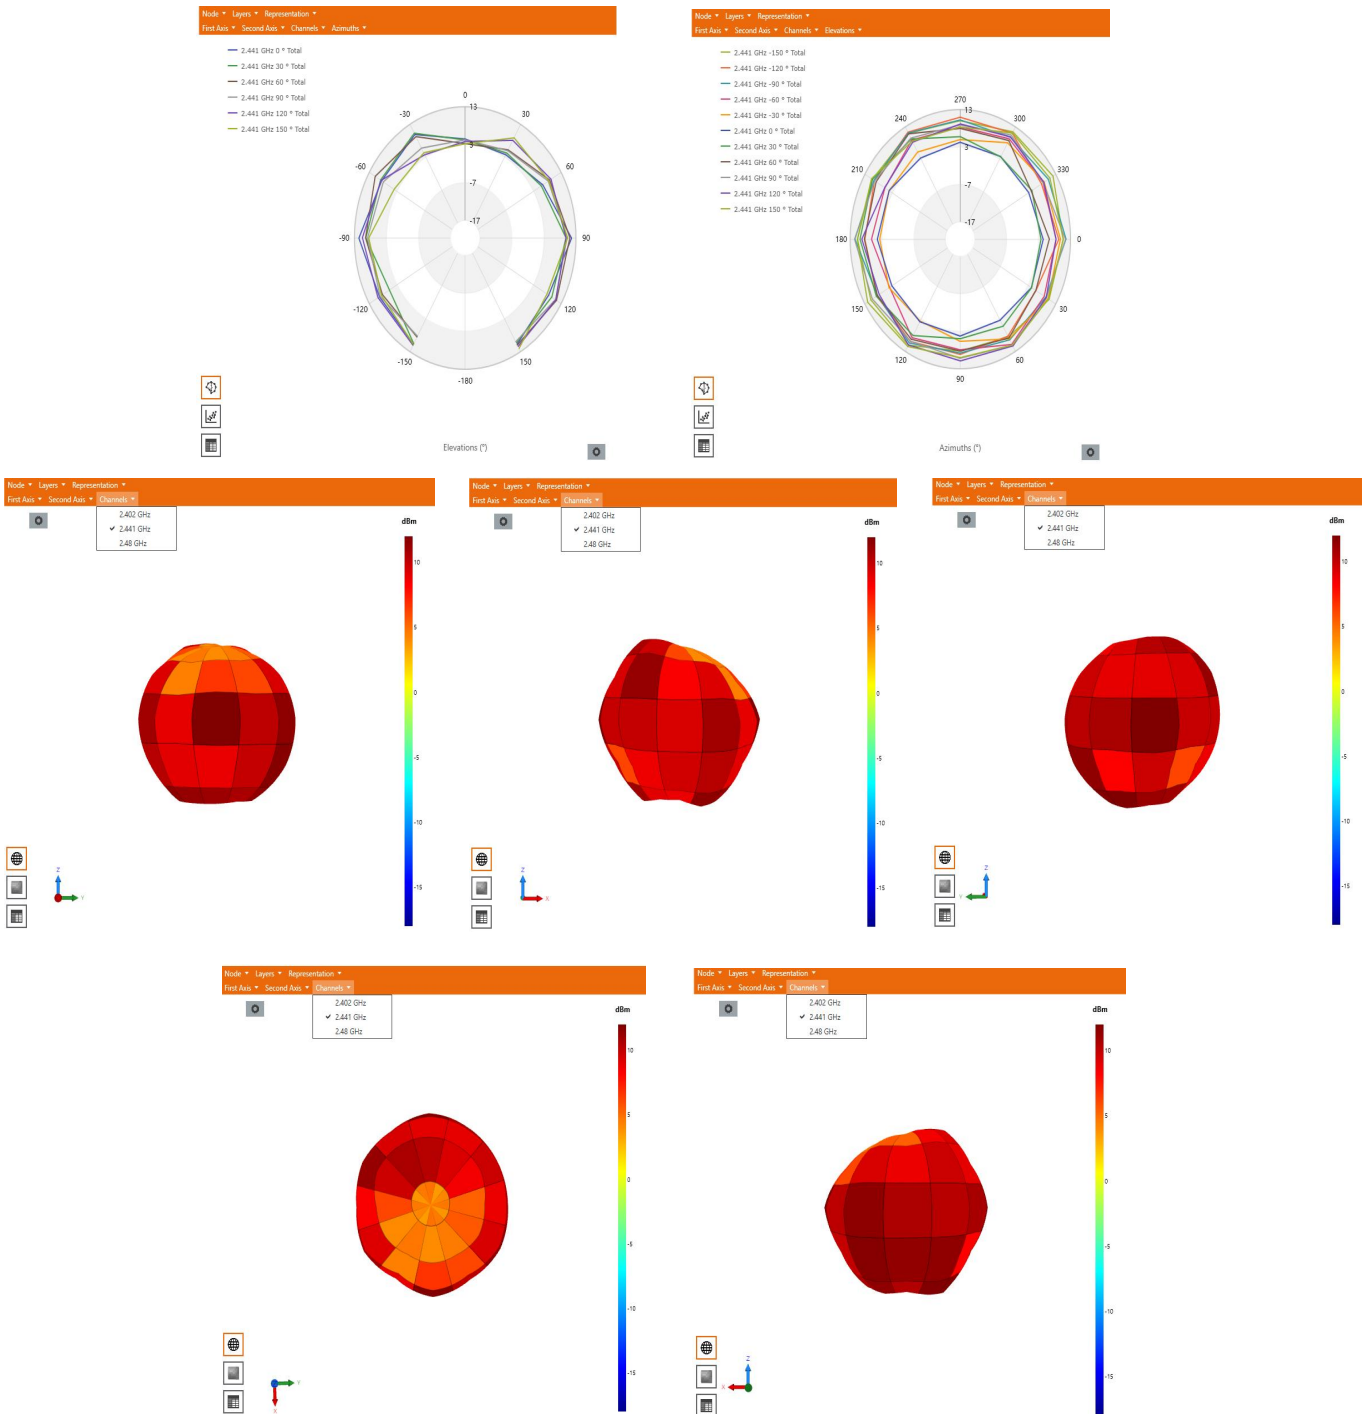


[www.Topant.com.cn](http://www.Topant.com.cn)

Confidential requirement

Shenzhen Daxian limited company of science and technology has proprietary technology to provide information, which should be kept strictly confidential and proprietary information, without the prior written consent of Shenzhen Daxian Co. Ltd. are not allowed to disclose to any person or company.

## 5.1、Antenna active field pattern diagram--TIS

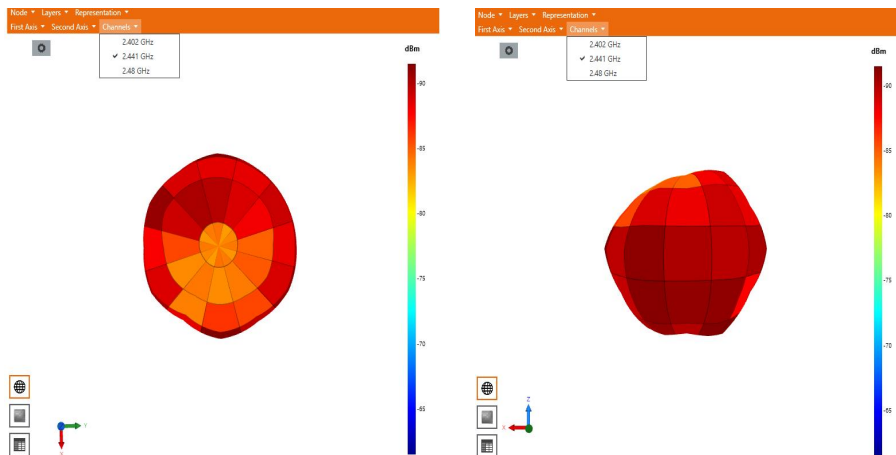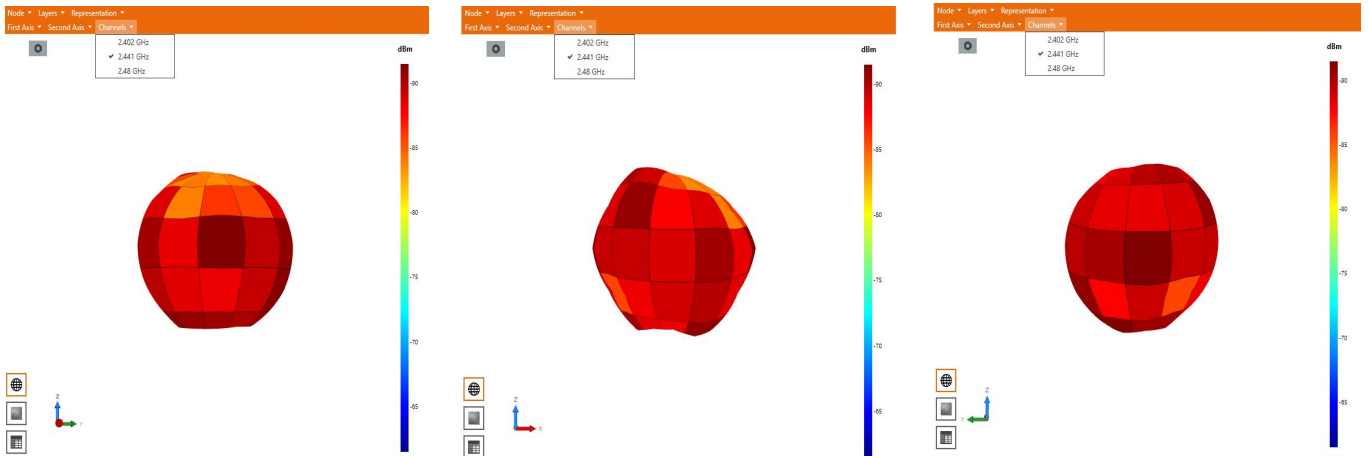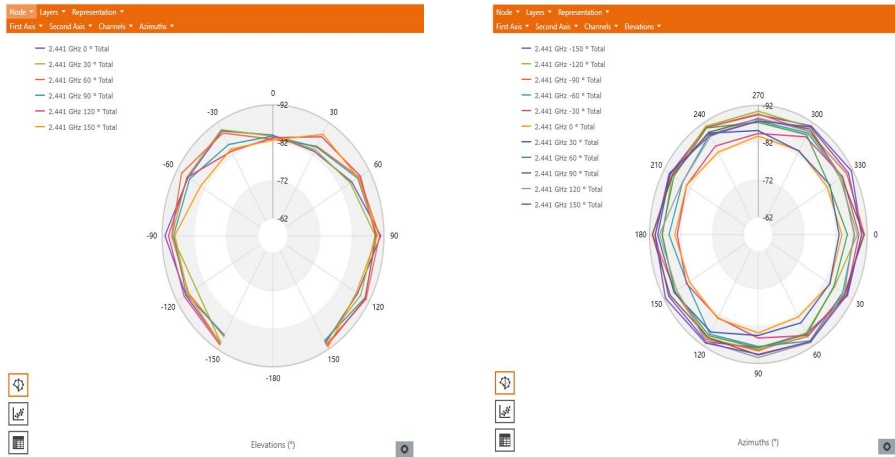


[www.Topant.com.cn](http://www.Topant.com.cn)

Confidential requirement

Shenzhen Daxian limited company of science and technology has proprietary technology to provide information, which should be kept strictly confidential and proprietary information, without the prior written consent of Shenzhen Daxian Co. Ltd. are not allowed to disclose to any person or company.

## 6、 Antenna passive field pattern diagram

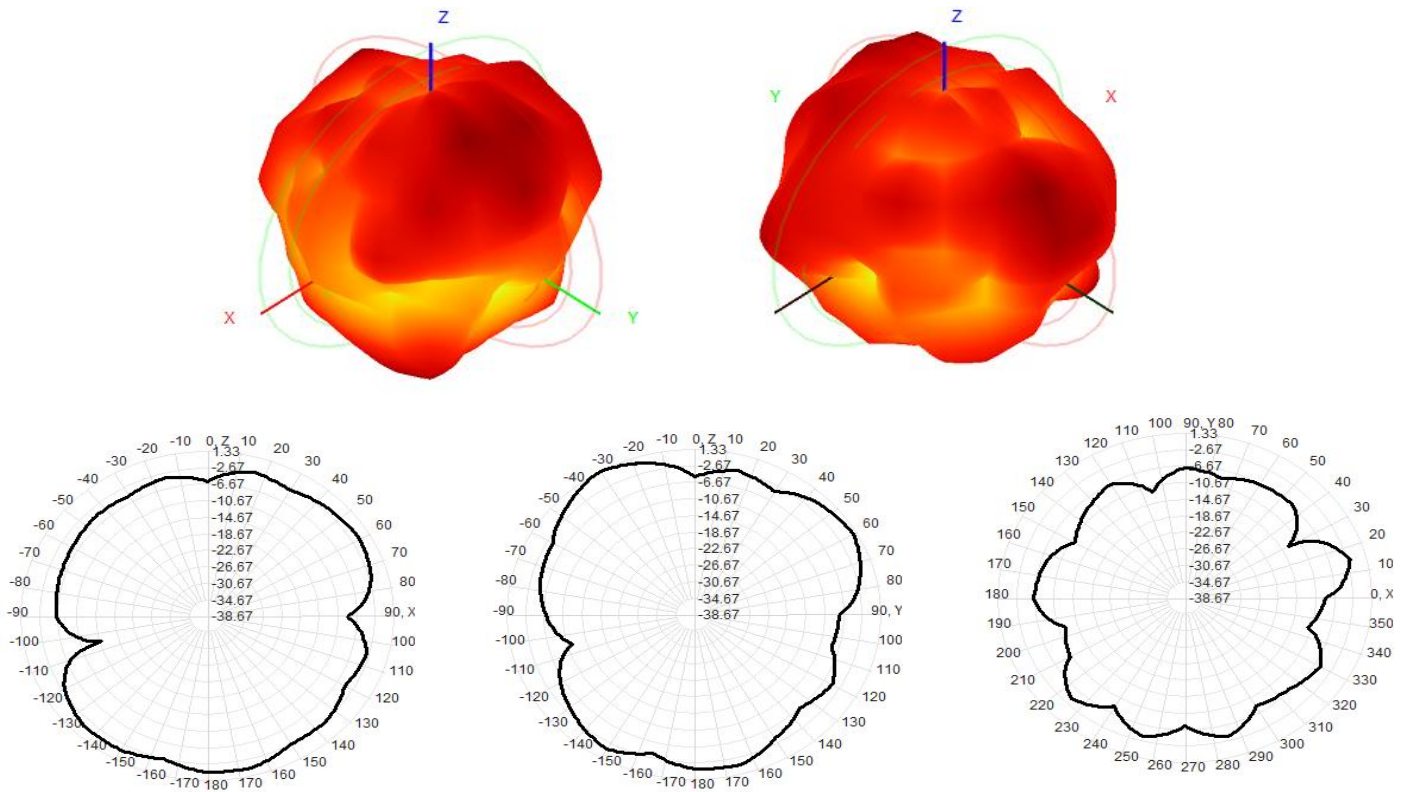


## 7、 conclusion:

This antenna is designed on the basis of the prototype provided by the customer, electrical parameters and structural performance have reached the technical requirements, please confirm!


[www.Topant.com.cn](http://www.Topant.com.cn)  
Confidential requirement

Shenzhen Daxian limited company of science and technology has proprietary technology to provide information, which should be kept strictly confidential and proprietary information, without the prior written consent of Shenzhen Daxian Co. Ltd. are not allowed to disclose to any person or company.

Third perspective		☉ -- ▽		0~10		10~30		30~50		50~		Angle		○		◎		⊥		▱			
Unit	mm	Acale	1:1	A	0.05	0.10	0.15	0.20	1°	0.02	0.02	0.03	0.05	B	0.10	0.15	0.20	0.25	2°	0.03	0.05	0.05	0.08

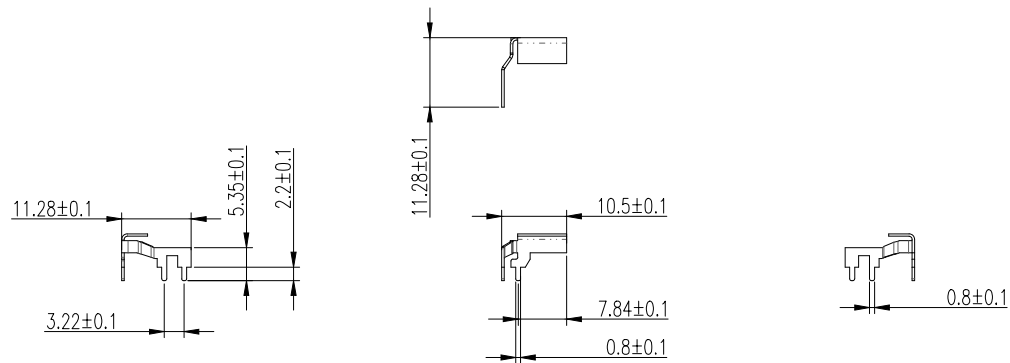


sus304 3/4H T=0.4, plating can be welded nickel after forming, nickel layer 3-6um, welding effectiveness can not be less than 12 months

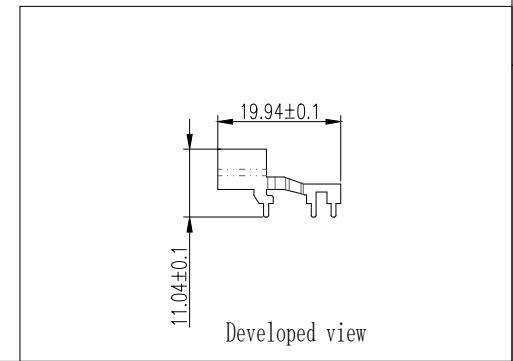

注:

1. "\*" is the key size;
2. Please follow the drawing if the dimensions are not marked;
3. Meet our RoHS, REACH, halogen-free requirements.

A	New map	2023-06-09	
Edition	Description	Date	Remark

		Shenzhen Topant Technology Co., Ltd.				
Model	EM112	Product color	Natural quality	Date	2023-6-9	
Project Coding	CE-M112X-031	Die surface treatment		Structural design	biyezhi	
Part Name	TX_ANT	Quality requirement		Radio frequency design	shenchuan	
Parts coding	2E-M112X-031-1			Audit	zhoukang	
Material	SUS304 T=0.4 3/4H			Approval	zhanglei	
Save Path					Current version	A