L ear BLE 1M 2440MHz_Back side 0mm

Communication System: UID 0, BT(0) (0); Communication System Band: BT; Frequency: 2440 MHz;

Medium parameters used: f = 2440 MHz; σ = 1.82 S/m; ϵ_r = 39.51; ρ = 1000 kg/m³ Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 SN7383; ConvF(7.65, 7.65, 7.65); Calibrated: 2022/1/12;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), z = -19.0, 31.0
- Electronics: DAE3 Sn427; Calibrated: 2022/4/12
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)


Configuration/Body/Area Scan (7x7x1): Measurement grid: dx=12mm, dy=12mm Maximum value of SAR (measured) = 0.140 W/kg

Configuration/Body/Zoom Scan (7x7x4)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.464 V/m; Power Drift = 0.19 dBPeak SAR (extrapolated) = 0.677 W/kg

SAR(1 g) = 0.130 W/kg; SAR(10 g) = 0.049 W/kg

Maximum value of SAR (measured) = 0.300 W/kg

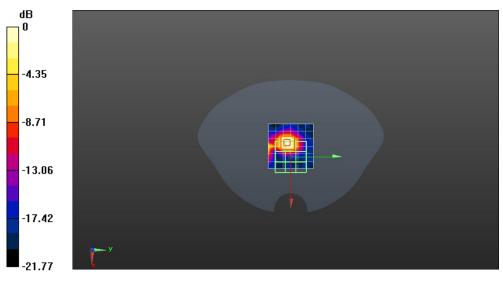

0 dB = 0.140 W/kg = -8.54 dBW/kg

R ear BLE 1M 2440MHz_Back side 0mm

Communication System: UID 0, BT(0) (0); Communication System Band: BT; Frequency: 2440 MHz;

Medium parameters used: f = 2440 MHz; σ = 1.82 S/m; ϵ_r = 39.51; ρ = 1000 kg/m³ Phantom section: Flat Section


DASY Configuration:

- Probe: EX3DV4 SN7383; ConvF(7.65, 7.65, 7.65); Calibrated: 2022/1/12;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), z = -19.0, 31.0
- Electronics: DAE3 Sn427; Calibrated: 2022/4/12
- Phantom: SAM; Type: QD000P40CD; Serial: 1805
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (7x7x1): Measurement grid: dx=12mm, dy=12mm Maximum value of SAR (measured) = 0.229 W/kg

Configuration/Body/Zoom Scan (7x7x4)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.77 V/m; Power Drift = -0.13 dB Peak SAR (extrapolated) = 0.337 W/kg SAR(1 g) = 0.093 W/kg; SAR(10 g) = 0.033 W/kg Maximum value of SAR (measured) = 0.202 W/kg

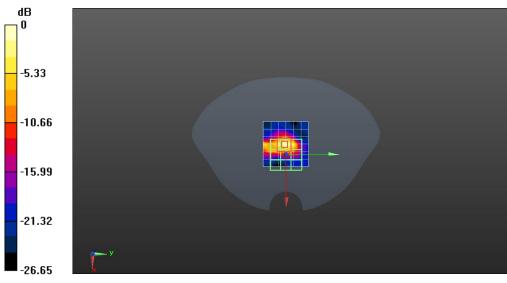

0 dB = 0.229 W/kg = -6.40 dBW/kg