



| | | | | |
|--|--|--|---|--|
| Prüfbericht-Nr.: <i>Test report no.:</i> | CN235L5Y 001 | Auftrags-Nr.: <i>Order no.:</i> | 168422487 | Seite 1 von 24 <i>Page 1 of 24</i> |
| Kunden-Referenz-Nr.: <i>Client reference no.:</i> | N/A | Auftragsdatum: <i>Order date:</i> | 2023-03-28 | |
| Auftraggeber: <i>Client:</i> | Harman International Industries, Inc 8500 Balboa Blvd, Northridge, California, 91329, United States | | | |
| Prüfgegenstand: <i>Test item:</i> | Bluetooth Headset | | | |
| Bezeichnung / Typ-Nr.: <i>Identification / Type no.:</i> | LIVE770NC (Trademark: JBL) | | | |
| Auftrags-Inhalt: <i>Order content:</i> | Type test | | | |
| Prüfgrundlage: <i>Test specification:</i> | CFR47 FCC Part 15: Subpart C Section 15.247 RSS-247 Issue 2 February 2017 CFR47 FCC Part 15: Subpart C Section 15.207 RSS-Gen Issue 5 March 2019 CFR47 FCC Part 15: Subpart C Section 15.209 | | | |
| Wareneingangsdatum: <i>Date of sample receipt:</i> | 2023-05-08 | Refer to photos document | | |
| Prüfmuster-Nr.: <i>Test sample no.:</i> | A003470422 | | | |
| Prüfzeitraum: <i>Testing period:</i> | 2023-05-06 – 2023-05-23 | | | |
| Ort der Prüfung: <i>Place of testing:</i> | TÜV Rheinland (Shenzhen) Co., Ltd. | | | |
| Prüflaboratorium: <i>Testing laboratory:</i> | TÜV Rheinland (Shenzhen) Co., Ltd. | | | |
| Prüfergebnis*: <i>Test result*:</i> | Pass | | | |
| geprüft von: <i>tested by:</i> | X  | genehmigt von: <i>authorized by:</i> | X  | |
| Datum: <i>Date:</i> 2023-06-02 | Signed by: Harry W. C. Wu | Ausstellungsdatum: <i>Issue date:</i> 2023-06-02 | Signed by: Alex Lan | |
| Stellung / Position: | Project Manager | Stellung / Position: | Reviewer | |
| Sonstiges / <i>Other:</i> | FCC ID: APILIVE770NC IC: 6132A-LIVE770NC HVIN: LIVE770NC | | | |
| Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of the test item at delivery:</i> | Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i> | | | |
| * Legende: | P(ass) = entspricht o.g. Prüfgrundlage(n) | F(ail) = entspricht nicht o.g. Prüfgrundlage(n) | N/A = nicht anwendbar | N/T = nicht getestet |
| * Legend: | P(ass) = passed a.m. test specification(s) | F(ail) = failed a.m. test specification(s) | N/A = not applicable | N/T = not tested |
| Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the above mentioned test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i> | | | | |

V05

Prüfbericht-Nr.: CN235L5Y 001
Test report no.:

Seite 2 von 24
Page 2 of 24

Remarks
Anmerkungen

| | |
|---|--|
| 1 | <p>The equipment used during the specified testing period was calibrated according to our test laboratory calibration program. The equipment fulfils the requirements included in the relevant standards. The traceability of the test equipment used is ensured by compliance with the regulations of our management system.</p> <p>Detailed information regarding test conditions, equipment and measurement uncertainty is available in the test laboratory and could be provided on request.</p> <p><i>Alle eingesetzten Prüfmittel waren zum angegebenen Prüfzeitraum gemäß eines festgelegten Kalibrierungsprogramms unseres Prüfhauses kalibriert. Sie entsprechen den in den Prüfprogrammen hinterlegten Anforderungen. Die Rückverfolgbarkeit der eingesetzten Prüfmittel ist durch die Einhaltung der Regelungen unseres Managementsystems gegeben.</i></p> <p><i>Detaillierte Informationen bezüglich Prüfkonditionen, Prüfequipment und Messunsicherheiten sind im Prüflabor vorhanden und können auf Wunsch bereitgestellt werden.</i></p> |
| 2 | <p>As contractually agreed, this document has been signed digitally only. TUV Rheinland has not verified and unable to verify which legal or other pertaining requirements are applicable for this document. Such verification is within the responsibility of the user of this document. Upon request by its client, TUV Rheinland can confirm the validity of the digital signature by a separate document. Such request shall be addressed to our Sales department. An environmental fee for such additional service will be charged.</p> <p><i>Wie vertraglich vereinbart, wurde dieses Dokument nur digital unterzeichnet. Der TÜV Rheinland hat nicht überprüft, welche rechtlichen oder sonstigen diesbezüglichen Anforderungen für dieses Dokument gelten. Diese Überprüfung liegt in der Verantwortung des Benutzers dieses Dokuments. Auf Verlangen des Kunden kann der TÜV Rheinland die Gültigkeit der digitalen Signatur durch ein gesondertes Dokument bestätigen. Diese Anfrage ist an unseren Vertrieb zu richten. Eine Umweltgebühr für einen solchen zusätzlichen Service wird erhoben.</i></p> |
| 3 | <p>Test clauses with remark of * are subcontracted to qualified subcontractors and described under the respective test clause in the report. Deviations of testing specification(s) or customer requirements are listed in specific test clause in the report.</p> <p><i>Prüfklausel mit der Note * wurden an qualifizierte Unterauftragnehmer vergeben und sind unter der jeweiligen Prüfklausel des Berichts beschrieben. Abweichungen von Prüfspezifikation(en) oder Kundenanforderungen sind in der jeweiligen Prüfklausel im Bericht aufgeführt.</i></p> |
| 4 | <p>The decision rule for statements of conformity, based on numerical measurement results, in this test report is based on the "Zero Guard Band Rule" and "Simple Acceptance" in accordance with ILAC G8:2019 and IEC Guide 115:2021, unless otherwise specified in the applied standard mentioned on Page 1 of this report or requested by the customer. This means that measurement uncertainty is not taken in account and hence also not declared in the test report. For additional information to the resulting risk based of this decision rule please refer to ILAC G8:2019.</p> <p><i>Die Entscheidungsregel für Konformitätserklärungen basierend auf numerischen Messergebnissen in diesem Prüfbericht basiert auf der "Null-Grenzwert-Regel" und der "Einfachen Akzeptanz" gemäß ILAC G8:2019 und IEC Guide 115:2021, es sei denn, in der auf Seite 1 dieses Berichts genannten angewandten Norm ist etwas anderes festgelegt oder vom Kunden gewünscht. Dies bedeutet, dass die Messunsicherheit nicht berücksichtigt wird und daher auch nicht im Prüfbericht angegeben wird. Zu weiteren Informationen bezüglich des Risikos durch diese Entscheidungsregel siehe ILAC G8:2019.</i></p> |

Prüfbericht-Nr.: CN235L5Y 001
Test report no.:

Seite 3 von 24
Page 3 of 24

Test Summary

5.1.1 ANTENNA REQUIREMENT

RESULT: Pass

5.1.2 MAXIMUM CONDUCTED OUTPUT POWER

RESULT: Pass

5.1.3 99% BANDWIDTH

RESULT: Pass

5.1.4 CONDUCTED SPURIOUS EMISSIONS MEASURED IN 100 KHz BANDWIDTH

RESULT: Pass

5.1.5 RADIATED SPURIOUS EMISSION

RESULT: Pass

5.1.6 20dB BANDWIDTH

RESULT: Pass

5.1.7 CARRIER FREQUENCY SEPARATION

RESULT: Pass

5.1.8 FREQUENCY STABILITY

RESULT: Pass

5.1.9 NUMBER OF HOPPING FREQUENCY

RESULT: Pass

5.1.10 TIME OF OCCUPANCY

RESULT: Pass

Prüfbericht-Nr.: CN235L5Y 001
Test report no.:

Seite 4 von 24
Page 4 of 24

Contents

| | | |
|--------|--|----|
| 1 | GENERAL REMARKS | 5 |
| 1.1 | COMPLEMENTARY MATERIALS | 5 |
| 2 | TEST SITES..... | 5 |
| 2.1 | TEST FACILITIES..... | 5 |
| 2.2 | LIST OF TEST AND MEASUREMENT INSTRUMENTS | 6 |
| 2.3 | TRACEABILITY..... | 7 |
| 2.4 | CALIBRATION..... | 7 |
| 2.5 | MEASUREMENT UNCERTAINTY | 7 |
| 2.6 | LOCATION OF ORIGINAL DATA | 7 |
| 2.7 | STATUS OF FACILITY USED FOR TESTING..... | 7 |
| 3 | GENERAL PRODUCT INFORMATION..... | 8 |
| 3.1 | PRODUCT FUNCTION AND INTENDED USE..... | 8 |
| 3.2 | RATINGS AND SYSTEM DETAILS | 8 |
| 3.3 | INDEPENDENT OPERATION MODES | 10 |
| 3.4 | NOISE GENERATING AND NOISE SUPPRESSING PARTS..... | 10 |
| 3.5 | SUBMITTED DOCUMENTS..... | 10 |
| 4 | TEST SET-UP AND OPERATION MODES | 11 |
| 4.1 | PRINCIPLE OF CONFIGURATION SELECTION..... | 11 |
| 4.2 | TEST OPERATION AND TEST SOFTWARE..... | 11 |
| 4.3 | SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT..... | 11 |
| 4.4 | COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE..... | 11 |
| 4.5 | TEST SETUP DIAGRAM | 12 |
| 5 | TEST RESULTS..... | 14 |
| 5.1 | TRANSMITTER REQUIREMENT & TEST SUITES..... | 14 |
| 5.1.1 | Antenna Requirement..... | 14 |
| 5.1.2 | Maximum Conducted Output Power | 15 |
| 5.1.3 | 99% Bandwidth | 16 |
| 5.1.4 | Conducted Spurious Emissions Measured in 100 kHz Bandwidth | 17 |
| 5.1.5 | Radiated Spurious Emission..... | 18 |
| 5.1.6 | 20dB Bandwidth | 19 |
| 5.1.7 | Carrier Frequency Separation..... | 20 |
| 5.1.8 | Frequency stability | 21 |
| 5.1.9 | Number of Hopping Frequency..... | 22 |
| 5.1.10 | Time of Occupancy | 23 |
| 6 | PHOTOGRAPHS OF THE TEST SET-UP..... | 24 |
| 7 | LIST OF TABLES | 24 |

Prüfbericht-Nr.: CN235L5Y 001
Test report no.:

Seite 5 von 24
Page 5 of 24

1 General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A: Photographs of the Test Set-up

Appendix B: Test Results.

2 Test Sites

2.1 Test Facilities

TÜV Rheinland (Shenzhen) Co., Ltd.

No.362, Huanguan Middle Road, Songyuansha Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China/518110

FCC Registration No.: 694916

IC Registration No.: 25069 and the CAB identifier is CN0078.

Prüfbericht-Nr.: CN235L5Y 001
Test report no.:

Seite 6 von 24
Page 6 of 24

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

| Radio Spectrum Testing (TS8997) | | | | |
|--|--------------|-------------------|--------------|------------|
| Equipment | Manufacturer | Model | Serial No. | Cal. until |
| EXA Signal Analyzer, Multi-touch | Keysight | N9010B | MY60241175 | 2023-10-10 |
| MXG X-Series RF Vector Signal Generator | Keysight | N5182B | MY61250137 | 2023-10-10 |
| EXG X-Series Microwave Analog Signal Generator | Keysight | N5173B | MY61250141 | 2023-10-10 |
| DC Power Supply | Keysight | E3642A | MY61276100 | 2023-10-10 |
| Wireless Connectivity Tester | R&S | CMW270 | 102505 | 2023-10-10 |
| Power Control Unit | Tonscend | JS0806-4ADC | N/A | 2023-10-10 |
| Automation Control Unit | Tonscend | JS0806-2 | 21C8060396 | 2023-10-10 |
| Test Software | Tonscend | JS1120-3 | N/A | N/A |
| Control PC | Lenovo | TianYi510S-071MB | YLX23JMF | N/A |
| Unwanted Emission Testing (TS9975) | | | | |
| Equipment | Manufacturer | Model | Serial No. | Cal. until |
| EMI Test Receiver | R&S | ESR 7 | 102021 | 2023-08-02 |
| Signal Analyzer | R&S | FSV 40 | 101439 | 2023-08-01 |
| System Controller Interface | R&S | SCI-100 | S10010038 | N/A |
| Filterbank | R&S | Wlan | 100759 | 2023-08-01 |
| OSP | R&S | OSP 120 | 102040 | N/A |
| Pre-amplifier | R&S | SCU08F1 | 08320031 | 2023-08-02 |
| Amplifier | R&S | SCU-18F | 180070 | 2023-08-02 |
| Amplifier | R&S | SCU40A | 100475 | 2023-08-02 |
| Trilog Broadband Antenna (30 MHz - 7 GHz) | Schwarzbeck | VULB 9162 | 193 | 2024-08-06 |
| Double-Ridged Antenna (1 -18 GHz) | ETS-LINDGREN | 3117 | 00218717 | 2024-08-06 |
| Wideband Ridged Horn Antenna (18-40 GHz) | Steatite | QMS-00880 | 19067 | 2024-08-27 |
| Active Loop Antenna | Schwarzbeck | FMZB 1513 | 302 | 2023-08-06 |
| Test software | R&S | EMC32 (V10.60.10) | N/A | N/A |
| Control PC | Dell | OptiPlex 7050 | 36NV9P2 | N/A |
| 3m Semi-Anechoic Chamber | Albatross | SAC-3m | APC17151-SAC | 2024-06-22 |

Prüfbericht-Nr.: CN235L5Y 001
Test report no.:

Seite 7 von 24
Page 7 of 24

2.3 Traceability

All measurement equipment calibrations are traceable to NIM (National Institute of Metrology) or where calibration is performed in other countries, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements as below table

| Parameter | Uncertainty (k=2) |
|-------------------------------|-------------------|
| Occupied Channel Bandwidth | ± 2.08 % |
| RF output power, conducted | ± 0.99 dB |
| RF power density, conducted | ± 0.99 dB |
| Unwanted Emissions, conducted | ± 0.89 dB |
| All emissions, radiated | ± 4.17 dB |

2.6 Location of Original Data

The original copies of all test data taken during actual testing were attached at Appendix A & B of this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Shenzhen) file for certification follow-up purposes.

2.7 Status of Facility Used for Testing

The TÜV Rheinland (Shenzhen) Co., Ltd. Test facility located at No.362, Huanguan Middle Road, Songyuansha Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China/518110 is listed on the US Federal Communications Commission list of facilities approved to perform measurements.

Prüfbericht-Nr.: CN235L5Y 001
Test report no.:

Seite 8 von 24
Page 8 of 24

3 General Product Information

3.1 Product Function and Intended Use

The EUT are Bluetooth Headset, which supports Bluetooth dual mode technology, this product has four different color of enclosure: pink, blue, black and white.

The Classical Bluetooth and Bluetooth low energy can't transmit at the same time.

For details refer to the User Manual, Technical Description and Circuit Diagram.

3.2 Ratings and System Details

Table 2: Technical Specification of EUT

| General Information of EUT | Value |
|--|---|
| Kind of Equipment | Bluetooth Headset |
| Type Designation | LIVE770NC |
| Trademark | JBL |
| FCC ID | APILIVE770NC |
| IC | 6132A-LIVE770NC |
| HVIN | LIVE770NC |
| Extreme Temperature Range | 0°C to +45°C |
| Operating Voltage | DC 3.7V, 850mAh via built-in Li-ion battery DC 5V, 1A via Type-C port for charging |
| Technical Specification of Classical Bluetooth | |
| Bluetooth Core Version | Bluetooth 5.3 |
| Operating Frequency band | 2402 ~ 2480 MHz |
| Channel Number | 79 channels |
| Channel separation | 1MHz |
| Modulation | GFSK, $\pi/4$ DQPSK, 8DPSK |
| Antenna Type | Integral antenna |
| Antenna Gain | 1.93 dBi (Provided by the Client) |
| Technical Specification of Bluetooth Low Energy | |
| Bluetooth Core Version | Bluetooth 5.3 |
| Operating Frequency band | 2402 ~ 2480 MHz |
| Channel Number | 40 channels |
| Channel separation | 2MHz |
| Data rate | 1Mbps, 2Mbps |
| Modulation | GFSK |
| Antenna Type | Integral antenna |
| Antenna Gain | 1.93 dBi (Provided by the Client) |

Prüfbericht-Nr.: **CN235L5Y 001**
 Test report no.:

Seite 9 von 24
 Page 9 of 24

Table 3: RF Channel and Frequency of Classic Bluetooth

| RF Channel | Frequency (MHz) | RF Channel | Frequency (MHz) | RF Channel | Frequency (MHz) | RF Channel | Frequency (MHz) |
|------------|-----------------|------------|-----------------|------------|-----------------|------------|-----------------|
| 00 | 2402.00 | 20 | 2422.00 | 40 | 2442.00 | 60 | 2462.00 |
| 01 | 2403.00 | 21 | 2423.00 | 41 | 2443.00 | 61 | 2463.00 |
| 02 | 2404.00 | 22 | 2424.00 | 42 | 2444.00 | 62 | 2464.00 |
| 03 | 2405.00 | 23 | 2425.00 | 43 | 2445.00 | 63 | 2465.00 |
| 04 | 2406.00 | 24 | 2426.00 | 44 | 2446.00 | 64 | 2466.00 |
| 05 | 2407.00 | 25 | 2427.00 | 45 | 2447.00 | 65 | 2467.00 |
| 06 | 2408.00 | 26 | 2428.00 | 46 | 2448.00 | 66 | 2468.00 |
| 07 | 2409.00 | 27 | 2429.00 | 47 | 2449.00 | 67 | 2469.00 |
| 08 | 2410.00 | 28 | 2430.00 | 48 | 2450.00 | 68 | 2470.00 |
| 09 | 2411.00 | 29 | 2431.00 | 49 | 2451.00 | 69 | 2471.00 |
| 10 | 2412.00 | 30 | 2432.00 | 50 | 2452.00 | 70 | 2472.00 |
| 11 | 2413.00 | 31 | 2433.00 | 51 | 2453.00 | 71 | 2473.00 |
| 12 | 2414.00 | 32 | 2434.00 | 52 | 2454.00 | 72 | 2474.00 |
| 13 | 2415.00 | 33 | 2435.00 | 53 | 2455.00 | 73 | 2475.00 |
| 14 | 2416.00 | 34 | 2436.00 | 54 | 2456.00 | 74 | 2476.00 |
| 15 | 2417.00 | 35 | 2437.00 | 55 | 2457.00 | 75 | 2477.00 |
| 16 | 2418.00 | 36 | 2438.00 | 56 | 2458.00 | 76 | 2478.00 |
| 17 | 2419.00 | 37 | 2439.00 | 57 | 2459.00 | 77 | 2479.00 |
| 18 | 2420.00 | 38 | 2440.00 | 58 | 2460.00 | 78 | 2480.00 |
| 19 | 2421.00 | 39 | 2441.00 | 59 | 2461.00 | -- | -- |

Table 4: RF Channel and Frequency of Bluetooth Low Energy

| RF Channel | Frequency (MHz) | RF Channel | Frequency (MHz) | RF Channel | Frequency (MHz) | RF Channel | Frequency (MHz) |
|------------|-----------------|------------|-----------------|------------|-----------------|------------|-----------------|
| 00 | 2402.00 | 10 | 2422.00 | 20 | 2442.00 | 30 | 2462.00 |
| 01 | 2404.00 | 11 | 2424.00 | 21 | 2444.00 | 31 | 2464.00 |
| 02 | 2406.00 | 12 | 2426.00 | 22 | 2446.00 | 32 | 2466.00 |
| 03 | 2408.00 | 13 | 2428.00 | 23 | 2448.00 | 33 | 2468.00 |
| 04 | 2410.00 | 14 | 2430.00 | 24 | 2450.00 | 34 | 2470.00 |
| 05 | 2412.00 | 15 | 2432.00 | 25 | 2452.00 | 35 | 2472.00 |
| 06 | 2414.00 | 16 | 2434.00 | 26 | 2454.00 | 36 | 2474.00 |
| 07 | 2416.00 | 17 | 2436.00 | 27 | 2456.00 | 37 | 2476.00 |
| 08 | 2418.00 | 18 | 2438.00 | 28 | 2458.00 | 38 | 2478.00 |
| 09 | 2420.00 | 19 | 2440.00 | 29 | 2460.00 | 39 | 2480.00 |

Prüfbericht-Nr.: CN235L5Y 001
Test report no.:

Seite 10 von 24
Page 10 of 24

3.3 Independent Operation Modes

The basic operation modes are:

- A. On
 - 1. Bluetooth transmitting mode (BR & EDR mode)
 - a) Low Channel
 - b) Middle Channel
 - c) High Channel
- B. On, Transmitting on Hopping channel
- C. Off

3.4 Noise Generating and Noise Suppressing Parts

Refer to Circuit Diagram for further details.

3.5 Submitted Documents

- Application Form
- Block Diagram
- Schematics
- Technical Description
- FCC/IC Label and Location Info
- Photo Document
- User Manual

Prüfbericht-Nr.: CN235L5Y 001
Test report no.:

Seite 11 von 24
Page 11 of 24

4 Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

Radio Spectrum: The equipment under test (EUT) was configured at its highest power output in order to measure its highest possible radiation and conducted level. The test modes were adapted accordingly in reference to the instructions for use.

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5. All testing were performed according to the procedures in ANSI C63.10: 2013.

According to clause 3.1, all test items were applied on model LIVE770NC with black enclosure.

4.3 Special Accessories and Auxiliary Equipment

Table 5: List of Accessories and Auxiliary Equipment

| Description | Manufacturer | Model | S/N or Rating |
|-------------|--------------|-------|---------------|
| Laptop | Lenovo | T480 | PF-16A6N8 |

4.4 Countermeasures to Achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Technical Construction File (TCF).

No additional measures were employed to achieve compliance.

4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test (Below 30MHz)

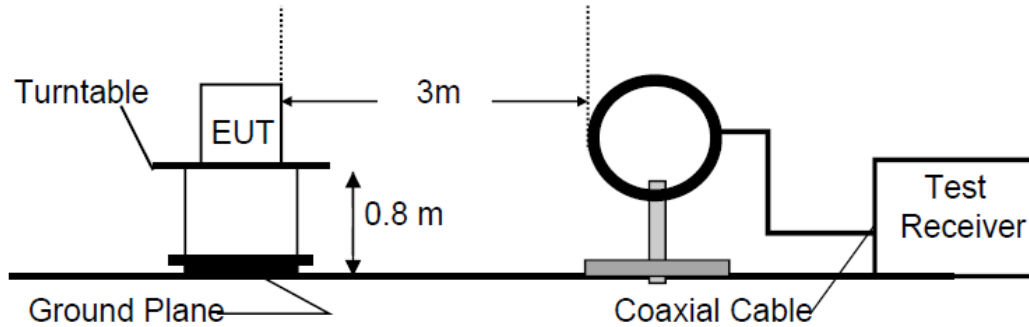


Diagram of Measurement Configuration for Radiation Test (Below 1GHz)


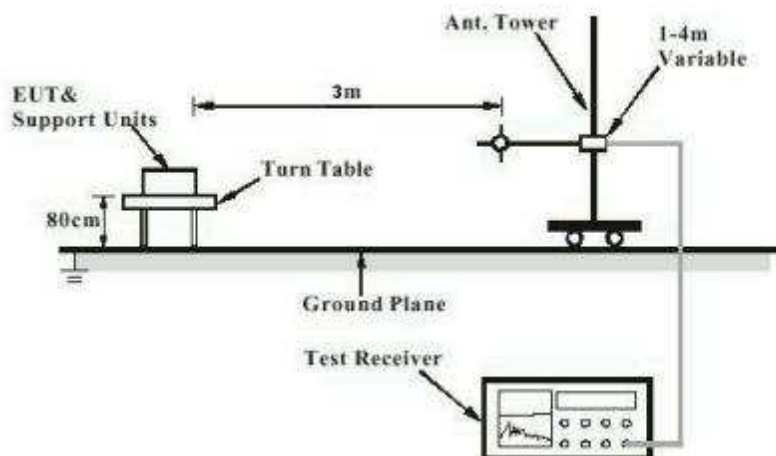



Diagram of Measurement Configuration for Radiation Test (Above 1GHz)

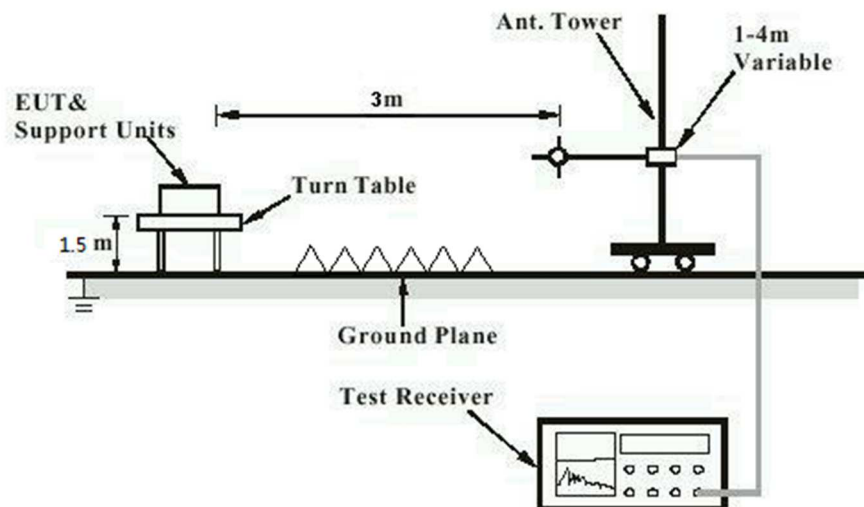

Prüfbericht-Nr.: CN235L5Y 001
Test report no.:

Seite 13 von 24
Page 13 of 24

Diagram of Measurement Configuration for Conducted Transmitter Measurement

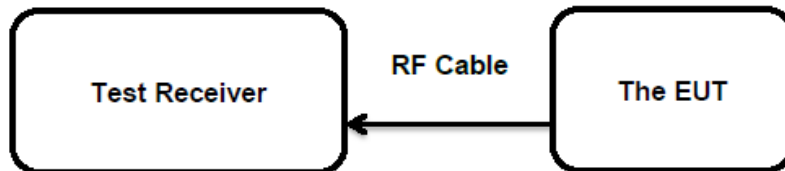

Prüfbericht-Nr.: CN235L5Y 001
Test report no.:

Seite 14 von 24
Page 14 of 24

5 Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

RESULT: **Pass**

Test Specification

Test standard : FCC Part 15.247(b)(4) and Part 15.203
RSS-Gen Clause 8.3

According to the manufacturer declared, the EUT has one Integral antenna, the directional gain of antennas are 1.93 dBi, and the antenna connector is designed with permanent attachment and no consideration of replacement. Therefore the EUT is considered sufficient to comply with the provision.

Refer to EUT Photo for further details.

Prüfbericht-Nr.: CN235L5Y 001
Test report no.:

Seite 15 von 24
 Page 15 of 24

5.1.2 Maximum Conducted Output Power

RESULT: **Pass**

Test Specification

| | |
|-------------------|--|
| Test standard | FCC Part 15.247(b)(1) RSS-247 Clause 5.4(b) |
| Basic standard | ANSI C63.10: 2013 |
| Limits | FHSS<0.125W(Maximum peak conducted output power) < 4 W (e.i.r.p.) |
| Kind of test site | Shielded Room |

Test Setup

| | |
|----------------------|--------------------------|
| Date of testing | 2023-05-06 to 2023-05-23 |
| Input voltage | DC 3.7V |
| Operation mode | A.1 |
| Test channel | Low / Middle / High |
| Ambient temperature | 25.2 °C |
| Relative humidity | 53 % |
| Atmospheric pressure | 101 kPa |

Table 6: Test Result of Maximum Conducted Output Power

| Test Mode | Channel Frequency (MHz) | Measured Peak Output Power | | Limit (W) |
|-------------------------------|-------------------------|----------------------------|---------|-----------|
| | | (dBm) | (W) | |
| BR | 2402 | 3.98 | 0.00250 | < 0.125 |
| | 2441 | 4.40 | 0.00275 | |
| | 2480 | 3.80 | 0.00240 | |
| EDR | 2402 | 3.47 | 0.00222 | |
| | 2441 | 4.65 | 0.00292 | |
| | 2480 | 3.82 | 0.00241 | |
| Maximum Measured Value | | 4.65 | 0.00292 | |

Note: The cable loss is taken into account in results and the maximum e.i.r.p. is 6.58 dBm less than 4W(36dBm).

Prüfbericht-Nr.: CN235L5Y 001
Test report no.:

Seite 16 von 24
 Page 16 of 24

5.1.3 99% Bandwidth

RESULT: **Pass**

Test Specification

Test standard : RSS-Gen Clause 6.7
 Basic standard : ANSI C63.10: 2013
 Kind of test site : Shielded Room

Test Setup

Date of testing : 2023-05-06 to 2023-05-23
 Input voltage : DC 3.7V
 Operation mode : A.1
 Test channel : Low / Middle / High
 Ambient temperature : 25.2 °C
 Relative humidity : 53 %
 Atmospheric pressure : 101 kPa

For the measurement records, refer to the appendix B.

Table 7: Test Result of 99% Bandwidth

| Test Mode | Channel Frequency (MHz) | Measured 99% Bandwidth | Limit |
|-----------|-------------------------|------------------------|-------|
| | | (MHz) | |
| BR | 2402 | 0.87983 | / |
| | 2441 | 0.86327 | |
| | 2480 | 0.89332 | |
| EDR | 2402 | 1.1558 | / |
| | 2441 | 1.1517 | |
| | 2480 | 1.1668 | |

Note: The fundamental emissions stay within the allocated band 2400-2483.5MHz.

Prüfbericht-Nr.: CN235L5Y 001
Test report no.:

Seite 17 von 24
Page 17 of 24

5.1.4 Conducted Spurious Emissions Measured in 100 kHz Bandwidth

RESULT: **Pass**

Test Specification

Test standard : FCC Part 15.247(d)
RSS-247 Clause 5.5
Basic standard : ANSI C63.10: 2013
Limits : 20dB (below that in the 100kHz bandwidth within the band that contains the highest level of the desired power);
Kind of test site : Shielded Room

Test Setup

Date of testing : 2023-05-06 to 2023-05-23
Input voltage : DC 3.7V
Operation mode : A.1
Test channel : Low / Middle / High
Ambient temperature : 25.2 °C
Relative humidity : 53 %
Atmospheric pressure : 101 kPa

Test results of 100kHz Bandwidth of Frequency Band Edge by Conducted method refer to following test plot, and compliance is achieved as well.

For the measurement records, refer to the appendix B

Prüfbericht-Nr.: CN235L5Y 001
Test report no.:

Seite 18 von 24
Page 18 of 24

5.1.5 Radiated Spurious Emission

RESULT: **Pass**

Test Specification

Test standard : FCC Part 15.247(d) & FCC Part 15.205
RSS-247 Clause 3.3
Basic standard : ANSI C63.10: 2013
Limits : Refer to 15.209(a) of FCC part 15.247(d)
RSS-Gen Table 6 & Table 7
Kind of test site : 3m Semi-anechoic Chamber

Test Setup

Date of testing : 2023-05-06 to 2023-05-23
Input voltage : DC 3.7V
Operation mode : A.1
Test channel : Low / Middle / High
Ambient temperature : Refer to test result
Relative humidity : Refer to test result
Atmospheric pressure : 101 kPa

Remark:

During the pretest the EUT was rotated through three orthogonal axes to determine the attitude that maximizes the emissions. After that the EUT was manually handled to find the orientation that has the maximum emission, which is the orientation shown in the test set-up photos.

Testing was carried out within frequency range 9kHz to the tenth harmonics.

For the measurement records, refer to the appendix B.

Prüfbericht-Nr.: CN235L5Y 001
Test report no.:

 Seite 19 von 24
 Page 19 of 24

5.1.6 20dB Bandwidth

RESULT: **Pass**
Test Specification

Test standard : FCC Part 15.247(a)(1)
 RSS-247 Clause 5.1(a)

Basic standard : ANSI C63.10: 2013

Kind of test site : Shielded Room

Test Setup

Date of testing : 2023-05-06 to 2023-05-23

Input voltage : DC 3.7V

Operation mode : A.1

Test channel : Low / Middle / High

Ambient temperature : 25.2 °C

Relative humidity : 53 %

Atmospheric pressure : 101 kPa

For the measurement records, refer to the appendix B.

Table 8: Test Result of -20dB Bandwidth

| Test Mode | Channel Frequency (MHz) | 20dB Bandwidth (kHz) | 2/3 of 20dB Bandwidth (kHz) | Limit (MHz) |
|-----------|-------------------------|----------------------|-----------------------------|-------------|
| BR | 2402 | 1023 | 682.000 | / |
| | 2441 | 948 | 632.000 | |
| | 2480 | 1023 | 682.000 | |
| EDR | 2402 | 1155 | 770.000 | / |
| | 2441 | 1179 | 786.000 | |
| | 2480 | 1164 | 776.000 | |

Prüfbericht-Nr.: CN235L5Y 001
Test report no.:

Seite 20 von 24
Page 20 of 24

5.1.7 Carrier Frequency Separation

RESULT: **Pass**

Test Specification

Test standard : FCC Part 15.247(a)(1)
RSS-247 Clause 5.1(b)
Basic standard : ANSI C63.10: 2013
Limits : $\geq 25\text{kHz}$ or $2/3$ of 20dB bandwidth, whichever is greater
Kind of test site : Shielded Room

Test Setup

Date of testing : 2023-05-06 to 2023-05-23
Input voltage : DC 3.7V
Operation mode : B
Test channel : Low / Middle / High
Ambient temperature : 25.2 °C
Relative humidity : 53 %
Atmospheric pressure : 101 kPa

For the measurement records, refer to the appendix B.

Table 9: Test Result of Carrier Frequency Separation

| Test Mode | Channel | Result[MHz] | Limit[MHz] | Verdict |
|-----------|---------|-------------|--------------|---------|
| BR-DH5 | Hop | 1.128 | ≥ 1.023 | PASS |
| EDR-3DH5 | Hop | 1.146 | ≥ 0.786 | PASS |

Note:

The limit is maximum $2/3$ of the 20 dB bandwidth: 786KHz.

Prüfbericht-Nr.: CN235L5Y 001
Test report no.:

Seite 21 von 24
Page 21 of 24

5.1.8 Frequency stability

RESULT: **Pass**

Test Specification

Test standard : RSS-247 Clause 8.11
Basic standard : ANSI C63.10: 2013
Limits : within at least the central 80% of its permitted operating frequency band (2400-2483.5MHz)
Kind of test site : Shielded Room

Test Setup

Date of testing : 2023-05-06 to 2023-05-23
Input voltage : DC 3.7V
Operation mode : B
Ambient temperature : 25.2 °C
Relative humidity : 53 %
Atmospheric pressure : 101 kPa

For the measurement records, refer to the appendix B.

Prüfbericht-Nr.: CN235L5Y 001
Test report no.:

Seite 22 von 24
Page 22 of 24

5.1.9 Number of Hopping Frequency

RESULT: **Pass**

Test Specification

Test standard : FCC part 15.247(a)(1)(iii)
RSS-247 Clause 5.1(d)
Basic standard : ANSI C63.10: 2013
Limits : ≥ 15 non-overlapping channels
Kind of test site : Shielded Room

Test Setup

Date of testing : 2023-05-06 to 2023-05-23
Input voltage : DC 3.7V
Operation mode : B
Ambient temperature : 25.2 °C
Relative humidity : 53 %
Atmospheric pressure : 101 kPa

For the measurement records, refer to the appendix B.

Table 10: Test Result of Number of Hopping Frequency

| Frequency Range | Measured Quantity of Hopping Channel | Limit | Result |
|------------------|--------------------------------------|-----------|--------|
| 2402 to 2480 MHz | 79 | ≥ 15 | Pass |

Prüfbericht-Nr.: CN235L5Y 001
Test report no.:

Seite 23 von 24
Page 23 of 24

5.1.10 Time of Occupancy

RESULT: **Pass**

Test Specification

Test standard : FCC part 15.247(a)(1)(iii)
RSS-247 Clause 5.1(d)
Basic standard : ANSI C63.10: 2013
Limits : < 0.4s
Kind of test site : Shielded Room

Test Setup

Date of testing : 2023-05-06 to 2023-05-23
Input voltage : DC 3.7V
Operation mode : B
Test channel : Low / Middle / High
Ambient temperature : 25.2 °C
Relative humidity : 53 %
Atmospheric pressure : 101 kPa

For the measurement records, refer to the appendix B.

Prüfbericht-Nr.: CN235L5Y 001
Test report no.:

Seite 24 von 24
Page 24 of 24

6 Photographs of the Test Set-Up

For photographs of the test set-up, refer to the appendix A.

7 List of Tables



| | |
|--|----|
| Table 1: List of Test and Measurement Equipment..... | 6 |
| Table 2: Technical Specification of EUT | 8 |
| Table 3: RF Channel and Frequency of Classic Bluetooth..... | 9 |
| Table 4: RF Channel and Frequency of Bluetooth Low Energy..... | 9 |
| Table 5: List of Accessories and Auxiliary Equipment..... | 11 |
| Table 6: Test Result of Maximum Conducted Output Power..... | 15 |
| Table 7: Test Result of 99% Bandwidth | 16 |
| Table 8: Test Result of -20dB Bandwidth..... | 19 |
| Table 9: Test Result of Carrier Frequency Separation | 20 |
| Table 10: Test Result of Number of Hopping Frequency | 22 |


Appendix B: Test Results


| | |
|---|-----------|
| APPENDIX B: TEST RESULTS OF LEFT EARBUD | 1 |
| APPENDIX B.1: TEST RESULTS OF 99% BANDWIDTH | 2 |
| APPENDIX B.2: TEST RESULTS OF 20dB BANDWIDTH | 5 |
| APPENDIX B.3: TEST RESULTS OF FREQUENCY STABILITY | 8 |
| APPENDIX B.4: TEST RESULTS OF CARRIER FREQUENCY SEPARATION | 10 |
| APPENDIX B.5: TEST RESULTS OF NUMBER OF HOPPING FREQUENCY | 11 |
| APPENDIX B.6: TEST RESULTS OF TIME OF OCCUPANCY | 12 |
| APPENDIX B.7: TEST RESULTS OF CONDUCTED SPURIOUS EMISSIONS MEASURED IN 100 kHz BANDWIDTH | 17 |
| <i>Conducted measurements</i> | 17 |
| <i>Band edge measurements</i> | 24 |
| APPENDIX B.8: TEST RESULTS OF RADIATED SPURIOUS EMISSIONS | 28 |
| 30MHz - 1GHz | 28 |
| 1GHz - 18GHz | 29 |
| APPENDIX B.9: TEST RESULTS OF RADIATED EMISSIONS IN RESTRICTED BANDS | 30 |

Appendix B.1: Test Results of 99% Bandwidth

| TestMode | Antenna | Channel | OCB [MHz] | FL[MHz] | FH[MHz] | Limit[MHz] | Verdict |
|----------|---------|---------|-----------|-----------|-----------|------------|---------|
| DH5 | Ant1 | 2402 | 0.87983 | 2401.5666 | 2402.4464 | --- | --- |
| | | 2441 | 0.86327 | 2440.5640 | 2441.4273 | --- | --- |
| | | 2480 | 0.89332 | 2479.5433 | 2480.4367 | --- | --- |
| 3DH5 | Ant1 | 2402 | 1.1558 | 2401.4162 | 2402.5720 | --- | --- |
| | | 2441 | 1.1517 | 2440.4154 | 2441.5671 | --- | --- |
| | | 2480 | 1.1668 | 2479.4065 | 2480.5733 | --- | --- |

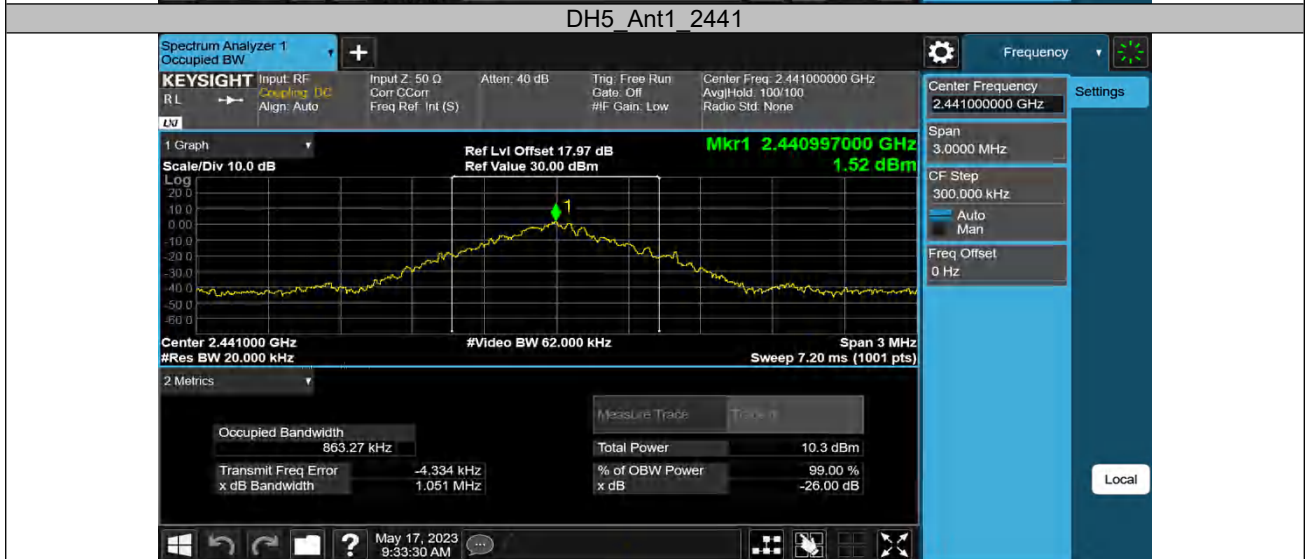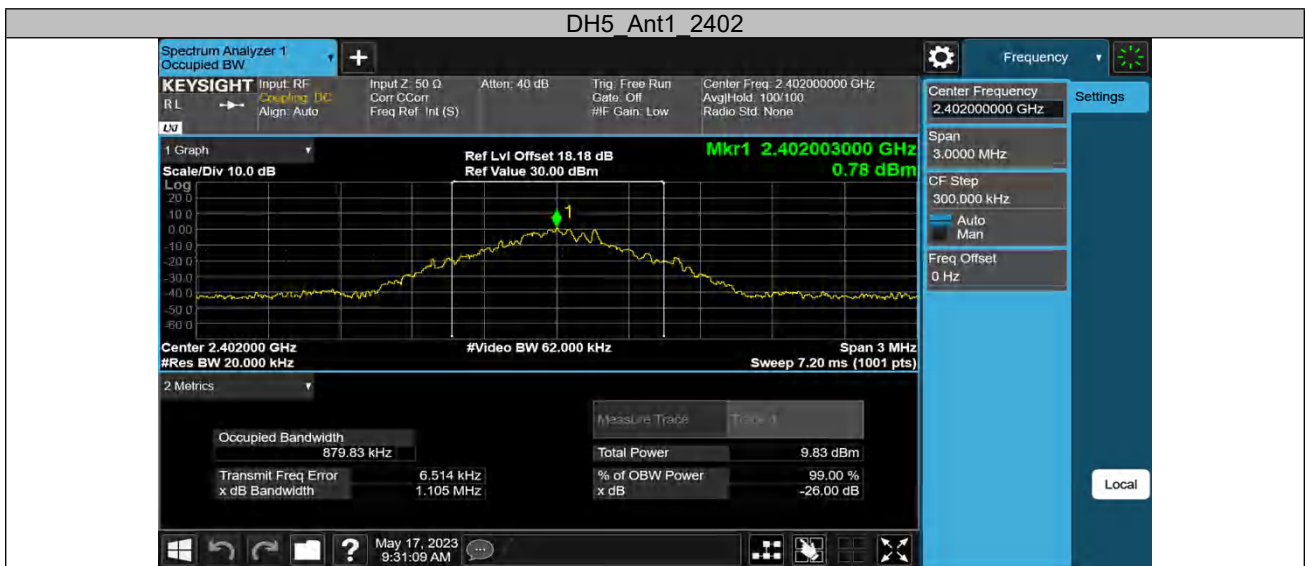


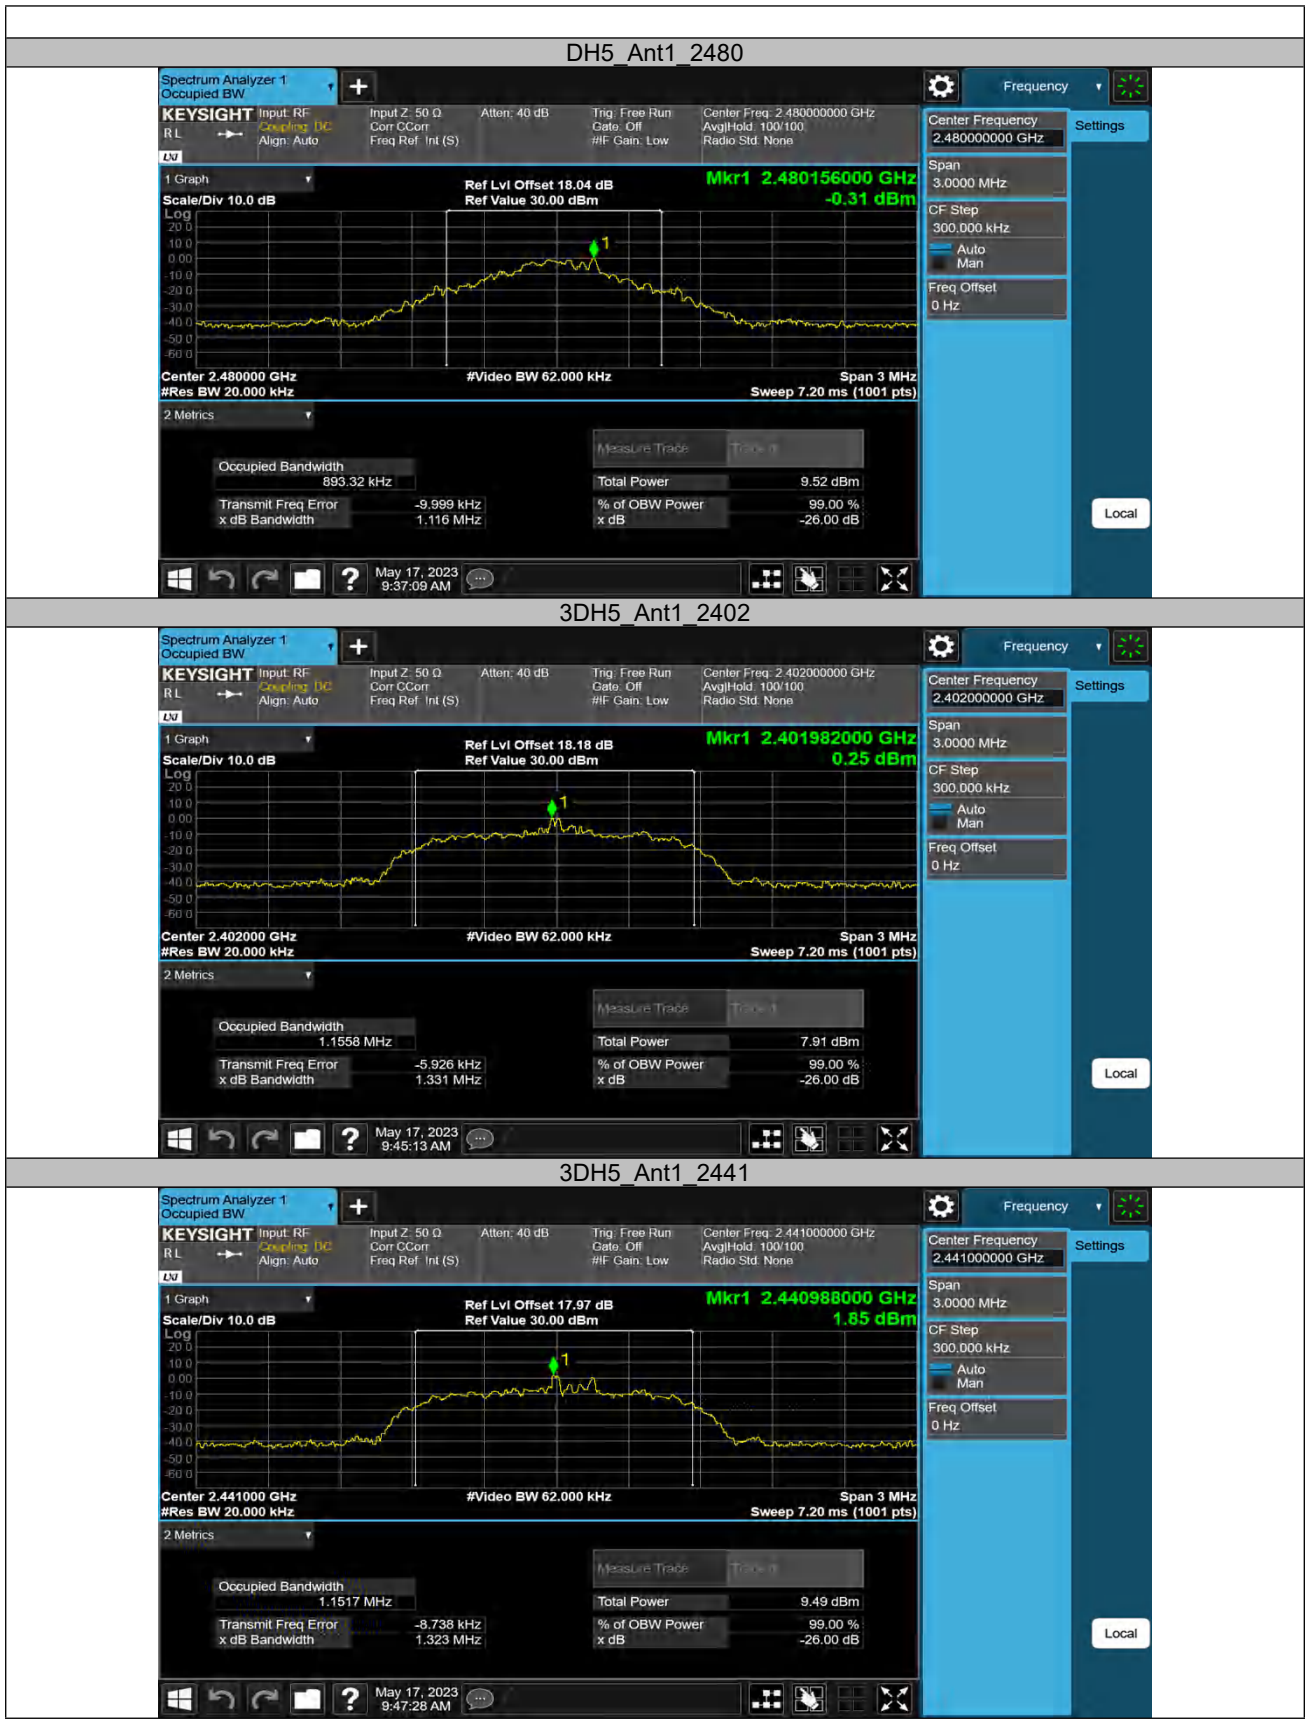


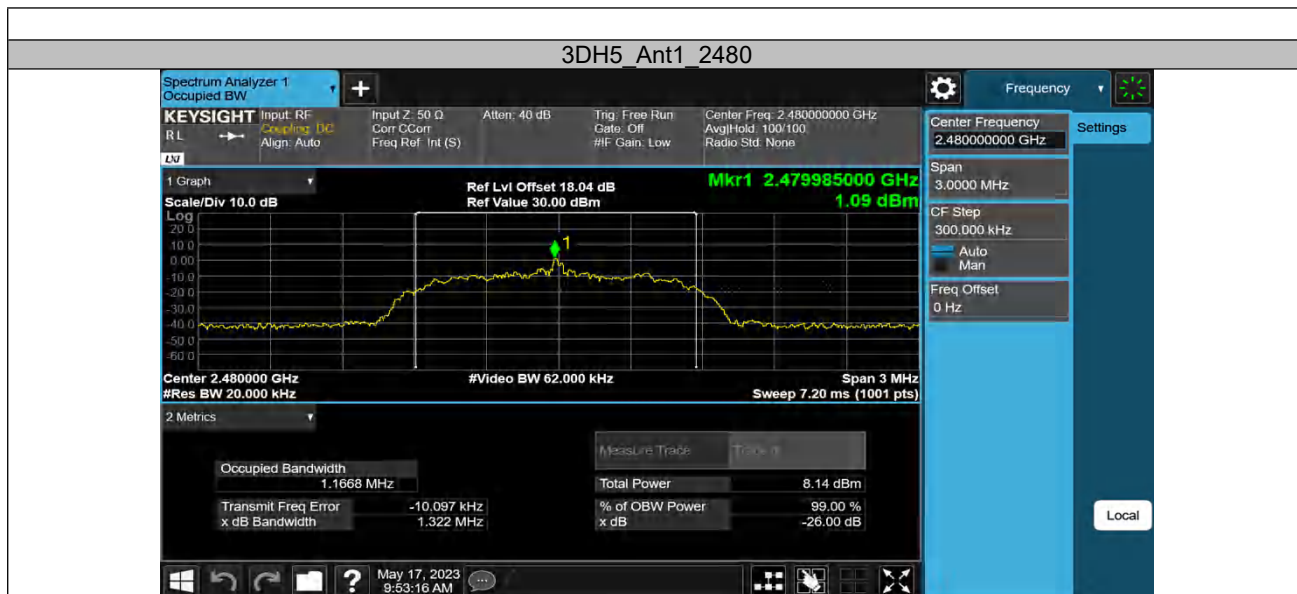

Appendix B.2: Test Results of 20dB Bandwidth

| TestMode | Antenna | Channel | 20db EBW[MHz] | FL[MHz] | FH[MHz] | Limit[MHz] | Verdict |
|----------|---------|---------|---------------|----------|----------|------------|---------|
| DH5 | Ant1 | 2402 | 1.023 | 2401.487 | 2402.510 | --- | --- |
| | | 2441 | 0.948 | 2440.541 | 2441.489 | --- | --- |
| | | 2480 | 1.023 | 2479.490 | 2480.513 | --- | --- |
| 3DH5 | Ant1 | 2402 | 1.155 | 2401.427 | 2402.582 | --- | --- |
| | | 2441 | 1.179 | 2440.412 | 2441.591 | --- | --- |
| | | 2480 | 1.164 | 2479.421 | 2480.585 | --- | --- |

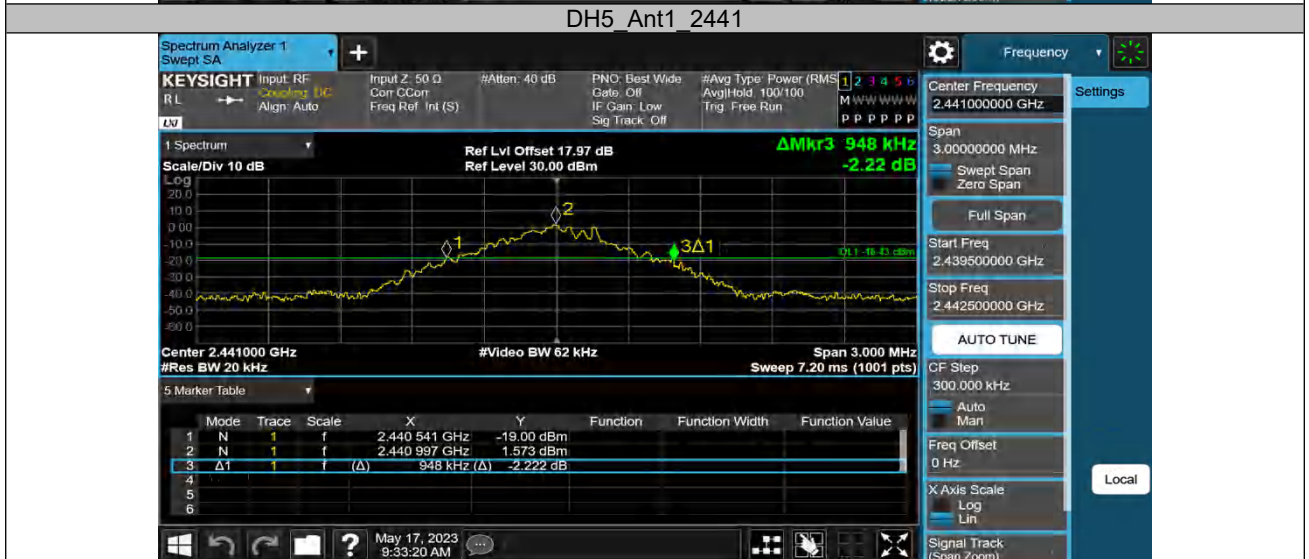

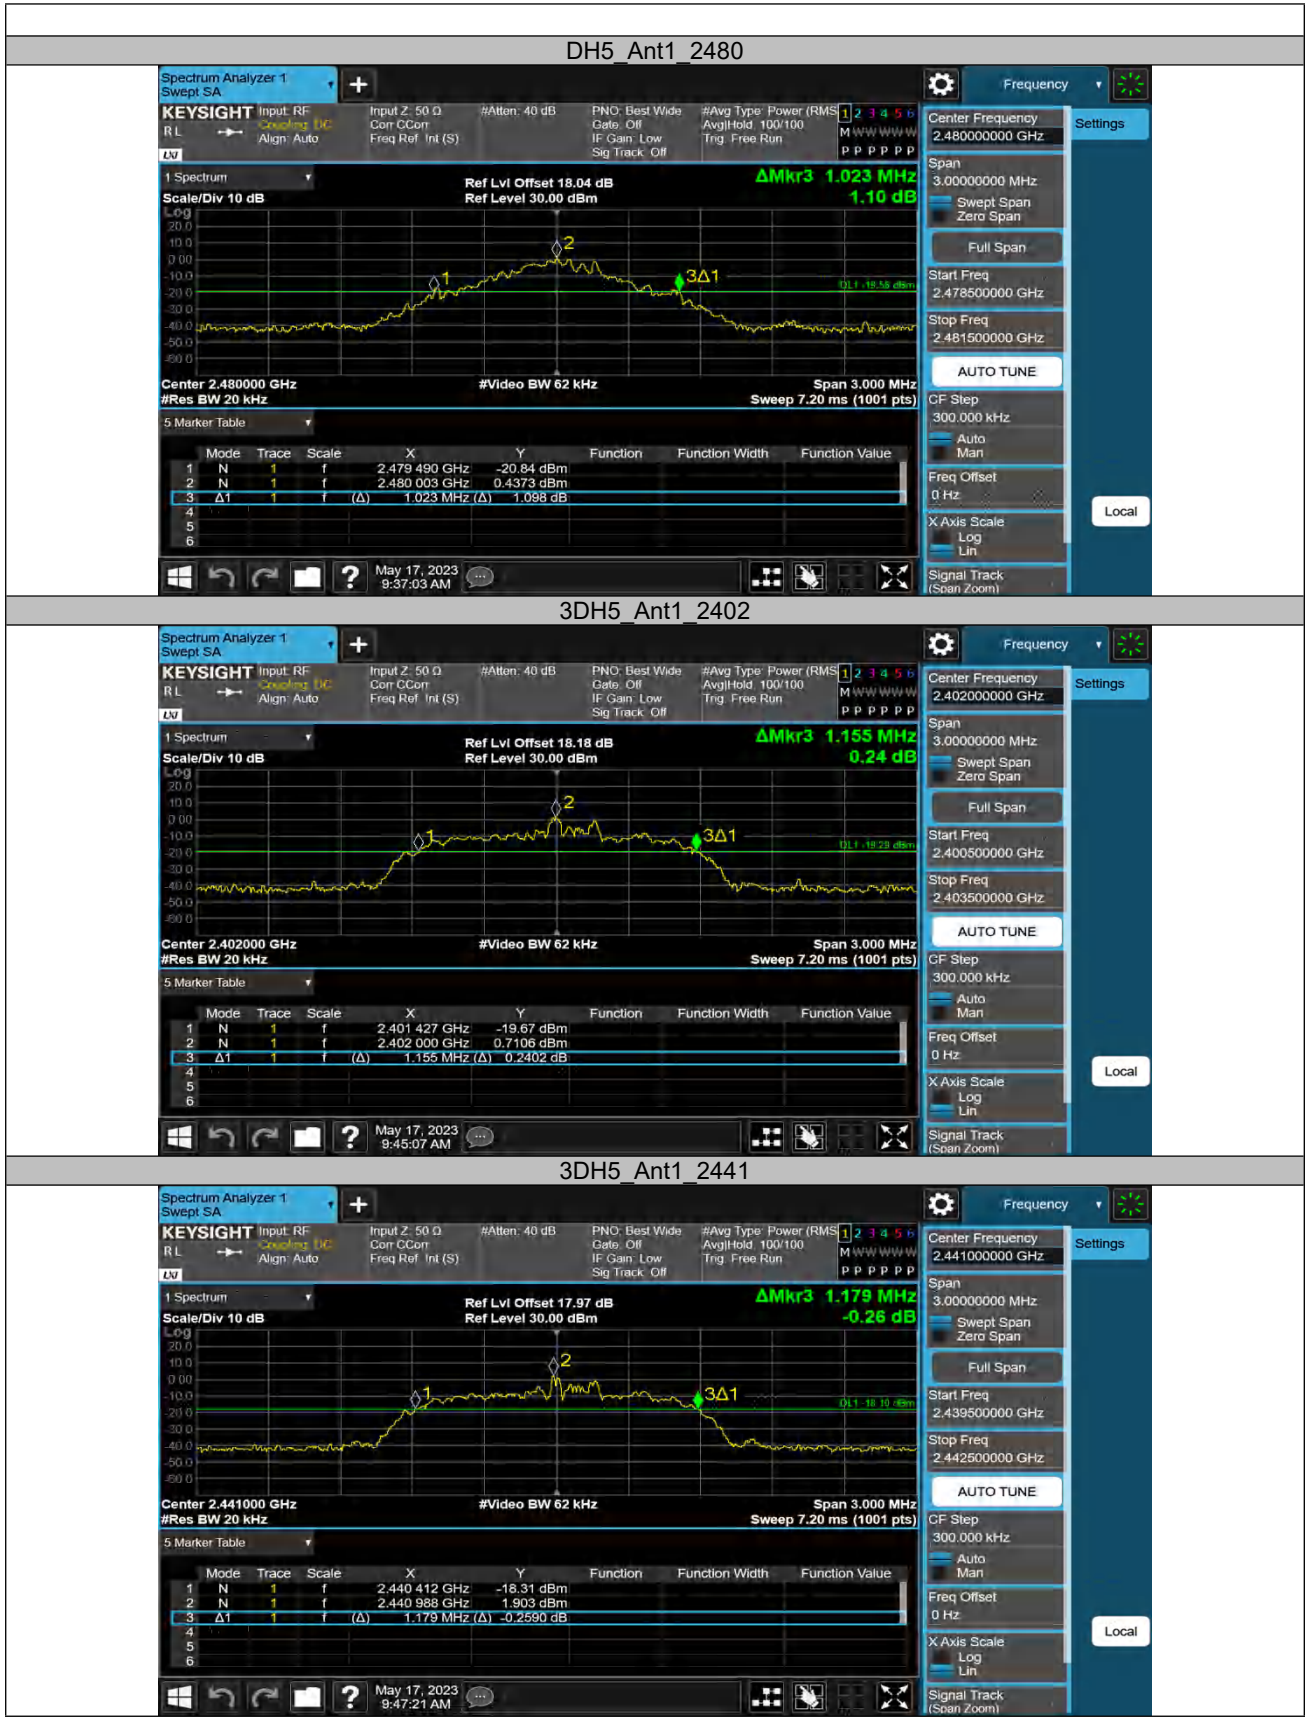



Appendix B.3: Test Results of Frequency stability

| | |
|--------------------|------|
| Test Channel (MHz) | 2402 |
|--------------------|------|

Test result of frequency tolerance of voltage variation

| Voltage | Test result (MHz) | Deviation Frequency (KHz) | Test result (ppm) | Limit (ppm) |
|----------|-------------------|---------------------------|-------------------|-------------|
| DC 3.33V | 2401.994 | 6 | 2.50 | 10 |
| DC 3.7V | 2401.995 | 5 | 2.08 | |
| DC 4.07V | 2401.993 | 7 | 2.91 | |

Test result of frequency tolerance of temperature variation

| Temperature (°C) | Test result (MHz) | Deviation Frequency (KHz) | Test result (ppm) | Limit (ppm) |
|------------------|-------------------|---------------------------|-------------------|-------------|
| -30 | 2401.990 | 10 | 4.16 | 10 |
| -20 | 2401.992 | 8 | 3.33 | |
| -10 | 2401.994 | 6 | 2.50 | |
| 0 | 2401.994 | 6 | 2.50 | |
| 10 | 2401.995 | 5 | 2.08 | |
| 20 | 2401.996 | 4 | 1.67 | |
| 30 | 2401.998 | 2 | 0.83 | |
| 40 | 2401.988 | 12 | 5.00 | |
| 50 | 2401.997 | 3 | 1.25 | |
| 55 | 2401.996 | 4 | 1.67 | |

| | |
|--------------------|------|
| Test Channel (MHz) | 2441 |
|--------------------|------|

Test result of frequency tolerance of voltage variation

| Voltage | Test result (MHz) | Deviation Frequency (KHz) | Test result (ppm) | Limit (ppm) |
|----------|-------------------|---------------------------|-------------------|-------------|
| DC 3.33V | 2440.992 | -8 | -3.28 | 10 |
| DC 3.7V | 2440.995 | -5 | -2.05 | |
| DC 4.07V | 2440.997 | -3 | -1.23 | |

Test result of frequency tolerance of temperature variation

| Temperature (°C) | Test result (MHz) | Deviation Frequency (KHz) | Test result (ppm) | Limit (ppm) |
|------------------|-------------------|---------------------------|-------------------|-------------|
| -30 | 2440.993 | -7 | -2.87 | 10 |
| -20 | 2440.994 | -6 | -2.46 | |
| -10 | 2440.995 | -5 | -2.05 | |
| 0 | 2440.992 | -8 | -3.28 | |
| 10 | 2440.994 | -6 | -2.46 | |
| 20 | 2440.996 | -4 | -1.64 | |
| 30 | 2440.996 | -4 | -1.64 | |
| 40 | 2440.997 | -3 | -1.23 | |
| 50 | 2440.991 | -9 | -3.69 | |
| 55 | 2440.997 | -3 | -1.23 | |

| | |
|--------------------|------|
| Test Channel (MHz) | 2480 |
|--------------------|------|

Test result of frequency tolerance of voltage variation


| Voltage | Test result (MHz) | Deviation Frequency (KHz) | Test result (ppm) | Limit (ppm) |
|----------|-------------------|---------------------------|-------------------|-------------|
| DC 3.33V | 2479.993 | -7 | -2.82 | 10 |
| DC 3.7V | 2479.995 | -5 | -2.02 | |
| DC 4.07V | 2479.996 | -4 | -1.61 | |

Test result of frequency tolerance of temperature variation

| Temperature (°C) | Test result (MHz) | Deviation Frequency (KHz) | Test result (ppm) | Limit (ppm) |
|------------------|-------------------|---------------------------|-------------------|-------------|
| -30 | 2479.995 | -5 | -2.02 | 10 |
| -20 | 2479.995 | -5 | -2.02 | |
| -10 | 2479.993 | -7 | -2.82 | |
| 0 | 2479.994 | -6 | -2.42 | |
| 10 | 2479.993 | -7 | -2.82 | |
| 20 | 2479.995 | -5 | -2.02 | |
| 30 | 2479.996 | -4 | -1.61 | |
| 40 | 2479.996 | -4 | -1.61 | |
| 50 | 2479.993 | -7 | -2.82 | |
| 55 | 2479.995 | -5 | -2.02 | |


Appendix B.4: Test Results of Carrier Frequency Separation

| TestMode | Antenna | Channel | Result[MHz] | Limit[MHz] | Verdict |
|----------|---------|---------|-------------|------------|---------|
| DH5 | Ant1 | Hop | 1.128 | ≥1.023 | PASS |
| 3DH5 | Ant1 | Hop | 1.146 | ≥0.786 | PASS |

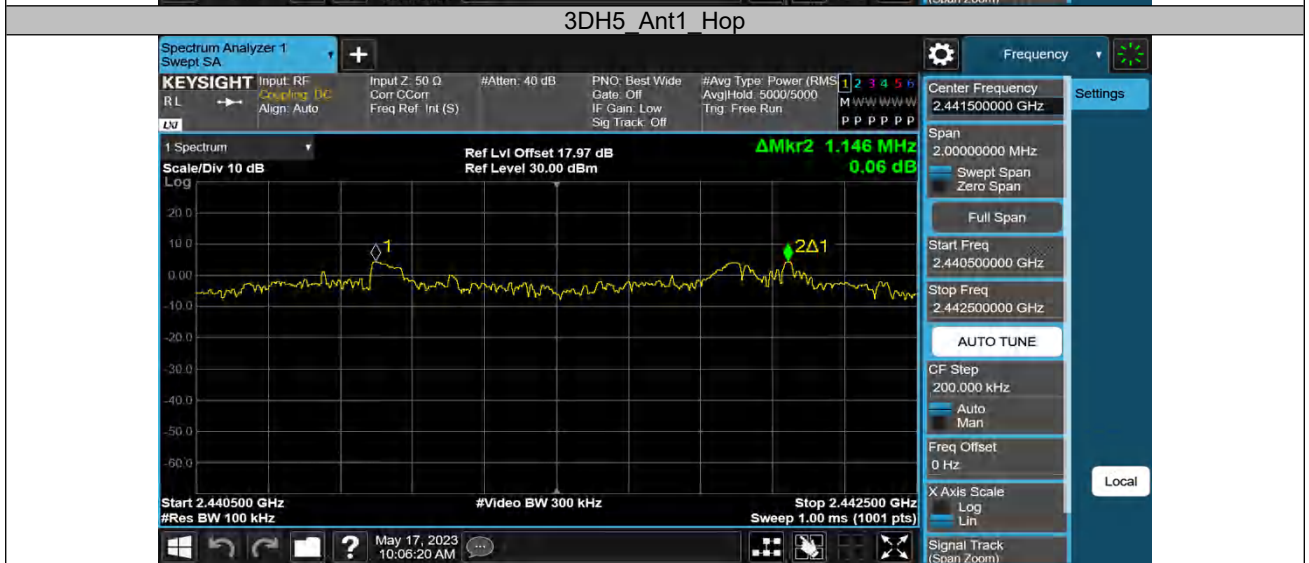


Appendix B.5: Test Results of Number of Hopping Frequency


| TestMode | Antenna | Channel | Result[Num] | Limit[Num] | Verdict |
|----------|---------|---------|-------------|------------|---------|
| DH5 | Ant1 | Hop | 79 | ≥15 | PASS |
| 3DH5 | Ant1 | Hop | 79 | ≥15 | PASS |

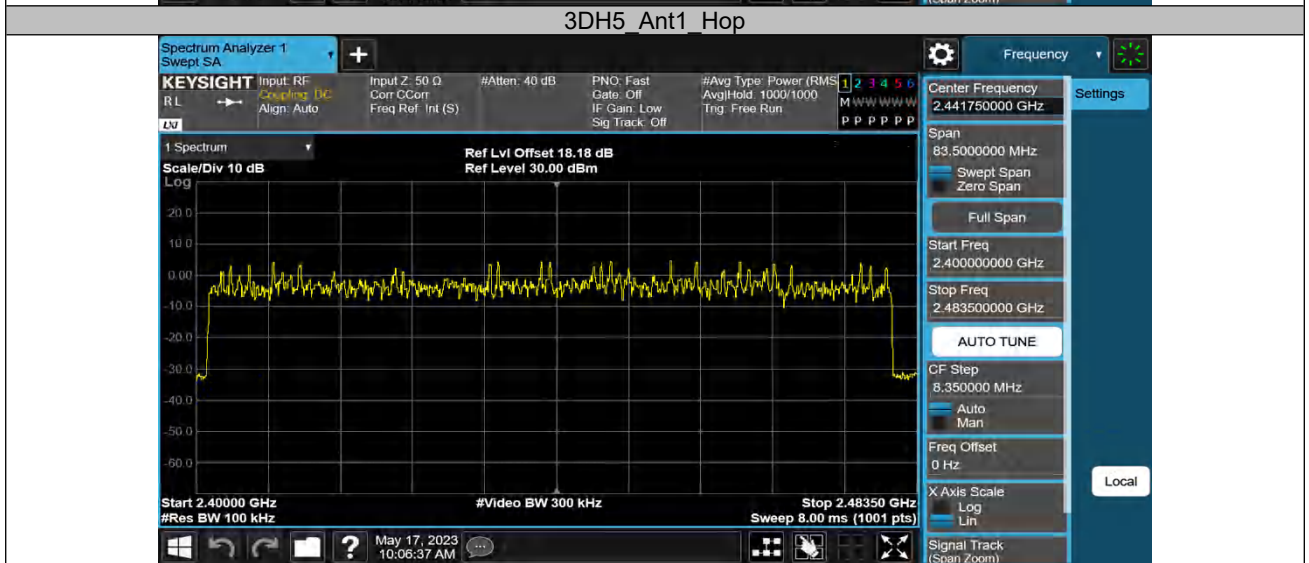

Appendix B.6: Test Results of Time of Occupancy


| TestMode | Antenna | Channel | BurstWidth [ms] | TotalHops [Num] | Result[s] | Limit[s] | Verdict |
|----------|---------|---------|-----------------|-----------------|-----------|----------|---------|
| DH1 | Ant1 | Hop | 0.394 | 167 | 0.066 | ≤0.4 | PASS |
| DH3 | Ant1 | Hop | 1.649 | 108 | 0.178 | ≤0.4 | PASS |
| DH5 | Ant1 | Hop | 2.897 | 86 | 0.249 | ≤0.4 | PASS |
| 3DH1 | Ant1 | Hop | 0.404 | 155 | 0.063 | ≤0.4 | PASS |
| 3DH3 | Ant1 | Hop | 1.654 | 100 | 0.165 | ≤0.4 | PASS |
| 3DH5 | Ant1 | Hop | 2.904 | 82 | 0.238 | ≤0.4 | PASS |

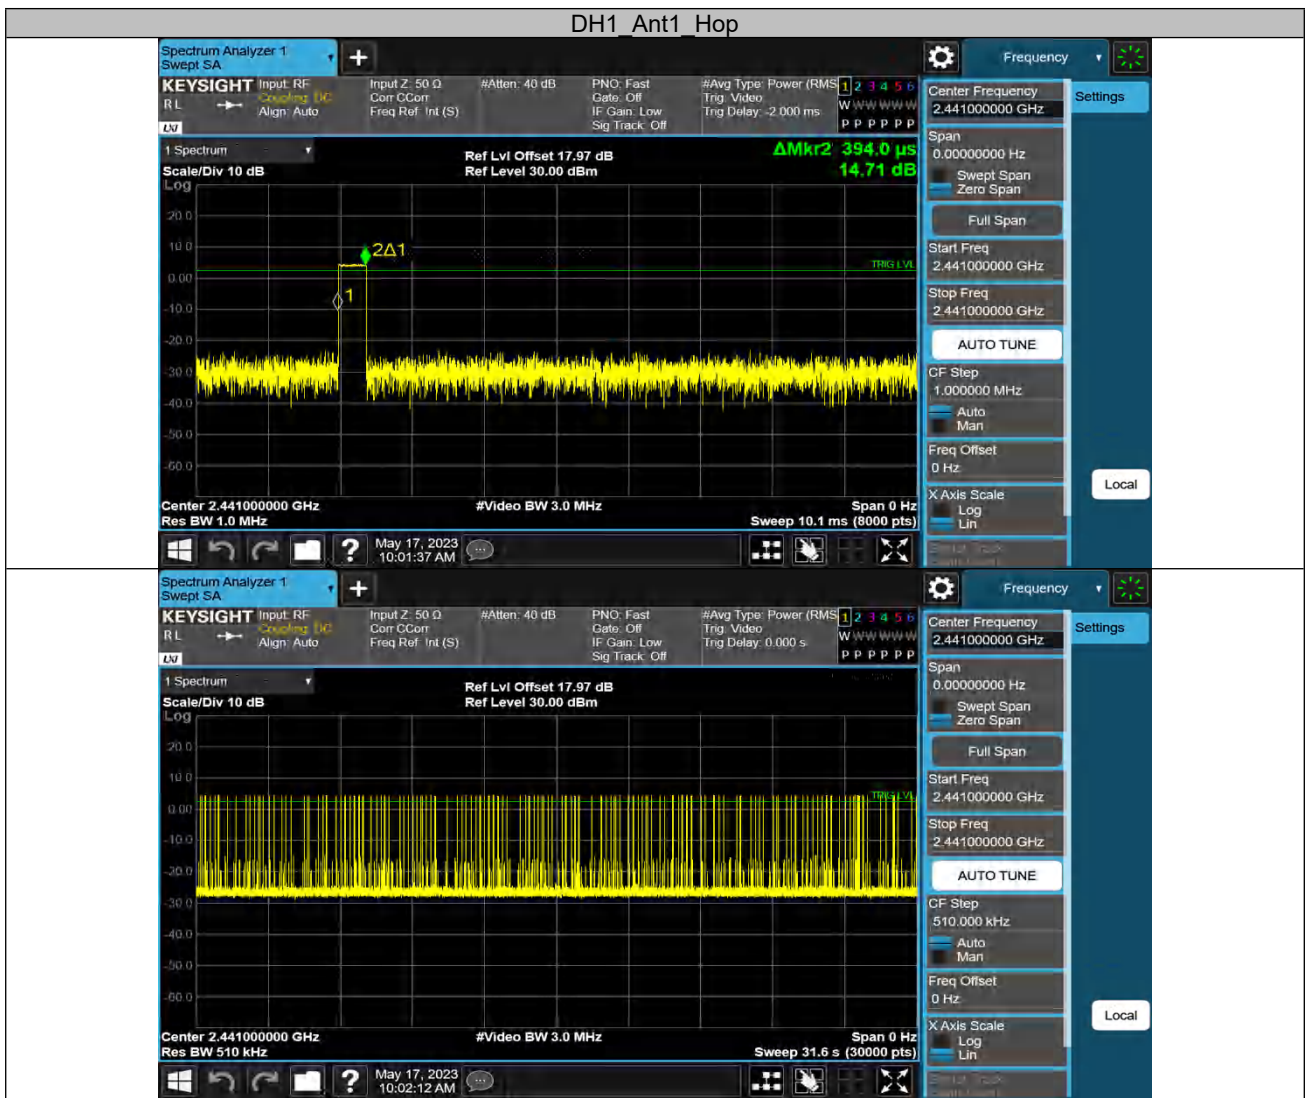


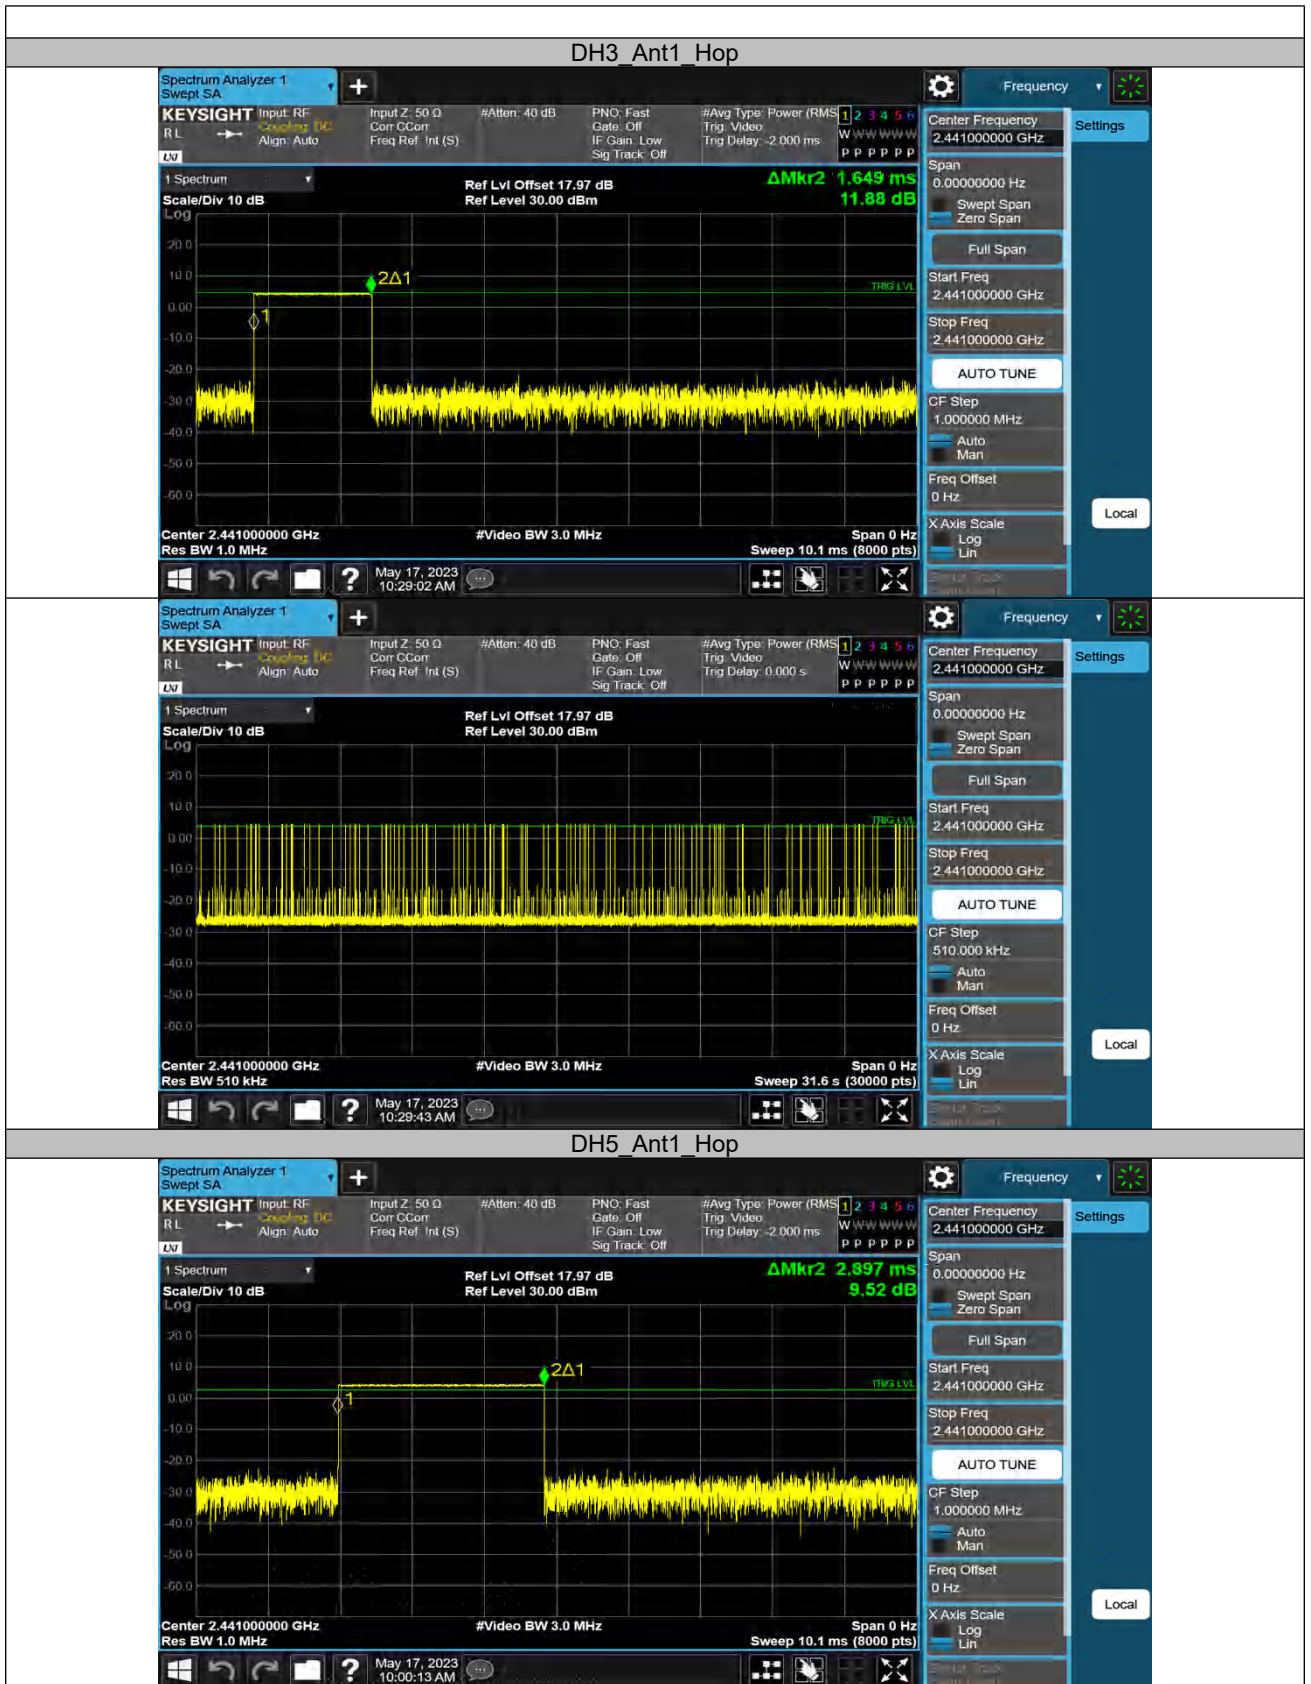



3DH1_Ant1_Hop

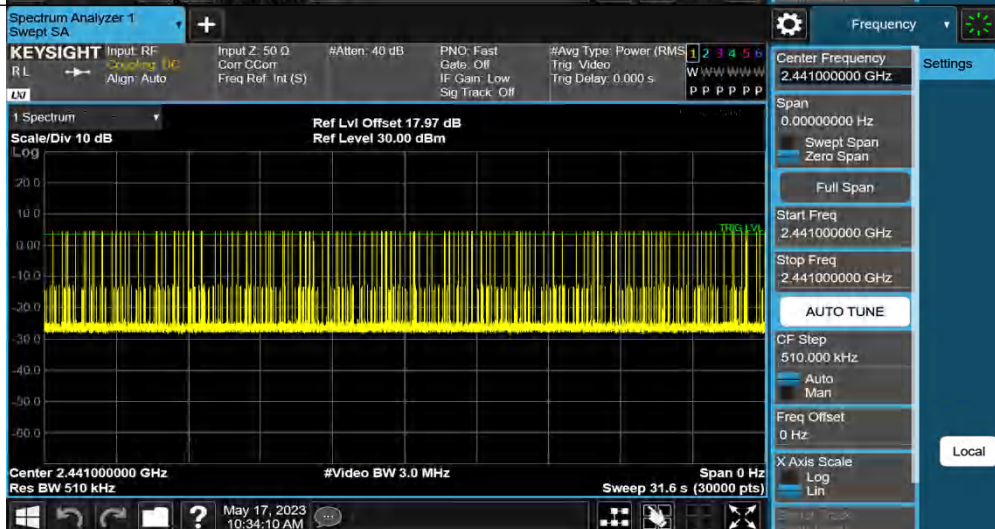

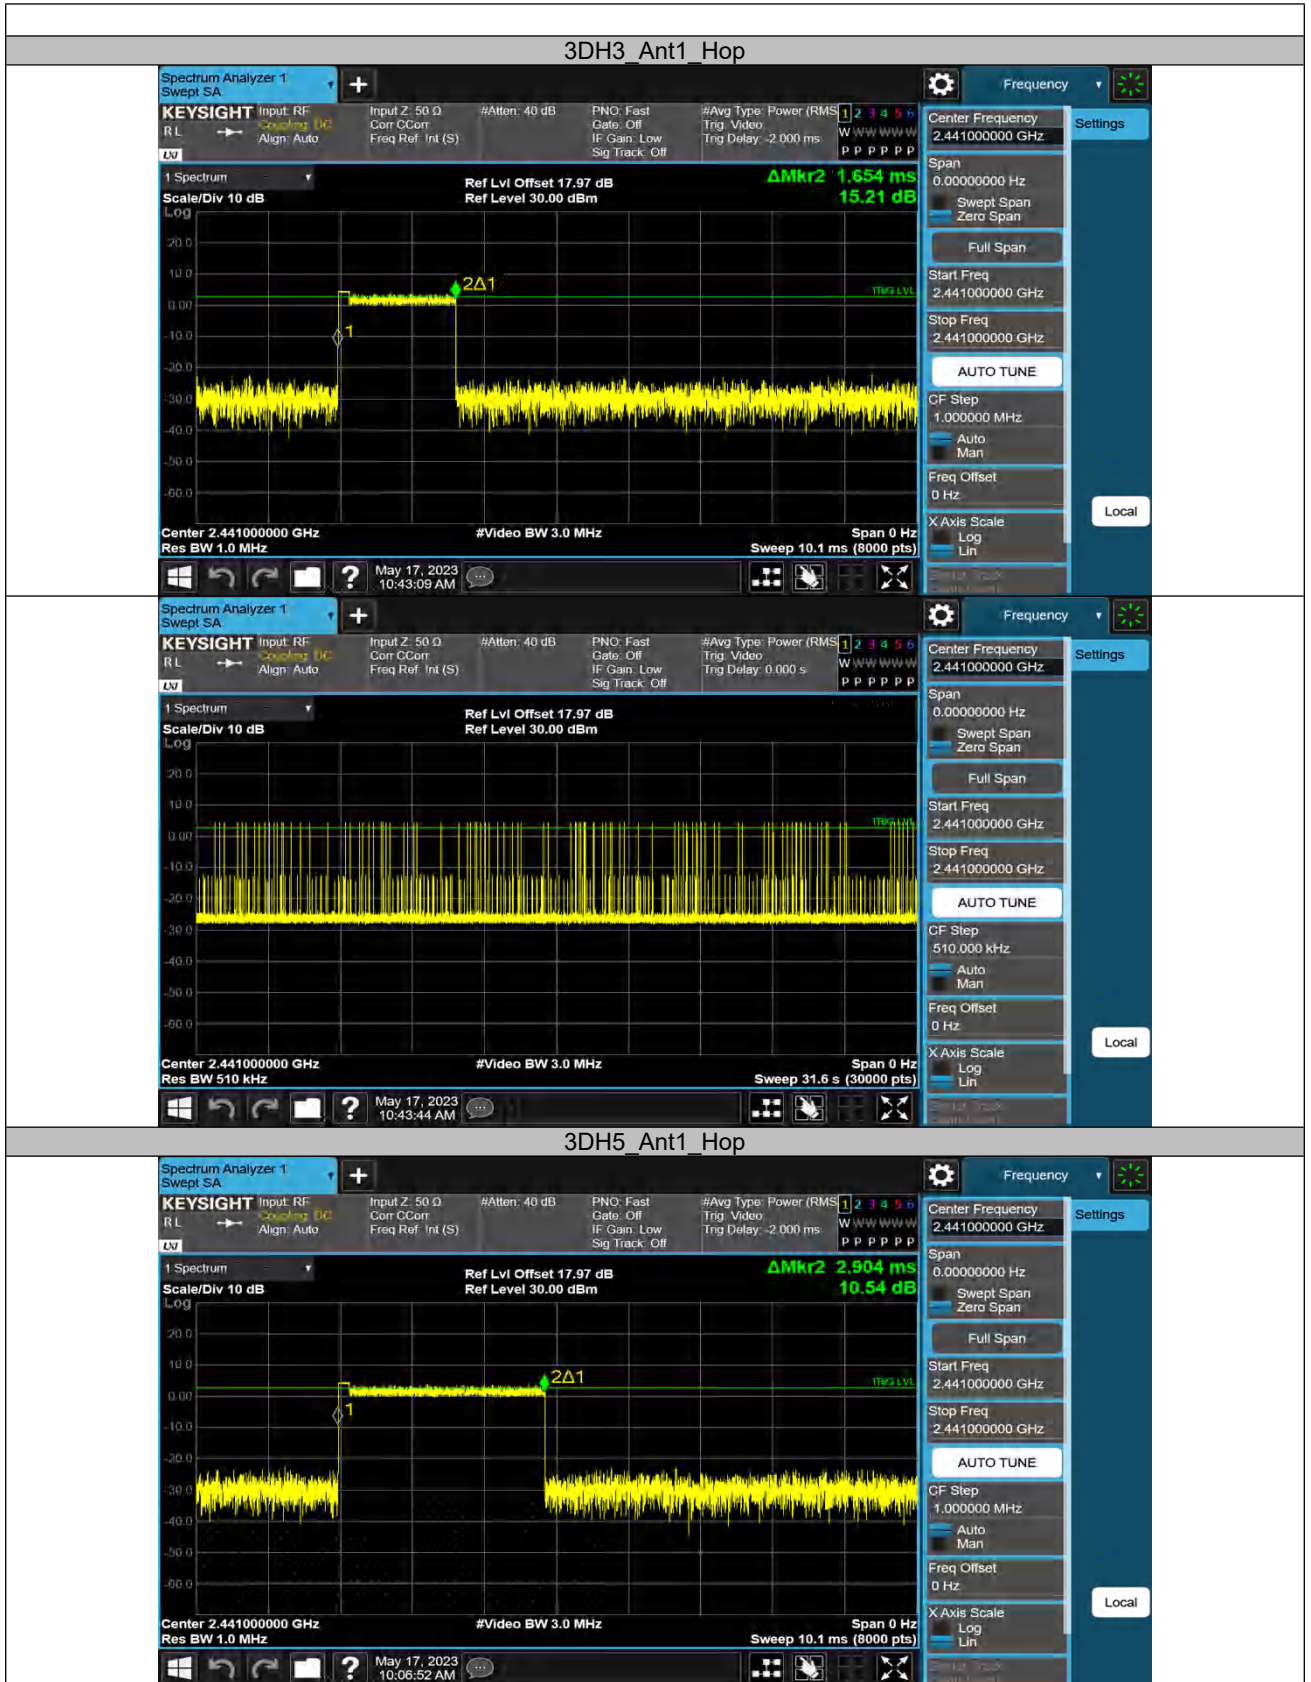






Appendix B.7: Test Results of Conducted Spurious Emissions Measured in 100 kHz Bandwidth

Conducted measurements

| TestMode | Antenna | Channel | FreqRange [MHz] | RefLevel [dBm] | Result [dBm] | Limit [dBm] | Verdict |
|----------|---------|---------|-----------------|----------------|--------------|-------------|---------|
| DH5 | Ant1 | 2402 | Reference | 9.09 | 9.09 | --- | PASS |
| | | | 30~1000 | 9.09 | -41.16 | ≤-10.91 | PASS |
| | | | 1000~26500 | 9.09 | -32.71 | ≤-10.91 | PASS |
| | | 2441 | Reference | 3.22 | 3.22 | --- | PASS |
| | | | 30~1000 | 3.22 | -42.62 | ≤-16.78 | PASS |
| | | | 1000~26500 | 3.22 | -34.45 | ≤-16.78 | PASS |
| | | 2480 | Reference | 2.31 | 2.31 | --- | PASS |
| | | | 30~1000 | 2.31 | -42.04 | ≤-17.69 | PASS |
| | | | 1000~26500 | 2.31 | -33.99 | ≤-17.69 | PASS |
| 3DH5 | Ant1 | 2402 | Reference | 4.23 | 4.23 | --- | PASS |
| | | | 30~1000 | 4.23 | -40.4 | ≤-15.77 | PASS |
| | | | 1000~26500 | 4.23 | -31.97 | ≤-15.77 | PASS |
| | | 2441 | Reference | 4.08 | 4.08 | --- | PASS |
| | | | 30~1000 | 4.08 | -41.84 | ≤-15.92 | PASS |
| | | | 1000~26500 | 4.08 | -33.65 | ≤-15.92 | PASS |
| | | 2480 | Reference | 0.16 | 0.16 | --- | PASS |
| | | | 30~1000 | 0.16 | -41.38 | ≤-19.84 | PASS |
| | | | 1000~26500 | 0.16 | -32.96 | ≤-19.84 | PASS |




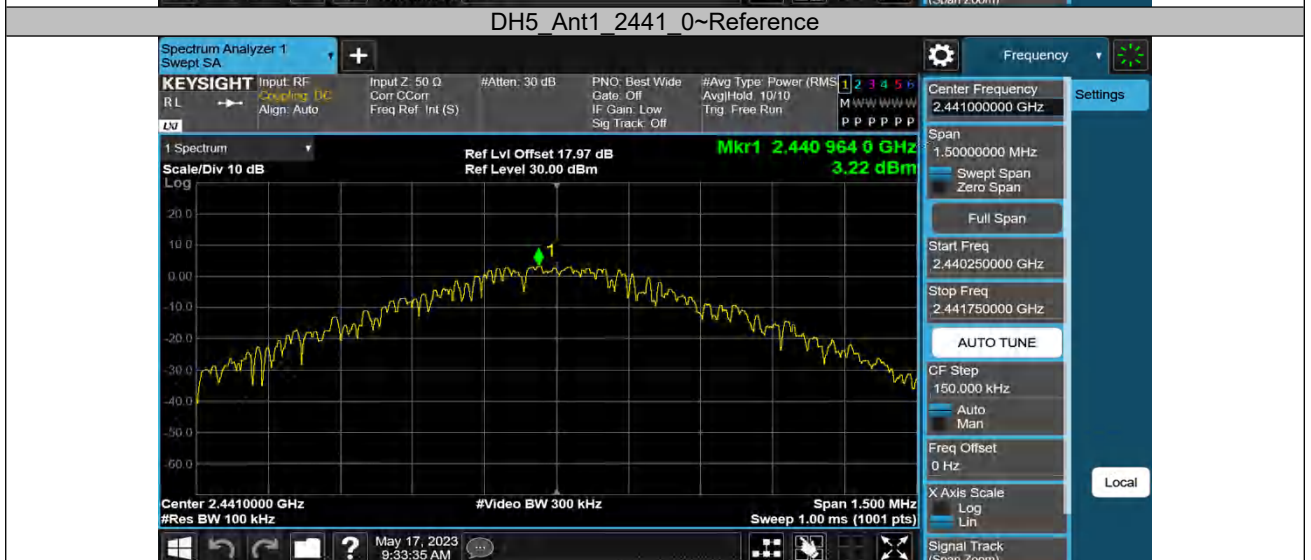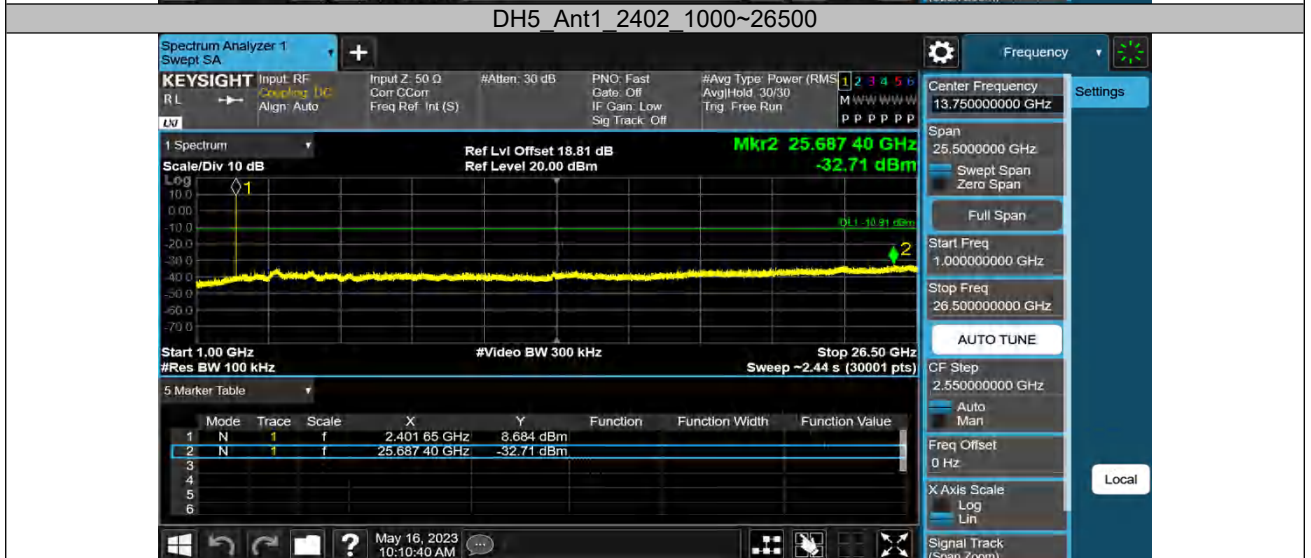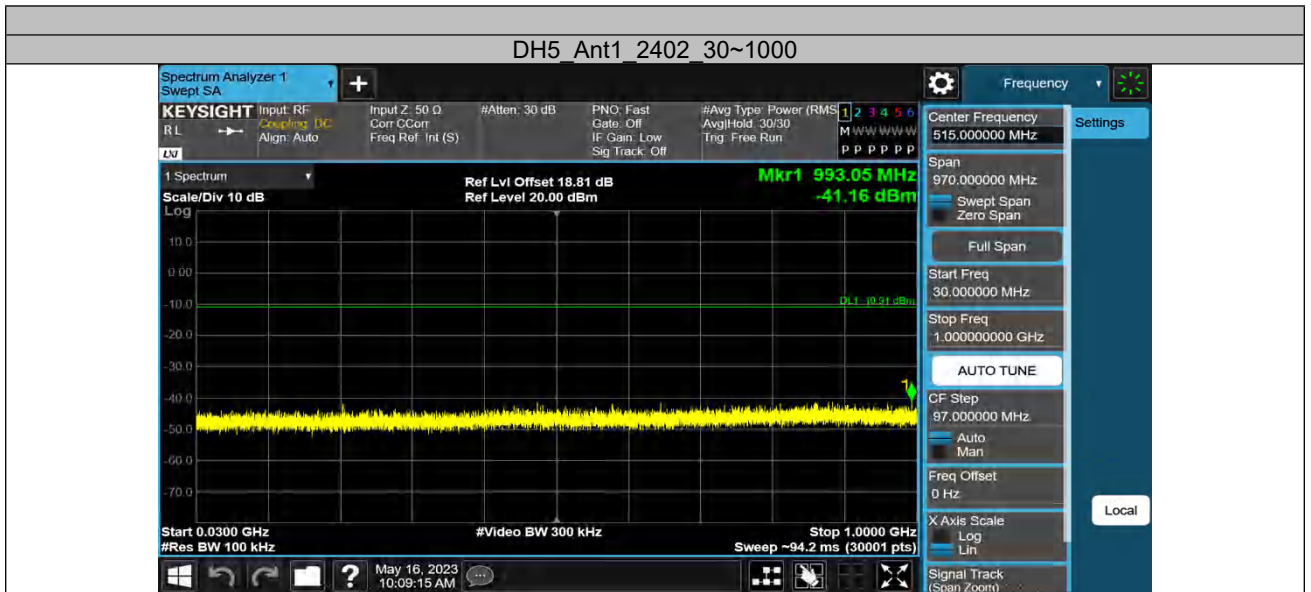

DH5_Ant1_2441_30~1000




DH5_Ant1_2441_1000~26500

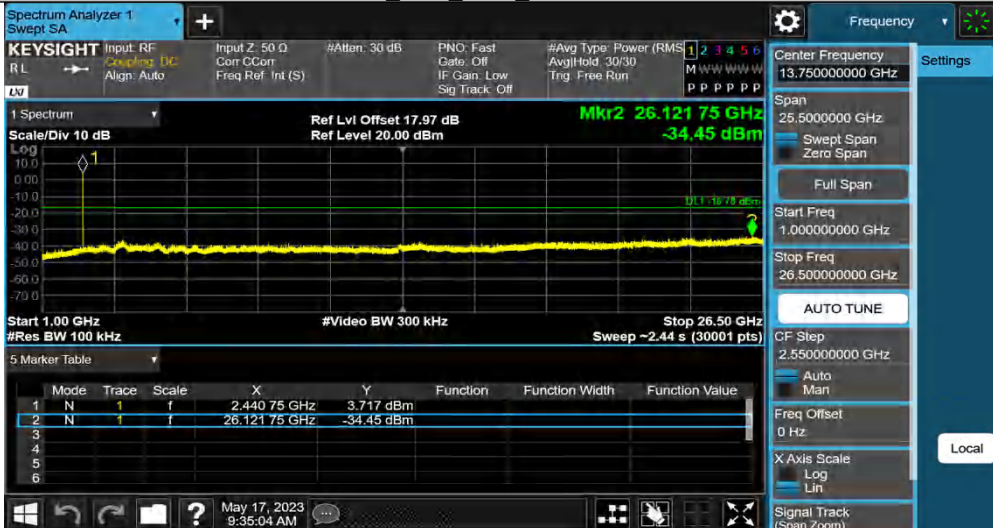

DH5_Ant1_2480_0~Reference



DH5 Ant1 2480 30~1000

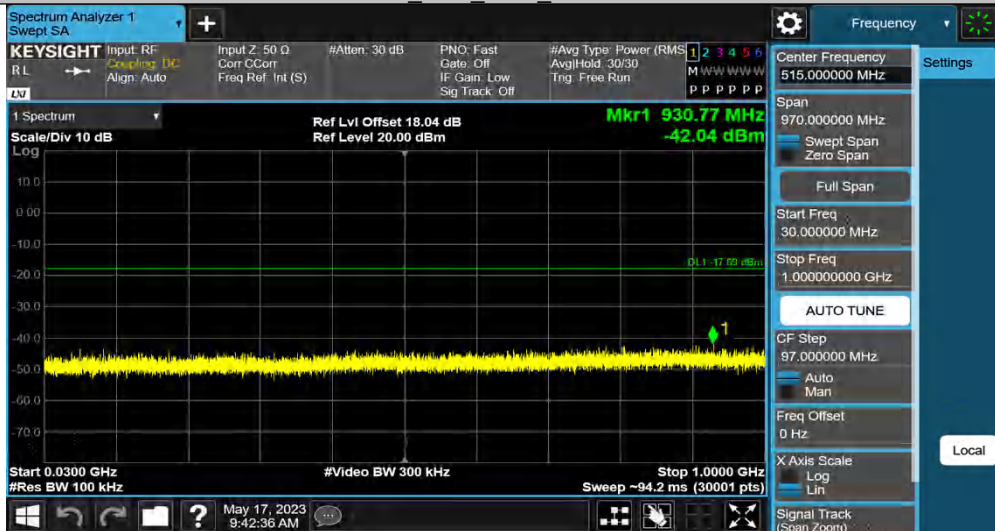


DH5 Ant1 2480 1000~26500




3DH5 Ant1 2402 0~Reference



3DH5_Ant1_2402_30~1000

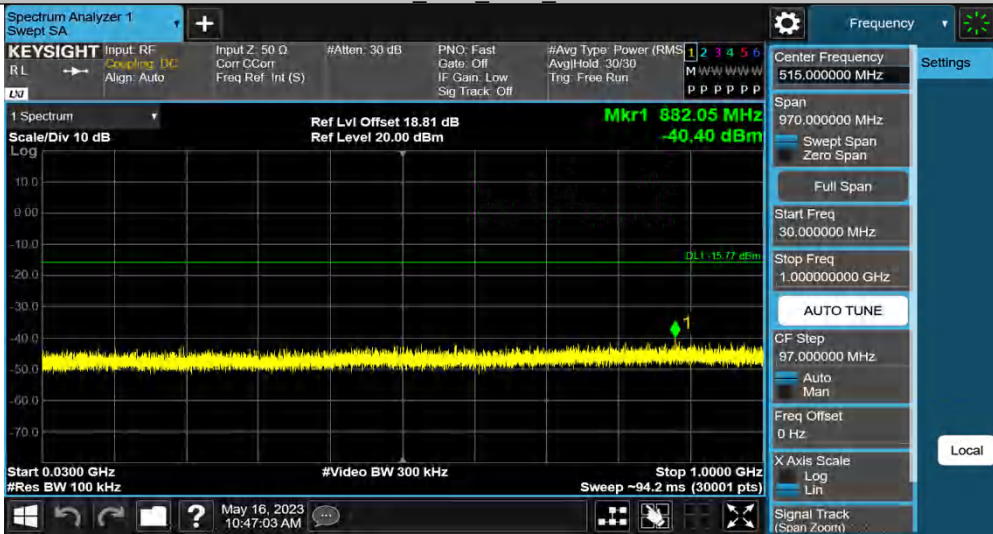


3DH5_Ant1_2402_1000~26500

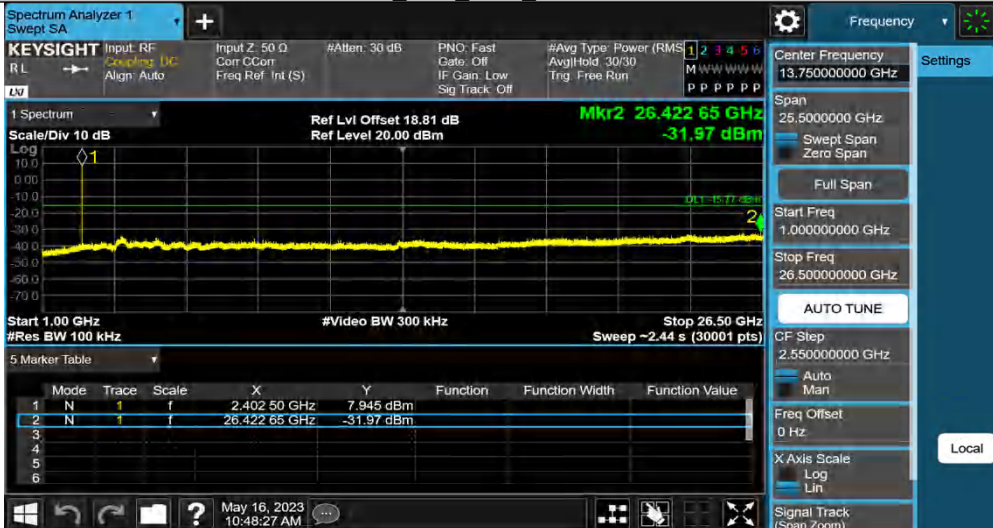


3DH5_Ant1_2441_0~Reference



3DH5_Ant1_2441_30~1000

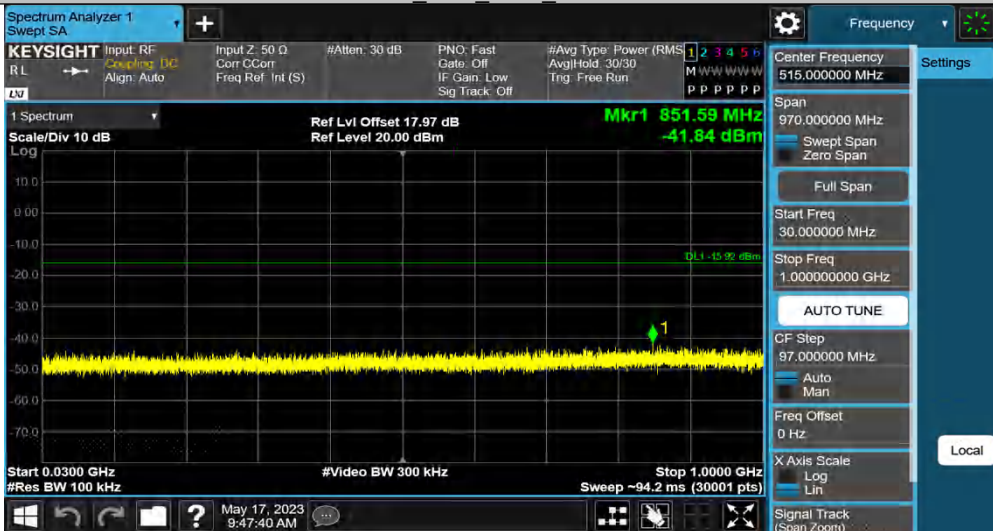

3DH5_Ant1_2441_1000~26500

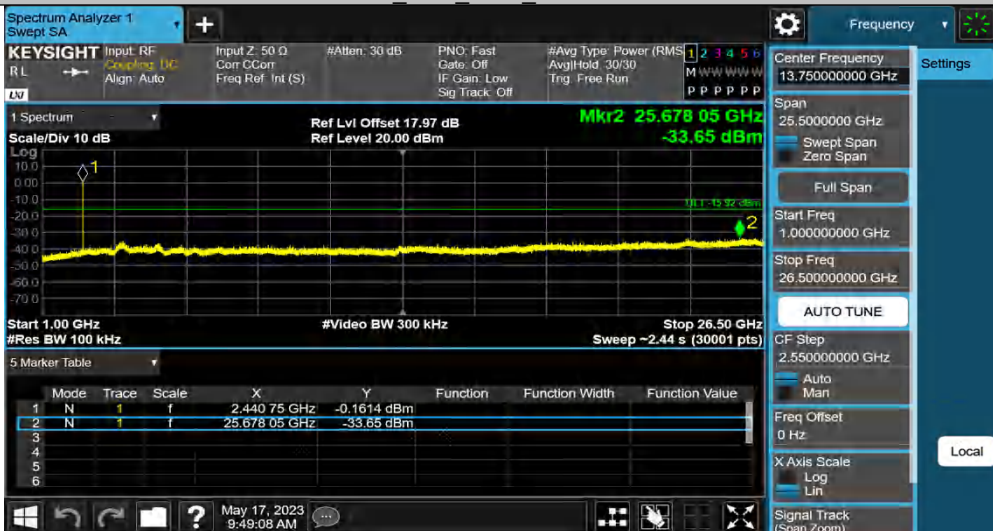



3DH5_Ant1_2480_0~Reference





Band edge measurements

| TestMode | Antenna | ChName | Channel | RefLevel [dBm] | Result [dBm] | Limit [dBm] | Verdict |
|----------|---------|---------|---------|----------------|--------------|-------------|---------|
| DH5 | Ant1 | Low | 2402 | 3.492 | -44.61 | ≤-16.51 | PASS |
| DH5 | Ant1 | Low | 2402 | 3.462 | -44.49 | ≤-16.54 | PASS |
| 3DH5 | Ant1 | High | 2480 | 3.733 | -44.83 | ≤-16.27 | PASS |
| 3DH5 | Ant1 | High | 2480 | 3.220 | -43.21 | ≤-16.78 | PASS |
| DH5 | Ant1 | Hopping | 2402 | 3.122 | -44.13 | ≤-16.88 | PASS |
| DH5 | Ant1 | Hopping | 2480 | 2.052 | -43.15 | ≤-17.95 | PASS |
| 3DH5 | Ant1 | Hopping | 2402 | -2.385 | -44.60 | ≤-22.39 | PASS |
| 3DH5 | Ant1 | Hopping | 2480 | -1.716 | -44.81 | ≤-21.72 | PASS |

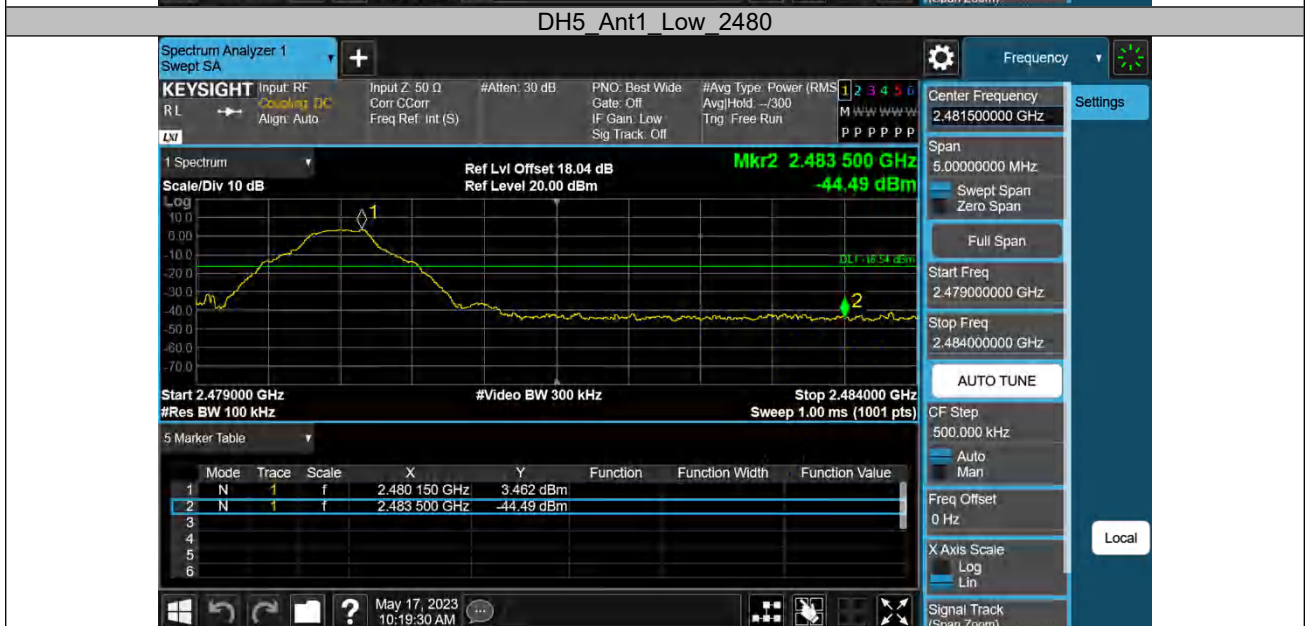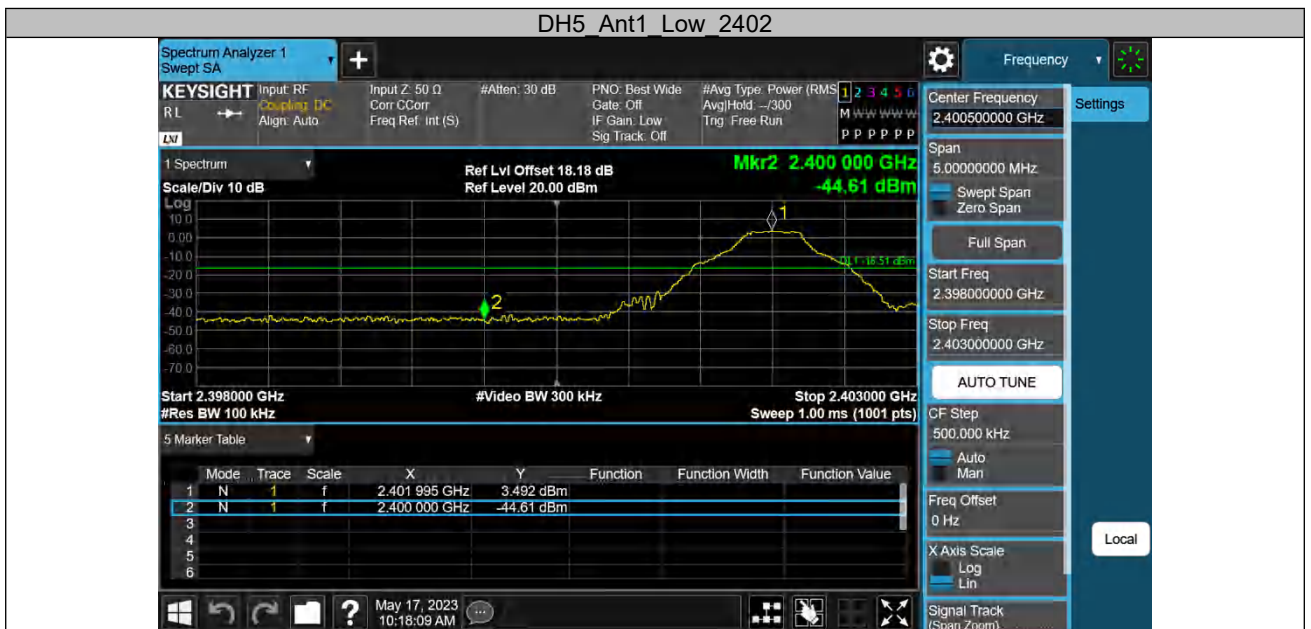

3DH5 Ant1 High 2402



3DH5 Ant1 High 2480




DH5 Ant1 Hopping 2402



DH5 Ant1 Hopping 2480



3DH5 Ant1 Hopping 2402

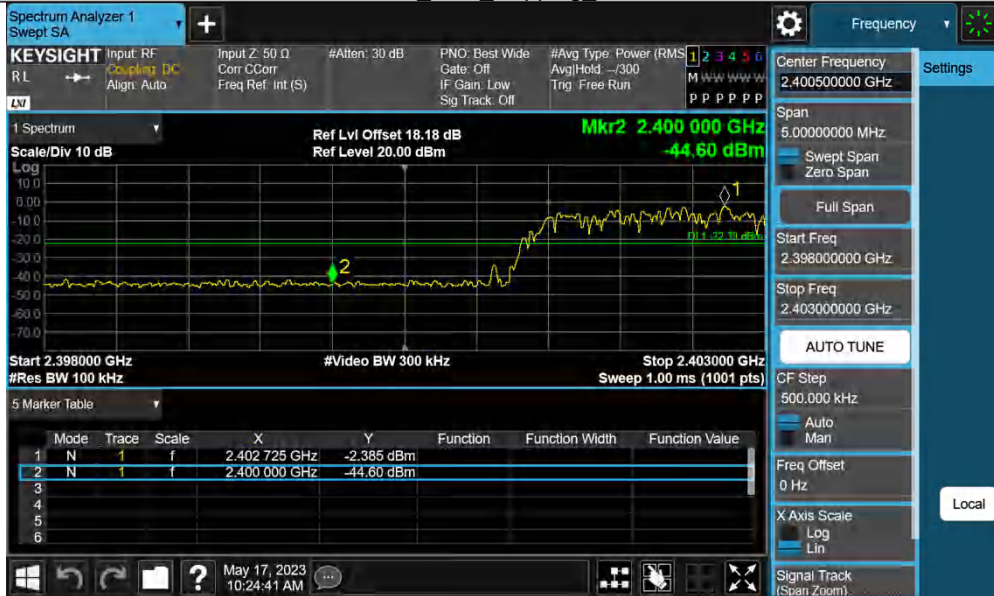

3DH5 Ant1 Hopping 2480




Appendix B.8: Test Results of Radiated Spurious Emissions

Note: 1. Testing was carried out within frequency range 9kHz to the tenth harmonics. The measurement results below 30MHz and 18GHz - 26.5GHz were greater than 20dB below the limit, so only the radiated spurious emissions from 30MHz to 18GHz were reported. 2. This testing was carried out on different modulations, but only the worst case (GFSK) was presented in this report.

30MHz - 1GHz

EUT Information

| | |
|---------------------|--------------------------|
| EUT Name: | Bluetooth Headset |
| Model: | LIVE770NC |
| Test Mode: | BR_DH5_Mid channel |
| Order No/Sample No: | 168425866/A003470422-010 |
| Test Voltage:: | Battery |
| Remark: | Temp 23 Humi:56% |
| Test Standard: | FCC 15.247 |
| Tested By: | Kei Zhang |
| Reviewed By: | Terry Yin |

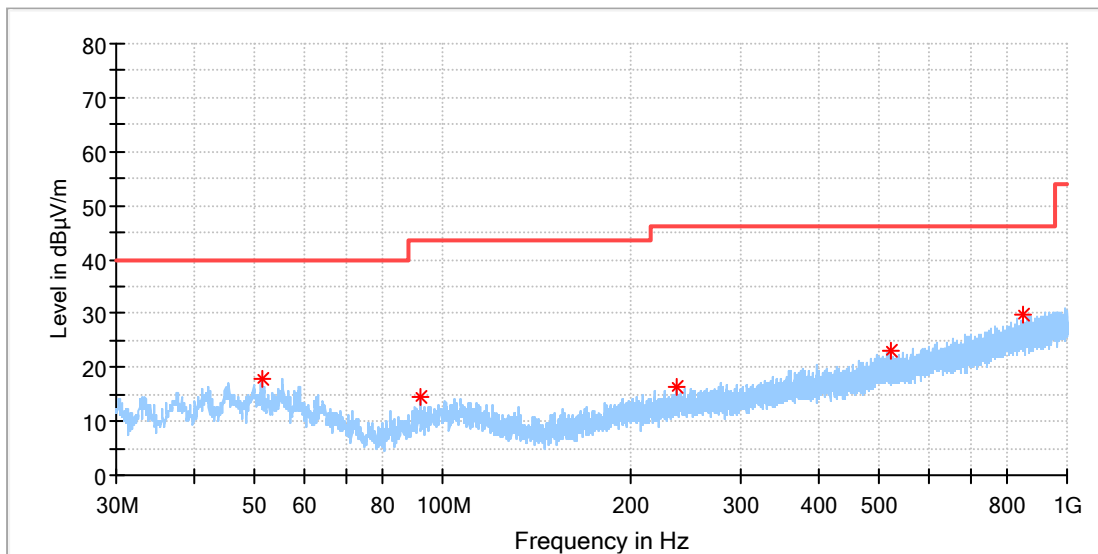


Critical Freqs

| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 51.291500 | 17.82 | 40.00 | 22.18 | 100.0 | H | 24.0 | -18.3 |
| 92.322500 | 14.39 | 43.50 | 29.11 | 100.0 | H | 256.0 | -20.4 |
| 236.319000 | 16.28 | 46.00 | 29.72 | 100.0 | H | 12.0 | -17.8 |
| 521.693000 | 22.90 | 46.00 | 23.10 | 100.0 | H | 63.0 | -11.5 |
| 847.516000 | 29.78 | 46.00 | 16.22 | 100.0 | H | 97.0 | -5.5 |

EUT Information

| | |
|---------------------|--------------------------|
| EUT Name: | Bluetooth Headset |
| Model: | LIVE770NC |
| Test Mode: | BR_DH5_Mid channel |
| Order No/Sample No: | 168425866/A003470422-010 |
| Test Voltage:: | Battery |
| Remark: | Temp 23 Humi:56% |
| Test Standard: | FCC 15.247 |
| Tested By: | Kei Zhang |
| Reviewed By: | Terry Yin |

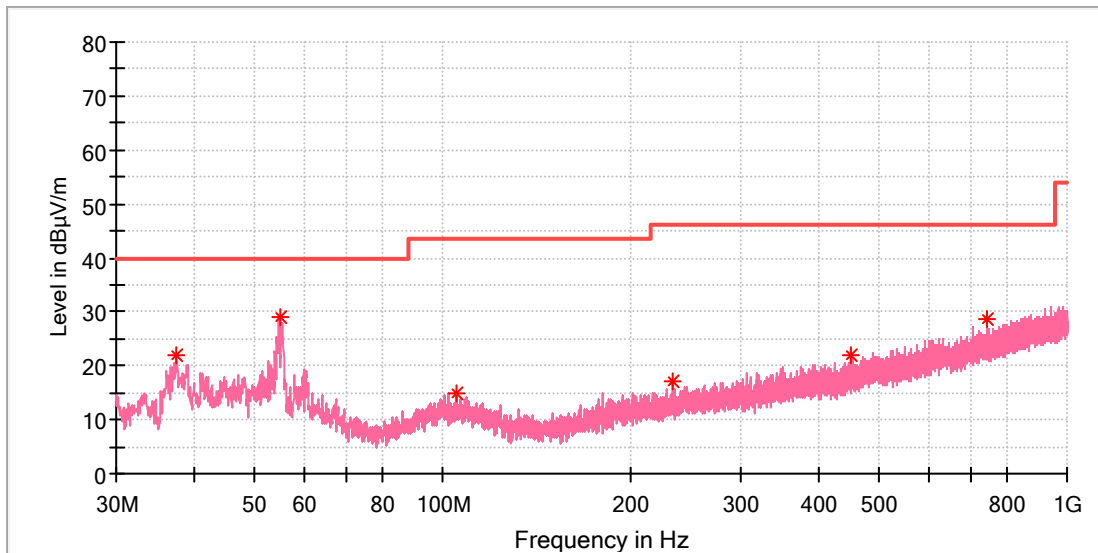

Critical Freqs


| Frequency (MHz) | MaxPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 37.517500 | 22.12 | 40.00 | 17.88 | 100.0 | V | 239.0 | -21.0 |
| 54.783500 | 28.95 | 40.00 | 11.05 | 100.0 | V | 51.0 | -18.4 |
| 105.126500 | 14.82 | 43.50 | 28.68 | 100.0 | V | 119.0 | -18.8 |
| 233.069500 | 17.08 | 46.00 | 28.92 | 100.0 | V | 65.0 | -17.9 |
| 450.398000 | 22.08 | 46.00 | 23.92 | 100.0 | V | 302.0 | -12.9 |
| 745.035500 | 28.83 | 46.00 | 17.17 | 100.0 | V | 183.0 | -7.3 |

1GHz - 18GHz

Note: The highest waveform in the figure is Bluetooth Fundamental.

EUT Information

| | |
|---------------------|--------------------------|
| EUT Name: | Bluetooth Headset |
| Model: | LIVE770NC |
| Test Mode: | BR_DH5_Low channel |
| Order No/Sample No: | 168425866/A003470422-010 |
| Test Voltage:: | Battery |
| Remark: | Temp 23 Humi:56% |
| Test Standard: | FCC 15.247 |
| Tested By: | Kei Zhang |
| Reviewed By: | Terry Yin |

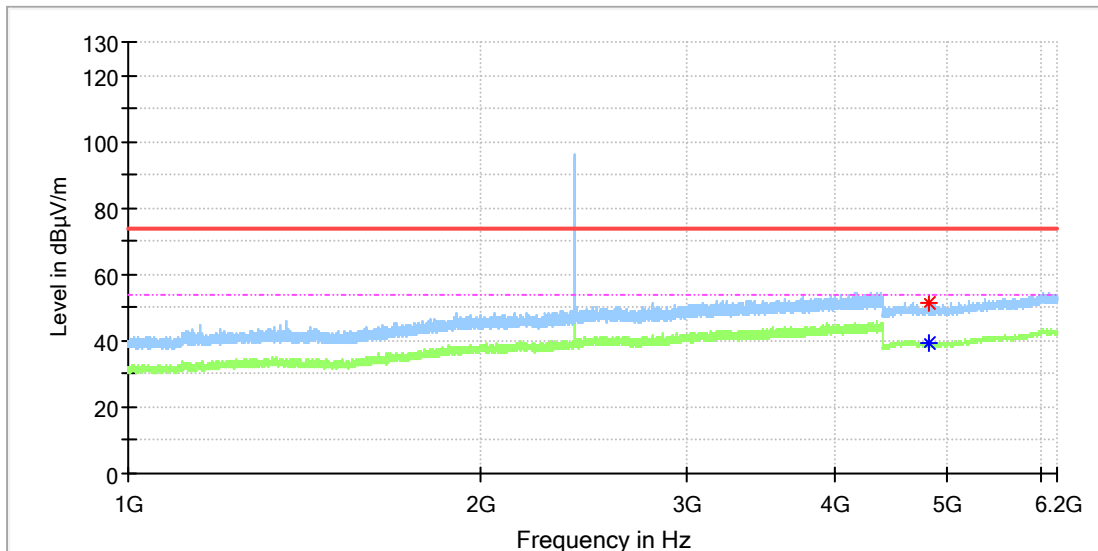


Critical Freqs

| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 4811.500000 | 51.20 | --- | 74.00 | 22.80 | 150.0 | H | 224.0 | 11.8 |
| 4814.000000 | --- | 39.24 | 54.00 | 14.76 | 150.0 | H | 344.0 | 11.8 |

EUT Information

EUT Name: Bluetooth Headset
 Model: LIVE770NC
 Test Mode: BR_DH5_Low channel
 Order No/Sample No: 168425866/A003470422-010
 Test Voltage:: Battery
 Remark: Temp 23 Humi:56%
 Test Standard: FCC 15.247
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

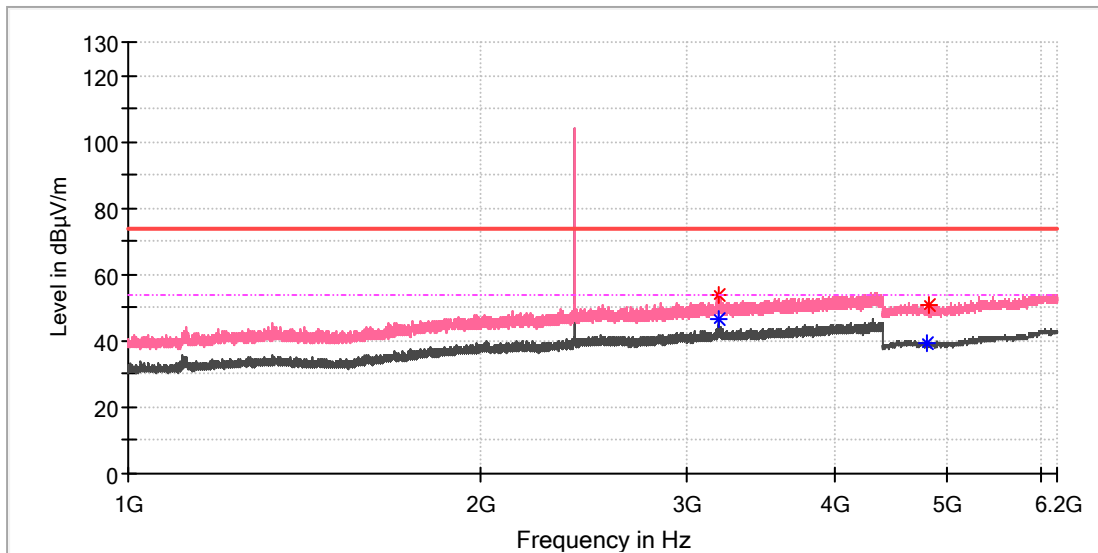


Critical Freqs

| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 3187.730000 | 53.85 | --- | 74.00 | 20.15 | 150.0 | V | 175.0 | 8.6 |
| 3193.000000 | --- | 46.43 | 54.00 | 7.57 | 150.0 | V | 175.0 | 8.6 |
| 4810.000000 | --- | 39.51 | 54.00 | 14.49 | 150.0 | V | 320.0 | 11.8 |
| 4819.000000 | 50.85 | --- | 74.00 | 23.15 | 150.0 | V | 339.0 | 11.8 |

EUT Information

EUT Name: Bluetooth Headset
 Model: LIVE770NC
 Test Mode: BR_DH5_Mid channel
 Order No/Sample No: 168425866/A003470422-010
 Test Voltage:: Battery
 Remark: Temp 23 Humi:56%
 Test Standard: FCC 15.247
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

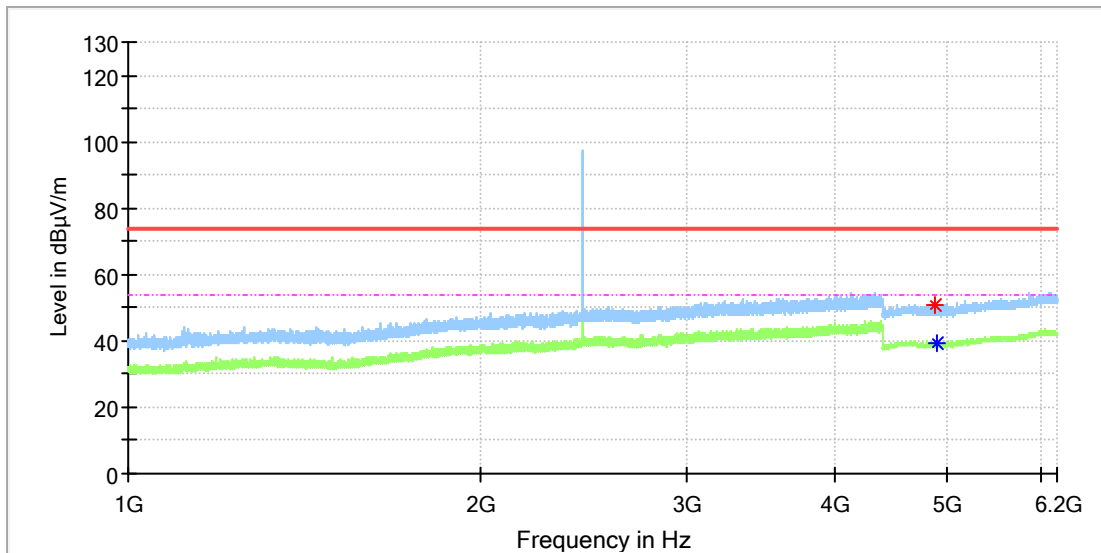


Critical Freqs

| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 4875.500000 | 50.83 | --- | 74.00 | 23.17 | 150.0 | H | 174.0 | 11.8 |
| 4894.500000 | --- | 39.21 | 54.00 | 14.79 | 150.0 | H | 31.0 | 11.8 |

EUT Information

EUT Name: Bluetooth Headset
 Model: LIVE770NC
 Test Mode: BR_DH5_Mid channel
 Order No/Sample No: 168425866/A003470422-010
 Test Voltage:: Battery
 Remark: Temp 23 Humi:56%
 Test Standard: FCC 15.247
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

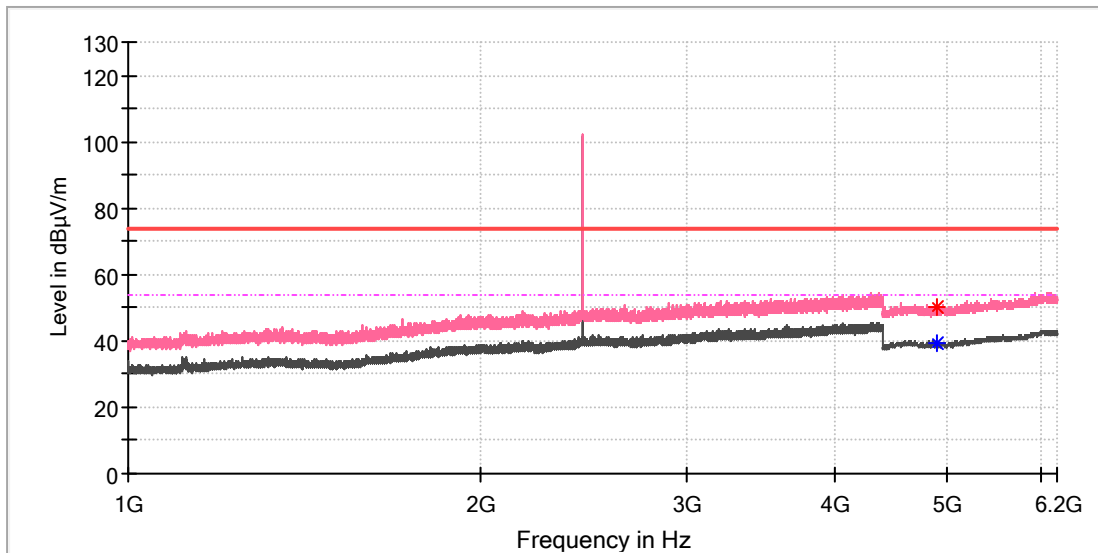


Critical Freqs

| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 4903.000000 | --- | 39.28 | 54.00 | 14.72 | 150.0 | V | 103.0 | 11.8 |
| 4906.500000 | 50.15 | --- | 74.00 | 23.85 | 150.0 | V | 49.0 | 11.8 |

EUT Information

EUT Name: Bluetooth Headset
 Model: LIVE770NC
 Test Mode: BR_DH5_High channel
 Order No/Sample No: 168425866/A003470422-010
 Test Voltage:: Battery
 Remark: Temp 23 Humi:56%
 Test Standard: FCC 15.247
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

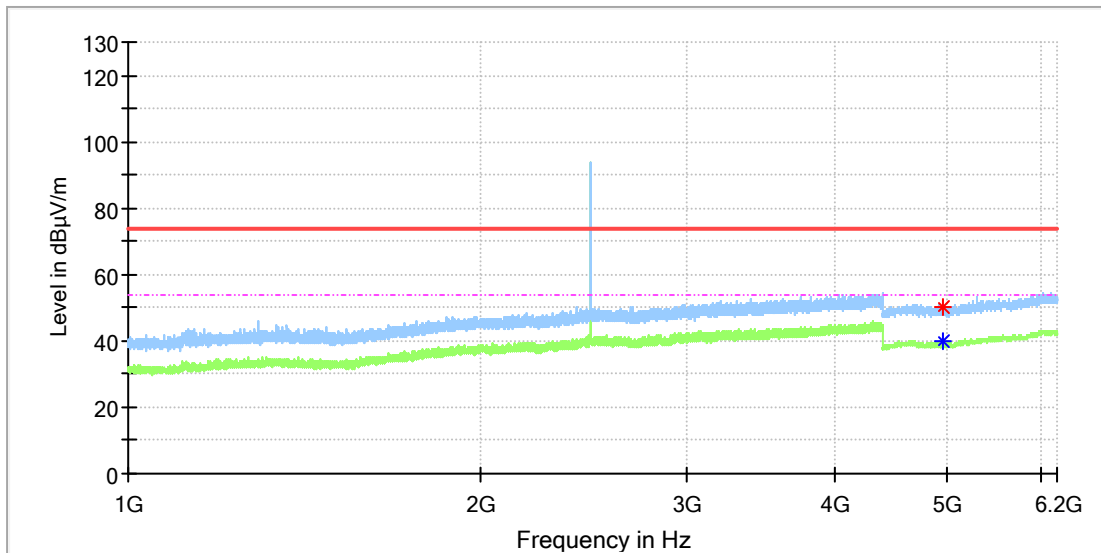


Critical Freqs

| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 4958.000000 | --- | 39.63 | 54.00 | 14.37 | 150.0 | H | 334.0 | 11.8 |
| 4964.000000 | 50.28 | --- | 74.00 | 23.72 | 150.0 | H | 169.0 | 11.8 |

EUT Information

EUT Name: Bluetooth Headset
 Model: LIVE770NC
 Test Mode: BR_DH5_High channel
 Order No/Sample No: 168425866/A003470422-010
 Test Voltage:: Battery
 Remark: Temp 23 Humi:56%
 Test Standard: FCC 15.247
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

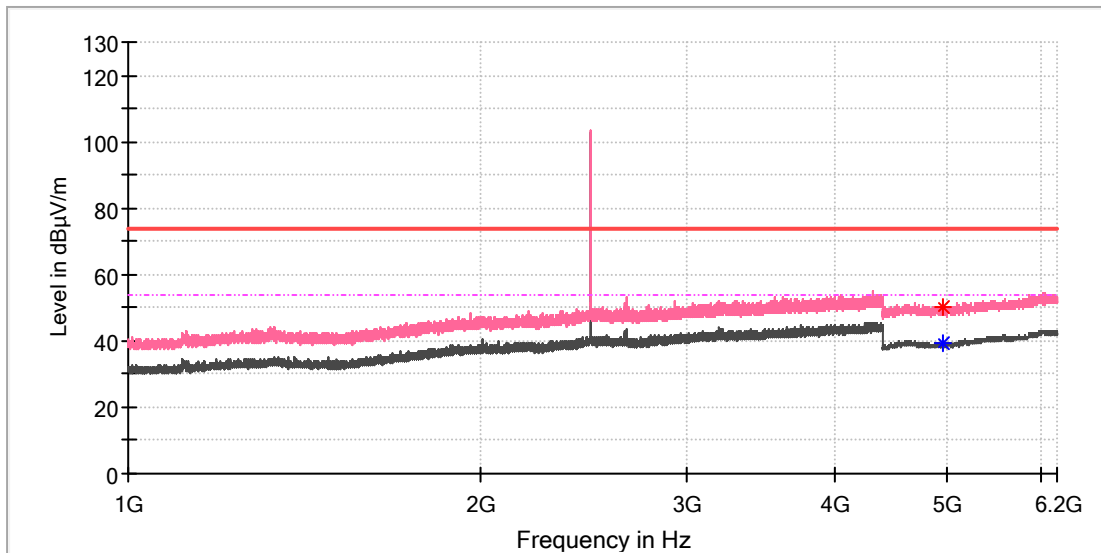


Critical Freqs

| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 4949.000000 | 50.18 | --- | 74.00 | 23.82 | 150.0 | V | 196.0 | 11.8 |
| 4950.500000 | --- | 39.24 | 54.00 | 14.76 | 150.0 | V | 182.0 | 11.8 |

EUT Information

EUT Name: Bluetooth Headset
 Model: LIVE770NC
 Test Mode: BR_DH5_Low channel
 Order No/Sample No: 168425866/A003470422-010
 Test Voltage:: Battery
 Remark: Temp 23 Humi:56%
 Test Standard: FCC 15.247
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

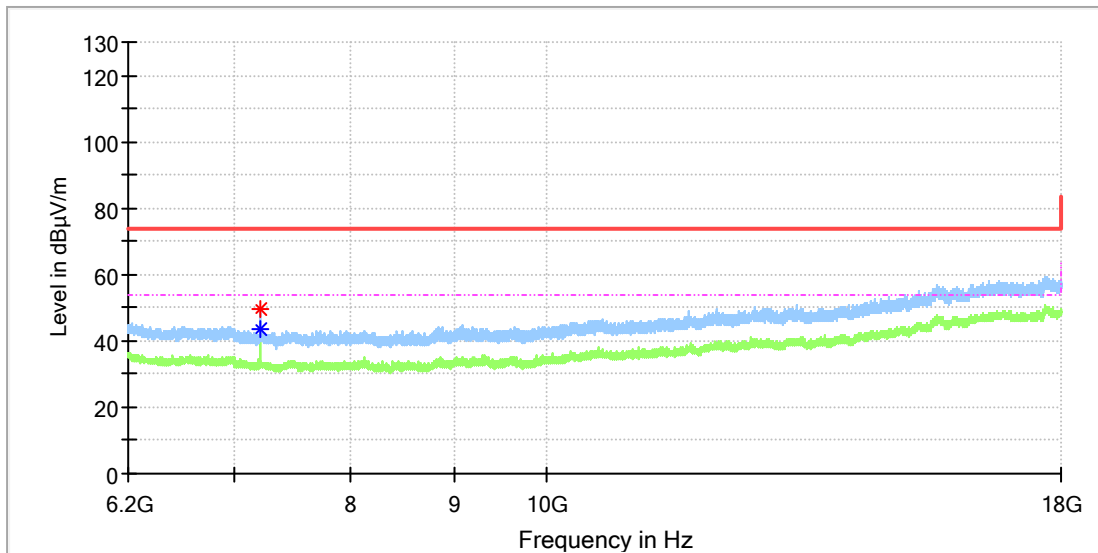


Critical Freqs

| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 7205.950000 | 49.52 | --- | 74.00 | 24.48 | 150.0 | H | 230.0 | 8.8 |
| 7205.950000 | --- | 43.47 | 54.00 | 10.53 | 150.0 | H | 230.0 | 8.8 |

EUT Information

EUT Name: Bluetooth Headset
 Model: LIVE770NC
 Test Mode: BR_DH5_Low channel
 Order No/Sample No: 168425866/A003470422-010
 Test Voltage:: Battery
 Remark: Temp 23 Humi:56%
 Test Standard: FCC 15.247
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

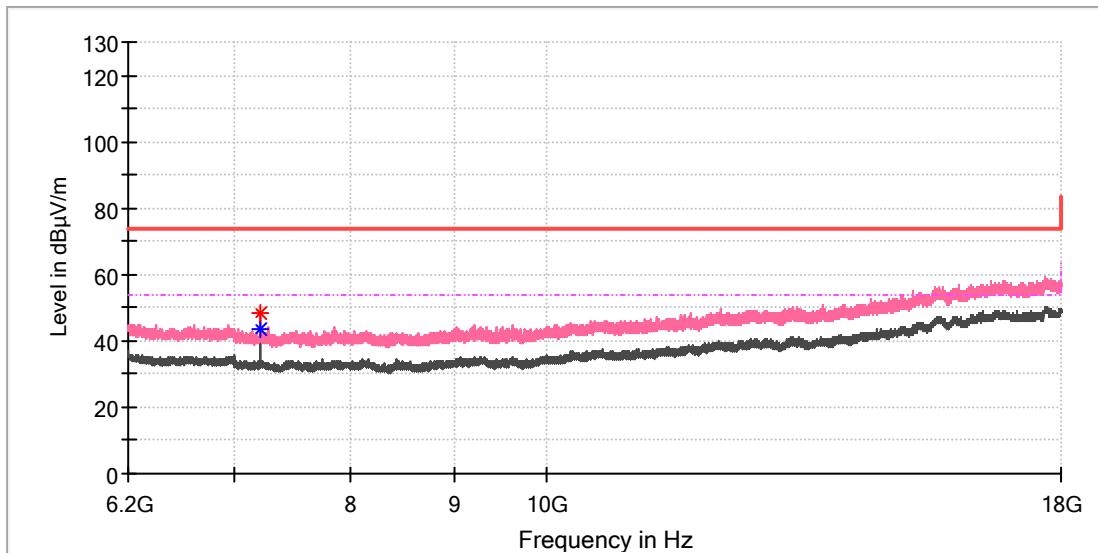


Critical Freqs

| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 7205.458333 | 48.44 | --- | 74.00 | 25.56 | 150.0 | V | 297.0 | 8.8 |
| 7205.458333 | --- | 43.38 | 54.00 | 10.62 | 150.0 | V | 297.0 | 8.8 |

EUT Information

EUT Name: Bluetooth Headset
 Model: LIVE770NC
 Test Mode: BR_DH5_Mid channel
 Order No/Sample No: 168425866/A003470422-010
 Test Voltage:: Battery
 Remark: Temp 23 Humi:56%
 Test Standard: FCC 15.247
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

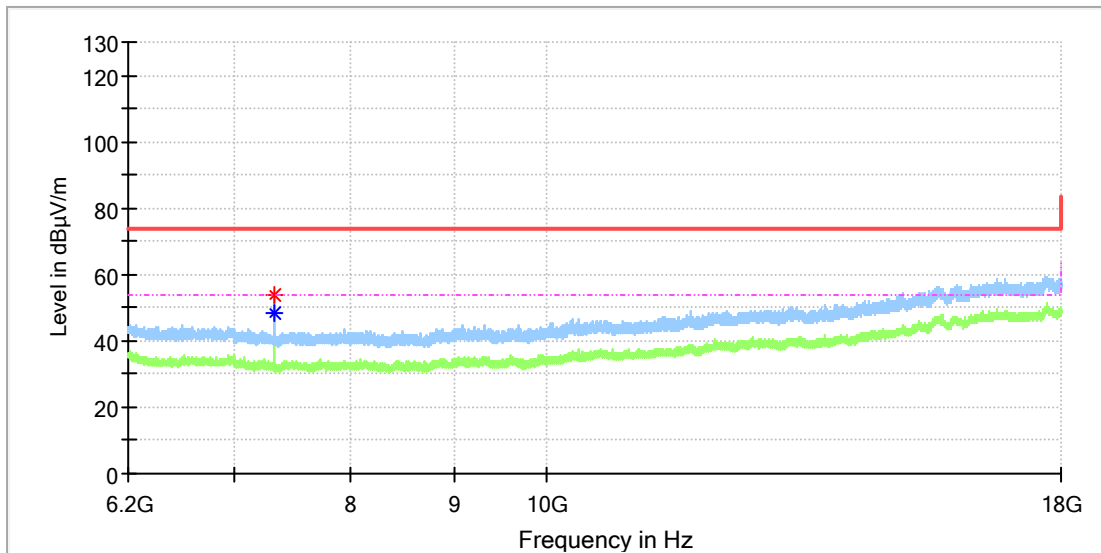


Critical Freqs

| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 7322.475000 | 53.68 | --- | 74.00 | 20.32 | 150.0 | H | 251.0 | 8.2 |
| 7322.475000 | --- | 48.52 | 54.00 | 5.48 | 150.0 | H | 251.0 | 8.2 |

EUT Information

EUT Name: Bluetooth Headset
 Model: LIVE770NC
 Test Mode: BR_DH5_Mid channel
 Order No/Sample No: 168425866/A003470422-010
 Test Voltage:: Battery
 Remark: Temp 23 Humi:56%
 Test Standard: FCC 15.247
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

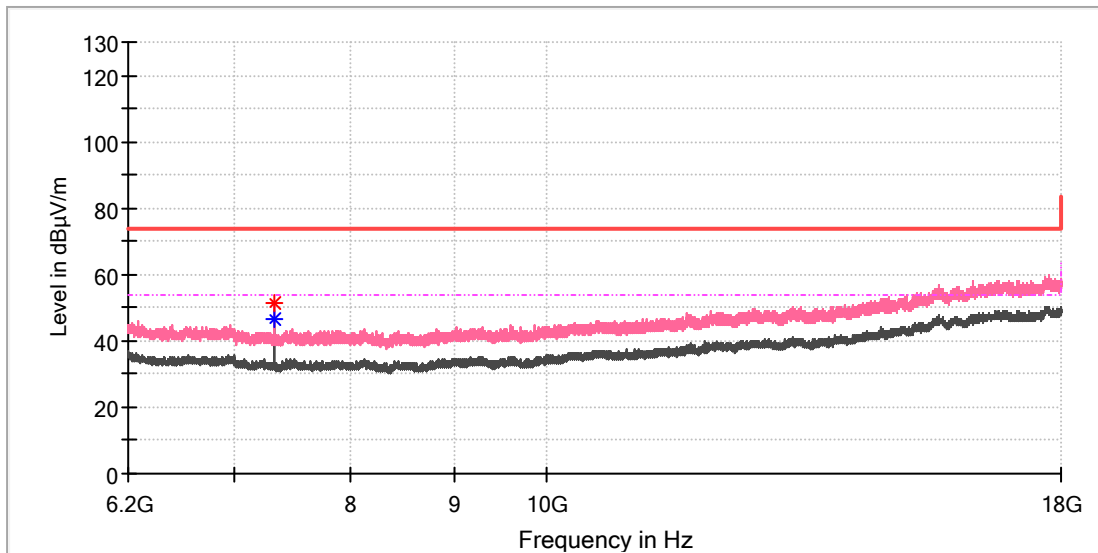


Critical Freqs

| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 7322.475000 | --- | 46.69 | 54.00 | 7.31 | 150.0 | V | 299.0 | 8.2 |
| 7322.966667 | 51.54 | --- | 74.00 | 22.46 | 150.0 | V | 299.0 | 8.2 |

EUT Information

EUT Name: Bluetooth Headset
 Model: LIVE770NC
 Test Mode: BR_DH5_High channel
 Order No/Sample No: 168425866/A003470422-010
 Test Voltage:: Battery
 Remark: Temp 23 Humi:56%
 Test Standard: FCC 15.247
 Tested By: Kei Zhang
 Reviewed By: Terry Yin

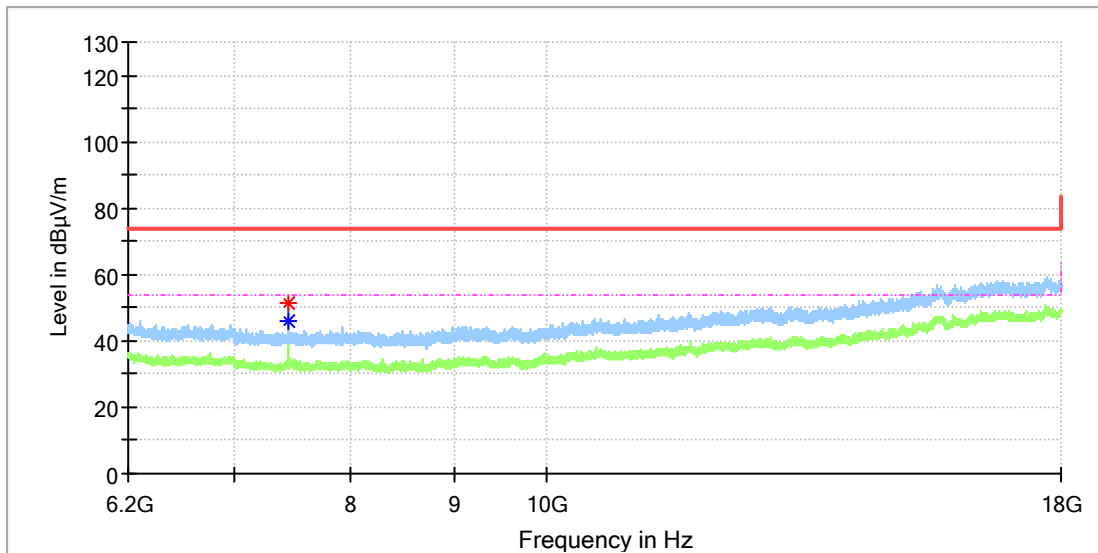


Critical Freqs

| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 7439.491667 | --- | 46.24 | 54.00 | 7.76 | 150.0 | H | 256.0 | 8.4 |
| 7439.983333 | 51.10 | --- | 74.00 | 22.90 | 150.0 | H | 256.0 | 8.4 |

EUT Information

| | |
|---------------------|--------------------------|
| EUT Name: | Bluetooth Headset |
| Model: | LIVE770NC |
| Test Mode: | BR_DH5_High channel |
| Order No/Sample No: | 168425866/A003470422-010 |
| Test Voltage:: | Battery |
| Remark: | Temp 23 Humi:56% |
| Test Standard: | FCC 15.247 |
| Tested By: | Kei Zhang |
| Reviewed By: | Terry Yin |

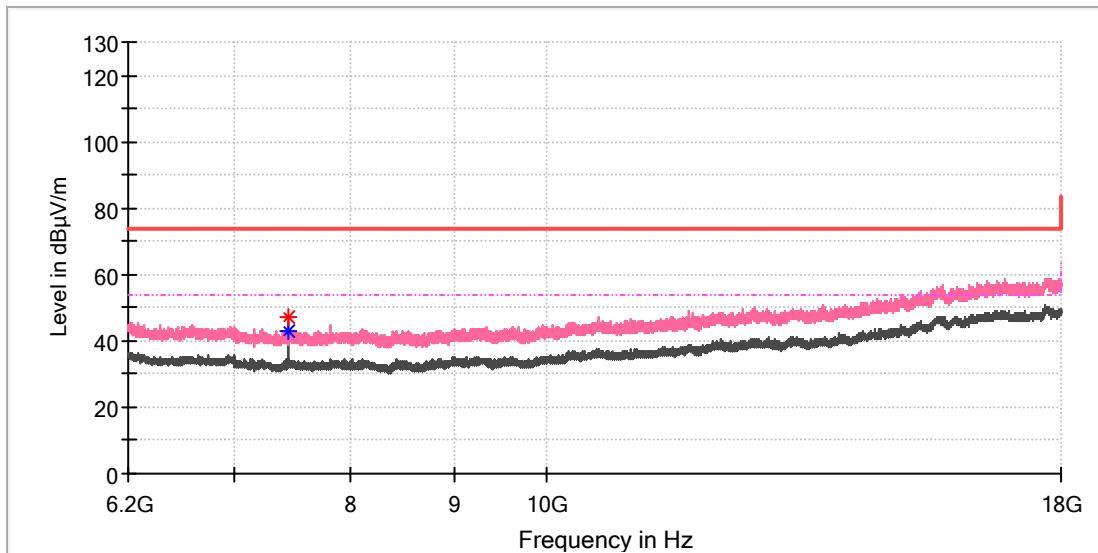


Critical Freqs

| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 7439.983333 | 47.37 | --- | 74.00 | 26.63 | 150.0 | V | 301.0 | 8.4 |
| 7439.983333 | --- | 43.07 | 54.00 | 10.93 | 150.0 | V | 301.0 | 8.4 |

Appendix B.9: Test Results of Radiated Emissions in Restricted Bands

EUT Information

| | |
|---------------------|--------------------------|
| EUT Name: | Bluetooth Headset |
| Model: | LIVE770NC |
| Test Mode: | BR_DH5_Low channel |
| Order No/Sample No: | 168425866/A003470422-010 |
| Test Voltage:: | Battery |
| Remark: | Temp 23 Humi:56% |
| Test Standard: | FCC 15.247 |
| Tested By: | Kei Zhang |
| Reviewed By: | Terry Yin |

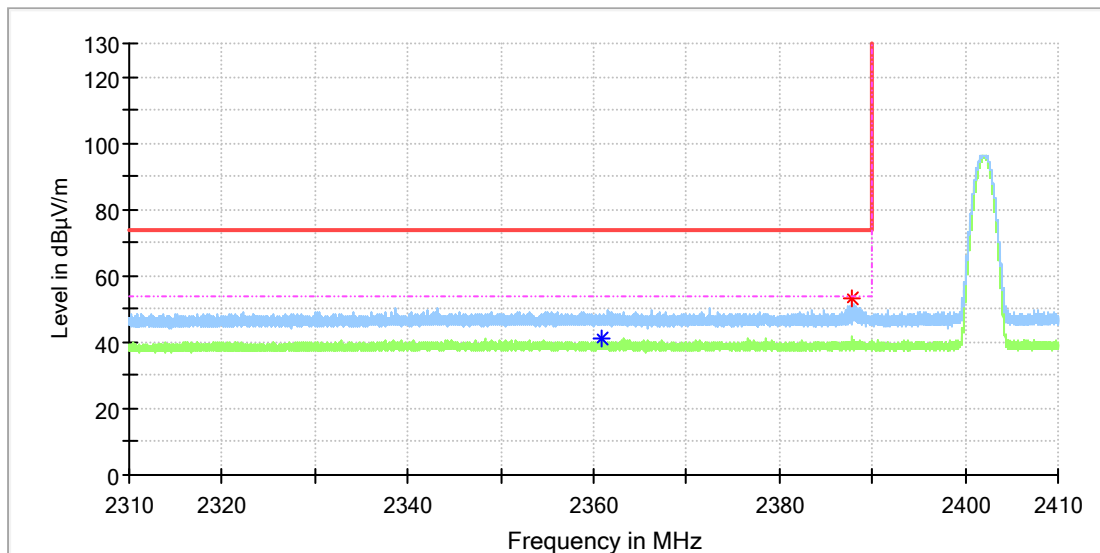


Critical_Freqs

| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 2360.910000 | --- | 41.02 | 54.00 | 12.98 | 150.0 | H | 284.0 | 6.9 |
| 2387.765000 | 52.93 | --- | 74.00 | 21.07 | 150.0 | H | 258.0 | 7.0 |

EUT Information

| | |
|---------------------|--------------------------|
| EUT Name: | Bluetooth Headset |
| Model: | LIVE770NC |
| Test Mode: | BR_DH5_Low channel |
| Order No/Sample No: | 168425866/A003470422-010 |
| Test Voltage:: | Battery |
| Remark: | Temp 23 Humi:56% |
| Test Standard: | FCC 15.247 |
| Tested By: | Kei Zhang |
| Reviewed By: | Terry Yin |

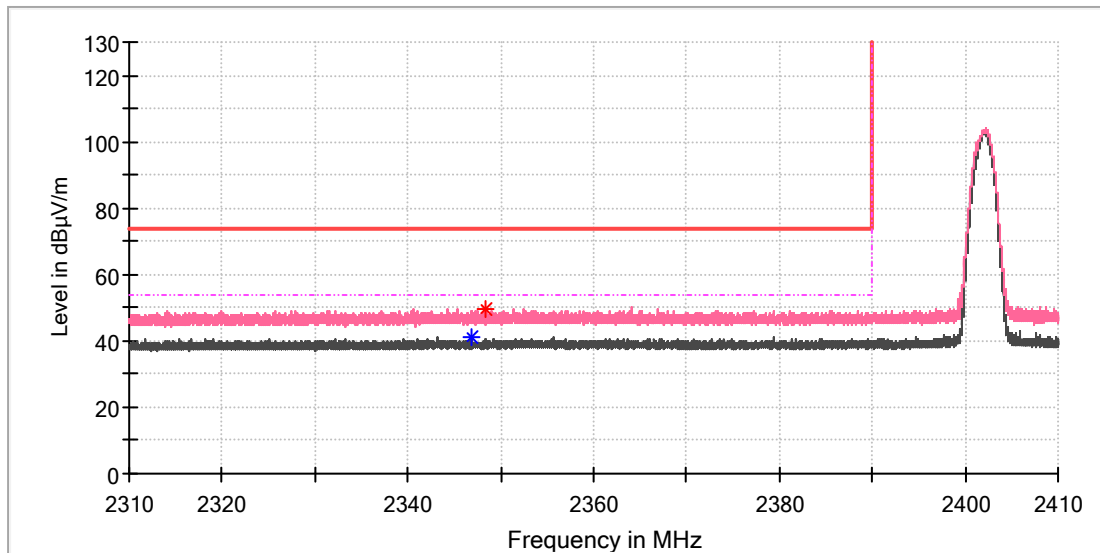


Critical Freqs

| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 2346.890000 | --- | 41.17 | 54.00 | 12.83 | 150.0 | V | 329.0 | 6.9 |
| 2348.465000 | 49.55 | --- | 74.00 | 24.45 | 150.0 | V | 359.0 | 6.9 |

EUT Information

| | |
|---------------------|--------------------------|
| EUT Name: | Bluetooth Headset |
| Model: | LIVE770NC |
| Test Mode: | BR_DH5_High channel |
| Order No/Sample No: | 168425866/A003470422-010 |
| Test Voltage:: | Battery |
| Remark: | Temp 23 Humi:56% |
| Test Standard: | FCC 15.247 |
| Tested By: | Kei Zhang |
| Reviewed By: | Terry Yin |

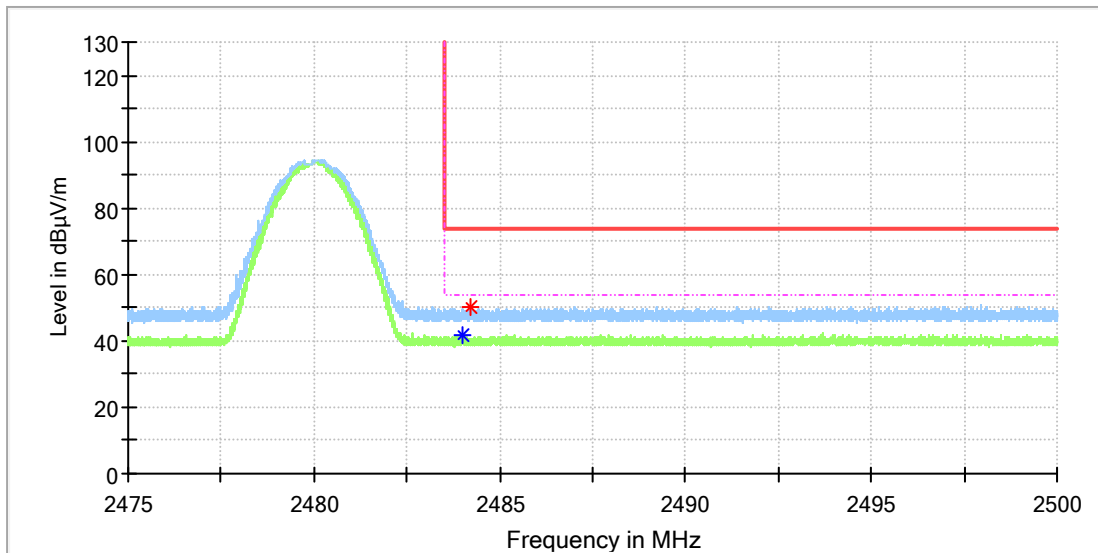


Critical Freqs

| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 2483.973750 | --- | 41.59 | 54.00 | 12.41 | 150.0 | H | 245.0 | 7.4 |
| 2484.192500 | 50.08 | --- | 74.00 | 23.92 | 150.0 | H | 351.0 | 7.4 |

EUT Information

| | |
|---------------------|--------------------------|
| EUT Name: | Bluetooth Headset |
| Model: | LIVE770NC |
| Test Mode: | BR_DH5_High channel |
| Order No/Sample No: | 168425866/A003470422-010 |
| Test Voltage:: | Battery |
| Remark: | Temp 23 Humi:56% |
| Test Standard: | FCC 15.247 |
| Tested By: | Kei Zhang |
| Reviewed By: | Terry Yin |

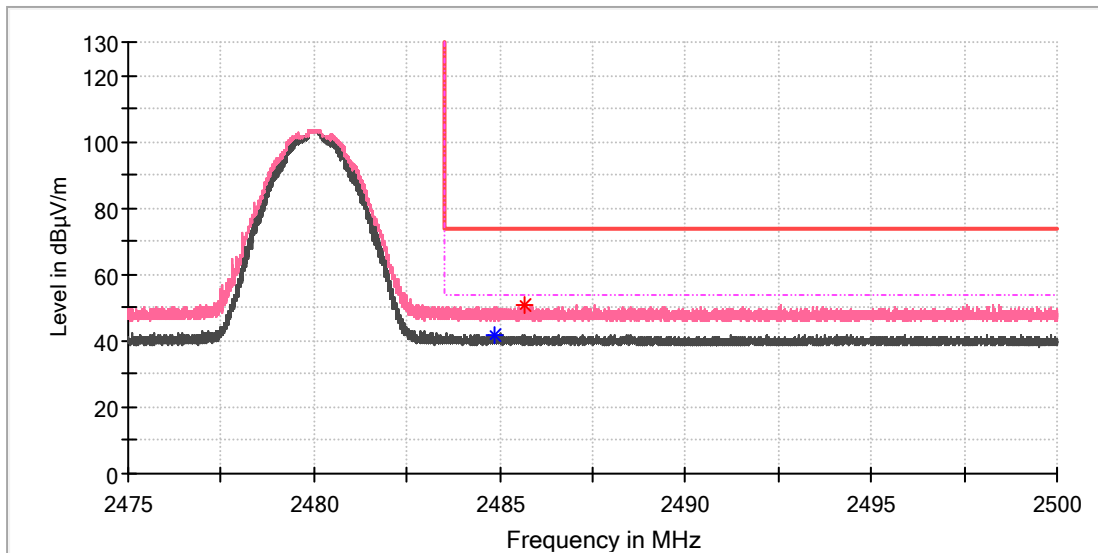

Critical Freqs

| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) |
|-----------------|------------------|------------------|----------------|-------------|-------------|-----|---------------|--------------|
| 2484.855000 | --- | 41.90 | 54.00 | 12.10 | 150.0 | V | 60.0 | 7.4 |
| 2485.675000 | 50.98 | --- | 74.00 | 23.02 | 150.0 | V | 199.0 | 7.4 |