## left ear headset BT DH5 2402 Back 0mm

Communication System: UID 0, BT(0) (0); Communication System Band: BT; Frequency: 2402 MHz; Medium parameters used (interpolated): f = 2402 MHz;  $\sigma$  = 1.812 S/m;  $\epsilon_r$  = 40.766;  $\rho$  = 1000 kg/m<sup>3</sup>


Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 SN7383; ConvF(7.75, 7.75, 7.75); Calibrated: 2020/11/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), z = -9.0, 31.0
- Electronics: DAE3 Sn427; Calibrated: 2021/4/9
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1235
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

**Configuration/Body/Area Scan (7x8x1):** Measurement grid: dx=12mm, dy=12mm Maximum value of SAR (measured) = 0.207 W/kg

Configuration/Body/Zoom Scan (5x5x5mm, graded), dist=1.4mm (7x8x5)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 6.114 V/m; Power Drift = 0.02 dB Peak SAR (extrapolated) = 0.535 W/kg SAR(1 g) = 0.046 W/kg; SAR(10 g) = 0.012 W/kg Maximum value of SAR (measured) = 0.166 W/kg

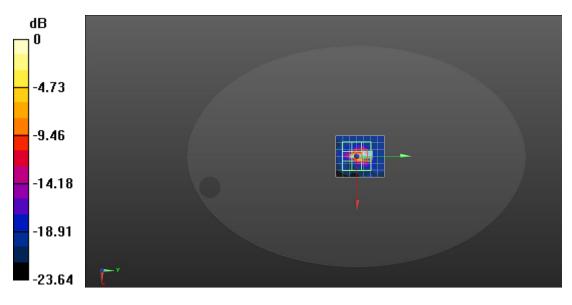

0 dB = 0.207 W/kg = -6.84 dBW/kg

## left ear headset BLE 2440 Back Side 0mm

Communication System: UID 0, BLE (0); Communication System Band: BLE; Frequency: 2440 MHz;

Medium parameters used (interpolated): f = 2440 MHz;  $\sigma$  = 1.812 S/m;  $\epsilon_r$  = 40.41;  $\rho$  = 1000 kg/m^3

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 SN7383; ConvF(7.75, 7.75, 7.75); Calibrated: 2020/11/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), z = -9.0, 31.0
- Electronics: DAE3 Sn427; Calibrated: 2021/4/9
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: 1235
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Body/Area Scan (6x6x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0816 W/kg

Configuration/Body/Zoom Scan (5x5x5mm, graded), dist=1.4mm (7x7x5)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.476 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.344 W/kg

SAR(1 g) = 0.044 W/kg; SAR(10 g) = 0.012 W/kg

Maximum value of SAR (measured) = 0.127 W/kg

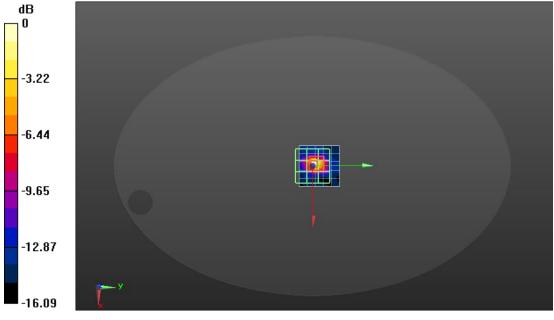

0 dB = 0.0816 W/kg = -10.88 dBW/kg