

**Harman International Industries, Inc.**

# RF TEST REPORT

**Report Type:**

FCC Part 15.247 & ISED RSS-247 RF report

**Model:**

LUXASTR01

**REPORT NUMBER:**

210402581SHA-002

**ISSUE DATE:**

May 27, 2021

**DOCUMENT CONTROL NUMBER:**

TTRF15.247-03\_V1 © 2018 Intertek



**Applicant:** Harman International Industries, Inc.  
8500, Balboa Blvd, Northridge, CA,91329, USA

**Manufacturer:** Anam Electronics Co., Ltd.  
27, Digital-ro 27ga-gil, Guro-gu, Seoul, 08375, Republic of Korea

**Product Name:** WiFi Module

**Type/Model:** LUXASTR01

**FCC ID:** APILUXASTR01

**IC:** 6132A-LUXASTR01

### SUMMARY:

The equipment complies with the requirements according to the following standard(s) or Specification:

**47CFR Part 15 (2019):** Radio Frequency Devices (Subpart C)


**ANSI C63.10 (2013):** American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

**RSS-247 Issue 2 (February 2017):** Digital Transmission Systems (DTs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices

**RSS-Gen Issue 5 (February 2021) Amendment 2:** General Requirements for Compliance of Radio Apparatus

### PREPARED BY:

### REVIEWED BY:



Project Engineer  
Dylan Tang

Reviewer  
Daniel Zhao

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

**TEST REPORT**

**Content**

**REVISION HISTORY..... 4**

**MEASUREMENT RESULT SUMMARY ..... 5**

**1 GENERAL INFORMATION ..... 6**

1.1 DESCRIPTION OF EQUIPMENT UNDER TEST (EUT) .....6

1.2 TECHNICAL SPECIFICATION .....6

1.3 ANTENNA INFORMATION.....7

1.4 DESCRIPTION OF TEST FACILITY .....7

**2 TEST SPECIFICATIONS..... 8**

2.1 STANDARDS OR SPECIFICATION .....8

2.2 MODE OF OPERATION DURING THE TEST.....8

2.3 TEST SOFTWARE LIST .....9

2.4 TEST PERIPHERALS LIST .....9

2.5 TEST ENVIRONMENT CONDITION:.....9

2.6 INSTRUMENT LIST .....10

2.7 MEASUREMENT UNCERTAINTY .....12

**3 MAXIMUM CONDUCTED OUTPUT POWER AND E.I.R.P..... 13**

3.1 LIMIT .....13

3.2 MEASUREMENT PROCEDURE .....13

3.3 TEST CONFIGURATION .....14

3.4 TEST RESULTS OF MAXIMUM CONDUCTED OUTPUT POWER.....14

**4 RADIATED EMISSIONS IN RESTRICTED FREQUENCY BANDS..... 17**

4.1 LIMIT .....17

4.2 MEASUREMENT PROCEDURE .....17

4.3 TEST CONFIGURATION .....19

4.4 TEST RESULTS OF RADIATED EMISSIONS .....21

**5 POWER LINE CONDUCTED EMISSION..... 34**

5.1 LIMIT .....34

5.2 TEST CONFIGURATION .....34

5.3 MEASUREMENT PROCEDURE .....35

5.4 TEST RESULTS OF POWER LINE CONDUCTED EMISSION.....36

**6 ANTENNA REQUIREMENT..... 38**

### Revision History

Report No.	Version	Description	Issued Date
210402581SHA-002	Rev. 01	C2PC	May 27, 2021

### Measurement result summary

TEST ITEM	FCC REFERANCE	IC REFERANCE	RESULT
Minimum 6dB Bandwidth	15.247(a)(2)	RSS-247 Issue 2 Clause 5.2	NA
Maximum conducted output power and e.i.r.p.	15.247(b)(3)	RSS-247 Issue 2 Clause 5.4	Verified
Power spectrum density	15.247(e)	RSS-247 Issue 2 Clause 5.2	NA
Emission outside the frequency band	15.247(d)	RSS-247 Issue 2 Clause 5.5	NA
Radiated Emissions in restricted frequency bands	15.247(d), 15.205&15.209	RSS-Gen Issue 5 Clause 8.9&8.10	Pass
Power line conducted emission	15.207(a)	RSS-Gen Issue 5 Clause 8.8	NA
Occupied bandwidth	-	RSS-Gen Issue 5 Clause 6.6	NA
Antenna requirement	15.203	-	Pass

**Notes:**

1: NA =Not Applicable

2. Determination of the test conclusion is based on IEC Guide 115 in consideration of measurement uncertainty.

3: Additions, Deviations and Exclusions from Standards: None.

4. Verified= This report is based on the previous report that add three Antennas. For specific changes, need to verified power.

## 1 GENERAL INFORMATION

### 1.1 Description of Equipment Under Test (EUT)

Product name:	WiFi Module
Type/Model:	LUXASTR01
Description of EUT:	The EUT is a WiFi Platform Module, which supports 802.11a/b/g/n/ac mode, when use three antennas, 802.11n40 mode was disabled by software.
Rating:	DC 5V
EUT type:	<input checked="" type="checkbox"/> Table top <input type="checkbox"/> Floor standing
Sample number:	G212B019
Product Marketing Name:	WiFi & BT Platform Module
Hardware Version:	LUXASTR01
Sample received date:	May 6, 2021
Date of test:	April 28, 2020 ~ May 25, 2021

### 1.2 Technical Specification

Frequency Band:	2400MHz ~ 2483.5MHz
Support Standards:	IEEE 802.11b, IEEE 802.11g, IEEE 802.11n(HT20)
Type of Modulation:	IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g: OFDM (64-QAM, 16-QAM, QPSK, BPSK) IEEE 802.11n(HT20): OFDM (64-QAM, 16-QAM, QPSK, BPSK)
Operating Frequency:	2412MHz to 2462MHz for IEEE 802.11b/g/n(HT20)
Channel Number:	11 Channels for 802.11b, 802.11g and 802.11n(HT20)
Channel Separation:	5 MHz
Antenna port Information:	Chip antenna: ant1 1.55dBi, ant2 1.55dBi PCB antenna: ant1 3.19dBi, ant2 3.19dBi Pole antenna: ant1 2.53dBi, ant2 2.53dBi

**TEST REPORT**

**1.3 Antenna information**

No.	Antenna Type	Gain	Note
0	Chip Antenna	1.55dBi	Internal type
1	PCB Antenna	3.19dBi	Internal type
2	Pole Antenna	2.53dBi	External type

Mode	Tx/Rx Function	Beamforming function	CDD function	Directional gain (dBi)
802.11b	1Tx/1Rx	NO	NO	-
802.11g	1Tx/1Rx	NO	NO	-
802.11n(HT20)	2Tx/2Rx	NO	NO	

Note: For 802.11b and 802.11g mode, it only supports 1TX.  
 For 802.11n modes, it can support 2TX, all the two transmit signals are completely uncorrelated with each other, so the directional gain =  $10 \log ((10^{G1/10} + 10^{G2/10} + \dots + 10^{Gn/10}) / N_{ANT})$

**1.4 Description of Test Facility**

Name:	Intertek Testing Services Shanghai
Address:	Building 86, No. 1198 Qinzhou Road(North), Shanghai 200233, P.R. China
Telephone:	86 21 61278200
Telefax:	86 21 54262353

The test facility is recognized, certified, or accredited by these organizations:	CNAS Accreditation Lab Registration No. CNAS L0139
	FCC Accredited Lab Designation Number: CN1175
	IC Registration Lab CAB identifier.: CN0051
	VCCI Registration Lab Registration No.: R-14243, G-10845, C-14723, T-12252
	A2LA Accreditation Lab Certificate Number: 3309.02

**TEST REPORT**

**2 TEST SPECIFICATIONS**

**2.1 Standards or specification**

- 47CFR Part 15 (2019)
- ANSI C63.10 (2013)
- KDB 662911 D01 (v02r01)
- KDB 558074 (v05r02)
- RSS-247 Issue 2 (February 2017)
- RSS-Gen Issue 5 (March 2019) Amendment 1

**2.2 Mode of operation during the test**

While testing transmitting mode of EUT, the internal modulation and continuously transmission was applied.

Software name	Manufacturer	Version	Supplied by
SecureCRT	-	-	Client

The lowest, middle and highest channel were tested as representatives.

Frequency Band (MHz)	Mode	Lowest (MHz)	Middle (MHz)	Highest (MHz)
2400-2483.5	802.11b	2412	2437	2462
	802.11g	2412	2437	2462
	802.11n(HT20)	2412	2437	2462

**Data rate and Power setting:**

The pre-scan for the conducted power with all rates in each modulation and bands was used, and the worst case was found and used in all test cases. After this pre-scan, we choose the following table of the data rate as the worst case.

Test software and Power Setting parameter		
Supply voltage	120V/60Hz	
Frequency Band (MHz)	Mode	Worst case data rate
2400-2483.5	802.11b	1Mbps
	802.11g	6Mbps
	802.11n(HT20)	MCS0

Power level setting using in test:

Channel	802.11b	802.11g	802.11n(HT20)
1	Default	Default	Default
6	Default	Default	Default
11	Default	Default	Default



**TEST REPORT**

**2.3 Test software list**

Test Items	Software	Manufacturer	Version
Radiated emission	ES-K1	R&S	V1.71

**2.4 Test peripherals list**

Item No.	Name	Band and Model	Description
1	Laptop computer	DELL 5480	-
2	RF cable	/	0.2m length; 0.8dB loss

**2.5 Test environment condition:**

Test items	Temperature	Humidity
Minimum 6dB Bandwidth	18°C	51%RH
Maximum conducted output power and e.i.r.p.		
Power spectrum density		
Emission outside the frequency band		
Occupied bandwidth		
Radiated Emissions in restricted frequency bands	25.2°C	52%RH
Power line conducted emission	19°C	52%RH

**TEST REPORT**

**2.6 Instrument list**

Conducted Emission					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Test Receiver	R&S	ESCS 30	EC 2107	2021-07-14
<input checked="" type="checkbox"/>	A.M.N.	R&S	ESH2-Z5	EC 3119	2021-11-09
Radiated Emission					
Used	Equipment	Manufacturer	Type	Serial Number	Due date
<input checked="" type="checkbox"/>	3m Chamber & Accessory Equipment	ETS-LINDGREN	3m	N/A	2024-01-21
<input checked="" type="checkbox"/>	Receiver	R&S	ESIB26	100114	2021-11-17
<input checked="" type="checkbox"/>	Loop Antenna	ETS-LINDGREN	6502	00202525	2021-11-13
<input checked="" type="checkbox"/>	Broadband Antenna	ETS-LINDGREN	3142E	00201566	2021-11-13
<input checked="" type="checkbox"/>	6dB Attenuator	Talent	RA6A5-N-18	18103001	2021-11-13
<input checked="" type="checkbox"/>	Preamplifier	HP	8447F	2805A02960	2021-11-09
<input checked="" type="checkbox"/>	Horn Antenna (Pre-amplifier)	ETS-LINDGREN	3117-PA	00201541	2022-05-28
<input checked="" type="checkbox"/>	Pre-amplifier	ETS-LINDGREN	118385	00201874	2021-11-09
<input checked="" type="checkbox"/>	Horn Antenna	ETS-LINDGREN	3116C	00200180	2021-06-18
<input checked="" type="checkbox"/>	Pre-amplifier	ETS-LINDGREN	118384	00202652	2021-11-13
<input checked="" type="checkbox"/>	Multi device Controller	ETS-LINDGREN	7006-001	00160105	N/A
RF test					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	PXA Signal Analyzer	Keysight	N9030A	EC 5338	2022-03-15
<input checked="" type="checkbox"/>	PXA Signal Analyzer	Keysight	N9030B	EC 6078	2022-06-09
<input checked="" type="checkbox"/>	Power sensor	Agilent	U2021XA	EC 5338-1	2022-03-15
<input checked="" type="checkbox"/>	Vector Signal Generator	Agilent	N5182B	EC 5175	2022-03-17
<input checked="" type="checkbox"/>	MXG Analog Signal Generator	Agilent	N5181A	EC 5338-2	2022-03-17
<input checked="" type="checkbox"/>	Test Receiver	R&S	ESCI 7	EC 4501	2021-09-16
<input type="checkbox"/>	Universal Radio Communication Tester	R&S	CMW500	EC5944	2021-12-09
<input type="checkbox"/>	Universal Radio Communication Tester	R&S	CMW500	Ec6209	2021-12-30
<input checked="" type="checkbox"/>	Signal generator	Agilent	N5182A	Ec6172	2021-08-21
<input checked="" type="checkbox"/>	Signal generator	Agilent	N5181A	Ec6171	2021-08-21
<input checked="" type="checkbox"/>	Climate chamber	GWS	MT3065	EC 6021	2022-03-04
Additional instrument					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Therom-Hygrograph	ZJ1-2A	S.M.I.F.	EC 3783	2022-03-02

**TEST REPORT**

<input checked="" type="checkbox"/>	Pressure meter	YM3	Shanghai Mengde	EC 4620	2021-09-09
-------------------------------------	----------------	-----	--------------------	---------	------------

**TEST REPORT**

**2.7 Measurement uncertainty**

The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Test item	Measurement uncertainty
Maximum peak output power	± 0.74dB
Radiated Emissions in restricted frequency bands below 1GHz	± 4.60dB
Radiated Emissions in restricted frequency bands above 1GHz	± 4.40dB
Emission outside the frequency band	± 2.70dB
Power line conducted emission	± 3.19dB

### 3 Maximum conducted output power and e.i.r.p.

**Test result:** Pass

#### 3.1 Limit

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 W. (The e.i.r.p. shall not exceed 4 W)

If the transmitting antenna of directional gain greater than 6dBi is used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. If there have a beam forming type, the limit should be the minimum of 30dBm and 30+ (6 –antenna gain-beam forming gain).


#### 3.2 Measurement Procedure

The EUT was tested according to DTS test procedure of “KDB558074 D01 DTS Meas Guidance” (clause 9.1.1) for compliance requirements.

- a) Set the RBW  $\geq$  DTS bandwidth.
- b) Set VBW  $\geq 3 \times$  RBW.
- c) Set span  $\geq 3 \times$  RBW
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

**TEST REPORT**

**3.3 Test Configuration**



**3.4 Test Results of Maximum conducted output power**

Chip antenna

WLAN AVGSA Output Power									
Mode	Test Frequency (MHz)	Ant	Duty Cycle Factor (dB)	Max Power (dBm)	Total Power (dBm)	FCC Limit (dBm)	EIRP (dBm)	IC EIRP Limit (dBm)	Result
802.11b	2412	Ant0	0.00	13.01	13.01	30	14.56	36.00	Pass
802.11b	2412	Ant1	0.00	13.88	13.88	30	15.43	36.00	Pass
802.11b	2437	Ant0	0.00	15.18	15.18	30	16.73	36.00	Pass
802.11b	2437	Ant1	0.00	15.69	15.69	30	17.24	36.00	Pass
802.11b	2462	Ant0	0.00	12.98	12.98	30	14.53	36.00	Pass
802.11b	2462	Ant1	0.00	13.31	13.31	30	14.86	36.00	Pass
802.11g	2412	Ant0	0.00	11.96	11.96	30	13.51	36.00	Pass
802.11g	2412	Ant1	0.00	12.75	12.75	30	14.3	36.00	Pass
802.11g	2437	Ant0	0.00	14.27	14.27	30	15.82	36.00	Pass
802.11g	2437	Ant1	0.00	14.44	14.44	30	15.99	36.00	Pass
802.11g	2462	Ant0	0.00	12.08	12.08	30	13.63	36.00	Pass
802.11g	2462	Ant1	0.00	12.27	12.27	30	13.82	36.00	Pass
802.11n (HT20)MIMO	2412	Ant0+ Ant1	0.09	11.01	14.35	30	15.90	36.00	Pass
				11.64					
802.11n (HT20)MIMO	2437	Ant0+ Ant1	0.00	13.27	16.32	30	17.87	36.00	Pass
				13.35					
802.11n (HT20)MIMO	2462	Ant0+ Ant1	0.09	11.05	14.15	30	15.70	36.00	Pass
				11.22					

**TEST REPORT**

PCB Antenna

WLAN AVGSA Output Power									
Mode	Test Frequency (MHz)	Ant	Duty Cycle Factor (dB)	Max Power (dBm)	Total Power (dBm)	FCC Limit (dBm)	EIRP (dBm)	IC EIRP Limit (dBm)	Result
802.11b	2412	Ant0	0.00	13.01	13.01	30	16.20	36.00	Pass
802.11b	2412	Ant1	0.00	13.88	13.88	30	17.07	36.00	Pass
802.11b	2437	Ant0	0.00	15.18	15.18	30	18.37	36.00	Pass
802.11b	2437	Ant1	0.00	15.69	15.69	30	18.88	36.00	Pass
802.11b	2462	Ant0	0.00	12.98	12.98	30	16.17	36.00	Pass
802.11b	2462	Ant1	0.00	13.31	13.31	30	16.50	36.00	Pass
802.11g	2412	Ant0	0.00	11.96	11.96	30	15.15	36.00	Pass
802.11g	2412	Ant1	0.00	12.75	12.75	30	15.94	36.00	Pass
802.11g	2437	Ant0	0.00	14.27	14.27	30	17.46	36.00	Pass
802.11g	2437	Ant1	0.00	14.44	14.44	30	17.63	36.00	Pass
802.11g	2462	Ant0	0.00	12.08	12.08	30	15.27	36.00	Pass
802.11g	2462	Ant1	0.00	12.27	12.27	30	15.46	36.00	Pass
802.11n (HT20)MIMO	2412	Ant0+ Ant1	0.09	11.01	14.35	30	17.54	36.00	Pass
				11.64					
802.11n (HT20)MIMO	2437	Ant0+ Ant1	0.00	13.27	16.32	30	19.51	36.00	Pass
				13.35					
802.11n (HT20)MIMO	2462	Ant0+ Ant1	0.09	11.05	14.15	30	17.34	36.00	Pass
				11.22					

**TEST REPORT**

Pole Antenna

WLAN AVGSA Output Power									
Mode	Test Frequency (MHz)	Ant	Duty Cycle Factor (dB)	Max Power (dBm)	Total Power (dBm)	FCC Limit (dBm)	EIRP (dBm)	IC EIRP Limit (dBm)	Result
802.11b	2412	Ant0	0.00	13.01	13.01	30	15.54	36.00	Pass
802.11b	2412	Ant1	0.00	13.88	13.88	30	16.41	36.00	Pass
802.11b	2437	Ant0	0.00	15.18	15.18	30	17.71	36.00	Pass
802.11b	2437	Ant1	0.00	15.69	15.69	30	18.22	36.00	Pass
802.11b	2462	Ant0	0.00	12.98	12.98	30	15.51	36.00	Pass
802.11b	2462	Ant1	0.00	13.31	13.31	30	15.84	36.00	Pass
802.11g	2412	Ant0	0.00	11.96	11.96	30	14.49	36.00	Pass
802.11g	2412	Ant1	0.00	12.75	12.75	30	15.28	36.00	Pass
802.11g	2437	Ant0	0.00	14.27	14.27	30	16.8	36.00	Pass
802.11g	2437	Ant1	0.00	14.44	14.44	30	16.97	36.00	Pass
802.11g	2462	Ant0	0.00	12.08	12.08	30	14.61	36.00	Pass
802.11g	2462	Ant1	0.00	12.27	12.27	30	14.80	36.00	Pass
802.11n (HT20)MIMO	2412	Ant0+ Ant1	0.09	11.01	14.35	30	16.88	36.00	Pass
				11.64					
802.11n (HT20)MIMO	2437	Ant0+ Ant1	0.00	13.27	16.32	30	18.85	36.00	Pass
				13.35					
802.11n (HT20)MIMO	2462	Ant0+ Ant1	0.09	11.05	14.15	30	16.68	36.00	Pass
				11.22					



**TEST REPORT**

**4 Radiated Emissions in restricted frequency bands**

**Test result:** Pass

**4.1 Limit**

The radiated emissions which fall in the restricted bands, must also comply with the radiated emission limits specified showed as below:

<b>Frequencies (MHz)</b>	<b>Field Strength (microvolts/meter)</b>	<b>Measurement Distance (meters)</b>
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

**4.2 Measurement Procedure**

The EUT was tested according to Subclause 11.12 of ANSI C63.10.

**For Radiated emission below 30MHz:**

- a) The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c) Both X and Y axes of the antenna are set to make the measurement.
- d) For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e) The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

**NOTE:**

- 1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

**TEST REPORT****For Radiated emission above 30MHz:**


- a) The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meters chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c) The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e) The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f) The test-receiver system was set to peak and average detector function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

**Note:**


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle < 98%) or  $3 \times \text{RBW}$  (Duty cycle  $\geq 98\%$ ) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions were reported.

### 4.3 Test Configuration


For Radiated emission below 30MHz:

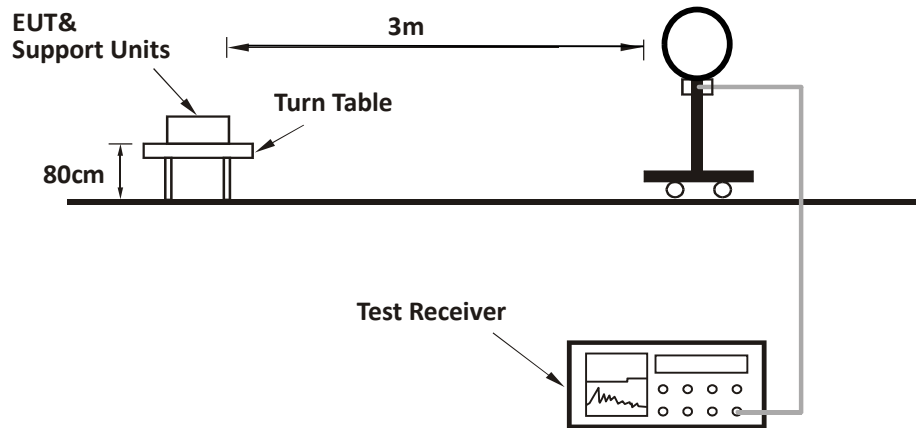

For Radiated emission 30MHz to 1GHz:

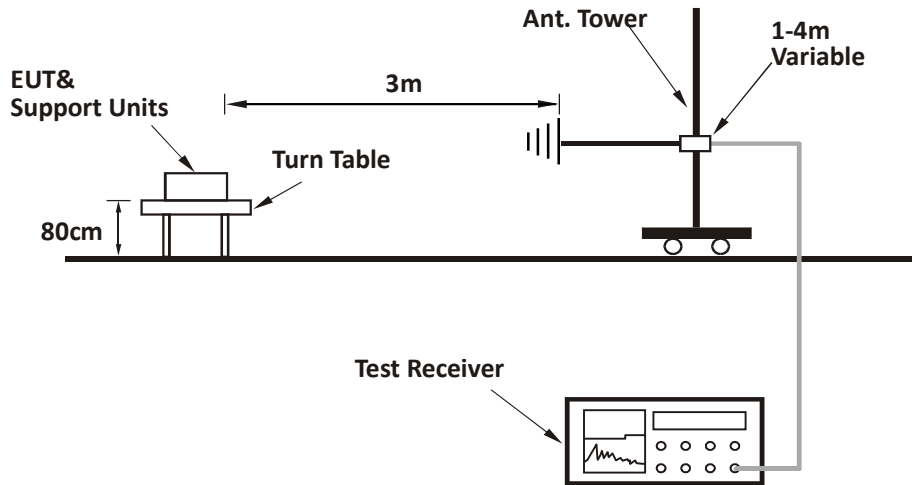

**For Radiated emission above 1GHz:**

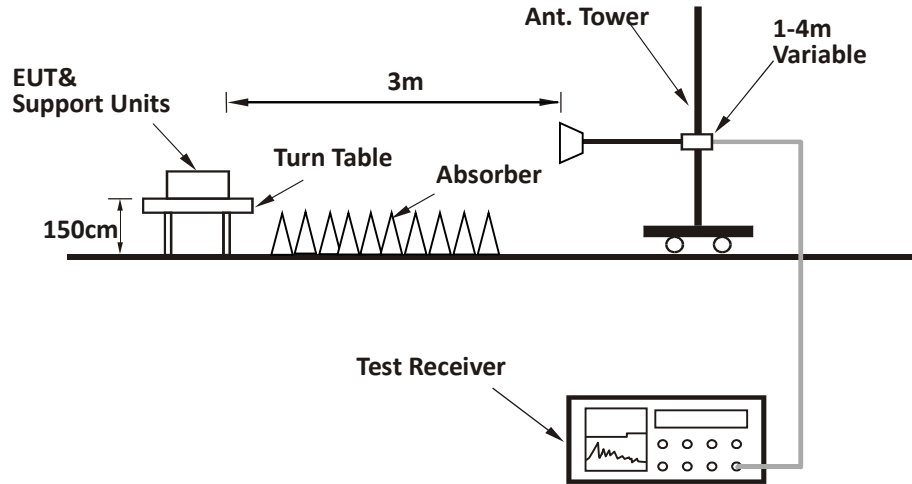


**TEST REPORT**

**4.4 Test Results of Radiated Emissions**


The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

The worst waveform from 30MHz to 1000MHz is listed as below(Chip antenna 802.11n20):

Horizontal

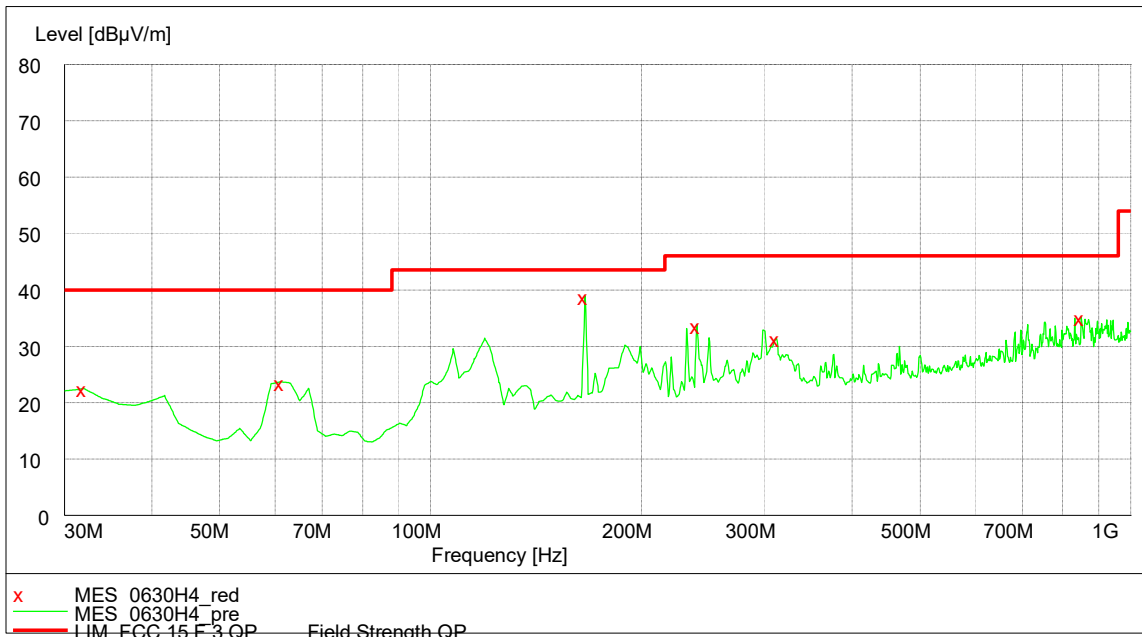

Vertical

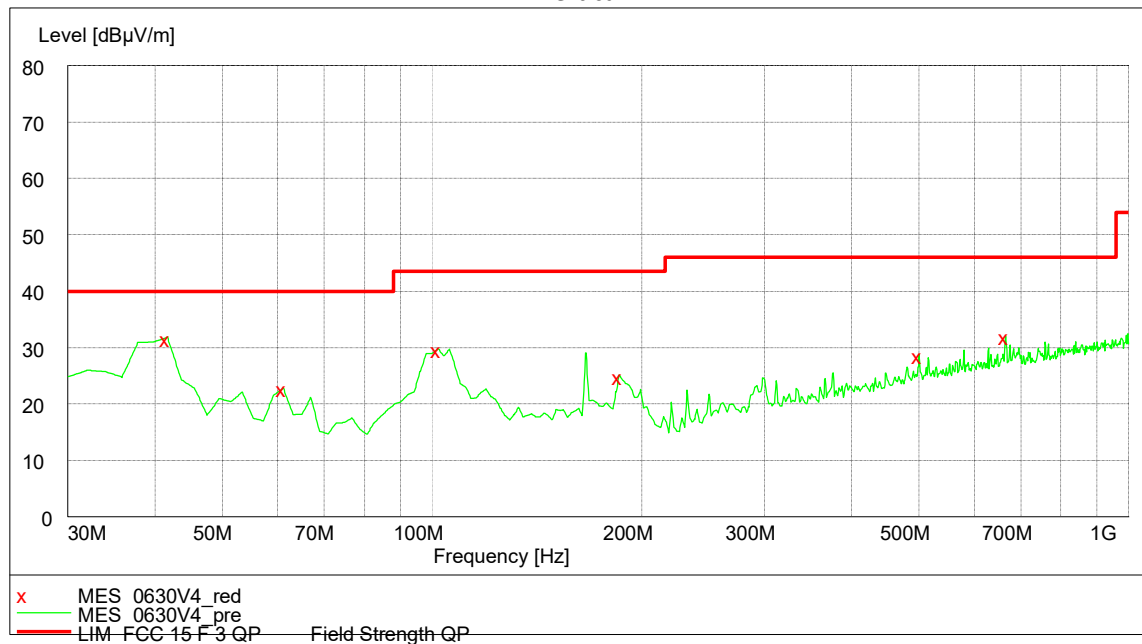

**TEST REPORT**

**Test data below 1GHz**

Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector
H	31.94	22.50	17.6	40.00	17.5	PK
H	61.10	23.70	7.10	40.00	16.3	PK
H	166.07	38.90	11.1	43.50	4.6	PK
H	239.94	33.80	13.0	46.00	12.2	PK
H	311.86	31.40	15.3	46.00	14.6	PK
H	848.38	35.20	23.3	46.00	10.8	PK
V	41.66	31.80	12.6	40.00	8.2	PK
V	61.10	22.80	7.10	40.00	17.2	PK
V	101.92	29.80	12.2	43.50	13.7	PK
V	185.51	25.10	10.8	43.50	18.4	PK
V	500.42	28.80	19.7	46.00	17.2	PK
V	665.65	32.00	21.4	46.00	14.0	PK


**TEST REPORT**

The worst waveform from 30MHz to 1000MHz is listed as below(PCB antenna 802.11n20):

Horizontal



Vertical

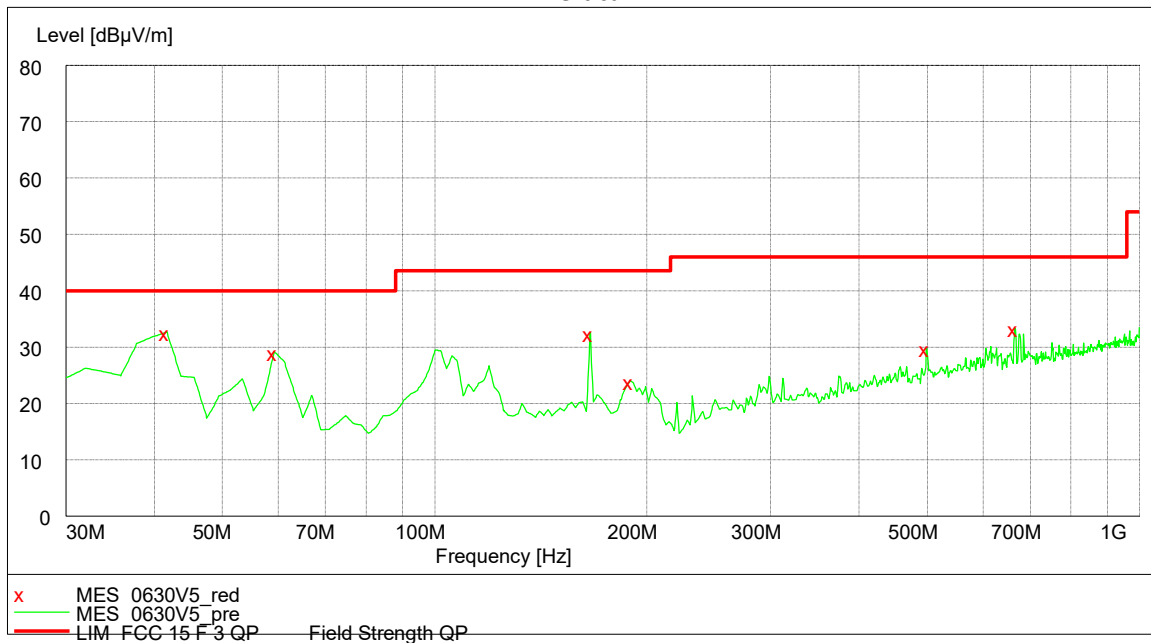

**TEST REPORT**

**Test data below 1GHz**

Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector
H	30.00	22.20	18.8	40.00	17.8	PK
H	61.10	23.70	7.10	40.00	16.3	PK
H	166.07	39.10	11.1	43.50	4.4	PK
H	199.12	30.40	11.1	43.50	13.1	PK
H	311.86	30.60	15.3	46.00	15.4	PK
H	778.40	35.40	22.6	46.00	10.6	PK
V	41.66	32.70	12.6	40.00	7.3	PK
V	59.16	29.10	7.20	40.00	10.9	PK
V	166.07	32.50	11.1	43.50	11.0	PK
V	189.40	24.10	10.9	43.50	19.4	PK
V	498.48	29.80	19.7	46.00	16.2	PK
V	665.65	33.30	21.4	46.00	12.7	PK




Total Quality. Assured.


**TEST REPORT**

The worst waveform from 30MHz to 1000MHz is listed as below(Pole antenna 802.11n20):

**Horizontal**

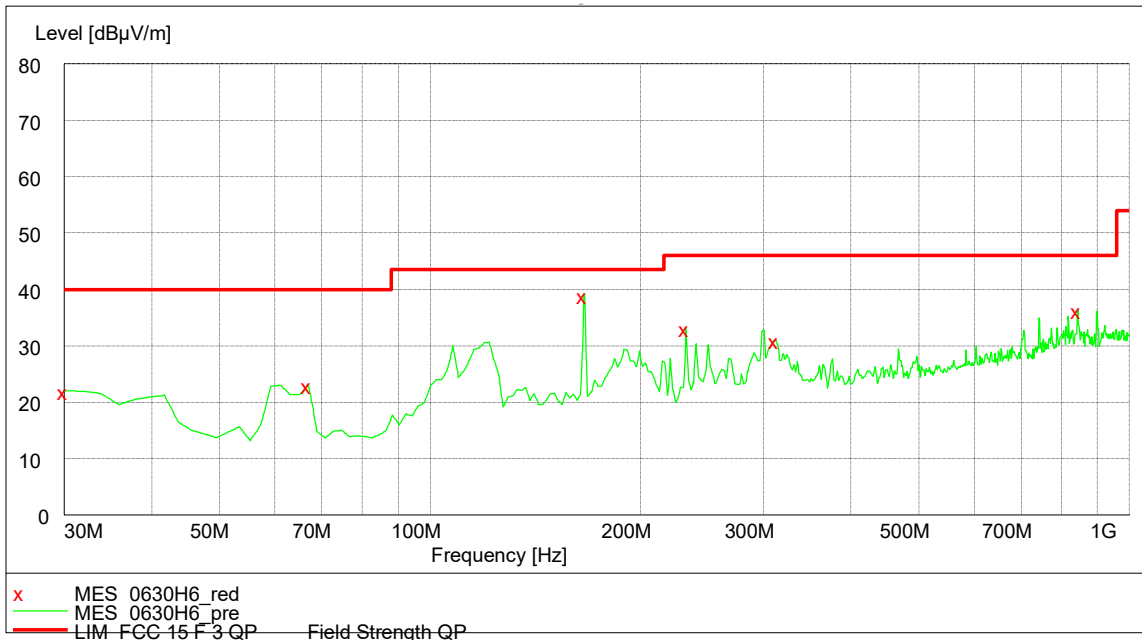

**Vertical**

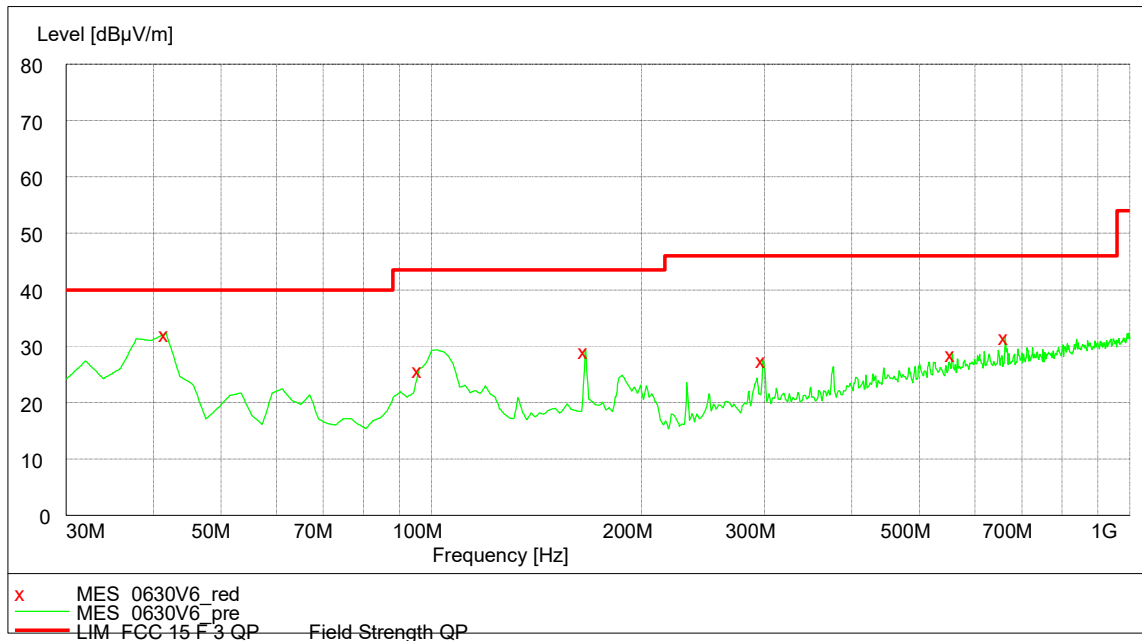

**TEST REPORT**

Test data below 1GHz

Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector
H	30.00	22.00	18.8	40.00	18.0	PK
H	66.93	23.10	7.30	40.00	16.9	PK
H	166.07	39.10	11.1	43.50	4.4	PK
H	232.16	33.10	12.2	46.00	12.9	PK
H	311.86	31.10	15.3	46.00	14.9	PK
H	844.49	36.40	23.3	46.00	9.6	PK
V	41.66	32.30	12.6	40.00	7.7	PK
V	96.09	25.90	11.3	43.50	17.6	PK
V	166.07	29.30	11.1	43.50	14.2	PK
V	298.26	27.60	14.9	46.00	18.4	PK
V	556.79	28.80	20.4	46.00	17.2	PK
V	663.71	31.70	21.4	46.00	14.3	PK

**TEST REPORT**

**Test result above 1GHz:**

The emission was conducted from 1GHz to 18GHz

**1) Dipole antenna**

**802.11b**

CH	Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	2412.00	104.2	36.30	Fundamental	/	PK
	V	2412.00	98.70	36.30	Fundamental	/	PK
	H	2390.00	52.50	36.30	74.00	21.5	PK
	V	2390.00	44.80	36.30	74.00	29.2	PK
	H	4824.00	47.50	-11.80	74.00	26.5	PK
	V	4824.00	47.80	-11.80	74.00	26.2	
M	H	7236.00	47.30	-11.80	74.00	26.7	PK
	V	7236.00	47.60	-11.80	74.00	26.4	PK
H	H	2462.00	107.40	36.50	Fundamental	/	PK
	V	2462.00	102.50	36.50	Fundamental	/	PK
	H	2483.50	53.57	34.80	74.00	20.43	PK
	V	2483.50	54.30	36.30	74.00	19.7	PK
	V	2483.50	51.90	36.30	54.00	2.1	AV
	H	4924.00	47.70	-11.30	74.00	26.3	PK
	V	4924.00	50.00	-11.30	74.00	24	PK

**802.11g**

CH	Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	2412.00	105.00	36.30	Fundamental	/	PK
	V	2412.00	100.80	36.30	Fundamental	/	PK
	H	2390.00	67.50	36.30	74.00	6.5	PK
	H	2390.00	50.05	36.30	54.00	3.95	AV
	V	2390.00	64.30	36.30	74.00	9.7	PK
	V	2390.00	48.10	36.30	54.00	5.9	AV

**TEST REPORT**

	H	4824.00	48.30	-11.80	74.00	25.7	PK
	V	4824.00	46.70	-11.80	54.00	7.3	AV
M	H	4874.00	47.50	-11.80	74.00	26.5	PK
	V	4874.00	47.20	-11.80	74.00	26.8	PK
H	H	2462.00	107.10	36.50	Fundamental	/	PK
	V	2462.00	101.90	36.60	Fundamental	/	PK
	H	2483.50	67.80	36.30	74.00	6.2	PK
	H	2483.50	48.60	36.30	54.00	5.4	AV
	V	2483.50	54.80	36.30	74.00	19.2	PK
	V	2483.50	51.70	36.30	54.00	2.3	AV
	H	4924.00	47.80	-11.3	74.00	26.2	PK
	V	4924.00	47.50	-11.3	74.00	26.5	PK

802.11n(HT20)

CH	Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	2412.00	106.50	36.30	Fundamental	/	PK
	V	2412.00	102.30	36.30	Fundamental	/	PK
	H	2390.00	69.30	36.30	74.00	4.7	PK
	H	2390.00	51.90	36.30	54.00	2.1	AV
	V	2390.00	61.30	36.30	74.00	12.7	PK
	V	2390.00	46.40	36.30	54.00	7.6	AV
	H	4824.00	47.50	-11.80	74.00	26.5	PK
	V	4824.00	47.30	-11.80	74.00	26.7	PK
M	H	4874.00	47.90	-11.80	74.00	26.1	PK
	V	4874.00	47.50	-11.80	74.00	26.5	PK
H	H	2462.00	109.80	36.50	Fundamental	/	PK
	V	2462.00	102.40	36.50	Fundamental	/	PK
	H	2483.50	71.20	36.30	74.00	2.8	PK
	H	2483.50	52.60	36.30	54.00	1.4	AV
	V	2483.50	53.80	36.30	74.00	20.2	PK

**TEST REPORT**

	H	4924.00	47.50	-11.30	74.00	26.5	PK
	V	4924.00	48.00	-11.30	74.00	26	PK

**2) PCB Antenna**

## 802.11b

CH	Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	2412.00	105.50	36.30	Fundamental	/	PK
	V	2412.00	99.80	36.30	Fundamental	/	PK
	H	2390.00	53.80	36.30	74.00	20.2	PK
	H	2390.00	46.50	36.30	54.00	7.5	AV
	V	2390.00	54.20	36.30	74.00	19.8	PK
	H	4824.00	48.50	-11.80	74.00	25.5	PK
	V	4824.00	47.80	-11.80	74.00	26.2	
M	H	7236.00	47.80	-11.80	74.00	26.2	PK
	V	7236.00	47.50	-11.80	74.00	26.5	PK
H	H	2462.00	109.40	36.50	Fundamental	/	PK
	V	2462.00	104.80	36.50	Fundamental	/	PK
	H	2483.50	69.40	34.80	74.00	4.6	PK
	H	2483.50	48.10	36.30	54.00	5.9	AV
	V	2483.50	49.10	36.30	74.00	24.9	PK
	H	4924.00	48.10	-11.30	74.00	25.9	PK
	V	4924.00	51.50	-11.30	74.00	22.5	PK

## 802.11g

CH	Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	2412.00	106.10	36.30	Fundamental	/	PK
	V	2412.00	102.50	36.30	Fundamental	/	PK
	H	2390.00	68.20	36.30	74.00	5.8	PK
	H	2390.00	51.50	36.30	54.00	2.5	AV

**TEST REPORT**

	V	2390.00	66.20	36.30	74.00	7.8	PK
	V	2390.00	49.05	36.30	74.00	24.95	AV
	H	4824.00	49.50	-11.80	74.00	24.5	PK
	V	4824.00	47.05	-11.80	54.00	6.95	AV
M	H	4874.00	48.20	-11.80	74.00	25.8	PK
	V	4874.00	47.60	-11.80	74.00	26.4	PK
H	H	2462.00	109.30	36.50	Fundamental	/	PK
	V	2462.00	105.90	36.60	Fundamental	/	PK
	H	2483.50	71.90	36.30	74.00	2.1	PK
	H	2483.50	50.90	36.30	54.00	3.1	AV
	V	2483.50	59.90	36.30	74.00	14.1	PK
	V	2483.50	46.50	36.30	54.00	7.5	AV
	H	4924.00	48.50	-11.3	74.00	25.5	PK
	V	4924.00	47.90	-11.3	74.00	26.1	PK

## 802.11n(HT20)

CH	Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	2412.00	106.30	36.30	Fundamental	/	PK
	V	2412.00	101.50	36.30	Fundamental	/	PK
	H	2390.00	71.70	36.30	74.00	2.3	PK
	H	2390.00	48.60	36.30	54.00	5.4	AV
	V	2390.00	51.20	36.30	74.00	22.8	PK
	H	4824.00	48.10	-11.80	74.00	25.9	PK
	V	4824.00	47.50	-11.80	74.00	26.5	PK
M	H	4874.00	48.80	-11.80	74.00	25.2	PK
	V	4874.00	47.80	-11.80	74.00	26.2	PK
H	H	2462.00	107.00	36.50	Fundamental	/	PK
	V	2462.00	102.70	36.50	Fundamental	/	PK
	H	2483.50	60.90	36.30	74.00	13.1	PK
	H	2483.50	48.50	36.30	54.00	5.5	AV

**TEST REPORT**

	V	2483.50	57.70	36.30	74.00	16.3	PK
	V	2483.50	45.80	36.30	54.00	8.2	AV
	H	4924.00	46.90	-11.30	74.00	27.1	PK
	V	4924.00	48.50	-11.30	74.00	25.5	PK

**3) Dipole antenna +Chip antenna**

## 802.11b

CH	Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	2412.00	104.90	36.30	Fundamental	/	PK
	V	2412.00	100.90	36.30	Fundamental	/	PK
	H	2390.00	64.70	36.30	74.00	9.3	PK
	H	2390.00	48.70	36.30	54.00	5.3	AV
	V	2390.00	52.80	36.30	74.00	21.2	PK
	H	4824.00	49.80	-11.80	74.00	24.2	PK
	V	4824.00	48.60	-11.80	74.00	25.4	PK
M	H	7236.00	48.20	-11.80	74.00	25.8	PK
	V	7236.00	47.30	-11.80	74.00	26.7	PK
H	H	2462.00	107.60	36.50	Fundamental	/	PK
	V	2462.00	102.20	36.50	Fundamental	/	PK
	H	2483.50	53.50	34.80	74.00	20.5	PK
	V	2483.50	54.10	36.30	74.00	19.9	PK
	V	2483.50	52.50	36.30	54.00	1.5	AV
	H	4924.00	48.80	-11.30	74.00	25.2	PK
	V	4924.00	51.20	-11.30	74.00	22.8	PK

## 802.11g

CH	Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	2412.00	105.40	36.30	Fundamental	/	PK
	V	2412.00	100.10	36.30	Fundamental	/	PK

**TEST REPORT**

	H	2390.00	72.60	36.30	74.00	1.4	PK
	H	2390.00	52.90	36.30	54.00	1.1	AV
	V	2390.00	53.80	36.30	74.00	20.2	PK
	H	4824.00	49.80	-11.80	74.00	24.2	PK
	V	4824.00	47.50	-11.80	54.00	6.5	AV
M	H	4874.00	48.20	-11.80	74.00	25.8	PK
	V	4874.00	46.90	-11.80	74.00	27.1	PK
H	H	2462.00	107.80	36.50	Fundamental	/	PK
	V	2462.00	102.20	36.60	Fundamental	/	PK
	H	2483.50	65.20	36.30	74.00	8.8	PK
	H	2483.50	49.80	36.30	54.00	4.2	AV
	V	2483.50	55.50	36.30	74.00	18.5	PK
	V	2483.50	52.10	36.30	54.00	1.9	AV
	H	4924.00	49.80	-11.3	74.00	24.2	PK
	V	4924.00	47.10	-11.3	74.00	26.9	PK

802.11n(HT20)

CH	Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Correct Factor (dB/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	2412.00	106.10	36.30	Fundamental	/	PK
	V	2412.00	102.80	36.30	Fundamental	/	PK
	H	2390.00	67.20	36.30	74.00	6.8	PK
	V	2390.00	50.10	36.30	54.00	3.9	AV
	V	2390.00	59.80	36.30	74.00	14.2	PK
	V	2390.00	47.50	36.30	54.00	6.5	AV
	H	4824.00	49.20	-11.80	74.00	24.8	PK
	V	4824.00	46.90	-11.80	74.00	27.1	PK
M	H	4874.00	48.60	-11.80	74.00	25.4	PK
	V	4874.00	46.20	-11.80	74.00	27.8	PK
H	H	2462.00	108.50	36.50	Fundamental	/	PK
	V	2462.00	103.90	36.50	Fundamental	/	PK



**TEST REPORT**

	H	2483.50	72.80	36.30	74.00	1.2	PK
	H	2483.50	52.90	36.30	54.00	1.1	AV
	V	2483.50	53.70	36.30	74.00	20.3	PK
	H	4924.00	49.80	-11.30	74.00	24.2	PK
	V	4924.00	47.50	-11.30	74.00	26.5	PK

- Remark: 1. Correct Factor = Antenna Factor + Cable Loss (+ Amplifier, for higher than 1GHz), the value was added to Original Receiver Reading by the software automatically.  
 2. Corrected Reading = Original Receiver Reading + Correct Factor  
 3. Margin = Limit - Corrected Reading  
 4. If the PK Corrected Reading is lower than AV limit, the AV test can be elided.

Example: Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB,  
 Gain of Preamplicifier = 32.00dB, Original Receiver Reading = 10.00dBμV,  
 Limit = 40.00dBμV/m.  
 Then Correct Factor = 30.20 + 2.00 – 32.00 = 0.20dB/m;  
 Corrected Reading = 10dBμV + 0.20dB/m = 10.20dBμV/m;  
 Margin = 40.00dBμV/m - 10.20dBμV/m = 29.80dB.

**TEST REPORT**

**5 Power line conducted emission**


Test result: **PASS**

**5.1 Limit**

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	QP	AV
0.15-0.5	66 to 56*	56 to 46 *
0.5-5	56	46
5-30	60	50

\* Decreases with the logarithm of the frequency.

**5.2 Test Configuration**

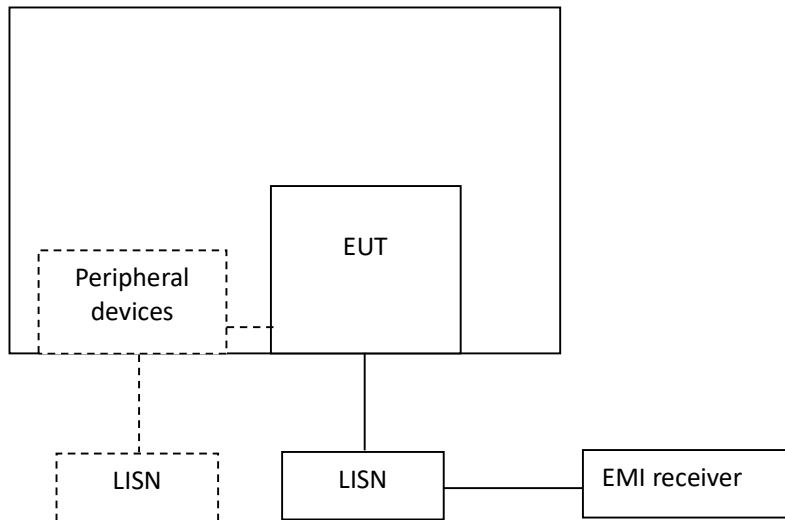

**TEST REPORT****5.3 Measurement Procedure**

Measured levels of ac power-line conducted emission shall be the emission voltages from the voltage probe, where permitted, or across the 50  $\Omega$  LISN port (to which the EUT is connected), where permitted, terminated into a 50  $\Omega$  measuring instrument. All emission voltage and current measurements shall be made on each current-carrying conductor at the plug end of the EUT power cord by the use of mating plugs and receptacles on the LISN, if used. Equipment shall be tested with power cords that are normally supplied or recommended by the manufacturer and that have electrical and shielding characteristics that are the same as those cords normally supplied or recommended by the manufacturer. For those measurements using a LISN, the 50  $\Omega$  measuring port is terminated by a measuring instrument having 50  $\Omega$  input impedance. All other ports are terminated in 50  $\Omega$  loads.

Tabletop devices shall be placed on a platform of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The vertical conducting plane or wall of an RF-shielded (screened) room shall be located 40 cm to the rear of the EUT. Floor-standing devices shall be placed either directly on the reference ground-plane or on insulating material as described in ANSI C63.4. All other surfaces of tabletop or floor-standing EUTs shall be at least 80 cm from any other grounded conducting surface, including the case or cases of one or more LISNs.

The bandwidth of the test receiver is set at 9 kHz.


**TEST REPORT**

**5.4 Test Results of Power line conducted emission**

The worst waveform from 30MHz to 1000MHz is listed as below:

**Test Curve:**

L Line

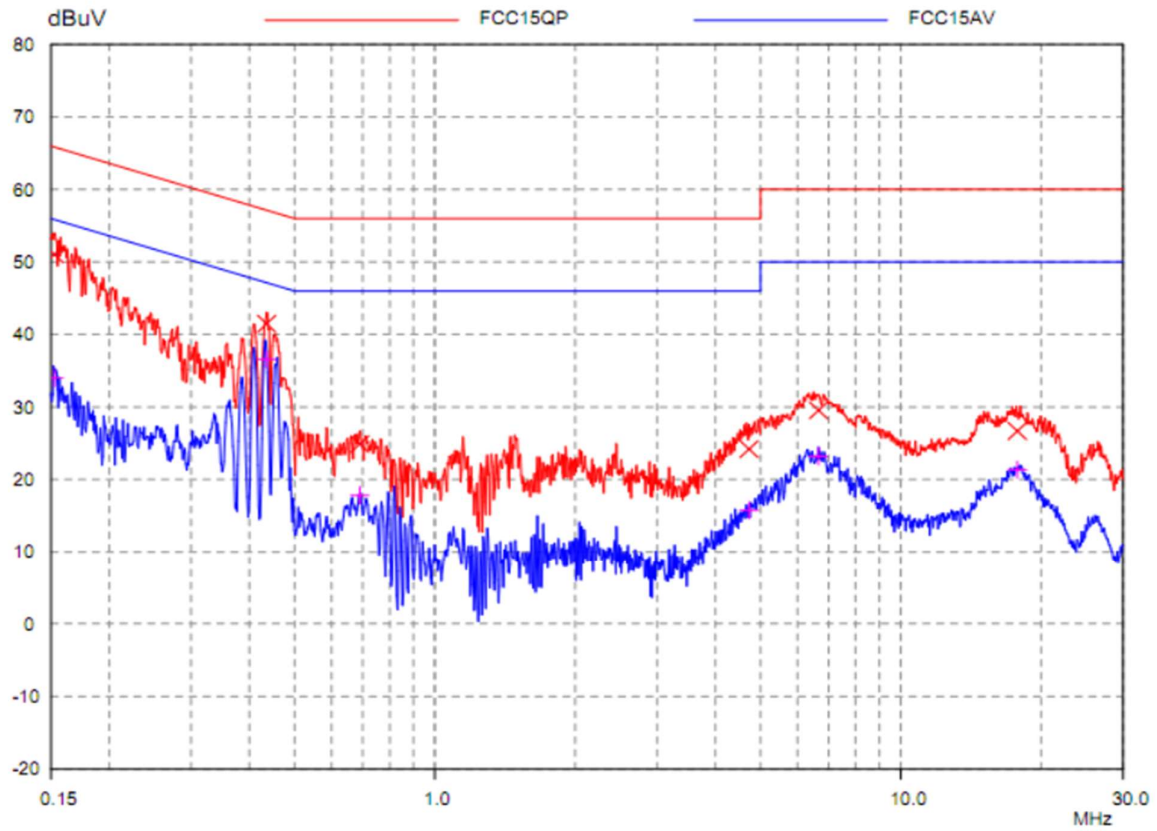


**Test Data:**

Frequency (MHz)	Quasi-peak			Average		
	level dB(μV)	Limit dB(μV)	Margin (dB)	level dB(μV)	limit dB(μV)	Margin (dB)
0.1524	51.04	65.87	14.83	33.97	55.87	21.90
0.4355	41.48	57.15	15.67	36.57	47.15	10.58
0.6892	24.89	56.00	31.11	17.83	46.00	28.17
4.7208	24.18	56.00	31.82	15.75	46.00	30.25
6.6545	29.54	60.00	30.46	23.20	50.00	26.80
17.766	26.67	60.00	33.33	21.34	50.00	28.66

## TEST REPORT

Test Curve:

N Line

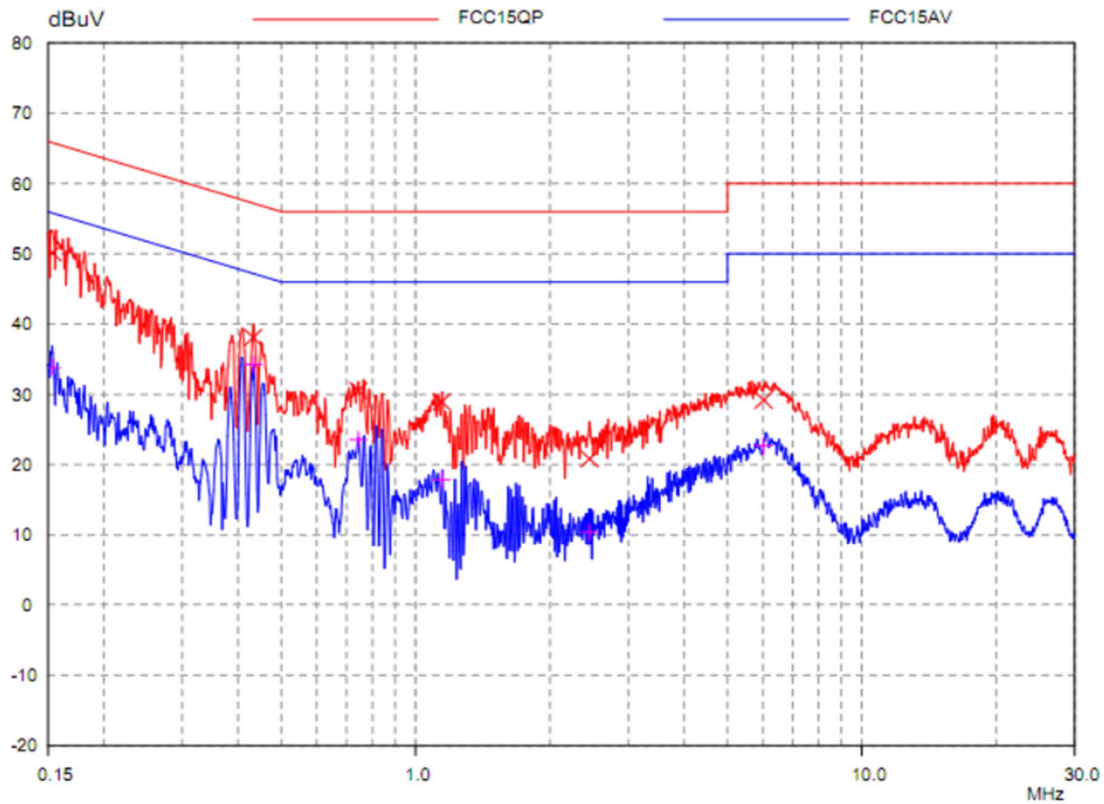

### Test Data:

Frequency (MHz)	Quasi-peak			Average		
	level dB(μV)	Limit dB(μV)	Margin (dB)	level dB(μV)	limit dB(μV)	Margin (dB)
0.1536	50.12	65.80	15.68	33.88	55.80	21.92
0.4320	38.10	57.21	19.11	34.25	47.21	12.96
0.7435	30.54	56.00	25.46	23.57	46.00	22.43
1.1443	28.95	56.00	27.05	17.85	46.00	28.15
2.4529	20.84	56.00	35.16	10.38	46.00	35.62
6.0224	29.18	60.00	30.82	22.69	50.00	27.31

Remark: 1. Correct Factor = LISN Factor + Cable Loss, the value was added to Original Receiver Reading by the software automatically.

2. Corrected Reading = Original Receiver Reading + Correct Factor

3. Margin = Limit - Corrected Reading

4. If the PK Corrected Reading is lower than AV limit, the AV test can be elided.

**TEST REPORT**

**6 Antenna requirement**

**Requirement:**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

**Result:**

EUT uses unique coupling to the intentional radiator, so it can comply with the provisions of this section.

\*\*\*\*\* END \*\*\*\*\*