
SPECIFICATION



Cosonic CE-2188N Bluetooth antenna

Product Specification

| connection | Cosonic | frequency range | 2400 ~ 2500MHz |
|-------------------------|-----------------|--------------------|----------------|
| entry name | CE-2188N | edition | / |
| Material No | 1E-2188N-008 | Color | Natural color |
| Customer Item Number | 300116190201C00 | | |
| R F Design | Yuanqing.Zhu | Structural Design | Ruibin Zhou |
| Quality Manager | Jin.Yang | Technical Director | Lei.Zhang |
| Date | | 2024-4-16 | |

| Customer confirmation: | | | | |
|---|--------------------------------------|--|--|--|
| Whether the assembly meets your company's requirements: \Box OK \Box NG | | | | |
| | | | | |
| | Shenzhen DaXian Technology Co., Ltd. | | | |

Buji Town, Longgang District, Shenzhen, China Jihua Road 513, Shangshuijing Village (opposite the national defense training base) Dacheng Industrial Park, Building 7.

TEL:0755-28576002 FAX:0755-84276383

 ${\tt Room 201, Building 8, Long Dong Road 3000 \#, Semiconductor \quad Industry \quad Park, Zhang Jiang \quad Hitechnool Long Boundary \quad Lo$

Zone, ShangHai TEL:021-61630552 FAX:755-84276383

I. Project Description

| Customer Name: | cosonic |
|---------------------------|----------------|
| Type of complete machine: | Battery Pack |
| Antenna band: | 2400 ~ 2500MHz |
| Antenna form: | ironware |
| Feed form: | soldered |
| Number of feed legs: | one |

www. Topant.com.cn Confidentiality requirements

IV. The Equipment of Active Test

Satimo 3D Chamber $6 \times 4 \times 4$ (m)

Agilent 8960 E5515c

Network analyzer-R&S ZVL










Figure 2

www. Topant.com.cn

Confidentiality requirements

3 test

3.1 The Test of standing Wave (VSWR)

3.1.1 The Test of standing Wave (VSWR): In turn, the connection of the VSWR testing device is as follows: RES ZVL Network Analyzer / testing Line / testing tool

Actual measurement (with diagram)

3.2 Measurement of Efficiency, Power (TRP) and Sensitivity (TIS)

3.2.1 Test site:

Large-scale microwave darkroom. The test frequency range is 400MHz / 6GHz, the static range is 50cm circumferential and the reflectivity is less than-50 dB..

3.2.2 Test instrument:

Rs ZVL Network Analyzer, Agilent8960 E5515C, Standard Horn Antenna, French SATIMO-SG24SYSTEM system, Printer, etc.

3.2.3 test data : In microwave anechoic chambers, the power and sensitivity values measured are shown in the following table:

OTA Active Test:


| СН | TRP (dBm) | TIS(dBm) |
|----|-----------|----------|
| 0 | 3. 56 | -89. 16 |
| 39 | 4. 13 | -90. 68 |
| 78 | 4. 49 | -89. 74 |

Confidentiality requirements

Passive efficiency&gain:


| Frequency (MHz) | AVG Gain (dB) | Efficiency (%) | Gain (dBi) |
|-----------------|---------------|----------------|------------|
| 2400 | -4.85 | 32. 73 | -0.21 |
| 2410 | -4.84 | 32. 82 | -0. 29 |
| 2420 | -4.86 | 32. 64 | -0. 56 |
| 2430 | -4. 78 | 33. 23 | -0.88 |
| 2440 | -4. 73 | 33. 64 | -0.72 |
| 2450 | -4. 62 | 34. 49 | -0.34 |
| 2460 | -4. 69 | 33. 95 | -0. 25 |
| 2470 | -4.88 | 32. 48 | -0.3 |
| 2480 | -5.04 | 31. 35 | -0.41 |
| 2490 | -4.99 | 31.88 | -0.45 |
| 2500 | -5.01 | 31.66 | -0.48 |
| AVG | -4. 84 | 32. 8 | -0. 44 |

4. VSWR parameter diagram

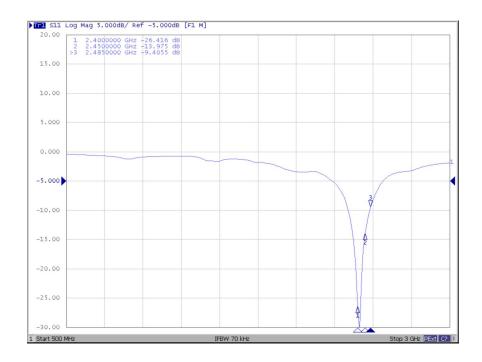


www. Topant.com.cn

Confidentiality requirements

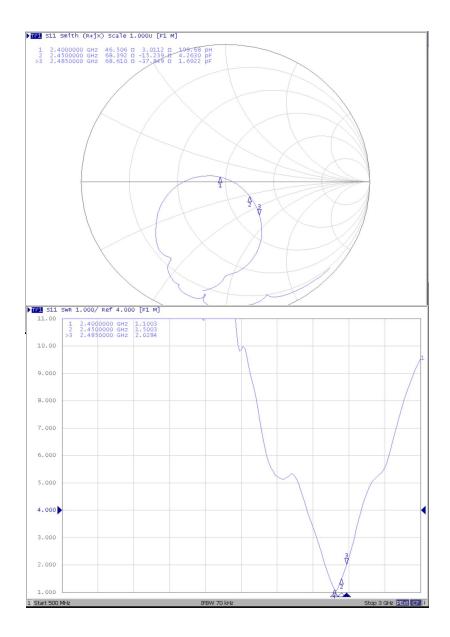

www. Topant.com.cn Confidentiality requirements

Confidential Information

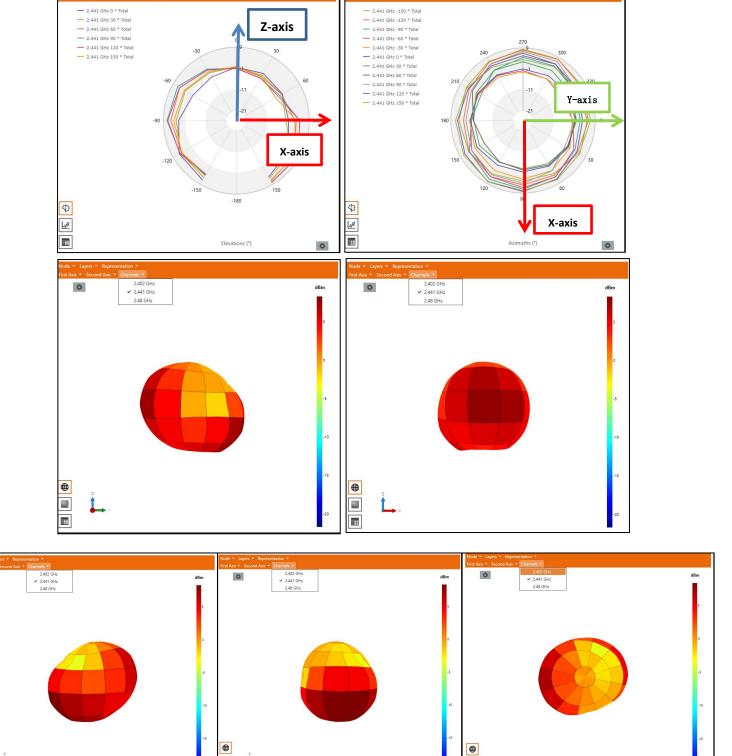

www. Topant.com.cn


П


Confidentiality requirements

TIS

#

8

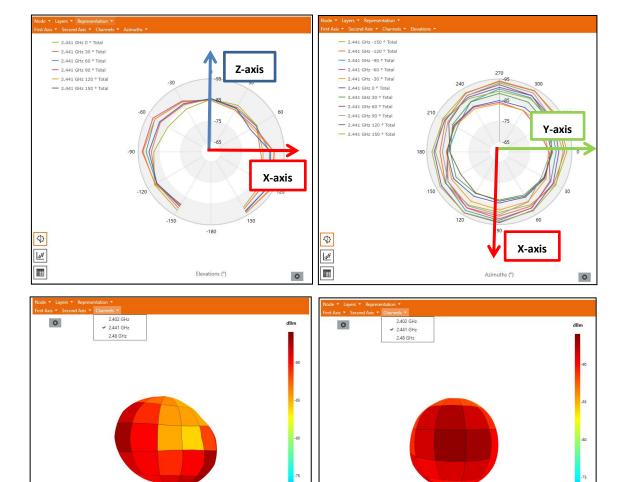

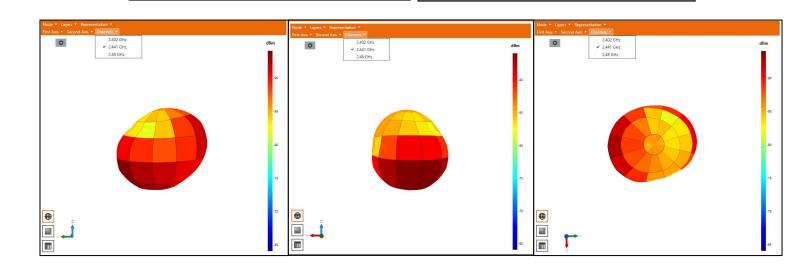


#

RQ.

www. Topant.com.cn

Confidentiality requirements

6. Passive field pattern diagram

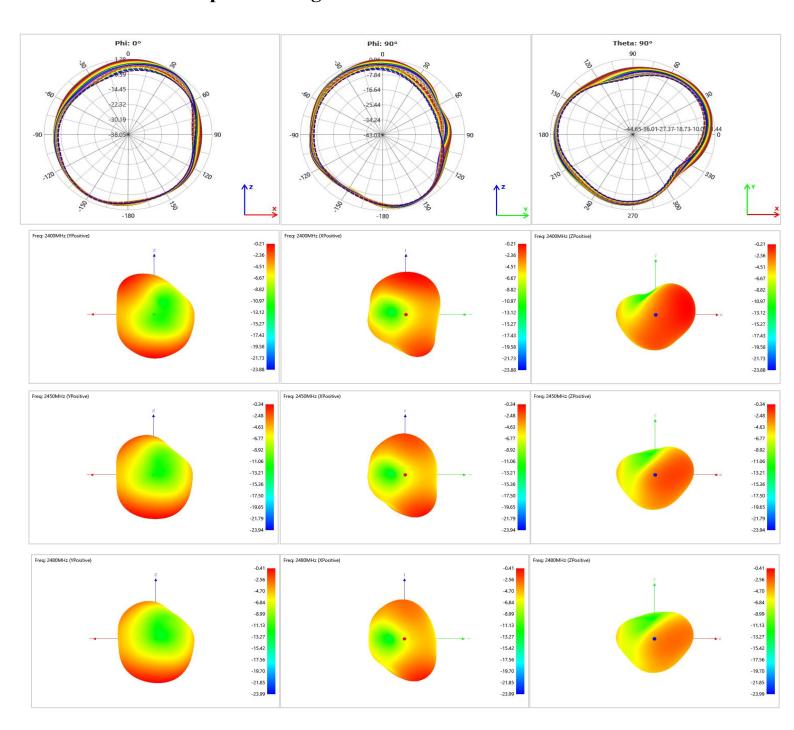

www. Topant.com.cn

Confidentiality requirements