

September 30, 2020

CalAmp  
2200 Faraday Ave, Suite 220  
Carlsbad, CA 92008  
USA

Dear Imad Rizk,

Enclosed is the EMC Wireless test report for compliance testing of the CalAmp., TTU2830MB as tested to the requirements of the FCC Certification rules under Title 47 of the CFR Part 22 Subpart H for Cellular Devices and FCC Part 24 Subpart E for Broadband PCS Devices.

Thank you for using the services of Eurofins E&E North America. If you have any questions regarding these results or if MET can be of further service to you, please contact me.

Sincerely yours,  
EUROFINS E&E NORTH AMERICA

A handwritten signature in black ink, appearing to read "Arsalan Hasan".

Arsalan Hasan  
Wireless Laboratory

Reference: (\CalAmp\WIRS109402-FCC22\_24 Rev 5)



Certificates and reports shall not be reproduced except in full, without the written permission of Eurofins E&E North America. While use of the A2LA logo in this report reflects MET accreditation under these programs, the report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government. This letter of transmittal is not a part of the attached report.

Eurofins MET Laboratories Inc. (Eurofins E&E North America) is part of the Eurofins Electrical & Electronics (E&E) global compliance network.

## **Electromagnetic Compatibility Criteria Test Report**

for the

**CalAmp.  
TTU2830MB**

**Tested under  
FCC Certification Rules  
Title 47 of the CFR,  
Part 22 Subpart H for Cellular Devices  
&  
Part 24 Subpart E for Broadband PCS Devices**

**Report: WIRS109402-FCC22\_24 Rev 5**

September 30, 2020

**Prepared For:**

**CalAmp.  
2200 Faraday Ave, Suite 220  
Carlsbad, CA 92008  
USA**


**Prepared By:  
Eurofins E&E North America  
3162 Belick St.  
Santa Clara, CA 95054**

**Electromagnetic Compatibility Criteria  
Test Report**

for the

**CalAmp.  
TTU2830MB**

**Tested Under  
FCC Certification Rules  
Title 47 of the CFR,  
Part 22 Subpart H for Cellular Devices  
&  
Part 24 Subpart E for Broadband PCS Devices**



Felix Huang  
Engineer, Wireless Laboratory



Arsalan Hasan  
Manager, Wireless Laboratory

**Engineering Statement:** The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of Part 22 Subpart H and Part 24 Subpart E of the FCC Rules under normal use and maintenance.



Eleazar Zuniga, PhD.  
Director, Wireless Technologies

## Report Status Sheet

| Revision | Report Date        | Reason for Revision |
|----------|--------------------|---------------------|
| Ø        | September 12, 2020 | Initial Issue.      |
| 1        | September 17, 2020 | TCB Updates         |
| 2        | September 21, 2020 | TCB Updates         |
| 3        | September 27, 2020 | TCB Updates         |
| 4        | September 29, 2020 | TCB Updates         |
| 5        | September 30, 2020 | TCB Updates         |

## Table of Contents

|             |                                                                               |           |
|-------------|-------------------------------------------------------------------------------|-----------|
| <b>I.</b>   | <b>Executive Summary .....</b>                                                | <b>1</b>  |
|             | A. Purpose of Test .....                                                      | 2         |
|             | B. Executive Summary .....                                                    | 2         |
| <b>II.</b>  | <b>Equipment Configuration .....</b>                                          | <b>3</b>  |
|             | A. Overview .....                                                             | 4         |
|             | B. References .....                                                           | 5         |
|             | C. Test Site .....                                                            | 5         |
|             | D. Measurement Uncertainty .....                                              | 5         |
|             | E. Description of Test Sample .....                                           | 6         |
|             | F. Equipment Configuration .....                                              | 6         |
|             | G. Ports and Cabling Information .....                                        | 6         |
|             | H. Mode of Operation .....                                                    | 6         |
|             | I. Method of Monitoring EUT Operation .....                                   | 7         |
|             | J. Modifications .....                                                        | 7         |
|             | Modifications to EUT .....                                                    | 7         |
|             | Modifications to Test Standard .....                                          | 7         |
|             | K. Disposition of EUT .....                                                   | 7         |
| <b>III.</b> | <b>Electromagnetic Compatibility Criteria for Intentional Radiators .....</b> | <b>8</b>  |
|             | § 2.1046 Radiated Output Power .....                                          | 9         |
|             | § 2.1053 Radiated Spurious Emissions .....                                    | 17        |
| <b>IV.</b>  | <b>Test Equipment .....</b>                                                   | <b>26</b> |

## List of Terms and Abbreviations

|                              |                                                             |
|------------------------------|-------------------------------------------------------------|
| <b>AC</b>                    | <b>Alternating Current</b>                                  |
| <b>ACF</b>                   | <b>Antenna Correction Factor</b>                            |
| <b>Cal</b>                   | <b>Calibration</b>                                          |
| <b><i>d</i></b>              | <b>Measurement Distance</b>                                 |
| <b>dB</b>                    | <b>Decibels</b>                                             |
| <b>dB<math>\mu</math>A</b>   | <b>Decibels above one <b>micro</b>amp</b>                   |
| <b>dB<math>\mu</math>V</b>   | <b>Decibels above one <b>micro</b>volt</b>                  |
| <b>dB<math>\mu</math>A/m</b> | <b>Decibels above one <b>micro</b>amp <b>per</b> meter</b>  |
| <b>dB<math>\mu</math>V/m</b> | <b>Decibels above one <b>micro</b>volt <b>per</b> meter</b> |
| <b>DC</b>                    | <b>Direct Current</b>                                       |
| <b>E</b>                     | <b>Electric Field</b>                                       |
| <b>DSL</b>                   | <b>Digital Subscriber Line</b>                              |
| <b>ESD</b>                   | <b>Electrostatic Discharge</b>                              |
| <b>EUT</b>                   | <b>Equipment Under Test</b>                                 |
| <b><i>f</i></b>              | <b>Frequency</b>                                            |
| <b>FCC</b>                   | <b>Federal Communications Commission</b>                    |
| <b>GRP</b>                   | <b>Ground Reference Plane</b>                               |
| <b>H</b>                     | <b>Magnetic Field</b>                                       |
| <b>HCP</b>                   | <b>Horizontal Coupling Plane</b>                            |
| <b>Hz</b>                    | <b>Hertz</b>                                                |
| <b>IEC</b>                   | <b>International Electrotechnical Commission</b>            |
| <b>kHz</b>                   | <b>kilohertz</b>                                            |
| <b>kPa</b>                   | <b>kilopascal</b>                                           |
| <b>kV</b>                    | <b>kilovolt</b>                                             |
| <b>LISN</b>                  | <b>Line Impedance Stabilization Network</b>                 |
| <b>MHz</b>                   | <b>Megahertz</b>                                            |
| <b><math>\mu</math>H</b>     | <b><b>micro</b>henry</b>                                    |
| <b><math>\mu</math></b>      | <b><b>micro</b>farad</b>                                    |
| <b><math>\mu</math>s</b>     | <b><b>micro</b>seconds</b>                                  |
| <b>NEBS</b>                  | <b>Network Equipment-Building System</b>                    |
| <b>PRF</b>                   | <b>Pulse Repetition Frequency</b>                           |
| <b>RF</b>                    | <b>Radio Frequency</b>                                      |
| <b>RMS</b>                   | <b>Root-Mean-Square</b>                                     |
| <b>TWT</b>                   | <b>Traveling Wave Tube</b>                                  |
| <b>V/m</b>                   | <b>Volts <b>per</b> meter</b>                               |
| <b>VCP</b>                   | <b>Vertical Coupling Plane</b>                              |

# **I. Executive Summary**

## A. Purpose of Test

An EMC evaluation was performed to determine compliance of the CalAmp TTU2830MB, with the requirements of Part 22 Subpart H and Part 24 Subpart E. All references are to the most current version of Title 47 of the Code of Federal Regulations in effect. In accordance with §2.1033, the following data is presented in support of the Certification of the TTU2830MB. CalAmp should retain a copy of this document which should be kept on file for at least two years after the manufacturing of the TTU2830MB, has been **permanently** discontinued.

## B. Executive Summary

The following tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 22 Subpart H and Part 24 Subpart E, in accordance with CalAmp., purchase order number 401701.

| FCC Reference                      | Description                                                        | Compliance                                                                |
|------------------------------------|--------------------------------------------------------------------|---------------------------------------------------------------------------|
| §2.1049; §22.917;<br>§24.232(d)    | Occupied Bandwidth                                                 | Data valid from module<br>original certification<br>FCC-ID: XMR201707BG96 |
| §2.1049, §22.355,<br>§24.238       | Frequency stability                                                | Data valid from module<br>original certification<br>FCC-ID: XMR201707BG96 |
| §22.913(d), §24.323(d)             | Peak to Average Ratio                                              | Data valid from module<br>original certification<br>FCC-ID: XMR201707BG96 |
| §2.1051; §22.917,<br>§24.238       | Conducted Spurious Emissions at Antenna Terminals and<br>Band Edge | Data valid from module<br>original certification<br>FCC-ID: XMR201707BG96 |
| §2.1046; §22.913(a);<br>§24.232    | RF Power Output                                                    | Data valid from module<br>original certification<br>FCC-ID: XMR201707BG96 |
| §2.1046; §22.913(a)(2);<br>§24.232 | Effective Radiated Power                                           | Compliant                                                                 |
| §2.1053; §22.917(a),<br>§24.238    | Radiated Spurious Emissions from the Cabinet                       | Compliant                                                                 |

**Table 1. Executive Summary of EMC Compliance Testing**

**Rationale:** Per KDB KDB 996369 D04 “Modular Transmitter Integration Guide – Guidance for Host Product Manufacturers” only worst-case radiated measurements are reported in this filing.

## **II. Equipment Configuration**

## A. Overview

Eurofins E&E North America was contracted by CalAmp to perform testing on the TTU2830MB, under CalAmp.'s purchase order number 401701.

This document describes the test setups, test methods, required test equipment, and the test limit criteria used to perform compliance testing of the CalAmp, TTU2830MB.

The results obtained relate only to the item(s) tested.

|                                       |                                                                                                                                                                                           |                         |                         |                      |
|---------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|-------------------------|----------------------|
| <b>Model(s) Tested:</b>               | TTU2830MB                                                                                                                                                                                 |                         |                         |                      |
| <b>Model(s) Covered:</b>              | TTU2830MB                                                                                                                                                                                 |                         |                         |                      |
| <b>Filing Status:</b>                 | Original                                                                                                                                                                                  |                         |                         |                      |
| <b>EUT Specifications:</b>            | Primary Power: 12V DC                                                                                                                                                                     |                         |                         |                      |
|                                       | FCC ID: APV-2830MB                                                                                                                                                                        |                         |                         |                      |
|                                       | Module Original Report Number(s):<br>Part 22: Report R2007A0435-R4 Date Available in FCC Database: 09/04/2020<br>Part 24: Report R2007A0435-R5 Date Available in FCC Database: 09/04/2020 |                         |                         |                      |
|                                       | Type of Modulations:                                                                                                                                                                      | GMSK, 8PSK, QPSK, 16QAM |                         |                      |
|                                       | Equipment Code:                                                                                                                                                                           | PCB                     |                         |                      |
|                                       | Technology                                                                                                                                                                                | TX Frequency Range      | (Measured) Power Output | (Rated) Power Output |
|                                       | GSM 850                                                                                                                                                                                   | 824 – 849 MHz           | 30.29 dBm ERP           | 32.13 dBm ERP        |
|                                       | GSM 1900                                                                                                                                                                                  | 1850 – 1910 MHz         | 29.32 dBm EIRP          | 32.43 dBm EIRP       |
|                                       | LTE CAT-M1 Band 2                                                                                                                                                                         | 1850 – 1910 MHz         | 28.31 dBm EIRP          | 29.66 dBm EIRP       |
|                                       | LTE CAT-M1 Band 5                                                                                                                                                                         | 824 – 849 MHz           | 26.12 dBm ERP           | 27.65 dBm ERP        |
|                                       | LTE CAT-M1 Band 25                                                                                                                                                                        | 1850 – 1915 MHz         | 21.19 dBm EIRP          | 22.61 dBm EIRP       |
| <b>Analysis:</b>                      | The results obtained relate only to the item(s) tested.                                                                                                                                   |                         |                         |                      |
| <b>Environmental Test Conditions:</b> | Temperature: 15-35° C                                                                                                                                                                     |                         |                         |                      |
|                                       | Relative Humidity: 30-60%                                                                                                                                                                 |                         |                         |                      |
|                                       | Barometric Pressure: 860-1060 mbar                                                                                                                                                        |                         |                         |                      |
| <b>Evaluated by:</b>                  | Arsalan Hasan                                                                                                                                                                             |                         |                         |                      |
| <b>Date(s):</b>                       | September 30, 2020                                                                                                                                                                        |                         |                         |                      |

**Table 2. EUT Summary Table**

## B. References

|                                   |                                                                                                                                              |
|-----------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|
| <b>CFR 47, Part 22, Subpart H</b> | Federal Communication Commission, Code of Federal Regulations, Title 47, Part 22: Rules and Regulations for Cellular Devices.                |
| <b>CFR 47, Part 24, Subpart E</b> | Federal Communication Commission, Code of Federal Regulations, Title 47, Part 24: Rules and Regulations for Personal Communications Services |
| <b>KDB 996369 D04</b>             | Modular Transmitter Integration Guide – Guidance For Host Product Manufacturers                                                              |
| <b>ANSI C63.4:20014</b>           | Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical And Electronic Equipment in the Range of 9 kHz to 40 GHz       |
| <b>ANSI C63.26: 2015</b>          | Compliance Testing of Transmitters Used in Licensed Radio Services                                                                           |
| <b>ISO/IEC 17025:2017</b>         | General Requirements for the Competence of Testing and Calibration Laboratories                                                              |
| <b>EIA/TIA-603-D-2010</b>         | Land Mobile FM or PM Communication Equipment Measurement and Performance Standards                                                           |
| <b>KDB 971168 v02r02</b>          | Measurement Guidance For Certification Of Licensed Digital Transmitters                                                                      |

**Table 3. References**

## C. Test Site

All testing was performed at Eurofins E&E North America, 3162 Belick St. Santa Clara, CA 95054. All equipment used in making physical determinations is accurate and bears recent traceability to the National Institute of Standards and Technology.

Radiated Emissions measurements were performed in a 10 meter semi-anechoic chamber (equivalent to an Open Area Test Site). In accordance with §2.948(a)(3), a complete site description is contained at MET Laboratories.

MET Laboratories is a ISO/IEC 17025 accredited site by A2LA, California #0591.02.

## D. Measurement Uncertainty

| Test Method                                  | Typical Expanded Uncertainty | K | Confidence Level |
|----------------------------------------------|------------------------------|---|------------------|
| <b>RF Frequencies</b>                        | ±4.52 Hz                     | 2 | 95%              |
| <b>RF Power Conducted Emissions</b>          | ±2.32 dB                     | 2 | 95%              |
| <b>RF Power Conducted Spurious Emissions</b> | ±2.25 dB                     | 2 | 95%              |
| <b>RF Power Radiated Emissions</b>           | ±3.01 dB                     | 2 | 95%              |
| <b>Radiated Emissions, (30 MHz – 1 GHz)</b>  | ±3.24                        | 2 | 95%              |
| <b>Radiated Emissions, (1 - 6 GHz)</b>       | ±3.92                        | 2 | 95%              |
| <b>Conducted Emission</b>                    | ±3.53                        | 2 | 95%              |
| <b>CEV Telecom Port</b>                      | ±2.44                        | 2 | 95%              |

**Table 4. Uncertainty Calculations Summary**

## E. Description of Test Sample

The CalAmp TTU2830MB is a vehicle tracking device using LTE connectivity and GPS for fleet management.



Figure 1: Block Diagram of Test Configuration

## F. Equipment Configuration

| Ref. ID | Slot # | Name / Description | Model Number | Part Number | Serial Number | Revision |
|---------|--------|--------------------|--------------|-------------|---------------|----------|
| 1       |        | Asset Tracker      | TTU2830MB    | TTU2830MB   | 4672001045    | 1        |

Table 5: Equipment Configuration

## G. Support Equipment

Support equipment necessary for the operation and testing of the EUT is included in the following list.

| Ref. ID | Name / Description | Manufacturer | Model Number | *Customer Supplied Calibration Data |
|---------|--------------------|--------------|--------------|-------------------------------------|
| 3       | Serial Adaptor     | CalAmp       | 134364-SER   | NA                                  |
| 4       | Laptop             | Dell         | Latitude     | NA                                  |

Table 6: Support Equipment

## H. Ports and Cabling Information

| Ref. ID | Port name on EUT | Cable Description or reason for no cable | Qty | Length as tested (m) | Max Length (m) | Shielded? (Y/N) | Termination Box ID & Port Name |
|---------|------------------|------------------------------------------|-----|----------------------|----------------|-----------------|--------------------------------|
| 2       | Power/Data Port  | 12 wire BUS                              | 1   | 1m                   | 1m             | n               | na                             |

Table 7: Ports and Cabling Information

**I. Mode of Operation During Testing**

The TTU2830MB was paired with CMW500 and the callbox on screen indication was used to monitor proper connection.

**J. Method of Monitoring EUT Operation**

The signal will be displayed on a spectrum analyzer.

**K. Modifications****a) Modifications to EUT**

No modifications were made to the EUT.

**b) Modifications to Test Standard**

No modifications were made to the test standard.

**L. Disposition of EUT**

The test sample including all support equipment submitted to the Electro-Magnetic Compatibility Lab for testing was returned to CalAmp upon completion of testing.

### **III. Electromagnetic Compatibility Criteria for Intentional Radiators**

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 2.1046 Radiated Output Power


- Test Requirements:**
- § 22.913(a)(2): Extend coverage on a secondary basis into cellular unserved areas, as those areas are defined in §22.949, the ERP of base transmitters and cellular repeaters of such systems must not exceed 1000 Watts. The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.
- § 24.232 (c): Mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

**Test Procedures:** The EUT was tested according to the average power integration procedures of ANSI C63.26 (2015) 5.5.3.


Radiated measurements shall be performed using the test arrangement shown in Figure . After a direct field strength measurement of the maximum emission amplitude level (maximized as described previously), a signal generator and transmit antenna are substituted in place of the EUT, as shown in Figure 7. The output power of the signal generator is adjusted to replicate the maximized signal amplitude measured in the direct field strength measurement. The signal generator power setting is then used to determine the ERP or EIRP of the EUT spurious emission(s). These measurements shall be performed in accordance with the common requirements specified in 5.5.2 and the specific requirements provided in this subclause.

A step-by-step procedure is as follows.

- a) Place the EUT in the center of the turntable. The EUT shall be configured to transmit into the standard non-radiating load (for measuring radiated spurious emissions), connected with cables of minimal length unless specified otherwise. If the EUT uses an adjustable antenna, the antenna shall be positioned to the length that produces the worst case emission at the fundamental operating frequency.
- b) Each emission under consideration shall be evaluated:
  - 1) Raise and lower the measurement antenna in accordance 5.5.2, as necessary to enable detection of the maximum emission amplitude relative to measurement antenna height.
  - 2) Rotate the EUT through 360° to determine the maximum emission level relative to the axial position.
  - 3) Return the turntable to the azimuth where the highest emission amplitude level was observed.
  - 4) Vary the measurement antenna height again through 1 m to 4 m again to find the height associated with the maximum emission amplitude.
  - 5) Record the measured emission amplitude level and frequency using the appropriate RBW.
- c) Repeat step b) for each emission frequency with the measurement antenna oriented in both the horizontal and vertical polarizations to determine the orientation that gives the maximum emissions amplitude.
- d) Set-up the substitution measurement with the reference point of the substitution a antenna located as near as possible to where the center of the EUT radiating element was located during the initial EUT measurement.

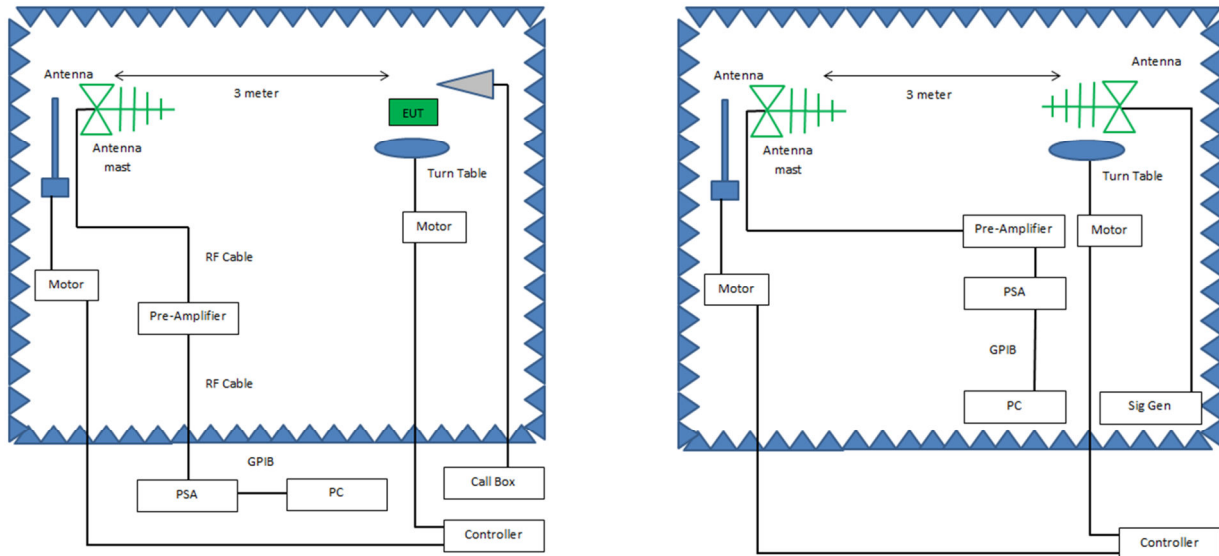

**Figure 2. ERP / EIRP, Block Diagram, Test Setup Below 1GHz**

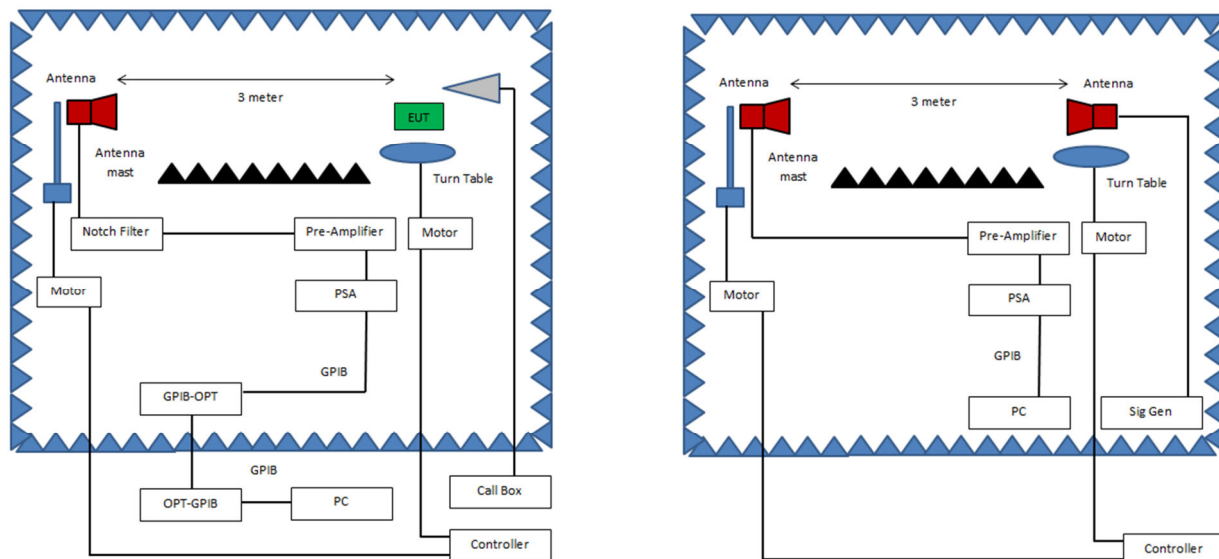

**Figure 3. ERP / EIRP, Block Diagram, Test Setup Above 1GHz**

- e) Maintain the previous measurement instrument settings and test set-up, with the exception that the EUT is removed and replaced by the substitution antenna.
- f) Connect a signal generator to the substitution antenna; locate the signal generator so as to minimize any potential influences on the measurement results. Set the signal generator to the frequency where emissions are detected, and set an output power level such that the radiated signal can be detected by the measurement instrument, with sufficient dynamic range relative to the noise floor.
- g) For each emission that was detected and measured in the initial test [i.e., in step b) and step c)]:
  - 1) Vary the measurement antenna height between 1 m to 4 m to maximize the received (measured) signal amplitude.
  - 2) Adjust the signal generator output power level until the amplitude detected by the measurement instrument equals the amplitude level of the emission previously measured directly in step b) and step c).
  - 3) Record the output power level of the signal generator when equivalence is achieved in step 2).
- h) Repeat step e) through step g) with the measurement antenna oriented in the opposite polarization.
- i) Calculate the emission power in dBm referenced to a half-wave dipole using the following equation:

$$P_e = P_s(\text{dBm}) - \text{cable loss (dB)} + \text{antenna gain (dBd)}$$

where

$P_e$  = equivalent emission power in dBm

$P_s$  = source (signal generator) power in dBm

NOTE—dBd refers to the measured antenna gain in decibels relative to a half-wave dipole.

- j) Correct the antenna gain of the substitution antenna if necessary to reference the emission power to a half-wave dipole. When using measurement antennas with the gain specified in dBi, the equivalent dipole-referenced gain can be determined from:  
 $\text{gain (dBd)} = \text{gain (dBi)} - 2.15 \text{ dB}$ . If necessary, the antenna gain can be calculated from calibrated antenna factor information

**Test Results:** The EUT was found compliant with the requirements of this section.

**Test Engineer(s):** Felix Huang

**Test Date(s):** 09/03/2020 & 9/25/2020 & 9/30/2020

## Test Results

| GSM 850                 |                 | Conducted Power (dBm) |             |             |
|-------------------------|-----------------|-----------------------|-------------|-------------|
|                         |                 | Channel 128           | Channel 190 | Channel 251 |
|                         |                 | 824.2 (MHz)           | 836.6 (MHz) | 848.8 (MHz) |
| <b>GPRS<br/>(GMSK)</b>  | <b>1TXslot</b>  | 32.25                 | 32.28       | 32.31       |
|                         | <b>2TXslots</b> | 32.11                 | 32.05       | 32.10       |
|                         | <b>3TXslots</b> | 31.21                 | 31.26       | 31.31       |
|                         | <b>4TXslots</b> | 30.01                 | 30.11       | 30.28       |
| <b>EGPRS<br/>(8PSK)</b> | <b>1TXslot</b>  | 26.58                 | 26.65       | 26.78       |
|                         | <b>2TXslots</b> | 26.51                 | 26.48       | 26.61       |
|                         | <b>3TXslots</b> | 26.27                 | 26.28       | 26.42       |
|                         | <b>4TXslots</b> | 26.05                 | 26.06       | 26.19       |

Table 8. Module Original Conducted Powers from Module Report R2007A0435-R4

### Note:

Highest conducted power listed in green. Channels with highest conducted power were selected for spot checking.

| Mode                                  | Freq.<br>(MHz) | SG<br>(dBm) | CL<br>(dB) | AG<br>(dBi) | Ant. Pol. | ERP Level<br>(dBm) | Limit<br>(dBm) | Margin |
|---------------------------------------|----------------|-------------|------------|-------------|-----------|--------------------|----------------|--------|
| <b>GSM 850 –<br/>GPRS<br/>(GMSK)</b>  | 848.8          | 29.54       | 0.90       | 3.8         | Vertical  | 30.29              | 38.45          | 8.72   |
| <b>GSM 850 –<br/>EGPRS<br/>(8PSK)</b> | 848.8          | 24.34       | 0.90       | 3.8         | Vertical  | 25.09              | 38.45          | 13.36  |

Table 9. ERP, Test Results, Part 22, GSM 850

### Note:

$$\text{EIRP} = \text{SG} - \text{CL} + \text{AG}$$

$$\text{ERP} = \text{EIRP} - 2.15$$

| Mode   | Bandwidth | Channel/<br>Frequency<br>(MHz) | Index | RB#<br>RBstart | Conducted Power (dBm) |       |
|--------|-----------|--------------------------------|-------|----------------|-----------------------|-------|
|        |           |                                |       |                | QPSK                  | 16QAM |
| Band 5 | 10 MHz    | 20450/829                      | 3     | 1#0            | 22.64                 | 23.74 |
|        |           |                                | 0     | 4#0            | 22.65                 | 22.65 |
|        |           | 20525/836.5                    | 0     | 1#0            | 23.08                 | 22.60 |
|        |           |                                | 0     | 4#0            | 22.65                 | 23.16 |
|        |           | 20600/844                      | 4     | 1#5            | 23.19                 | 23.09 |
|        |           |                                | 7     | 4#2            | 22.81                 | 22.97 |

Table 10. Module Original Conducted Powers from Module Report R2007A0435-R4

**Note:**

Highest conducted power listed in green. Channels with highest conducted power were selected for spot checking.

**Note:**

Only 10MHz Bandwidth is supported by the host device.

| Mode                             | Freq.<br>(MHz) | SG<br>(dBm) | CL<br>(dB) | AG<br>(dBi) | Ant. Pol. | ERP Level<br>(dBm) | Limit<br>(dBm) | Margin |
|----------------------------------|----------------|-------------|------------|-------------|-----------|--------------------|----------------|--------|
| LTE Band 5<br>10 MHz BW<br>QPSK  | 844.0          | 24.87       | 0.90       | 3.7         | Vertical  | 25.52              | 38.45          | 12.93  |
| LTE Band 5<br>10 MHz BW<br>16QAM | 829.0          | 25.62       | 0.85       | 3.5         | Vertical  | 26.12              | 38.45          | 12.33  |

Table 11. ERP, Test Results, Part 22, LTE Band 5

**Note:**

EIRP = SG – CL + AG  
ERP = EIRP – 2.15

| GSM 1900                |                 | Conducted Power (dBm) |             |              |
|-------------------------|-----------------|-----------------------|-------------|--------------|
|                         |                 | Channel 512           | Channel 661 | Channel 810  |
|                         |                 | 1850.2 (MHz)          | 1880 (MHz)  | 1909.8 (MHz) |
| <b>GPRS<br/>(GMSK)</b>  | <b>1TXslot</b>  | 29.76                 | 29.66       | 29.46        |
|                         | <b>2TXslots</b> | 29.65                 | 29.57       | 29.38        |
|                         | <b>3TXslots</b> | 29.51                 | 29.45       | 29.27        |
|                         | <b>4TXslots</b> | 29.42                 | 29.32       | 29.16        |
| <b>EGPRS<br/>(8PSK)</b> | <b>1TXslot</b>  | 26.06                 | 25.88       | 25.84        |
|                         | <b>2TXslots</b> | 25.89                 | 25.81       | 25.68        |
|                         | <b>3TXslots</b> | 25.78                 | 25.64       | 25.49        |
|                         | <b>4TXslots</b> | 25.57                 | 25.45       | 25.38        |

Table 12. Module Original Conducted Powers from Module Report R2007A0435-R5

**Note:**

Highest conducted power listed in green. Channels with highest conducted power were selected for spot checking.

| Mode                                   | Freq.<br>(MHz) | SG<br>(dBm) | CL<br>(dB) | AG<br>(dBi) | Ant. Pol. | EIRP Level<br>(dBm) | Limit<br>(dBm) | Margin |
|----------------------------------------|----------------|-------------|------------|-------------|-----------|---------------------|----------------|--------|
| <b>GSM 1900 –<br/>GPRS<br/>(GMSK)</b>  | 1850.2         | 0.24        | 1.33       | 30.413      | Vertical  | 29.32               | 33             | 3.67   |
| <b>GSM 1900 -<br/>EGPRS<br/>(8PSK)</b> | 1850.2         | -4.76       | 1.33       | 30.413      | Vertical  | 24.32               | 33             | 8.67   |

Table 13. EIRP, Test Results, Part 24, GSM 1900

**Note:**

$$\text{EIRP} = \text{SG} - \text{CL} + \text{AG}$$

$$\text{ERP} = \text{EIRP} - 2.15$$

| Mode   | Bandwidth | Channel/<br>Frequency<br>(MHz) | Index | RB#<br>RBstart | Conducted Power (dBm) |       |
|--------|-----------|--------------------------------|-------|----------------|-----------------------|-------|
|        |           |                                |       |                | QPSK                  | 16QAM |
| Band 2 | 10 MHz    | 18650/1855                     | 3     | 1#0            | 23.26                 | 23.82 |
|        |           |                                | 0     | 4#0            | 23.51                 | 23.56 |
|        |           | 18900/1880                     | 0     | 1#0            | 23.40                 | 23.84 |
|        |           |                                | 0     | 4#0            | 23.60                 | 23.77 |
|        |           | 19150/1905                     | 4     | 1#5            | 23.75                 | 23.86 |
|        |           |                                | 7     | 4#2            | 23.75                 | 23.76 |

Table 14. Module Original Conducted Powers from Module Report R2007A0435-R5

**Note:**

Highest conducted power listed in green. Channels with highest conducted power were selected for spot checking.

**Note:**

Only 10MHz Bandwidth is supported by the host device.

| Mode                             | Freq.<br>(MHz) | SG<br>(dBm) | CL<br>(dB) | AG<br>(dBi) | Ant. Pol. | EIRP Level<br>(dBm) | Limit<br>(dBm) | Margin |
|----------------------------------|----------------|-------------|------------|-------------|-----------|---------------------|----------------|--------|
| LTE Band 2<br>10 MHz BW<br>QPSK  | 1905.0         | -2.46       | 1.37       | 30.651      | Vertical  | 26.82               | 33             | 6.17   |
| LTE Band 2<br>10 MHz BW<br>16QAM | 1905.0         | -0.97       | 1.37       | 30.651      | Vertical  | 28.31               | 33             | 4.68   |

Table 15. EIRP, Test Results, Part 24, LTE Band 2

| Mode    | Bandwidth | Channel/<br>Frequency<br>(MHz) | Index | RB#<br>RBstart | Conducted Power (dBm) |       |
|---------|-----------|--------------------------------|-------|----------------|-----------------------|-------|
|         |           |                                |       |                | QPSK                  | 16QAM |
| Band 25 | 10 MHz    | 26090/1855                     | 3     | 1#0            | 23.79                 | 23.38 |
|         |           |                                | 0     | 4#0            | 24.00                 | 24.37 |
|         |           | 26365/1882.5                   | 0     | 1#0            | 23.50                 | 24.41 |
|         |           |                                | 0     | 4#0            | 23.66                 | 23.47 |
|         |           | 26640/1910                     | 4     | 1#5            | 23.65                 | 24.53 |
|         |           |                                | 7     | 4#2            | 23.85                 | 23.55 |

Table 16. Module Original Conducted Powers from Module Report R2007A0435-R5

**Note:**

Highest conducted power listed in green. Channels with highest conducted power were selected for spot checking.

**Note:**

Only 10MHz Bandwidth is supported by the host device.

| Mode                              | Freq.<br>(MHz) | SG<br>(dBm) | CL<br>(dB) | AG<br>(dBi) | Ant. Pol. | EIRP Level<br>(dBm) | Limit<br>(dBm) | Margin |
|-----------------------------------|----------------|-------------|------------|-------------|-----------|---------------------|----------------|--------|
| LTE Band 25<br>10 MHz BW<br>QPSK  | 1855.0         | -8.24       | 1.33       | 30.413      | Vertical  | 20.84               | 33             | 12.15  |
| LTE Band 25<br>10 MHz BW<br>16QAM | 1910.0         | -7.89       | 1.35       | 30.651      | Vertical  | 21.19               | 33             | 11.80  |

Table 17. EIRP, Test Results, Part 24, LTE Band 25

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 2.1053 Radiated Spurious Emissions

**Test Requirement(s):** § 2.1053 Measurements required: Field strength of spurious radiation.

§ 2.1053 (a) Measurements shall be made to detect spurious emissions that may be radiated directly from the cabinet, control circuits, power leads, or intermediate circuit elements under normal conditions of installation and operation. Curves or equivalent data shall be supplied showing the magnitude of each harmonic and other spurious emission. For this test, single sideband, independent sideband, and controlled carrier transmitters shall be modulated under the conditions specified in paragraph (c) of § 2.1049, as appropriate. For equipment operating on frequencies below 890 MHz, an open field test is normally required with the measuring instrument antenna located in the far-field at all test frequencies. In the event it is either impractical or impossible to make open field measurements (e.g. a broadcast transmitter installed in a building) measurements will be accepted of the equipment as installed. Such measurements must be accompanied by a description of the site where the measurements were made showing the location of any possible source of reflections which might distort the field strength measurements. Information submitted shall include the relative radiated power of each spurious emission with reference to the rated power output of the transmitter, assuming all emissions are radiated from half-wave dipole antennas.

§ 2.1053 (b): The measurements specified in paragraph (a) of this section shall be made for the following equipment:

- (1) Those in which the spurious emissions are required to be 60 dB or more below the mean power of the transmitter.
- (2) All equipment operating on frequencies higher than 25 MHz.
- (3) All equipment where the antenna is an integral part of, and attached directly to the transmitter.
- (4) Other types of equipment as required, when deemed necessary by the Commission.

§ 22.917 **Emission limitations Cellular equipment:** The rules in this section govern the spectral characteristics of emissions in the Cellular Radiotelephone Service.

§ 22.917 (a): Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$ . Limit is -13 dBm.


§ 24.238 (a): Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. Limit is -13 dBm.

**Test Procedures:** The EUT was tested according to the average power integration procedures of ANSI C63.26 (2015) 5.5.3.


Radiated measurements shall be performed using the test arrangement shown in Figure. After a direct field strength measurement of the maximum emission amplitude level (maximized as described previously), a signal generator and transmit antenna are substituted in place of the EUT, as shown in Figure 7. The output power of the signal generator is adjusted to replicate the maximized signal amplitude measured in the direct field strength measurement. The signal generator power setting is then used to determine the ERP or EIRP of the EUT spurious emission(s). These measurements shall be performed in accordance with the common requirements specified in 5.5.2 and the specific requirements provided in this subclause.

A step-by-step procedure is as follows.

- k) Place the EUT in the center of the turntable. The EUT shall be configured to transmit into the standard non-radiating load (for measuring radiated spurious emissions), connected with cables of minimal length unless specified otherwise. If the EUT uses an adjustable antenna, the antenna shall be positioned to the length that produces the worst case emission at the fundamental operating frequency.
- l) Each emission under consideration shall be evaluated:
  - 6) Raise and lower the measurement antenna in accordance 5.5.2, as necessary to enable detection of the maximum emission amplitude relative to measurement antenna height.
  - 7) Rotate the EUT through 360° to determine the maximum emission level relative to the axial position.
  - 8) Return the turntable to the azimuth where the highest emission amplitude level was observed.
  - 9) Vary the measurement antenna height again through 1 m to 4 m again to find the height associated with the maximum emission amplitude.
  - 10) Record the measured emission amplitude level and frequency using the appropriate RBW.
- m) Repeat step b) for each emission frequency with the measurement antenna oriented in both the horizontal and vertical polarizations to determine the orientation that gives the maximum emissions amplitude.
- n) Set-up the substitution measurement with the reference point of the substitution a antenna located as near as possible to where the center of the EUT radiating element was located during the initial EUT measurement.

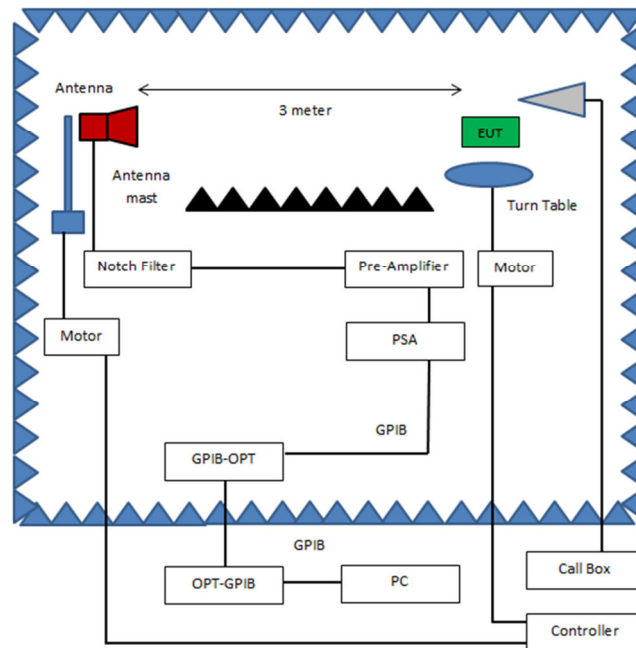

**Figure 4. Radiated Spurious Emissions, Block Diagram, Test Setup**

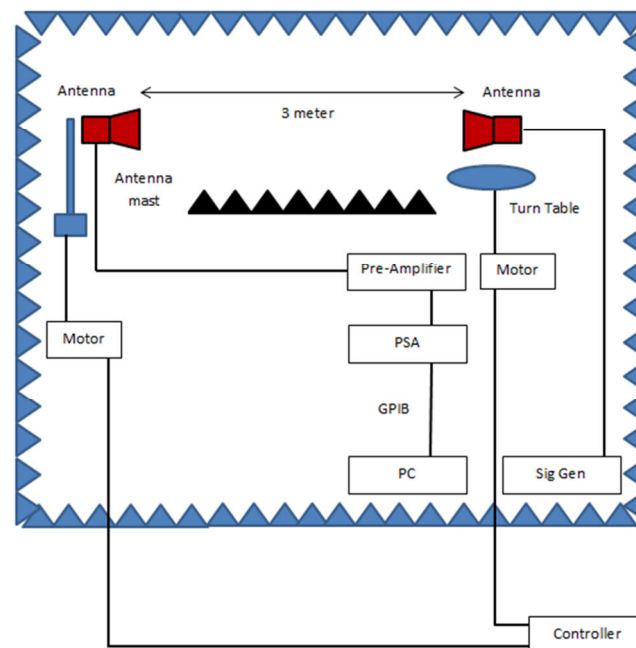

**Figure 5. Radiated Spurious Emissions, Block Diagram, Test Setup**

- o) Maintain the previous measurement instrument settings and test set-up, with the exception that the EUT is removed and replaced by the substitution antenna.
- p) Connect a signal generator to the substitution antenna; locate the signal generator so as to minimize any potential influences on the measurement results. Set the signal generator to the frequency where emissions are detected, and set an output power level such that the radiated signal can be detected by the measurement instrument, with sufficient dynamic range relative to the noise floor.
- q) For each emission that was detected and measured in the initial test [i.e., in step b) and step c)]:
  - 4) Vary the measurement antenna height between 1 m to 4 m to maximize the received (measured) signal amplitude.
  - 5) Adjust the signal generator output power level until the amplitude detected by the measurement instrument equals the amplitude level of the emission previously measured directly in step b) and step c).
  - 6) Record the output power level of the signal generator when equivalence is achieved in step 2).
- r) Repeat step e) through step g) with the measurement antenna oriented in the opposite polarization.
- s) Calculate the emission power in dBm referenced to a half-wave dipole using the following equation:

$$P_e = P_s(\text{dBm}) - \text{cable loss (dB)} + \text{antenna gain (dBd)}$$

where

$P_e$  = equivalent emission power in dBm

$P_s$  = source (signal generator) power in dBm

NOTE—dBd refers to the measured antenna gain in decibels relative to a half-wave dipole.

- t) Correct the antenna gain of the substitution antenna if necessary to reference the emission power to a half-wave dipole. When using measurement antennas with the gain specified in dBi, the equivalent dipole-referenced gain can be determined from:  $\text{gain (dBd)} = \text{gain (dBi)} - 2.15 \text{ dB}$ . If necessary, the antenna gain can be calculated from calibrated antenna factor information

**Test Results:** The EUT was found compliant with the requirements of this section.

Measurements were made in each configuration. Data is presented for the worse case configuration.

**Test Engineer:** Felix Huang

**Test Date(s):** 09/03/2020 & 9/25/2020 & 9/29/2020

## Radiated Spurious Emissions Test Results,

| GSM 850 – GPRS (GMSK) |             |          |                 |            |           |                 |             |        |
|-----------------------|-------------|----------|-----------------|------------|-----------|-----------------|-------------|--------|
| Harmonic              | Freq. (MHz) | SG (dBm) | Cable Loss (dB) | Gain (dBi) | Ant. Pol. | ERP Level (dBm) | Limit (dBm) | Margin |
| 2                     | 1697.6      | -65      | 1.25            | 29.78      | Vertical  | -38.62          | -13         | 25.62  |
| 3                     | 2546.4      | -64      | 1.56            | 33.03      | Vertical  | -34.68          | -13         | 21.68  |
| 4                     | 3395.2      | -81      | 1.82            | 33.14      | Vertical  | -51.83          | -13         | 38.83  |
| 5                     | 4244.0      | -67      | 2.03            | 33.91      | Vertical  | -37.27          | -13         | 24.27  |
| 6                     | 5092.8      | -80      | 2.34            | 34.56      | Vertical  | -49.93          | -13         | 36.93  |
| 7                     | 5941.6      | -79      | 2.82            | 35.63      | Vertical  | -48.34          | -13         | 35.34  |
| 8                     | 6790.4      | -81      | 2.91            | 35.98      | Vertical  | -50.08          | -13         | 37.08  |
| 9                     | 7639.2      | -78      | 3.2             | 36         | Vertical  | -47.35          | -13         | 34.35  |
| 10                    | 8488.0      | -76      | 3.57            | 36.11      | Vertical  | -45.61          | -13         | 32.61  |

Table 18. Radiated Spurious Emissions, Test Results, Part 22, GSM 850

| GSM 850 – EGPRS (8PSK) |             |          |                 |            |           |                 |             |        |
|------------------------|-------------|----------|-----------------|------------|-----------|-----------------|-------------|--------|
| Harmonic               | Freq. (MHz) | SG (dBm) | Cable Loss (dB) | Gain (dBi) | Ant. Pol. | ERP Level (dBm) | Limit (dBm) | Margin |
| 2                      | 1697.6      | -63      | 1.25            | 29.78      | Vertical  | -36.62          | -13         | 23.62  |
| 3                      | 2546.4      | -62      | 1.56            | 33.03      | Vertical  | -32.68          | -13         | 19.68  |
| 4                      | 3395.2      | -75      | 1.82            | 33.14      | Vertical  | -45.83          | -13         | 32.83  |
| 5                      | 4244.0      | -62      | 2.03            | 33.91      | Vertical  | -32.27          | -13         | 19.27  |
| 6                      | 5092.8      | -76      | 2.34            | 34.56      | Vertical  | -45.93          | -13         | 32.93  |
| 7                      | 5941.6      | -72      | 2.82            | 35.63      | Vertical  | -41.34          | -13         | 28.34  |
| 8                      | 6790.4      | -64      | 2.91            | 35.98      | Vertical  | -33.08          | -13         | 20.08  |
| 9                      | 7639.2      | -75      | 3.2             | 36         | Vertical  | -44.35          | -13         | 31.35  |
| 10                     | 8488.0      | -72      | 3.57            | 36.11      | Vertical  | -41.61          | -13         | 28.61  |

Table 19. Radiated Spurious Emissions, Test Results, Part 22, GSM 850

Note :

$$\text{EIRP} = \text{SG} - \text{CL} + \text{AG}$$

$$\text{ERP} = \text{EIRP} - 2.15$$

| LTE Band 5 - QPSK |             |          |                 |            |           |                 |             |        |
|-------------------|-------------|----------|-----------------|------------|-----------|-----------------|-------------|--------|
| Harmonic          | Freq. (MHz) | SG (dBm) | Cable Loss (dB) | Gain (dBi) | Ant. Pol. | ERP Level (dBm) | Limit (dBm) | Margin |
| 2                 | 1688.0      | -79      | 1.24            | 28.91      | Vertical  | -53.48          | -13         | 40.48  |
| 3                 | 2532.0      | -78      | 1.54            | 32.40      | Vertical  | -49.29          | -13         | 36.29  |
| 4                 | 3346.0      | -77      | 1.80            | 32.70      | Vertical  | -48.25          | -13         | 35.25  |
| 5                 | 4220.0      | -76      | 2.03            | 32.24      | Vertical  | -47.94          | -13         | 34.94  |
| 6                 | 5064.0      | -75      | 2.39            | 34.02      | Vertical  | -45.52          | -13         | 32.52  |
| 7                 | 5908.0      | -74      | 2.67            | 34.94      | Vertical  | -43.88          | -13         | 30.88  |
| 8                 | 6752.0      | -79      | 2.88            | 35.45      | Vertical  | -48.58          | -13         | 35.58  |
| 9                 | 7596.0      | -78      | 3.22            | 35.66      | Vertical  | -47.71          | -13         | 34.71  |
| 10                | 8440.0      | -79      | 3.58            | 36.61      | Vertical  | -48.12          | -13         | 35.12  |

Table 20. Radiated Spurious Emissions, Test Results, Part 22, LTE Band 5

| LTE Band 5 – 16QAM |             |          |                 |            |           |                 |             |        |
|--------------------|-------------|----------|-----------------|------------|-----------|-----------------|-------------|--------|
| Harmonic           | Freq. (MHz) | SG (dBm) | Cable Loss (dB) | Gain (dBi) | Ant. Pol. | ERP Level (dBm) | Limit (dBm) | Margin |
| 2                  | 1658.0      | -77      | 1.26            | 28.43      | Vertical  | -51.98          | -13         | 38.98  |
| 3                  | 2487.0      | -76      | 1.56            | 32.05      | Vertical  | -47.66          | -13         | 34.66  |
| 4                  | 3316.0      | -75      | 1.79            | 32.76      | Vertical  | -46.18          | -13         | 33.18  |
| 5                  | 4182.5      | -74      | 1.99            | 33.27      | Vertical  | -44.87          | -13         | 31.87  |
| 6                  | 4974.0      | -73      | 2.34            | 33.84      | Vertical  | -43.65          | -13         | 30.65  |
| 7                  | 5803.0      | -72      | 2.59            | 34.80      | Vertical  | -41.94          | -13         | 28.94  |
| 8                  | 6632.0      | -74      | 2.92            | 35.41      | Vertical  | -43.66          | -13         | 30.66  |
| 9                  | 7461.0      | -72      | 3.17            | 35.69      | Vertical  | -41.63          | -13         | 28.63  |
| 10                 | 8290.0      | -70      | 3.61            | 35.81      | Vertical  | -39.95          | -13         | 26.95  |

Table 21. Radiated Spurious Emissions, Test Results, Part 22, LTE Band 5

Note :

$$\text{EIRP} = \text{SG} - \text{CL} + \text{AG}$$

$$\text{ERP} = \text{EIRP} - 2.15$$

| GSM 1900 – GPRS (GMSK) |             |          |                 |            |           |                  |             |        |
|------------------------|-------------|----------|-----------------|------------|-----------|------------------|-------------|--------|
| Harmonic               | Freq. (MHz) | SG (dBm) | Cable Loss (dB) | Gain (dBi) | Ant. Pol. | EIRP Level (dBm) | Limit (dBm) | Margin |
| 2                      | 3700.4      | -65      | 1.89            | 33.61      | Vertical  | -33.28           | -13         | 20.28  |
| 3                      | 5550.6      | -65      | 2.5             | 35.04      | Vertical  | -32.46           | -13         | 19.46  |
| 4                      | 7400.8      | -64      | 3.29            | 35.89      | Vertical  | -31.4            | -13         | 18.4   |
| 5                      | 9251.0      | -63      | 3.74            | 36.82      | Vertical  | -29.92           | -13         | 16.92  |
| 6                      | 11101.2     | -61      | 3.9             | 38.54      | Vertical  | -26.36           | -13         | 13.36  |
| 7                      | 12951.4     | -62      | 4.75            | 39.37      | Vertical  | -27.38           | -13         | 14.38  |
| 8                      | 14801.6     | -62      | 4.52            | 40.08      | Vertical  | -26.44           | -13         | 13.44  |
| 9                      | 16651.8     | -63      | 5               | 42.3       | Vertical  | -25.7            | -13         | 12.7   |
| 10                     | 18502.0     | x        | x               | x          | x         | x                | x           | x      |

Table 22. Radiated Spurious Emissions, Test Results, Part 24, GSM 1900

| GSM 1900 – EGPRS (8PSK) |             |          |                 |            |           |                  |             |        |
|-------------------------|-------------|----------|-----------------|------------|-----------|------------------|-------------|--------|
| Harmonic                | Freq. (MHz) | SG (dBm) | Cable Loss (dB) | Gain (dBi) | Ant. Pol. | EIRP Level (dBm) | Limit (dBm) | Margin |
| 2                       | 3700.4      | -63      | 1.89            | 33.61      | Vertical  | -31.28           | -13         | 18.28  |
| 3                       | 5550.6      | -62      | 2.5             | 35.04      | Vertical  | -29.46           | -13         | 16.46  |
| 4                       | 7400.8      | -62      | 3.29            | 35.89      | Vertical  | -29.4            | -13         | 16.4   |
| 5                       | 9251.0      | -61      | 3.74            | 36.82      | Vertical  | -27.92           | -13         | 14.92  |
| 6                       | 11101.2     | -60      | 3.9             | 38.54      | Vertical  | -25.36           | -13         | 12.36  |
| 7                       | 12951.4     | -60      | 4.75            | 39.37      | Vertical  | -25.38           | -13         | 12.38  |
| 8                       | 14801.6     | -59      | 4.52            | 40.08      | Vertical  | -23.44           | -13         | 10.44  |
| 9                       | 16651.8     | -58      | 5               | 42.3       | Vertical  | -20.7            | -13         | 7.7    |
| 10                      | 18502.0     | x        | x               | x          | x         | x                | x           | x      |

Table 23. Radiated Spurious Emissions, Test Results, Part 24, GSM 1900

Note :

$$\text{EIRP} = \text{SG} - \text{CL} + \text{AG}$$

$$\text{ERP} = \text{EIRP} - 2.15$$

| LTE Band 2 - QPSK |             |          |                 |            |           |                  |             |        |
|-------------------|-------------|----------|-----------------|------------|-----------|------------------|-------------|--------|
| Harmonic          | Freq. (MHz) | SG (dBm) | Cable Loss (dB) | Gain (dBi) | Ant. Pol. | EIRP Level (dBm) | Limit (dBm) | Margin |
| 2                 | 3810.0      | -86      | 1.89            | 33.56      | Vertical  | -54.33           | -13         | 41.33  |
| 3                 | 5715.0      | -83      | 2.7             | 35.18      | Vertical  | -50.52           | -13         | 37.52  |
| 4                 | 7620.0      | -82      | 3.26            | 35.98      | Vertical  | -49.28           | -13         | 36.28  |
| 5                 | 9525.0      | -81      | 3.73            | 37.06      | Vertical  | -47.67           | -13         | 34.67  |
| 6                 | 11430.0     | -80      | 4.1             | 38.83      | Vertical  | -45.27           | -13         | 32.27  |
| 7                 | 13335.0     | -79      | 4.85            | 39.28      | Vertical  | -44.57           | -13         | 31.57  |
| 8                 | 15240.0     | -78      | 4.42            | 40.26      | Vertical  | -42.16           | -13         | 29.16  |
| 9                 | 17145.0     | -76      | 4.87            | 41.86      | Vertical  | -39.01           | -13         | 26.01  |
| 10                | 19050.0     | x        | x               | x          | x         | x                | x           | x      |

**Table 24. Radiated Spurious Emissions, Test Results, Part 24, LTE Band 2**

| LTE Band 2 – 16QAM |             |          |                 |            |           |                  |             |        |
|--------------------|-------------|----------|-----------------|------------|-----------|------------------|-------------|--------|
| Harmonic           | Freq. (MHz) | SG (dBm) | Cable Loss (dB) | Gain (dBi) | Ant. Pol. | EIRP Level (dBm) | Limit (dBm) | Margin |
| 2                  | 3810.0      | -82      | 1.89            | 33.56      | Vertical  | -50.33           | -13         | 37.33  |
| 3                  | 5715.0      | -81      | 2.7             | 35.18      | Vertical  | -48.52           | -13         | 35.52  |
| 4                  | 7620.0      | -80      | 3.26            | 35.98      | Vertical  | -47.28           | -13         | 34.28  |
| 5                  | 9525.0      | -79      | 3.73            | 37.06      | Vertical  | -45.67           | -13         | 32.67  |
| 6                  | 11430.0     | -78      | 4.1             | 38.83      | Vertical  | -43.27           | -13         | 30.27  |
| 7                  | 13335.0     | -78      | 4.85            | 39.28      | Vertical  | -43.57           | -13         | 30.57  |
| 8                  | 15240.0     | -77      | 4.42            | 40.26      | Vertical  | -41.16           | -13         | 28.16  |
| 9                  | 17145.0     | -76      | 4.87            | 41.86      | Vertical  | -39.01           | -13         | 26.01  |
| 10                 | 19050.0     | x        | x               | x          | x         | x                | x           | x      |

**Table 25. Radiated Spurious Emissions, Test Results, Part 24, LTE Band 2**

**Note :**

**EIRP = SG – CL + AG**  
**ERP = EIRP – 2.15**

| LTE Band 25 - QPSK |             |          |                 |            |           |                  |             |        |
|--------------------|-------------|----------|-----------------|------------|-----------|------------------|-------------|--------|
| Harmonic           | Freq. (MHz) | SG (dBm) | Cable Loss (dB) | Gain (dBi) | Ant. Pol. | EIRP Level (dBm) | Limit (dBm) | Margin |
| 2                  | 3710.0      | -84      | 1.89            | 33.04      | Vertical  | -52.85           | -13         | 39.85  |
| 3                  | 5565.0      | -82      | 2.57            | 34.43      | Vertical  | -50.14           | -13         | 37.14  |
| 4                  | 7420.0      | -81      | 3.66            | 35.57      | Vertical  | -49.09           | -13         | 36.09  |
| 5                  | 9275.0      | -80      | 3.82            | 36.47      | Vertical  | -47.35           | -13         | 34.35  |
| 6                  | 11130.0     | -80      | 3.99            | 37.72      | Vertical  | -46.27           | -13         | 33.27  |
| 7                  | 12985.0     | -79      | 4.62            | 39.04      | Vertical  | -44.58           | -13         | 31.58  |
| 8                  | 14840.0     | -77      | 4.55            | 39.73      | Vertical  | -41.82           | -13         | 28.82  |
| 9                  | 16695.0     | -77      | 4.90            | 41.70      | Vertical  | -40.2            | -13         | 27.2   |
| 10                 | 18550.0     | x        | x               | x          | x         | x                | x           | x      |

Table 26. Radiated Spurious Emissions, Test Results, Part 24, LTE Band 25

| LTE Band 25 – 16QAM |             |          |                 |            |           |                  |             |        |
|---------------------|-------------|----------|-----------------|------------|-----------|------------------|-------------|--------|
| Harmonic            | Freq. (MHz) | SG (dBm) | Cable Loss (dB) | Gain (dBi) | Ant. Pol. | EIRP Level (dBm) | Limit (dBm) | Margin |
| 2                   | 3820.0      | -82      | 1.87            | 33.06      | Vertical  | -50.81           | -13         | 37.81  |
| 3                   | 5730.0      | -81      | 2.75            | 34.70      | Vertical  | -49.05           | -13         | 36.05  |
| 4                   | 7640.0      | -80      | 3.20            | 35.66      | Vertical  | -47.54           | -13         | 34.54  |
| 5                   | 9550.0      | -79      | 3.78            | 36.65      | Vertical  | -46.13           | -13         | 33.13  |
| 6                   | 11460.0     | -78      | 3.85            | 37.87      | Vertical  | -43.98           | -13         | 30.98  |
| 7                   | 13370.0     | -77      | 4.92            | 39.07      | Vertical  | -42.85           | -13         | 29.85  |
| 8                   | 15280.0     | -77      | 4.40            | 40.25      | Vertical  | -41.15           | -13         | 28.15  |
| 9                   | 17190.0     | -75      | 5.08            | 41.67      | Vertical  | -38.78           | -13         | 25.78  |
| 10                  | 19100.0     | x        | x               | x          | x         | x                | x           | x      |

Table 27. Radiated Spurious Emissions, Test Results, Part 24, LTE Band 25

Note :

$$\text{EIRP} = \text{SG} - \text{CL} + \text{AG}$$

$$\text{ERP} = \text{EIRP} - 2.15$$

## IV. Test Equipment

## Test Equipment

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ISO/IEC 17025:2017.

| Asset # | Equipment                  | Manufacturer       | Model        | Last Cal Date | Cal Due Date |
|---------|----------------------------|--------------------|--------------|---------------|--------------|
| 1S4075  | RADIO COMMUNICATION TESTER | ROHDE & SCHWARZ    | CMW500       | 09/18/2018    | 09/18/2020   |
| 1S2399  | TURNTABLE/MAST CONTROLLER  | SUNOL SCIENCES     | SC99V        | SEE NOTE 1    |              |
| 1S2600  | BILOG ANTENNA              | TESEQ              | CBL6112D     | 03/19/2019    | 03/19/2021   |
| 1S2733  | BILOG ANTENNA              | TESEQ              | CBL6112D     | 06/05/2019    | 06/05/2021   |
| 1S3826  | DRG HORN ANTENNA           | ETS-LINDGREN       | 3117         | 12/03/2018    | 12/03/2020   |
| 1S2198  | DRG HORN ANTENNA           | ETS-LINDGREN       | 3117         | 10/07/2019    | 10/07/2021   |
| 1S2000  | SPECTRUM ANALYZER          | AGILENT            | E4448A       | 11/06/2019    | 11/06/2020   |
| 1S2587  | PRE AMPLIFIER              | AML COMMUNICATIONS | AML0126L3801 | SEE NOTE 1    |              |
| 1S2653  | AMPLIFIER                  | SONOMA INSTRUMENT  | 310 N        | SEE NOTE 1    |              |
| 1S2486  | 5 METER CHAMBER            | PANASHIELD - ETS   | 5M           | SEE NOTE 2    |              |
| 1S3824  | SIGNAL GENERATOR           | ROHDE & SCHWARZ    | SMA100B      | 11/06/2019    | 05/06/2021   |

**Table 15. Test Equipment List**

Note 1: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.

Note 2: Latest NSA and VSWR data available upon request.

**End of Report**