

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

PARTIAL REPORT


OF

Applicant:	CALAMP WIRELESS NETWORKS CORPORATION 2200 Faraday Ave, Suite 220, Carlsbad, CA 92008
Product Name:	LMU5541 Broadband Router/Tracker
Brand Name:	CalAmp
Model No.:	LMU5541LW
Model Difference:	N/A
Report Number:	ER/2019/C0114
FCC ID:	APV-5541LW
IC:	5843C-5541LW
FCC Rule Part:	§15.247, Cat: DSS
IC RSS:	RSS-247 issue 2 Feb 2017
Issue Date:	Jan. 15, 2020
Date of Test:	Dec. 13, 2019 ~ Jan. 07, 2020
Date of EUT Re- ceived: We hereby certify tha	Dec. 13, 2019 t:

The above equipment was tested by SGS Taiwan Ltd. Electronics & Communication Laboratory The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10:2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits.

The test results of this report relate only to the tested sample identified in this report.

Approved By:





Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留00天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and <u>Conditions</u> of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and <u>Conditions</u> of Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Revision History					
Report Number	Revision	Description	Issue Date	Remark	
ER/2019/C0114	Rev.00	Original.	Jan. 15, 2020	Revised By: Stefanie Yu	

Note:

Test data is referenced from cross authorization(s)

Measurement results in the original test report 2323ERM.005A1 under FCC ID: RI7WE866C3 / IC: 5131A-WE866C3 are partially leveraged in this test report with Radiated Emission Test check to demonstrate compliance.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_edocument.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



Table of Contents

1	GENERAL INFORMATION	5
	 Product description	
2	SYSTEM TEST CONFIGURATION	7
	 2.1 EUT Configuration	
3	SUMMARY OF TEST RESULTS	9
4	DESCRIPTION OF TEST MODES	
	 4.1 Operated in 2400 ~ 2483.5MHz Band 4.2 The Worst Test Modes and Channel Details 	
5	MEASUREMENT UNCERTAINTY	
6	CONDUCTED EMISSION TEST	
	 6.1 Standard Applicable 6.2 Measurement Equipment Used 6.3 EUT Setup 6.4 Test SET-UP (Block Diagram of Configuration) 6.5 Measurement Procedure 6.6 Measurement Result 	
7	PEAK OUTPUT POWER MEASUREMENT	
	 7.1 Standard Applicable 7.2 Measurement Equipment Used 7.3 Test Set-up: 7.4 Measurement Procedure: 7.5 Peak & Average Power Measurement Result 7.6 EIRP Measurement Result 	
8	RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREM 8.1 Standard Applicable	



	8.4.1	Radiated Emission	21
8.5	5 Field S	Strength Calculation	
8.6		esults of Radiated Spurious Emissions form 9 kHz to 30 MHz	
8.7		irement Result:	
	8.7.1	Radiated Bandedge Result (Hopping Mode)	23
	8.7.2	Radiated Bandedge Result (Non-Hopping Mode)	
	8.7.3	Radiated Spurious Emission form 30MHz to 1000MHz:	
	8.7.4	Radiated Spurious Emission above 1 GHz:	
9 AI		REQUIREMENT	47
9.1	1 Standa	ard Applicable	47
9.2		na Connected Construction	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_edocument.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the lulest extent of the law. SGS Taiwan Ltd. INo.134 WukungRoad NewTaineindustriaPark WukuDistrict.NewTaineiCityTaiwan24803/新北市五股區新北產業園區五工路 134 號

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



GENERAL INFORMATION 1

1.1 **Product description**

Product Name:	LMU554	LMU5541 Broadband Router/Tracker					
Brand Name:	CalAmp	CalAmp					
Model No.:	LMU554	1LW					
Model Difference:	N/A						
Hardware Version:	Rev E						
Software Version:	LMU,166 V4.1a						
Power Supply:	12Vdc fr Battery	om Car Battery & 3.7Vdc from Rechargeable Li-ion					
	Battery:	Battery: Model No.: GSP633248, Supplier: N/A					

Radio Technology:	Bluetooth BR+EDR
Channel number:	79 channels
Modulation type:	GFSK + π/4DQPSK + 8DPSK
Transmit Power:	-0.99 dBm
Frequency Range:	2.402GHz – 2.480GHz
Dwell Time:	\leq 0.4s

BT Modular Report

	Test Lab: DEKRA Certification. Inc.
BT:	Applicant: Telit Communication s.p.a
DI.	Model Number: WE866C3-P
	Report Number: 2323ERM.005A1

1.2 **Antenna Designation**

Туре	pe Supplier Antenna		Freq.	Peak Antenna
	Part No.		(MHz)	Gain (dBi)
PIFA	TAOGLAS	MA284.LBIC.001	2402-2480	-2.21

Report No.: ER/2019/C0114 Page 6 of 47



1.3 Test Methodology of Applied Standards

FCC Part 15, Subpart C §15.247 KDB 558074 D01 v05 DSS Meas. Guidance RSS-247 issue 2 Feb. 2017 RSS-Gen. issue 5, Amendment 1, March 2019 ANSI C63.10:2013

1.4 Test Facility

SGS Taiwan Ltd. Electronics & Communication Laboratory (TAF code 0513) No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803

FCC Designation number: TW0001

ISED CAB identifier: TW0513

1.5 Special Accessories

There is no special accessory used while test was conducted.

1.6 Equipment Modifications

There was no modification incorporated into the EUT.

1.7 Radiated Emission Test Sites For Measurements From 9 kHz To 30 MHz

Radiated emission below 30MHz is measured in a 9m*9m*6m semi-anechoic chamber, the measurements correspond to those obtained at an open-field test site. There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/tems_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/tems_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



2 SYSTEM TEST CONFIGURATION

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

An engineering test mode (software/firmware) that applicant provided was utilized to manipulate the EUT into transmit, selection of the test channel, and modulation scheme.

2.3 Test Procedure

2.3.1 Conducted Emissions

The EUT is a placed on a table which is 0.8 m above ground plane. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz. The CISPR Quasi-Peak and Average detector mode is employed. The two LISNs provide 50uH/50 ohm of coupling impedance for the measuring instrument. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

2.3.2 Conducted Test (RF)

The active antenna port of the unlicensed wireless device is connected to the spectrum analyzer with attenuator to protect the instrumentation. If a second antenna port is available, it is tested at one operating frequency, with other port(s) appropriately terminated, to verify it has similar output characteristics as the fully tested port.

2.3.3 Radiated Emissions

The EUT is a placed on a turn table. For emissions testing at or below 1 GHz, the table height shall be 0.8 m above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.

2.4 Measurement Results Explanation Example For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuation factor between EUT conducted port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly EUT RF output level.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document to eproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. INo.134, WuKungRoad, NewTaipei/Client, Taiwan24803/新士市开股區新士產業開區开工路 134 號

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



2.5 **Configuration of Tested System**

Fig. 2-1 Radiated Emission




Table 2-1 Equipment Used in Tested System

ltem	Equipment	Mfr/Brand	Model/Type No.	Series No.	Data Cable	Power Cord
1	DC Power Supply	Agilent	E3640A	MY52410006	N/A	N/A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_edocument.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. <u>SGS Taiwan Ltd.</u> [No.134.WuKungRoad.NewTaineindustriaPark.WukunDistrict NewTaineinCity Taiwan24803/95/1+ 再去股回去+ ** 爱展回去+ **

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



SUMMARY OF TEST RESULTS 3

FCC Rules	IC Rules	Description Of Test	Result
§15.247(b)(1)	RSS-247 §5.4 b	Peak Output Power	Compliant
§15.205 §15.209 §15.247(d)	RSS-247 §5.5 RSS-Gen §8.9 RSS-Gen §8.10	Conducted & Radiated Band Edge and Spurious Emission	Compliant
§15.203	N/A	Antenna Requirement	Compliant



DESCRIPTION OF TEST MODES Δ

4.1 Operated in 2400 ~ 2483.5MHz Band

79 channels are provided for Bluetooth

ITEM	FREQUENCY	ITEM	FREQUENCY	ITEM	FREQUENCY	ITEM	FREQUENCY
1	2402 MHz	21	2422 MHz	41	2442 MHz	71	2462 MHz
2	2403 MHz	22	2423 MHz	42	2443 MHz	72	2463 MHz
3	2404 MHz	23	2424 MHz	43	2444 MHz	73	2464 MHz
4	2405 MHz	24	2425 MHz	44	2445 MHz	74	2465 MHz
5	2406 MHz	25	2426 MHz	45	2446 MHz	75	2466 MHz
6	2407 MHz	26	2427 MHz	46	2447 MHz	76	2467 MHz
7	2408 MHz	27	2428 MHz	47	2448 MHz	77	2468 MHz
8	2409 MHz	28	2429 MHz	48	2449 MHz	78	2469 MHz
9	2410 MHz	29	2430 MHz	49	2450 MHz	79	2470 MHz
10	2411 MHz	30	2431 MHz	50	2451 MHz	70	2471 MHz
11	2412 MHz	31	2432 MHz	51	2452 MHz	71	2472 MHz
12	2413 MHz	32	2433 MHz	52	2453 MHz	72	2473 MHz
13	2414 MHz	33	2434 MHz	53	2454 MHz	73	2474 MHz
14	2415 MHz	34	2435 MHz	54	2455 MHz	74	2475 MHz
15	2416 MHz	35	2436 MHz	55	2456 MHz	75	2476 MHz
16	2417 MHz	36	2437 MHz	56	2457 MHz	76	2477 MHz
17	2418 MHz	37	2438 MHz	57	2458 MHz	77	2478 MHz
18	2419 MHz	38	2439 MHz	58	2459 MHz	78	2479 MHz
19	2420 MHz	39	2440 MHz	59	2460 MHz	79	2480 MHz
20	2421 MHz	40	2441 MHz	60	2461 MHz		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_edocument.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of

Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號




4.2 The Worst Test Modes and Channel Details

- 1 The EUT has been tested under operating condition.
- 2 Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.
- Investigation has been done on all the possible configurations for searching the worst case. 3

MODE	AVAILABLE FREQUENCY (MHz)	TESTED FREQUENCY (MHz)	MODULATION	PACKET TYPE					
	RADIATED EMISSION TEST (BELOW 1 GHz)								
Bluetooth	2402 to 2480	2402, 2441, 2480	GFSK	DH5					
RADIATED EMISSION TEST (ABOVE 1 GHz)									
Bluetooth	2402 to 2480	2402, 2441, 2480	GFSK	DH5					
	Note: The field strength of radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for Bluetooth BR+EDR Transmitter for channel Low, Mid and								

High, the worst case E2 position was reported.





MEASUREMENT UNCERTAINTY 5

Test Items	Uncertainty	
AC Power Line Conducted Emission	+/- 2.586 dB	
Peak Output Power	+/- 0.84 dB	
20dB Bandwidth +/- 51.33 Hz		
100 KHz Bandwidth Of Frequency Band Edges	+/- 0.84 dB	
Frequency Separation	+/- 51.33 Hz	
Number of hopping frequency	+/- 51.33 Hz	
Time of Occupancy	+/- 51.33 Hz	
Temperature	+/- 0.65 °C	
Humidity	+/- 4.6 %	
DC / AC Power Source	DC= +/- 0.13%, AC= +/- 0.2%	

Radiated Spurious Emission Measurement Uncertainty			
	9kHz~30MHz: +-2.3dB		
Polarization: Vertical	30MHz - 180MHz: +/- 3.37dB		
	180MHz -417MHz: +/- 3.19dB		
	0.417GHz-1GHz: +/- 3.19dB		
	1GHz - 18GHz: +/- 4.04dB		
	18GHz - 40GHz: +/- 4.04dB		
	9kHz~30MHz: +-2.3dB		
	30MHz - 167MHz: +/- 4.22dB		
Polarization: Horizontal	167MHz -500MHz: +/- 3.44dB		
Folarization. Horizontal	0.5GHz-1GHz: +/- 3.39dB		
	1GHz - 18GHz: +/- 4.08dB		
	18GHz - 40GHz: +/- 4.08dB		

Note:

- 1. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
- 2. The conformity assessment statement in this report is based solely on the test results, measurement uncertainty is excluded.



6 CONDUCTED EMISSION TEST

6.1 Standard Applicable

Frequency within 150 kHz to 30MHz shall not exceed the limit table as below.

Frequency range	Limits dB(uV) Quasi-peak Average			
MHz				
0.15 to 0.50	66 to 56	56 to 46		
0.50 to 5	56	46		
5 to 30	60	50		

Note

1. The lower limit shall apply at the transition frequencies

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.


6.2 Measurement Equipment Used

N/A

6.3 EUT Setup

- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI 63.10:2013.
- 2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
- 3. The LISN was connected with 120Vac/60Hz power source.

6.4 Test SET-UP (Block Diagram of Configuration)

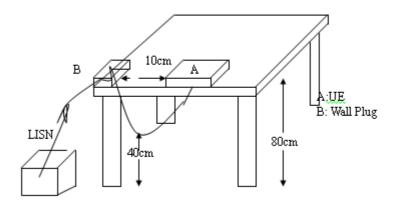

6.5 Measurement Procedure

1. The EUT was placed on a table which is 0.8m above ground plan.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Report No.: ER/2019/C0114 Page 14 of 47



- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all frequency measured were complete.

6.6 **Measurement Result**

N/A, powered from car battery.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份復製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions of Electronic Documents at <u>www.sgs.com/terms_edocument.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



PEAK OUTPUT POWER MEASUREMENT

7.1 **Standard Applicable**


For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels, The Limit: 1Watt. For all other frequency hopping systems in the 2400 -2483.5MHz band: The Limit: 0.125 Watts. The power limit for 1Mbps is 1watt, and 2Mbps, 3Mbps and AFH mode are 0.125 watts.

The e.i.r.p. shall not exceed 4 W. (ISED)

7.2 **Measurement Equipment Used**

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Power Meter	Anritsu	ML2496A	1804001	02/13/2019	02/12/2020
Power Sensor	Anritsu	MA2411B	1726104	02/13/2019	02/12/2020
Power Sensor	Anritsu	MA2411B	1726107	02/13/2019	02/12/2020
Attenuator	Mini-Circuit	BW- S10W2+	4	01/02/2019	01/01/2020
Attenuator	Mini-Circuit	BW- S10W2+	4	01/02/2020	01/01/2021

7.3 Test Set-up:



Measurement Procedure: 7.4

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows ANSI C63.10 Measurement Guidelines.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter or spectrum. (Max Hold, Detector = Peak, RBW >=20dB bandwidth)
- 4. Record the max. reading.
- Repeat above procedures until all default test channel is completed.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. SGS Taiwan Ltd.



7.5 **Peak & Average Power Measurement Result**

1M BR mode (Peak):

СН	Freq. (MHz)	Peak Output Power (dBm)	Output Power (mW)	Limit (mW)
Low	2402	-1.12	0.773	1000
Mid	2441	-0.99	0.796	1000
High	2480	-1.14	0.769	1000

2M EDR mode (Peak):

СН	Freq. (MHz)	Peak Output Power (dBm)	Output Power (mW)	Limit (mW)
Low	2402	-2.08	0.619	125
Mid	2441	-1.85	0.653	125
High	2480.00	-2.11	0.62	125

3M EDR mode (Peak):

СН	Freq. (MHz)	Peak Output Power (dBm)	Output Power (mW)	Limit (mW)
Low	2402	-1.65	0.684	125
Mid	2441	-1.43	0.719	125
High	2480	-1.62	0.689	125
NOTE	rahla loss a	s OdR that a	offecte in th	a snactru

NOTE: cable loss as 0dB that offsets in the spectrum

СН	Freq. (MHz)	Max. Output include tune up tolerance Power (dBm)	Output Power (mW)	Limit (mW)
Low	2402	-1.42	0.722	1000
Mid	2441	-1.39	0.727	1000
High	2480	-1.45	0.717	1000

2M EDR mode (Average):

СН	Freq. (MHz)	Max. Avg.Out- put include tune up tolerance Power (dBm)	Output Power (mW)	Limit (mW)
Low	2402	-4.57	0.349	125
Mid	2441	-4.14	0.386	125
0.8	2480	-4.56	0.350	125

3M EDR mode (Average):

СН	Freq. (MHz)	Max. Avg.Out- put include tune up tolerance Power (dBm)	Output Power (mW)	Limit (mW)
Low	2402	-4.58	0.349	125
Mid	2441	-4.12	0.388	125
High	2480	-4.53	0.353	125

*Note: Max. Output include tune up tolerance Power measured by using average detector.



7.6 **EIRP Measurement Result**

1M BR mode EIRP

Channel	Frequency (MHz)	Max. Output in- clude tune up tolerance Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	Limit (mW)
Low	2402	-1.42	-2.21	0.434	4000
Mid	2441	-1.39	-2.21	0.437	4000
High	2480	-1.45	-2.21	0.431	4000

2M EDR mode EIRP

Channel	Frequency (MHz)	Max. Avg.Output include tune up tolerance Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	Limit (mW)
Low	2402	-4.57	-2.21	0.210	4000
Mid	2441	-4.14	-2.21	0.232	4000
High	2480	-4.56	-2.21	0.211	4000

3M EDR mode EIRP

Channel	Frequency (MHz)	Max. Avg.Output include tune up tolerance Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	Limit (mW)
Low	2402	-4.58	-2.21	0.210	4000
Mid	2441	-4.12	-2.21	0.233	4000
High	2480	-4.53	-2.21	0.212	4000

* Note: EIRP = Average Power + Gain



8 RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT

8.1 Standard Applicable

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands must also comply with the §15.209 limit as below.

And according to §15.33(a) (1), for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

Frequency (MHz)	Field strength (microvolts/meter)	Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

- 1. The lower limit shall apply at the transition frequencies.
- 2. Emission level $(dB\mu V/m) = 20 \log Emission \, level (dB\mu V/m)$

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/tems_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/tems_edocument.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



8.2 **Measurement Equipment Used**

	· ·	966 Chamber			
EQUIPMENT TYPE	MFR	MODEL	SERIAL NUMBER	LAST CAL.	CAL DUE.
Horn Antenna	Schwarzbeck	BBHA9170	184		12/24/2020
Horn Antenna	Schwarzbeck	BBHA9120D	D803		12/19/2020
Bi-log Antenna	TESEO	CBL 6112D	35242 & AT- N0555		01/09/2020
Loop Antenna	ETS.LINDGREN	6502	148045	10/15/2019	10/14/2020
DC Power Supply	Agilent	E3640A	MY5241000 6	12/10/2019	12/09/2020
EMI Test Receiver	R&S	ESCI 7	1166.5950.0 7	07/04/2019	07/03/2020
EXA Spectrum Ana- lyzer	KEYSIGHT	N9010A	MY51440113	07/15/2019	07/14/2020
Pre-Amplifier	EMC Instru- ments	EMC184045B	980135	01/02/2019	01/01/2020
Pre-Amplifier	EMC Instru- ments	EMC184045B	980135	01/02/2020	01/01/2021
Pre-Amplifier	EMC Instru- ments	EMC051825	980152	01/02/2019	01/01/2020
Pre-Amplifier	EMC Instru- ments	EMC051825	980152	01/02/2020	01/01/2021
Pre-Amplifier	HP	8447D	2944A09469	01/02/2019	01/01/2020
Pre-Amplifier	HP	8447D	2944A09469	01/02/2020	01/01/2021
Attenuator	Mini-Circuit	BW-S10W2+	4	01/02/2019	01/01/2020
Attenuator	Mini-Circuit	BW-S10W2+	4	01/02/2020	01/01/2021
Filter 2400-2483.5 MHz	EWT	EWT-14-0166	M1	01/02/2019	01/01/2020
Filter 2400-2483.5 MHz	EWT	EWT-14-0166	M1	01/02/2020	01/01/2021
High Pass Filter	WI	WHKX4.0/18G- 10SS	22	01/02/2019	01/01/2020
High Pass Filter	WI	WHKX4.0/18G- 10SS	22	01/02/2020	01/01/2021
Coaxial Cable	Huber Suhner	succoflex 102	MY2622/2	01/02/2019	01/01/2020
Coaxial Cable	Huber Suhner	succoflex 102	MY2622/2	01/02/2020	01/01/2021
Coaxial Cable	Huber Suhner	succoflex 104A	800086/4a	01/02/2019	01/01/2020
Coaxial Cable	Huber Suhner	succoflex 104A	800086/4a	01/02/2020	01/01/2021
Coaxial Cable	Huber Suhner	EMC 104-SM- SM-2000	160123	01/02/2019	01/01/2020
Coaxial Cable	Huber Suhner	EMC 104-SM- SM-2000	160123	01/02/2020	01/01/2021

NOTE: N.C.R refers to Not Calibrated Required.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_edocument.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. <u>SCG Taiwan Ltd.</u> <u>INO 134 WuKungRoad. New TaipeindustriaPark WukuDistrict NewTaipeiCity Taiwan24803/新士市五股區新士產業園區五丁路 134 號</u>

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號




8.3 **Test SET-UP**


(A) Radiated Emission Test Set-UP Frequency Below 30MHz.

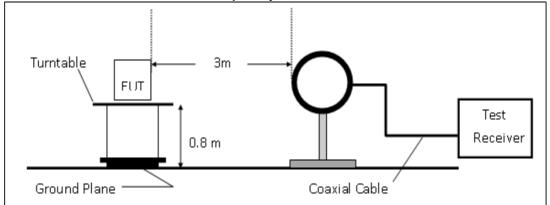

(B) Radiated Emission Test Set-Up, Frequency form 30MHz to 1000MHz

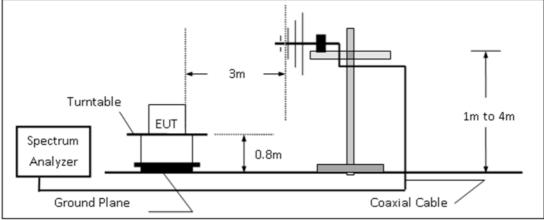

(C) Radiated Emission Test Set-UP Frequency Over 1 GHz

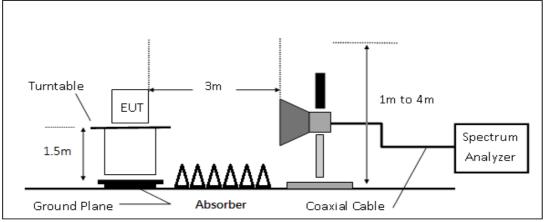



8.4 **Measurement Procedure**

8.4.1 Radiated Emission

- 1. The testing follows the Measurement Procedure of ANSI C63.10:2013.
- The EUT was placed on a turn table with 0.8m for frequency< 1GHz and 1.5m for fre-2. quency> 1GHz above ground plan.
- 3. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 4. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
- Set the spectrum analyzer as RBW=120 kHz and VBW=300 kHz for Peak Detector (PK) 5. and Quasi-peak (QP) at frequency below 1 GHz.
- Set the spectrum analyzer as RBW=1 MHz, VBW=3 MHz for Peak Detector at frequency 6. above 1 GHz.
- Set the spectrum analyzer as RBW=1 MHz, VBW=10 Hz (Duty cycle > 98%) or VBW ≥ 7. 1/T (Duty cycle < 98%) for Average Detector at frequency above 1 GHz.
- When measurement procedures for electric field radiated emissions above 1 GHz the 8. EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.
- 9. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 10. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. On spectrum, change spectrum mode in linear display mode, and reduce VBW = 10Hz if average reading is measured.
- 11. Repeat above procedures until all default test channel measured were complete.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號



8.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where FS = Field Strength RA = Reading Amplitude AF = Antenna Factor CL = Cable Attenuation Factor (Cable Loss) AG = Amplifier Gain

The limit of the emission level is expressed in dBuV/m, which converts 20*log(uV/m)

Actual $FS(dB\mu V/m) = SPA$. Reading level($dB\mu V$) + Factor(dB) Factor(dB) = Antenna Factor($dB\mu V/m$) + Cable Loss(dB) – Pre_Amplifier Gain(dB)

8.6 Test Results of Radiated Spurious Emissions form 9 kHz to 30 MHz

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit per 15.31(o) & RSS-GEN §6.13.2 was not reported.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sqs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms_e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document document documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



8.7 **Measurement Result:**

8.7.1 Radia	ted Bandedge Result (Hopping Mode)		
Report Number	:ER/2019/C0114	Test Date	:2020-01-07
Operation Mode	:BR Hopping	Temp./Humi.	:22.6/69
Test Channel	:2402 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Bandedge CH Low	Engineer	:Thomas
EUT Pol	:E2 Plane		

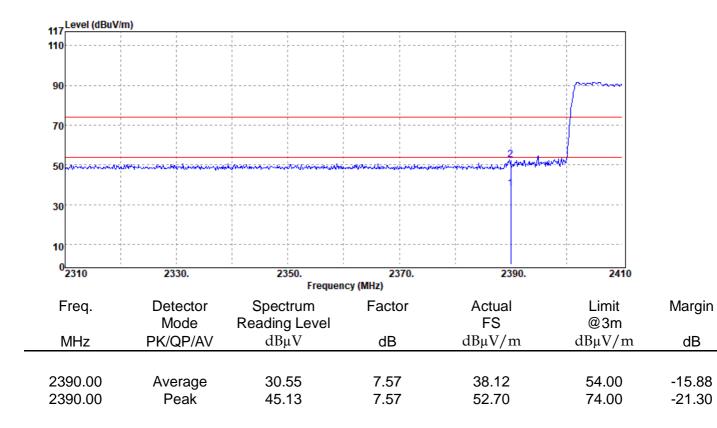



30


10

eport Number peration Mode est Channel est Mode UT Pol	:ER/2019/C0114 :BR Hopping :2402 MHz :Bandedge CH Low :E2 Plane		•	:2020-01-07 :22.6/69 :HORIZONTAL :Thomas
117 117 110				
90				
70				
50		an a the second and a second and the	2 Ministration for the second	

2310	2330.	2350.	2370.	2390.	2410	
		Frequ	ency (MHz)			
Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	-
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00	Average	29.96	7.57	37.53	54.00	-16.47
2390.00	Peak	43.79	7.57	51.36	74.00	-22.64
2390.00	reak	43.79	1.57	51.50	74.00	-22.04




Report Number	:ER/2019/C0114	Test Date	:2020-01-07
Operation Mode	:BR Hopping	Temp./Humi.	:22.6/69
Test Channel	:2480 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Bandedge CH High	Engineer	:Thomas
EUT Pol	:E2 Plane		

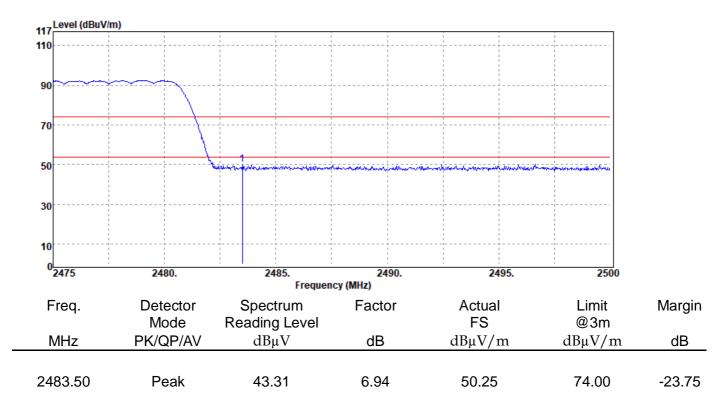



Report Number	:ER/2019/C0114	Test Date	:2020-01-07
Operation Mode	:BR Hopping	Temp./Humi.	:22.6/69
Test Channel	:2480 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Bandedge CH High	Engineer	:Thomas
EUT Pol	:E2 Plane		

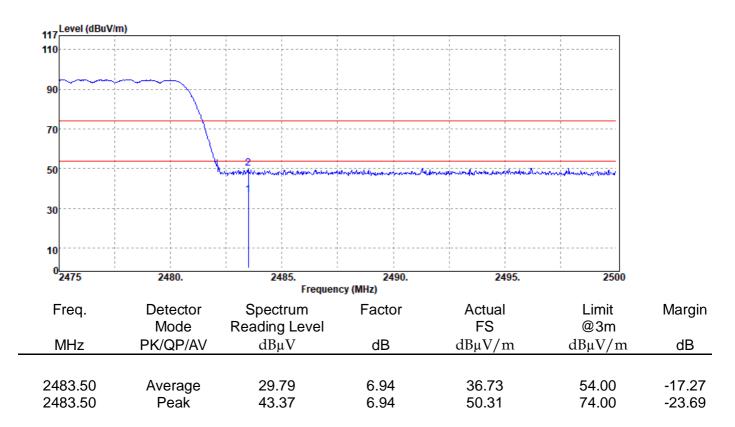

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for elec-tronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms_edocument.htm</u></u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or ap-pearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. <u>SQS Taiwan Lto.</u> <u>No. 134. WuKungRoad. New TaipeindustriaPark WukuDistrict NewTaipeiCity.Taiwan24803/新士市五股區新士產業園區五工路 134 號</u>

No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號 SGS Taiwan Ltd.



50

30

10

Report Number Operation Mode	:ER/2019/C0114 :EDR Hopping	Test Date Temp./Humi.	
Test Channel	:2402 MHz	Antenna Pol.	IVERTICAL
Test Mode	:Bandedge CH Low	Engineer :Thoma	
EUT Pol	:E2 Plane		
117			
110			
90			puntonna
70			

montheast

⁰ 2310	2330.	2350. Frequenc	2370. cy (MHz)	2390.	2410	
Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
2390.00 2390.00	Average Peak	30.00 43.28	7.57 7.57	37.57 50.85	54.00 74.00	-16.43 -23.15

Report No.: ER/2019/C0114 Page 28 of 47

:2020-01-07

Test Date



:ER/2019/C0114

Report Number


peration Mode		ng		Temp./Humi.	
st Channel	:2402 MHz			Antenna Pol.	:HORIZONTAL
st Mode	:Bandedge (CH Low		Engineer	:Thomas
JT Pol	:E2 Plane				
Lough (dDu)//m)					
117 Level (dBuV/m)					
110					
90					parameter
70					
50	Malandon Antolinthia and and	-Aquidamatic Activities		2	
30					
10					
⁰ 2310	2330.	2350.	2370. ency (MHz)	2390.	2410

Frequency (MHZ)							
Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB	
2390.00 2390.00	Average Peak	29.67 43.46	7.57 7.57	37.24 51.03	54.00 74.00	-16.76 -22.97	




Report Number	:ER/2019/C0114	Test Date	:20
Operation Mode	:EDR Hopping	Temp./Humi.	:22
Test Channel	:2480 MHz	Antenna Pol.	:VE
Test Mode	:Bandedge CH High	Engineer	:Th
EUT Pol	:E2 Plane		

Test Date	:2020-01-07
Temp./Humi.	:22.6/69
Antenna Pol.	:VERTICAL
Engineer	:Thomas

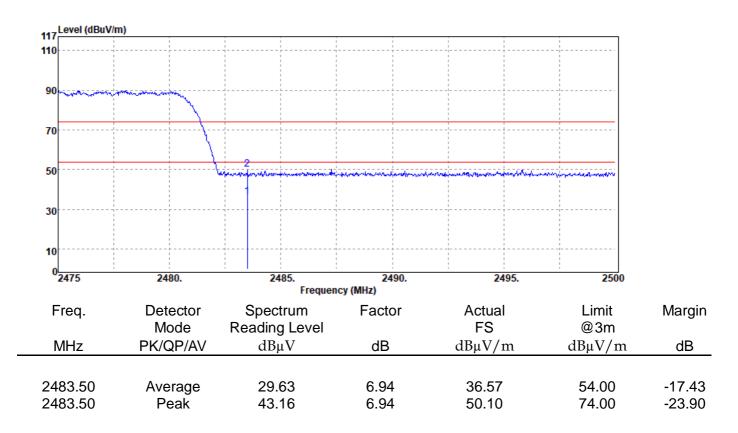




Report Number	:ER/2019/C0114	Test Date	:2020-01-07
Operation Mode	:EDR Hopping	Temp./Humi.	:22.6/69
Test Channel	:2480 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Bandedge CH High	Engineer	:Thomas
EUT Pol	:E2 Plane		

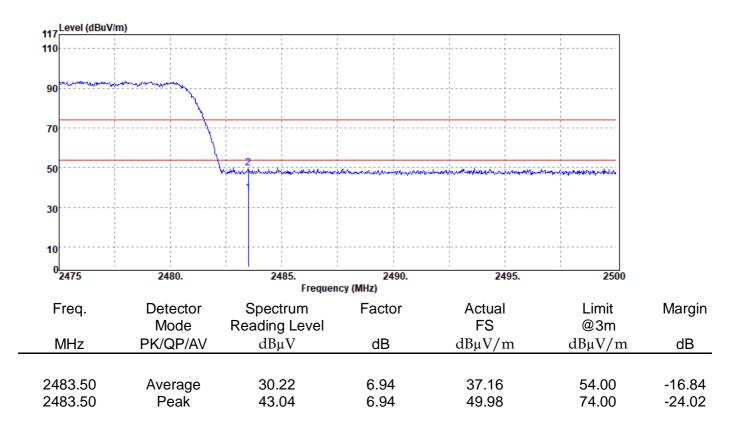



8.7.2 Radiated Bandedge Result (Non-Hopping Mode)

Report Number	:ER/2019/C0114	Test Date	:2020-01-07
Operation Mode	:BR(1M)	Temp./Humi.	:22.6/69
Test Channel	:2402 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Bandedge CH Low	Engineer	:Thomas
EUT Pol	:E2 Plane		

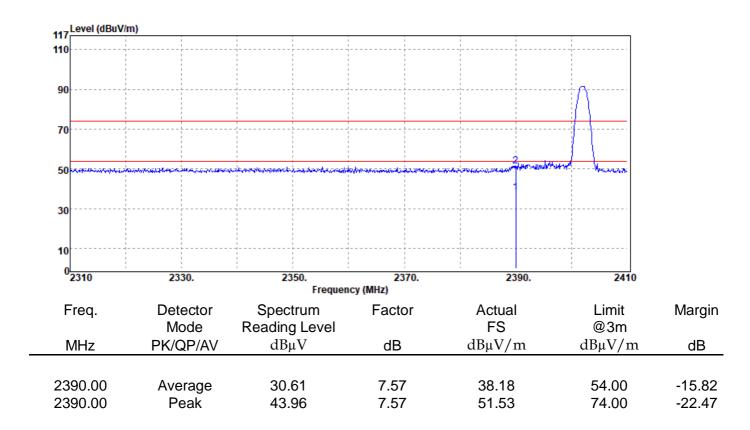

Report No.: ER/2019/C0114 Page 32 of 47

:2020-01-07

Test Date



:ER/2019/C0114


Report Number

Operation Mode Test Channel Test Mode	:BR(1M) :2402 MHz :Bandedge			Temp./Humi. Antenna Pol. Engineer		AL
EUT Pol	:E2 Plane			5		
117 Level (dBuV/m)						
110						
90					A	
70						
50	and the and the second	amaadadaaaaaaaaaaaaaaaaaaaaaaaaaaaaaaa	ana ana ang ang ang ang ang ang ang ang	2 nintutionnisettemailterräteisetterräteisetterräteisetterräteisetterräteisetterräteisetterräteisetterräteisetter	d Phonese	
30						
10						
⁰ 2310	2330.	2350. Frequer	2370. icy (MHz)	2390.	2410	
Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB

2390.00	Average	30.03	7.57	37.60	54.00	-16.40
2390.00	Peak	43.71	7.57	51.28	74.00	-22.72




Report Number	:ER/2019/C0114	Test Date	:2020-01-07
Operation Mode	:BR(1M)	Temp./Humi.	:22.6/69
Test Channel	:2480 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Bandedge CH High	Engineer	:Thomas
EUT Pol	:E2 Plane		

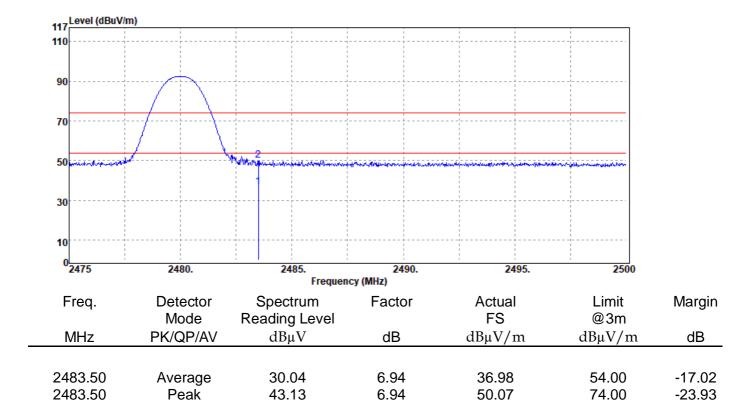




Report Number	:ER/2019/C0114	Test Date	:2020-01-07
Operation Mode	:BR(1M)	Temp./Humi.	:22.6/69
Test Channel	:2480 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Bandedge CH High	Engineer	:Thomas
EUT Pol	:E2 Plane		

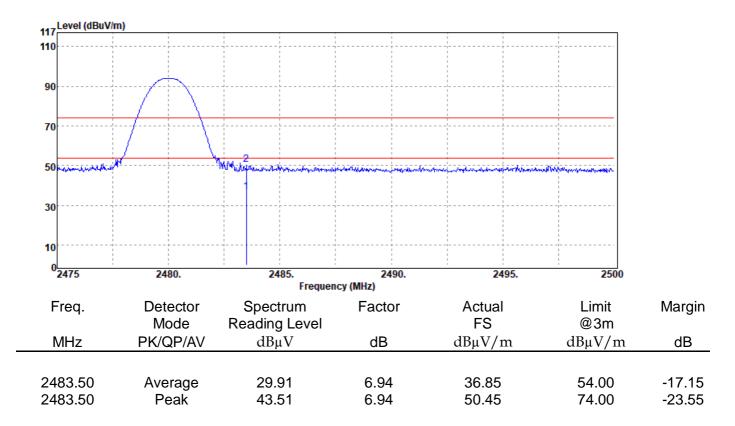



Report Number	:ER/2019/C0114	Test Date	:2020-01-07		
Operation Mode	:EDR(3M)	Temp./Humi.	:22.6/69		
Test Channel	:2402 MHz	:2402 MHz			
Test Mode	:Bandedge CH Low	Engineer	:Thomas		
EUT Pol	:E2 Plane				
117 Level (dBuV/m)					
110			i I		
				1	

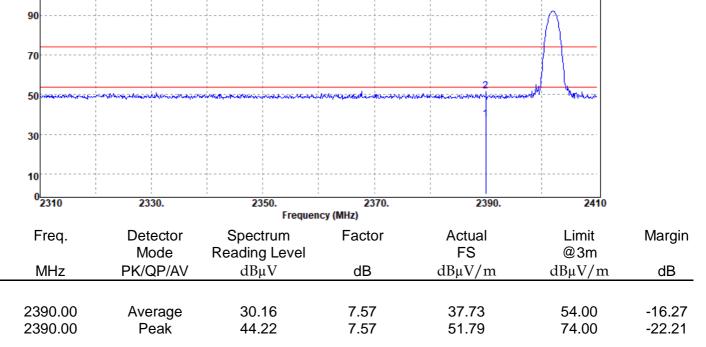

:2020-01-07

Test Date



:ER/2019/C0114

Report Number

est C	ation Mode Channel Aode Pol	:EDR(3M) :2402 MHz :Bandedge :E2 Plane					na Pol.	:22.6/69 :HORIZ(:Thomas	ONTAL
117	Level (dBuV/m)								
110									
90								Λ	
70								+	
50	ant and the first of the state of the second	www.www.alanga.hterawa	the second to the second state of the	a an an an a priver of the second	en annan marchanaichteann	uner an and a strategic of the	municity	1 Marina	
30									
10								- -	
0	2310	2330.	2350.	Frequency (MH	2370. z)	23	90.	241	0

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBμV	dB	dBµV/m	dBµV/m	dB
2390.00 2390.00	5	29.96 42.62	7.57 7.57	37.53 50.19	54.00 74.00	-16.47 -23.81




Report Number	:ER/2019/C0114	Test Date	:2020-01-07
Operation Mode	:EDR(3M)	Temp./Humi.	:22.6/69
Test Channel	:2480 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Bandedge CH High	Engineer	:Thomas
EUT Pol	:E2 Plane		

117 Level (dBuV/	m)					
110				1 1 1 1 1 1 1 1		
1						
90						
70						
50 mininter	¥	2 History and a second	where we have the second second	Manipuntaniantehenseeda	and the contraction of the state of the stat	
30						
10						
0 <mark></mark> 2475	2480.	2485. Freque	2490. ncy (MHz)	2495.	2500	
Freq.	Detector	Spectrum	Factor	Actual	Limit	Mai
MHz	Mode PK/QP/AV	Reading Level dBµV	dB	FS dBµV/m	@3m dBµV/m	d
		r				
2483.50	Average	30.19	6.94	37.13	54.00	-16
2483.50	Peak	43.36	6.94	50.30	74.00	-23




Report Number	:ER/2019/C0114	Test Date	:2020-01-07
Operation Mode	:EDR(3M)	Temp./Humi.	:22.6/69
Test Channel	:2480 MHz	Antenna Pol.	:HORIZONTAL
Test Mode	:Bandedge CH High	Engineer	:Thomas
EUT Pol	:E2 Plane		

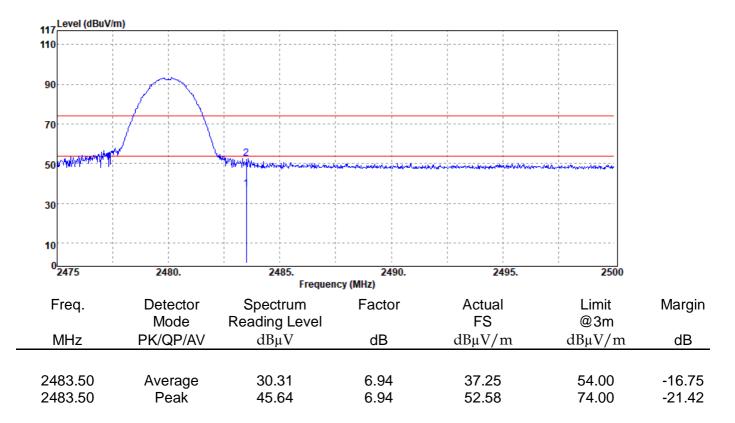



8.7.3 Radiated Spurious Emission form 30MHz to 1000MHz:

Report Number	:ER/2019/C0114	Test Date	:2020-01-07
Operation Mode	:BR(1M)	Temp./Humi.	:22.6/69
Test Channel	:2441 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Tx CH Mid	Engineer	:Thomas
EUT Pol	:E2 Plane		

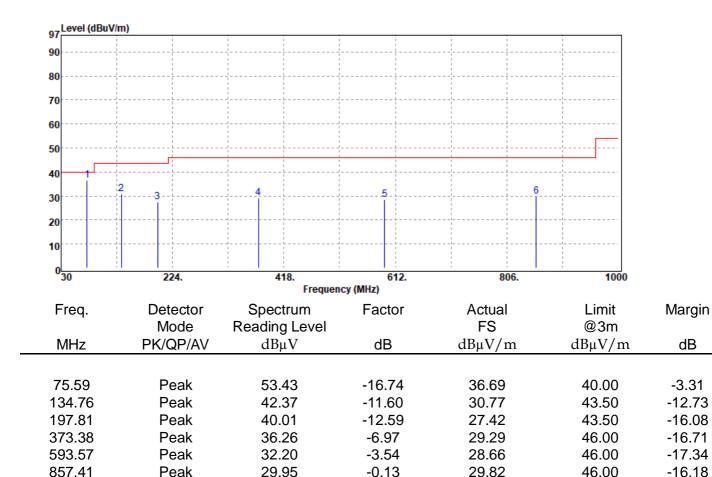

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_edocument.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



30

Report Number Operation Mode Test Channel Test Mode EUT Pol	:ER/2019/C0114 :BR(1M) :2441 MHz :Tx CH Mid :E2 Plane			Test Date Temp./Humi. Antenna Pol. Engineer	:2020-01-07 :22.6/69 :HORIZONTAL :Thomas
97 Level (dBuV/m)				 	
90			 	 	
80			 	 	
70			, , , , ,	 	
60			, , , ,		
50					
40			 		
	5	1			


10						
0 <mark></mark>	224.	418. Frequen	612.	806.	1000	
_	_	-				
Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
63.95	Peak	47.52	-17.39	30.13	40.00	-9.87
111.48	Peak	41.76	-11.57	30.19	43.50	-13.31
197.81	Peak	42.72	-12.59	30.13	43.50	-13.37
303.54	Peak	39.01	-7.95	31.06	46.00	-14.94
373.38	Peak	41.65	-6.97	34.68	46.00	-11.32
792.42	Peak	30.59	-1.08	29.51	46.00	-16.49

6



8.7.4 **Radiated Spurious Emission above 1 GHz:**

Report Number	:ER/2019/C0114	Test Date	:2020-01-07
Operation Mode	:BR(1M)	Temp./Humi.	:22.6/69
Test Channel	:2402 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Tx CH Low	Engineer	:Thomas
EUT Pol	:E2 Plane		

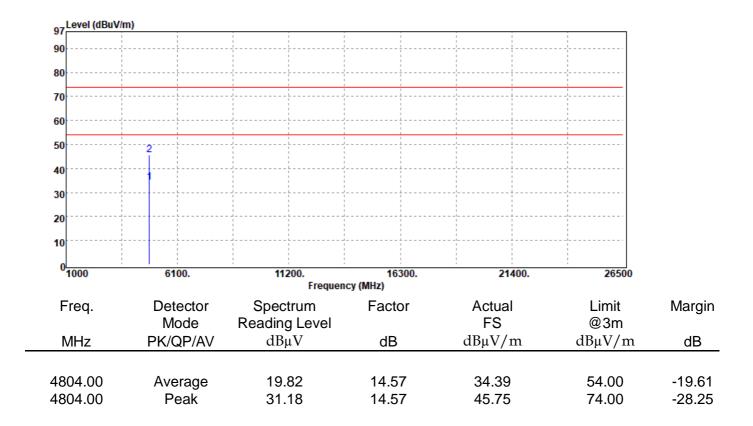

Report No.: ER/2019/C0114 Page 42 of 47

:2020-01-07

Test Date



·FR/2019/C0114

Report Number


20 10

	.LIV/2019/00114			1031 D		.2020 01	01
Operation Mode	:BR(1M)			Temp./	Humi.	:22.6/69	
Fest Channel	:2402 MHz			Antenn	a Pol.	:HORIZC)NT
Fest Mode	:Tx CH Low			Engine	er	:Thomas	
EUT Pol	:E2 Plane						
97 Level (dBuV/m)			 				
90		· · · · · · · · · · · · · · · · · · ·	 				
80		·	 				
70		· · · · · · · · · · · · · · · · · · ·	 				
60			 				
50	2	· · · · · · · · · · · · · · · · · · ·	 				
40	2		 				
30			 				

0 ^L 1000	6100.	11200. Frequence	16300. cy (MHz)	21400.	26500	
Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4804.00 4804.00	Average Peak	19.56 29.24	14.57 14.57	34.13 43.81	54.00 74.00	-19.87 -30.19



Report Number	:ER/2019/C0114	Test Date	:2019-12-31
Operation Mode	:BR(1M)	Temp./Humi.	:22.5/61
Test Channel	:2441 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Tx CH Mid	Engineer	:Thomas
EUT Pol	:E2 Plane		

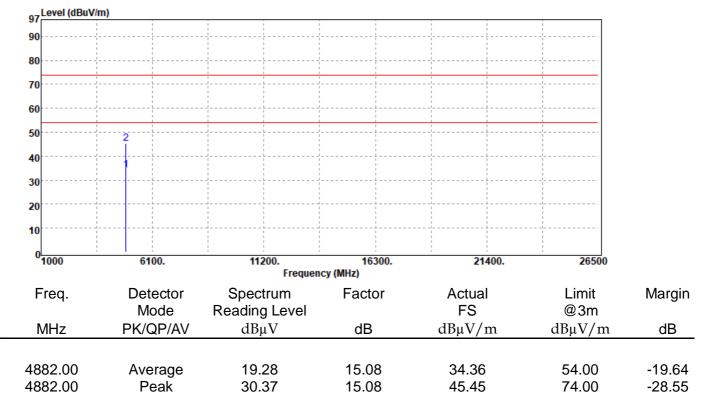

Report No.: ER/2019/C0114 Page 44 of 47

:2019-12-31

26500

Margin

dB

-20.53

-29.94

Limit

@3m

dBµV/m

54.00

74.00

Test Date

21400.

Actual

FS

dBµV/m

33.47

44.06



:ER/2019/C0114

Report Number

20 10

0^L 1000

Freq.

MHz

4882.00

4882.00

6100.

Detector

Mode

PK/QP/AV

Average

Peak

Operation Mode Test Channel Test Mode	n Mode :BR(1M) Temp./Hum nnel :2441 MHz Antenna Po e :Tx CH Mid Engineer		na Pol.				
EUT Pol	:E2 Plane						
97 Level (dBuV/m)				 			
90			 	 			
80			1 1 1 1 1	 			
70				 			
60			, , , , ,	 			
50		-	 	 		 	
	2						
40	1	- L	/ 	 			
30			, / ! !	 	 		

16300.

Factor

dB

15.08

15.08

11200.

Spectrum

Reading Level

dBµV


18.39

28.98

Frequency (MHz)




Report Number	:ER/2019/C0114	Test Date	:2020-01-07
Operation Mode	:BR(1M)	Temp./Humi.	:22.6/69
Test Channel	:2480 MHz	Antenna Pol.	:VERTICAL
Test Mode	:Tx CH High	Engineer	:Thomas
EUT Pol	:E2 Plane		

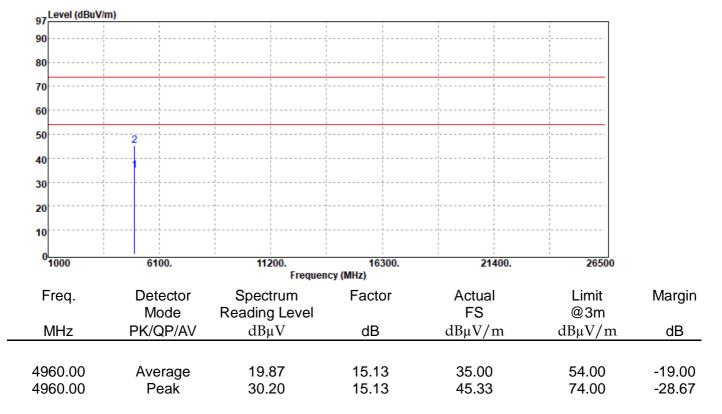

Report No.: ER/2019/C0114 Page 46 of 47



Report Number	:ER/2019/C0114		Test Date	:2020-01-07
Operation Mode	:BR(1M)		Temp./Humi.	:22.6/69
Test Channel	:2480 MHz		Antenna Pol.	:HORIZONTAL
Test Mode	:Tx CH High		Engineer	:Thomas
EUT Pol	:E2 Plane			
97 Level (dBuV/m)			 	
90		1	1	
90			 	

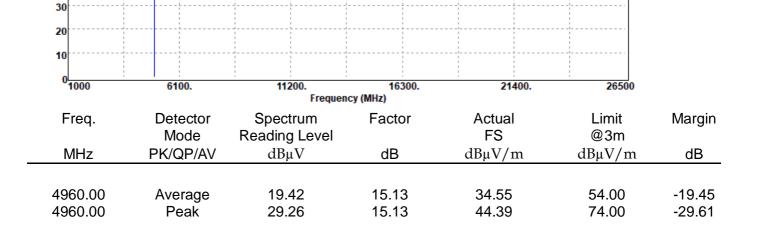



ANTENNA REQUIREMENT 9

9.1 Standard Applicable

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device.

If the transmitting antenna is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi.

9.2 Antenna Connected Construction

The antenna is designed with unique RF connector and no consideration of replacement. Please see EUT photo for details.

~ End of Report ~

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms-e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路 134號