

RF TEST REPORT



Report No.: FCC_IC_RF_SL19012101-MET-002_BLE_Rev1.0
Supersede Report No.: FCC_IC_RF_SL19012101-MET-002_BLE

FCC Applicant Name	:	CalAmp
IC Applicant Name	:	CALAMP WIRELESS NETWORKS CORPORATION
Host Product	:	Tracking Device
Host Model No.	:	SC1204
Variant Host Model No.	:	SC1204V
Module (LMA) Model No	:	SCI_BLE
Test Standard	:	47 CFR 15.247 RSS 247 Issue 2, February 2017
Test Method	:	ANSI C63.10: 2013 RSS Gen Issue 5, April 2018 558074 D01 15.247 Meas Guidance v05r01
Module FCC ID	:	APV-SC1204
Module IC	:	5843C-SC1204
Dates of test	:	03/29/2019-04/06/2019
Issue Date	:	10/4/2019
Test Result	:	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail
Equipment complied with the specification <input checked="" type="checkbox"/>		
Equipment did not comply with the specification <input type="checkbox"/>		

This Test Report is Issued Under the Authority of:	
Deon Dai	Chen Ge
Test Engineer	Engineer Reviewer

Issued By:
SIEMIC Laboratories
775 Montague Expressway, Milpitas, 95035 CA



775 Montague Expressway, Milpitas, CA 95035, USA • Phone: (+1) 408 526 1188 • Facsimile (+1) 408 526 1088

Visit us at: www.siemic.com; Follow us at:

Laboratory Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Accreditation Body	Scope
USA	FCC, A2LA	EMC, RF/Wireless, Telecom
Canada	IC, A2LA, NIST	EMC, RF/Wireless, Telecom
Taiwan	BSMI, NCC, NIST	EMC, RF, Telecom, Safety
Hong Kong	OFTA, NIST	RF/Wireless, Telecom
Australia	NATA, NIST	EMC, RF, Telecom, Safety
Korea	KCC/RRA, NIST	EMI, EMS, RF, Telecom, Safety
Japan	VCCI, JATE, TELEC, RFT	EMI, RF/Wireless, Telecom
Mexico	NOM, COFETEL, Caniety	Safety, EMC, RF/Wireless, Telecom
Europe	A2LA, NIST	EMC, RF, Telecom, Safety
Israel	MOC, NIST	EMC, RF, Telecom, Safety

Accreditations for Product Certifications

Country	Accreditation Body	Scope
USA	FCC TCB, NIST	EMC, RF, Telecom
Canada	IC FCB, NIST	EMC, RF, Telecom
Singapore	iDA, NIST	EMC, RF, Telecom
EU	NB	EMC & R&TTE Directive
Japan	MIC (RCB 208)	RF, Telecom
Hong Kong	OFTA (US002)	RF, Telecom

CONTENTS

1	REPORT REVISION HISTORY	4
2	EXECUTIVE SUMMARY	5
3	CUSTOMER INFORMATION	5
4	TEST SITE INFORMATION	5
5	MODIFICATION	5
6	EUT INFORMATION	6
6.1	EUT Description	6
6.2	Radio Description	6
7	SUPPORTING EQUIPMENT/SOFTWARE AND CABLING DESCRIPTION.....	7
7.1	Supporting Equipment	7
7.2	Cabling Description	7
7.3	Test Software Description	7
8	TEST SUMMARY	8
9	MEASUREMENT UNCERTAINTY	9
10	MEASUREMENTS, EXAMINATION AND DERIVED RESULTS	10
10.1	Antenna Requirement.....	10
10.2	6dB & 99% Bandwidth.....	11
10.3	Output Power	14
10.4	Band Edge	17
10.5	Peak Spectral Density	19
10.6	Radiated Spurious Emissions below 1GHz.....	22
10.7	Restricted band and Radiated Spurious Emissions between 1GHz – 25GHz.....	24
ANNEX A. TEST INSTRUMENT.....		27
ANNEX B. SIEMIC ACCREDITATION		28

1 Report Revision History

Report No.	Report Version	Description	Issue Date
FCC_IC_RF_SL19012101-MET-002_BLE	None	Original	04/08/2019
FCC_IC_RF_SL19012101-MET-002_BLE_Rev1.0	1.0	Update Model No	10/4/2019

2 Executive Summary

The purpose of this test program was to demonstrate compliance of following product

Company:	CalAmp
Host Product:	Tracking Device
Host Model:	SC1204, SC1204V
Module Model:	SCI_BLE

against the current Stipulated Standards. The specified model product stated above has demonstrated compliance with the Stipulated Standard listed on 1st page.

3 Customer information

Applicant Name	:	CalAmp
Applicant Address	:	2177 Salk Ave, Suite 200, Carlsbad, CA 92008, USA
Manufacturer Name	:	CalAmp
Manufacturer Address	:	2177 Salk Ave, Suite 200, Carlsbad, CA 92008, USA

4 Test site information

Lab performing tests	SIEMIC Laboratories
Lab Address	775 Montague Expressway, Milpitas, CA 95035
FCC Test Site No.	540430
IC Test Site No.	4842D-2
VCCI Test Site No.	A0133

5 Modification

Index	Item	Description	Note
-	-	-	-

6 EUT Information

6.1 EUT Description

Host Product	Tracking Device
Host Model No.	SC1204, SC1204V
Module Model No.	SCI_BLE
Trade Name	CalAmp Corp.
Serial No.	N/A
Input Power	3.7 VDC Battery
Power Adapter Manu/Model	N/A
Power Adapter SN	N/A
Date of EUT received	03/28/2019
Equipment Class/ Category	DTS
Port/Connectors	N/A

6.2 Radio Description

Spec for BLE:

Radio Type	BLE
Operating Frequency	2402MHz-2480MHz
Modulation	GFSK
Channel Spacing	2 MHz
Antenna Type	PCB Trace Antenna
Antenna Gain	2 dBi
Antenna Connector Type	N/A

7 Supporting Equipment/Software and cabling Description

7.1 Supporting Equipment

Item	Supporting Equipment Description	Model	Serial Number	Manufacturer	Note
1	Laptop	Satellite C55-A5322	3E198990U	TOSHIBA	-
2	USB to UART Bridge	CP210x	-	Silicon	-

7.2 Cabling Description

Name	Connection Start		Connection Stop		Length / shielding Info		Note
	From	I/O Port	To	I/O Port	Length (m)	Shielding	
-	Laptop	USB	UART Bridge	USB	-	-	-
							-

7.3 Test Software Description

Test Item	Software	Description
RF Testing	Putty	Set the EUT to transmit continuously in diferent test modes and channels

8 Test Summary

Test Item	Test standard		Test Method/Procedure		Pass / Fail
Restricted Band of Operation	FCC	15.205	FCC	ANSI C63.10:2013 558074 D01 DTS Meas Guidance v05r01	<input checked="" type="checkbox"/> Pass
	IC	RSS Gen 8.10	IC		<input type="checkbox"/> N/A
AC Conducted Emissions	FCC	15.207(a)	FCC	ANSI C63.10:2013	<input type="checkbox"/> Pass
	IC	RSS Gen 8.8	IC	RSS Gen Issue 5: 2018	<input checked="" type="checkbox"/> N/A
Antenna Requirement	FCC	15.203	FCC	-	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> N/A

DTS Band Requirement

Test Item	Test standard		Test Method/Procedure		Pass / Fail
99% Occupied Bandwidth	-	-	-	-	<input checked="" type="checkbox"/> Pass
	IC	RSS Gen 6.7	IC	RSS Gen Issue 5: 2018	<input type="checkbox"/> N/A
6dB Bandwidth	FCC	15.247(a)(2)	FCC	ANSI C63.10:2013 558074 D01 DTS Meas Guidance v05r01	<input checked="" type="checkbox"/> Pass
	IC	RSS247 (5.2.a)	IC		<input type="checkbox"/> N/A
Band Edge and Radiated Spurious Emissions	FCC	15.247(d)	FCC	ANSI C63.10:2013 558074 D01 DTS Meas Guidance v05r01	<input checked="" type="checkbox"/> Pass
	IC	RSS247 (5.5)	IC		<input type="checkbox"/> N/A
Output Power	FCC	15.247(b)	FCC	ANSI C63.10:2013 558074 D01 DTS Meas Guidance v05r01	<input checked="" type="checkbox"/> Pass
	IC	RSS247 (5.4.d)	IC		<input type="checkbox"/> N/A
Receiver Spurious Emissions	IC	RSS Gen (7.3)	IC	RSS Gen Issue 5: 2018	<input type="checkbox"/> Pass <input checked="" type="checkbox"/> N/A
Power Spectral Density	FCC	15.247(e)	FCC	ANSI C63.10:2013 558074 D01 DTS Meas Guidance v05r01	<input checked="" type="checkbox"/> Pass
	IC	RSS247 (5.2.b)	IC		<input type="checkbox"/> N/A
RF Exposure requirement	FCC	15.247(i)	FCC	-	<input checked="" type="checkbox"/> Pass
	IC	RSS Gen(3.4)	IC	RSS Gen Issue 5: 2018	<input type="checkbox"/> N/A
Remark	<ol style="list-style-type: none"> All measurement uncertainties do not take into consideration for all presented test results. The applicant shall ensure frequency stability by showing that an emission is maintained within the band of operation under all normal operating conditions as specified in the user's manual. The test EUT is the SCI_BLE module which was tested with host device. 				

9 Measurement Uncertainty

Emissions			
Test Item	Frequency Range	Description	Uncertainty
RF conducted measurement	150KHz – 40GHz	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2	±0.95dB
Radiated Spurious Emissions	30MHz – 1GHz	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	±6dB
Radiated Spurious Emissions	1GHz – 40GHz	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	±6dB


10 Measurements, Examination and Derived Results

10.1 Antenna Requirement

Spec	Requirement	Applicable
§15.203	<p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.</p> <p>Antenna requirement must meet at least one of the following:</p> <p>a) Antenna must be permanently attached to the device. b) The antenna must use a unique type of connector to attach to the device. c) Device must be professionally installed. The installer shall be responsible for ensuring that the correct antenna is employed by the device.</p>	<input checked="" type="checkbox"/>
Remark	The Bluetooth Module uses an PCB trace antenna that is integrated to the board which meets the requirement.	
Result	<input checked="" type="checkbox"/> PASS <input type="checkbox"/> FAIL	

10.2 6dB & 99% Bandwidth



Requirement(s):

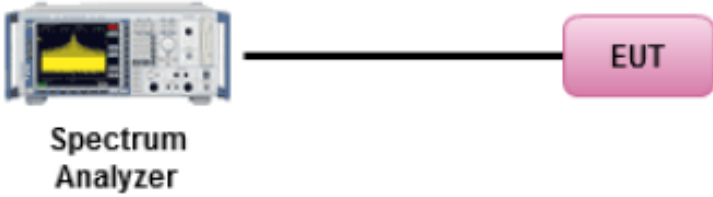Spec	Requirement	Applicable
§ 15.247 RSS247 (5.2.a)	6dB BW≥500KHz;	<input checked="" type="checkbox"/>
RSS Gen 6.7	For the 99% emission bandwidth, the trace data points are recovered and directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached, and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded. The difference between the two recorded frequencies is the occupied bandwidth (or the 99% emission bandwidth).	<input checked="" type="checkbox"/>
Test Setup	 <p style="text-align: center;">Spectrum Analyzer</p>	
Test Procedure	558074 D01 DTS Meas Guidance v05r01, 8.2 DTS bandwidth ANSI C63.10, 11.8 <u>Measurement procedure</u> <ul style="list-style-type: none"> - Set RBW = 100 kHz. - Set the video bandwidth (VBW) $\geq 3 \times$ RBW. - Detector = Peak. - Trace mode = max hold. - Sweep = auto couple. - Allow the trace to stabilize. - Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission. 	
Test Date	04/02/2019	Environmental condition Temperature 23°C Relative Humidity 42% Atmospheric Pressure 1021mbar
Remark	N/A	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail	

Test Data Yes N/A


Test Plot Yes N/A

Test was done by Deon Dai at RF test site.

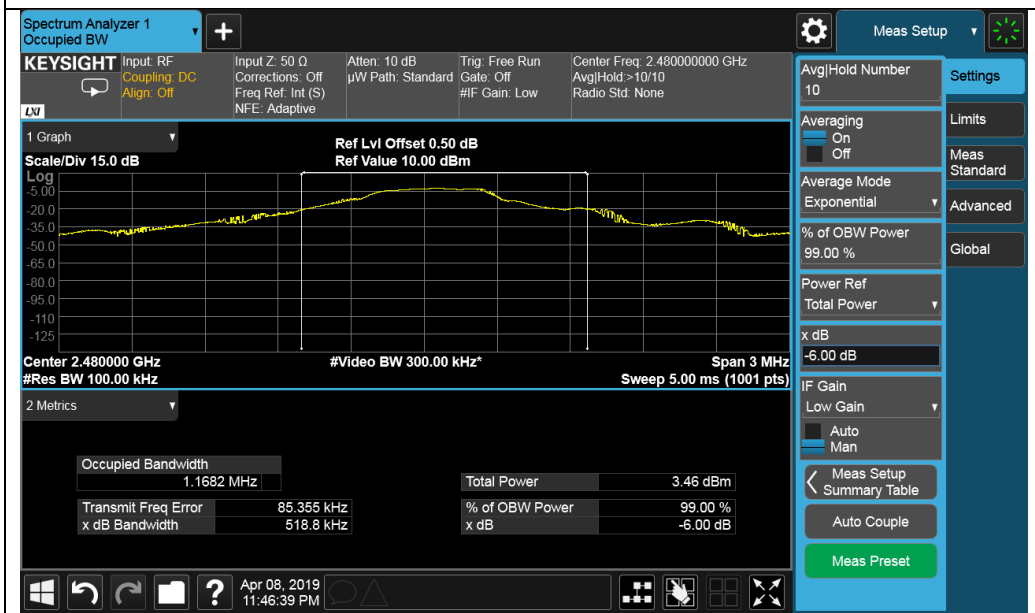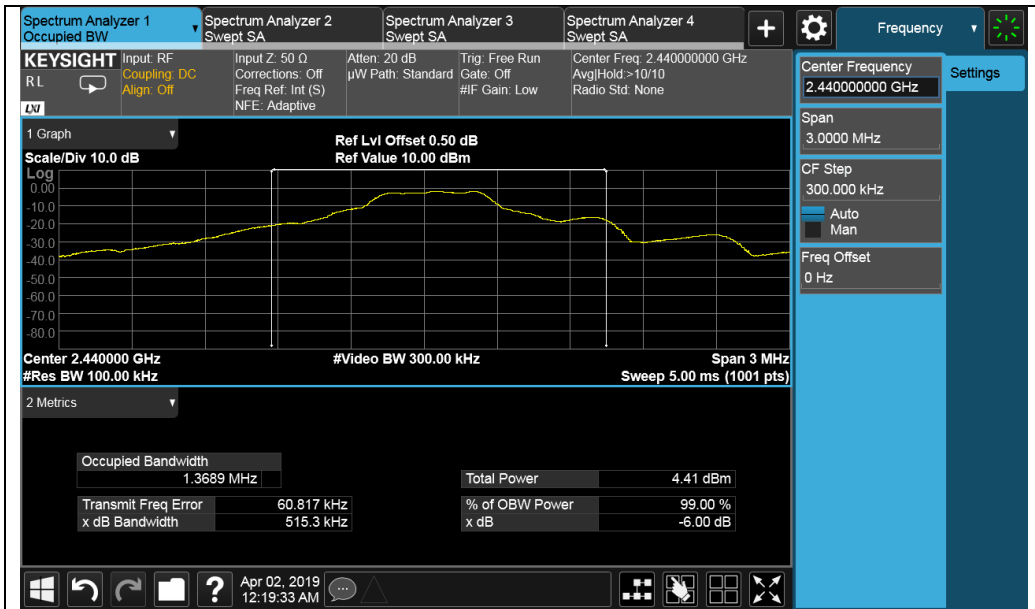

10.3 Output Power

Requirement(s):

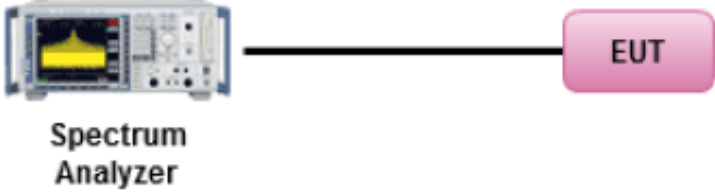Spec	Item	Requirement	Applicable
§ 15.247 RSS247 (5.4.4)	a)	FHSS in 2400-2483.5MHz with ≥ 75 channels: ≤ 1 Watt	<input type="checkbox"/>
	b)	FHSS in 5725-5850MHz: ≤ 1 Watt	<input type="checkbox"/>
	c)	For all other FHSS in the 2400-2483.5MHz band: ≤ 0.125 Watt.	<input type="checkbox"/>
	d)	FHSS in 902-928MHz with ≥ 50 channels: ≤ 1 Watt	<input type="checkbox"/>
	e)	FHSS in 902-928MHz with ≥ 25 & < 50 channels: ≤ 0.25 Watt	<input type="checkbox"/>
	f)	For systems using digital modulation in 902-928MHz, 2400-2483.5MHz, 5725-5850MHz: ≤ 1 Watt	<input checked="" type="checkbox"/>
Test Setup	 <p style="text-align: center;">Spectrum Analyzer EUT</p>		
Test Procedure	<p>558074 D01 DTS Meas Guidance v05r01, 8.3.2.2 ANSI C63.10, 11.9.2.2</p> <p><u>Measurement using a Spectrum Analyzer (SA)</u></p> <ul style="list-style-type: none"> (a) Set span to at least 1.5 times the OBW (b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz. (c) Set VBW $\geq 3 \times$ RBW. (d) Number of points in sweep $\geq 2 \times$ span / RBW. (This gives bin-to-bin spacing \leq RBW/2, so that narrowband signals are not lost between frequency bins.) (e) Sweep time = auto. (f) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode. (g) If transmit duty cycle $< 98\%$, use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle $\geq 98\%$, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run". (h) Trace average at least 100 traces in power averaging (i.e., RMS) mode (i) Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum. 		
Test Date	04/02/2019	Environmental condition	Temperature 23°C Relative Humidity 44% Atmospheric Pressure 1021mbar
Remark	NONE		
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Test Data Yes N/A


Test Plot Yes (See below) N/A


Test was done by Deon Dai at RF test site.

Output Power measurement results for BLE:

Type	Freq (MHz)	Test mode	CH	Conducted Power (dBm)	Limit (dBm)	Result
Output power	2402	BLE	Low	-1.61	≤30	Pass
	2440	BLE	Mid	-1.96	≤30	Pass
	2480	BLE	High	-2.29	≤30	Pass


Test Plots:

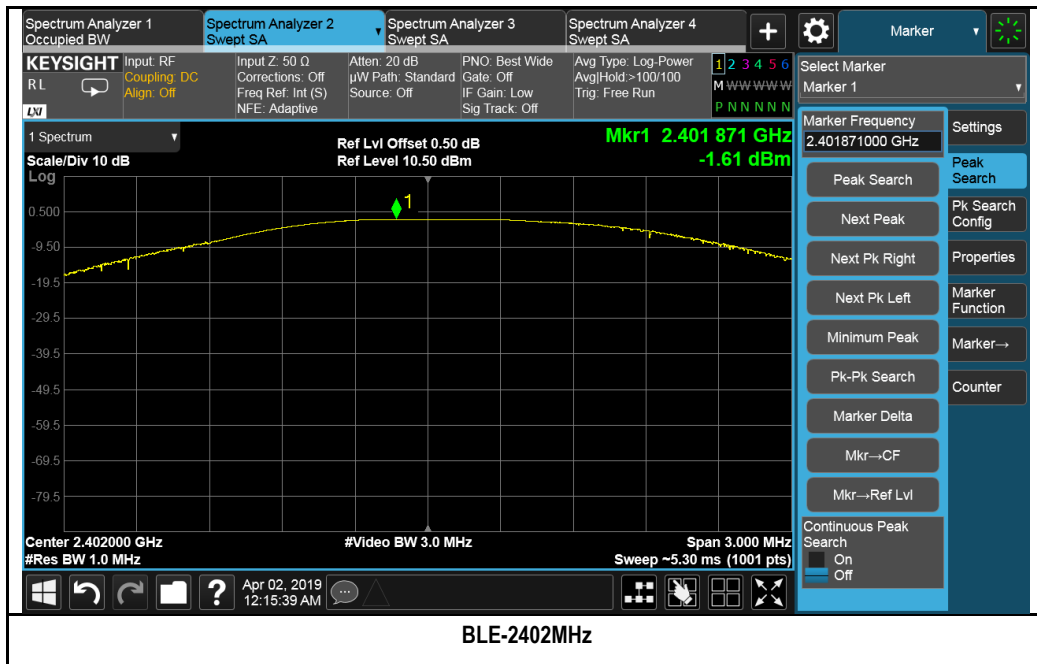

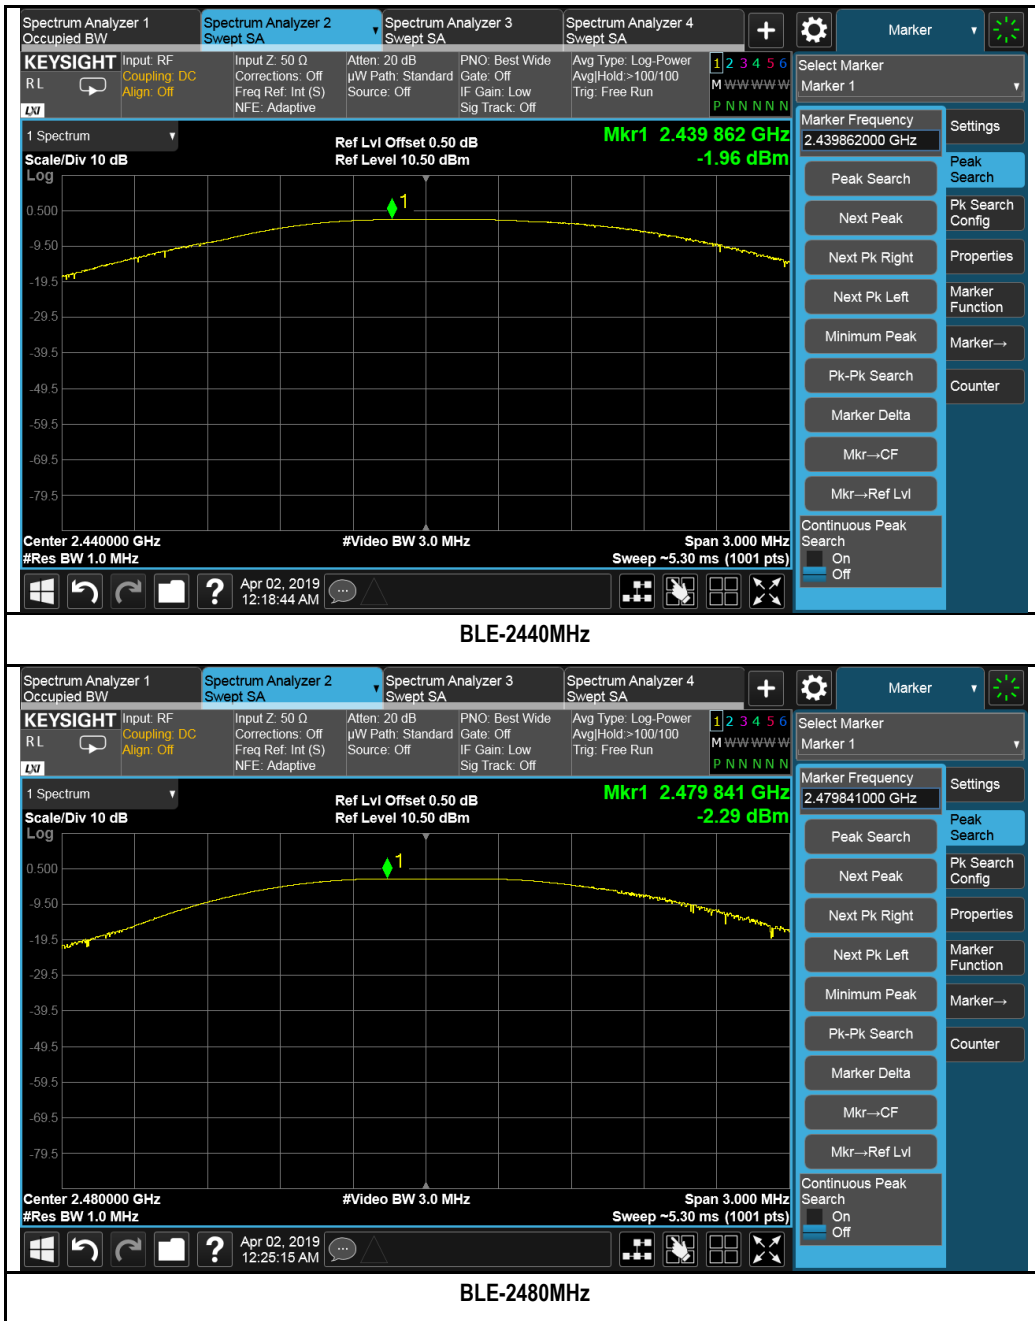

10.4 Band Edge

Requirement(s):

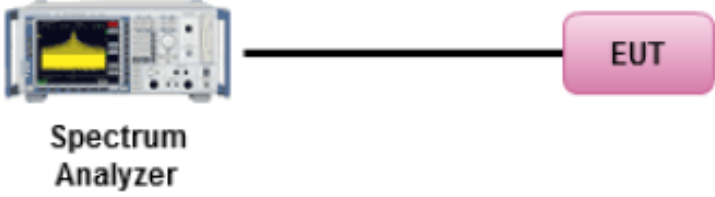
Spec	Item	Requirement	Applicable
§ 15.247 RSS247(5.5)	d)	For non-restricted band, In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB or 30dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, determined by the measurement method on output power to be used. Attenuation below the general limits specified in § 15.209 (a) is not required <input checked="" type="checkbox"/> 20 dB down <input type="checkbox"/> 30 dB down	<input checked="" type="checkbox"/>
Test Setup	 <p style="text-align: center;">Spectrum Analyzer EUT</p>		
Test Procedure	<p>558074 D01 DTS Meas Guidance v05r01 ANSI C63.10</p> <p><u>Band Edge measurement procedure</u></p> <ol style="list-style-type: none"> 1. Set the EUT to maximum power setting and enable the EUT transmit continuously. 2. Band edge emissions must be at least 30 dB down from the highest emission level within the authorized band as a measured. The attenuation shall be be 30 dB instead of 20 dB when Peak conducted output power procedure is used. 3. Change modulation and channel bandwidth then repeat step 1 to 2. 4. Measured and record the results in the test report. 		
Test Date	04/02/2019	Environmental condition	Temperature 22°C Relative Humidity 46% Atmospheric Pressure 1020mbar
Remark	-		
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Test Data Yes N/A

Test Plot Yes (See below) N/A


Test was done by Deon Dai at RF test site.

Test Plots:

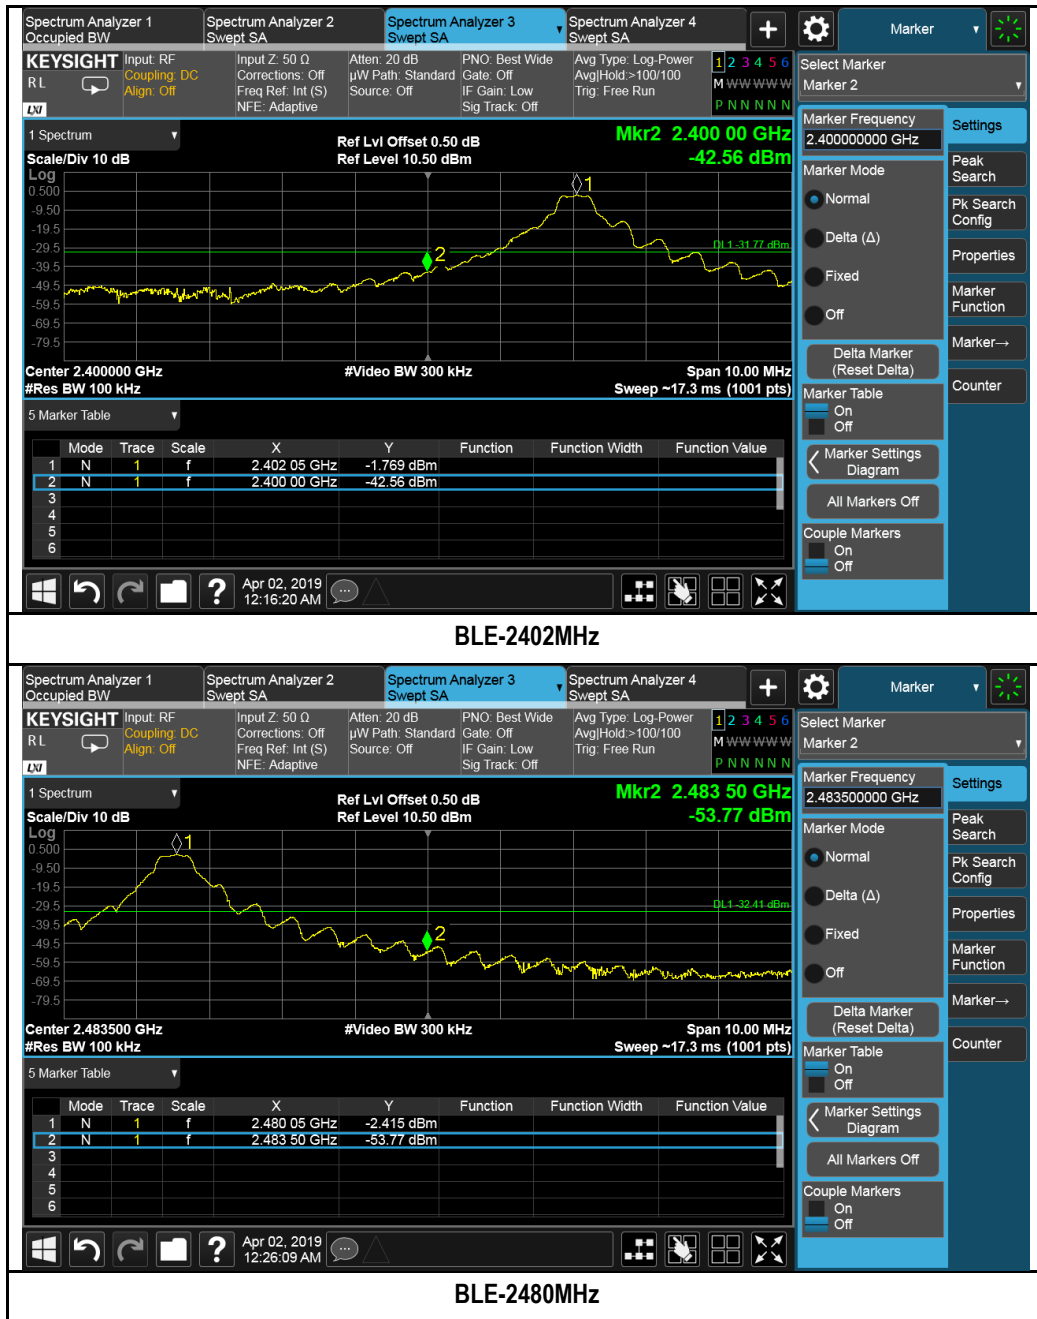

10.5 Peak Spectral Density

Requirement(s):

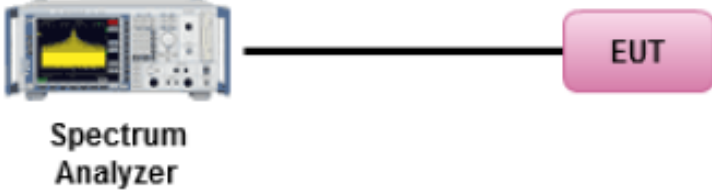Spec	Item	Requirement	Applicable
§ 15.247(e) RSS247 (5.2.b)	e)	DSSS: $\leq 8\text{dBm}/3\text{KHz}$	<input checked="" type="checkbox"/>
	f)	DSSS in hybrid sys with FH turned off: $\leq 8\text{dBm}/3\text{KHz}$	<input type="checkbox"/>
Test Setup	 <p style="text-align: center;">Spectrum Analyzer ——— EUT</p>		
Test Procedure	<p>558074 D01 DTS Meas Guidance v05r01, 8.4 ANSI C63.10:2013, 11.10.2</p> <p><u>Peak spectral density measurement procedure</u></p> <ul style="list-style-type: none"> - Set analyzer center frequency to DTS channel center frequency. - Set the span to 1.5 times the DTS bandwidth. - Set the RBW to: $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$. - Set the VBW $\geq 3 \times \text{RBW}$. - Detector = Peak - Sweep time = auto couple. - Trace mode = Max Hold - Allow trace to fully stabilize. - Use the peak marker function to determine the maximum amplitude level within the RBW. - If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat. 		
Test Date	04/02/2019	Environmental condition	Temperature 22°C Relative Humidity 46% Atmospheric Pressure 1020mbar
Remark	N/A		
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Test Data Yes N/A


Test Plot Yes (See below) N/A


Test was done by Deon Dai at RF test site.

PSD measurement results for BLE:

Type	Freq (MHz)	Test mode	CH	Conducted PSD (dBm/3KHz)	Limit (dBm/3KHz)	Result
PSD	2402	BLE	Low	-12.07	8	Pass
	2440	BLE	Mid	-12.85	8	Pass
	2480	BLE	High	-12.96	8	Pass


Test Plots

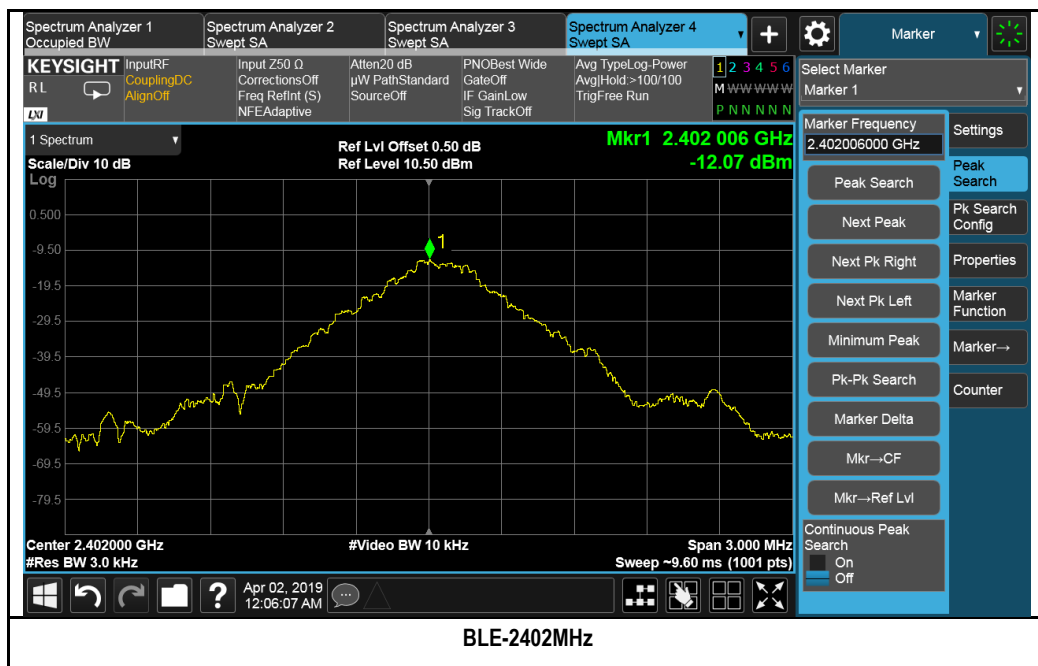

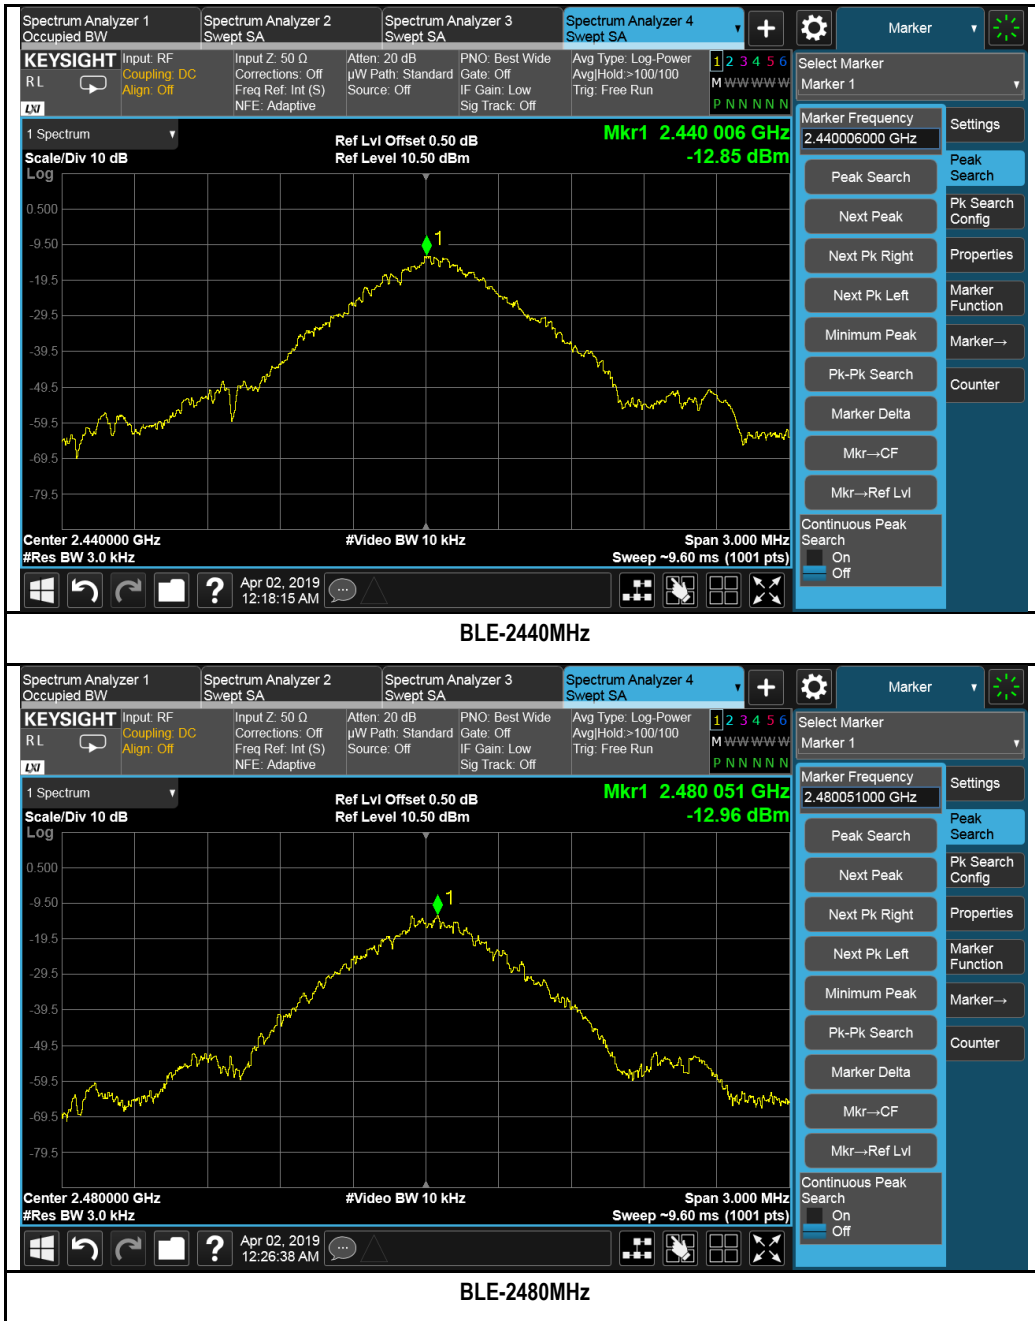

10.6 Radiated Spurious Emissions below 1GHz

Requirement(s):

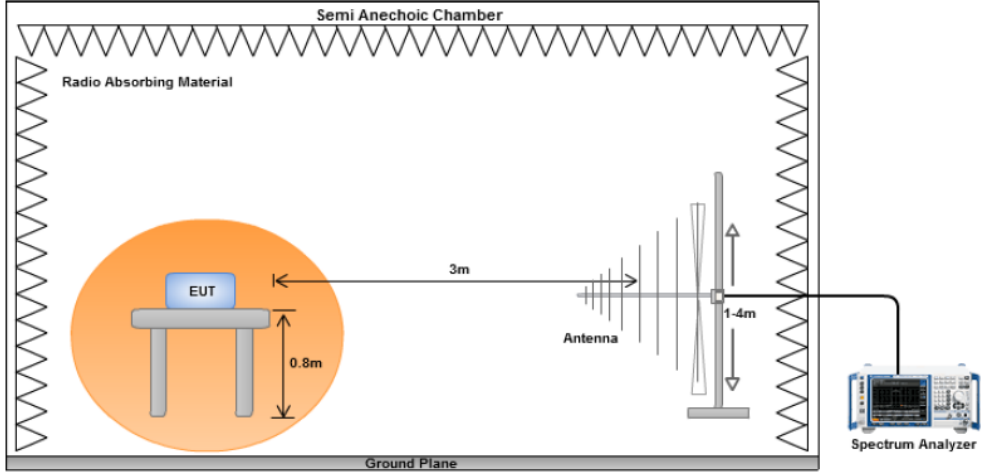Spec	Item	Requirement	Applicable										
47CFR§15.247(d) RSS247 (A8.5)	a)	<p>Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges</p> <table border="1"> <thead> <tr> <th>Frequency range (MHz)</th> <th>Field Strength (uV/m)</th> </tr> </thead> <tbody> <tr> <td>30 – 88</td> <td>100</td> </tr> <tr> <td>88 – 216</td> <td>150</td> </tr> <tr> <td>216 960</td> <td>200</td> </tr> <tr> <td>Above 960</td> <td>500</td> </tr> </tbody> </table>	Frequency range (MHz)	Field Strength (uV/m)	30 – 88	100	88 – 216	150	216 960	200	Above 960	500	☒
Frequency range (MHz)	Field Strength (uV/m)												
30 – 88	100												
88 – 216	150												
216 960	200												
Above 960	500												
Test Setup													
Procedure		<ol style="list-style-type: none"> The EUT was switched on and allowed to warm up to its normal operating condition. The test was carried out at the selected frequency points obtained from the EUT characterisation. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: <ol style="list-style-type: none"> Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen. The EUT was then rotated to the direction that gave the maximum emission. Finally, the antenna height was adjusted to the height that gave the maximum emission. A Quasi-peak measurement was then made for that frequency point. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured. 											
Remark		The EUT was scanned up to 1GHz. Both horizontal and vertical polarities were investigated. The results show only the worst case. The EUT was evaluated in each of three orthogonal axis positions, the orientation is the worst case, please refer to setup photos.											
Result		☒ Pass ☐ Fail											


Test Data ☒ Yes (See below) ☐ N/A

Test Plot ☒ Yes (See below) ☐ N/A

Test was done by Deon Dai at 10m chamber.

Radiated Emission Test Results (Below 1GHz)

Test specification	below 1GHz			Result	Pass
Environmental Conditions:	Temp (°C):	26			
	Humidity (%)	47			
	Atmospheric (mbar):	1020			
Mains Power:	3.7VDC				
Tested by:	Deon Dai				
Test Date:	03/29/2019				
Remarks:	BLE, 2440MHz				

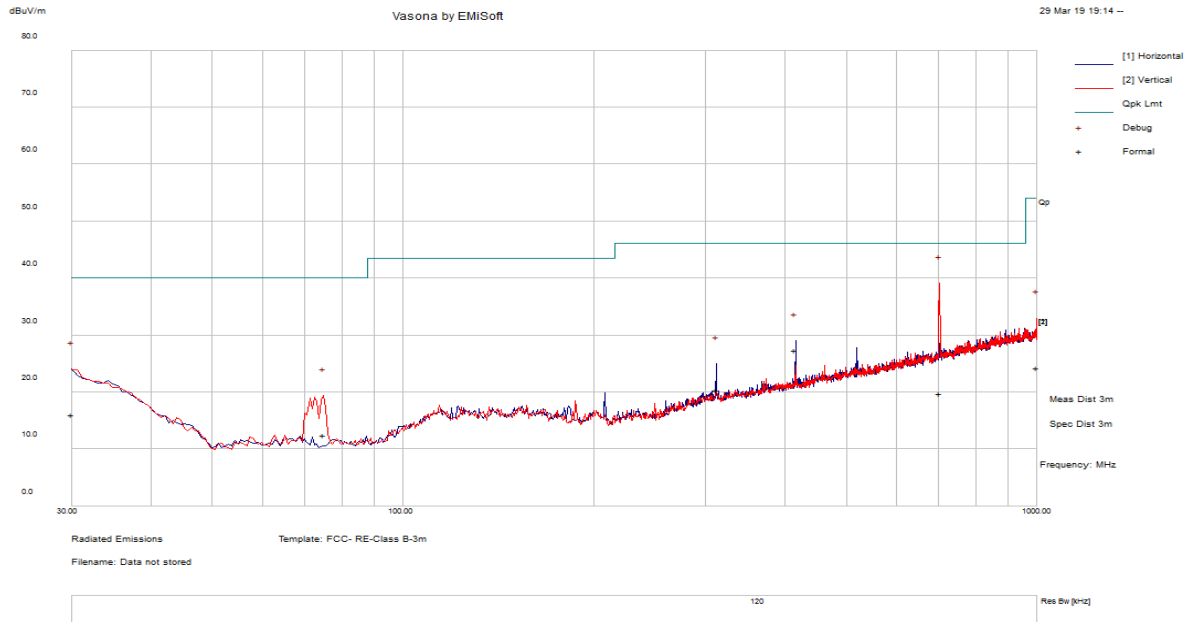


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Po l	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
701.67	19.95	15.14	-15.33	19.77	Quasi Max	V	131	188	46	-26.23	Pass
30.01	17.03	11.12	-12.1	16.05	Quasi Max	H	306	356	40	-23.95	Pass
416.01	33.39	13.89	-19.8	27.48	Quasi Max	H	248	192	46	-18.52	Pass
74.83	27.84	11.62	-27.48	11.98	Quasi Max	V	332	324	40	-28.02	Pass
1000.00	19.97	16.28	-12	24.25	Quasi Max	H	190	295	54	-29.75	Pass
311.97	28.9	13.29	-21.78	20.41	Quasi Max	H	102	169	46	-25.59	Pass

Note: Both horizontal and vertical polarities were investigated. The results above show only the worst case.

10.7 Restricted band and Radiated Spurious Emissions between 1GHz – 25GHz

Requirement(s):

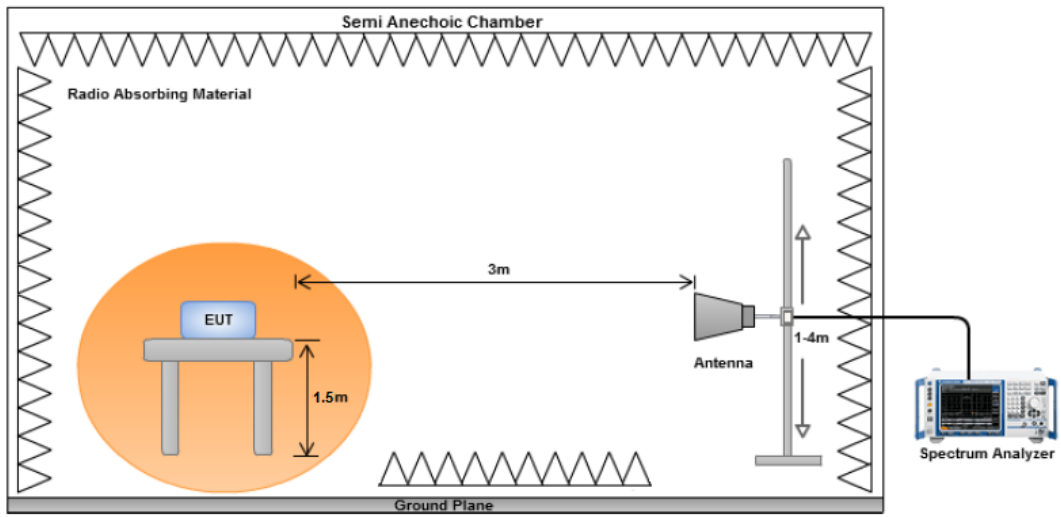
Spec	Item	Requirement	Applicable
47CFR§15.205 47CFR§15.247(d), RSS247(A8.5)	a)	For non-restricted band, In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB or 30dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, determined by the measurement method on output power to be used. Attenuation below the general limits specified in § 15.209(a) is not required <input type="checkbox"/> 20 dB down <input checked="" type="checkbox"/> 30 dB down	<input checked="" type="checkbox"/>
Test Setup			
Procedure	<ol style="list-style-type: none"> The EUT was switched on and allowed to warm up to its normal operating condition. The test was carried out at the selected frequency points obtained from the EUT characterisation. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: <ol style="list-style-type: none"> Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen. The EUT was then rotated to the direction that gave the maximum emission. Finally, the antenna height was adjusted to the height that gave the maximum emission. An average measurement was then made for that frequency point. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured. 		
Remark	The EUT was scanned up to 40GHz. Both horizontal and vertical polarities were investigated. The results show only the worst case. There isn't outstanding emission found at the edge of restricted frequency. The EUT was evaluated in each of three orthogonal axis positions, the orientation is the worst case, please refer to setup photos.		
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Test Data Yes (See below) N/A

Test Plot Yes (See below) N/A

Test was done by Deon Dai at 10m chamber.

Restricted Band Measurement Plots:

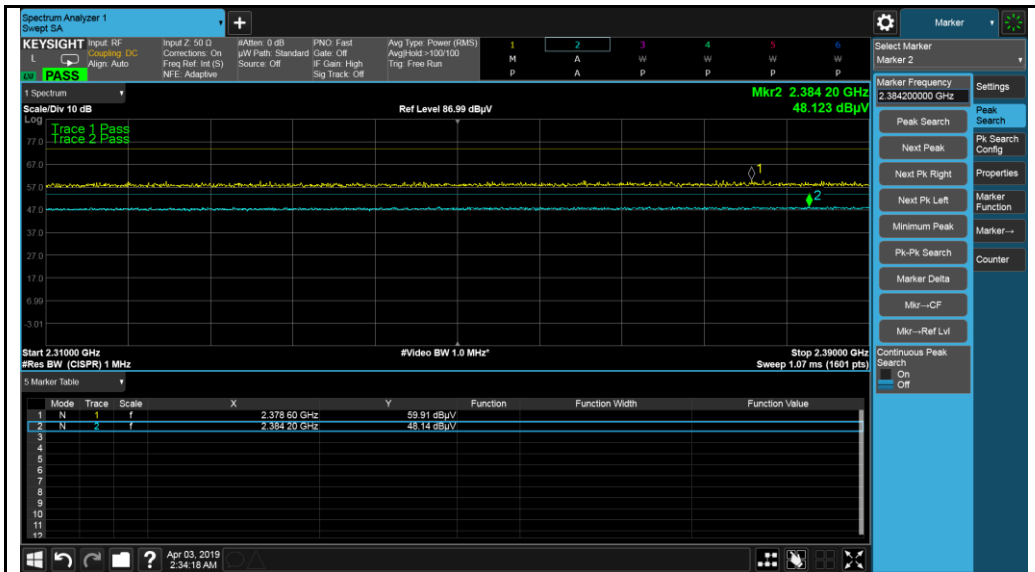

BLE-2402MHz



BLE-2480MHz

Radiated Emission Test Results (Above 1GHz)

Above 1GHz-25GHz- BLE - 2402MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
17924.50	39.76	7.94	8.67	56.38	Peak Max	H	125	205	74	-17.62	Pass
4803.95	51.85	4.1	-0.93	55.03	Peak Max	H	110	23	74	-18.98	Pass
7205.71	48	5.15	-0.45	52.7	Peak Max	H	187	356	74	-21.3	Pass
17924.50	27.18	7.94	8.67	43.8	Average Max	H	125	205	54	-10.2	Pass
4803.95	47.94	4.1	-0.93	51.12	Average Max	H	110	23	54	-2.88	Pass
7205.71	36.74	5.15	-0.45	41.43	Average Max	H	187	356	54	-12.57	Pass

Above 1GHz-25GHz- BLE - 2440MHz

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
4879.73	53.17	4.18	-1	56.35	Peak Max	H	147	14	74	-17.65	Pass
17861.69	39.4	8.02	8.52	55.93	Peak Max	V	144	56	74	-18.07	Pass
7320.67	45.88	5.15	-0.49	50.54	Peak Max	H	157	357	74	-23.46	Pass
4879.73	48.25	4.18	-1	51.43	Average Max	H	147	14	54	-2.57	Pass
17861.69	27.42	8.02	8.52	43.95	Average Max	V	144	56	54	-10.05	Pass
7320.67	34.48	5.15	-0.49	39.14	Average Max	H	157	357	54	-14.86	Pass

















Above 1GHz-25GHz- BLE - 2480MHz








Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
17851.37	40.17	8.03	8.49	56.69	Peak Max	H	106	136	74	-17.31	Pass
4961.14	50.06	4.25	-1.07	53.25	Peak Max	H	169	14	74	-20.75	Pass
7440.34	45.04	5.14	-0.53	49.64	Peak Max	V	112	222	74	-24.36	Pass
17851.37	27.44	8.03	8.49	43.96	Average Max	H	106	136	54	-10.04	Pass
4961.14	46.53	4.25	-1.07	49.71	Average Max	H	169	14	54	-4.29	Pass
7440.34	35.86	5.14	-0.53	40.47	Average Max	V	112	222	54	-13.53	Pass

Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Cycle	Cal Due	In use
Conducted Emissions						
R & S Receiver	ESIB 40	100179	08/28/2018	1 Year	08/29/2019	<input type="checkbox"/>
LISN	3816/2NM	214372	01/10/2019	1 Year	01/10/2020	<input type="checkbox"/>
Radiated Emissions						
50GHz Spectrum Analyzer	N9030B(PXA)	MY57140374	08/20/2018	1 Year	08/20/2019	<input checked="" type="checkbox"/>
Bi-Log antenna (30MHz~6GHz)	JB6	A111717	08/12/2018	1 Year	08/12/2019	<input checked="" type="checkbox"/>
Horn Antenna (1GHz~26GHz)	3115	100059	01/26/2019	1 Year	01/26/2020	<input checked="" type="checkbox"/>
Horn Antenna (26GHz~40GHz)	AH-840	101013	08/28/2018	1 Year	08/28/2019	<input checked="" type="checkbox"/>
Pre-Amplifier(0.3MHz-6.5GHz)	LPA-6-30	11170602	02/06/2019	1 Year	02/06/2020	<input checked="" type="checkbox"/>
Pre-Amplifier (1-26.5GHz)	8449B	3008A00715	08/16/2018	1 Year	08/16/2019	<input checked="" type="checkbox"/>
Pre-Amp (10MHz~50GHz)	RAMP00M50GA	17032300047	02/10/2019	1 Year	02/10/2020	<input checked="" type="checkbox"/>
RF Conducted Measurement						
50GHz Spectrum Analyzer	N9030B (PXA)	MY57140584	10/02/2018	1 Year	10/02/2019	<input checked="" type="checkbox"/>

Annex B. SIEMIC Accreditation

Accreditations	Document	Scope / Remark
ISO 17025 (A2LA)		Please see the documents for the detailed scope
ISO Guide 65 (A2LA)		Please see the documents for the detailed scope
TCB Designation		A1 , A2 , A3 , A4 , B1 , B2 , B3 , B4 , C
FCC DoC Accreditation		FCC Declaration of Conformity Accreditation
FCC Site Registration		3 meter site
FCC Site Registration		10 meter site
IC Site Registration		3 meter site
IC Site Registration		10 meter site
EU NB		Radio & Telecommunications Terminal Equipment: EN45001 – EN ISO/IEC 17025
		Electromagnetic Compatibility: EN45001 – EN ISO/IEC 17025
Singapore iDA CB(Certification Body)	 	Phase I , Phase II
Vietnam MIC CAB Accreditation		Please see the document for the detailed scope
Hong Kong OFCA		(Phase II) OFCA Foreign Certification Body for Radio and Telecom
		(Phase I) Conformity Assessment Body for Radio and Telecom
Industry Canada CAB		Radio: Scope A – All Radio Standard Specification in Category I
		Telecom: CS-03 Part I, II, V, VI, VII, VIII

Japan Recognized Certification Body Designation		<p>Radio: A1. Terminal equipment for purpose of calling</p> <p>Telecom: B1. Specified radio equipment specified in Article 38-2, Paragraph 1, Item 1 of the Radio Law</p>
Korea CAB Accreditation		<p>EMI: KCC Notice 2008-39, RRL Notice 2008-3: CA Procedures for EMI KN22: Test Method for EMI</p> <p>EMS: KCC Notice 2008-38, RRL Notice 2008-4: CA Procedures for EMS KN24, KN61000-4-2, -4-3, -4-4, -4-5, -4-6, -4-8, -4-11: Test Method for EMS</p>
		<p>Radio: RRL Notice 2008-26, RRL Notice 2008-2, RRL Notice 2008-10, RRL Notice 2007-49, RRL Notice 2007-20, RRL Notice 2007-21, RRL Notice 2007-80, RRL Notice 2004-68</p> <p>Telecom: President Notice 20664, RRL Notice 2007-30, RRL Notice 2008-7 with attachments 1, 3, 5, 6; President Notice 20664, RRL Notice 2008-7 with attachment 4</p>
Taiwan NCC CAB Recognition		LP0002, PSTN01, ADSL01, ID0002, IS6100, CNS14336, PLMN07, PLMN01, PLMN08
Taiwan BSMI CAB Recognition		CNS 13438
Japan VCCI		<p>R-3083: Radiation 3 meter site</p> <p>C-3421: Main Ports Conducted Interference Measurement</p> <p>T-1597: Telecommunication Ports Conducted Interference Measurement</p>
Australia CAB Recognition		<p>EMC: AS/NZS CISPR 11, AS/NZS CISPR 14.1, AS/NZS CISPR22, AS/NZS 61000.6.3, AS/NZS 61000.6.4</p>
		<p>Radio communications: AS/NZS 4281, AS/NZS 4268, AS/NZS 4280.1, AS/NZS 4280.2, AS/NZS 4295, AS/NZS 4582, AS/NZS 4583, AS/NZS 4769.1, AS/NZS 4769.2, AS/NZS 4770, AS/NZS 4771</p>
		<p>Telecommunications: AS/ACIF S002:05, AS/ACIF S003:06, AS/ACIF S004:06, AS/ACIF S006:01, AS/ACIF S016:01, AS/ACIF S031:01, AS/ACIF S038:01, AS/ACIF S040:01, AS/ACIF S041:05, AS/ACIF S043.2:06, AS/ACIF S60950.1</p>
Australia NATA Recognition		AS/ACIF S002, AS/ACIF S003, AS/ACIF S004, AS/ACIF S006, AS/ACIF S016, AS/ACIF S031, AS/ACIF S038, AS/ACIF S040, AS/ACIF S041, AS/ACIF S043.2