



REMARK

Tolerance				
平均寸法	A級	B級	C級	D級
1 ~ 4	005	01	02	03
4 ~ 6	01	02	03	05
6 ~ 63	02	03	04	07
63 ~ 250	03	04	06	12
250	04	05	08	20

### 3-3. Sketch showing location of statement



S=1/1

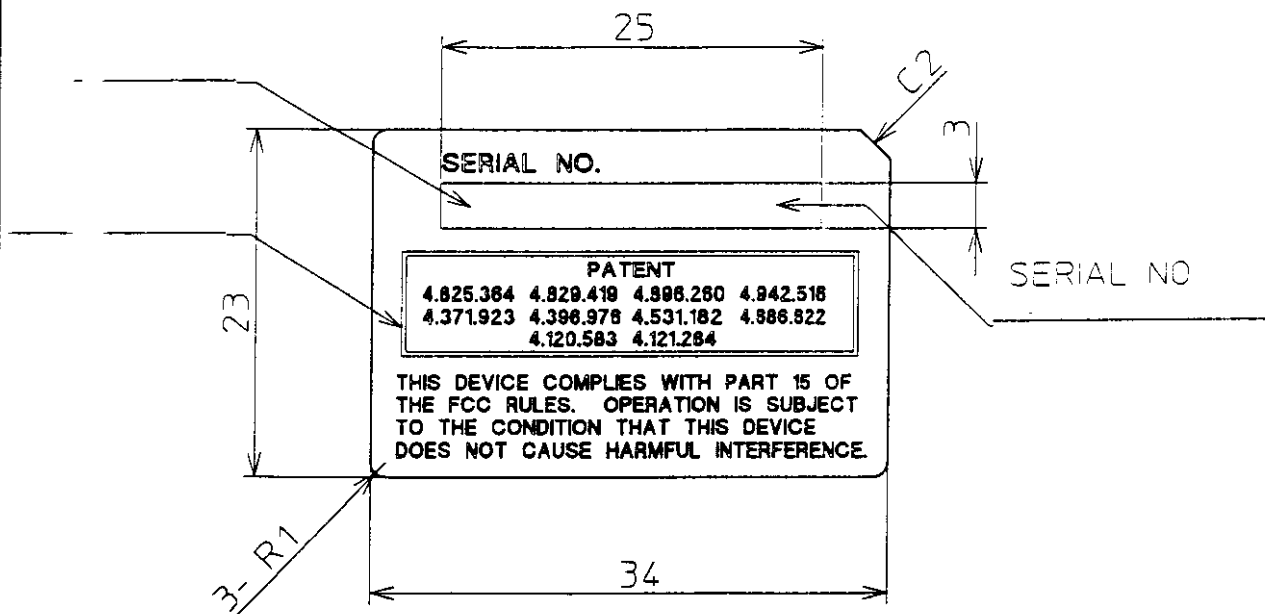

Cadmium or substance including Cadmium should not be used in this product!


ORDER	411X	DATE	98-3-27	TOOL1		TOOL2	
SCALE	DESIGNED BY	MATERIAL		TREATMENT		平均寸法	
2/1	MOC-	注記参照				B	
03	APPROVED BY	PART NAME		PART CODE		PAGE	

REMARK


Tolerance

呼び寸法	A	B	C	D
1 ~ 4	0.05	0.1	0.2	0.3
4 ~ 16	0.1	0.2	0.3	0.5
16 ~ 63	0.2	0.3	0.4	0.7
63 ~ 250	0.3	0.4	0.6	1.2
250 ~	0.4	0.5	0.8	2.0

### 3-1. Sketch showing location of FCC ID for HX625A




S=1/1

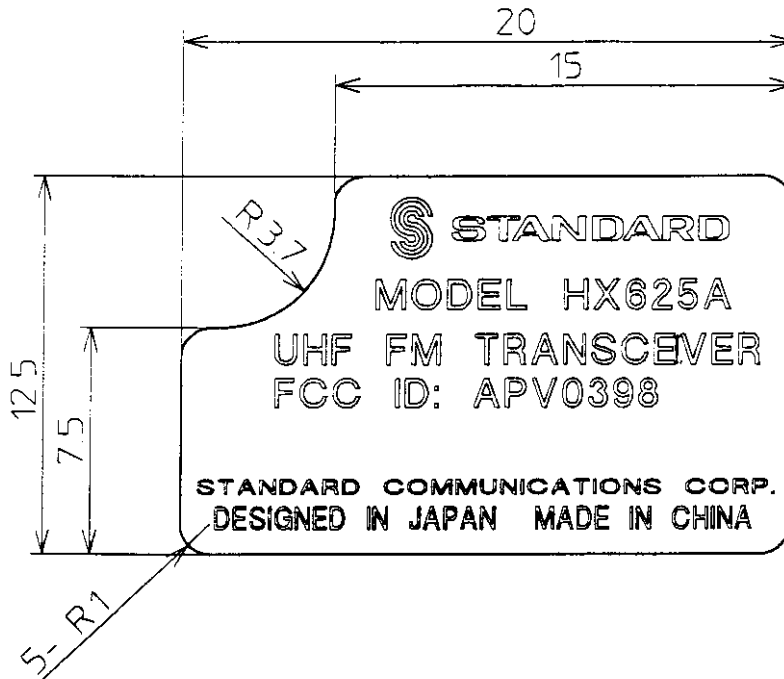

Cadmium or substance including Cadmium should not be used in this product.

ORDER	411X	DATE	98-3-30	TOOL1		TOOL2	
SCALE	DESIGNED BY		MATERIAL		TREATMENT		呼び寸法
4/1	MOCHI		注記参照				8
PR.	APPROVED BY		PART NAME		PART CODE		PAGE

FUNCTION SHOWING LOCATION OF INDIC AND MECHANICAL COMPONENTS FOR MAINTENANCE

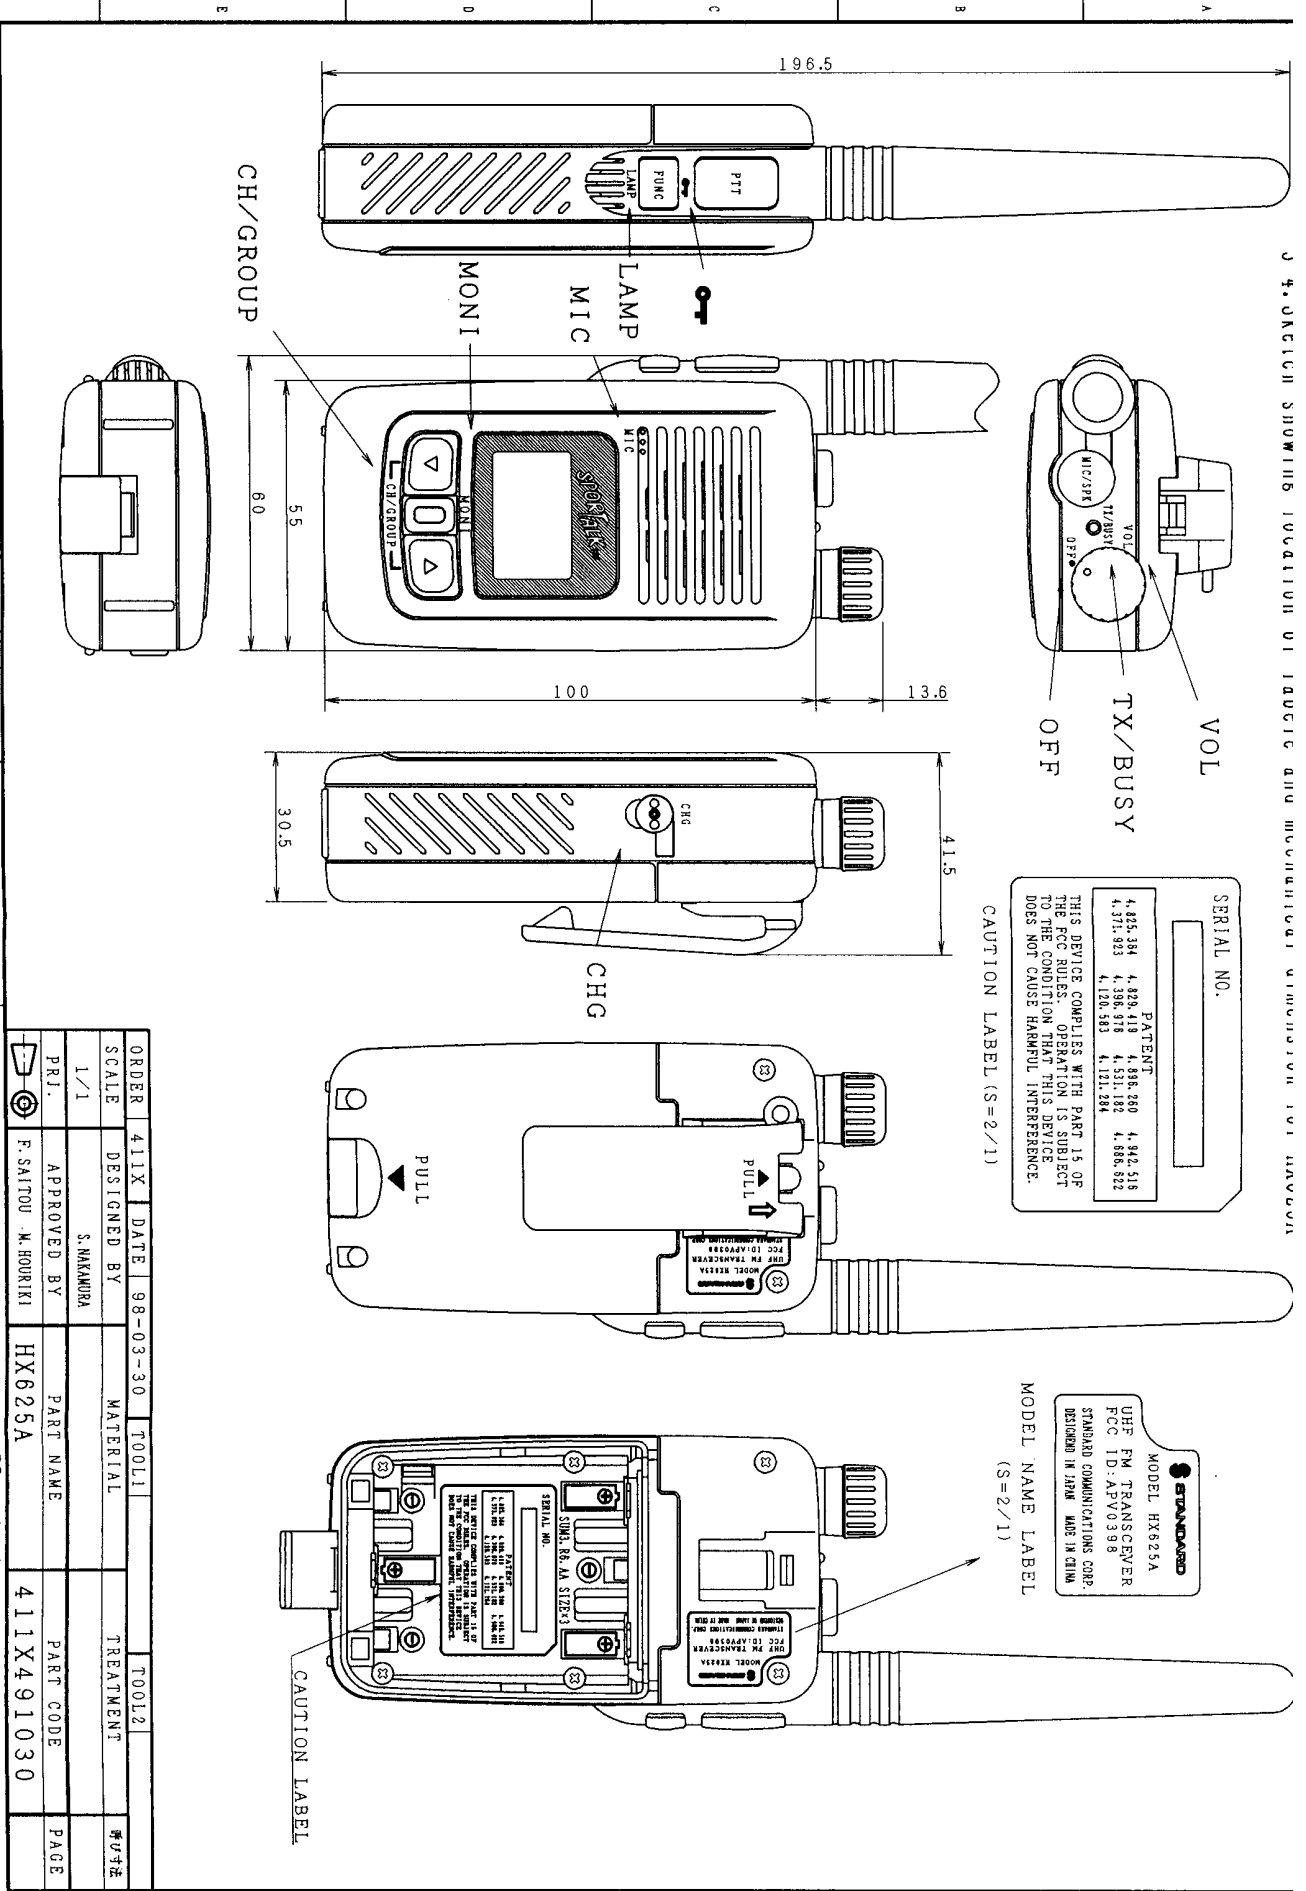

ORDER	411X	DATE	98-03-30	TOOL1	TOOL2	TREATMENT	号/仕様
SCALE	DESIGNED BY	S. NAKAMURA		MATERIAL			
1/1	APPROVED BY	F. SAITOU M. HIGUCHI		PART NAME	HX625A	PART CODE	411X491030
PRJ.							PAGE

GROUP=CM02 USER=4368 DATE=14/05/98 MARANTZ JAPAN INC  
 ID=411X491030 A3 TIME=20:22