



Integration Guide
CRM4200/4250

Cellular Radio Module

Standard Communications Corp.
1111 Knox St.
Torrance, CA 90502

800-767-2831

Cellular Modem Module

CRM4200/4250

Document Changes:

Date	Document Revision	Details
-------------	--------------------------	----------------

RF SAFETY WARNING

This device and associated antenna must be installed in a location at least 20cm from the body of the user or other nearby persons in order to comply with the FCC RF exposure guidelines.

The above warning must be included in the user documentation of the final product that these modules are incorporated into. A warning label must also be included on the exterior of the device.

WARNING

While this device is in operation, a separation distance of at least 20 centimeters must be maintained between the radiating antenna and the body of all persons exposed to the transmitter in order to meet the FCC RF exposure guidelines

IMPORTANT!!

Performance and compliance with FCC rules are heavily influenced by final packaging and antenna configuration of the end-product. Installations not complying with the 20cm minimum separation requirement, using substantially different antenna configurations from those described herein, or utilizing operating voltages outside of the normal specifications must be evaluated for compliance with FCC Rules and RF exposure requirements. Responsibility for compliance of the final product is the responsibility of the end-product manufacturer.

Refer to the following resources for additional information regarding FCC rules and RF Safety Guidelines for this type of devices:

47CFR Part 22 Subpart H

47CFR Part 1.1310

47CFR Part 2.1091

Federal Communications Commission (FCC) Primary website:


www.fcc.gov

Federal Communications Commission Office of Engineering and Technology web site:

www.fcc.gov/oet/rfsafety

INTEGRATION




The following guide is designed to provide the developer / designer additional information regarding hardware considerations. The sections include detailed design ideas along with tips and tricks we have used in implementing various applications. Each section has a brief description and diagrams to assist you in your planning stages with the CRM4200/4250.

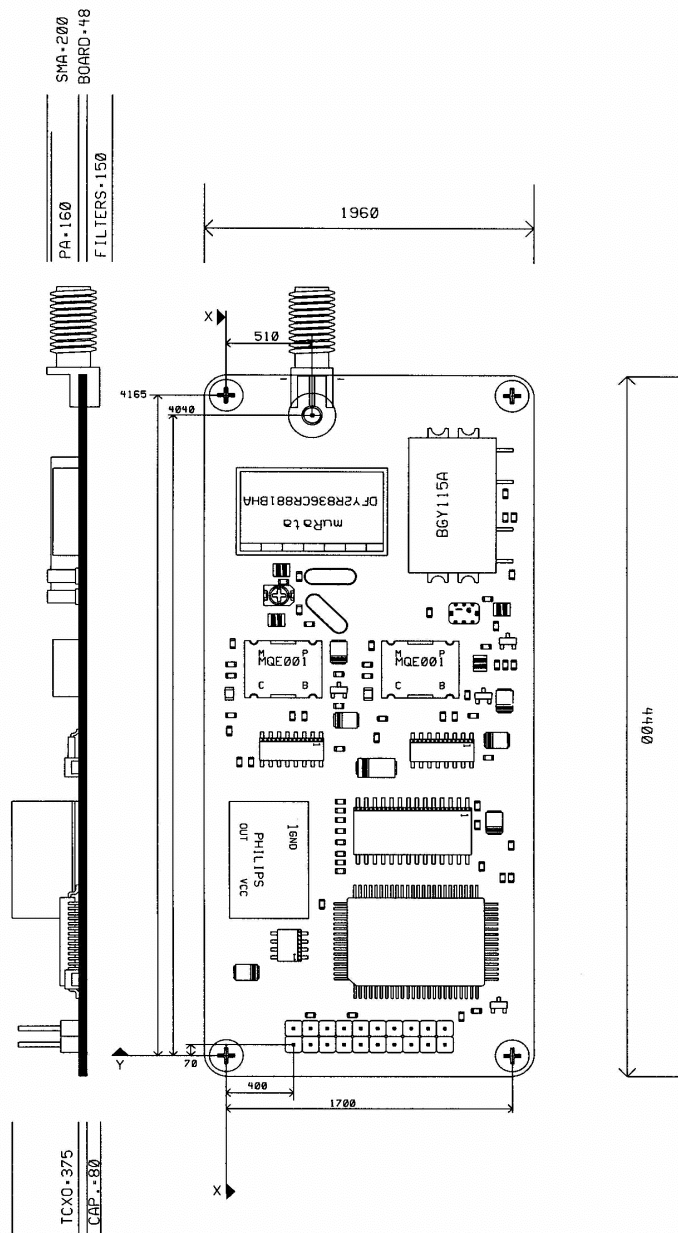

Cellular Modem Module

CRM4200/4250

Mounting Considerations

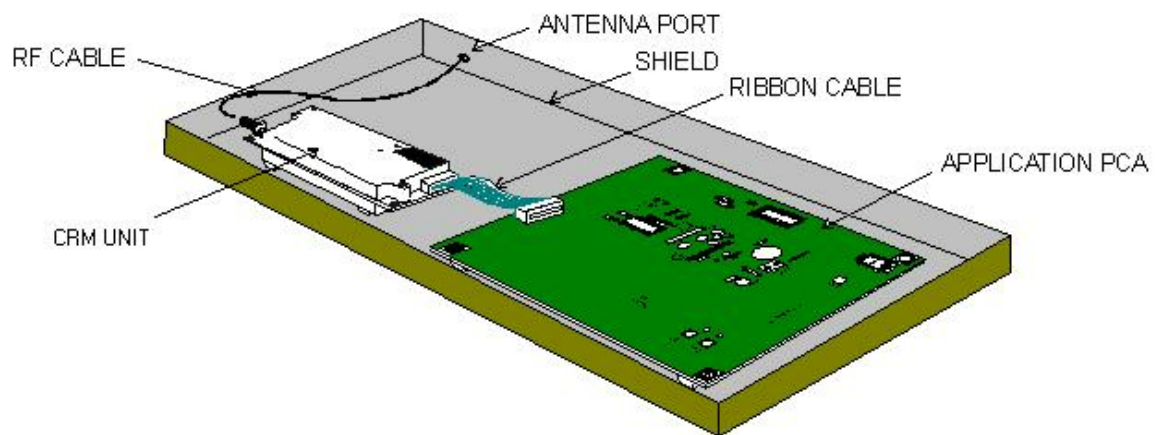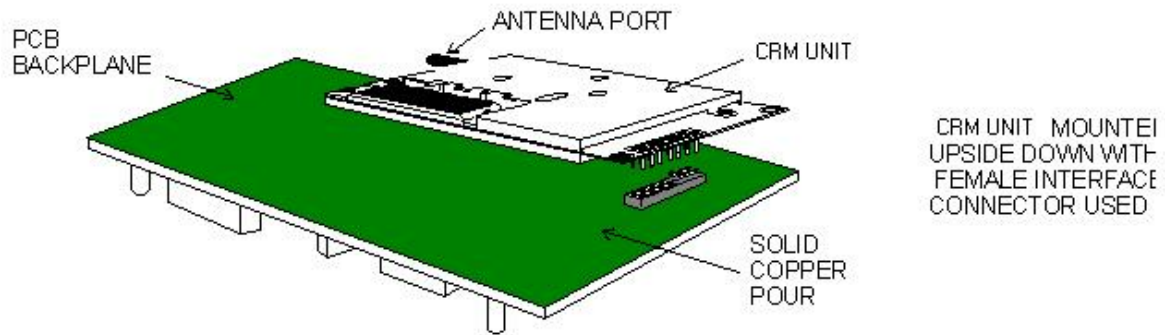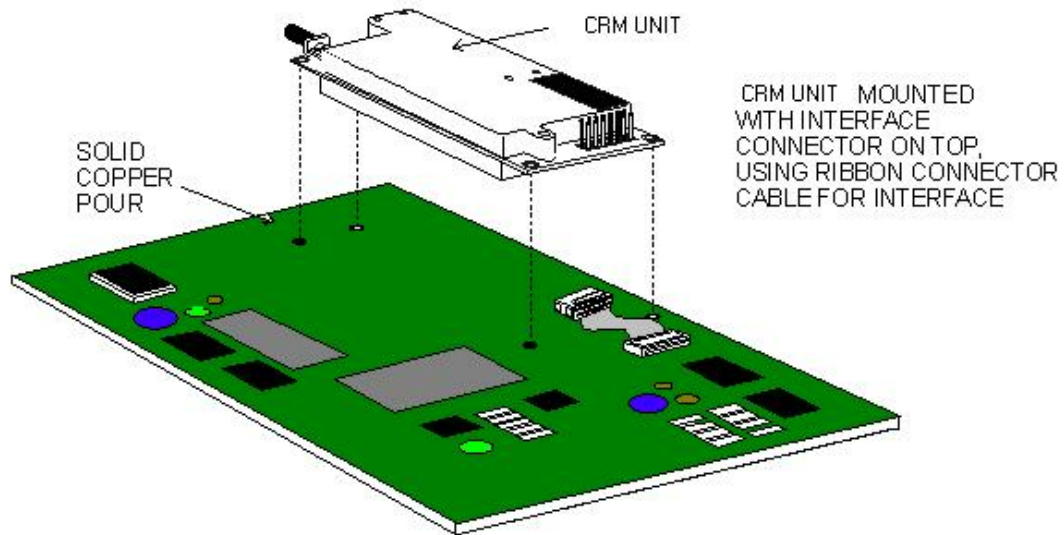

Cellular Modem Module

CRM4200/4250

ANTENNA SPECIFICATION

Standard Communication has provided a Centurion (Model: EXE-821-SM) 2.5 dBi gain antenna with the kit. Only use this antenna with the module. (Please refer to statement below)

* Centurion Antenna: Model: EXE-821-SM 2.5dBi gain

IMPORTANT!!

Performance and compliance with FCC rules are heavily influenced by final packaging and antenna configuration of the end-product. Installations not complying with the 20cm minimum separation requirement, using substantially different antenna configurations from those described above, or utilizing operating voltages outside of the normal specifications must be evaluated for compliance with FCC Rules and RF exposure requirements. Responsibility for compliance of the final product with a different antenna(s) is the responsibility of the OEM end-product manufacturer and will required a new MPE measurement. The new application can be submitted as a Class II Permissive change with the new antenna(s).

SHIELDING CONSIDERATIONS

When planning the PCB layout for an application some design rules and layout plans should be considered. The following diagrams show various mounting configurations with respect to shielding. Often the application PCB does not allow for separate ground plane implementation. In these cases a list of design rules should be used in order to prevent inter-circuit problems. The last section of this document deals with common design practices used with RF module implementations.

HARDWARE RESOURCES

The following are suggested hardware manufacturers providing various components of an application. The sources are kept as current as possible, but changes in the product line offered by the manufacturers occur often. Please contact them for their latest catalog to insure product availability.

Antennas

Company	Products offered	Telephone #
Ace Antenna Company	Fixed and portable antennas	818-718-1534
Antenna Specialist / Allen Telecom Group www.allentele.com	Mobile portable & base antennas	800-664-5274
Astron Antenna Co. www.astronantennas.com	Fixed, "DISC", "Hemi" antennas	703-450-5517
Centurion International www.centurion.com	Fixed and portable antennas and batteries.	800-228-4563
MAXRAD www.maxrad.com/wirelessdata	Fixed and Mobile antennas	800-323-9122
TX/RX Systems Inc. www.txrx.com	Base antennas / Fixed antennas	716-549-4700

Batteries

Company	Products offered	Telephone #
Centurion International www.centurion.com	Fixed and portable antennas and batteries.	800-228-4563
Digi-Key Corporation www.digikey.com	Mounting hardware / connectors interface cables and components	800-344-4539

Cables

Company	Products offered	Telephone #
Richardson Electronics www.rfpower.net.com	RF connectors and cable assy's	800-737-6937

Cellular Modem Module**CRM4200/4250****Coatings (RF shielding)**

Company	Products offered	Telephone #
Chomerics www.chomerics.com	EMI, RF Shielding gaskets, covers & spray	781-935-4850

Connectors

Company	Products offered	Telephone #
Digi-Key Corporation www.digikey.com	Mounting hardware / connectors interface cables and components	800-344-4539
Dynawave Incorporated www.dynawave.com	RF connectors (PCB mount + cable)	800-886-7786
Johnson Components www.johnsoncomp.com	RF connectors + hardware	800-247-8256
Richardson Electronics www.rfpower.net	RF connectors and cable assy's	800-737-6937
Samtec www.samtec.com	Headers (0.100") PCB inter- connection solutions.	800-726-8329

Cores (ferrite)

Company	Products offered	Telephone #
Digi-Key Corporation www.digikey.com	Ferrite core products	800-344-4539
Ferronics Incorporated www.ferronics.com	Ferrite beads	716-388-1020

Enclosures (shielded)

Company	Products offered	Telephone #
Compac Development Corp.	Shielded enclosures	516-585-3400
Leader Tech Inc.	Shielded enclosures	813-855-6921
Serpac Electronic Enclosures www.serpac.com	Plastic enclosures w/EMI	626-331-0517

Cellular Modem Module**CRM4200/4250****Generators (see Service Monitors)****Power Converters (DC-DC)**

Company	Products offered	Telephone #
Allied Electronics, Inc. www.allied.avnet.com	Multi-source DC-DC converters	800-433-5700

Power Supplies

Company	Products offered	Telephone #
AstroDyne	Power Supplies	508-823-8080
Astron	Power Supplies	949-458-7277
Maxim Integrated Products www.maxin-ic.com	Power Supplies IC's	800-998-8800
Watkins-Johnson Co. www.wj.com	Power Supplies & Assy's	800-951-4401

Service Monitors (Cellular test sets)

Company	Products offered	Telephone #
Hewlett Packard www.hp.com	HP8920A, 8920B	800-452-4844
Grayson Wireless / Allen Telecom www.allentele.com	Cellscope (over the air monitoring)	216-349-8400

Solar Panels

Company	Products offered	Telephone #
Sunwize Technologies, Inc. www.sunwize.com	Solar panels, system components	800-817-6527

Miscellaneous

Cellular Modem Module**CRM4200/4250**

Company	Products offered	Telephone #
Black Box Corporation	Misc. Adapters, converters	800-321-0746
Global Engineering	EIA/TIA/IS-41.1-B, EIA/TIA-553	303-792-2181
Documents	Industry standards documents	
RAF Electronic Hardware http://www.rafhdwe.com	Stand-offs, chassis fasteners	203-888-2133