

EMITEST REPORT

Test Report No. : 22HE0077-YW

Applicant: Sharp Corporation

Type of Equipment: Facsimile Equipment / Cordless Handset

Model No.: UX-CC500 (Facsimile Equipment)
UX-CC500K (Cordless Handset)
UX-K01 (Optional Cordless Handset)

Test standard: FCC Part 15 Subpart C Section 15.247
* Except Section 15.247(e) Processing Gain

FCC ID: APYHRO00024

Test Result: Complied

1. This test report shall not be reproduced in full or partial, without the written approval of A-Pex International Co., Ltd.
2. The results in this report apply only to the sample tested.
3. This equipment is in compliance with above regulation. We hereby certify that the data contain a true representation of the EMC profile.
4. The test results in this report are traceable to the national or international standards.
5. This test report does not constitute an endorsement by NIST/NVLAP or U.S. Government.

Date of test: April 2, 6, 7, 9, 20 and 22, 2002

Tested by: 
Makoto Kosaka
EMC Section

Approved by: 
Kazutoyo Nakanishi
Site Operation Manager of EMC Section

A-pex International Co., Ltd.
YOKOWA LAB.

108 Yokowa-cho, Ise-shi, Mie-ken 516-1106 JAPAN

Telephone: int +81 596 39 1485

Facsimile: int +81 596 39 0232

CONTENTS

	PAGE
SECTION 1: Client information	3
SECTION 2: Equipment under test (E.U.T.)	3
SECTION 3: Test specification, methods & procedures	4
SECTION 4: Operation of E.U.T. during testing	5
SECTION 5: Summary of test results	7
SECTION 6: Conducted Emissions (AC Mains), Section 15.207	8
SECTION 7: 6dB Bandwidth (Conducted), Section 15.247(a)(2)	9
SECTION 8: Maximum Peak Output Power (Conducted), Section 15.247(b)	9
SECTION 9: Variation of Input Power (Conducted), Section 15.31(e)	9
SECTION 10: Out of Band Emissions (Radiated), Section 15.247(c)	10
SECTION 11: Out of Band Emissions (Conducted), Section 15.247(c)	15
SECTION 12: Power Density (Conducted), Section 15.247(d)	15
APPENDIX 1: Photographs of test setup	16
APPENDIX 2: Test instruments	16
APPENDIX 3: Data of EMI test	16

A-pex International Co., Ltd.
YOKOWA LAB.

108 Yokowa-cho, Ise-shi, Mie-ken 516-1106 JAPAN

Telephone: int +81 596 39 1485

Facsimile: int +81 596 39 0232

SECTION 1: Client information

Company name : Sharp Corporation
Trade name : SHARP
Address : 492 Minosho-cho, Yamatokoriyama-shi, Nara 639-1186 Japan
Telephone Number : +81-743-55-4085
Facsimile Number : +81-743-52-9514
Contact Person : Shigekazu Fujiwara

SECTION 2: Equipment under test (E.U.T.)

Type of Equipment : Facsimile Equipment / Cordless Handset
Model No. : UX-CC500 (Facsimile Equipment)
UX-CC500K (Cordless Handset)
UX-K 01(Optional Cordless Handset)
Serial No. : Sample No. 3 / No. 4 (Facsimile Equipment)
Sample No. 1 / No. 2 (Cordless Handset)
*Facsimile Equipment, Sample No. 4, and Cordless Handset,
Sample No. 2, were made over for conducted test of radio.
Rating : AC 120V/ 60Hz (Facsimile Equipment)
DC 3.6V Ni-MH Battery (Cordless Handset)
AC120V/60Hz (AC Adaptor with Cordless Handset)
Country of Manufacture : Thailand
Receipt Date of Sample : April 2, 2002

2.2 Product Description

Model: UX-CC500 is a Facsimile Equipment and Model: UX-CC500K and UX-K01 is a Cordless Handset.
They are referred to as the EUT in this report.

Frequency Characteristics : 2404.8MHz-2475.0MHz (Facsimile Equipment and Cordless Handset)
Channel Characteristics : 40channels selectable by 1.8MHz spacing.
Modulation : DBPSK (Differential Binary Phase Shift Keyed)
Antenna type : Dipole Antenna (Facsimile Equipment), Whip Antenna (Cordless Handset)
Antenna Gain : 2.9dBi (Facsimile Equipment), 3.08dBi (Cordless Handset)
Spread Method : DSSS (Direct Sequence Spread Spectrum)

2.3 Differences between UX-CC500K and UX-K01

UX-K01 is an optional Cordless Handset . UX-K01 is equal to UX-CC500K in electric circuit and software to control.

A-pex International Co., Ltd.
YOKOWA LAB.

108 Yokowa-cho, Ise-shi, Mie-ken 516-1106 JAPAN
Telephone: int +81 596 39 1485
Facsimile: int +81 596 39 0232

SECTION 3: Test specification, methods & procedures

3.1 Test Specification

Test Specification : FCC Part 15 Subpart C
Title : FCC 47CFR Part15 Radio Frequency Device
Subpart C Intentional Radiators
Section 15.247 Operation within the bands 902-928MHz, 2400-2483.5MH
and 5725-5850MHz

3.2 Methods & Procedures

No.	Item	Test Procedure	Specification	Remarks
1	Conducted Emission	ANSI C63.4:1992	Section 15.207	AC Mains only
2	6dB Bandwidth	ANSI C63.4:1992	Section 15.247(a)(2)	Conducted
3	Maximum Peak Output Power	ANSI C63.4:1992	Section 15.247(b)	Conducted
4	Variation of Input Power	ANSI C63.4:1992	Section 15.31(e)	Conducted, Facsimile equipment only
5	Out of Band Emissions	ANSI C63.4:1992	Section 15.205 Section 15.209 Section 15.247(c)	Conducted / Radiated
6	Power Density	ANSI C63.4:1992	Section 15.247(d)	Conducted
7	Processing Gain	ANSI C63.4:1992	Section 15.247(e)	-

*These tests were also referred to FCC 97-114 "Guidance on Measurement for Direct Sequence Spread Spectrum Systems."

*These tests were performed without any deviations from test procedure except for the following exclusions.

3.3 Exclusion from standard

No.	Item	Test Procedure	Specification	Remarks
1	Processing Gain	ANSI C63.4:1992	Section 15.247(e)	-

The test was not performed since it had been measured at another laboratory.

A-pex International Co., Ltd.
YOKOWA LAB.

108 Yokowa-cho, Ise-shi, Mie-ken 516-1106 JAPAN

Telephone: int +81 596 39 1485

Facsimile: int +81 596 39 0232

SECTION 4: Operation of E.U.T. during testing

4.1 Operating Modes

The EUT exercise program used during radiated and conducted testing was designed to exercise the various system components in a manner similar to typical use.

The operating mode/system were as follows:

Operation mode is as follows;

Facsimile Equipment


- Transmitting mode (ch1: 2404.8MHz, ch20: 2439MHz, ch40: 2475MHz)
- Intercom mode (Conducted emission only)

Cordless Handset

- Transmitting mode (ch1: 2404.8MHz, ch20: 2439MHz, ch40: 2475MHz / Except for Conducted emission test)
- Intercom mode (Conducted emission only)
- Charging mode (Conducted emission only)

Justification: The system was configured in typical fashion (as a customer would normally use it) for testing.

4.2 Configuration and peripherals

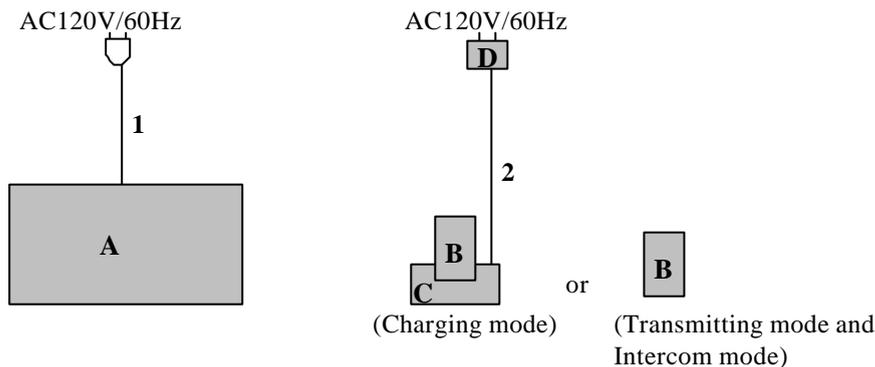

Description of EUT

No.	Item	Model number	Serial number	Manufacturer	FCC ID
A	Facsimile Equipment	UX-CC500	Sample No. 3 / No. 4	SHARP	APYHRO00024
B	Cordless Handset	UX-CC500K	Sample No. 1 / No. 2	SHARP	APYHRO00024
C	Cordless Handset Charger	-	-	SHARP	-
D	AC Adaptor	A20930N	-	SHARP	-

*C and D are intended to be supplied with the products.

List of cables used

No.	Name	Length (m)	Shield	Remark
1	AC Power Cable	1.85	N	-
2	DC Power Cable	1.95	N	-

A-pex International Co., Ltd.
YOKOWA LAB.

108 Yokowa-cho, Ise-shi, Mie-ken 516-1106 JAPAN

Telephone: int +81 596 39 1485

Facsimile: int +81 596 39 0232

4.3 Verification of the frequency and channel

The following table verifies the frequency pairs.

Channel	Base (GHz)	Handset (GHz)	Channel	Base (GHz)	Handset (GHz)	Channel	Base (GHz)	Handset (GHz)
*1	2.4048	2.4048	16	2.4318	2.4318	31	2.4588	2.4588
2	2.4066	2.4066	17	2.4336	2.4336	32	2.4606	2.4606
3	2.4084	2.4088	18	2.4354	2.4354	33	2.4624	2.4624
4	2.4102	2.4102	19	2.4372	2.4372	34	2.4642	2.4642
5	2.4120	2.4120	*20	2.4390	2.4390	35	2.4660	2.4660
6	2.4138	2.4138	21	2.4408	2.4408	36	2.4678	2.4678
7	2.4156	2.4156	22	2.4426	2.4426	37	2.4696	2.4696
8	2.4174	2.4174	23	2.4444	2.4444	38	2.4714	2.4714
9	2.4192	2.4192	24	2.4462	2.4462	39	2.4732	2.4372
10	2.4210	2.4210	25	2.4480	2.4480	*40	2.4750	2.4750
11	2.4228	2.4228	26	2.4498	2.4498			
12	2.4246	2.4246	27	2.4516	2.4516			
13	2.4264	2.4264	28	2.4534	2.4534			
14	2.4282	2.4282	29	2.4552	2.4552			
15	2.4300	2.4300	30	2.4570	2.4570			

*Tested channel

Note 1: This is for sure that all frequencies are in 2.4048GHz to 2.4750GHz.

Note 2: Section 15.31(m): Measurements on intentional radiators or receivers shall be performed at three frequencies for operating frequency range over 10MHz. (The locations of these frequencies one near the top, one near the middle and one near the bottom.)

Note 3: After test, the EUT operating frequencies are in 2.4048GHz to 2.4750GHz. So all the items as followed in testing report are needed to test these three frequencies: top: channel 1, middle: channel 20, bottom: channel 40.

A-pex International Co., Ltd.
YOKOWA LAB.

108 Yokowa-cho, Ise-shi, Mie-ken 516-1106 JAPAN

Telephone: int +81 596 39 1485

Facsimile: int +81 596 39 0232

SECTION 5: Summary of test results

5.1 Test results

No.	Item	Test Procedure	Specification	Remarks	Result
1	Conducted Emission	ANSI C63.4:1992	Section 15.207	AC Mains only	Complied
2	6dB Bandwidth	ANSI C63.4:1992	Section 15.247(a)(2)	Conducted	Complied
3	Maximum Peak Output Power	ANSI C63.4:1992	Section 15.247(b)	Conducted	Complied
4	Variation of Input Power	ANSI C63.4:1992	Section 15.31(e)	Conducted, Facsimile equipment only	Complied
5	Out of Band Emissions	ANSI C63.4:1992	Section 15.205 Section 15.209 Section 15.247(c)	Conducted / Radiated	Complied
6	Power Density	ANSI C63.4:1992	Section 15.247(d)	Conducted	Complied

A-PEX INTERNATIONAL hereby confirms that E.U.T., in the configuration tested, complies with the specifications FCC Part 15 Subpart C Section 15.247.

5.2 Uncertainty

Conducted Emission Test

The measurement uncertainty (with a 95% confidence level) for this test was ± 2.0 dB.

- The data listed in this test report may exceed the test limit because it does not have enough margin.
 The data listed in this test report has enough margin, more than site margin.

Radiated Emission Test

The measurement uncertainty (with a 95% confidence level) for this test using Biconical antenna is ± 4.4 dB.

The measurement uncertainty (with a 95% confidence level) for this test using Logperiodic antenna is ± 4.8 dB.

The measurement uncertainty (with a 95% confidence level) for this test using Horn antenna is ± 5.8 dB.

- The data listed in this test report may exceed the test limit because it does not have enough margin.
 The data listed in this test report has enough margin.

5.3 Test Location

A-PEX International Co., Ltd. Yokowa No.3 test site

108 Yokowa-cho, Ise-shi, Mie-ken 516-1106 Japan

Telephone number : +81-596-39-1485

Facsimile number : +81-596-39-0232

The site has been fully described in a report submitted to FCC office, and listed on September 12, 2000

(Registration number: 90412).

*NVLAP Lab. code : 200109-0

5.4 Photographs of test setup

Refer to Appendix 1.

5.5 Test instruments

Refer to Appendix 2.

5.6 Data of EMI Test

Refer to Appendix 3.

A-pex International Co., Ltd.

YOKOWA LAB.

108 Yokowa-cho, Ise-shi, Mie-ken 516-1106 JAPAN

Telephone: int +81 596 39 1485

Facsimile: int +81 596 39 0232

SECTION 6: Conducted Emissions (AC Mains), Section 15.207

Test Procedure

EUT was placed on a platform of nominal size, 1.0m by 1.0m, raised 80cm above the conducting ground plane. The rear of tabletop was located 40cm to the vertical conducting plane. The rear of EUT was aligned and flushed with rear of tabletop. All other surfaces of tabletop were at least 80cm from any other grounded conducting surface. AC cables and DC cables were bundled in center. They were folded back and forth forming a bundle 30cm to 40cm long and were hanged at a 40cm height to the ground plane. Each EUT current-carrying power lead, except the ground (safety) lead, was individually connected through a LISN to the input power source. All unused 50 ohm connectors of the LISN were resistively terminated in 50 ohm when not connected to the measuring equipment.

The AC Mains Terminal Continuous disturbance Voltage has been measured with the EUT on a shielded room.

The EUT was connected to a Line Impedance Stabilization Network (LISN).

The facsimile equipment was tested under transmitting mode and intercom mode.

The cordless handset was tested under intercom mode and charging mode. It was not operated under transmitting mode since it was not possible to transmit with the handset put on the charger.

An overview sweep with peak detection has been performed.

The measurements have been performed with a CISPR quasi-peak detector (IF BW 10kHz).

The frequency range measured is 450kHz to 30MHz.

Test data : Page A1 to A14 (APPENDIX 3)

Photographs of test setup : Page 17-20

Test result : Pass

Test instruments : LS-03, LS-04, SA-04, TR-05

A-pex International Co., Ltd.

YOKOWA LAB.

108 Yokowa-cho, Ise-shi, Mie-ken 516-1106 JAPAN

Telephone: int +81 596 39 1485

Facsimile: int +81 596 39 0232

SECTION 7: 6dB Bandwidth (Conducted), Section 15.247(a)(2)

Test Procedure

The minimum 6dB bandwidth was measured with a spectrum analyzer connected to the antenna port.

Frequency (GHz)	Base / Handset	6dB Band width (MHz)	Limit (kHz)	Result
Ch1 2.4048	Base	1.538	> 500	Pass
	Handset	1.538	> 500	Pass
Ch20 2.4390	Base	1.532	> 500	Pass
	Handset	1.526	> 500	Pass
Ch40 2.4750	Base	1.526	> 500	Pass
	Handset	1.532	> 500	Pass

Test data : Page A15 to A16 (APPENDIX 3)

Test result : Pass

Test instruments : SA-06, AT-14

SECTION 8: Maximum Peak Output Power (Conducted), 15.247(b)

Test Procedure

The Maximum Peak Output power was measured with a power meter connected to the antenna port.

* Antenna Gain dose not exceed 6dBi.

Test data : Page A17to A18(APPENDIX 3)

Test result : Pass

Test instruments : PS-03, PM-02, SA-06, AT-14

SECTION 9: Variation of Input Power (Conducted), Section 15.31(e)

Test Procedure

The Variation of Input Power was measured with a spectrum analyzer.

Test data : Page A19 to A21 (APPENDIX 3)

Test result : Pass

Test instruments : SA-06, AT-14

A-pex International Co., Ltd.

YOKOWA LAB.

108 Yokowa-cho, Ise-shi, Mie-ken 516-1106 JAPAN

Telephone: int +81 596 39 1485

Facsimile: int +81 596 39 0232

SECTION 10: Out of Band Emissions (Radiated), Section 15.247(c)

Test Procedure

EUT was placed on a platform of nominal size, 1m by 1m, raised 80cm above the conducting ground plane.

Test was made with the antenna positioned in both the horizontal and vertical planes of polarization.

The Radiated Electric Field Strength intensity has been measured on an open test site with a ground plane and at a distance of 3m.

The measuring antenna height was varied between 1 to 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity. The measurements were performed for both vertical and horizontal antenna polarization.

For the facsimile equipment, pre-check was performed at the each antenna angle of 0 degrees, 90 degrees and 180 degrees to compare and detect the maximum noise level. The cordless handset was also previously checked at each position of three axes X, Y and Z to find the worst position. The position in which the maximum noise occurred was chosen to put into measurement.

Worse cases are referred to the following page.

It was operated under transmitting mode.

Radiated Spurious emissions

In any 100kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator confirmed 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on a radiated measurement. The result was also satisfied the general limits specified in Sec.15.209(a).

Measurement range : 30MHz to 1000MHz CISPR QP Detector, IF BW 120kHz

: 1GHz to 26GHz PK and AV Detector

Test data : 30 –1000MHz : Page A22 to A27 (APPENDIX 3)

: 1 – 26GHz : Page A28 to A33(APPENDIX 3)

: Restricted Band Edges:2390MHz/2483.5MHz: Page A34 to A51 (APPENDIX 3)

Photographs of test setup : Page 21-22

Test result : Pass

Test instruments : AF-01, AF-06, BA-03, LA-06, HA-01, SA-04, SA-06, AT-06, EST-10, HF-04, AT-14

Duty Cycle Factor Measurement

The duty cycle factor measurement is performed in a shield enclosure. The test condition and setup is as same as above paragraph.

Set the RB = 1MHz, VB=1MHz, and span=0MHz. Link the base and handset, then get the Time of duty and cycle.

The duty cycle factor = $20 \log (T_{\text{width}} / T_{\text{period}}) = 20 \log (940 \times 10^{-6} / 2 \times 10^{-3}) = -6.558$

Test instruments : SA-06, AT-14

A-pex International Co., Ltd.

YOKOWA LAB.

108 Yokowa-cho, Ise-shi, Mie-ken 516-1106 JAPAN

Telephone: int +81 596 39 1485


Facsimile: int +81 596 39 0232

Pre check of worse-case position

Facsimile Equipment




Worse case (30MHz-26GHz, Antenna: Horizontal)

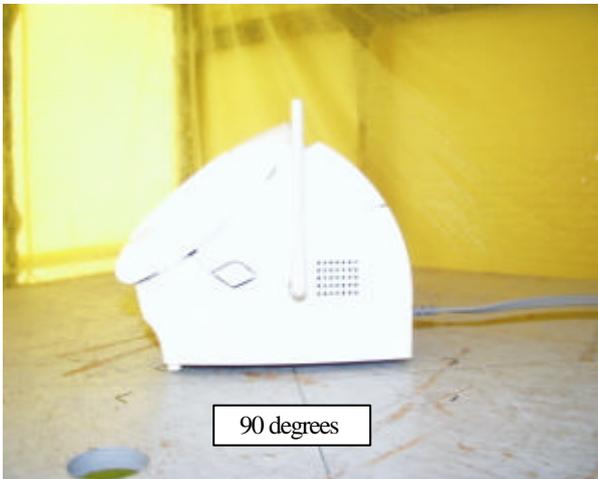

Worse case (30MHz-26GHz, Antenna: Vertical)




Cordless Handset

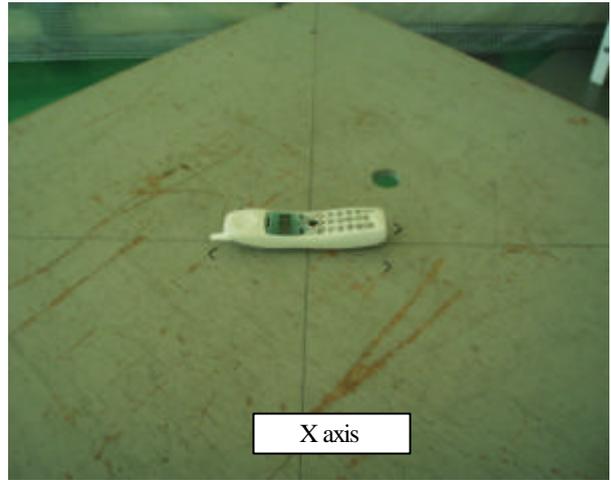

Worse case (30MHz-26GHz , Antenna: Horizontal)
Worse case (1GHz-26GHz, Antenna: Vertical)



Worse case (30MHz-1GHz, Antenna: Vertical)

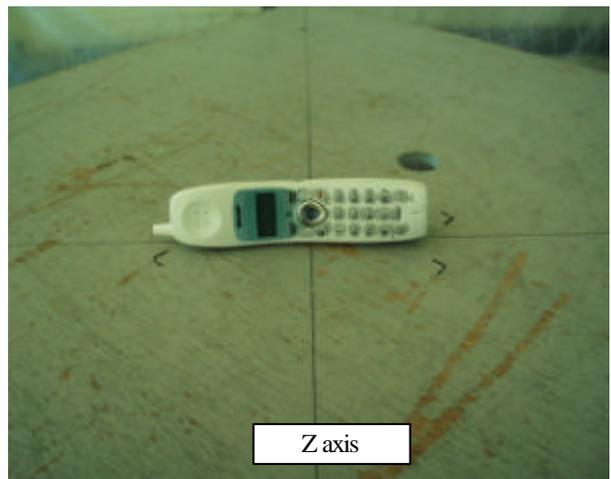

A-pex International Co., Ltd.
YOKOWA LAB.

108 Yokowa-cho, Ise-shi, Mie-ken 516-1106 JAPAN


Telephone: int +81 596 39 1485

Facsimile: int +81 596 39 0232


Duty cycle under normal operation

(Facsimile Equipment)

T width

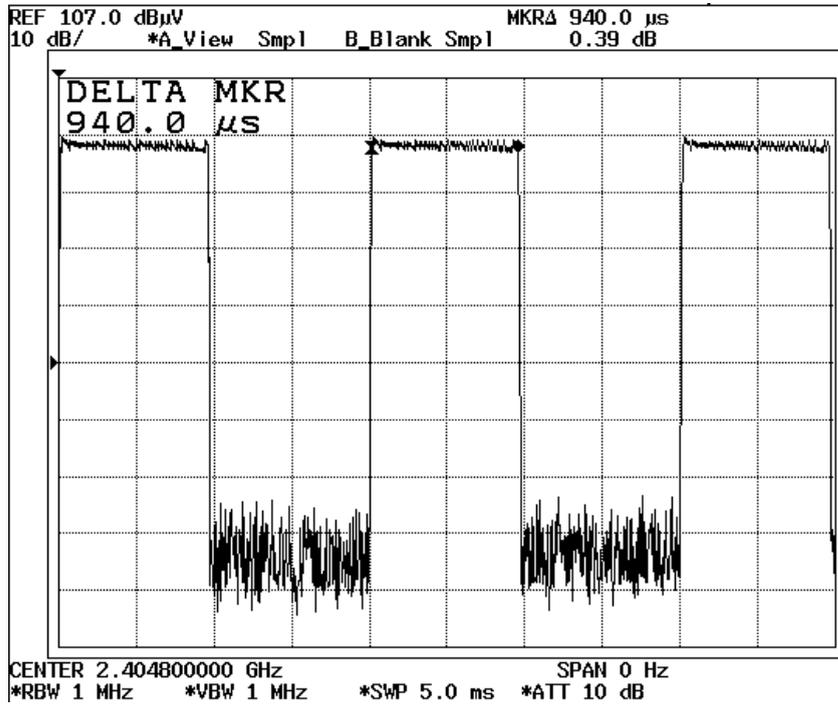

T period

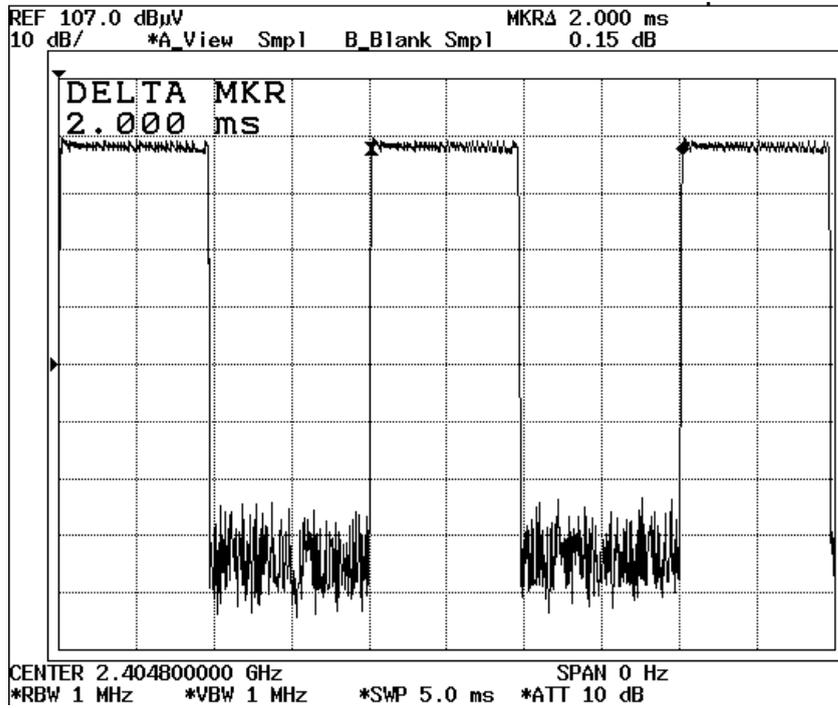


A-pex International Co., Ltd.
YOKOWA LAB.

108 Yokowa-cho, Ise-shi, Mie-ken 516-1106 JAPAN


Telephone: int +81 596 39 1485

Facsimile: int +81 596 39 0232

Duty wave under testing mode

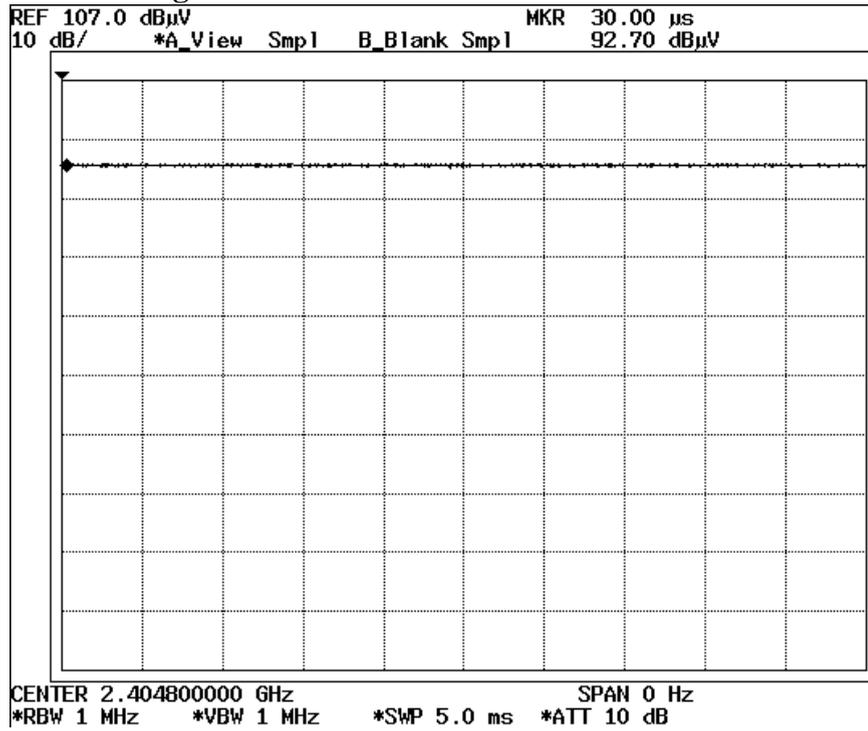

(Cordless Handset)
T width

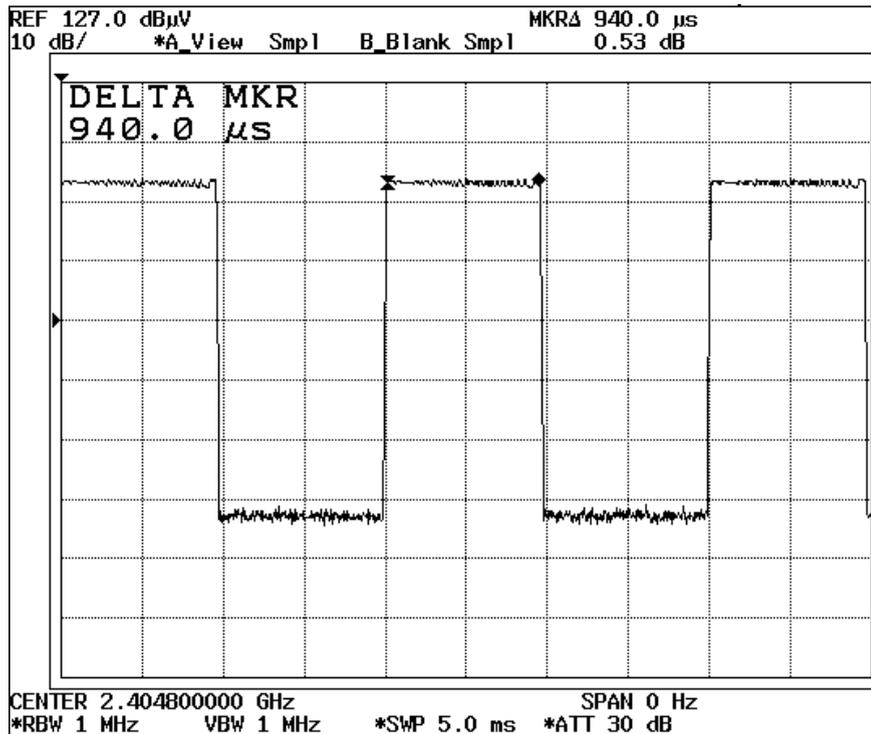


A-pex International Co., Ltd.
YOKOWA LAB.

108 Yokowa-cho, Ise-shi, Mie-ken 516-1106 JAPAN


Telephone: int +81 596 39 1485

Facsimile: int +81 596 39 0232

T period

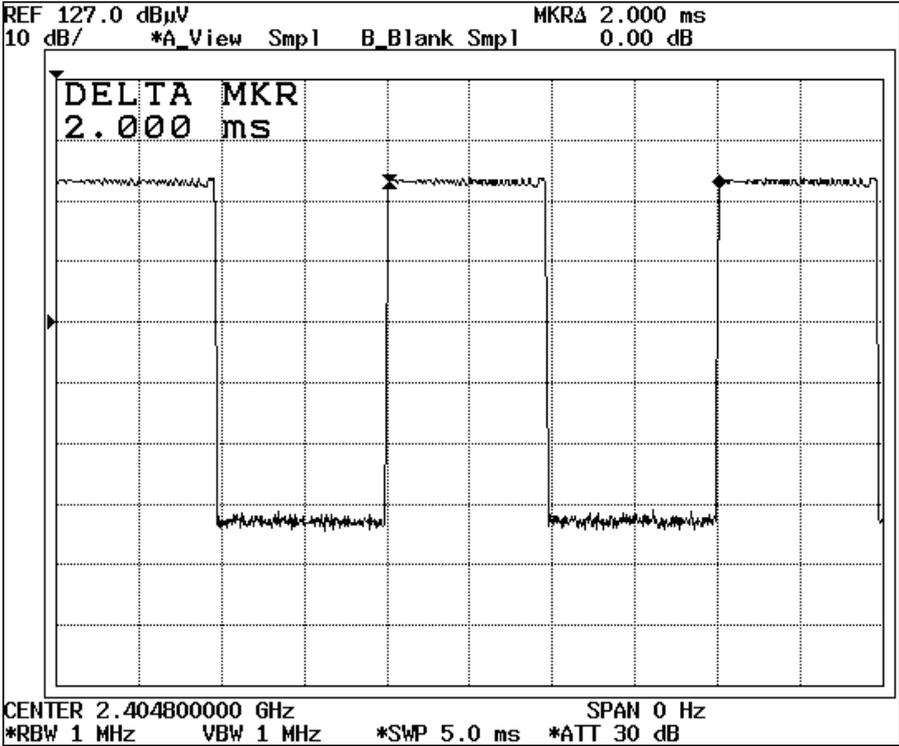

Duty wave under testing mode

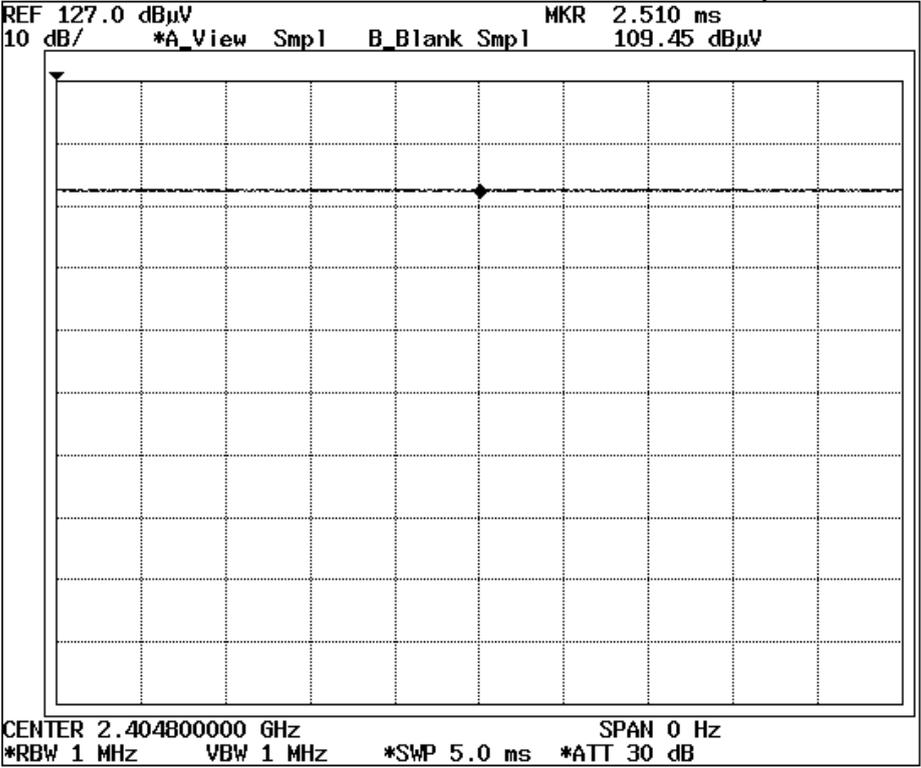

A-pex International Co., Ltd.
YOKOWA LAB.

108 Yokowa-cho, Ise-shi, Mie-ken 516-1106 JAPAN

Telephone: int +81 596 39 1485

Facsimile: int +81 596 39 0232

SECTION 11: Out of Band Emissions (Conducted), Section 15.247(c)

Test Procedure

The Out of Band Emissions was measured with a spectrum analyzer connected to the antenna port.
At 100kHz(RBW and VBW 100kHz), spurious emission in the frequency range 30MHz-26GHz which was out of 2400-2483.5MHz was lower 20 dB than radio frequency power.
It was operated under transmitting mode.

Test data : Page A52 to A65 (APPENDIX 3)

Test result : Pass

Test instruments : SA-06, AT-14

SECTION 12: Power Density(Conducted), Section 15.247(d)

Test Procedure

The Power Density was measured with a spectrum analyzer connected to the antenna port.
It was operated under transmitting mode.

Test data : Page A66 to A69 (APPENDIX 3)

Test result : Pass

Test instruments : SA-06, AT-14

A-pex International Co., Ltd.
YOKOWA LAB.

108 Yokowa-cho, Ise-shi, Mie-ken 516-1106 JAPAN

Telephone: int +81 596 39 1485

Facsimile: int +81 596 39 0232

APPENDIX 1: Photographs of test setup

Page 17-20: Conducted emission (AC Mains)

Page 21-22: Radiated emission

APPENDIX 2: Test instruments

Page 23: Test instruments

APPENDIX 3: Data of EMI test

Page A1-A14: Conducted emission (AC Mains)

Page A15-A16: 6dB Bandwidth (Conducted)

Page A17-A18: Maximum peak output power (Conducted)

Page A19-A21: Variation of input power (Conducted)

Page A22-A51: Out of band emissions (Radiated)

Page A52-A65: Out of band emissions (Conducted)

Page A66-A69: Power density (Conducted)

Conducted emission AC Mains (Facsimile Equipment)

Transmitting mode (ch1, ch20, ch40) / Front view



Transmitting mode (ch1, ch20, ch40) / Side view



A-pex International Co., Ltd.
YOKOWA LAB.

108 Yokowa-cho, Ise-shi, Mie-ken 516-1106 JAPAN

Telephone: int +81 596 39 1485

Facsimile: int +81 596 39 0232

Intercom mode (Facsimile Equipment)

*Calling up Facsimile Equipment from Cordless Handset



A-pex International Co., Ltd.
YOKOWA LAB.

108 Yokowa-cho, Ise-shi, Mie-ken 516-1106 JAPAN

Telephone: int +81 596 39 1485

Facsimile: int +81 596 39 0232

Conducted emission AC Mains (Cordless Handset)

Charging mode / Front view



Charging mode / Side view



A-pex International Co., Ltd.
YOKOWA LAB.

108 Yokowa-cho, Ise-shi, Mie-ken 516-1106 JAPAN

Telephone: int +81 596 39 1485

Facsimile: int +81 596 39 0232

Intercom mode (Cordless Handset)

*Calling up Cordless Handset from Facsimile Equipment



A-pex International Co., Ltd.
YOKOWA LAB.

108 Yokowa-cho, Ise-shi, Mie-ken 516-1106 JAPAN

Telephone: int +81 596 39 1485

Facsimile: int +81 596 39 0232

Radiated emission (Facsimile Equipment; Worse case position)

Horizontal antenna polarization: EUT Antenna angle: 0 degrees



Vertical antenna polarization: EUT Antenna angle: 90 degrees



A-pex International Co., Ltd.
YOKOWA LAB.

108 Yokowa-cho, Ise-shi, Mie-ken 516-1106 JAPAN

Telephone: int +81 596 39 1485

Facsimile: int +81 596 39 0232

Radiated emission (Cordless Handset; Worse case position)

Horizontal antenna polarization (X axis, 30MHz-26GHz)

Vertical antenna polarization (X axis, 1 GHz-26GHz)



Vertical antenna polarization (Y axis, 30MHz-1GHz)



A-pex International Co., Ltd.
YOKOWA LAB.

108 Yokowa-cho, Ise-shi, Mie-ken 516-1106 JAPAN

Telephone: int +81 596 39 1485

Facsimile: int +81 596 39 0232

Test Report No : 22HE0077-YW

APPENDIX 2
Test Instruments
EMI test equipment

Control No.	Instrument	Manufacturer	Model No.	Test Item	Calibration Date * Interval(month)
AF-01	Pre Amplifier	Hewlett Packard	8447D	RE	2002/04/01 * 12
AT-06	Attenuator	Anritsu	MP721B	RE	2002/04/04 * 12
BA-03	Biconical Antenna	Schwarzbeck	BBA9106	RE	2001/05/01 * 12
LA-06	Logperiodic Antenna	Schwarzbeck	UHALP9108-A	RE	2001/05/01 * 12
SA-04	Spectrum Analyzer	Hewlett Packard	8567A	RE / CE	2002/04/03 * 12
TR-05	Test Receiver	Rohde & Schwarz	ESHS10	CE	2001/08/24 * 12
TR-06	Test Receiver	Rohde & Schwarz	ESVS10	RE	2001/11/22 * 12
CC-30RC	Yokowa No.3 open coaxial(0.01-1000MHz)	A-PEX	CC-31,CC-32,CC-33,CC-34,CC-35,CC-36,CC-37,SW-31,SW-32	RE	2002/03/30 * 12
CC-3S	Yokowa No.3 shield coaxial(0.01-1000MHz)	A-PEX	CC-34,CC-35,CC-36,CC-38,SW-31,SW-32	CE	2002/03/30 * 12
YOATS-03	Open Test Site	JSE	10m	RE	2001/05/01 * 12
HA-01	Horn Antenna	A.H.Systems	SAS-200/571	RE	2001/05/20 * 12
EST-10	Horn Antenna	Schwarzbeck	BBHA9170	RE	2001/10/17 * 36
LS-04	LISN	Rohde & Schwarz	ESH3-Z5	CE(EUT)	2001/11/06 * 12
AT-14	Attenuator	Weinschel	2	RE	2002/04/23 * 12
LS-03	LISN	Schwarzbeck	NSLK8127	CE	2001/11/06 * 12
CC-C10	Microwave Cable	Storm	421-014(7m)	RE	2001/12/22 * 12
CC-C13	Microwave Cable	Suhner	SUCOFLEX	RE	2002/01/13 * 12
AF-06	Pre Amplifier	Agilent	HP8449B	RE	2001/12/21 * 12
SA-06	Spectrum Analyzer	Advantest	R3273	RE / CE	2001/11/20 * 12
PM-02	Power Meter	Agilent	E4416A	CE	2002/03/22 * 12
PS-03	Power sensor	Agilent	E9327A	CE	2002/03/12 * 12

All equipment is calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

CE: Conducted emission,

RE: Radiated emission,

DATA OF CONDUCTION TEST

A-PEX INTERNATIONAL CO., LTD.
YOKOWA No.3 OPEN TEST SITE
Report No. : 22HE0077-YW

Applicant : SHARP Corporation
Kind of Equipment : Facsimile Equipment
Model No. : UX-CC500
Serial No. : No. 3
Power : AC120V/60Hz
Mode : Transmitting(ch1 2.4048GHz)
Remarks : FCC ID: APYHR000024
Date : 4/7/2002
Phase : Single Phase
Temperature : 21 °C
Humidity : 64 %
Regulation : FCC Part15.207


Engineer : Makoto Kosaka

No.	FREQ. [MHz]	READING (N)		READING (L1)		LISN FACTOR [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS		MARGIN	
		QP [dBuV]	AV	QP [dBuV]	AV				QP [dBuV]	AV	QP [dBuV]	AV		
1.	0.5509	33.3	-	31.6	-	0.1	0.2	0.0	33.6	-	48.0	0.0	14.4	-
2.	0.8236	31.4	-	30.9	-	0.1	0.1	0.0	31.6	-	48.0	0.0	16.4	-
3.	1.3738	31.8	-	31.4	-	0.1	0.1	0.0	32.0	-	48.0	0.0	16.0	-
4.	2.2005	31.8	-	31.4	-	0.2	0.2	0.0	32.2	-	48.0	0.0	15.8	-
5.	6.8778	21.4	-	22.4	-	0.3	0.3	0.0	23.0	-	48.0	0.0	25.0	-
6.	19.8778	24.5	-	24.0	-	0.8	0.5	0.0	25.8	-	48.0	0.0	22.2	-
7.	25.3281	36.4	-	36.7	-	0.9	0.5	0.0	38.1	-	48.0	0.0	9.9	-
8.	28.8003	39.8	-	40.3	-	0.9	0.6	0.0	41.8	-	48.0	0.0	6.2	-

CALCULATION: READING + LISN FACTOR + CABLE LOSS + ATTEN.

All other spurious emissions were less than 20dB for the limit.

DATA OF CONDUCTION TEST CHART



A-PEX INTERNATIONAL CO., LTD.

YOKOWA No.3 OPEN TEST SITE

Report No. : 22HE0077-YW

Applicant : SHARP Corporation
Kind of Equipment : Facsimile Equipment
Model No. : UX-CC500
Serial No. : No. 3
Power : AC120V/60Hz
Mode : Transmitting(ch1 2.4048GHz)
Remarks : FCC ID: APYHR000024
Date : 4/7/2002
Phase : Single Phase
Temperature : 21 °C
Humidity : 64 %
Regulation 1 : FCC Part15.207
Regulation 2 : FCC Part15.207


Engineer : Makoto Kosaka

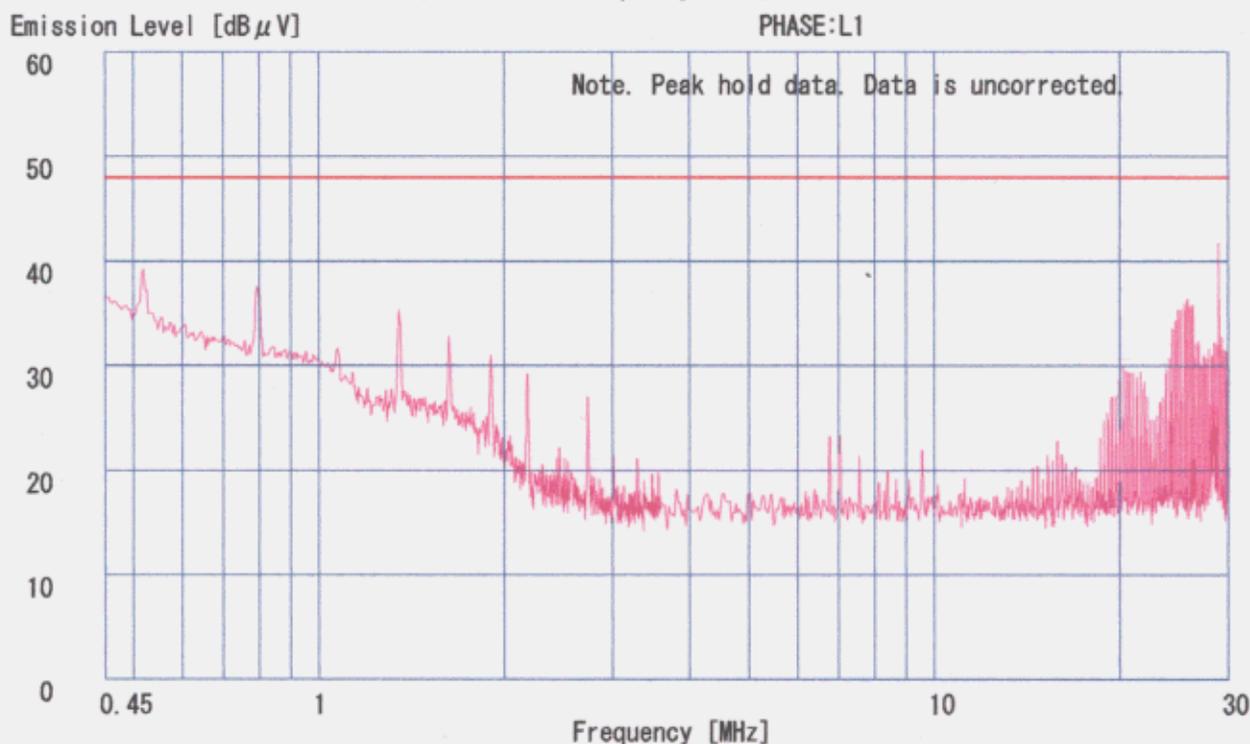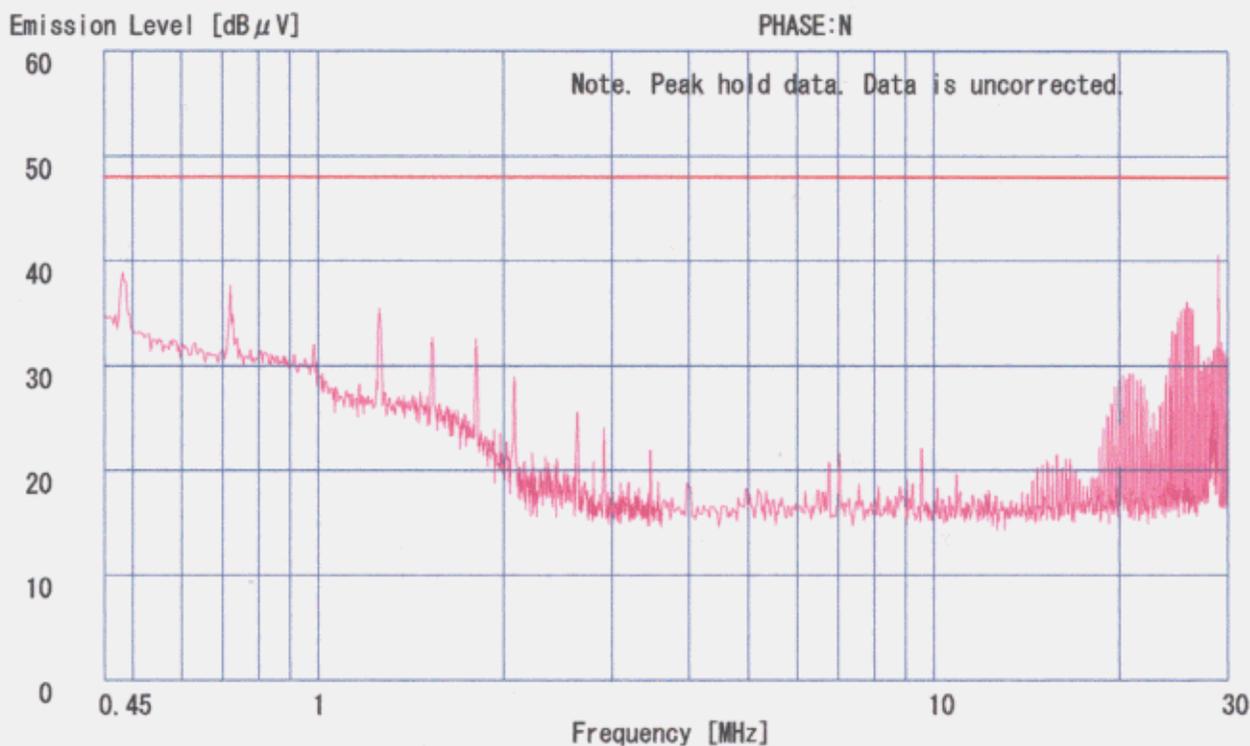

DATA OF CONDUCTION TEST

A-PEX INTERNATIONAL CO., LTD.
YOKOWA No.3 OPEN TEST SITE
Report No. : 22HE0077-YW

Applicant : SHARP Corporation
Kind of Equipment : Facsimile Equipment
Model No. : UX-CC500
Serial No. : No. 3
Power : AC120V/60Hz
Mode : Transmitting(ch20 2.439GHz)
Remarks : FCC ID: APYHR000024
Date : 4/7/2002
Phase : Single Phase
Temperature : 21 °C
Humidity : 64 %
Regulation : FCC Part15.207


Engineer : Makoto Kosaka

No.	FREQ. [MHz]	READING (N)		READING (L1)		LISN FACTOR [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS		MARGIN	
		QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]				QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]	QP [dBuV]	AV [dBuV]
1.	0.5509	33.3	-	31.6	-	0.1	0.2	0.0	33.6	-	48.0	0.0	14.4	-
2.	0.8236	31.4	-	30.9	-	0.1	0.1	0.0	31.6	-	48.0	0.0	16.4	-
3.	1.3662	32.2	-	31.9	-	0.1	0.1	0.0	32.4	-	48.0	0.0	15.6	-
4.	2.2005	31.8	-	31.4	-	0.2	0.2	0.0	32.2	-	48.0	0.0	15.8	-
5.	6.8778	21.4	-	22.4	-	0.3	0.3	0.0	23.0	-	48.0	0.0	25.0	-
6.	21.8559	29.5	-	30.1	-	0.9	0.5	0.0	31.5	-	48.0	0.0	16.5	-
7.	25.9520	36.0	-	36.4	-	0.9	0.5	0.0	37.8	-	48.0	0.0	10.2	-
8.	28.7978	41.0	-	41.6	-	0.9	0.6	0.0	43.1	-	48.0	0.0	4.9	-

CALCULATION: READING + LISN FACTOR + CABLE LOSS + ATTEN.



All other spurious emissions were less than 20dB for the limit.

DATA OF CONDUCTION TEST CHART

A-PEX INTERNATIONAL CO., LTD.
YOKOWA No.3 OPEN TEST SITE
Report No. : 22HE0077-YW

Applicant : SHARP Corporation
Kind of Equipment : Facsimile Equipment
Model No. : UX-CC500
Serial No. : No. 3
Power : AC120V/60Hz
Mode : Transmitting (ch20 2.439GHz)
Remarks : FCC ID: APYHR000024
Date : 4/7/2002
Phase : Single Phase
Temperature : 21 °C
Humidity : 64 %
Regulation 1 : FCC Part15.207
Regulation 2 : FCC Part15.207


Engineer : Makoto Kosaka

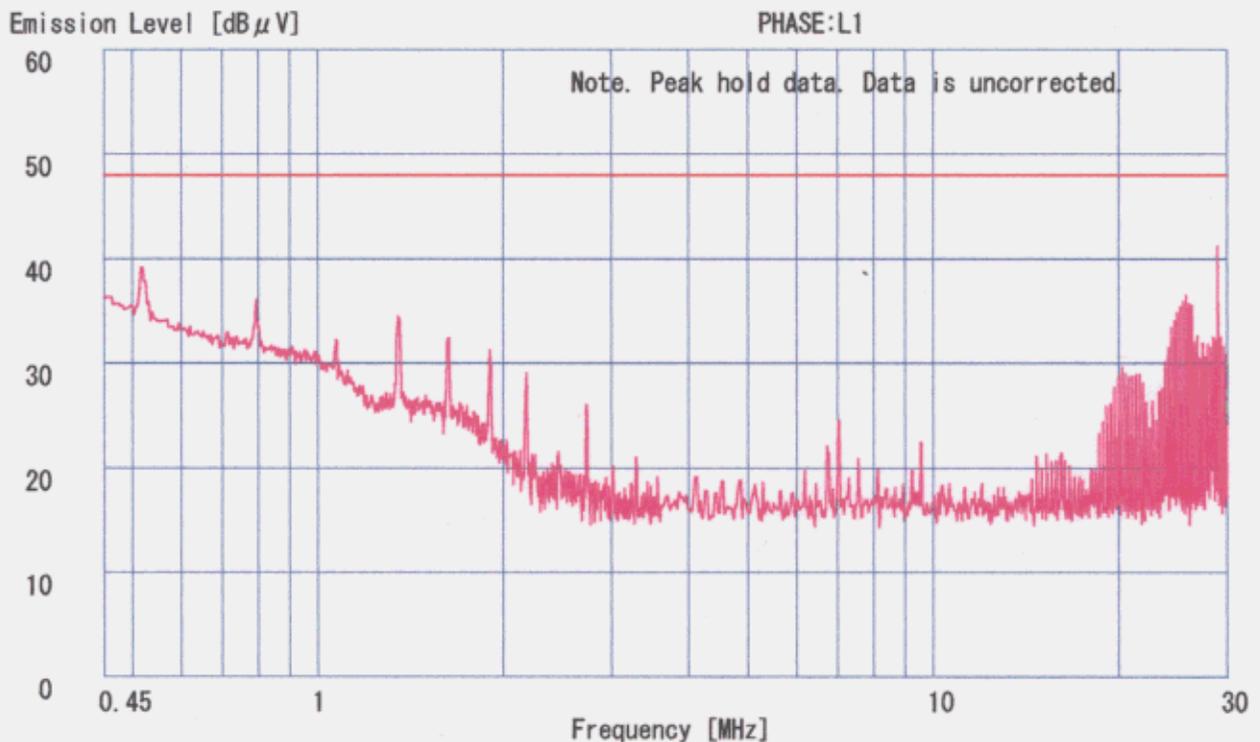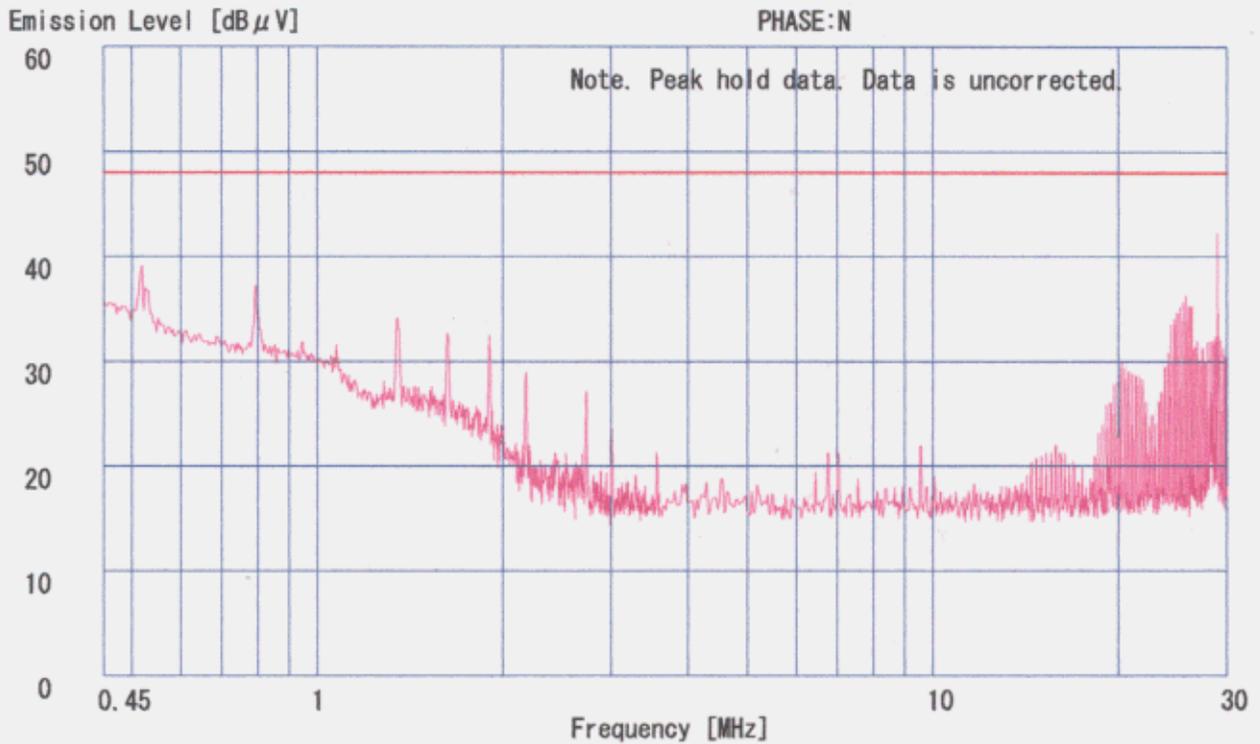

DATA OF CONDUCTION TEST

A-PEX INTERNATIONAL CO., LTD.
YOKOWA No.3 OPEN TEST SITE
Report No. : 22HE0077-YW

Applicant : SHARP Corporation
Kind of Equipment : Facsimile Equipment
Model No. : UX-CC500
Serial No. : No. 3
Power : AC120V/60Hz
Mode : Transmitting(ch40 2.475GHz)
Remarks : FCC ID: APYHR000024
Date : 4/7/2002
Phase : Single Phase
Temperature : 21 °C
Humidity : 64 %
Regulation : FCC Part15.207


Engineer : Makoto Kosaka

No.	FREQ. [MHz]	READING (N)		READING (L1)		LISN FACTOR [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS		MARGIN	
		QP [dBuV]	AV	QP [dBuV]	AV				QP [dBuV]	AV	QP [dBuV]	AV	QP [dB]	AV
1.	0.5442	33.3	-	32.3	-	0.1	0.2	0.0	33.6	-	48.0	0.0	14.4	-
2.	0.8236	31.4	-	30.9	-	0.1	0.1	0.0	31.6	-	48.0	0.0	16.4	-
3.	1.3662	32.2	-	31.9	-	0.1	0.1	0.0	32.4	-	48.0	0.0	15.6	-
4.	2.2005	31.8	-	31.4	-	0.2	0.2	0.0	32.2	-	48.0	0.0	15.8	-
5.	6.8778	21.4	-	22.4	-	0.3	0.3	0.0	23.0	-	48.0	0.0	25.0	-
6.	21.8559	29.5	-	30.1	-	0.9	0.5	0.0	31.5	-	48.0	0.0	16.5	-
7.	25.9457	36.2	-	36.3	-	0.9	0.5	0.0	37.7	-	48.0	0.0	10.3	-
8.	28.7992	41.5	-	41.6	-	0.9	0.6	0.0	43.1	-	48.0	0.0	4.9	-

CALCULATION: READING + LISN FACTOR + CABLE LOSS + ATTEN.



All other spurious emissions were less than 20dB for the limit.

DATA OF CONDUCTION TEST CHART

A-PEX INTERNATIONAL CO., LTD.
YOKOWA No.3 OPEN TEST SITE
Report No. : 22HE0077-YW

Applicant : SHARP Corporation
Kind of Equipment : Facsimile Equipment
Model No. : UX-CC500
Serial No. : No. 3
Power : AC120V/60Hz
Mode : Transmitting (ch40 2.475GHz)
Remarks : FCC ID: APYHR000024
Date : 4/7/2002
Phase : Single Phase
Temperature : 21 °C
Humidity : 64 %
Regulation 1 : FCC Part15.207
Regulation 2 : FCC Part15.207


Engineer : Makoto Kosaka

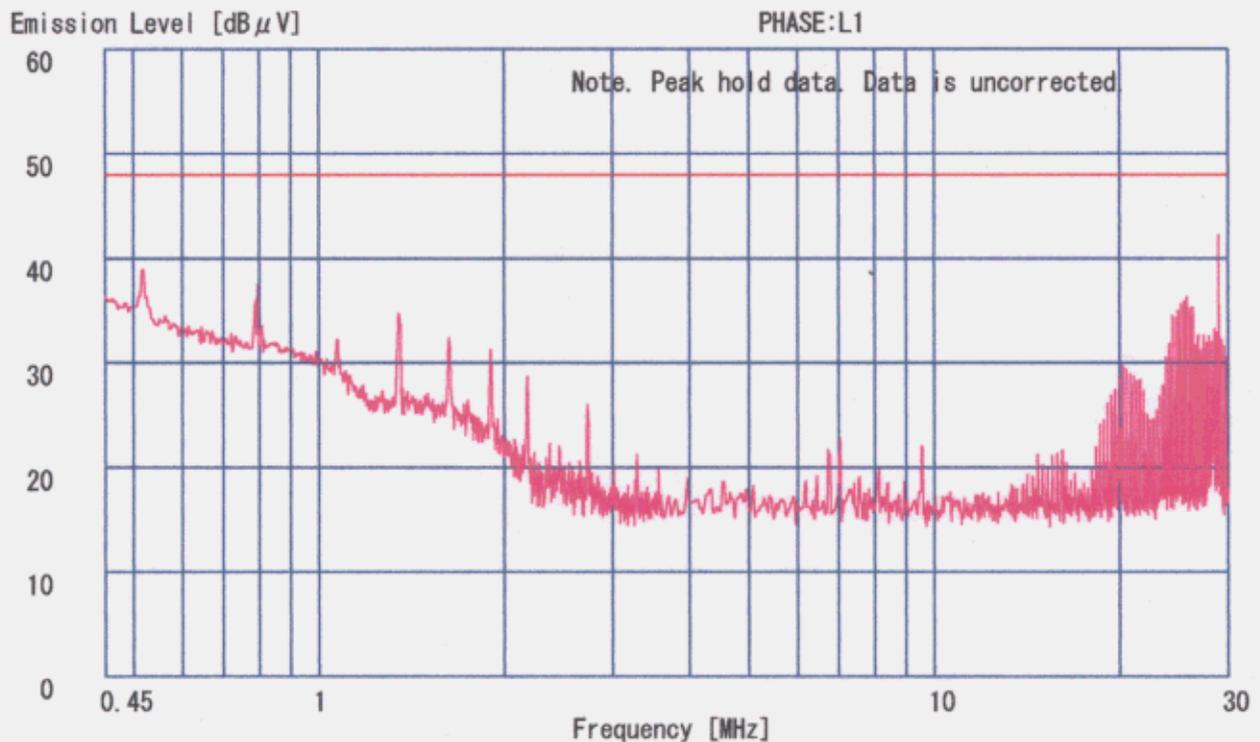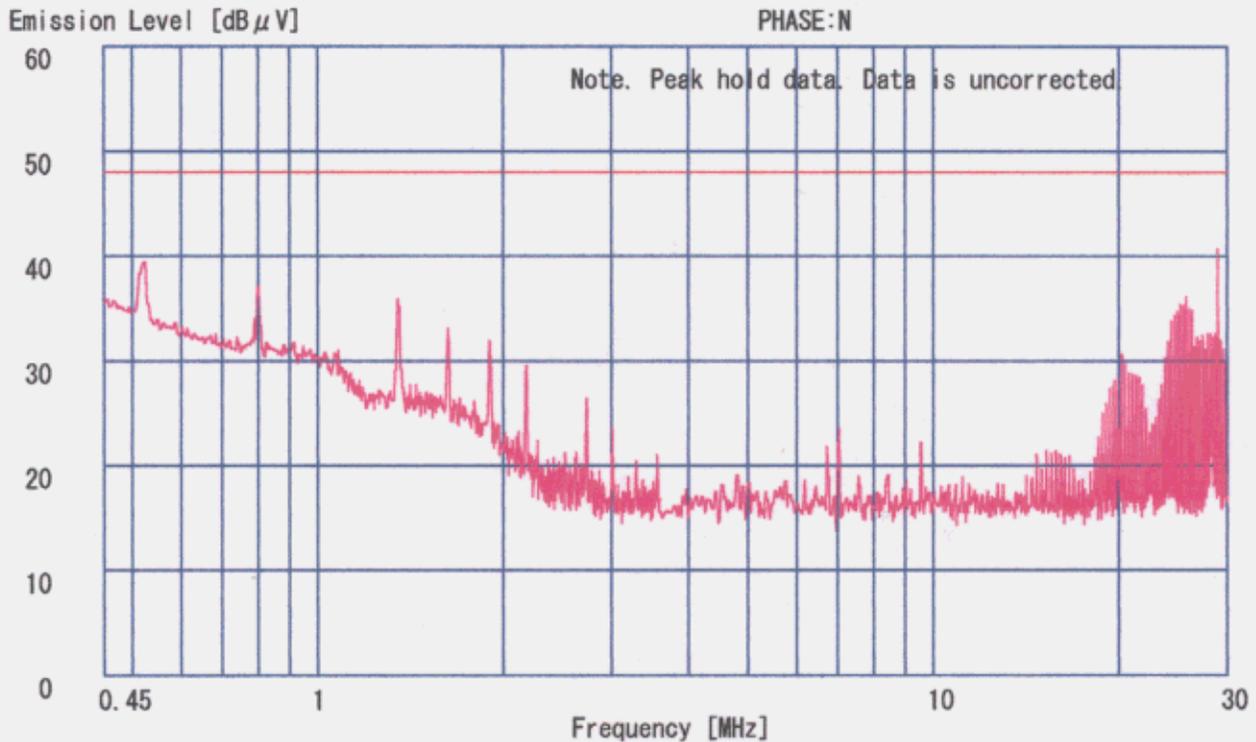

DATA OF CONDUCTION TEST

A-PEX INTERNATIONAL CO., LTD.
YOKOWA No.3 OPEN TEST SITE
Report No. : 22HE0077-YW

Applicant : SHARP Corporation
Kind of Equipment : Facsimile Equipment
Model No. : UX-CC500
Serial No. : No. 3
Power : AC120V/60Hz
Mode : Intercom(Base to Hand)
Remarks : FCC ID: APYHR000024
Date : 4/7/2002
Phase : Single Phase
Temperature : 21 °C
Humidity : 64 %
Regulation : FCC Part15. 207


Engineer : Makoto Kosaka

No.	FREQ. [MHz]	READING (N)		READING (L1)		LISN FACTOR [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS		MARGIN	
		QP [dBuV]	AV	QP [dBuV]	AV				QP [dBuV]	AV	QP [dBuV]	AV	QP [dB]	AV
1.	0.5442	33.3	-	32.3	-	0.1	0.2	0.0	33.6	-	48.0	0.0	14.4	-
2.	0.8236	31.4	-	30.9	-	0.1	0.1	0.0	31.6	-	48.0	0.0	16.4	-
3.	1.3724	32.0	-	31.7	-	0.1	0.1	0.0	32.2	-	48.0	0.0	15.8	-
4.	2.2005	31.8	-	31.4	-	0.2	0.2	0.0	32.2	-	48.0	0.0	15.8	-
5.	6.8778	21.4	-	22.4	-	0.3	0.3	0.0	23.0	-	48.0	0.0	25.0	-
6.	19.5334	21.1	-	21.4	-	0.8	0.5	0.0	22.7	-	48.0	0.0	25.3	-
7.	25.0367	34.2	-	34.4	-	0.9	0.5	0.0	35.8	-	48.0	0.0	12.2	-
8.	28.8000	39.9	-	40.1	-	0.9	0.6	0.0	41.6	-	48.0	0.0	6.4	-

CALCULATION: READING + LISN FACTOR + CABLE LOSS + ATTEN.

All other spurious emissions were less than 20dB for the limit.


DATA OF CONDUCTION TEST CHART



A-PEX INTERNATIONAL CO., LTD.

YOKOWA No.3 OPEN TEST SITE

Report No. : 22HE0077-YW

Applicant : SHARP Corporation
Kind of Equipment : Facsimile Equipment
Model No. : UX-CC500
Serial No. : No. 3
Power : AC120V/60Hz
Mode : Intercom (Base to Hand)
Remarks : FCC ID: APYHR000024
Date : 4/7/2002
Phase : Single Phase
Temperature : 21 °C
Humidity : 64 %
Regulation 1 : FCC Part15.207
Regulation 2 : FCC Part15.207


Engineer : Makoto Kosaka

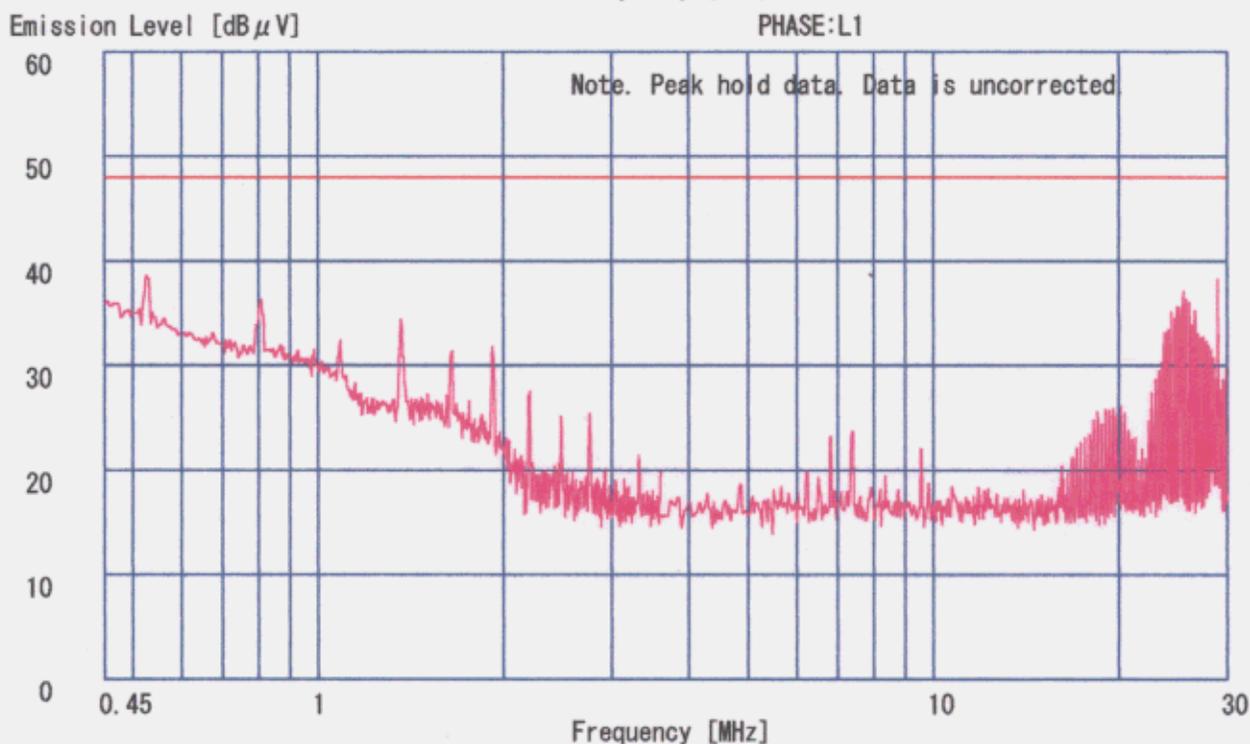
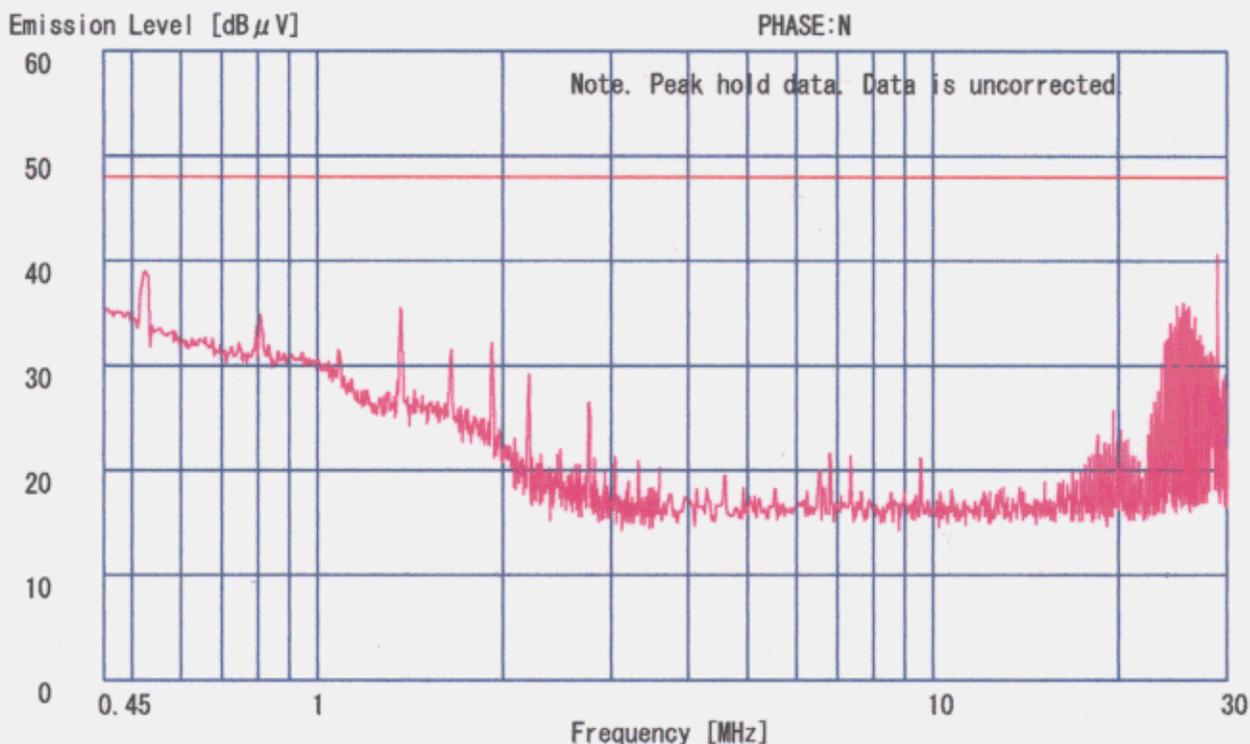


DATA OF CONDUCTION TEST CHART

A-PEX INTERNATIONAL CO., LTD.
YOKOWA No.3 OPEN TEST SITE
Report No. : 22HE0077-YW

Applicant : SHARP Corporation
Kind of Equipment : Facsimile Equipment
Model No. : UX-CC500
Serial No. : No. 3
Power : AC120V/60Hz
Mode : Intercom (Hand to Base)
Remarks : FCC ID: APYHR000024
Date : 4/7/2002
Phase : Single Phase
Temperature : 21 °C
Humidity : 64 %
Regulation 1 : FCC Part15.207
Regulation 2 : FCC Part15.207


Engineer : Makoto Kosaka

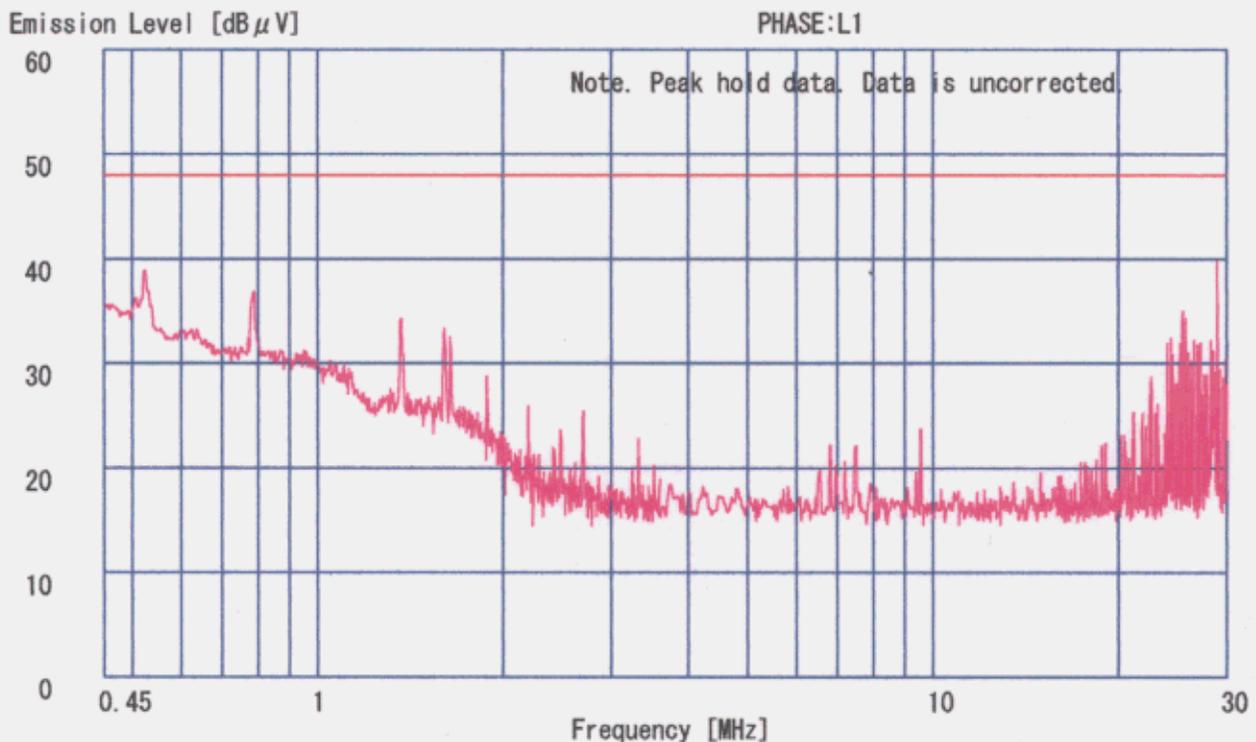
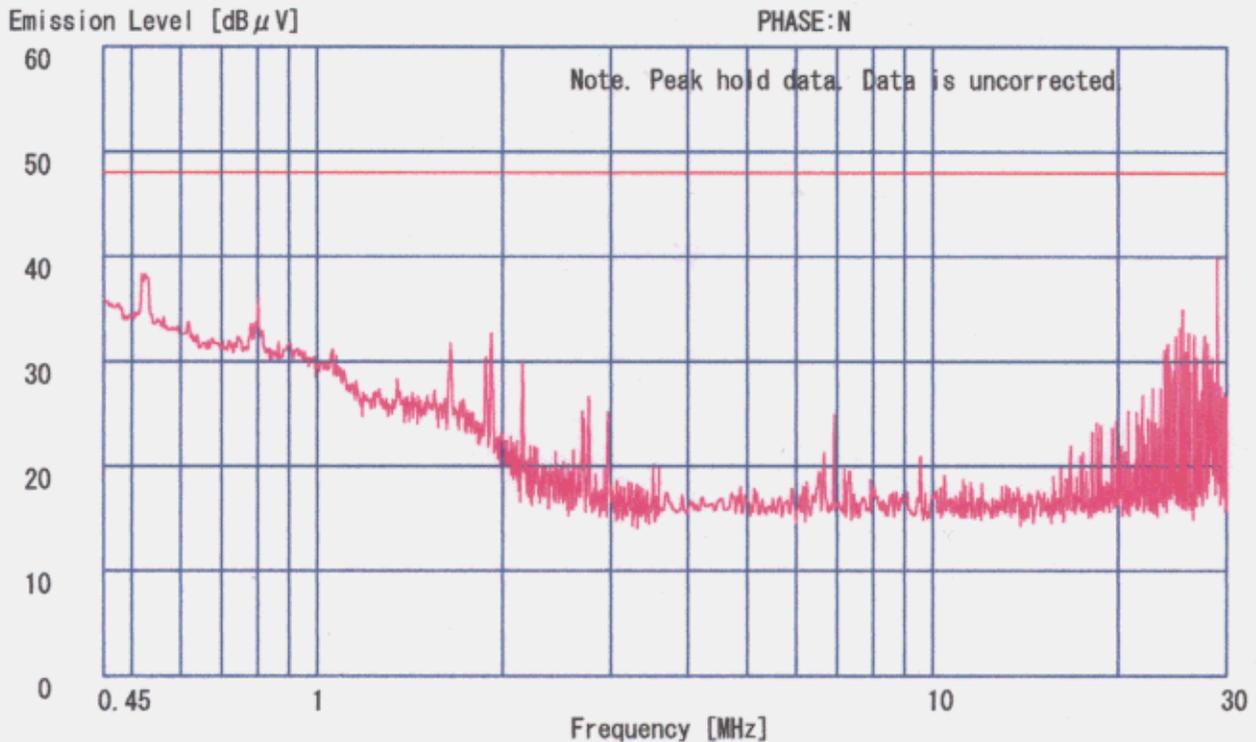


DATA OF CONDUCTION TEST CHART

A-PEX INTERNATIONAL CO., LTD.
YOKOWA No.3 OPEN TEST SITE
Report No. : 22HE0077-YW

Applicant : SHARP Corporation
Kind of Equipment : Facsimile Equipment
Model No. : UX-CC500
Serial No. : No. 3
Power : AC120V/60Hz
Mode : Stand-by
Remarks : FCC ID: APYHR000024
Date : 4/7/2002
Phase : Single Phase
Temperature : 21 °C
Humidity : 64 %
Regulation 1 : FCC Part15.207
Regulation 2 : FCC Part15.207


Engineer : Makoto Kosaka

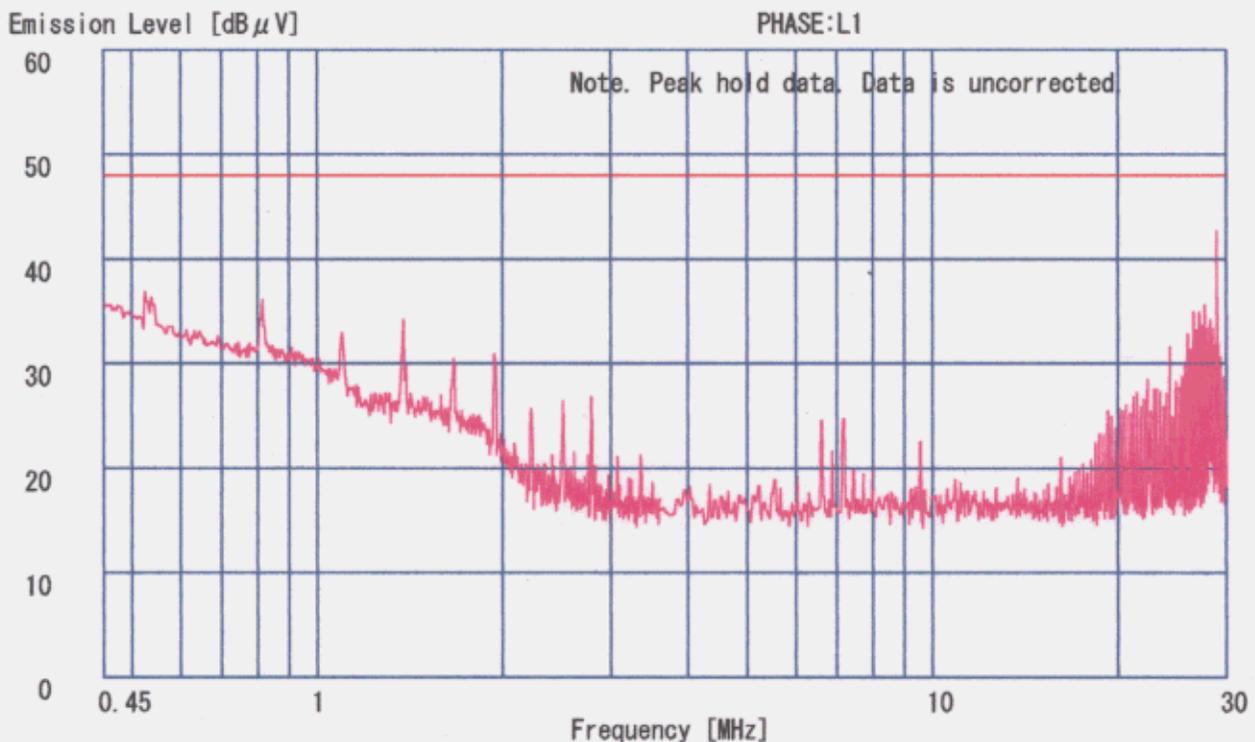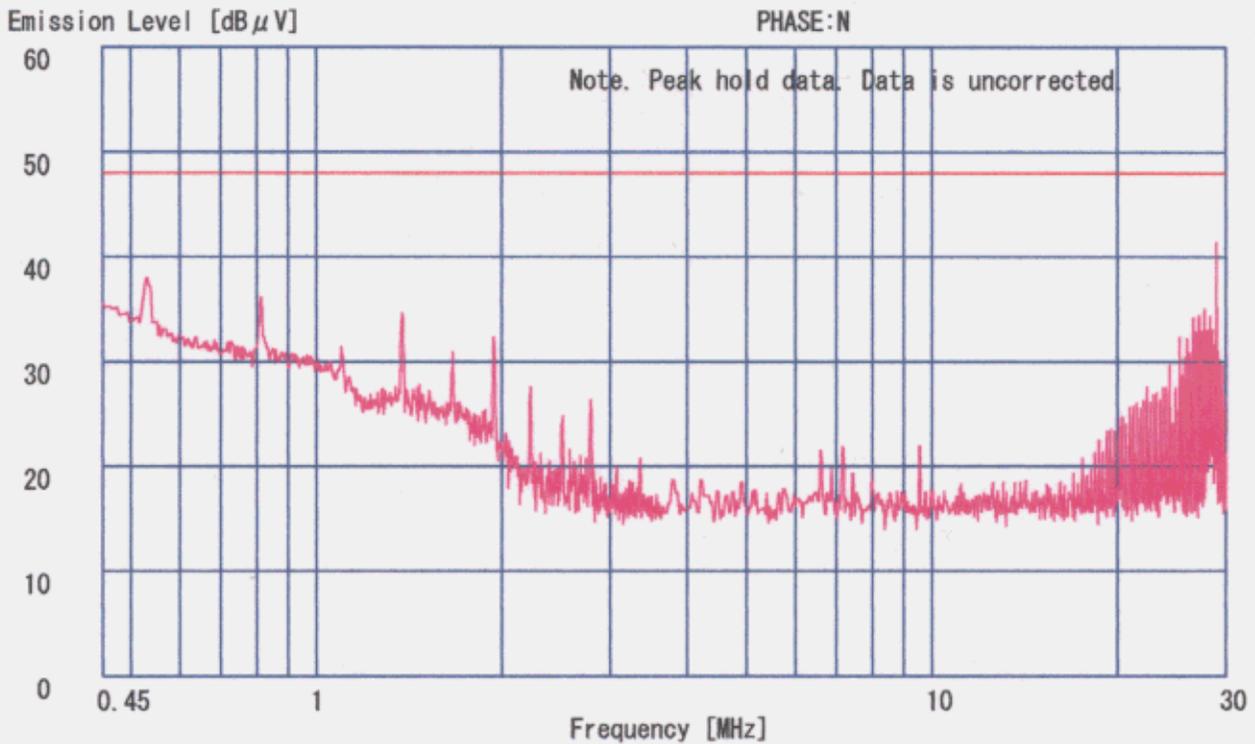

DATA OF CONDUCTION TEST

A-PEX INTERNATIONAL CO., LTD.
YOKOWA No.3 OPEN TEST SITE
Report No. : 22HE0077-YW

Applicant : SHARP Corporation
Kind of Equipment : Cordless Handset
Model No. : UX-CC500K
Serial No. : No. 1
Power : AC120V/60Hz
Mode : Intercom(Base to Hand)
Remarks : FCC ID: APYHR000024
Date : 4/7/2002
Phase : Single Phase
Temperature : 21 °C
Humidity : 64 %
Regulation : FCC Part15. 207


Engineer : Makoto Kosaka

No.	FREQ. [MHz]	READING (N)		READING (L1)		LISN FACTOR [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS		MARGIN	
		QP [dBuV]	AV	QP [dBuV]	AV				QP [dBuV]	AV	QP [dBuV]	AV	QP [dB]	AV
1.	0.4500	26.0	-	28.2	-	0.1	0.1	0.0	28.4	-	48.0	0.0	19.6	-
2.	0.5418	22.0	-	24.0	-	0.1	0.2	0.0	24.3	-	48.0	0.0	23.7	-
3.	0.8700	11.1	-	12.7	-	0.1	0.1	0.0	12.9	-	48.0	0.0	35.1	-
4.	1.3736	9.3	-	10.9	-	0.1	0.1	0.0	11.1	-	48.0	0.0	36.9	-
5.	3.0247	0.5	-	3.2	-	0.2	0.2	0.0	3.6	-	48.0	0.0	44.4	-
6.	6.8765	9.5	-	10.1	-	0.3	0.3	0.0	10.7	-	48.0	0.0	37.3	-
7.	9.6003	9.1	-	9.8	-	0.4	0.3	0.0	10.5	-	48.0	0.0	37.5	-
8.	28.7998	19.0	-	17.8	-	0.9	0.6	0.0	20.5	-	48.0	0.0	27.5	-

CALCULATION: READING + LISN FACTOR + CABLE LOSS + ATTEN.

All other spurious emissions were less than 20dB for the limit.

DATA OF CONDUCTION TEST CHART



A-PEX INTERNATIONAL CO., LTD.

YOKOWA No.3 OPEN TEST SITE

Report No. : 22HE0077-YW

Applicant : SHARP Corporation
Kind of Equipment : Cordless Handset
Model No. : UX-CC500K
Serial No. : No.1
Power : AC120V/60Hz
Mode : Intercom(Base to Hand)
Remarks : FCC ID: APYHR000024
Date : 4/7/2002
Phase : Single Phase
Temperature : 21 °C
Humidity : 64 %
Regulation 1 : FCC Part15.207
Regulation 2 : FCC Part15.207


Engineer : Makoto Kosaka

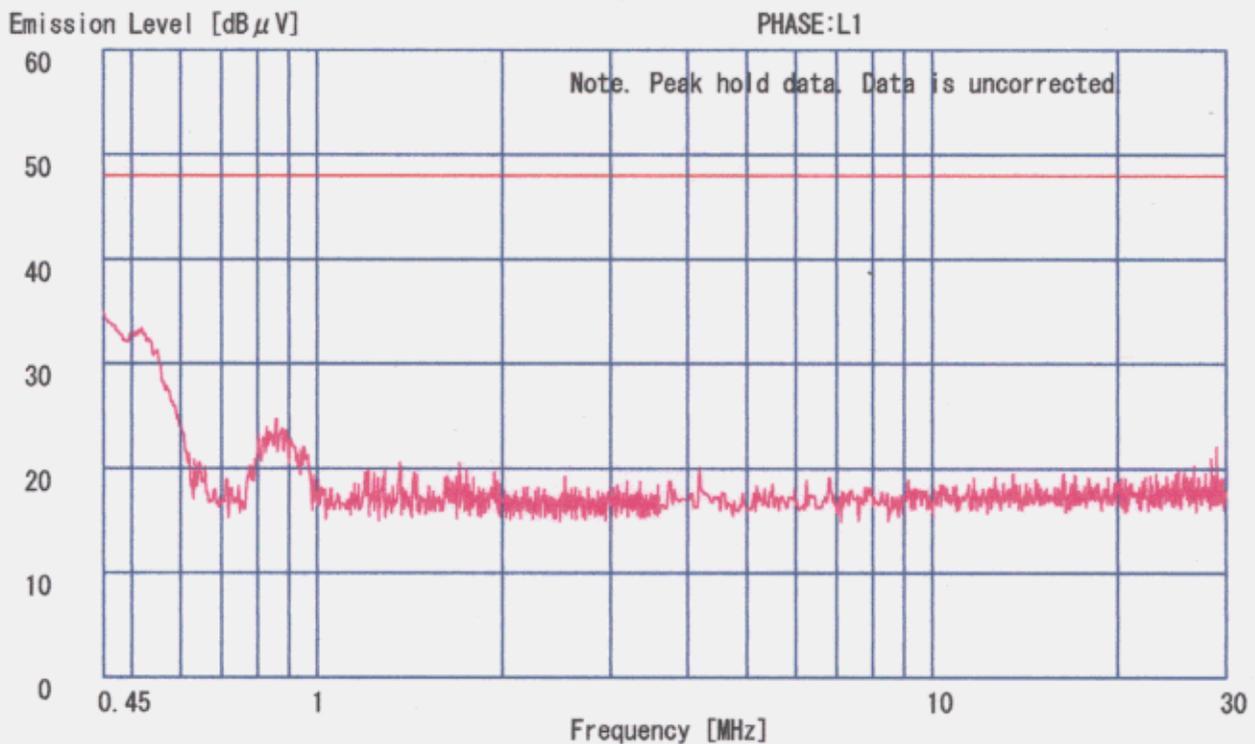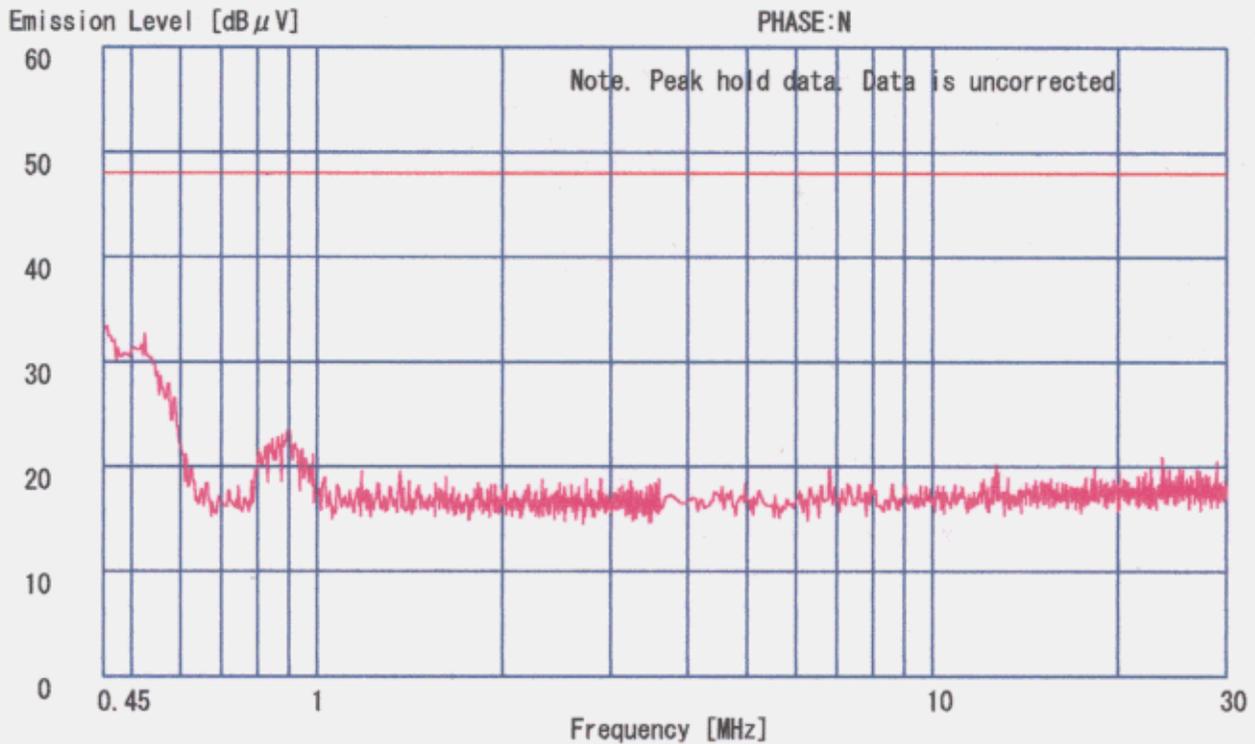

DATA OF CONDUCTION TEST

A-PEX INTERNATIONAL CO., LTD.
YOKOWA No.3 OPEN TEST SITE
Report No. : 22HE0077-YW

Applicant : SHARP Corporation
Kind of Equipment : Cordless Handset
Model No. : UX-CC500K
Serial No. : No. 1
Power : AC120V/60Hz
Mode : Charging
Remarks : FCC ID: APYHR000024
Date : 4/7/2002
Phase : Single Phase
Temperature : 21 °C
Humidity : 64 %
Regulation : FCC Part15. 207


Engineer : Makoto Kosaka

No.	FREQ. [MHz]	READING (N)		READING (L1)		LISN FACTOR [dB]	CABLE LOSS [dB]	ATTEN. [dB]	RESULT		LIMITS		MARGIN	
		QP [dBuV]	AV	QP [dBuV]	AV				QP [dBuV]	AV	QP [dBuV]	AV	QP [dB]	AV
1.	0.4500	25.9	-	27.9	-	0.1	0.1	0.0	28.1	-	48.0	0.0	19.9	-
2.	0.9020	10.9	-	12.1	-	0.1	0.1	0.0	12.3	-	48.0	0.0	35.7	-
3.	1.3898	8.3	-	10.2	-	0.1	0.1	0.0	10.4	-	48.0	0.0	37.6	-
4.	1.6653	4.6	-	7.5	-	0.1	0.1	0.0	7.7	-	48.0	0.0	40.3	-
5.	6.6696	8.3	-	9.2	-	0.3	0.3	0.0	9.8	-	48.0	0.0	38.2	-
6.	9.5974	12.0	-	13.4	-	0.4	0.3	0.0	14.1	-	48.0	0.0	33.9	-
7.	28.7990	18.1	-	17.0	-	0.9	0.6	0.0	19.6	-	48.0	0.0	28.4	-

CALCULATION: READING + LISN FACTOR + CABLE LOSS + ATTEN.



All other spurious emissions were less than 20dB for the limit.

DATA OF CONDUCTION TEST CHART


A-PEX INTERNATIONAL CO., LTD.
YOKOWA No.3 OPEN TEST SITE
Report No. : 22HE0077-YW

Applicant : SHARP Corporation
Kind of Equipment : Cordless Handset
Model No. : UX-CC500K
Serial No. : No.1
Power : AC120V/60Hz
Mode : Charging
Remarks : FCC ID: APYHR000024
Date : 4/7/2002
Phase : Single Phase
Temperature : 21 °C
Humidity : 64 %
Regulation 1 : FCC Part15.207
Regulation 2 : FCC Part15.207



Engineer : Makoto Kosaka

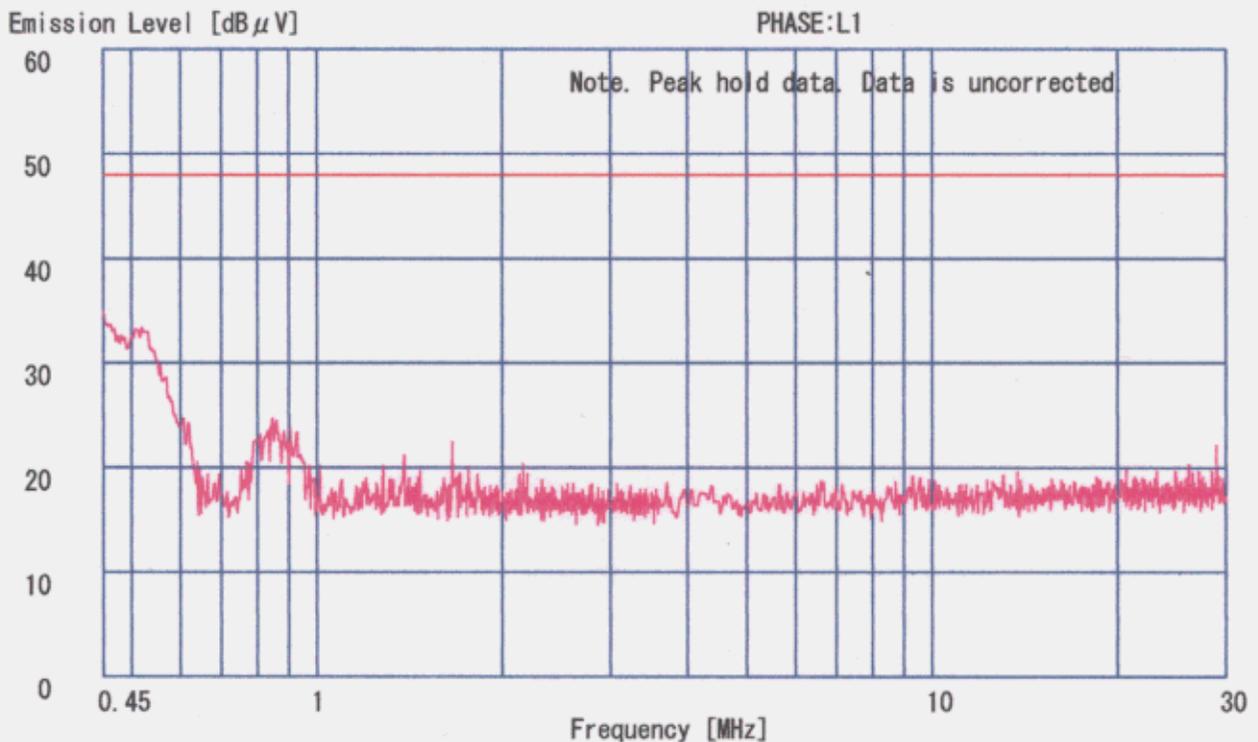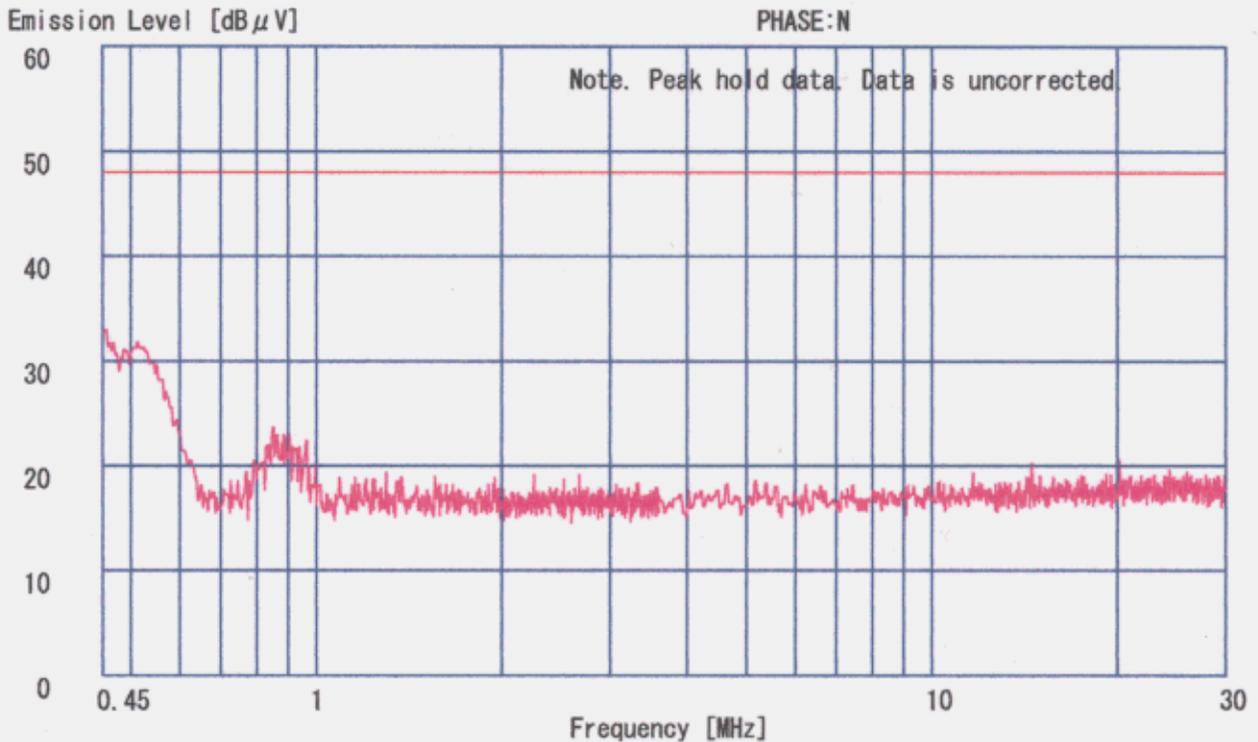


1. ch 1: 2.4048GHz

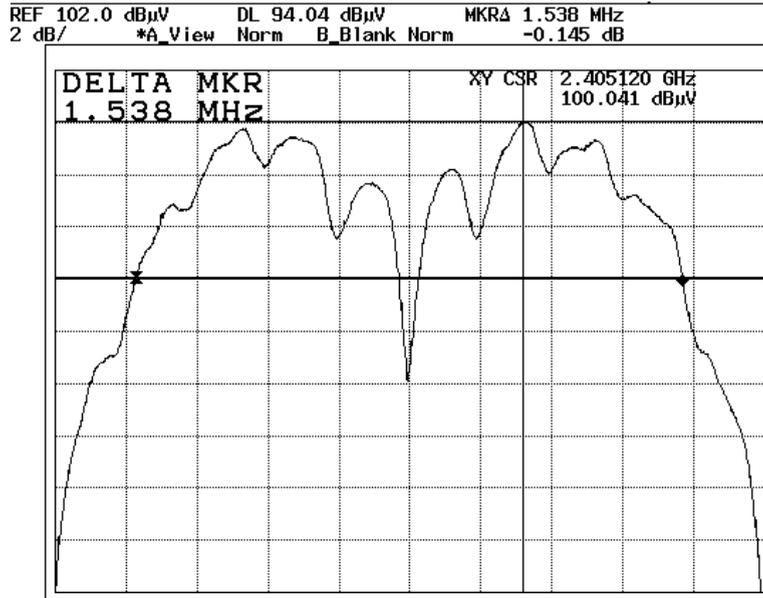

2. ch 20: 2.439GHz

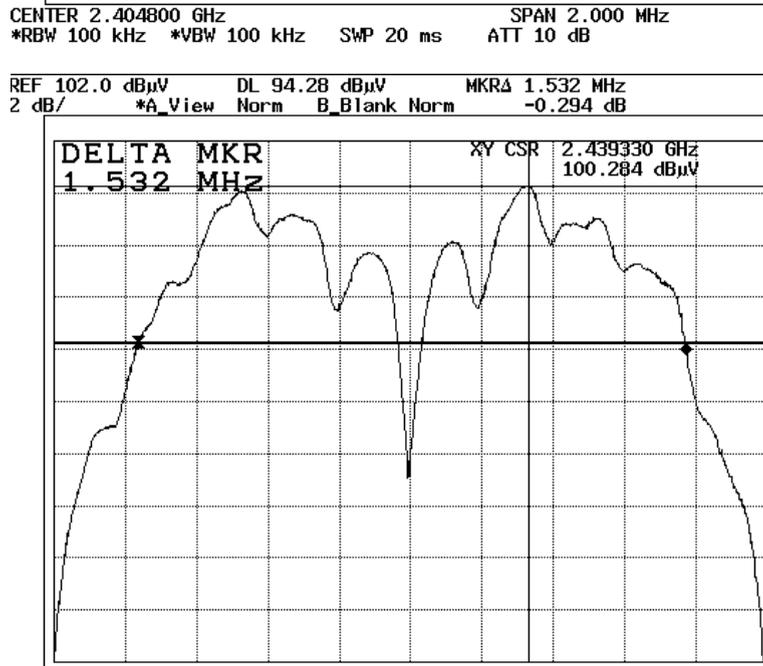


3. ch 40: 2.475GHz

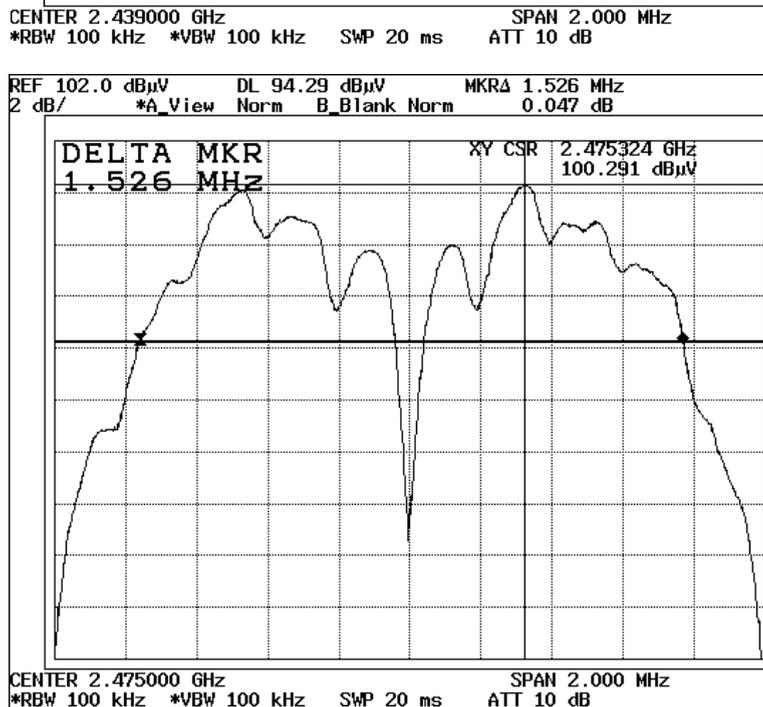


1. ch 1: 2.4048GHz



2. ch 20: 2.439GHz

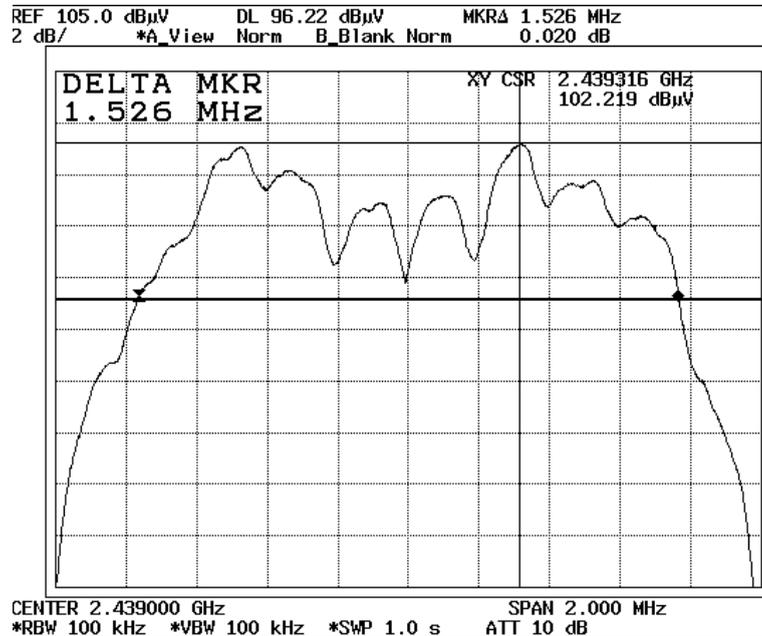

3. ch 40: 2.475GHz

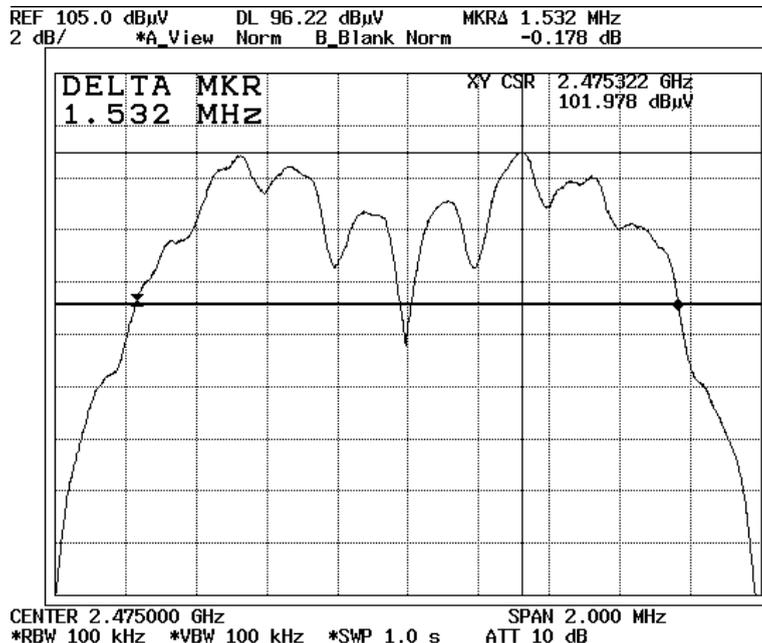


Maximum Peak Output Power (Conducted)

A-PEX INTERNATIONAL CO., LTD.
YOKOWA NO.3 OPEN SITE

Company : SHARP Corporation
Equipment : Facsimile Equipment
Model : UX-CC500
Sample No. : 4
FCC ID : APYHRO00024
Power : DC 3.6V
Mode : Transmitting(ch1,20,40)

Report No. : 22HE0077-YW
Regulation : Fcc Part15SubpartC 247(b)(1)
Date : 2002/04/20
Temperature : 23deg.C
Humidity : 55%



ENGINEER : Makoto Kosaka

ch	FREQ [MHz]	P/M Reading [dBm]	ATTEN. [dB]	RESULT [dBm]	convert [mW]	Limit (1W) [dBm]	Margin [dB]
ch1	2404.8	3.21	10.0	13.21	20.94	30.0	16.79
ch20	2439.0	3.03	10.0	13.03	20.09	30.0	16.97
ch40	2475.0	3.04	10.0	13.04	20.14	30.0	16.96

REMARKS:


CALCULATION : P = Power Meter Reading + ATTEN

Maximum Peak Output Power (Conducted)

A-PEX INTERNATIONAL CO., LTD.
YOKOWA NO.3 OPEN SITE

Company : SHARP Corporation
Equipment : Cordless Handset
Model : UX-CC500K
Sample No. : 2
FCC ID : APYHRO00024
Power : DC 3.6V
Mode : Transmitting(ch1,20,40)

Report No. : 22HE0077-YW
Regulation : Fcc Part15SubpartC 247(b)(1)
Date : 2002/04/20
Temperature : 23deg.C
Humidity : 55%




ENGINEER : Makoto Kosaka

ch	FREQ [MHz]	P/M Reading [dBm]	ATTEN. [dB]	RESULT [dBm]	convert [mW]	Limit (1W) [dBm]	Margin [dB]
ch1	2404.8	5.73	10.0	15.73	37.41	30.0	14.27
ch20	2439.0	5.73	10.0	15.73	37.41	30.0	14.27
ch40	2475.0	5.68	10.0	15.68	36.98	30.0	14.32

REMARKS:


CALCULATION : P = Power Meter Reading + ATTEN

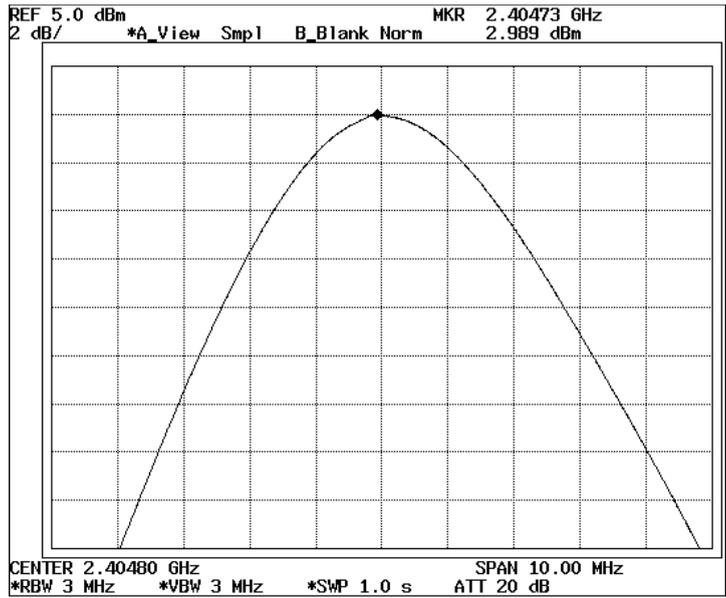


2. AC 120V (100 %) / (ch 1: 2.4048GHz): External Attenuator 10dB




3. AC 138V (115 %) / (ch 1: 2.4048GHz): External Attenuator 10dB

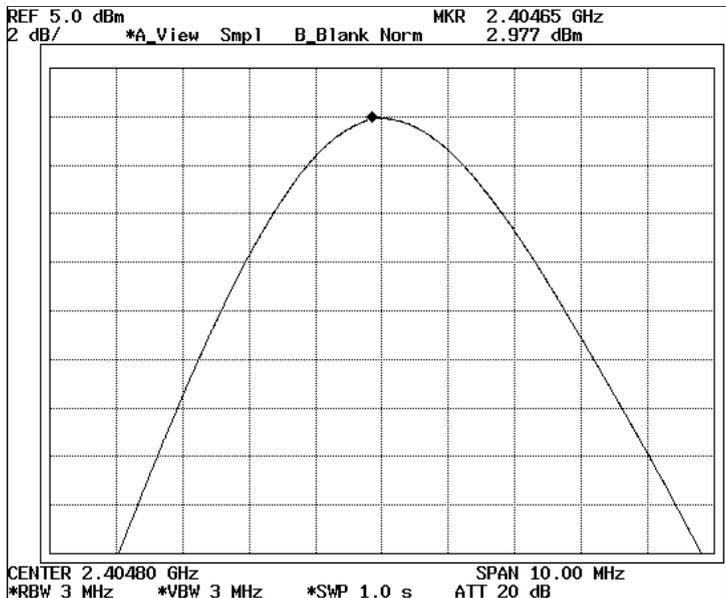


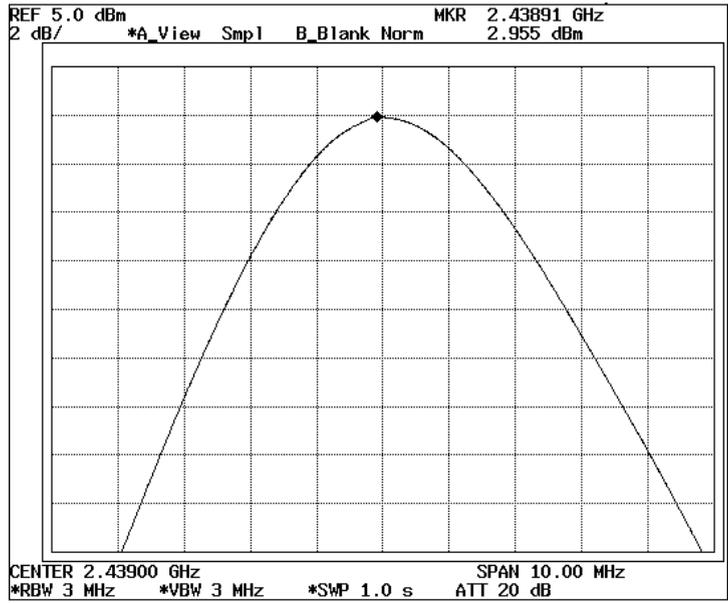


5. AC 120V (100 %) / (ch 20: 2.439GHz): External Attenuator 10dB

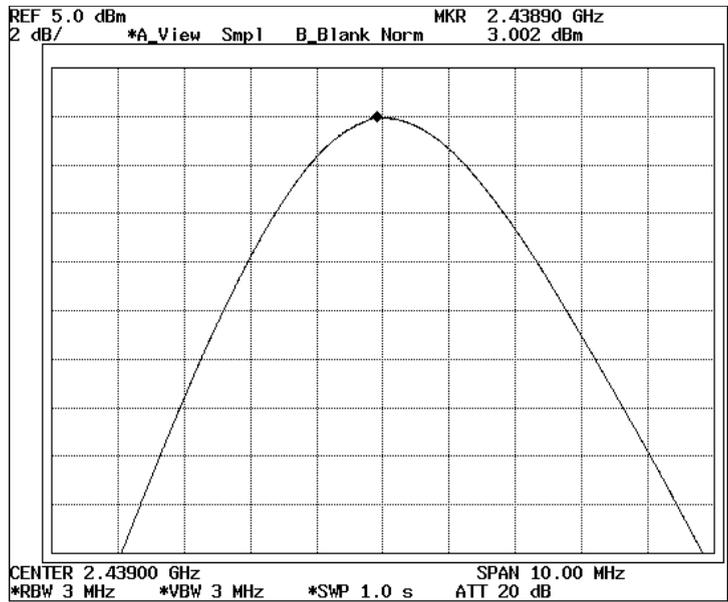


6. AC 138V (115 %) / (ch 20: 2.439GHz): External Attenuator 10dB

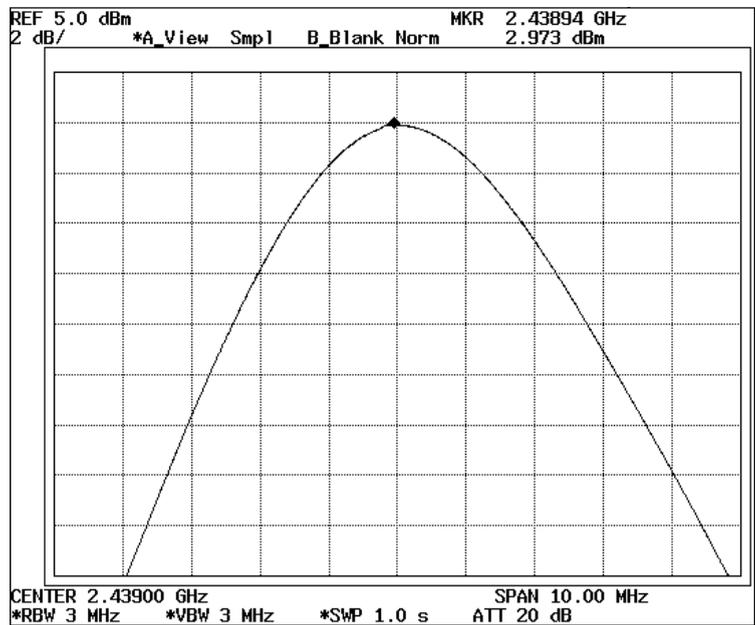


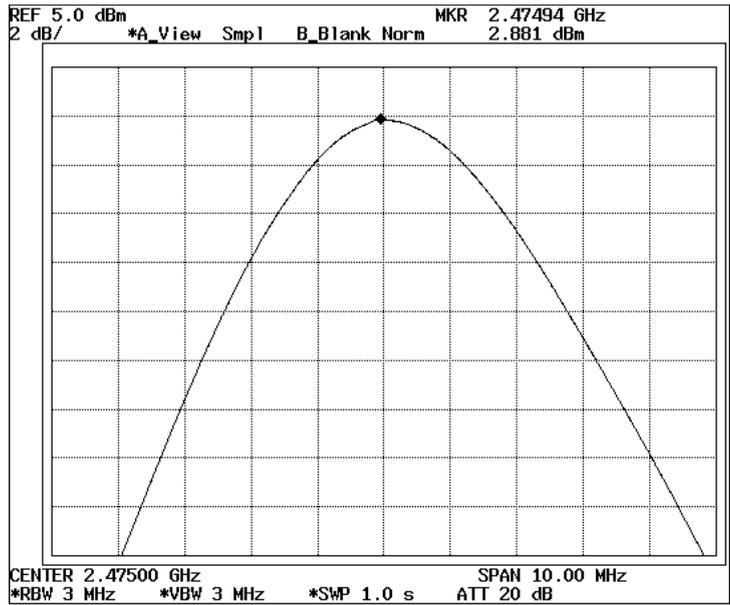

8. AC 120V (100 %) / (ch 40: 2.475GHz): External Attenuator 10dB

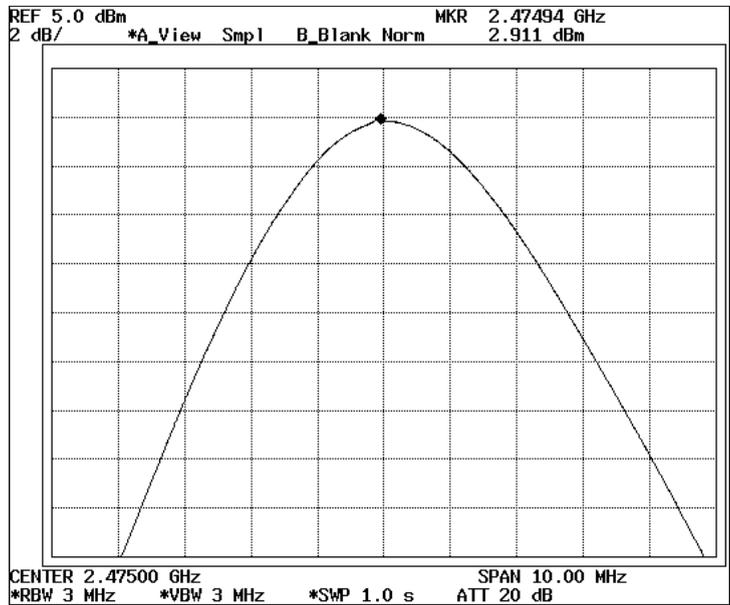

9. AC 138V (115 %) / (ch 40: 2.475GHz): External Attenuator 10dB

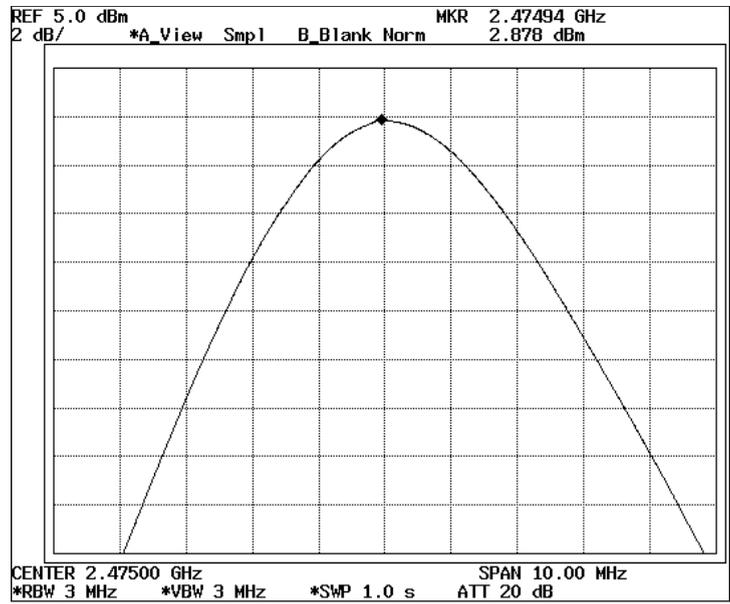

DATA OF SUPURIOUS EMISSIONS(30MHz to 1000MHz)

A-PEX INTERNATIONAL CO., LTD.
YOKOWA NO.3 OPEN SITE

Company : SHARP Corporation
 Equipment : Facsimile Equipment
 Model : UX-CC500
 Sample No. : 3
 FCC ID : APYHRO00024
 Power : AC120V/60Hz
 Mode : Transmitting (ch1: 2404.8MHz)

Report No. : 22HE0077-YW
 Regulation : Fcc Part15SubpartC 247 / 209
 Test Distance : 3m
 Date : 2002/04/09
 Temperature : 18deg.C
 Humidity : 74%



ENGINEER : Makoto Kosaka

QP DETECT(Test Receiver: BW 120kHz)

No.	FREQ [MHz]	READING		ANT Factor [dB]	ATTEN [dB]	CABLE LOSS [dB]	AMP GAIN [dB]	RESULT		LIMIT [dBuV/m]	MARGIN	
		HOR	VER					HOR	VER		HOR	VER
		[dBuV]										
1	88.720	34.2	33.2	7.6	5.9	2.0	27.9	21.8	20.8	43.5	21.7	22.7
2	120.960	32.7	30.6	13.3	6.0	2.3	27.9	26.4	24.3	43.5	17.1	19.2
3	145.150	38.8	35.3	14.3	6.0	2.7	27.9	33.9	30.4	43.5	9.6	13.1
4	161.280	40.2	35.1	14.9	6.0	2.8	27.8	36.1	31.0	43.5	7.4	12.5
5	193.540	38.6	32.8	16.2	6.0	3.0	27.8	36.0	30.2	43.5	7.5	13.3
6	201.620	37.3	29.5	16.4	6.0	3.1	27.8	35.0	27.2	43.5	8.5	16.3
7	209.670	35.1	30.2	16.4	6.0	3.1	27.8	32.8	27.9	43.5	10.7	15.6
8	220.810	37.6	28.9	16.5	6.0	3.2	27.8	35.5	26.8	46.0	10.5	19.2
9	241.920	36.9	28.9	16.6	6.0	3.1	27.4	35.2	27.2	46.0	10.8	18.8
10	322.560	42.7	37.5	14.5	6.1	4.0	28.0	39.3	34.1	46.0	6.7	11.9
11	384.000	41.1	37.8	15.2	6.0	4.5	27.9	38.9	35.6	46.0	7.1	10.4
12	432.000	39.1	40.5	16.3	6.0	4.8	27.8	38.4	39.8	46.0	7.6	6.2

REMARKS

*The antenna of EUT was angled 0 degrees when the measurement antenna was positioned horizontally.(wors case)

*The antenna of EUT was angled 90 degrees when the measurement antenna was positioned vertically.(wors case)

ANTENNA TYPE: 30-300MHz Biconical / 300-1000MHz Logperiodic

CALCULATION(30MHz to 1000MHz) : READING + ANT Factor + ATTEN + Cable Loss - AMP Gain

*Except for the above table : All other spurious emissions were less than 20dB for the limit.

DATA OF SUPURIOUS EMISSIONS(30MHz to 1000MHz)

A-PEX INTERNATIONAL CO., LTD.
YOKOWA NO.3 OPEN SITE

Company : SHARP Corporation
 Equipment : Facsimile Equipment
 Model : UX-CC500
 Sample No. : 3
 FCC ID : APYHRO00024
 Power : AC120V/60Hz
 Mode : Transmitting (ch20: 2439MHz)

Report No. : 22HE0077-YW
 Regulation : Fcc Part15SubpartC 247 / 209
 Test Distance : 3m
 Date : 2002/04/09
 Temperature : 18deg.C
 Humidity : 74%



ENGINEER : Makoto Kosaka

QP DETECT(Test Receiver: BW 120kHz)

No.	FREQ [MHz]	READING		ANT Factor [dB]	ATTEN [dB]	CABLE LOSS [dB]	AMP GAIN [dB]	RESULT		LIMIT [dBuV/m]	MARGIN	
		HOR	VER					HOR	VER		HOR	VER
		[dBuV]										
1	88.720	34.1	33.1	7.6	5.9	2.0	27.9	21.7	20.7	43.5	21.8	22.8
2	120.960	33.0	29.5	13.3	6.0	2.3	27.9	26.7	23.2	43.5	16.8	20.3
3	145.180	38.1	32.8	14.3	6.0	2.7	27.9	33.2	27.9	43.5	10.3	15.6
4	161.280	38.4	35.5	14.9	6.0	2.8	27.8	34.3	31.4	43.5	9.2	12.1
5	193.540	38.4	30.8	16.2	6.0	3.0	27.8	35.8	28.2	43.5	7.7	15.3
6	201.600	37.0	31.8	16.4	6.0	3.1	27.8	34.7	29.5	43.5	8.8	14.0
7	209.660	32.9	31.7	16.4	6.0	3.1	27.8	30.6	29.4	43.5	12.9	14.1
8	220.800	38.5	30.3	16.5	6.0	3.2	27.8	36.4	28.2	46.0	9.6	17.8
9	241.940	30.6	25.0	16.6	6.0	3.1	27.4	28.9	23.3	46.0	17.1	22.7
10	322.560	42.9	35.0	14.5	6.1	4.0	28.0	39.5	31.6	46.0	6.5	14.4
11	384.000	40.5	36.1	15.2	6.0	4.5	27.9	38.3	33.9	46.0	7.7	12.1
12	432.000	38.5	40.4	16.3	6.0	4.8	27.8	37.8	39.7	46.0	8.2	6.3

REMARKS

*The antenna of EUT was angled 0 degrees when the measurement antenna was positioned horizontally.(wors case)

*The antenna of EUT was angled 90 degrees when the measurement antenna was positioned vertically.(wors case)

ANTENNA TYPE: 30-300MHz Biconical / 300-1000MHz Logperiodic

CALCULATION(30MHz to 1000MHz) : READING + ANT Factor + ATTEN + Cable Loss - AMP Gain


*Except for the above table : All other spurious emissions were less than 20dB for the limit.

DATA OF SUPURIOUS EMISSIONS(30MHz to 1000MHz)

A-PEX INTERNATIONAL CO., LTD.
YOKOWA NO.3 OPEN SITE

Company : SHARP Corporation
 Equipment : Facsimile Equipment
 Model : UX-CC500
 Sample No. : 3
 FCC ID : APYHRO00024
 Power : AC120V/60Hz
 Mode : Transmitting (ch40: 2475MHz)

Report No. : 22HE0077-YW
 Regulation : Fcc Part15SubpartC 247 / 209
 Test Distance : 3m
 Date : 2002/04/09
 Temperature : 18deg.C
 Humidity : 74%



ENGINEER : Makoto Kosaka

QP DETECT(Test Receiver: BW 120kHz)

No.	FREQ [MHz]	READING		ANT Factor [dB]	ATTEN [dB]	CABLE LOSS [dB]	AMP GAIN [dB]	RESULT		LIMIT [dBuV/m]	MARGIN	
		HOR	VER					HOR	VER		HOR	VER
		[dBuV]										
1	88.720	33.9	32.7	7.6	5.9	2.0	27.9	21.5	20.3	43.5	22.0	23.2
2	120.900	33.0	29.8	13.3	6.0	2.3	27.9	26.7	23.5	43.5	16.8	20.0
3	145.160	38.9	33.2	14.3	6.0	2.7	27.9	34.0	28.3	43.5	9.5	15.2
4	161.280	38.8	35.7	14.9	6.0	2.8	27.8	34.7	31.6	43.5	8.8	11.9
5	193.540	38.5	30.7	16.2	6.0	3.0	27.8	35.9	28.1	43.5	7.6	15.4
6	201.600	37.3	31.6	16.4	6.0	3.1	27.8	35.0	29.3	43.5	8.5	14.2
7	209.660	33.6	31.5	16.4	6.0	3.1	27.8	31.3	29.2	43.5	12.2	14.3
8	220.800	38.3	30.5	16.5	6.0	3.2	27.8	36.2	28.4	46.0	9.8	17.6
9	241.930	31.3	25.4	16.6	6.0	3.1	27.4	29.6	23.7	46.0	16.4	22.3
10	322.570	42.5	35.4	14.5	6.1	4.0	28.0	39.1	32.0	46.0	6.9	14.0
11	384.020	41.3	37.0	15.2	6.0	4.5	27.9	39.1	34.8	46.0	6.9	11.2
12	432.000	38.9	40.5	16.3	6.0	4.8	27.8	38.2	39.8	46.0	7.8	6.2

REMARKS

*The antenna of EUT was angled 0 degrees when the measurement antenna was positioned horizontally.(wors case)

*The antenna of EUT was angled 90 degrees when the measurement antenna was positioned vertically.(wors case)

ANTENNA TYPE: 30-300MHz Biconical / 300-1000MHz Logperiodic

CALCULATION(30MHz to 1000MHz) : READING + ANT Factor + ATTEN + Cable Loss - AMP Gain


*Except for the above table : All other spurious emissions were less than 20dB for the limit.

DATA OF SUPURIOUS EMISSIONS(30MHz to 1000MHz)

A-PEX INTERNATIONAL CO., LTD.
YOKOWA NO.3 OPEN SITE

Company : SHARP Corporation
 Equipment : Cordless Handset
 Model : UX-CC500K
 Sample No. : 1
 FCC ID : APYHRO00024
 Power : DC 3.6V
 Mode : Transmitting (ch1: 2404.8MHz)

Report No. : 22HE0077-YW
 Regulation : Fcc Part15SubpartC 247 / 209
 Test Distance : 3m
 Date : 2002/04/02
 Temperature : 18deg.C
 Humidity : 35%



ENGINEER : Makoto Kosaka

QP DETECT(Test Receiver: BW 120kHz)

No.	FREQ [MHz]	READING		ANT Factor [dB]	ATTEN [dB]	CABLE LOSS [dB]	AMP GAIN [dB]	RESULT		LIMIT [dBuV/m]	MARGIN	
		HOR	VER					HOR	VER		HOR	VER
		[dBuV]						[dBuV/m]			[dB]	
1	115.210	26.8	27.7	12.5	5.9	2.1	27.9	19.4	20.3	43.5	24.1	23.2
2	192.020	25.9	23.9	16.2	5.9	2.7	27.8	22.9	20.9	43.5	20.6	22.6
3	230.410	27.4	23.8	16.5	5.9	3.1	27.7	25.2	21.6	46.0	20.8	24.4
4	364.810	33.4	31.9	15.0	5.8	3.9	27.6	30.5	29.0	46.0	15.5	17.0
5	384.030	33.4	32.9	15.2	5.8	4.0	27.5	30.9	30.4	46.0	15.1	15.6
6	441.600	34.1	36.0	16.5	5.9	4.5	27.6	33.4	35.3	46.0	12.6	10.7
7	480.000	30.0	32.6	17.6	5.8	4.7	27.5	30.6	33.2	46.0	15.4	12.8
8	518.400	26.5	28.3	18.2	5.9	4.9	27.5	28.0	29.8	46.0	18.0	16.2

REMARKS

*EUT was placed in X axis when the measurement antenna was positioned horizontally.(wors case)

*EUT was placed in Y axis when the measurement antenna was positioned vertically.(wors case)

ANTENNA TYPE: 30-300MHz Biconical / 300-1000MHz Logperiodic

CALCULATION(30MHz to 1000MHz) : READING + ANT Factor + ATTEN + Cable Loss - AMP Gain

*Except for the above table : All other spurious emissions were less than 20dB for the limit.

DATA OF SUPURIOUS EMISSIONS(30MHz to 1000MHz)

A-PEX INTERNATIONAL CO., LTD.
YOKOWA NO.3 OPEN SITE

Company : SHARP Corporation
 Equipment : Cordless Handset
 Model : UX-CC500K
 Sample No. : 1
 FCC ID : APYHRO00024
 Power : DC 3.6V
 Mode : Transmitting (ch20: 2439.0MHz)

Report No. : 22HE0077-YW
 Regulation : Fcc Part15SubpartC 247 / 209
 Test Distance : 3m
 Date : 2002/04/02
 Temperature : 18deg.C
 Humidity : 35%



ENGINEER : Makoto Kosaka

QP DETECT(Test Receiver: BW 120kHz)

No.	FREQ [MHz]	READING		ANT Factor [dB]	ATTEN [dB]	CABLE LOSS [dB]	AMP GAIN [dB]	RESULT		LIMIT [dBuV/m]	MARGIN	
		HOR	VER					HOR	VER		HOR	VER
		[dBuV]						[dBuV/m]			[dB]	
1	115.210	27.5	27.9	12.5	5.9	2.1	27.9	20.1	20.5	43.5	23.4	23.0
2	192.020	26.0	24.6	16.2	5.9	2.7	27.8	23.0	21.6	43.5	20.5	21.9
3	230.410	27.6	24.2	16.5	5.9	3.1	27.7	25.4	22.0	46.0	20.6	24.0
4	364.810	32.8	31.2	15.0	5.8	3.9	27.6	29.9	28.3	46.0	16.1	17.7
5	384.030	33.1	32.7	15.2	5.8	4.0	27.5	30.6	30.2	46.0	15.4	15.8
6	441.600	34.0	35.6	16.5	5.9	4.5	27.6	33.3	34.9	46.0	12.7	11.1
7	480.000	30.7	33.0	17.6	5.8	4.7	27.5	31.3	33.6	46.0	14.7	12.4
8	518.400	26.9	28.9	18.2	5.9	4.9	27.5	28.4	30.4	46.0	17.6	15.6

REMARKS

*EUT was placed in X axis when the measurement antenna was positioned horizontally.(wors case)

*EUT was placed in Y axis when the measurement antenna was positioned vertically.(wors case)

ANTENNA TYPE: 30-300MHz Biconical / 300-1000MHz Logperiodic

CALCULATION(30MHz to 1000MHz) : READING + ANT Factor + ATTEN + Cable Loss - AMP Gain


*Except for the above table : All other spurious emissions were less than 20dB for the limit.

DATA OF SUPURIOUS EMISSIONS(30MHz to 1000MHz)

A-PEX INTERNATIONAL CO., LTD.
YOKOWA NO.3 OPEN SITE

Company : SHARP Corporation
 Equipment : Cordless Handset
 Model : UX-CC500K
 Sample No. : 1
 FCC ID : APYHRO00024
 Power : DC 3.6V
 Mode : Transmitting (ch40: 2475.0MHz)

Report No. : 22HE0077-YW
 Regulation : Fcc Part15SubpartC 247 / 209
 Test Distance : 3m
 Date : 2002/04/02
 Temperature : 18deg.C
 Humidity : 35%



ENGINEER : Makoto Kosaka

QP DETECT(Test Receiver: BW 120kHz)

No.	FREQ [MHz]	READING		ANT Factor [dB]	ATTEN [dB]	CABLE LOSS [dB]	AMP GAIN [dB]	RESULT		LIMIT [dBuV/m]	MARGIN	
		HOR	VER					HOR	VER		HOR	VER
		[dBuV]						[dBuV/m]			[dB]	
1	115.210	27.4	27.7	12.5	5.9	2.1	27.9	20.0	20.3	43.5	23.5	23.2
2	192.020	25.9	24.1	16.2	5.9	2.7	27.8	22.9	21.1	43.5	20.6	22.4
3	230.410	27.6	24.3	16.5	5.9	3.1	27.7	25.4	22.1	46.0	20.6	23.9
4	364.810	32.8	31.0	15.0	5.8	3.9	27.6	29.9	28.1	46.0	16.1	17.9
5	384.030	33.2	32.5	15.2	5.8	4.0	27.5	30.7	30.0	46.0	15.3	16.0
6	441.600	35.4	36.3	16.5	5.9	4.5	27.6	34.7	35.6	46.0	11.3	10.4
7	480.000	31.7	34.1	17.6	5.8	4.7	27.5	32.3	34.7	46.0	13.7	11.3
8	518.400	27.3	29.8	18.2	5.9	4.9	27.5	28.8	31.3	46.0	17.2	14.7

REMARKS

*EUT was placed in X axis when the measurement antenna was positioned horizontally.(wors case)

*EUT was placed in Y axis when the measurement antenna was positioned vertically.(wors case)

ANTENNA TYPE: 30-300MHz Biconical / 300-1000MHz Logperiodic

CALCULATION(30MHz to 1000MHz) : READING + ANT Factor + ATTEN + Cable Loss - AMP Gain


*Except for the above table : All other spurious emissions were less than 20dB for the limit.

DATA OF SUPURIOUS EMISSIONS(1GHz to 26GHz)

A-PEX INTERNATIONAL CO., LTD.
YOKOWA NO.3 OPEN SITE

Company : SHARP Corporation
Equipment : Facsimile Equipment
Model : UX-CC500
Sample No. : 3
FCC ID : APYHRO00024
Power : AC120V/60Hz
Mode : Transmitting (ch1: 2404.8MHz)

Report No. : 22HE0077-YW
Regulation : Fcc Part15SubpartC 247 / 209
Test Distance : 3m and 0.5m
Date : 2002/04/07
Temperature : 18deg.C
Humidity : 81%



ENGINEER : Makoto Kosaka

AV DETECT(S/A : RBW 1MHz and VBW 10Hz)

No.	FREQ [GHz]	S/A READING		ANT Factor [dB]	AMP GAIN [dB]	CABLE LOSS [dB]	H-Pass Filter [dB]	ATTN [dB]	Duty Factor [dB]	D-fac [dB]	RESULT		Limit AV [dBuV/m]	MARGIN	
		HOR	VER								HOR	VER			
		[dBuV]												[dB]	
Test distance 3meters RESULT=Reading + ANT Factor - Amp Gain + CABLE LOSS + (High Pass or ATTN) + Duty Factor															
1	4.80962	56.1	56.8	35.3	38.0	4.2	1.1	0.0	-6.6	0.0	52.1	52.8	54.0	1.9	1.2
2	7.21442	45.3	46.3	38.5	38.2	5.7	0.5	0.0	-6.6	0.0	45.2	46.2	54.0	8.8	7.8
3	9.61922	35.7	38.8	38.4	38.5	6.2	0.5	0.0	-6.6	0.0	35.7	38.8	54.0	18.3	15.2
Test distance 0.5meters RESULT=Reading + ANT Factor - Amp Gain + CABLE LOSS + High Pass + Duty Factor - Dfac															
4	12.02412	34.4	34.1	42.9	38.5	7.5	0.5	0.0	-6.6	15.6	24.6	24.3	54.0	29.4	29.7
5	14.42880	33.4	33.1	41.7	38.5	7.9	0.6	0.0	-6.6	15.6	22.9	22.6	54.0	31.1	31.4
6	16.83362	34.3	34.3	43.3	38.5	8.1	0.6	0.0	-6.6	15.6	25.6	25.6	54.0	28.4	28.4
7	19.23840	34.9	34.6	38.5	38.5	8.6	1.0	0.0	-6.6	15.6	22.3	22.0	54.0	31.7	32.0
8	21.64320	35.7	35.7	38.8	38.5	10.1	0.6	0.0	-6.6	15.6	24.5	24.5	54.0	29.5	29.5
9	24.04800	35.9	35.6	39.3	38.5	12.6	0.7	0.0	-6.6	15.6	27.8	27.5	54.0	26.2	26.5

PK DETECT(S/A : RBW 1MHz and VBW 1MHz)

No.	FREQ [GHz]	S/A READING		ANT Factor [dB]	AMP GAIN [dB]	CABLE LOSS [dB]	H-Pass Filter [dB]	ATTN [dB]	Duty Factor [dB]	D-fac [dB]	RESULT		Limit PK [dBuV/m]	MARGIN	
		HOR	VER								HOR	VER			
		[dBuV]												[dB]	
Test distance 3meters RESULT=Reading + ANT Factor - Amp Gain + CABLE LOSS + (High Pass or ATTN) + Duty Factor															
1	4.80962	57.3	58.1	35.3	38.0	4.2	1.1	0.0	-6.6	0.0	53.3	54.1	74.0	20.7	19.9
2	7.21448	50.4	51.2	38.5	38.2	5.7	0.5	0.0	-6.6	0.0	50.3	51.1	74.0	23.7	22.9
3	9.61922	46.3	48.1	38.4	38.5	6.2	0.5	0.0	-6.6	0.0	46.3	48.1	74.0	27.7	25.9
Test distance 0.5meters RESULT=Reading + ANT Factor - Amp Gain + CABLE LOSS + High Pass + Duty Factor - Dfac															
4	12.02412	45.8	45.8	42.9	38.5	7.5	0.5	0.0	-6.6	15.6	36.0	36.0	74.0	38.0	38.0
5	14.42880	45.0	44.3	41.7	38.5	7.9	0.6	0.0	-6.6	15.6	34.5	33.8	74.0	39.5	40.2
6	16.83362	46.5	45.1	43.3	38.5	8.1	0.6	0.0	-6.6	15.6	37.8	36.4	74.0	36.2	37.6
7	19.23840	46.6	46.3	38.5	38.5	8.6	1.0	0.0	-6.6	15.6	34.0	33.7	74.0	40.0	40.3
8	21.64320	46.2	46.1	38.8	38.5	10.1	0.6	0.0	-6.6	15.6	35.0	34.9	74.0	39.0	39.1
9	24.04800	46.1	46.3	39.3	38.5	12.6	0.7	0.0	-6.6	15.6	38.0	38.2	74.0	36.0	35.8

REMARKS

- *The antenna of EUT was angled 0 degrees when the measurement antenna was positioned horizontally.(wors case)
- *The antenna of EUT was angled 90 degrees when the measurement antenna was positioned vertically.(wors case)
- *Test Distance 0.5m : Distance Factor(D-fac) = 20log(3/0.5) =15.6dB
- * Duty factor = 20log (Twidth / Tperiod) = 20log (940*10⁻⁶ / 2*10⁻³) = -6.558
- *Except for the above table : All other spurious emissions were less than 20dB for the limit.

DATA OF SUPURIOUS EMISSIONS(1GHz to 26GHz)

A-PEX INTERNATIONAL CO., LTD.

YOKOWA NO.3 OPEN SITE

Company : SHARP Corporation

Equipment : Facsimile Equipment

Model : UX-CC500

Sample No. : 3

FCC ID : APYHRO00024

Power : AC120V/60Hz

Mode : Transmitting (ch20: 2439.0MHz)

Report No. : 22HE0077-YW

Regulation : Fcc Part15SubpartC 247 / 209

Test Distance : 3m and 0.5m

Date : 2002/04/07

Temperature : 18deg.C

Humidity : 81%



ENGINEER : Makoto Kosaka

AV DETECT(S/A : RBW 1MHz and VBW 10Hz)

No.	FREQ [GHz]	S/A READING		ANT Factor [dB]	AMP GAIN [dB]	CABLE LOSS [dB]	H-Pass Filter [dB]	ATTN [dB]	Duty Factor [dB]	D-fac [dB]	RESULT		Limit AV [dBuV/m]	MARGIN	
		HOR	VER								HOR	VER			
		[dBuV]												[dB]	
Test distance 3meters RESULT=Reading + ANT Factor - Amp Gain + CABLE LOSS + (High Pass or ATTN) + Duty Factor															
1	4.87800	55.0	56.1	35.6	37.9	4.2	1.1	0.0	-6.6	0.0	51.4	52.5	54.0	2.6	1.5
2	7.31700	45.8	44.4	38.6	38.2	5.7	0.5	0.0	-6.6	0.0	45.8	44.4	54.0	8.2	9.6
3	9.75612	35.6	38.5	38.5	38.5	6.2	0.5	0.0	-6.6	0.0	35.7	38.6	54.0	18.3	15.4
Test distance 0.5meters RESULT=Reading + ANT Factor - Amp Gain + CABLE LOSS + High Pass + Duty Factor - Dfac															
4	12.19518	34.5	34.1	43.1	38.5	7.5	0.5	0.0	-6.6	15.6	24.9	24.5	54.0	29.1	29.5
5	14.63400	33.3	33.1	42.1	38.5	8.0	0.5	0.0	-6.6	15.6	23.2	23.0	54.0	30.8	31.0
6	17.07300	34.2	34.3	43.5	38.5	8.1	0.6	0.0	-6.6	15.6	25.7	25.8	54.0	28.3	28.2
7	19.51200	35.0	35.0	38.1	38.5	9.4	1.3	0.0	-6.6	15.6	23.1	23.1	54.0	30.9	30.9
8	21.95100	36.0	36.1	38.7	38.5	9.6	0.2	0.0	-6.6	15.6	23.8	23.9	54.0	30.2	30.1
9	24.39000	37.0	36.9	39.4	38.5	12.5	0.9	0.0	-6.6	15.6	29.1	29.0	54.0	24.9	25.0

PK DETECT(S/A : RBW 1MHz and VBW 1MHz)

No.	FREQ [GHz]	S/A READING		ANT Factor [dB]	AMP GAIN [dB]	CABLE LOSS [dB]	H-Pass Filter [dB]	ATTN [dB]	Duty Factor [dB]	D-fac [dB]	RESULT		Limit PK [dBuV/m]	MARGIN	
		HOR	VER								HOR	VER			
		[dBuV]												[dB]	
Test distance 3meters RESULT=Reading + ANT Factor - Amp Gain + CABLE LOSS + (High Pass or ATTN) + Duty Factor															
1	4.87800	56.8	58.0	35.6	37.9	4.2	1.1	0.0	-6.6	0.0	53.2	54.4	74.0	20.8	19.6
2	7.31700	50.8	49.1	38.6	38.2	5.7	0.5	0.0	-6.6	0.0	50.8	49.1	74.0	23.2	24.9
3	9.75612	47.3	48.2	38.5	38.5	6.2	0.5	0.0	-6.6	0.0	47.4	48.3	74.0	26.6	25.7
Test distance 0.5meters RESULT=Reading + ANT Factor - Amp Gain + CABLE LOSS + High Pass + Duty Factor - Dfac															
4	12.19518	46.1	45.8	43.1	38.5	7.5	0.5	0.0	-6.6	15.6	36.5	36.2	74.0	37.5	37.8
5	14.63400	44.8	44.3	42.1	38.5	8.0	0.5	0.0	-6.6	15.6	34.7	34.2	74.0	39.3	39.8
6	17.07300	44.4	45.1	43.5	38.5	8.1	0.6	0.0	-6.6	15.6	35.9	36.6	74.0	38.1	37.4
7	19.51200	46.1	46.1	38.1	38.5	9.4	1.3	0.0	-6.6	15.6	34.2	34.2	74.0	39.8	39.8
8	21.95100	46.2	46.3	38.7	38.5	9.6	0.2	0.0	-6.6	15.6	34.0	34.1	74.0	40.0	39.9
9	24.39000	46.2	46.2	39.4	38.5	12.5	0.9	0.0	-6.6	15.6	38.3	38.3	74.0	35.7	35.7

REMARKS

*The antenna of EUT was angled 0 degrees when the measurement antenna was positioned horizontally.(wors case)

*The antenna of EUT was angled 90 degrees when the measurement antenna was positioned vertically.(wors case)

*Test Distance 0.5m : Distance Factor(D-fac) = 20log(3/0.5) =15.6dB

* Duty factor = 20log (Twidth / Tperiod) = 20log (940*10-6 / 2*10-3) = -6.558


*Except for the above table : All other spurious emissions were less than 20dB for the limit.

DATA OF SUPURIOUS EMISSIONS(1GHz to 26GHz)

A-PEX INTERNATIONAL CO., LTD.
YOKOWA NO.3 OPEN SITE

Company : SHARP Corporation
Equipment : Facsimile Equipment
Model : UX-CC500
Sample No. : 3
FCC ID : APYHRO00024
Power : AC120V/60Hz
Mode : Transmitting (ch40: 2475MHz)

Report No. : 22HE0077-YW
Regulation : Fcc Part15SubpartC 247 / 209
Test Distance : 3m and 0.5m
Date : 2002/04/07
Temperature : 18deg.C
Humidity : 81%



ENGINEER : Makoto Kosaka

AV DETECT(S/A : RBW 1MHz and VBW 10Hz)

No.	FREQ [GHz]	S/A READING		ANT Factor [dB]	AMP GAIN [dB]	CABLE LOSS [dB]	H-Pass Filter [dB]	ATTN [dB]	Duty Factor [dB]	D-fac [dB]	RESULT		Limit AV [dBuV/m]	MARGIN	
		HOR	VER								HOR	VER			
		[dBuV]												[dB]	
Test distance 3meters RESULT=Reading + ANT Factor - Amp Gain + CABLE LOSS + (High Pass or ATTEN) + Duty Factor															
1	4.95000	52.9	54.4	35.9	37.9	4.3	1.1	0.0	-6.6	0.0	49.7	51.2	54.0	4.3	2.8
2	7.42500	45.1	45.9	38.7	38.3	5.8	0.5	0.0	-6.6	0.0	45.2	46.0	54.0	8.8	8.0
3	9.90000	35.9	37.5	38.5	38.5	6.1	0.5	0.0	-6.6	0.0	35.9	37.5	54.0	18.1	16.5
Test distance 0.5meters RESULT=Reading + ANT Factor - Amp Gain + CABLE LOSS + High Pass + Duty Factor - Dfac															
4	12.37500	34.5	34.5	43.4	38.5	7.4	0.5	0.0	-6.6	15.6	25.1	25.1	54.0	28.9	28.9
5	14.85000	34.2	34.2	42.4	38.5	8.1	0.5	0.0	-6.6	15.6	24.5	24.5	54.0	29.5	29.5
6	17.32500	34.3	34.4	43.6	38.5	8.2	0.6	0.0	-6.6	15.6	26.0	26.1	54.0	28.0	27.9
7	19.80000	35.9	35.6	38.3	38.5	10.1	1.6	0.0	-6.6	15.6	25.2	24.9	54.0	28.8	29.1
8	22.27500	34.3	34.3	38.8	38.5	9.6	0.3	0.0	-6.6	15.6	22.3	22.3	54.0	31.7	31.7
9	24.75000	38.1	38.0	39.4	38.6	12.3	1.0	0.0	-6.6	15.6	30.0	29.9	54.0	24.0	24.1

PK DETECT(S/A : RBW 1MHz and VBW 1MHz)

No.	FREQ [GHz]	S/A READING		ANT Factor [dB]	AMP GAIN [dB]	CABLE LOSS [dB]	H-Pass Filter [dB]	ATTN [dB]	Duty Factor [dB]	D-fac [dB]	RESULT		Limit PK [dBuV/m]	MARGIN	
		HOR	VER								HOR	VER			
		[dBuV]												[dB]	
Test distance 3meters RESULT=Reading + ANT Factor - Amp Gain + CABLE LOSS + (High Pass or ATTEN) + Duty Factor															
1	4.95000	55.7	56.8	35.9	37.9	4.3	1.1	0.0	-6.6	0.0	52.5	53.6	74.0	21.5	20.5
2	7.42500	50.6	50.3	38.7	38.3	5.8	0.5	0.0	-6.6	0.0	50.7	50.4	74.0	23.3	23.6
3	9.90000	47.1	47.9	38.5	38.5	6.1	0.5	0.0	-6.6	0.0	47.1	47.9	74.0	26.9	26.1
Test distance 0.5meters RESULT=Reading + ANT Factor - Amp Gain + CABLE LOSS + High Pass + Duty Factor - Dfac															
4	12.37500	45.2	45.7	43.4	38.5	7.4	0.5	0.0	-6.6	15.6	35.8	36.3	74.0	38.2	37.7
5	14.85000	45.5	44.3	42.4	38.5	8.1	0.5	0.0	-6.6	15.6	35.8	34.6	74.0	38.2	39.4
6	17.32500	46.3	45.5	43.6	38.5	8.2	0.6	0.0	-6.6	15.6	38.0	37.2	74.0	36.0	36.8
7	19.80000	47.2	47.2	38.3	38.5	10.1	1.6	0.0	-6.6	15.6	36.5	36.5	74.0	37.5	37.5
8	22.27500	45.6	45.8	38.8	38.5	9.6	0.3	0.0	-6.6	15.6	33.6	33.8	74.0	40.4	40.2
9	24.75000	49.8	49.9	39.4	38.6	12.3	1.0	0.0	-6.6	15.6	41.7	41.8	74.0	32.3	32.2

REMARKS

- *The antenna of EUT was angled 0 degrees when the measurement antenna was positioned horizontally.(wors case)
- *The antenna of EUT was angled 90 degrees when the measurement antenna was positioned vertically.(wors case)
- *Test Distance 0.5m : Distance Factor(D-fac) = 20log(3/0.5) =15.6dB
- * Duty factor = 20log (Twidth / Tperiod) = 20log (940*10-6 / 2*10-3) = -6.558
- *Except for the above table : All other spurious emissions were less than 20dB for the limit.

DATA OF SUPURIOUS EMISSIONS(1GHz to 26GHz)

A-PEX INTERNATIONAL CO., LTD.

YOKOWA NO.3 OPEN SITE

Company : SHARP Corporation
 Equipment : Cordless Handset
 Model : UX-CC500K
 Sample No. : 1
 FCC ID : APYHRO00024
 Power : DC 3.6V
 Mode : Transmitting (ch1: 2404.8MHz)

Report No. : 22HE0077-YW
 Regulation : Fcc Part15SubpartC 247 / 209
 Test Distance : 3m and 0.5m
 Date : 2002/04/07
 Temperature : 18deg.C
 Humidity : 81%



ENGINEER : Makoto Kosaka

AV DETECT(S/A : RBW 1MHz and VBW 10Hz)

No.	FREQ [GHz]	S/A READING		ANT Factor [dB]	AMP GAIN [dB]	CABLE LOSS [dB]	H-Pass Filter [dB]	ATTN [dB]	Duty Factor [dB]	D-fac [dB]	RESULT		Limit AV [dBuV/m]	MARGIN	
		HOR	VER								HOR	VER			
		[dBuV]												[dB]	
Test distance 3meters RESULT=Reading + ANT Factor - Amp Gain + CABLE LOSS + (High Pass or ATTEN) + Duty Factor															
1	4.80960	51.4	51.9	35.3	38.0	4.2	1.1	0.0	-6.6	0.0	47.4	47.9	54.0	6.6	6.1
2	7.21440	50.7	50.3	38.5	38.2	5.7	0.5	0.0	-6.6	0.0	50.6	50.2	54.0	3.4	3.8
3	9.61922	36.4	39.9	38.4	38.5	6.2	0.5	0.0	-6.6	0.0	36.4	39.9	54.0	17.6	14.1
Test distance 0.5meters RESULT=Reading + ANT Factor - Amp Gain + CABLE LOSS + High Pass + Duty Factor - Dfac															
4	12.02417	34.2	34.0	42.9	38.5	8.7	0.5	0.0	-6.6	15.6	25.6	25.4	54.0	28.4	28.6
5	14.42880	33.2	32.9	41.7	38.5	9.2	0.6	0.0	-6.6	15.6	24.0	23.7	54.0	30.0	30.3
6	16.83360	34.5	34.4	38.6	38.5	9.6	0.6	0.0	-6.6	15.6	22.6	22.5	54.0	31.4	31.6
7	19.23840	34.9	34.6	38.5	38.5	10.3	1.0	0.0	-6.6	15.6	24.0	23.7	54.0	30.0	30.3
8	21.64320	35.7	35.8	38.8	38.5	11.3	0.6	0.0	-6.6	15.6	25.7	25.8	54.0	28.3	28.2
9	24.04800	35.7	35.6	39.3	38.5	12.2	0.7	0.0	-6.6	15.6	27.2	27.1	54.0	26.8	26.9

PK DETECT(S/A : RBW 1MHz and VBW 1MHz)

No.	FREQ [GHz]	S/A READING		ANT Factor [dB]	AMP GAIN [dB]	CABLE LOSS [dB]	H-Pass Filter [dB]	ATTN [dB]	Duty Factor [dB]	D-fac [dB]	RESULT		Limit PK [dBuV/m]	MARGIN	
		HOR	VER								HOR	VER			
		[dBuV]												[dB]	
Test distance 3meters RESULT=Reading + ANT Factor - Amp Gain + CABLE LOSS + (High Pass or ATTEN) + Duty Factor															
1	4.80966	55.1	54.7	35.3	38.0	4.2	1.1	0.0	-6.6	0.0	51.1	50.7	74.0	22.9	23.3
2	7.21451	56.7	54.0	38.5	38.2	5.7	0.5	0.0	-6.6	0.0	56.6	53.9	74.0	17.4	20.2
3	9.61922	47.6	48.3	38.4	38.5	6.2	0.5	0.0	-6.6	0.0	47.6	48.3	74.0	26.4	25.7
Test distance 0.5meters RESULT=Reading + ANT Factor - Amp Gain + CABLE LOSS + High Pass + Duty Factor - Dfac															
4	12.02417	45.8	43.9	42.9	38.5	8.7	0.5	0.0	-6.6	15.6	37.2	35.3	74.0	36.8	38.7
5	14.42880	44.7	44.7	41.7	38.5	9.2	0.6	0.0	-6.6	15.6	35.5	35.5	74.0	38.5	38.5
6	16.83360	45.9	45.8	38.6	38.5	9.6	0.6	0.0	-6.6	15.6	34.0	33.9	74.0	40.0	40.1
7	19.23840	46.6	46.3	38.5	38.5	10.3	1.0	0.0	-6.6	15.6	35.7	35.4	74.0	38.3	38.6
8	21.64320	46.2	46.3	38.8	38.5	11.3	0.6	0.0	-6.6	15.6	36.2	36.3	74.0	37.8	37.7
9	24.04800	46.1	46.3	39.3	38.5	12.2	0.7	0.0	-6.6	15.6	37.6	37.8	74.0	36.4	36.2

REMARKS


- *EUT was placed in X axis when the measurement antenna was positioned horizontally.(wors case)
- *EUT was placed in Y axis when the measurement antenna was positioned horizontally.(wors case)
- *Test Distance 0.5m : Distance Factor(D-fac) = $20\log(3/0.5) = 15.6\text{dB}$
- * Duty factor = $20\log(T\text{width} / T\text{period}) = 20\log(940 \times 10^{-6} / 2 \times 10^{-3}) = -6.558$
- *Except for the above table : All other spurious emissions were less than 20dB for the limit.

DATA OF SUPURIOUS EMISSIONS(1GHz to 26GHz)

A-PEX INTERNATIONAL CO., LTD.
YOKOWA NO.3 OPEN SITE

Company : SHARP Corporation
Equipment : Cordless Handset
Model : UX-CC500K
Sample No. : 1
FCC ID : APYHRO00024
Power : DC 3.6V
Mode : Transmitting (ch20: 2439.0MHz)

Report No. : 22HE0077-YW
Regulation : Fcc Part15SubpartC 247 / 209
Test Distance : 3m and 0.5m
Date : 2002/04/07
Temperature : 18deg.C
Humidity : 81%



ENGINEER : Makoto Kosaka

AV DETECT(S/A : RBW 1MHz and VBW 10Hz)

No.	FREQ [GHz]	S/A READING		ANT Factor [dB]	AMP GAIN [dB]	CABLE LOSS [dB]	H-Pass Filter [dB]	ATTN [dB]	Duty Factor [dB]	D-fac [dB]	RESULT		Limit AV [dBuV/m]	MARGIN	
		HOR	VER								HOR	VER			
		[dBuV]												[dB]	
Test distance 3meters RESULT=Reading + ANT Factor - Amp Gain + CABLE LOSS + (High Pass or ATTEN) + Duty Factor															
1	4.87800	53.5	50.6	35.6	37.9	4.2	1.1	0.0	-6.6	0.0	49.9	47.0	54.0	4.1	7.0
2	7.31703	49.6	47.2	38.6	38.2	5.7	0.5	0.0	-6.6	0.0	49.6	47.2	54.0	4.4	6.8
3	9.75601	39.2	38.1	38.5	38.5	6.2	0.5	0.0	-6.6	0.0	39.3	38.2	54.0	14.7	15.8
Test distance 0.5meters RESULT=Reading + ANT Factor - Amp Gain + CABLE LOSS + High Pass + Duty Factor - Dfac															
4	12.19500	34.2	34.0	43.1	38.5	7.5	0.5	0.0	-6.6	15.6	24.6	24.4	54.0	29.4	29.6
5	14.63400	33.2	32.9	42.1	38.5	8.0	0.5	0.0	-6.6	15.6	23.1	22.8	54.0	30.9	31.2
6	17.07300	34.5	34.4	43.5	38.5	8.1	0.6	0.0	-6.6	15.6	26.0	25.9	54.0	28.0	28.2
7	19.51200	35.0	35.0	38.1	38.5	9.4	1.3	0.0	-6.6	15.6	23.1	23.1	54.0	30.9	30.9
8	21.95100	36.4	36.1	38.7	38.5	9.6	0.2	0.0	-6.6	15.6	24.2	23.9	54.0	29.8	30.1
9	24.39000	37.8	36.9	39.4	38.5	12.5	0.9	0.0	-6.6	15.6	29.9	29.0	54.0	24.1	25.0

PK DETECT(S/A : RBW 1MHz and VBW 1MHz)

No.	FREQ [GHz]	S/A READING		ANT Factor [dB]	AMP GAIN [dB]	CABLE LOSS [dB]	H-Pass Filter [dB]	ATTN [dB]	Duty Factor [dB]	D-fac [dB]	RESULT		Limit PK [dBuV/m]	MARGIN	
		HOR	VER								HOR	VER			
		[dBuV]												[dB]	
Test distance 3meters RESULT=Reading + ANT Factor - Amp Gain + CABLE LOSS + (High Pass or ATTEN) + Duty Factor															
1	4.87800	56.9	54.8	35.6	37.9	4.2	1.1	0.0	-6.6	0.0	53.3	51.2	74.0	20.7	22.8
2	7.31703	53.5	53.9	38.6	38.2	5.7	0.5	0.0	-6.6	0.0	53.5	53.9	74.0	20.5	20.1
3	9.75601	48.7	48.1	38.5	38.5	6.2	0.5	0.0	-6.6	0.0	48.8	48.2	74.0	25.2	25.8
Test distance 0.5meters RESULT=Reading + ANT Factor - Amp Gain + CABLE LOSS + High Pass + Duty Factor - Dfac															
4	12.19500	45.8	43.9	43.1	38.5	7.5	0.5	0.0	-6.6	15.6	36.2	34.3	74.0	37.8	39.7
5	14.63400	44.7	44.7	42.1	38.5	8.0	0.5	0.0	-6.6	15.6	34.6	34.6	74.0	39.4	39.4
6	17.07300	45.9	45.8	43.5	38.5	8.1	0.6	0.0	-6.6	15.6	37.4	37.3	74.0	36.6	36.7
7	19.51200	46.1	46.1	38.1	38.5	9.4	1.3	0.0	-6.6	15.6	34.2	34.2	74.0	39.8	39.8
8	21.95100	46.3	46.3	38.7	38.5	9.6	0.2	0.0	-6.6	15.6	34.1	34.1	74.0	39.9	39.9
9	24.39000	46.2	46.3	39.4	38.5	12.5	0.9	0.0	-6.6	15.6	38.3	38.4	74.0	35.7	35.6

REMARKS


- *EUT was placed in X axis when the measurement antenna was positioned horizontally.(wors case)
- *EUT was placed in Y axis when the measurement antenna was positioned horizontally.(wors case)
- *Test Distance 0.5m : Distance Factor(D-fac) = 20log(3/0.5) = 15.6dB
- * Duty factor = 20log (Twidth / Tperiod) = 20log (940*10⁻⁶ / 2*10⁻³) = -6.558
- *Except for the above table : All other spurious emissions were less than 20dB for the limit.

DATA OF SUPURIOUS EMISSIONS(1GHz to 26GHz)

A-PEX INTERNATIONAL CO., LTD.
YOKOWA NO.3 OPEN SITE

Company : SHARP Corporation
 Equipment : Cordless Handset
 Model : UX-CC500K
 Sample No. : 1
 FCC ID : APYHRO00024
 Power : DC 3.6V
 Mode : Transmitting (ch40: 2475MHz)

Report No. : 22HE0077-YW
 Regulation : Fcc Part15SubpartC 247 / 209
 Test Distance : 3m and 0.5m
 Date : 2002/04/07
 Temperature : 18deg.C
 Humidity : 81%



ENGINEER : Makoto Kosaka

AV DETECT(S/A : RBW 1MHz and VBW 10Hz)

No.	FREQ [GHz]	S/A READING		ANT Factor [dB]	AMP GAIN [dB]	CABLE LOSS [dB]	H-Pass Filter [dB]	ATTN [dB]	Duty Factor [dB]	D-fac [dB]	RESULT		Limit AV [dBuV/m]	MARGIN	
		HOR	VER								HOR	VER			
		[dBuV]												[dB]	
Test distance 3meters RESULT=Reading + ANT Factor - Amp Gain + CABLE LOSS + (High Pass or ATTEN) + Duty Factor															
1	4.95001	54.7	52.9	35.9	37.9	4.3	1.1	0.0	-6.6	0.0	51.5	49.7	54.0	2.5	4.3
2	7.42493	51.0	49.1	38.7	38.3	5.8	0.5	0.0	-6.6	0.0	51.1	49.2	54.0	2.9	4.8
3	9.89998	35.8	36.3	38.5	38.5	6.1	0.5	0.0	-6.6	0.0	35.8	36.3	54.0	18.2	17.7
Test distance 0.5meters RESULT=Reading + ANT Factor - Amp Gain + CABLE LOSS + High Pass + Duty Factor - Dfac															
4	12.37500	34.2	34.0	43.4	38.5	7.4	0.5	0.0	-6.6	15.6	24.8	24.6	54.0	29.2	29.4
5	14.85000	33.2	32.9	42.4	38.5	8.1	0.5	0.0	-6.6	15.6	23.5	23.2	54.0	30.5	30.8
6	17.32500	34.5	34.4	43.6	38.5	8.2	0.6	0.0	-6.6	15.6	26.2	26.1	54.0	27.8	28.0
7	19.80000	35.9	35.6	38.3	38.5	10.1	1.6	0.0	-6.6	15.6	25.2	24.9	54.0	28.8	29.1
8	22.27500	34.3	34.3	38.8	38.5	9.6	0.3	0.0	-6.6	15.6	22.3	22.3	54.0	31.7	31.7
9	24.75000	38.1	38.3	39.4	38.6	12.3	1.0	0.0	-6.6	15.6	30.0	30.2	54.0	24.0	23.8

PK DETECT(S/A : RBW 1MHz and VBW 1MHz)

No.	FREQ [GHz]	S/A READING		ANT Factor [dB]	AMP GAIN [dB]	CABLE LOSS [dB]	H-Pass Filter [dB]	ATTN [dB]	Duty Factor [dB]	D-fac [dB]	RESULT		Limit PK [dBuV/m]	MARGIN	
		HOR	VER								HOR	VER			
		[dBuV]												[dB]	
Test distance 3meters RESULT=Reading + ANT Factor - Amp Gain + CABLE LOSS + (High Pass or ATTEN) + Duty Factor															
1	4.95001	57.6	56.6	35.9	37.9	4.3	1.1	0.0	-6.6	0.0	54.4	53.4	74.0	19.6	20.6
2	7.42493	56.2	55.1	38.7	38.3	5.8	0.5	0.0	-6.6	0.0	56.3	55.2	74.0	17.7	18.8
3	9.89998	47.5	47.6	38.5	38.5	6.1	0.5	0.0	-6.6	0.0	47.5	47.6	74.0	26.5	26.4
Test distance 0.5meters RESULT=Reading + ANT Factor - Amp Gain + CABLE LOSS + High Pass + Duty Factor - Dfac															
4	12.37500	45.8	43.9	43.4	38.5	7.4	0.5	0.0	-6.6	15.6	36.4	34.5	74.0	37.6	39.5
5	14.85000	44.7	44.7	42.4	38.5	8.1	0.5	0.0	-6.6	15.6	35.0	35.0	74.0	39.0	39.0
6	17.32500	45.9	45.8	43.6	38.5	8.2	0.6	0.0	-6.6	15.6	37.6	37.5	74.0	36.4	36.5
7	19.80000	47.1	47.2	38.3	38.5	10.1	1.6	0.0	-6.6	15.6	36.4	36.5	74.0	37.6	37.5
8	22.27500	45.6	45.8	38.8	38.5	9.6	0.3	0.0	-6.6	15.6	33.6	33.8	74.0	40.4	40.2
9	24.75000	49.8	49.5	39.4	38.6	12.3	1.0	0.0	-6.6	15.6	41.7	41.4	74.0	32.3	32.6

REMARKS


- *EUT was placed in X axis when the measurement antenna was positioned horizontally.(wors case)
- *EUT was placed in Y axis when the measurement antenna was positioned horizontally.(wors case)
- *Test Distance 0.5m : Distance Factor(D-fac) = 20log(3/0.5) =15.6dB
- * Duty factor = 20log (Twidth / Tperiod) = 20log (940*10-6 / 2*10-3) = -6.558
- *Except for the above table : All other spurious emissions were less than 20dB for the limit.

Restricted Band Edges(Radiated)

A-PEX INTERNATIONAL CO., LTD.
YOKOWA NO.3 OPEN SITE

Company : SHARP Corporation
Equipment : Facsimile Equipment
Model : UX-CC500
Sample No. : 3
FCC ID : APYHRO00024
Power : AC120V/60Hz
Mode : Transmitting

Report No. : 22HE0077-YW
Regulation : Fcc Part15SubpartC 247 / 209
Test Distance : 3m
Date : 2002/04/06
Temperature : 28deg.C
Humidity : 35%



ENGINEER : Makoto Kosaka

AV DETECT(S/A : RBW 1MHz and VBW 10Hz)

ch	FREQ [GHz]	S/A READING		ANT Factor [dB]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN [dB]	Duty Factor [dB]	RESULT		Limit AV [dBuV/m]	MARGIN	
		HOR	VER						HOR	VER		HOR	VER
		[dBuV]							[dBuV/m]			[dB]	
Ch1	2.3900	35.8	35.4	31.2	38.0	3.1	10.0	-6.6	35.5	35.1	54.0	18.6	18.9
Ch40	2.4835	36.4	35.7	31.4	38.0	3.2	10.0	-6.6	36.4	35.7	54.0	17.6	18.3

PK DETECT(S/A : RBW 1MHz and VBW 1MHz)

ch	FREQ [GHz]	S/A READING		ANT Factor [dB]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN [dB]	Duty Factor [dB]	RESULT		Limit PK [dBuV/m]	MARGIN	
		HOR	VER						HOR	VER		HOR	VER
		[dBuV]							[dBuV/m]			[dB]	
Ch1	2.3900	46.7	46.1	31.2	38.0	3.1	10.0	-6.6	46.4	45.8	74.0	27.6	28.2
Ch40	2.4835	47.1	47.4	31.4	38.0	3.2	10.0	-6.6	47.1	47.4	74.0	26.9	26.6

Sample Calculation :

RESULT= S/A Reading + ANT Factor - Amp Gain + CABLE LOSS + ATTEN + Duty Factor

REMARKS

*The antenna of EUT was angled 0 degrees when the measurement antenna was positioned horizontally.(wors case)

*The antenna of EUT was angled 90 degrees when the measurement antenna was positioned vertically.(wors case)

* Duty factor = $20\log(Twidth / Tperiod) = 20\log(940 \times 10^{-6} / 2 \times 10^{-3}) = -6.558$

*Except for the above table : All other spurious emissions were less than 20dB for the limit.

*Ch1: 2404.8MHz Transmitting


*C40: 2475.0MHz Transmitting

Restricted Band Edges(Radiated)

A-PEX INTERNATIONAL CO., LTD.
YOKOWA NO.3 OPEN SITE

Company : SHARP Corporation
Equipment : Cordless Handset
Model : UX-CC500K
Sample No. : 1
FCC ID : APYHRO00024
Power : DC 3.6V
Mode : Transmitting

Report No. : 22HE0077-YW
Regulation : Fcc Part15SubpartC 247 / 209
Test Distance : 3m
Date : 2002/04/06
Temperature : 29deg.C
Humidity : 31%



ENGINEER : Makoto Kosaka

AV DETECT(S/A : RBW 1MHz and VBW 10Hz)

ch	FREQ [GHz]	S/A READING		ANT Factor [dB]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN [dB]	Duty Factor [dB]	RESULT		Limit AV [dBuV/m]	MARGIN	
		HOR	VER						HOR	VER		HOR	VER
		[dBuV]							[dBuV/m]			[dB]	
Ch1	2.3900	35.5	35.4	31.2	38.0	3.1	10.0	-6.6	35.2	35.1	54.0	18.8	18.9
Ch40	2.4835	35.3	35.2	31.4	38.0	3.2	10.0	-6.6	35.3	35.2	54.0	18.7	18.8

PK DETECT(S/A : RBW 1MHz and VBW 1MHz)

ch	FREQ [GHz]	S/A READING		ANT Factor [dB]	AMP GAIN [dB]	CABLE LOSS [dB]	ATTEN [dB]	Duty Factor [dB]	RESULT		Limit PK [dBuV/m]	MARGIN	
		HOR	VER						HOR	VER		HOR	VER
		[dBuV]							[dBuV/m]			[dB]	
Ch1	2.3900	46.8	47.1	31.2	38.0	3.1	10.0	-6.6	46.5	46.8	74.0	27.5	27.2
Ch40	2.4835	46.6	46.1	31.4	38.0	3.2	10.0	-6.6	46.6	46.1	74.0	27.4	27.9

Sample Calculation :

RESULT= S/A Reading + ANT Factor - Amp Gain + CABLE LOSS + ATTEN + Duty Factor

REMARKS

*EUT was placed in X axis when the measurement antenna was positioned horizontally.(wors case)

*EUT was placed in Y axis when the measurement antenna was positioned horizontally.(wors case)


* Duty factor = $20\log(Twidth / Tperiod) = 20\log(940 \times 10^{-6} / 2 \times 10^{-3}) = -6.558$

*Except for the above table : All other spurious emissions were less than 20dB for the limit.


*Ch1: 2404.8MHz Transmitting

*C40: 2475.0MHz Transmitting


5. 2.4048GHz (ch 1)/ Vertical/ AV: External Attenuator 10dB

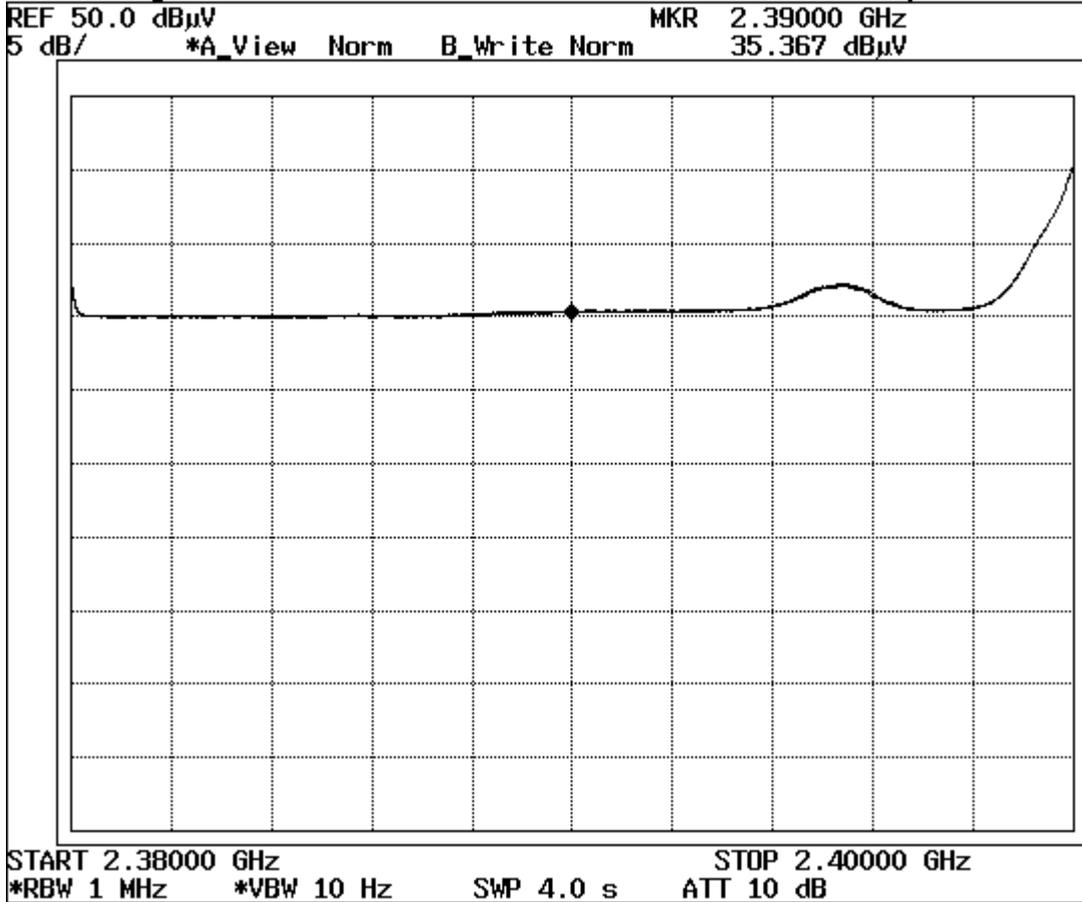


6. 2.4048GHz (ch 1)/ Vertical/ AV: External Attenuator 10dB

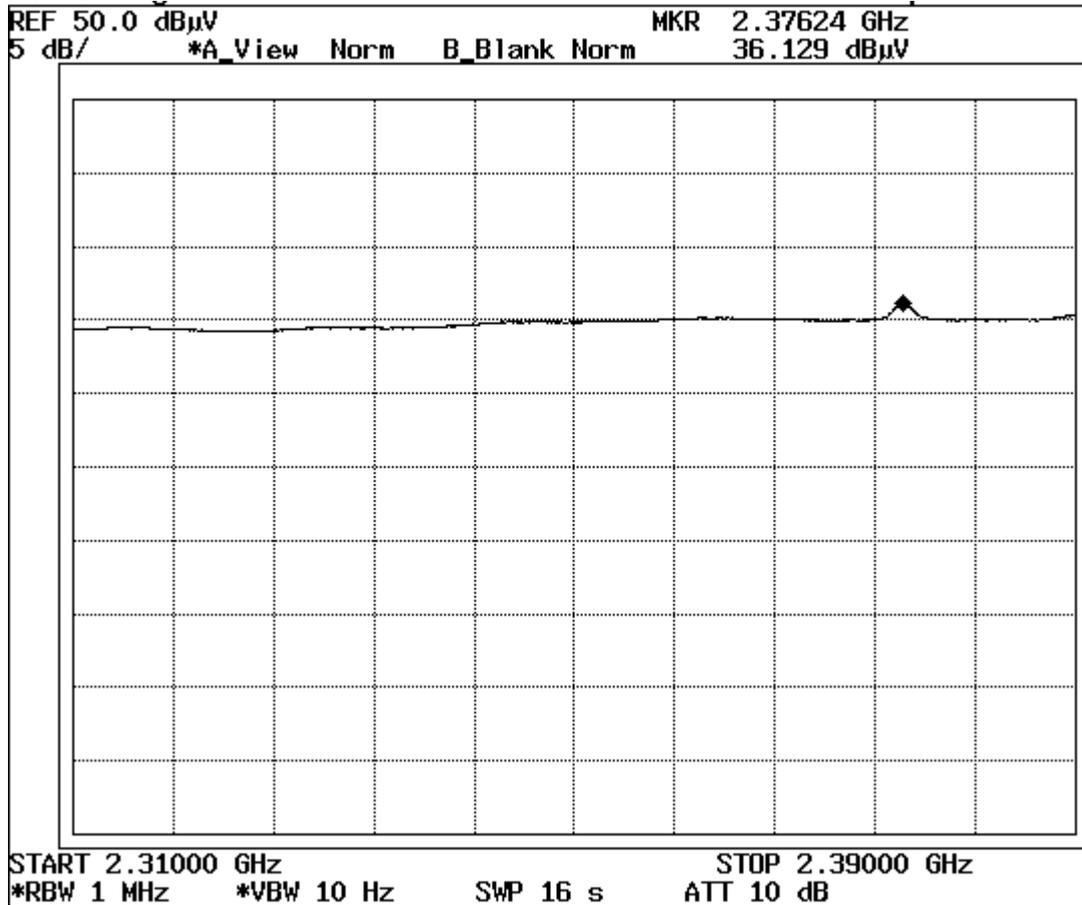


7. 2.4048GHz (ch 1)/ Vertical/ PK: External Attenuator 10dB

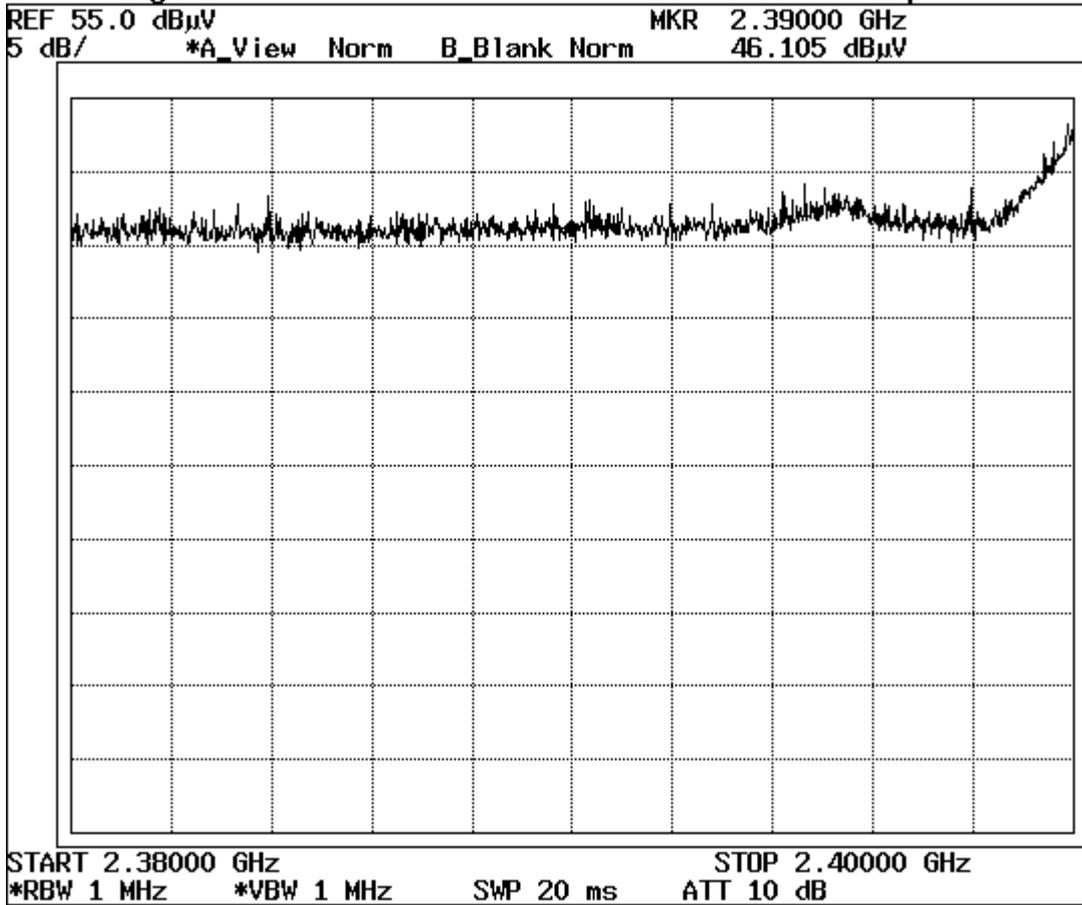


8. 2.4048GHz (ch 1)/ Vertical/ PK2: External Attenuator 10dB

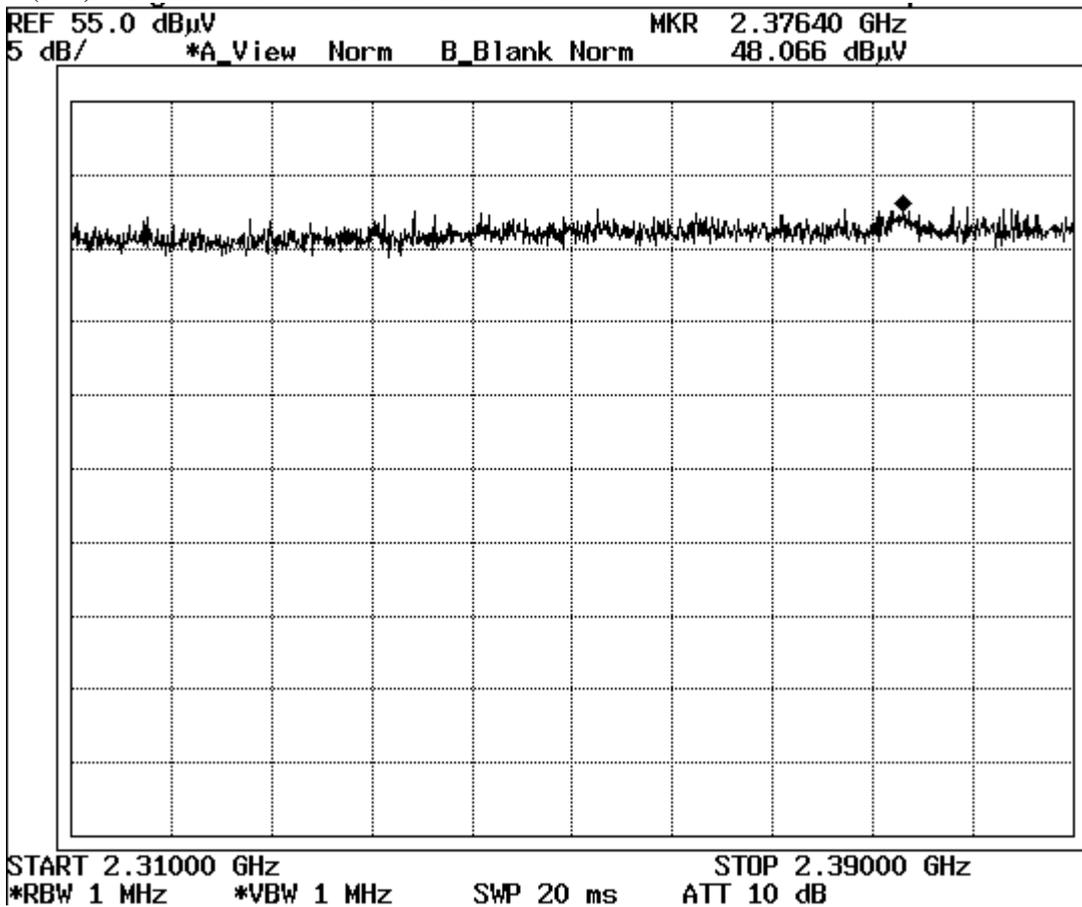


13.. 2.475GHz (ch 40)/ Vertical/ AV: External Attenuator 10dB

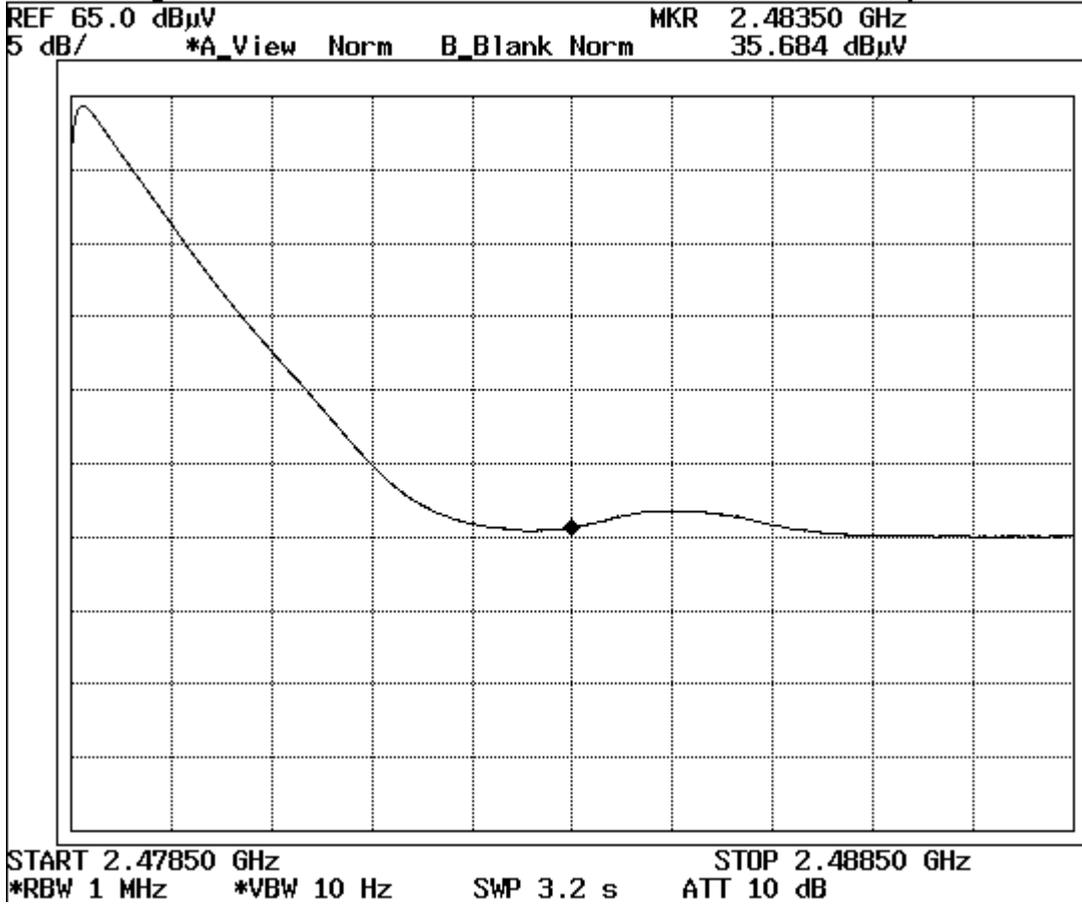


14. 2.475GHz (ch 40)/ Vertical/ AV2: External Attenuator 10dB

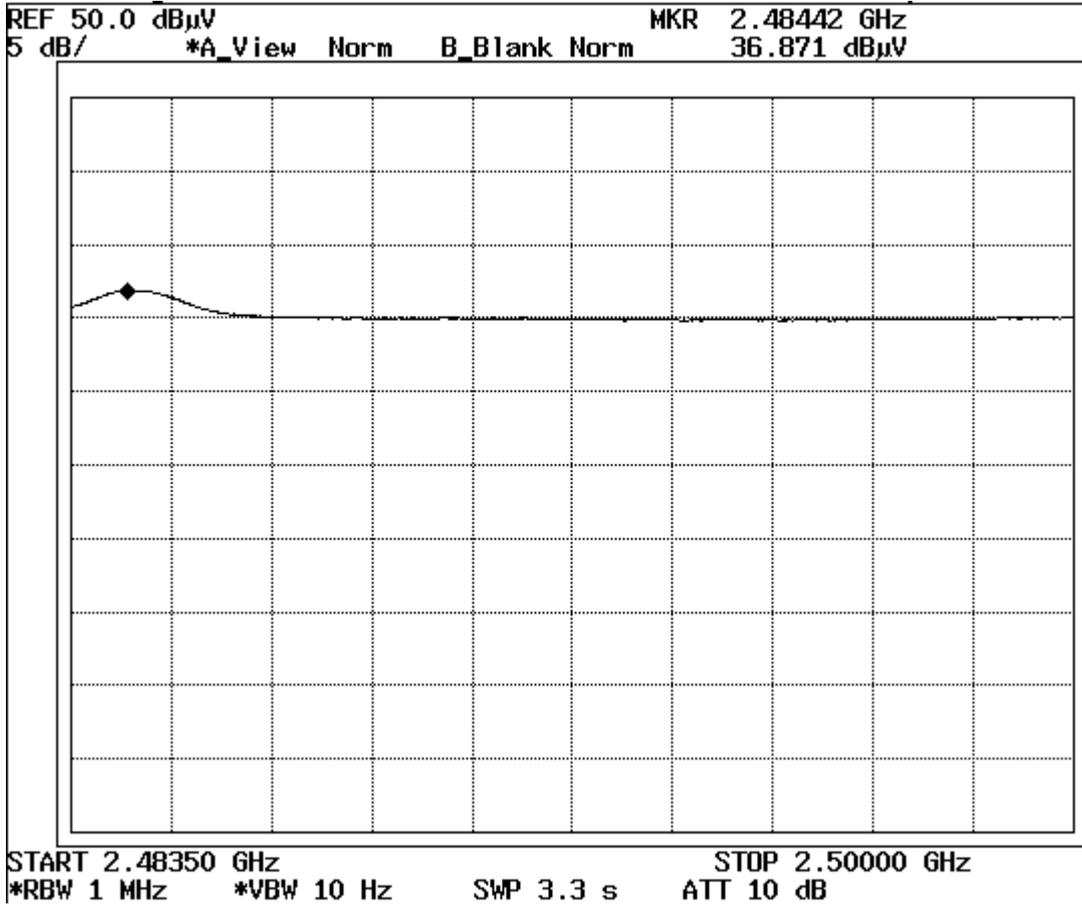


2. 2.4048GHz (ch 1)/ Horizontal/PK: External Attenuator 10dB

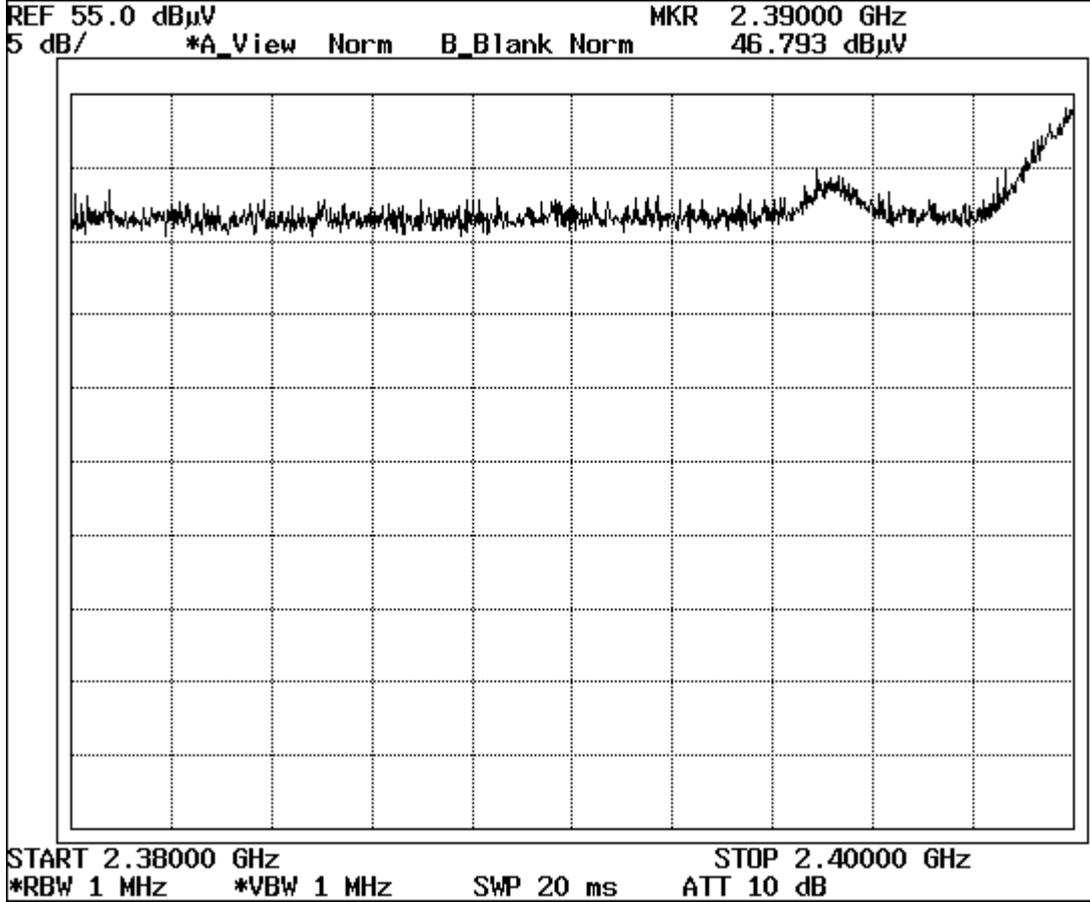


4. 2.4048GHz (ch 1)/ Horizontal/PK2: External Attenuator 10dB

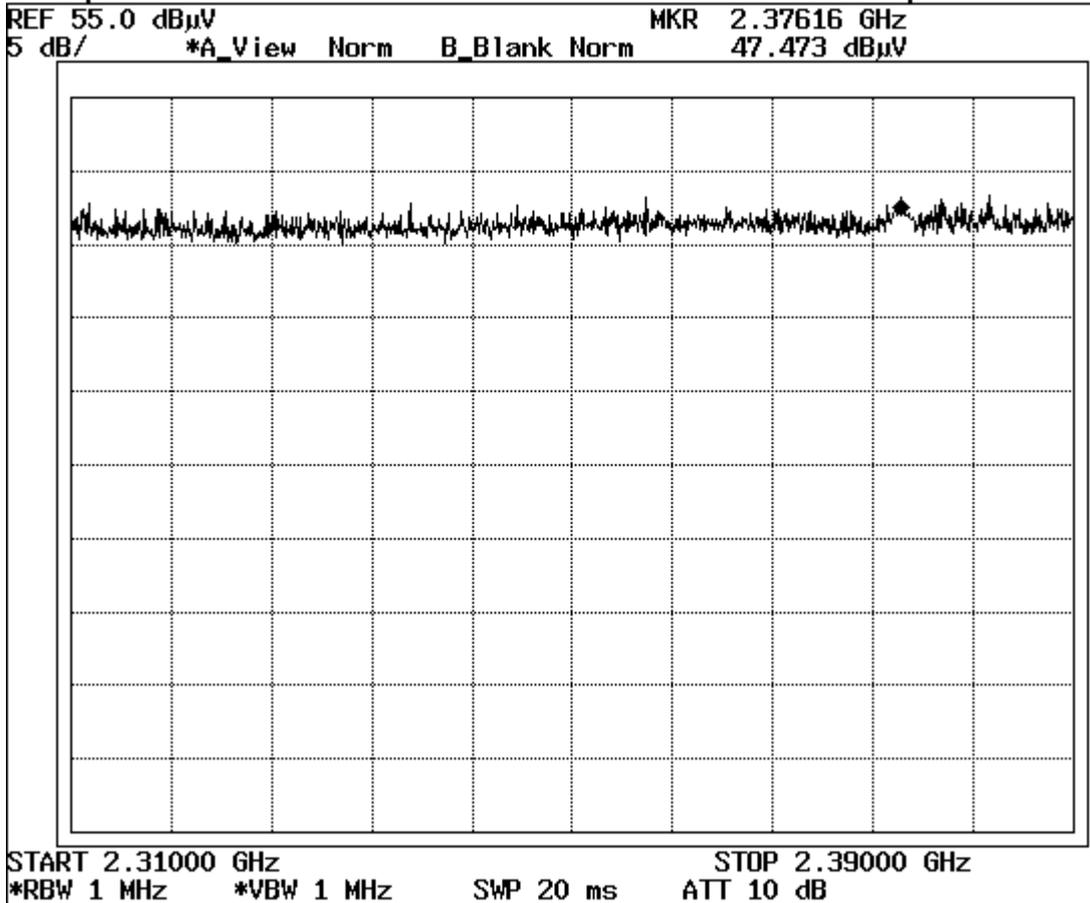


5. 2.4048GHz (ch 1)/ Vertical/ AV: External Attenuator 10dB

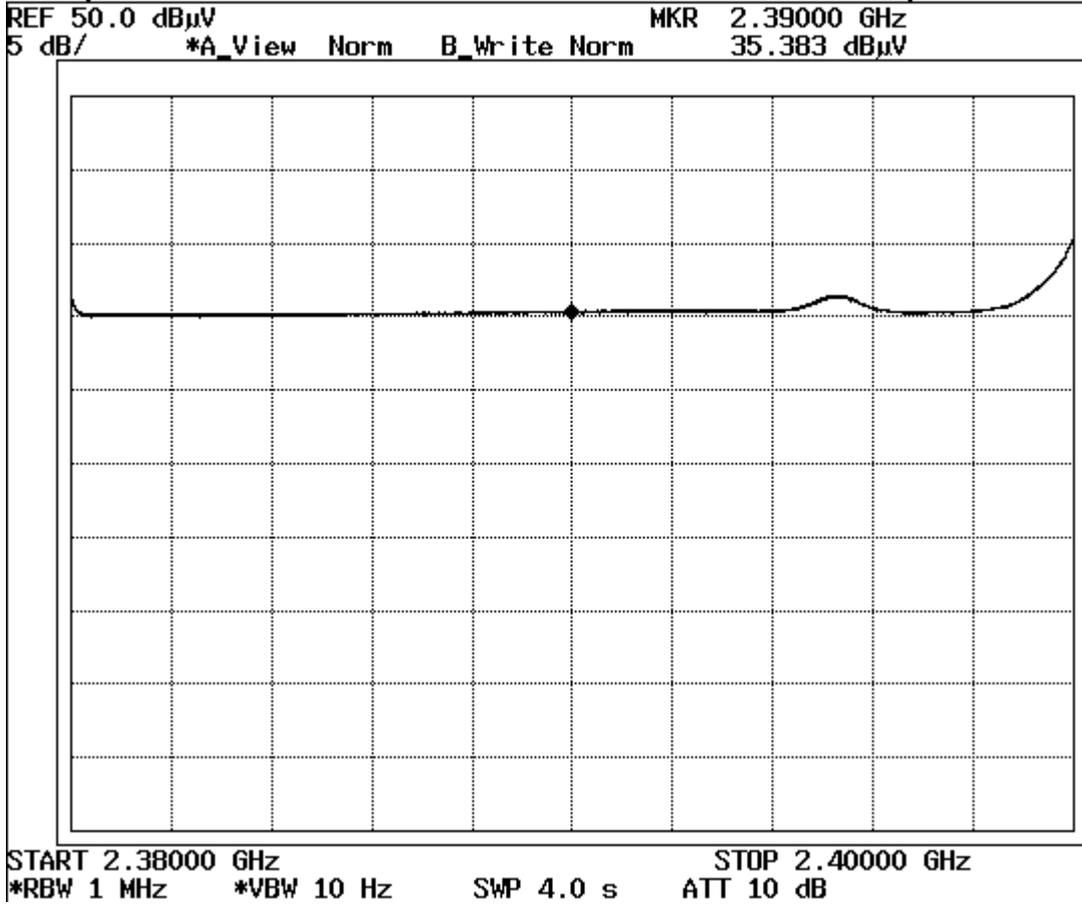


6. 2.4048GHz (ch 1)/ Vertical/ AV2: External Attenuator 10dB

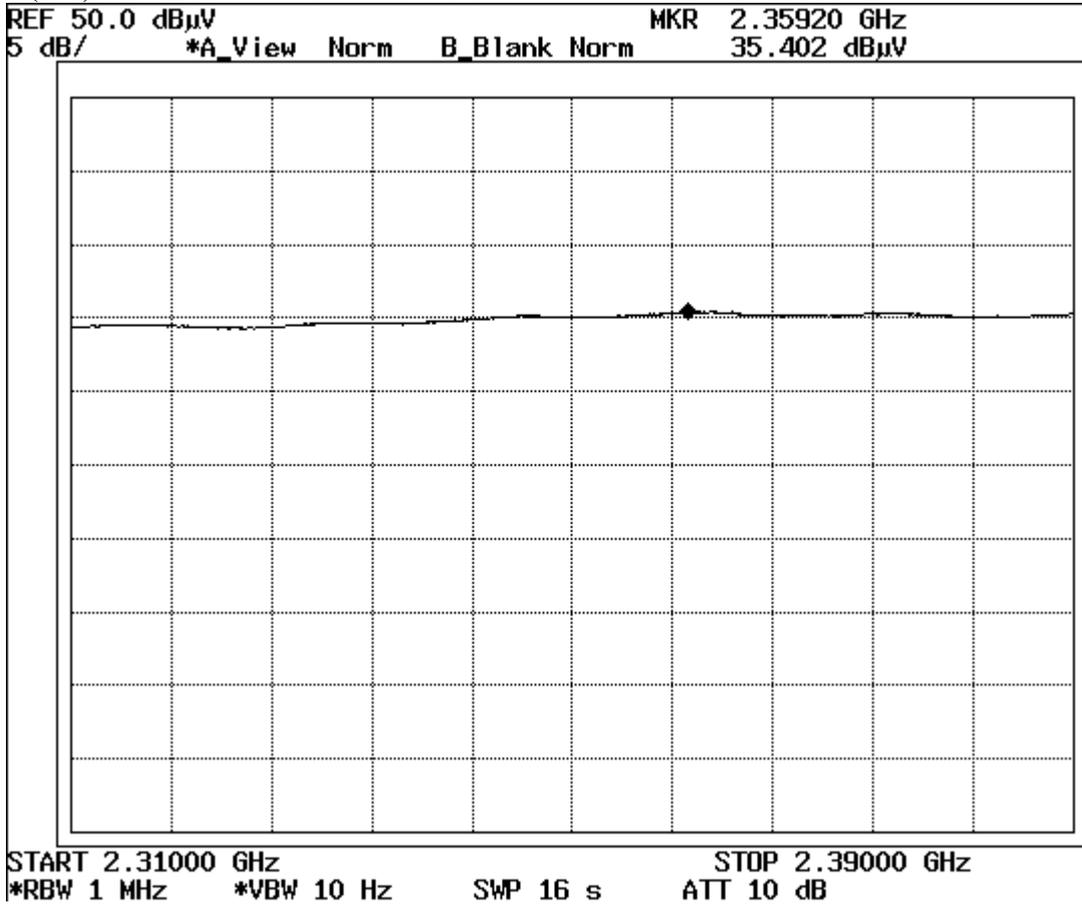


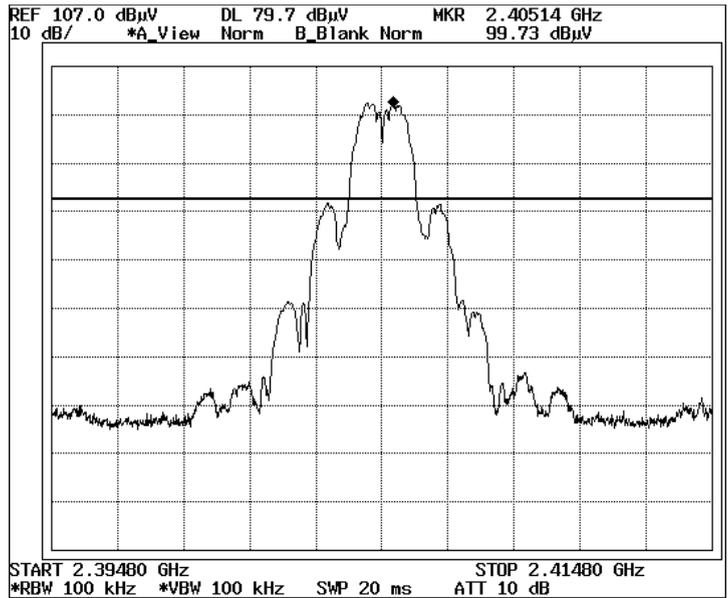


2. ch 1: 2.4048GHz: External Attenuator 10dB

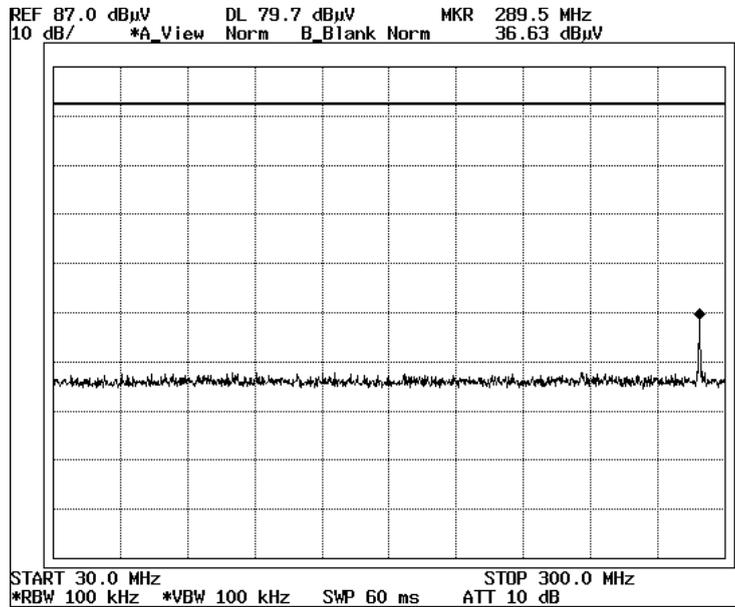


3. ch 1: 2.4048GHz: External Attenuator 10dB

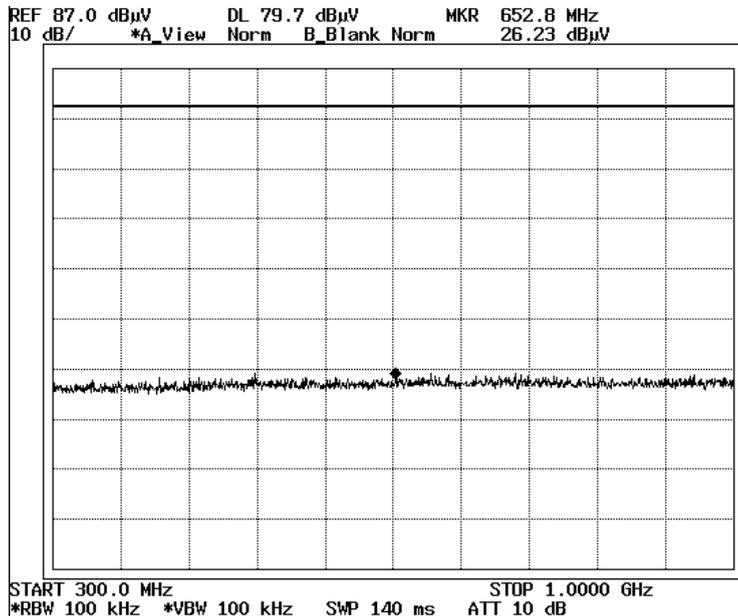


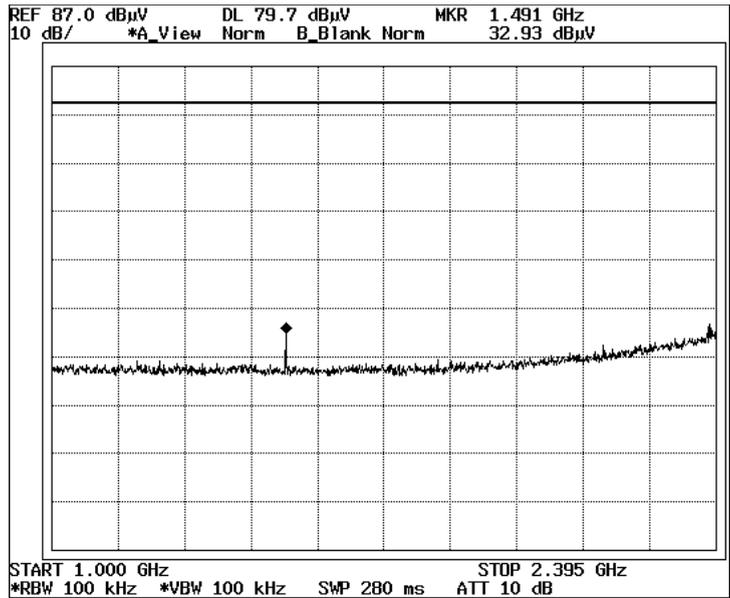


5. ch 1: 2.4048GHz: External Attenuator 10dB

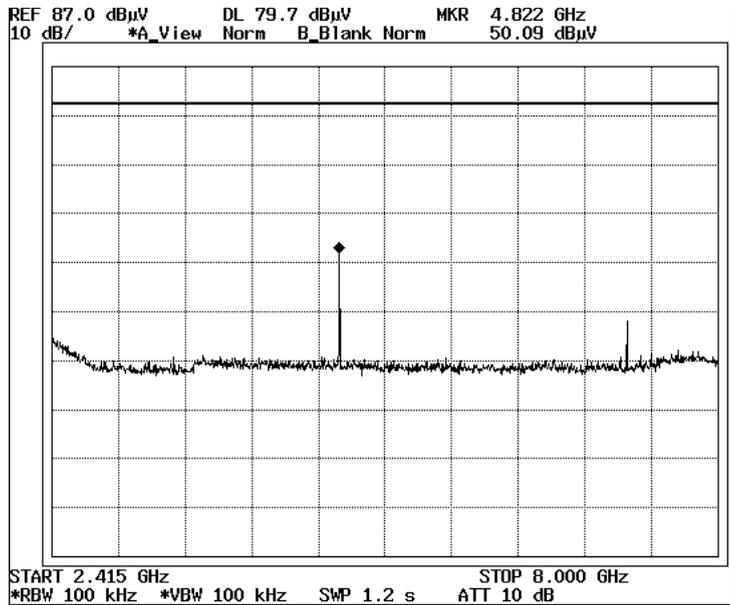


6. ch 1: 2.4048GHz: External Attenuator 10dB

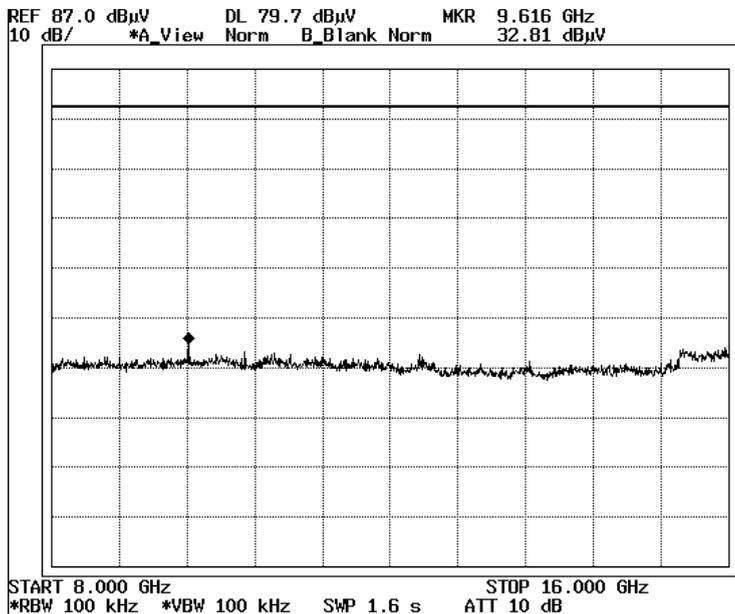


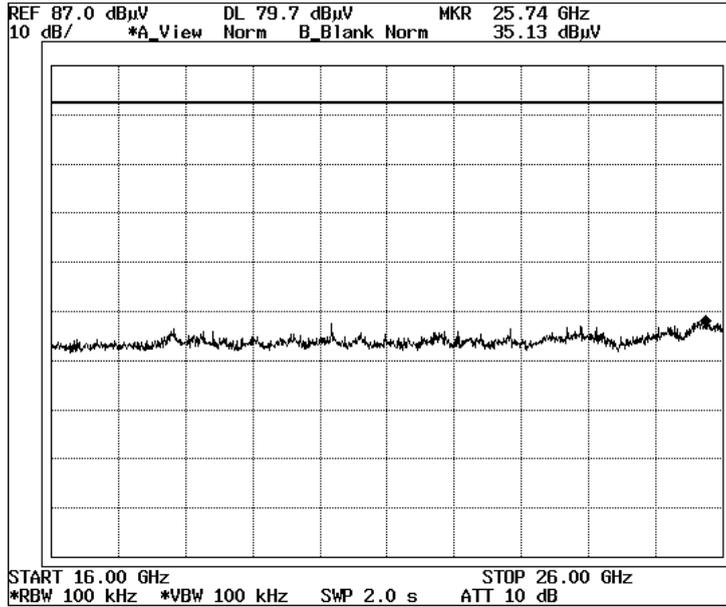


8. ch 20: 2.439GHz: External Attenuator 10dB

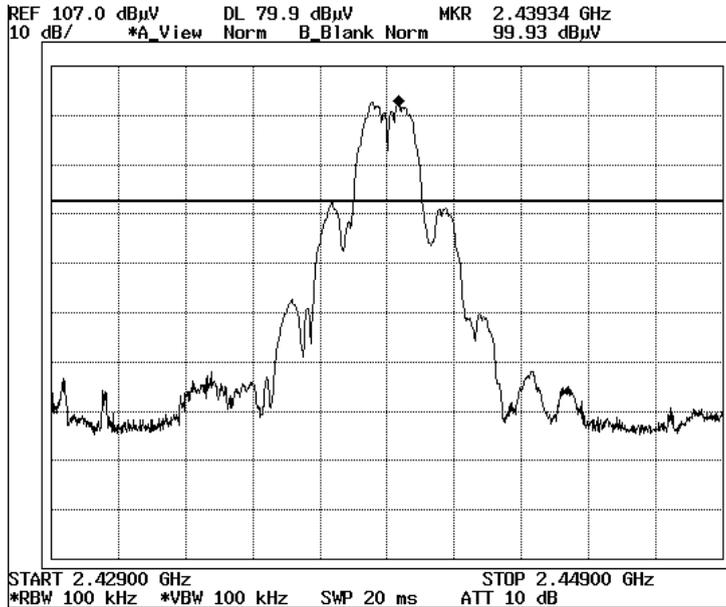


9. ch 20: 2.439GHz: External Attenuator 10dB

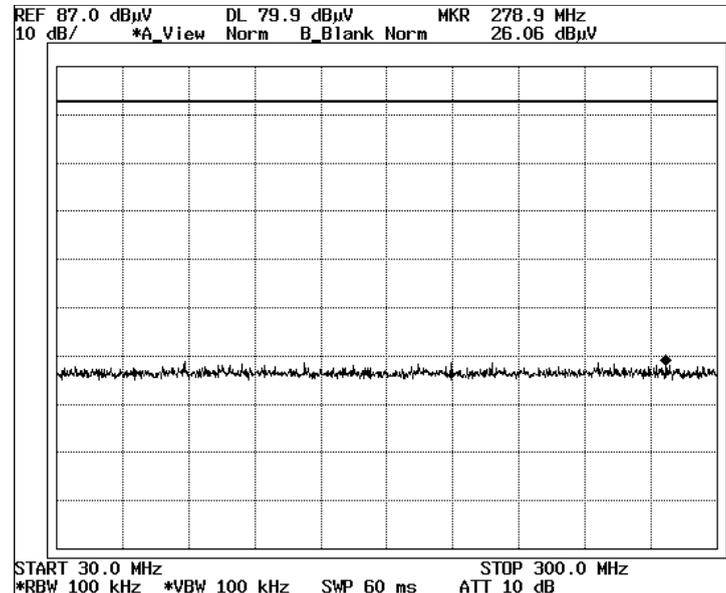


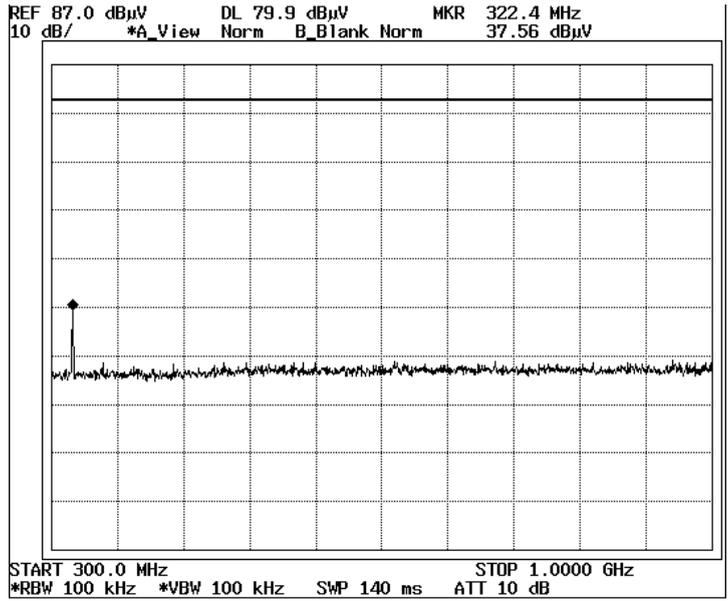


11. ch 20: 2.439GHz: External Attenuator 10dB

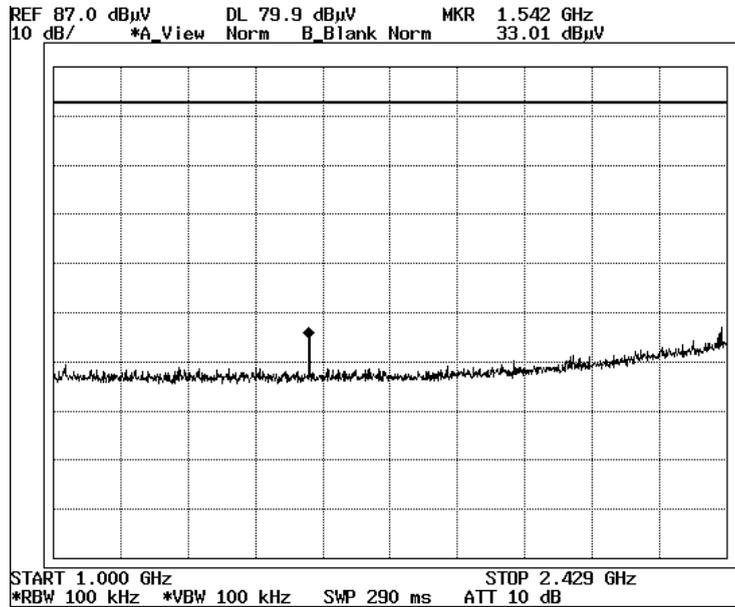


12. ch 20: 2.439GHz: External Attenuator 10dB

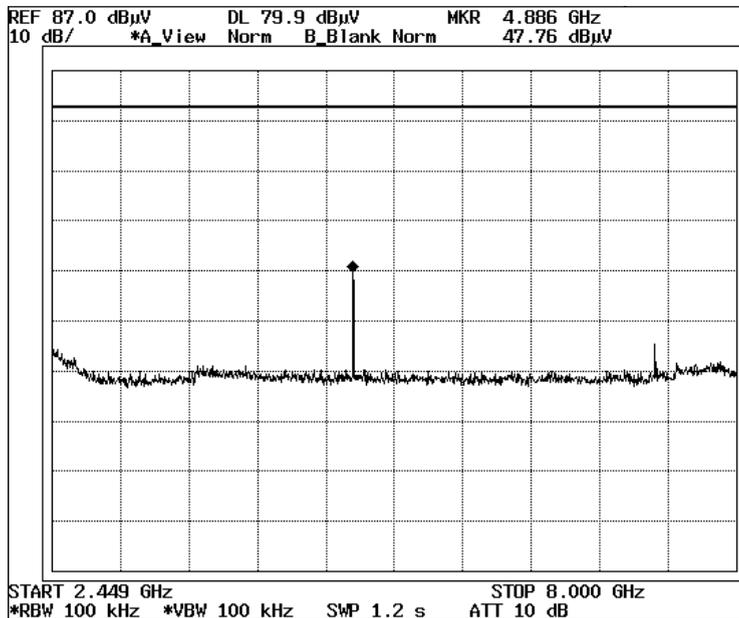


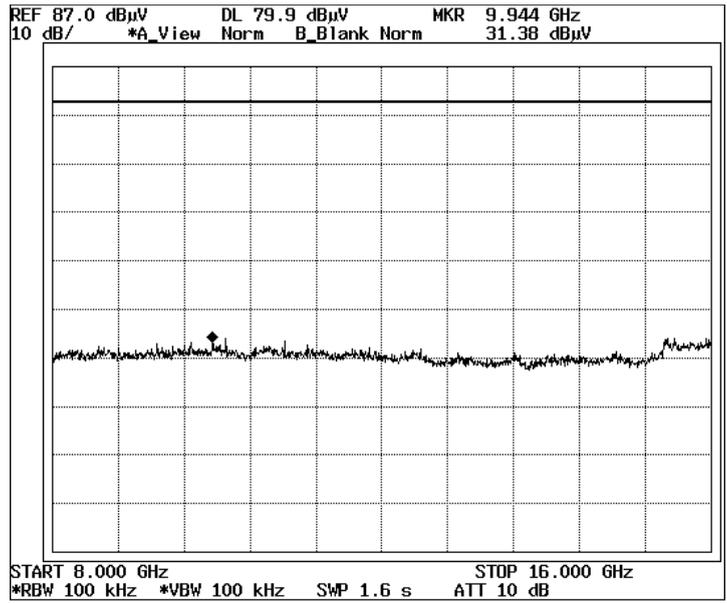


14. ch 20: 2.439GHz: External Attenuator 10dB

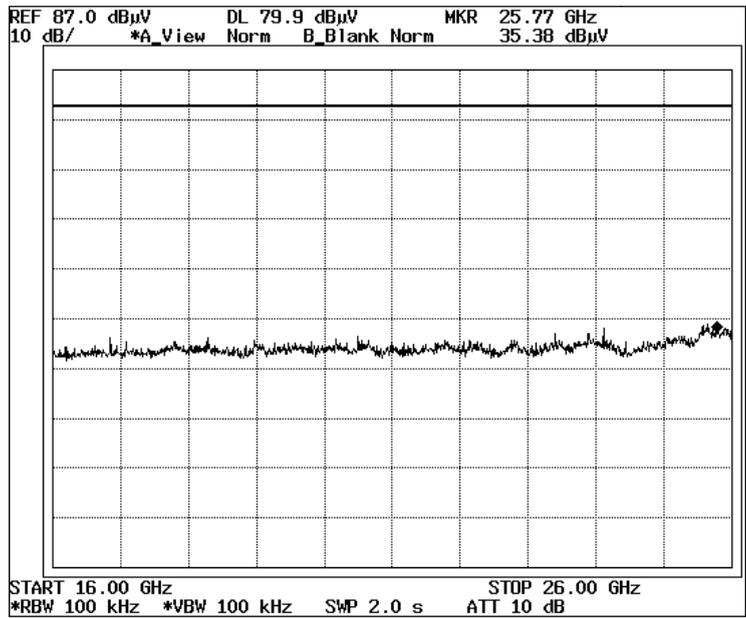


15. ch 40: 2.475GHz: External Attenuator 10dB

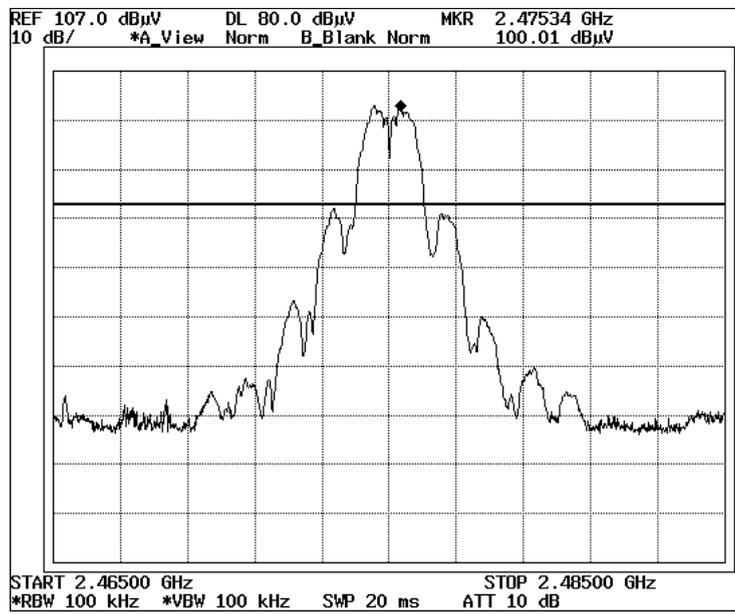


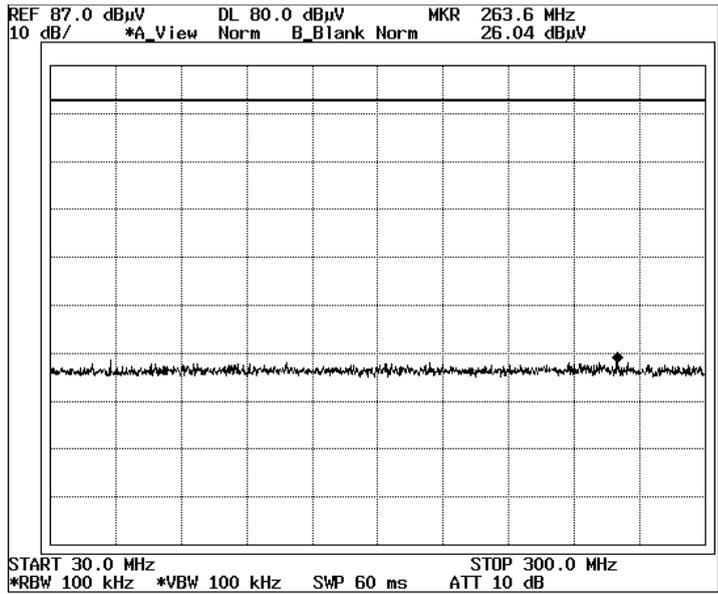


17. ch 40: 2.475GHz: External Attenuator 10dB

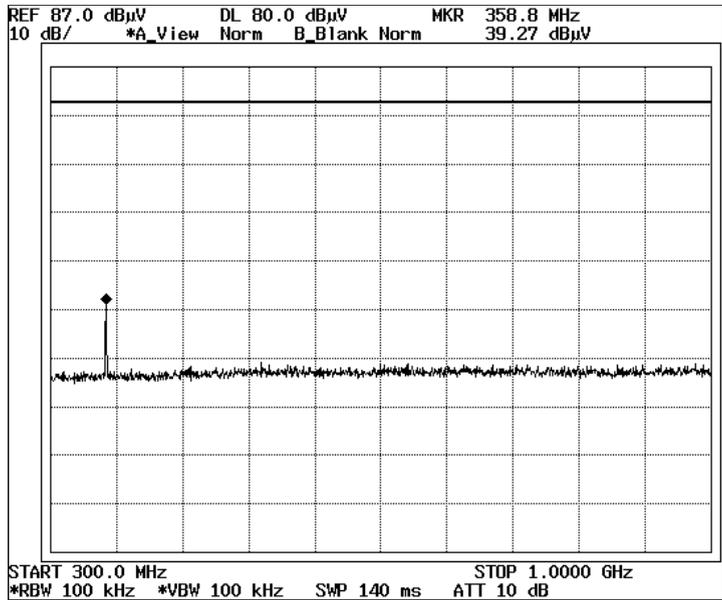


18. ch 40: 2.475GHz: External Attenuator 10dB

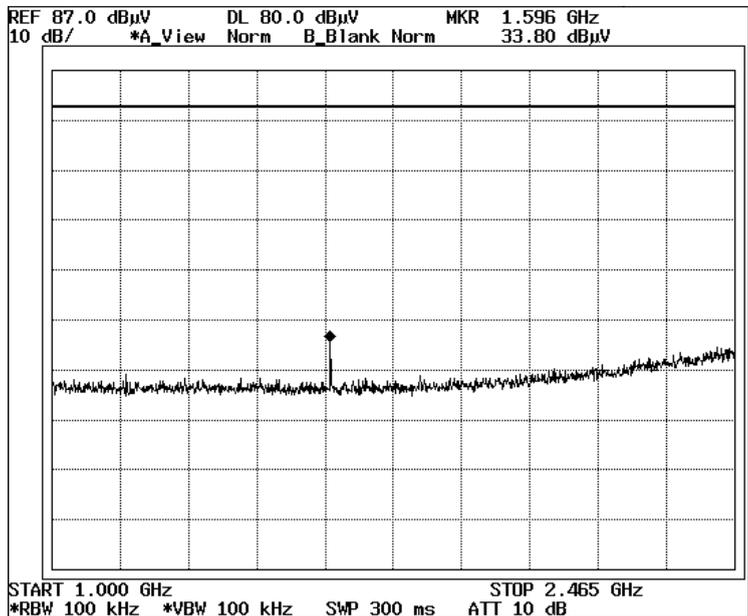


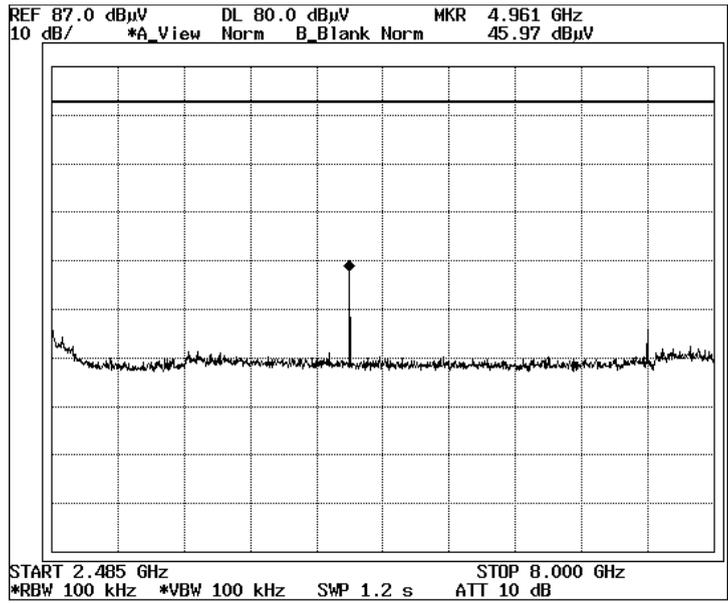


20. ch 40: 2.475GHz: External Attenuator 10dB

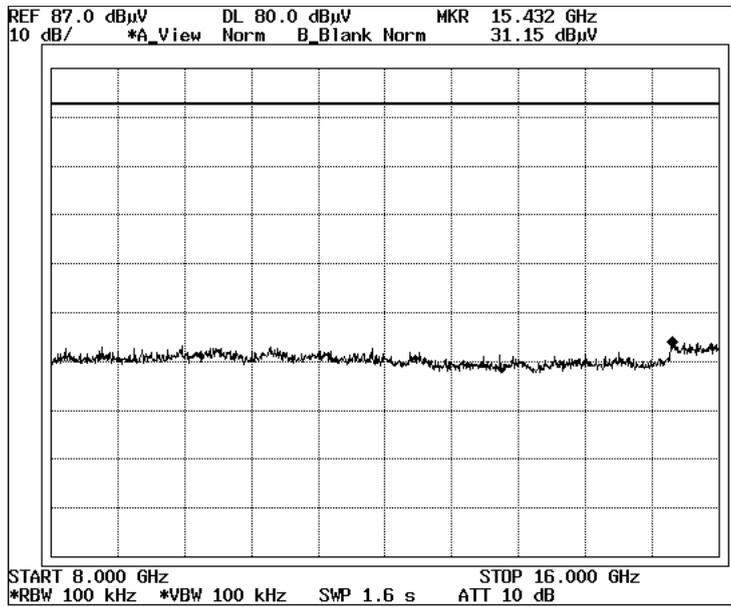


21. ch 40: 2.475GHz: External Attenuator 10dB

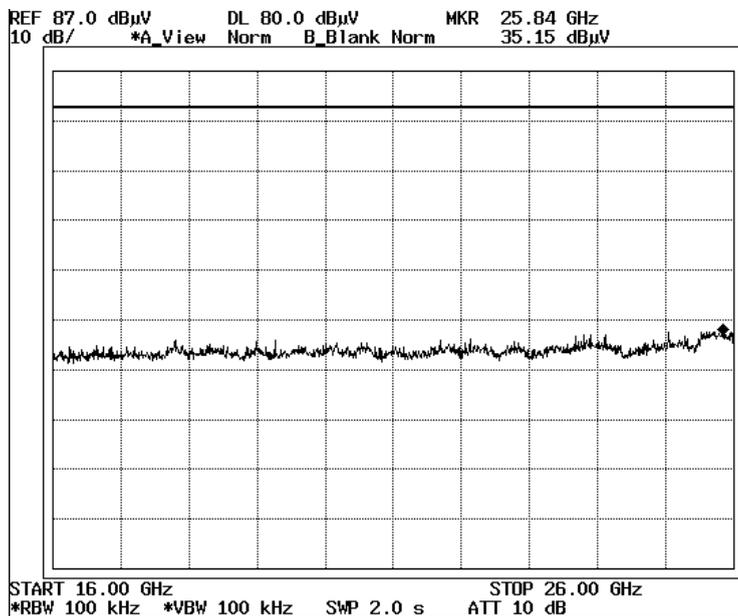


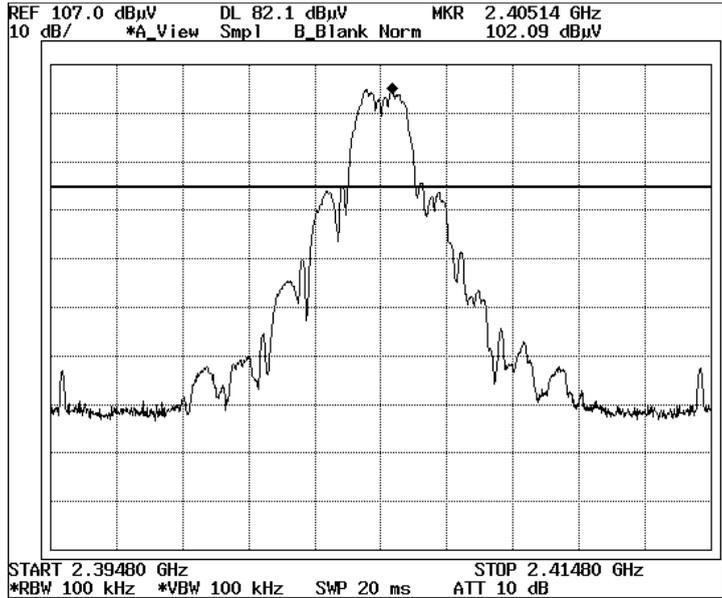


2. ch 1: 2.4048GHz: External Attenuator 10dB

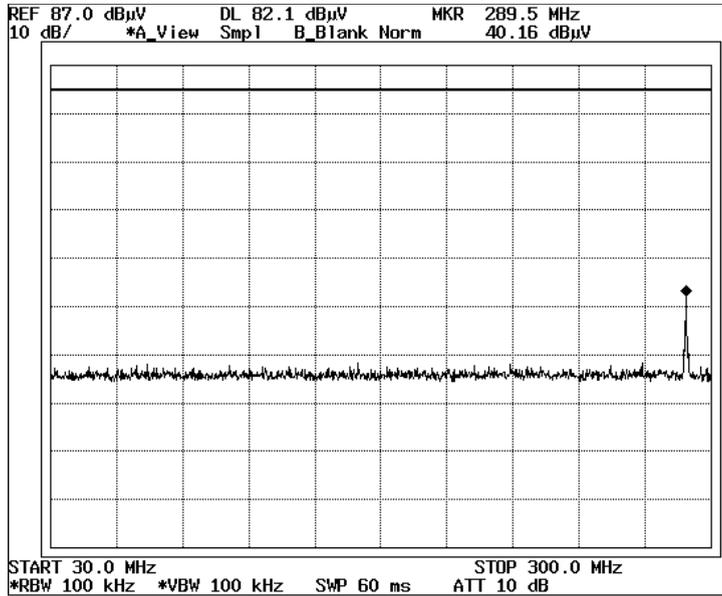


3. ch 1: 2.4048GHz: External Attenuator 10dB

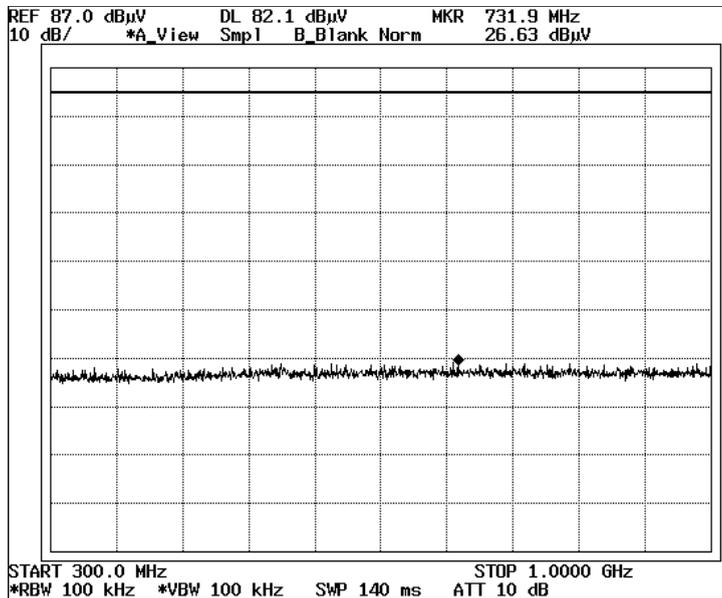


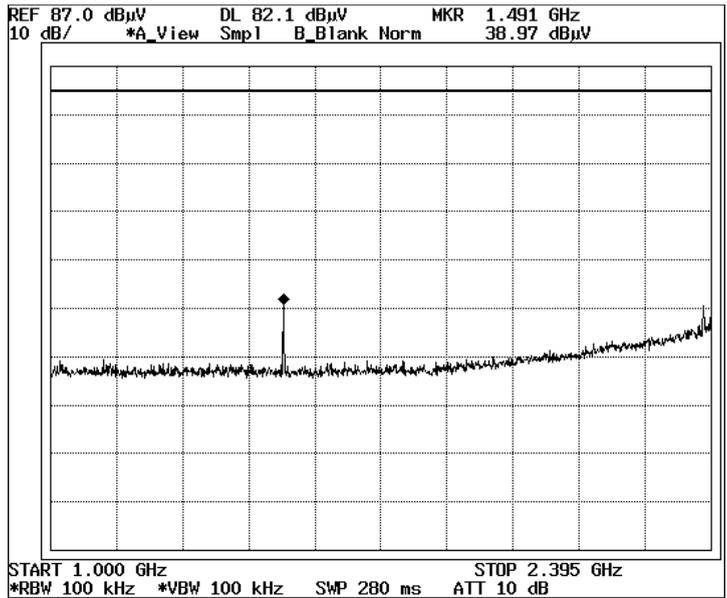


5. ch 1: 2.4048GHz: External Attenuator 10dB

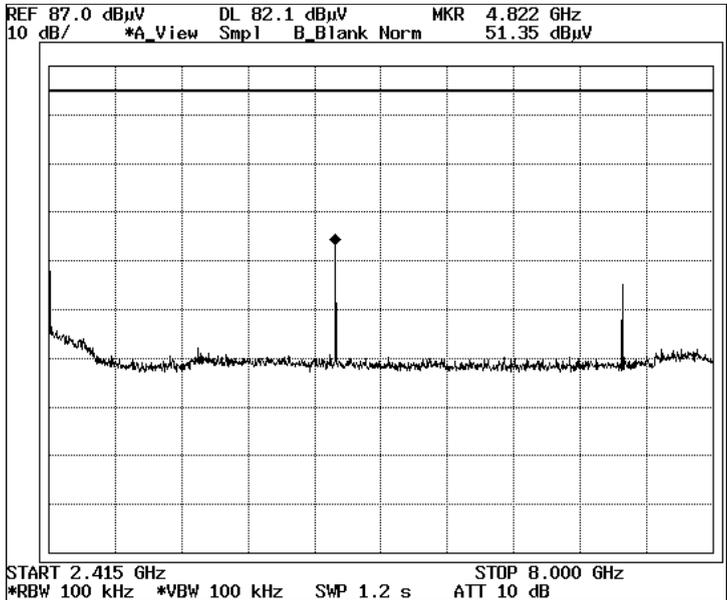


6. ch 1: 2.4048GHz: External Attenuator 10dB

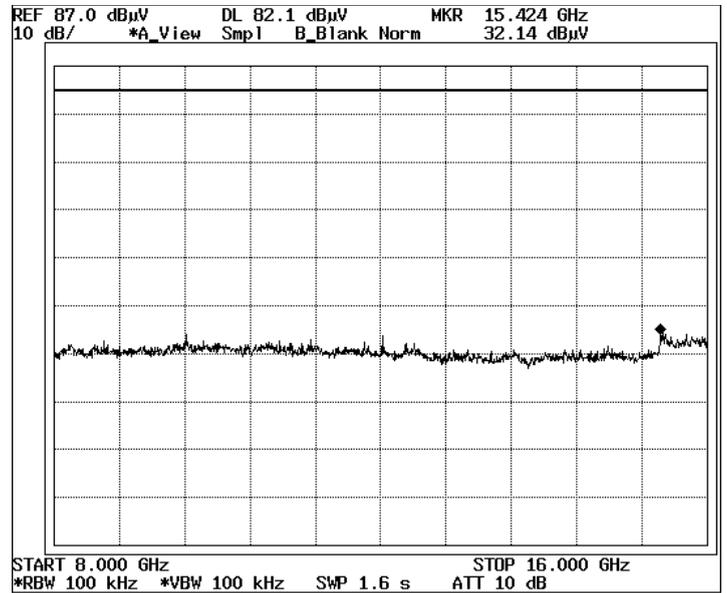


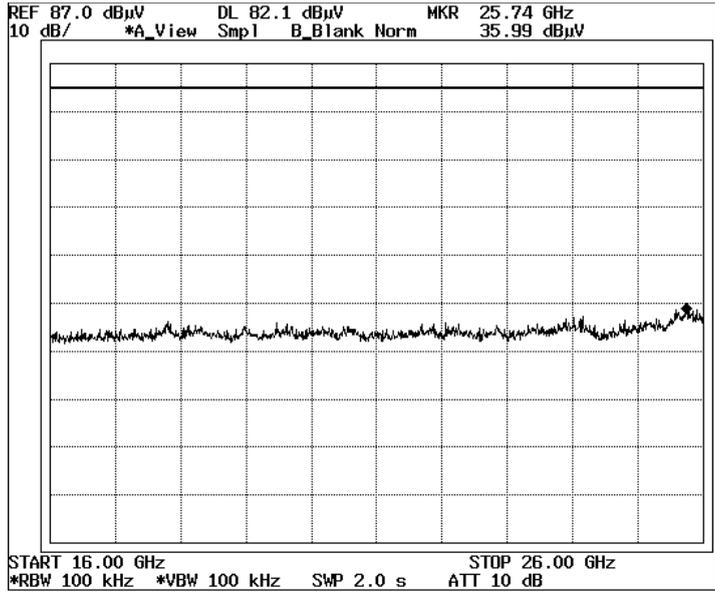


8. ch 20: 2.439GHz: External Attenuator 10dB

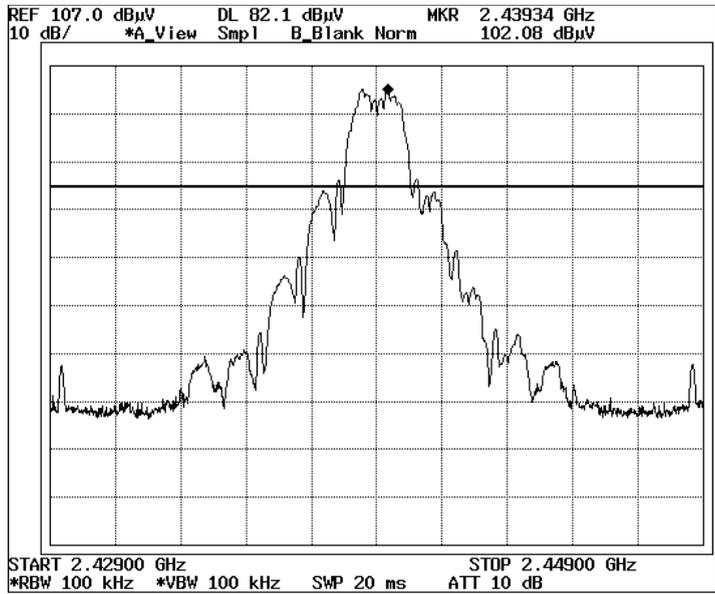


9. ch 20: 2.439GHz: External Attenuator 10dB

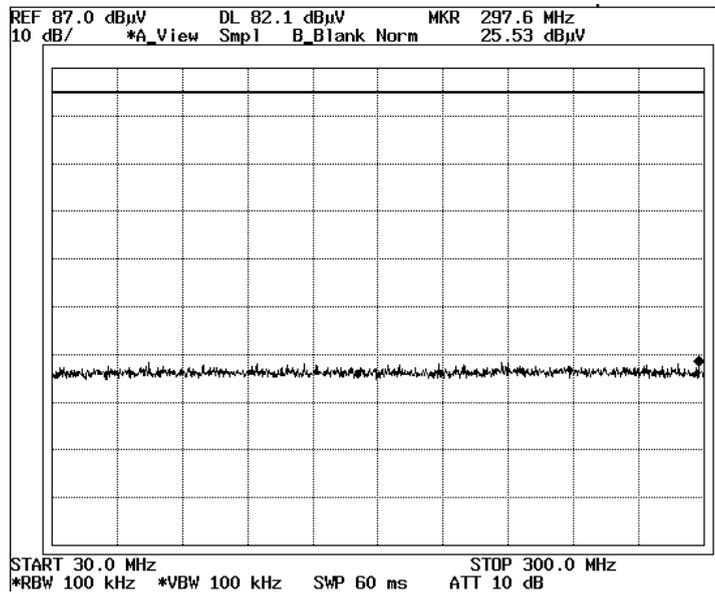


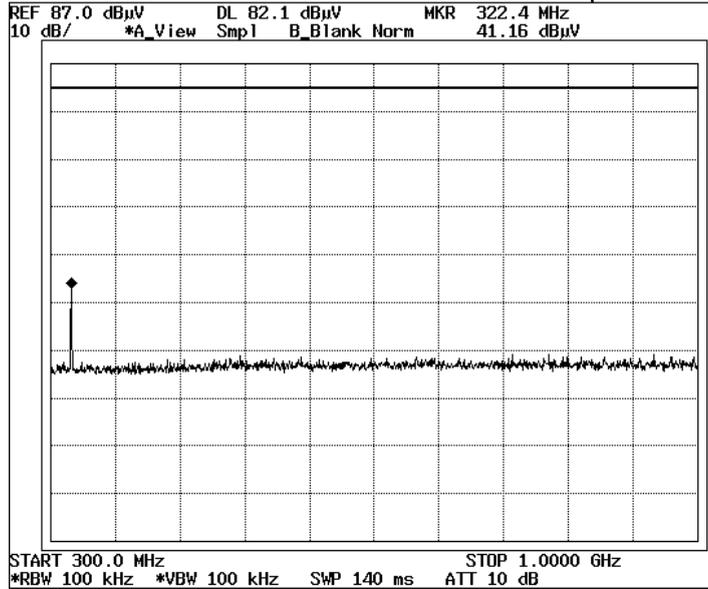


11. ch 20: 2.439GHz: External Attenuator 10dB

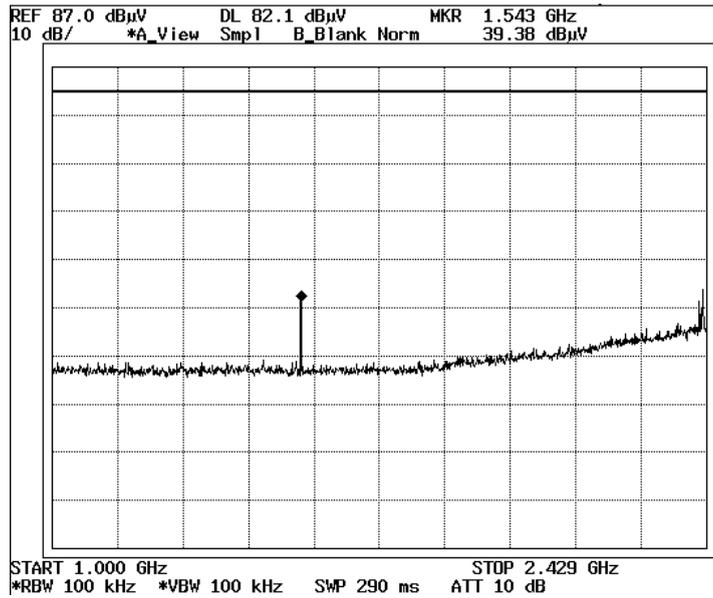


12. ch 20: 2.439GHz: External Attenuator 10dB

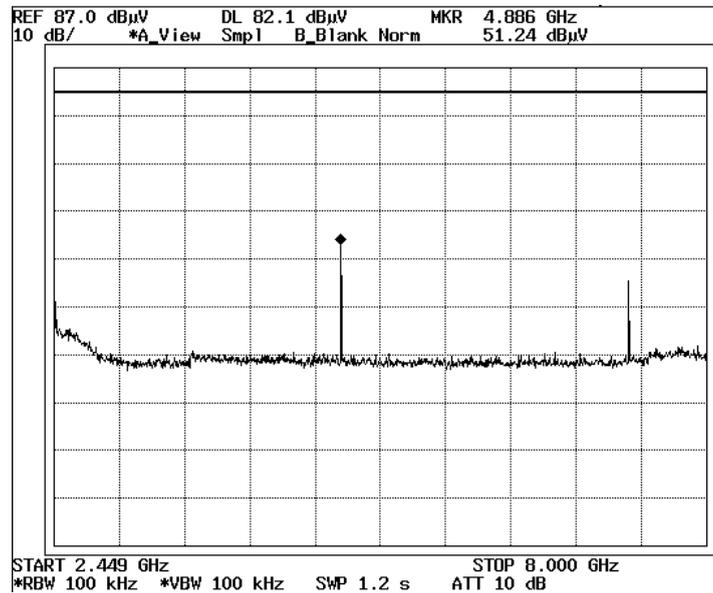


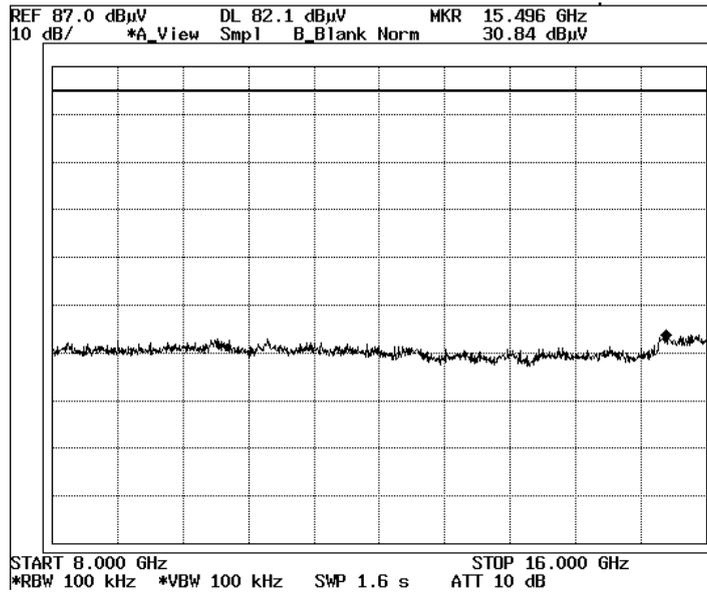


14. ch 20: 2.439GHz: External Attenuator 10dB

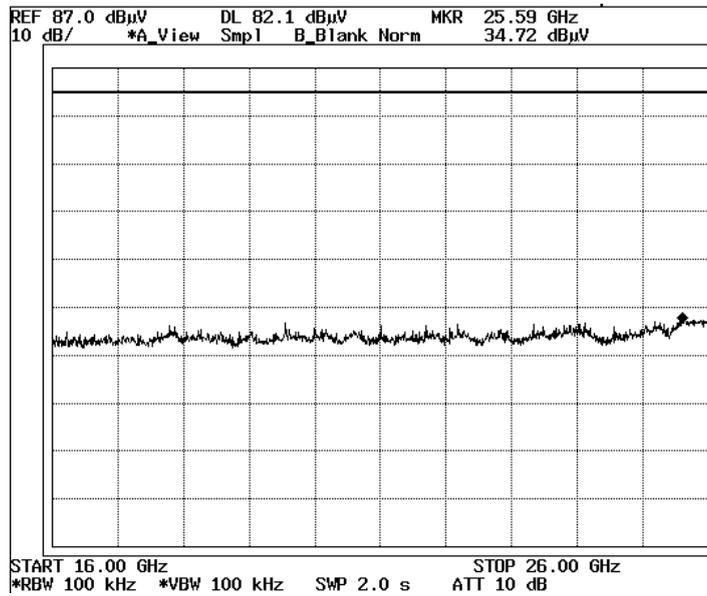


15. ch 40: 2.475GHz: External Attenuator 10dB

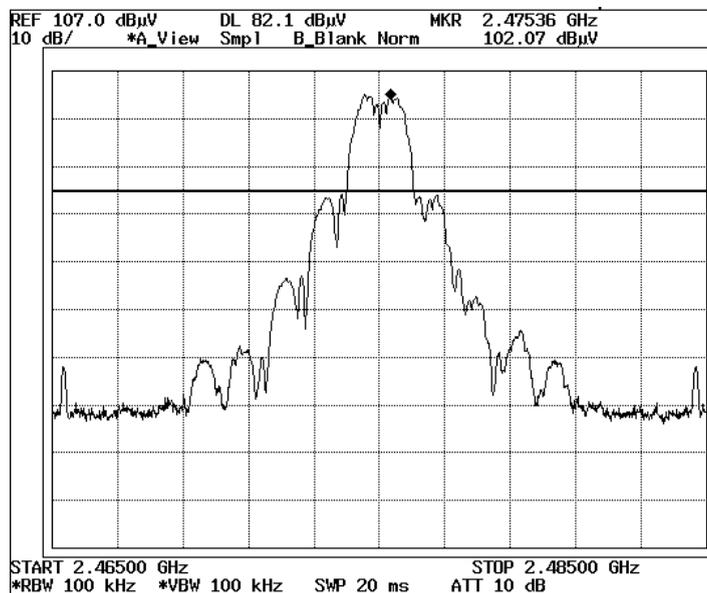


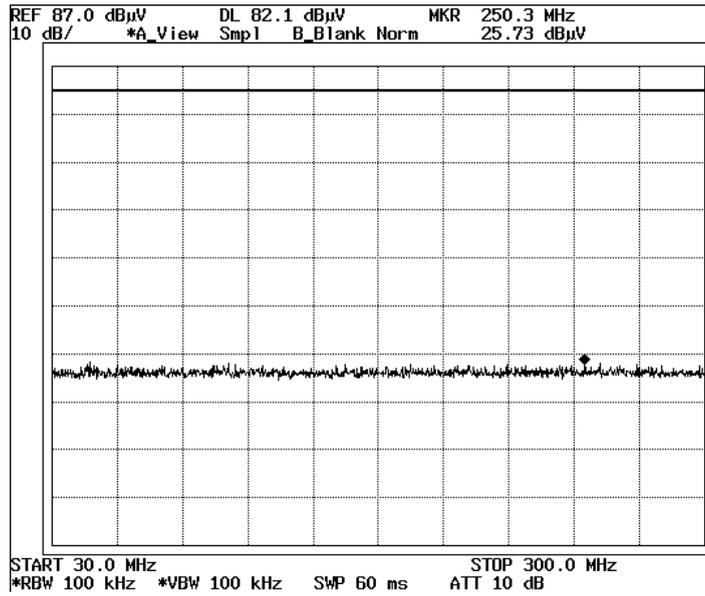


17. ch 40: 2.475GHz: External Attenuator 10dB

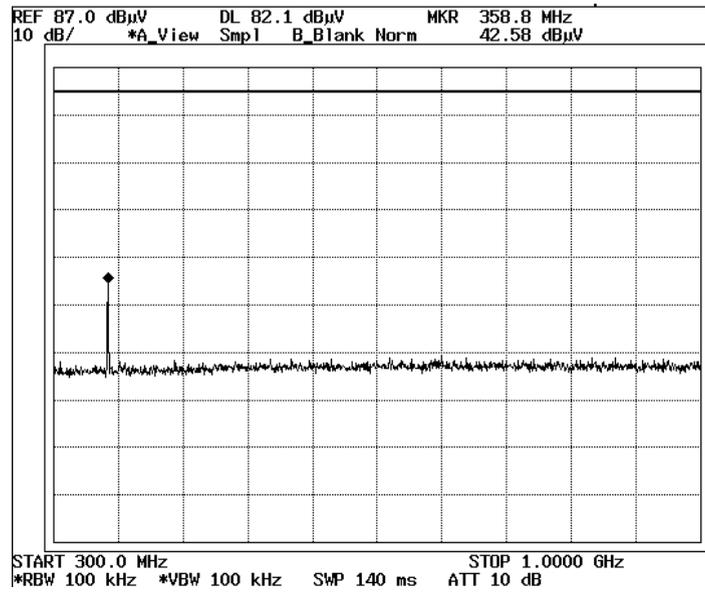


18. ch 40: 2.475GHz: External Attenuator 10dB

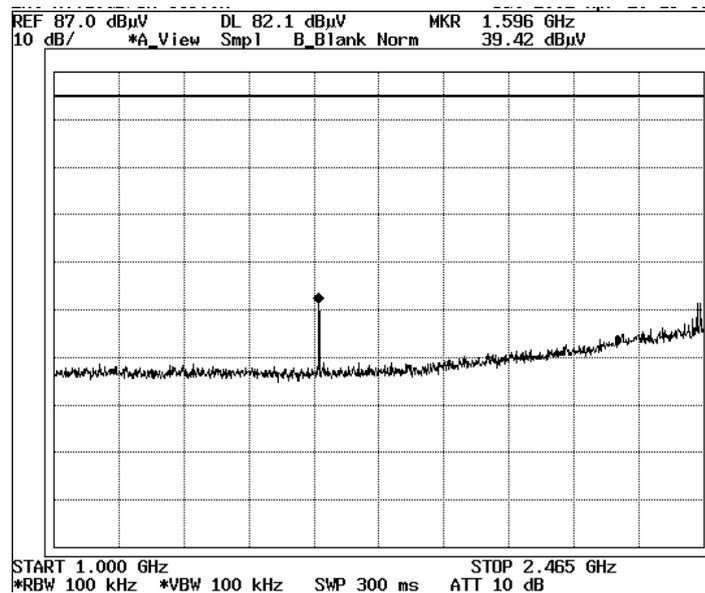


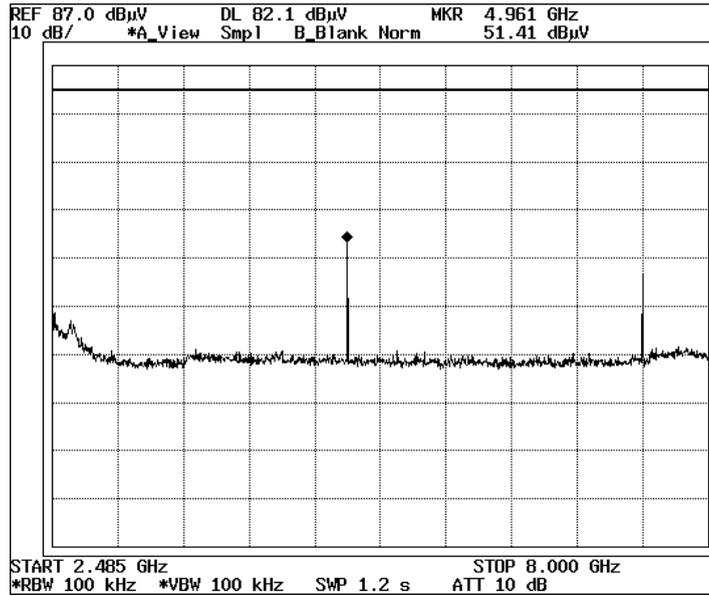

20. ch 40: 2.475GHz: External Attenuator 10dB

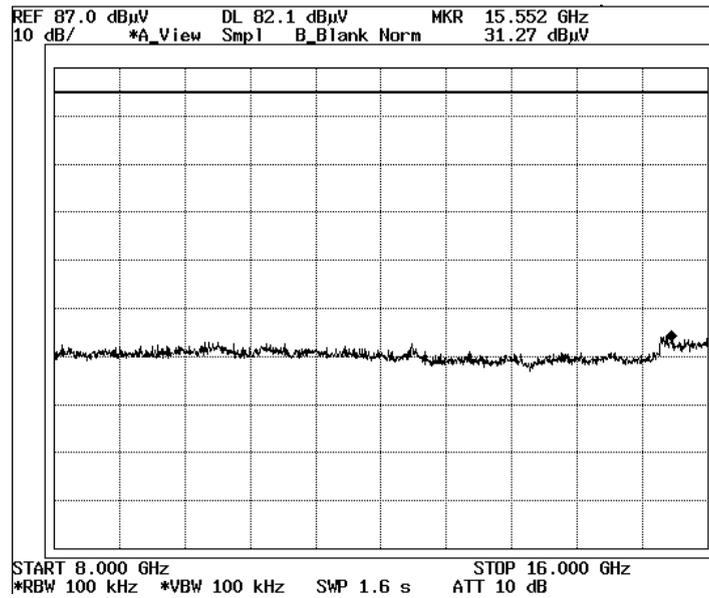

21. ch 40: 2.475GHz: External Attenuator 10dB

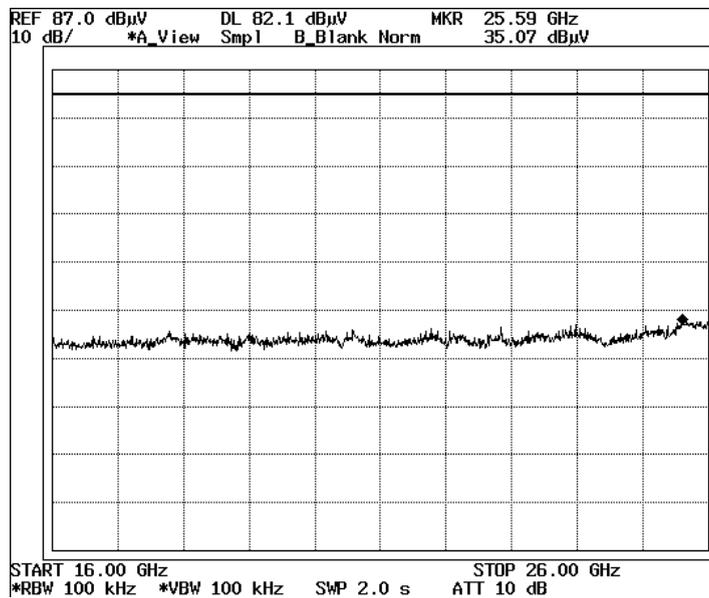

Peak Power Density(Conducted)

A-PEX INTERNATIONAL CO., LTD.
YOKOWA NO.3 OPEN SITE

Company : SHARP Corporation
Equipment : Facsimile Equipment
Model : UX-CC500
Sample No. : 4
FCC ID : APYHRO00024
Power : AC120V/60Hz
Mode : Transmitting(ch1,20,40)

Report No. : 22HE0077-YW
Regulation : Fcc Part15SubpartC 247(d)
Date : 2002/04/20
Temperature : 24deg.C
Humidity : 54%



ENGINEER : Makoto Kosaka

Spectrum Analyzer Setting: RBW 3kHz / VBW 10kHz / SWP 500s / Span 1.5MHz)

ch	FREQ [GHz]	S/A Reading [dBuV]	ATTEN. [dB]	Result [dBm]	Limit [dBm]	Margin [dB]
ch1 : 2404.8MHz	2.405099	98.4	10.0	1.4	8.0	6.6
ch20: 2439.0MHz	2.439299	98.7	10.0	1.7	8.0	6.3
ch40: 2475.0MHz	2.475299	98.7	10.0	1.7	8.0	6.3

Sample Calculation :

RESULT=Reading (-107:Converted to dBm) + ATTEN.

Peak Power Density(Conducted)

A-PEX INTERNATIONAL CO., LTD.
YOKOWA NO.3 OPEN SITE

Company : SHARP Corporation
Equipment : Cordless Handset
Model : UX-CC500K
Sample No. : 2
FCC ID : APYHRO00024
Power : DC 3.6V
Mode : Transmitting(ch1,20,40)

Report No. : 22HE0077-YW
Regulation : Fcc Part15SubpartC 247(d)
Date : 2002/04/20
Temperature : 24deg.C
Humidity : 54%



ENGINEER : Makoto Kosaka


Spectrum Analyzer Setting: RBW 3kHz / VBW 10kHz / SWP 500s / Span 1.5MHz)

ch	FREQ [GHz]	S/A Reading [dBuV]	ATTEN. [dB]	Result [dBm]	Limit [dBm]	Margin [dB]
ch1 : 2404.8MHz	2.405100	101.0	10.0	4.0	8.0	4.0
ch20: 2439.0MHz	2.439300	100.9	10.0	3.9	8.0	4.1
ch40: 2475.0MHz	2.475300	100.4	10.0	3.4	8.0	4.6


Sample Calculation :

RESULT=Reading (-107:Converted to dBm) + ATTEN.


1. ch 1: 2.4048GHz: External Attenuator 10dB

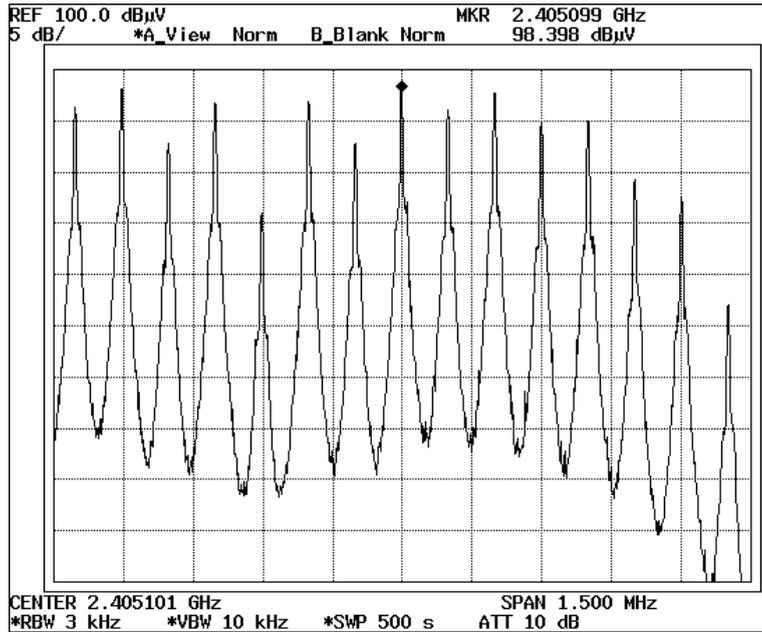


2. ch 20: 2.439GHz: External Attenuator 10dB

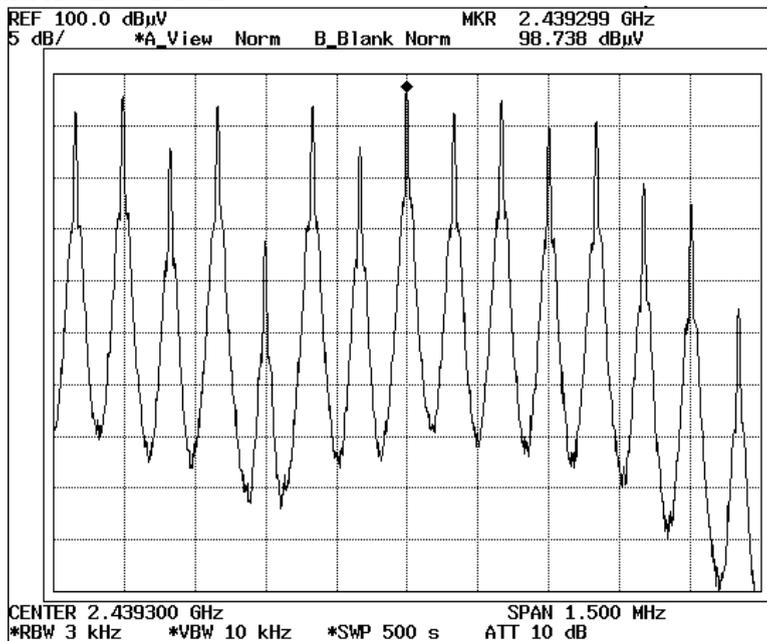


3. ch 40: 2.475GHz: External Attenuator 10dB

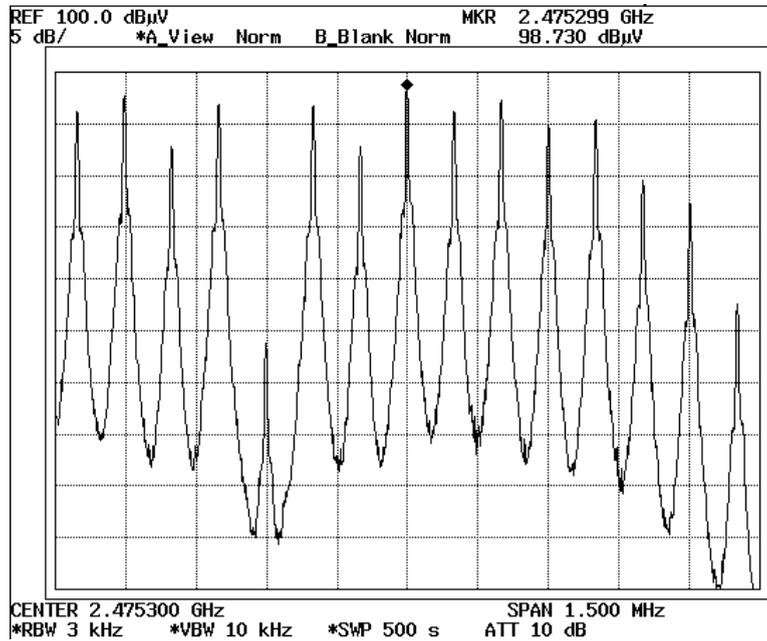

1. ch 1: 2.4048GHz: External Attenuator 10dB

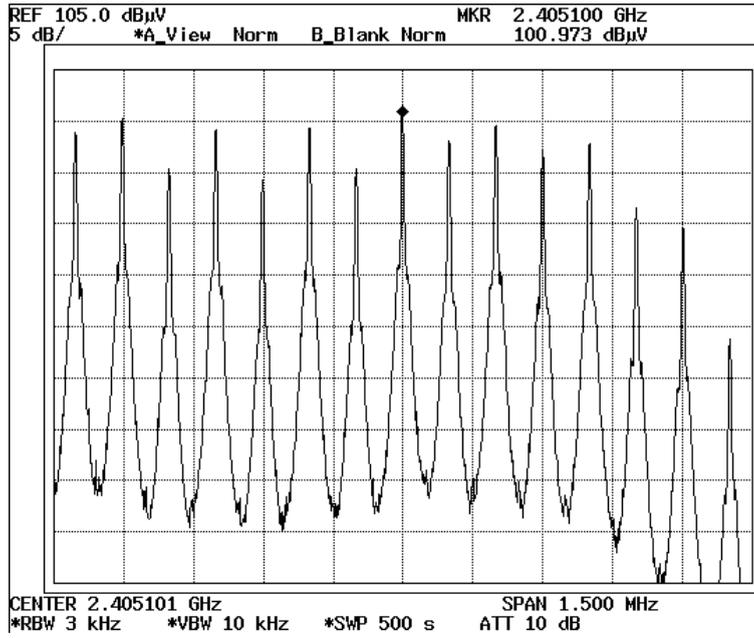

2. ch 20: 2.439GHz: External Attenuator 10dB

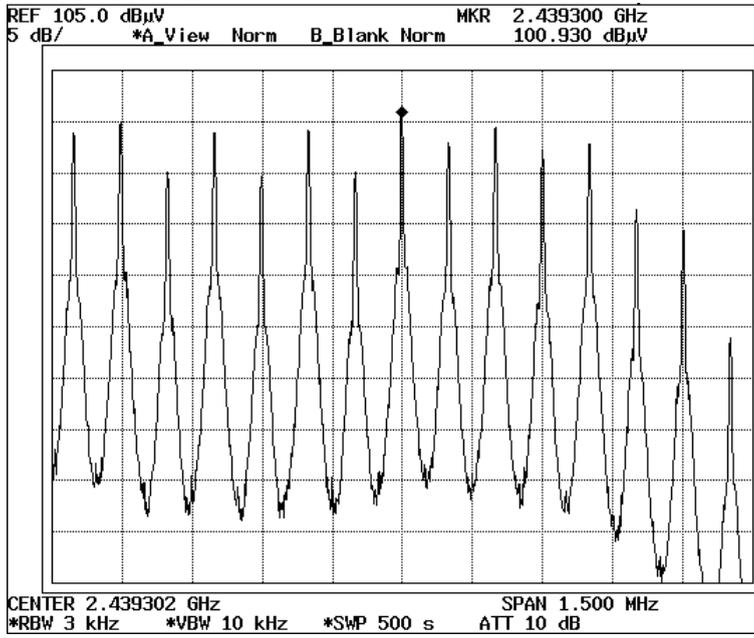

3. ch 40: 2.475GHz: External Attenuator 10dB

