

System Validation - D1800V2 S/N: 294

(Input power: 250 mW)

SAM; Flat

Probe: ET3DV6 - SN1578; ConvF(5.50,5.50,5.50); Crest factor: 1.0

Head 1800 MHz: $\sigma = 1.38$ mho/m $\epsilon_r = 39.7$ $\rho = 1.00$ g/cm³


Cube 5x5x7: Peak: 16.7 mW/g, SAR (1g): 9.14 mW/g, SAR (10g): 4.82 mW/g, (Worst-case extrapolation)

Penetration depth: 8.5 (8.1, 9.4) [mm]


Powerdrift: 0.03 dB

Ambient Temperature (degree C): 23

Liquid Temperature (degree C): 21.5

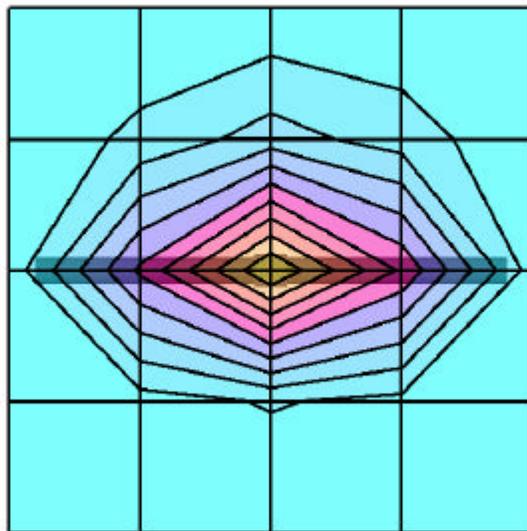

SAR_{Tot} [mW/g]

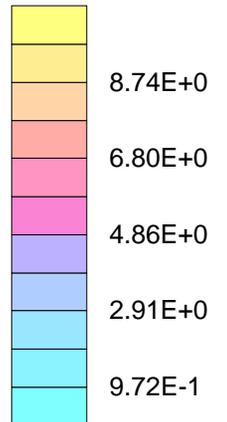

System Validation - D1800V2 S/N: 294

(Input power: 250 mW)

SAM;

Probe: ET3DV6 - SN1578; ConvF(5.50,5.50,5.50); Crest factor: 1.0

Head 1800 MHz: $\sigma = 1.38$ mho/m $\epsilon_r = 39.7$ $\rho = 1.00$ g/cm³

: , , ()

Penetration depth: 8.5 (8.0, 9.4) [mm]

Ambient Temperature (degree C): 23

Liquid Temperature (degree C): 21.5

