
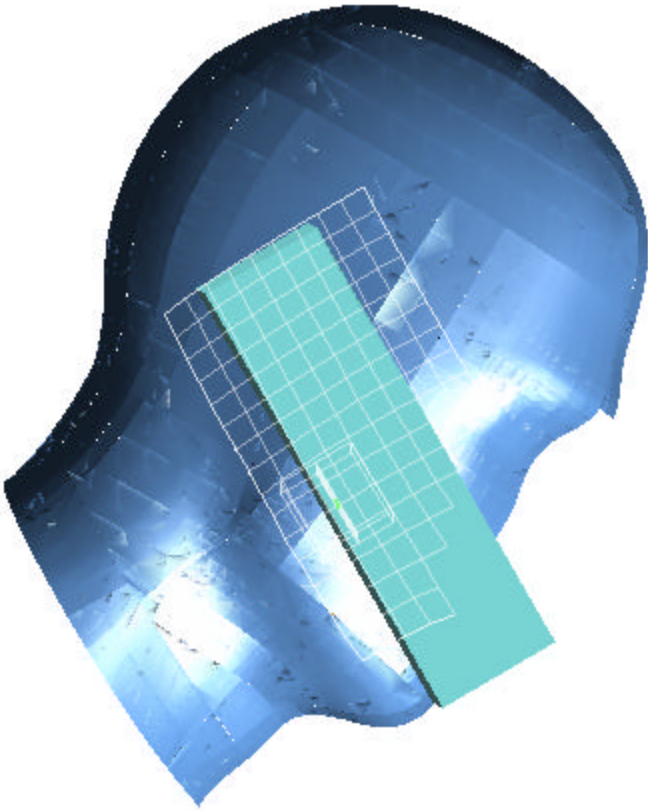


Test Laboratory: Compliance Certification Services
File Name: 1L-CH_0.386 mW.da4

Left Head (Touch position)

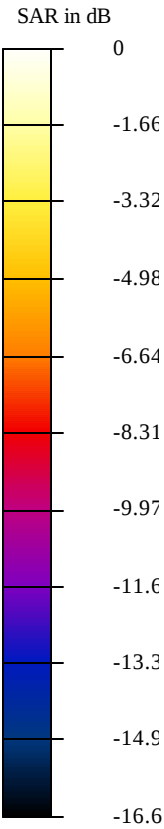

Test Laboratory: Compliance Certification Services

File Name: 1L-CH_0.386 mW.da4

DUT: Sharp Type & Serial Number: GX20

Program: Left Head -Touch position; Air temp 22.5 deg C & Liquid temp 20.3 deg C

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8

Medium: Head 1900MHz ($\sigma = 1.3963$ mho/m, $\epsilon = 39.12$, $\rho = 1000$ kg/m³)

Phantom section: LeftSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1577; ConvF(5.3, 5.3, 5.3); Calibrated: 2/7/2003

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn427; Calibrated: 2/4/2003

- Phantom: SAM 2 - TP:1050

- Software: DASY4, V4.0 Build 51

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm


Reference Value = 4.21 V/m

Peak SAR = 0.593 mW/g

SAR(1 g) = 0.386 mW/g; SAR(10 g) = 0.225 mW/g

Power Drift = 0.05 dB

Area Scan (16x10x1): Measurement grid: dx=10mm, dy=10mm

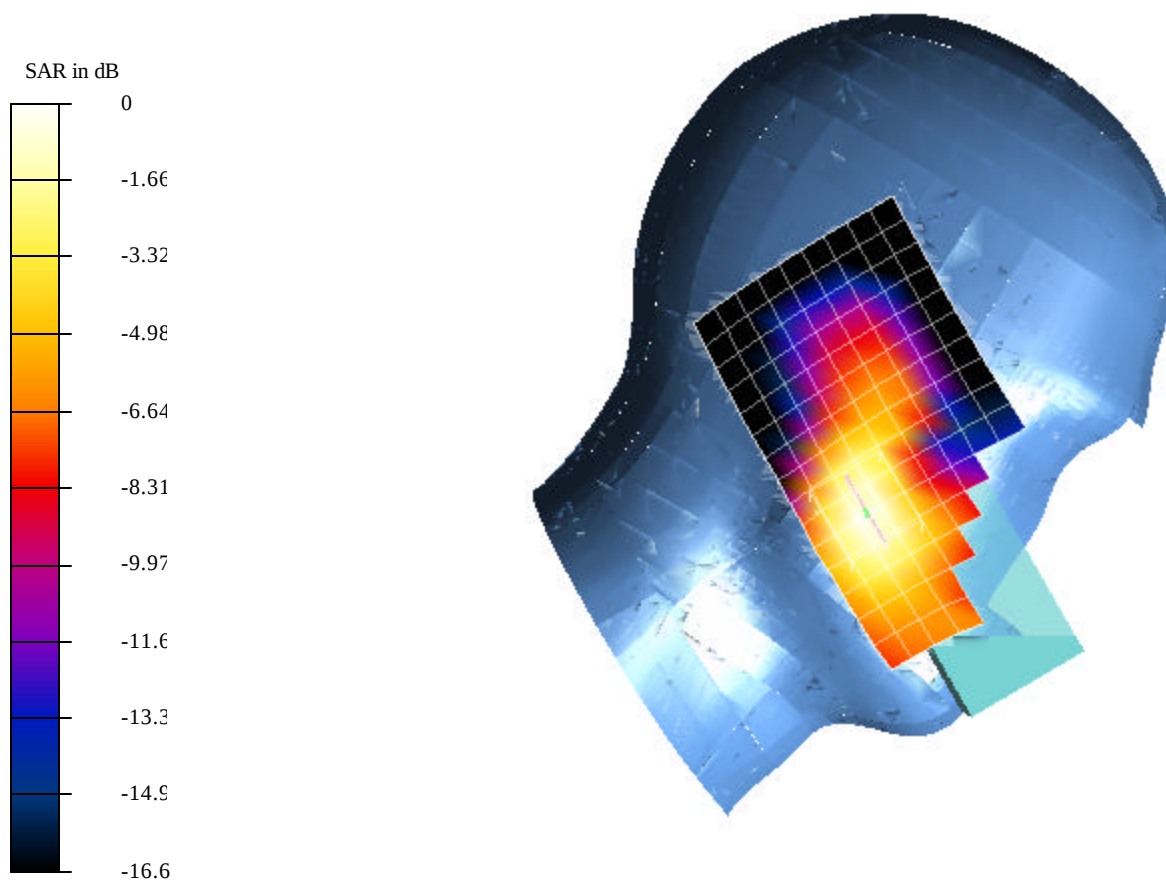

Test Laboratory: Compliance Certification Services

File Name: 2M-CH_0.416 mW.da4

DUT: Sharp Type & Serial Number: GX20

Program: Left Head -Touch position; Air temp 22.5 deg C & Liquid temp 20.3 deg C

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8

Medium: Head 1900MHz ($\sigma = 1.3963$ mho/m, $\epsilon = 39.12$, $\rho = 1000$ kg/m³)

Phantom section: LeftSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1577; ConvF(5.3, 5.3, 5.3); Calibrated: 2/7/2003

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn427; Calibrated: 2/4/2003

- Phantom: SAM 2 - TP:1050

- Software: DASY4, V4.0 Build 51

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm


Reference Value = 4.99 V/m

Peak SAR = 0.65 mW/g

SAR(1 g) = 0.416 mW/g; SAR(10 g) = 0.238 mW/g

Power Drift = 0.06 dB

Area Scan (16x10x1): Measurement grid: dx=10mm, dy=10mm

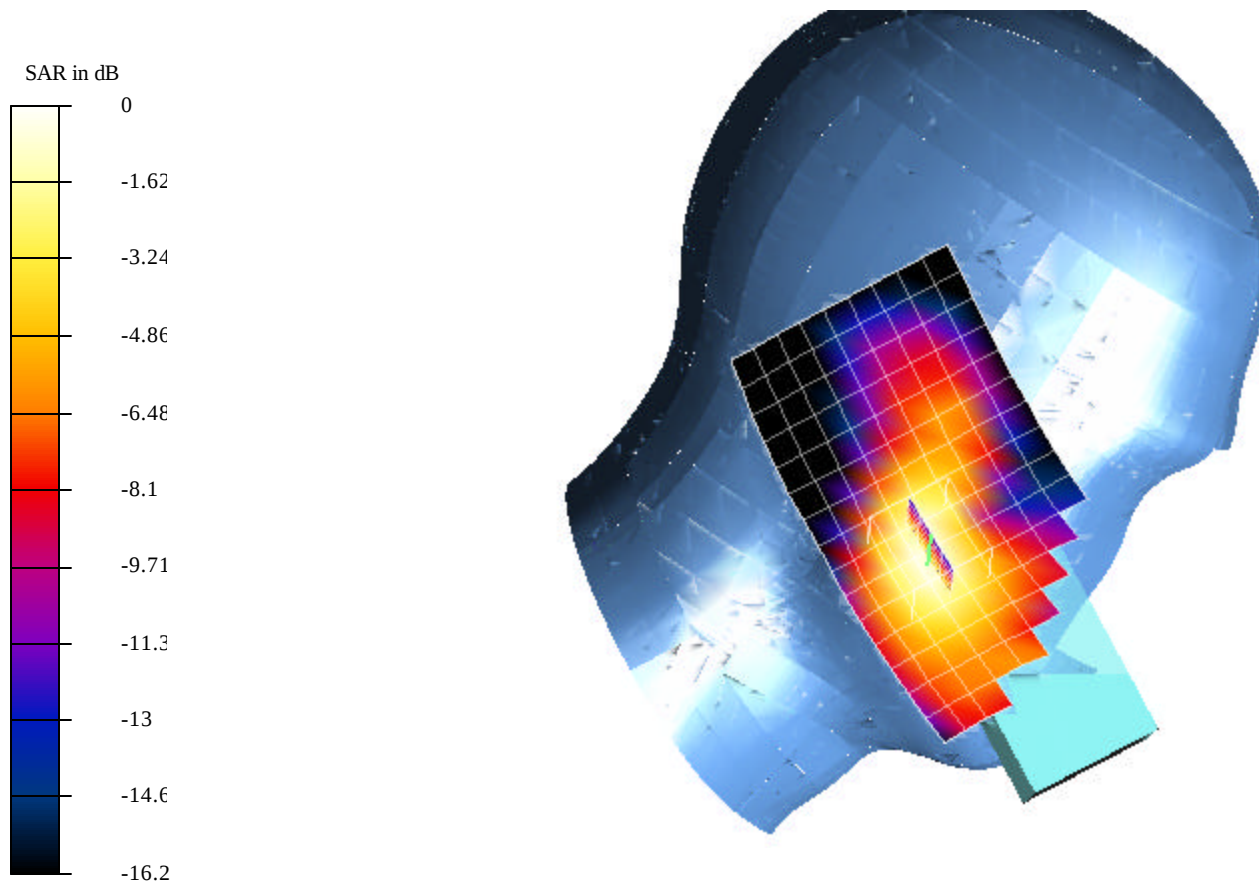

Test Laboratory: Compliance Certification Services

File Name: 3H-CH_0.384 mW.da4

DUT: Sharp Type & Serial Number: GX20

Program: Left Head -Touch position; Air temp 22.5 deg C & Liquid temp 20.2 deg C

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8

Medium: Head 1900MHz ($\sigma = 1.3963$ mho/m, $\epsilon = 39.12$, $\rho = 1000$ kg/m³)

Phantom section: LeftSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1577; ConvF(5.3, 5.3, 5.3); Calibrated: 2/7/2003

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn427; Calibrated: 2/4/2003

- Phantom: SAM 2 - TP:1050

- Software: DASY4, V4.0 Build 51

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm


Reference Value = 4.73 V/m

Peak SAR = 0.605 mW/g

SAR(1 g) = 0.384 mW/g; SAR(10 g) = 0.218 mW/g



Power Drift = 0.03 dB

Area Scan (16x10x1): Measurement grid: dx=10mm, dy=10mm

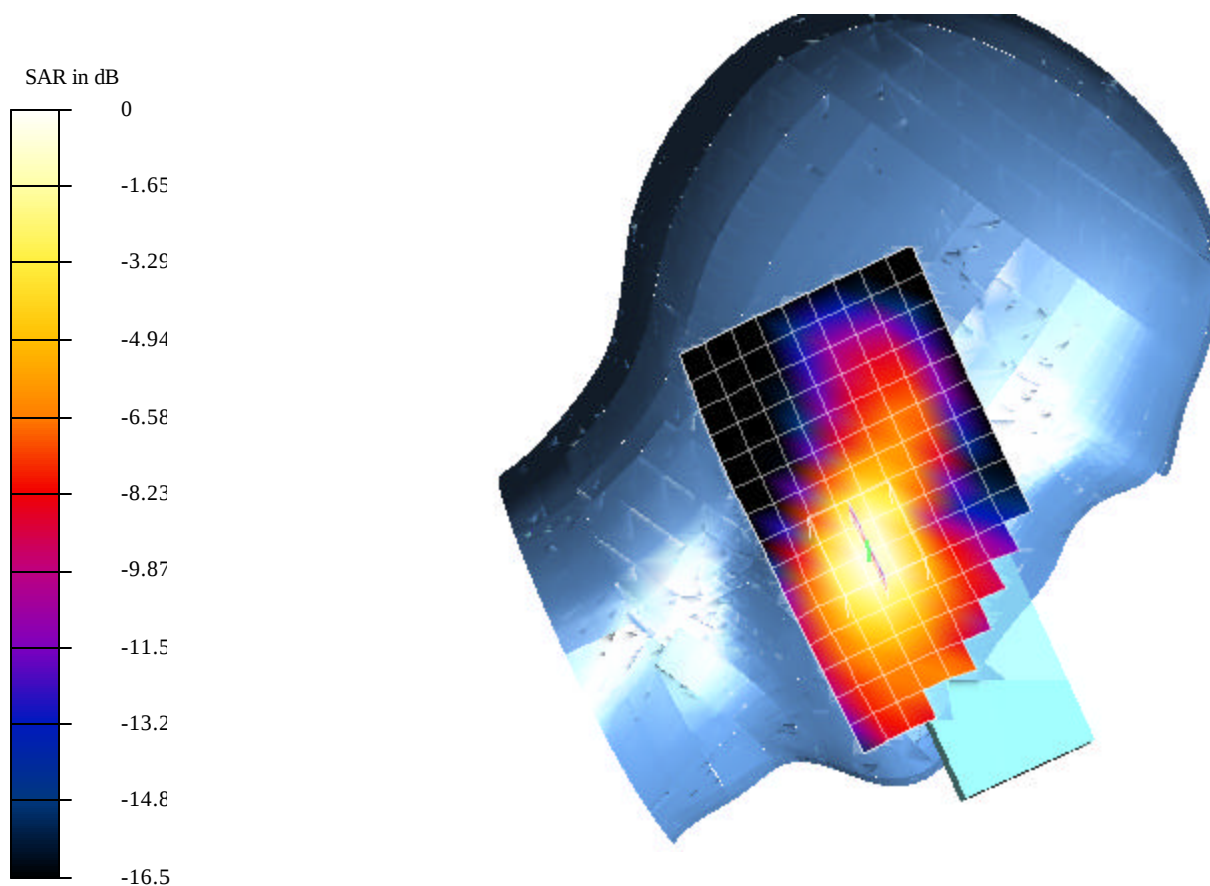

Test Laboratory: Compliance Certification Services
File Name: 1L-CH_0.112 mW.da4

Left Head (Tilt position)

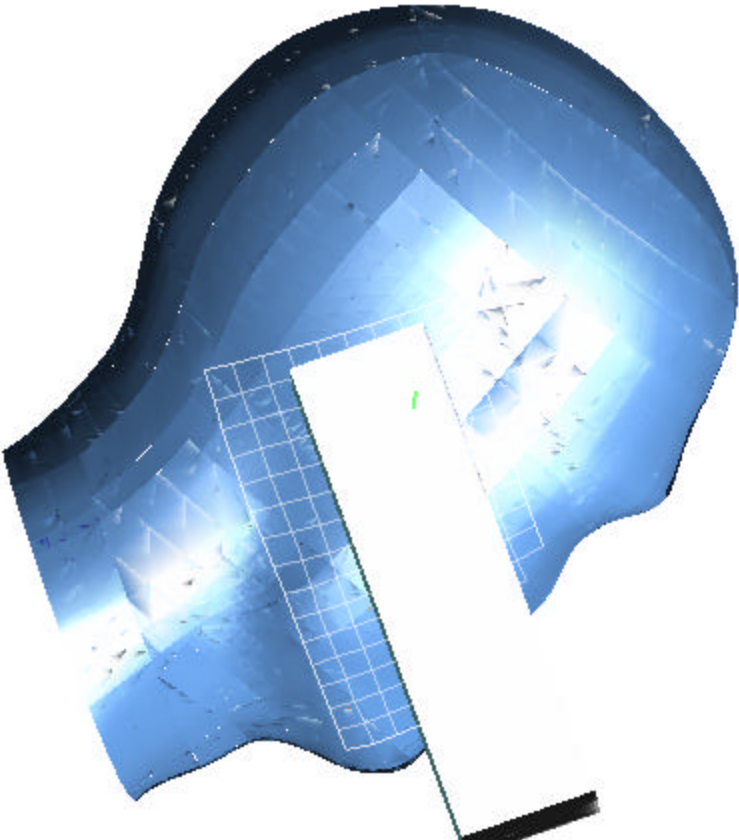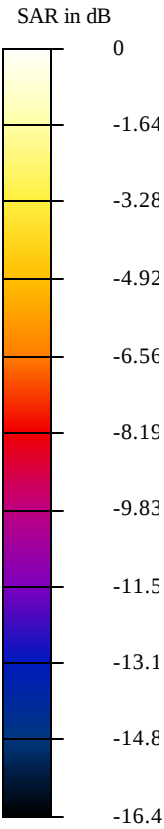

Test Laboratory: Compliance Certification Services

File Name: 1L-CH_0.112 mW.da4

DUT: Sharp Type & Serial Number: GX20

Program: Left Head -Tilt position; Air temp 22.5 deg C & Liquid temp 20.3 deg C

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8

Medium: Head 1900MHz ($\sigma = 1.3963$ mho/m, $\epsilon = 39.12$, $\rho = 1000$ kg/m³)

Phantom section: LeftSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1577; ConvF(5.3, 5.3, 5.3); Calibrated: 2/7/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 2/4/2003
- Phantom: SAM 2 - TP:1050
- Software: DASY4, V4.0 Build 51

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm


Reference Value = 7.57 V/m

Peak SAR = 0.154 mW/g

SAR(1 g) = 0.112 mW/g; SAR(10 g) = 0.0712 mW/g

Power Drift = -0.008 dB

Area Scan (16x10x1): Measurement grid: dx=10mm, dy=10mm

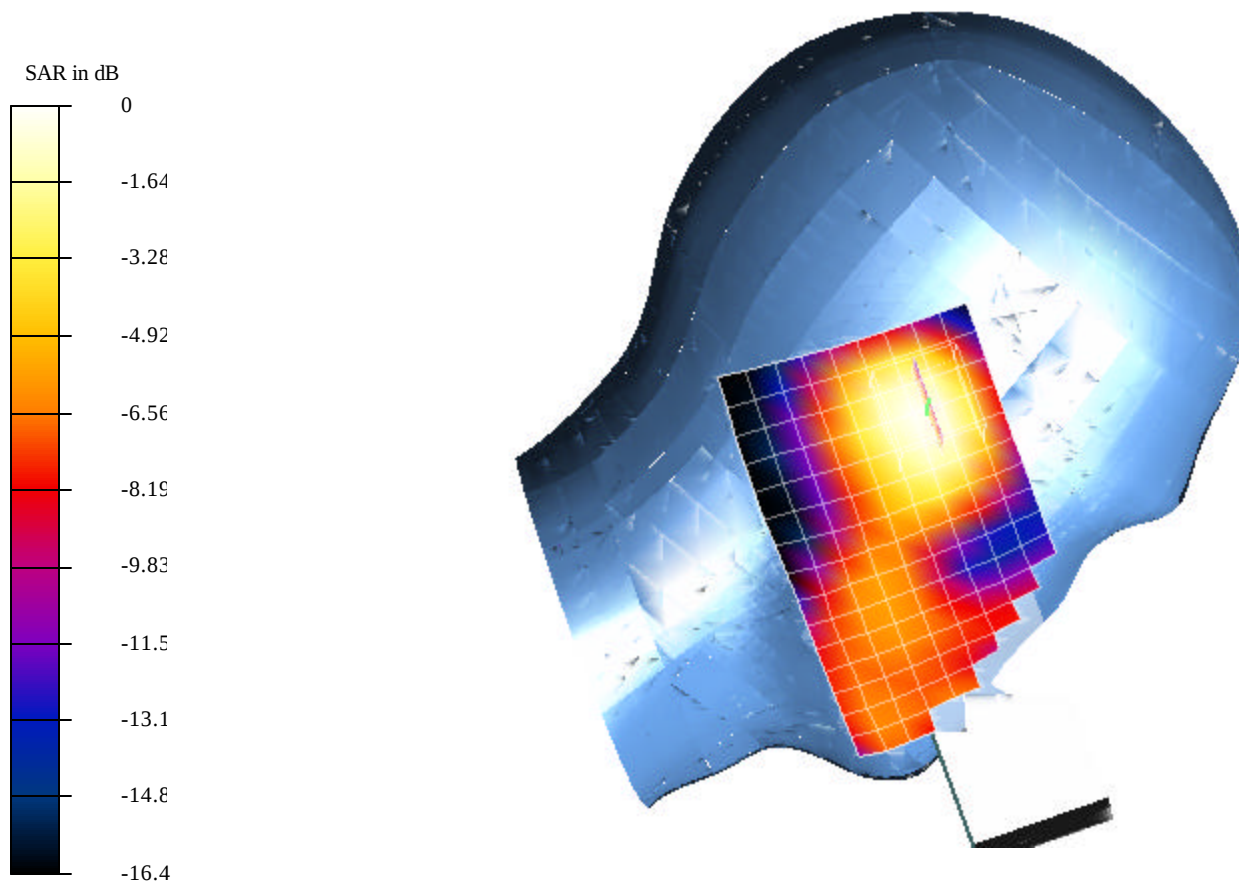

Test Laboratory: Compliance Certification Services

File Name: 2M-CH_0.111 mW.da4

DUT: Sharp Type & Serial Number: GX20

Program: Left Head -Tilt position; Air temp 22.5 deg C & Liquid temp 20.3 deg C

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8

Medium: Head 1900MHz ($\sigma = 1.3963$ mho/m, $\epsilon = 39.12$, $\rho = 1000$ kg/m³)

Phantom section: LeftSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1577; ConvF(5.3, 5.3, 5.3); Calibrated: 2/7/2003

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn427; Calibrated: 2/4/2003

- Phantom: SAM 2 - TP:1050

- Software: DASY4, V4.0 Build 51

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm


Reference Value = 7.47 V/m

Peak SAR = 0.156 mW/g

SAR(1 g) = 0.111 mW/g; SAR(10 g) = 0.0698 mW/g

Power Drift = 0.07 dB

Area Scan (16x10x1): Measurement grid: dx=10mm, dy=10mm

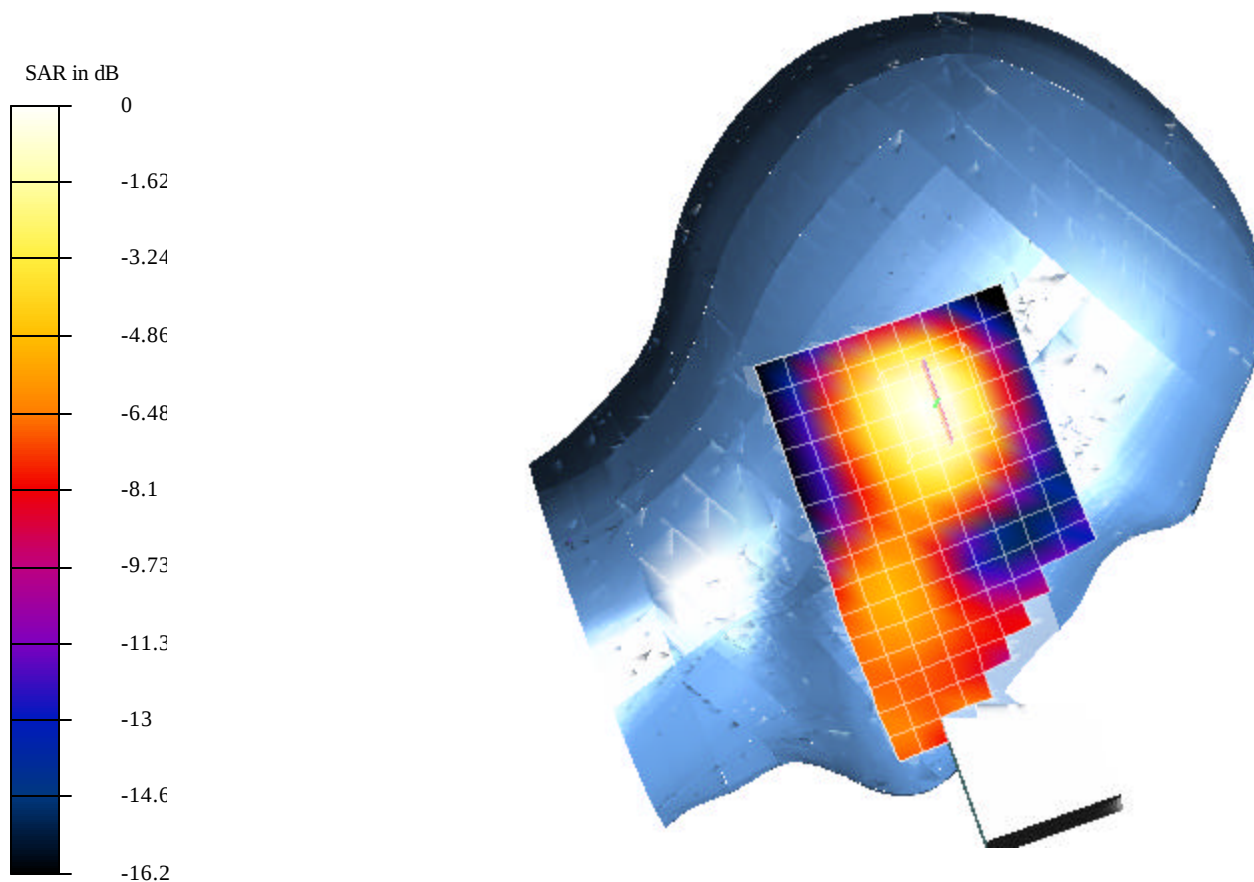

Test Laboratory: Compliance Certification Services

File Name: 3H-CH_0.102 mW.da4

DUT: Sharp Type & Serial Number: GX20

Program: Left Head -Tilt position; Air temp 22.5 deg C & Liquid temp 20.3 deg C

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8

Medium: Head 1900MHz ($\sigma = 1.3963$ mho/m, $\epsilon = 39.12$, $\rho = 1000$ kg/m³)

Phantom section: LeftSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1577; ConvF(5.3, 5.3, 5.3); Calibrated: 2/7/2003

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn427; Calibrated: 2/4/2003

- Phantom: SAM 2 - TP:1050

- Software: DASY4, V4.0 Build 51

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm


Reference Value = 7.18 V/m

Peak SAR = 0.145 mW/g

SAR(1 g) = 0.102 mW/g; SAR(10 g) = 0.063 mW/g



Power Drift = 0.09 dB

Area Scan (16x10x1): Measurement grid: dx=10mm, dy=10mm

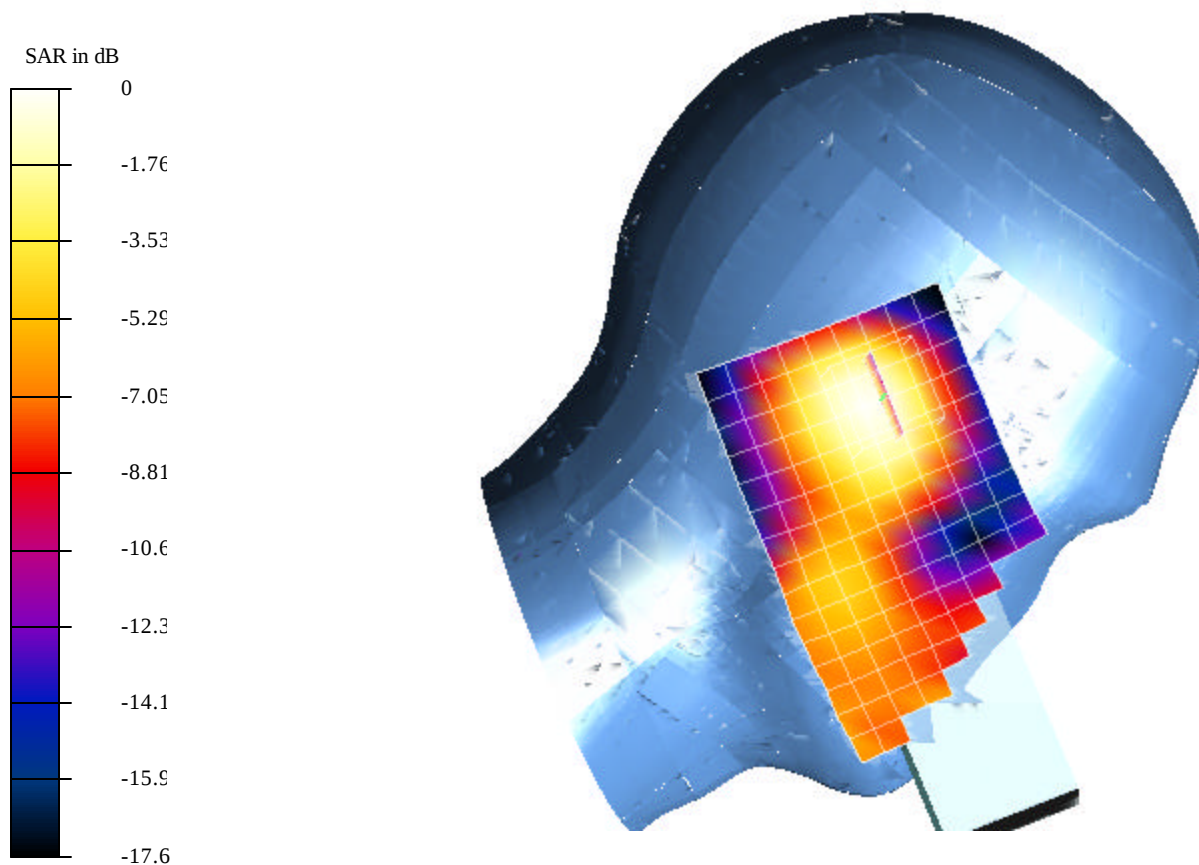

Test Laboratory: Compliance Certification Services
File Name: 1L-CH_0.339 mW.da4

Right Head (Touch position)

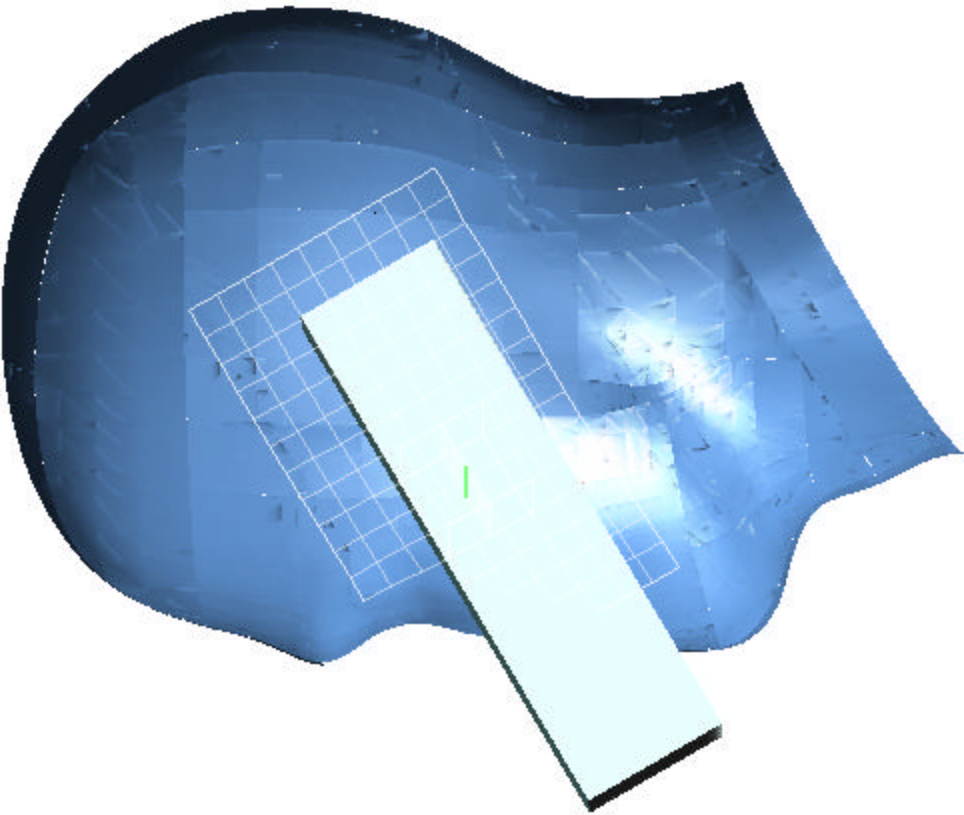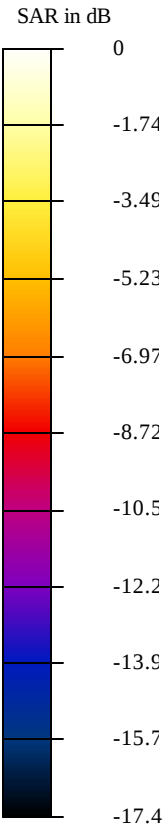

Test Laboratory: Compliance Certification Services

File Name: 1L-CH_0.339 mW.da4

DUT: Sharp Type & Serial Number: GX20

Program: Right Head -Touch position; Air temp 22.5 deg C & Liquid temp 20.3deg C

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8

Medium: Head 1900MHz ($\sigma = 1.3952$ mho/m, $\epsilon = 39.72$, $\rho = 1000$ kg/m³)

Phantom section: RightSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1577; ConvF(5.3, 5.3, 5.3); Calibrated: 2/7/2003

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn427; Calibrated: 2/4/2003

- Phantom: SAM 2 - TP:1050

- Software: DASY4, V4.0 Build 51

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm



Reference Value = 4.65 V/m

Peak SAR = 0.515 mW/g

SAR(1 g) = 0.339 mW/g; SAR(10 g) = 0.193 mW/g

Power Drift = 0.02 dB

Area Scan (16x10x1): Measurement grid: dx=10mm, dy=10mm

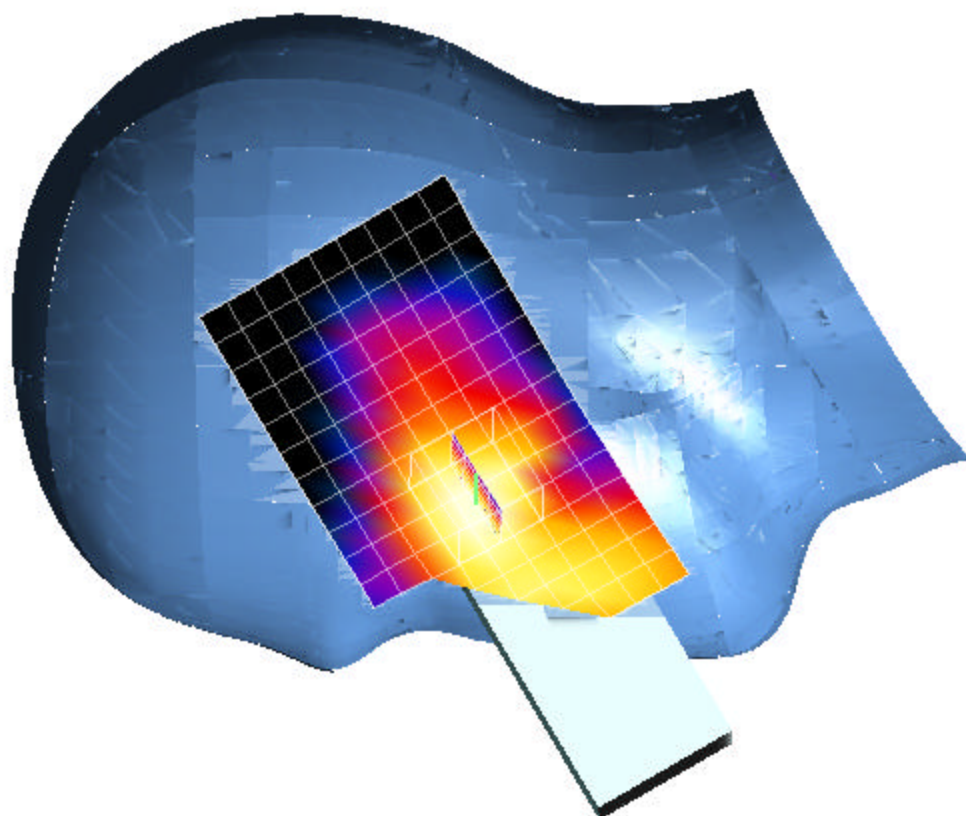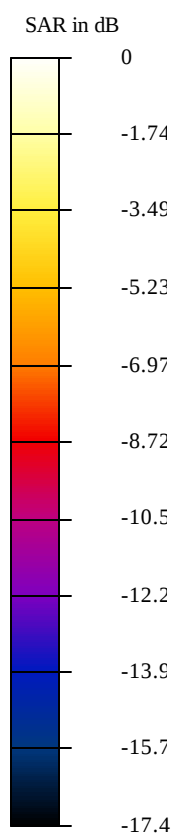

Test Laboratory: Compliance Certification Services

File Name: 2M-CH_0.367 mW.da4

DUT: Sharp Type & Serial Number: GX20

Program: Right Head -Touch position; Air temp 22.5 deg C & Liquid temp 20.3 deg C

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8

Medium: Head 1900MHz ($\sigma = 1.3952$ mho/m, $\epsilon = 39.72$, $\rho = 1000$ kg/m³)

Phantom section: RightSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1577; ConvF(5.3, 5.3, 5.3); Calibrated: 2/7/2003

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn427; Calibrated: 2/4/2003

- Phantom: SAM 2 - TP:1050

- Software: DASY4, V4.0 Build 51

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm



Reference Value = 4.58 V/m

Peak SAR = 0.568 mW/g

SAR(1 g) = 0.367 mW/g; SAR(10 g) = 0.207 mW/g

Power Drift = -0.03 dB

Area Scan (16x10x1): Measurement grid: dx=10mm, dy=10mm

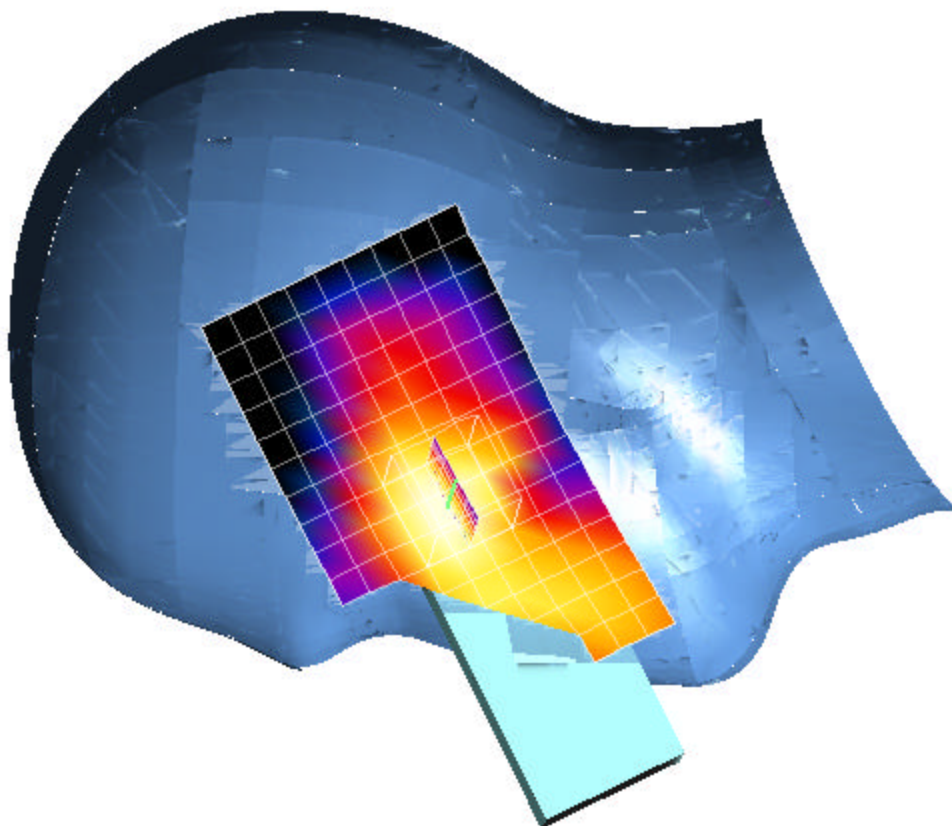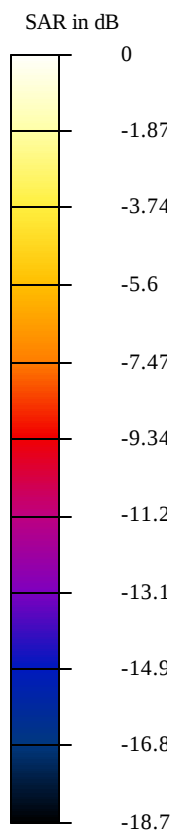

Test Laboratory: Compliance Certification Services

File Name: 3H-CH_0.32 mW.da4

DUT: Sharp Type & Serial Number: GX20

Program: Right Head -Touch position; Air temp 22.5 deg C & Liquid temp 20.3 deg C

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8

Medium: Head 1900MHz ($\sigma = 1.3952$ mho/m, $\epsilon = 39.72$, $\rho = 1000$ kg/m³)

Phantom section: RightSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1577; ConvF(5.3, 5.3, 5.3); Calibrated: 2/7/2003

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn427; Calibrated: 2/4/2003

- Phantom: SAM 2 - TP:1050

- Software: DASY4, V4.0 Build 51

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm


Reference Value = 3.94 V/m

Peak SAR = 0.495 mW/g

SAR(1 g) = 0.32 mW/g; SAR(10 g) = 0.181 mW/g



Power Drift = 0.07 dB

Area Scan (16x10x1): Measurement grid: dx=10mm, dy=10mm

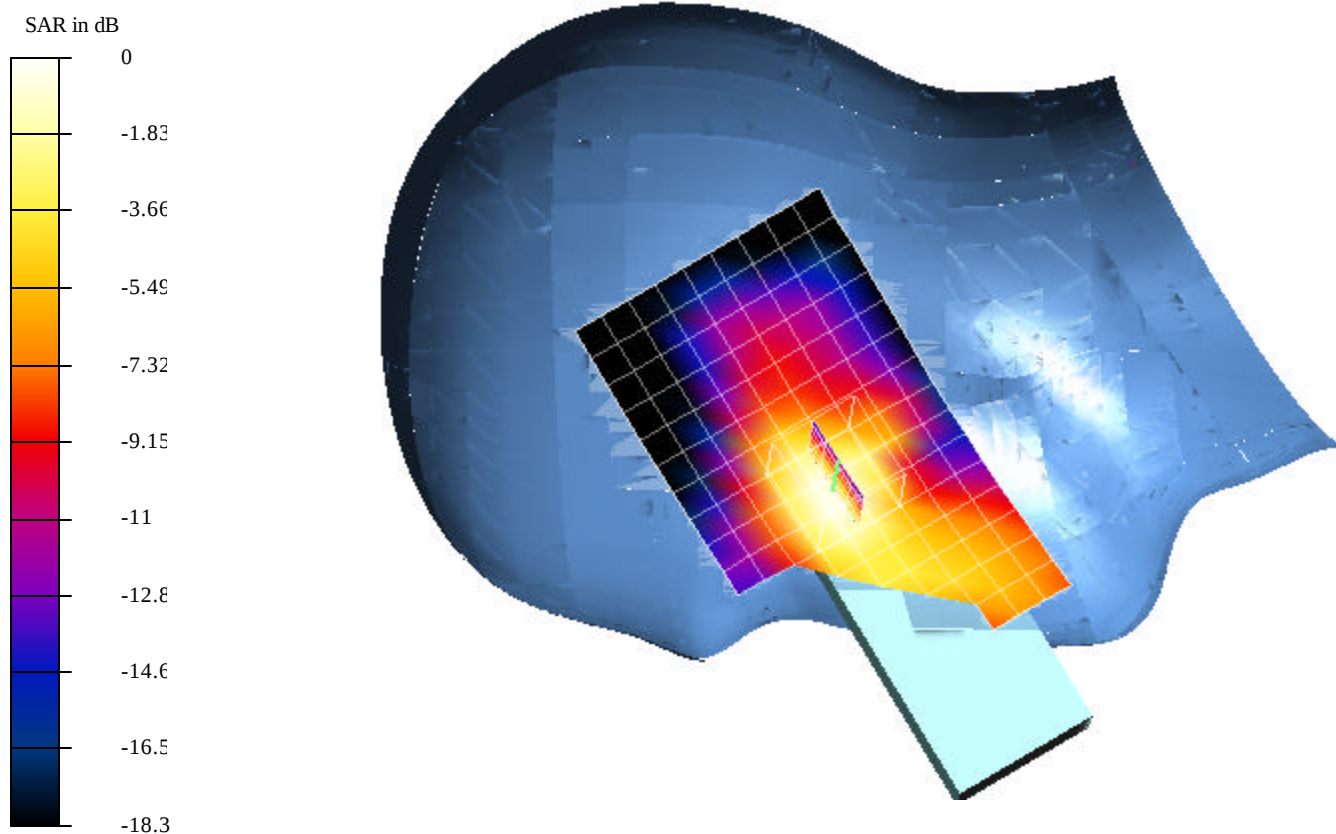

Test Laboratory: Compliance Certification Services
File Name: 1L-CH_0.0952 mW.da4

Right Head (Tilt position)

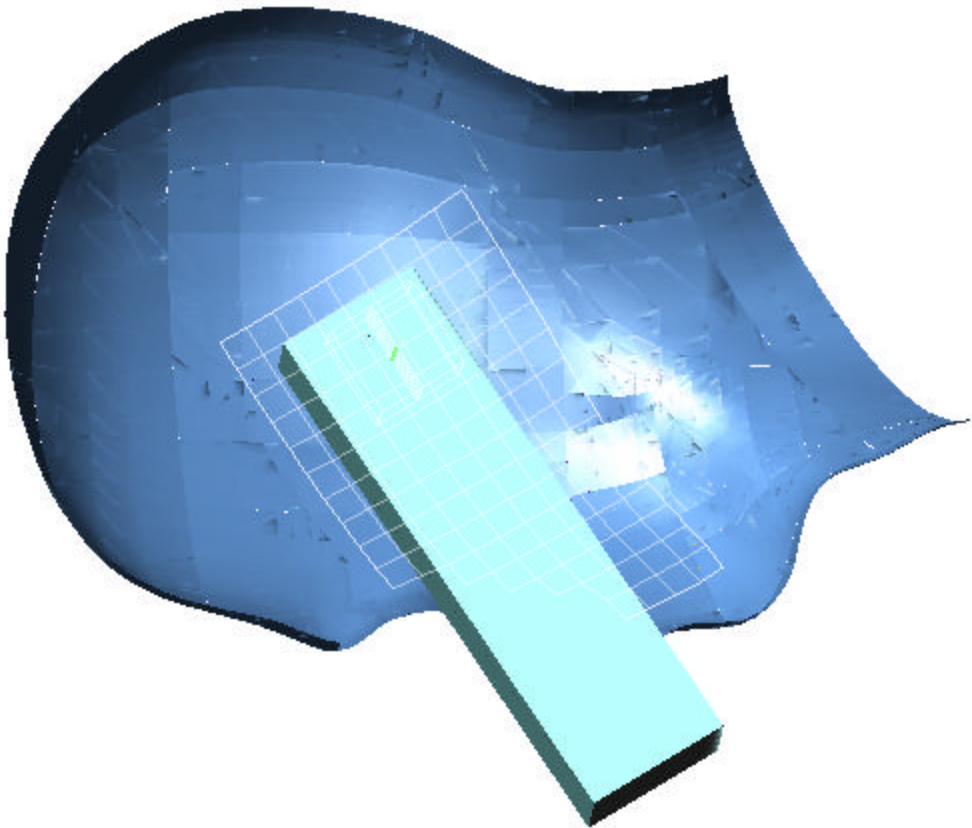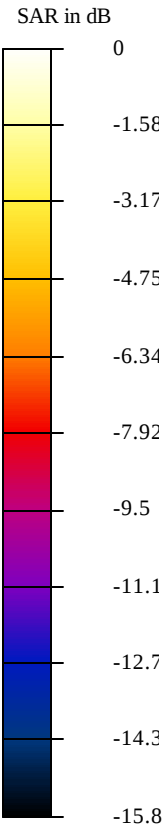

Test Laboratory: Compliance Certification Services

File Name: 1L-CH_0.0952 mW.da4

DUT: Sharp Type & Serial Number: GX20

Program: Right Head -Tilt position; Air temp 22.5 deg C & Liquid temp 20.2 deg C

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8

Medium: Head 1900MHz ($\sigma = 1.3963$ mho/m, $\epsilon = 39.12$, $\rho = 1000$ kg/m³)

Phantom section: RightSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1577; ConvF(5.3, 5.3, 5.3); Calibrated: 2/7/2003

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn427; Calibrated: 2/4/2003

- Phantom: SAM 2 - TP:1050

- Software: DASY4, V4.0 Build 51

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm


Reference Value = 7.03 V/m

Peak SAR = 0.134 mW/g

SAR(1 g) = 0.0952 mW/g; SAR(10 g) = 0.0596 mW/g

Power Drift = 0.07 dB

Area Scan (16x10x1): Measurement grid: dx=10mm, dy=10mm

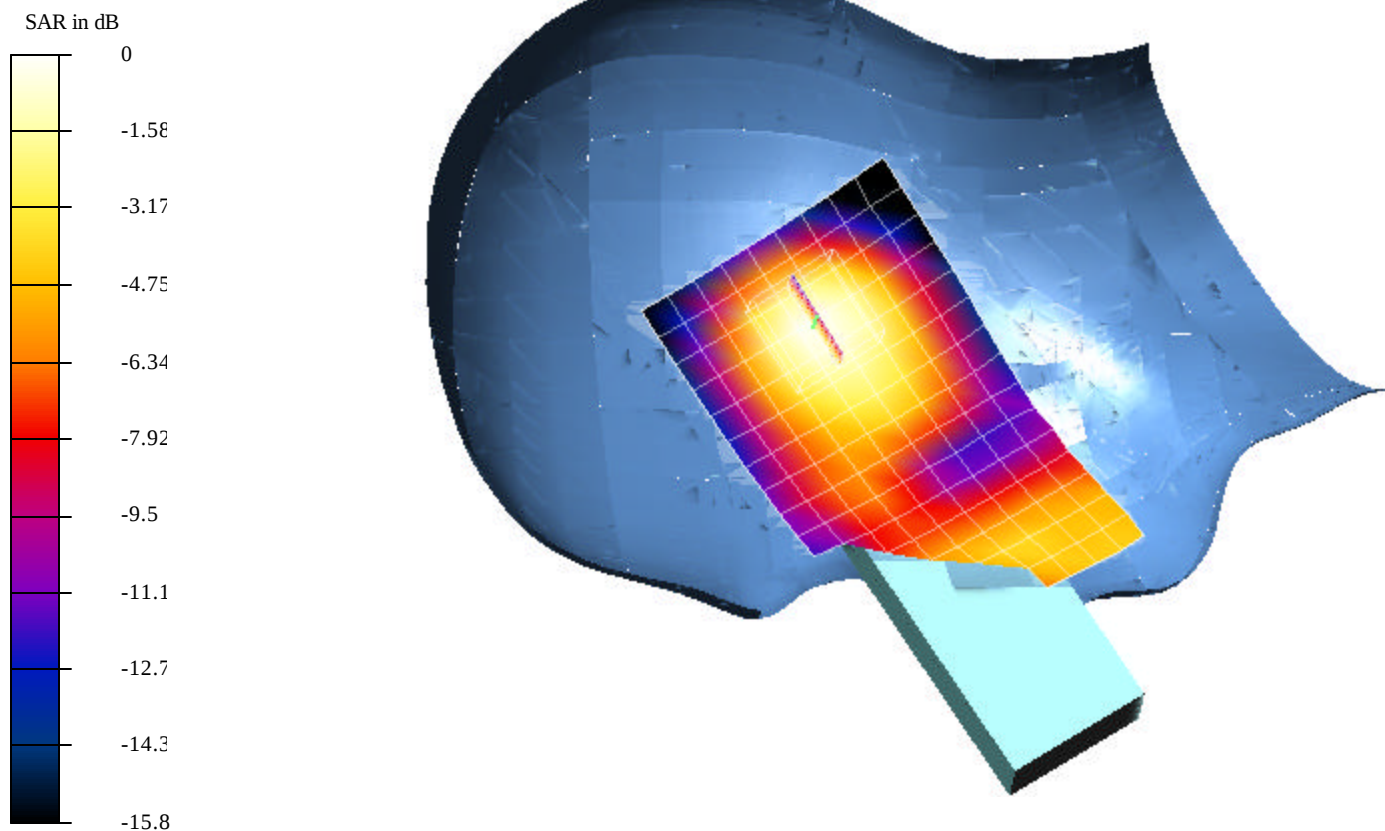

Test Laboratory: Compliance Certification Services

File Name: 2M-CH_0.0982 mW.da4

DUT: Sharp Type & Serial Number: GX20

Program: Right Head -Tilt position; Air temp 22.5 deg C & Liquid temp 20.2 deg C

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8

Medium: Head 1900MHz ($\sigma = 1.3963$ mho/m, $\epsilon = 39.12$, $\rho = 1000$ kg/m³)

Phantom section: RightSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1577; ConvF(5.3, 5.3, 5.3); Calibrated: 2/7/2003

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn427; Calibrated: 2/4/2003

- Phantom: SAM 2 - TP:1050

- Software: DASY4, V4.0 Build 51

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm


Reference Value = 7.79 V/m

Peak SAR = 0.139 mW/g

SAR(1 g) = 0.0982 mW/g; SAR(10 g) = 0.061 mW/g

Power Drift = 0.09 dB

Area Scan (16x10x1): Measurement grid: dx=10mm, dy=10mm

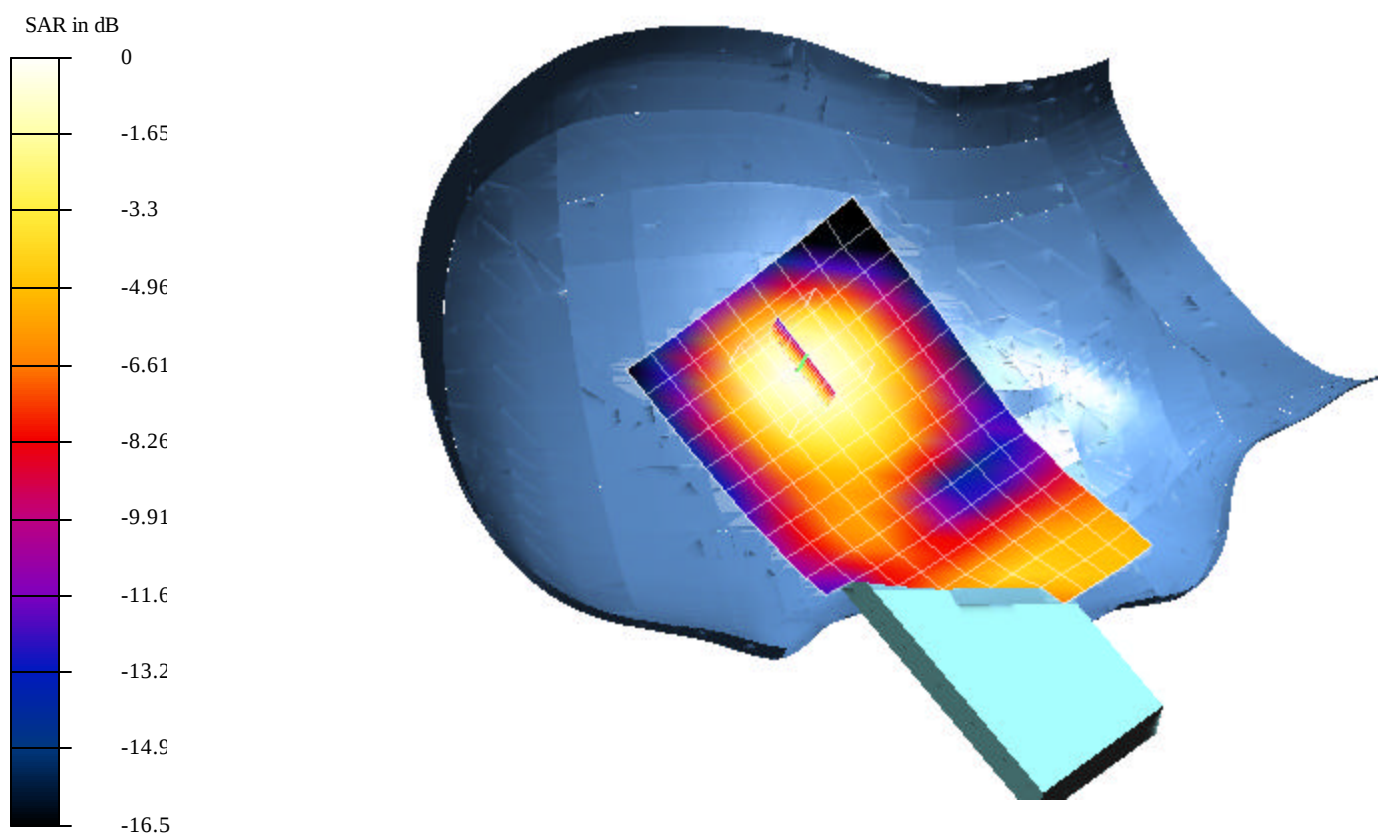

Test Laboratory: Compliance Certification Services

File Name: 3H-CH_0.0922 mW.da4

DUT: Sharp Type & Serial Number: GX20

Program: Right Head -Tilt position; Air temp 22.5 deg C & Liquid temp 20.2 deg C

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8

Medium: Head 1900MHz ($\sigma = 1.3963$ mho/m, $\epsilon = 39.12$, $\rho = 1000$ kg/m³)

Phantom section: RightSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1577; ConvF(5.3, 5.3, 5.3); Calibrated: 2/7/2003

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn427; Calibrated: 2/4/2003

- Phantom: SAM 2 - TP:1050

- Software: DASY4, V4.0 Build 51

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm


Reference Value = 7.77 V/m

Peak SAR = 0.13 mW/g

SAR(1 g) = 0.0922 mW/g; SAR(10 g) = 0.0571 mW/g



Power Drift = -0.09 dB

Area Scan (16x10x1): Measurement grid: dx=10mm, dy=10mm

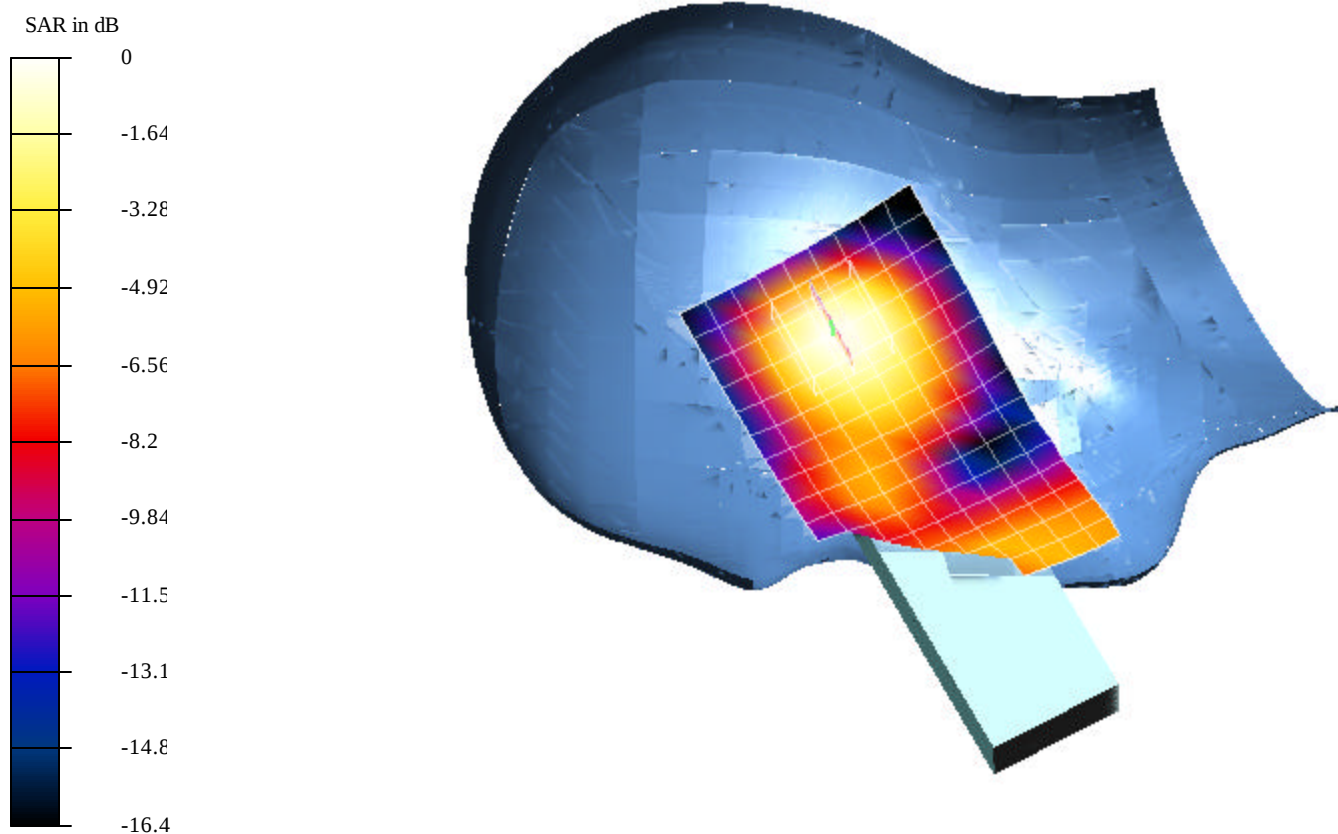

Test Laboratory: Compliance Certification Services
File Name: 1L-CH_0.232 mW-GSM mode.da4

Body/Flat (GSM Mode)

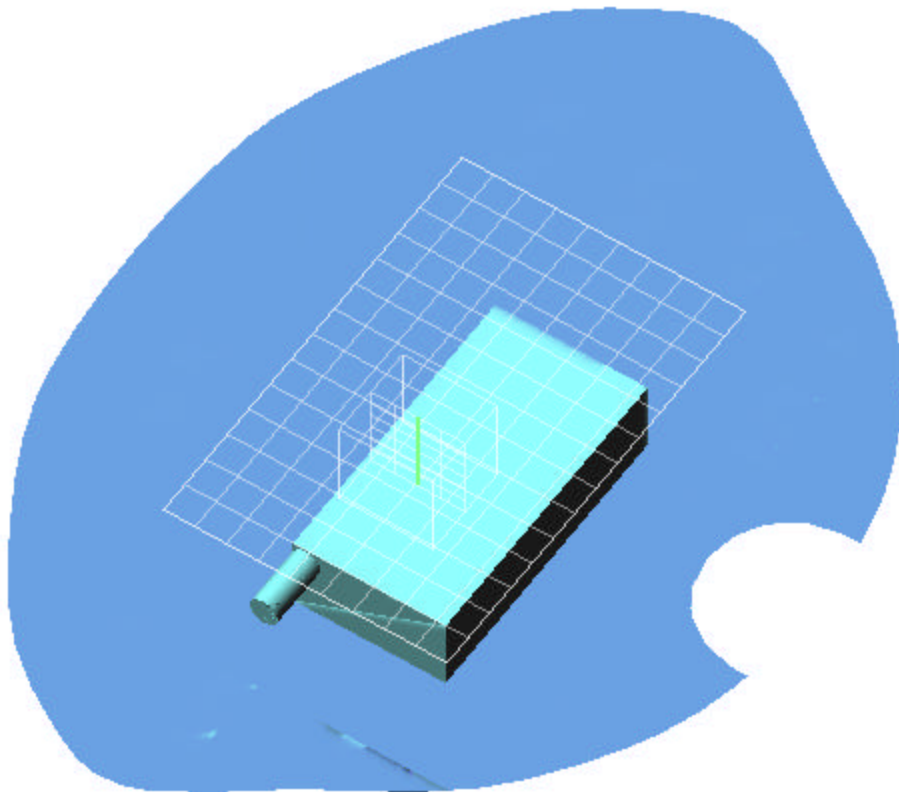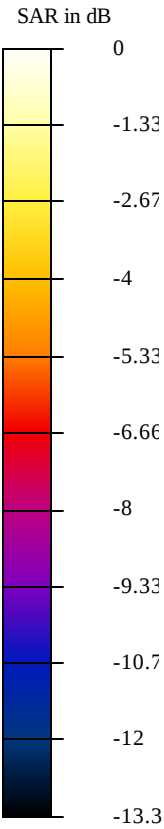

Test Laboratory: Compliance Certification Services
File Name: 1L-CH_0.232 mW-GSM mode.da4

DUT: Sharp Type & Serial Number: GX20

Program: Body/Flat (GSM Mode); Air temp 22.5 deg C & Liquid temp 20.4 deg C

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8
Medium: Muscle 1900 MHz ($\sigma = 1.53648$ mho/m, $\epsilon = 52.27$, $\rho = 1000$ kg/m³)
Phantom section: FlatSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1577; ConvF(5, 5, 5); Calibrated: 2/7/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 2/4/2003
- Phantom: SAM 2 - TP:1050
- Software: DASY4, V4.0 Build 51

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm



Reference Value = 11.2 V/m

Peak SAR = 0.34 mW/g

SAR(1 g) = 0.232 mW/g; SAR(10 g) = 0.15 mW/g

Power Drift = -0.004 dB

Area Scan (10x15x1): Measurement grid: dx=10mm, dy=10mm

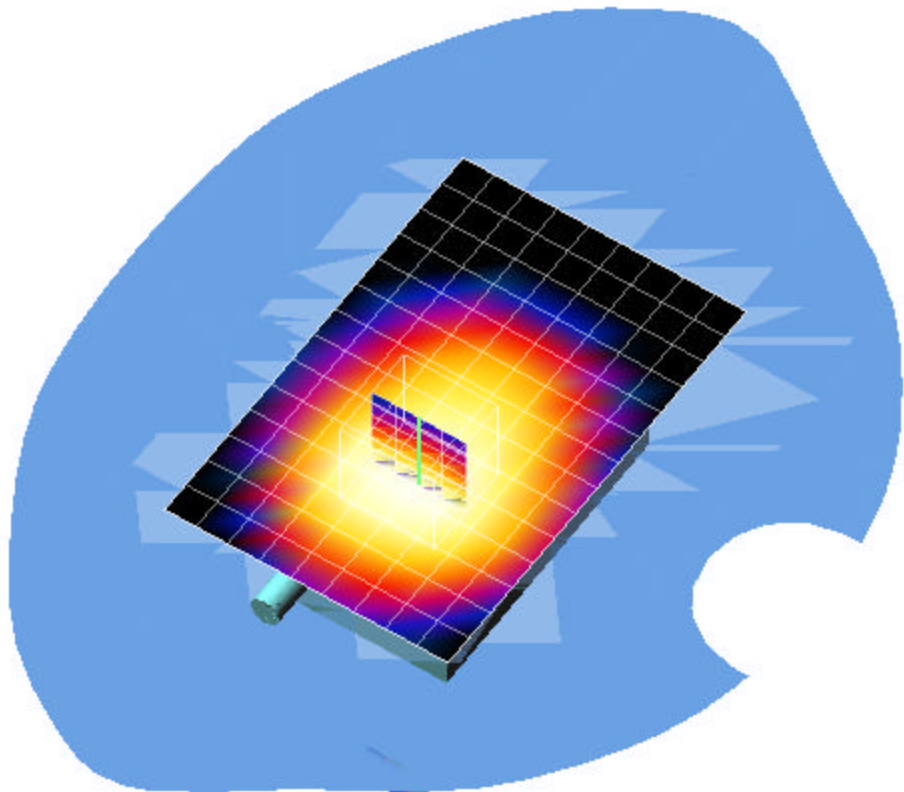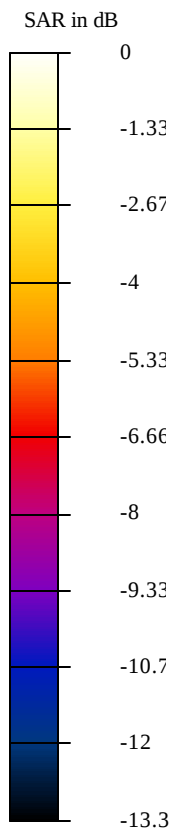

Test Laboratory: Compliance Certification Services

File Name: 2M-CH_0.213 mW-GSM mode.da4

DUT: Sharp Type & Serial Number: GX20

Program: Body/Flat (GSM Mode); Air temp 22.5 deg C & Liquid temp 20.4 deg C

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:8

Medium: Muscle 1900 MHz ($\sigma = 1.53648$ mho/m, $\epsilon = 52.27$, $\rho = 1000$ kg/m³)

Phantom section: FlatSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1577; ConvF(5, 5, 5); Calibrated: 2/7/2003

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn427; Calibrated: 2/4/2003

- Phantom: SAM 2 - TP:1050

- Software: DASY4, V4.0 Build 51

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm


Reference Value = 10.8 V/m

Peak SAR = 0.315 mW/g

SAR(1 g) = 0.213 mW/g; SAR(10 g) = 0.138 mW/g

Power Drift = 0.04 dB

Area Scan (10x15x1): Measurement grid: dx=10mm, dy=10mm

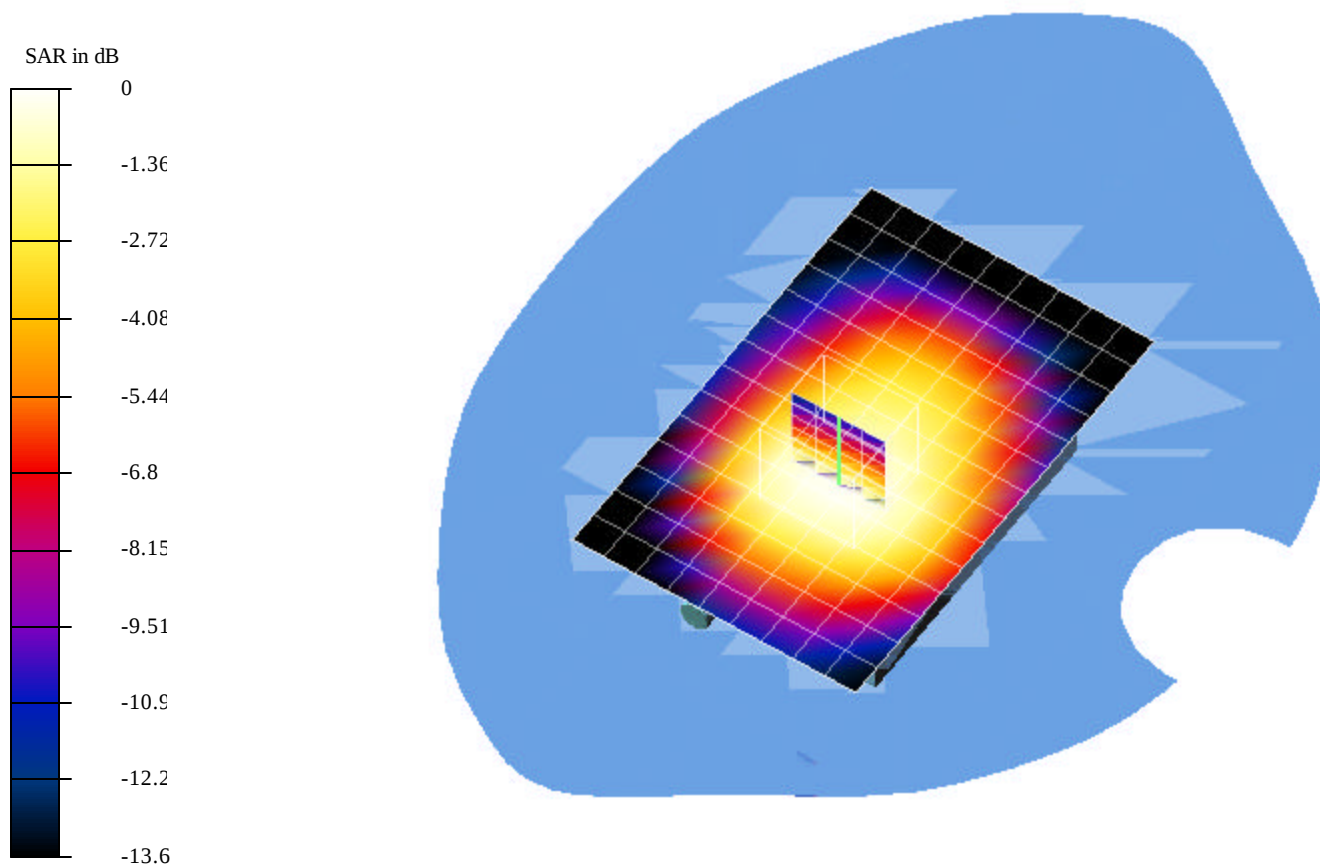

Test Laboratory: Compliance Certification Services
File Name: 3H-CH_0.191 mW-GSM mode.da4

DUT: Sharp Type & Serial Number: GX20

Program: Body/Flat (GSM Mode); Air temp 22.5 deg C & Liquid temp 20.4 deg C

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8
Medium: Muscle 1900 MHz ($\sigma = 1.53648$ mho/m, $\epsilon = 52.27$, $\rho = 1000$ kg/m³)
Phantom section: FlatSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1577; ConvF(5, 5, 5); Calibrated: 2/7/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 2/4/2003
- Phantom: SAM 2 - TP:1050
- Software: DASY4, V4.0 Build 51

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm


Reference Value = 10.1 V/m

Peak SAR = 0.309 mW/g

SAR(1 g) = 0.191 mW/g; SAR(10 g) = 0.119 mW/g



Power Drift = -0.004 dB

Area Scan (10x15x1): Measurement grid: dx=10mm, dy=10mm

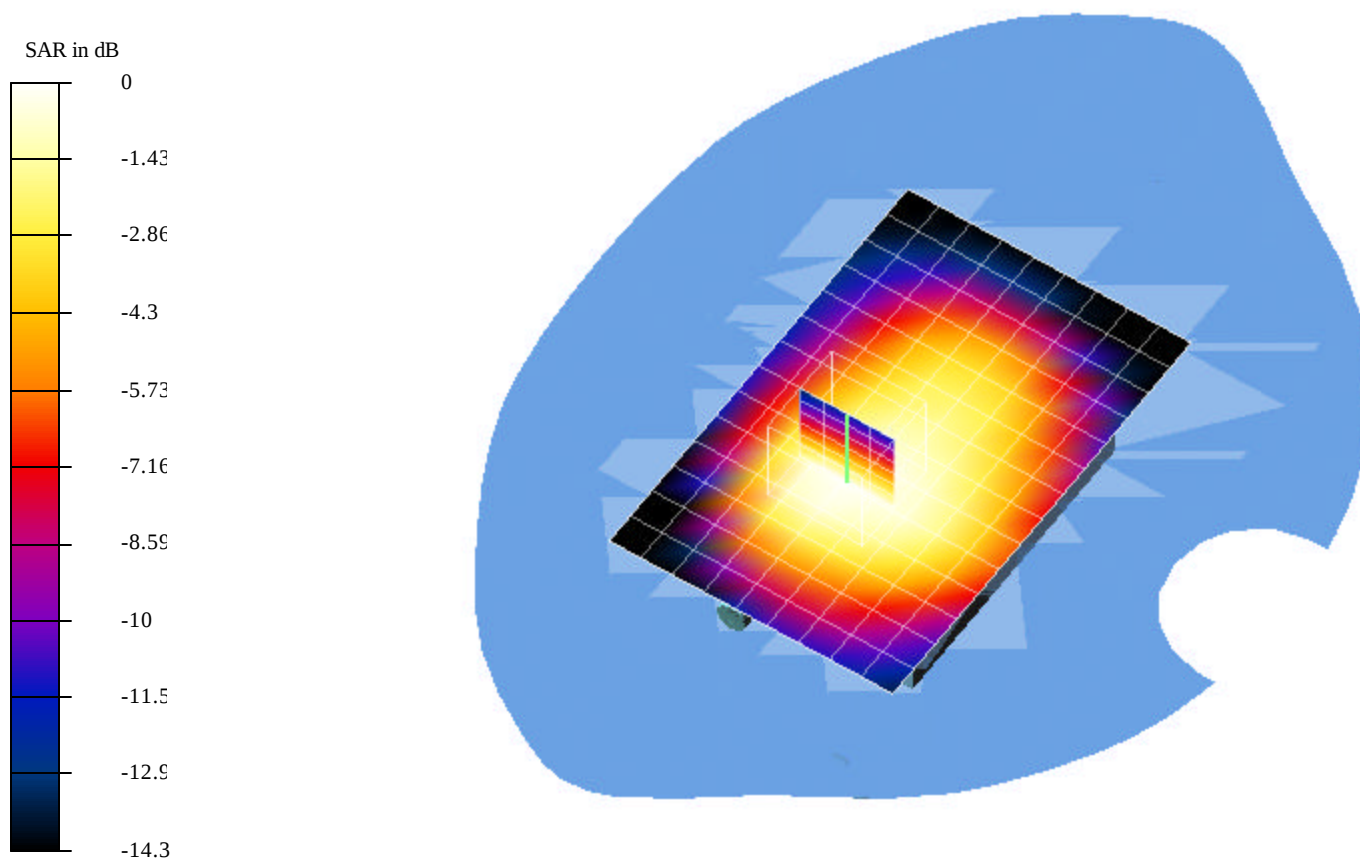

Test Laboratory: Compliance Certification Services
File Name: 1L-CH_0.494 mW-GPRS mode.da4

Body/Flat (GPRS Mode)

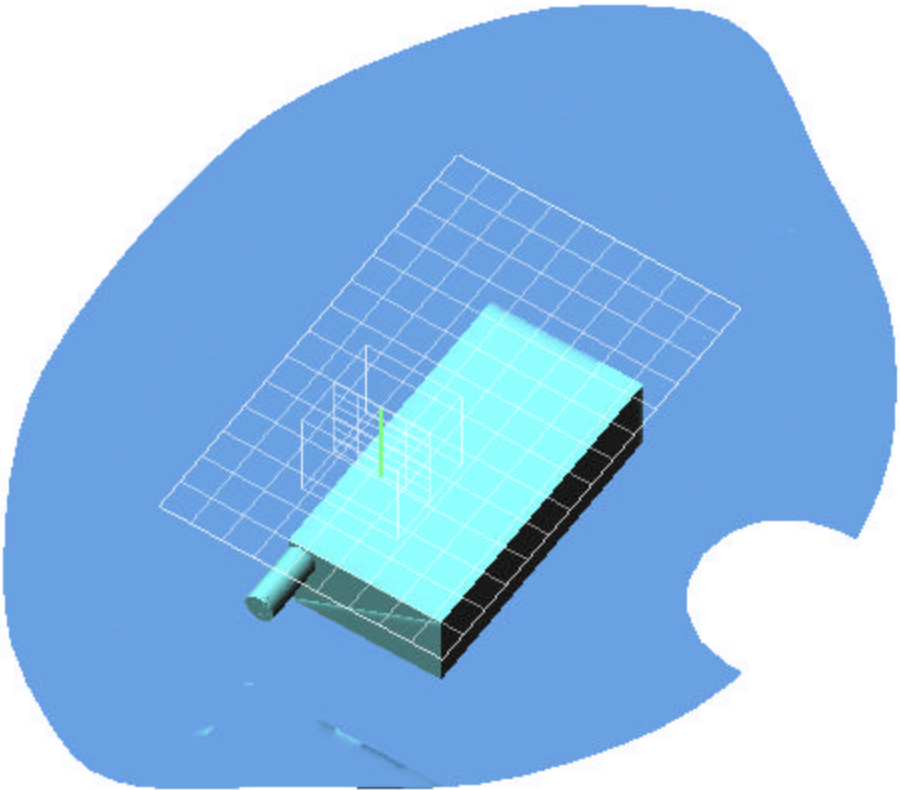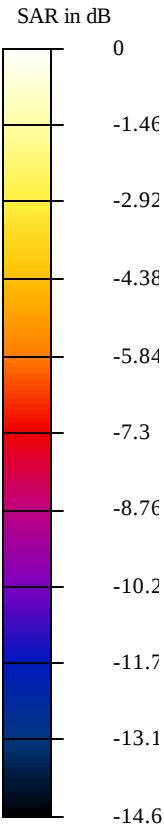

Test Laboratory: Compliance Certification Services
File Name: 1L-CH_0.494 mW-GPRS mode.da4

DUT: Sharp Type & Serial Number: GX20

Program: Body/Flat (GPRS Mode); Air temp 22.5 deg C & Liquid temp 20.3 deg C

Communication System: GSM 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:4
Medium: Muscle 1900 MHz ($\sigma = 1.53648$ mho/m, $\epsilon = 52.27$, $\rho = 1000$ kg/m³)
Phantom section: FlatSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1577; ConvF(5, 5, 5); Calibrated: 2/7/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 2/4/2003
- Phantom: SAM 2 - TP:1050
- Software: DASY4, V4.0 Build 51

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm


Reference Value = 14.9 V/m

Peak SAR = 0.758 mW/g

SAR(1 g) = 0.494 mW/g; SAR(10 g) = 0.314 mW/g

Power Drift = -0.06 dB

Area Scan (10x15x1): Measurement grid: dx=10mm, dy=10mm

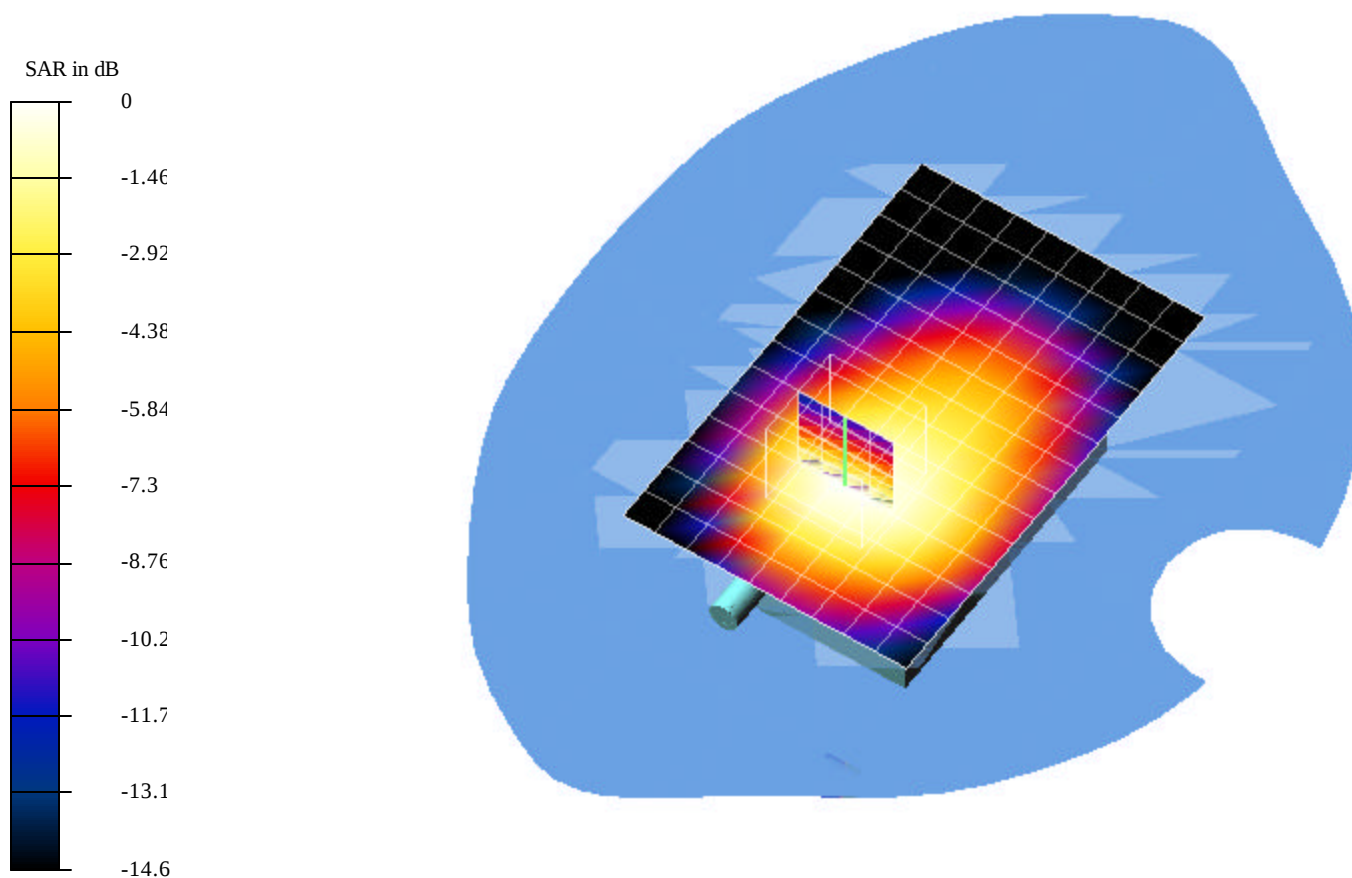

Test Laboratory: Compliance Certification Services
File Name: 2M-CH_0.392 mW-GPRS mode.da4

DUT: Sharp Type & Serial Number: GX20

Program: Body/Flat (GPRS Mode); Air temp 22.5 deg C & Liquid temp 20.3 deg C

Communication System: GSM 1900; Frequency: 1880 MHz; Duty Cycle: 1:4
Medium: Muscle 1900 MHz ($\sigma = 1.53648$ mho/m, $\epsilon = 52.27$, $\rho = 1000$ kg/m³)
Phantom section: FlatSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1577; ConvF(5, 5, 5); Calibrated: 2/7/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 2/4/2003
- Phantom: SAM 2 - TP:1050
- Software: DASY4, V4.0 Build 51

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm


Reference Value = 14.5 V/m

Peak SAR = 0.597 mW/g

SAR(1 g) = 0.392 mW/g; SAR(10 g) = 0.252 mW/g

Power Drift = -0.003 dB

Area Scan (10x15x1): Measurement grid: dx=10mm, dy=10mm

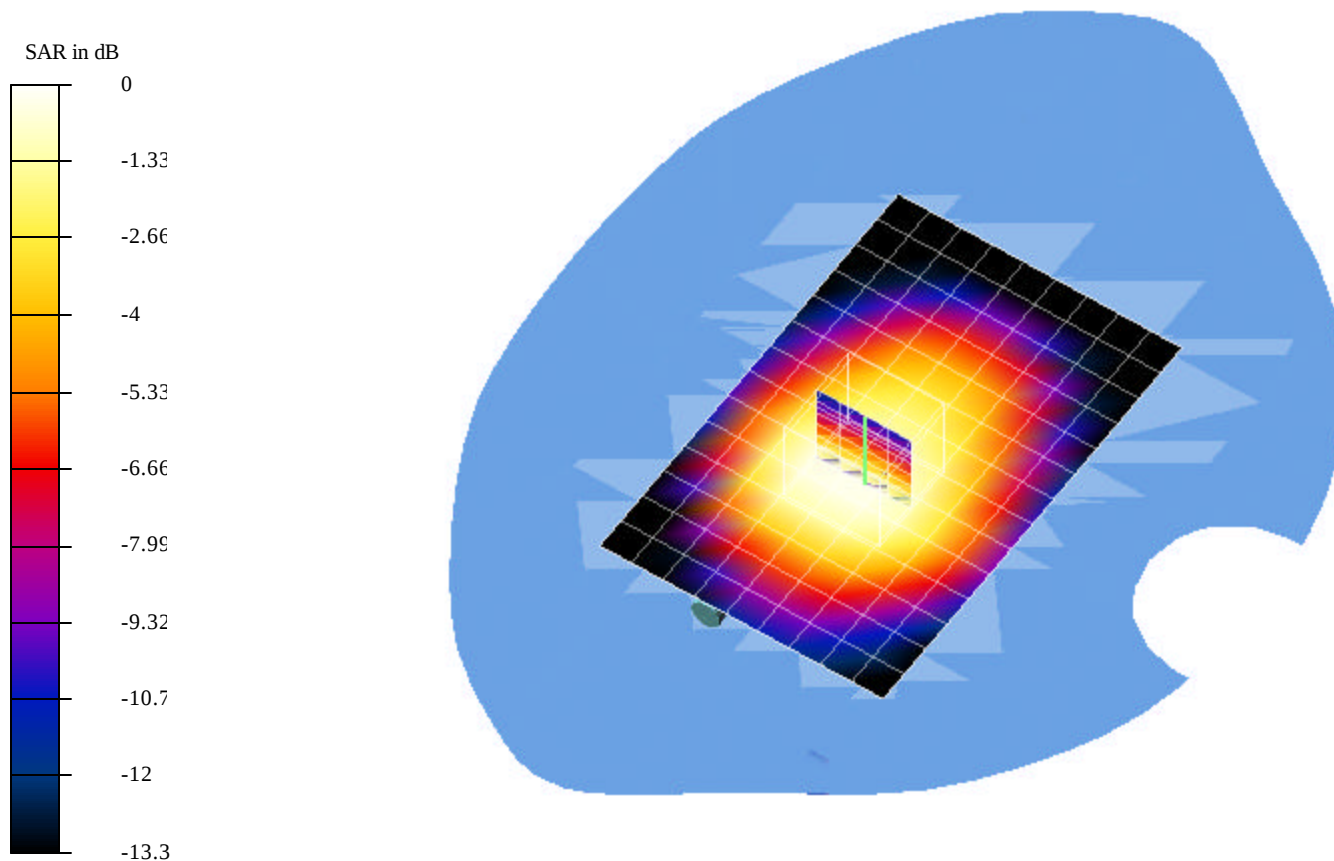

Test Laboratory: Compliance Certification Services
File Name: 3H-CH_0.331 mW-GPRS mode.da4

DUT: Sharp Type & Serial Number: GX20

Program: Body/Flat (GPRS Mode); Air temp 22.5 deg C & Liquid temp 20.3 deg C

Communication System: GSM 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:4
Medium: Muscle 1900 MHz ($\sigma = 1.53648$ mho/m, $\epsilon = 52.27$, $\rho = 1000$ kg/m³)
Phantom section: FlatSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1577; ConvF(5, 5, 5); Calibrated: 2/7/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 2/4/2003
- Phantom: SAM 2 - TP:1050
- Software: DASY4, V4.0 Build 51

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm

Reference Value = 13.3 V/m

Peak SAR = 0.531 mW/g

SAR(1 g) = 0.331 mW/g; SAR(10 g) = 0.206 mW/g

Power Drift = -0.02 dB

Area Scan (9x14x1): Measurement grid: dx=10mm, dy=10mm

