

TEST REPORT (SAR EVALUATION)

APPLICANT : Sharp Corporation, Communication Systems Group
ADDRESS : 2-13-1, Iida, Hachihonmatsu, Higashi-Hiroshima City, Hiroshima,
739-0192, Japan

APPLICANT : UMTS / GSM 900/1800/1900 GPRS Phone / Bluetooth Enable
MODEL NO. : 550SH
SERIAL NO. : 004401/11/010710/5
FCC ID : APYHRO00047

TEST STANDARD : FCC/OET Bulletin 65 Supplement C (Edition 01-01)

TESTING LOCATION : Japan Quality Assurance Organization
KITA-KANSAI Testing Center
1-7-7, Ishimaru, Minoh-shi, Osaka 562-0027, Japan

TEST RESULTS : **Passed**

DATE OF TEST : February 6, 2006 - February 9, 2006



Yuichi Fukumoto

Manager

Japan Quality Assurance Organization

KITA-KANSAI Testing Center

Testing Dept. EMC Division

1-7-7, Ishimaru, Minoh-shi, Osaka 562-0027, Japan

-
- The measurement values stated in Test Report was made with traceable to National Institute of Advanced Industrial Science and Technology (AIST) of Japan, National Institute of Information and Communications Technology (NICT) of Japan, and Laboratory for EMF and Microwave Electronics at the Swiss Federal Institute of Technology (ETH) in Zürich, Switzerland.
 - The applicable standard, testing condition and testing method which were used for the tests are based on the request of the applicant.
 - The test results presented in this report relate only to the offered test sample.
 - The contents of this test report cannot be used for the purposes, such as advertisement for consumers.
 - This test report shall not be reproduced except in full without the written approval of JQA.

TABLE OF CONTENTS**Page**

Documentation	3
1 Test Regulation	3
2 Test Location	3
3 Recognition of Test Laboratory	3
4 Description of the Equipment Under Test	4
5 Measurement System Diagram	5
6 System Components	6
7 Measurement Process	8
8 Measurement Uncertainties	9
9 Equipment Under Test Modification	11
10 Responsible Party	11
11 Deviation from Standard	11
12 Test Results	12
13 Summary	13
14 Test Arrangement	14
15 Equipment Under Test Tune-Up Procedures	16
Appendix A: Test Data	17
A.1 System Validation	17
A.2 Tissue Verification	18
A.3 SAR Measurement Data	19
Appendix B: Test Instruments	22
Appendix C: Attachments	23

DEFINITIONS FOR ABBREVIATION AND SYMBOLS USED IN THIS TEST REPORT

“EUT” means Equipment Under the Test.

“N/A” means that Not Applicable.

“N/T” means that Not Tested.

- ☒ - indicates that the listed condition, standard or equipment is applicable for this report.
☐ - indicates that the listed condition, standard or equipment is not applicable for this report.

Documentation

1 Test Regulation

Applied Standard : CFR 47 FCC Rules and Regulations Part 2
Radio-frequency Radiation Exposure Evaluation (§2.1091 and §2.1093)

Test Procedure : FCC/OET Bulletin 65 Supplement C (Edition 01-01) and IEEE Std.1528–2003

Exposure Limits : ANSI/IEEE Std. C95.1, 1999 Edition

2 Test Location

KITA-KANSAI Testing Center

7-7, Ishimaru, 1-chome, Minoh-shi, Osaka, 562-0027, Japan

KAMEOKA EMC Branch

9-1, Ozaki, Inukanno, Nishibetsuin-cho, Kameoka-shi, Kyoto, 621-0126, Japan

3 Recognition of Test Laboratory

JQA KITA-KANSAI Testing Center Testing Department EMC Division is recognized under ISO/IEC 17025 by following accreditation bodies and the test facility of Testing Division is registered by the following bodies.

VLAC Code : VLAC-001-2 (Effective through : April 3, 2006)

NVLAP Lab Code : 200191-0 (Effective through : June 30, 2006)

BSMI Recognition No. : SL2-IS-E-6006, SL2-IN-E-6006, SL2-AI-E-6006
(Effective through : September 14, 2007)

VCCI Registration No. : R-006, R-008, R-1117, C-006, C-007, C-1674, C-2143
(Effective through : April 3, 2006)

FCC Registration No. : 683630 (Effective through : June 30, 2006)

IC Registration No. : IC 4125-1, IC 6217-1, IC 6217-2 (Effective through : November 16, 2008)

Accredited as conformity assessment body for Japan electrical appliances and material law by METI.
(Effective through : February 24, 2007)

Accredited as conformity assessment body for Article 2, Paragraph 8, Item 5 on law for implementation of the Mutual Recognition between Japan and the European Community by METI.

(Effective through : August 7, 2007)

4 Description of the Equipment Under Test

1. Manufacturer : Sharp Corporation, Communication Systems Group
2-13-1, Iida, Hachihonmatsu, Higashi-Hiroshima City, Hiroshima,
739-0192, Japan
2. Products : UMTS / GSM 900/1800/1900 GPRS Phone / Bluetooth Enable
3. Model No. : 550SH
4. Serial No. : 004401/11/010710/5
5. Product Type : Pre-production
6. Date of Manufacture : --
7. Transmitting Frequency : 1850.20 MHz – 1909.80 MHz
8. Receiving Frequency : 1930.20 MHz – 1989.80 MHz
9. Max. RF Output Power (Conducted / Peak) : 28.82 dBm (GSM), 28.82 dBm (GPRS)
10. Antenna : L type antenna
25.2 mm × 4.0 mm
11. Battery Option : Lithium-ion Battery Pack XN-1BT50 (900mAh)
12. Power Rating : 4.0VDC
13. EUT Grounding : None
14. Device Category : Portable Device (§2.1093)
15. Exposure Category : General Population/Uncontrolled Exposure
16. FCC Rule Part(s) : 24(E)
17. EUT Authorization : Certification
18. Received Date of EUT : February 3, 2006

NOTE 1 : This device contains WCDMA, GSM 900 MHz and DCS 1800 MHz functions not operational in U.S. territories. This report is only appliance for PCS 1900 MHz band.


NOTE 2 : Information for Bluetooth Function

- | | |
|------------------------|-----------------------|
| Transmitting Frequency | : 2402 MHz – 2480 MHz |
| Receiving Frequency | : 2402 MHz – 2480 MHz |
| Antenna Type | : L type (inside) |
| Antenna Dimensions | : 7.63 mm × 21.7 mm |

5 Measurement System Diagram

These measurements are performed using the DASY4 automated dosimetric assessment system (manufactured by Schmid & Partner Engineering AG (SPEAG) in Zürich, Switzerland). It consists of high precision robotics system, cell controller system, DASY4 measurement server, personal computer with DASY4 software, data acquisition electronic (DAE) circuit, the Electro-optical converter (EOC), near-field probe, and the twin SAM phantom containing the equivalent tissue. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF).

The Robot is connected to the cell controller to allow software manipulation of the robot. The DAE is connected to the EOC. The DAE performs the signal amplification, signal multiplexing, A/D conversion, offset measurements, mechanical surface detection, collision detection, etc. The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the DASY4 measurement server.

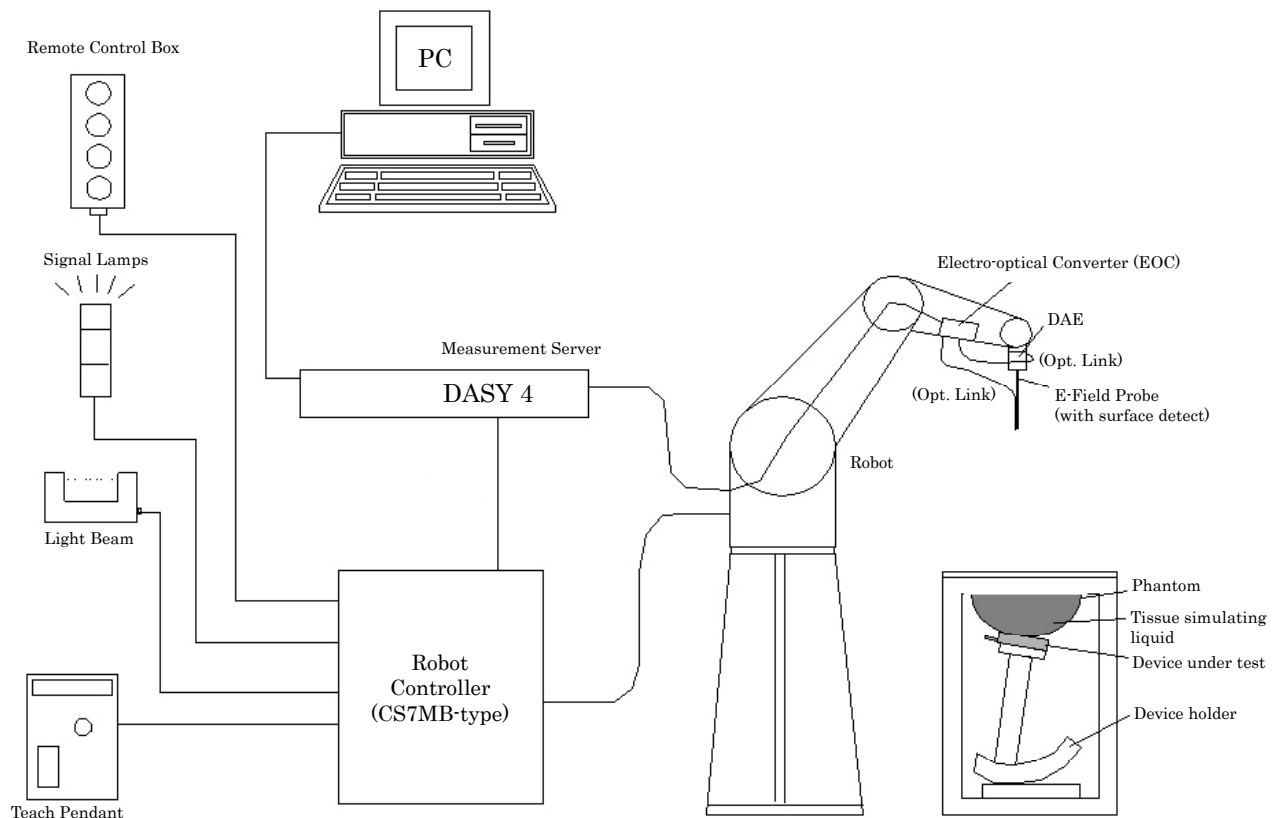

6 System Components

6.1 Probe Specification

Construction : Symmetrical design with triangular core
Built-in optical fiber for surface detection system
Built-in shielding against static changes

Calibration : In air from 10 MHz to 2.5 GHz
In head tissue simulating liquid (HSL) and
muscle tissue simulating liquid
900 MHz (accuracy $\pm 11.0\%$; $k=2$)
1450 MHz (accuracy $\pm 11.0\%$; $k=2$)
1810 MHz (accuracy $\pm 11.0\%$; $k=2$)
1950 MHz (accuracy $\pm 11.0\%$; $k=2$)
2450 MHz (accuracy $\pm 11.8\%$; $k=2$)

Frequency : 10 MHz to 3 GHz (dosimetry);
Linearity: ± 0.2 dB (30 MHz to 3 GHz)

Directivity : ± 0.2 dB in HSL (rotation around probe axis)
 ± 0.4 dB in HSL (rotation normal probe axis)

Dynamic Range : $5 \mu\text{W/g}$ to $>100 \text{ mW/g}$; Linearity: ± 0.2 dB

Surface Detection : ± 0.2 mm repeatability in air and clear liquids over diffuse reflecting surfaces

Dimensions : Overall length 330 mm
Tip length 16 mm
Body diameter 12 mm
Tip diameter 6.8 mm
Distance from probe tip to dipole centers 2.7 mm



6.2 Twin SAM Phantom

The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528-2003, CENELEC 50361 and IEC 62209-1. It enables the dosimetric evaluation of left and right head phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points with the robot.



Shell Thickness : 2 ± 0.2 mm
 Filling Volume : Volume Approx. 25 liters
 Dimensions : $810 \times 1000 \times 500$ mm (H $\times$ L $\times$ W)

6.3 Mounting Device for Transmitters

The Mounting Device enables the rotation of the mounted transmitter in spherical coordinates, whereby the rotation point is the ear opening. The devices can be easily and accurately positioned according to IEC, IEEE, CENELEC, FCC or other specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom).



6.4 Typical Composition of Ingredients for Liquid Tissue

Ingredients (% by weight)	Frequency (MHz)					
	835		1900		2450	
	Head	Body	Head	Body	Head	Body
Water	41.45	52.40	54.90	40.40	62.70	73.20
Salt (NaCl)	1.45	1.40	0.18	0.50	0.50	0.04
Sugar	56.00	45.00	0.00	58.00	0.00	0.00
HEC	1.00	1.00	0.00	1.00	0.00	0.00
Bactericide	0.10	0.10	0.00	0.10	0.00	0.00
Triton X-100	0.00	0.00	0.00	0.00	36.80	0.00
DGBE	0.00	0.00	44.92	0.00	0.00	26.70

Salt : 99+% Pure Sodium Chloride Sugar : 98+% Pure Sucrose
 Water : De-ionized, 16 MΩ⁺ resistivity HEC : Hydroxyethyl Cellulose
 DGBE : 99+% Di (ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]
 Triton X-100 (ultra pure) : Polyethylene glycol mono [4-(1,1,3,3-tetramethylbutyl)phenyl]ether

The composition of ingredients is according to FCC/OET Bulletin 65 Supplement C.

7 Measurement Process

Area Scan for Maximum Search :

The SAR distribution at the exposed side of the head was measured at a distance of 3.9 mm from the inner surface of the shell. The area covered the entire dimension of the head and the horizontal grid spacing was 10 mm × 10 mm. The evaluation on the measured area scan gives the interpolated maximum (hot spot) of the measured area.

Cube Scan for Spatial Peak SAR Evaluation :

The 1g and 10g peak evaluations were available for the predefined cube 5×5×7 scans. The grid spacing was 8 mm × 8 mm × 5 mm. The first procedure is an extrapolation to get the points between the lowest measured plane and the surface. The next step uses 3D interpolation to get all points within the measured volume in a 1mm grid (35000 points). In the last step, a 1g cube is placed numerically into the volume and its averaged SAR is calculated. This cube is moved around until the highest averaged SAR is found. This last procedure is repeated for a 10g cube. If the highest SAR is found at the edge of the measured volume, the system will issue a warning: higher SAR values might be found outside of the measured volume. In that case the cube measurement can be repeated, using the new interpolated maximum as the center.

Extrapolation :

The extrapolation is based on a least square algorithm. Through the points in the first 3 cm in all z-axis, polynomials of order four are calculated. This polynomial is then used to evaluate the points between the surface and the probe tip. The points, calculated from the surface, have a distance of 1 mm from one another.

Interpolation :

The maximum interpolated value is searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1g or 10g) are computed by the 3D spline algorithm. The 3D spline is composed of three one-dimensional splines with the “Not a knot” –condition (x, y and z –directions). The volume is integrated with the trapezoidal algorithm.

8 Measurement Uncertainties

8.1 Uncertainties for System Validation

Uncertainty Component	Uncertainty value (%)	Probability distribution	Divisor	c_i (1g)	c_i (10g)	Standard Uncertainty (%)		v_i
						1g	10g	
Measurement System								
Probe calibration	4.8	Normal	1	1	1	4.8	4.8	∞
Axial isotropy	4.7	Rectangular	$\sqrt{3}$	1	1	2.7	2.7	∞
Hemispherical isotropy	0.0	Rectangular	$\sqrt{3}$	1	1	0.0	0.0	∞
Boundary effect	1.0	Rectangular	$\sqrt{3}$	1	1	0.6	0.6	∞
Linearity	4.7	Rectangular	$\sqrt{3}$	1	1	2.7	2.7	∞
Detection limits	1.0	Rectangular	$\sqrt{3}$	1	1	0.6	0.6	∞
Readout electronics	1.0	Normal	1	1	1	1.0	1.0	∞
Response time	0.0	Rectangular	$\sqrt{3}$	1	1	0.0	0.0	∞
Integration time	0.0	Rectangular	$\sqrt{3}$	1	1	0.0	0.0	∞
RF ambient conditions	3.0	Rectangular	$\sqrt{3}$	1	1	1.7	1.7	∞
Mechanical tolerance	0.4	Rectangular	$\sqrt{3}$	1	1	0.2	0.2	∞
Probe positioning	2.9	Rectangular	$\sqrt{3}$	1	1	1.7	1.7	∞
Extrapolation, interpolation and integration algorithms	1.0	Rectangular	$\sqrt{3}$	1	1	0.6	0.6	∞
Dipole								
Dipole axis to liquid distance	2.0	Rectangular	$\sqrt{3}$	1	1	1.2	1.2	∞
Input power and SAR drift measurement	4.7	Rectangular	$\sqrt{3}$	1	1	2.7	2.7	∞
Physical parameters								
Phantom uncertainty	4.0	Rectangular	$\sqrt{3}$	1	1	2.3	2.3	∞
Liquid conductivity - deviation from target values	5.0	Rectangular	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞
Liquid Conductivity - measurement uncertainty	2.5	Normal	1	0.64	0.43	1.6	1.1	∞
Liquid Permittivity - deviation from target values	5.0	Rectangular	$\sqrt{3}$	0.6	0.49	1.7	1.4	∞
Liquid Permittivity - measurement uncertainty	2.5	Normal	1	0.6	0.49	1.5	1.2	∞
Combined Standard Uncertainty						8.4	8.1	
Expanded Uncertainty (k=2) (confidence interval of 95%)						16.8	16.2	

NOTE : The above measurement uncertainties are according to IEEE Std.1528–2003.

8.2 Uncertainties for SAR Measurement

Uncertainty Component	Uncertainty value (%)	Probability distribution	Divisor	c_i (1g)	c_i (10g)	Standard Uncertainty (%)		v_i
						1g	10g	
Measurement System								
Probe calibration	4.8	Normal	1	1	1	4.8	4.8	∞
Axial isotropy	4.7	Rectangular	$\sqrt{3}$	0.7	0.7	1.9	1.9	∞
Hemispherical isotropy	9.6	Rectangular	$\sqrt{3}$	0.7	0.7	3.9	3.9	∞
Boundary effect	1.0	Rectangular	$\sqrt{3}$	1	1	0.6	0.6	∞
Linearity	4.7	Rectangular	$\sqrt{3}$	1	1	2.7	2.7	∞
Detection limits	1.0	Rectangular	$\sqrt{3}$	1	1	0.6	0.6	∞
Readout electronics	1.0	Normal	1	1	1	1.0	1.0	∞
Response time	0.8	Rectangular	$\sqrt{3}$	1	1	0.5	0.5	∞
Integration time	2.6	Rectangular	$\sqrt{3}$	1	1	1.5	1.5	∞
RF ambient conditions	3.0	Rectangular	$\sqrt{3}$	1	1	1.7	1.7	∞
Mechanical tolerance	0.4	Rectangular	$\sqrt{3}$	1	1	0.2	0.2	∞
Probe positioning	2.9	Rectangular	$\sqrt{3}$	1	1	1.7	1.7	∞
Extrapolation, interpolation and integration algorithms	1.0	Rectangular	$\sqrt{3}$	1	1	0.6	0.6	∞
Test Sample Related								
Device positioning	3.4	Normal	1	1	1	3.4	3.4	23
Device holder uncertainty	4.6	Normal	1	1	1	4.6	4.6	5
Output power drift	5.0	Rectangular	$\sqrt{3}$	1	1	2.9	2.9	∞
Physical parameters								
Phantom uncertainty	4.0	Rectangular	$\sqrt{3}$	1	1	2.3	2.3	∞
Liquid conductivity - deviation from target values	5.0	Rectangular	$\sqrt{3}$	0.64	0.43	1.8	1.2	∞
Liquid Conductivity - measurement uncertainty	2.5	Normal	1	0.64	0.43	1.6	1.1	∞
Liquid Permittivity - deviation from target values	5.0	Rectangular	$\sqrt{3}$	0.6	0.49	1.7	1.4	∞
Liquid Permittivity - measurement uncertainty	2.5	Normal	1	0.6	0.49	1.5	1.2	∞
Combined Standard Uncertainty						10.8	10.6	
Expanded Uncertainty (k=2) (confidence interval of 95%)						21.6	21.2	

NOTE : The above measurement uncertainties are according to IEEE Std. 1528–2003.

9 Equipment Under Test Modification

- ☒ - No modifications were conducted by JQA to achieve compliance to the limitations.
☐ - To achieve compliance to the limitations, the following changes were made by JQA during the compliance test.

The modifications will be implemented in all production models of this equipment.

Applicant : Not Applicable

Date : Not Applicable

Typed Name : Not Applicable

Position : Not Applicable

10 Responsible Party

Responsible Party of Test Item (Product)

Responsible Party :

Contact Person :

Signatory

11 Deviation from Standard

- ☒ - No deviations from the standard described in clause 1.
☐ - The following deviations were employed from the standard described in clause 1.

12 Test Results**12.1 SAR Measurement for Head Configuration**

The requirements are ☒ - Applicable ☒ - Tested. ☐ - Not tested by applicant request.]
☐ - Not Applicable

☒ - Passed ☐ - Failed ☐ - Not judged

Maximum SAR (1g) 0.996 mW/g at 1850.20 MHz

Phantom Position ☐ - Left Head ☒ - Right Head

Device Position ☒ - Cheek/Touch ☐ - Ear/Tilt

Antenna Position ☐ - In ☐ - Out ☒ - Fixed

Modulation Type GSM

Remarks : _____

12.2 SAR Measurement for Body-worn Configuration

The requirements are ☒ - Applicable ☒ - Tested. ☐ - Not tested by applicant request.]
☐ - Not Applicable

☒ - Passed ☐ - Failed ☐ - Not judged

Maximum SAR (1g) 0.800 mW/g at 1850.20 MHz

Body-worn Carry Accessories ☐ - Supplied ☒ - Not supplied

Separation Distance between Device and Phantom 1.5 cm

Modulation Type GSM+GPRS

Remarks : _____

13 Summary**General Remarks :**

The EUT was tested according to the requirements of
FCC/OET Bulletin 65 Supplement C (Edition 01-01)
under the test configuration, as shown in clause 14 to 15.

The conclusion for the test items of which are required by the applied regulation is indicated
under the final judgment.

Final Judgment :

The "as received" sample;

- ☒ - fulfill the test requirements of the regulation mentioned on clause 1.
- ☐ - doesn't fulfill the test requirements of the regulation mentioned on clause 1.

Reviewed by:



Shigeru Kinoshita
Deputy Manager
Testing Dept. EMC Div.
JQA KITA-KANSAI Testing Center

Tested by:





Yasuhisa Sakai
Engineer
Testing Dept. EMC Div.
JQA KITA-KANSAI Testing Center

14 Test Arrangement


14.1 Cheek-Touch Position

1. Position the device with the vertical center line of the body of the device and the horizontal line crossing the center of the ear piece in a plane parallel to the sagittal plane of the phantom.
2. While maintaining the device in this plane, align the vertical center line with the reference plane containing the three ear and mouth reference points (M, RE and LE) and align the center of the ear piece with the line RE-LE.
3. Translate the mobile phone box towards the phantom with the ear piece aligned with the line RE-LE until the phone touches the ear.
4. While maintaining the device in the reference plane and maintaining the phone contact with the ear, move the bottom of the box until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost.

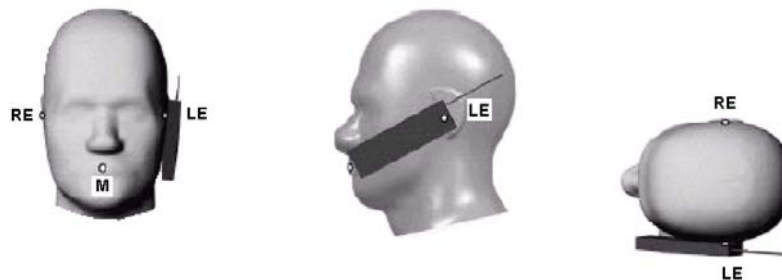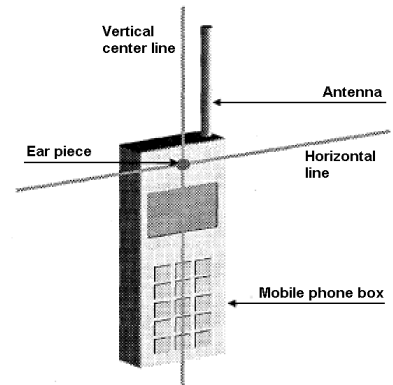


14.2 Ear-Tilt Position

1. Position the device in the "Cheek/Touch Position".
2. While maintaining the device in the reference plane and pivoting against the ear, move it outward away from the mouth by an angle of 15 degrees or until contact with the ear is lost.

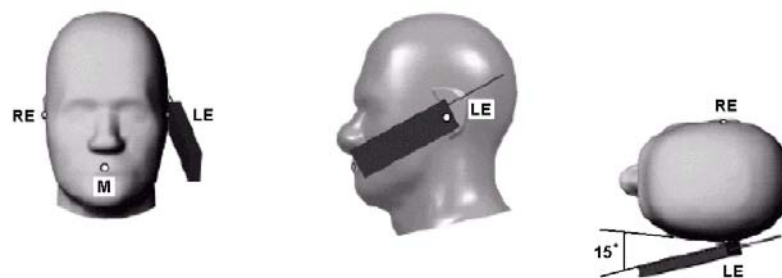


14.3 Body-worn Configuration

Body-worn operating configurations should be tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in normal use configurations. Devices with a headset output should be tested with a headset connected to the device. Both the physical spacing to the body of the user as dictated by the accessory and the materials used in an accessory affect the SAR produced by the transmitting device. For purpose of determining test requirements, accessories may be divided into two categories: those that do not contain metallic components and those that do.

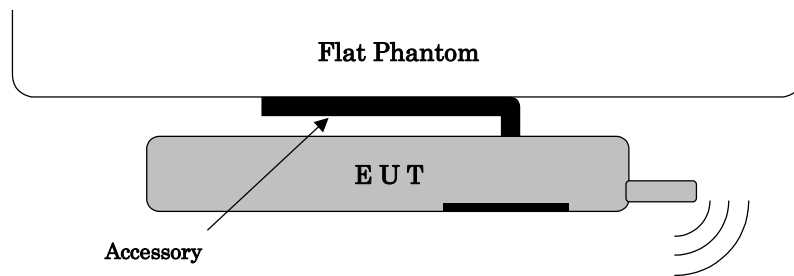

When multiple accessories that do not contain metallic components are supplied with the device, the device may be tested with only the accessory that dictates the closest spacing to the body. When multiple accessories that contain metallic components are supplied with the device, the device must be tested with each accessory that contains a unique metallic component. If multiple accessories share an identical metallic component (e.g., the same metallic belt-clip used with different holsters with no other metallic components), only the accessory that dictates the closest spacing to the body must be tested.

Body-worn accessories may not always be supplied or available as options for some devices that are intended to be authorized for body-worn use. A separation distance of 1.5 cm between the back of the device and a flat phantom is recommended for testing body-worn SAR compliance under such circumstances. Other separation distances may be used, but they should not exceed 2.5 cm. In these cases, the device may use body-worn accessories that provide a separation distance greater than that tested for the device provided however that the accessory contains no metallic components.

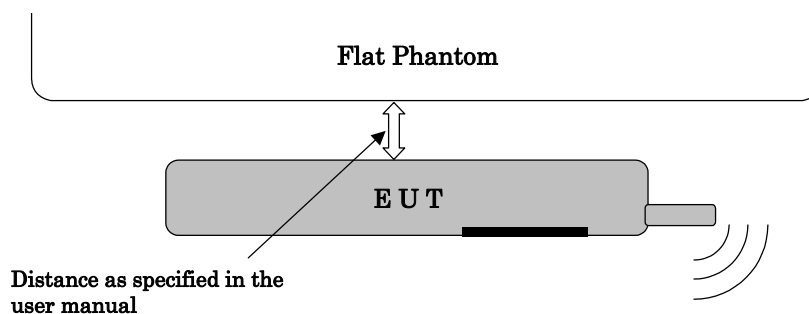

15 Equipment Under Test Tune-Up Procedures

The following procedures had been used to prepare the EUT for the SAR test.

To setup the desire channel frequency and the maximum output power, a Radio Communication Tester "Rohde & Schwarz, CMU-200" was used to program the EUT.

SM Mobile Station : GSM 1900
Network Support : GSM Mode – Circuit Switched
GPRS Mode – Packet Data (GPRS Level 10 / 2 slot)
Power Control Level (PCL) : 0 (30.0 dBm)

Channel	Frequency
0512	1850.20
0661	1880.00
0810	1909.80

For the Bluetooth transmitter, RF test mode prepared by the manufacturer was used to program the EUT.

Communication system : Bluetooth
Modulation type : Frequency Hopping Spread Spectrum (FHSS)

Channel	Frequency
00	2402.0
39	2441.0
78	2480.0


Maximum conducted power was measured by replacing the antenna with an adapter for conductive measurements, before and after the SAR measurements was done.

Appendix A: Test Data

A.1 System Validation

The power meter PM1 (including Attenuator) measures the forward power at the location of the validation dipole connector. The signal generator is adjusted for 250 mW at the dipole connector and the power meter PM2 is read at that level. After connecting the cable to the dipole, the signal generator is readjusted for the same reading at power meter PM2.

The dipole antenna is matched to be used near flat phantom filled with tissue simulating solution. A specific distance holder is used in the positioning of the antenna to ensure correct spacing between the phantom and the dipole.

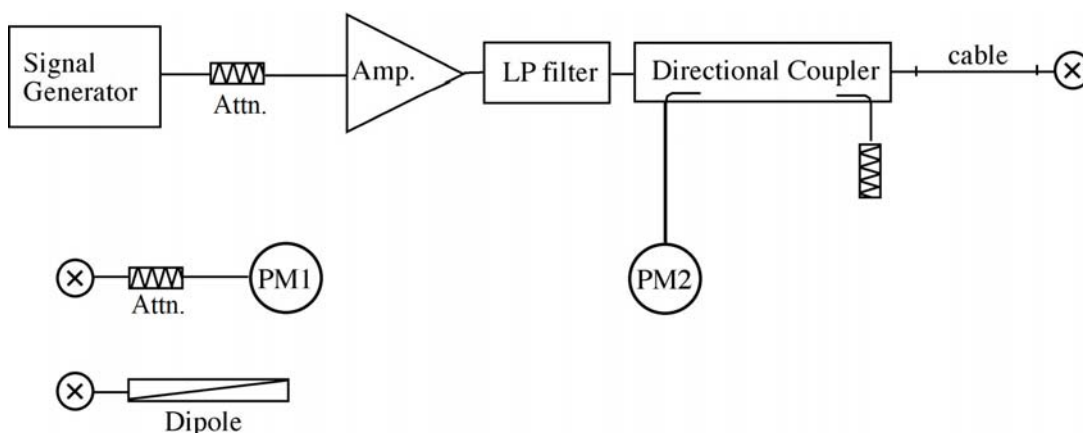


System Validation Results :

System Validation Dipole : D1800V2, S/N: 2d038						
Ambient Conditions : 21°C 30%		Depth of Liquid : 15.0 cm			Date : February 9, 2006	
Liquid		Parameters	Target	Measured	Deviation [%]	Limit [%]
Medium	Temp. [°C]					
Head 1800 MHz	21.0	Permittivity	40.0	39.80	-0.50	± 5
		Conductivity	1.40	1.345	-3.93	± 5
		1g SAR (mW/g)	9.47	9.53	+0.63	± 10
Ambient Conditions : 21°C 32%		Depth of Liquid : 15.0 cm			Date : February 6, 2006	
Muscle 1800 MHz	21.0	Permittivity	53.3	53.44	+0.26	± 5
		Conductivity	1.52	1.454	-4.34	± 5
		1g SAR (mW/g)	9.68	9.77	+0.93	± 10

NOTE : Please refer to attachment for the result presentation in plot format.

A.2 Tissue Verification

The tissue dielectric parameters of the tissue medium at the middle of a device transmission band should be within $\pm 5\%$ of the parameters specified at that target frequency. It is verified by using the dielectric probe and the network analyzer.

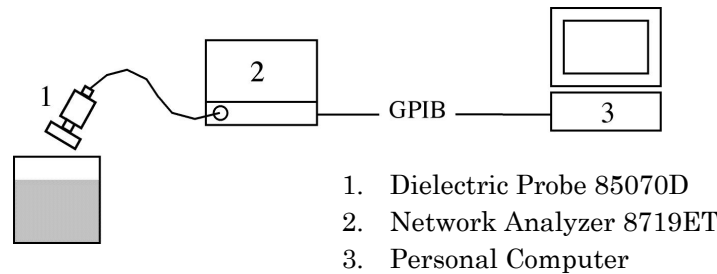

Tissue Verification Results :

Ambient Conditions : 21°C 30%				Date : February 9, 2006		
Liquid		Parameters	Target	Measured	Deviation [%]	Limit [%]
Medium	Temp. [°C]					
Head 1900 MHz	21.0	Permittivity	40.0	39.34	-1.65	± 5
		Conductivity	1.40	1.436	+2.57	± 5
Ambient Conditions : 21°C 32%				Date : February 6, 2006		
Muscle 1900 MHz	21.0	Permittivity	53.3	53.16	-0.26	± 5
		Conductivity	1.52	1.575	+3.62	± 5

A.3 SAR Measurement Data

A.3.1 Left Side

CONFIDENTIAL

Cheek/Touch Position				Ear/Tilt Position				
GSM 1900 (Duty Cycle: 12.0 %, Crest Factor: 8.3)						Date : February 9, 2006		
EUT Set-up Configuration		Frequency		Power [dBm] (Peak)		Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
EUT Position	Antenna	Channel	MHz	Start	End			
Cheek/Touch	Fixed	0512	1850.20	--	--	1.6	**	--
		0661	1880.00	28.82	28.79		0.649	21.0
		0810	1909.80	--	--		**	--
Ear/Tilt	Fixed	0512	1850.20	--	--	1.6	**	--
		0661	1880.00	28.82	28.71		0.610	21.0
		0810	1909.80	--	--		**	--

NOTES :

1. Depth of Liquid : 15.0 cm

2. Transmitter power was measured at the antenna-conducted terminal.

3. The SAR result marked at ** is optional, because the SAR measured at the middle channel for that configuration is at least 3.0 dB lower than the SAR limit.

4. Please refer to attachment for the result presentation in plot format.

A.3.2 Right Side

CONFIDENTIAL

Cheek/Touch Position				Ear/Tilt Position				
GSM 1900 (Duty Cycle: 12.0 %, Crest Factor: 8.3)						Date : February 9, 2006		
EUT Set-up Configuration		Frequency		Power [dBm] (Peak)		Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
EUT Position	Antenna	Channel	MHz	Start	End			
Cheek/Touch	Fixed	0512	1850.20	28.73	28.71	1.6	0.993	21.0
		0661	1880.00	28.82	28.79		0.903	21.0
		0810	1909.80	28.67	28.66		0.685	21.0
Ear/Tilt	Fixed	0512	1850.20	28.73	28.71	1.6	0.897	21.0
		0661	1880.00	28.82	28.79		0.843	21.0
		0810	1909.80	28.67	28.66		0.628	21.0
GSM 1900 (Duty Cycle: 12.0 %, Crest Factor: 8.3) co-located with Bluetooth								
Cheek/Touch	Fixed	0512	1850.20	28.73	28.71	1.6	0.996	21.0
NOTES :								
1. Depth of Liquid : 15.0 cm								
2. Transmitter power was measured at the antenna-conducted terminal.								
3. Please refer to attachment for the result presentation in plot format.								

A.3.3 Body-worn Position

CONFIDENTIAL

GSM 1900 (Duty Cycle: 12.0 %, Crest Factor: 8.3)						Date : February 6, 2006		
EUT Set-up Configuration		Frequency		Power [dBm] (Peak)		Limit [mW/g]	SAR (1g) [mW/g]	Tissue Temp. [°C]
Separation	Antenna	Channel	MHz	Start	End			
1.5 cm	Fixed	0512	1850.20	28.73	28.71	1.6	0.405	21.0
		0661	1880.00	28.82	28.79		0.333	21.0
		0810	1909.80	28.67	28.66		0.239	21.0
GSM 1900 (Duty Cycle: 12.0 %, Crest Factor: 8.3) co-located with Bluetooth								
1.5 cm	Fixed	0512	1850.20	28.73	28.71	1.6	0.410	21.0
GSM 1900 GSM+GPRS (Duty Cycle: 24.0 %, Crest Factor: 4.2)								
1.5 cm	Fixed	0512	1850.20	28.73	28.71	1.6	0.800	21.0
		0661	1880.00	28.82	28.79		0.657	21.0
		0810	1909.80	28.67	28.66		0.467	21.0
NOTES :								
1. Depth of Liquid : 15.0 cm								
2. Transmitter power was measured at the antenna-conducted terminal.								
3. The earphone wire connected to the EUT to simulate hand-free operation in a body-worn configuration.								
4. Please refer to attachment for the result presentation in plot format.								

Appendix B: Test Instruments**B.1 SAR Measurement**

Type	Model	Manufacturer	ID No.	Last Cal.	Interval
E-Field Probe	ET3DV6	SPEAG	S-2	2005/12	1 Year
DAE	DAE3 V1	SPEAG	S-3	2005/12	1 Year
Robot	RX60L	Stäubli	S-7	N/A	N/A
Probe Alignment Unit	LB1RX60L	SPEAG	S-13	N/A	N/A
Universal Radio Communication Tester	CMU200	Rohde & Schwarz	B-21	2005/4	1 Year

B.2 System Validation and Tissue Verification

Type	Model	Manufacturer	ID No.	Last Cal.	Interval
Network Analyzer	8719ET	Agilent	B-53	2005/9	1 Year
Dielectric Probe	85070D	Agilent	B-54	N/A	N/A
1800 MHz Dipole	D1800V2	SPEAG	S-5	2004/12	2 Years
Signal Generator	MG3681A	Anritsu	B-3	2005/2	1 Year
Power Amplifier	A0840-3833-R	R&K	A-34	N/A	N/A
Power Meter	E4417A	Agilent	B-51	2005/8	1 Year
Power Sensor	E9300B	Agilent	B-32	2005/5	1 Year

B.3 Antenna-Conducted Power Measurement

Type	Model	Manufacturer	ID No.	Last Cal.	Interval
Power Meter	E4417A	Agilent	B-51	2005/8	1 Year
Power Sensor	E9321A	Agilent	B-52	2005/5	1 Year
Attenuator	4T-10	Weinschel	D-73	2005/5	1 Year
Attenuator	4T-10	Weinschel	D-74	2005/5	1 Year

Appendix C: Attachments

No.	Contents	No. of page(s)
1	System Validation Plots	2
2	SAR Test Plots	18
3	Dosimetric E-Field Probe – ET3DV6, S/N: 1679	9
4	System Validation Dipole – D1800V2, S/N: 2d038	9
5	Transmitted Duty Cycle Plots	1
6	EUT Photographs	2